

**LITHIUM-ION RECHARGEABLE
WATERPROOF LED SPOTLIGHT
INSTRUCTION MANUAL**



**SAVE THIS INSTRUCTION MANUAL FOR FUTURE
REFERENCE.**

Copyright © 2017
Baccus Global LLC, Boca Raton, FL 33432
(877) 571-2391



Intertek

Optional 120V AC/USB Charging Adapter: This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.

SAFETY GUIDELINES / DEFINITIONS

DANGER: Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

WARNING: Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION: Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

NOTICE: Used without the safety alert symbol indicates potentially hazardous situation which, if not avoided, may result in property damage.

RISK OF UNSAFE OPERATION. When using tools or equipment, basic safety precautions should always be followed to reduce the risk of personal injury. Improper operation, maintenance or modification of tools or equipment could result in serious injury and property damage. There are certain applications for which tools and equipment are designed. Manufacturer strongly recommends that this product NOT be modified and/or used for any application other than for which it was designed. Read and understand all warnings and operating instructions before using any tool or equipment.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: This product or its power cord contains lead, a chemical known to the State of California to cause cancer and birth defect or other reproductive harm. Wash hands after handling.

GENERAL SAFETY WARNINGS AND INSTRUCTIONS

READ ALL INSTRUCTIONS

WARNING: Read all instructions before operating the spotlight. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

INSTRUCTIONS PERTAINING TO RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

WARNING: RISK OF FIRE, ELECTRIC SHOCK, BURST HAZARD, OR INJURY TO PERSONS

- WHEN USING ELECTRICAL APPLIANCES, BASIC PRECAUTIONS SHOULD ALWAYS BE FOLLOWED, INCLUDING THE FOLLOWING:

- LED gets HOT quickly!
 - Do not touch the LED at any time when operating.
 - Only contact trigger when turning on.
 - Do not touch hot lens or enclosure.
 - Do not remain in light if skin feels warm.
 - Do not operate the spotlight with a missing or damaged lens or enclosure.
 - The spotlight and the supplied charging adapters are not toys and cannot be played with as toys. To reduce the risk of injury, close supervision is necessary when these units are used near children.
 - Use only attachments recommended or sold by the manufacturer.
- WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK:**
- Use only the chargers supplied by the manufacturer to charge and recharge.
 - When an extension cord is used:
 - The marked rating of the detachable power supply cord or extension cord should be at least as great as the electrical rating of this appliance.
 - The cord should be arranged so that it will not drape over the countertop or tabletop where it can be tripped over, snagged, or pulled unintentionally (especially by children).
 - The extension cord should be kept dry and off the ground.
 - Do not store the unit or chargers outdoors.
 - Charge indoors only. Do not expose chargers to water or any other liquid.
- WARNING: FIRE HAZARD:**
- Never contact combustible material to the lens.
 - Keep spotlight lamp away from materials that may burn.

CAUTION: TO REDUCE THE RISK OF INJURY OR PROPERTY DAMAGE:

- All lights give off heat:
 - Do not touch lens while operating.
 - Keep combustibles away from spotlight lens. Extreme heat can cause fires.
 - Never place the light face down on any surface when lit, charging or not in use. Never store the light face down on any surface.
- Never look directly into the light or shine the light into another person's eyes.
- Keep sharp objects away from lens — it can crack or break.
- Do not expose this unit to extremely high temperatures.
- Do not drop or throw spotlight. It contains a lithium-ion battery.
- Use only with either the AC or DC charging adapter and USB charging cable that are provided with unit. Plug in the charging cable at the light first, then plug into the charging source.
- After charging/recharging, disconnect charging adapter or extension cord and wait 5 minutes before use.
- Do not crush, cut, pull or expose charging adapter cords to extreme heat.
- Position charging adapter cords so they do not become entangled or become a safety hazard. Keep charging adapter cords away from sharp edges.

FL5W10

- There are no user-serviceable parts inside. Do not attempt to disassemble any other parts of the unit.
- To reduce risk of damage to electric plug and cord, pull by plug rather than cord when disconnecting.
- Do not attempt to charge the unit if the charger or cord is damaged — return the charger to manufacturer for repair or replacement.

SPECIFIC SAFETY INSTRUCTIONS FOR LITHIUM-ION BATTERIES

- WARNING: TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, BURST HAZARD, OR INJURY TO PERSON OR PROPERTY:**
- Lithium-ion batteries are small, compact and ideal for providing long-lasting power to this unit. However, they must be used and charged properly. Improper use can result in serious injury, fire, or death.
 - Lithium-ion batteries can explode in the presence of a source of ignition. Do not use the product in the presence of an open flame.
 - Do not place this lithium-ion battery powered unit in fire or apply heat to it.
 - Do not subject this lithium-ion battery powered unit to strong impacts or shocks. The battery in this unit contains safety and protection devices which, if damaged, may cause the battery to generate heat, rupture or ignite.
 - Do not expose this lithium-ion battery powered unit to water or salt water, or allow the battery to get wet.
 - Avoid storing this lithium-ion battery powered unit in the basement, bathroom or other areas of the house that are or may become wet or humid or where moisture may concentrate.
 - Do not leave this lithium-ion battery powered unit in direct sunlight, or use or store the unit inside cars in hot weather. Doing so may cause the battery to generate heat, rupture, or ignite. Using the battery in this manner may also result in a loss of performance and a shortened life expectancy.
 - Never charge this unit near heat or flammable objects.
 - NEVER THROW WATER ON A BURNING LI-ION BATTERY! If a lithium-ion battery does catch on fire, it will burn even more violently if it comes in contact with water or even moisture in the air. A fire extinguisher must be used.

Battery Charging and Capacity

This unit is delivered in a partially charged state — you must fully charge it before using it for the first time.

When stored at room temperature with a full charge, Li-ion batteries will begin to discharge from the time they are manufactured, even when unused. Deep discharges also decrease their capacity. Battery life can be extended by the following:

- Charge battery to full capacity before storage.
- Optimal storage temperature for this unit is between 5°C and 20°C (41°F and 68°F).
- Never discharge the battery fully.
- Charge after each use.
- Always charge at least once every 3-6 months if not in frequent use to prevent overdischarge.

Transportation of Lithium-Ion Batteries

- Always check all applicable local, national, and international regulations before transporting a unit containing a lithium-ion battery.
- Transporting an end-of-life, damaged, or recalled battery may, in certain cases, be specifically limited or prohibited.

INSTRUCTIONS PERTAINING TO WATERPROOF SPOTLIGHTS

The rubber "O" ring acts to preserve the waterproof qualities of the spotlight. The "O" ring seals the end cap to prevent water from entering the gap. An undamaged rubber "O" ring, rubber bezel and lens, and proper sealing of the end cap before use are very important.

CAUTION: TO REDUCE THE RISK OF PROPERTY DAMAGE:

- Attempting to remove the rubber "O" ring, use of the unit with a damaged "O" ring, rubber bezel or lens, improper sealing of the waterproof end cap; and/or submerging this unit in depths greater than 6 feet may cause the unit to no longer be waterproof. Do not submerge the unit if these conditions exist or the unit could sustain permanent damage.
- Submerging this unit in depths greater than 6 feet and/or operating it in water temperature other than between 41°F and 104°F (5°C and 40°C) could result in leakage, warping or malfunction, causing permanent damage to the spotlight.

INSTRUCTIONS PERTAINING TO THE 12V DC/USB CHARGING ADAPTER

CAUTION: TO AVOID THE RISK OF PROPERTY DAMAGE:

- NEVER CONNECT THE UNIT TO A POSITIVE GROUNDED VEHICLE.
- The 12 Volt DC charging adapter must only be connected to batteries with a nominal output voltage of 12 Volts. The unit will not operate from a 6 volt battery and will sustain permanent damage if connected to a 24 volt battery.
- Always connect the 12V DC/USB charging adapter to the 12 volt DC power source before plugging any devices into it.

INSTRUCTIONS PERTAINING TO THE USB PORTS

IMPORTANT: Some household USB-powered electronics will not operate with the USB ports provided with this device. Check the manual of the corresponding electronic device to confirm that it can be used with this type of USB port.

- **THE USB PORTS DO NOT SUPPORT DATA COMMUNICATION.** They only provide power to an external USB powered device (5VDC2.1A using the USB port on the DC/USB charging adapter or 5VDC1A using the AC/USB charging adapter). Make sure the rating of equipment plugged into the port does not exceed the amperage stated.
- Always connect the appropriate charging adapter to either the 120 volt AC or 12 volt DC power source before plugging any devices into it.
- Do not attach USB hubs allowing connection of multiple personal electronic devices to any of the USB ports on the charging adapters.

SAVE THESE INSTRUCTIONS

INTRODUCTION



Congratulations on purchasing your new **Stanley® FatMax® Spotlight**. Read this Instruction Manual and follow the instructions carefully before using your new spotlight.

FEATURES

1. LED bulb
2. Rubber bezel
3. On/off trigger
4. Grip handle
5. Micro-USB charging port (for use with the USB Charging Cable and Charging Adapters)
6. Battery/charge status LED indicator
7. Translucent waterproof end cap (see detailed view in the "Reading the Battery/Charge Status LED Indicator" section)
8. Rubber O-ring
9. USB charging cable (for use with 12V DC/USB Charging Adapter and 120V AC/USB Charging Adapter)
10. Regular USB plug
11. Micro-USB plug
12. 12V DC/USB Charging Adapter (Optional Accessory)
13. 12V DC/USB Charging Adapter LED Indicator
14. 12V DC/USB Charging Adapter USB Port (Optional Accessory)
15. 120V AC/USB Charging Adapter (Optional Accessory)
16. 120V AC/USB Charging Adapter USB Port (Optional Accessory)

READING THE BATTERY/CHARGE STATUS LED INDICATOR

The battery and charging status LED indicator is located directly above the micro-USB charging port under the waterproof end cap on the back of the unit.

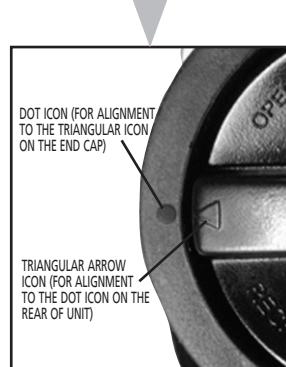

It lights or flashes in three colors to indicate the following:

When charging:

- Green:** Battery is in a fully charged state.
Green (flashing): Battery is in a high partially charged state.
Orange (flashing): Battery is operating at partial voltage.
Red (flashing): Battery needs to be recharged.
Red (flashing rapidly): The battery of the unit is overheated due to extensive use or recharging. The charging process will stop at this stage and will automatically resume after a cool down period.

When operating:

- Green:** Battery is operating at full voltage.
Orange: Battery is operating at low voltage, and should be recharged or the built-in low voltage protection will be activated and the unit will automatically shut down shortly.

Red (flashing rapidly): The battery of the unit is overheated (due to extensive use or recharging), or is too cold (the ambient temperature has dropped below -20°C). Operation will stop at this stage.

CHARGING/RECHARGING THE SPOTLIGHT

This unit is shipped in a partially charged state. Charge unit after purchase and BEFORE first use until the battery/charge status LED indicator lights green.

Recharge after each use until the battery/charge status LED indicator lights green.

IMPORTANT: When the unit is not in use, we recommend that the battery is charged at least every 3 to 6 months.

CAUTION: TO REDUCE THE RISK OF INJURY OR PROPERTY DAMAGE:

- Make sure the unit is thoroughly dry before charging or recharging. If the unit has been submerged, wipe it with a soft cloth before opening the end cap. If water leaks into the charging port, the unit can sustain permanent damage.
- Never place the light face down on any surface when charging.
- Failure to keep the battery charged will cause permanent damage and result in poor performance.

Charging/recharging using the 120V AC/USB Charging Adapter

1. Make sure the spotlight is off.

2. Unscrew (counterclockwise) the waterproof end cap on the back of the unit and remove it.

3. Insert the micro-USB plug of the USB charging cable into the micro-USB charging port on the back of the spotlight.

4. Insert the regular USB plug of the USB charging cable into the 120V AC/USB charging adapter.

5. Plug the 120V AC/USB charging adapter into a (powered) standard North American 120 volt 60Hz outlet.

6. Charge up to 5 hours or until the battery/charge status LED indicator lights green.

7. When charging is complete, first unplug the 120V AC/USB charging adapter from the power source, then disconnect the USB charging cable from the adapter and the spotlight. Store the adapter and cable in a safe place.

8. Replace the end cap on the unit, screwing clockwise until the triangular arrow on the end cap is pointing to the dot icon on the rear of the unit. Make sure it fits securely, but do NOT overtighten.

Charging/recharging using the 12V DC/USB Charging Adapter

1. Make sure the spotlight is off.

2. Unscrew (counterclockwise) the waterproof end cap on the back of the unit and remove it.

3. Insert the micro-USB plug of the USB charging cable into the micro-USB charging port on the back of the spotlight.

4. Insert the regular USB plug of the USB charging cable into the 12V DC/USB charging adapter.

5. Insert the 12 volt DC/USB charging adapter into the 12 volt DC accessory outlet of a vehicle or other functioning 12 volt DC power source. The LED indicator on the 12V DC/USB charging adapter will light green when it is properly plugged into the 12 volt DC power source. The battery/charge status LED indicator will light or flash in one of three colors (as described in the "Reading the Battery/Charge Status LED Indicator" section) to indicate the charging status.

- Note:** Some vehicles require that the ignition be switched to the accessory position in order to power the accessory outlet.


6. Charge until the battery/charge status LED indicator lights green.

7. When charging is complete, first unplug the 12V DC/USB charging adapter from the power source, then disconnect the USB charging cable from the device's USB power port and the spotlight. Store the cable in a safe place.

8. Replace the end cap on the unit, screwing clockwise until the triangular arrow on the end cap is pointing to the dot icon on the rear of the unit. Make sure it fits securely, but do NOT overtighten.

Charging/recharging using the USB charging cable and a device with a USB power port (not supplied)

LINTERNA LED RECARGABLE DE IONES DE LITIO E IMPERMEABLE MANUAL DE INSTRUCCIÓN

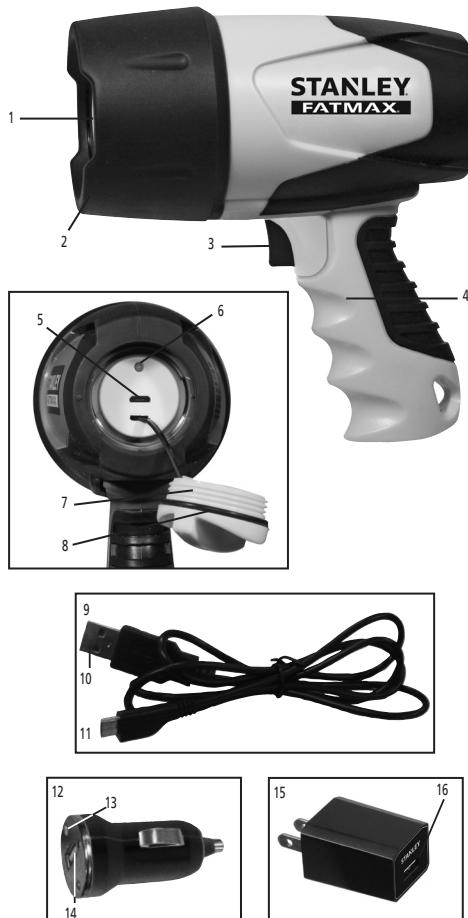

CONSERVE ESTE MANUAL PARA FUTURAS CONSULTAS.

Derechos Reservados © 2017
Bacus Global LLC, Boca Raton, FL 33432
(877) 571-2391

FL5W10

- Use sólo sea con el CA o CC adaptador de carga y cable de carga USB que se proporciona con la unidad. Conecte el cable de carga a la luz en primer lugar, a continuación, conectarlo a la fuente de carga.
- Después de cargar/reregar, desconecte el adaptador de recarga o extensión eléctrica y espere 5 minutos antes usar la linterna.
- No aplaste, corte, hale o exponga los cables del adaptador de carga al calor extremo.
- Coloque los cables del adaptador de carga de manera que no se enreden o se conviertan en un peligro de seguridad. Mantenga los cables del adaptador de carga alejados de bordes afilados.
- No hay piezas que el usuario pueda reparar. No intente desmontar ninguna otra parte de la unidad.
- Para reducir el riesgo de daños al enchufe o al cable eléctrico, tire por el enchufe más bien que por el cable al desconectar.
- No intente utilizar la unidad si el cargador o cable está dañado - devuelva la unidad al fabricante para su reparación.

INSTRUCCIONES DE SEGURIDAD ESPECÍFICAS PARA LAS BATERÍAS DEL LITIO-ION

- **ADVERTENCIA: PARA REDUCIR EL RIESGO DE FUEGO, DE DESCARGA ELÉCTRICA, DE PELIGRO DE LA EXPLOSIÓN, O DE LESIONES O DAÑOS A LA PROPIEDAD:**
Baterías del litio-ion son pequeñas, compactas e ideal para proporcionar energía duradera a esta unidad. Sin embargo, deben ser utilizadas y ser cargadas correctamente. El uso incorrecto puede dar lugar a una lesión seria, a fuego, o a muerte.
 - Los del litio-ion pueden estallar en presencia de una fuente de ignición. No utilice el producto en presencia de una llama abierta.
 - No ponga esta unidad con baterías del litio-ion en fuego ni aplique el calor a él.
 - No someta la batería del litio-ion unidad a impactos o golpes fuertes. La batería en esta unidad contiene dispositivos de seguridad y de protección que, si están dañados, pueden hacer la batería generar calor, romper o encender.
 - No exponga esta unidad accionada por la batería del litio-ion para reparar o agua salada, o permita que la batería se lleve a mojar.
 - Evite almacenar esta batería del litio-ion dispositivo eléctrico en el sótano, cuarto de baño u otras áreas de la casa que están o pueden quedar mojados o húmedos o donde la humedad pueda concentrarse.
 - No deje esta unidad accionada por la batería del litio-ion en luz del sol directa, o utilice o almacene la unidad dentro de los coches en tiempo caliente. El hacer tan puede hacer la batería para generar calor, para romper, o para encender. Usando la batería de este modo puede también dar lugar a una pérdida de funcionamiento y de una esperanza de vida acortada.
 - Nunca cague esta unidad cerca de calor o de objetos inflamables.
 - **NUNCA LANZA AGUA A UNA BATERÍA ARDIENTE DE LI-ION!** Si una batería del litio-ion coge fuego, quemará más violentamente si entra en contacto con el agua o aún la humedad en el aire. Un extinguidor debe ser utilizado.

Carga y capacidad de la batería

Esta unidad se entrega en un estado parcialmente cargado – usted debe cargarlo completamente antes de usarlo por primera vez.

Cuando están almacenadas a temperatura ambiente con una carga completa, las baterías del Li-ion comienzan a descargarse a partir del tiempo que son manufacturadas, incluso cuando no están en uso. Las descargas profundas también disminuyen su capacidad. La vida de batería se puede ampliar por el siguiente:

- Cargue la batería a la capacidad plena antes de almacenaje.
- Las temperaturas óptimas para el almacenamiento de esta unidad están entre 5°C y 20°C (41°F y 68°F).
- Nunca descargue la batería completamente.
- Cargue después de cada uso.
- Cargue siempre por lo menos una vez cada 3 a 6 meses si no en uso frecuente de prevenir el overdischarge.

Transporte de las baterías del Litio-Ion

- Compruebe siempre todas las regulaciones locales, nacionales, e internacionales aplicables antes de transportar una unidad que contiene una batería del Litio-Ion.
- El transporte de una fin-de-vida, dañada, o de la batería recordada puede, en ciertos casos, ser específicamente limitado o prohibido.

INSTRUCCIONES REFERENTE A LINTERNAS IMPERMEABLES

La junta tórica de goma actúa para preservar la impermeabilidad del linterna. La junta tórica cierra herméticamente el casquillo de extremo para evitar la entrada de agua. Una junta tórica, el bisel de goma y la lente indemne, y un lazo apropiado del casquillo de extremo antes de usar es muy importante.

■ PRECAUCIÓN: PARA REDUCIR EL RIESGO DE DAÑOS A LA PROPIEDAD:

- Intentar quitar la junta tórica; uso de la unidad con una junta tórica, el bisel de goma y la lente dañada; lacre incorrecto del casquillo de extremo impermeable; y/o sumergir esta unidad en mayores de 6 pies de las profundidades puede hacer la unidad más ser impermeable. No sumerja la unidad si existen estas condiciones o la unidad podría sostener daño permanente.
- Sumergir esta unidad en mayores de 6 pies en las profundidades y/o el funcionamiento de ella en temperatura del agua con excepción de 41°F y de 104°F (5°C y 40°C) podrían dar lugar a la salida, al combeo o al malfuncionamiento, causando daño permanente a la linterna.

INSTRUCCIONES REFERENTES AL ADAPTADOR DE CARGA 12V CC/USB

■ PRECAUCIÓN: PARA REDUCIR EL RIESGO DE LESIONES O DAÑOS A LA PROPIEDAD:

- **NUNCA CONECTE LA UNIDAD A UN VEHÍCULO A TIERRA POSITIVA.**
- El adaptador de carga de CC a 12 voltios sólo debe conectarse a baterías con un voltaje nominal de 12 voltios. La unidad no funcionaría con una batería de 6 voltios y sufriría daños permanentes si se conecta a una batería de 24 voltios.
- Conecte siempre el adaptador de carga CC/USB a la fuente de alimentación de CC de 12 voltios antes de conectar cualquier dispositivo en ello.

INSTRUCCIONES RELATIVAS A LOS PUERTOS USB

- **IMPORTANTE:** Algunos electrodomésticos de uso doméstico alimentados por USB no funcionan con los puertos USB proporcionados con este dispositivo. Compruebe el manual del electrodoméstico correspondiente para confirmar que se puede utilizar con este tipo de puerto USB.
- **Los puertos USB no son compatibles con la comunicación de datos.** Ellos sólo proporcionan energía a un dispositivo externo USB alimentado (SVCC2). A mediante el puerto USB del adaptador de carga CC/USB o SVCC2A mediante el adaptador de carga CA/USB. Asegúrese de que la clasificación de potencia de los equipos conectados a cada puerto USB no excede el amperaje indicado.
- Siempre conecte el adaptador de carga apropiado ya sea a la CC de 12 V o 120 V CA fuente de alimentación antes de conectar cualquier dispositivo a ella.
- No conecte concentradores USB que permiten la conexión de varios dispositivos electrónicos personales a cualquiera de estos puertos USB.

Adaptador de carga opcional de 120V CA/USB: Este dispositivo cumple con la parte 15 de las normas de la Comisión Federal de Comunicaciones de Estados Unidos (FCC). La operación está sujeta a las dos condiciones siguientes: (1) este dispositivo no puede causar interferencia perjudicial y (2) este mecanismo debe aceptar cualquier interferencia recibida, incluida la interferencia que puede provocar una operación no deseada.

Este equipo ha sido probado y se encontró que cumple con los límites para dispositivo digital Clase B, según la parte 15 de las normas de la FCC. Estos límites están diseñados para brindar protección razonable contra interferencia perjudicial en una instalación residencial. Este equipo genera, usa y puede irradiar energía en frecuencia de radio y, si no se instala y se usa de acuerdo con las instrucciones, puede provocar interferencia perjudicial en las comunicaciones de radio. Sin embargo, no hay garantía de que la interferencia no ocurra en una instalación en particular. Si el equipo provoca interferencia perjudicial en la recepción de radio o televisión, lo que se puede determinar al apagar y encender el equipo, el usuario debe tratar de corregir la interferencia mediante una o más de las siguientes medidas:

- Cambiar la orientación o la ubicación de la antena de recepción.
- Aumentar la separación entre el equipo y el receptor.
- Conectar el equipo a un tomacorriente sobre un circuito diferente de aquel al que está conectado el receptor.
- Consultar al vendedor o pedir la ayuda de un técnico en radio y televisión con experiencia.
- Los cambios o las modificaciones no aprobados por el partido responsable de conformidad podrían anular la autoridad del usuario para funcionar el equipo.

NORMAS DE SEGURIDAD / DEFINICIONES

■ PELIGRO: Indica una situación de peligro inminente que, si no se evita, provocará la muerte o lesiones graves.

■ ADVERTENCIA: Indica una situación de peligro inminente que, si no se evita, provocará la muerte o lesiones graves.

■ PRECAUCIÓN: Indica una situación de peligro potencial que, si no se evita, puede provocar lesiones leves o moderadas.

PRECAUCIÓN: Utilizado sin el símbolo de alerta de seguridad indica una situación de peligro potencial que, si no se evita, puede provocar daños a la propiedad.

RIESGO DE OPERACIÓN INSEGURA: Cuando se utilizan herramientas o equipos, siempre se deben respetar las precauciones de seguridad para reducir el riesgo de lesiones personales. La operación, el mantenimiento o la modificación incorrectas de herramientas o equipos pueden provocar lesiones graves y daños a la propiedad. Las herramientas y los equipos están diseñados para usos determinados. Fabricante recomienda encarecidamente que NO se modifique este producto y que NO se utilice para ningún otro uso que aquél para el que fue diseñado. Lea y comprenda todas las instrucciones operativas y las advertencias antes de utilizar cualquier herramienta o equipo.

INSTRUCCIONES Y ADVERTENCIAS DE SEGURIDAD GENERALES

LEA TODAS LAS INSTRUCCIONES

■ ADVERTENCIA: Lea todas las instrucciones antes de operar la linterna. El incumplimiento de todas las instrucciones enumeradas a continuación puede provocar una descarga eléctrica, un incendio o lesiones graves.

ADVERTENCIAS E INSTRUCCIONES DE SEGURIDAD GENERALES

■ ADVERTENCIA: Este producto o su cable de alimentación contiene plomo, una sustancia química reconocida por el Estado de California como causante de cáncer, defectos de nacimiento u otros problemas reproductivos. Lávese las manos después de utilizarlo.

INSTRUCCIONES RELATIVAS AL RIESGO DE INCENDIOS, DESCARGAS ELÉCTRICAS O LESIONES PERSONALES

■ ADVERTENCIA: RIESGO DE INCENDIOS, DESCARGAS ELÉCTRICAS, PELIGRO DE EXPLOSIÓN O LESIONES A PERSONAS - AL USAR APLICACIONES ELÉCTRICAS, LAS PRECAUCIONES DEL BASIC SE DEBEN SEGUIR SIEMPRE, INCLUYENDO EL SIGUIENTE:

- ¡Le LED se CALIENTA rápidamente!
- No toque el LED en cualquier momento al funcionar.
- Entre en contacto solamente con el disparador al encender.
- No toque el lente caliente o el recinto.
- No siéntese en luz si la piel siente caliente.
- No utilice la linterna sin un lente o recinto dañado.
- La linterna y los adaptadores de carga suministrados no son juguetes y no se pueden jugar con como juguetes. Para reducir el riesgo de lesiones, es necesario una estrecha supervisión cuando estas unidades se utilizan cerca de niños.
- Utilice solamente los accesorios recomendados o vendidos por el fabricante.

■ ADVERTENCIA: PARA REDUCIR EL RIESGO DE DESCARGA ELÉCTRICA:

- Utilice solamente el cargador provisto por el fabricante para recargar.
- Cuando un cable de extensión es utilizada:

- El calibre marcado en el cable de suministro eléctrico desmontable o el cable de extensión debe ser por lo menos tan grande como la clasificación eléctrica del aparato.
- El cable debe acomodarse de modo que no cuele del mostrador o mesa donde se pueda tropezar con él, enganchar, o jalar involuntariamente (especialmente por niños).
- La cuerda de la extensión se debe mantener seca y sobre tierra.

- No guarde la unidad o los cargadores en exteriores.

- Cargue solo en interiores. No exponga los cargadores al agua ni a ningún otro líquido.

■ ADVERTENCIA: Riesgo de incendio:

- Nunca contacta con materiales combustibles a la lente.

- Mantenga la lámpara de la linterna lejos de materiales inflamables

■ PRECAUCIÓN: PARA REDUCIR EL RIESGO DE LESIONES O DAÑOS A LA PROPIEDAD:

- Todas las luces emiten calor.

- No toque el lente mientras la unidad esté en uso.

- Mantenga cualquier combustible lejos del lente y linterna. El calor extremo puede ocasionar incendios.

- Nunca coloque la luz encendida hacia abajo sobre cualquier superficie, cargando o si no está en uso. Nunca almaceñe la luz hacia abajo sobre cualquier superficie.

- Nunca mire directamente a la luz ni la apunte directamente a los ojos de otra persona.

- Nunca mantenga los objetos afilados lejos del lente de la linterna - la piedra agrietarse o romperse.

- No exponga esta unidad extremadamente a las temperaturas altas.

- No tire ni deje caer la linterna. Contiene una batería de iones de litio.

CÓMO LEER EL INDICADOR LED DEL ESTADO DE LA BATERÍA/CARGA

La batería y el indicador de carga del estado LED está situada directamente sobre el puerto de carga micro-USB debajo del casquillo de extremo impermeable en la parte posterior de la unidad.

DETALLE DEL CASQUILLO DE EXTREMO

OPERA

RECARGA

DE

ESTADO

DE

LA

BATERÍA

CARGA

DE

ESTADO

DE

LA

BATERÍA

RECARGA

DE

ESTADO