



Toll Free: 87 PERMATEX
(877-376-2839)

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Super Glue Gel

AAM Revised 02/19

PRODUCT DESCRIPTION

Permatex® Super Glue Gel is an instant-bonding adhesive in a gel form designed to bond close fitting surfaces quickly. Sets in seconds to form a permanent, transparent bond. Supplied as a gel, the adhesive may be used on vertical, overhead and hard to reach surfaces. It is effective on metal, rubber, glass, aluminum, ceramics, vinyl, alloys, many plastics and other non-porous surfaces. **Note: Permatex® Super Glue Gel will not bond polyethylene and polypropylene plastics.**

PRODUCT BENEFITS


- Useful on vertical and overhead surfaces
- No drip, high performance gel formula
- Ready to use
- No mixing
- Permanent, transparent bond
- Fills gaps
- Can be used to bond porous and non-porous materials

TYPICAL APPLICATIONS

- Automotive trim
- Logos
- Knobs
- Gear shift logos
- Minor interior repairs

DIRECTIONS FOR USE

1. Protect the work surface against accidental spills, as cyanoacrylates can mark finishes and fabrics.
2. Clean and ensure a close fit on the surfaces to be bonded. Wiping wood with a damp cloth will increase bonding speed.
3. To use the clean and easy self-piercing tube, screw nozzle onto tube clockwise, hold base of nozzle and remove the cap counter-clockwise.
4. Apply the glue to one of the surfaces. Use sparingly, one square inch of surface area requires only one drop of glue.

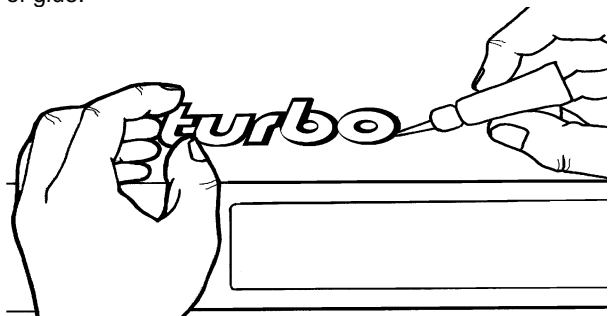

5. Hold the surfaces to be bonded together for 15 to 30 seconds. No clamping is required, even on wood. **DO NOT REPOSITION THE PARTS.**

6. Replace the cap, and store the glue in a cool spot.
7. Allow the parts to cure overnight.

For Cleanup

1. For skin adhesion, first immerse the bonded surfaces in warm, soapy water. Peel or roll the surfaces apart with the aid of a blunt edge (spatula, teaspoon handle or similar). Then remove the dried adhesive from the skin with soapy water. **Do not try to pull surfaces apart with direct opposing action.**
2. To remove from hard surfaces, saturate a soft cloth or paper towel with the acetone and allow it to rest on the spot for about 10 – 15 minutes. After the Super Glue is removed, a white or light colored spot may be left which is easily removed by applying vegetable oil or olive oil to the spot to restore the color.
3. Clean hands with Permatex® brand hand cleaners.

PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Ethyl cyanoacrylate
Appearance	Clear gel
Odor	Mild pungent
Specific Gravity	1.05
Flash Point, TCC, °F	150 - 200

TYPICAL CURING PERFORMANCE

Permatex® Super Glue Gel cures on exposure to moisture. Fixture time is 15 – 30 seconds and full cure within 2 hours.

TYPICAL ENVIRONMENTAL RESISTANCE

Temperature Resistance	Typical Values
Continuous, °C (°F)	-54 to 82 (-65 to 180)

Chemical / Solvent Resistance

The product retains effective properties when in contact with most solvents.

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
82191	2 g tube, 1-pack carded
85744	2 g tube, 2-pack carded

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.