



Cutting Tool Solutions

2020 Product Catalog



osgtool.com

Introduction

1-49

Icon Guide.....	2-3
Catalog Guide.....	4
Website/Social Media.....	5
About OSG.....	6-7
OSG Timeline.....	8-9

OSG Global Network.....	10-13
Core Products.....	14-15
Surface Treatments.....	16-17
Brand Index.....	18-48



Drills

50-401

Featured Drilling Products.....	52-53
Drilling Application Guide.....	54-55
Illustrated Index/Application Guide.....	56-65
A Brand®.....	66-141
EXOPRO®.....	142-152
EXOCARB®.....	147-150
EXOCARB® MAX.....	158-172
Composite Drills.....	173-181
HY-PRO® CARB.....	182-203

Carbide.....	204-225
SOMTA® Carbide.....	226-229
V-Series.....	230-254
NEXUS.....	255-259
EX-GOLD®.....	260-298
SOMTA® HSS.....	299-344
Drills Technical.....	345-398
Drill Reconditioning.....	399-401



Taps

402-793

Featured Threading Products.....	404-405
Threading Application Guide.....	406-407
Illustrated Index/Application Guide.....	408-431
Thread Mills.....	432-444
Diameter Correction Tool.....	445-447
Forming Taps.....	448-489
Spiral Fluted Taps.....	490-576

Spiral Pointed Taps.....	577-659
Straight Fluted Taps.....	660-704
Screw Thread Insert Taps.....	705-734
Pipe Taps.....	735-751
Round Dies.....	752-756
Thread Gages.....	757-758
Threading Technical.....	759-793



End Mills

794-1313

Featured Milling Products.....	796-797
Illustrated Index/Application Guide.....	798-829
A Brand®.....	830-840
EXOPRO®.....	841-852
EXOCARB® WXL®.....	853-883
EXOCARB® WXS®.....	884-904
EXOCARB® MAX.....	905-909
EXOCARB® Diamond.....	910-918
EXOCARB® AERO.....	919-951
Composite Routers.....	952-959
HY-PRO® CARB.....	960-990
Carbide Single End.....	991-1020
Carbide Double End.....	1021-1024

Carbide Routers.....	1025-1026
SOMTA® Carbide.....	1027-1040
EXOMINI VC-10.....	1041-1042
EXOMILL VC-10®.....	1043-1046
HY-PRO® V.....	1047-1048
Roughing End Mills.....	1049-1056
HSS Single End.....	1057-1075
HSS Double End.....	1076-1084
SOMTA® HSS.....	1085-1087
Carbide Burs.....	1088-1110
Milling Technical.....	1112-1310
End Mill Reconditioning.....	1311-1313



Indexable

1314-1507

Illustrated Index.....	1316-1321
OSG PHOENIX®.....	1322-1497

EXOCARB® DISC CUTTER.....	1498-1506
EXOCARB® Arbor.....	1504



HY-PRO® Shrink

1508-1532

SynchroMaster®.....	1511-1512
---------------------	-----------

HY-PRO® Shrink.....	1513-1532
---------------------	-----------



Product Indexes

1533-1696

List Number Index.....	1533-1536
------------------------	-----------

EDP Numerical Index.....	1537-1696
--------------------------	-----------

Icon Guide

Tool Materials

HSS	HSS	HSSE	High Vanadium HSS	HSSE V3	HSSE V3
HSS-Co	HSS Cobalt	HSS-Co5	HSS-Co5	HSS-Co8	HSS-Co8
VC10	Powder Metallurgy HSS	XPM	High Grade Powder Metallurgy HSS	CARBIDE	Tungsten Carbide
CBN	CBN	CERMET	CERMET	PCD	PCD

Surface Treatment









BR	Bright	HR	HR Coating	TiCN	TiCN Coating
CrN	CrN Coating	IchAda	IchAda Coating	TiN	TiN Coating
DIA	OSG Patented Diamond Coating	N	Nitride Coating	V	OSG Special Multi-Layer TiCN Coating
DLC	DLC Coating	N S/O	Nitride/ Steam Oxide Coating	WD1	WD1 Coating
DUR	Duarise Coating	S/O	Steam Oxide Coating	WXL	WXL® Coating
EgiAs	EgiAs Coating	SS	Super Smooth	WXS	WXS® Coating
EXO	Multi-Layer TiAlN Coating	TiAlN	TiAlN Coating		

Other Icons

SPEED FEED	Speeds & Feeds	SHRINK FIT	Shrink Fit	NEW	New	NEW SIZES	New Sizes
-------------------	----------------	-------------------	------------	------------	-----	------------------	-----------



Tool Dimensions

EXTRA LONG Extra Long Length	LH Left Hand	 Milling Diameter Tolerance
LONG Long Length	LHS Left Hand Spiral	 Coolant-Through
JOBBERS Jobbers Length	STI Screw Thread Insert	 Straight Shank
MED Medium Length	 Center Cutting	 Taper Shank
REG Regular Length	 Non-Center Cutting	 Helix Angle
STUB Stub Length	 Radius Tolerance	

Tool Dimensions

TYPE W For Soft Materials	TYPE UNI For Universal Use	TYPE N Standard
TYPE H For Hard Materials	TYPE GG For Cast Iron	
TYPE VA For Steels and Stainless Steels	TYPE FS Parabolic Flute	

Color Bands

RED BAND For Alloy Steels	YELLOW BAND For Aluminum	GREEN BAND For Carbon Steel
BLUE BAND For Stainless Steels	WHITE BAND For Cast Iron	

Tour the New Catalog

Finding Your Tooling Needs

Master Index: P1

A snapshot of the entire catalog.

Surface Treatment Guide: P16-17

A complete list of all OSG surface treatments, their features and recommended applications.

Brand Index: P18-48

A complete list of all stocked OSG products organized by brand.

Featured Drilling Products: P52-53

A snapshot of OSG's featured drilling products to make tooling selection for any material fast and easy.

Drilling Application Guide: P54-55

Each of OSG's drill series recommendations according to materials

Drilling Illustrated Index: P56-65

All of OSG's drills listed according to length alongside their material recommendations.

Featured Threading Products: P404-405

A snapshot of OSG's featured threading products to make tooling selection for any material fast and easy.

Threading Application Guide: P406-407

OSG's threading products recommended according to materials with recommended SFM ranges. Compare tap performance to select your perfect tap.

Threading Illustrated Index: P408-431

All of OSG's threading products listed according to style alongside their material recommendations.

Featured Milling Products: P796-797

A snapshot of OSG's featured Milling products to make tooling selection for any material fast and easy.

Milling Illustrated Index: P798-829

All of OSG's Milling products listed according to brand alongside their material recommendations.

Indexable Illustrated Index: P1316-1321


All of OSG's Indexable products and their material recommendations.

List Number Index: P1533-1536

A complete list of all stocked OSG products organized by list number.

EDP Numerical Index: P1537-1696

A complete list of all stocked OSG products organized by EDP number.

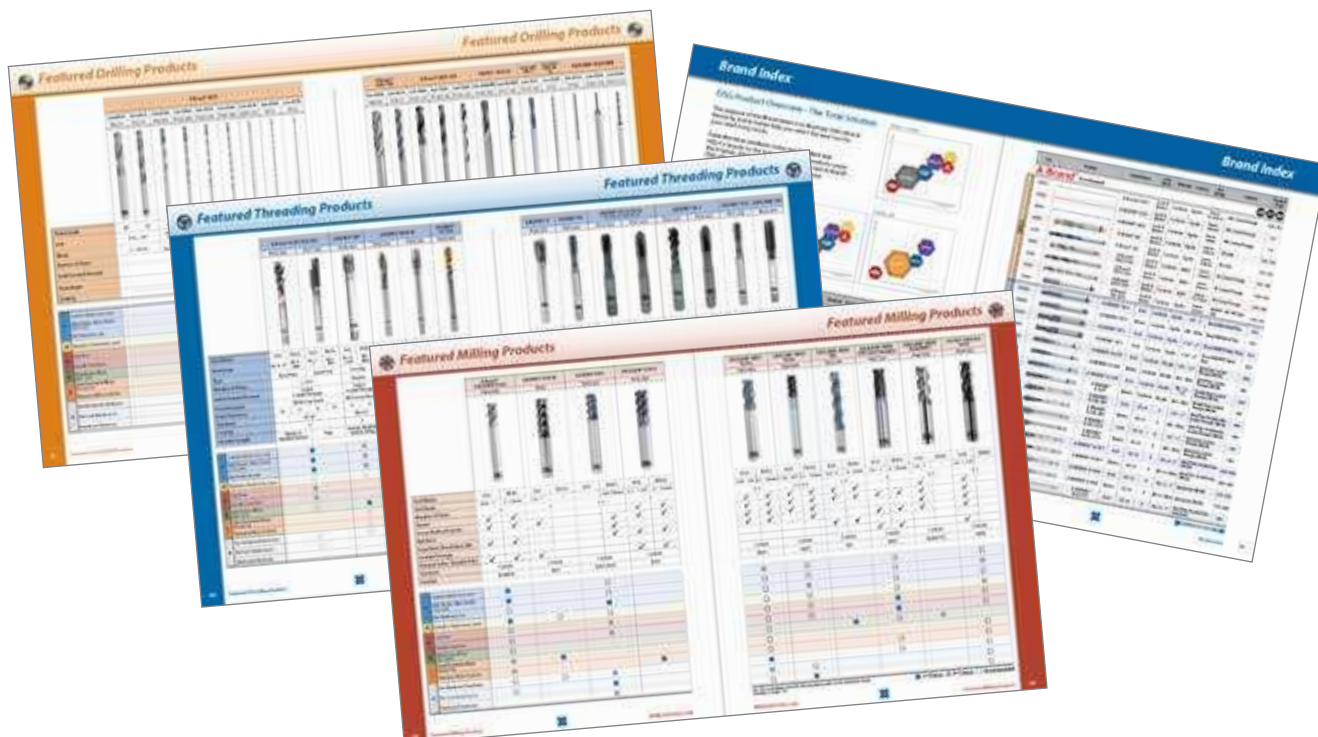

OSG Online

www.osgtool.com

OSG is constantly striving to help you find what you need when you need it. Our website includes features that focus on functionality, usability and even appearance to make your experience as enjoyable as possible. We have recently updated the website so it is responsive across all your favorite devices!



OSG News: *See What's New at OSG*

- Press Releases
- New Products
- Social Media Blog

Resources: *Tools to Make it Easier*

- Product Search
- Tool Reconditioning
- Find a Distributor
- Competitor Crossover
- Fast Service Taps
- MSDS Download
- Tap-Drill Size Calculator

OSG's Tool Selector: *The Right Tool Right Now*

- With OSG's new tool selector, you are never more than 5 simple steps away from the right tool for your job.

Online Live Chat

- During regular business hours, OSG provides online support for customers looking for an alternative way to get their technical product assistance.

OSG Ozone: *Save BIG on Overstock*

- Browse through an array of premium OSG products being offered at special discount prices!

Social Media

Connect with OSG

Follow and interact with OSG on popular social media sites including Facebook, Twitter, LinkedIn, Instagram, and YouTube.

Facebook: facebook.com/osgtool


Twitter: twitter.com/OSGTOOL

LinkedIn: linkedin.com/company/osg-usa-inc

Instagram: instagram.com/osgtool/

YouTube: youtube.com/osgtool

OSG E-CLUB: Subscribe: eclub@osgtool.com

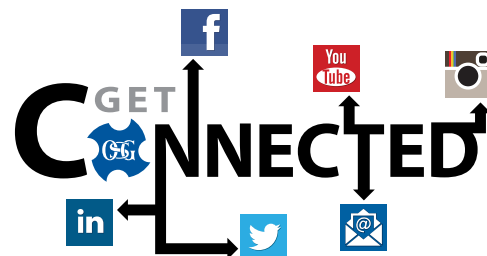

Philosophy & Business Model

Corporate Philosophy: Global Presence

As a comprehensive cutting tool manufacturer, we make products that at a fundamental level contribute to enhancing people's quality of life. Through continuous growth, we have established a production, sales and technical support network spanning 33 countries.

Our corporate aim is to continue to expand our operations globally and strengthen our contribution to manufacturing industries worldwide.


Business Model

Customer communication is at the heart of the OSG brand. We anticipate, listen and actively react to customer needs through on-site face-to-face support. OSG's vast global network provides our production sites with accurate feedback about user needs so that they can quickly design, develop, manufacture and deliver products that precisely meet those needs.

shaping your dreams

The power of OSG lies in our assured innovative technological know-how for producing high-quality and high-performance products; our exceptional services to respond to situations diligently; and our out-of-the-box thinking to provide total solutions that anticipate our customers' needs. We are committed to contribute to the advancement of the manufacturing industries by shaping our customers' dreams into reality.

The Power to Exceed Customers' Expectations

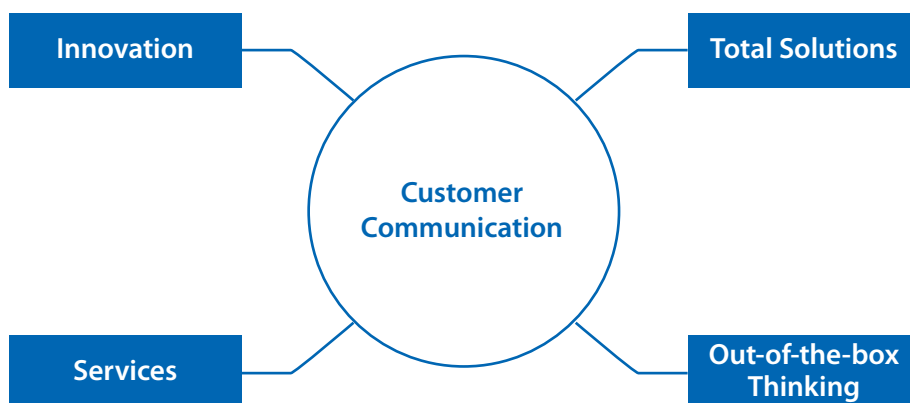

Message from the President

Shaping Customers' Dreams as a Comprehensive Cutting Tool Manufacturer

OSG Corporation has succeeded in maintaining steady growth over the past 80 years. We would like to express our heartfelt gratitude to the support of our customers, business partners and shareholders for contributing to OSG's tremendous global success today.

Ever since the company's establishment in 1938, OSG has been committed to developing quality products that truly exceed the expectations of each customer. This spirit remains alive in all facets of our operation today, and has given OSG the strength to challenge the status quo and deliver products and services in sync with manufacturing needs of the times. Our corporate tagline "shaping your dreams" summarizes this passion for new challenges and commitment to transforming each and every one of our customers' dreams into reality.

While the manufacturing industry is consistently evolving through the new discovery of materials and technologies, OSG is poised for continued growth by responding with new innovations. OSG will continue to support the global manufacturing industries while living up to our stakeholders' trust and expectations. We thank you for your continuous and enthusiastic support for OSG Corporation, a company that keeps evolving without forgetting its origin.



Jeff Tennant
President of OSG USA

OSG USA's Mission

It is the role of OSG USA, as well as its subsidiary companies, to carry out the core philosophy of our parent company.

OSG USA's mission is to contribute to the advancement of the manufacturing industry and society through innovative technology and superior quality products.

At OSG we are committed to providing our customers with the most cost effective quality products and the best service in the industry.

Our experienced staff strives to not only provide solutions but also works with our customers to improve processes through innovative strategies.

A Commitment to Quality that Withstands the Test of Time

In March 1938, Hideo Osawa established OSG Grinding Co., Ltd. to achieve domestic production of high-quality taps. Thirty years later, OSG's first overseas subsidiary was established in the United States. Based on the corporate philosophy of "global presence," OSG has since then built a production, sales and technical support network spanning 33 countries. With over 50 years of experience in developing new markets and human assets, OSG will continue its global expansion and contribute to the advancement of the manufacturing industry worldwide.



March 1938

- Hideo Osawa established OSG Grinding Co., Ltd. in Tokyo
- Began manufacturing taps and dies

May 1942

- Began manufacturing and sales of screw gauges

May 1943

- Established Aichi Factory (now OSG Academy)



May 1963

- Began manufacturing and sales of flat rolling dies

August 1956

- Began manufacturing and sales of cylindrical rolling dies

April 1961

- Toyokawa Factory began operation



August 1970

- Began manufacturing and sales of HSS end mills

1970

December 1971

- Toyohashi Factory began operation

June 1968

- First overseas subsidiary, OSG Tap & Die, Inc., opens in the USA

March 1967

- Oike Factory began operation

June 1963

- Changed the company name to OSG MFG. Company

December 1963

- Separated sales department and established OSG Corporation



March 1984

• Began manufacturing and sales of drills

February 1987

• Began manufacturing and sales of cutter bodies

September 1980

• Began manufacturing and sales of carbide end mills

1990

November 1990

• Yana Factory began Operation

June 1982

• Shinshiro Factory began operation

1980

2000

June 2010

• Began sales of OSG Phoenix, an indexable tooling series

2010

September 2014

• Introduces "The A Brand" product brand

November 2014

• Achieved consolidation net sales of 100 billion yen in FY2014

December 2004

• Established Design Center

January 1998

• Established Hongu Center

December 2006

• Established Global Technology Center

September 2017

• Established D-Lab

December 1992

• OSG MFG. Company and OSG Corporation were merged into OSG Corporation

February 1993

• Relocated corporate headquarters to Toyokawa, Aichi

December 1998

• Established CS Center



2018


• OSG celebrates its 80th anniversary
• OSG USA, Inc. celebrates its 50th anniversary



Anniversary



Global Network

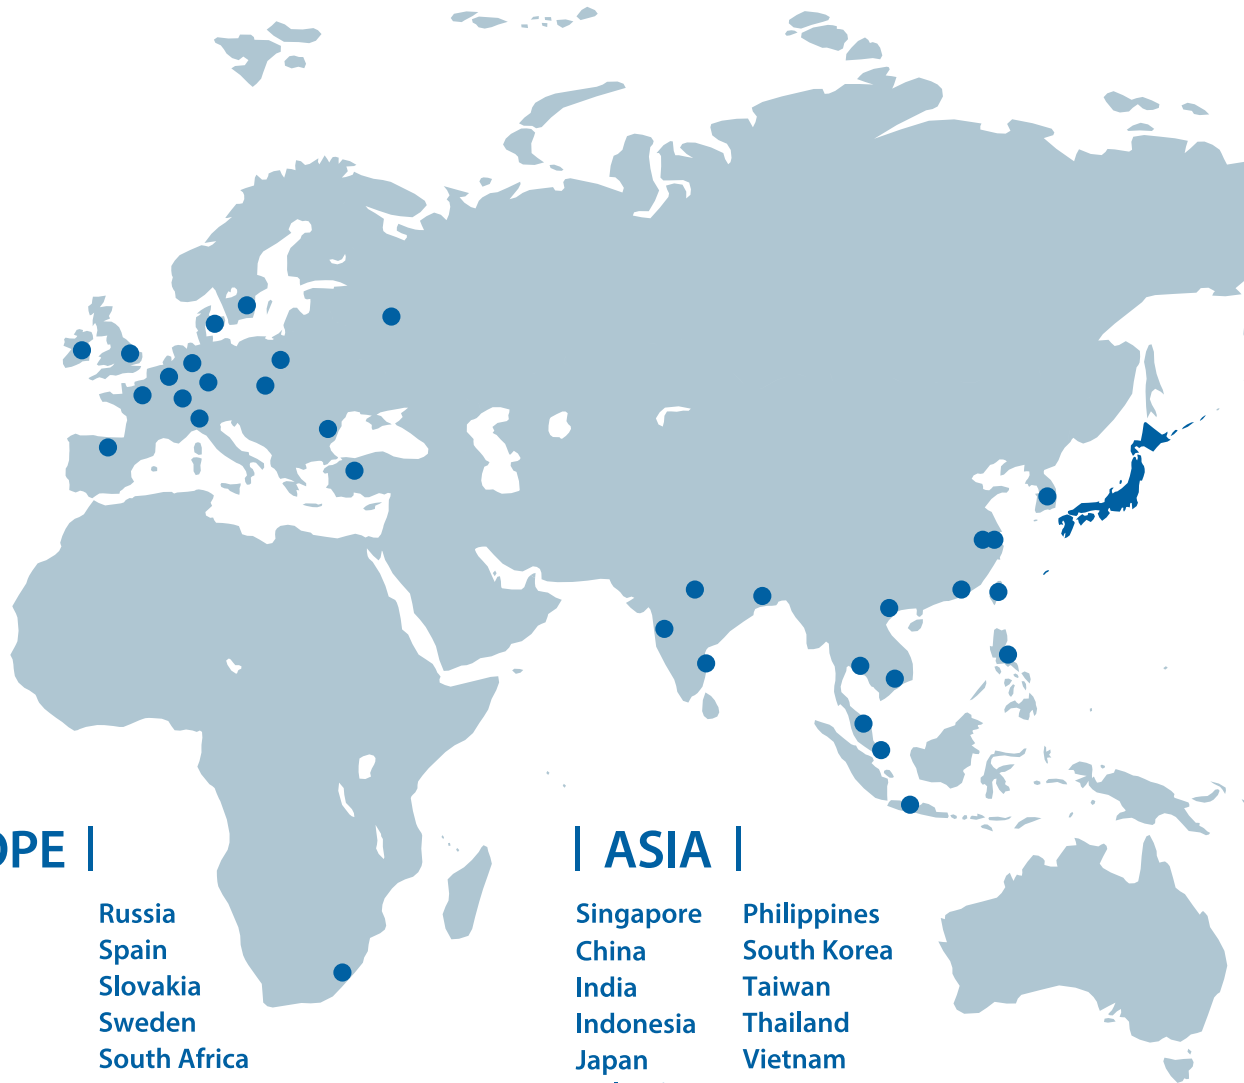

| EUROPE |


Belgium	Russia
Denmark	Spain
France	Slovakia
Germany	Sweden
Italy	South Africa
Ireland	Switzerland
The Netherlands	Turkey
Poland	United Kingdom
Romania	

| ASIA |

Singapore	Philippines
China	South Korea
India	Taiwan
Indonesia	Thailand
Japan	Vietnam
Malaysia	

A Global Network that Accelerates International Business Development

In 1968, OSG Corporation established its very first overseas subsidiary in the United States. Since then, OSG has dynamically expanded its global presence, establishing a production, sales and technical support network spanning 33 countries.

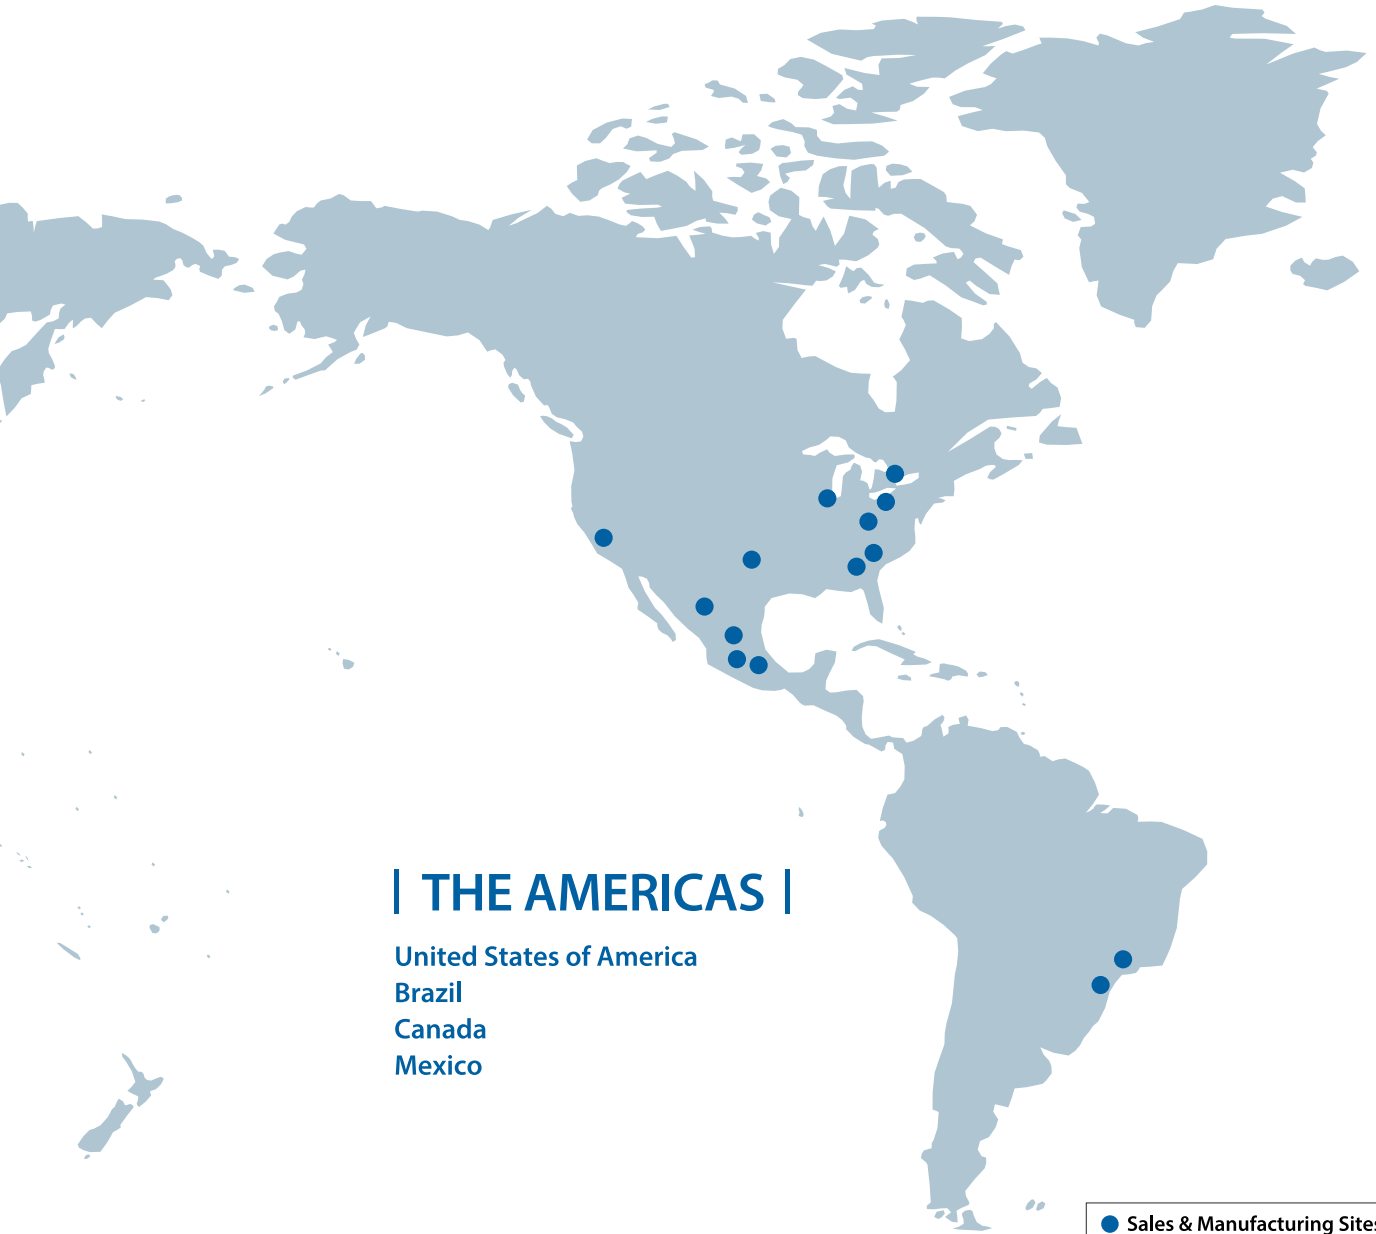

| THE AMERICAS |

United States of America
Brazil
Canada
Mexico

● Sales & Manufacturing Sites

As of December 1, 2019

United States of America (OSG USA, Inc.)



Singapore (OSG Asia Pte Ltd.)



Belgium (OSG Europe Logistics S.A.)



North America Locations

U.S.A.

Texas



OSG National Headquarters
1945 West Walnut Hill Lane
Irving, Texas 75038, USA
Toll Free: (1) 800-837-2223
Phone: (1) 800-837-3334
Web: www.osgtool.com

Ohio



OSG Mfg. Fastener Products Division, Parma, Ohio
12502 Plaza Drive
Parma, Ohio 44130, USA
Toll Free: (1) 800-533-1300
Fax: (1) 216-267-3356
Web: www.osgtool.com

California



OSG California Regional Service Center
1921 Miraloma Avenue, Suite B
Placentia, CA 92870, USA
Toll Free: (1) 800-837-2223
Fax: (1) 714-528-9209
Web: www.osgtool.com

Illinois



OSG Illinois National Service Center
620 Stetson Avenue
St. Charles, IL 60174, USA
Toll Free: (1) 800-837-2223
Phone: (1) 630-790-1400
Fax: (1) 800-837-3334
Web: www.osgtool.com



OSG Ohio Sales Office
3611 Socialville Foster Road,
Suite 102 Mason, OH 45040, USA
Phone: (1) 513-755-3360
Fax: (1) 513-755-3362
Web: www.osgtool.com

South Carolina



OSG Mfg. Carbide Products Division, Bensenville, Illinois
759 Industrial Drive
Bensenville, IL 60106, USA
Phone: (1) 630-274-2100
Fax: (1) 630-274-2121
Web: www.osgtool.com



AMAMCO Tool & Supply Company, Inc.
130 Lee Joyal Road,
Duncan SC, 29334, USA
Toll Free: (1) 800-833-2239
Fax: (1) 864-877-6554
Web: www.amamcotool.com



North America Locations

Canada

Canada



OSG Canada, Ltd.
538 King Forest Court
Burlington, ON L7P 5C1, Canada
Toll Free: (1) 800-263-4861
Phone: (1) 905-632-8032
Fax: (1) 905-632-8466
Web: www.osgtool.com

Mexico

Mexico



**OSG Royco, S.A. de C.V.
(Headquarters)**
Avenida Central No.186,
Col. Nueva Industrial Vallejo,
Mexico, D.F., 07700, Mexico
Phone: (52) 55-5119-3363
Fax: (52) 55-5119-3370
Web: www.osgtool.com



**OSG Royco, S.A. de C.V.
(Silao Tech Center)**
Circuito Santa Fe 265, Parque
Industrial Santa Fe III, Silao,
Guanajuato, C.P. 36275, Mexico
Phone: (52) 472-4780-200



**OSG Royco, S.A. de C.V.
(Toluca Plant)**
Eje 1 Norte Esquina Calle 5 Parque
Industrial, Toluca 2000, Toluca,
Estado de Mexico, 50200, Mexico
Phone: (52) 72-22-793-609
Fax: (52) 72-22-793-612

**Premium Grinding,
S de R.L. de C.V.**
Calle Nicolas Gogol 11371
Complejo Industrial Chihuahua,
Chihuahua, 31136, Mexico
Phone: (52) 61-44-81-68-98

Primus Coating S.A. DE C.V.
Avenida Central No. 186,
Col. Nueva Industrial Vallejo,
Mexico, D.F. 07700, Mexico
Phone: (52) 722-4922-793
Web: www.primuscoating.com

Global Headquarters

Japan

OSG CORPORATION
3-22 Honnogahara, Toyokawa,
Aichi, Japan 422-8543
Phone: (81) 533-82-1111
Fax: (81) 533-82-1131
Web: www.osg.co.jp



Core Products

Supporting Global Manufacturing with Top Class Products and Technology

OSG maintains absolute control over every aspect of its manufacturing capabilities. OSG products are produced in-house - from the production of tool material, creation of tool geometry, to the development of its own proprietary coatings - the 3 vital elements in the manufacturing of superior cutting tools.



Taps

Taps are used to cut screw threads on the inside surfaces of holes, creating the "female" half (nut) of the screw. High precision is of vital importance, particularly in areas such as automobile engines, which require precision screws. OSG offers a lineup of taps with diameters in various sizes and with specifications suitable for a wide variety of uses.



Drills

Drills are used to make holes in a wide range of surfaces. OSG has received high acclaim for the development of high-precision, high-value-added products for manufacturing use in automotive and aircraft part manufacture, which demands advanced processing techniques and zero margin of error.


End Mills

End Mills are used to cut and contour molds for plastic parts, which include electric home appliances, die-casting dies for automotive parts and stamping molds. To meet today's demanding requirements (smaller size, lower weight and reduced cost), OSG has developed many carbide end mills that are excellent in both processing accuracy and durability.



Rolling Dies

Thread rolling dies are used to copy threading onto "Male" screws (bolts); the process consists of rolling a metal bar between two thread rolling dies tightly pressed to each side. OSG manufactures cylindrical and flat rolling dies for screws, worms and serrations, thread rolling planetary dies and contour-flow rolling dies, in accordance with their intended use.

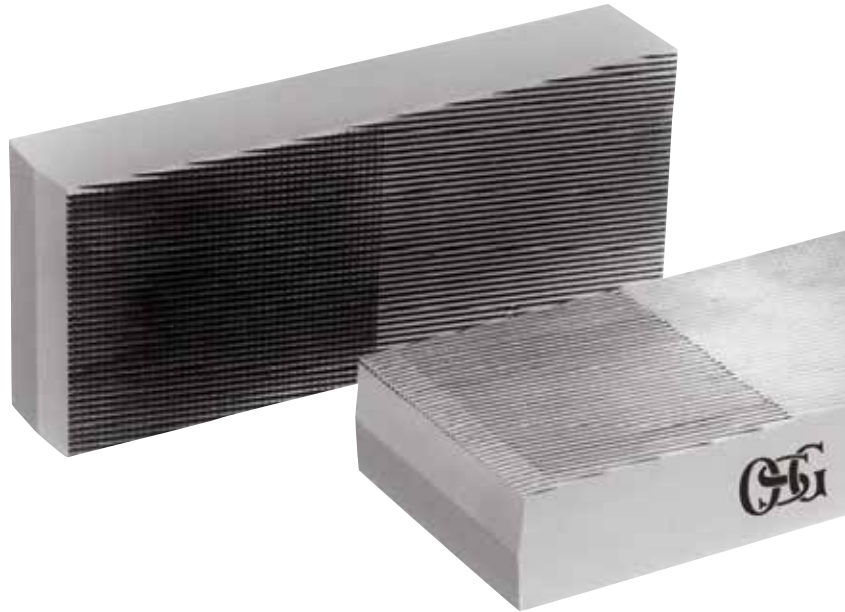

Indexable Tools

Indexable tools are used to shape metal molds and machine parts. While end mills are used for finishing, indexable tools are intended for rough cutting and contouring, and use disposable inserts attached to the tool body.

Gauges

Gauges are used to inspect the final dimensions of screw threads and holes. OSG was an early adopter of changes in the Japan Industrial Standards (JIS). Today, we offer a range of screw gauges based on ISO standards. Precision checking is an extremely important process because of the trend toward increasing product precision and compliance with international standards.



















Surface Treatments






















OSG Product Treatments

OSG's surface treatments are designed to meet customer needs through comprehensive technology by providing wear resistance, seizure resistance, corrosion resistance and mold release. OSG proprietary treatments provide a range of thicknesses, hardnesses and oxidation temperatures so you are sure to find the best match for any application.



Coating	Coating Color	Type	Thickness (µm)	Hardness (HV)	Oxidation Temp. (°C)	Application
 IchAda	 Black Gray	Cr	1~5	3100	1100	For drilling steel, stainless steel & hardened steel. A PVD coating with excellent surface smoothness and abrasion resistance, high surface hardness and heat resistance for small diameter tools.
 DUR	 Black Gray	Cr multilayer	1~5	3100	1100	For milling steel, stainless steel & hardened steel. A PVD coating with excellent surface hardness and wear resistance, excellent heat resistance and low coefficient of friction to reduce material adhesion.
 WD1	 Iridescent Blue	Cr multilayer	3~5	3300	1100	For drilling steel, stainless steel, cast iron & hardened steel. A PVD coating with excellent surface hardness and wear resistance, excellent heat resistance and low coefficient of friction to reduce material adhesion.
 EgiAs	 Iridescent Red	Nano multilayer	3~5	3200	1100	For drilling steel, stainless steel, cast iron, aluminum & hardened steel. A PVD coating with excellent surface hardness and wear resistance, excellent heat resistance and low coefficient of friction to reduce material adhesion.
 WXS	 Black Gray	SiC	1~5	3500	1300	For drilling, tapping & milling steel, stainless steel & hardened steel. A PVD coating with excellent surface hardness and wear resistance, excellent heat resistance and low coefficient of friction to reduce material adhesion.
 WXL	 Black Gray	Cr	1~5	3100	1100	For drilling & milling steel, stainless steel & hardened steel. A PVD coating with excellent surface hardness and wear resistance, excellent heat resistance and low coefficient of friction to reduce material adhesion.
 EXO	 Black Violet	TiAlN multilayer	3	2800	850	For drilling, tapping & milling steel, stainless steel, cast iron & heat resistant alloys. A PVD coating with high surface hardness and wear resistance, very good heat resistance and low coefficient of friction to reduce material adhesion.
 TiAlN	 Black Violet	TiAlN	3	2800	800	For drilling, tapping & milling steel, stainless steel, cast iron & heat resistant alloys. A PVD coating with high surface hardness and wear resistance, very good heat resistance and low coefficient of friction to reduce material adhesion.

Surface Treatments

Coating	Coating Color	Type	Thickness (µm)	Hardness (HV)	Oxidation Temp. (°C)	Application
 V	 Blue Gray	TiCN multilayer	3	2700	400	For drilling & tapping steel, stainless steel, aluminum & heat resistant alloys. A PVD coating with high surface hardness and wear resistance, good heat resistance and low coefficient of friction to reduce material adhesion.
 TiCN	 Blue Gray	TiCN	3	2700	400	For drilling, tapping & milling steel, stainless steel, aluminum & heat resistant alloys. A PVD coating with high surface hardness and wear resistance, good heat resistance and low coefficient of friction to reduce material adhesion.
 TiN	 Gold	TiN	3	2000	500	For drilling, tapping & milling steel, stainless steel, tool & die steel & aluminum. A PVD coating with good surface hardness and wear resistance, good heat resistance and low coefficient of friction to reduce material adhesion.
 SS	 Black Violet	TiAlN	1	2800	800	For drilling & tapping steel, stainless steel, & heat resistant alloys. A PVD coating with high wear & abrasion resistance, very good heat resistance and high surface smoothness to reduce material adhesion.
 HR	 Silver Gray	Ti	2	2800	700	For tapping stainless steel & heat resistant alloys. A PVD coating with high wear & abrasion resistance, very good heat resistance and high surface smoothness to reduce material adhesion.
 S/O	 Black	Steam-Oxide	-	-	-	For tapping steel, stainless steel, tool & die steel & nickel-alloys. The oxidized surface layer is porous and increases lubricity by retaining cutting fluid on the working area of the tool.
 Ni	 Silver Gray	Nitride	30~50	1000	-	For tapping cast iron, cast aluminum, & plastic. The case-hardened surface layer increases wear resistance in abrasive and tough materials.
 CrN	 Silver Gray	CrN	3	1800	700	For tapping non-ferrous materials. A PVD coating with high surface lubricity to reduce material adhesion applied over a case-hardened surface layer with increased wear resistance.
 DIA	 Black	DIA	20, 12	9000	600	For drilling, tapping & milling non-ferrous & composite materials. A CVD coating with superior surface hardness and wear resistance, outstanding durability, and excellent smoothness to reduce material adhesion.
 DLC	 Iridescent Green	DLC	0.2	6000	550	For milling non-ferrous materials. A PVD coating with excellent surface hardness and wear resistance, and very low coefficient of friction to reduce material adhesion.
 BR	-	-	-	-	-	For general machining of all materials. The uncoated substrate provides good wear resistance and durability in general machining applications.


Brand Index

OSG Product Overview - The Total Solution


The purpose of this Brand Index is to illustrate OSG's Brand hierarchy and to better help you select the best tool for your machining needs.

From the value products under our Standard and HSS-Co brands to the high performance products under the V-Series, EXOCARB®, EXOPRO® and our new A Brand®, OSG offers a broad range of tools to meet your application requirements.


Drilling - Carbide

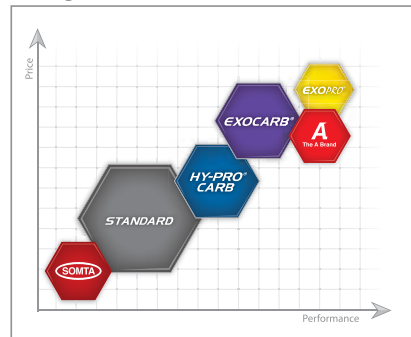


Threading

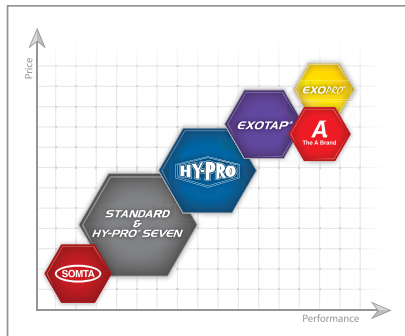

Milling

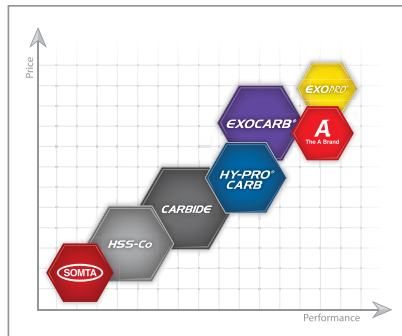

Drilling - HSS

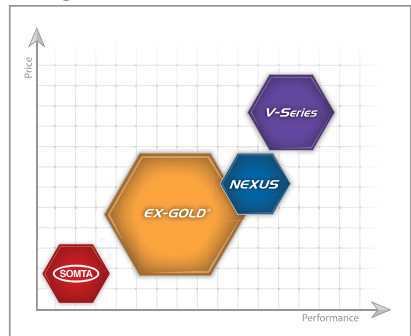

List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-------------	----------	---------	------------	----------	--------------

A Brand®



DRILLS	List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
	6600		A Brand® ADO-TRS	Inch & Metric	Carbide	EgiAs	4mm - 20mm	3D, Coolant-Through, 3 Flutes	66-69
	6610		A Brand® ADO-TRS	Inch & Metric	Carbide	EgiAs	4mm - 20mm	5D, Coolant-Through, 3 Flutes	70-73
	5720		A Brand® ADFO	Inch & Metric	Carbide	EgiAs	3mm - 20mm	3D, Coolant-Through, Flat Drill	74-77
	5700		A Brand® ADF	Inch & Metric	Carbide	EgiAs	0.2mm - 20mm	2D, Solid, Flat Drill	78-83
	5705		A Brand® ADFLS	Inch & Metric	Carbide	EgiAs	3mm - 20mm	2D, Solid, Flat Drill, Long Shank	84-85
	6500		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 20mm	3D, Coolant-Through	86-91
	6510		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 20mm	5D, Coolant-Through	92-97
	6520		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 15.88mm	8D, Coolant-Through	98-101
	6530		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 14.29mm	10D, Coolant-Through	102-104
	6535		A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 14.29mm	15D, Coolant-Through	105-106
	6540		A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 14.29mm	20D, Coolant-Through	107-108



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

A Brand® (Continued)



	List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
DRILLS	6550		A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 14.29mm	30D, Coolant-Through	109-110
	6560		A BRAND® ADO	Inch & Metric	Carbide	EgiAs	3mm - 10mm	40D, Coolant-Through	111
	6570		A BRAND® ADO	Inch & Metric	Carbide	EgiAs	3mm - 8mm	50D, Coolant-Through	112
	6300		A Brand® AD	Inch & Metric	Carbide	EgiAs	2mm - 20mm	2D, Solid	113-116
	6310		A Brand® AD	Inch & Metric	Carbide	EgiAs	2mm - 20mm	4D, Solid	117-120
	5200		A Brand® ADO-SUS	Inch & Metric	Carbide	WXL®	2mm-20mm	3D, Coolant-Through	121-127
	5210		A Brand® ADO-SUS	Inch & Metric	Carbide	WXL®	2mm-20mm	5D, Coolant-Through	128-134
	5220		A Brand® ADO-SUS	Inch & Metric	Carbide	WXL®	2mm - 12.7mm	8D, Coolant-Through	135-139
	5190		A Brand® AD-LDS	Inch & Metric	Carbide	EgiAs	3mm - 25mm	Solid 90°, 120°, 140° Spot Drill	140-141
	TAPS	16625		A BRAND® AT-1	Inch	Carbide	EgiAs	1/4" - 1"	Thread Mill, Helical Flute
16620			A BRAND® AT-1	Metric	Carbide	EgiAs	M6 - M24	Thread Mill, Helical Flute	433
16630			A BRAND® AT-1	Inch	Carbide	EgiAs	1/16" - 2"	Thread Mill, NPT, Helical Flute	434
16631			A BRAND® AT-1	Inch	Carbide	EgiAs	1/16" - 2"	Thread Mill, NPTF, Helical Flute	435
16605			A BRAND® A-CSF	Inch	Carbide	Bright	1/4" - 1/2"	Spiral Flute, Coolant-Through, DIN OAL	490
16600			A BRAND® A-CSF	Metric	Carbide	Bright	M5 - M12	Spiral Flute, Coolant-Through, DIN OAL	491
16615			A BRAND® A-CHT	Inch	Carbide	Bright	No. 12 - 1/2"	Straight Flute, Coolant-Through, DIN OAL	660
16610			A BRAND® A-CHT	Metric	Carbide	Bright	M5 - M12	Straight Flute, Coolant-Through, DIN OAL	661
16545			A BRAND® A-OIL-SFT	Inch	VC-10	V	1/4" - 2"	Spiral Flute, Variable Helix, Coolant-Through, DIN OAL	498
16540			A BRAND® A-OIL-SFT	Metric	VC-10	V	M6 - M56	Spiral Flute, Variable Helix, Coolant-Through, DIN OAL	499
16555			A BRAND® A-OIL-POT	Inch	VC-10	V	1/4" - 1"	Spiral point, Coolant-Through, DIN OAL	581
16550			A BRAND® A-OIL-POT	Metric	VC-10	V	M6 - M24	Spiral point, Coolant-Through, DIN OAL	582
16505			A BRAND® A-SFT	Inch	VC-10	V	No. 4 - 2"	Spiral Flute, Variable Helix, DIN OAL	492-494
16500			A BRAND® A-SFT	Metric	VC-10	V	M1.4 - M56	Spiral Flute, Variable Helix, DIN OAL	495-497
16515			A BRAND® A-POT	Inch	VC-10	V	No. 2 - 1"	Spiral point, DIN OAL	577-578
16510			A BRAND® A-POT	Metric	VC-10	V	M1.4 - M24	Spiral point, DIN OAL	579-580
16525			A BRAND® A-LT-SFT	Inch	VC-10	V	No. 4 - 1"	Spiral Flute, Variable Helix, Long Shank	500

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------






A Brand® (Continued)

ADR ATP AEM

TAPS	16520		A BRAND® A-LT-SFT	Metric	VC-10	V	M3 - M24	Spiral Flute, Variable Helix, Long Shank	501-502
	16535		A BRAND® A-LT-POT	Inch	VC-10	V	No. 4 - 1"	Spiral point, Long Shank	583
	16530		A BRAND® A-LT-POT	Metric	VC-10	V	M3 - M24	Spiral point, Long Shank	584-585
	16570		A BRAND A-NPT	Inch	HSSE	V	1/16" - 1"	NPT, Interrupted	735
	16575		A BRAND A-LT-NPT	Inch	HSSE	V	1/16" - 1"	NPT, Long shank, Interrupted	736
	16590		A BRAND A-NPS	Inch	HSSE	V	1/16" - 1"	NPS	739
	16585		A BRAND A-BSPT	Inch	HSSE	V	1/8" - 1"	BSPT	738
	16580		A BRAND A-BSPP	Inch	HSSE	V	1/8" - 1"	BSPP	737
END MILLS	8200		A BRAND® AE-VMS	Inch	Carbide	Durise	5/64" - 1"	Anti-Vibration	830
	8205		A BRAND® AE-VMS	Metric	Carbide	Durise	3mm - 25mm	Anti-Vibration	831
	8210		A BRAND® AE-CR-VMS	Inch	Carbide	Durise	3/16" - 1"	Anti-Vibration, Corner Radius	832
	8215		A BRAND® AE-CR-VMS	Metric	Carbide	Durise	3mm - 12mm	Anti-Vibration, Corner Radius	833
	8220		A BRAND® AE-LN-CR-VMS	Inch	Carbide	Durise	1/4" - 1"	Anti-Vibration, Long Neck, Corner Radius	834
	8206		A BRAND® AE-VMSS	Metric	Carbide	Duarise	1mm - 12mm	Anti-Vibration	835
	8230		A BRAND® AE-LN-VMSS	Inch	Carbide	Duarise	1/4" - 1"	Anti-Vibration, Long Neck	836
	8235		A BRAND® AE-LN-VMSS	Metric	Carbide	Duarise	6mm - 12mm	Anti-Vibration, Long Neck	837
	8201		A BRAND® AE-VML	Inch	Carbide	Duarise	1/4" - 1/2"	Anti-Vibration, Long LOC	838
	8207		A BRAND® AE-VML	Metric	Carbide	Duarise	6mm - 12mm	Anti-Vibration, Long LOC	839
	8202		A BRAND® AE-NIK-VML	Inch	Carbide	Duarise	1/4" - 1/2"	Anti-Vibration, Long LOC, Nicks	840
	8208		A BRAND® AE-NIK-VML	Metric	Carbide	Duarise	6mm - 12mm	Anti-Vibration, Long LOC, Nicks	840

EXOPRO®

EP










DRILLS	5600		EXOPRO® Mega Muscle	Inch & Metric	Carbide	WD1	4mm- 20mm	3D, Coolant-Through, 3 Flutes	142-143
	5610		EXOPRO® Mega Muscle	Inch & Metric	Carbide	WD1	4mm- 20mm	5D, Coolant-Through, 3 Flutes	144-145
	5630		EXOPRO® Mega Muscle	Inch & Metric	Carbide	WD1	5mm - 15.88mm	10D, Coolant-Through	146-148
	5950Ni		EXOPRO® WHO-Ni	Inch & Metric	Carbide	WXS®	3mm- 12.7mm	3D, Coolant-Through	149-150
	5955Ni		EXOPRO® WHO-Ni	Inch & Metric	Carbide	WXS®	3mm- 12.7mm	5D, Coolant-Through	151-152



List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-------------	----------	---------	------------	----------	--------------

EXOPRO® (Continued)

EP

List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page	
DRILLS	7501		EXOPRO® AERO-STAD	Inch	Carbide	Dia.	#40 - 1/2"	Composite, Triple Angle	173
	7520		EXOPRO® AERO-LHX	Inch	Carbide	Dia.	#40 - 1/2"	Composite, Low Helix	174
	7500		EXOPRO® AERO-D-REAM	Inch	Carbide	Dia.	#40 - 1/2"	Composite, Tapered Reamer	175
	7530		EXOPRO® AERO-S	Inch	Carbide	Dia.	#40 - 1/2"	Composite, High Helix, Stack Drill	176
	7532		EXOPRO® AERO-H	Inch	Carbide	Dia.	#40 - 1/2"	Composite, Stack Drill for All Stacks	177
TAPS	16050		EXOPRO® XPF-OIL	Inch	HSS-Co	V	1/4" - 1-3/4"	Forming Tap, Coolant-Through, DIN OAL	448-449
	16150		EXOPRO® XPF-OIL	Metric	HSS-Co	V	M6 - M45	Forming Tap, Coolant-Through, DIN OAL	450-452
	16250		EXOPRO® XPF	Inch	HSS-Co	V	No. 0 - 1-3/4"	Forming Tap, DIN OAL	453-456
	16350		EXOPRO® XPF	Metric	HSS-Co	V	M1 - M45	Forming Tap, DIN OAL	457-460
	16260		EXOPRO® XPF	Inch	HSS-CO	V	No. 2 - 1"	STI, Forming Tap, DIN OAL	705-706
	16360		EXOPRO® XPF	Metric	HSS-CO	V	M2 - M24	STI, Forming Tap, DIN OAL	707
	16255		EXOPRO® XPF-LS	Inch	HSS-Co	V	No. 5 - 1"	Forming Tap, Long Shank	461-462
	16355		EXOPRO® XPF-LS	Metric	HSS-Co	V	M3 - M20	Forming Tap, Long Shank	463-464
	16450		EXOPRO® CC-SUS	Inch	HSSE	TiN	No. 2 - 1"	Spiral Flute, Variable Helix, DIN OAL	503-504
	16455		EXOPRO® CC-SUS	Metric	HSSE	TiN	M2 - M24	Spiral Flute, Variable Helix, DIN OAL	505
	335Ni		EXOPRO® WHR-Ni	Inch	VC10	HR	No. 2 - 1"	Spiral Flute, DIN OAL	506-507
	336Ni		EXOPRO® WHR-Ni	Metric	VC10	HR	M2.5 - M24	Spiral Flute, DIN OAL	508
	337Ni		EXOPRO® WHR-Ni	Inch	VC-10	HR	No. 2 - 1"	Spiral Point, DIN OAL	588-589
	338Ni		EXOPRO® WHR-Ni	Metric	VC-10	HR	M2.5 - M24	Spiral Point, DIN OAL	590
	13063		EXOPRO® Ti	Inch	VC-10	V	No. 2 - 1/2"	Spiral Flute, RHC/LHS	586
13163		EXOPRO® Ti	Metric	VC-10	V	M2.5 - M12	Spiral Flute, RHC/LHS	587	
END MILLS	2055		EXOPRO® UVX-Ni	Inch	Carbide	EXO®	1/4" - 1"	Corner Radius	841
	9510		EXOPRO® PHX	Metric	Carbide	EXO®	1mm - 20mm	Deep Feed, Ball End	842
	9590		EXOPRO® PHX	Metric	Carbide	WXS®	0.06mm - 6mm	Long Neck, Ball End	843
	9581		EXOPRO® PHX	Metric	Carbide	WXS®	1mm - 12mm	Pencil-Neck, Deep Feed, Ball End	844-845
	9592		EXOPRO® PHX	Metric	Carbide	WXS®	0.8mm - 3mm	Pencil Neck, Deep Feed, Corner Radius	846

▶ continued on next page ▶



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------
















EXOPRO® (Continued)

EP

END MILLS	9575		EXOPRO® PHX	Metric	Carbide	WXS®	6mm - 20mm	Deep Feed, Corner Radius	847
	9576		EXOPRO® PHX	Metric	Carbide	WXS®	4mm - 16mm	Long Neck, Deep Feed, Corner Radius	848
	9580		EXOPRO® PHX	Metric	Carbide	WXS®	2mm - 12mm	Pencil Neck, Deep Feed, Corner Radius	849-851
	9570		EXOPRO® PHX	Metric	Carbide	EXO®	1mm - 20mm	High-Feed, Corner Radius	852
	2061		EXOPRO® AERO-BNC	Inch	Carbide	Dia.	1/8" - 1/2"	Composite, Nicked Router	952
	2066		EXOPRO® AERO-HBC 30	Inch	Carbide	Dia.	1/8" - 1/2"	Composite, Compression Router	953
	2064		EXOPRO® AERO-HBC 45	Inch	Carbide	Dia.	1/4" - 1/2"	Composite, Compression Router	954
	2068		EXOPRO® AERO-HBC 60	Inch	Carbide	Dia.	1/4" - 1/2"	Composite, Compression Router	955
	2680		EXOPRO® AERO-REC	Inch	Carbide	Dia.	15/64" - 1/2"	Composite, Roughing Router	956
	2650		EXOPRO® AERO-MFR	Inch	Carbide	Dia.	1/4" - 1/2"	Composite, Finishing Router	957

EXOCARB®

HTE



























DRILLS	5171		EXOCARB® WH70	Metric	Carbide	WXS®	2mm-18.6mm	5D	153-155
	5172		EXOCARB® XH	Metric	Carbide	Bright	2mm-12mm	Solid, Tap Extractor	156
	5275		EXOCARB® MAX-OIL AL	Metric	Carbide	Bright	3mm-10mm	15-30D, Coolant-Through	157
	5310		EXOCARB® MAX-MINI	Metric	Carbide	EXO®	1mm-3mm	10-20D, Solid, Miniature, 3 Flutes	158
	5315		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.05mm	Solid, Miniature, Pilot Drill	159
	5320		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.02mm-0.08mm	5D, Solid, Miniature	160
	5325		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.02mm-0.08mm	10D, Solid, Miniature	161
	5330		EXOCARB® MAX-MINI	Inch & Metric	Carbide	TiAlN	0.2mm-5mm	3D, Solid, Miniature	162-170
	5340		EXOCARB® MAX-MINI	Inch & Metric	Carbide	SS	0.5mm-3mm	10D, Solid, Miniature	171-172
	5732		EXOCARB® AERO-H	Inch	Carbide	TiAlN	#11 - 1/2"	Composite, Stack Drill for All Stacks	178
TAPS	41200		EXOCARB® Mini	Inch	Carbide	WXS®, SS	No. 0 - No. 8	Thread Mill, Miniature, Helical Flute	436
	41300		EXOCARB® Mini	Metric	Carbide	WXS®, SS	M1 - M5	Thread Mill, Miniature, Helical Flute	437
	41000		EXOCARB®	Inch	Carbide	EXO®	No. 10 - 1"	Thread Mill, Helical Flute	438-439
	41100		EXOCARB®	Metric	Carbide	EXO®	M6 - M24	Thread Mill, Helical Flute	440
	41050		EXOCARB® Oil	Inch	Carbide	EXO®	1/4" - 1"	Thread Mill, Coolant-Through, Helical Flute	441



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

EXOCARB® (Continued)



TAPS	41150		EXOCARB® Oil	Metric	Carbide	EXO®	M6 - M24	Thread Mill, Coolant-Through, Helical Flute	442
	42000		EXOCARB® Pipe	Inch	Carbide	EXO®	1/16" - 2-1/2"	Thread Mill, NPT, Helical Flute	443
	42001		EXOCARB® Pipe	Inch	Carbide	EXO®	1/16" - 2-1/2"	Thread Mill, NPTF, Helical Flute	444
	14153		EXOCARB®	Metric	Carbide	Bright	M6 - M10	Forming Tap, Carbide Inlaid, DIN/DIN	465
	369		EXOCARB®	Metric	Carbide	Bright	M3 - M12	Forming Tap, JIS	466
	357		EXOCARB®	Metric	Carbide	Bright	M6 - M12	Forming Tap, JIS, Long Shank	467
	389		EXOCARB®	Metric	Carbide	Bright	M3 - M12	Spiral Flute, JIS	509
	311		EXOCARB® VX	Inch	Carbide	V	No. 4 - 1/2"	Straight Flute, DIN OAL	662
	341		EXOCARB® VX	Metric	Carbide	V	M2.6 - M20	Straight Flute, JIS	663
	329		EXOCARB® Diamond	Inch	Carbide	Dia.	No. 4 - 1/2"	Straight Flute, UNJC, UNJF, DIN OAL	664
	359		EXOCARB® Diamond	Metric	Carbide	Dia.	M3 - M12	Straight Flute, JIS	665
	319		EXOCARB®	Inch	Carbide	Bright	No. 4 - 1/2"	Straight Flute, DIN OAL	666
	10059		EXOCARB®	Inch	Carbide	Bright	No. 10 - 3/8"	Straight Flute	667
	10061		EXOCARB®	Metric	Carbide	Bright	M3 - M10	Straight Flute, DIN OAL	668
	349		EXOCARB®	Metric	Carbide	Bright	M1.4 - M24	Straight Flute, JIS	669
	356		EXOCARB®	Metric	Carbide	Bright	M6 - M12	Straight Flute, JIS, Long Shank	670
	END MILLS	3610		EXOCARB® WXL	Inch	Carbide	WXL®	1/32" - 1/2"	Ball End
3710			EXOCARB® WXL	Metric	Carbide	WXL®	0.1mm - 20mm	Ball End	854
3670			EXOCARB® WXL	Inch	Carbide	WXL®	1/16" - 1"	Corner Radius	855
3604			EXOCARB® WXL	Inch	Carbide	WXL®	1/16" - 1"	Square End	856
3690			EXOCARB® WXL	Inch	Carbide	WXL®	1/64" - 1/4"	Ball End, Long Neck, ±5µm Radius Tolerance	857
3790			EXOCARB® WXL	Metric	Carbide	WXL®	0.1mm - 6mm	Ball End, Long Neck, ±5µm Radius Tolerance	858-860
3619			EXOCARB® WXL	Inch	Carbide	WXL®	1/16" - 1/2"	Square End	861
3620			EXOCARB® WXL	Inch	Carbide	WXL®	1/16" - 3/4"	Square End	862
3621			EXOCARB® WXL	Inch	Carbide	WXL®	1/16" - 3/4"	Square End	863
3704			EXOCARB® WXL	Metric	Carbide	WXL®	1mm - 12mm	Square End	864

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

EXOCARB® (Continued)



END MILLS	List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
	3742		EXOCARB® WXL	Metric	Carbide	WXL®	3mm - 26mm	Square End	865
	3791		EXOCARB® WXL	Metric	Carbide	WXL®	0.2mm - 5mm	Long Neck	866-867
	3711		EXOCARB® WXL	Metric	Carbide	WXL®	1mm - 18mm	Ball End, Long Shank	868
	3720		EXOCARB® WXL	Metric	Carbide	WXL®	0.1mm - 6mm	Square End	869
	3721		EXOCARB® WXL	Metric	Carbide	WXL®	0.1mm - 20mm	Square End	870
	3712		EXOCARB® WXL	Metric	Carbide	WXL®	0.2mm - 6mm	Pencil Neck, Ball End	871-876
	3722		EXOCARB® WXL	Metric	Carbide	WXL®	0.1mm - 20mm	Square End	877
	3723		EXOCARB® WXL	Metric	Carbide	WXL®	0.2mm - 12mm	Square End	878
	3770		EXOCARB® WXL	Metric	Carbide	WXL®	0.6mm - 12mm	Corner Radius	879
	3771		EXOCARB® WXL	Metric	Carbide	WXL®	3mm - 12mm	Corner Radius	880
	3794		EXOCARB® WXL	Metric	Carbide	WXL®	1mm - 3mm	Long Neck	881-882
	4445		EXOCARB® WXL	Inch	Carbide	WXL®	1/8" - 1/2"	High Helix, Corner Radius	883
	4410		EXOCARB® WXS	Inch	Carbide	WXS®	1/32" - 1/2"	Ball End	884
	4510		EXOCARB® WXS	Metric	Carbide	WXS®	1mm - 12mm	Ball End	885
	4440		EXOCARB® WXS	Inch	Carbide	WXS®	1/16" - 3/4"	Square End	886
	4540		EXOCARB® WXS	Metric	Carbide	WXS®	1mm - 25mm	Square End	887
	4471		EXOCARB® WXS	Inch	Carbide	WXS®	1/16" - 1/2"	Corner Radius	888
	4571		EXOCARB® WXS	Metric	Carbide	WXS®	3mm - 12mm	Corner Radius	889
	4470		EXOCARB® WXS	Inch	Carbide	WXS®	1/8" - 1/2"	Corner Radius, High Feed	890
	4570		EXOCARB® WXS	Metric	Carbide	WXS®	2mm - 13mm	Corner Radius, High Feed	890
	4472		EXOCARB® WXS	Inch	Carbide	WXS®	1/8" - 1/2"	Corner Radius, High Feed	891
4572		EXOCARB® WXS	Metric	Carbide	WXS®	2mm - 12mm	Corner Radius, High Feed	892	
4592		EXOCARB® WXS	Metric	Carbide	WXS®	0.4mm - 3mm	Corner Radius, Long Neck, ±5µm Radius Tolerance	893-895	
4590		EXOCARB® WXS	Metric	Carbide	WXS®	0.1mm - 6mm	Ball End, Long Neck, ±5µm Radius Tolerance	896-898	
4430		EXOCARB® WXS	Inch	Carbide	WXS®	1/4" - 1/2"	Ball End, True 4 Flute	899	
4530		EXOCARB® WXS	Metric	Carbide	WXS®	6mm - 12mm	Ball End, True 4 Flute	900	



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

EXOCARB® (Continued)



END MILLS	4413		EXOCARB® WXS	Inch	Carbide	WXS®	1/16" - 1/2"	Ball End, Sphere Type	901
	4513		EXOCARB® WXS	Metric	Carbide	WXS®	1mm - 12mm	Ball End, Sphere Type	902
	4581		EXOCARB® WXS	Metric	Carbide	WXS®	1mm - 2.5mm	Ball End, Tapered	903
	4541		EXOCARB® WXS	Metric	Carbide	WXS®	3mm - 12mm	Corner Radius	904
	9010		EXOCARB® MAX	Inch	Carbide	WXS®	1/32" - 1/2"	Ball End	905
	9110		EXOCARB® MAX	Metric	Carbide	WXS®	1mm - 10mm	Ball End	905
	9011		EXOCARB® MAX	Inch	Carbide	WXS®	1/32" - 3/8"	Ball End, Long Shank	906
	9111		EXOCARB® MAX	Metric	Carbide	WXS®	1mm - 10mm	Ball End, Long Shank	906
	9140		EXOCARB® MAX	Metric	Carbide	WXS®	3mm - 12mm	Square End	907
	9144		EXOCARB® MAX	Metric	Carbide	WXS®	6mm - 12mm	Corner Radius	907
	9191		EXOCARB® MAX	Metric	CBN	Bright	0.4mm - 3mm	CBN, Ball End	908
	9192		EXOCARB® MAX	Metric	CBN	Bright	0.4mm - 3mm	CBN, Super Long Neck, Ball Nose	908
	9181		EXOCARB® MAX	Metric	CBN	Bright	0.5mm - 3mm	CBN, Corner Radius	909
	9182		EXOCARB® MAX	Metric	CBN	Bright	0.5mm - 3mm	Long Neck, CBN, Corner Radius	909
	7020		EXOCARB® Diamond	Inch	Carbide	Dia.	1/64" - 1/2"	Square End	910
	7120		EXOCARB® Diamond	Metric	Carbide	Dia.	1mm - 12mm	Square End	911
	7040		EXOCARB® Diamond	Inch	Carbide	Dia.	1/16" - 1/2"	Square End	911
	7041		EXOCARB® Diamond	Inch	Carbide	Dia.	1/8" - 1/2"	Square End	912
	7042		EXOCARB® Diamond	Inch	Carbide	Dia.	1/16" - 1/2"	Long Shank	912
	7072		EXOCARB® Diamond	Inch	Carbide	Dia.	1/8" - 1/2"	Long Shank, Corner Radius	913
	7010		EXOCARB® Diamond	Inch	Carbide	Dia.	1/32" - 1/2"	Ball End	913
	7110		EXOCARB® Diamond	Metric	Carbide	Dia.	1mm - 12mm	Ball End	914
	7030		EXOCARB® Diamond	Inch	Carbide	Dia.	1/32" - 1/2"	Ball End	914
	7031		EXOCARB® Diamond	Inch	Carbide	Dia.	3/16" - 1/2"	Ball End	915
	7032		EXOCARB® Diamond	Inch	Carbide	Dia.	1/16" - 1/2"	Ball End, Long Shank	915
	7173		EXOCARB® Diamond	Metric	Carbide	Dia.	0.5mm - 12mm	Ball End, Long Shank	916

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

EXOCARB® (Continued)














END MILLS	7132		EXOCARB® Diamond	Metric	Carbide	Dia.	3mm - 12mm	Long Shank, Corner Radius	917
	7140		EXOCARB® Diamond	Metric	Carbide	Dia.	0.5mm - 12mm	Square End	917
	7230		EXOCARB® Diamond	Inch	Carbide	Dia.	1/64" - 1/4"	High Precision, Ball End	918
	7231		EXOCARB® Diamond	Inch	Carbide	Dia.	1/64" - 1/4"	High Precision, Ball End, Long Reach	918
	2050		EXOCARB® AERO UVX	Inch	Carbide	EXO®	1/8" - 1"	Square End, for Exotics	919
	2052		EXOCARB® AERO UVX	Inch	Carbide	EXO®	1/8" - 1"	Corner Radius, for Exotics	920
	3815		EXOCARB® AERO UVX Silent Rougher	Inch	Carbide	WXL®	1/4" - 1"	Low Helix, Corner Chamfer	921
	3820		EXOCARB® AERO UVX Silent Rougher	Inch	Carbide	WXL®	1/4" - 1"	High Helix, Corner Chamfer	921
	3915		EXOCARB® AERO UVX Silent Rougher	Metric	Carbide	WXL®	6mm - 25mm	Low Helix	922
	3920		EXOCARB® AERO UVX Silent Rougher	Metric	Carbide	WXL®	6mm - 25mm	High Helix	922
	3825		EXOCARB® AERO UVX Silent Rougher	Inch	Carbide	WXL®	1/4" - 1"	Low Helix, Long Neck, Corner Chamfer	923
	3830		EXOCARB® AERO UVX Silent Rougher	Inch	Carbide	WXL®	1/4" - 1"	High Helix, Long Neck, Corner Chamfer	923
	2015		EXOCARB® AERO Rougher	Inch	Carbide	TiAlN	1/4" - 1"	Rougher, for Exotics	924
	2100		EXOCARB® AERO UVX-Ti	Inch	Carbide	EXO®	1/2" - 1-1/4"	Corner Radius, Rougher	925
	2106		EXOCARB® AERO UVX-Ti	Inch	Carbide	EXO®	1/2" - 1-1/4"	Corner Radius	926- 927
	2104		EXOCARB® AERO UVX-Ti	Metric	Carbide	EXO®	12mm - 25mm	Reduced Neck	928
	2102		EXOCARB® AERO UVX-Ti	Inch	Carbide	EXO®	1/2" - 1-1/4"	Reduced Neck, Corner Radius	928
	2108		EXOCARB® AERO UVX-Ti	Inch	Carbide	EXO®	1/2" - 1-1/4"	Reduced Neck, Corner Radius	929
	2110		EXOCARB® AERO UVX-Ti	Metric	Carbide	EXO®	12mm - 20mm	Reduced Neck, Corner Radius	930
	2080		EXOCARB® AERO HFC-Ti	Inch	Carbide	Bright	5/8" - 1"	High Feed Radius Cutter for Titanium	931
	2081		EXOCARB® AERO HFC-Ti	Metric	Carbide	Bright	16mm - 25mm	High Feed Radius Cutter for Titanium	931
	2863		EXOCARB® AERO DLC	Inch	Carbide	DLC	1/2" - 1"	Corner Radius	932
	2963		EXOCARB® AERO DLC	Metric	Carbide	DLC	12mm - 25mm	Corner Radius	933
	2873		EXOCARB® AERO DLC	Inch	Carbide	DLC	1/2" - 1"	Square & Corner Radius	934
	2973		EXOCARB® AERO DLC	Metric	Carbide	DLC	12mm - 25mm	Square & Corner Radius	935
	2874		EXOCARB® AERO DLC	Inch	Carbide	DLC	5/8" - 1"	Coolant through, Square & Corner Radius	936



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------



EXOCARB® (Continued)



END MILLS	2974		EXOCARB® AERO DLC	Metric	Carbide	DLC	20mm - 25mm	Coolant through, Square & Corner Radius	937
	2843		EXOCARB® AERO DLC	Inch	Carbide	DLC	1/2" - 1"	Long Length, Square & Corner Radius	938
	2943		EXOCARB® AERO DLC	Metric	Carbide	DLC	12mm - 20mm	Long Length, Square & Corner Radius	939
	2853		EXOCARB® AERO DLC	Inch	Carbide	DLC	3/4"	Extra Long Length, Square & Corner Radius	940
	2953		EXOCARB® AERO DLC	Metric	Carbide	DLC	20mm	Extra Long Length, Square & Corner Radius	941
	8120		EXOCARB® AERO	Metric	Carbide	Bright	1mm - 16mm	Square End	951
DISC CUTTERS	6440		EXOCARB® DISC CUTTER	Metric	Steel	-	3.150"-4.921" 80mm - 125mm	S for Roughing	1500
	6442		EXOCARB® DISC CUTTER	Metric	Carbide	-	9.52mm	S Inserts & Accessories	1501
	6441		EXOCARB® DISC CUTTER	Metric	Steel	-	3.150"-4.921" 80mm - 125mm	Pro for Finishing	1502
	6541		EXOCARB® DISC CUTTER	Metric	Carbide	-	9.52mm	Pro Inserts & Accessories	1503
	6640		EXOCARB® ARBOR	Inch & Metric	Steel	-	1" / 25.4mm	Arbors & Accessories	1504

OSG PHOENIX®



INDEXABLE DRILLING	52400		OSG PHOENIX® PKD	Inch	-	-	0.551- 1.023"	Exchangeable Head Drill, 3D & 5D	1328
	78310			Metric	-	-	14.00- 25.99mm	Exchangeable Head Drill, 3D & 5D	1329
	78PXD			-	-	-	-	PXD Exchangeable Heads	1330- 1334
	7808H			-	-	-	-	PXD Accessories	1335
	52502		OSG PHOENIX® PD	Inch	-	-	0.594- 2.500"	Indexable Drill, 2D	1337- 1338
	78031			Metric	-	-	15.00- 63.00mm	Indexable Drill, 2D	1339- 1340
	52503			Inch	-	-	0.594- 2.500"	Indexable Drill, 3D	1341- 1342
	78032			Metric	-	-	15.00- 63.00mm	Indexable Drill, 3D	1343- 1344
	52504			Inch	-	-	0.594- 2.500"	Indexable Drill, 4D	1345- 1346
	78033			Metric	-	-	15.00- 63.00mm	Indexable Drill, 4D	1347- 1348
52505	Inch			-	-	0.594- 2.500"	Indexable Drill, 5D	1349- 1350	
78027	Metric			-	-	15.00- 63.00mm	Indexable Drill, 5D	1351- 1352	
78P5D	-	-	-	-	PD Inserts	1353			

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

OSG PHOENIX® (Continued)



INDEXABLE DRILLING	7808H		OSG PHOENIX® PD	-	-	-	-	PD Accessories	1354
	78001		OSG PHOENIX® PHP	Metric	-	-	14.00- 40.00mm	High Performance Drill, 3D	1361
	78PHP			-	-	-	-	PHP Inserts	1362
	7808H			-	-	-	-	PHP Accessories	1362
	52510		OSG PHOENIX® PZAG	Inch	-	-	0.531- 1.813"	Counterbore Cutter, SA	1364
	78321			Metric	-	-	14-48mm	Counterbore Cutter, SS	1365
	52511			Inch	-	-	2.000- 3.125"	Counterbore Cutter, Bore	1366
78421	Metric			-	-	54-82mm	Counterbore Cutter, Bore	1367	
78PZAG	-			-	-	-	PZAG Inserts	1368	
7808H	-			-	-	-	PZAG Accessories	1368	
INDEXABLE MILLING	52700		OSG PHOENIX® PAS	Inch	-	-	2.000- 6.000"	45° Face Mill, 2-Sided Square Insert, Bore	1370
	78020			Metric	-	-	50-125mm	45° Face Mill, 2-Sided Square Insert, Bore	1370
	78PAS			-	-	-	-	PAS Inserts	1371
	7808H			-	-	-	-	PAS Accessories	1371
	52800		OSG PHOENIX® PAO	Inch	-	-	2.000- 8.000"	45° Face Mill, 2-Sided Octagon Insert, Bore	1373
	78120			Metric	-	-	50- 200mm	45° Face Mill, 2-Sided Octagon Insert, Bore	1374
	78PAO			-	-	-	-	PAO Inserts	1375
	7808H			-	-	-	-	PAO Accessories	1376
	78013		OSG PHOENIX® PSE	Inch	-	-	0.625- 1.500"	90° Shoulder Cutter, SA/FA	1378
	78011			Metric	-	-	16-36mm	90° Shoulder Cutter, SS	1379- 1380
	78012			Inch	-	-	2.000- 6.000"	90° Shoulder Cutter, Bore	1381
	78010			Metric	-	-	40-125mm	90° Shoulder Cutter, Bore	1382
	52601			Inch	-	-	0.625- 1.500"	90° Shoulder Cutter, ASF	1383
78016	Metric			-	-	16-40mm	90° Shoulder Cutter, SF	1384	
78PSE	-			-	-	-	PSE/PSEL Inserts	1385	
7808H	-			-	-	-	PSE Accessories	1386	



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

OSG PHOENIX® (Continued)

PXT PXI

INDEXABLE MILLING	53000		OSG PHOENIX® PSEL	Inch	-	-	1.000- 1.500"	90° Roughing Cutter, SA/FA	1389
	78029			Metric	-	-	25-50mm	90° Roughing Cutter, SS	1390
	53001			Inch	-	-	2.000- 3.000"	90° Roughing Cutter, Bore	1391
	78028			Metric	-	-	50-80mm	90° Roughing Cutter, Bore	1391
	78PSE			-	-	-	-	PSE/PSEL Inserts	1392
	7808H			-	-	-	-	PSEL Accessories	1393
	52900				OSG PHOENIX® PSF	Inch	-	-	1.000- 1.500"
	78030	Metric	-			-	25-40mm	90° Shoulder Cutter, Square Insert, SS	1396
	52901	Inch	-			-	2.000- 3.000"	90° Shoulder Cutter, Square Insert, Bore	1397
	78130	Metric	-			-	50-80mm	90° Shoulder Cutter, Square Insert, Bore	1397
	78PSF	-	-			-	-	PSF/PSFL Inserts	1398
	7808H	-	-			-	-	PSF Accessories	1398
	53200		OSG PHOENIX® PSFL			Inch	-	-	1.250- 1.500"
	78037			Metric	-	-	32-40mm	90° Roughing Cutter, Square Insert, SS	1400
	53201			Inch	-	-	2.000- 4.000"	90° Roughing Cutter, Square Insert, Bore	1401
	78137			Metric	-	-	50-80mm	90° Roughing Cutter, Square Insert, Bore	1401
	78PSF			-	-	-	-	PSF/PSFL Inserts	1402
	7808H			-	-	-	-	PSFL Accessories	1402
	53100				OSG PHOENIX® PSTW	Inch	-	-	2.000- 6.000"
	78131	Metric	-			-	50-125mm	90° Shoulder Cutter, 2-Sided Triangle Insert, Bore	1405
	78PSTW	-	-			-	-	PSTW Inserts	1406
	7808H	-	-			-	-	PSTW Accessories	1406
	78005		OSG PHOENIX® PRC	Inch	-	-	1.000- 1.500"	Radius Cutter, SA	1408
	78003			Metric	-	-	20-63mm	Radius Cutter, SS	1409
78004	Inch			-	-	2.000- 6.000"	Radius Cutter, Bore	1410	
78002	Metric			-	-	50- 100mm	Radius Cutter, Bore	1411	

continued on next page

Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

OSG PHOENIX® (Continued)






INDEXABLE MILLING	52602		OSG PHOENIX® PRC	Inch	-	-	1.000- 1.500"	Radius Cutter, ASF	1412
	78017			Metric	-	-	20-40mm	Radius Cutter, SF	1412
	78PRC			-	-	-	-	PRC Inserts	1413
	7808H			-	-	-	-	PRC Accessories	1413
	78009		OSG PHOENIX® PHC	Inch	-	-	0.625- 1.500"	High Feed Radius Cutter, SA/FA	1416- 1417
	78007			Metric	-	-	16-63mm	High Feed Radius Cutter, SS	1418- 1419
	78008			Inch	-	-	2.000- 6.000"	High Feed Radius Cutter, Bore	1420
	78006			Metric	-	-	40- 100mm	High Feed Radius Cutter, Bore	1421
	52603			Inch	-	-	0.625- 1.500"	High Feed Radius Cutter, ASF	1423
	78015			Metric	-	-	16-40mm	High Feed Radius Cutter, SF	1424
	78PHC			-	-	-	-	PHC Inserts	1425
	7808H			-	-	-	-	PHC Accessories	1425
	6420		OSG PHOENIX® PDR	Metric	-	-	40-50mm	Deep Feed Radius Cutter, SS	1427
	6450			Metric	-	-	63-125mm	Deep Feed Radius Cutter, Bore	1427
	78PDR			-	-	-	-	PDR Inserts	1428
	7808H			-	-	-	-	PDR Accessories	1428
	78036		OSG PHOENIX® PFAL	Metric	-	-	50- 160mm	Finishing Cutter for Aluminum, Bore	1430
	78PFAL			-	-	-	-	PFAL Inserts	1431
	7808H			-	-	-	-	PFAL Accessories	1431
	52100		OSG PHOENIX® PFB	Inch	-	-	0.250- 1.250"	Finishing Ball End Mill, SA	1433- 1434
	78014			Metric	-	-	6-32mm	Finishing Ball End Mill, SS	1435
	52604			Inch	-	-	0.375- 1.000"	Finishing Ball End Mill, ASF	1436
	78114			Metric	-	-	10-32mm	Finishing Ball End Mill, SF	1436
	78PFB			-	-	-	-	PFB Inserts	1437- 1438
	7808H			-	-	-	-	PFB Accessories	1439
	52200				OSG PHOENIX® PFR	Inch	-	-	0.250- 1.250"



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

OSG PHOENIX® (Continued)

PXT **PXI**

INDEXABLE MILLING	78320		OSG PHOENIX® PFR	Metric	-	-	6-32mm	Finishing Radius End Mill, SS	1443
	52605			Inch	-	-	0.375-1.000"	Finishing Radius End Mill, ASF	1444
	78220			Metric	-	-	10-32mm	Finishing Radius End Mill, SF	1444
	78PFR			-	-	-	-	PFR Inserts	1445-1449
	7808H			-	-	-	-	PFR Accessories	1450
	52601		OSG PHOENIX® SF	Inch	-	-	0.625-1.500"	Screw Fit Cutter, PSE ASF	1453
	78016			Metric	-	-	16-40mm	Screw Fit Cutter, PSE SF	1454
	52602			Inch	-	-	1.000-1.500"	Screw Fit Cutter, PRC ASF	1455
	78017			Metric	-	-	20-40mm	Screw Fit Cutter, PRC SF	1455
	52603			Inch	-	-	0.625-1.500"	Screw Fit Cutter, PHC ASF	1456
	78015			Metric	-	-	16-40mm	Screw Fit Cutter, PHC SF	1457
	52604			Inch	-	-	0.375-1.000"	Screw Fit Cutter, PFB ASF	1458
	78114			Metric	-	-	10-30mm	Screw Fit Cutter, PFB SF	1459
	52605			Inch	-	-	0.375-1.000"	Screw Fit Cutter, PFR ASF	1460
	78220			Metric	-	-	10-32mm	Screw Fit Cutter, PFR SF	1460
	52600			Inch	-	-	-	Screw Fit Cutter, SF Arbor SA	1461
	78019			Metric	-	-	-	Screw Fit Cutter, SF Arbor SS	1462
	78025			-	-	-	-	Screw Fit Cutter, SF Arbor BT	1463
	78125			-	-	-	-	Screw Fit Cutter, SF Arbor HSK	1464
	78PXSE				OSG PHOENIX® PXM	Inch/ Metric	-	-	0.375-1.000" 10-25mm
78PXSE-O	Inch/ Metric	-	-			0.500-1.000" 12-25mm	PXSE, 4 Flute, Square & CR, Coolant-Through	1466	
78PXVC	Inch/ Metric	-	-			0.375-1.250" 10-32mm	PXVC, 4 Flute, Square & CR	1467-1468	
78PXSM	Inch/ Metric	-	-			0.375-1.000" 10-25mm	PXSM, Multiple Flute, Square & CR	1469-1470	
78PXNL	Inch/ Metric	-	-			0.375-1.000" 10-25mm	PXNL, 4 Flute, Roughing, Low Helix	1471	
78PXNL-O	Inch/ Metric	-	-			0.500-1.000" 12-25mm	PXNL, 4 Flute, Roughing, Low Helix, Coolant-Through	1471	
78PXNH	Inch/ Metric	-	-			0.375-1.000" 10-25mm	PXNH, 4 Flute, Roughing, High Helix	1472	


 continued on next page 

Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

OSG PHOENIX® (Continued)

PXT PXI

INDEXABLE MILLING	78PXNH-O		OSG PHOENIX® PXM	Inch/ Metric	-	-	0.500-1.000" 12-25mm	PXNH, 4 Flute, Roughing, High Helix, Coolant-Through	1472
	78PXRE			Inch/ Metric	-	-	0.375-1.000" 10-25mm	PXRE, Multiple Flute, Straight Flute, Corner Radius	1473
	78PXDR			Inch/ Metric	-	-	0.375-1.000" 10-25mm	PXDR, 3 Flute, Helical Flute, Corner Radius	1473-1474
	78PXBE			Inch/ Metric	-	-	0.375-1.000" 10-25mm	PXBE, 3 Flute, Ball End	1475-1476
	78PXBE-O			Inch/ Metric	-	-	0.500-0.750" 12-20mm	PXBE, 3 Flute, Ball End, Coolant-Through	1476-1477
	78PXB			Inch/ Metric	-	-	0.375-1.000" 10-25mm	PXB, Multiple Flute, Ball End	1477
	52300			Inch	-	-	-	PXM SA/TPA	1478-1479
	52319			Inch	-	-	-	PXM SA/TPA, Coolant-Through	1480-1481
	78018			Metric	-	-	-	PXM SS/TP	1482-1483
	78035			Metric	-	-	-	PXM SS/TP, Coolant-Through	1484-1485
	78340			Metric	-	-	-	PXMC	1486
	7808H			-	-	-	-	PXM Accessories	1488




SynchroMaster

HDR

Holders	9950		SynchroMaster Tap Holders	Inch & Metric	-	-	-	Micro Float Tap Holders for Rigid tapping	1511
	9953		SynchroMaster Collet	Inch & Metric	-	-	-	Sealed Collets	1511
	9955		SynchroMaster Accessories	-	-	-	-	Accessories	1512





HY-PRO® SHRINK

HTE

Holders	68802B		HR-B Handy Type Unit	-	-	-	-	Compact hot air shrink device	1513
	-		HR-B Handy Type Unit	-	-	-	-	Accessories	1514-1515
	-		Shrink Holders	Inch & Metric	-	-	-	Standard and Coolant-through	1521-1524
	-		Shrink Extensions	Inch & Metric	-	-	-	Multi Type Extensions	1525-1532

BLIZZARD®

BLZ

END MILLS	2021		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/8" - 1"	Square & Corner Radius	942
	2022		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/8" - 1"	Square & Corner Radius	943
	2023		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/4" - 1"	Reduced Neck, Square & Corner Radius	944
	2024		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/4" - 1"	Reduced Neck, Square & Corner Radius	945



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

BLIZZARD® (Continued)



END MILLS	2041		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/8" - 1"	Square & Corner Radius	946
	2042		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/8" - 1"	Square & Corner Radius	947
	2043		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/4" - 1"	Reduced Neck, Square & Corner Radius	948
	2048		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/4" - 1"	Reduced Neck, Square & Corner Radius	949
	2010		EXOCARB® AERO BLIZZARD	Inch	Carbide	Bright	1/8" - 1"	Ball End	950

HY-PRO® CARB



DRILLS	HP243		HY-PRO® CARB	Inch & Metric	Carbide	WD1	1mm-20mm	3D, Solid	182-185
	HP253		HY-PRO® CARB	Inch & Metric	Carbide	WD1	3mm-20mm	3D, Coolant-Through	190-193
	HP245		HY-PRO® CARB	Inch & Metric	Carbide	WD1	1mm-20mm	5D, Solid	186-189
	HP255		HY-PRO® CARB	Inch & Metric	Carbide	WD1	3mm-20mm	5D, Coolant-Through	194-197
	HP258		HY-PRO® CARB	Inch & Metric	Carbide	WD1	3mm-20mm	8D, Coolant-Through	198-201
	HP700		HY-PRO® CARB NEPTUNE	Inch	Carbide	TiALN	#40 - 1/4"	Composite, Hand Drill	179
END MILLS	VG441		HY-PRO® VGX	Inch	Carbide	TiAIN	1/8" - 1"	Square End	960
	VG434		HY-PRO® VGX	Inch	Carbide	TiAIN	1/8" - 1"	Corner Radius	961
	VG436		HY-PRO® VGX	Inch	Carbide	TiAIN	1/8" - 1"	Corner Chamfer	962
	VG446		HY-PRO® VGX	Inch	Carbide	TiAIN	1/4" - 1"	Reduced Neck, Corner Radius/Corner Chamfer	963
	VG464		HY-PRO® VGX	Inch	Carbide	TiAIN	1/4" - 1"	Extended Length, Square End/Corner Chamfer	964
	VG441BN		HY-PRO® VGX	Inch	Carbide	TiAIN	1/8" - 1-1/4"	Ball Nose	965
	VG541		HY-PRO® VGX	Inch	Carbide	TiAIN	1/8" - 1"	Square End	966
	VG534		HY-PRO® VGX	Inch	Carbide	TiAIN	3/16" - 1"	Corner Radius	967-968
	HP421		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	3/64" - 1" 3mm-25mm	Square End	969-970
	HP441		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	3/64" - 1" 3mm-25mm	Square End	969-970
	HP460		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1" 3mm-25mm	High Helix	971
	HP450		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1" 3mm-25mm	Square End	972
	HP453		HY-PRO® CARB	Metric	Carbide	TiAIN	4mm - 20mm	Super Tough Mills	973
	HP456		HY-PRO® CARB	Metric	Carbide	TiAIN	6mm - 12mm	Super Tough Mills, Corner Radius	973

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

HY-PRO® CARB (Continued)



END MILLS	List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
	HP451		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1" 4mm-20mm	Super Tough Mills	974
	HP400		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/4" - 1" 3mm - 25mm	Rougher	975
	HP410		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/32" - 3/16" 0.5mm - 2.5mm	Short Length, Long Neck	976- 977
	HP411		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1/4" 3mm - 6mm	Short Length, Long Neck	978
	HP455		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1" 3mm - 25mm	Corner Protection	979
	HP421BN		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	3/64" - 1" 1mm-25mm	Ball End	980- 981
	HP441BN		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	3/64" - 1" 1mm-25mm	Ball End	980- 981
	HP416		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/32" - 1/2" 1mm-25mm	Ball End	982
	HP418		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	3/22" - 3/8" 1mm-12mm	Ball End, Pencil Neck	983
	HP419		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/32" - 3/16" 0.5mm-6mm	Ball End, Long Neck	984
	HP419L		HY-PRO® CARB	Metric	Carbide	TiAIN	0.6mm - 3mm	Ball End, Long Neck	985
	HP413		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/32" - 3/16" 1mm-6mm	Ball End	986
	HP432		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1" 3mm-12mm	Corner Radius	987- 988
	HP434		HY-PRO® CARB	Inch/ Metric	Carbide	TiAIN	1/8" - 1" 3mm-12mm	Corner Radius	987- 988
	HP433		HY-PRO® CARB	Metric	Carbide	TiAIN	3mm - 12mm	Corner Radius	989
HP435		HY-PRO® CARB	Metric	Carbide	TiAIN	3mm - 12mm	Corner Radius	990	

CARBIDE



DRILLS	List	Product	Brand/Name	Inch & Metric	Material	Coating	Size Range	Features	Product Page
	215		CARBIDE	Inch & Metric	Carbide	Bright	1mm- 12.7mm	Jobbers, Solid, Slow Spiral	204- 208
	220D		CARBIDE	Inch & Metric	Carbide	Bright	1.18mm- 12.7mm	Jobbers, Solid	209- 211
	233		CARBIDE	Inch & Metric	Carbide	Bright	3mm- 19.05mm	Jobbers, Solid, 3 Flutes	212
	200		CARBIDE	Inch & Metric	Carbide	Bright	1.18mm- 12.7mm	Jobbers, Solid, Straight Flute	213- 215
	235		CARBIDE	Inch	Carbide	Bright	3/64"- 7/32"	Solid, Drill/Countersink	216- 221
	700		CARBIDE	Inch	Carbide	Bright	1/8"-1"	Solid, Countersink, Single Flute	223
	701		CARBIDE	Inch	Carbide	Bright	1/4"-1"	Solid, Countersink, Multiple Flutes	224
	706		CARBIDE	Inch	Carbide	Bright	1/4"-1"	Solid, Countersink, Multiple Flutes	225
	300D		CARBIDE	Inch & Metric	Carbide	Bright	0.80mm- 13mm	Reamer, Solid, Multiple Flutes, RH Cutting	217- 221



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

CARBIDE (Continued)



DRILLS	List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
		750		CARBIDE	Inch	Carbide	Bright	1/16"-3/8"	Solid, Grinding/Deburring
	257		AERO-D-REAM	Inch	Carbide	BRIGHT	#40 - 1/2"	Composite, Tapered Drill/ Reamer	180- 181
END MILLS	400		CARBIDE	Inch/ Metric	Carbide	Bright*	1/4" - 1" 6mm-25mm	Roughy Mills	991
	415		CARBIDE	Inch	Carbide	Bright*	1/8" - 1"	Toughy Mills, Standard Cut	992
	415C		CARBIDE	Inch	Carbide	Bright*	1/8" - 1"	Toughy Mills, Coarse Cut	992
	402		CARBIDE	Inch/ Metric	Carbide	TiAlN, TiCN, Bright*	1/32" - 1" 0.5mm-25mm	General Purpose	993- 995
	403		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 1" 0.5mm-25mm	General Purpose	993- 995
	404		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 1" 0.5mm-25mm	General Purpose	993- 995
	408		CARBIDE	Inch	Carbide	Bright*	1/8" - 1"	Slow Spiral	996
	409		CARBIDE	Inch	Carbide	Bright*	1/16" - 1"	Slow Spiral	996
	452		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/16" - 1"	Plus Tolerance	997
	454		CARBIDE	Inch	Carbide	Bright*	1/16" - 1"	Plus Tolerance	997
	412		CARBIDE	Inch/ Metric	Carbide	Bright*	1/32" - 3/4" 1mm-12mm	Stub Length	998- 999
	414		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 3/4" 1mm-12mm	Stub Length	998- 999
	462		CARBIDE	Inch/ Metric	Carbide	TiCN, TiAlN, Bright*	1/8" - 1" 3mm-25mm	Long Length	1000- 1001
	464		CARBIDE	Inch/ Metric	Carbide	TiCN, TiAlN, Bright*	1/8" - 1" 3mm-25mm	Long Length	1000- 1001
	482		CARBIDE	Inch/ Metric	Carbide	TiCN, TiAlN, Bright*	1/8" - 1" 3mm-25mm	Extra-Long Length	1002- 1003
	484		CARBIDE	Inch/ Metric	Carbide	TiCN, TiAlN, Bright*	1/8" - 1" 3mm-25mm	Extra-Long Length	1002- 1003
	495		CARBIDE	Inch	Carbide	Bright*	1/8" - 1"	Corner Radius	1004
	496		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/8" - 1"	Corner Radius	1004
	455C		CARBIDE	Inch	Carbide	TiCN, TiAlN, Bright*	1/8" - 1"	Corner Protection	1005
	460C		CARBIDE	Inch/ Metric	Carbide	Bright*	1/8"-1" 6mm - 25mm	High Helix	1006
	445		CARBIDE	Inch/ Metric	Carbide	Bright*	1/16" - 1" 1mm-20mm	RHS/RHC	1007
	461		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/8" - 1" 3mm-25mm	RHS/RHC	1008
	447		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/16" - 1"	LHS/RHC	1009
	492		CARBIDE	Inch	Carbide	Bright*	0.015" - 0.060"	Miniature	1010

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

CARBIDE (Continued)





END MILLS	494		CARBIDE	Inch	Carbide	Bright*	0.015" - 0.060"	Miniature	1010
	402BN		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 1" 0.5mm-25mm	Ball End	1011- 1013
	403BN		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 1" 0.5mm-25mm	Ball End	1011- 1013
	404BN		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 1" 0.5mm-25mm	Ball End	1011- 1013
	452BN		CARBIDE	Inch	Carbide	Bright*	1/16" - 1"	Ball End, Plus Tolerance	1014
	412BN		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/32" - 3/4" 1mm - 12mm	Ball End, Stub Length	1015- 1016
	414BN		CARBIDE	Inch/ Metric	Carbide	TiCN, TiAlN, Bright*	1/32" - 3/4" 1mm - 12mm	Ball End, Stub Length	1015- 1016
	462BN		CARBIDE	Inch/ Metric	Carbide	TiCN, Bright*	1/8" - 1" 3mm-25mm	Ball End, Long Length	1017
	464BN		CARBIDE	Inch/ Metric	Carbide	TiCN, TiAlN, Bright*	1/8" - 1" 3mm-25mm	Ball End, Long Length	1017
	482BN		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/8" - 1" 3mm-25mm	Ball End, Extra Long Length	1018- 1019
	484BN		CARBIDE	Inch/ Metric	Carbide	TiAlN, Bright*	1/8" - 1" 3mm-25mm	Ball End, Extra Long Length	1018- 1019
	497		CARBIDE	Inch/ Metric	Carbide	Bright*	1/8" - 1" 3mm-20mm	Ball End, Long Shank	1020
	442		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/8" - 1/2"	Double End	1021
	444		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/8" - 1/2"	Double End	1021
	422		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/32" - 1/2"	Double End, Stub Length	1022
	423		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/32" - 1/2"	Double End, Stub Length	1022
	424		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/32" - 1/2"	Double End, Stub Length	1022
	442BN		CARBIDE	Inch	Carbide	Bright*	1/8" - 1/2"	Double End, Ball End	1023
	444BN		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/8" - 1/2"	Double End, Ball End	1023
	422BN		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/32" - 1/2"	Double End, Ball End, Stub Length	1024
	423BN		CARBIDE	Inch	Carbide	Bright*	1/32" - 1/2"	Double End, Ball End, Stub Length	1024
	424BN		CARBIDE	Inch	Carbide	TiAlN, Bright*	1/32" - 1/2"	Double End, Ball End, Stub Length	1024
	500		CARBIDE	Inch	Carbide	Bright	3/32" - 1/2"	2 Flute, Straight Router	1025
	502		CARBIDE	Inch	Carbide	Bright	3/32" - 1/2"	3 Flute, Straight Router	1025
	640		CARBIDE	Inch	Carbide	Bright	1/16" - 1/2"	Fiberglass Routers, Diamond Cut	1026
	668		AERO-HBC 60°	Inch	Carbide	Bright	1/4" - 1/2"	Compression Router	958



List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-------------	----------	---------	------------	----------	--------------


CARBIDE (Continued)



END MILLS	641R		AERO-HFR	Inch	Carbide	Bright	3/16" - 1/2"	General Purpose Router	959
	800 - 968		CARBIDE BURS	Inch/Metric	Carbide	Bright	-	Carbide Burs	1089-1110



HY-PRO® MULTI PURPOSE



DRILL	738		HY-PRO® CARB	Inch	-	Bright	-	Indexable, Spot Drill/Countersink/Chamfer	202-203
-------	-----	---	--------------	------	---	--------	---	---	---------

EXOTAP®



TAPS	14050		EXOTAP® NRT®	Inch	VC-10	V	No. 0 - 3/8"	Forming Tap	468-470
	14150		EXOTAP® NRT®	Metric	VC-10	V	M1.6 - M12	Forming Tap	471-472
	313Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1"	Spiral Flute	510-511
	345Ti		EXOTAP® VC-10 Ti	Metric	VC-10	V	M2.5 - M12	Spiral Flute	512
	312Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1"	Spiral Point	591-592
	344Ti		EXOTAP® VC-10 Ti	Metric	VC-10	V	M3 - M12	Spiral Point	593
	315Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Fluted	708
	314Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Pointed	720
	317Ti		EXOTAP® VC-10 Ti Oil	Inch	VC-10	V	1/4" - 1"	Spiral Flute, Coolant-Through, DIN OAL	513
	348Ti		EXOTAP® VC-10 Ti Oil	Metric	VC-10	V	M8 - M24	Spiral Flute, Coolant-Through, DIN OAL	514
	316Ti		EXOTAP® VC-10 Ti Oil	Inch	VC-10	V	1/4" - 1"	Spiral Point, Coolant-Through, DIN OAL	594
	347Ti		EXOTAP® VC-10 Ti Oil	Metric	VC-10	V	M8 - M24	Spiral Point, Coolant-Through, DIN OAL	595
	313Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V,S/O	No. 2 - 1"	Spiral Flute	515-516
	345Ni		EXOTAP® VC-10 Ni	Metric	VC-10	S/O	M2.5 - M12	Spiral Flute	517
	312Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V, S/O	No. 2 - 1"	Spiral Point	596-597
	344Ni		EXOTAP® VC-10 Ni	Metric	VC-10	V, S/O	M2.5 - M12	Spiral Point	598
	315Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Fluted	709
	314Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Pointed	721
	313		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 1/2"	Spiral Flute	518-519
	345		EXOTAP® VC-10	Metric	VC-10	V, S/O	M3 - M12	Spiral Flute	520
312		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 3/4"	Spiral Point	599-600	

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

EXOTAP® (Continued)

EXT

TAPS	344		EXOTAP® VC-10	Metric	VC-10	V, S/O	M3 - M12	Spiral Point	601
	315		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 1"	STI, Spiral Fluted	710-711
	345STI		EXOTAP® VC-10	Metric	VC-10	V, S/O	M2 - M24	STI, Spiral Fluted	712
	314		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 1"	STI, Spiral Pointed	722-723
	344STI		EXOTAP® VC-10	Metric	VC-10	V, S/O	M2 - M24	STI, Spiral Pointed	724
	317		EXOTAP® VC-10 Oil	Inch	VC-10	V	5/16" - 1"	Spiral Flute, Coolant-Through, DIN OAL	521
	351		EXOTAP® VC-10 Oil	Metric	VC-10	V	M8 - M24	Spiral Flute, Coolant-Through, DIN OAL	522
	316		EXOTAP® VC-10 Oil	Inch	VC-10	V	1/4" - 1"	Spiral Point, Coolant-Through, DIN OAL	602
	350		EXOTAP® VC-10 Oil	Metric	VC-10	V	M6 - M24	Spiral Point, Coolant-Through, DIN OAL	603
	303		EXOTAP VA-3°	Inch	HSSE	V, TiN, S/O	No. 2 - 1"	Spiral Flute	523-525
	343		EXOTAP VA-3°	Metric	HSSE	V, TiN, S/O	M3 - M18	Spiral Flute	526
	300		EXOTAP VA-3°	Inch	HSSE	V, TiN, S/O	No. 2 - 1"	Spiral Point	604-605
	342		EXOTAP VA-3°	Metric	HSSE	V, TiN, S/O	M3 - M18	Spiral Point	606
	302		EXOTAP VA-3°	Inch	HSSE	V, S/O	No. 2 - 1"	STI, Spiral Fluted	713-714
	343STI		EXOTAP VA-3°	Metric	HSSE	V, S/O	M2 - M24	STI, Spiral Fluted	715
	301		EXOTAP VA-3°	Inch	HSSE	V, S/O	No. 2 - 1"	STI, Spiral Pointed	725-726
	342STI		EXOTAP VA-3°	Metric	HSSE	V, S/O	M2 - M24	STI, Spiral Pointed	727
	307		EXOTAP® VA-3 Oil	Inch	HSSE	V	1/4" - 1"	Spiral Flute, Coolant-Through, DIN OAL	527
	347		EXOTAP® VA-3 Oil	Metric	HSSE	V	M6 - M24	Spiral Flute, Coolant-Through, DIN OAL	528
	306		EXOTAP® VA-3 Oil	Inch	HSSE	V	1/4" - 1"	Spiral Point, Coolant-Through, DIN OAL	607
	346		EXOTAP® VA-3 Oil	Metric	HSSE	V	M6 - M24	Spiral Point, Coolant-Through, DIN OAL	608
	398		EXOTAP VA-3°	Inch	HSSE	S/O	No. 4 - 5/8"	Spiral Flute, Long Shank	529
	397		EXOTAP VA-3°	Inch	HSSE	S/O	No. 4 - 5/8"	Spiral Point, Long Shank	609
	320		EXOTIN	Inch	HSSE	TiN	No. 4 - 3/4"	Spiral Point	610
	10051		EXOTAP® VCX	Inch	XPM	V	No. 6 - 1"	Straight Flute	671
	11051		EXOTAP® VCX	Metric	XPM	V	M3 - M24	Straight Flute	672



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------







EXOTAP® (Continued)

EXT

TAPS	305		EXOTAP-MOLD®	Inch	HSS-CO	Bright	No. 4 - 3/4"	Straight Flute	673
	10052		EXOTAP® DC	Inch	VC-10	V	1/4" - 1"	Straight Flute, DIN OAL	674
	11052		EXOTAP® DC	Metric	VC-10	V	M6 - M24	Straight Flute, DIN OAL	675
	11054		EXOTAP® DC	Metric	VC-10	V	M6 - M10	Straight Flute, DIN Shank, DIN OAL	678
	10056		EXOTAP® DC	Inch	VC-10	V	1/4" - 3/4"	Straight Flute	680
	11056		EXOTAP® DC	Metric	VC-10	V	M6 - M14	Straight Flute	681
	10053		EXOTAP® DC-OIL	Inch	VC-10	V	1/4" - 1"	Straight Flute, Coolant-Through, DIN OAL	676
	11053		EXOTAP® DC-OIL	Metric	VC-10	V	M6 - M24	Straight Flute, Coolant-Through, DIN OAL	677
	11055		EXOTAP® DC-OIL	Metric	VC-10	V	M6 - M12	Straight Flute, Coolant-Through, DIN Shank, DIN OAL	679
	10057		EXOTAP® DC-OIL	Inch	VC-10	V	1/4" - 1/2"	Straight Flute, Coolant-Through	682
	11057		EXOTAP® DC-OIL	Metric	VC-10	V	M6 - M14	Straight Flute, Coolant-Through	683
	308		EXOPIPE®	Inch	HSSE	TiN, S/O	1/16" - 1"	Pipe Tap, NPT	740
	318		EXOPIPE®	Inch	HSSE	TiN, S/O	1/16" - 1"	Pipe Tap, NPTF	741
	328		EXOTAP-MOLD®	Inch	HSS-CO	Bright	1/8" - 3/4"	Pipe Tap, NPT, ANPT	743
	15001		GENERAL	Inch	HSS	Bright	No. 2 - 1-1/2"	Gage, GO/NOGO Set, Class 2B	757
15002		GENERAL	Metric	HSS	Bright	M3 - M24	Gage, GO/NOGO Set, Class 6H	758	
15015		GENERAL	Inch	HSS	TiN	No.5 - 1"	Diameter Correction Tool	445	
15010		GENERAL	Metric	HSS	TiN	M3 - M16	Diameter Correction Tool	446	
15020		GENERAL	-	-	-	-	Diameter Correction Tool Accessories	447	

EXOMINI/EXOMILL

EXM

END MILLS	673		EXOMINI VC-10	Inch	VC-10	TiN	1/32" - 3/16"	Square End	1041
	676		EXOMINI VC-10	Inch	VC-10	TiN	1/16" - 3/16"	Center Hole (smaller than 1/8)	1042
	677		EXOMINI VC-10	Inch	VC-10	TiN	1/16" - 3/16"	Center Hole (smaller than 1/8)	1042
	690		EXOTIN Roughing	Inch	HSSE	TiN	1/4" - 2"	EXOTIN®, Center Hole	1049
	620		EXOMILL VC-10®	Inch	VC-10	Bright	1/8" - 1-1/2"	Square End	1043
	621		EXOMILL VC-10®	Inch	VC-10	Bright	1/8" - 1-1/2"	Ball End	1043

continued on next page







Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

EXOMINI/EXOMILL (Continued)

EXM

END MILLS	641		EXOMILL VC-10®	Inch	VC-10	Bright	1/8" - 2"	Square End	1044
	644		EXOMILL VC-10®	Inch	VC-10	Bright	3/8" - 1-1/2"	Ball End	1045
	646		EXOMILL VC-10®	Inch	VC-10	Bright	1/4" - 2"	Square End	1046
	660		EXOMILL VC-10®	Inch	VC-10	Bright	1/4" - 1"	High Helix	1046

OIL-HOLE DRILL

OHD

DRILL	1700		V-HO GDR	Inch & Metric	HSS-CO	V	5.95mm-31.75mm	Jobbers, Coolant-Through	243-244
-------	------	---	----------	---------------	--------	---	----------------	--------------------------	---------




EX-GOLD®

EXD

DRILLS	1750		HELIOS®	Inch & Metric	HSS-CO	WXL®	1.6mm-17.86mm	10D, Solid, Parabolic	245-247
	1760		HELIOS®	Inch & Metric	HSS-CO	WXL®	1.6mm-17.86mm	15D, Solid, Parabolic	248-249
	1770		HELIOS®	Inch & Metric	HSS-CO	WXL®	1.6mm-14.29mm	20D, Solid, Parabolic	250-251
	1900		VPH GDS	Inch & Metric	XPM	V	0.5mm-20mm	Stub, Solid	230-236
	1950		VPH GDR	Inch & Metric	XPM	V	1.99mm-17.46mm	Jobbers, Solid	237-239
	2000		VP® GDR	Inch & Metric	XPM	V	2mm-32mm	Jobbers, Solid, Parabolic	240-242
	1800		V-Select	Inch & Metric	HSSE	V	2mm-13mm	Jobbers, Solid	252-254
	1000		EX-GOLD®	Inch & Metric	HSS-CO	TiN	1.99mm-12.7mm	Stub, Solid	260-262
	1500		EX-GOLD®	Inch & Metric	HSS-CO	TiN	1.99mm-19.05mm	Jobbers, Solid	263-265
	1100		EX-SUS-GOLD	Inch & Metric	HSSE	TiN, TiAlN	0.5mm-32mm	Stub, Solid	266-283
	1600		EX-SUS-GOLD	Inch & Metric	HSSE	TiN, TiAlN	2mm-32mm	Jobbers, Solid	284-296
	1150		NEXUS	Inch & Metric	HSSE	WD1	1mm-12.7mm	Stub, Solid	255-257
	1650		NEXUS	Inch & Metric	HSSE	WD1	2mm-12.7mm	Jobbers, Solid	258-259
	1200		EX-SPOT	Metric	HSS	Bright, TiN	3mm-25mm	Solid, 60°/90°/120° Spot Drill	297
	1250		EX-SPOT	Metric	HSS	Bright	3mm-25mm	Solid, 90° Spot Drill, Long Shank	298

HY-PRO® TAP

HYT

TAPS	14001		HY-PRO® NRT®	Inch	HSS-CO	TiCN, TiN, Bright, S/O	No. 0 - 3/4"	Forming Tap	473-485
	14101		HY-PRO® NRT®	Metric	HSS-CO	TiCN, TiN, Bright, S/O	M1.6 - M12	Forming Tap	486-488
	290		HY-PRO®	Inch	HSSE	TiCN, S/O, Bright	No. 2 - 1-1/2"	Spiral Flute	550-552



List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-------------	----------	---------	------------	----------	--------------

HY-PRO® TAP (Continued)



TAPS	299		HY-PRO®	Metric	HSSE	TiCN, S/O, Bright	M3 - M30	Spiral Flute	553
	280		HY-PRO®	Inch	HSSE	TiCN, S/O, Bright	No. 2 - 1-1/2"	Spiral Point	629-631
	289		HY-PRO®	Metric	HSSE	TiCN, S/O, Bright	M3 - M30	Spiral Point	632
	13039		HYPRO® AL	Inch	HSSE	Bright, V	No. 2 - 1/2"	STI, Spiral Fluted	716
	11036		HYPRO® AL	Inch	HSSE	Bright, V	No. 2 - 1/2"	STI, Spiral Pointed	728
	230		HY-PRO® DIN	Inch	HSSE	TiN	1/4" - 1"	Spiral Flute, Coolant-Through, DIN OAL	532
	239		HY-PRO® DIN	Metric	HSSE	TiN	M6 - M20	Spiral Flute, Coolant-Through, DIN OAL	533
	260		HY-PRO® DIN	Inch	HSSE	TiN	1/4" - 1"	Spiral Point, Coolant-Through, DIN OAL	613
	269		HY-PRO® DIN	Metric	HSSE	TiN	M6 - M20	Spiral Point, Coolant-Through, DIN OAL	614
	220		HY-PRO® DIN	Inch	HSSE	S/O	No. 4 - 2"	Spiral Flute, DIN OAL	530
	229		HY-PRO® DIN	Metric	HSSE	S/O	M3 - M20	Spiral Flute, DIN OAL	531
	250		HY-PRO® DIN	Inch	HSSE	S/O	No. 4 - 3/4"	Spiral Point, DIN OAL	611
	259		HY-PRO® DIN	Metric	HSSE	S/O	M3 - M20	Spiral Point, DIN OAL	612
	13013		HY-PRO® ALLOY	Inch	HSSE	V	1/4" - 3/4"	Spiral Flute, Coolant-Through, DIN OAL	534
	13113		HY-PRO® ALLOY	Metric	HSSE	V	M6 - M20	Spiral Flute, Coolant-Through, DIN OAL	535
	13058		HY-PRO® SYNCHRO AL	Inch	HSSE	V	No. 6 - 1/2"	Spiral Flute, Synchronized	544
	13158		HY-PRO® SYNCHRO AL	Metric	HSSE	V	M3 - M12	Spiral Flute, Synchronized	545
	13059		HY-PRO® SYNCHRO AL	Inch	HSSE	V	No. 6 - 1/2"	Spiral Point, Synchronized, RHC/LHS	623
	13159		HY-PRO® SYNCHRO AL	Metric	HSSE	V	M3 - M12	Spiral Point, Synchronized, RHC/LHS	624
	295		HY-PRO® AL	Inch	HSSE	Bright	No. 4 - 3/8"	Spiral Flute	546
296		HY-PRO® AL	Metric	HSSE	Bright	M3 - M10	Spiral Flute	547	
13019		HY-PRO® AL-DIN	Inch	HSSE	N	No. 2 - 1/2"	Spiral Flute, DIN OAL	548	
13119		HY-PRO® AL-DIN	Metric	HSSE	N	M3 - M12	Spiral Flute, DIN OAL	549	
11016		HY-PRO®AL-DIN	Inch	HSSE	N	No. 2 - 1/2"	Spiral Point, DIN OAL	625	
11116		HY-PRO®AL-DIN	Metric	HSSE	N	M3 - M12	Spiral Point, DIN OAL	626	
11015		HY-PRO® AERO-F	Inch	HSS-Co	TiN	No. 4 - 1"	Spiral Point	615-619	

continued on next page










Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------










HY-PRO® TAP (Continued)

HYT

TAPS	11115		HY-PRO® AERO-F	Metric	HSS-Co	TiN	M3 - M14	Spiral Point	620-621
	11017		HY-PRO® V DIN	Inch	HSSE	V	No. 4 - 1/2"	Spiral Point, DIN OAL	627
	11117		HY-PRO® V DIN	Metric	HSSE	V	M3 - M12	Spiral Point, DIN OAL	628
	240		HYPRO® DC	Inch	HSSE	N, Bright	No. 2 - 1/2"	Straight Flute	684
	241		HYPRO® DC	Metric	HSSE	N	M3 - M12	Straight Flute	685
	12053		HY-PRO® PIPE	Inch	HSSE	TiCN	1/8" - 1"	Pipe Tap, NPT, Interrupted	742
	12054		HY-PRO® PIPE	Inch	HSSE	TiCN	1/8" - 1"	Pipe Tap, NPTF, Interrupted	742







HY-PRO® LARGE

HYL

TAPS	13014		HY-PRO® HXL	Inch	HSSE	S/O	1/2" - 2-1/2"	Spiral Flute, DIN OAL	536
	13024		HY-PRO® HXL-OIL	Inch	HSSE	S/O	1/2" - 2-1/2"	Spiral Flute, Coolant-Through, DIN OAL	537
	13015		HY-PRO® VXL	Inch	HSSE	S/O	1/2" - 2-1/2"	Spiral Flute, DIN OAL	538
	13025		HY-PRO® VXL-OIL	Inch	HSSE	S/O	1/2" - 2-1/2"	Spiral Flute, Coolant-Through, DIN OAL	539
	13116		HY-PRO® HXL-W	Metric	HSSE	S/O	M16 - M42	Spiral Flute, DIN OAL	540
	13126		HY-PRO® HXL-W-OIL	Metric	HSSE	S/O	M16 - M42	Spiral Flute, Coolant-Through, DIN OAL	541
	13117		HY-PRO® VXL-W	Metric	HSSE	S/O	M16 - M42	Spiral Flute, DIN OAL	542
	13127		HY-PRO® VXL-W-OIL	Metric	HSSE	S/O	M16 - M42	Spiral Flute, Coolant-Through, DIN OAL	543
	13118		HY-PRO® RXL-W	Metric	HSSE	V	M16 - M42	Spiral Point, DIN OAL & Extended OAL, For Through Holes, LHS	544

HY-PRO® SEVEN

HY7

TAPS	285		HY-PRO® SEVEN	Inch	HSS	TiCN, TiN, Bright	No. 0 - 1/2"	Forming Tap	489
	286		HY-PRO® SEVEN	Metric	HSS	TiCN, TiN, Bright	M3 - M12	Forming Tap	489
	297		HY-PRO® SEVEN	Inch	HSS	TiN, S/O, Bright	No. 3 - 1/2"	Spiral Flute	554
	298		HY-PRO® SEVEN	Metric	HSS	TiN, S/O, Bright	M3 - M12	Spiral Flute	555
	287		HY-PRO® SEVEN	Inch	HSS	TiN, S/O, Bright	No. 0 - 1/2"	Spiral Point	633
	288		HY-PRO® SEVEN	Metric	HSS	TiN, S/O, Bright	M3 - M12	Spiral Point	634



List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-------------	----------	---------	------------	----------	--------------

GENERAL PURPOSE END MILLS



END MILLS	List	Product	Brand/Name	Inch/Metric	Material	Coating	Size Range	Features	Product Page
	573		HY-PRO® V	Inch	HSSE	TiCN, Bright	1/8" - 1"	Square End	1047
	574		HY-PRO® V	Inch	HSSE	TiCN, Bright	1/8" - 1"	Square End	1048
	450		Roughing Cut	Inch	HSS-Co	TiCN, Bright	3/16" - 2"	Fine Pitch, Center Hole	1050
	455		Roughing Cut	Inch	HSS-Co	TiCN, TiAlN	1/4" - 2"	Fine Pitch	1051
	420		Roughing Cut	Inch	HSS-Co	Bright	1/4" - 1-1/2"	Fine Pitch, Center Cutting	1052
	460		Roughing Cut	Inch	HSS-Co	Bright	1/2" - 1-1/2"	Fine Pitch, Center Cutting	1052
	410		Roughing Cut	Inch	HSS-Co	Bright	1/2" - 1"	Square End	1053
	430E		Roughing Cut	Inch	HSS-Co	Bright	3/8" - 1-1/2"	3 Flute, Aluminum	1053
	490		Roughing Cut	Inch	HSS-Co	Bright	1/4" - 2"	General Purpose, Center Hole	1054
	440		Roughing Cut	Inch	HSS-Co	Bright	1/2" - 2"	Ball End, General Purpose	1055
	470		Roughing Cut	Inch	HSS-Co	Bright	1/4" - 2"	Rough & Finish	1056
	520		Single End	Inch	HSS-Co	TiN, Bright	1/8" - 2"	Square End	1057
	580		Single End	Metric	HSS-Co	Bright	3mm - 50mm	Square End	1058
	525		Single End	Inch	HSS-Co	Bright	3/8" - 2"	Square End	1059
	527		Single End	Inch	HSS-Co	Bright	1/8" - 1-1/4"	Reduced Neck	1059
	530		Single End	Inch	HSS-Co	Bright	1/4" - 2"	High Helix	1060
	535		Single End	Inch	HSS-Co	Bright	1/4" - 2"	High Helix	1060
	521		Single End	Inch	HSS-Co	Bright	1/8" - 1-1/2"	Ball End	1061
	526		Single End	Inch	HSS-Co	Bright	1/8" - 1"	Ball End, Reduced Neck	1061
531		Single End	Inch	HSS-Co	Bright	1/8" - 2"	Square End	1062	
581		Single End	Metric	HSS-Co	Bright	3mm - 45mm	Center Hole	1063	
536		Single End	Inch	HSS-Co	Bright	1/4" - 2"	Square End	1064	
541		Single End	Inch	HSS-Co	TiCN, TiN, TiAlN, Bright	1/8" - 2"	Square End	1065	
548		Single End	Inch	HSS-Co	TiCN, Bright	5/8" - 1-1/2"	Square End	1066	
546		Single End	Inch	HSS-Co	TiCN, Bright	1/4" - 2"	Square End	1066	
558		Single End	Inch	HSS-Co	TiCN, Bright	1/4" - 2"	Square End	1067	


























continued on next page



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

GENERAL PURPOSE END MILLS (Continued)

STE

END MILLS	544		Single End	Inch	HSS-Co	Bright	3/8" - 1-1/2"	Ball End	1068
	540		Single End	Inch	HSS-Co	TiN, Bright	1/8" - 2"	Center Hole	1069
	547		Single End	Inch	HSS-Co	Bright	1" - 2"	Center Hole	1070
	545		Single End	Inch	HSS-Co	Bright	1/4" - 2"	Center Hole	1070
	557		Single End	Inch	HSS-Co	Bright	1/4" - 2"	Center Hole	1070
	591		Single End Tapered	Inch	HSS-Co	Bright	1/16" - 5/8"	1° Taper per Side	1072
	593		Single End Tapered	Inch	HSS-Co	Bright	1/16" - 5/8"	2° Taper per Side	1072
	594		Single End Tapered	Inch	HSS-Co	Bright	3/32" - 1/2"	3° Taper per Side	1073
	595		Single End Tapered	Inch	HSS-Co	Bright	3/32" - 1/2"	3° Taper per Side	1074
	596		Single End Tapered	Inch	HSS-Co	Bright	5/64" - 1/2"	7° Taper per Side	1075
	597		Single End Tapered	Inch	HSS-Co	Bright	3/32" - 1/4"	10° Taper per Side	1075
	522		Double End	Inch	HSS-Co	TiN, Bright	1/8" - 1"	Square End	1076
	582		Double End	Metric	HSS-Co	Bright	1mm - 25mm	Square End	1077
	532		Double End	Inch	HSS-Co	Bright	1/8" - 1"	Square End	1078
	542		Double End	Inch	HSS-Co	TiN, Bright	1/8" - 1"	Center Hole	1079
	543		Double End	Inch	HSS-Co	Bright	1/8" - 1"	Square End	1080
	523		Double End	Inch	HSS-Co	Bright	1/8" - 1"	Ball End	1080
	562		Double End	Inch	HSS-Co	Bright	1/32" - 3/16"	Miniature	1081
	563		Double End	Inch	HSS-Co	Bright	1/32" - 3/16"	Miniature	1081
	564		Double End	Inch	HSS-Co	Bright	1/16" - 3/16"	Miniature	1082
566		Double End	Inch	HSS-Co	Bright	1/16" - 3/16"	Miniature	1082	
567		Double End	Inch	HSS-Co	Bright	1/16" - 3/16"	Miniature	1083	
568		Double End	Inch	HSS-Co	Bright	1/16" - 3/16"	Miniature	1083	
570		Double End	Inch	HSS-Co	Bright	1/16" - 3/16"	Ball End, Miniature	1084	
571		Double End	Inch	HSS-Co	Bright	1/16" - 3/16"	Ball End, Miniature	1084	

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

GENERAL PURPOSE TAP



TAPS	107		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	No. 3 - 3/4"	Spiral Flute	556
	143		GENERAL PURPOSE	Metric	HSS	TiCN, TiN, S/O, Bright	M3 - M12	Spiral Flute	557
	13020		GENERAL PURPOSE	Inch	HSSE	S/O	No. 6 - 5/8"	Spiral Flute	558
	105		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	No. 0 - 3/4"	Spiral Point	635-637
	142		GENERAL PURPOSE	Metric	HSS	TiCN, TiN, S/O, Bright	M1.6 - M20	Spiral Point	643
	101		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	1/4" - 1-1/2"	Straight Flute	688-689
	102		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	No. 0 - No. 12	Straight Flute	691-692
	141		GENERAL PURPOSE	Metric	HSS	S/O, Bright	M1.6 - M36	Straight Flute	697
	S108		GENERAL PURPOSE	Inch	HSS	Bright	No. 2 - 1"	STI, Spiral Fluted	717-718
	S109		GENERAL PURPOSE	Metric	HSS	Bright	M2 - M24	STI, Spiral Fluted	719
	125		GENERAL PURPOSE	Inch	HSS	Bright	No. 2 - 1"	STI, Spiral Pointed	729-730
	127		GENERAL PURPOSE	Metric	HSS	Bright	M2 - M24	STI, Spiral Pointed	731
	126		GENERAL PURPOSE	Inch	HSS	Bright	No. 2 - 1"	STI, Straight Fluted	732-733
	128		GENERAL PURPOSE	Metric	HSS	Bright	M2 - M24	STI, Straight Fluted	734
	123		GENERAL PURPOSE	Metric	HSSE	Bright	M3 - M24	Spiral Flute, JIS	559
	122		GENERAL PURPOSE	Metric	HSSE	S/O, Bright	M3 - M24	Spiral Point, JIS	644
	121		GENERAL PURPOSE	Metric	HSS	S/O, Bright	M2 - M36	Straight Flute, JIS	698-699
	S111		GENERAL PURPOSE	Inch	HSS	Bright	No. 00	Spiral Point, Miniature	647
	S110		GENERAL PURPOSE	Inch	HSS	Bright	No. 00 - No. 000	Straight Flute, Miniature	701
	918		GENERAL PURPOSE	Inch	HSS	Bright	No. 4 - 5/8"	Spiral Flute, Long Shank	560
	917		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 4 - 5/8"	Spiral Point, Long Shank	645
	11118		GENERAL PURPOSE	Metric	HSS	S/O	M4 - M12	Spiral Point, Extended Length	646
	916		GENERAL PURPOSE	Inch	HSS	S/O	1/4" - 3/4"	Straight Flute, Pulley Taps, Long Shank	700
	105B		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 0 - 7/16"	Spiral Point, Bottom Taps	638
	105A		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 4 - 1/2"	Spiral Point, Assembly Type Taps	639
	105+		GENERAL PURPOSE	Inch	HSS	TiN, Bright	No. 4 - No. 10	Spiral Point, H7 Taps	640
























continued on next page



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------



GENERAL PURPOSE TAP (Continued)

STT

TAPS	105H		GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	No. 6 - 3/4"	Spiral Point, +.005" Oversize	641
	142H		GENERAL PURPOSE	Metric	HSS	Bright	M4 - M12	Spiral Point, +.005" Oversize	642
	101C		GENERAL PURPOSE	Inch	HSS	N, S/O	1/4" - 3/4"	Straight Flute, Cast Iron Tap	686
	141C		GENERAL PURPOSE	Metric	HSS	N, S/O	M6 - M12	Straight Flute, Cast Iron Tap	687
	101H		GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	1/4" - 3/4"	Straight Flute, +.005" Oversize	690
	102H		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 6 - No. 10	Straight Flute, +.005" Oversize	693
	103		GENERAL PURPOSE	Inch	HSS	TiN, S/O, Bright	No. 8 - 1/2"	Straight Flute, Three Flutes	694
	104		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 2 - 5/16"	Straight Flute, Two Flutes	695
	101N		GENERAL PURPOSE	Inch	HSS	Bright	No. 12 - 1"	Straight Flute, UNEF	696
	114		GENERAL PURPOSE	Inch	HSS-CO	N	No. 2 - 1/4"	Straight Flute, For Plastics	702
	180		GENERAL PURPOSE	Inch	HSS	Bright	1-1/8" - 2-1/4"	Straight Flute, 8 Pitch	703
	101L		GENERAL PURPOSE	Inch	HSS	Bright	No. 6 - 1"	Straight Flute, Left Hand	704
	108		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	1/16" - 2"	Pipe Tap, NPT, ANPT	744
	108AL		GENERAL PURPOSE	Inch	HSS	Bright	1/8" - 1"	Pipe Tap, NPT	745
	118		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	1/16" - 2"	Pipe Tap, NPTF	746
	108G		GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	1/8" - 2"	Pipe Tap, NPT, NPTF, ANPT, Interrupted Thread	747
	S125		GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	1/8" - 1"	Pipe Tap, NPT, NPTF, Short Projection	748
	12006		GENERAL PURPOSE	Inch	HSS	Bright	1/8" - 3/4"	Pipe Tap, NPTF, Special Short Projection	749
	12007		GENERAL PURPOSE	Inch	HSS	Bright	1/8" - 3/4"	Pipe Tap, NPT	750
	109		GENERAL PURPOSE	Inch	HSS	S/O, Bright	1/8" - 1"	Pipe Tap, NPS, NPSF	751
134		GENERAL	Inch	HSS	Bright	No. 0 - 1-1/2"	Solid & Adjustable Round Split Dies	752-754	
134P		GENERAL	Inch	HSS	Bright	1/8" - 1/2"	Adjustable Round Split Dies, Taper Pipe	755	
135		GENERAL	Metric	HSS	Bright	M2 - M30	Adjustable Round Split Dies	756	

SOMTA

SOM

DRILLS	OCS-SO		SOMTA	Inch & Metric	Carbide	TiALN	6mm - 14mm	Stub, Coolant-Through	226
	01S-SO		SOMTA	Inch & Metric	Carbide	TiALN	1mm - 14mm	Stub, Solid	228



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

SOMTA (Continued)

SOM

DRILLS	List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
	163-SO		SOMTA	Inch & Metric	HSS-Co5	Bright/ TiALN	1mm - 14mm	Stub, Solid	299-304
0CJ-SO		SOMTA	Inch & Metric	Carbide	TiALN	6mm - 14mm	Jobbers, Coolant-Through	227	
01J-SO		SOMTA	Inch & Metric	Carbide	TiALN	1mm - 14mm	Jobbers, Solid	229	
164-SO		SOMTA	Inch & Metric	HSS-Co5	Bright/ TiALN	1mm - 15.88mm	Jobbers, Solid	305-310	
1R5-SO		SOMTA	Inch & Metric	HSS-Co5	TiALN	1mm - 13mm	Red Band, Ideal for Alloy Steel	316-318	
1BB-SO		SOMTA	Inch & Metric	HSS-Co5	TiALN	1mm - 13mm	Blue Band, Ideal for Stainless Steel	319-321	
1AQ-SO		SOMTA	Inch & Metric	HSS	Bright	0.9mm - 13mm	Yellow Band, Ideal for Aluminum	322-325	
1W6-SO		SOMTA	Inch & Metric	HSS-Co5	TiALN	1.984mm - 12.7mm	White Band, Ideal for Cast Iron	326-327	
1G7-SO		SOMTA	Inch & Metric	HSS-Co5	TiN	1mm - 13mm	Green Band, Ideal for Carbon Steel	328-331	
101-SO		SOMTA	Inch & Metric	HSS	Steam Oxide	0.3mm - 20mm	Straight Shank Jobbers Drill	332-337	
102-SO		SOMTA	Inch & Metric	HSS	Steam Oxide	0.3mm - 20mm	Straight Shank Jobbers Drill	332-337	
1X6-SO		SOMTA	Inch & Metric	HSS	TiN	3.175mm - 15.875mm	X-Ratio Split Point Straight Shank Jobbers Drill	338-340	
110-SO		SOMTA	Inch & Metric	HSS-Co5	Bright	1mm - 12.7mm	UDL Long Drill	311-315	
1NA-SO		SOMTA	Inch	HSS	Bright	3/64" - 1/4"	Center Drill	341	
751-SO		SOMTA	Inch & Metric	HSS-Co5	Bright	2mm - 20mm	Parallel Shank Machine Chucking Reamer	342-344	
752-SO		SOMTA	Inch & Metric	HSS-Co5	Bright	2mm - 20mm	Parallel Shank Machine Chucking Reamer	342-344	
TAPS	5BA-SO, 5BL-SO		SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4	Spiral Flute, Red Band, Ideal for Alloy Steel	561-562
	5EA-SO, 5EL-SO		SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Spiral Flute, Red Band, Ideal for Alloy Steel	563
	5BB-SO, 5BM-SO		SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4	Spiral Flute, Blue Band, Ideal for Stainless Steel	564-565
	5EB-SO, 5EM-SO		SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Spiral Flute, Blue Band, Ideal for Stainless Steel	566
	5BC-SO, 5BN-SO		SOMTA	Inch	HSSE-V3	Bright	No. 4 - 1-1/4	Spiral Flute, Yellow Band, Ideal for Aluminum	567-568
	5EC-SO, 5EN-SO		SOMTA	Metric	HSSE-V3	Bright	M3 - M24	Spiral Flute, Yellow Band, Ideal for Aluminum	569
	5BD-SO, 5BP-SO		SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4	Spiral Flute, White Band, Ideal for Cast Iron	570-571
	5ED-SO, 5EP-SO		SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Spiral Flute, White Band, Ideal for Cast Iron	572
	5BE-SO, 5BK-SO		SOMTA	Inch	HSSE-V3	TiN	No. 4 - 1-1/4	Spiral Flute, Green Band, Ideal for Carbon Steel	573-574
	5EV-SO		SOMTA	Metric	HSSE-V3	TiN	M3 - M24	Spiral Flute, Green Band, Ideal for Carbon Steel	575

continued on next page



Brand Index

List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page
------	---------	------------	-----------------	----------	---------	---------------	----------	-----------------

SOMTA (Continued)



List	Product	Brand/Name	Inch/ Metric	Material	Coating	Size Range	Features	Product Page	
TAPS	5EW-SO		SOMTA	Metric	HSSE-V3	TiN	M3 - M24	Spiral Flute, Green Band , Ideal for Carbon Steel	576
	5BF-SO, 5BS-SO		SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4	Spiral Point, Red Band , Ideal for Alloy Steel	648-649
	5EF-SO, 5ES-SO		SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Spiral Point, Red Band , Ideal for Alloy Steel	650
	5BG-SO, 5BT-SO		SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4	Spiral Point, Blue Band , Ideal for Stainless Steel	651-652
	5EG-SO, 5ET-SO		SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Spiral Point, Blue Band , Ideal for Stainless Steel	653
	5BH-SO, 5BU-SO		SOMTA	inch	HSSE-V3	Bright	No. 4 - 1-1/4	Spiral Point, Yellow Band , Ideal for Aluminum	654-655
	5EH-SO, 5EU-SO		SOMTA	Metric	HSSE-V3	Bright	M3 - M24	Spiral Point, Yellow Band , Ideal for Aluminum	656
	5BJ-SO, 5BV-SO		SOMTA	inch	HSSE-V3	TiN	No. 4 - 1-1/4	Spiral Point, Green Band , Ideal for Carbon Steel	657-658
	5EX-SO		SOMTA	Metric	HSSE-V3	TiN	M3 - M24	Spiral Point, Green Band , Ideal for Carbon Steel	659
END MILLS	04V-SO		SOMTA	Inch, Metric	Carbide	TiALN	3/16" - 3/4", 5mm - 20mm	Variable Index	1027
	03V-SO		SOMTA	Inch, Metric	Carbide	TiALN	1/4" - 1", 5mm - 20mm	Variable Index	1028-1029
	05V-SO		SOMTA	Inch, Metric	Carbide	TiALN	3/16" - 3/4", 5mm - 20mm	Variable Index	1030-1031
	03A-SO		SOMTA	Metric	Carbide	TiALN	1mm - 20mm	Square	1032
	03K-SO		SOMTA	Metric	Carbide	TiALN	1mm - 20mm	Square	1033
	03M-SO		SOMTA	Metric	Carbide	TiALN	1mm - 20mm	Ball Nose	1034
	03P-SO		SOMTA	Metric	Carbide	TiALN	1mm - 20mm	Ball Nose	1035
	03E-SO		SOMTA	Inch, Metric	Carbide	TiALN	1/4" - 1", 6mm - 20mm	Fine Pitch Rougher	1036
	03C-SO		SOMTA	Inch	Carbide	Bright	1/4" - 1"	Coarse Pitch Rougher	1037
	03F-SO		SOMTA	Inch, Metric	Carbide	TiALN	1/4" - 1", 6mm - 20mm	Fine Pitch Flat Crest Rougher	1038-1039
	03D-SO		SOMTA	Inch	Carbide	Bright	1/4" - 1"	Coarse Pitch Flat Crest Rougher	1040
	310-SO		SOMTA	Metric	HSS-Co8	TiALN	2mm - 25mm	Square	1085
	314-SO		SOMTA	Metric	HSS Co8	TiALN	3mm - 25mm	Square	1086
	312-SO		SOMTA	Metric	HSS Co8	TiALN	2mm - 25mm	Ball Nose	1087



The A Brand Story

The A Brand® represent a new evolution in cutting tool technology. With a commitment to only the best, the A Brand® emanates innovations essential for shaping the future of global manufacturing.

The A Brand® is a premium tooling brand that represents OSG's quality assurance guarantee to each and every customer. The A Brand® products have been developed with attention to the finest details, while incorporating a versatility to enable a wide range of processing in various materials. With the capability to perform difficult processing tasks, and high efficiency the A Brand® products lend to shortened production time and cost savings.

The A Brand® products have been developed with OSG's latest tooling innovations in threading, drilling, and milling to bring an unparalleled experience to our manufacturers with the highest level of quality, reliability, and satisfaction that can only be delivered by the A Brand®, the tooling master class.



DRILLING

The A Brand®

OSG's premium tooling brand. Features products that are designed to exceed the evolving manufacturing needs of our customers.

EXOPRO®

OSG's ultra-premium tooling series. Features supreme performance carbide drills with OSG's proprietary coatings, like WD1, WXS® and DIA, for maximum cost-efficiency.

EXOCARB®

High performance sub-micrograin carbide drills with OSG's proprietary EXO®, WXS and SS coatings.

EXOCARB® MAX

Maximum performance carbide coolant-through drills for ultra high-speed drilling.

HY-PRO® CARB

Premium micrograin carbide drills with OSG WD1 coating. Perfect blend of performance and cost-efficiency.

CARBIDE

Micrograin carbide drills and reamers.

V Products

Premium powdered metal and cobalt high speed steel drills with OSG's proprietary V or WXL coating.

NEXUS

Premium high speed steel drills with OSG's proprietary WD1 coating.

EX-GOLD®

Premium high speed steel drills with TiN & TiAlN coating.

SOMTA

Value carbide and HSS-Co drills for a wide range of applications.







Featured Drilling Products

A Brand® ADO								
List 6500	List 6510	List 6520	List 6530	List 6535	List 6540	List 6550	List 6560	List 6570
P86-91	P92-97	P98-101	P102-104	P105-106	P107-108	P109-110	P111	P112

Flute Length	3D	5D	8D	10D	15D	20D	30D	40D	50D
Inch	3/32 - 3/4"		3/32 - 5/8"	3/32 - 9/16"	1/8 - 9/16"			1/8 - 3/8"	1/8 - 5/16"
Metric	2 - 20mm		2 - 15.88mm	2 - 14.29mm	3 - 14.29mm			3 - 10mm	3 - 8mm
Number of Flutes	2								
Solid/Coolant-Through	Coolant-Through								
Point Angle	140°								
Coating	EgiAs								

P	Carbon Steels (1010, 1018)	
	Mild Steels, Alloy Steels (1050, 4140)	
	Die Steels (H13, D2)	
M	Stainless Steel (304SS, 420SS)	
K	Cast Iron	
	Ductile Cast Iron	
N	Aluminum Alloys (6061, 7075)	
S	Heat Resistant Alloys (Inconel 718)	
	Titanium Alloy (Ti-6Al-4V)	
H	Pre-Hardened Steel (P20)	
	Die Cast Steels (A2, S7)	
	Hardened Steels (D2)	



Featured Drilling Products



A Brand® ADO-TRS		A Brand® ADO-SUS			EXOPRO® WHO-Ni		EXOCARB® WH-70	EXOCARB® MAX-OIL AL	EXOCARB® MAX-MINI		
List 6600	List 6610	List 5200	List 5210	List 5220	List 5950Ni	List 5955Ni	List 5171	List 5275	List 5310	List 5330	List 5340
P66-69	P70-73	P121-127	P128-134	P135-139	P149-150	P151-152	P153-155	P157	P158	P162-170	P171-172
3D	5D	3D	5D	8D	3D	5D	Regular	15-30D	20D	Regular	Long
1/8 - 3/4"		3/32 - 3/4"		3/32 - 1/2"	1/8 - 1/2"		-	-	-	-	-
3 - 20mm		2 - 20mm		2 - 12.7mm	3 - 12.7mm		2 - 18.6mm	3 - 10mm	1 - 3mm	0.20 - 5mm	0.50 - 3mm
3		2			2		2	2	3	2	2
Coolant-Through		Coolant-Through			Coolant-Through		Solid	Coolant-Through	Solid	Solid	Solid
140°		140°			140°		120°	140°	140°, 120°	140°, 130°	120°
EgiAs		WXL			WXS		WXS	Bright	EXO	TiAlN	SS

For OSG's complete drill offering please refer to the Illustrated Index on pages 56-65.

1st Choice 2nd Choice Recommended





	Work Material	Material Designation	Material Condition	Hardness	
				BHN	HRC
P	Low Carbon Steel	1010, 1018	Normalized	~190	~10
	Medium Carbon Steel	1035, 1045	Normalized	~208	~15
	High Carbon Steel	1065, 1095	Normalized	~253	~25
	Alloy Steel	4140, 4340, 8620	Normalized	253~301	25~32
4140, 4340, 8620		Hardened	327~390	35~42	
M	Stainless Steel	300 Series / 400 Series	Annealed	~253	~25
		300 Series / 400 Series	Hardened	327~390	35~42
		17-4, 15-5, A286	Annealed	~253	~25
		17-4, 15-5, A286	Hardened	327~390	35~42
K	Cast Iron	Nodular, Grey	As Cast	~208	~15
N	Aluminum Alloy	6061, 7075, 2011	Normalized	~150	
	Die Cast Aluminum	356AL, 390AL	As Cast	~150	
S	Nickel Based Alloy	Inconel 718, 625	Annealed	253~301	25~32
		Inconel 718	Hardened	327~390	35~42
		Hastelloy, Waspaloy	Normalized		25~40
		Kovar	Normalized		25~40
	Titanium Alloy	6Al4V	Annealed	253~301	25~32
		6Al4V, 6Al6V	Hardened	327~390	35~42
H	Tool Steel	D2, H13, P20, S7	Annealed	190~253	10~25
		H13	Hardened	327~450	35~48
		D2, A2	Hardened		48~55
		D2, A2	Hardened		55~70
Other	Magnesium			~100	
	Brass, Bronze			~150	
	Copper			~150	
	Beryllium Copper			~253	~25
	Cobalt-Chrome	Stellite			



TOOL SELECTOR

Find the Drilling Solution for your Application

www.osgtool.com/toolselector





Carbide														Powdered Metal		HSS-Va & HSS-Co					
66-73	74-77	78-85	86-101	102-112	113-120	121-139	149-152	153-155	157	158-172	190-201	182-189	230-239	240-242	243-244	245-251	252-254	255-259	260-265	266-296	
A Brand® ADO-TRS <i>Coolant-Through</i>	A Brand® ADFO <i>Coolant-Through</i>	A Brand® ADF	A Brand® ADO 3D-8D <i>Coolant-Through</i>	A Brand® ADO 10D-50D <i>Coolant-Through</i>	A Brand® AD	A Brand® ADO-SUS <i>Coolant-Through</i>	EXOPRO® WHO-Ni <i>Coolant-Through</i>	EXOCARB® WH70	EXOCARB® MAX-OIL AL <i>Coolant-Through</i>	EXOCARB® MAX-MINI* <i>Coolant-Through</i>	HY-PRO® CARB <i>Coolant-Through</i>	HY-PRO® CARB	VPH GDS & GDR	VP® GDR	V-HO GDR <i>Coolant-Through</i>	HELIOS®	V-Select	NEXUS	EX-GOLD®	EX-SUS-GOLD	
●	●	●	●	●	●	●	○			●	●	●	○	○	●	●	○	●	●	●	
●	●	●	●	●	●	●	○			●	●	●	●	○	●	●	○	●	●	○	
●	●	●	●	●	○	●	●			○	●	●	●	●	●	●	○	●	●		
●	●	●	●	○	○		●			○	●	●	●	○	○	○			○		
○	●	○	○	○		●				●	○				●	○		○		●	
○	●	○	○	○		●				●	○				●	○		○		○	
○	●	○	○	○		●				●	○				○	○		○		○	
○	●	○	○	○	●	○	○				●	●	●	●	○	●	○	○	○		
	○	○	○						●	●			○	○	○	○	○	●		●	
	○	○	○			○				●	○	○	○	○	○	○	○	○		●	
			○			●	●			●	○		●								
			○			●	●			●	○		●								
			○			●	●			○	○		○	○	○	○	○	○			
			○			●	●			○	○		○	○	○	○	○	○			
●	●	●	●	○	○	○	○			○	●	●	●	●	○	●	○	●	●		
○	○	○	○				●			○	○	○	○	○		○					
○			○				●	●		●											
○	○	○	○				○			●	○		○	●	●			●	○	●	
	○	○	○						●	●	○		○			○		●		●	
			○						●	●	○					○		●		●	
			○						○	○	○		○				○			○	

*EXOCARB® MAX-MINI covers different materials for each list number. Verify recommended materials on each product page.





● = 1st Choice
○ = 2nd Choice





List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------	-------------	----------	---------	------------	----------	--------------	-----------


≤2D

5700	 NEW SIZES	A Brand® ADF	Inch & Metric	Carbide	EgiAs/IchAda	0.2mm-20mm	2D, Solid, Flat Drill	78-83	348-349
5705		A Brand® ADFLS	Inch & Metric	Carbide	EgiAs	3mm-20mm	2D, Solid, Flat Drill, Long Shank	84-85	350
6300		A Brand® AD	Inch & Metric	Carbide	EgiAs	2mm-20mm	2D, Solid	113-116	357
5172		EXOCARB® XH	Metric	Carbide	Bright	2mm-12mm	Solid, Tap Extractor	156	363

≤3D

6600	 NEW SIZES	A Brand® ADO-TRS	Inch & Metric	Carbide	EgiAs	3mm - 20mm	3D, Coolant-Through, 3 Flutes	66-69	346
5720		A Brand® ADFO	Inch & Metric	Carbide	EgiAs	3mm - 20mm	3D, Coolant-Through, Flat Drill	74-77	347
6500		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 20mm	3D, Coolant-Through	86-91	351
5200		A Brand® ADO-SUS	Inch & Metric	Carbide	WXL®	2mm-20mm	3D, Coolant-Through	121-127	358
5600		EXOPRO® Mega Muscle	Inch & Metric	Carbide	WD1	4.089mm-20mm	3D, Coolant-Through, 3 Flutes	142-143	360
5950Ni		EXOPRO® WHO-Ni	Inch & Metric	Carbide	WXS®	3mm-12.7mm	3D, Coolant-Through	149-150	362
5330		EXOCARB® MAX-MINI	Metric	Carbide	TiAlN	0.2mm-5mm	3D, Solid, Miniature	162-170	367
HP243		HY-PRO® CARB	Inch & Metric	Carbide	WD1	1mm-20mm	3D, Solid	182-185	372-373
HP253		HY-PRO® CARB	Inch & Metric	Carbide	WD1	3mm-20mm	3D, Coolant-Through	190-193	374-375
0CS-SO	 NEW	SOMTA	Inch & Metric	Carbide	TiAlN	6mm - 14mm	Stub, Coolant-Through	226	380-381
01S-SO	 NEW	SOMTA	Inch & Metric	Carbide	TiAlN	1mm - 14mm	Stub, Solid	228	380-381
1900		VPH GDS	Inch & Metric	XPM	V	0.5mm-20mm	Stub, Solid	230-236	382-383
1150		NEXUS	Inch & Metric	HSSE	WD1	1mm-12.7mm	Stub, Solid	255-257	388-389
1000		EX-GOLD®	Inch & Metric	HSS-CO	TiN	1.99mm-12.7mm	Stub, Solid	260-262	390
1100		EX-SUS-GOLD	Inch & Metric	HSSE	TiN, TiAlN	0.5mm-32mm	Stub, Solid	266-283	391
163-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	Bright/TiAlN	1mm - 14mm	Stub, Parabolic	299-304	293

≤4D

6310		A Brand® AD	Inch & Metric	Carbide	EgiAs	2mm-20mm	4D, Solid	117-120	357
------	---	-------------	---------------	---------	-------	----------	-----------	---------	-----



List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

≤2D

5700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>		
5705	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
6300	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>			
5172																	<input type="checkbox"/>

≤3D

6600	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5720	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>		
6500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
5600	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
5950Ni	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
5330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
HP243	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>		
HP253	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
0CS-S0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
01S-S0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
1900	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
1150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
1000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
163-S0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			

≤4D

6310	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>			
------	-------------------------------------	-------------------------------------	-------------------------------------	--------------------------	--------------------------	--	--	--	-------------------------------------	--	--	--	--	--------------------------	--	--	--

good best



List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------	-------------	----------	---------	------------	----------	--------------	-----------

≤5D

6610	 NEW SIZES	A Brand® ADO-TRS	Inch & Metric	Carbide	EgiAs	3mm - 20mm	5D, Coolant-Through, 3 Flutes	70-73	346
6510		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 20mm	5D, Coolant-Through	92-97	351
5210		A Brand® ADO-SUS	Inch & Metric	Carbide	WXL®	2mm - 20mm	5D, Coolant-Through	128-134	358
5610		EXOPRO® Mega Muscle	Inch & Metric	Carbide	WD1	4.089mm - 20mm	5D, Coolant-Through, 3 Flutes	144-145	360
5955Ni		EXOPRO® WHO-Ni	Inch & Metric	Carbide	WXS®	3mm - 12.7mm	5D, Coolant-Through	151-152	362
5171		EXOCARB® WH70	Metric	Carbide	WXS®	2mm - 18.6mm	5D	153-155	363
5320		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.02mm - 0.08mm	5D, Solid, Miniature	160	366
HP245		HY-PRO® CARB	Inch & Metric	Carbide	WD1	1mm - 20mm	5D, Solid	186-189	372-373
HP255		HY-PRO® CARB	Inch & Metric	Carbide	WD1	3mm - 20mm	5D, Coolant-Through	194-197	374-375
215		CARBIDE	Inch & Metric	Carbide	Bright	1mm - 12.7mm	Jobbers, Solid, Slow Spiral	204-208	377-378
220D		CARBIDE	Inch & Metric	Carbide	Bright	1.18mm - 12.7mm	Jobbers, Solid	209-211	377-378
233		CARBIDE	Inch & Metric	Carbide	Bright	3mm - 19.05mm	Jobbers, Solid, 3 Flutes	212	377-378
200		CARBIDE	Inch & Metric	Carbide	Bright	1.18mm - 12.7mm	Jobbers, Solid, Straight Flute	213-215	377-378
0CJ-SO	 NEW	SOMTA	Inch & Metric	Carbide	TiALN	6mm - 14mm	Jobbers, Coolant-Through	227	380-381
01J-SO	 NEW	SOMTA	Inch & Metric	Carbide	TiALN	1mm - 14mm	Jobbers, Solid	229	380-381
1950		VPH GDR	Inch & Metric	XPM	V	1.99mm - 17.46mm	Jobbers, Solid	237-239	382-383
2000		VP® GDR	Inch & Metric	XPM	V	2mm - 32mm	Jobbers, Solid, Parabolic	240-242	384
1700		V-HO GDR	Inch & Metric	HSS-CO	V	5.95mm - 31.75mm	Jobbers, Coolant-Through	243-244	385
1800		V-Select	Inch & Metric	HSSE	V	2mm - 13mm	Jobbers, Solid	252-254	387
1650		NEXUS	Inch & Metric	HSSE	WD1	2mm - 12.7mm	Jobbers, Solid	258-259	388-389
1500		EX-GOLD®	Inch & Metric	HSS-CO	TiN	1.99mm - 19.05mm	Jobbers, Solid	263-265	390
1600		EX-SUS-GOLD	Inch & Metric	HSSE	TiN, TiALN	2mm - 32mm	Jobbers, Solid	284-296	391
164-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	Bright/TiALN	1mm - 15.88mm	Jobbers, Parabolic	305-310	393





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

≤5D

6610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
6510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
5610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>			
5955Ni	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
5171																	<input checked="" type="checkbox"/>
5320						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
HP245	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>		
HP255	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
215	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
220D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>			
233	<input type="checkbox"/>								<input type="checkbox"/>								
200	<input type="checkbox"/>								<input type="checkbox"/>								
0CJ-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
01J-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
1950	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>		
1700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
1800	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
1650	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
1500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>			
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
164-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			









good best








List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------	-------------	----------	---------	------------	----------	--------------	-----------










≤5D

1R5-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	TiALN	1mm - 13mm	Red Band, Ideal for Alloy Steel	316-318	394-395
1BB-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	TiALN	1mm - 13mm	Blue Band, Ideal for Stainless Steel	319-321	394-395
1AQ-SO	 NEW	SOMTA	Inch & Metric	HSS	Bright	0.9mm - 13mm	Yellow Band, Ideal for Aluminum	322-325	394-395
1W6-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	TiALN	5/64" - 1/2"	White Band, Ideal for Cast Iron	326-327	394-395
1G7-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	TiN	1mm - 13mm	Green Band, Ideal for Carbon Steel	328-331	394-395
101-SO	 NEW	SOMTA	Metric	HSS	Steam Oxide	0.3mm - 20mm	Jobbers, Solid	332-337	396
102-SO	 NEW	SOMTA	Inch	HSS	Steam Oxide	1/64" - 5/8"	Jobbers, Solid	332-337	396
1X6-SO	 NEW	SOMTA	Inch	HSS	TiN	1/8" - 5/8"	Jobbers, Solid	338-340	396

≤8D

6520		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 15.88mm	8D, Coolant-Through	98-101	351
5220		A Brand® ADO-SUS	Inch & Metric	Carbide	WXL®	2mm - 12.7mm	8D, Coolant-Through	135-139	358
HP258		HY-PRO® CARB	Inch & Metric	Carbide	WD1	3mm - 20mm	8D, Coolant-Through	198-201	374-375

>10D

6530		A Brand® ADO	Inch & Metric	Carbide	EgiAs	2mm - 14.29mm	10D, Coolant-Through	102-104	352-353
6535		A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 14.29mm	15D, Coolant-Through	105-106	352-353
6540		A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 14.29mm	20D, Coolant-Through	107-108	352-353
6550		A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 14.29mm	30D, Coolant-Through	109-110	352-353
6560	 NEW	A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 10mm	40D, Coolant-Through	111	354
6570	 NEW	A Brand® ADO	Inch & Metric	Carbide	EgiAs	3mm - 8mm	50D, Coolant-Through	112	354
5630		EXOPRO® Mega Muscle	Inch & Metric	Carbide	WD1	5mm - 15.88mm	10D, Coolant-Through	146-148	361
5275		EXOCARB® MAX-OIL AL	Metric	Carbide	Bright	3mm - 10mm	15-30D, Coolant-Through	157	364
5310		EXOCARB® MAX-MINI	Metric	Carbide	EXO®	1mm - 3mm	Up to 20D, Solid, Miniature, 3 Flutes	158	365
5325		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.02mm - 0.08mm	10D, Solid, Miniature	161	366





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

≤5D

1R5-SO	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>									<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
1BB-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>				
1AQ-SO	<input type="checkbox"/>									<input checked="" type="checkbox"/>	<input type="checkbox"/>						
1W6-SO									<input checked="" type="checkbox"/>								
1G7-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>													
101-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
102-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
1X6-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				

≤8D

6520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
5220	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
HP258	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

>10D






6530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
6535	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
6540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
6550	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
6560	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
6570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
5630	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>			
5275										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
5310														<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
5325						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

good best













List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------	-------------	----------	---------	------------	----------	--------------	-----------




>10D

5340		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.5mm-3mm	10D, Solid, Miniature	171-172	368
1750		HELIOS®	Inch & Metric	HSS-CO	WXL®	1.6mm-17.86mm	10D, Solid, Parabolic	245-247	386
1760		HELIOS®	Inch & Metric	HSS-CO	WXL®	1.6mm-17.86mm	15D, Solid, Parabolic	248-249	386
1770		HELIOS®	Inch & Metric	HSS-CO	WXL®	1.6mm-14.29mm	20D, Solid, Parabolic	250-251	386
110-SO	 NEW	SOMTA	Inch & Metric	HSS-Co5	Bright	1mm - 12.7mm	Long, Parabolic	311-315	393


Centering/Countersinking

5190		A Brand® AD-LDS	Inch & Metric	Carbide	EgiAs	3mm - 25mm	Solid, 90°, 120°, 140° Spot Drill	140-141	359
5315		EXOCARB® MAX-MINI	Metric	Carbide	SS	0.05mm	Solid, Miniature, Pilot Drill	159	366
738		HY-PRO® CARB	Inch	-	Bright	-	Indexable, Spot Drill/Countersink/Chamfer	202-203	376
235		CARBIDE	Inch	Carbide	Bright	3/64"-7/32"	Solid, Drill/Countersink	216	-
700		CARBIDE	Inch	Carbide	Bright	1/8"-1"	Solid, Countersink, Single Flute	223	-
701		CARBIDE	Inch	Carbide	Bright	1/4"-1"	Solid, Countersink, Multiple Flutes	224	-
706		CARBIDE	Inch	Carbide	Bright	1/4"-1"	Solid, Countersink, 6 Flutes	225	-
1200		EX-SPOT	Metric	HSS	Bright, TiN	3mm-25mm	Solid, 60°/90°/120° Spot Drill	297	392
1250		EX-SPOT	Metric	HSS	Bright	3mm-25mm	Solid, 90° Spot Drill, Long Shank	298	392
1NA-SO	 NEW	SOMTA	Inch	HSS	Bright	3/64" - 1/4"	Center Drill	341	397

Chucking Reamer

300D		CARBIDE	Inch & Metric	Carbide	Bright	0.80mm-13mm	Solid, Multiple Flutes, RH Cutting	217-221	379
751-SO	 NEW	SOMTA	Metric	HSS-Co5	Bright	2mm - 20mm	Solid, RH Cutting	342-344	398
752-SO	 NEW	SOMTA	Inch	HSS-Co5	Bright	1/8" - 3/4"	Solid, RH Cutting	342-344	398

Boring Tools

750		CARBIDE	Inch	Carbide	Bright	1/16"-3/8"	Solid, Grinding/Deburring	222	-
-----	---	---------	------	---------	--------	------------	---------------------------	-----	---

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

>10D

5340	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1750	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1760	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1770	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
110-S0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Centering/Countersinking

5190	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
5315	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
738	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
235	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
700	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
701	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
706	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1250	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1NA-S0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Chucking Reamer

300D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
751-S0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
752-S0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>









Boring Tools

750	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-----	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

good best

List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	-----------------	--------------

Composite Drills

7501		EXOPRO® AERO-STAD	Inch	Carbide	Diamond	#40 - 1/2"	Triple Angle	173	369
7520		EXOPRO® AERO-LHX	Inch	Carbide	Diamond	#40 - 1/2"	Low Helix	174	369
7500		EXOPRO® AERO-D-REAM	Inch	Carbide	Diamond	#40 - 1/2"	Tapered Drill/ Reamer	175	369
7530		EXOPRO® AERO-S	Inch	Carbide	Diamond	#40 - 1/2"	High Helix, Stack Drill	176	369
7532		EXOPRO® AERO-H	Inch	Carbide	Diamond	#40 - 1/2"	Stack Drill for All Stacks	177	370
5732		EXOCARB® AERO-H	Inch	Carbide	TiAlN	#11 - 1/2"	Stack Drill for All Stacks	178	370
HP700		HY-PRO® CARB NEPTUNE®	Inch	Carbide	TiAlN	#40 - 1/4"	Hand Drill	179	371
257		AERO-D-REAM	Inch	Carbide	Bright	#40 - 1/2"	Tapered Drill/ Reamer	180-181	369

List No.	Machine Type			Composite Type				
	Hand	Pneumatic	CNC	CFRP	Honeycomb	CFRP/ Al Stack	CFRP/ Ti Stack	CFRP/ CRES Stack

Composite Drills

7501	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
7520		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
7500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
7530		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
7532		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
5732		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
HP700	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
257	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			

Good Best



A Brand[®] ADO-TRS

Advanced Performance High Feed 3-Flute Carbide Drills

List 6600

ADO-TRS-3D, 3 Flute, Coolant-Through

NEW SIZES	SPEED FEED P346	CARBIDE	EgiAs		30°	SHANK h6
------------------	---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8720300	-	-	-	3.000	0.11811	18	66	3
660012517	1/8	-	-	3.175	0.12500	20	74	1/8
8720330	-	-	-	3.300	0.12992	21		4
660013217	-	-	-	3.360	0.13228			
660013517	-	-	-	3.440	0.13543			
8720350	-	-	-	3.500	0.13780			
660013817	-	-	-	3.520	0.13858			
660014017	-	-	-	3.570	0.14055			
8720366	-	-	-	3.660	0.14409			
660014817	-	-	-	3.770	0.14843			
8720386	-	-	-	3.860	0.15197			
660015617	5/32	-	-	3.969	0.15625	24	5/32	
8720400	-	-	-	4.000	0.15748	25	4	
660015917	-	-	-	4.050	0.15945			
660016117	-	20	-	4.089	0.16100			
8720410	-	-	-	4.100	0.16142			
660016317	-	-	-	4.160	0.16378			
8720420	-	-	-	4.200	0.16535			
660016817	-	-	-	4.270	0.16811			
8720430	-	-	-	4.300	0.16929			
660017217	11/64	-	-	4.366	0.17188			
8720440	-	-	-	4.400	0.17323		27	3/16
660017517	-	-	-	4.460	0.17559			
8720450	-	-	-	4.500	0.17717			
8720460	-	-	-	4.600	0.18110			
660018317	-	-	-	4.660	0.18346			
8720470	-	-	-	4.700	0.18504			
660018717	3/16	-	-	4.763	0.18750			
8720480	-	-	-	4.800	0.18898			
8720490	-	-	-	4.900	0.19291			
8720500	-	-	-	5.000	0.19685	26		6
8720510	-	-	-	5.100	0.20079			
660020317	13/64	-	-	5.159	0.20313			
8720520	-	-	-	5.200	0.20472			
8720530	-	-	-	5.300	0.20866			
8720540	-	-	-	5.400	0.21260			
660021317	-	3	-	5.410	0.21300			
8720550	-	-	-	5.500	0.21654			
660021817	7/32	-	-	5.556	0.21875			
8720560	-	-	-	5.600	0.22047			
8720570	-	-	-	5.700	0.22441			
8720580	-	-	-	5.800	0.22835			
8720590	-	-	-	5.900	0.23228			
660023417	15/64	-	-	5.953	0.23438			
8720600	-	-	-	6.000	0.23622			

Packed: 1 pc.
Available EgiAs coating only.





List 6600 (Continued)

ADO-TRS-3D, 3 Flute, Coolant-Through

NEW SIZES

SPEED FEED
P346

CARBIDE

EgiAs

30°

SHANK
h6

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8720610	-	-	-	6.100	0.24016	31		8
8720620	-	-	-	6.200	0.24409	31		
8720630	-	-	-	6.300	0.24803	32	88	1/4
660025017	1/4	-	E	6.350	0.25000			
8720640	-	-	-	6.400	0.25197	33	88	8
8720650	-	-	-	6.500	0.25591			
660025717	-	-	F	6.528	0.25700	34	88	5/16
8720660	-	-	-	6.600	0.25984			
8720670	-	-	-	6.700	0.26378	35	88	8
660026517	17/64	-	-	6.747	0.26563			
8720680	-	-	-	6.800	0.26772	36	94	5/16
8720690	-	-	-	6.900	0.27165			
8720700	-	-	-	7.000	0.27559	37	94	8
8720710	-	-	-	7.100	0.27953			
660028117	9/32	-	-	7.144	0.28125	38	94	5/16
8720720	-	-	-	7.200	0.28346			
8720730	-	-	-	7.300	0.28740	39	94	8
8720738	-	-	-	7.380	0.29055			
8720740	-	-	-	7.400	0.29134	40	94	5/16
8720750	-	-	-	7.500	0.29528			
660029617	19/64	-	-	7.541	0.29688	41	101	8
8720760	-	-	-	7.600	0.29921			
8720770	-	-	-	7.700	0.30315	42	101	8
8720780	-	-	-	7.800	0.30709			
8720790	-	-	-	7.900	0.31102	43	101	10
660031217	5/16	-	-	7.938	0.31250			
8720800	-	-	-	8.000	0.31496	44	106	3/8
8720810	-	-	-	8.100	0.31890			
8720820	-	-	-	8.200	0.32283	45	106	10
8720830	-	-	-	8.300	0.32677			
660032817	21/64	-	-	8.334	0.32813	46	106	3/8
8720840	-	-	-	8.400	0.33071			
660033217	-	-	Q	8.433	0.33200	47	106	10
8720850	-	-	-	8.500	0.33465			
8720860	-	-	-	8.600	0.33858	48	106	10
8720870	-	-	-	8.700	0.34252			
660034317	11/32	-	-	8.731	0.34375	48	106	10
8720880	-	-	-	8.800	0.34646			
8720890	-	-	-	8.900	0.35039	48	106	10
8720900	-	-	-	9.000	0.35433			
8720910	-	-	-	9.100	0.35827	48	106	10
660035917	23/64	-	-	9.128	0.35938			
8720920	-	-	-	9.200	0.36220	48	106	10
8720925	-	-	-	9.250	0.36417			
8720930	-	-	-	9.300	0.36614	48	106	10
8720938	-	-	-	9.380	0.36929			
8720940	-	-	-	9.400	0.37008	48	106	10
8720950	-	-	-	9.500	0.37402			

Packed: 1 pc.
Available EgiAs coating only.

▶ continued on next page ▶ **ADR**

Work Material

List No.	P						M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
6600	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand[®] ADO-TRS

Advanced Performance High Feed 3-Flute Carbide Drills

List 6600 (Continued)

ADO-TRS-3D, 3 Flute, Coolant-Through

NEW SIZES	SPEED FEED P346	CARBIDE	EgiAs		30°	SHANK h6
------------------	---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
660037517	3/8	-	-	9.525	0.37500	48	106	3/8
8720960	-	-	-	9.600	0.37795			
8720970	-	-	-	9.700	0.38189			
8720980	-	-	-	9.800	0.38583	49		10
8720990	-	-	-	9.900	0.38976			
660039017	25/64	-	-	9.922	0.39063	50		7/16
8721000	-	-	-	10.000	0.39370		10	
8721010	-	-	-	10.100	0.39764	51	12	
8721020	-	-	-	10.200	0.40157			
8721030	-	-	-	10.300	0.40551	52	7/16	
660040617	13/32	-	-	10.319	0.40625			
8721040	-	-	-	10.400	0.40945	53	12	
8721050	-	-	-	10.500	0.41339			
8721060	-	-	-	10.600	0.41732	54	7/16	
8721070	-	-	-	10.700	0.42126			
660042217	27/64	-	-	10.716	0.42188	55	12	
8721080	-	-	-	10.800	0.42520			
8721090	-	-	-	10.900	0.42913	56	7/16	
8721100	-	-	-	11.000	0.43307			
8721110	-	-	-	11.100	0.43701	57	12	
660043717	7/16	-	-	11.113	0.43750			
8721120	-	-	-	11.200	0.44094	58	1/2	
8721125	-	-	-	11.250	0.44291			
8721130	-	-	-	11.300	0.44488	59	12	
8721138	-	-	-	11.380	0.44803			
8721140	-	-	-	11.400	0.44882	60	7/16	
8721150	-	-	-	11.500	0.45276			
660045317	29/64	-	-	11.509	0.45313	61	12	
8721160	-	-	-	11.600	0.45669			
8721170	-	-	-	11.700	0.46063	62	1/2	
8721180	-	-	-	11.800	0.46457			
8721190	-	-	-	11.900	0.46850	63	14	
660046817	15/32	-	-	11.906	0.46875			
8721200	-	-	-	12.000	0.47244	64	1/2	
660048417	31/64	-	-	12.303	0.48438			
8721250	-	-	-	12.500	0.49213	65	14	
660050017	1/2	-	-	12.700	0.50000			
8721300	-	-	-	13.000	0.51181	66	14	
8721325	-	-	-	13.250	0.52165			
8721330	-	-	-	13.300	0.52362	67	5/8	
8721338	-	-	-	13.380	0.52677			
660053117	17/32	-	-	13.494	0.53125	68	14	
8721350	-	-	-	13.500	0.53150			
8721400	-	-	-	14.000	0.55118	69	16	
8721410	-	-	-	14.100	0.55512			
8721420	-	-	-	14.200	0.55906	70	5/8	
660056217	9/16	-	-	14.288	0.56250			
8721430	-	-	-	14.300	0.56299	71	16	
8721450	-	-	-	14.500	0.57087			
8721500	-	-	-	15.000	0.59055	75		

Packed: 1 pc.
Available EgiAs coating only.





List 6600 (Continued)

ADO-TRS-3D, 3 Flute, Coolant-Through

NEW SIZES	SPEED FEED P346	CARBIDE	EgiAs		30°	SHANK h6
------------------	---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
660059317	19/32	-	-	15.081	0.59375	76	145	5/8
8721520	-	-	-	15.200	0.59843	76		16
8721530	-	-	-	15.300	0.60236	77		16
8721550	-	-	-	15.500	0.61024	78		16
660062517	5/8	-	-	15.875	0.62500	80	150	5/8
8721600	-	-	-	16.000	0.62992	80		16
8721650	-	-	-	16.500	0.64961	83		18
660065617	21/32	-	-	16.669	0.65625	83		3/4
660066317	-	-	-	16.840	0.66299	85	155	18
8721700	-	-	-	17.000	0.66929	85		18
8721725	-	-	-	17.250	0.67913	87		18
660068717	11/16	-	-	17.463	0.68750	88		3/4
8721750	-	-	-	17.500	0.68898	88	160	18
660070317	45/64	-	-	17.859	0.70313	90		3/4
8721800	-	-	-	18.000	0.70866	90		18
660071817	23/32	-	-	18.256	0.71875	92		3/4
8721850	-	-	-	18.500	0.72835	93	165	20
8721900	-	-	-	19.000	0.74803	95		20
660075017	3/4	-	-	19.050	0.75000	95		3/4
8721925	-	-	-	19.250	0.75787	97		20
8721950	-	-	-	19.500	0.76772	98	170	20
8722000	-	-	-	20.000	0.78740	100		20

Packed: 1 pc.
Available EgiAs coating only.



List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6600	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand[®] ADO-TRS

Advanced Performance High Feed 3-Flute Carbide Drills

List 6610

ADO-TRS-5D, 3 Flute, Coolant-Through

NEW SIZES	SPEED FEED P346	CARBIDE	EgiAs		30°	SHANK h6
------------------	---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8722300	-	-	-	3.000	0.11811	27	78	3
661012517	1/8	-	-	3.175	0.12500	29	86	1/8
8722330	-	-	-	3.300	0.12992	30		
8722350	-	-	-	3.500	0.13780	32		
8722366	-	-	-	3.660	0.14409	33		
661015617	5/32	-	-	3.969	0.15625	36		
8722400	-	-	-	4.000	0.15748	36	4	
661016117	-	20	-	4.089	0.16100	37	95	6
8722410	-	-	-	4.100	0.16142	37		
8722420	-	-	-	4.200	0.16535	38		
8722430	-	-	-	4.300	0.16929	39		
661017217	11/64	-	-	4.366	0.17188	40		
8722440	-	-	-	4.400	0.17323	40	100	6
8722450	-	-	-	4.500	0.17717	41		
8722460	-	-	-	4.600	0.18110	42		
8722470	-	-	-	4.700	0.18504	43		
661018717	3/16	-	-	4.763	0.18750	43		
8722480	-	-	-	4.800	0.18898	44	109	8
8722490	-	-	-	4.900	0.19291	45		
8722500	-	-	-	5.000	0.19685	45		
8722510	-	-	-	5.100	0.20079	41		
661020317	13/64	-	-	5.159	0.20313	42		
8722520	-	-	-	5.200	0.20472	43	118	8
8722530	-	-	-	5.300	0.20866	43		
8722540	-	-	-	5.400	0.21260	44		
661021317	-	3	-	5.410	0.21300	44		
8722550	-	-	-	5.500	0.21654	45		
661021817	7/32	-	-	5.556	0.21875	45	109	8
8722560	-	-	-	5.600	0.22047	46		
8722570	-	-	-	5.700	0.22441	46		
8722580	-	-	-	5.800	0.22835	47		
8722590	-	-	-	5.900	0.23228	47		
661023417	15/64	-	-	5.953	0.23438	48	109	8
8722600	-	-	-	6.000	0.23622	48		
8722610	-	-	-	6.100	0.24016	49		
8722620	-	-	-	6.200	0.24409	50		
8722630	-	-	-	6.300	0.24803	51		
661025017	1/4	-	E	6.350	0.25000	51	109	8
8722640	-	-	-	6.400	0.25197	52		
8722650	-	-	-	6.500	0.25591	52		
661025717	-	-	F	6.528	0.25700	53		
8722660	-	-	-	6.600	0.25984	53		
8722670	-	-	-	6.700	0.26378	54	109	8
661026517	17/64	-	-	6.747	0.26563	54		
8722680	-	-	-	6.800	0.26772	55		
8722690	-	-	-	6.900	0.27165	55		
8722700	-	-	-	7.000	0.27559	56		
8722710	-	-	-	7.100	0.27953	57		

Packed: 1 pc.
Available EgiAs coating only.





List 6610 (Continued)

ADO-TRS-5D, 3 Flute, Coolant-Through

NEW SIZES

SPEED FEED
P346

CARBIDE

EgiAs

30°

SHANK
h6

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter	
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)	
661028117	9/32	-	-	7.144	0.28125			5/16	
8722720	-	-	-	7.200	0.28346	58	118	8	
8722730	-	-	-	7.300	0.28740	59			
8722738	-	-	-	7.380	0.29055	60			
8722740	-	-	-	7.400	0.29134				
8722750	-	-	-	7.500	0.29528				
661029617	19/64	-	-	7.541	0.29688	61			
8722760	-	-	-	7.600	0.29921	62			
8722770	-	-	-	7.700	0.30315	63			
8722780	-	-	-	7.800	0.30709	64			
8722790	-	-	-	7.900	0.31102				
661031217	5/16	-	-	7.938	0.31250	64	5/16		
8722800	-	-	-	8.000	0.31496	65	8		
8722810	-	-	-	8.100	0.31890				
8722820	-	-	-	8.200	0.32283	66	10		
8722830	-	-	-	8.300	0.32677	67	3/8		
661032817	21/64	-	-	8.334	0.32813				
8722840	-	-	-	8.400	0.33071	68	128	10	
661033217	-	-	Q	8.433	0.33200				
8722850	-	-	-	8.500	0.33465	69			
8722860	-	-	-	8.600	0.33858	70			3/8
8722870	-	-	-	8.700	0.34252				
661034317	11/32	-	-	8.731	0.34375	71			
8722880	-	-	-	8.800	0.34646	72		10	
8722890	-	-	-	8.900	0.35039				
8722900	-	-	-	9.000	0.35433	73		136	3/8
8722910	-	-	-	9.100	0.35827				
661035917	23/64	-	-	9.128	0.35938	74			
8722920	-	-	-	9.200	0.36220	75	10		
8722925	-	-	-	9.250	0.36417				
8722930	-	-	-	9.300	0.36614	76	3/8		
8722938	-	-	-	9.380	0.36929				
8722940	-	-	-	9.400	0.37008	77	10		
8722950	-	-	-	9.500	0.37402				
661037517	3/8	-	-	9.525	0.37500	78			
8722960	-	-	-	9.600	0.37795	79	10		
8722970	-	-	-	9.700	0.38189				
8722980	-	-	-	9.800	0.38583	80	146	7/16	
8722990	-	-	-	9.900	0.38976				
661039017	25/64	-	-	9.922	0.39063	81			
8723000	-	-	-	10.000	0.39370	82			10
8723010	-	-	-	10.100	0.39764				
8723020	-	-	-	10.200	0.40157	83		12	
8723030	-	-	-	10.300	0.40551				
661040617	13/32	-	-	10.319	0.40625	84		7/16	
8723040	-	-	-	10.400	0.40945				
8723050	-	-	-	10.500	0.41339	85		12	
8723060	-	-	-	10.600	0.41732				
8723070	-	-	-	10.700	0.42126	86	7/16		
661042217	27/64	-	-	10.716	0.42188				

Packed: 1 pc.
Available EgiAs coating only.

▶ continued on next page ▶

Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
6610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand[®] ADO-TRS

Advanced Performance High Feed 3-Flute Carbide Drills

List 6610 (Continued)

ADO-TRS-5D, 3 Flute, Coolant-Through

NEW SIZES	SPEED FEED P346	CARBIDE	EgiAs		30°	SHANK h6
------------------	---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8723080	-	-	-	10.800	0.42520	87	146	12
8723090	-	-	-	10.900	0.42913	88		
8723100	-	-	-	11.000	0.43307	89	7/16	
8723110	-	-	-	11.100	0.43701			
661043717	7/16	-	-	11.113	0.43750	90	12	
8723120	-	-	-	11.200	0.44094			
8723125	-	-	-	11.250	0.44291	91	12	
8723130	-	-	-	11.300	0.44488			
8723138	-	-	-	11.380	0.44803	92	12	
8723140	-	-	-	11.400	0.44882			
8723150	-	-	-	11.500	0.45276	93	1/2	
661045317	29/64	-	-	11.509	0.45313			
8723160	-	-	-	11.600	0.45669	94	12	
8723170	-	-	-	11.700	0.46063			
8723180	-	-	-	11.800	0.46457	95	12	
8723190	-	-	-	11.900	0.46850			
661046817	15/32	-	-	11.906	0.46875	96	1/2	
8723200	-	-	-	12.000	0.47244			
661048417	31/64	-	-	12.303	0.48438	99	1/2	
8723250	-	-	-	12.500	0.49213			
661050017	1/2	-	-	12.700	0.50000	100	14	
8723300	-	-	-	13.000	0.51181			
8723325	-	-	-	13.250	0.52165	102	1/2	
8723330	-	-	-	13.300	0.52362			
8723338	-	-	-	13.380	0.52677	104	14	
661053117	17/32	-	-	13.494	0.53125			
8723350	-	-	-	13.500	0.53150	106	14	
8723400	-	-	-	14.000	0.55118			
8723410	-	-	-	14.100	0.55512	107	16	
8723420	-	-	-	14.200	0.55906			
661056217	9/16	-	-	14.288	0.56250	108	5/8	
8723430	-	-	-	14.300	0.56299			
8723450	-	-	-	14.500	0.57087	109	16	
8723500	-	-	-	15.000	0.59055			
661059317	19/32	-	-	15.081	0.59375	110	5/8	
8723520	-	-	-	15.200	0.59843			
8723530	-	-	-	15.300	0.60236	111	16	
8723550	-	-	-	15.500	0.61024			
661062517	5/8	-	-	15.875	0.62500	112	5/8	
8723600	-	-	-	16.000	0.62992			
8723650	-	-	-	16.500	0.64961	113	18	
661065617	21/32	-	-	16.669	0.65625			
661066317	-	-	-	16.840	0.66299	114	3/4	
8723700	-	-	-	17.000	0.66929			
8723725	-	-	-	17.250	0.67913	115	18	
661068717	11/16	-	-	17.463	0.68750			
8723750	-	-	-	17.500	0.68898	116	3/4	
661070317	45/64	-	-	17.859	0.70313			
8723800	-	-	-	18.000	0.70866	117	18	

Packed: 1 pc.
Available EgiAs coating only.





List 6610 (Continued)

ADO-TRS-5D, 3 Flute, Coolant-Through

NEW SIZES	SPEED FEED P346	CARBIDE	EgiAs		30°	SHANK h6
------------------	---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)
661071817	23/32	-	-	18.256	0.71875	147	217	3/4
8723850	-	-	-	18.500	0.72835	148		20
8723900	-	-	-	19.000	0.74803	152		3/4
661075017	3/4	-	-	19.050	0.75000	154		20
8723925	-	-	-	19.250	0.75787	160	225	20
8723950	-	-	-	19.500	0.76772			
8724000	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available EgiAs coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>			

good best






List 5720

ADFO-3D, Coolant-Through, Flat Drill

SPEED FEED P347	CARBIDE	EgiAs		20°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

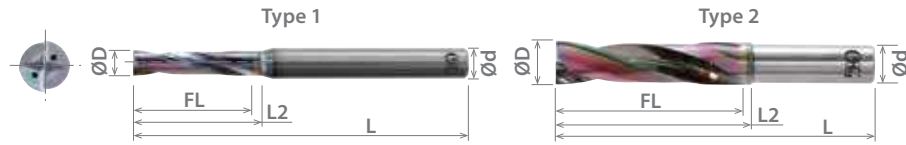

Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3334300	-	-	-	3.000	0.11811	15	16	55	4	1
3334302	-	-	-	3.100	0.12205					
572012517	1/8	-	-	3.175	0.12500	16	17	60	1/8	2
3334304	-	-	-	3.200	0.12598					
3334305	-	-	-	3.300	0.12992	19	20	65	4	1
3334306	-	-	-	3.400	0.13386					
3334307	-	-	-	3.500	0.13780	21	22	70	6	1
3334309	-	-	-	3.600	0.14173					
3334312	-	-	-	3.700	0.14567	24	25	75	3/16	2
3334313	-	-	-	3.800	0.14961					
3334314	-	-	-	3.900	0.15354	27	28	80	4	2
572015617	5/32	-	-	3.969	0.15625					
3334315	-	-	-	4.000	0.15748	30	31	85	6	1
3334317	-	-	-	4.100	0.16142					
3334318	-	-	-	4.200	0.16535	33	34	90	8	1
3334319	-	-	-	4.300	0.16929					
3334320	-	-	-	4.400	0.17323	36	37	95	1/4	2
3334321	-	-	-	4.500	0.17717					
3334322	-	-	-	4.600	0.18110	39	40	100	6	1
3334326	-	-	-	4.700	0.18504					
572018717	3/16	-	-	4.763	0.18750	42	43	105	8	1
3334327	-	-	-	4.800	0.18898					
3334328	-	-	-	4.900	0.19291	45	46	110	1/4	2
3334329	-	-	-	5.000	0.19685					
3334331	-	-	-	5.100	0.20079	48	49	115	6	1
3334332	-	-	-	5.200	0.20472					
3334333	-	-	-	5.300	0.20866	51	52	120	8	1
3334334	-	-	-	5.400	0.21260					
3334335	-	-	-	5.500	0.21654	54	55	125	1/4	2
572021817	7/32	-	-	5.556	0.21875					
3334338	-	-	-	5.600	0.22047	57	58	130	6	1
3334339	-	-	-	5.700	0.22441					
3334340	-	-	-	5.800	0.22835	60	61	135	8	1
3334341	-	-	-	5.900	0.23228					
3334342	-	-	-	6.000	0.23622	63	64	140	1/4	2
3334344	-	-	-	6.100	0.24016					
3334345	-	-	-	6.200	0.24409	66	67	145	6	1
3334346	-	-	-	6.300	0.24803					
572025017	1/4	-	E	6.350	0.25000	69	70	150	8	1
3334347	-	-	-	6.400	0.25197					
3334348	-	-	-	6.500	0.25591	72	73	155	1/4	2
3334350	-	-	-	6.600	0.25984					
3334351	-	-	-	6.700	0.26378	75	76	160	6	1
3334352	-	-	-	6.800	0.26772					
3334353	-	-	-	6.900	0.27165	78	79	165	8	1
3334354	-	-	-	7.000	0.27559					
3334356	-	-	-	7.100	0.27953	81	82	170	1/4	2
572028117	9/32	-	-	7.144	0.28125					
3334357	-	-	-	7.200	0.28346	84	85	175	6	1
3334358	-	-	-	7.300	0.28740					
3334359	-	-	-	7.400	0.29134	87	88	180	8	1
3334360	-	-	-	7.500	0.29528					
3334361	-	-	-	7.600	0.29921					

Packed: 1 pc.
Available EgiAs coating only.





List 5720 (Continued)

ADFO-3D, Coolant-Through, Flat Drill

SPEED FEED P347	CARBIDE	EgiAs		20°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3334362	-	-	-	7.700	0.30315	34	35	75	8	1
3334363	-	-	-	7.800	0.30709					
3334364	-	-	-	7.900	0.31102					
572031217	5/16	-	-	7.938	0.31250	34	35	75	5/16	2
3334365	-	-	-	8.000	0.31496					
3334367	-	-	-	8.100	0.31890	38	39	80	10	1
3334368	-	-	-	8.200	0.32283					
3334369	-	-	-	8.300	0.32677					
572032817	21/64	-	-	8.334	0.32813					
3334370	-	-	-	8.400	0.33071					
3334371	-	-	-	8.500	0.33465					
3334373	-	-	-	8.600	0.33858					
3334374	-	-	-	8.700	0.34252					
3334375	-	-	-	8.800	0.34646					
3334376	-	-	-	8.900	0.35039					
3334377	-	-	-	9.000	0.35433					
3334379	-	-	-	9.100	0.35827	42	43	85	3/8	1
572035917	23/64	-	-	9.128	0.35938					
3334380	-	-	-	9.200	0.36220					
3334381	-	-	-	9.300	0.36614					
3334382	-	-	-	9.400	0.37008					
3334383	-	-	-	9.500	0.37402					
572037517	3/8	-	-	9.525	0.37500					
3334384	-	-	-	9.600	0.37795					
3334385	-	-	-	9.700	0.38189					
3334386	-	-	-	9.800	0.38583					
3334387	-	-	-	9.900	0.38976					
3334388	-	-	-	10.000	0.39370	46	47	90	10	1
3334390	-	-	-	10.100	0.39764					
3334391	-	-	-	10.200	0.40157					
3334392	-	-	-	10.300	0.40551					
572040617	13/32	-	-	10.319	0.40625					
3334393	-	-	-	10.400	0.40945					
3334394	-	-	-	10.500	0.41339					
3334395	-	-	-	10.600	0.41732					
3334396	-	-	-	10.700	0.42126					
3334397	-	-	-	10.800	0.42520					
3334398	-	-	-	10.900	0.42913					
3334399	-	-	-	11.000	0.43307	50	51	95	12	1
3334401	-	-	-	11.100	0.43701					
572043717	7/16	-	-	11.113	0.43750					
3334402	-	-	-	11.200	0.44094					
3334403	-	-	-	11.300	0.44488					
3334404	-	-	-	11.400	0.44882					
3334405	-	-	-	11.500	0.45276					
572045317	29/64	-	-	11.509	0.45313					

Packed: 1 pc.
Available EgiAs coating only.

➔ continued on next page ➔ **ADR**

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5720	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 5720 (Continued)

ADFO-3D, Coolant-Through, Flat Drill

SPEED FEED P347	CARBIDE	EgiAs		20°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

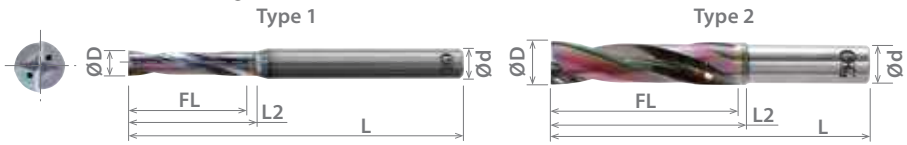

Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3334406	-	-	-	11.600	0.45669	50	51	95	12	1
3334407	-	-	-	11.700	0.46063					
3334408	-	-	-	11.800	0.46457					
3334409	-	-	-	11.900	0.46850	50	51	95	12	2
572046817	15/32	-	-	11.906	0.46875					
3334410	-	-	-	12.000	0.47244					
3334412	-	-	-	12.100	0.47638	56	57	100	14	1
3334413	-	-	-	12.200	0.48031					
3334414	-	-	-	12.300	0.48425					
3334415	-	-	-	12.400	0.48819					
3334416	-	-	-	12.500	0.49213					
3334417	-	-	-	12.600	0.49606					
3334418	1/2	-	-	12.700	0.50000					
3334419	-	-	-	12.800	0.50394					
3334420	-	-	-	12.900	0.50787					
3334421	-	-	-	13.000	0.51181					
3334422	-	-	-	13.100	0.51575	60	61	105	16	1
3334423	-	-	-	13.200	0.51969					
3334424	-	-	-	13.300	0.52362					
3334425	-	-	-	13.400	0.52756					
3334426	-	-	-	13.500	0.53150					
3334427	-	-	-	13.600	0.53543					
3334428	-	-	-	13.700	0.53937					
3334429	-	-	-	13.800	0.54331					
3334430	-	-	-	13.900	0.54724					
3334431	-	-	-	14.000	0.55118					
3334432	-	-	-	14.100	0.55512	64	65	110	16	1
3334433	-	-	-	14.200	0.55906					
572056217	9/16	-	-	14.288	0.56250					
3334434	-	-	-	14.300	0.56299					
3334435	-	-	-	14.400	0.56693					
3334436	-	-	-	14.500	0.57087					
3334437	-	-	-	14.600	0.57480					
3334438	-	-	-	14.700	0.57874					
3334439	-	-	-	14.800	0.58268					
3334440	-	-	-	14.900	0.58661					
3334441	-	-	-	15.000	0.59055	68	69	115	18	1
3334442	-	-	-	15.100	0.59449					
3334443	-	-	-	15.200	0.59843					
3334444	-	-	-	15.300	0.60236					
3334445	-	-	-	15.400	0.60630					
3334446	-	-	-	15.500	0.61024					
3334447	-	-	-	15.600	0.61417					
3334448	-	-	-	15.700	0.61811					
3334449	-	-	-	15.800	0.62205					
572062517	5/8	-	-	15.875	0.62500					
3334450	-	-	-	15.900	0.62598	74	75	125	18	1
3334451	-	-	-	16.000	0.62992					
3334452	-	-	-	16.500	0.64961					
3334453	-	-	-	17.000	0.66929	78	79	130	18	2
572068717	11/16	-	-	17.463	0.68750					
3334454	-	-	-	17.500	0.68898					
3334455	-	-	-	18.000	0.70866					

Packed: 1 pc.
Available EgiAs coating only.





List 5720 (Continued)

ADFO-3D, Coolant-Through, Flat Drill

SPEED FEED P347	CARBIDE	EgiAs		20°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3334456	-	-	-	18.500	0.72835	84	85	135	20	1
3334457	-	-	-	19.000	0.74803		90			
572075017	3/4	-	-	19.050	0.75000	88	89	140	20	2
3334458	-	-	-	19.500	0.76772					1
3334459	-	-	-	20.000	0.78740					2

Packed: 1 pc.
Available EgiAs coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5720	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 5700

ADF-2D, Flat Drill

NEW SIZES	SPEED FEED	CARBIDE	IchAda	EgiAs	20°	SHANK h6
	P348-349					

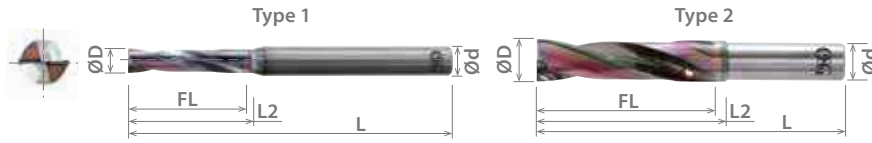

Cutting Diameter Tolerance		
Size	mm	inch
D < 2	+0 / -0.009	+0 / -0.0004
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length		Neck Length		Overall Length	Shank Diameter		Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L2 (mm)	L (mm)	d (mm/in)				
3330020	-	-	-	0.200	0.00787	0.6	0.7	40			3	1	
3330025	-	-	-	0.250	0.00984	0.8	0.9						
3330030	-	-	-	0.300	0.01181	0.9	1.0						
3330035	-	-	-	0.350	0.01378	1.1	1.2						
570001511	1/64	-	-	0.397	0.01563	1.2	1.3						
3330040	-	-	-	0.400	0.01575	1.4	1.5						
3330045	-	-	-	0.450	0.01772	1.7	1.9						
3330050	-	-	-	0.500	0.01969	1.9	2.1						
3330055	-	-	-	0.550	0.02165	2.0	2.2						
3330060	-	-	-	0.600	0.02362	2.2	2.4						
3330065	-	-	-	0.650	0.02559	2.4	2.6						
3330070	-	-	-	0.700	0.02756	2.5	2.7						
3330071	-	-	-	0.710	0.02795	2.6	2.8						
3330072	-	-	-	0.720	0.02835	2.7	2.9						
3330074	-	-	-	0.740	0.02913	2.8	3.0						
3330075	-	-	-	0.750	0.02953	2.9	3.1						
570003111	1/32	-	-	0.794	0.03125	3.0	3.2						
3330080	-	-	-	0.800	0.03150	3.1	3.2						
3330081	-	-	-	0.810	0.03189	3.2	3.3						
3330085	-	-	-	0.850	0.03346	3.2	3.4						
3330089	-	-	-	0.890	0.03504	4.0	4.3						
3330090	-	-	-	0.900	0.03543	4.4	4.7						
3330091	-	-	-	0.910	0.03583	4.5	4.8						
3330092	-	-	-	0.920	0.03622	4.8	5.1						
3330095	-	-	-	0.950	0.03740	5.0	5.3						
3330100	-	-	-	1.000	0.03937	5.1	5.4						
3330109	-	-	-	1.090	0.04291	5.2	5.5						
3330110	-	-	-	1.100	0.04331	5.4	5.7						
3330111	-	-	-	1.110	0.04370	5.6	5.9						
3330112	-	-	-	1.120	0.04409	5.8	6.1						
570004611	3/64	-	-	1.191	0.04688	5.9	6.2						
3330120	-	-	-	1.200	0.04724	6.0	6.3						
3330125	-	-	-	1.250	0.04921	6.1	6.4						
3330126	-	-	-	1.260	0.04961	6.2	6.5						
3330127	-	-	-	1.270	0.05000	6.2	6.5						
3330128	-	-	-	1.280	0.05039	6.2	6.5						
3330129	-	-	-	1.290	0.05079	6.2	6.5						
3330130	-	-	-	1.300	0.05118	6.2	6.5						
3330135	-	-	-	1.350	0.05315	6.2	6.5						
3330140	-	-	-	1.400	0.05512	6.2	6.5						
3330144	-	-	-	1.440	0.05669	6.2	6.5						
3330145	-	-	-	1.450	0.05709	6.2	6.5						
3330146	-	-	-	1.460	0.05748	6.2	6.5						
3330147	-	-	-	1.470	0.05787	6.2	6.5						
3330148	-	-	-	1.480	0.05827	6.2	6.5						
3330150	-	-	-	1.500	0.05906	6.2	6.5						
3330153	-	-	-	1.530	0.06024	6.2	6.5						
3330154	-	-	-	1.540	0.06063	6.2	6.5						
3330155	-	-	-	1.550	0.06102	6.2	6.5						
3330156	-	-	-	1.560	0.06142	6.2	6.5						

Packed: 1 pc.
 Sizes smaller than 2mm available with IchAda coating.
 Sizes 2mm and larger available with EgiAs coating.



List 5700 (Continued)

ADF-2D, Flat Drill

NEW SIZES	SPEED FEED <small>P348-349</small>	CARBIDE	IchAda	EgiAs	20°	SHANK h6
-----------	---------------------------------------	---------	--------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3330157	-	-	-	1.570	0.06181	6.3	6.6	45	3	1
3330158	-	-	-	1.580	0.06220	6.4	6.7			
570006211	1/16	-	-	1.588	0.06250	6.8	7.1			
3330160	-	-	-	1.600	0.06299	7.0	7.3			
3330170	-	-	-	1.700	0.06693	7.2	7.5			
3330175	-	-	-	1.750	0.06890	7.3	7.6			
3330180	-	-	-	1.800	0.07087	7.4	7.7			
3330182	-	-	-	1.820	0.07165	7.6	7.9			
3330183	-	-	-	1.830	0.07205	7.8	8.1			
3330184	-	-	-	1.840	0.07244	7.9	8.2			
3330185	-	-	-	1.850	0.07283	10	10.3	50	4	1
3330186	-	-	-	1.860	0.07323	10.5	10.6			
3330190	-	-	-	1.900	0.07480	10.6	10.8			
3330195	-	-	-	1.950	0.07677	10.8	11.0			
570007811	5/64	-	-	1.984	0.07813	11	11.0			
3330200	-	-	-	2.000	0.07874	11	11.0			
3330210	-	-	-	2.100	0.08268	12	11.2			
3330220	-	-	-	2.200	0.08661	12	11.2			
3330230	-	-	-	2.300	0.09055	13	11.4			
570009311	3/32	-	-	2.381	0.09375	13	11.6			
3330240	-	-	-	2.400	0.09449	13	11.6			
3330250	-	-	-	2.500	0.09843	14	11.8			
3330260	-	-	-	2.600	0.10236	14	11.8			
3330270	-	-	-	2.700	0.10630	14	11.9			
3330280	-	-	-	2.800	0.11024	15	11.4	55	6	1
3330290	-	-	-	2.900	0.11417	15	11.6			
3330300	-	-	-	3.000	0.11811	15	11.6			
3330310	-	-	-	3.100	0.12205	15	11.6			
570012511	1/8	-	-	3.175	0.12500	15	11.6			
3330320	-	-	-	3.200	0.12598	15	11.8			
3330330	-	-	-	3.300	0.12992	15	12.0			
3330340	-	-	-	3.400	0.13386	16	12.1			
3330350	-	-	-	3.500	0.13780	16	12.3			
3330360	-	-	-	3.600	0.14173	16	12.5			
3330370	-	-	-	3.700	0.14567	16	12.7			
3330380	-	-	-	3.800	0.14961	19	17.9	60	3/16	1
3330390	-	-	-	3.900	0.15354	19	18.1			
570015611	5/32	-	-	3.969	0.15625	19	20.5			
3330400	-	-	-	4.000	0.15748	19	18.3			
3330410	-	-	-	4.100	0.16142	19	18.5			
3330420	-	-	-	4.200	0.16535	21	18.6			
3330430	-	-	-	4.300	0.16929	21	18.8			
3330440	-	-	-	4.400	0.17323	21	19.0			
3330450	-	-	-	4.500	0.17717	21	19.2			
3330460	-	-	-	4.600	0.18110	21	19.4			
3330470	-	-	-	4.700	0.18504	21	19.6			

Packed: 1 pc.
 Sizes smaller than 2mm available with IchAda coating.
 Sizes 2mm and larger available with EgiAs coating.

➔ continued on next page ➔

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 5700 (Continued)

NEW SIZES	SPEED FEED P348-349	CARBIDE	IchAda	EgiAs	20°	SHANK h6
------------------	-------------------------------	----------------	---------------	--------------	------------	---------------------------

ADF-2D, Flat Drill

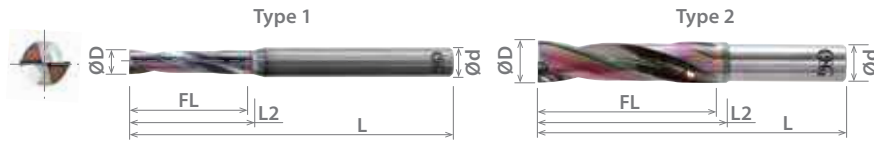

Cutting Diameter Tolerance		
Size	mm	inch
D < 2	+0 / -0.009	+0 / -0.0004
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
570018711	3/16	-	-	4.763	0.18750	24	27.0	65	3/16	2
3330480	-	-	-	4.800	0.18898					
3330490	-	-	-	4.900	0.19291					
3330500	-	-	-	5.000	0.19685					
3330510	-	-	-	5.100	0.20079					
3330520	-	-	-	5.200	0.20472					
3330530	-	-	-	5.300	0.20866					
3330540	-	-	-	5.400	0.21260					
3330550	-	-	-	5.500	0.21654					
570021811	7/32	-	-	5.556	0.21875					
3330560	-	-	-	5.600	0.22047					
3330570	-	-	-	5.700	0.22441					
3330580	-	-	-	5.800	0.22835					
3330590	-	-	-	5.900	0.23228					
3330600	-	-	-	6.000	0.23622					
3330610	-	-	-	6.100	0.24016					
3330620	-	-	-	6.200	0.24409					
3330630	-	-	-	6.300	0.24803					
570025011	1/4	-	E	6.350	0.25000					
3330640	-	-	-	6.400	0.25197					
3330650	-	-	-	6.500	0.25591					
3330660	-	-	-	6.600	0.25984					
3330670	-	-	-	6.700	0.26378					
3330680	-	-	-	6.800	0.26772					
3330690	-	-	-	6.900	0.27165					
3330700	-	-	-	7.000	0.27559					
3330710	-	-	-	7.100	0.27953					
570028111	9/32	-	-	7.144	0.28125					
3330720	-	-	-	7.200	0.28346					
3330730	-	-	-	7.300	0.28740					
3330740	-	-	-	7.400	0.29134					
3330750	-	-	-	7.500	0.29528					
3330760	-	-	-	7.600	0.29921					
3330770	-	-	-	7.700	0.30315					
3330780	-	-	-	7.800	0.30709					
3330790	-	-	-	7.900	0.31102					
570031211	5/16	-	-	7.938	0.31250					
3330800	-	-	-	8.000	0.31496					
3330810	-	-	-	8.100	0.31890					
3330820	-	-	-	8.200	0.32283					
3330830	-	-	-	8.300	0.32677					
570032811	21/64	-	-	8.334	0.32813					
3330840	-	-	-	8.400	0.33071					
3330850	-	-	-	8.500	0.33465					
3330860	-	-	-	8.600	0.33858					
3330870	-	-	-	8.700	0.34252					
3330880	-	-	-	8.800	0.34646					
3330890	-	-	-	8.900	0.35039					
3330900	-	-	-	9.000	0.35433					

Packed: 1 pc.
 Sizes smaller than 2mm available with IchAda coating.
 Sizes 2mm and larger available with EgiAs coating.





List 5700 (Continued)

ADF-2D, Flat Drill

NEW SIZES	SPEED FEED P348-349	CARBIDE	IchAda	EgiAs	20°	SHANK h6
------------------	-------------------------------	----------------	---------------	--------------	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type				
	Fractional Size	Wire Gage	Letter Size	mm	Inch									
3330910	-	-	-	9.100	0.35827	42	44.0	85	8	2				
570035911	23/64	-	-	9.128	0.35938		43.3		3/8	1				
3330920	-	-	-	9.200	0.36220	46	44.0	85	8	2				
3330930	-	-	-	9.300	0.36614									
3330940	-	-	-	9.400	0.37008									
3330950	-	-	-	9.500	0.37402									
570037511	3/8	-	-	9.525	0.37500									
3330960	-	-	-	9.600	0.37795									
3330970	-	-	-	9.700	0.38189									
3330980	-	-	-	9.800	0.38583									
3330990	-	-	-	9.900	0.38976									
3331000	-	-	-	10.000	0.39370									
3331010	-	-	-	10.100	0.39764	46	48.0	90	10	2				
3331020	-	-	-	10.200	0.40157									
3331030	-	-	-	10.300	0.40551	50	46.5	95	7/16	1				
570040611	13/32	-	-	10.319	0.40625									
3331040	-	-	-	10.400	0.40945	46	48.0	90	10	2				
3331050	-	-	-	10.500	0.41339									
3331060	-	-	-	10.600	0.41732									
3331070	-	-	-	10.700	0.42126									
3331080	-	-	-	10.800	0.42520									
3331090	-	-	-	10.900	0.42913									
3331100	-	-	-	11.000	0.43307									
3331110	-	-	-	11.100	0.43701									
570043711	7/16	-	-	11.113	0.43750				50		52.0	95	7/16	2
3331120	-	-	-	11.200	0.44094									
3331130	-	-	-	11.300	0.44488	50	49.8	95	10	1				
3331140	-	-	-	11.400	0.44882									
3331150	-	-	-	11.500	0.45276	50	52.0	95	1/2	2				
570045311	29/64	-	-	11.509	0.45313									
3331160	-	-	-	11.600	0.45669	50	50.5	95	10	1				
3331170	-	-	-	11.700	0.46063									
3331180	-	-	-	11.800	0.46457	56	52.0	100	1/2	2				
3331190	-	-	-	11.900	0.46850									
570046811	15/32	-	-	11.906	0.46875	56	58.0	100	1/2	1				
3331200	-	-	-	12.000	0.47244									
3331210	-	-	-	12.100	0.47638									
3331220	-	-	-	12.200	0.48031									
3331230	-	-	-	12.300	0.48425									
3331240	-	-	-	12.400	0.48819									
3331250	-	-	-	12.500	0.49213									
3331260	-	-	-	12.600	0.49606									
3331270	1/2	-	-	12.700	0.50000									
3331280	-	-	-	12.800	0.50394									
3331290	-	-	-	12.900	0.50787									
3331300	-	-	-	13.000	0.51181									

Packed: 1 pc.
 Sizes smaller than 2mm available with IchAda coating.
 Sizes 2mm and larger available with EgiAs coating.

➔ continued on next page ➔ **ADR**

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 5700 (Continued)

NEW SIZES	SPEED FEED P348-349	CARBIDE	IchAda	EgiAs	20°	SHANK h6
------------------	-------------------------------	----------------	---------------	--------------	------------	--------------------

ADF-2D, Flat Drill

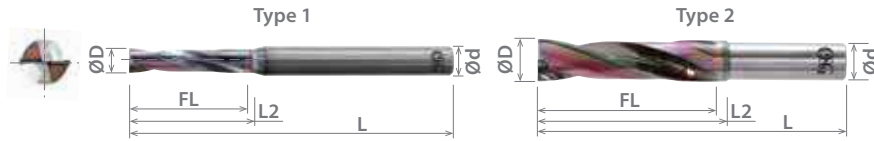

Cutting Diameter Tolerance		
Size	mm	inch
D < 2	+0 / -0.009	+0 / -0.0004
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type					
	Fractional Size	Wire Gage	Letter Size	mm	Inch										
3331310	-	-	-	13.100	0.51575	60	62.0	105	12	2					
3331320	-	-	-	13.200	0.51969										
3331330	-	-	-	13.300	0.52362										
3331340	-	-	-	13.400	0.52756										
3331350	-	-	-	13.500	0.53150										
3331360	-	-	-	13.600	0.53543										
3331370	-	-	-	13.700	0.53937										
3331380	-	-	-	13.800	0.54331										
3331390	-	-	-	13.900	0.54724										
3331400	-	-	-	14.000	0.55118										
3331410	-	-	-	14.100	0.55512	66.0	110	12	2						
3331420	-	-	-	14.200	0.55906										
570056211	9/16	-	-	14.288	0.56250	63.0	5/8	1							
3331430	-	-	-	14.300	0.56299	64	66.0	110	12	2					
3331440	-	-	-	14.400	0.56693										
3331450	-	-	-	14.500	0.57087										
3331460	-	-	-	14.600	0.57480										
3331470	-	-	-	14.700	0.57874										
3331480	-	-	-	14.800	0.58268										
3331490	-	-	-	14.900	0.58661										
3331500	-	-	-	15.000	0.59055										
3331510	-	-	-	15.100	0.59449										
3331520	-	-	-	15.200	0.59843						68	70.0	115	12	2
3331530	-	-	-	15.300	0.60236										
3331540	-	-	-	15.400	0.60630										
3331550	-	-	-	15.500	0.61024										
3331560	-	-	-	15.600	0.61417										
3331570	-	-	-	15.700	0.61811										
3331580	-	-	-	15.800	0.62205										
570062511	5/8	-	-	15.875	0.62500	74	76.0	125	5/8	2					
3331590	-	-	-	15.900	0.62598				12						
3331600	-	-	-	16.000	0.62992										
3331650	-	-	-	16.500	0.64961				16						
3331700	-	-	-	17.000	0.66929										

Packed: 1 pc.
 Sizes smaller than 2mm available with IchAda coating.
 Sizes 2mm and larger available with EgiAs coating.

➔ continued on next page ➔ **ADR**



List 5700 (Continued)

ADF-2D, Flat Drill

NEW SIZES	SPEED FEED <small>P348-349</small>	CARBIDE	IchAda	EgiAs	20°	SHANK h6
-----------	---------------------------------------	---------	--------	-------	-----	-------------

EDP Number	Diameter					Flute Length	Neck Length	Overall Length	Shank Diameter	Type	
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L2 (mm)	L (mm)	d (mm/in)		
570068711	11/16	-	-	17.463	0.68750	78	77.1	130	3/4	1	
3331750	-	-	-	17.500	0.68898		80.0		16		
3331800	-	-	-	18.000	0.70866		84				86.0
3331850	-	-	-	18.500	0.72835	88		90.0	140		
3331900	-	-	-	19.000	0.74803			16			3/4
570075011	3/4	-	-	19.050	0.75000	16	16				
3331950	-	-	-	19.500	0.76772		20		20		
3332000	-	-	-	20.000	0.78740			20			

Packed: 1 pc.
 Sizes smaller than 2mm available with IchAda coating.
 Sizes 2mm and larger available with EgiAs coating.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 5705

ADFLS-2D, Long Shank, Flat Drill

SPEED FEED P350	CARBIDE	EgiAs	20°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
3 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

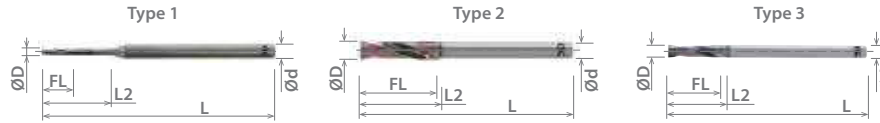

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3332300	-	-	-	3.000	0.11811	15	30	100	6	1
3332310	-	-	-	3.100	0.12205					
570512517	1/8	-	-	3.175	0.12500	16	32	100	1/8	2
3332320	-	-	-	3.200	0.12598					
3332330	-	-	-	3.300	0.12992	16	33	100	6	1
3332340	-	-	-	3.400	0.13386					
3332350	-	-	-	3.500	0.13780	16	34	100	6	1
3332360	-	-	-	3.600	0.14173					
3332370	-	-	-	3.700	0.14567	16	35	100	6	1
3332380	-	-	-	3.800	0.14961					
3332390	-	-	-	3.900	0.15354	19	36	100	3/16	1
570515617	5/32	-	-	3.969	0.15625					
3332400	-	-	-	4.000	0.15748	19	37	100	6	1
3332410	-	-	-	4.100	0.16142					
3332420	-	-	-	4.200	0.16535	21	38	100	6	1
3332430	-	-	-	4.300	0.16929					
3332440	-	-	-	4.400	0.17323	21	39	100	6	1
3332450	-	-	-	4.500	0.17717					
3332460	-	-	-	4.600	0.18110	21	40	100	6	1
3332470	-	-	-	4.700	0.18504					
570518717	3/16	-	-	4.763	0.18750	24	41	110	3/16	2
3332480	-	-	-	4.800	0.18898					
3332490	-	-	-	4.900	0.19291	24	42	110	6	1
3332500	-	-	-	5.000	0.19685					
3332510	-	-	-	5.100	0.20079	24	43	110	6	1
3332520	-	-	-	5.200	0.20472					
3332530	-	-	-	5.300	0.20866	24	44	110	6	1
3332540	-	-	-	5.400	0.21260					
3332550	-	-	-	5.500	0.21654	27	45	110	1/4	1
570521817	7/32	-	-	5.556	0.21875					
3332560	-	-	-	5.600	0.22047	27	46	110	6	1
3332570	-	-	-	5.700	0.22441					
3332580	-	-	-	5.800	0.22835	27	47	110	6	1
3332590	-	-	-	5.900	0.23228					
3332600	-	-	-	6.000	0.23622	30	29	120	2	3
3334060	-	-	-	6.000	0.23622					
570525017	1/4	-	E	6.350	0.25000	30	60	120	1/4	2
3332650	-	-	-	6.500	0.25591					
3332680	-	-	-	6.800	0.26772	30	32	120	6	2
3332700	-	-	-	7.000	0.27559					
570528117	9/32	-	-	7.144	0.28125	34	72	130	5/16	1
3332750	-	-	-	7.500	0.29528					
3332780	-	-	-	7.800	0.30709	34	36	130	6	2
570531217	5/16	-	-	7.938	0.31250					
3332800	-	-	-	8.000	0.31496	34	79	130	5/16	2
3334080	-	-	-	8.000	0.31496					
570532817	21/64	-	-	8.334	0.32813	38	80	140	3/8	1
3332850	-	-	-	8.500	0.33465					
3332880	-	-	-	8.800	0.34646	38	40	140	8	2
3332900	-	-	-	9.000	0.35433					

Packed: 1 pc.
Available EgiAs coating only.



List 5705 (Continued)

ADFLS-2D, Long Shank, Flat Drill

SPEED FEED P350	CARBIDE	EgiAs	20°	SHANK h6
-----------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Neck Length L2 (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Type							
	Fractional Size	Wire Gage	Letter Size	mm	Inch												
570535917	23/64	-	-	9.128	0.35938	42	91	150	3/8	1							
3332950	-	-	-	9.500	0.37402				8								
570537517	3/8	-	-	9.525	0.37500				95	3/8	2						
3332980	-	-	-	9.800	0.38583				44	8							
3333000	-	-	-	10.000	0.39370				100	10	3						
3334100	-	-	-	10.319	0.40625					103		7/16					
570540617	13/32	-	-	10.500	0.41339				46	48	160	10	2				
3333050	-	-	-	10.800	0.42520							50		111	170	7/16	
3333080	-	-	-	11.000	0.43307								115			1/2	1
3333100	-	-	-	11.113	0.43750								52			10	2
570543717	7/16	-	-	11.509	0.45313	119	1/2	1									
570545317	29/64	-	-	11.800	0.46457	52	120	180	1/2	2							
3333180	-	-	-	11.906	0.46875				58		12	3					
570546817	15/32	-	-	12.000	0.47244	56	127	190	12	2							
3333200	-	-	-	12.500	0.49213				58		1/2						
3334120	-	-	-	12.700	0.50000	60	62	200	12	1							
3333250	-	-	-	13.000	0.51181				66		5/8	2					
570550017	1/2	-	-	13.500	0.53150	64	143	210	5/8	2							
3333300	-	-	-	14.000	0.55118				70		16	3					
3333350	-	-	-	14.288	0.56250	68	159	220	16	2							
3333400	-	-	-	15.000	0.59055				160		3/4	1					
570556217	9/16	-	-	15.875	0.62500	74	76	230	16	2							
3333500	-	-	-	16.000	0.62992				175		16	3					
570562517	5/8	-	-	17.000	0.66929	78	80	250	17	1							
3333600	-	-	-	17.463	0.68750				191		3/4	2					
3334160	-	-	-	17.500	0.68898	88	90	250	20	3							
3333700	-	-	-	18.000	0.70866				191		3/4	2					
570568717	11/16	-	-	19.050	0.75000	88	90	250	20	3							
3333750	-	-	-	20.000	0.78740				191		3/4	2					
3333800	-	-	-	20.000	0.78740	90	20	3									
570575017	3/4	-	-														
3334000	-	-	-														
3334200	-	-	-														

Packed: 1 pc.
Available EgiAs coating only.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5705	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6500

ADO-3D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
650007812	-	-	-	2.000	0.07874	12	66	3
650008212	-	-	-	2.100	0.08268	13		
650008612	-	-	-	2.200	0.08661	14		
8690230	-	-	-	2.300	0.09055			
650009312	3/32	-	-	2.381	0.09375	15		
650009412	-	-	-	2.400	0.09449			
8690250	-	-	-	2.500	0.09843	16		
8690260	-	-	-	2.600	0.10236			
650010612	-	-	-	2.700	0.10630	17		
650010912	7/64	-	-	2.778	0.10938			
8690280	-	-	-	2.800	0.11024	18		
650011161	-	-	-	2.830	0.11142			
8690290	-	-	-	2.900	0.11417	19		
650011631	-	-	-	2.950	0.11614			
8690300	-	-	-	3.000	0.11811	20		
8690310	-	-	-	3.100	0.12205			
650012511	1/8	-	-	3.175	0.12500	74	4	
8690320	-	-	-	3.200	0.12598			
8690330	-	-	-	3.300	0.12992			21
650013231	-	-	-	3.360	0.13228			
8690340	-	-	-	3.400	0.13386			22
650013561	-	-	-	3.440	0.13543			
8690350	-	-	-	3.500	0.13780			23
650013871	-	-	-	3.520	0.13858			
650014051	-	-	-	3.570	0.14055			24
8690360	-	-	-	3.600	0.14173			
8690370	-	-	-	3.700	0.14567	25		
650014841	-	-	-	3.770	0.14843			
8690380	-	-	-	3.800	0.14961	26		
650015211	-	-	-	3.860	0.15197			
8690390	-	-	-	3.900	0.15354	27		
650015511	5/32	-	-	3.969	0.15625			
8690400	-	-	-	4.000	0.15748	28		
650015911	-	-	-	4.050	0.15945			
650016011	-	20	-	4.089	0.16100	29		
8690410	-	-	-	4.100	0.16142			
8700410	-	-	-	4.160	0.16378	80	6	
650016311	-	-	-	4.160	0.16378			
8690420	-	-	-	4.200	0.16535	5		
8700420	-	-	-	4.200	0.16535			
650016711	-	-	-	4.270	0.16811	6		
8690430	-	-	-	4.300	0.16929			
8700430	-	-	-	4.300	0.16929	3/16		
650017111	11/64	-	-	4.366	0.17188			
8690440	-	-	-	4.400	0.17323	5		
8700440	-	-	-	4.400	0.17323			
650017511	-	-	-	4.460	0.17559	6		
8690450	-	-	-	4.500	0.17717			
8700450	-	-	-	4.500	0.17717	5		
8690460	-	-	-	4.600	0.18110			
8700460	-	-	-	4.600	0.18110	6		
650018311	-	-	-	4.660	0.18346			

Packed: 1 pc.
Available EgiAs coating only.





List 6500 (Continued)

ADO-3D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
8690470	-	-	-	4.700	0.18504	29	80	5		
8700470	-	-	-	4.700	0.18504			6		
650018711	3/16	-	-	4.763	0.18750			3/16		
8690480	-	-	-	4.800	0.18898	5				
8700480	-	-	-	4.800	0.18898	6				
8690490	-	-	-	4.900	0.19291	5				
8700490	-	-	-	4.900	0.19291	6				
8690500	-	-	-	5.000	0.19685	5				
8700500	-	-	-	5.000	0.19685	5				
8690510	-	-	-	5.100	0.20079	26		82	6	
650020291	-	-	-	5.150	0.20276		5.150			
650020211	13/64	-	-	5.159	0.20313		5.159			
8690520	-	-	-	5.200	0.20472	27	82		6	
650020701	-	-	-	5.260	0.20709				5.260	
8690530	-	-	-	5.300	0.20866				5.300	
8690540	-	-	-	5.400	0.21260	28			82	6
650021211	-	3	-	5.410	0.21300					5.410
650021521	-	-	-	5.470	0.21535					5.470
8690550	-	-	-	5.500	0.21654	30				88
650021711	7/32	-	-	5.556	0.21875			5.556		
8690560	-	-	-	5.600	0.22047			5.600		
8690570	-	-	-	5.700	0.22441	29		88		
8690580	-	-	-	5.800	0.22835		5.800			
8690590	-	-	-	5.900	0.23228		5.900			
650023311	15/64	-	-	5.953	0.23438	31	88			
8690600	-	-	-	6.000	0.23622				6.000	
8690610	-	-	-	6.100	0.24016				6.100	
8700610	-	-	-	6.100	0.24016	32			88	
650024211	-	-	-	6.150	0.24213					6.150
8690620	-	-	-	6.200	0.24409					6.200
8700620	-	-	-	6.200	0.24409	33				88
8690630	-	-	-	6.300	0.24803			6.300		
8700630	-	-	-	6.300	0.24803			6.300		
650025011	1/4	-	E	6.350	0.25000	34		88		
8690640	-	-	-	6.400	0.25197		6.400			
8700640	-	-	-	6.400	0.25197		6.400			
8690650	-	-	-	6.500	0.25591	35	88			
8700650	-	-	-	6.500	0.25591				6.500	
650025611	-	-	F	6.528	0.25700				6.528	
8690660	-	-	-	6.600	0.25984	34			88	
8700660	-	-	-	6.600	0.25984					6.600
650026211	-	-	-	6.650	0.26181					6.650
8690670	-	-	-	6.700	0.26378	34				88
8700670	-	-	-	6.700	0.26378			6.700		
650026411	17/64	-	-	6.747	0.26563			6.747		
8690680	-	-	-	6.800	0.26772	35		88		
8700680	-	-	-	6.800	0.26772		6.800			
650026911	-	-	-	6.860	0.27008		6.860			

Packed: 1 pc.
Available EgiAs coating only.

continued on next page **ADR**

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
6500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6500 (Continued)

ADO-3D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
8690690	-	-	-	6.900	0.27165	35	88	7		
8700690	-	-	-					8		
8690700	-	-	-	7.000	0.27559			7		
8700700	-	-	-							
650027701	-	-	-	7.040	0.27717	36	94	8		
8690710	-	-	-	7.100	0.27953					
650028011	9/32	-	-	7.144	0.28125					5/16
8690720	-	-	-	7.200	0.28346	37	94	8		
8690730	-	-	-	7.300	0.28740					
8690740	-	-	-	7.400	0.29134					
8690750	-	-	-	7.500	0.29528	38	94	5/16		
650029611	19/64	-	-	7.541	0.29688					
8690760	-	-	-	7.600	0.29921					
8690770	-	-	-	7.700	0.30315	39	94	8		
8690780	-	-	-	7.800	0.30709					
8690790	-	-	-	7.900	0.31102					
650031211	5/16	-	-	7.938	0.31250	40	94	5/16		
8690800	-	-	-	8.000	0.31496					8
8690810	-	-	-							9
8700810	-	-	-	8.100	0.31890	41	94	10		
650032111	-	-	-	8.150	0.32087					
8690820	-	-	-	8.200	0.32283					9
8700820	-	-	-					10		
8690830	-	-	-			42	94	9		
8700830	-	-	-	8.300	0.32677					10
650032711	21/64	-	-	8.334	0.32813					3/8
8690840	-	-	-	8.400	0.33071	43	94	9		
8700840	-	-	-							10
650033011	-	-	Q	8.433	0.33200					10
8690850	-	-	-			44	94	9		
8700850	-	-	-	8.500	0.33465					10
650033611	-	-	-	8.560	0.33701					9
8690860	-	-	-	8.600	0.33858	45	94	10		
8700860	-	-	-							
650034011	-	-	-	8.640	0.34016					10
650034111	-	-	-	8.680	0.34173	46	94	9		
8690870	-	-	-							10
8700870	-	-	-	8.700	0.34252					3/8
650034211	11/32	-	-	8.731	0.34375	47	94	9		
8690880	-	-	-	8.800	0.34646					10
8700880	-	-	-							9
650034811	-	-	-	8.860	0.34882	48	94	10		
8690890	-	-	-	8.900	0.35039					9
8700890	-	-	-							10
8690900	-	-	-	9.000	0.35433	49	94	9		
8700900	-	-	-							10
8690910	-	-	-	9.100	0.35827					10
650035811	23/64	-	-	9.128	0.35938	50	94	3/8		
8690920	-	-	-	9.200	0.36220					
8690930	-	-	-	9.300	0.36614					10
8690940	-	-	-	9.400	0.37008	51	94			
8690950	-	-	-	9.500	0.37402					
650037511	3/8	-	-	9.525	0.37500					3/8

Packed: 1 pc.
Available EgiAs coating only.





List 6500 (Continued)

ADO-3D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
650037601	-	-	-	9.550	0.37598	48	106	10	
8690960	-	-	-	9.600	0.37795	49			
8690970	-	-	-	9.700	0.38189				
8690980	-	-	-	9.800	0.38583	50			
8690990	-	-	-	9.900	0.38976				
650038911	25/64	-	-	9.922	0.39063	51			7/16
8691000	-	-	-	10.000	0.39370				10
8691010	-	-	-	10.100	0.39764	52			11
8701010	-	-	-	10.200	0.40157				12
8691020	-	-	-	10.200	0.40157	53			11
8701020	-	-	-	10.300	0.40551		12		
8691030	-	-	-	10.300	0.40551	54	11		
8701030	-	-	-	10.319	0.40625		12		
650040511	13/32	-	-	10.319	0.40625	55	7/16		
8691040	-	-	-	10.400	0.40945		11		
8701040	-	-	-	10.400	0.40945	56	12		
650041011	-	-	-	10.440	0.41102		57	11	
8691050	-	-	-	10.500	0.41339	12			
8701050	-	-	-	10.500	0.41339	58	11		
8691060	-	-	-	10.600	0.41732		12		
8701060	-	-	-	10.600	0.41732	59	11		
8691070	-	-	-	10.700	0.42126		12		
8701070	-	-	-	10.700	0.42126	60	12		
650042111	27/64	-	-	10.716	0.42188		61	7/16	
8691080	-	-	-	10.800	0.42520	11			
8701080	-	-	-	10.800	0.42520	62	12		
650042661	-	-	-	10.860	0.42756		63	11	
8691090	-	-	-	10.900	0.42913	12			
8701090	-	-	-	10.900	0.42913	64	11		
8691100	-	-	-	11.000	0.43307		12		
8701100	-	-	-	11.000	0.43307	65	12		
8691110	-	-	-	11.100	0.43701		11		
650043711	7/16	-	-	11.113	0.43750	66	7/16		
8691120	-	-	-	11.200	0.44094		67	12	
8691130	-	-	-	11.300	0.44488	11			
8691140	-	-	-	11.400	0.44882	68	12		
8691150	-	-	-	11.500	0.45276		11		
650045211	29/64	-	-	11.509	0.45313	69	1/2		
8691160	-	-	-	11.600	0.45669		70	12	
8691170	-	-	-	11.700	0.46063	11			
8691180	-	-	-	11.800	0.46457	71	12		
8691190	-	-	-	11.900	0.46850		11		
650046711	15/32	-	-	11.906	0.46875	72	1/2		
8691200	-	-	-	12.000	0.47244		12		
8691210	-	-	-	12.100	0.47638	73	13		
8701210	-	-	-	12.100	0.47638		14		
8691220	-	-	-	12.200	0.48031	74	13		
8701220	-	-	-	12.200	0.48031		14		

Packed: 1 pc.
Available EgiAs coating only.

➔ continued on next page ➔

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
6500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6500 (Continued)

ADO-3D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8691230	-	-	-	12.300	0.48425	62	128	1/2
8701230	-	-	-	12.300	0.48425			13
650048411	31/64	-	-	12.303	0.48438			14
8691240	-	-	-	12.400	0.48819	63		13
8701240	-	-	-	12.400	0.48819			14
650049011	-	-	-	12.450	0.49016	64		13
8691250	-	-	-	12.500	0.49213			14
8701250	-	-	-	12.500	0.49213			13
8691260	-	-	-	12.600	0.49606	65		14
8701260	-	-	-	12.600	0.49606			13
650049811	-	-	-	12.680	0.49921			14
650050011	1/2	-	-	12.700	0.50000	66		1/2
8691270	-	-	-	12.700	0.50000		13	
8701270	-	-	-	12.700	0.50000		14	
8691280	-	-	-	12.800	0.50394	67	13	
8701280	-	-	-	12.800	0.50394		14	
8691290	-	-	-	12.900	0.50787		13	
8701290	-	-	-	12.900	0.50787	68	14	
8691300	-	-	-	13.000	0.51181		13	
8701300	-	-	-	13.000	0.51181		69	14
650051501	-	-	-	13.080	0.51496	70		14
8691310	-	-	-	13.100	0.51575			13.200
8691320	-	-	-	13.200	0.51969		71	14
8691330	-	-	-	13.300	0.52362	72		5/8
8691340	-	-	-	13.400	0.52756			13.494
650053011	17/32	-	-	13.494	0.53125		73	14
8691350	-	-	-	13.500	0.53150	74		14
8691360	-	-	-	13.600	0.53543			75
8691370	-	-	-	13.700	0.53937		76	
8691380	-	-	-	13.800	0.54331	77		
650054601	-	-	-	13.870	0.54606			78
8691390	-	-	-	13.900	0.54724		79	
8691400	-	-	-	14.000	0.55118	80		
8691410	-	-	-	14.100	0.55512			81
8701410	-	-	-	14.100	0.55512		82	
8691420	-	-	-	14.200	0.55906	83		
8701420	-	-	-	14.200	0.55906			84
650056111	9/16	-	-	14.288	0.56250		85	
8691430	-	-	-	14.300	0.56299	86		
8701430	-	-	-	14.300	0.56299			87
8691440	-	-	-	14.400	0.56693		88	
8701440	-	-	-	14.400	0.56693	89		
8691450	-	-	-	14.500	0.57087			90
8701450	-	-	-	14.500	0.57087		91	
8691460	-	-	-	14.600	0.57480	92		
8701460	-	-	-	14.600	0.57480			93
650057711	37/64	-	-	14.684	0.57813		94	
8691470	-	-	-	14.700	0.57874	95		
8701470	-	-	-	14.700	0.57874			96
8691480	-	-	-	14.800	0.58268		97	
8701480	-	-	-	14.800	0.58268	98		
8691490	-	-	-	14.900	0.58661			99
8701490	-	-	-	14.900	0.58661		16	

Packed: 1 pc.
Available EgiAs coating only.





List 6500 (Continued)

ADO-3D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8691500	-	-	-	15.000	0.59055	75	140	15
8701500	-	-	-	15.100	0.59449	76	145	16
8691510	-	-	-	15.200	0.59843			
8691520	-	-	-	15.300	0.60236	77	145	16
8691530	-	-	-	15.400	0.60630			
8691540	-	-	-	15.500	0.61024	78	145	16
8691550	-	-	-	15.600	0.61417			
8691560	-	-	-	15.700	0.61811	79	145	16
8691570	-	-	-	15.800	0.62205			
8691580	-	-	-	15.875	0.62500	80	145	16
650062511	5/8	-	-	15.900	0.62598			
8691590	-	-	-	16.000	0.62992	81	150	18
8691600	-	-	-	16.100	0.63386			
650063311	-	-	-	16.500	0.64961	83	150	18
8691650	-	-	-	16.669	0.65625			
8701650	-	-	-	16.840	0.66299	85	150	18
650065511	21/32	-	-	17.000	0.66929			
650066311	-	-	-	17.500	0.68898	88	155	18
8691700	-	-	-	17.610	0.69331			
8701700	-	-	-	17.680	0.69606	90	155	18
8691750	-	-	-	17.730	0.69803			
650069321	-	-	-	18.000	0.70866	93	160	19
650069601	-	-	-	18.500	0.72835			
650069801	-	-	-	18.640	0.73386	95	160	20
8691800	-	-	-	19.000	0.74803			
8691850	-	-	-	19.050	0.75000	97	165	20
8701850	-	-	-	19.250	0.75787			
650073311	-	-	-	19.500	0.76772	98	165	20
8691900	-	-	-	19.660	0.77402			
8701900	-	-	-	19.730	0.77677	100	165	20
650075011	3/4	-	-	19.760	0.77795			
650075711	-	-	-	20.000	0.78740			
8691950	-	-	-					
650077401	-	-	-					
650077661	-	-	-					
650077801	-	-	-					
8692000	-	-	-					

Packed: 1 pc.
Available EgiAs coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6510

ADO-5D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
651007812	-	-	-	2.000	0.07874	18	70	3
651008212	-	-	-	2.100	0.08268	19		
651008612	-	-	-	2.200	0.08661	20		
8692230	-	-	-	2.300	0.09055	21		
651009312	3/32	-	-	2.381	0.09375	22		
651009412	-	-	-	2.400	0.09449	23		
8692250	-	-	-	2.500	0.09843	24		
8692260	-	-	-	2.600	0.10236	25		
651010612	-	-	-	2.700	0.10630	26		
8692278	7/64	-	-	2.778	0.10938	27		
8692280	-	-	-	2.800	0.11024	28		
8692290	-	-	-	2.900	0.11417	29		
8692300	-	-	-	3.000	0.11811	30		
8692310	-	-	-	3.100	0.12205	31		
651012511	1/8	-	-	3.175	0.12500	32		
8692320	-	-	-	3.200	0.12598	33		
8692330	-	-	-	3.300	0.12992	34		
8692340	-	-	-	3.400	0.13386	35		
8692350	-	-	-	3.500	0.13780	36		
8692360	-	-	-	3.600	0.14173	37		
8692370	-	-	-	3.700	0.14567	38		
8692380	-	-	-	3.800	0.14961	39		
8692390	-	-	-	3.900	0.15354	40		
651015511	5/32	-	-	3.969	0.15625	41		
8692400	-	-	-	4.000	0.15748	42		
651016011	-	20	-	4.089	0.16100	43		
8692410	-	-	-	4.100	0.16142	44		
8702410	-	-	-	-	-	45		
8692420	-	-	-	4.200	0.16535	46		
8702420	-	-	-	-	-	47		
8692430	-	-	-	4.300	0.16929	48		
8702430	-	-	-	-	-	49		
651017111	11/64	-	-	4.366	0.17188	50		
8692440	-	-	-	4.400	0.17323	51		
8702440	-	-	-	-	-	52		
8692450	-	-	-	4.500	0.17717	53		
8702450	-	-	-	-	-	54		
8692460	-	-	-	4.600	0.18110	55		
8702460	-	-	-	-	-	56		
8692470	-	-	-	4.700	0.18504	57		
8702470	-	-	-	-	-	58		
651018711	3/16	-	-	4.763	0.18750	59		
8692480	-	-	-	4.800	0.18898	60		
8702480	-	-	-	-	-	61		
8692490	-	-	-	4.900	0.19291	62		
8702490	-	-	-	-	-	63		
8692500	-	-	-	5.000	0.19685	64		
8702500	-	-	-	-	-	65		
8692510	-	-	-	5.100	0.20079	66		

Packed: 1 pc.
Available EgiAs coating only.





List 6510 (Continued)

ADO-5D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs	30°	SHANK h6
-----------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
651020211	13/64	-	-	5.159	0.20313	42	100	1/4
8692520	-	-	-	5.200	0.20472	42		6
8692530	-	-	-	5.300	0.20866	43		
8692540	-	-	-	5.400	0.21260	43		1/4
651021311	-	3	-	5.410	0.21300	44		
8692550	-	-	-	5.500	0.21654	44		6
651021711	7/32	-	-	5.556	0.21875	45		1/4
8692560	-	-	-	5.600	0.22047	45		6
8692570	-	-	-	5.700	0.22441	46		
8692580	-	-	-	5.800	0.22835	47		
8692590	-	-	-	5.900	0.23228	47		
651023311	15/64	-	-	5.953	0.23438	48	1/4	
8692600	-	-	-	6.000	0.23622	48	6	
8692610	-	-	-	6.100	0.24016	49	7	
8702610	-	-	-	6.100	0.24016	49	8	
8692620	-	-	-	6.200	0.24409	50	7	
8702620	-	-	-	6.200	0.24409	50	8	
8692630	-	-	-	6.300	0.24803	51	7	
8702630	-	-	-	6.300	0.24803	51	8	
651025011	1/4	-	E	6.350	0.25000	52	1/4	
8692640	-	-	-	6.400	0.25197		7	
8702640	-	-	-	6.400	0.25197		8	
8692650	-	-	-	6.500	0.25591		7	
8702650	-	-	-	6.500	0.25591	7	8	
651025611	-	-	F	6.528	0.25700	53		
8692660	-	-	-	6.600	0.25984		7	
8702660	-	-	-	6.600	0.25984	8		
8692670	-	-	-	6.700	0.26378	54	7	
8702670	-	-	-	6.700	0.26378	54	8	
651026411	17/64	-	-	6.747	0.26563	55	5/16	
8692680	-	-	-	6.800	0.26772		7	
8702680	-	-	-	6.800	0.26772	8		
8692690	-	-	-	6.900	0.27165	56	7	
8702690	-	-	-	6.900	0.27165		8	
8692700	-	-	-	7.000	0.27559		7	
8702700	-	-	-	7.000	0.27559		7	
8692710	-	-	-	7.100	0.27953	57	8	
651028011	9/32	-	-	7.144	0.28125	58	5/16	
8692720	-	-	-	7.200	0.28346		7	
8692730	-	-	-	7.300	0.28740	59	8	
8692740	-	-	-	7.400	0.29134			
8692750	-	-	-	7.500	0.29528	60	5/16	
651029611	19/64	-	-	7.541	0.29688			
8692760	-	-	-	7.600	0.29921	61	8	
8692770	-	-	-	7.700	0.30315	62		
8692780	-	-	-	7.800	0.30709	63		
8692790	-	-	-	7.900	0.31102	63		
651031211	5/16	-	-	7.938	0.31250	64		5/16
8692800	-	-	-	8.000	0.31496			8

Packed: 1 pc.
Available EgiAs coating only.

➔ continued on next page ➔

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
6510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6510 (Continued)

ADO-5D, Coolant-Through



SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8692810	-	-	-	8.100	0.31890	65	128	9
8702810	-	-	-	8.200	0.32283	66		10
8692820	-	-	-	8.300	0.32677	67		9
8702820	-	-	-	8.334	0.32813	67		10
8692830	-	-	-	8.400	0.33071	68		9
8702830	-	-	-	8.433	0.33200	68		10
651032711	21/64	-	-	8.500	0.33465	69		11/32
8692840	-	-	-	8.600	0.33858	69		9
8702840	-	-	-	8.700	0.34252	70		10
651033111	-	-	Q	8.731	0.34375	70		9
8692850	-	-	-	8.800	0.34646	71		10
8702850	-	-	-	8.900	0.35039	71		9
8692860	-	-	-	9.000	0.35433	72	10	
8702860	-	-	-	9.100	0.35827	72	9	
8692870	-	-	-	9.128	0.35938	73	10	
8702870	-	-	-	9.200	0.36220	73	9	
651034211	11/32	-	-	9.300	0.36614	74	136	3/8
8692880	-	-	-	9.400	0.37008	75		10
8692880	-	-	-	9.500	0.37402	75		9
8692890	-	-	-	9.525	0.37500	76		10
8702890	-	-	-	9.600	0.37795	76		9
8692900	-	-	-	9.700	0.38189	77		10
8702900	-	-	-	9.800	0.38583	77		9
8692910	-	-	-	9.900	0.38976	78		10
651035811	23/64	-	-	9.922	0.39063	78		7/16
8692920	-	-	-	10.000	0.39370	79		10
8692920	-	-	-	10.100	0.39764	80		11
8692930	-	-	-	10.200	0.40157	81		12
8692940	-	-	-	10.300	0.40551	82	11	
8692950	-	-	-	10.319	0.40625	82	12	
651037511	3/8	-	-	10.400	0.40945	83	11	
8692960	-	-	-	10.500	0.41339	83	12	
8692970	-	-	-	10.600	0.41732	84	7/16	
8692980	-	-	-	10.700	0.42126	84	11	
8692990	-	-	-	10.716	0.42188	84	12	
651038911	25/64	-	-			85	11	
8693000	-	-	-			85	12	
8693010	-	-	-			86	11	
8703010	-	-	-			86	12	
8693020	-	-	-				11	
8703020	-	-	-				12	
8693030	-	-	-				11	
8703030	-	-	-				12	
651040511	13/32	-	-				7/16	
8693040	-	-	-				11	
8703040	-	-	-				12	
8693050	-	-	-				11	
8703050	-	-	-				12	
8693060	-	-	-				11	
8703060	-	-	-				12	
8693070	-	-	-				11	
8703070	-	-	-				12	
651042111	27/64	-	-				7/16	

Packed: 1 pc.
Available EgiAs coating only.





List 6510 (Continued)

ADO-5D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8693080	-	-	-	10.800	0.42520	87	146	11	
8703080	-	-	-					12	
8693090	-	-	-	10.900	0.42913	88		11	
8703090	-	-	-					12	
8693100	-	-	-	11.000	0.43307		11		
8703100	-	-	-				12		
8693110	-	-	-	11.100	0.43701	89	156	11	
651043711	7/16	-	-	11.113	0.43750				7/16
8693120	-	-	-	11.200	0.44094	90		12	12
8693130	-	-	-	11.300	0.44488	91			12
8693140	-	-	-	11.400	0.44882	92	1/2		12
8693150	-	-	-	11.500	0.45276				
651045211	29/64	-	-	11.509	0.45313			1/2	
8693160	-	-	-	11.600	0.45669	93		12	12
8693170	-	-	-	11.700	0.46063	94	12		
8693180	-	-	-	11.800	0.46457	95	12		
8693190	-	-	-	11.900	0.46850	96	1/2		12
651046711	15/32	-	-	11.906	0.46875				1/2
8693200	-	-	-	12.000	0.47244			12	
8693210	-	-	-	12.100	0.47638	97		167	13
8703210	-	-	-				14		
8693220	-	-	-	12.200	0.48031	98	13		
8703220	-	-	-				14		
8693230	-	-	-	12.300	0.48425	99	1/2	13	
8703230	-	-	-						13
651048411	31/64	-	-	12.303	0.48438			14	
8693240	-	-	-	12.400	0.48819	100		13	13
8703240	-	-	-						14
8693250	-	-	-	12.500	0.49213		13		
8703250	-	-	-				14		
8693260	-	-	-	12.600	0.49606	101	13	13	
8703260	-	-	-					14	
651050011	1/2	-	-	12.700	0.50000	102		1/2	
8693270	-	-	-					13	
8703270	-	-	-				14		
8693280	-	-	-	12.800	0.50394	103	14	13	
8703280	-	-	-					14	
8693290	-	-	-	12.900	0.50787	104		13	13
8703290	-	-	-						
8693300	-	-	-	13.000	0.51181		13		
8703300	-	-	-				14		

Packed: 1 pc.
Available EgiAs coating only.

continued on next page **ADR**

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6510 (Continued)

ADO-5D, Coolant-Through



SPEED FEED	CARBIDE	EgiAs		30°	SHANK h6
P351					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8693310	-	-	-	13.100	0.51575	105	176	14
8693320	-	-	-	13.200	0.51969	106		
8693330	-	-	-	13.300	0.52362	107		
8693340	-	-	-	13.400	0.52756	108		5/8
651053011	17/32	-	-	13.494	0.53125			
8693350	-	-	-	13.500	0.53150	109		14
8693360	-	-	-	13.600	0.53543			
8693370	-	-	-	13.700	0.53937	110		14
8693380	-	-	-	13.800	0.54331			
8693390	-	-	-	13.900	0.54724	111		14
8693400	-	-	-	14.000	0.55118			
8693410	-	-	-	14.100	0.55512	112	15	
8703410	-	-	-	14.200	0.55906			
8693420	-	-	-	14.200	0.55906	113	16	
8703420	-	-	-	14.200	0.55906			
651056111	9/16	-	-	14.288	0.56250	114	15	
8693430	-	-	-	14.300	0.56299			
8703430	-	-	-	14.300	0.56299	115	16	
8693440	-	-	-	14.400	0.56693			
8703440	-	-	-	14.400	0.56693	116	5/8	
8693450	-	-	-	14.500	0.57087			
8703450	-	-	-	14.500	0.57087	117	15	
8693460	-	-	-	14.600	0.57480			
8703460	-	-	-	14.600	0.57480	118	16	
8693470	-	-	-	14.700	0.57874			
8703470	-	-	-	14.700	0.57874	119	15	
8693480	-	-	-	14.800	0.58268			
8703480	-	-	-	14.800	0.58268	120	16	
8693490	-	-	-	14.900	0.58661			
8703490	-	-	-	14.900	0.58661	121	15	
8693500	-	-	-	15.000	0.59055			
8703500	-	-	-	15.000	0.59055	122	16	
8693510	-	-	-	15.100	0.59449			
8693520	-	-	-	15.200	0.59843	123	16	
8693530	-	-	-	15.300	0.60236			
8693540	-	-	-	15.400	0.60630	124	16	
8693550	-	-	-	15.500	0.61024			
8693560	-	-	-	15.600	0.61417	125	16	
8693570	-	-	-	15.700	0.61811			
8693580	-	-	-	15.800	0.62205	126	16	
651062511	5/8	-	-	15.875	0.62500			
8693590	-	-	-	15.900	0.62598	127	5/8	
8693600	-	-	-	16.000	0.62992			
651063311	-	-	-	16.100	0.63386	128	16	
8693650	-	-	-	16.500	0.64961			
8703650	-	-	-	16.500	0.64961	129	18	
651065511	21/32	-	-	16.669	0.65625			
8693700	-	-	-	17.000	0.66929	132	18	
8703700	-	-	-	17.000	0.66929			
8693750	-	-	-	17.500	0.68898	134	3/4	
8693800	-	-	-	18.000	0.70866			
8693800	-	-	-	18.000	0.70866	140	17	
8693800	-	-	-	18.000	0.70866			
8693800	-	-	-	18.000	0.70866	144	18	
8693800	-	-	-	18.000	0.70866			

Packed: 1 pc.
Available EgiAs coating only.





List 6510 (Continued)

ADO-5D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8693850	-	-	-	18.500	0.72835	148	217	19
8703850	-	-	-					20
8693900	-	-	-	19.000	0.74803	152		19
8703900	-	-	-					20
651075011	3/4	-	-	19.050	0.75000	154		3/4
651075711	-	-	-	19.250	0.75787			
8693950	-	-	-	19.500	0.76772	156	225	20
8694000	-	-	-	20.000	0.78740	160		

Packed: 1 pc.
Available EgiAs coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
6510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 6520

ADO-8D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 15.88	+0 / -0.027	+0 / -0.0011

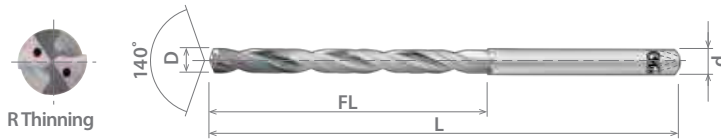

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
*8694200	-	-	-	2.000	0.07874	22	75	3
*8694210	-	-	-	2.100	0.08268	24		
*8694220	-	-	-	2.200	0.08661	25		
*8694230	-	-	-	2.300	0.09055	26		
*652009312	3/32	-	-	2.381	0.09375	27		
*8694240	-	-	-	2.400	0.09449	28		
*8694250	-	-	-	2.500	0.09843	29		
*8694260	-	-	-	2.600	0.10236	30		
*8694270	-	-	-	2.700	0.10630	31		
*652010911	7/64	-	-	2.778	0.10938	32		
*8694280	-	-	-	2.800	0.11024	33		
*8694290	-	-	-	2.900	0.11417	34		
8694300	-	-	-	3.000	0.11811	35	95	4
8694310	-	-	-	3.100	0.12205	36		
652012511	1/8	-	-	3.175	0.12500	37		
8694320	-	-	-	3.200	0.12598	38		
8694330	-	-	-	3.300	0.12992	39		
8694340	-	-	-	3.400	0.13386	40		
8694350	-	-	-	3.500	0.13780	41		
8694360	-	-	-	3.600	0.14173	42		
8694370	-	-	-	3.700	0.14567	43		
8694380	-	-	-	3.800	0.14961	44		
8694390	-	-	-	3.900	0.15354	45		
652015511	5/32	-	-	3.969	0.15625	46	105	6
8694400	-	-	-	4.000	0.15748	47		
652016011	-	20	-	4.089	0.16100	48		
8704410	-	-	-	4.100	0.16142	49		
8704420	-	-	-	4.200	0.16535	50		
8704430	-	-	-	4.300	0.16929	51		
652017111	11/64	-	-	4.366	0.17188	52		
8704440	-	-	-	4.400	0.17323	53		
8694450	-	-	-	4.500	0.17717	54		
8704450	-	-	-	4.600	0.18110	55		
8704460	-	-	-	4.700	0.18504	56		
8704470	-	-	-	4.763	0.18750	57	115	6
652018711	3/16	-	-	4.763	0.18750	58		
8704480	-	-	-	4.800	0.18898	59		
8704490	-	-	-	4.900	0.19291	60		
8694500	-	-	-	5.000	0.19685	61		
8704500	-	-	-	5.100	0.20079	62		
8704510	-	-	-	5.159	0.20313	63		
652020211	13/64	-	-	5.159	0.20313	64		
8704520	-	-	-	5.200	0.20472	65		
8704530	-	-	-	5.300	0.20866	66		
8704540	-	-	-	5.400	0.21260	67		
652021311	-	3	-	5.410	0.21300	68		
8694550	-	-	-	5.500	0.21654	69		
652021711	7/32	-	-	5.556	0.21875	70		
8704560	-	-	-	5.600	0.22047	71		
8704570	-	-	-	5.700	0.22441	72		

Packed: 1 pc.
 Available EgiAs coating only.
 * Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.





List 6520 (Continued)

ADO-8D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8704580	-	-	-	5.800	0.22835	64	115	6
8704590	-	-	-	5.900	0.23228	65		6
652023311	15/64	-	-	5.953	0.23438	66		1/4
8694600	-	-	-	6.000	0.23622	66	6	6
8704610	-	-	-	6.100	0.24016	67	125	8
8704620	-	-	-	6.200	0.24409	68		8
8704630	-	-	-	6.300	0.24803	69		8
652025011	1/4	-	E	6.350	0.25000	70	1/4	8
8704640	-	-	-	6.400	0.25197	70	8	7
8694650	-	-	-	6.500	0.25591	72	125	8
8704650	-	-	-					6.528
652025611	-	-	F	6.600	0.25984	73		8
8704660	-	-	-	6.700	0.26378	74	8	5/16
8704670	-	-	-	6.747	0.26563	74	8	8
652026411	17/64	-	-	6.800	0.26772	75	8	7
8704680	-	-	-	6.900	0.27165	76	8	8
8704690	-	-	-	7.000	0.27559	77	140	7
8694700	-	-	-					7.100
8704700	-	-	-	7.144	0.28125	79		5/16
8704710	-	-	-	7.200	0.28346	80	8	8
652028011	9/32	-	-	7.300	0.28740	80	8	5/16
8704720	-	-	-	7.400	0.29134	81	8	8
8704730	-	-	-	7.500	0.29528	83	8	8
8704740	-	-	-	7.541	0.29688	84	8	5/16
8694750	-	-	-	7.600	0.29921	84	8	8
652029611	19/64	-	-	7.700	0.30315	85	8	8
8704760	-	-	-	7.800	0.30709	86	8	8
8704770	-	-	-	7.900	0.31102	87	8	5/16
8704780	-	-	-	7.938	0.31250	87	8	8
8704790	-	-	-	8.000	0.31496	88	8	5/16
652031211	5/16	-	-	8.100	0.31890	89	8	8
8694800	-	-	-	8.200	0.32283	90	8	10
8704810	-	-	-	8.300	0.32677	91	8	10
8704820	-	-	-	8.334	0.32813	92	8	3/8
8704830	-	-	-	8.400	0.33071	92	8	10
652032711	21/64	-	-	8.433	0.33200	93	8	11/32
8704840	-	-	Q	8.500	0.33465	94	8	9
652033111	-	-	-	8.600	0.33858	95	8	10
8694850	-	-	-	8.700	0.34252	96	8	10
8704850	-	-	-	8.733	0.34375	96	8	3/8
8704860	-	-	-	8.800	0.34646	97	8	10
8704870	-	-	-	8.900	0.35039	98	8	10
652035211	11/32	-	-					
8704880	-	-	-					
8704890	-	-	-					

Packed: 1 pc.

Available EgiAs coating only.

* Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.

continued on next page



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
6520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 6520 (Continued)

ADO-8D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 15.88	+0 / -0.027	+0 / -0.0011



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8694900	-	-	-	9.000	0.35433	99	150	9
8704900	-	-	-	9.100	0.35827	100		10
8704910	-	-	-	9.128	0.35938	101		3/8
652035711	23/64	-	-	9.200	0.36220	102	160	10
8704920	-	-	-	9.300	0.36614	103		10
8704930	-	-	-	9.400	0.37008	105		10
8704940	-	-	-	9.500	0.37402	106	160	3/8
8694950	-	-	-	9.525	0.37500	107		10
652037511	3/8	-	-	9.600	0.37795	107		10
8704960	-	-	-	9.700	0.38189	108	160	10
8704970	-	-	-	9.800	0.38583	109		10
8704980	-	-	-	9.900	0.38976	110		10
8704990	-	-	-	9.922	0.39063	110	160	7/16
652038811	25/64	-	-	10.000	0.39370	111		10
8695000	-	-	-	10.100	0.39764	111		12
8705010	-	-	-	10.200	0.40157	112	182	12
8705020	-	-	-	10.300	0.40551	113		12
8705030	-	-	-	10.319	0.40625	113		7/16
652040711	13/32	-	-	10.400	0.40945	114	182	12
8705040	-	-	-	10.500	0.41339	116		11
8695050	-	-	-	10.600	0.41732	117		12
8705050	-	-	-	10.700	0.42126	118	182	12
8705060	-	-	-	10.716	0.42188	118		7/16
8705070	-	-	-	10.800	0.42520	119		12
652042111	27/64	-	-	10.900	0.42913	120	194	12
8705080	-	-	-	11.000	0.43307	121		11
8705090	-	-	-	11.100	0.43701	122		12
8695100	-	-	-	11.113	0.43750	122	194	7/16
8705100	-	-	-	11.200	0.44094	123		12
8705110	-	-	-	11.300	0.44488	124		12
652043811	7/16	-	-	11.400	0.44882	125	194	12
8705120	-	-	-	11.500	0.45276	127		1/2
8705130	-	-	-	11.509	0.45313	127		1/2
8705140	-	-	-	11.600	0.45669	128	206	12
8695150	-	-	-	11.700	0.46063	129		12
652045211	29/64	-	-	11.800	0.46457	130		12
8705160	-	-	-	11.900	0.46850	131	206	14
8705170	-	-	-	12.000	0.47244	132		14
8705180	-	-	-	12.100	0.47638	133		14
8705190	-	-	-	12.200	0.48031	134	206	14
8695200	-	-	-	12.300	0.48425	135		13
8705210	-	-	-	12.400	0.48819	136		14
8705220	-	-	-	12.500	0.49213	138	206	14
8705230	-	-	-	12.600	0.49606	139		14
8705240	-	-	-	12.700	0.50000	140		1/2
8695250	-	-	-					
8705250	-	-	-					
8705260	-	-	-					
652050011	1/2	-	-					

Packed: 1 pc.
 Available EgiAs coating only.
 * Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.





List 6520 (Continued)

ADO-8D, Coolant-Through

SPEED FEED P351	CARBIDE	EgiAs		30°	SHANK h6
---------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
652053011	17/32	-	-	13.494	0.53125	149	218	5/8
8705350	-	-	-	13.500	0.53150			14
8705400	-	-	-	14.000	0.55118			154
652056111	9/16	-	-	14.288	0.56250	157	230	5/8
8705450	-	-	-	14.500	0.57087	160		16
652062511	5/8	-	-	15.875	0.62500	175		5/8

Packed: 1 pc.

Available EgiAs coating only.

* Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum			Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 6530

ADO-10D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (e8)		
Size	mm	inch
2 ≤ D ≤ 3	-0.014 / -0.028	-0.0006 / -0.0011
3 < D ≤ 6	-0.020 / -0.038	-0.0008 / -0.0015
6 < D ≤ 10	-0.025 / -0.047	-0.0010 / -0.0019
10 < D ≤ 14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
*653007812	-	-	-	2.000	0.07874	26	75	3
*653008212	-	-	-	2.100	0.08268			
*653008612	-	-	-	2.200	0.08661			
*653009012	-	-	-	2.300	0.09055			
*653009312	3/32	-	-	2.381	0.09375			
*653009412	-	-	-	2.400	0.09449			
*653009812	-	-	-	2.500	0.09843			
*653010212	-	-	-	2.600	0.10236			
*653010612	-	-	-	2.700	0.10630			
*653010912	7/64	-	-	2.778	0.10938			
*653011012	-	-	-	2.800	0.11024			
*653011412	-	-	-	2.900	0.11417			
8696300	-	-	-	3.000	0.11811	45	100	4
653012212	-	-	-	3.100	0.12205			
653012512	1/8	-	-	3.175	0.12500			
653012612	-	-	-	3.200	0.12598			
653012912	-	-	-	3.300	0.12992			
653013312	-	-	-	3.400	0.13386			
8696350	-	-	-	3.500	0.13780			
653014112	-	-	-	3.600	0.14173			
653014512	-	-	-	3.700	0.14567			
653014912	-	-	-	3.800	0.14961			
653015312	-	-	-	3.900	0.15354			
653015612	5/32	-	-	3.969	0.15625			
8696400	-	-	-	4.000	0.15748			
653016012	-	20	-	4.089	0.16100	55	115	6
8710410	-	-	-	4.100	0.16142			
8710420	-	-	-	4.200	0.16535			
8710430	-	-	-	4.300	0.16929			
8710440	-	-	-	4.400	0.17323			
8696450	-	-	-	4.500	0.17717			
8710450	-	-	-	4.600	0.18110			
8710460	-	-	-	4.700	0.18504			
8710470	-	-	-	4.763	0.18750			
653018712	3/16	-	-	4.763	0.18750			
8710480	-	-	-	4.800	0.18898			
8710490	-	-	-	4.900	0.19291			
8696500	-	-	-	5.000	0.19685			
8710500	-	-	-	5.100	0.20079	70	128	6
653020012	-	-	-	5.100	0.20079			
653020212	13/64	-	-	5.159	0.20313			
653020412	-	-	-	5.200	0.20472			
653020812	-	-	-	5.300	0.20866			
653021212	-	-	-	5.400	0.21260			
653021112	-	3	-	5.410	0.21300			
8696550	-	-	-	5.500	0.21654			
653021712	7/32	-	-	5.556	0.21875			
653022012	-	-	-	5.600	0.22047			
653022412	-	-	-	5.700	0.22441			
653022812	-	-	-	5.800	0.22835			

Packed: 1 pc.
 Available EgiAs coating only.
 * Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.





List 6530 (Continued)

ADO-10D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
653023212	-	-	-	5.900	0.23228	78	128	6		
8696600	-	-	-	6.000	0.23622					
8710610	-	-	-	6.100	0.24016	87	140	8		
8696620	-	-	-	6.200	0.24409			7		
8710620	-	-	-	6.300	0.24803			8		
653025012	1/4	-	E	6.350	0.25000			1/4		
8710640	-	-	-	6.400	0.25197			8		
8696650	-	-	-	6.500	0.25591			7		
8710650	-	-	-	6.528	0.25700			8		
653025612	-	-	F	6.600	0.25984					
8710660	-	-	-	6.700	0.26378			90	155	8
8710670	-	-	-	6.747	0.26563					5/16
653026412	17/64	-	-	6.800	0.26772	8				
8710680	-	-	-	6.900	0.27165	7				
8710690	-	-	-	7.000	0.27559	8				
8696700	-	-	-	7.100	0.27953	5/16				
8710700	-	-	-	7.144	0.28125					
653027912	-	-	-	7.200	0.28346	100	165			8
653028012	9/32	-	-	7.300	0.28740					8
653028312	-	-	-	7.400	0.29134					7
653028712	-	-	-	7.500	0.29528			8		
653029112	-	-	-	7.600	0.29921			5/16		
8696750	-	-	-	7.700	0.30315					
653029912	-	-	-	7.800	0.30709			105	175	8
653030312	-	-	-	7.900	0.31102					8
653030712	-	-	-	7.938	0.31250					5/16
653031112	-	-	-	8.000	0.31496					8
653031212	5/16	-	-	8.100	0.31890	8				
8696800	-	-	-	8.200	0.32283					
8710810	-	-	-	8.300	0.32677	110	185			10
8710820	-	-	-	8.400	0.33071					9
8696830	-	-	-	8.433	0.33200					10
8710830	-	-	-	8.500	0.33465					9
8710840	-	-	-	8.600	0.33858			10		
653033112	-	-	Q	8.700	0.34252			3/8		
8696850	-	-	-	8.731	0.34375					
8710850	-	-	-	8.800	0.34646			115	195	10
8710860	-	-	-	8.900	0.35039					10
8710870	-	-	-	9.000	0.35433					9
653034212	11/32	-	-			10				
8710880	-	-	-			9				
8710890	-	-	-			10				
8696900	-	-	-			9				
8710900	-	-	-			10				

Packed: 1 pc.

Available EgiAs coating only.

* Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
6530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>				

good best





List 6530 (Continued)

ADO-10D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (e8)		
Size	mm	inch
2 ≤ D ≤ 3	-0.014 / -0.028	-0.0006 / -0.0011
3 < D ≤ 6	-0.020 / -0.038	-0.0008 / -0.0015
6 < D ≤ 10	-0.025 / -0.047	-0.0010 / -0.0019
10 < D ≤ 14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
653035812	-	-	-	9.100	0.35827	125	190	10
653036212	-	-	-	9.200	0.36220			
653036612	-	-	-	9.300	0.36614			
653037012	-	-	-	9.400	0.37008			
8696950	-	-	-	9.500	0.37402			
653037512	3/8	-	-	9.525	0.37500			
653037812	-	-	-	9.600	0.37795			
653038112	-	-	-	9.700	0.38189			
653038512	-	-	-	9.800	0.38583			
653038912	-	-	-	9.900	0.38976			
8697000	-	-	-	10.000	0.39370			
8711010	-	-	-	10.100	0.39764			
8711020	-	-	-	10.200	0.40157			
8711030	-	-	-	10.300	0.40551			
8711040	-	-	-	10.400	0.40945			
8711050	-	-	-	10.500	0.41339			
8711060	-	-	-	10.600	0.41732			
8711070	-	-	-	10.700	0.42126			
653042312	27/64	-	-	10.716	0.42188			
8711080	-	-	-	10.800	0.42520			
8711090	-	-	-	10.900	0.42913			
8697100	-	-	-	11.000	0.43307			
8711100	-	-	-	11.100	0.43701			
653043712	-	-	-	11.100	0.43701			
653043812	7/16	-	-	11.113	0.43750			
653044012	-	-	-	11.200	0.44094			
653044412	-	-	-	11.300	0.44488			
653044812	-	-	-	11.400	0.44882			
653045212	-	-	-	11.500	0.45276			
653045412	29/64	-	-	11.509	0.45313			
653045612	-	-	-	11.600	0.45669			
653046012	-	-	-	11.700	0.46063			
653046412	-	-	-	11.800	0.46457			
653046812	-	-	-	11.900	0.46850			
8697200	-	-	-	12.000	0.47244			
8711250	-	-	-	12.500	0.49213			
653050012	1/2	-	-	12.700	0.50000			
653056112	9/16	-	-	14.288	0.56250			

Packed: 1 pc.
 Available EgiAs coating only.
 * Sizes ≤ 2.90 mm have a single margin. Sizes ≥ 3 mm have a double margin.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
6530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6535

ADO-15D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014 / -0.028	-0.0006 / -0.0011
3 < D ≤ 6	-0.020 / -0.038	-0.0008 / -0.0015
6 < D ≤ 10	-0.025 / -0.047	-0.0010 / -0.0019
10 < D ≤ 14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8698300	-	-	-	3.000	0.11811	55	105	3
653512512	1/8	-	-	3.175	0.12500	60	125	1/8
8698320	-	-	-	3.200	0.12598	65		4
8698350	-	-	-	3.500	0.13780			5/32
653514112	9/64	-	-	3.572	0.14063	75	3/16	
653515612	5/32	-	-	3.969	0.15625		4	
8698400	-	-	-	4.000	0.15748	85	3/16	
653517212	11/64	-	-	4.366	0.17188		85	6
8712440	-	-	-	4.400	0.17323			3/16
8712450	-	-	-	4.500	0.17717	90	6	
653518712	3/16	-	-	4.763	0.18750		90	3/16
8712480	-	-	-	4.800	0.18898			6
8712500	-	-	-	5.000	0.19685	95	6	
8712510	-	-	-	5.100	0.20079		95	1/4
653520312	13/64	-	-	5.159	0.20313			6
8712520	-	-	-	5.200	0.20472	110	6	
653521312	-	-	-	5.410	0.21299		110	1/4
8698550	-	-	-	5.500	0.21654			6
653521912	7/32	-	-	5.556	0.21875	120	1/4	
653523412	15/64	-	-	5.953	0.23438		120	6
8698600	-	-	-	6.000	0.23622			8
8712620	-	-	-	6.200	0.24409	125	1/4	
653525012	1/4	-	E	6.350	0.25000		125	8
8712650	-	-	-	6.500	0.25591			8
653526612	17/64	-	-	6.747	0.26563	135	5/16	
8712700	-	-	-	7.000	0.27559		135	8
653528112	9/32	-	-	7.144	0.28125			5/16
8698750	-	-	-	7.500	0.29528	145	8	
653529712	19/64	-	-	7.541	0.29688		145	5/16
653531312	5/16	-	-	7.938	0.31250			8
8698800	-	-	-	8.000	0.31496	155	10	
8712810	-	-	-	8.100	0.31890		155	3/8
8712820	-	-	-	8.200	0.32283			10
653532812	21/64	-	-	8.334	0.32813	160	3/8	
8712850	-	-	-	8.500	0.33465		160	10
653534412	11/32	-	-	8.731	0.34375			3/8
8712900	-	-	-	9.000	0.35433	170	10	
653535912	23/64	-	-	9.128	0.35938		170	3/8
8712940	-	-	-	9.400	0.37008			10
8698950	-	-	-	9.500	0.37402			

Packed: 1 pc.
Available EgiAs coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
6535	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>				

good best






List 6535 (Continued)

ADO-15D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------

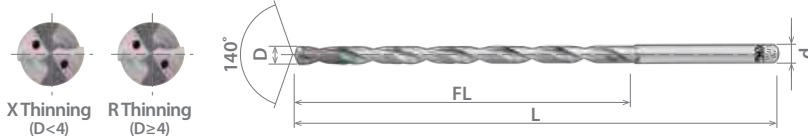

Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014/-0.028	-0.0006/-0.0011
3<D≤6	-0.020/-0.038	-0.0008/-0.0015
6<D≤10	-0.025/-0.047	-0.0010/-0.0019
10<D≤14.29	-0.032/-0.059	-0.0013/-0.0023

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
653537512	3/8	-	-	9.525	0.37500	180	240	3/8
8712980	-	-	-	9.800	0.38583			10
653539112	25/64	-	-	9.922	0.39063			7/16
8699000	-	-	-	10.000	0.39370	190	260	10
653540612	13/32	-	-	10.319	0.40625			7/16
8713050	-	-	-	10.500	0.41339			12
653542212	27/64	-	-	10.716	0.42188	200	280	7/16
8713100	-	-	-	11.000	0.43307			12
653543712	7/16	-	-	11.113	0.43750			7/16
8713150	-	-	-	11.500	0.45276	210	320	12
653545312	29/64	-	-	11.509	0.45313			1/2
653546912	15/32	-	-	11.906	0.46875			12
8699200	-	-	-	12.000	0.47244	215	290	12
8713250	-	-	-	12.500	0.49213			14
653550012	1/2	-	-	12.700	0.50000			230
653553112	17/32	-	-	13.494	0.53125	245	315	5/8
653556312	9/16	-	-	14.288	0.56250			

Packed: 1 pc.
Available EgiAs coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
6535	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>				

good best






List 6540

ADO-20D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------

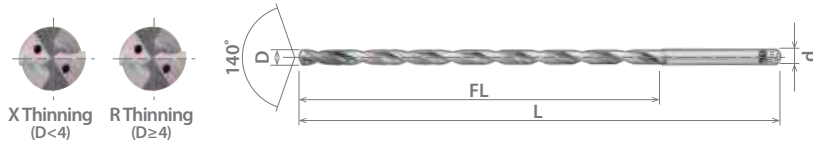

Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014 / -0.028	-0.0006 / -0.0011
3<D≤6	-0.020 / -0.038	-0.0008 / -0.0015
6<D≤10	-0.025 / -0.047	-0.0010 / -0.0019
10<D≤14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8706300	-	-	-	3.000	0.11811	70	120	3
654012512	1/8	-	-	3.175	0.12500	80	140	1/8
8706320	-	-	-	3.200	0.12598	85	140	4
8706350	-	-	-	3.500	0.13780	90	140	5/32
654014012	9/64	-	-	3.572	0.14063	90	140	3/16
654015612	5/32	-	-	3.969	0.15625	110	165	4
8706400	-	-	-	4.000	0.15748	110	165	3/16
654017212	11/64	-	-	4.366	0.17188	115	165	5
8706450	-	-	-	4.500	0.17717	115	165	6
8714450	-	-	-	4.500	0.17717	115	165	3/16
654018712	3/16	-	-	4.763	0.18750	120	190	6
8714480	-	-	-	4.800	0.18898	120	190	6
8706500	-	-	-	5.000	0.19685	140	190	5
8714500	-	-	-	5.000	0.19685	140	190	6
8714510	-	-	-	5.100	0.20079	140	190	6
654020212	13/64	-	-	5.159	0.20313	155	210	1/4
8714520	-	-	-	5.200	0.20472	155	210	6
654021312	-	-	-	5.410	0.21299	155	210	6
8706550	-	-	-	5.500	0.21654	155	210	1/4
654021712	7/32	-	-	5.556	0.21875	160	210	6
654023412	15/64	-	-	5.953	0.23438	170	230	1/4
8706600	-	-	-	6.000	0.23622	170	230	6
8714620	-	-	-	6.200	0.24409	170	230	6
654025012	1/4	-	E	6.350	0.25000	180	230	1/4
8706650	-	-	-	6.500	0.25591	180	230	7
8714650	-	-	-	6.500	0.25591	180	230	8
654026412	17/64	-	-	6.747	0.26563	180	230	5/16
8706700	-	-	-	7.000	0.27559	180	230	7
8714700	-	-	-	7.000	0.27559	180	230	8
654028012	9/32	-	-	7.144	0.28125	180	230	5/16
8706750	-	-	-	7.500	0.29528	180	230	8
654029612	19/64	-	-	7.541	0.29688	180	230	5/16
654031212	5/16	-	-	7.938	0.31250	180	230	5/16
8706800	-	-	-	8.000	0.31496	180	230	8

Packed: 1 pc.
Available EgiAs coating only.

continued on next page

List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6540 (Continued)

ADO-20D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014 / -0.028	-0.0006 / -0.0011
3 < D ≤ 6	-0.020 / -0.038	-0.0008 / -0.0015
6 < D ≤ 10	-0.025 / -0.047	-0.0010 / -0.0019
10 < D ≤ 14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8714810	-	-	-	8.100	0.31890	195	260	10
654032812	21/64	-	-	8.334	0.32813			3/8
8706850	-	-	-	8.500	0.33465			9
8714850	-	-	-	8.500	0.33465	210		10
654034212	11/32	-	-	8.731	0.34375			3/8
8706900	-	-	-	9.000	0.35433	9		
8714900	-	-	-	9.000	0.35433	10		
654035912	23/64	-	-	9.128	0.35938	220	290	3/8
8714940	-	-	-	9.400	0.37008			10
8706950	-	-	-	9.500	0.37402			3/8
654037512	3/8	-	-	9.525	0.37500	230		10
8714980	-	-	-	9.800	0.38583			7/16
654039012	25/64	-	-	9.922	0.39063	10		
8707000	-	-	-	10.000	0.39370	250	310	7/16
654040612	13/32	-	-	10.319	0.40625			12
8715050	-	-	-	10.500	0.41339			7/16
654042112	27/64	-	-	10.716	0.42188	270		11
8707100	-	-	-	11.000	0.43307			12
8715100	-	-	-	11.000	0.43307	280		330
654043712	7/16	-	-	11.113	0.43750		12	
654045212	-	-	-	11.500	0.45276		1/2	
654045412	29/64	-	-	11.509	0.45313		12	
654046812	15/32	-	-	11.906	0.46875		14	
8707200	-	-	-	12.000	0.47244		1/2	
8715250	-	-	-	12.500	0.49213	310	365	5/8
654050012	1/2	-	-	12.700	0.50000			380
654053112	17/32	-	-	13.494	0.53125			315
654056112	9/16	-	-	14.288	0.56250	365		

Packed: 1 pc.
Available EgiAs coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 6550

ADO-30D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------

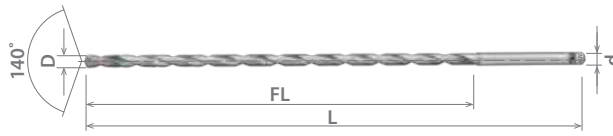

Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014 / -0.028	-0.0006 / -0.0011
3 < D ≤ 6	-0.020 / -0.038	-0.0008 / -0.0015
6 < D ≤ 10	-0.025 / -0.047	-0.0010 / -0.0019
10 < D ≤ 14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					xD	Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch		FL (mm)	L (mm)	d (mm/in)
655011812	-	-	-	3.000	0.11811	25 x D	85	135	3
655012512	1/8	-	-	3.175	0.12500		95	165	1/8
8708320	-	-	-	3.200	0.12598		105	185	4
8708350	-	-	-	3.500	0.13780		116		5/32
655014012	9/64	-	-	3.572	0.14063				132
655015612	5/32	-	-	3.969	0.15625		150		
8708400	-	-	-	4.000	0.15748			155	3/16
655017212	11/64	-	-	4.366	0.17188		165		5
8708450	-	-	-	4.500	0.17717			165	6
8716450	-	-	-	4.763	0.18750		180		3/16
655018712	3/16	-	-	4.800	0.18898			200	6
8716480	-	-	-	5.000	0.19685		215		1/4
8708500	-	-	-	5.100	0.20079			250	6
655020212	13/64	-	-	5.159	0.20313		280		1/4
8716520	-	-	-	5.200	0.20472			280	8
655021312	-	-	-	5.410	0.21299		280		7
8708550	-	-	-	5.500	0.21654	280		8	
655021712	7/32	-	-	5.556	0.21875		280	5/16	
655023412	15/64	-	-	5.953	0.23438	315		7	
8708600	-	-	-	6.000	0.23622		315	8	
8716620	-	-	-	6.200	0.24409	315		5/16	
655025012	1/4	-	E	6.350	0.25000		350	7	
8708650	-	-	-	6.500	0.25591	350		8	
8716650	-	-	-	6.747	0.26563		350	8	
655026412	17/64	-	-	7.000	0.27559	350		10	
8708700	-	-	-	7.144	0.28125		350	3/8	
8716700	-	-	-	7.500	0.29528	350		9	
655028012	9/32	-	-	7.541	0.29688		350	10	
8708750	-	-	-	7.541	0.29688	350		3/8	
655029612	19/64	-	-	7.938	0.31250		350	9	
655031212	5/16	-	-	8.000	0.31496	350		10	
8708800	-	-	-	8.100	0.31890		350	3/8	
8716810	-	-	-	8.334	0.32813	350		9	
655032812	21/64	-	-	8.500	0.33465		350	10	
8708850	-	-	-	8.733	0.34375	350		3/8	
8716850	-	-	-						
655034212	11/32	-	-						

Packed: 1 pc.
Available EgiAs coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6550	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 6550 (Continued)

ADO-30D, Coolant-Through

SPEED FEED P352-353	CARBIDE	EgiAs		30°	SHANK h6
-------------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014 / -0.028	-0.0006 / -0.0011
3<D≤6	-0.020 / -0.038	-0.0008 / -0.0015
6<D≤10	-0.025 / -0.047	-0.0010 / -0.0019
10<D≤14.29	-0.032 / -0.059	-0.0013 / -0.0023

EDP Number	Diameter					xD	Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
8708900	-	-	-	9.000	0.35433	30 x D	300	350	9	
8716900	-	-	-						10	
655035912	23/64	-	-	9.128	0.35938				3/8	
8716940	-	-	-	9.400	0.37008		315	390	10	
8708950	-	-	-	9.500	0.37402				3/8	
655037512	3/8	-	-	9.525	0.37500				10	
8716980	-	-	-	9.800	0.38583				7/16	
655039012	25/64	-	-	9.922	0.39063				10	
8709000	-	-	-	10.000	0.39370				7/16	
655040612	13/32	-	-	10.319	0.40625		340	400	12	
655041212	-	-	-	10.500	0.41339				7/16	
655042112	27/64	-	-	10.716	0.42188				12	
655043212	-	-	-	11.000	0.43307				7/16	
655043712	7/16	-	-	11.113	0.43750				12	
655045212	-	-	-	11.500	0.45276				7/16	
655045412	29/64	-	-	11.509	0.45313				12	
655046812	15/32	-	-	11.906	0.46875				25 x D	1/2
655047212	-	-	-	12.000	0.47244				26 x D	12
655049112	-	-	-	12.500	0.49213	25 x D			14	
655050012	1/2	-	-	12.700	0.50000	22 x D			340	1/2
655053112	17/32	-	-	13.494	0.53125					5/8
655056112	9/16	-	-	14.288	0.56250		350			

Packed: 1 pc.
Available EgiAs coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6550	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>				

good best





List 6560

ADO-40D, Coolant-Through

NEW
SPEED FEED
P354
CARBIDE
EgiAs
25°
SHANK
h6



Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014/-0.028	-0.0006/-0.0011
3<D≤6	-0.020/-0.038	-0.0008/-0.0015
6<D≤10	-0.025/-0.047	-0.0010/-0.0019

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8717300	-	-	-	3.000	0.11811	129	179	3
656012512	1/8	-	-	3.175	0.12500	137	187	1/8
656015612	5/32	-	-	3.969	0.15625	171	221	3/16
8717400	-	-	-	4.000	0.15748	172	222	4
656018712	3/16	-	-	4.763	0.18750	205	255	3/16
8717500	-	-	-	5.000	0.19685	215	265	5
8717600	-	-	-	6.000	0.23622	258	308	6
656025012	1/4	-	-	6.350	0.25000	273	323	1/4
656031212	5/16	-	-	7.938	0.31250	341	391	5/16
8717800	-	-	-	8.000	0.31496	344	394	8
656037512	3/8	-	-	9.525	0.37500	410	460	3/8
8718000	-	-	-	10.000	0.39370	430	490	10

Packed: 1 pc.
Available EgiAs coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6560	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>				

good best





List 6570

ADO-50D, Coolant-Through

NEW	SPEED FEED P354	CARBIDE	EgiAs		25°	SHANK h6
------------	---------------------------	----------------	--------------	--	------------	--------------------



Cutting Diameter Tolerance (e8)		
Size	mm	inch
D=3	-0.014/-0.028	-0.0006/-0.0011
3<D≤6	-0.020/-0.038	-0.0008/-0.0015
6<D≤8	-0.025/-0.047	-0.0010/-0.0019

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8718300	-	-	-	3.000	0.11811	159	209	3
657012512	1/8	-	-	3.175	0.12500	169	219	1/8
657015612	5/32	-	-	3.969	0.15625	210	260	3/16
8718400	-	-	-	4.000	0.15748	212	262	4
657018712	3/16	-	-	4.763	0.18750	252	302	3/16
8718500	-	-	-	5.000	0.19685	265	315	5
8718600	-	-	-	6.000	0.23622	318	368	6
657025012	1/4	-	-	6.350	0.25000	337	387	1/4
657031212	5/16	-	-	7.938	0.31250	421	471	5/16
8718800	-	-	-	8.000	0.31496	424	474	8

Packed: 1 pc.
Available EgiAs coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>				


good best





List 6300

AD-2D

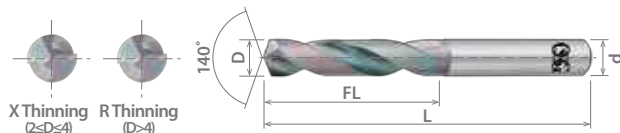

SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8670200	-	-	-	2.000	0.07874	14	62	4
8670210	-	-	-	2.100	0.08268			
8670220	-	-	-	2.200	0.08661			
8670230	-	-	-	2.300	0.09055			
8670240	-	-	-	2.400	0.09449			
8670250	-	-	-	2.500	0.09843			
8670260	-	-	-	2.600	0.10236			
8670270	-	-	-	2.700	0.10630			
8670280	-	-	-	2.800	0.11024			
8670290	-	-	-	2.900	0.11417			
8670300	-	-	-	3.000	0.11811			
8670310	-	-	-	3.100	0.12205			
630012311	1/8	-	-	3.175	0.12500			
8670320	-	-	-	3.200	0.12598			
8670330	-	-	-	3.300	0.12992			
8670340	-	-	-	3.400	0.13386			
8670350	-	-	-	3.500	0.13780			
8670360	-	-	-	3.600	0.14173			
8670370	-	-	-	3.700	0.14567			
8670380	-	-	-	3.800	0.14961			
8670390	-	-	-	3.900	0.15354			
630015511	5/32	-	-	3.969	0.15625			
8670400	-	-	-	4.000	0.15748			
630016111	-	20	-	4.089	0.16100			
8670410	-	-	-	4.100	0.16142			
8670420	-	-	-	4.200	0.16535			
8670430	-	-	-	4.300	0.16929			
630017111	11/64	-	-	4.366	0.17188			
8670440	-	-	-	4.400	0.17323			
8670450	-	-	-	4.500	0.17717			
8670460	-	-	-	4.600	0.18110			
8670470	-	-	-	4.700	0.18504			
630018611	3/16	-	-	4.763	0.18750			
8670480	-	-	-	4.800	0.18898			
8670490	-	-	-	4.900	0.19291			
8670500	-	-	-	5.000	0.19685			
8670510	-	-	-	5.100	0.20079			
630020211	13/64	-	-	5.159	0.20313			
8670520	-	-	-	5.200	0.20472			
8670530	-	-	-	5.300	0.20866			

Packed: 1 pc.
Available EgiAs coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
6300	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>				<input type="checkbox"/>				


good best





List 6300 (Continued)

AD-2D



SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8670540	-	-	-	5.400	0.21260	28	66	6
630021311	-	3	-	5.410	0.21300			
8670550	-	-	-	5.500	0.21654			
630021711	7/32	-	-	5.556	0.21875			
8670560	-	-	-	5.600	0.22047			
8670570	-	-	-	5.700	0.22441			
8670580	-	-	-	5.800	0.22835			
8670590	-	-	-	5.900	0.23228			
630023311	15/64	-	-	5.953	0.23438			
8670600	-	-	-	6.000	0.23622			
8670610	-	-	-	6.100	0.24016	34	79	8
8670620	-	-	-	6.200	0.24409			
8670630	-	-	-	6.300	0.24803			
630024911	1/4	-	E	6.350	0.25000			
8670640	-	-	-	6.400	0.25197			
8670650	-	-	-	6.500	0.25591			
630025711	-	-	F	6.528	0.25700			
8670660	-	-	-	6.600	0.25984			
8670670	-	-	-	6.700	0.26378			
630026411	17/64	-	-	6.747	0.26563			
8670680	-	-	-	6.800	0.26772	41	89	10
8670690	-	-	-	6.900	0.27165			
8670700	-	-	-	7.000	0.27559			
8670710	-	-	-	7.100	0.27953			
630028011	9/32	-	-	7.144	0.28125			
8670720	-	-	-	7.200	0.28346			
8670730	-	-	-	7.300	0.28740			
8670740	-	-	-	7.400	0.29134			
8670750	-	-	-	7.500	0.29528			
630029511	19/64	-	-	7.541	0.29688			
8670760	-	-	-	7.600	0.29921	47	89	10
8670770	-	-	-	7.700	0.30315			
8670780	-	-	-	7.800	0.30709			
8670790	-	-	-	7.900	0.31102			
630031111	5/16	-	-	7.938	0.31250			
8670800	-	-	-	8.000	0.31496			
8670810	-	-	-	8.100	0.31890			
8670820	-	-	-	8.200	0.32283			
8670830	-	-	-	8.300	0.32677			
630032711	21/64	-	-	8.334	0.32813			
8670840	-	-	-	8.400	0.33071	47	89	10
630033111	-	-	Q	8.433	0.33200			
8670850	-	-	-	8.500	0.33465			
8670860	-	-	-	8.600	0.33858			
8670870	-	-	-	8.700	0.34252			
630034211	11/32	-	-	8.731	0.34375			
8670880	-	-	-	8.800	0.34646			
8670890	-	-	-	8.900	0.35039			
8670900	-	-	-	9.000	0.35433			

Packed: 1 pc.
Available EgiAs coating only.



List 6300 (Continued)

AD-2D

SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
-----------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8670910	-	-	-	9.100	0.35827	47	89	10
630035811	23/64	-	-	9.128	0.35938			3/8
8670920	-	-	-	9.200	0.36220			10
8670930	-	-	-	9.300	0.36614			
8670940	-	-	-	9.400	0.37008			
8670950	-	-	-	9.500	0.37402			
630037411	3/8	-	-	9.525	0.37500			3/8
8670960	-	-	-	9.600	0.37795			10
8670970	-	-	-	9.700	0.38189			
8670980	-	-	-	9.800	0.38583			
8670990	-	-	-	9.900	0.38976			
630038911	25/64	-	-	9.922	0.39063	7/16		
8671000	-	-	-	10.000	0.39370	10		
8671010	-	-	-	10.100	0.39764	12		
8671020	-	-	-	10.200	0.40157			
8671030	-	-	-	10.300	0.40551			
630040511	13/32	-	-	10.319	0.40625		7/16	
8671040	-	-	-	10.400	0.40945		12	
8671050	-	-	-	10.500	0.41339			
8671060	-	-	-	10.600	0.41732			
8671070	-	-	-	10.700	0.42126			
630042111	27/64	-	-	10.716	0.42188		7/16	
8671080	-	-	-	10.800	0.42520		12	
8671090	-	-	-	10.900	0.42913			
8671100	-	-	-	11.000	0.43307			
8671110	-	-	-	11.100	0.43701			
630043711	7/16	-	-	11.113	0.43750	7/16		
8671120	-	-	-	11.200	0.44094	12		
8671130	-	-	-	11.300	0.44488			
8671140	-	-	-	11.400	0.44882			
8671150	-	-	-	11.500	0.45276			
630045211	29/64	-	-	11.509	0.45313	1/2		
8671160	-	-	-	11.600	0.45669	12		
8671170	-	-	-	11.700	0.46063			
8671180	-	-	-	11.800	0.46457			
8671190	-	-	-	11.900	0.46850			
630046811	15/32	-	-	11.906	0.46875	1/2		
8671200	-	-	-	12.000	0.47244	12		
630047611	-	-	-	12.100	0.47638	14		
630048011	-	-	-	12.200	0.48031			
630048311	31/64	-	-	12.303	0.48438		1/2	
630048811	-	-	-	12.400	0.48819		14	
630049211	-	-	-	12.500	0.49213			
630049611	-	-	-	12.600	0.49606			
630049911	1/2	-	-	12.700	0.50000			
630050311	-	-	-	12.800	0.50394		1/2	
							14	

Packed: 1 pc.
Available EgiAs coating only.

▶ continued on next page ▶

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
6300	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>				


good best





List 6300 (Continued)

AD-2D



SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
--------------------	---------	-------	-----	-------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
630050711	-	-	-	12.900	0.50787	60	107	14
630051111	-	-	-	13.000	0.51181			5/8
630051411	33/64	-	-	13.097	0.51563			14
630051911	-	-	-	13.200	0.51969			5/8
630052311	-	-	-	13.300	0.52362			16
630052711	-	-	-	13.400	0.52756	65	115	14
630053211	-	-	-	13.500	0.53150			5/8
630055111	-	-	-	14.000	0.55118			16
630056111	9/16	-	-	14.288	0.56250			5/8
630057011	-	-	-	14.500	0.57087			16
630059011	-	-	-	15.000	0.59055	73	123	16
630061011	-	-	-	15.500	0.61024			5/8
630062311	5/8	-	-	15.875	0.62500			16
630062911	-	-	-	16.000	0.62992			18
630064911	-	-	-	16.500	0.64961			79
630066911	-	-	-	17.000	0.66929	20		
630068911	-	-	-	17.500	0.68898	3/4		
630070811	-	-	-	18.000	0.70866	20		
630072811	-	-	-	18.500	0.72835	3/4		
630074811	-	-	-	19.000	0.74803	630074911	131	20
630074911	3/4	-	-	19.050	0.75000			3/4
630076711	-	-	-	19.500	0.76772			20
630078711	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available EgiAs coating only.




Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
6300	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>			

good best



List 6310

AD-4D



SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
--------------------	---------	-------	-----	-------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8672200	-	-	-	2.000	0.07874	20	66	4
8672210	-	-	-	2.100	0.08268			
8672220	-	-	-	2.200	0.08661			
8672230	-	-	-	2.300	0.09055			
8672240	-	-	-	2.400	0.09449			
8672250	-	-	-	2.500	0.09843			
8672260	-	-	-	2.600	0.10236			
8672270	-	-	-	2.700	0.10630			
8672280	-	-	-	2.800	0.11024			
8672290	-	-	-	2.900	0.11417			
8672300	-	-	-	3.000	0.11811	28	74	4
8672310	-	-	-	3.100	0.12205			
631012311	1/8	-	-	3.175	0.12500			
8672320	-	-	-	3.200	0.12598			
8672330	-	-	-	3.300	0.12992			
8672340	-	-	-	3.400	0.13386			
8672350	-	-	-	3.500	0.13780			
8672360	-	-	-	3.600	0.14173			
8672370	-	-	-	3.700	0.14567			
8672380	-	-	-	3.800	0.14961			
8672390	-	-	-	3.900	0.15354	36	82	6
631015511	5/32	-	-	3.969	0.15625			
8672400	-	-	-	4.000	0.15748			
631016111	-	20	-	4.089	0.16100			
8672410	-	-	-	4.100	0.16142			
8672420	-	-	-	4.200	0.16535			
8672430	-	-	-	4.300	0.16929			
631017111	11/64	-	-	4.366	0.17188			
8672440	-	-	-	4.400	0.17323			
8672450	-	-	-	4.500	0.17717			
8672460	-	-	-	4.600	0.18110			
8672470	-	-	-	4.700	0.18504	44	82	6
631018611	3/16	-	-	4.763	0.18750			
8672480	-	-	-	4.800	0.18898			
8672490	-	-	-	4.900	0.19291			
8672500	-	-	-	5.000	0.19685			
8672510	-	-	-	5.100	0.20079			
631020211	13/64	-	-	5.159	0.20313			
8672520	-	-	-	5.200	0.20472			
8672530	-	-	-	5.300	0.20866			

Packed: 1 pc.
Available EgiAs coating only.

▶ continued on next page ▶

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
6310	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>				


good best





List 6310 (Continued)

AD-4D



SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
--------------------	---------	-------	-----	-------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8672540	-	-	-	5.400	0.21260	44	82	6
631021311	-	3	-	5.410	0.21300			
8672550	-	-	-	5.500	0.21654			
631021711	7/32	-	-	5.556	0.21875			
8672560	-	-	-	5.600	0.22047			
8672570	-	-	-	5.700	0.22441			
8672580	-	-	-	5.800	0.22835			
8672590	-	-	-	5.900	0.23228			
631023311	15/64	-	-	5.953	0.23438			
8672600	-	-	-	6.000	0.23622			
8672610	-	-	-	6.100	0.24016			
8672620	-	-	-	6.200	0.24409			
8672630	-	-	-	6.300	0.24803			
631024911	1/4	-	E	6.350	0.25000			
8672640	-	-	-	6.400	0.25197			
8672650	-	-	-	6.500	0.25591			
631025711	-	-	F	6.258	0.25700			
8672660	-	-	-	6.600	0.25984			
8672670	-	-	-	6.700	0.26378			
631026411	17/64	-	-	6.747	0.26563			
8672680	-	-	-	6.800	0.26772			
8672690	-	-	-	6.900	0.27165			
8672700	-	-	-	7.000	0.27559			
8672710	-	-	-	7.100	0.27953			
631028011	9/32	-	-	7.144	0.28125			
8672720	-	-	-	7.200	0.28346			
8672730	-	-	-	7.300	0.28740			
8672740	-	-	-	7.400	0.29134			
8672750	-	-	-	7.500	0.29528			
631029511	19/64	-	-	7.541	0.29688			
8672760	-	-	-	7.600	0.29921			
8672770	-	-	-	7.700	0.30315			
8672780	-	-	-	7.800	0.30709			
8672790	-	-	-	7.900	0.31102			
631031111	5/16	-	-	7.938	0.31250			
8672800	-	-	-	8.000	0.31496			
8672810	-	-	-	8.100	0.31890			
8672820	-	-	-	8.200	0.32283			
8672830	-	-	-	8.300	0.32677			
631032711	21/64	-	-	8.334	0.32813			
8672840	-	-	-	8.400	0.33071			
631033111	-	-	Q	8.433	0.33200			
8672850	-	-	-	8.500	0.33465			
8672860	-	-	-	8.600	0.33858			
8672870	-	-	-	8.700	0.34252			
631034211	11/32	-	-	8.731	0.34375			
8672880	-	-	-	8.800	0.34646			
8672890	-	-	-	8.900	0.35039			
8672900	-	-	-	9.000	0.35433			
8672910	-	-	-	9.100	0.35827			

Packed: 1 pc.
Available EgiAs coating only.



List 6310 (Continued)

AD-4D

SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
-----------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
631035811	23/64	-	-	9.128	0.35938	61	103	3/8
8672920	-	-	-	9.200	0.36220			10
8672930	-	-	-	9.300	0.36614			10
8672940	-	-	-	9.400	0.37008			10
8672950	-	-	-	9.500	0.37402			10
631037411	3/8	-	-	9.525	0.37500			3/8
8672960	-	-	-	9.600	0.37795			10
8672970	-	-	-	9.700	0.38189			10
8672980	-	-	-	9.800	0.38583			10
8672990	-	-	-	9.900	0.38976			10
631038911	25/64	-	-	9.922	0.39063	71	118	7/16
8673000	-	-	-	10.000	0.39370			10
8673010	-	-	-	10.100	0.39764			12
8673020	-	-	-	10.200	0.40157			12
8673030	-	-	-	10.300	0.40551			12
631040511	13/32	-	-	10.319	0.40625			7/16
8673040	-	-	-	10.400	0.40945			12
8673050	-	-	-	10.500	0.41339			12
8673060	-	-	-	10.600	0.41732			12
8673070	-	-	-	10.700	0.42126			12
631042111	27/64	-	-	10.716	0.42188	77	124	7/16
8673080	-	-	-	10.800	0.42520			12
8673090	-	-	-	10.900	0.42913			12
8673100	-	-	-	11.000	0.43307			12
8673110	-	-	-	11.100	0.43701			12
631043711	7/16	-	-	11.113	0.43750			7/16
8673120	-	-	-	11.200	0.44094			12
8673130	-	-	-	11.300	0.44488			12
8673140	-	-	-	11.400	0.44882			12
8673150	-	-	-	11.500	0.45276			12
631045211	29/64	-	-	11.509	0.45313	77	124	1/2
8673160	-	-	-	11.600	0.45669			12
8673170	-	-	-	11.700	0.46063			12
8673180	-	-	-	11.800	0.46457			12
8673190	-	-	-	11.900	0.46850			12
631046811	15/32	-	-	11.906	0.46875			1/2
8673200	-	-	-	12.000	0.47244			12
8673210	-	-	-	12.100	0.47638			14
8673220	-	-	-	12.200	0.48031			14
8673230	-	-	-	12.300	0.48425			1/2
631048411	31/64	-	-	12.303	0.48438	77	124	14
8673240	-	-	-	12.400	0.48819			14
8673250	-	-	-	12.500	0.49213			14
8673260	-	-	-	12.600	0.49606			14
631050011	1/2	-	-	12.700	0.50000			1/2
8673270	1/2	-	-	12.700	0.50000			14
8673280	-	-	-	12.800	0.50394			14

Packed: 1 pc.
Available EgiAs coating only.

▶ continued on next page ▶ 

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
6310	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>				

good best






List 6310 (Continued)

SPEED FEED P357	CARBIDE	EgiAs	30°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

AD-4D



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2<D<=3	+0 / -0.014	+0 / -0.0006
3<D<=6	+0 / -0.018	+0 / -0.0007
6<D<=10	+0 / -0.022	+0 / -0.0009
10<D<=18	+0 / -0.027	+0 / -0.0011
18<D<=20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
8673290	-	-	-	12.900	0.50787	77	124	14		
8673300	-	-	-	13.000	0.51181			5/8		
631051511	33/64	-	-	13.097	0.51563			83	133	14
8673310	-	-	-	13.100	0.51575					16
8673320	-	-	-	13.200	0.51969					5/8
8673330	-	-	-	13.300	0.52362					16
8673340	-	-	-	13.400	0.52756					5/8
8673350	-	-	-	13.500	0.53150					16
8673400	-	-	-	14.000	0.55118					5/8
631056111	9/16	-	-	14.288	0.56250					93
8673450	-	-	-	14.500	0.57087	5/8				
8673500	-	-	-	15.000	0.59055	16				
8673550	-	-	-	15.500	0.61024	5/8				
631062311	5/8	-	-	15.875	0.62500	16				
8673600	-	-	-	16.000	0.62992	101	153	18		
8673650	-	-	-	16.500	0.64961			20		
8673700	-	-	-	17.000	0.66929			3/4		
8673750	-	-	-	17.500	0.68898			20		
8673800	-	-	-	18.000	0.70866			3/4		
8673850	-	-	-	18.500	0.72835			20		
8673900	-	-	-	19.000	0.74803			3/4		
631074911	3/4	-	-	19.050	0.75000			20		
8673950	-	-	-	19.500	0.76772			20		
8674000	-	-	-	20.000	0.78740					

Packed: 1 pc.
Available EgiAs coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
6310	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>				

good best





List 5200

ADO-SUS-3D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8665200	-	-	-	2.000	0.07874	12	66	3	
8665210	-	-	-	2.100	0.08268	13			
8665220	-	-	-	2.200	0.08661	14			
8665230	-	-	-	2.300	0.09055				
520009312	3/32	-	-	2.381	0.09375	15			
8665240	-	-	-	2.400	0.09449				
8665250	-	-	-	2.500	0.09843				
8665260	-	-	-	2.600	0.10236	16			
8665270	-	-	-	2.700	0.10630	17			
520010912	7/64	-	-	2.778	0.10938				
8665280	-	-	-	2.800	0.11024				
8665290	-	-	-	2.900	0.11417	18			
520011612	-	-	-	2.950	0.11614				
8665300	-	-	-	3.000	0.11811	19			4
8665310	-	-	-	3.100	0.12205				
8665315	-	-	-	3.150	0.12402				
520012512	1/8	-	-	3.175	0.12500	20	1/8		
8665320	-	-	-	3.200	0.12598				
8665326	-	-	-	3.260	0.12835				
8665330	-	-	-	3.300	0.12992	21			
520013212	-	-	-	3.360	0.13228				
8665340	-	-	-	3.400	0.13386				
520013512	-	-	-	3.440	0.13543	22	4		
8665350	-	-	-	3.500	0.13780				
520013812	-	-	-	3.520	0.13858				
520014012	9/64	-	-	3.572	0.14063	23			
8665360	-	-	-	3.600	0.14173				
8665370	-	-	-	3.700	0.14567				
8665375	-	-	-	3.750	0.14764	24			
520014812	-	-	-	3.770	0.14843				
8665380	-	-	-	3.800	0.14961				
520015212	-	-	-	3.860	0.15197	25		6	
8665390	-	-	-	3.900	0.15354				
520015612	5/32	-	-	3.969	0.15625			80	
8665400	-	-	-	4.000	0.15748				
520015912	-	-	-	4.050	0.15945				
520016112	-	20	-	4.089	0.16100	5			
8665410	-	-	-	4.100	0.16142				

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.

continued on next page



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5200 (Continued)

ADO-SUS-3D, Coolant-Through

SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8680410	-	-	-			25	80	6
520016312	-	-	-	4.160	0.16378	26		5
8665420	-	-	-	4.200	0.16535			6
8680420	-	-	-	4.270	0.16811			5
520016812	-	-	-	4.300	0.16929			6
8665430	-	-	-	4.366	0.17188	27		3/16
8680430	-	-	-	4.400	0.17323			5
520017112	11/64	-	-	4.460	0.17559			6
8665440	-	-	-	4.500	0.17717			5
8680440	-	-	-	4.500	0.17717	6		
520017512	-	-	-	4.600	0.18110	28		5
8665450	-	-	-	4.600	0.18110	29		6
8680450	-	-	-	4.660	0.18346			5
8665460	-	-	-	4.700	0.18504			6
8680460	-	-	-	4.700	0.18504			3/16
520018312	-	-	-	4.763	0.18750	30		5
8665470	-	-	-	4.800	0.18898			6
8680470	-	-	-	4.850	0.19094			5
520018712	3/16	-	-	4.900	0.19291			25
8665480	-	-	-	5.000	0.19685	5		
8680480	-	-	-	5.000	0.19685	82	6	
8665485	-	-	-	5.100	0.20079		5	
8665490	-	-	-	5.150	0.20276		6	
8680490	-	-	-	5.150	0.20276		26	1/4
8665500	-	-	-	5.190	0.20472	5		
8680500	-	-	-	5.250	0.20669	27		6
8665510	-	-	-	5.260	0.20709			5
520020212	-	-	-	5.300	0.20866		28	6
520020312	13/64	-	-	5.400	0.21260			5
8665520	-	-	-	5.410	0.21300	29		1/4
8665525	-	-	-	5.470	0.21535			6
520020712	-	-	-	5.500	0.21654		30	6
8665530	-	-	-	5.556	0.21875			5
8665540	-	-	-	5.600	0.22047	31		7
520021312	-	3	-	5.700	0.22441			88
520021512	-	-	-	5.800	0.22835		5	
8665550	-	-	-	5.900	0.23228		6	
520021812	7/32	-	-	5.953	0.23438	6.100	1/4	
8665560	-	-	-	6.000	0.23622		6	
8665570	-	-	-	6.100	0.24016		7	
8665580	-	-	-	6.150	0.24213		8	
8665590	-	-	-					
520023412	15/64	-	-					
8665600	-	-	-					
8665610	-	-	-					
8680610	-	-	-					
520024212	-	-	-					

Packed: 1 pc.
 Available WXL[®] coating only.
 MEGA COOLER™ applies only to diameter sizes over 6 mm.





List 5200 (Continued)

ADO-SUS-3D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8665620	-	-	-	6.200	0.24409	31	88	7
8680620	-	-	-	6.200	0.24409	31		8
8665625	-	-	-	6.250	0.24606	32		7
8665630	-	-	-	6.300	0.24803			8
8680630	-	-	-	6.300	0.24803	8		
8665635	1/4	-	E	6.350	0.25000	32		1/4
8665640	-	-	-	6.400	0.25197	33		7
8680640	-	-	-	6.400	0.25197			8
8665650	-	-	-	6.500	0.25591	33		7
8680650	-	-	-	6.500	0.25591	33		8
520025712	-	-	F	6.528	0.25700	34		8
8665660	-	-	-	6.600	0.25984			7
8680660	-	-	-	6.600	0.25984	7		
520026112	-	-	-	6.650	0.26181	34		8
8665670	-	-	-	6.700	0.26378			7
8680670	-	-	-	6.700	0.26378	8		
8665675	-	-	-	6.750	0.26575	34	7	
520026512	17/64	-	-	6.747	0.26563	35	5/16	
8665680	-	-	-	6.800	0.26772		7	
8680680	-	-	-	6.800	0.26772	8		
520027012	-	-	-	6.860	0.27008	35	7	
8665690	-	-	-	6.900	0.27165		8	
8680690	-	-	-	6.900	0.27165	7		
8665700	-	-	-	7.000	0.27559	36	8	
8680700	-	-	-	7.000	0.27559		8	
520027712	-	-	-	7.040	0.27717	36	5/16	
8665710	-	-	-	7.100	0.27953		7	
520028112	9/32	-	-	7.144	0.28125	37	8	
8665720	-	-	-	7.200	0.28346		7	
8665725	-	-	-	7.250	0.28543	37	8	
8665730	-	-	-	7.300	0.28740		7	
8665740	-	-	-	7.400	0.29134	38	5/16	
8665750	-	-	-	7.500	0.29528		7	
520029612	19/64	-	-	7.541	0.29688	39	8	
8665760	-	-	-	7.600	0.29921		7	
8665770	-	-	-	7.700	0.30315	39	5/16	
8665775	-	-	-	7.750	0.30512		8	
8665780	-	-	-	7.800	0.30709	40	8	
8665790	-	-	-	7.900	0.31102		7	
520031212	5/16	-	-	7.938	0.31250	40	5/16	
8665800	-	-	-	8.000	0.31496		8	
8665810	-	-	-	8.100	0.31890	41	9	
8680810	-	-	-	8.100	0.31890		10	

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.

continued on next page



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5200 (Continued)

ADO-SUS-3D, Coolant-Through

SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
520032012	-	-	-	8.150	0.32087	41	101	10
8665820	-	-	-	8.200	0.32283			9
8680820	-	-	-					10
8665825	-	-	-	8.250	0.32480	42		9
8665830	-	-	-	8.300	0.32677			10
8680830	-	-	-			10		
520032812	21/64	-	-	8.334	0.32813	42		3/8
8665840	-	-	-	8.400	0.33071			9
8680840	-	-	-			10		
520033212	-	-	Q	8.433	0.33200	43		9
8665850	-	-	-	8.500	0.33465		10	
8680850	-	-	-				9	
520033712	-	-	-	8.560	0.33701	43	10	
8665860	-	-	-	8.600	0.33858		9	
8680860	-	-	-				10	
520034012	-	-	-	8.640	0.34016	44	10	
520034112	-	-	-	8.680	0.34173		9	
8665870	-	-	-				10	
8680870	-	-	-	8.700	0.34252	44	10	
520034312	11/32	-	-	8.731	0.34375		3/8	
8665875	-	-	-	8.750	0.34449		9	
8665880	-	-	-			10		
8680880	-	-	-	8.800	0.34646	45	10	
520034812	-	-	-	8.860	0.34882		9	
8665890	-	-	-	8.900	0.35039		10	
8680890	-	-	-			9		
8665900	-	-	-	9.000	0.35433	10		
8680900	-	-	-			10		
8665910	-	-	-			9.100	0.35827	46
520035912	23/64	-	-	9.128	0.35938	10		
8665920	-	-	-	9.200	0.36220	10		
8665925	-	-	-			9.250	0.36417	47
8665930	-	-	-	9.300	0.36614	10		
8665940	-	-	-	9.400	0.37008	48	10	
8665950	-	-	-	9.500	0.37402		10	
520037512	3/8	-	-	9.525	0.37500		3/8	
520037612	-	-	-	9.550	0.37598	48	10	
8665960	-	-	-	9.600	0.37795		10	
8665970	-	-	-	9.700	0.38189		49	10
8665975	-	-	-	9.750	0.38386	10		
8665980	-	-	-	9.800	0.38583	50		10
8665990	-	-	-	9.900	0.38976		10	
520039012	25/64	-	-	9.922	0.39063		7/16	
8666000	-	-	-	10.000	0.39370	10		
8666010	-	-	-	10.100	0.39764	11		
8681010	-	-	-			12		
8666020	-	-	-	10.200	0.40157	11		

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.





List 5200 (Continued)

ADO-SUS-3D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8681020	-	-	-	10.200	0.40157	51	113	12
8666025	-	-	-	10.250	0.40354	52		11
8666030	-	-	-	10.300	0.40551			12
8681030	-	-	-	10.319	0.40625	7/16		
520040612	13/32	-	-	10.400	0.40945	53		11
8666040	-	-	-	10.440	0.41102			12
8681040	-	-	-	10.500	0.41339	54		11
520041112	-	-	-	10.600	0.41732			12
8666050	-	-	-	10.700	0.42126	55		11
8681050	-	-	-	10.716	0.42188			12
8666060	-	-	-	10.750	0.42323	56		7/16
8681060	-	-	-	10.800	0.42520			11
8666070	-	-	-	10.860	0.42756	57		12
8681070	-	-	-	10.900	0.42913			11
520042212	27/64	-	-	11.000	0.43307	58		12
8666075	-	-	-	11.100	0.43701			11
8666080	-	-	-	11.113	0.43750	59		7/16
520042712	-	-	-	11.200	0.44094			12
8666090	-	-	-	11.300	0.44488	60		12
8681090	-	-	-	11.400	0.44882			
8666100	-	-	-	11.500	0.45276	61	12	
8681100	-	-	-	11.509	0.45313			
8666110	-	-	-	11.600	0.45669	62	1/2	
520043712	7/16	-	-	11.700	0.46063			
8666120	-	-	-	11.800	0.46457	63	12	
8666130	-	-	-	11.900	0.46850			
8666140	-	-	-	11.906	0.46875	64	1/2	
8666150	-	-	-	12.000	0.47244			
520045312	29/64	-	-	12.100	0.47638	65	12	
8666160	-	-	-	12.200	0.48031			
8666170	-	-	-	12.300	0.48425	66	13	
8666180	-	-	-	12.303	0.48438			
8666190	-	-	-				14	
520046912	15/32	-	-				13	
8666200	-	-	-				14	
8666210	-	-	-				13	
8681210	-	-	-				14	
8666220	-	-	-				13	
8681220	-	-	-				14	
8666230	-	-	-				13	
8681230	-	-	-				14	
520048512	31/64	-	-				1/2	

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.

continued on next page



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5200 (Continued)

ADO-SUS-3D, Coolant-Through

SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8666240	-	-	-	12.400	0.48819	62	128	13
8681240	-	-	-	12.450	0.49016	63		14
520049012	-	-	-	12.500	0.49213			13
8666250	-	-	-	12.600	0.49606	14		
8681250	-	-	-	12.680	0.49921	13		
8666260	-	-	-	12.700	0.50000	64		14
8681260	-	-	-	12.750	0.50197			13
520049912	-	-	-	12.800	0.50394	65		14
8666270	-	-	-	12.900	0.50787			13
520050012	1/2	-	-	13.000	0.51181	66		14
8666275	-	-	-	13.080	0.51496			13
8666280	-	-	-	13.100	0.51575	67		5/8
8681280	-	-	-	13.200	0.51969		14	
8666290	-	-	-	13.300	0.52362	68	140	14
8681290	-	-	-	13.400	0.52756			13
8666300	-	-	-	13.494	0.53125	69		15
8681300	-	-	-	13.500	0.53150			16
520051512	-	-	-	13.600	0.53543	70		5/8
8666310	-	-	-	13.700	0.53937			14
8666320	-	-	-	13.800	0.54331	71		15
8666330	-	-	-	13.870	0.54606			16
8666340	-	-	-	13.900	0.54724	72		15
520053112	17/32	-	-	14.000	0.55118			16
8666350	-	-	-	14.100	0.55512	73		15
8666360	-	-	-	14.200	0.55906			16
8666370	-	-	-	14.288	0.56250	74	5/8	
8666380	-	-	-	14.300	0.56299		15	
520054612	-	-	-	14.300	0.56299	74	16	
8666390	-	-	-	14.400	0.56693		15	
8666400	-	-	-	14.400	0.56693	74	16	
8666410	-	-	-	14.500	0.57087		15	
520055512	-	-	-	14.500	0.57087	74	16	
8666420	-	-	-	14.600	0.57480		15	
520055912	-	-	-	14.600	0.57480	74	16	
520056212	9/16	-	-	14.684	0.57813		5/8	
8666430	-	-	-	14.684	0.57813	74	15	
520056312	-	-	-	14.700	0.57874		16	
8666440	-	-	-	14.700	0.57874	74	15	
520056612	-	-	-	14.800	0.58268		16	
8666450	-	-	-	14.800	0.58268	15		
8681450	-	-	-					
8666460	-	-	-					
520057412	-	-	-					
520057812	37/64	-	-					
8666470	-	-	-					
520057912	-	-	-					
8666480	-	-	-					

Packed: 1 pc.
 Available WXL[®] coating only.
 MEGA COOLER™ applies only to diameter sizes over 6 mm.





List 5200 (Continued)

ADO-SUS-3D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)			
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
520058212	-	-	-	14.800	0.58268	74	140	16			
8666490	-	-	-	14.900	0.58661	75		15			
520058612	-	-	-					15.000	0.59055	16	
8666500	-	-	-	15.100	0.59449	76	15				
8681500	-	-	-				15.200	0.59843	145	16	
8666510	-	-	-				15.300	0.60236			
8666520	-	-	-	15.400	0.60630	77					
8666530	-	-	-	15.500	0.61024	78	16				
8666540	-	-	-	15.600	0.61417			78			
8666550	-	-	-	15.700	0.61811	79		16			
8666560	-	-	-	15.800	0.62205		79				
8666570	-	-	-	15.875	0.62500	80	5/8				
8666580	-	-	-	15.900	0.62598		80	16			
520062512	5/8	-	-	16.000	0.62992		81	150	16		
8666590	-	-	-	16.100	0.63386	81			18		
8666600	-	-	-	16.500	0.64961	83			17		
520063312	-	-	-	16.669	0.65625	85	155	18			
8666650	-	-	-					16.840	0.66299	85	17
8681650	-	-	-					17.000	0.66929	88	18
8666750	-	-	-	17.500	0.68898	88	3/4				
520065612	21/32	-	-	17.610	0.69331	90	160	18			
520066312	-	-	-	17.680	0.69606			90	18		
8666700	-	-	-	17.730	0.69803			93	165	17	
8681700	-	-	-	18.000	0.70866	93	18				
8666750	-	-	-	18.500	0.72835	95	160			19	
520069312	-	-	-	18.640	0.73386			95	20		
520069612	-	-	-	19.000	0.74803			97	165	19	
520069812	-	-	-	19.050	0.75000	97	20				
8666800	-	-	-	19.250	0.75787	98	165			3/4	
8666850	-	-	-	19.500	0.76772			98	20		
8681850	-	-	-	19.660	0.77402			100	165	20	
520073312	-	-	-	19.730	0.77677	100	20				
8666900	-	-	-	19.760	0.77795	100	165			20	
8681900	-	-	-	20.000	0.78740			100	20		
520075012	3/4	-	-								
520075712	-	-	-								
8666950	-	-	-								
520077412	-	-	-								
520077612	-	-	-								
520077812	-	-	-								
8667000	-	-	-								

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5210

ADO-SUS-5D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8667200	-	-	-	2.000	0.07874	18	70	3
8667210	-	-	-	2.100	0.08268	19		
8667220	-	-	-	2.200	0.08661	20		
8667230	-	-	-	2.300	0.09055	21		
521009312	3/32	-	-	2.381	0.09375	22		
8667240	-	-	-	2.400	0.09449	23		
8667250	-	-	-	2.500	0.09843	24		
8667260	-	-	-	2.600	0.10236	25		
8667270	-	-	-	2.700	0.10630	26		
8667276	-	-	-	2.760	0.10866	27		
8667278	-	-	-	2.780	0.10945	28		
8667280	-	-	-	2.800	0.11024	29		
8667290	-	-	-	2.900	0.11417	30		
8667300	-	-	-	3.000	0.11811	31		
8667310	-	-	-	3.100	0.12205	32		
8667315	-	-	-	3.150	0.12402	33		
521012512	1/8	-	-	3.175	0.12500	34		
8667320	-	-	-	3.200	0.12598	35		
8667326	-	-	-	3.260	0.12835	36		
8667330	-	-	-	3.300	0.12992	37		
8667340	-	-	-	3.400	0.13386	38		
8667350	-	-	-	3.500	0.13780	39		
8667360	-	-	-	3.600	0.14173	40		
8667366	-	-	-	3.660	0.14409	41		
8667368	-	-	-	3.680	0.14488	42		
8667370	-	-	-	3.700	0.14567	43		
8667375	-	-	-	3.750	0.14764	44		
8667380	-	-	-	3.800	0.14961	45		
8667390	-	-	-	3.900	0.15354	46		
521015612	5/32	-	-	3.969	0.15625	47		
8667400	-	-	-	4.000	0.15748	48		
521016112	-	20	-	4.089	0.16100	49		
8667410	-	-	-	4.100	0.16142	50		
8682410	-	-	-	4.200	0.16535	51		
8667420	-	-	-	4.300	0.16929	52		
8682420	-	-	-	4.366	0.17188	53		
8667430	-	-	-	4.400	0.17323	54		
8682430	-	-	-	4.500	0.17717	55		
521017112	11/64	-	-	4.575	0.18062	56		
8667440	-	-	-	4.600	0.18110	57		
8682440	-	-	-	4.700	0.18504	58		
8667450	-	-	-	4.800	0.18898	59		
8682450	-	-	-	4.900	0.19292	60		
8667460	-	-	-	5.000	0.19686	61		
8682460	-	-	-	5.100	0.20080	62		

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER[™] applies only to diameter sizes over 6 mm.





List 5210 (Continued)

ADO-SUS-5D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8667462	-	-	-	4.620	0.18189	42	95	5
8667464	-	-	-	4.640	0.18268			
8667470	-	-	-	4.700	0.18504	43		6
8682470	-	-	-					
521018712	3/16	-	-	4.763	0.18750	44		3/16
8667480	-	-	-	4.800	0.18898			
8682480	-	-	-	4.850	0.19094	45		5
8667485	-	-	-					
8667490	-	-	-	4.900	0.19291	41		6
8682490	-	-	-					
8667500	-	-	-	5.000	0.19685	42	5	
8682500	-	-	-					
8667510	-	-	-	5.100	0.20079	43	5	
521020312	13/64	-	-	5.159	0.20313			
8667520	-	-	-	5.200	0.20472	44	6	
8667525	-	-	-	5.250	0.20669			
8667530	-	-	-	5.300	0.20866	45	1/4	
8667540	-	-	-	5.400	0.21260			
521021312	-	3	-	5.410	0.21300	46	109	
8667550	-	-	-	5.500	0.21654			
8667552	-	-	-	5.520	0.21732	47		6
8667554	-	-	-	5.540	0.21811			
521021812	7/32	-	-	5.556	0.21875	48		1/4
8667560	-	-	-	5.600	0.22047			
8667570	-	-	-	5.700	0.22441	49		6
8667580	-	-	-	5.800	0.22835			
8667590	-	-	-	5.900	0.23228	50		7
521023412	15/64	-	-	5.953	0.23438			
8667600	-	-	-	6.000	0.23622	51	8	
8667610	-	-	-	6.100	0.24016		52	7
8682610	-	-	-	6.200	0.24409	53		8
8667620	-	-	-					
8682620	-	-	-	6.250	0.24606	54	7	
8667625	-	-	-	6.300	0.24803		55	8
8667630	-	-	-	6.350	0.25000	56		1/4
8667635	1/4	-	E	6.400	0.25197		57	7
8667640	-	-	-	6.400	0.25197	58		8
8682640	-	-	-	6.500	0.25591		59	7
8667650	-	-	-					
8682650	-	-	-	6.528	0.25700	60	8	
521025712	-	-	F	6.528	0.25700		61	7
8667660	-	-	-	6.600	0.25984			

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER[™] applies only to diameter sizes over 6 mm.

continued on next page

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5210 (Continued)

ADO-SUS-5D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8682660	-	-	-	6.600	0.25984	53	109	8
8667670	-	-	-	6.700	0.26378	54		7
8682670	-	-	-	6.700	0.26378	54		8
521026512	17/64	-	-	6.747	0.26563	55		55
8667675	-	-	-	6.750	0.26575	54		7
8667680	-	-	-	6.800	0.26772	55		7
8682680	-	-	-	6.800	0.26772	55		8
8667690	-	-	-	6.900	0.27165	56		7
8682690	-	-	-	6.900	0.27165	56		8
8667700	-	-	-	7.000	0.27559	57		7
8682700	-	-	-	7.000	0.27559	57	8	
8667710	-	-	-	7.100	0.27953	58	118	5/16
521028112	9/32	-	-	7.144	0.28125	58		8
8667720	-	-	-	7.200	0.28346	59		8
8667725	-	-	-	7.250	0.28543	59		8
8667730	-	-	-	7.300	0.28740	60		8
8667736	-	-	-	7.360	0.28976	60		8
8667738	-	-	-	7.380	0.29055	60		8
8667740	-	-	-	7.400	0.29134	61		8
8667750	-	-	-	7.500	0.29528	61		8
8667752	-	-	-	7.520	0.29606	62		8
8667754	-	-	-	7.540	0.29685	63	8	
521029612	19/64	-	-	7.541	0.29688	64	5/16	
8667760	-	-	-	7.600	0.29921	64	128	8
8667770	-	-	-	7.700	0.30315	65		9
8667775	-	-	-	7.750	0.30512	65		10
8667780	-	-	-	7.800	0.30709	66		9
8667790	-	-	-	7.900	0.31102	66		10
521031212	5/16	-	-	7.938	0.31250	67		9
8667800	-	-	-	8.000	0.31496	67		10
8667810	-	-	-	8.100	0.31890	68		9
8682810	-	-	-	8.100	0.31890	68		10
8667820	-	-	-	8.200	0.32283	69		9
8682820	-	-	-	8.200	0.32283	69	10	
8667825	-	-	-	8.250	0.32480	70	9	
8667830	-	-	-	8.300	0.32677	70	10	
8682830	-	-	-	8.300	0.32677	70	10	
521032812	21/64	-	-	8.334	0.32813	71	3/8	
8667840	-	-	-	8.400	0.33071	71	9	
8682840	-	-	-	8.400	0.33071	71	10	
521033212	-	-	Q	8.433	0.33200	72	9	
8667850	-	-	-	8.500	0.33465	72	10	
8682850	-	-	-	8.500	0.33465	72	9	
8667860	-	-	-	8.600	0.33858	73	10	
8682860	-	-	-	8.600	0.33858	73	10	
8667870	-	-	-	8.700	0.34252	74	9	

Packed: 1 pc.
 Available WXL® coating only.
 MEGA COOLER™ applies only to diameter sizes over 6 mm.





List 5210 (Continued)

ADO-SUS-5D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)								
	Fractional Size	Wire Gage	Letter Size	mm	Inch											
8682870	-	-	-	8.700	0.34252	70	128	10								
521034312	11/32	-	-	8.731	0.34375			3/8								
8667875	-	-	-	8.750	0.34449			9								
8667880	-	-	-	8.800	0.34646	71		10								
8667890	-	-	-	8.900	0.35039	72		9								
8682880	-	-	-					10								
8667900	-	-	-	9.000	0.35433	73		9								
8682900	-	-	-					10								
8667910	-	-	-	9.100	0.35827	74		9								
521035912	23/64	-	-	9.128	0.35938			10								
8667920	-	-	-	9.200	0.36220	75		136	3/8							
8667924	-	-	-	9.240	0.36378				74							
8667925	-	-	-	9.250	0.36417	76	10		10							
8667926	-	-	-	9.260	0.36457					75						
8667930	-	-	-	9.300	0.36614	77				146	11					
8667936	-	-	-	9.360	0.36850							74				
8667938	-	-	-	9.380	0.36929	78						10	10			
8667940	-	-	-	9.400	0.37008									76		
8667950	-	-	-	9.500	0.37402	79								10	10	
8667952	-	-	-	9.520	0.37480											75
521037512	3/8	-	-	9.525	0.37500	77										3/8
8667954	-	-	-	9.540	0.37559	80										10
8667960	-	-	-	9.600	0.37795			76								
8667970	-	-	-	9.700	0.38189	81		10								
8667975	-	-	-	9.750	0.38386		77									
8667980	-	-	-	9.800	0.38583	82	10		10							
8667990	-	-	-	9.900	0.38976					78						
521039012	25/64	-	-	9.922	0.39063	83				10	10					
8668000	-	-	-	10.000	0.39370							79				
8668010	-	-	-	10.100	0.39764	84						10	10			
8683010	-	-	-	10.200	0.40157									80		
8668020	-	-	-			81										
8683020	-	-	-	10.250	0.40354	82								10	10	
8668025	-	-	-													82
8668030	-	-	-	10.300	0.40551	83										10
8683030	-	-	-	10.319	0.40625			83								
521040612	13/32	-	-			10.400		0.40945								
8668040	-	-	-	10.400	0.40945	84										
8683040	-	-	-			10.500	0.41339	85	10							
8668050	-	-	-	85												
8683050	-	-	-	10.600	0.41732	85										
8668060	-	-	-					11								

Packed: 1 pc.
Available WXL® coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5210 (Continued)

ADO-SUS-5D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL	30°	SHANK h6
---------------------------	----------------	------------	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8683060	-	-	-	10.600	0.41732	85	146	12
8668070	-	-	-	10.700	0.42126	86		11
8683070	-	-	-	10.716	0.42188			12
521042212	27/64	-	-	10.716	0.42188	7/16		
8668075	-	-	-	10.750	0.42323	87	11	
8668080	-	-	-	10.800	0.42520		12	
8683080	-	-	-	10.800	0.42520		11	
8668090	-	-	-	10.800	0.42520		12	
8668090	-	-	-	10.900	0.42913	88	11	
8683090	-	-	-	10.900	0.42913		12	
8668100	-	-	-	11.000	0.43307	89	11	
8683100	-	-	-	11.000	0.43307		12	
8668110	-	-	-	11.100	0.43701		12	
521043812	7/16	-	-	11.113	0.43750		7/16	
8668120	-	-	-	11.200	0.44094	90	12	
8668122	-	-	-	11.220	0.44173			
8668124	-	-	-	11.240	0.44252			
8668130	-	-	-	11.300	0.44488			
8668136	-	-	-	11.360	0.44724	91	12	
8668138	-	-	-	11.380	0.44803			
8668140	-	-	-	11.400	0.44882	92	156	
8668150	-	-	-	11.500	0.45276			
521045312	29/64	-	-	11.509	0.45313			
8668160	-	-	-	11.600	0.45669			
8668170	-	-	-	11.700	0.46063	93	12	
8668180	-	-	-	11.800	0.46457			
8668190	-	-	-	11.900	0.46850	94	12	
521046912	15/32	-	-	11.906	0.46875			
8668200	-	-	-	12.000	0.47244	95	12	
8668210	-	-	-	12.100	0.47638			
8683210	-	-	-	12.100	0.47638			
8668220	-	-	-	12.200	0.48031			
8683220	-	-	-	12.200	0.48031	96	13	
8668230	-	-	-	12.300	0.48425			
8683230	-	-	-	12.300	0.48425	97	14	
521048512	31/64	-	-	12.303	0.48438			
8668240	-	-	-	12.400	0.48819	98	13	
8683240	-	-	-	12.400	0.48819			
8668250	-	-	-	12.500	0.49213			
8683250	-	-	-	12.500	0.49213			
8668260	-	-	-	12.600	0.49606	99	13	
8683260	-	-	-	12.600	0.49606			
8668270	-	-	-	12.700	0.50000	100	14	
521050012	1/2	-	-	12.700	0.50000			
8668275	-	-	-	12.750	0.50197			
8668280	-	-	-	12.750	0.50197			
8668280	-	-	-	12.800	0.50394	101	13	
8683280	-	-	-	12.800	0.50394			

Packed: 1 pc.
 Available WXL[®] coating only.
 MEGA COOLER™ applies only to diameter sizes over 6 mm.





List 5210 (Continued)

ADO-SUS-5D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8668290	-	-	-	12.900	0.50787	104	167	13	
8683290	-	-	-	12.900	0.50787			14	
8668300	-	-	-	13.000	0.51181			13	
8683300	-	-	-	13.100	0.51575	105	176	14	
8668310	-	-	-	13.200	0.51969	106			
8668320	-	-	-	13.250	0.52165	107			
8668325	-	-	-	13.300	0.52362	108			5/8
8668330	-	-	-	13.400	0.52756				
8668340	-	-	-	13.494	0.53125				
521053112	17/32	-	-	13.500	0.53150	109			185
8668350	-	-	-	13.600	0.53543	110			
8668360	-	-	-	13.700	0.53937	111			
8668370	-	-	-	13.800	0.54331	112			
8668380	-	-	-	13.900	0.54724	113	15		
8668390	-	-	-	14.000	0.55118	114	16		
8668400	-	-	-	14.100	0.55512	115	15		
8668410	-	-	-	14.200	0.55906	116	15		
521055512	-	-	-	14.288	0.56250	117	16		
8668420	-	-	-	14.300	0.56299	118	5/8		
521055912	9/16	-	-	14.400	0.56693	119	15		
521056212	-	-	-	14.400	0.56693	120	16		
8668430	-	-	-	14.500	0.57087	121	15		
521056312	-	-	-	14.600	0.57480	122	16		
8668440	-	-	-	14.700	0.57874	123	15		
8668440	-	-	-	14.800	0.58268	124	16		
521056612	-	-	-	14.900	0.58661	125	15		
8668450	-	-	-	15.000	0.59055	126	16		
8683450	-	-	-	15.100	0.59449	127	15		
8668460	-	-	-	15.200	0.59843	128	16		
521057412	-	-	-	15.250	0.60039	129	15		
8668470	-	-	-	15.300	0.60236	130	16		
521057812	-	-	-	15.400	0.60630	131	15		
8668480	-	-	-	15.500	0.61024	132	16		
521058212	-	-	-	15.500	0.61024	133	15		
8668490	-	-	-	15.500	0.61024	134	16		
521058612	-	-	-	15.500	0.61024	135	15		
8668500	-	-	-	15.500	0.61024	136	16		
8668510	-	-	-	15.500	0.61024	137	15		
8668520	-	-	-	15.500	0.61024	138	16		
8668525	-	-	-	15.500	0.61024	139	15		
8668530	-	-	-	15.500	0.61024	140	16		
8668540	-	-	-	15.500	0.61024	141	15		
8668550	-	-	-	15.500	0.61024	142	16		

Packed: 1 pc.
Available WXL[®] coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5210 (Continued)

ADO-SUS-5D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8668560	-	-	-	15.600	0.61417	125	193	16
8668570	-	-	-	15.700	0.61811	126		
8668580	-	-	-	15.800	0.62205	127		
521062512	5/8	-	-	15.875	0.62500	128	16	5/8
8668590	-	-	-	15.900	0.62598			
8668600	-	-	-	16.000	0.62992	113	184	16
521063312	-	-	-	16.100	0.63386			
8668650	-	-	-	16.500	0.64961	116	18	17
8683650	-	-	-	16.500	0.64961			
521065612	21/32	-	-	16.669	0.65625	117	184	18
8668700	-	-	-	16.669	0.65625			
8683700	-	-	-	17.000	0.66929	119	184	17
8668750	-	-	-	17.000	0.66929			
8668750	-	-	-	17.500	0.68898	123	191	18
8668800	-	-	-	17.500	0.68898			
8668850	-	-	-	18.000	0.70866	126	198	19
8668850	-	-	-	18.000	0.70866			
8668850	-	-	-	18.500	0.72835	130	198	20
8668900	-	-	-	18.500	0.72835			
8668900	-	-	-	19.000	0.74803	133	198	19
8683900	-	-	-	19.000	0.74803			
521075012	3/4	-	-	19.050	0.75000	134	205	3/4
521075712	-	-	-	19.250	0.75787			
8668950	-	-	-	19.500	0.76772	137	205	20
8669000	-	-	-	19.500	0.76772			
8669000	-	-	-	20.000	0.78740	140		

Packed: 1 pc.
Available WXL® coating only.
MEGA COOLER™ applies only to diameter sizes over 6 mm.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				


good best





List 5220

ADO-SUS-8D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8686200	-	-	-	2.000	0.07874	22	75	3
8686210	-	-	-	2.100	0.08268	24		
8686220	-	-	-	2.200	0.08661	25		
8686230	-	-	-	2.300	0.09055	26		
522009312	3/32	-	-	2.381	0.09375	27		
8686240	-	-	-	2.400	0.09449			
8686250	-	-	-	2.500	0.09843	28		
8686260	-	-	-	2.600	0.10236	29		
8686270	-	-	-	2.700	0.10630	30		
522010912	7/64	-	-	2.778	0.10938	31		
8686280	-	-	-	2.800	0.11024			
8686290	-	-	-	2.900	0.11417	32		
8686300	-	-	-	3.000	0.11811	33		
8684310	-	-	-	3.100	0.12205	34		
522012512	1/8	-	-	3.175	0.12500	35		
8684320	-	-	-	3.200	0.12598	36	4	
8684330	-	-	-	3.300	0.12992			
8684340	-	-	-	3.400	0.13386	37		
8684350	-	-	-	3.500	0.13780	39		
8684360	-	-	-	3.600	0.14173	40		
8684370	-	-	-	3.700	0.14567	41		
8684380	-	-	-	3.800	0.14961	42		
8684390	-	-	-	3.900	0.15354	43		
522015612	5/32	-	-	3.970	0.15630	44		3/16
8684400	-	-	-	4.000	0.15748			4
522016112	-	20	-	4.089	0.16100	45	6	
8686410	-	-	-	4.100	0.16142		5	
8684410	-	-	-	4.100	0.16142		6	
8686420	-	-	-	4.200	0.16535		5	
8684420	-	-	-	4.200	0.16535		6	
8686430	-	-	-	4.300	0.16929		5	
8684430	-	-	-	4.300	0.16929		6	
522017212	11/64	-	-	4.366	0.17188		47	3/16
8686440	-	-	-	4.400	0.17323			5
8684440	-	-	-	4.400	0.17323		6	
8686450	-	-	-	4.500	0.17717	50	5	
8684450	-	-	-	4.500	0.17717		6	

Packed: 1 pc.
Available WXL® coating only.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5220	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 5220 (Continued)

ADO-SUS-8D, Coolant-Through



SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8686460	-	-	-	4.600	0.18110	51	105	5
8684460	-	-	-	4.600	0.18110	51		6
8686470	-	-	-	4.700	0.18504	52		5
8684470	-	-	-	4.700	0.18504			6
522018712	3/16	-	-	4.763	0.18750	53		3/16
8686480	-	-	-	4.800	0.18898			5
8684480	-	-	-	4.800	0.18898	53		6
8686490	-	-	-	4.900	0.19291	54		5
8684490	-	-	-	4.900	0.19291			6
8686500	-	-	-	5.000	0.19685	55		5
8684500	-	-	-	5.000	0.19685	115	6	
8684510	-	-	-	5.100	0.20079		56	6
522020312	13/64	-	-	5.159	0.20313		57	1/4
8684520	-	-	-	5.200	0.20472			57
8684530	-	-	-	5.300	0.20866		58	6
8684540	-	-	-	5.400	0.21260			58
522021312	-	3	-	5.410	0.21300		59	1/4
8684550	-	-	-	5.500	0.21654			59
522021812	7/32	-	-	5.556	0.21875		60	1/4
8684560	-	-	-	5.600	0.22047			60
8684570	-	-	-	5.700	0.22441	61	6	
8684580	-	-	-	5.800	0.22835		61	6
8684590	-	-	-	5.900	0.23228	62	6	
522023412	15/64	-	-	5.953	0.23438		62	6
8684600	-	-	-	6.000	0.23622	125	1/4	
8686610	-	-	-	6.100	0.24016		63	6
8684610	-	-	-	6.100	0.24016		64	7
8686620	-	-	-	6.200	0.24409			64
8684620	-	-	-	6.200	0.24409		65	7
8686630	-	-	-	6.300	0.24803			65
8684630	-	-	-	6.300	0.24803		66	7
522025012	1/4	-	E	6.350	0.25000			66
8686640	-	-	-	6.400	0.25197		67	1/4
8684640	-	-	-	6.400	0.25197			67
8686650	-	-	-	6.500	0.25591	68	8	
8684650	-	-	-	6.500	0.25591		68	7
522025712	-	-	F	6.528	0.25700	69	8	
8686660	-	-	-	6.600	0.25984		69	7
8684660	-	-	-	6.600	0.25984	70	8	
8686670	-	-	-	6.700	0.26378		70	7
8684670	-	-	-	6.700	0.26378	71	8	
522026512	17/64	-	-	6.747	0.26563		71	8
8686680	-	-	-	6.800	0.26772	72	5/16	
8684680	-	-	-	6.800	0.26772		72	7
8686690	-	-	-	6.900	0.27165	73	8	
8684690	-	-	-	6.900	0.27165		73	7

Packed: 1 pc.
Available WXL[®] coating only.





List 5220 (Continued)

ADO-SUS-8D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8686700	-	-	-	7.000	0.27559	77	125	7
8684700	-	-	-	7.000	0.27559	77		8
8684710	-	-	-	7.100	0.27953	78		8
522028112	9/32	-	-	7.144	0.28125	79	140	5/16
8684720	-	-	-	7.200	0.28346			80
8684730	-	-	-	7.300	0.28740	81		8
8684740	-	-	-	7.400	0.29134	83	140	5/16
8684750	-	-	-	7.500	0.29528	84		
522029612	19/64	-	-	7.541	0.29688	85		
8684760	-	-	-	7.600	0.29921	86	140	8
8684770	-	-	-	7.700	0.30315	87		
8684780	-	-	-	7.800	0.30709	88		
8684790	-	-	-	7.900	0.31102	89	140	5/16
522031212	5/16	-	-	7.938	0.31250	90		
8684800	-	-	-	8.000	0.31496	91		
8686810	-	-	-	8.100	0.31890	92	150	9
8684810	-	-	-	8.100	0.31890	93		10
8686820	-	-	-	8.200	0.32283	94		9
8684820	-	-	-	8.200	0.32283	95	10	
8686830	-	-	-	8.300	0.32677	96	150	9
8684830	-	-	-	8.300	0.32677	97		10
522032812	21/64	-	-	8.334	0.32813	98		3/8
8686840	-	-	-	8.400	0.33071	99	150	9
8684840	-	-	-	8.400	0.33071	100		10
522033112	-	-	Q	8.433	0.33200	101		11/32
8686850	-	-	-	8.500	0.33465	102	150	9
8684850	-	-	-	8.500	0.33465	103		10
8686860	-	-	-	8.600	0.33858	104		9
8684860	-	-	-	8.600	0.33858	105	10	
8686870	-	-	-	8.700	0.34252	106	150	9
8684870	-	-	-	8.700	0.34252	107		10
522034312	11/32	-	-	8.731	0.34375	108		3/8
8686880	-	-	-	8.800	0.34646	109	150	9
8684880	-	-	-	8.800	0.34646	110		10
8686890	-	-	-	8.900	0.35039	111		9
8684890	-	-	-	8.900	0.35039	112	10	
8686900	-	-	-	9.000	0.35433	113	150	9
8684900	-	-	-	9.000	0.35433	114		10
8684910	-	-	-	9.100	0.35827	115		10
522035912	23/64	-	-	9.128	0.35938	116	160	3/8
8684920	-	-	-	9.200	0.36220	117		10
8684930	-	-	-	9.300	0.36614	118		
8684940	-	-	-	9.400	0.37008	119	10	

Packed: 1 pc.
Available WXL[®] coating only.

continued on next page **ADR**

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5220	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>				


good best





List 5220 (Continued)

ADO-SUS-8D, Coolant-Through

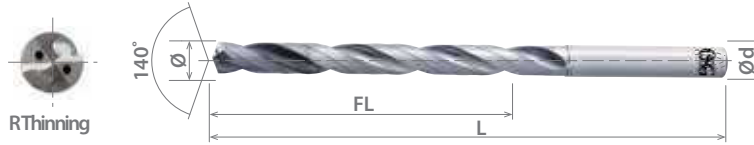

SPEED FEED P358	CARBIDE	WXL		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8684950	-	-	-	9.500	0.37402	105	160	10	
522037512	3/8	-	-	9.525	0.37500			3/8	
8684960	-	-	-	9.600	0.37795			106	10
8684970	-	-	-	9.700	0.38189			107	
8684980	-	-	-	9.800	0.38583			108	
8684990	-	-	-	9.900	0.38976			109	
522039012	25/64	-	-	9.922	0.39063	110	7/16		
8685000	-	-	-	10.000	0.39370		10		
8687010	-	-	-	10.100	0.39764	111	11		
8685010	-	-	-				12		
8687020	-	-	-	10.200	0.40157	112	11		
8685020	-	-	-				12		
8687030	-	-	-	10.300	0.40551	113	11		
8685030	-	-	-				12		
522040612	13/32	-	-	10.319	0.40625	114	7/16		
8687040	-	-	-	10.400	0.40945		11		
8685040	-	-	-	10.500	0.41339	116	12		
8687050	-	-	-				11		
8685050	-	-	-	10.600	0.41732	117	12		
8687060	-	-	-				11		
8685060	-	-	-	10.700	0.42126	118	12		
8687070	-	-	-				11		
8685070	-	-	-	10.716	0.42188	119	7/16		
522042212	27/64	-	-				10.800	0.42520	12
8687080	-	-	-	10.900	0.42913	120	11		
8685080	-	-	-				12		
8687090	-	-	-	11.000	0.43307	121	11		
8685090	-	-	-				12		
8687100	-	-	-	11.100	0.43701	122	11		
8685100	-	-	-				12		
8685110	-	-	-	11.113	0.43750	123	12		
522043712	7/16	-	-					11.200	0.44094
8685120	-	-	-	11.300	0.44488	124	194		
8685130	-	-	-					125	
8685140	-	-	-	11.400	0.44882	127	1/2		
8685150	-	-	-					128	
522045312	29/64	-	-	11.509	0.45313	129	12		
8685160	-	-	-	11.600	0.45669			130	
8685170	-	-	-	11.700	0.46063	131	14		
8685180	-	-	-	11.800	0.46457			132	
8685190	-	-	-	11.900	0.46850	133	206		
8685200	-	-	-	12.000	0.47244			134	
522047612	-	-	-	12.100	0.47638	135	14		
522048012	-	-	-	12.200	0.48031			136	
522048412	-	-	-	12.300	0.48425	136	14		
522048812	-	-	-	12.400	0.48819			136	

Packed: 1 pc.
Available WXL[®] coating only.





List 5220 (Continued)

ADO-SUS-8D, Coolant-Through



EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)
522049212	-	-	-	12.500	0.49213	138	206	13
522049312	-	-	-					
522049612	-	-	-	12.600	0.49606	139		14
522050012	1/2	-	-	12.700	0.50000	140		1/2

Packed: 1 pc.
Available WXL[®] coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy	Titanium	H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum				Inconel	Hardened Steels	Hardened Steels	
	Low	Med.	High			300	400	17-4 PH		6061	Casting	6Al4V (30 HRC)	~35 HRC			35-45 HRC	45-50 HRC
5220	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				

good best





A Brand[®] AD-LDS

Advanced Performance Spot Drills

List 5190

AD-LDS

SPEED FEED P359	CARBIDE	EgiAs	12°	25°	SHANK h7
---------------------------	----------------	--------------	------------	------------	--------------------



EDP Number	Diameter					Min. Drill Hole Size	Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Point Angle a	Helix
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
8688933	-	-	-	3.000	0.11811	1.2	9	48	3	90°	12°
8688957	-	-	-							120°	25°
8688966	-	-	-							140°	25°
8688934	-	-	-	4.000	0.15748	1.5	12	54	4	90°	12°
8688958	-	-	-							120°	25°
8688967	-	-	-							140°	25°
519012017	-	-	-	5.000	0.19685	1.7	14	70	5	90°	12°
519022017	-	-	-							120°	25°
519032017	-	-	-							140°	25°
8688935	-	-	-	6.000	0.23622	1.9	15	72	6	90°	12°
8688959	-	-	-							120°	25°
8688968	-	-	-							140°	25°
519012517	-	-	-	6.350	0.25000	2.1	17	75	1/4	90°	12°
519022517	1/4	-	E							120°	25°
519032517	-	-	-							140°	25°
8688936	-	-	-	8.000	0.31496	2.1	20	81	8	90°	12°
8688960	-	-	-							120°	25°
8688969	-	-	-							140°	25°
519013817	-	-	-	9.525	0.37500	2.3	24	93	3/8	90°	12°
519023817	3/8	-	-							120°	25°
519033817	-	-	-							140°	25°
8688937	-	-	-	10.000	0.39370	2.5	24	93	10	90°	12°
8688961	-	-	-							120°	25°
8688970	-	-	-							140°	25°
8688938	-	-	-	12.000	0.47244	2.5	28	108	12	90°	12°
8688962	-	-	-							120°	25°
8688971	-	-	-							140°	25°
519015017	-	-	-	12.700	0.50000	3.0	36	111	1/2	90°	12°
519025017	1/2	-	-							120°	25°
519035017	-	-	-							140°	25°
519016217	-	-	-	15.875	0.62500	5.0	41	118	5/8	90°	12°
519026217	5/8	-	-							120°	25°
519036217	-	-	-							140°	25°
519016317	-	-	-	16.000	0.62992	5.0	41	118	16	90°	12°
519026317	-	-	-							120°	25°
519036317	-	-	-							140°	25°
519017517	-	-	-	19.050	0.75000	5.0	46	132	3/4	90°	12°
519027517	3/4	-	-							120°	25°
519037517	-	-	-							140°	25°
519017917	-	-	-	20.000	0.78740	5.0	46	132	20	90°	12°
519027917	-	-	-							120°	25°
519037917	-	-	-							140°	25°

Packed: 1 pc.
Available EgiAs coating only.
Minimum drill hole size is recommended for chamfering operations.





List 5190 (Continued)

AD-LDS

SPEED FEED P359	CARBIDE	EgiAs	12°	25°	SHANK h7
---------------------------	----------------	--------------	------------	------------	--------------------

EDP Number	Diameter					Min. Drill Hole Size	Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	Point Angle a	Helix
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
519019817	-	-	-	25.000	0.98425	5.0	53	151	25	90°	12°
519029817	-	-	-							120°	25°
519039817	-	-	-							140°	25°

Packed: 1 pc.

Available EgiAs coating only.

Minimum drill hole size is recommended for chamfering operations.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5190	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 5600

WHILE SUPPLIES LAST

SPEED FEED P360	CARBIDE	WD1		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

TRS-HO-3D, 3 Flute, Coolant-Through



Cutting Diameter Tolerance (h8)		
Size	mm	inch
4 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)			
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
560016011	-	20	-	4.089	0.16100	25	80	5			
560016111	-	-	-	4.100	0.16142						
560016311	-	-	-	4.160	0.16378						
560016511	-	-	-	4.200	0.16535						
560016811	-	-	-	4.270	0.16811						
560016911	-	-	-	4.300	0.16929						
560017211	11/64	-	-	4.366	0.17188	26		3/16			
560017311	-	-	-	4.400	0.17323						
560017511	-	-	-	4.460	0.17559	27		5			
560017711	-	-	-	4.500	0.17717						
560018511	-	-	-	4.700	0.18504						
560018711	3/16	-	-	4.763	0.18750	29	3/16				
560018911	-	-	-	4.800	0.18898						
560019211	-	-	-	4.900	0.19291	30	5				
560020311	13/64	-	-	5.159	0.20313	26	82	15/64			
8660530	-	-	-	5.300	0.20866	27		7			
8660540	-	-	-	5.400	0.21260						
560021311	-	3	-	5.410	0.21300	28			1/4		
560021911	7/32	-	-	5.558	0.21880				29	15/64	
8660570	-	-	-	5.700	0.22441	29				6	
560023411	15/64	-	-	5.953	0.23438	30			15/64		
8660610	-	-	-	6.100	0.24016	31			88		
8660620	-	-	-	6.200	0.24409						
8660630	-	-	-	6.300	0.24803	32				8	
8660660	-	-	-	6.600	0.25984						
8660670	-	-	-	6.700	0.26378	33	11				
8660670	-	-	-	6.700	0.26378						
8660760	-	-	-	7.600	0.29921	34		13			
8660770	-	-	-	7.700	0.30315						
8660780	-	-	-	7.800	0.30709	39					10
560032811	21/64	-	-	8.334	0.32813						
8660840	-	-	-	8.400	0.33071	42			11/32		
8660980	-	-	-	9.800	0.38583				49		
8660990	-	-	-	9.900	0.38976	50				106	
8661000	-	-	-	10.000	0.39370						
8661010	-	-	-	10.100	0.39764	51	113				
8661050	-	-	-	10.500	0.41339						
8661060	-	-	-	10.600	0.41732	53		11			
8661070	-	-	-	10.700	0.42126						
560045311	29/64	-	-	11.509	0.45313	58			128		
8661190	-	-	-	11.900	0.46850						
560046911	15/32	-	-	11.906	0.46875	60					15/32
8661210	-	-	-	12.100	0.47638						61
8661220	-	-	-	12.200	0.48031						
8661230	-	-	-	12.300	0.48425	62				13	
8661250	-	-	-	12.500	0.49213						
8661260	-	-	-	12.600	0.49606	63	128				
560050011	1/2	-	-	12.700	0.50000						
8661270	-	-	-	12.700	0.50000	64		1/2			
8661310	33/64	-	-	13.097	0.51563			66	13		
8661320	-	-	-	13.200	0.51969	67			134		
8661340	-	-	-	13.400	0.52756						

Packed: 1 pc.
Available WD1 coating only.





List 5600 (Continued)

WHILE SUPPLIES LAST

SPEED FEED P360	CARBIDE	WD1		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

TRS-HO-3D, 3 Flute, Coolant-Through

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8661420	-	-	-	14.200	0.55906	71	140	15
8661430	-	-	-	14.300	0.56299	72		
8661440	-	-	-	14.400	0.56693	73		
8661450	-	-	-	14.500	0.57087	74		
8661460	-	-	-	14.600	0.57480	75		
8661470	-	-	-	14.700	0.57874	76		
8661480	-	-	-	14.800	0.58268	77		
8661490	-	-	-	14.900	0.58661	78		
8661500	-	-	-	15.000	0.59055	79		
560059311	19/32	-	-	15.081	0.59375	80		
8661540	-	-	-	15.400	0.60630	81	145	16
8661570	-	-	-	15.700	0.61811	82		
8661580	-	-	-	15.800	0.62205	83		
560063311	-	-	-	16.100	0.63386	84	150	18
560066311	-	-	-	16.840	0.66299	85		
560071811	23/32	-	-	18.256	0.71875	92	160	3/4
8661850	-	-	-	18.500	0.72835	93		
560075711	-	-	-	19.250	0.75787	97		
8661950	-	-	-	19.500	0.76772	98	165	20
8662000	-	-	-	20.000	0.78740	100		

Packed: 1 pc.
Available WD1 coating only.



Additional Offerings

Looking for more sizes? Try A Brand® ADO-TRS 3D (p. 66-69)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5600	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5610 WHILE SUPPLIES LAST

SPEED FEED P360	CARBIDE	WD1		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

TRS-HO-5D, 3 Flute, Coolant-Through



Cutting Diameter Tolerance (h8)		
Size	mm	inch
4 ≤ D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
561016011	-	20	-	4.089	0.16100	37	95	5	
561016111	-	-	-	4.100	0.16142				
561016511	-	-	-	4.200	0.16535	38			
561017211	11/64	-	-	4.366	0.17188	40		3/16	
561018111	-	-	-	4.600	0.18110	42		5	
561018511	-	-	-	4.700	0.18504	43		3/16	
561018711	3/16	-	-	4.763	0.18750				
561018911	-	-	-	4.800	0.18898	44		5	
561019211	-	-	-	4.900	0.19291	45		100	
561021311	-	3	-	5.410	0.21300	44			1/4
561021911	7/32	-	-	5.556	0.21875	45	15/64		
8662570	-	-	-	5.700	0.22441	46	6		
8662590	-	-	-	5.900	0.23228	48	15/64		
561023411	15/64	-	-	5.953	0.23438				
561025011	1/4	-	E	6.350	0.25000	52	109		1/4
8662640	-	-	-	6.400	0.25197				7
8662710	-	-	-	7.100	0.27953	57	8		
8662720	-	-	-	7.200	0.28346	58	8		
8662740	-	-	-	7.400	0.29134				
561029711	19/64	-	-	7.541	0.29688	60	5/16		
8662760	-	-	-	7.600	0.29921	61	8		
8662770	-	-	-	7.700	0.30315				
8662790	-	-	-	7.900	0.31102	64	8		
8662800	-	-	-	8.000	0.31496				
8662830	-	-	-	8.300	0.32677	67	128	8	
561032811	21/64	-	-	8.334	0.32813				
561033211	-	-	Q	8.433	0.33200	68	11/32		
8662860	-	-	-	8.600	0.33858	69	9		
8662880	-	-	-	8.800	0.34646	71			
561035911	23/64	-	-	9.128	0.35938	73	25/64		
8662990	-	-	-	9.900	0.38976	80	10		
8663070	-	-	-	10.700	0.42126	86	146	11	
8663080	-	-	-	10.800	0.42520				
8663090	-	-	-	10.900	0.42913	88			
8663120	-	-	-	11.200	0.44094	90	156	12	
8663130	-	-	-	11.300	0.44488				
8663160	-	-	-	11.600	0.45669	93			
561046911	15/32	-	-	11.906	0.46875	96	15/32		
8663210	-	-	-	12.100	0.47638	97	13		
8663230	-	-	-	12.300	0.48425				
561048411	31/64	-	-	12.303	0.48438	99	1/2		
8663240	-	-	-	12.400	0.48819	100	167	13	
8663270	-	-	-	12.700	0.50000				
8663280	-	-	-	12.800	0.50394	103			
8663290	-	-	-	12.900	0.50787	104			
8663310	33/64	-	-	13.097	0.51563	105	176	14	
8663320	-	-	-	13.200	0.51969				
8663330	-	-	-	13.300	0.52362	107			
8663340	-	-	-	13.400	0.52756	108			
8663390	-	-	-	13.900	0.54724	112			

Packed: 1 pc.
Available WD1 coating only.





List 5610 (Continued)

WHILE SUPPLIES LAST

SPEED FEED P360	CARBIDE	WD1		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

TRS-HO-5D, 3 Flute, Coolant-Through

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8663410	-	-	-	14.100	0.55512	113	185	15
8663430	-	-	-	14.300	0.56299	115		
8663450	-	-	-	14.500	0.57087	117		
8663460	-	-	-	14.600	0.57480	118		
8663470	-	-	-	14.700	0.57874	119		
8663480	-	-	-	14.800	0.58268	120		
8663490	-	-	-	14.900	0.58661	121		
8663500	-	-	-	15.000	0.59055	122		
561059311	19/32	-	-	15.081	0.59375	123		
8663530	-	-	-	15.300	0.60236	124		
8663540	-	-	-	15.400	0.60630	125		
8663560	-	-	-	15.600	0.61417	126		
8663570	-	-	-	15.700	0.61811	127		
8663580	-	-	-	15.800	0.62205	128		
561062511	5/8	-	-	15.875	0.62500	132	193	16
8663590	-	-	-	15.900	0.62598	132		
8663600	-	-	-	16.000	0.62992	132	201	17
8663650	-	-	-	16.500	0.64961	140		
561068711	11/16	-	-	17.463	0.68750	144	209	3/4
8663800	-	-	-	18.000	0.70866	147		
561071811	23/32	-	-	18.256	0.71875	147	217	3/4
8663850	-	-	-	18.500	0.72835	148		
8663900	-	-	-	19.000	0.74803	152		
561075011	3/4	-	-	19.050	0.75000	154		
561075711	-	-	-	19.250	0.75787	156		
8663950	-	-	-	19.500	0.76772	160		
8664000	-	-	-	20.000	0.78740	160	225	20

Packed: 1 pc.
Available WD1 coating only.



Additional Offerings

Looking for more sizes? Try A Brand® ADO-TRS 5D (p. 70-73)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>				

good best





List 5630

TRS-HO-10D, 3 Flute, Coolant-Through

SPEED FEED	CARBIDE	WD1		30°	SHANK
P361					h6



Cutting Diameter Tolerance (h8)		
Size	mm	inch
5 ≤ D ≤ 6	-0.020 / -0.038	-0.0007 / -0.0014
6 < D ≤ 10	-0.025 / -0.047	-0.0009 / -0.0018
10 < D ≤ 15.88	-0.032 / -0.059	-0.0012 / -0.0023

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
48159050	-	-	-	5.000	0.19685	65	115	6
563020011	-	-	-	5.100	0.20079	70	128	
563020311	13/64	-	-	5.159	0.20313			
563020411	-	-	-	5.200	0.20472			
563020811	-	-	-	5.300	0.20866			
563021211	-	-	-	5.400	0.21260			
563021311	-	3	-	5.410	0.21299			
8664055	-	-	-	5.500	0.21654			
563021811	7/32	-	-	5.558	0.21880			
563022011	-	-	-	5.600	0.22047			
563022411	-	-	-	5.700	0.22441			
563022811	-	-	-	5.800	0.22835			
563023211	-	-	-	5.900	0.23228			
563023411	15/64	-	-	5.953	0.23438			
8664060	-	-	-	6.000	0.23622			
563024011	-	-	-	6.100	0.24016			
563024411	-	-	-	6.200	0.24409			
563024811	-	-	-	6.300	0.24803			
563025011	1/4	-	E	6.350	0.25000	87	140	8
563025211	-	-	-	6.400	0.25197			
48159065	-	-	-	6.500	0.25591			
563025711	-	-	-	6.530	0.25709			
563025911	-	-	-	6.600	0.25984			
563026311	-	-	-	6.700	0.26378			
563026511	17/64	-	-	6.747	0.26563			
563026711	-	-	-	6.800	0.26772			
563027111	-	-	-	6.900	0.27165			
48159070	-	-	-	7.000	0.27559			
563027911	-	-	-	7.100	0.27953			
563028111	9/32	-	-	7.144	0.28125			
563028311	-	-	-	7.200	0.28346			
563028711	-	-	-	7.300	0.28740			
563029111	-	-	-	7.400	0.29134			
8664075	-	-	-	7.500	0.29528			
563029611	19/64	-	-	7.541	0.29688			
563029911	-	-	-	7.600	0.29921			
563030311	-	-	-	7.700	0.30315			
563030711	-	-	-	7.800	0.30709			
563031111	-	-	-	7.900	0.31102			
563031211	5/16	-	-	7.938	0.31250			
8664080	-	-	-	8.000	0.31496			
563031811	-	-	-	8.100	0.31890			
563032211	-	-	-	8.200	0.32283			
563032611	-	-	-	8.300	0.32677			
563032811	21/64	-	-	8.334	0.32813			
563033011	-	-	-	8.400	0.33071			
563033111	-	-	Q	8.433	0.33200			
48159085	-	-	-	8.500	0.33465			
563033811	-	-	-	8.600	0.33858			
563034211	-	-	-	8.700	0.34252			
563034311	11/32	-	-	8.733	0.34380			
563034611	-	-	-	8.800	0.34646			

Packed: 1 pc.
Available WD1 coating only.





List 5630 (Continued)

TRS-HO-10D, 3 Flute, Coolant-Through

SPEED FEED P361	CARBIDE	WD1		30°	SHANK h6
---------------------------	----------------	------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
563035011	-	-	-	8.900	0.35039	115	165	10
48159090	-	-	-	9.000	0.35433			
563035811	-	-	-	9.100	0.35827	125	190	3/8
563035911	23/64	-	-	9.128	0.35938			
563036211	-	-	-	9.200	0.36220			
563036611	-	-	-	9.300	0.36614			
563037011	-	-	-	9.400	0.37008			
8664095	-	-	-	9.500	0.37402			
563037511	3/8	-	-	9.525	0.37500	130	190	3/8
563037811	-	-	-	9.600	0.37795			
563038111	-	-	-	9.700	0.38189			
563038511	-	-	-	9.800	0.38583			
563038911	-	-	-	9.900	0.38976			
563039011	25/64	-	-	9.922	0.39063			
8664100	-	-	-	10.000	0.39370	140	205	10
563039711	-	-	-	10.100	0.39764			
563040111	-	-	-	10.200	0.40157			
563040511	-	-	-	10.300	0.40551			
563040611	13/32	-	-	10.319	0.40625			
563040911	-	-	-	10.400	0.40945			
563041311	-	-	-	10.500	0.41339	145	205	12
563041711	-	-	-	10.600	0.41732			
563041211	-	-	-	10.700	0.42126			
563042211	27/64	-	-	10.716	0.42188			
563042511	-	-	-	10.800	0.42520			
563042911	-	-	-	10.900	0.42913			
563043311	-	-	-	11.000	0.43307	155	215	12
563043711	-	-	-	11.100	0.43701			
563043811	7/16	-	-	11.113	0.43750			
563044011	-	-	-	11.200	0.44094			
563044411	-	-	-	11.300	0.44488			
563044811	-	-	-	11.400	0.44882			
8664115	-	-	-	11.500	0.45276	175	225	14
563045311	29/64	-	-	11.509	0.45313			
563045611	-	-	-	11.600	0.45669			
563046011	-	-	-	11.700	0.46063			
563046411	-	-	-	11.800	0.46457			
563056811	-	-	-	11.900	0.46850			
8664120	-	-	-	12.000	0.47244	14	215	12
563047611	-	-	-	12.100	0.47638			
563048011	-	-	-	12.200	0.48031			
563048411	-	-	-	12.300	0.48425			
563048811	-	-	-	12.400	0.48819			
563049211	-	-	-	12.500	0.49213			
563049611	-	-	-	12.600	0.49606	14	215	14
563050011	1/2	-	-	12.700	0.50000			
563053111	17/32	-	-	13.494	0.53125	175	225	5/8
563053211	-	-	-	13.500	0.53150			

Packed: 1 pc.
Available WD1 coating only.

continued on next page



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
5630	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 5630 (Continued)

TRS-HO-10D, 3 Flute, Coolant-Through

SPEED FEED	CARBIDE	WD1		30°	SHANK
P361					h6

Cutting Diameter Tolerance (h8)		
Size	mm	inch
5 ≤ D ≤ 6	-0.020 / -0.038	-0.0007 / -0.0014
6 < D ≤ 10	-0.025 / -0.047	-0.0009 / -0.0018
10 < D ≤ 15.88	-0.032 / -0.059	-0.0012 / -0.0023



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
563055111	-	-	-	14.000	0.55118	180	230	14
563056211	9/16	-	-	14.288	0.56250			5/8
563057011	-	-	-	14.500	0.57087	190	240	16
563062511	5/8	-	-	15.875	0.62500	210	260	5/8

Packed: 1 pc.
Available WD1 coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5630	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>				

good best





List 5950Ni

WHO55-3D, Coolant-Through

SPEED FEED P362	CARBIDE	WXS		12-20°	SHANK h6
---------------------------	----------------	------------	--	---------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
D=3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
595011811	-	-	-	3.000	0.11811	20	62	6
595012511	1/8	-	-	3.175	0.12500			
595013011	-	-	-	3.300	0.12992			
595013411	-	-	-	3.400	0.13386			
595013711	-	-	-	3.490	0.13740			
595013811	-	-	-	3.500	0.13780			
595013911	-	-	-	3.510	0.13819			
595014211	-	-	-	3.600	0.14173			
595014611	-	-	-	3.700	0.14567			
595015011	-	-	-	3.800	0.14961			
595015411	-	-	-	3.900	0.15354			
595015611	5/32	-	-	3.969	0.15625			
595015711	-	-	-	4.000	0.15748			
595016111	-	-	-	4.100	0.16142			
595016311	-	-	-	4.150	0.16339			
595016511	-	-	-	4.200	0.16535			
595016911	-	-	-	4.300	0.16929			
595017111	11/64	-	-	4.366	0.17188			
595017311	-	-	-	4.400	0.17323			
595017711	-	-	-	4.500	0.17717			
595018111	-	-	-	4.600	0.18110			
595018511	-	-	-	4.700	0.18504			
595018711	3/16	-	-	4.763	0.18750			
595018911	-	-	-	4.800	0.18898			
595019311	-	-	-	4.900	0.19291			
595019711	-	-	-	5.000	0.19685			
595020111	-	-	-	5.100	0.20079			
595020311	13/64	-	-	5.159	0.20313			
595020511	-	-	-	5.200	0.20472			
595020611	-	-	-	5.220	0.20550			
595020911	-	-	-	5.300	0.20866			
595021311	-	-	-	5.400	0.21260			
595021711	-	-	-	5.500	0.21654			
595021611	-	-	-	5.530	0.21772			
595021811	7/32	-	-	5.556	0.21875			
595021911	-	-	-	5.560	0.21890			
595022011	-	-	-	5.600	0.22047			
595022411	-	-	-	5.700	0.22441			
595022811	-	-	-	5.800	0.22835			
595023211	-	-	-	5.900	0.23228			
595023411	15/64	-	-	5.953	0.23438			
595023611	-	-	-	6.000	0.23622			

Packed: 1 pc.
Available WXS[®] coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5950Ni	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 5950Ni (Continued)



WHO55-3D, Coolant-Through

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
595025011	1/4	-	-	6.350	0.25000	33	83	8
595025611	-	-	-	6.500	0.25591			
595026211	-	-	-	6.650	0.26181	34		
595026511	17/64	-	-	6.747	0.26563			
595026811	-	-	-	6.800	0.26772	35		
595027411	-	-	-	6.960	0.27402			
595027611	-	-	-	7.000	0.27559	36	94	
595028111	9/32	-	-	7.144	0.28125			
595029511	-	-	-	7.500	0.29528	38		
595029611	19/64	-	-	7.541	0.29688			
595030711	-	-	-	7.800	0.30709	39		
595031211	5/16	-	-	7.938	0.31250			
595031511	-	-	-	8.000	0.31496	40	101	
595031711	-	-	-	8.040	0.31654			
595032811	21/64	-	-	8.334	0.32813	43		
595033411	-	-	-	8.500	0.33465			
595033511	-	-	-	8.520	0.33543	44		
595033811	-	-	-	8.580	0.33780			
595034211	-	-	-	8.700	0.34252	45	106	
595034311	11/32	-	-	8.731	0.34375			
595034611	-	-	-	8.800	0.34646	46		
595035411	-	-	-	9.000	0.35433			
595035911	23/64	-	-	9.128	0.35938	48		
595037011	-	-	-	9.390	0.36969			
595037411	-	-	-	9.500	0.37402	49	113	
595037511	3/8	-	-	9.525	0.37500			
595038611	-	-	-	9.800	0.38583	50		
595038911	-	-	-	9.900	0.38976			
595039011	25/64	-	-	9.922	0.39063	53		
595039311	-	-	-	9.970	0.39252			
595039411	-	-	-	10.000	0.39370	55	120	
595040511	-	-	-	10.300	0.40551			
595040611	13/32	-	-	10.319	0.40625	56		
595041311	-	-	-	10.500	0.41339			
595042211	27/64	-	-	10.716	0.42188	58		
595042511	-	-	-	10.800	0.42520			
595042611	-	-	-	10.830	0.42638	59	128	
595043311	-	-	-	11.000	0.43307			
595043711	7/16	-	-	11.113	0.43750	60		
595045211	-	-	-	11.470	0.45157			
595045411	-	-	-	11.500	0.45276	63		
595045311	29/64	-	-	11.509	0.45313			
595045511	-	-	-	11.560	0.45512	65		
595046511	-	-	-	11.800	0.46457			
595046811	15/32	-	-	11.906	0.46875	66		
595047211	-	-	-	12.000	0.47244			
595048411	31/64	-	-	12.303	0.48438	67	14	
595050011	1/2	-	-	12.700	0.50000			

Packed: 1 pc.
Available WXS[®] coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5950Ni	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best






List 5955Ni

WHO55-5D, Coolant-Through

SPEED FEED P362	CARBIDE	WXS	12-20°	SHANK h6
---------------------------	----------------	------------	---------------	--------------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
D=3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
595511811	-	-	-	3.000	0.11811	29	78	6
595512511	1/8	-	-	3.175	0.12500			
3316330	-	-	-	3.300	0.12992			
3316340	-	-	-	3.400	0.13386			
3316349	-	-	-	3.490	0.13740			
3316350	-	-	-	3.500	0.13780			
595513911	-	-	-	3.510	0.13819			
3316360	-	-	-	3.600	0.14173			
3316370	-	-	-	3.700	0.14567			
3316380	-	-	-	3.800	0.14961			
3316390	-	-	-	3.900	0.15354			
595515611	5/32	-	-	3.969	0.15625			
3316400	-	-	-	4.000	0.15748			
3316410	-	-	-	4.100	0.16142			
3316415	-	-	-	4.150	0.16339			
3316420	-	-	-	4.200	0.16535			
3316430	-	-	-	4.300	0.16929			
595517111	11/64	-	-	4.366	0.17188			
3316440	-	-	-	4.400	0.17323			
3316450	-	-	-	4.500	0.17717			
3316460	-	-	-	4.600	0.18110			
3316470	-	-	-	4.700	0.18504			
595518711	3/16	-	-	4.763	0.18750			
3316480	-	-	-	4.800	0.18898			
3316490	-	-	-	4.900	0.19291			
3316500	-	-	-	5.000	0.19685			
3316510	-	-	-	5.100	0.20079			
595520311	13/64	-	-	5.159	0.20313			
3316520	-	-	-	5.200	0.20472			
595520611	-	-	-	5.220	0.20550			
3316530	-	-	-	5.300	0.20866			
3316540	-	-	-	5.400	0.21260			
3316550	-	-	-	5.500	0.21654			
595521611	-	-	-	5.530	0.21772			
595521811	7/32	-	-	5.556	0.21875			
3316556	-	-	-	5.560	0.21890			
3316560	-	-	-	5.600	0.22047			
3316570	-	-	-	5.700	0.22441			
3316580	-	-	-	5.800	0.22835			
3316590	-	-	-	5.900	0.23228			
595523411	15/64	-	-	5.953	0.23438			
3316600	-	-	-	6.000	0.23622			

Packed: 1 pc.
Available WXS[®] coating only.

continued on next page **EP**

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5955Ni	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 5955Ni (Continued)

SPEED FEED P362	CARBIDE	WXS		12-20°	SHANK h6
---------------------------	----------------	------------	--	---------------	--------------------

WHO55-5D, Coolant-Through

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
595525011	1/4	-	-	6.350	0.25000	52	102	8
3316650	-	-	-	6.500	0.25591			
595526211	-	-	-	6.650	0.26181	54		
595526511	17/64	-	-	6.747	0.26563	55		
3316680	-	-	-	6.800	0.26772	56		
595527411	-	-	-	6.960	0.27402			
3316700	-	-	-	7.000	0.27559	58		
595528111	9/32	-	-	7.144	0.28125			
3316750	-	-	-	7.500	0.29528	60		
595529611	19/64	-	-	7.541	0.29688	62		
3316780	-	-	-	7.800	0.30709	64		
595531211	5/16	-	-	7.938	0.31250			
3316800	-	-	-	8.000	0.31496	66		
595531711	-	-	-	8.040	0.31654			
595532811	21/64	-	-	8.334	0.32813	68		
3316850	-	-	-	8.500	0.33465			
595533511	-	-	-	8.520	0.33543	70		
3316858	-	-	-	8.580	0.33780			
3316870	-	-	-	8.700	0.34252	72		
595534311	11/32	-	-	8.731	0.34375			
3316880	-	-	-	8.800	0.34646	74		
3316900	-	-	-	9.000	0.35433			
595535911	23/64	-	-	9.128	0.35938	76		
595537011	-	-	-	9.390	0.36969			
3316950	-	-	-	9.500	0.37402	78		
595537511	3/8	-	-	9.525	0.37500			
3316980	-	-	-	9.800	0.38583	80		
595538911	-	-	-	9.900	0.38976			
595539011	25/64	-	-	9.922	0.39063	84		
3316997	-	-	-	9.970	0.39252			
3317000	-	-	-	10.000	0.39370	88		
3317030	-	-	-	10.300	0.40551			
595540611	13/32	-	-	10.319	0.40625	90		
3317050	-	-	-	10.500	0.41339			
595542211	27/64	-	-	10.716	0.42188	92		
3317080	-	-	-	10.800	0.42520			
595542611	-	-	-	10.830	0.42638	94		
3317100	-	-	-	11.000	0.43307			
595543711	7/16	-	-	11.113	0.43750	96		
595545211	-	-	-	11.470	0.45157			
3317150	-	-	-	11.500	0.45276	100		
595545311	29/64	-	-	11.509	0.45313			
3317156	-	-	-	11.560	0.45512	104		
3317180	-	-	-	11.800	0.46457			
595546811	15/32	-	-	11.906	0.46875	167		
3317200	-	-	-	12.000	0.47244			
595548411	31/64	-	-	12.303	0.48438	14		
595550011	1/2	-	-	12.700	0.50000			

Packed: 1 pc.
Available WXS[®] coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron 6061 7075	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		Casting	~35 HRC			35-45 HRC	45-50 HRC	50-70 HRC	
5955Ni	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best






List 5171

WH70-DRL, 55-70 HRC

SPEED FEED P363	CARBIDE	WXS	12°	SHANK h6
---------------------------	----------------	------------	------------	--------------------

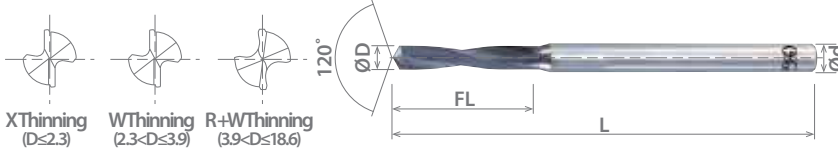

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 18.6	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
3318200	-	-	-	2.000	0.07874	12	42	3		
3318210	-	-	-	2.100	0.08268					
3318220	-	-	-	2.200	0.08661					
3318230	-	-	-	2.300	0.09055	13	43		3	
3318240	-	-	-	2.400	0.09449					
3318250	-	-	-	2.500	0.09843					
3318260	-	-	-	2.600	0.10236	14	44			3
3318270	-	-	-	2.700	0.10630					
3318280	-	-	-	2.800	0.11024					
3318290	-	-	-	2.900	0.11417	16	46	3		
3318300	-	-	-	3.000	0.11811					
3318310	-	-	-	3.100	0.12205					
3318320	-	-	-	3.200	0.12598	18	48		3	
3318330	-	-	-	3.300	0.12992					
3318340	-	-	-	3.400	0.13386					
3318350	-	-	-	3.500	0.13780	20	50			4
3318360	-	-	-	3.600	0.14173					
3318370	-	-	-	3.700	0.14567					
3318380	-	-	-	3.800	0.14961	22	52	4		
3318390	-	-	-	3.900	0.15354					
3318400	-	-	-	4.000	0.15748					
3318410	-	-	-	4.100	0.16142	25	56		5	
3318420	-	-	-	4.200	0.16535					
3318430	-	-	-	4.300	0.16929					
3318440	-	-	-	4.400	0.17323	28	60			5
3318450	-	-	-	4.500	0.17717					
3318460	-	-	-	4.600	0.18110					
3318470	-	-	-	4.700	0.18504	32	64	5		
3318480	-	-	-	4.800	0.18898					
3318490	-	-	-	4.900	0.19291					
3318500	-	-	-	5.000	0.19685	35	68		5	
3318510	-	-	-	5.100	0.20079					
3318520	-	-	-	5.200	0.20472					
3318530	-	-	-	5.300	0.20866	38	72			6
3318540	-	-	-	5.400	0.21260					
3318550	-	-	-	5.500	0.21654					
3318560	-	-	-	5.600	0.22047	40	76	6		
3318570	-	-	-	5.700	0.22441					
3318580	-	-	-	5.800	0.22835					
3318590	-	-	-	5.900	0.23228	42	80		7	
3318600	-	-	-	6.000	0.23622					
3318610	-	-	-	6.100	0.24016					

Packed: 1 pc.
Available WXS coating only.
EXOCARB® VX taps recommended.

➔ continued on next page ➔

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5171																☑	


good best





List 5171 (Continued)

WH70-DRL, 55-70 HRC

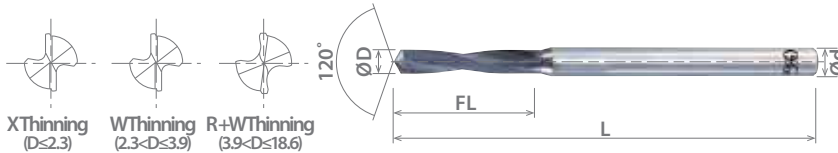

SPEED FEED P363	CARBIDE	WXS	12°	SHANK h6
---------------------------	----------------	------------	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤18.6	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
3318620	-	-	-	6.200	0.24409	40	83	7
3318630	-	-	-	6.300	0.24803			
3318640	-	-	-	6.400	0.25197			
3318650	-	-	-	6.500	0.25591			
3318660	-	-	-	6.600	0.25984			
3318670	-	-	-	6.700	0.26378			
3318680	-	-	-	6.800	0.26772			
3318690	-	-	-	6.900	0.27217			
3318700	-	-	-	7.000	0.27559			
3318710	-	-	-	7.100	0.27953			
3318720	-	-	-	7.200	0.28346			
3318730	-	-	-	7.300	0.28740			
3318740	-	-	-	7.400	0.29134			
3318750	-	-	-	7.500	0.29528			
3318760	-	-	-	7.600	0.29921			
3318770	-	-	-	7.700	0.30315			
3318780	-	-	-	7.800	0.30709			
3318790	-	-	-	7.900	0.31102			
3318800	-	-	-	8.000	0.31496			
3318810	-	-	-	8.100	0.31890			
3318820	-	-	-	8.200	0.32283			
3318830	-	-	-	8.300	0.32677			
3318840	-	-	-	8.400	0.33071			
3318850	-	-	-	8.500	0.33465			
3318860	-	-	-	8.600	0.33858			
3318870	-	-	-	8.700	0.34252			
3318880	-	-	-	8.800	0.34646			
3318890	-	-	-	8.900	0.35039			
3318900	-	-	-	9.000	0.35433			
3318910	-	-	-	9.100	0.35827			
3318920	-	-	-	9.200	0.36220			
3318930	-	-	-	9.300	0.36614			
3318940	-	-	-	9.400	0.37008			
3318950	-	-	-	9.500	0.37402			
3318960	-	-	-	9.600	0.37795			
3318970	-	-	-	9.700	0.38189			
3318980	-	-	-	9.800	0.38583			
3318990	-	-	-	9.900	0.38976			
3319000	-	-	-	10.000	0.39370			
3319010	-	-	-	10.100	0.39764			
3319020	-	-	-	10.200	0.40157			
3319030	-	-	-	10.300	0.40551			
3319040	-	-	-	10.400	0.40945			
3319050	-	-	-	10.500	0.41339			
3319060	-	-	-	10.600	0.41732			
3319070	-	-	-	10.700	0.42126			
3319080	-	-	-	10.800	0.42520			
3319090	-	-	-	10.900	0.42913			
3319100	-	-	-	11.000	0.43307			
3319110	-	-	-	11.100	0.43701			
3319120	-	-	-	11.200	0.44094			
3319130	-	-	-	11.300	0.44488			

Packed: 1 pc.
 Available WXS coating only.
 EXOCARB® VX taps recommended.





List 5171 (Continued)

WH70-DRL, 55-70 HRC

SPEED FEED P363	CARBIDE	WXS	12°	SHANK h6
--------------------	---------	-----	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
3319140	-	-	-	11.400	0.44882	71	120	12
3319150	-	-	-	11.500	0.45276			
3319160	-	-	-	11.600	0.45669			
3319170	-	-	-	11.700	0.46063			
3319180	-	-	-	11.800	0.46457			
3319190	-	-	-	11.900	0.46850	76	136	16
3319200	-	-	-	12.000	0.47244			
517112113	-	-	-	12.100	0.47638	79	139	16
517112613	-	-	-	12.600	0.49606	90	150	
517114113	-	-	-	14.100	0.55512	96	156	
517114613	-	-	-	14.600	0.57480	102	162	
517115613	-	-	-	15.600	0.61417	108	168	20
517116113	-	-	-	16.100	0.63386	114	174	
517116613	-	-	-	16.600	0.65354			
517117613	-	-	-	17.600	0.69291			
517118613	-	-	-	18.600	0.73228			

Packed: 1 pc.
Available WXS coating only.
EXOCARB® VX taps recommended.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5171																		<input checked="" type="checkbox"/>

good best





List 5172

EX-H-DRL, Tap Extractor

SPEED FEED P363	CARBIDE	BR	SHANK h7
---------------------------	----------------	-----------	--------------------



EDP Number	Diameter mm	Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Tap Types					
					Straight Fluted		Spiral Pointed		Spiral Fluted	
					Metric	ANSI	Metric	ANSI	Metric	ANSI
87702	2.000	10	30	2	M3	#4, #5, #6	M3	#4, #5	M3	#4, #5, #6
87703	3.000	15	40	3	M4, M5	#8, #10	M4	#8, #10	M4, M5	#8, #10
87704	4.000	20	45	4	M6	1/4, 5/16	M5, M6	1/4	M6	1/4 and 5/16
87705	5.000	25	50	5	M8, M10	3/8	-	5/16	M8, M10	3/8
87706	6.000	30	60	6	M12	7/16, 1/2	M8	3/8	M12	7/16, 1/2
87707	7.000	35	80	7	M14	9/16	M10	7/16	M14	9/16
87708	8.000	40	80	8	M16	5/8	M12	1/2	M16	5/8
87709	9.000	45	100	9	M18	3/4	M14	9/16	M18	3/4
87710	10.000	50	100	10	M20	-	M16	5/8	M20	-
87781	11.000	55	110	11	M22	7/8	M18	-	M22	7/8
87782	12.000	60	110	12	M24	1.00	M20	3/4	M24	1.00
87700	2-6 Set	-	-	-	-	-	-	-	-	-

Packed: 1 pc.

Drills are available in 5pc sets (EDP 87700) for ØD through Ø6.


For drill diameter selection, use the method outlined below.

Straight Fluted & Spiral Fluted Taps: $0.46(\text{Tap } \varnothing) < (\text{Drill } \varnothing) < 0.75(\text{Tap } \varnothing)$

Spiral Pointed Taps: $0.6(\text{Tap } \varnothing) < (\text{Drill } \varnothing) < 0.75(\text{Tap } \varnothing)$




1. Broken Tap




Check how tap is broken. If any portion of the tap is protruding, grind the damaged surface of the tap flush with the workpiece. This will allow the damaged tap to be drilled easier.

2. Centering of Drill




Position the drill over the center of the tap. Please make sure both the workpiece and drill are properly secured. Make an initial light drill approach, and then quickly retract the drill. For this step, do not use lubrication.

3. Hole Processing



Drill the hole at a fixed feed and speed, stopping the operation occasionally to remove broken chips. In addition, use plenty of high quality cutting oil.

4. Chip Removal



Once the tap has been broken up, the remaining portions of the tap can be removed. For best results, use a scribe. Once the hole is cleaned, tapping can be resumed.

Cutting Conditions and Procedures to Note

1. Use a drilling speed of 65-80SFM.
2. Hand feed of 0.0005~0.001 in/rev is normal.
3. Use a rigid holder.
4. Select a high quality cutting oil and apply in sufficient amounts.
5. This tool should not be used to drill soft steels, aluminum alloys or other soft materials.
6. Resharpener should be done periodically.
7. For through hole processing of heat treated steels, use a spare piece of material underneath the material being drilled as this will prevent breakage caused by sudden torque.
8. **Cannot be used to remove forming taps.**

Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5172	1010 1018	1035 1045	1065	4140 4340														

good best






List 5275

CAO-GDXL, 15D-30D, Coolant-Through

SPEED FEED P364	CARBIDE	BR		30°	SHANK h6
---------------------------	----------------	-----------	--	------------	--------------------

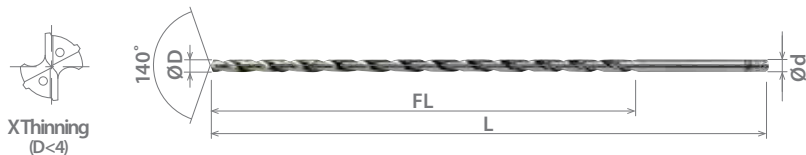

Cutting Diameter Tolerance (h8)		
Size	mm	inch
D=3	+0/-0.014	+0/-0.0006
3<D≤6	+0/-0.018	+0/-0.0007
6<D≤10	+0/-0.022	+0/-0.0009

EDP Number	Diameter					xD	Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch		FL (mm)	L (mm)	d (mm)
8567130	-	-	-	3.000	0.11811	15 x D	55	105	3
8567140	-	-	-	4.000	0.15748		75	125	4
8567340	-	-	-	4.500	0.17717	20 x D	90	140	5
8567345	-	-	-	5.000	0.19685		110	165	
8567150	-	-	-	5.000	0.19685	15 x D	90	140	6
8567350	-	-	-			20 x D	115	165	
8567450	-	-	-			30 x D	165	215	
8567355	-	-	-	5.500	0.21654	20 x D	140	190	7
8567455	-	-	-			30 x D	200	250	
8567160	-	-	-			15 x D	110	160	
8567360	-	-	-	6.000	0.23622	20 x D	140	190	8
8567460	-	-	-			30 x D	200	250	
8567165	-	-	-			6.500	0.25591	15 x D	
8567170	-	-	-	7.000	0.27559	20 x D	125	210	9
8567370	-	-	-			30 x D	160	210	
8567470	-	-	-			15 x D	145	195	
8567180	-	-	-	8.000	0.31496	20 x D	180	230	10
8567380	-	-	-			30 x D	265	315	
8567480	-	-	-			15 x D	160	210	
8567190	-	-	-	9.000	0.35433	20 x D	210	260	11
8567390	-	-	-			15 x D	180	240	
8567200	-	-	-	10.000	0.39370	20 x D	230	290	12
8567400	-	-	-			15 x D	180	240	

Packed: 1 pc.
Available Bright finish only.



Work Material																			
List No.	P				Die Steels	M			K	N		S	H						
	Carbon Steels			Alloy Steels		Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH			6061				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5275	1010	1035	1065	4140															
	1018	1045		4340															

good best





EXOCARB® MAX-MINI


High Performance Micro Carbide Drills

List 5310

FHL-GDTS, Miniature, 3 Flute, Up to 20D, 40-65 HRC

SPEED FEED P365	CARBIDE	EXO®	25°	SHANK h6
---------------------------	----------------	-------------	------------	--------------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0/-0.014	+0/-0.0006



EDP Number	Diameter					Flute Length FL (mm)	Neck Length L1 (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
8569010	-	-	-	1.000	0.03937	5.0	20	57	3	140°
8569011	-	-	-	1.100	0.04331	5.5				
8569012	-	-	-	1.200	0.04724	6.0				
8569013	-	-	-	1.300	0.05118	6.5				
8569014	-	-	-	1.400	0.05512	7.0				
8569015	-	-	-	1.500	0.05906	7.5				
8569016	-	-	-	1.600	0.06299	8.0				
8569017	-	-	-	1.700	0.06693	8.5				
8569018	-	-	-	1.800	0.07087	9.0	30	65	120°	
8569019	-	-	-	1.900	0.07480	9.5				
8569020	-	-	-	2.000	0.07874	10.0				
8569025	-	-	-	2.500	0.09843	13.0				
8569030	-	-	-	3.000	0.11811	15.0				

Packed: 1 pc.
 Available EXO® coating only.
 Shrink fit holders recommended.
 Must utilize recommended peck cycle for optimum tool life.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5310	1010 1018	1035 1045	1065	4140 4340										<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best





List 5315

UVM-LDS, Miniature, Pilot

SPEED FEED P366	CARBIDE	SS	30°	SHANK h3
--------------------	---------	----	-----	-------------

Cutting Diameter Tolerance		
Size	mm	inch
0.05	+0/-0.003	+0/-0.0001



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8589205	-	-	-	0.050	0.00197	0.075	38	3
8589255	-	-	-					1/8

Packed: 1 pc.
Available Super Smooth coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5315	1010 1018	1035 1045	1065	4140 4340														

good best





EXOCARB[®] MAX-MINI

High Performance Micro Carbide Drills

List 5320

UVM-DRL-5D, Miniature

SPEED FEED P366	CARBIDE	SS	30°	SHANK h3
--------------------	---------	----	-----	-------------

Cutting Diameter Tolerance		
Size	mm	inch
0.02≤D≤0.08	+0/-0.003	+0/-0.0001



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8589002	-	-	-	0.020	0.00079	0.12	38	3
8589052	-	-	-	0.030	0.00118	0.18		1/8
8589003	-	-	-					3
8589053	-	-	-	0.040	0.00157	0.24		1/8
8589004	-	-	-					3
8589054	-	-	-	0.050	0.00197	0.30		1/8
8589005	-	-	-					3
8589055	-	-	-	0.080	0.00315	0.48		1/8
8589008	-	-	-					3
8589058	-	-	-					1/8

Packed: 1 pc.
Available Super Smooth coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5320	1010 1018	1035 1045	1065	4140 4340														

good best





List 5325

UVM-DRL-10D, Miniature

SPEED FEED P366	CARBIDE	SS	30°	SHANK h3
--------------------	---------	----	-----	-------------

Cutting Diameter Tolerance		
Size	mm	inch
0.02≤D≤0.08	+0/-0.003	+0/-0.0001



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8589102	-	-	-	0.020	0.00079	0.22	38	3
8589152	-	-	-	0.030	0.00118	0.33		1/8
8589103	-	-	-					3
8589153	-	-	-	0.040	0.00157	0.44		1/8
8589104	-	-	-					3
8589154	-	-	-	0.050	0.00197	0.55		1/8
8589105	-	-	-					3
8589155	-	-	-	0.080	0.00315	0.88		1/8
8589108	-	-	-					3
8589158	-	-	-					1/8

Packed: 1 pc.
Available Super Smooth coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5325	1010 1018	1035 1045	1065	4140 4340														

good best







EXOCARB® MAX-MINI

High Performance Miniature Carbide Drills

List 5330

WX-MS-GDS, Precision Drill

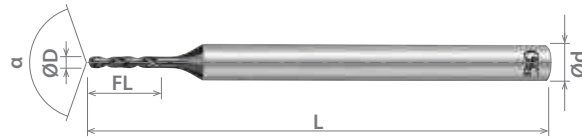

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

Cutting Diameter Tolerance		
Size	mm	inch
0.2 ≤ D ≤ 5.00	+0 / -0.010	+0 / -0.0004

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
3300020	-	-	-	0.200	0.00787	1.5	38	3	140°
3300021	-	-	-	0.210	0.00827				
3300022	-	-	-	0.220	0.00866				
3300023	-	-	-	0.230	0.00906				
3300024	-	-	-	0.240	0.00945				
3300025	-	-	-	0.250	0.00984				
3300026	-	-	-	0.260	0.01024				
3300027	-	-	-	0.270	0.01063				
3300028	-	-	-	0.280	0.01102				
3300029	-	-	-	0.290	0.01142				
3300030	-	-	-	0.300	0.01181	2.0	38	3	140°
3300031	-	-	-	0.310	0.01220				
3300032	-	-	-	0.320	0.01260				
3300033	-	-	-	0.330	0.01299				
3300034	-	-	-	0.340	0.01339				
3300035	-	-	-	0.350	0.01378				
3300036	-	-	-	0.360	0.01417				
3300037	-	-	-	0.370	0.01457				
3300038	-	-	-	0.380	0.01496				
3300039	-	-	-	0.390	0.01535				
3300040	-	-	-	0.400	0.01575	2.5	38	3	140°
3300041	-	-	-	0.410	0.01614				
3300042	-	-	-	0.420	0.01654				
3300043	-	-	-	0.430	0.01693				
3300044	-	-	-	0.440	0.01732				
3300045	-	-	-	0.450	0.01772				
3300046	-	-	-	0.460	0.01811				
3300047	-	-	-	0.470	0.01850				
3300048	-	-	-	0.480	0.01890				
3300049	-	-	-	0.490	0.01929				
3300050	-	-	-	0.500	0.01969	3.0	38	3	140°
3300051	-	-	-	0.510	0.02008				
3300052	-	-	-	0.520	0.02047				
3300053	-	-	-	0.530	0.02087				
3300054	-	-	-	0.540	0.02126				
3300055	-	-	-	0.550	0.02165				
3300056	-	-	-	0.560	0.02205				
3300057	-	-	-	0.570	0.02244				
3300058	-	-	-	0.580	0.02283				
3300059	-	-	-	0.590	0.02323				
3300060	-	-	-	0.600	0.02362	3.5	38	3	140°
3300061	-	-	-	0.610	0.02402				
3300062	-	-	-	0.620	0.02441				
3300063	-	-	-	0.630	0.02480				
3300064	-	-	-	0.640	0.02520				
3300065	-	-	-	0.650	0.02559				
3300066	-	-	-	0.660	0.02598				
3300067	-	-	-	0.670	0.02638				
3300068	-	-	-	0.680	0.02677				
3300069	-	-	-	0.690	0.02717				

Packed: 1 pc.
Available TiAlN coating only.





List 5330 (Continued)

WX-MS-GDS, Precision Drill

SPEED FEED P367	CARBIDE	TiAlN	30°	GRANK h6
-----------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
3300070	-	-	-	0.700	0.02756	4.5	38	3	140°
3300071	-	-	-	0.710	0.02795				
3300072	-	-	-	0.720	0.02835				
3300073	-	-	-	0.730	0.02874				
3300074	-	-	-	0.740	0.02913				
3300075	-	-	-	0.750	0.02953				
3300076	-	-	-	0.760	0.02992				
3300077	-	-	-	0.770	0.03031				
3300078	-	-	-	0.780	0.03071				
3300079	-	-	-	0.790	0.03110				
3300080	-	-	-	0.800	0.03150				
3300081	-	-	-	0.810	0.03189				
3300082	-	-	-	0.820	0.03228				
3300083	-	-	-	0.830	0.03268				
3300084	-	-	-	0.840	0.03307				
3300085	-	-	-	0.850	0.03346				
3300086	-	-	-	0.860	0.03386				
3300087	-	-	-	0.870	0.03425				
3300088	-	-	-	0.880	0.03465				
3300089	-	-	-	0.890	0.03504				
3300090	-	-	-	0.900	0.03543				
3300091	-	-	-	0.910	0.03583				
3300092	-	-	-	0.920	0.03622				
3300093	-	-	-	0.930	0.03661				
3300094	-	-	-	0.940	0.03701				
3300095	-	-	-	0.950	0.03740				
3300096	-	-	-	0.960	0.03780				
3300097	-	-	-	0.970	0.03819				
3300098	-	-	-	0.980	0.03858				
3300099	-	-	-	0.990	0.03898				
3300100	-	-	-	1.000	0.03937				
3300101	-	-	-	1.010	0.03976				
3300102	-	-	-	1.020	0.04016				
3300103	-	-	-	1.030	0.04055				
3300104	-	-	-	1.040	0.04094				
3300105	-	-	-	1.050	0.04134				
3300106	-	-	-	1.060	0.04173				
3300107	-	-	-	1.070	0.04213				
3300108	-	-	-	1.080	0.04252				
3300109	-	-	-	1.090	0.04291				
3300110	-	-	-	1.100	0.04331				
3300111	-	-	-	1.110	0.04370				
3300112	-	-	-	1.120	0.04409				
3300113	-	-	-	1.130	0.04449				
3300114	-	-	-	1.140	0.04488				
3300115	-	-	-	1.150	0.04528				

Packed: 1 pc.
Available TiAlN coating only.

continued on next page



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 5330 (Continued)

WX-MS-GDS, Precision Drill

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

Cutting Diameter Tolerance		
Size	mm	inch
0.2≤D≤5.00	+0 / -0.010	+0 / -0.0004

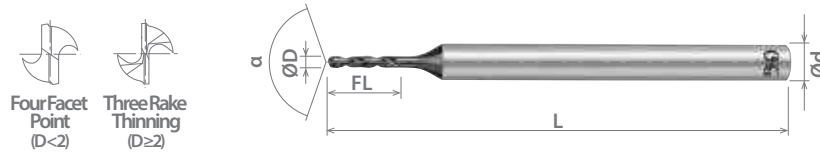

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
3300116	-	-	-	1.160	0.04567	7.0	42	3	140°
3300117	-	-	-	1.170	0.04606				
3300118	-	-	-	1.180	0.04646				
3300119	-	-	-	1.190	0.04685				
3300120	-	-	-	1.200	0.04724				
3300121	-	-	-	1.210	0.04764				
3300122	-	-	-	1.220	0.04803				
3300123	-	-	-	1.230	0.04843				
3300124	-	-	-	1.240	0.04882				
3300125	-	-	-	1.250	0.04921				
3300126	-	-	-	1.260	0.04961				
3300127	-	-	-	1.270	0.05000				
3300128	-	-	-	1.280	0.05039				
3300129	-	-	-	1.290	0.05079				
3300130	-	-	-	1.300	0.05118				
3300131	-	-	-	1.310	0.05157				
3300132	-	-	-	1.320	0.05197				
3300133	-	-	-	1.330	0.05236				
3300134	-	-	-	1.340	0.05276				
3300135	-	-	-	1.350	0.05315				
3300136	-	-	-	1.360	0.05354				
3300137	-	-	-	1.370	0.05394				
3300138	-	-	-	1.380	0.05433				
3300139	-	-	-	1.390	0.05472				
3300140	-	-	-	1.400	0.05512				
3300141	-	-	-	1.410	0.05551				
3300142	-	-	-	1.420	0.05591				
3300143	-	-	-	1.430	0.05630				
3300144	-	-	-	1.440	0.05669				
3300145	-	-	-	1.450	0.05709				
3300146	-	-	-	1.460	0.05748				
3300147	-	-	-	1.470	0.05787				
3300148	-	-	-	1.480	0.05827				
3300149	-	-	-	1.490	0.05866				
3300150	-	-	-	1.500	0.05906				
3300151	-	-	-	1.510	0.05945				
3300152	-	-	-	1.520	0.05984				
3300153	-	-	-	1.530	0.06024				
3300154	-	-	-	1.540	0.06063				
3300155	-	-	-	1.550	0.06102				
3300156	-	-	-	1.560	0.06142				
3300157	-	-	-	1.570	0.06181				
3300158	-	-	-	1.580	0.06220				
3300159	-	-	-	1.590	0.06260				
3300160	-	-	-	1.600	0.06299				
3300161	-	-	-	1.610	0.06339				
3300162	-	-	-	1.620	0.06378				
3300163	-	-	-	1.630	0.06417				
3300164	-	-	-	1.640	0.06457				
3300165	-	-	-	1.650	0.06496				

Packed: 1 pc.
Available TiAlN coating only.





List 5330 (Continued)

WX-MS-GDS, Precision Drill

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
--------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
3300166	-	-	-	1.660	0.06535	10	42	3	140°
3300167	-	-	-	1.670	0.06575				
3300168	-	-	-	1.680	0.06614				
3300169	-	-	-	1.690	0.06654				
3300170	-	-	-	1.700	0.06693				
3300171	-	-	-	1.710	0.06732				
3300172	-	-	-	1.720	0.06772				
3300173	-	-	-	1.730	0.06811				
3300174	-	-	-	1.740	0.06850				
3300175	-	-	-	1.750	0.06890				
3300176	-	-	-	1.760	0.06929				
3300177	-	-	-	1.770	0.06969				
3300178	-	-	-	1.780	0.07008				
3300179	-	-	-	1.790	0.07047				
3300180	-	-	-	1.800	0.07087				
3300181	-	-	-	1.810	0.07126				
3300182	-	-	-	1.820	0.07165				
3300183	-	-	-	1.830	0.07205				
3300184	-	-	-	1.840	0.07244				
3300185	-	-	-	1.850	0.07283				
3300186	-	-	-	1.860	0.07323				
3300187	-	-	-	1.870	0.07362				
3300188	-	-	-	1.880	0.07402				
3300189	-	-	-	1.890	0.07441				
3300190	-	-	-	1.900	0.07480				
3300191	-	-	-	1.910	0.07520				
3300192	-	-	-	1.920	0.07559				
3300193	-	-	-	1.930	0.07598				
3300194	-	-	-	1.940	0.07638				
3300195	-	-	-	1.950	0.07677				
3300196	-	-	-	1.960	0.07717				
3300197	-	-	-	1.970	0.07756				
3300198	-	-	-	1.980	0.07795				
3300199	-	-	-	1.990	0.07835				
3300200	-	-	-	2.000	0.07874				
48172201	-	-	-	2.010	0.07913				
48172202	-	-	-	2.020	0.07953				
48172203	-	-	-	2.030	0.07992				
48172204	-	-	-	2.040	0.08031				
3300205	-	-	-	2.050	0.08071				
48172206	-	-	-	2.060	0.08110				
48172207	-	-	-	2.070	0.08150				
48172208	-	-	-	2.080	0.08189				
48172209	-	-	-	2.090	0.08228				
3300210	-	-	-	2.100	0.08268				
48172211	-	-	-	2.110	0.08307				
					12	50			

Packed: 1 pc.
Available TiAlN coating only.

continued on next page

List No.	Work Material																		
	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 5330 (Continued)

WX-MS-GDS, Precision Drill

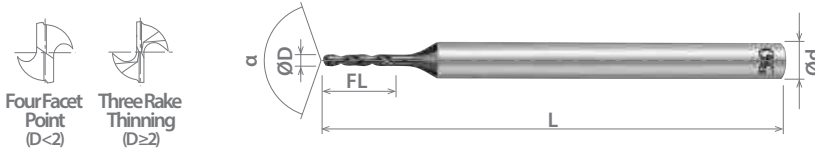

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

Cutting Diameter Tolerance		
Size	mm	inch
0.2 ≤ D ≤ 5.00	+0 / -0.010	+0 / -0.0004

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
48172212	-	-	-	2.120	0.08346	12	50	3	140°
48172213	-	-	-	2.130	0.08386				
48172214	-	-	-	2.140	0.08425				
3300215	-	-	-	2.150	0.08465				
48172216	-	-	-	2.160	0.08504				
48172217	-	-	-	2.170	0.08543				
48172218	-	-	-	2.180	0.08583				
48172219	-	-	-	2.190	0.08622				
3300220	-	-	-	2.200	0.08661				
48172221	-	-	-	2.210	0.08701				
48172222	-	-	-	2.220	0.08740				
48172223	-	-	-	2.230	0.08780				
48172224	-	-	-	2.240	0.08819				
3300225	-	-	-	2.250	0.08858				
48172226	-	-	-	2.260	0.08898				
48172227	-	-	-	2.270	0.08937				
48172228	-	-	-	2.280	0.08976				
48172229	-	-	-	2.290	0.09016				
3300230	-	-	-	2.300	0.09055				
48172231	-	-	-	2.310	0.09094				
48172232	-	-	-	2.320	0.09134				
48172233	-	-	-	2.330	0.09173				
48172234	-	-	-	2.340	0.09213				
3300235	-	-	-	2.350	0.09252				
48172236	-	-	-	2.360	0.09291				
48172237	-	-	-	2.370	0.09331				
48172238	-	-	-	2.380	0.09370				
48172239	-	-	-	2.390	0.09409				
3300240	-	-	-	2.400	0.09449				
48172241	-	-	-	2.410	0.09488				
48172242	-	-	-	2.420	0.09528				
48172243	-	-	-	2.430	0.09567				
48172244	-	-	-	2.440	0.09606				
3300245	-	-	-	2.450	0.09646				
48172246	-	-	-	2.460	0.09685				
48172247	-	-	-	2.470	0.09724				
48172248	-	-	-	2.480	0.09764				
48172249	-	-	-	2.490	0.09803				
3300250	-	-	-	2.500	0.09843				
48172251	-	-	-	2.510	0.09882				
48172252	-	-	-	2.520	0.09921				
48172253	-	-	-	2.530	0.09961				
48172254	-	-	-	2.540	0.10000				
3300255	-	-	-	2.550	0.10039				
48172256	-	-	-	2.560	0.10079				
48172257	-	-	-	2.570	0.10118				
48172258	-	-	-	2.580	0.10157				
48172259	-	-	-	2.590	0.10197				
3300260	-	-	-	2.600	0.10236				
48172261	-	-	-	2.610	0.10276				

Packed: 1 pc.
Available TiAlN coating only.





List 5330 (Continued)

WX-MS-GDS, Precision Drill

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
-----------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
48172262	-	-	-	2.620	0.10315	14	50	3	130°
48172263	-	-	-	2.630	0.10354				
48172264	-	-	-	2.640	0.10394				
3300265	-	-	-	2.650	0.10433				
48172266	-	-	-	2.660	0.10472				
48172267	-	-	-	2.670	0.10512				
48172268	-	-	-	2.680	0.10551				
48172269	-	-	-	2.690	0.10591				
3300270	-	-	-	2.700	0.10630				
48172271	-	-	-	2.710	0.10669				
48172272	-	-	-	2.720	0.10709				
48172273	-	-	-	2.730	0.10748				
48172274	-	-	-	2.740	0.10787				
3300275	-	-	-	2.750	0.10827				
48172276	-	-	-	2.760	0.10866				
48172277	-	-	-	2.770	0.10906				
48172278	-	-	-	2.780	0.10945				
48172279	-	-	-	2.790	0.10984				
3300280	-	-	-	2.800	0.11024	16	56	4	130°
48172281	-	-	-	2.810	0.11063				
48172282	-	-	-	2.820	0.11102				
48172283	-	-	-	2.830	0.11142				
48172284	-	-	-	2.840	0.11181				
3300285	-	-	-	2.850	0.11220				
48172286	-	-	-	2.860	0.11260				
48172287	-	-	-	2.870	0.11299				
48172288	-	-	-	2.880	0.11339				
48172289	-	-	-	2.890	0.11378				
3300290	-	-	-	2.900	0.11417				
48172291	-	-	-	2.910	0.11457				
48172292	-	-	-	2.920	0.11496				
48172293	-	-	-	2.930	0.11535				
48172294	-	-	-	2.940	0.11575				
3300295	-	-	-	2.950	0.11614				
48172296	-	-	-	2.960	0.11654				
48172297	-	-	-	2.970	0.11693				
48172298	-	-	-	2.980	0.11732				
48172299	-	-	-	2.990	0.11772				
3300300	-	-	-	3.000	0.11811	18	56	4	130°
48172301	-	-	-	3.010	0.11850				
48172302	-	-	-	3.020	0.11890				
48172303	-	-	-	3.030	0.11929				
48172304	-	-	-	3.040	0.11969				
3300305	-	-	-	3.050	0.12008				
48172306	-	-	-	3.060	0.12047				
48172307	-	-	-	3.070	0.12087				

Packed: 1 pc.
Available TiAlN coating only.

continued on next page

List No.	Work Material																		
	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
5330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best







EXOCARB® MAX-MINI

High Performance Miniature Carbide Drills

List 5330 (Continued)

WX-MS-GDS, Precision Drill

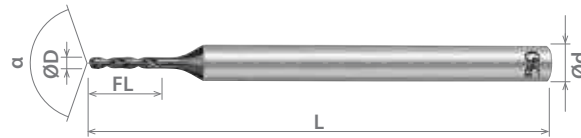

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
--------------------	---------	-------	-----	-------------

Cutting Diameter Tolerance		
Size	mm	inch
0.2 ≤ D ≤ 5.00	+0 / -0.010	+0 / -0.0004

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
48172308	-	-	-	3.080	0.12126	18	56	4	130°
48172309	-	-	-	3.090	0.12165				
3300310	-	-	-	3.100	0.12205				
48172311	-	-	-	3.110	0.12244				
48172312	-	-	-	3.120	0.12283				
48172313	-	-	-	3.130	0.12323				
48172314	-	-	-	3.140	0.12362				
3300315	-	-	-	3.150	0.12402				
48172316	-	-	-	3.160	0.12441				
48172317	-	-	-	3.170	0.12480				
48172318	-	-	-	3.180	0.12520				
48172319	-	-	-	3.190	0.12559				
3300320	-	-	-	3.200	0.12598				
48172321	-	-	-	3.210	0.12638				
48172322	-	-	-	3.220	0.12677				
48172323	-	-	-	3.230	0.12717				
48172324	-	-	-	3.240	0.12756				
3300325	-	-	-	3.250	0.12795				
48172326	-	-	-	3.260	0.12835				
48172327	-	-	-	3.270	0.12874				
48172328	-	-	-	3.280	0.12913				
48172329	-	-	-	3.290	0.12953				
3300330	-	-	-	3.300	0.12992				
48172331	-	-	-	3.310	0.13031				
48172332	-	-	-	3.320	0.13071				
48172333	-	-	-	3.330	0.13110				
48172334	-	-	-	3.340	0.13150				
3300335	-	-	-	3.350	0.13189				
48172336	-	-	-	3.360	0.13228				
48172337	-	-	-	3.370	0.13268				
48172338	-	-	-	3.380	0.13307				
48172339	-	-	-	3.390	0.13346				
3300340	-	-	-	3.400	0.13386				
48172341	-	-	-	3.410	0.13425				
48172342	-	-	-	3.420	0.13465				
48172343	-	-	-	3.430	0.13504				
48172344	-	-	-	3.440	0.13543				
3300345	-	-	-	3.450	0.13583				
48172346	-	-	-	3.460	0.13622				
48172347	-	-	-	3.470	0.13661				
48172348	-	-	-	3.480	0.13701				
48172349	-	-	-	3.490	0.13740				
3300350	-	-	-	3.500	0.13780				
48172351	-	-	-	3.510	0.13819				
48172352	-	-	-	3.520	0.13858				
48172353	-	-	-	3.530	0.13898				
48172354	-	-	-	3.540	0.13937				
3300355	-	-	-	3.550	0.13976				
48172356	-	-	-	3.560	0.14016				
48172357	-	-	-	3.570	0.14055				

Packed: 1 pc.
Available TiAlN coating only.





List 5330 (Continued)

WX-MS-GDS, Precision Drill

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
--------------------	---------	-------	-----	-------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
48172358	-	-	-	3.580	0.14094	20	56	4	130°
48172359	-	-	-	3.590	0.14134				
3300360	-	-	-	3.600	0.14173				
48172361	-	-	-	3.610	0.14213				
48172362	-	-	-	3.620	0.14252				
48172363	-	-	-	3.630	0.14291				
48172364	-	-	-	3.640	0.14331				
3300365	-	-	-	3.650	0.14370				
48172366	-	-	-	3.660	0.14409				
48172367	-	-	-	3.670	0.14449				
48172368	-	-	-	3.680	0.14488				
48172369	-	-	-	3.690	0.14528				
3300370	-	-	-	3.700	0.14567				
48172371	-	-	-	3.710	0.14606				
48172372	-	-	-	3.720	0.14646				
48172373	-	-	-	3.730	0.14685				
48172374	-	-	-	3.740	0.14724				
3300375	-	-	-	3.750	0.14764				
48172376	-	-	-	3.760	0.14803				
48172377	-	-	-	3.770	0.14843				
48172378	-	-	-	3.780	0.14882				
48172379	-	-	-	3.790	0.14921				
3300380	-	-	-	3.800	0.14961				
48172381	-	-	-	3.810	0.15000				
48172382	-	-	-	3.820	0.15039				
48172383	-	-	-	3.830	0.15079				
48172384	-	-	-	3.840	0.15118				
3300385	-	-	-	3.850	0.15157				
48172386	-	-	-	3.860	0.15197				
48172387	-	-	-	3.870	0.15236				
48172388	-	-	-	3.880	0.15276				
48172389	-	-	-	3.890	0.15315				
3300390	-	-	-	3.900	0.15354				
48172391	-	-	-	3.910	0.15394				
48172392	-	-	-	3.920	0.15433				
48172393	-	-	-	3.930	0.15472				
48172394	-	-	-	3.940	0.15512				
3300395	-	-	-	3.950	0.15551				
48172396	-	-	-	3.960	0.15591				
48172397	-	-	-	3.970	0.15630				
48172398	-	-	-	3.980	0.15669				
48172399	-	-	-	3.990	0.15709				
3300400	-	-	-	4.000	0.15748				
3300405	-	-	-	4.050	0.15945				
3300410	-	-	-	4.100	0.16142				
3300415	-	-	-	4.150	0.16339				
						64	5		

Packed: 1 pc.
Available TiAlN coating only.

continued on next page

List No.	Work Material																		
	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
5330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® MAX-MINI


High Performance Miniature Carbide Drills

List 5330 (Continued)

WX-MS-GDS, Precision Drill

SPEED FEED P367	CARBIDE	TiAlN	30°	SHANK h6
--------------------	---------	-------	-----	-------------

Cutting Diameter Tolerance		
Size	mm	inch
0.2 ≤ D ≤ 5.00	+0 / -0.010	+0 / -0.0004

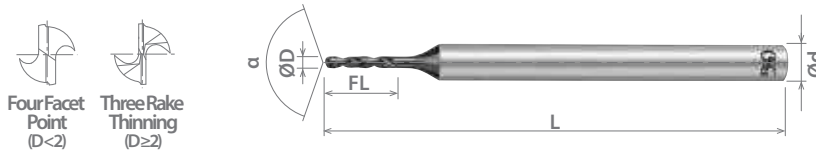

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
3300420	-	-	-	4.200	0.16535	22	64	5	130°
3300425	-	-	-	4.250	0.16732				
3300430	-	-	-	4.300	0.16929				
3300435	-	-	-	4.350	0.17126				
3300440	-	-	-	4.400	0.17323				
3300445	-	-	-	4.450	0.17520				
3300450	-	-	-	4.500	0.17717	24			
3300455	-	-	-	4.550	0.17913				
3300460	-	-	-	4.600	0.18110				
3300465	-	-	-	4.650	0.18307				
3300470	-	-	-	4.700	0.18504				
3300475	-	-	-	4.750	0.18701	26			
3300480	-	-	-	4.800	0.18898				
3300485	-	-	-	4.850	0.19094				
3300490	-	-	-	4.900	0.19291				
3300495	-	-	-	4.950	0.19488				
3300500	-	-	-	5.000	0.19685				

Packed: 1 pc.
Available TiAlN coating only.



List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5330	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 5340

MRS-GDL, Precision Drill

SPEED FEED P368	CARBIDE	SS	30°	SHANK h6
---------------------------	----------------	-----------	------------	--------------------

Cutting Diameter Tolerance		
Size	mm	inch
0.50 ≤ D ≤ 3.00	+0 / -0.008	+0 / -0.0003

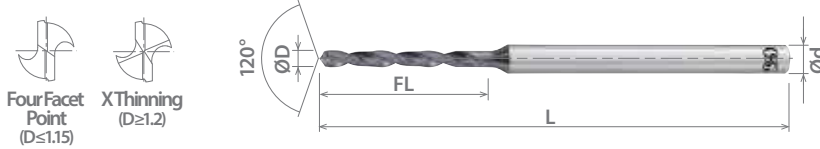

Four Facet Point (D ≤ 1.15)
XThinning (D ≥ 1.2)

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8577050	-	-	-	0.500	0.01969	6.0	42	3
8577054	-	-	-	0.540	0.02126	6.6		
8577055	-	-	-	0.550	0.02165	7.2		
8577056	-	-	-	0.560	0.02205			
8577060	-	-	-	0.600	0.02362	7.8		
8577063	-	-	-	0.630	0.02480			
8577064	-	-	-	0.640	0.02520			
8577065	-	-	-	0.650	0.02559			
8577070	-	-	-	0.700	0.02756	8.4		
8577071	-	-	-	0.710	0.02795			
8577072	-	-	-	0.720	0.02835	9.0		
8577073	-	-	-	0.730	0.02874			
8577074	-	-	-	0.740	0.02913			
8577075	-	-	-	0.750	0.02953			
8577080	-	-	-	0.800	0.03150	9.6		
8577081	-	-	-	0.810	0.03189			
8577082	-	-	-	0.820	0.03228	10.2		
8577090	-	-	-	0.900	0.03543			
8577091	-	-	-	0.910	0.03583			
8577092	-	-	-	0.920	0.03622			
8577100	-	-	-	1.000	0.03937	12.0		
8577110	-	-	-	1.100	0.04331			
8577111	-	-	-	1.110	0.04370	13.8		
8577112	-	-	-	1.120	0.04409			
8577115	-	-	-	1.150	0.04528			
8577120	-	-	-	1.200	0.04724			
8577127	-	-	-	1.270	0.05000	14.4		
8577128	-	-	-	1.280	0.05039			
8577129	-	-	-	1.290	0.05079	15.6		
8577130	-	-	-	1.300	0.05118			
8577140	-	-	-	1.400	0.05512			
8577145	-	-	-	1.450	0.05709			
8577146	-	-	-	1.460	0.05748	17.4		
8577147	-	-	-	1.470	0.05787			
8577150	-	-	-	1.500	0.05906	18.0		
8577151	-	-	-	1.510	0.05945			
8577152	-	-	-	1.520	0.05984			
8577153	-	-	-	1.530	0.06024			
8577155	-	-	-	1.550	0.06102	18.6		
8577156	-	-	-	1.560	0.06142			

Packed: 1 pc.
Available Super Smooth coating only.

continued on next page

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5340	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				

good best





EXOCARB® MAX-MINI


High Performance Miniature Carbide Drills

List 5340 (Continued)

MRS-GDL, Precision Drill

SPEED FEED P368	CARBIDE	SS	30°	SHANK h6
--------------------	---------	----	-----	-------------

Cutting Diameter Tolerance		
Size	mm	inch
0.50 ≤ D ≤ 3.00	+0 / -0.008	+0 / -0.0003

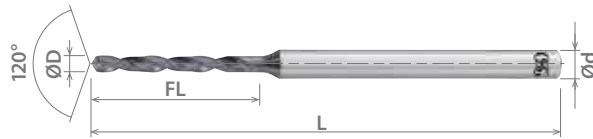

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8577157	-	-	-	1.570	0.06181	19.2	54	3
8577160	-	-	-	1.600	0.06299	20.4		
8577170	-	-	-	1.700	0.06693		21.6	
8577180	-	-	-	1.800	0.07087	22.2		
8577181	-	-	-	1.810	0.07126		22.8	
8577182	-	-	-	1.820	0.07165	24.0		
8577183	-	-	-	1.830	0.07205		25.2	
8577190	-	-	-	1.900	0.07480	25.8		
8577198	-	-	-	1.980	0.07795		26.4	
8577199	-	-	-	1.990	0.07835	27.6		
8577200	-	-	-	2.000	0.07874		28.2	
8577210	-	-	-	2.100	0.08268	28.8		
8577212	-	-	-	2.120	0.08346		29.4	
8577213	-	-	-	2.130	0.08386	30.0		
8577214	-	-	-	2.140	0.08425		30.6	
8577220	-	-	-	2.200	0.08661	31.2		
8577229	-	-	-	2.290	0.09016		32.4	
8577230	-	-	-	2.300	0.09055	33.6		
8577231	-	-	-	2.310	0.09094		34.8	
8577239	-	-	-	2.390	0.09409	36.0		
8577240	-	-	-	2.400	0.09449			
8577241	-	-	-	2.410	0.09488			
8577242	-	-	-	2.420	0.09528			
8577250	-	-	-	2.500	0.09843			
8577255	-	-	-	2.550	0.10039			
8577256	-	-	-	2.560	0.10079			
8577257	-	-	-	2.570	0.10118			
8577260	-	-	-	2.600	0.10236			
8577270	-	-	-	2.700	0.10630			
8577277	-	-	-	2.770	0.10906			
8577278	-	-	-	2.780	0.10945			
8577279	-	-	-	2.790	0.10984			
8577280	-	-	-	2.800	0.11024			
8577290	-	-	-	2.900	0.11417			
8577300	-	-	-	3.000	0.11811			

Packed: 1 pc.
Available Super Smooth coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5340	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 7501

Triple Angle

SPEED FEED P369	CARBIDE	DIA	0°
---------------------------	----------------	------------	-----------

Tolerance +0/-0.001"



EDP Number	Approximate Hole Size			Drill Size		Flute Length	Taper Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	I (mm)	L (mm)	d (mm)
750109816	-	#40	-	2.502	0.09850	15.2	3.8	50.8	2.50
750112916	-	#30	-	3.277	0.12900	20.3	4.8		3.27
750116116	-	#20	-	4.102	0.16150	25.4	5.9	76.2	4.10
750119116	-	#11	-	4.864	0.19150	27.9	7.0		101.6
750119216	-	#11	-			48.2			
750122116	-	#2	-	5.626	0.22150	33.0	8.0	88.9	5.62
750125116	1/4	-	-	6.375	0.25100	38.1	9.0		139.7
750125216	1/4	-	-			63.5			
750131316	5/16	-	-	7.963	0.31350	48.2	11.2	101.6	7.96
750137616	3/8	-	-	9.550	0.37600	58.4	13.4		152.4
750137716	3/8	-	-			96.5			
750143816	7/16	-	-	11.138	0.43850	66.0	15.5	101.6	11.13
750150116	1/2	-	-	12.725	0.50100	76.2	17.7	127.0	12.72

Packed: 1 pc.
Available Diamond coating only.
Drills are oversize over nominal.
Tri-Flat shank available upon request.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
7501	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

Good Best





List 7520

Low Helix

SPEED FEED P369	CARBIDE	DIA	5°
--------------------	---------	-----	----

Tolerance
+0/-0.001"



EDP Number	Approximate Hole Size			Drill Size		Flute Length	Taper Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	I (mm)	L (mm)	d (mm)
752009816	-	#40	-	2.502	0.09850	15.2	7.0	50.8	2.50
752012916	-	#30	-	3.277	0.12900	20.3	9.0		3.27
752016116	-	#20	-	4.102	0.16150	25.4	11.2	76.2	4.10
752019216	-	#11	-	4.864	0.19150	27.9	13.2		4.86
752022116	-	#2	-	5.626	0.22150	33.0	15.2	88.9	5.62
752025116	1/4	-	-	6.375	0.25100	38.1	17.2		6.37
752031316	5/16	-	-	7.963	0.31350	48.2	21.4	101.6	7.96
752037616	3/8	-	-	9.550	0.37600	58.4	25.6		9.55
752043816	7/16	-	-	11.138	0.43850	66.0	29.8	127.0	11.13
752050116	1/2	-	-	12.725	0.50100	76.2	34.0		12.72

Packed: 1 pc.
 Available Diamond coating only.
 Drills are oversize over nominal.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
7520	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>			

Good Best



List 7500

Tapered Drill/Reamer

SPEED FEED	CARBIDE	DIA	0°
P369			

Tolerance
+0/-0.001"



EDP Number	Approximate Hole Size			Drill Size		Flute Length	Taper Length	Overall Length	Shank Diameter						
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	I (mm)	L (mm)	d (mm)						
750009816	-	#40	-	2.502	0.09850	14.5	5.0	76.2	2.50						
750012816	-	#30	-	3.264	0.12850	18.9	6.5		152.4	3.26					
750012916	-		-			-		31.9		8.1	76.2	4.10			
750016116	-	#20	-	4.102	0.16150	23.8	152.4	4.76							
750016216	-	-	-	-	-	40.1			9.4	4.82					
750018716	3/16	-	-	4.763	0.18750	46.7	9.5	101.6			4.82				
750019016	-	#11	-	4.826	0.19000	47.3			9.6	152.4		4.85			
750019116	-		-				-	4.851			0.19100		28.3	101.6	4.87
750019216	-		-				-	-			-				
750019316	-		-				-	4.864			0.19200		48.64	10.9	5.53
750019416	-		-				-	-			-				
750019516	-		-				-	5.626			0.22150		62.3	12.5	6.35
750019716	-	-	-	6.350	0.25000	37.1	15.5	101.6	7.93						
750021816	7/32	-	-	5.537	0.21800					62.6	15.6	152.4	7.96		
750022116	-	#2	-	5.626	0.22150	55.5	18.6	101.6	9.52						
750025016	-	-	-	6.350	0.25000					55.5	18.7	101.6	9.55		
750025116	-	-	-	6.375	0.25100	64.8	21.7	101.6	11.13						
750025316	1/4	-	-	7.938	0.31250					74.6	24.8	152.4	12.72		
750025416	-	-	-	7.963	0.31350	99.5	24.8	152.4	12.72						
750025516	-	-	-	9.525	0.37500					99.5	24.8	152.4	12.72		
750031216	-	-	-	9.550	0.37600	99.5	24.8	152.4	12.72						
750031316	5/16	-	-	9.550	0.37600					99.5	24.8	152.4	12.72		
750031416	-	-	-	11.138	0.43850	99.5	24.8	152.4	12.72						
750031516	-	-	-	11.138	0.43850					99.5	24.8	152.4	12.72		
750031516	-	-	-	12.725	0.50100	99.5	24.8	152.4	12.72						
750037516	3/8	-	-	9.525	0.37500					99.5	24.8	152.4	12.72		
750037616	-	-	-	9.550	0.37600	99.5	24.8	152.4	12.72						
750037716	-	-	-	9.550	0.37600					99.5	24.8	152.4	12.72		
750037816	-	-	-	11.138	0.43850	99.5	24.8	152.4	12.72						
750043816	7/16	-	-	11.138	0.43850					99.5	24.8	152.4	12.72		
750050116	1/2	-	-	12.725	0.50100	99.5	24.8	152.4	12.72						

Packed: 1 pc.
Available Diamond coating only.
Drills are oversize over nominal.
Tri-Flat shank available upon request.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CFES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
7500	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>			

Good Best




List 7530

High Helix

SPEED FEED P369	CARBIDE	DIA	40°
---------------------------	----------------	------------	------------

Tolerance +0/-0.001"



EDP Number	Approximate Hole Size			Drill Size		Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	D				
				mm	Inch			
753009816	-	#40	-	2.502	0.09850	15.2	50.8	2.50
753012916	-	#30	-	3.277	0.12900	20.3	76.2	3.27
753016116	-	#20	-	4.102	0.16150	25.4	101.6	4.10
753019116	-	#11	-	4.864	0.19150	27.9		4.86
753022116	-	#2	-	5.626	0.22150	33.0		5.62
753025116	1/4	-	-	6.375	0.25100	38.1		6.37
753031316	5/16	-	-	7.963	0.31350	48.2	152.4	7.96
753037616	3/8	-	-	9.550	0.37600	58.4		9.55
753043816	7/16	-	-	11.138	0.43850	66.0		11.13
753050116	1/2	-	-	12.725	0.50100	76.2		12.72

Packed: 1 pc.
Available Diamond coating only.
Drills are oversize over nominal.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
7530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>		

Good Best





List 7532

Stack Drill

SPEED FEED P370	CARBIDE	DIA	40°
Tolerance			
+0/-0.001"			



EDP Number	Approximate Hole Size			Drill Size		Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	D				
				mm	Inch			
753209816	-	#40	-	2.502	0.09850	15.2	50.8	2.50
753212916	-	#30	-	3.277	0.12900	20.3	76.2	3.27
753216116	-	#20	-	4.102	0.16150	25.4	101.6	4.10
753219116	-	#11	-	4.864	0.19150	27.9		4.86
753222116	-	#2	-	5.626	0.22150	33.0		5.62
753225116	1/4	-	-	6.375	0.25100	38.1		6.37
753231316	5/16	-	-	7.963	0.31350	48.2	152.4	7.96
753237616	3/8	-	-	9.550	0.37600	58.4		9.55
753243816	7/16	-	-	11.138	0.43850	66.0		11.13
753250116	1/2	-	-	12.725	0.50100	76.2		12.72

Packed: 1 pc.
Available Diamond coating only.
Drills are oversize over nominal.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
7532	<input checked="" type="checkbox"/>									<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Good Best





EXOCARB® AERO-H

Stack Drill for All Stack Applications

List 5732

Stack Drill

SPEED FEED P370	CARBIDE	TiAlN	40°
--------------------	---------	-------	-----

Tolerance
+0/-0.0011"



EDP Number	Approximate Hole Size			Drill Size		Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	D				
				mm	Inch	FL (mm)	L (mm)	d (mm)
573219111	-	#11	-	4.864	0.19150			4.86
573225111	1/4	-	-	6.375	0.25100	50.8	101.6	6.37
573237611	3/8	-	-	9.550	0.37600			9.55
573250111	1/2	-	-	12.725	0.50100	101.6	152.4	12.72

Packed: 1 pc.
Available TiAlN coating only.
Drills are oversize over nominal.



Work Material

List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
5732	<input checked="" type="checkbox"/>									<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Good Best






List HP700

Three Flute Drill

SPEED FEED P371	CARBIDE	TiAIN	30°
Tolerance +0/-0.001"			



EDP Number	Approximate Hole Size			Drill Size		Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	D				
				mm	Inch			
HP700-0980	-	#40	-	2.490	0.09800	12.7	38.1	2.48
HP700-1285	-	#30	-	3.260	0.12850			3.26
HP700-1610	-	#20	-	4.090	0.16100			4.08
HP700-1910	-	#11	-	4.850	0.19100			4.85
HP700-2500	1/4	-	-	6.350	0.25000	15.8		6.35
HP700-2512	1/4	-	-	4.090 x 6.350	#20 x 0.250 Step			

Packed: 1 pc.
Available TiAIN coating only.
Tri-Flat shank available upon request.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
HP700	<input checked="" type="checkbox"/>									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Good Best





CARBIDE AERO-D-REAM


Carbide Drill/Reamer for Composites

List 257

Tapered Drill/Reamer

SPEED FEED P369	CARBIDE	BR	0°
---------------------------	----------------	-----------	-----------

Tolerance +0.0005"/-0



EDP Number	Approximate Hole Size					Flute Length	Taper Length	Overall Length	Shank Diameter	
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	I (mm)	L (mm)	d (mm)	
257-0980	-	40	-	2.489	0.09800	14.4	5.1	76.2	2.48	
257-1094	7/64	-	-	2.779	0.10940	16.1	5.6		2.77	
257-1250	1/8	-	-	3.175	0.12500	18.4	6.4		3.17	
257-1280	-	-	-	3.251	0.12800	31.9	6.5	152.4	3.25	
257-1285	-	30	-	3.264	0.12850	18.9	6.6	76.2	3.26	
257-1286	-	-	-	3.299	0.12990	32.0		152.4	3.29	
257-1299	-	-	-	3.299	0.12990	19.2	7.2	76.2	3.29	
257-1406	9/64	-	-	3.571	0.14060	20.7			3.57	
257-1440	-	27	-	3.658	0.14400	21.2			3.65	
257-1562	5/32	-	-	3.970	0.15630	23.0	7.9	76.2	3.96	
257-1570	-	22	-	3.988	0.15700	23.2	8.0		3.98	
257-1610	-	20	-	4.089	0.16100	23.7	8.2		152.4	4.08
257-1616	-	-	-	4.140	0.16300	40.1		4.14		
257-1630	-	-	-	4.366	0.17190	24.1	8.3	76.2	4.36	
257-1719	11/64	-	-	4.366	0.17190	25.4	8.7		4.74	
257-1870	-	-	-	4.750	0.18700	27.6	9.4		4.76	
257-1875	3/16	-	-	4.763	0.18750	27.7	9.5	101.6	4.82	
257-1900	-	-	-	4.826	0.19000	47.3	9.6		152.4	4.85
257-1906	-	-	-	4.851	0.19100	47.6			76.2	4.87
257-1916	-	11	-	4.877	0.19200	47.8	9.7	101.6	4.90	
257-1920	-	-	-	4.902	0.19300	48.1			4.91	
257-1930	-	-	-	4.915	0.19350	48.2			4.92	
257-1935	-	10	-	4.928	0.19400	48.3	9.8	101.6	5.10	
257-1940	-	-	-	5.105	0.20100	50.1			10.1	5.15
257-2010	-	7	-	5.159	0.20310	50.6	10.2	101.6	5.18	
257-2031	13/64	-	-	5.182	0.20400	50.8	10.3		5.21	
257-2040	-	6	-	5.220	0.20550	51.2	10.4		5.53	
257-2055	-	5	-	5.537	0.21800	54.3	11.0	152.4	5.55	
257-2180	-	-	-	5.558	0.21880	54.5			5.55	
257-2188	7/32	-	-	5.613	0.22100	54.3	11.1	101.6	5.61	
257-2210	-	2	-	5.613	0.22100	55.1			5.79	
257-2280	-	1	-	5.791	0.22800	56.8			11.5	5.95
257-2344	15/64	-	-	5.954	0.23440	58.4	11.8	152.4	6.35	
257-2500	-	-	-	6.350	0.25000	54.3	12.5		101.6	6.37
257-2506	1/4	-	-	6.375	0.25100	62.3	12.6		152.4	6.40
257-2510	-	-	-	6.375	0.25100	62.6		152.4	6.42	
257-2516	-	-	-	6.401	0.25200	62.8	12.7	101.6	6.42	
257-2520	-	-	-	6.426	0.25300	63.0			6.74	
257-2530	-	-	-	6.746	0.26560	66.2			13.3	7.14
257-2656	17/64	-	-	7.145	0.28130	70.1	14.1	101.6	7.54	
257-2812	9/32	-	-	7.541	0.29690	74.0	14.9		7.92	
257-2969	19/64	-	-	7.925	0.31200	46.1	15.6		7.93	
257-3120	-	-	-	7.938	0.31250	46.2		7.96		
257-3125	5/16	-	-	7.963	0.31350	46.3	15.7	101.6	8.33	
257-3135	-	-	-	8.334	0.32810	48.4	16.4		8.73	
257-3280	21/64	-	-	8.733	0.34380	50.8	17.2		8.89	
257-3438	11/32	-	-	8.890	0.35000	51.7	17.5	101.6	9.12	
257-3500	-	-	-	9.129	0.35940	53.1	17.9		9.12	
257-3594	23/64	-	-							

Packed: 1 pc.
Brazed shanks available on request: Threaded, Quick Change and Tri-Flat.





List 257 (Continued)

Tapered Drill/Reamer

SPEED FEED P369	CARBIDE	BR	0°
-----------------------	---------	----	----

EDP Number	Approximate Hole Size					Flute Length FL (mm)	Taper Length l (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
257-3750	3/8	-	-	9.525	0.37500	55.4	18.7	101.6	9.52
257-3756		-	-			74.4			
257-3906	25/64	-	-	9.921	0.39060	77.4	19.4	152.4	9.90
257-4066	13/32	-	-	10.320	0.40630	80.6	20.2		10.31
257-4376	7/16	-	-	11.113	0.43750	86.8	21.8		11.11
257-5006	1/2	-	-	12.700	0.50000	99.3	24.9		12.70

Packed: 1 pc.

Brazed shanks available on request: Threaded, Quick Change and Tri-Flat.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
257	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			

good best





List HP243

3D



SPEED FEED P372-373	CARBIDE	WD1	30°	SHANK h6
-------------------------------	----------------	------------	------------	--------------------

Cutting Diameter Tolerance (m7)		
Size	mm	inch
1 ≤ D ≤ 3	+0.002 / +0.012	+0.0001 / +0.0005
3 < D ≤ 6	+0.004 / +0.016	+0.0002 / +0.0006
6 < D ≤ 10	+0.006 / +0.021	+0.0002 / +0.0008
10 < D ≤ 18	+0.007 / +0.025	+0.0003 / +0.0010
18 < D ≤ 20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)			
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
HP243-0394	-	-	-	1.000	0.03937	7	35	3			
HP243-0433	-	-	-	1.100	0.04331						
HP243-0469	3/64	-	-	1.191	0.04688						
HP243-0472	-	-	-	1.200	0.04724	8	35		3		
HP243-0512	-	-	-	1.300	0.05118						
HP243-0551	-	-	-	1.400	0.05512						
HP243-0591	-	-	-	1.500	0.05906	9	35			3	
HP243-0626	1/16	-	-	1.588	0.06250						
HP243-0630	-	-	-	1.600	0.06299						
HP243-0669	-	-	-	1.700	0.06693	10	40				3
HP243-0709	-	-	-	1.800	0.07087						
HP243-0748	-	-	-	1.900	0.07480						
HP243-0780	5/64	-	-	1.984	0.07813	11	40	3			
HP243-0787	-	-	-	2.000	0.07874						
HP243-0827	-	-	-	2.100	0.08268						
HP243-0866	-	-	-	2.200	0.08661	13	45		3		
HP243-0906	-	-	-	2.300	0.09055						
HP243-0937	3/32	-	-	2.381	0.09375						
HP243-0945	-	-	-	2.400	0.09449	15	45			3	
HP243-0984	-	-	-	2.500	0.09843						
HP243-1024	-	-	-	2.600	0.10236						
HP243-1063	-	-	-	2.700	0.10630	17	50				3
HP243-1094	7/64	-	-	2.778	0.10938						
HP243-1102	-	-	-	2.800	0.11024						
HP243-1142	-	-	-	2.900	0.11417	20	62	6			
HP243-1181	-	-	-	3.000	0.11811						
HP243-1220	-	-	-	3.100	0.12205						
HP243-1248	1/8	-	-	3.175	0.12500	20	62		6		
HP243-1260	-	-	-	3.200	0.12598						
HP243-1299	-	-	-	3.300	0.12992						
HP243-1339	-	-	-	3.400	0.13386	24	66			6	
HP243-1378	-	-	-	3.500	0.13780						
HP243-1406	9/64	-	-	3.572	0.14063						
HP243-1417	-	-	-	3.600	0.14173	24	66				6
HP243-1457	-	-	-	3.700	0.14567						
HP243-1496	-	-	-	3.800	0.14961						
HP243-1535	-	-	-	3.900	0.15354	28	66	6			
HP243-1563	5/32	-	-	3.969	0.15625						
HP243-1575	-	-	-	4.000	0.15748						
HP243-1610	-	20	-	4.089	0.16100	28	66		6		
HP243-1614	-	-	-	4.100	0.16142						
HP243-1654	-	-	-	4.200	0.16535						
HP243-1693	-	-	-	4.300	0.16929	28	66			6	
HP243-1720	11/64	-	-	4.366	0.17188						
HP243-1732	-	-	-	4.400	0.17323						
HP243-1772	-	-	-	4.500	0.17717	28	66				6
HP243-1811	-	-	-	4.600	0.18110						
HP243-1831	-	-	-	4.650	0.18307						
HP243-1850	-	-	-	4.700	0.18504	28	66	6			
HP243-1874	3/16	-	-	4.763	0.18750						

Packed: 1 pc.
Available WD1 coating only.





List HP243 (Continued)

SPEED FEED P372-373	CARBIDE	WD1	30°	SHANK h6
------------------------	---------	-----	-----	-------------

3D

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP243-1890	-	-	-	4.800	0.18898	28	66	6
HP243-1929	-	-	-	4.900	0.19291			
HP243-1969	-	-	-	5.000	0.19685			
HP243-2008	-	-	-	5.100	0.20079			
HP243-2031	13/64	-	-	5.159	0.20313			
HP243-2047	-	-	-	5.200	0.20472			
HP243-2087	-	-	-	5.300	0.20866			
HP243-2126	-	-	-	5.400	0.21260			
HP243-2130	-	3	-	5.410	0.21300			
HP243-2165	-	-	-	5.500	0.21654			
HP243-2189	7/32	-	-	5.556	0.21875			
HP243-2205	-	-	-	5.600	0.22047			
HP243-2244	-	-	-	5.700	0.22441			
HP243-2283	-	-	-	5.800	0.22835			
HP243-2323	-	-	-	5.900	0.23228			
HP243-2343	15/64	-	-	5.953	0.23438			
HP243-2362	-	-	-	6.000	0.23622			
HP243-2402	-	-	-	6.100	0.24016			
HP243-2441	-	-	-	6.200	0.24409			
HP243-2480	-	-	-	6.300	0.24803			
HP243-2500	1/4	-	E	6.350	0.25000			
HP243-2520	-	-	-	6.400	0.25197			
HP243-2559	-	-	-	6.500	0.25591			
HP243-2571	-	-	F	6.528	0.25700			
HP243-2598	-	-	-	6.600	0.25984			
HP243-2638	-	-	-	6.700	0.26378			
HP243-2657	17/64	-	-	6.747	0.26563			
HP243-2677	-	-	-	6.800	0.26772			
HP243-2717	-	-	-	6.900	0.27165			
HP243-2756	-	-	-	7.000	0.27559			
HP243-2795	-	-	-	7.100	0.27953			
HP243-2811	9/32	-	-	7.144	0.28125			
HP243-2835	-	-	-	7.200	0.28346			
HP243-2874	-	-	-	7.300	0.28740			
HP243-2913	-	-	-	7.400	0.29134			
HP243-2953	-	-	-	7.500	0.29528			
HP243-2969	19/64	-	-	7.541	0.29688			
HP243-2992	-	-	-	7.600	0.29921			
HP243-3031	-	-	-	7.700	0.30315			
HP243-3071	-	-	-	7.800	0.30709			
HP243-3110	-	-	-	7.900	0.31102			
HP243-3126	5/16	-	-	7.938	0.31250			
HP243-3150	-	-	-	8.000	0.31496			
HP243-3189	-	-	-	8.100	0.31890			
HP243-3228	-	-	-	8.200	0.32283			
HP243-3268	-	-	-	8.300	0.32677			

Packed: 1 pc.
Available WD1 coating only.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
HP243	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>			

good best





List HP243 (Continued)

3D



SPEED FEED P372-373	CARBIDE	WD1	30°	SHANK h6
-------------------------------	----------------	------------	------------	--------------------

Cutting Diameter Tolerance (m7)		
Size	mm	inch
1 ≤ D ≤ 3	+0.002 / +0.012	+0.0001 / +0.0005
3 < D ≤ 6	+0.004 / +0.016	+0.0002 / +0.0006
6 < D ≤ 10	+0.006 / +0.021	+0.0002 / +0.0008
10 < D ≤ 18	+0.007 / +0.025	+0.0003 / +0.0010
18 < D ≤ 20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP243-3280	21/64	-	-	8.334	0.32813	47	89	10
HP243-3307	-	-	-	8.400	0.33071			
HP243-3319	-	-	Q	8.433	0.33200			
HP243-3346	-	-	-	8.500	0.33465			
HP243-3386	-	-	-	8.600	0.33858			
HP243-3425	-	-	-	8.700	0.34252			
HP243-3437	11/32	-	-	8.731	0.34375			
HP243-3465	-	-	-	8.800	0.34646			
HP243-3504	-	-	-	8.900	0.35039			
HP243-3543	-	-	-	9.000	0.35433			
HP243-3583	-	-	-	9.100	0.35827			
HP243-3594	23/64	-	-	9.128	0.35938			
HP243-3622	-	-	-	9.200	0.36220			
HP243-3642	-	-	-	9.250	0.36417			
HP243-3661	-	-	-	9.300	0.36614			
HP243-3701	-	-	-	9.400	0.37008			
HP243-3740	-	-	-	9.500	0.37402			
HP243-3748	3/8	-	-	9.525	0.37500			
HP243-3780	-	-	-	9.600	0.37795			
HP243-3819	-	-	-	9.700	0.38189			
HP243-3858	-	-	-	9.800	0.38583			
HP243-3898	-	-	-	9.900	0.38976			
HP243-3906	25/64	-	-	9.922	0.39063			
HP243-3937	-	-	-	10.000	0.39370			
HP243-3976	-	-	-	10.100	0.39764			
HP243-4016	-	-	-	10.200	0.40157			
HP243-4055	-	-	-	10.300	0.40551			
HP243-4063	13/32	-	-	10.319	0.40625			
HP243-4094	-	-	-	10.400	0.40945			
HP243-4134	-	-	-	10.500	0.41339			
HP243-4173	-	-	-	10.600	0.41732			
HP243-4213	-	-	-	10.700	0.42126			
HP243-4220	27/64	-	-	10.716	0.42188			
HP243-4252	-	-	-	10.800	0.42520			
HP243-4291	-	-	-	10.900	0.42913			
HP243-4331	-	-	-	11.000	0.43307			
HP243-4370	-	-	-	11.100	0.43701			
HP243-4374	7/16	-	-	11.113	0.43750			
HP243-4409	-	-	-	11.200	0.44094			
HP243-4449	-	-	-	11.300	0.44488			
HP243-4488	-	-	-	11.400	0.44882			
HP243-4528	-	-	-	11.500	0.45276			
HP243-4531	29/64	-	-	11.509	0.45313			
HP243-4567	-	-	-	11.600	0.45669			
HP243-4606	-	-	-	11.700	0.46063			
HP243-4646	-	-	-	11.800	0.46457			
HP243-4685	-	-	-	11.900	0.46850			
HP243-4689	15/32	-	-	11.906	0.46875			
HP243-4724	-	-	-	12.000	0.47244			
						55	102	12

Packed: 1 pc.
Available WD1 coating only.





List HP243 (Continued)

SPEED FEED P372-373	CARBIDE	WD1	30°	SHANK h6
------------------------	---------	-----	-----	-------------

3D

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP243-4764	-	-	-	12.100	0.47638	60	107	14
HP243-4803	-	-	-	12.200	0.48031			
HP243-4843	31/64	-	-	12.303	0.48438			
HP243-4882	-	-	-	12.400	0.48819			
HP243-4921	-	-	-	12.500	0.49213			
HP243-4961	-	-	-	12.600	0.49606			
HP243-5000	1/2	-	-	12.700	0.50000			
HP243-5039	-	-	-	12.800	0.50394			
HP243-5079	-	-	-	12.900	0.50787			
HP243-5118	-	-	-	13.000	0.51181			
HP243-5157	33/64	-	-	13.097	0.51563			
HP243-5197	-	-	-	13.200	0.51969			
HP243-5236	-	-	-	13.300	0.52362			
HP243-5276	-	-	-	13.400	0.52756			
HP243-5311	17/32	-	-	13.494	0.53125			
HP243-5315	-	-	-	13.500	0.53150			
HP243-5394	-	-	-	13.700	0.53937			
HP243-5512	-	-	-	14.000	0.55118			
HP243-5626	9/16	-	-	14.288	0.56250			
HP243-5709	-	-	-	14.500	0.57087			
HP243-5780	37/64	-	-	14.684	0.57813			
HP243-5787	-	-	-	14.700	0.57874			
HP243-5906	-	-	-	15.000	0.59055			
HP243-5937	19/32	-	-	15.081	0.59375			
HP243-6102	-	-	-	15.500	0.61024			
HP243-6181	-	-	-	15.700	0.61811			
HP243-6248	5/8	-	-	15.875	0.62500			
HP243-6299	-	-	-	16.000	0.62992			
HP243-6339	-	-	-	16.100	0.63386			
HP243-6496	-	-	-	16.500	0.64961			
HP243-6563	21/32	-	-	16.669	0.65625			
HP243-6693	-	-	-	17.000	0.66929			
HP243-6890	-	-	-	17.500	0.68898			
HP243-7087	-	-	-	18.000	0.70866			
HP243-7283	-	-	-	18.500	0.72835			
HP243-7480	-	-	-	19.000	0.74803			
HP243-7500	3/4	-	-	19.050	0.75000			
HP243-7579	-	-	-	19.250	0.75787			
HP243-7677	-	-	-	19.500	0.76772			
HP243-7874	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available WD1 coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP243	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>			

good best





List HP245

5D



SPEED FEED P372-373	CARBIDE	WD1	30°	SHANK h6
-------------------------------	----------------	------------	------------	--------------------

Cutting Diameter Tolerance (m7)		
Size	mm	inch
1 ≤ D ≤ 3	+0.002 / +0.012	+0.0001 / +0.0005
3 < D ≤ 6	+0.004 / +0.016	+0.0002 / +0.0006
6 < D ≤ 10	+0.006 / +0.021	+0.0002 / +0.0008
10 < D ≤ 18	+0.007 / +0.025	+0.0003 / +0.0010
18 < D ≤ 20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP245-0394	-	-	-	1.000	0.03937	9	38	3
HP245-0433	-	-	-	1.100	0.04331			
HP245-0469	3/64	-	-	1.191	0.04688			
HP245-0472	-	-	-	1.200	0.04724			
HP245-0512	-	-	-	1.300	0.05118	11		
HP245-0551	-	-	-	1.400	0.05512			
HP245-0591	-	-	-	1.500	0.05906	12		
HP245-0626	1/16	-	-	1.588	0.06250			
HP245-0630	-	-	-	1.600	0.06299	14		
HP245-0669	-	-	-	1.700	0.06693			
HP245-0709	-	-	-	1.800	0.07087	16		
HP245-0748	-	-	-	1.900	0.07480			
HP245-0780	5/64	-	-	1.984	0.07813	18	52	
HP245-0787	-	-	-	2.000	0.07874		50	
HP245-0827	-	-	-	2.100	0.08268	20		
HP245-0866	-	-	-	2.200	0.08661			
HP245-0906	-	-	-	2.300	0.09055	22		
HP245-0937	3/32	-	-	2.381	0.09375			
HP245-0945	-	-	-	2.400	0.09449	23		
HP245-0984	-	-	-	2.500	0.09843			
HP245-1024	-	-	-	2.600	0.10236	28		
HP245-1063	-	-	-	2.700	0.10630			
HP245-1094	7/64	-	-	2.778	0.10938	36		
HP245-1102	-	-	-	2.800	0.11024			
HP245-1142	-	-	-	2.900	0.11417	44		
HP245-1181	-	-	-	3.000	0.11811			
HP245-1220	-	-	-	3.100	0.12205	74		
HP245-1248	1/8	-	-	3.175	0.12500			
HP245-1260	-	-	-	3.200	0.12598	82		
HP245-1299	-	-	-	3.300	0.12992			
HP245-1339	-	-	-	3.400	0.13386	6		
HP245-1378	-	-	-	3.500	0.13780			
HP245-1406	9/64	-	-	3.572	0.14063	36		
HP245-1417	-	-	-	3.600	0.14173			
HP245-1457	-	-	-	3.700	0.14567	74		
HP245-1496	-	-	-	3.800	0.14961			
HP245-1535	-	-	-	3.900	0.15354	82		
HP245-1563	5/32	-	-	3.969	0.15625			
HP245-1575	-	-	-	4.000	0.15748	6		
HP245-1610	-	20	-	4.089	0.16100			
HP245-1614	-	-	-	4.100	0.16142	36		
HP245-1654	-	-	-	4.200	0.16535			
HP245-1693	-	-	-	4.300	0.16929	74		
HP245-1720	11/64	-	-	4.366	0.17188			
HP245-1732	-	-	-	4.400	0.17323	82		
HP245-1772	-	-	-	4.500	0.17717			
HP245-1811	-	-	-	4.600	0.18110	6		
HP245-1831	-	-	-	4.650	0.18307			
HP245-1850	-	-	-	4.700	0.18504	36		
HP245-1874	3/16	-	-	4.763	0.18750			

Packed: 1 pc.
Available WD1 coating only.



List HP245 (Continued)

5D

SPEED FEED	CARBIDE	WD1	30°	SHANK h6
P372-373				

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
HP245-1890	-	-	-	4.800	0.18898	44	82	6
HP245-1929	-	-	-	4.900	0.19291			
HP245-1969	-	-	-	5.000	0.19685			
HP245-2008	-	-	-	5.100	0.20079			
HP245-2031	13/64	-	-	5.159	0.20313			
HP245-2047	-	-	-	5.200	0.20472			
HP245-2087	-	-	-	5.300	0.20866			
HP245-2126	-	-	-	5.400	0.21260			
HP245-2130	-	3	-	5.410	0.21300			
HP245-2165	-	-	-	5.500	0.21654			
HP245-2189	7/32	-	-	5.556	0.21875			
HP245-2205	-	-	-	5.600	0.22047			
HP245-2244	-	-	-	5.700	0.22441			
HP245-2283	-	-	-	5.800	0.22835			
HP245-2323	-	-	-	5.900	0.23228			
HP245-2343	15/64	-	-	5.953	0.23438			
HP245-2362	-	-	-	6.000	0.23622			
HP245-2402	-	-	-	6.100	0.24016			
HP245-2441	-	-	-	6.200	0.24409			
HP245-2480	-	-	-	6.300	0.24803			
HP245-2500	1/4	-	E	6.350	0.25000			
HP245-2520	-	-	-	6.400	0.25197			
HP245-2559	-	-	-	6.500	0.25591			
HP245-2571	-	-	F	6.528	0.25700			
HP245-2598	-	-	-	6.600	0.25984			
HP245-2638	-	-	-	6.700	0.26378			
HP245-2657	17/64	-	-	6.747	0.26563			
HP245-2677	-	-	-	6.800	0.26772			
HP245-2717	-	-	-	6.900	0.27165			
HP245-2756	-	-	-	7.000	0.27559			
HP245-2795	-	-	-	7.100	0.27953			
HP245-2811	9/32	-	-	7.144	0.28125			
HP245-2835	-	-	-	7.200	0.28346			
HP245-2874	-	-	-	7.300	0.28740			
HP245-2913	-	-	-	7.400	0.29134			
HP245-2953	-	-	-	7.500	0.29528			
HP245-2969	19/64	-	-	7.541	0.29688			
HP245-2992	-	-	-	7.600	0.29921			
HP245-3031	-	-	-	7.700	0.30315			
HP245-3071	-	-	-	7.800	0.30709			
HP245-3110	-	-	-	7.900	0.31102			
HP245-3126	5/16	-	-	7.938	0.31250			
HP245-3150	-	-	-	8.000	0.31496			
HP245-3189	-	-	-	8.100	0.31890			
HP245-3228	-	-	-	8.200	0.32283			
HP245-3268	-	-	-	8.300	0.32677			
						61	103	10

Packed: 1 pc.
Available WD1 coating only.

▶ continued on next page ▶

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP245	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>			

good best





List HP245 (Continued)

5D



SPEED FEED	CARBIDE	WD1	30°	SHANK h6
P372-373				

Cutting Diameter Tolerance (m7)		
Size	mm	inch
1 ≤ D ≤ 3	+0.002 / +0.012	+0.0001 / +0.0005
3 < D ≤ 6	+0.004 / +0.016	+0.0002 / +0.0006
6 < D ≤ 10	+0.006 / +0.021	+0.0002 / +0.0008
10 < D ≤ 18	+0.007 / +0.025	+0.0003 / +0.0010
18 < D ≤ 20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP245-3280	21/64	-	-	8.334	0.32813	61	103	10
HP245-3307	-	-	-	8.400	0.33071			
HP245-3319	-	-	Q	8.433	0.33200			
HP245-3346	-	-	-	8.500	0.33465			
HP245-3386	-	-	-	8.600	0.33858			
HP245-3425	-	-	-	8.700	0.34252			
HP245-3437	11/32	-	-	8.731	0.34375			
HP245-3465	-	-	-	8.800	0.34646			
HP245-3504	-	-	-	8.900	0.35039			
HP245-3543	-	-	-	9.000	0.35433			
HP245-3583	-	-	-	9.100	0.35827			
HP245-3594	23/64	-	-	9.128	0.35938			
HP245-3622	-	-	-	9.200	0.36220			
HP245-3642	-	-	-	9.250	0.36417			
HP245-3661	-	-	-	9.300	0.36614			
HP245-3701	-	-	-	9.400	0.37008			
HP245-3740	-	-	-	9.500	0.37402			
HP245-3748	3/8	-	-	9.525	0.37500			
HP245-3780	-	-	-	9.600	0.37795			
HP245-3819	-	-	-	9.700	0.38189			
HP245-3858	-	-	-	9.800	0.38583			
HP245-3898	-	-	-	9.900	0.38976			
HP245-3906	25/64	-	-	9.922	0.39063			
HP245-3937	-	-	-	10.000	0.39370			
HP245-3976	-	-	-	10.100	0.39764			
HP245-4016	-	-	-	10.200	0.40157			
HP245-4055	-	-	-	10.300	0.40551			
HP245-4063	13/32	-	-	10.319	0.40625			
HP245-4094	-	-	-	10.400	0.40945			
HP245-4134	-	-	-	10.500	0.41339			
HP245-4173	-	-	-	10.600	0.41732			
HP245-4213	-	-	-	10.700	0.42126			
HP245-4220	27/64	-	-	10.716	0.42188			
HP245-4252	-	-	-	10.800	0.42520			
HP245-4291	-	-	-	10.900	0.42913			
HP245-4331	-	-	-	11.000	0.43307			
HP245-4370	-	-	-	11.100	0.43701			
HP245-4374	7/16	-	-	11.113	0.43750			
HP245-4409	-	-	-	11.200	0.44094			
HP245-4449	-	-	-	11.300	0.44488			
HP245-4488	-	-	-	11.400	0.44882			
HP245-4528	-	-	-	11.500	0.45276			
HP245-4531	29/64	-	-	11.509	0.45313			
HP245-4567	-	-	-	11.600	0.45669			
HP245-4606	-	-	-	11.700	0.46063			
HP245-4646	-	-	-	11.800	0.46457			
HP245-4685	-	-	-	11.900	0.46850			
HP245-4689	15/32	-	-	11.906	0.46875			
HP245-4724	-	-	-	12.000	0.47244			
HP245-4370	-	-	-	11.100	0.43701	71	118	12
HP245-4374	7/16	-	-	11.113	0.43750			
HP245-4409	-	-	-	11.200	0.44094			
HP245-4449	-	-	-	11.300	0.44488			
HP245-4488	-	-	-	11.400	0.44882			
HP245-4528	-	-	-	11.500	0.45276			
HP245-4531	29/64	-	-	11.509	0.45313			
HP245-4567	-	-	-	11.600	0.45669			
HP245-4606	-	-	-	11.700	0.46063			
HP245-4646	-	-	-	11.800	0.46457			
HP245-4685	-	-	-	11.900	0.46850			
HP245-4689	15/32	-	-	11.906	0.46875			
HP245-4724	-	-	-	12.000	0.47244			

Packed: 1 pc.
Available WD1 coating only.



List HP245 (Continued)



5D

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP245-4764	-	-	-	12.100	0.47638	77	124	14
HP245-4803	-	-	-	12.200	0.48031			
HP245-4843	31/64	-	-	12.303	0.48438			
HP245-4882	-	-	-	12.400	0.48819			
HP245-4921	-	-	-	12.500	0.49213			
HP245-4961	-	-	-	12.600	0.49606			
HP245-5000	1/2	-	-	12.700	0.50000			
HP245-5039	-	-	-	12.800	0.50394			
HP245-5079	-	-	-	12.900	0.50787			
HP245-5118	-	-	-	13.000	0.51181			
HP245-5157	33/64	-	-	13.097	0.51563			
HP245-5197	-	-	-	13.200	0.51969			
HP245-5236	-	-	-	13.300	0.52362			
HP245-5394	-	-	-	13.700	0.53937			
HP245-5276	-	-	-	13.400	0.52756			
HP245-5311	17/32	-	-	13.494	0.53125			
HP245-5315	-	-	-	13.500	0.53150			
HP245-5512	-	-	-	14.000	0.55118			
HP245-5626	9/16	-	-	14.288	0.56250			
HP245-5709	-	-	-	14.500	0.57087			
HP245-5780	37/64	-	-	14.684	0.57813			
HP245-5787	-	-	-	14.700	0.57874			
HP245-5906	-	-	-	15.000	0.59055			
HP245-5937	19/32	-	-	15.081	0.59375			
HP245-6102	-	-	-	15.500	0.61024			
HP245-6181	-	-	-	15.700	0.61811			
HP245-6248	5/8	-	-	15.875	0.62500			
HP245-6299	-	-	-	16.000	0.62992			
HP245-6339	-	-	-	16.100	0.63386			
HP245-6496	-	-	-	16.500	0.64961			
HP245-6563	21/32	-	-	16.669	0.65625			
HP245-6693	-	-	-	17.000	0.66929			
HP245-6890	-	-	-	17.500	0.68898			
HP245-7087	-	-	-	18.000	0.70866			
HP245-7283	-	-	-	18.500	0.72835			
HP245-7480	-	-	-	19.000	0.74803			
HP245-7500	3/4	-	-	19.050	0.75000			
HP245-7579	-	-	-	19.250	0.75787			
HP245-7677	-	-	-	19.500	0.76772			
HP245-7874	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available WD1 coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP245	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List HP253

3D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (m7)		
Size	mm	inch
D=3	+0.002 / +0.012	+0.0001 / +0.0005
3<D≤6	+0.004 / +0.016	+0.0002 / +0.0006
6<D≤10	+0.006 / +0.021	+0.0002 / +0.0008
10<D≤18	+0.007 / +0.025	+0.0003 / +0.0010
18<D≤20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP253-1181	-	-	-	3.000	0.11811	20	62	6
HP253-1220	-	-	-	3.100	0.12205			
HP253-1248	1/8	-	-	3.175	0.12500			
HP253-1260	-	-	-	3.200	0.12598			
HP253-1299	-	-	-	3.300	0.12992			
HP253-1339	-	-	-	3.400	0.13386			
HP253-1378	-	-	-	3.500	0.13780			
HP253-1406	9/64	-	-	3.572	0.14063			
HP253-1417	-	-	-	3.600	0.14173			
HP253-1457	-	-	-	3.700	0.14567			
HP253-1496	-	-	-	3.800	0.14961			
HP253-1535	-	-	-	3.900	0.15354			
HP253-1563	5/32	-	-	3.969	0.15625			
HP253-1575	-	-	-	4.000	0.15748			
HP253-1610	-	20	-	4.089	0.16100			
HP253-1614	-	-	-	4.100	0.16142			
HP253-1654	-	-	-	4.200	0.16535			
HP253-1693	-	-	-	4.300	0.16929			
HP253-1720	11/64	-	-	4.366	0.17188			
HP253-1732	-	-	-	4.400	0.17323			
HP253-1772	-	-	-	4.500	0.17717			
HP253-1811	-	-	-	4.600	0.18110			
HP253-1831	-	-	-	4.650	0.18307			
HP253-1850	-	-	-	4.700	0.18504			
HP253-1874	3/16	-	-	4.763	0.18750			
HP253-1890	-	-	-	4.800	0.18898			
HP253-1929	-	-	-	4.900	0.19291			
HP253-1969	-	-	-	5.000	0.19685			
HP253-2008	-	-	-	5.100	0.20079			
HP253-2031	13/64	-	-	5.159	0.20313			
HP253-2047	-	-	-	5.200	0.20472			
HP253-2087	-	-	-	5.300	0.20866			
HP253-2126	-	-	-	5.400	0.21260			
HP253-2130	-	3	-	5.410	0.21300			
HP253-2165	-	-	-	5.500	0.21654			
HP253-2189	7/32	-	-	5.556	0.21875			
HP253-2205	-	-	-	5.600	0.22047			
HP253-2244	-	-	-	5.700	0.22441			
HP253-2283	-	-	-	5.800	0.22835			
HP253-2323	-	-	-	5.900	0.23228			
HP253-2343	15/64	-	-	5.953	0.23438			
HP253-2362	-	-	-	6.000	0.23622			
HP253-2402	-	-	-	6.100	0.24016			
HP253-2441	-	-	-	6.200	0.24409			
HP253-2480	-	-	-	6.300	0.24803			
HP253-2500	1/4	-	E	6.350	0.25000			
HP253-2520	-	-	-	6.400	0.25197			
HP253-2559	-	-	-	6.500	0.25591			
HP253-2571	-	-	F	6.528	0.25700			
HP253-2598	-	-	-	6.600	0.25984			

Packed: 1 pc.
Available WD1 coating only.





List HP253 (Continued)

3D, Coolant-Through



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
HP253-2638	-	-	-	6.700	0.26378	34	79	8		
HP253-2657	17/64	-	-	6.747	0.26563					
HP253-2677	-	-	-	6.800	0.26772					
HP253-2717	-	-	-	6.900	0.27165					
HP253-2756	-	-	-	7.000	0.27559					
HP253-2795	-	-	-	7.100	0.27953					
HP253-2811	9/32	-	-	7.144	0.28125	41			89	10
HP253-2835	-	-	-	7.200	0.28346					
HP253-2874	-	-	-	7.300	0.28740					
HP253-2913	-	-	-	7.400	0.29134					
HP253-2953	-	-	-	7.500	0.29528					
HP253-2969	19/64	-	-	7.541	0.29688					
HP253-2992	-	-	-	7.600	0.29921	47	102	12		
HP253-3031	-	-	-	7.700	0.30315					
HP253-3071	-	-	-	7.800	0.30709					
HP253-3110	-	-	-	7.900	0.31102					
HP253-3126	5/16	-	-	7.938	0.31250					
HP253-3150	-	-	-	8.000	0.31496					
HP253-3189	-	-	-	8.100	0.31890	55			102	12
HP253-3228	-	-	-	8.200	0.32283					
HP253-3268	-	-	-	8.300	0.32677					
HP253-3280	21/64	-	-	8.334	0.32813					
HP253-3307	-	-	-	8.400	0.33071					
HP253-3319	-	-	Q	8.433	0.33200					
HP253-3346	-	-	-	8.500	0.33465	55	102	12		
HP253-3386	-	-	-	8.600	0.33858					
HP253-3425	-	-	-	8.700	0.34252					
HP253-3437	11/32	-	-	8.731	0.34375					
HP253-3465	-	-	-	8.800	0.34646					
HP253-3504	-	-	-	8.900	0.35039					
HP253-3543	-	-	-	9.000	0.35433	55			102	12
HP253-3583	-	-	-	9.100	0.35827					
HP253-3594	23/64	-	-	9.128	0.35938					
HP253-3622	-	-	-	9.200	0.36220					
HP253-3642	-	-	-	9.250	0.36417					
HP253-3661	-	-	-	9.300	0.36614					
HP253-3701	-	-	-	9.400	0.37008	55	102	12		
HP253-3740	-	-	-	9.500	0.37402					
HP253-3748	3/8	-	-	9.525	0.37500					
HP253-3780	-	-	-	9.600	0.37795					
HP253-3819	-	-	-	9.700	0.38189					
HP253-3858	-	-	-	9.800	0.38583					
HP253-3898	-	-	-	9.900	0.38976	55			102	12
HP253-3906	25/64	-	-	9.922	0.39063					
HP253-3937	-	-	-	10.000	0.39370					
HP253-3976	-	-	-	10.100	0.39764					

Packed: 1 pc.
Available WD1 coating only.

continued on next page

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP253	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List HP253 (Continued)

3D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (m7)		
Size	mm	inch
D=3	+0.002 / +0.012	+0.0001 / +0.0005
3<D≤6	+0.004 / +0.016	+0.0002 / +0.0006
6<D≤10	+0.006 / +0.021	+0.0002 / +0.0008
10<D≤18	+0.007 / +0.025	+0.0003 / +0.0010
18<D≤20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP253-4016	-	-	-	10.200	0.40157	55	102	12
HP253-4055	-	-	-	10.300	0.40551			
HP253-4063	13/32	-	-	10.319	0.40625			
HP253-4094	-	-	-	10.400	0.40945			
HP253-4134	-	-	-	10.500	0.41339			
HP253-4173	-	-	-	10.600	0.41732			
HP253-4213	-	-	-	10.700	0.42126			
HP253-4220	27/64	-	-	10.716	0.42188			
HP253-4252	-	-	-	10.800	0.42520			
HP253-4291	-	-	-	10.900	0.42913			
HP253-4331	-	-	-	11.000	0.43307			
HP253-4370	-	-	-	11.100	0.43701			
HP253-4374	7/16	-	-	11.113	0.43750			
HP253-4409	-	-	-	11.200	0.44094			
HP253-4449	-	-	-	11.300	0.44488			
HP253-4488	-	-	-	11.400	0.44882			
HP253-4528	-	-	-	11.500	0.45276			
HP253-4531	29/64	-	-	11.509	0.45313			
HP253-4567	-	-	-	11.600	0.45669			
HP253-4606	-	-	-	11.700	0.46063			
HP253-4646	-	-	-	11.800	0.46457			
HP253-4685	-	-	-	11.900	0.46850			
HP253-4689	15/32	-	-	11.906	0.46875			
HP253-4724	-	-	-	12.000	0.47244			
HP253-4764	-	-	-	12.100	0.47638			
HP253-4803	-	-	-	12.200	0.48031			
HP253-4843	31/64	-	-	12.303	0.48438			
HP253-4882	-	-	-	12.400	0.48819			
HP253-4921	-	-	-	12.500	0.49213			
HP253-4961	-	-	-	12.600	0.49606			
HP253-5000	1/2	-	-	12.700	0.50000			
HP253-5039	-	-	-	12.800	0.50394			
HP253-5079	-	-	-	12.900	0.50787			
HP253-5118	-	-	-	13.000	0.51181			
HP253-5157	33/64	-	-	13.097	0.51563			
HP253-5197	-	-	-	13.200	0.51969			
HP253-5236	-	-	-	13.300	0.52362			
HP253-5276	-	-	-	13.400	0.52756			
HP253-5311	17/32	-	-	13.494	0.53125			
HP253-5315	-	-	-	13.500	0.53150			
HP253-5394	-	-	-	13.700	0.53937			
HP253-5512	-	-	-	14.000	0.55118			
HP253-5626	9/16	-	-	14.288	0.56250			
HP253-5709	-	-	-	14.500	0.57087			
HP253-5780	37/64	-	-	14.684	0.57813			
HP253-5787	-	-	-	14.700	0.57874			
HP253-5906	-	-	-	15.000	0.59055			
HP253-5937	19/32	-	-	15.081	0.59375			
HP253-6102	-	-	-	15.500	0.61024			
HP253-6181	-	-	-	15.700	0.61811			
						60	107	14
						65	115	16

Packed: 1 pc.
Available WD1 coating only.





List HP253 (Continued)

3D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP253-6248	5/8	-	-	15.875	0.62500	65	115	16
HP253-6299	-	-	-	16.000	0.62992			
HP253-6339	-	-	-	16.100	0.63386			
HP253-6496	-	-	-	16.500	0.64961	73	123	18
HP253-6563	21/32	-	-	16.669	0.65625			
HP253-6693	-	-	-	17.000	0.66929			
HP253-6890	-	-	-	17.500	0.68898	79	131	20
HP253-7087	-	-	-	18.000	0.70866			
HP253-7283	-	-	-	18.500	0.72835			
HP253-7480	-	-	-	19.000	0.74803	79	131	20
HP253-7500	3/4	-	-	19.050	0.75000			
HP253-7579	-	-	-	19.250	0.75787			
HP253-7677	-	-	-	19.500	0.76772			
HP253-7874	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available WD1 coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP253	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB

Performance Coolant-Through Carbide Drills

List HP255

5D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (m7)		
Size	mm	inch
D=3	+0.002 / +0.012	+0.0001 / +0.0005
3<D≤6	+0.004 / +0.016	+0.0002 / +0.0006
6<D≤10	+0.006 / +0.021	+0.0002 / +0.0008
10<D≤18	+0.007 / +0.025	+0.0003 / +0.0010
18<D≤20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP255-1181	-	-	-	3.000	0.11811	28	66	6
HP255-1220	-	-	-	3.100	0.12205			
HP255-1248	1/8	-	-	3.175	0.12500			
HP255-1260	-	-	-	3.200	0.12598			
HP255-1299	-	-	-	3.300	0.12992			
HP255-1339	-	-	-	3.400	0.13386			
HP255-1378	-	-	-	3.500	0.13780			
HP255-1406	9/64	-	-	3.572	0.14063			
HP255-1417	-	-	-	3.600	0.14173			
HP255-1457	-	-	-	3.700	0.14567			
HP255-1496	-	-	-	3.800	0.14961			
HP255-1535	-	-	-	3.900	0.15354			
HP255-1563	5/32	-	-	3.969	0.15625	36	74	6
HP255-1575	-	-	-	4.000	0.15748			
HP255-1610	-	20	-	4.089	0.16100			
HP255-1614	-	-	-	4.100	0.16142			
HP255-1654	-	-	-	4.200	0.16535			
HP255-1693	-	-	-	4.300	0.16929			
HP255-1720	11/64	-	-	4.366	0.17188			
HP255-1732	-	-	-	4.400	0.17323			
HP255-1772	-	-	-	4.500	0.17717			
HP255-1811	-	-	-	4.600	0.18110			
HP255-1831	-	-	-	4.650	0.18307			
HP255-1850	-	-	-	4.700	0.18504			
HP255-1874	3/16	-	-	4.763	0.18750	44	82	6
HP255-1890	-	-	-	4.800	0.18898			
HP255-1929	-	-	-	4.900	0.19291			
HP255-1969	-	-	-	5.000	0.19685			
HP255-2008	-	-	-	5.100	0.20079			
HP255-2031	13/64	-	-	5.159	0.20313			
HP255-2047	-	-	-	5.200	0.20472			
HP255-2087	-	-	-	5.300	0.20866			
HP255-2126	-	-	-	5.400	0.21260			
HP255-2130	-	3	-	5.410	0.21300			
HP255-2165	-	-	-	5.500	0.21654			
HP255-2189	7/32	-	-	5.556	0.21875			
HP255-2205	-	-	-	5.600	0.22047			
HP255-2244	-	-	-	5.700	0.22441			
HP255-2283	-	-	-	5.800	0.22835			
HP255-2323	-	-	-	5.900	0.23228			
HP255-2343	15/64	-	-	5.953	0.23438	53	91	8
HP255-2362	-	-	-	6.000	0.23622			
HP255-2402	-	-	-	6.100	0.24016			
HP255-2441	-	-	-	6.200	0.24409			
HP255-2480	-	-	-	6.300	0.24803			
HP255-2500	1/4	-	E	6.350	0.25000			
HP255-2520	-	-	-	6.400	0.25197			
HP255-2559	-	-	-	6.500	0.25591			
HP255-2571	-	-	F	6.528	0.25700			
HP255-2598	-	-	-	6.600	0.25984			

Packed: 1 pc.
Available WD1 coating only.





List HP255 (Continued)

5D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP255-2638	-	-	-	6.700	0.26378	53	91	8
HP255-2657	17/64	-	-	6.746	0.26560			
HP255-2677	-	-	-	6.800	0.26772			
HP255-2717	-	-	-	6.900	0.27165			
HP255-2756	-	-	-	7.000	0.27559			
HP255-2795	-	-	-	7.100	0.27953			
HP255-2811	9/32	-	-	7.145	0.28130			
HP255-2835	-	-	-	7.200	0.28346			
HP255-2874	-	-	-	7.300	0.28740			
HP255-2913	-	-	-	7.400	0.29134			
HP255-2953	-	-	-	7.500	0.29528			
HP255-2969	19/64	-	-	7.541	0.29690			
HP255-2992	-	-	-	7.600	0.29921			
HP255-3031	-	-	-	7.700	0.30315			
HP255-3071	-	-	-	7.800	0.30709			
HP255-3110	-	-	-	7.900	0.31102			
HP255-3126	5/16	-	-	7.938	0.31250			
HP255-3150	-	-	-	8.000	0.31496			
HP255-3189	-	-	-	8.100	0.31890			
HP255-3228	-	-	-	8.200	0.32283			
HP255-3268	-	-	-	8.300	0.32677			
HP255-3280	21/64	-	-	8.334	0.32810			
HP255-3307	-	-	-	8.400	0.33071			
HP255-3319	-	-	Q	8.433	0.33200			
HP255-3346	-	-	-	8.500	0.33465			
HP255-3386	-	-	-	8.600	0.33858			
HP255-3425	-	-	-	8.700	0.34252			
HP255-3437	11/32	-	-	8.733	0.34380			
HP255-3465	-	-	-	8.800	0.34646			
HP255-3504	-	-	-	8.900	0.35039			
HP255-3543	-	-	-	9.000	0.35433			
HP255-3583	-	-	-	9.100	0.35827			
HP255-3594	23/64	-	-	9.129	0.35940			
HP255-3622	-	-	-	9.200	0.36220			
HP255-3642	-	-	-	9.250	0.36417			
HP255-3661	-	-	-	9.300	0.36614			
HP255-3701	-	-	-	9.400	0.37008			
HP255-3740	-	-	-	9.500	0.37402			
HP255-3748	3/8	-	-	9.525	0.37500			
HP255-3780	-	-	-	9.600	0.37795			
HP255-3819	-	-	-	9.700	0.38189			
HP255-3858	-	-	-	9.800	0.38583			
HP255-3898	-	-	-	9.900	0.38976			
HP255-3906	25/64	-	-	9.921	0.39060			
HP255-3937	-	-	-	10.000	0.39370			
HP255-3937	-	-	-	10.000	0.39370			
HP255-3937	-	-	-	10.000	0.39370			

Packed: 1 pc.
Available WD1 coating only.

➡ continued on next page ➡

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH			6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
HP255	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List HP255 (Continued)

5D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (m7)		
Size	mm	inch
D=3	+0.002 / +0.012	+0.0001 / +0.0005
3<D≤6	+0.004 / +0.016	+0.0002 / +0.0006
6<D≤10	+0.006 / +0.021	+0.0002 / +0.0008
10<D≤18	+0.007 / +0.025	+0.0003 / +0.0010
18<D≤20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP255-3976	-	-	-	10.100	0.39764	71	118	12
HP255-4016	-	-	-	10.200	0.40157			
HP255-4055	-	-	-	10.300	0.40551			
HP255-4063	13/32	-	-	10.319	0.40625			
HP255-4094	-	-	-	10.400	0.40945			
HP255-4134	-	-	-	10.500	0.41339			
HP255-4173	-	-	-	10.600	0.41732			
HP255-4213	-	-	-	10.700	0.42126			
HP255-4220	27/64	-	-	10.716	0.42190			
HP255-4252	-	-	-	10.800	0.42520			
HP255-4291	-	-	-	10.900	0.42913			
HP255-4331	-	-	-	11.000	0.43307			
HP255-4370	-	-	-	11.100	0.43701			
HP255-4374	7/16	-	-	11.113	0.43750			
HP255-4409	-	-	-	11.200	0.44094			
HP255-4449	-	-	-	11.300	0.44488			
HP255-4488	-	-	-	11.400	0.44882			
HP255-4528	-	-	-	11.500	0.45276			
HP255-4531	29/64	-	-	11.509	0.45310			
HP255-4567	-	-	-	11.600	0.45669			
HP255-4606	-	-	-	11.700	0.46063			
HP255-4646	-	-	-	11.800	0.46457			
HP255-4685	-	-	-	11.900	0.46850			
HP255-4689	15/32	-	-	11.908	0.46880			
HP255-4724	-	-	-	12.000	0.47244			
HP255-4764	-	-	-	12.100	0.47638			
HP255-4803	-	-	-	12.200	0.48031			
HP255-4843	-	-	-	12.300	0.48425			
HP255-4882	-	-	-	12.400	0.48819			
HP255-4921	-	-	-	12.500	0.49213			
HP255-4961	-	-	-	12.600	0.49606			
HP255-5000	1/2	-	-	12.700	0.50000			
HP255-5039	-	-	-	12.800	0.50394			
HP255-5079	-	-	-	12.900	0.50787			
HP255-5118	-	-	-	13.000	0.51181			
HP255-5157	-	-	-	13.100	0.51575			
HP255-5197	-	-	-	13.200	0.51969			
HP255-5236	-	-	-	13.300	0.52362			
HP255-5276	-	-	-	13.400	0.52756			
HP255-5311	17/32	-	-	13.495	0.53130			
HP255-5315	-	-	-	13.500	0.53150			
HP255-5394	-	-	-	13.700	0.53937			
HP255-5512	-	-	-	14.000	0.55118			
HP255-5626	9/16	-	-	14.288	0.56250			
HP255-5709	-	-	-	14.500	0.57087			
HP255-5780	37/64	-	-	14.684	0.57810			
HP255-5787	-	-	-	14.700	0.57874			
HP255-5906	-	-	-	15.000	0.59055			
HP255-5937	19/32	-	-	15.083	0.59380			
HP255-6102	-	-	-	15.500	0.61024			
						83	133	16

Packed: 1 pc.
Available WD1 coating only.



List HP255 (Continued)

5D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
HP255-6181	-	-	-	15.700	0.61811	83	133	16
HP255-6248	5/8	-	-	15.875	0.62500			
HP255-6299	-	-	-	16.000	0.62992			
HP255-6339	-	-	-	16.100	0.63386	93	143	18
HP255-6496	-	-	-	16.500	0.64961			
HP255-6563	21/32	-	-	16.669	0.65625			
HP255-6693	-	-	-	17.000	0.66929			
HP255-6890	-	-	-	17.500	0.68898			
HP255-7087	-	-	-	18.000	0.70866			
HP255-7283	-	-	-	18.500	0.72835	101	153	20
HP255-7480	-	-	-	19.000	0.74803			
HP255-7500	3/4	-	-	19.050	0.75000			
HP255-7579	-	-	-	19.250	0.75787			
HP255-7677	-	-	-	19.500	0.76772			
HP255-7874	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available WD1 coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP255	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List HP258

8D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------



Cutting Diameter Tolerance (m7)		
Size	mm	inch
D=3	+0.002 / +0.012	+0.0001 / +0.0005
3<D≤6	+0.004 / +0.016	+0.0002 / +0.0006
6<D≤10	+0.006 / +0.021	+0.0002 / +0.0008
10<D≤18	+0.007 / +0.025	+0.0003 / +0.0010
18<D≤20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP258-1181	-	-	-	3.000	0.11811	34	77	4
HP258-1220	-	-	-	3.100	0.12205	36		
HP258-1248	1/8	-	-	3.175	0.12500	43		
HP258-1260	-	-	-	3.200	0.12598	36	77	
HP258-1299	-	-	-	3.300	0.12992			
HP258-1339	-	-	-	3.400	0.13386	43	81	
HP258-1378	-	-	-	3.500	0.13780			
HP258-1406	9/64	-	-	3.572	0.14063	36	77	
HP258-1417	-	-	-	3.600	0.14173			
HP258-1457	-	-	-	3.700	0.14567	45	85	
HP258-1496	-	-	-	3.800	0.14961			
HP258-1535	-	-	-	3.900	0.15354	43	81	
HP258-1563	5/32	-	-	3.969	0.15625			
HP258-1575	-	-	-	4.000	0.15748	45	85	
HP258-1610	-	20	-	4.089	0.16100			
HP258-1614	-	-	-	4.100	0.16142	45	85	
HP258-1654	-	-	-	4.200	0.16535			
HP258-1693	-	-	-	4.300	0.16929	50	90	
HP258-1720	11/64	-	-	4.366	0.17188			
HP258-1732	-	-	-	4.400	0.17323	45	85	
HP258-1772	-	-	-	4.500	0.17717			
HP258-1811	-	-	-	4.600	0.18110	50	90	
HP258-1831	-	-	-	4.650	0.18307			
HP258-1850	-	-	-	4.700	0.18504	45	85	
HP258-1874	3/16	-	-	4.763	0.18750			
HP258-1890	-	-	-	4.800	0.18898	50	90	
HP258-1929	-	-	-	4.900	0.19291			
HP258-1969	-	-	-	5.000	0.19685	57	97	
HP258-2008	-	-	-	5.100	0.20079			
HP258-2031	13/64	-	-	5.159	0.20313	66	106	
HP258-2047	-	-	-	5.200	0.20472			
HP258-2087	-	-	-	5.300	0.20866	6.300	0.24803	
HP258-2126	-	-	-	5.400	0.21260			
HP258-2130	-	3	-	5.410	0.21300	6.350	0.25000	
HP258-2165	-	-	-	5.500	0.21654			
HP258-2189	7/32	-	-	5.556	0.21875	6.400	0.25197	
HP258-2205	-	-	-	5.600	0.22047			
HP258-2244	-	-	-	5.700	0.22441	6.500	0.25591	
HP258-2283	-	-	-	5.800	0.22835			
HP258-2323	-	-	-	5.900	0.23228	6.528	0.25700	
HP258-2343	15/64	-	-	5.953	0.23438			
HP258-2362	-	-	-	6.000	0.23622	6.600	0.25984	
HP258-2402	-	-	-	6.100	0.24016			
HP258-2441	-	-	-	6.200	0.24409	6.300	0.24803	
HP258-2480	-	-	-	6.300	0.24803			
HP258-2500	1/4	-	E	6.350	0.25000	6.400	0.25197	
HP258-2520	-	-	-	6.400	0.25197			
HP258-2559	-	-	-	6.500	0.25591	6.528	0.25700	
HP258-2571	-	-	F	6.528	0.25700			
HP258-2598	-	-	-	6.600	0.25984			

Packed: 1 pc.
Available WD1 coating only.



List HP258 (Continued)



8D, Coolant-Through

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)			
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
HP258-2638	-	-	-	6.700	0.26378	66	106	8			
HP258-2657	17/64	-	-	6.746	0.26560						
HP258-2677	-	-	-	6.800	0.26772						
HP258-2717	-	-	-	6.900	0.27165						
HP258-2756	-	-	-	7.000	0.27559						
HP258-2795	-	-	-	7.100	0.27953						
HP258-2811	9/32	-	-	7.145	0.28130						
HP258-2835	-	-	-	7.200	0.28346						
HP258-2874	-	-	-	7.300	0.28740						
HP258-2913	-	-	-	7.400	0.29134						
HP258-2953	-	-	-	7.500	0.29528	76	116	8			
HP258-2969	19/64	-	-	7.541	0.29690						
HP258-2992	-	-	-	7.600	0.29921						
HP258-3031	-	-	-	7.700	0.30315						
HP258-3071	-	-	-	7.800	0.30709						
HP258-3110	-	-	-	7.900	0.31102						
HP258-3126	5/16	-	-	7.938	0.31250						
HP258-3150	-	-	-	8.000	0.31496						
HP258-3189	-	-	-	8.100	0.31890				87	131	10
HP258-3228	-	-	-	8.200	0.32283						
HP258-3268	-	-	-	8.300	0.32677						
HP258-3280	21/64	-	-	8.334	0.32810						
HP258-3307	-	-	-	8.400	0.33071						
HP258-3319	-	-	Q	8.433	0.33200						
HP258-3346	-	-	-	8.500	0.33465						
HP258-3386	-	-	-	8.600	0.33858						
HP258-3425	-	-	-	8.700	0.34252						
HP258-3437	11/32	-	-	8.733	0.34380						
HP258-3465	-	-	-	8.800	0.34646	95	139	10			
HP258-3504	-	-	-	8.900	0.35039						
HP258-3543	-	-	-	9.000	0.35433						
HP258-3583	-	-	-	9.100	0.35827						
HP258-3594	23/64	-	-	9.129	0.35940						
HP258-3622	-	-	-	9.200	0.36220						
HP258-3642	-	-	-	9.250	0.36417						
HP258-3661	-	-	-	9.300	0.36614						
HP258-3701	-	-	-	9.400	0.37008						
HP258-3740	-	-	-	9.500	0.37402						
HP258-3748	3/8	-	-	9.525	0.37500						
HP258-3780	-	-	-	9.600	0.37795						
HP258-3819	-	-	-	9.700	0.38189						
HP258-3858	-	-	-	9.800	0.38583						
HP258-3898	-	-	-	9.900	0.38976						
HP258-3906	25/64	-	-	9.921	0.39060						
HP258-3937	-	-	-	10.000	0.39370						

Packed: 1 pc.
Available WD1 coating only.

➔ continued on next page ➔

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP258	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List HP258 (Continued)

8D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1	30°	SHANK h6
-------------------------------	----------------	------------	------------	--------------------



Cutting Diameter Tolerance (m7)		
Size	mm	inch
D=3	+0.002 / +0.012	+0.0001 / +0.0005
3<D≤6	+0.004 / +0.016	+0.0002 / +0.0006
6<D≤10	+0.006 / +0.021	+0.0002 / +0.0008
10<D≤18	+0.007 / +0.025	+0.0003 / +0.0010
18<D≤20	+0.008 / +0.029	+0.0003 / +0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
HP258-3976	-	-	-	10.100	0.39764	106	155	12
HP258-4016	-	-	-	10.200	0.40157			
HP258-4055	-	-	-	10.300	0.40551			
HP258-4063	13/32	-	-	10.319	0.40625			
HP258-4094	-	-	-	10.400	0.40945			
HP258-4134	-	-	-	10.500	0.41339			
HP258-4173	-	-	-	10.600	0.41732			
HP258-4213	-	-	-	10.700	0.42126			
HP258-4220	27/64	-	-	10.716	0.42190			
HP258-4252	-	-	-	10.800	0.42520			
HP258-4291	-	-	-	10.900	0.42913			
HP258-4331	-	-	-	11.000	0.43307			
HP258-4370	-	-	-	11.100	0.43701			
HP258-4374	7/16	-	-	11.113	0.43750			
HP258-4409	-	-	-	11.200	0.44094			
HP258-4449	-	-	-	11.300	0.44488			
HP258-4488	-	-	-	11.400	0.44882			
HP258-4528	-	-	-	11.500	0.45276			
HP258-4531	29/64	-	-	11.509	0.45310			
HP258-4567	-	-	-	11.600	0.45669			
HP258-4606	-	-	-	11.700	0.46063			
HP258-4646	-	-	-	11.800	0.46457			
HP258-4685	-	-	-	11.900	0.46850			
HP258-4689	15/32	-	-	11.908	0.46880			
HP258-4724	-	-	-	12.000	0.47244			
HP258-4764	-	-	-	12.100	0.47638			
HP258-4803	-	-	-	12.200	0.48031			
HP258-4843	-	-	-	12.300	0.48425			
HP258-4882	-	-	-	12.400	0.48819			
HP258-4921	-	-	-	12.500	0.49213			
HP258-4961	-	-	-	12.600	0.49606			
HP258-5000	1/2	-	-	12.700	0.50000			
HP258-5039	-	-	-	12.800	0.50394			
HP258-5079	-	-	-	12.900	0.50787			
HP258-5118	-	-	-	13.000	0.51181			
HP258-5157	-	-	-	13.100	0.51575			
HP258-5197	-	-	-	13.200	0.51969			
HP258-5236	-	-	-	13.300	0.52362			
HP258-5276	-	-	-	13.400	0.52756			
HP258-5311	17/32	-	-	13.495	0.53130			
HP258-5315	-	-	-	13.500	0.53150			
HP258-5394	-	-	-	13.700	0.53937			
HP258-5512	-	-	-	14.000	0.55118			
HP258-5626	9/16	-	-	14.288	0.56250			
HP258-5709	-	-	-	14.500	0.57087			
HP258-5780	37/64	-	-	14.684	0.57810			
HP258-5787	-	-	-	14.700	0.57874			
HP258-5906	-	-	-	15.000	0.59055			
HP258-5937	19/32	-	-	15.083	0.59380			
HP258-6102	-	-	-	15.500	0.61024			
						152	204	16

Packed: 1 pc.
Available WD1 coating only.





List HP258 (Continued)

8D, Coolant-Through

SPEED FEED P374-375	CARBIDE	WD1		30°	SHANK h6
-------------------------------	----------------	------------	--	------------	--------------------

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
HP258-6181	-	-	-	15.700	0.61811	152	204	16
HP258-6248	5/8	-	-	15.875	0.62500			
HP258-6299	-	-	-	16.000	0.62992			
HP258-6496	-	-	-	16.500	0.64961	171	223	18
HP258-6563	21/32	-	-	16.669	0.65625			
HP258-6693	-	-	-	17.000	0.66929			
HP258-6890	-	-	-	17.500	0.68898	190	244	20
HP258-7087	-	-	-	18.000	0.70866			
HP258-7283	-	-	-	18.500	0.72835			
HP258-7480	-	-	-	19.000	0.74803	190	244	20
HP258-7500	3/4	-	-	19.050	0.75000			
HP258-7677	-	-	-	19.500	0.76772			
HP258-7874	-	-	-	20.000	0.78740			

Packed: 1 pc.
Available WD1 coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP258	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





SPEED
FEED
P376

List 738

CNC Multi-Purpose Centering Drill & Chamfering Tool



60°

Holders				
EDP Number	Point Angle	Overall Length	Max. Diameter (in)	Shank Diameter
		L (in)		d (in)
73808100	60°	4-21/64	0.418	5/8

Packed: 1 pc.

Precise Ground Inserts		
EDP Number	Type	Application
73818119	NK1010-60	Aluminum, Cast Iron AlCrN
73801300	-	L-15 Replacement Screw

Packed: 10 pcs.
Insert Radius: 0.4 mm



90°



118°

Holders				
EDP Number	Point Angle	Overall Length	Max. Diameter (in)	Shank Diameter
		L (in)		d (in)
73801000	90°	4-1/2	0.500	5/8
73802000	118°		0.625	
73804000	100°	0.550		
73805000	90°	8	0.500	
73806000	118°		0.625	

Packed: 1 pc.

Precise Ground Inserts		
EDP Number	Type	Application
73811000	NK1010	Aluminum, Cast Iron
73812000	NK2020	Steel
73801100	-	L-6 Replacement Screw

Packed: 10 pcs.
Insert Radius: 0.6 mm



90°



120°

Holders				
EDP Number	Point Angle	Overall Length	Max. Diameter (in/mm)	Shank Diameter
		L (in)		d (in)
73809000	90°	5-1/8	0.866 (22mm)	3/4
73809100	120°		0.984 (25mm)	1
73809200	90°	8	0.866 (22mm)	1
73809300	120°		0.984 (25mm)	1-1/4

Packed: 1 pc.

Precise Ground Inserts		
EDP Number	Type	Application
73819000	NK2020	For Steel
73819100	NK1010	For Cast & Aluminum
73819011	NK6060	For Steel TiAlN
73819111	NK8080	For Cast & Aluminum TiAlN
73801200	-	L-10 Replacement Screw

Packed: 10 pcs.
Insert Radius: 0.6 mm



List 738 (Continued)

SPEED
FEED
P376

CNC Multi-Purpose Centering Drill & Chamfering Tool



90°

Holders				
EDP Number	Point Angle	Overall Length	Max. Diameter (in)	Shank Diameter
		L (in)		d (in)
73803000	90°	4-1/8	0.315	3/8
73803500		6-1/2		

Packed: 1 pc.

Precise Ground Inserts		
EDP Number	Type	Application
73813005	NK5050	Aluminum, Cast Iron
73801400	-	L-13 Replacement Screw

Packed: 10 pcs.
Insert Radius: 0.2 mm



90°

Holders				
EDP Number	Point Angle	Overall Length	Max. Diameter (in)	Shank Diameter
		L (in)		d (in)
73807000	90°	5-1/8	1.18	3/4

Packed: 1 pc.

Precise Ground Inserts		
EDP Number	Type	Application
73817000	2001	General Purpose
73801100	-	L-6 Replacement Screw

Packed: 10 pcs.
Holder requires 2 inserts.
Inserts have 3 edges per side and are 2 sided.
Insert Radius: 0.6mm



List 738 (Accessories)

Accessories	
EDP Number	Application
73801500	N-5 Wrench for L-13 screws
73801600	K-3 Wrench for L-6 & L-10 screws
73801700	N-6 Wrench for L-15 screws

Packed: 1 pcs.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
738	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 215

SPEED FEED P377-378	CARBIDE	BR	15°
------------------------	---------	----	-----

Cutting Diameter Tolerance		
Size	mm	inch
1.0≤D≤12.7	+0 / -0.013	+0 / -0.0005



Four Facet Point (D≤1.5)

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
215-0394	-	-	-	1.000	0.03937	11.1		1.00
215-0433	-	-	-	1.100	0.04331			1.10
215-0465	-	56	-	1.181	0.04650			1.18
215-0469	3/64	-	-	1.191	0.04688			3/64
215-0472	-	-	-	1.200	0.04724			1.20
215-0512	-	-	-	1.300	0.05118	12.7	38.1	1.30
215-0520	-	55	-	1.321	0.05200			1.32
215-0550	-	54	-	1.397	0.05500			1.40
215-0551	-	-	-	1.400	0.05512			
215-0591	-	-	-	1.500	0.05906			1.50
215-0595	-	53	-	1.511	0.05950			1.51
215-0625	1/16	-	-	1.588	0.06250	15.9	41.3	1/16
215-0630	-	-	-	1.600	0.06299		42.9	1.60
215-0635	-	52	-	1.613	0.06350		42.7	1.61
215-0669	-	-	-	1.700	0.06693	17.5		
215-0670	-	51	-	1.702	0.06700		42.9	
215-0700	-	50	-	1.778	0.07000			1.78
215-0709	-	-	-	1.800	0.07087	18.0	43.0	1.80
215-0730	-	49	-	1.854	0.07300			1.85
215-0748	-	-	-	1.900	0.07480	17.5	42.9	1.90
215-0760	-	48	-	1.930	0.07600			1.93
215-0781	5/64	-	-	1.984	0.07813			5/64
215-0785	-	47	-	1.994	0.07850			1.99
215-0787	-	-	-	2.000	0.07874			2.00
215-0810	-	46	-	2.057	0.08100			2.06
215-0820	-	45	-	2.083	0.08200			2.08
215-0827	-	-	-	2.100	0.08268			2.10
215-0860	-	44	-	2.184	0.08600	19.1	44.5	2.18
215-0866	-	-	-	2.200	0.08661			2.20
215-0890	-	43	-	2.261	0.08900			2.26
215-0906	-	-	-	2.300	0.09055			2.30
215-0935	-	42	-	2.375	0.09350			2.37
215-0938	3/32	-	-	2.381	0.09375			3/32
215-0945	-	-	-	2.400	0.09449			2.40
215-0960	-	41	-	2.438	0.09600			2.44
215-0980	-	40	-	2.489	0.09800			2.49
215-0984	-	-	-	2.500	0.09843			2.50
215-0995	-	39	-	2.527	0.09950			2.53
215-1015	-	38	-	2.578	0.10150	20.6	46.0	2.58
215-1024	-	-	-	2.600	0.10236			2.60
215-1040	-	37	-	2.642	0.10400			2.64
215-1063	-	-	-	2.700	0.10630			2.70
215-1065	-	36	-	2.705	0.10650			2.71
215-1094	7/64	-	-	2.778	0.10938			7/64
215-1100	-	35	-	2.794	0.11000			2.79
215-1102	-	-	-	2.800	0.11024			2.80
215-1110	-	34	-	2.819	0.11100	22.2	47.6	2.82
215-1130	-	33	-	2.870	0.11300			2.87
215-1142	-	-	-	2.900	0.11417			2.90
215-1160	-	32	-	2.946	0.11600			2.95

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



List 215 (Continued)

SPEED FEED P377-378	CARBIDE	BR	15°
---------------------------	---------	----	-----

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)
215-1181	-	-	-	3.000	0.11811	22.2	47.6	3.00
215-1200	-	31	-	3.048	0.12000			3.05
215-1220	-	-	-	3.100	0.12205			3.10
215-1250	1/8	-	-	3.175	0.12500	23.8	49.2	1/8
215-1260	-	-	-	3.200	0.12598			3.20
215-1285	-	30	-	3.264	0.12850			3.26
215-1299	-	-	-	3.300	0.12992			3.30
215-1339	-	-	-	3.400	0.13386			3.40
215-1360	-	29	-	3.454	0.13600			3.45
215-1378	-	-	-	3.500	0.13780			3.50
215-1405	-	28	-	3.569	0.14050			3.57
215-1406	9/64	-	-	3.572	0.14063			9/64
215-1417	-	-	-	3.600	0.14173			3.60
215-1440	-	27	-	3.658	0.14400			3.66
215-1457	-	-	-	3.700	0.14567			3.70
215-1470	-	26	-	3.734	0.14700	3.73		
215-1495	-	25	-	3.797	0.14950	25.4	52.4	3.80
215-1496	-	-	-	3.800	0.14961			3.80
215-1520	-	24	-	3.861	0.15200			3.86
215-1535	-	-	-	3.900	0.15354			3.90
215-1540	-	23	-	3.912	0.15400			3.91
215-1562	5/32	-	-	3.969	0.15625			5/32
215-1570	-	22	-	3.988	0.15700			3.99
215-1575	-	-	-	4.000	0.15748			4.00
215-1590	-	21	-	4.039	0.15900			4.04
215-1610	-	20	-	4.089	0.16100			4.09
215-1614	-	-	-	4.100	0.16142			4.10
215-1654	-	-	-	4.200	0.16535			4.20
215-1660	-	19	-	4.216	0.16600	4.22		
215-1693	-	-	-	4.300	0.16929	4.30		
215-1695	-	18	-	4.305	0.16950	4.31		
215-1719	11/64	-	-	4.366	0.17188	11/64		
215-1730	-	17	-	4.394	0.17300	4.39		
215-1732	-	-	-	4.400	0.17323	4.40		
215-1770	-	16	-	4.496	0.17700	27.0	54.0	4.50
215-1772	-	-	-	4.501	0.17720			4.50
215-1800	-	15	-	4.572	0.18000			4.57
215-1811	-	-	-	4.600	0.18110			4.60
215-1820	-	14	-	4.623	0.18200			4.62
215-1850	-	13	-	4.699	0.18500			4.70
215-1875	3/16	-	-	4.763	0.18750			3/16
215-1890	-	12	-	4.801	0.18900			4.80
215-1910	-	11	-	4.851	0.19100			4.85
215-1929	-	-	-	4.900	0.19291			4.90
215-1935	-	10	-	4.915	0.19350			4.91
215-1960	-	9	-	4.978	0.19600			4.98

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.

continued on next page

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
215	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best





List 215 (Continued)

SPEED FEED P377-378	CARBIDE	BR	15°
-------------------------------	----------------	-----------	------------

Cutting Diameter Tolerance		
Size	mm	inch
1.0≤D≤12.7	+0 / -0.013	+0 / -0.0005



FourFacet Point (D≤1.5)

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
215-1968	-	-	-	5.000	0.19685	30.2	57.2	5.00
215-1990	-	8	-	5.055	0.19900			5.05
215-2008	-	-	-	5.100	0.20079			5.10
215-2010	-	7	-	5.105	0.20100			5.11
215-2031	13/64	-	-	5.159	0.20313	31.8	60.3	13/64
215-2040	-	6	-	5.182	0.20400			5.18
215-2047	-	-	-	5.200	0.20472			5.20
215-2055	-	5	-	5.220	0.20550			5.22
215-2087	-	-	-	5.300	0.20866	33.3	61.9	5.30
215-2090	-	4	-	5.309	0.20900			5.31
215-2126	-	-	-	5.400	0.21260			5.40
215-2130	-	3	-	5.410	0.21300			5.41
215-2165	-	-	-	5.500	0.21654	34.9	63.5	5.50
215-2188	7/32	-	-	5.556	0.21875			5.56
215-2205	-	-	-	5.600	0.22047			5.60
215-2210	-	2	-	5.613	0.22100			5.61
215-2244	-	-	-	5.700	0.22441	36.5	66.7	5.70
215-2280	-	1	-	5.791	0.22800			5.79
215-2283	-	-	-	5.800	0.22835			5.80
215-2323	-	-	-	5.900	0.23228			5.90
215-2340	-	-	A	5.944	0.23400	38.1	68.3	5.94
215-2344	15/64	-	-	5.953	0.23438			5.95
215-2362	-	-	-	6.000	0.23622			6.00
215-2380	-	-	B	6.045	0.23800			6.05
215-2402	-	-	-	6.100	0.24016	39.7	69.9	6.10
215-2420	-	-	C	6.147	0.24200			6.15
215-2441	-	-	-	6.200	0.24409			6.20
215-2460	-	-	D	6.248	0.24600			6.25
215-2480	-	-	-	6.300	0.24803	68.3	68.3	6.30
215-2500	1/4	-	E	6.350	0.25000			1/4
215-2520	-	-	-	6.400	0.25197			6.40
215-2559	-	-	-	6.500	0.25591			6.50
215-2570	-	-	F	6.528	0.25700	68.3	68.3	6.53
215-2598	-	-	-	6.600	0.25984			6.60
215-2610	-	-	G	6.629	0.26100			6.63
215-2638	-	-	-	6.700	0.26378			6.70
215-2656	17/64	-	-	6.747	0.26563	68.3	68.3	17/64
215-2660	-	-	H	6.756	0.26600			6.76
215-2677	-	-	-	6.800	0.26772			6.80
215-2717	-	-	-	6.900	0.27165			6.90
215-2720	-	-	I	6.909	0.27200	68.3	68.3	6.91
215-2756	-	-	-	7.000	0.27559			7.00
215-2770	-	-	J	7.036	0.27700			7.04
215-2795	-	-	-	7.100	0.27953			7.10
215-2810	-	-	K	7.137	0.28100	69.9	69.9	7.14
215-2812	9/32	-	-	7.144	0.28125			9/32
215-2835	-	-	-	7.200	0.28346			7.20
215-2874	-	-	-	7.300	0.28740			7.30
215-2900	-	-	L	7.366	0.29000	69.9	69.9	7.37
215-2913	-	-	-	7.400	0.29134			7.40

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.





List 215 (Continued)

SPEED FEED P377-378	CARBIDE	BR	15°
------------------------	---------	----	-----

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter		
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)		
215-2950	-	-	M	7.493	0.29500	39.7	69.9	7.49		
215-2953	-	-	-	7.500	0.29528			7.50		
215-2969	19/64	-	-	7.541	0.29688			19/64		
215-2992	-	-	-	7.600	0.29921	41.3	71.4	7.60		
215-3020	-	-	N	7.671	0.30200			7.67		
215-3031	-	-	-	7.700	0.30315			7.70		
215-3071	-	-	-	7.800	0.30709			7.80		
215-3110	-	-	-	7.900	0.31102			7.90		
215-3125	5/16	-	-	7.938	0.31250			5/16		
215-3150	-	-	-	8.000	0.31496			8.00		
215-3160	-	-	O	8.026	0.31600			8.03		
215-3189	-	-	-	8.100	0.31890			8.10		
215-3228	-	-	-	8.200	0.32283			74.6	8.20	
215-3230	-	-	P	8.204	0.32300					
215-3268	-	-	-	8.300	0.32677	8.30				
215-3281	21/64	-	-	8.334	0.32813	21/64				
215-3307	-	-	-	8.400	0.33071	42.9	76.2	8.40		
215-3320	-	-	Q	8.433	0.33200			8.43		
215-3346	-	-	-	8.500	0.33465			8.50		
215-3386	-	-	-	8.600	0.33858			8.60		
215-3390	-	-	R	8.611	0.33900			8.61		
215-3425	-	-	-	8.700	0.34252			8.70		
215-3438	11/32	-	-	8.731	0.34375			11/32		
215-3465	-	-	-	8.800	0.34646			8.80		
215-3480	-	-	S	8.839	0.34800			8.84		
215-3504	-	-	-	8.900	0.35039			8.90		
215-3543	-	-	-	9.000	0.35433	9.00				
215-3580	-	-	T	9.093	0.35800	9.09				
215-3583	-	-	-	9.100	0.35827	9.10				
215-3594	23/64	-	-	9.128	0.35938	23/64				
215-3622	-	-	-	9.200	0.36220	9.20				
215-3661	-	-	-	9.300	0.36614	9.30				
215-3680	-	-	U	9.347	0.36800	9.35				
215-3701	-	-	-	9.400	0.37008	9.40				
215-3740	-	-	-	9.500	0.37402	46.0	79.0	9.50		
215-3750	3/8	-	-	9.525	0.37500	46.0	79.4	3/8		
215-3770	-	-	V	9.576	0.37700	47.6	82.6	9.58		
215-3780	-	-	-	9.600	0.37795			9.60		
215-3819	-	-	-	9.700	0.38189			9.70		
215-3858	-	-	-	9.800	0.38583			9.80		
215-3860	-	-	W	9.804	0.38600			9.90		
215-3898	-	-	-	9.900	0.38976			9.90		
215-3906	25/64	-	-	9.922	0.39063			25/64		
215-3937	-	-	-	10.000	0.39370			48.0	83.0	10.00
215-3970	-	-	X	10.084	0.39700			49.2	84.1	10.08
215-3976	-	-	-	10.100	0.39764					10.10

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
215	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 215 (Continued)

SPEED FEED P377-378	CARBIDE	BR	15°
-------------------------------	----------------	-----------	------------

Cutting Diameter Tolerance		
Size	mm	inch
1.0 ≤ D ≤ 12.7	+0 / -0.013	+0 / -0.0005

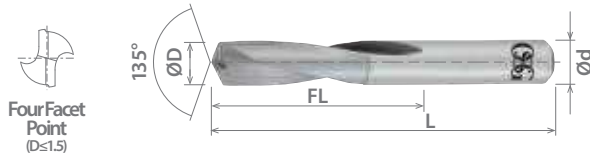

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
215-4016	-	-	-	10.200	0.40157	49.2	84.1	10.20
215-4040	-	-	Y	10.262	0.40400			10.26
215-4055	-	-	-	10.300	0.40551			10.30
215-4062	13/32	-	-	10.319	0.40625			13/32
215-4094	-	-	-	10.400	0.40945	50.8	85.7	10.40
215-4130	-	-	Z	10.490	0.41300			10.49
215-4134	-	-	-	10.500	0.41339			10.50
215-4173	-	-	-	10.600	0.41732			10.60
215-4213	-	-	-	10.700	0.42126	52.4	87.3	10.70
215-4219	27/64	-	-	10.716	0.42188			27/64
215-4252	-	-	-	10.800	0.42520			10.80
215-4291	-	-	-	10.900	0.42913			10.90
215-4331	-	-	-	11.000	0.43307	54.0	90.5	11.00
215-4370	-	-	-	11.100	0.43701			11.10
215-4375	7/16	-	-	11.113	0.43750			7/16
215-4409	-	-	-	11.200	0.44094			11.20
215-4449	-	-	-	11.300	0.44488	54.0	92.1	11.30
215-4488	-	-	-	11.400	0.44882			11.40
215-4528	-	-	-	11.500	0.45276			11.50
215-4531	29/64	-	-	11.509	0.45313			29/64
215-4567	-	-	-	11.600	0.45669	55.6	93.7	11.60
215-4606	-	-	-	11.700	0.46063			11.70
215-4646	-	-	-	11.800	0.46457			11.80
215-4685	-	-	-	11.900	0.46850			11.90
215-4688	15/32	-	-	11.906	0.46875	57.2	95.3	15/32
215-4724	-	-	-	12.000	0.47244			12.00
215-4844	31/64	-	-	12.303	0.48438			31/64
215-5000	1/2	-	-	12.700	0.50000			1/2

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
215	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 220D

SPEED FEED P377-378	CARBIDE	BR	20°
-------------------------------	----------------	-----------	------------

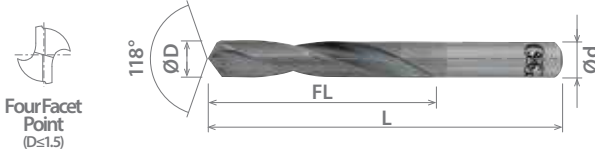

Cutting Diameter Tolerance		
Size	mm	inch
1.18≤D≤12.7	+0 / -0.013	+0 / -0.0005

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
220-0465	-	56	-	1.181	0.04650	19.1	38.1	1.18
220-0469	3/64	-	-	1.191	0.04688			3/64
220-0520	-	55	-	1.321	0.05200			1.32
220-0550	-	54	-	1.397	0.05500			1.40
220-0591	-	-	-	1.500	0.05906			1.50
220-0595	-	53	-	1.511	0.05950			1.51
220-0625	1/16	-	-	1.588	0.06250			1/16
220-0635	-	52	-	1.613	0.06350			1.61
220-0670	-	51	-	1.702	0.06700			1.70
220-0700	-	50	-	1.778	0.07000			1.78
220-0730	-	49	-	1.854	0.07300	1.85		
220-0760	-	48	-	1.930	0.07600	1.93		
220-0781	5/64	-	-	1.984	0.07813	22.2	44.5	5/64
220-0785	-	47	-	1.994	0.07850			1.99
220-0787	-	-	-	2.000	0.07874			2.00
220-0810	-	46	-	2.057	0.08100			2.06
220-0820	-	45	-	2.083	0.08200			2.08
220-0860	-	44	-	2.184	0.08600			2.18
220-0890	-	43	-	2.261	0.08900	2.26		
220-0935	-	42	-	2.375	0.09350	25.4	50.8	2.37
220-0938	3/32	-	-	2.291	0.09375			3/32
220-0960	-	41	-	2.438	0.09600			2.44
220-0980	-	40	-	2.489	0.09800			2.49
220-0984	-	-	-	2.500	0.09843			2.50
220-0995	-	39	-	2.527	0.09950			2.53
220-1015	-	38	-	2.578	0.10150			2.58
220-1040	-	37	-	2.642	0.10400			2.64
220-1065	-	36	-	2.705	0.10650			2.71
220-1094	7/64	-	-	2.778	0.10938			7/64
220-1100	-	35	-	2.794	0.11000	2.79		
220-1110	-	34	-	2.819	0.11100	2.82		
220-1130	-	33	-	2.870	0.11300	2.87		
220-1160	-	32	-	2.946	0.11600	2.95		
220-1181	-	-	-	3.000	0.11811	3.00		
220-1200	-	31	-	3.048	0.12000	3.05		
220-1250	1/8	-	-	3.175	0.12500	1/8		
220-1285	-	30	-	3.264	0.12850	3.26		
220-1360	-	29	-	3.454	0.13600	3.45		
220-1378	-	-	-	3.500	0.13780	3.50		
220-1405	-	28	-	3.569	0.14050	3.57		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.

continued on next page

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
220D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				

good best






List 220D (Continued)

SPEED FEED P377-378	CARBIDE	BR	20°
-------------------------------	----------------	-----------	------------

Cutting Diameter Tolerance		
Size	mm	inch
1.18≤D≤12.7	+0 / -0.013	+0 / -0.0005

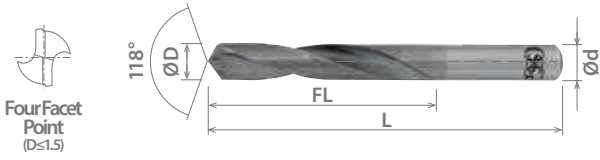

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
220-1406	9/64	-	-	3.572	0.14063	34.9	63.5	9/64
220-1440	-	27	-	3.658	0.14400			3.66
220-1470	-	26	-	3.734	0.14700			3.73
220-1495	-	25	-	3.797	0.14950			3.80
220-1520	-	24	-	3.861	0.15200			3.86
220-1540	-	23	-	3.912	0.15400			3.91
220-1562	5/32	-	-	3.969	0.15625			5/32
220-1570	-	22	-	3.988	0.15700			3.99
220-1575	-	-	-	4.000	0.15748			4.00
220-1590	-	21	-	4.039	0.15900			4.04
220-1610	-	20	-	4.089	0.16100			4.09
220-1660	-	19	-	4.216	0.16600			4.22
220-1695	-	18	-	4.305	0.16950			4.31
220-1719	11/64	-	-	4.366	0.17188			11/64
220-1730	-	17	-	4.394	0.17300	4.39		
220-1770	-	16	-	4.496	0.17700	4.50		
220-1772	-	-	-	4.500	0.17720			
220-1800	-	15	-	4.572	0.18000		4.57	
220-1820	-	14	-	4.623	0.18200		4.62	
220-1850	-	13	-	4.699	0.18500		4.70	
220-1875	3/16	-	-	4.763	0.18750		3/16	
220-1890	-	12	-	4.801	0.18900		4.80	
220-1910	-	11	-	4.851	0.19100		4.85	
220-1935	-	10	-	4.915	0.19350		4.91	
220-1960	-	9	-	4.978	0.19600		4.98	
220-1968	-	-	-	5.000	0.19685		5.00	
220-1990	-	8	-	5.055	0.19900		5.05	
220-2010	-	7	-	5.105	0.20100		5.11	
220-2031	13/64	-	-	5.159	0.20313		13/64	
220-2040	-	6	-	5.182	0.20400	5.18		
220-2055	-	5	-	5.220	0.20550	5.22		
220-2090	-	4	-	5.309	0.20900	5.31		
220-2130	-	3	-	5.410	0.21300	5.41		
220-2165	-	-	-	5.500	0.21654	5.50		
220-2188	7/32	-	-	5.556	0.21875	7/32		
220-2210	-	2	-	5.613	0.22100	5.61		
220-2280	-	1	-	5.791	0.22800	5.79		
220-2340	-	-	A	5.944	0.23400	5.94		
220-2344	15/64	-	-	5.953	0.23438	15/64		
220-2362	-	-	-	6.000	0.23622	6.00		
220-2380	-	-	B	6.045	0.23800	6.05		
220-2420	-	-	C	6.147	0.24200	6.15		
220-2460	-	-	D	6.248	0.24600	6.25		
220-2500	1/4	-	E	6.350	0.25000	1/4		
220-2559	-	-	-	6.500	0.25591	6.50		
220-2570	-	-	F	6.528	0.25700	6.53		
220-2610	-	-	G	6.629	0.26100	6.63		
220-2656	17/64	-	-	6.747	0.26563	17/64		
220-2660	-	-	H	6.756	0.26600	6.76		
220-2720	-	-	I	6.909	0.27200	6.91		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAIN.



List 220D (Continued)

SPEED FEED	CARBIDE	BR	20°
P377-378			

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter		
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)		
220-2756	-	-	-	7.000	0.27559	54.0	88.9	7.00		
220-2770	-	-	J	7.036	0.27700			7.04		
220-2810	-	-	K	7.137	0.28100			7.14		
220-2812	9/32	-	-	7.144	0.28125			9/32		
220-2900	-	-	L	7.366	0.29000	60.3	95.3	7.37		
220-2950	-	-	M	7.493	0.29500			7.49		
220-2953	-	-	-	7.500	0.29528			7.50		
220-2969	19/64	-	-	7.541	0.29688			19/64		
220-3020	-	-	N	7.671	0.30200			7.67		
220-3125	5/16	-	-	7.938	0.31250			7.94		
220-3150	-	-	-	8.000	0.31496			8.00		
220-3160	-	-	O	8.026	0.31600			8.03		
220-3230	-	-	P	8.204	0.32300			8.20		
220-3281	21/64	-	-	8.334	0.32813			21/64		
220-3320	-	-	Q	8.433	0.33200			8.43		
220-3346	-	-	-	8.500	0.33465			8.50		
220-3390	-	-	R	8.611	0.33900	63.5	101.6	8.61		
220-3438	11/32	-	-	8.731	0.34375			11/32		
220-3480	-	-	S	8.839	0.34800			8.84		
220-3543	-	-	-	9.000	0.35433			9.00		
220-3580	-	-	T	9.093	0.35800			69.9	108.0	9.09
220-3594	23/64	-	-	9.128	0.35938			63.5	101.6	23/64
220-3680	-	-	U	9.347	0.36800			69.9	108.0	9.35
220-3740	-	-	-	9.500	0.37402					9.50
220-3750	3/8	-	-	9.525	0.37500					9.53
220-3770	-	-	V	9.576	0.37700					9.58
220-3860	-	-	W	9.804	0.38600					9.80
220-3906	25/64	-	-	9.922	0.39063					73.0
220-3937	-	-	-	10.000	0.39370	10.00				
220-3970	-	-	X	10.084	0.39700	10.08				
220-4040	-	-	Y	10.262	0.40400	10.26				
220-4062	13/32	-	-	10.319	0.40625	13/32				
220-4130	-	-	Z	10.490	0.41300	10.49				
220-4134	-	-	-	10.500	0.41339	10.50				
220-4219	27/64	-	-	10.716	0.42188	17/64				
220-4331	-	-	-	11.000	0.43307	11.00				
220-4375	7/16	-	-	11.113	0.43750	7/16				
220-4528	-	-	-	11.500	0.45276	76.2	120.7	11.50		
220-4531	29/64	-	-	11.509	0.45313			29/64		
220-4688	15/32	-	-	11.906	0.46875			15/32		
220-4724	-	-	-	12.000	0.47244			12.00		
220-4844	31/64	-	-	12.303	0.48438			31/64		
220-5000	1/2	-	-	12.700	0.50000			1/2		

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum				Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
220D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				

good best





List 233

Three Flute



SPEED FEED P377-378	CARBIDE	BR	30°
-------------------------------	----------------	-----------	------------

Cutting Diameter Tolerance		
Size	mm	inch
3.00 ≤ D ≤ 19.05	+0 / -0.013	+0 / -0.0005

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
233-1181	-	-	-	3.000	0.11811	31.8	57.2	3.00
233-1250	1/8	-	-	3.175	0.12500			1/8
233-1406	9/64	-	-	0.357	0.14063	34.9	63.5	9/64
233-1562	5/32	-	-	3.969	0.15625			5/32
233-1719	11/64	-	-	4.366	0.17188	41.3	69.9	11/64
233-1875	3/16	-	-	4.763	0.18750			3/16
233-2031	13/64	-	-	5.159	0.20313	44.5	76.2	13/64
233-2188	7/32	-	-	5.556	0.21875			7/32
233-2344	15/64	-	-	5.953	0.23438	50.8	82.6	15/64
233-2362	-	-	-	6.000	0.23622			6.00
233-2500	1/4	-	E	6.350	0.25000	54.0	88.9	1/4
233-2656	17/64	-	-	6.747	0.26563			17/64
233-2812	9/32	-	-	7.144	0.28125	60.3	95.3	9/32
233-2969	19/64	-	-	7.541	0.29688			19/64
233-3125	5/16	-	-	7.938	0.31250	63.5	101.6	5/16
233-3150	-	-	-	8.000	0.31496			8.00
233-3281	21/64	-	-	8.334	0.32813	69.9	108.0	21/64
233-3438	11/32	-	-	8.733	0.34380			11/32
233-3594	23/64	-	-	9.128	0.35938	73.0	114.3	23/64
233-3750	3/8	-	-	9.525	0.37500			3/8
233-3906	25/64	-	-	9.922	0.39063	76.2	120.7	25/64
233-3937	-	-	-	10.000	0.39370			10.00
233-4062	13/32	-	-	10.319	0.40625	88.9	146.1	13/32
233-4219	27/64	-	-	10.716	0.42188			27/64
233-4375	7/16	-	-	11.113	0.43750	108.0	146.1	7/16
233-4531	29/64	-	-	11.509	0.45313			29/64
233-4688	15/32	-	-	11.906	0.46875	108.0	146.1	15/32
233-4724	-	-	-	12.000	0.47244			12.00
233-4844	31/64	-	-	12.303	0.48438	108.0	146.1	31/64
233-5000	1/2	-	-	12.700	0.50000			1/2
233-5312	17/32	-	-	13.494	0.43125	108.0	146.1	17/32
233-5512	-	-	-	14.000	0.55118			14.00
233-5625	9/16	-	-	14.288	0.56250	108.0	146.1	9/16
233-6250	5/8	-	-	15.875	0.62500			5/8
233-6299	-	-	-	16.000	0.62992	108.0	146.1	16.00
233-7500	3/4	-	-	19.050	0.75000			3/4

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



Work Material																		
List No.	P					M			K Cast Iron	N		S Titanium	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
233	<input type="checkbox"/>																	

good best





List 200

SPEED FEED P377-378	CARBIDE	BR	0°
------------------------	---------	----	----



FourFacet Point (D≤1.5)

Cutting Diameter Tolerance		
Size	mm	inch
1.18≤D≤12.7	+0 / -0.013	+0 / -0.0005

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
200-0465	-	56	-	1.181	0.04650	12.7	38.1	1.18
200-0469	3/64	-	-	1.191	0.04688			3/64
200-0520	-	55	-	1.321	0.05200			1.32
200-0550	-	54	-	1.397	0.05500			1.40
200-0591	-	-	-	1.500	0.05906			1.50
200-0595	-	53	-	1.511	0.05950	1.51		
200-0625	1/16	-	-	1.588	0.06250	15.9	41.3	1/16
200-0635	-	52	-	1.613	0.06350	17.5	42.9	1.61
200-0670	-	51	-	1.702	0.06700			1.70
200-0700	-	50	-	1.778	0.07000			1.78
200-0730	-	49	-	1.854	0.07300			1.85
200-0760	-	48	-	1.930	0.07600			1.93
200-0781	5/64	-	-	1.984	0.07813	19.1	44.5	5/64
200-0785	-	47	-	1.994	0.07850			1.99
200-0787	-	-	-	2.000	0.07874			2.00
200-0810	-	46	-	2.057	0.08100			2.06
200-0820	-	45	-	2.083	0.08200			2.08
200-0860	-	44	-	2.184	0.08600	20.6	46.0	2.18
200-0890	-	43	-	2.261	0.08900			2.26
200-0935	-	42	-	2.375	0.09350			2.37
200-0938	3/32	-	-	2.381	0.09375			3/32
200-0960	-	41	-	2.438	0.09600			2.44
200-0980	-	40	-	2.489	0.09800	22.2	47.6	2.49
200-0984	-	-	-	2.500	0.09843			2.50
200-0995	-	39	-	2.527	0.09950			2.53
200-1015	-	38	-	2.578	0.10150			2.58
200-1040	-	37	-	2.642	0.10400			2.64
200-1065	-	36	-	2.705	0.10650	23.8	49.2	2.71
200-1094	7/64	-	-	2.778	0.10938			7/64
200-1100	-	35	-	2.794	0.11000			2.79
200-1110	-	34	-	2.819	0.11100			2.82
200-1130	-	33	-	2.870	0.11300			2.87
200-1160	-	32	-	2.946	0.11600	23.8	49.2	2.95
200-1181	-	-	-	3.000	0.11811			3.00
200-1200	-	31	-	3.048	0.12000			3.05
200-1250	1/8	-	-	3.175	0.12500			1/8
200-1285	-	30	-	3.264	0.12850			3.26
200-1360	-	29	-	3.454	0.13600	23.8	49.2	3.45
200-1378	-	-	-	3.500	0.13780			3.50
200-1405	-	28	-	3.569	0.14050			3.57

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
200	<input type="checkbox"/>								<input type="checkbox"/>								

good best





List 200 (Continued)

SPEED FEED P377-378	CARBIDE	BR	0°
-------------------------------	----------------	-----------	-----------



Cutting Diameter Tolerance		
Size	mm	inch
1.18≤D≤12.7	+0 / -0.013	+0 / -0.0005

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
200-1406	9/64	-	-	3.572	0.14063	23.8	49.2	9/64
200-1440	-	27	-	3.658	0.14400			3.66
200-1470	-	26	-	3.734	0.14700	25.4	52.4	3.73
200-1495	-	25	-	3.797	0.14950			3.80
200-1520	-	24	-	3.861	0.15200			3.86
200-1540	-	23	-	3.912	0.15400			3.91
200-1562	5/32	-	-	3.969	0.15625			5/32
200-1570	-	22	-	3.988	0.15700			3.99
200-1575	-	-	-	4.000	0.15748	27.0	54.0	4.00
200-1590	-	21	-	4.039	0.15900			4.04
200-1610	-	20	-	4.089	0.16100			4.09
200-1660	-	19	-	4.216	0.16600			4.22
200-1695	-	18	-	4.305	0.16950			4.31
200-1719	11/64	-	-	4.366	0.17188			11/64
200-1730	-	17	-	4.394	0.17300	28.6	55.6	4.39
200-1770	-	16	-	4.496	0.17700			4.50
200-1772	-	-	-	4.500	1.77200			4.50
200-1800	-	15	-	4.572	0.18000			4.57
200-1820	-	14	-	4.623	0.18200			4.62
200-1850	-	13	-	4.699	0.18500			4.70
200-1875	3/16	-	-	4.763	0.18750	3/16		
200-1890	-	12	-	4.801	0.18900	30.2	57.2	4.80
200-1910	-	11	-	4.851	0.19100			4.85
200-1935	-	10	-	4.915	0.19350			4.91
200-1960	-	9	-	4.978	0.19600			4.98
200-1968	-	-	-	5.000	0.19685			5.00
200-1990	-	8	-	5.055	0.19900			5.05
200-2010	-	7	-	5.105	0.20100	5.11		
200-2031	13/64	-	-	5.159	0.20313	31.8	60.3	13/64
200-2040	-	6	-	5.182	0.20400			5.18
200-2055	-	5	-	5.220	0.20550			5.22
200-2090	-	4	-	5.309	0.20900			5.31
200-2130	-	3	-	5.410	0.21300			5.41
200-2165	-	-	-	5.500	0.21654			5.50
200-2188	7/32	-	-	5.556	0.21875	7/32		
200-2210	-	2	-	5.613	0.22100	33.3	61.9	5.61
200-2280	-	1	-	5.791	0.22800			5.79
200-2340	-	-	A	5.944	0.23400			5.94
200-2344	15/64	-	-	5.953	0.23438			15/64
200-2362	-	-	-	6.000	0.23622			6.00
200-2380	-	-	B	6.045	0.23800			6.05
200-2420	-	-	C	6.147	0.24200	6.15		
200-2460	-	-	D	6.248	0.24600	6.25		
200-2500	1/4	-	E	6.350	0.25000	34.9	63.5	1/4
200-2559	-	-	-	6.500	0.25591			6.50
200-2570	-	-	F	6.528	0.25700			6.53
200-2610	-	-	G	6.629	0.26100			6.63
200-2656	17/64	-	-	6.747	0.26563			17/64
200-2660	-	-	H	6.756	0.26600			6.76
200-2720	-	-	I	6.909	0.27200	38.1	68.3	6.91

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



List 200 (Continued)

SPEED FEED P377-378	CARBIDE	BR	0°
---------------------------	---------	----	----

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm/in)
200-2756	-	-	-	7.000	0.27559	38.1	68.3	7.00
200-2770	-	-	J	7.036	0.27700			7.04
200-2810	-	-	K	7.137	0.28100			7.14
200-2812	9/32	-	-	7.144	0.28125	39.7	69.9	9/32
200-2900	-	-	L	7.366	0.29000			7.37
200-2950	-	-	M	7.493	0.29500			7.49
200-2953	-	-	-	7.500	0.29528	41.3	71.4	7.50
200-2969	19/64	-	-	7.541	0.29688			19/64
200-3020	-	-	N	7.671	0.30200			7.67
200-3125	5/16	-	-	7.938	0.31250	62.9	74.6	7.94
200-3150	-	-	-	8.000	0.31496			8.00
200-3160	-	-	O	8.026	0.31600			8.03
200-3230	-	-	P	8.204	0.32300	44.5	77.8	8.20
200-3281	21/64	-	-	8.334	0.32813			21/64
200-3320	-	-	Q	8.433	0.33200			8.43
200-3346	-	-	-	8.500	0.33465	46.0	79.4	8.50
200-3390	-	-	R	8.611	0.33900			8.61
200-3438	11/32	-	-	8.731	0.34375			11/32
200-3480	-	-	S	8.839	0.34800	47.6	82.6	8.84
200-3543	-	-	-	9.000	0.35433			9.00
200-3580	-	-	T	9.093	0.35800			9.09
200-3594	23/64	-	-	9.128	0.35938	49.2	84.1	9.13
200-3680	-	-	U	9.347	0.36800			9.35
200-3740	-	-	-	9.500	0.37402			9.50
200-3750	3/8	-	-	9.525	0.37500	50.8	85.7	9.53
200-3770	-	-	V	9.576	0.37700			9.58
200-3860	-	-	W	9.804	0.38600			9.80
200-3906	25/64	-	-	9.922	0.39063	52.4	87.3	9.92
200-3937	-	-	-	10.000	0.39370			10.00
200-3970	-	-	X	10.084	0.39700			10.08
200-4040	-	-	Y	10.262	0.40400	54.0	90.5	10.26
200-4062	13/32	-	-	10.319	0.40625			10.32
200-4130	-	-	Z	10.490	0.41300			10.49
200-4134	-	-	-	10.500	0.41339	55.6	93.7	10.50
200-4219	27/64	-	-	10.716	0.42188			10.72
200-4331	-	-	-	11.000	0.43307			11.00
200-4375	7/16	-	-	11.113	0.43750	57.2	95.3	11.11
200-4528	-	-	-	11.500	0.45276			11.50
200-4531	29/64	-	-	11.509	0.45313			11.51
200-4688	15/32	-	-	11.906	0.46875	57.2	95.3	11.91
200-4724	-	-	-	12.000	0.47244			12.00
200-4844	31/64	-	-	12.303	0.48438			12.30
200-5000	1/2	-	-	12.700	0.50000	12.70	1/2	

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
200	<input type="checkbox"/>								<input type="checkbox"/>								

good best






CARBIDE

Combination Drill/Countersink

List 235

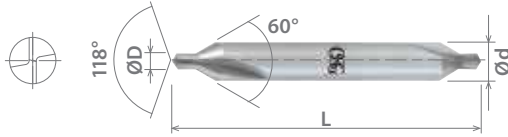

Cutting Diameter Tolerance		
Size	mm	inch
3/64 ≤ D ≤ 7/32	+0.076 / -0	+0.003 / -0

EDP Number	Diameter (in)	Tool Number	Overall Length	Shank Diameter
			L (in)	d (in)
235-0010	3/64	1	1.47	1/8
235-0020	5/64	2	1.83	3/16
235-0030	7/64	3	1.87	1/4
235-0040	1/8	4	2.43	5/16
235-0050	3/16	5	2.64	7/16
235-0060	7/32	6	2.87	1/2

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 05 = TiN, 08 = TiCN, 11 = TiAlN.



Work Material


List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
235	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 300D

SPEED FEED P379	CARBIDE	BR
--------------------	---------	----



Cutting Diameter Tolerance			
Size	mm	Inch	No. of Flutes
0.80mm-6.45mm	+0.025/+0.102	+0.001/+0.004	4
6.451mm-13mm	+0.025/+0.127	+0.001/+0.005	6

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
300-0315	-	-	-	0.800	0.03150	9.5	38.1	0.79
300-0354	-	-	-	0.900	0.03543			0.87
300-0394	-	-	-	1.000	0.03937			0.80
300-0433	-	-	-	1.100	0.04331	10.0	38.1	1.04
300-0465	-	56	-	1.181	0.04650			
300-0469	3/64	-	-	1.191	0.04688			
300-0472	-	-	-	1.200	0.04724	9.5	38.1	1.32
300-0512	-	-	-	1.300	0.05118			
300-0520	-	55	-	1.321	0.05200			
300-0550	-	54	-	1.397	0.05500	10.0	38.1	1.34
300-0551	-	-	-	1.400	0.05510			
300-0591	-	-	-	1.500	0.05906			
300-0595	-	53	-	1.511	0.05950	9.5	38.1	1.32
300-0625	1/16	-	-	1.588	0.06250			
300-0630	-	-	-	1.600	0.06299			
300-0635	-	52	-	1.613	0.06350	12.7	44.5	1.59
300-0669	-	-	-	1.700	0.06693			
300-0670	-	51	-	1.702	0.06700			
300-0700	-	50	-	1.778	0.07000	12.7	44.5	1.59
300-0709	-	-	-	1.800	0.07087			
300-0730	-	49	-	1.854	0.07300			
300-0748	-	-	-	1.900	0.07480	12.7	44.5	1.59
300-0760	-	48	-	1.930	0.07600			
300-0781	5/64	-	-	1.984	0.07813			
300-0785	-	47	-	1.994	0.07850	12.7	44.5	1.59
300-0787	-	-	-	2.000	0.07874			
300-0810	-	46	-	2.057	0.08100			
300-0820	-	45	-	2.083	0.08200	12.7	44.5	1.59
300-0827	-	-	-	2.100	0.08268			
300-0860	-	44	-	2.184	0.08600			
300-0866	-	-	-	2.200	0.08661	12.7	44.5	1.59
300-0890	-	43	-	2.261	0.08900			
300-0906	-	-	-	2.300	0.09055			
300-0935	-	42	-	2.375	0.09350	12.7	44.5	1.59
300-0938	3/32	-	-	2.381	0.09375			
300-0945	-	-	-	2.400	0.09449			
300-0960	-	41	-	2.438	0.09600	15.9	57.2	2.38
300-0980	-	40	-	2.489	0.09800			
300-0984	-	-	-	2.500	0.09843			
300-0995	-	39	-	2.527	0.09950	15.9	57.2	2.38
300-1015	-	38	-	2.578	0.10150			

Packed: 1 pc.

continued on next page

Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels					
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
300D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 300D (Continued)

SPEED FEED	CARBIDE	BR
P379		



Cutting Diameter Tolerance			
Size	mm	Inch	No. of Flutes
0.80mm-6.45mm	+0.025/+0.012	+0.001/+0.004	4
6.451mm-13mm	+0.025/+0.0127	+0.001/+0.005	6

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
300-1024	-	-	-	2.600	0.10236	15.9	57.2	2.38
300-1040	-	37	-	2.642	0.10400			
300-1063	-	-	-	2.700	0.10630			
300-1065	-	36	-	2.705	0.10650			
300-1094	7/64	-	-	2.778	0.10938			
300-1100	-	35	-	2.794	0.11000			
300-1102	-	-	-	2.800	0.11024			
300-1110	-	34	-	2.819	0.11100			
300-1130	-	33	-	2.870	0.11300			
300-1142	-	-	-	2.900	0.11417			
300-1160	-	32	-	2.946	0.11600			
300-1181	-	-	-	3.000	0.11811			
300-1200	-	31	-	3.048	0.12000			
300-1220	-	-	-	3.100	0.12205			
300-1250	1/8	-	-	3.175	0.12500			
300-1260	-	-	-	3.200	0.12598			
300-1285	-	30	-	3.264	0.12850			
300-1299	-	-	-	3.300	0.12992			
300-1339	-	-	-	3.400	0.13386			
300-1360	-	29	-	3.454	0.13600			
300-1378	-	-	-	3.500	0.13780			
300-1405	-	28	-	3.569	0.14050			
300-1406	9/64	-	-	3.572	0.14063			
300-1417	-	-	-	3.600	0.14173			
300-1440	-	27	-	3.658	0.14400			
300-1457	-	-	-	3.700	0.14567			
300-1470	-	26	-	3.734	0.14700			
300-1495	-	25	-	3.797	0.14950			
300-1496	-	-	-	3.800	0.14960			
300-1520	-	24	-	3.861	0.15200			
300-1535	-	-	-	3.900	0.15354			
300-1540	-	23	-	3.912	0.15400			
300-1562	5/32	-	-	3.969	0.15625			
300-1570	-	22	-	3.988	0.15700			
300-1575	-	-	-	4.000	0.15748			
300-1590	-	21	-	4.039	0.15900			
300-1610	-	20	-	4.089	0.16100			
300-1614	-	-	-	4.100	0.16142			
300-1654	-	-	-	4.200	0.16535			
300-1660	-	19	-	4.216	0.16600			
300-1693	-	-	-	4.300	0.16929			
300-1695	-	18	-	4.305	0.16950			
300-1719	11/64	-	-	4.366	0.17188			
300-1730	-	17	-	4.394	0.17300			
300-1732	-	-	-	4.400	0.17323			
300-1770	-	16	-	4.496	0.17700			
300-1772	-	-	-	4.500	0.17720			
300-1800	-	15	-	4.572	0.18000			
300-1811	-	-	-	4.600	0.18110			
300-1820	-	14	-	4.623	0.18200			

Packed: 1 pc.



List 300D (Continued)

SPEED FEED	CARBIDE	BR
P379		

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
300-1850	-	13	-	4.699	0.18500	22.2	69.9	4.37
300-1875	3/16	-	-	4.763	0.18750			
300-1890	-	12	-	4.801	0.18900			
300-1910	-	11	-	4.851	0.19100	25.4	76.2	4.76
300-1929	-	-	-	4.900	0.19291	22.2	69.9	
300-1935	-	10	-	4.915	0.19350			
300-1960	-	9	-	4.978	0.19600	25.4	76.2	
300-1969	-	-	-	5.000	0.19685			
300-1990	-	8	-	5.055	0.19900			
300-2008	-	-	-	5.100	0.20079			
300-2010	-	7	-	5.105	0.20100			
300-2031	13/64	-	-	5.159	0.20313			
300-2040	-	6	-	5.182	0.20400			
300-2047	-	-	-	5.200	0.20472			
300-2055	-	5	-	5.220	0.20550			
300-2087	-	-	-	5.300	0.20866			
300-2090	-	4	-	5.309	0.20900			
300-2126	-	-	-	5.400	0.21260			
300-2130	-	3	-	5.410	0.21300			
300-2165	-	-	-	5.500	0.21654			
300-2188	7/32	-	-	5.556	0.21875			
300-2205	-	-	-	5.600	0.22047			
300-2210	-	2	-	5.613	0.22100			
300-2244	-	-	-	5.700	0.22441			
300-2280	-	1	-	5.791	0.22800			
300-2283	-	-	-	5.800	0.22835			
300-2323	-	-	-	5.900	0.23228			
300-2340	-	-	A	5.944	0.23400			
300-2344	15/64	-	-	5.953	0.23438			
300-2362	-	-	-	6.000	0.23622			
300-2380	-	-	B	6.045	0.23800			
300-2402	-	-	-	6.100	0.24016			
300-2420	-	-	C	6.147	0.24200			
300-2441	-	-	-	6.200	0.24409			
300-2460	-	-	D	6.248	0.24600			
300-2480	-	-	-	6.300	0.24803			
300-2500	1/4	-	E	6.350	0.25000			
300-2520	-	-	-	6.400	0.25197			
300-2559	-	-	-	6.500	0.25591			
300-2570	-	-	F	6.528	0.25700			
300-2598	-	-	-	6.600	0.25984			
300-2610	-	-	G	6.629	0.26100			
300-2638	-	-	-	6.700	0.26378			
300-2656	17/64	-	-	6.747	0.26563			
300-2660	-	-	H	6.756	0.26600			
300-2677	-	-	-	6.800	0.26772			

Packed: 1 pc.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
300D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 300D (Continued)

SPEED FEED	CARBIDE	BR
P379		



Cutting Diameter Tolerance			
Size	mm	Inch	No. of Flutes
0.80mm-6.45mm	+0.025/+0.012	+0.001/+0.004	4
6.451mm-13mm	+0.025/+0.0127	+0.001/+0.005	6

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
300-2717	-	-	-	6.900	0.27165	28.6	82.6	6.35
300-2720	-	-	I	6.909	0.27200			
300-2756	-	-	-	7.000	0.27559			
300-2770	-	-	J	7.036	0.27700			
300-2795	-	-	-	7.100	0.27953			
300-2810	-	-	K	7.137	0.28100			
300-2812	9/32	-	-	7.144	0.28125			
300-2835	-	-	-	7.200	0.28346			
300-2874	-	-	-	7.300	0.28740			
300-2900	-	-	L	7.366	0.29000			
300-2913	-	-	-	7.400	0.29134			
300-2950	-	-	M	7.493	0.29500			
300-2953	-	-	-	7.500	0.29528			
300-2969	19/64	-	-	7.541	0.29688			
300-2992	-	-	-	7.600	0.29921			
300-3020	-	-	N	7.671	0.30200			
300-3031	-	-	-	7.700	0.30315			
300-3071	-	-	-	7.800	0.30709			
300-3110	-	-	-	7.900	0.31102			
300-3125	5/16	-	-	7.938	0.31250			
300-3150	-	-	-	8.000	0.31496			
300-3160	-	-	O	8.026	0.31600			
300-3189	-	-	-	8.100	0.31890			
300-3228	-	-	-	8.200	0.32283			
300-3230	-	-	P	8.204	0.32300			
300-3268	-	-	-	8.300	0.32677			
300-3281	21/64	-	-	8.334	0.32813			
300-3307	-	-	-	8.400	0.33071			
300-3320	-	-	Q	8.433	0.33200			
300-3346	-	-	-	8.500	0.33465			
300-3386	-	-	-	8.600	0.33858			
300-3390	-	-	R	8.611	0.33900			
300-3425	-	-	-	8.700	0.34252			
300-3438	11/32	-	-	8.733	0.34380			
300-3465	-	-	-	8.800	0.34646			
300-3480	-	-	S	8.839	0.34800			
300-3504	-	-	-	8.900	0.35039			
300-3543	-	-	-	9.000	0.35433			
300-3580	-	-	T	9.093	0.35800			
300-3583	-	-	-	9.100	0.35827			
300-3594	23/64	-	-	9.128	0.35938			
300-3622	-	-	-	9.200	0.36220			
300-3661	-	-	-	9.300	0.36614			
300-3680	-	-	U	9.347	0.36800			
300-3701	-	-	-	9.400	0.37008			
300-3740	-	-	-	9.500	0.37402			
300-3750	3/8	-	-	9.525	0.37500			
300-3770	-	-	V	9.576	0.37700			
300-3780	-	-	-	9.600	0.37795			
300-3819	-	-	-	9.700	0.38189			

Packed: 1 pc.



List 300D (Continued)

SPEED FEED P379	CARBIDE	BR
-----------------------	---------	----

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter			
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)			
300-3858	-	-	-	9.800	0.38583	31.8	88.9	9.13			
300-3860	-	-	W	9.804	0.38600						
300-3898	-	-	-	9.900	0.38976						
300-3906	25/64	-	-	9.922	0.39063						
300-3937	-	-	-	10.000	0.39370						
300-3970	-	-	X	10.084	0.39700						
300-3976	-	-	-	10.100	0.39764						
300-4016	-	-	-	10.200	0.40157						
300-4040	-	-	Y	10.262	0.40400						
300-4055	-	-	-	10.300	0.40551						
300-4062	13/32	-	-	10.319	0.40625						
300-4094	-	-	-	10.400	0.40945						
300-4130	-	-	Z	10.490	0.41300						
300-4134	-	-	-	10.500	0.41339						
300-4173	-	-	-	10.600	0.41732	34.9	95.3	9.53			
300-4213	-	-	-	10.700	0.42126						
300-4219	27/64	-	-	10.716	0.42188						
300-4252	-	-	-	10.800	0.42520						
300-4291	-	-	-	10.900	0.42913						
300-4331	-	-	-	11.000	0.43307				35.0		
300-4370	-	-	-	11.100	0.43701				34.9	95.3	11.11
300-4375	7/16	-	-	11.113	0.43750						
300-4409	-	-	-	11.200	0.44094						
300-4449	-	-	-	11.300	0.44488						
300-4488	-	-	-	11.400	0.44882						
300-4528	-	-	-	11.500	0.45276						
300-4531	29/64	-	-	11.509	0.45313						
300-4567	-	-	-	11.600	0.45669						
300-4606	-	-	-	11.700	0.46063						
300-4646	-	-	-	11.800	0.46457						
300-4685	-	-	-	11.900	0.46850						
300-4688	15/32	-	-	11.906	0.46875						
300-4724	-	-	-	12.000	0.47244						
300-4764	-	-	-	12.100	0.47638						
300-4803	-	-	-	12.200	0.48031						
300-4843	-	-	-	12.300	0.48425						
300-4844	31/64	-	-	12.303	0.48438						
300-4882	-	-	-	12.400	0.48819						
300-4921	-	-	-	12.500	0.49213						
300-4961	-	-	-	12.600	0.49606						
300-5000	1/2	-	-	12.700	0.50000						
300-5079	-	-	-	12.900	0.50787						
300-5118	-	-	-	13.000	0.51181						

Packed: 1 pc.



Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
300D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 750

CARBIDE BR



EDP Number	Diameter (in)	Flute Length	Max DOC (in)	Overall Length	Shank Diameter
		FL (in)		L (in)	
750-0625	1/16	1/8	1/2	1-1/2	1/8
750-0781	5/64	5/32			
750-0938	3/32	3/16			
750-1094	7/64	7/32			
750-1250	1/8	5/16	5/8	2	3/16
750-1406	9/64	1/4			
750-1562	5/32	9/32			
750-1719	11/64	5/16			
750-1875	3/16	11/32	3/4	2	1/4
750-2031	13/64	3/8			
750-2188	7/32	-			
750-2344	15/64	-			
750-2500	1/4	-	-	2-1/2	1/4
750-2812	9/32	-			
750-3125	5/16	-			
750-3438	11/32	-			
750-3750	3/8	-	-	-	-

Packed: 1 pc.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
750	1010 1018	1035 1045	1065	4140 4340										<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 700

Single Flute

CARBIDE BR



EDP Number	Diameter	Overall Length	Shank Diameter	Included Angle Degree	
	D (in)	L (in)	d (in)	α	
700-1250	1/8*	1-1/2	1/8	60	
700-1251				82	
700-1252				90	
700-1875	3/16*	2	3/16	60	
700-1871				82	
700-1872				90	
700-2500	1/4*	2-9/16	1/4	60	
700-2501				82	
700-2502				90	
700-3750	3/8	2-9/16	1/4	60	
700-3751		2-7/16		82	
700-3752				90	
700-5000	1/2	2-5/8	1/4	60	
700-5001					82
700-5002					90
700-6250	5/8	2-13/16	3/8	60	
700-6251		2-5/8		82	
700-6252		3-1/16		90	
700-6253		2-7/8		60	
700-6254				82	
700-6255				90	
700-7500	3/4	3	1/2	60	
700-7501		2-7/8		82	
700-7502				90	
700-1000	1	3-1/4	1/2	60	
700-1001		3		82	
700-1002				90	

Packed: 1 pc.

*Indicates Solid Carbide. All others have hardened steel shanks.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
700	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							

good best






List 701

CARBIDE

BR

Multiple Flute



EDP Number	Diameter	Overall Length	Shank Diameter	Included Angle Degree	No. of Flutes	
	D (in)	L (in)	d (in)	α		
701-2500	1/4*	2	1/4	60	18	
701-2501				82		
701-2502				90		
701-3750	3/8	2-3/16		60	20	
701-3751		2-5/16		82		
701-3752				90		
701-5000	1/2	2-1/8		3/8	60	24
701-5001					82	
701-5002					90	
701-6250	5/8	3	60		30	
701-6251		2-7/8	82			
701-6252			90			
701-7500	3/4	3	1/2		60	36
701-7501		2-7/8			82	
701-7502					90	
701-1000	1	3		60	46	
701-1001				82		
701-1002				90		

Packed: 1 pc.

*Indicates Solid Carbide. All others have hardened steel shanks.



Work Material

List No.	P					M			K Cast Iron	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
701			<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best



List 706

CARBIDE BR

6 Flute



EDP Number	Diameter		Overall Length	Shank Diameter	Included Angle Degree	
	D (in)		L (in)	d (in)	α	
706-2500-060	1/4*		2	1/4	60	
706-2500-082			2		82	
706-2500-090			2		90	
706-3750-060	3/8		2-1/2		60	
706-3750-082			2-3/8		82	
706-3750-090			2-3/8		90	
706-5000-060	1/2		2-5/8		60	
706-5000-082			2-1/2		82	
706-5000-090			2-1/2		90	
706-6250-060	5/8		3	3/8	60	
706-6250-082			2-7/8		82	
706-6250-090			2-7/8		90	
706-7500-060	3/4		3		60	
706-7500-082			2-7/8		82	
706-7500-090			2-7/8		90	
706-1000-060	1		3-1/4		1/2	60
706-1000-082			3			82
706-1000-090			3			90

Packed: 1 pc.

*Indicates Solid Carbide. All others have hardened steel shanks.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
706	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>						

good best





List OCS-SO

Coolant-Through, Stub Length Drills



NEW	SPEED FEED P380-381	CARBIDE	TYPE N	TiAlN	STUB		
------------	-------------------------------	----------------	---------------	--------------	-------------	--	--



Cutting Diameter Tolerance (h8)		
Size	mm	inch
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤14	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
0CS0600F-SO	-	-	-	6.000	0.23622	28	66	6
0CS0630F-SO	-	-	-	6.300	0.24803	34	79	8
0CS0650F-SO	-	-	-	6.500	0.25591			
0CS0680F-SO	-	-	-	6.800	0.26772			
0CS0700F-SO	-	-	-	7.000	0.27559			
0CS0750F-SO	-	-	-	7.500	0.29528	41	89	10
0CS0800F-SO	-	-	-	8.000	0.31496			
0CS0850F-SO	-	-	-	8.500	0.33465			
0CS0900F-SO	-	-	-	9.000	0.35433			
0CS0950F-SO	-	-	-	9.500	0.37402	47	102	12
0CS1000F-SO	-	-	-	10.000	0.39370			
0CS1020F-SO	-	-	-	10.200	0.40157			
0CS1050F-SO	-	-	-	10.500	0.41339			
0CS1100F-SO	-	-	-	11.000	0.43307	55	107	14
0CS1150F-SO	-	-	-	11.500	0.45276			
0CS1200F-SO	-	-	-	12.000	0.47244			
0CS1250F-SO	-	-	-	12.500	0.49213			
0CS1270F-SO	1/2	-	-	12.700	0.50000	60	107	14
0CS1300F-SO	-	-	-	13.000	0.51181			
0CS1350F-SO	-	-	-	13.500	0.53150			
0CS1400F-SO	-	-	-	14.000	0.55118			

Packed: 1 pc.
Available TiAlN coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
0CS-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>									<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 0CJ-SO



NEW SPEED FEED P380-381 CARBIDE TYPE N TiAIN JOBBERS 30°

Coolant-Through, Jobber Length Drills



Cutting Diameter Tolerance (h8)		
Size	mm	inch
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤14	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
0CJ0600F-SO	-	-	-	6.000	0.23622	44	82	6
0CJ0630F-SO	-	-	-	6.300	0.24803			
0CJ0650F-SO	-	-	-	6.500	0.25591			
0CJ0680F-SO	-	-	-	6.800	0.26772			
0CJ0700F-SO	-	-	-	7.000	0.27559	53	91	8
0CJ0750F-SO	-	-	-	7.500	0.29528			
0CJ0800F-SO	-	-	-	8.000	0.31496			
0CJ0850F-SO	-	-	-	8.500	0.33465			
0CJ0900F-SO	-	-	-	9.000	0.35433	61	103	10
0CJ0950F-SO	-	-	-	9.500	0.37402			
0CJ1000F-SO	-	-	-	10.000	0.39370			
0CJ1020F-SO	-	-	-	10.200	0.40157			
0CJ1050F-SO	-	-	-	10.500	0.41339	71	118	12
0CJ1100F-SO	-	-	-	11.000	0.43307			
0CJ1150F-SO	-	-	-	11.500	0.45276			
0CJ1200F-SO	-	-	-	12.000	0.47244			
0CJ1250F-SO	-	-	-	12.500	0.49213	77	124	14
0CJ1270F-SO	1/2	-	-	12.700	0.50000			
0CJ1300F-SO	-	-	-	13.000	0.51181			
0CJ1350F-SO	-	-	-	13.500	0.53150			
0CJ1400F-SO	-	-	-	14.000	0.55118			

Packed: 1 pc.
Available TiAIN coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels				Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	Alloy Steels 4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
0CJ-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 01S-SO



NEW	SPEED FEED P380-381	CARBIDE	TYPE N	TiAIN	STUB	30°
------------	-------------------------------	----------------	---------------	--------------	-------------	------------

Stub Length Drills



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 14	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
01S0100F-SO	-	-	-	1.000	0.03937	6	26	1.0
01S0150F-SO	-	-	-	1.500	0.05906	9	32	1.5
01S0200F-SO	-	-	-	2.000	0.07874	12	38	2.0
01S0250F-SO	-	-	-	2.500	0.09843	14	43	2.5
01S0300F-SO	-	-	-	3.000	0.11811	20	62	6.0
01S0330F-SO	-	-	-	3.300	0.12992			
01S0350F-SO	-	-	-	3.500	0.13780			
01S0400F-SO	-	-	-	4.000	0.15748	24	66	6.0
01S0420F-SO	-	-	-	4.200	0.16535			
01S0450F-SO	-	-	-	4.500	0.17717			
01S0500F-SO	-	-	-	5.000	0.19685	28	79	8.0
01S0550F-SO	-	-	-	5.500	0.21654			
01S0600F-SO	-	-	-	6.000	0.23622			
01S0630F-SO	-	-	-	6.300	0.24803	34	102	12.0
01S0650F-SO	-	-	-	6.500	0.25591			
01S0680F-SO	-	-	-	6.800	0.26772			
01S0700F-SO	-	-	-	7.000	0.27559	41	107	14.0
01S0750F-SO	-	-	-	7.500	0.29528			
01S0800F-SO	-	-	-	8.000	0.31496			
01S0850F-SO	-	-	-	8.500	0.33465	47	120	10.0
01S0900F-SO	-	-	-	9.000	0.35433			
01S0950F-SO	-	-	-	9.500	0.37402			
01S1000F-SO	-	-	-	10.000	0.39370	55	140	14.0
01S1020F-SO	-	-	-	10.200	0.40157			
01S1050F-SO	-	-	-	10.500	0.41339			
01S1100F-SO	-	-	-	11.000	0.43307	60	170	14.0
01S1150F-SO	-	-	-	11.500	0.45276			
01S1200F-SO	-	-	-	12.000	0.47244			
01S1250F-SO	-	-	-	12.500	0.49213	60	107	14.0
01S1270F-SO	1/2	-	-	12.700	0.50000			
01S1300F-SO	-	-	-	13.000	0.51181			
01S1350F-SO	-	-	-	13.500	0.53150	60	107	14.0
01S1400F-SO	-	-	-	14.000	0.55118			

Packed: 1 pc.
Available TiAIN coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
01S-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best





List 01J-SO

Jobber Length Drills



NEW	SPEED FEED P380-381	CARBIDE	TYPE N	TiAlN	JOBBERS	30°
------------	-------------------------------	----------------	---------------	--------------	----------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 14	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
01J0100F-SO	-	-	-	1.000	0.03937	8	55	4
01J0150F-SO	-	-	-	1.500	0.05906	12		
01J0200F-SO	-	-	-	2.000	0.07874	21		
01J0250F-SO	-	-	-	2.500	0.09843	28	66	6
01J0300F-SO	-	-	-	3.000	0.11811			
01J0330F-SO	-	-	-	3.300	0.12992			
01J0350F-SO	-	-	-	3.500	0.13780	36	74	8
01J0400F-SO	-	-	-	4.000	0.15748			
01J0420F-SO	-	-	-	4.200	0.16535			
01J0450F-SO	-	-	-	4.500	0.17717	44	82	10
01J0500F-SO	-	-	-	5.000	0.19685			
01J0550F-SO	-	-	-	5.500	0.21654			
01J0600F-SO	-	-	-	6.000	0.23622	53	91	12
01J0630F-SO	-	-	-	6.300	0.24803			
01J0650F-SO	-	-	-	6.500	0.25591			
01J0680F-SO	-	-	-	6.800	0.26772	61	103	14
01J0700F-SO	-	-	-	7.000	0.27559			
01J0750F-SO	-	-	-	7.500	0.29528			
01J0800F-SO	-	-	-	8.000	0.31496	71	118	10
01J0850F-SO	-	-	-	8.500	0.33465			
01J0900F-SO	-	-	-	9.000	0.35433			
01J0950F-SO	-	-	-	9.500	0.37402	77	124	8
01J1000F-SO	-	-	-	10.000	0.39370			
01J1020F-SO	-	-	-	10.200	0.40157			
01J1050F-SO	-	-	-	10.500	0.41339	77	124	14
01J1100F-SO	-	-	-	11.000	0.43307			
01J1150F-SO	-	-	-	11.500	0.45276			
01J1200F-SO	-	-	-	12.000	0.47244	77	124	14
01J1250F-SO	-	-	-	12.500	0.49213			
01J1270F-SO	1/2	-	-	12.700	0.50000			
01J1300F-SO	-	-	-	13.000	0.51181	77	124	14
01J1350F-SO	-	-	-	13.500	0.53150			
01J1400F-SO	-	-	-	14.000	0.55118			

Packed: 1 pc.
Available TiAlN coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	300		400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
01J-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 1900

VPH-GDS, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	STUB	30°
-------------------------------	------------	----------	-------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α		
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
8599005	-	-	-	0.500	0.01969	3.0	38	3	130°		
8608055	-	-	-	0.550	0.02165	3.5				3	
8608056	-	-	-	0.560	0.02205						4.0
8608057	-	-	-	0.570	0.02244	4.5					
8599006	-	-	-	0.600	0.02362						5.0
8608061	-	-	-	0.610	0.02402	5.5					
8608063	-	-	-	0.630	0.02480			6.0			3
8608065	-	-	-	0.650	0.02559	7.0				3	
8608066	-	-	-	0.660	0.02598			8.0			3
8608068	-	-	-	0.680	0.02677	9.0				3	
8608069	-	-	-	0.690	0.02717			9.0			3
8599007	-	-	-	0.700	0.02756	9.0				3	
8608071	-	-	-	0.710	0.02795		9.0	3			
8608074	-	-	-	0.740	0.02913	9.0			3		
8608075	-	-	-	0.750	0.02953		9.0	3			
8599008	-	-	-	0.800	0.03150	9.0			3		
8608082	-	-	-	0.820	0.03228		9.0	3			
8608083	-	-	-	0.830	0.03268	9.0			3		
8608085	-	-	-	0.850	0.03346		9.0	3			
8608088	-	-	-	0.880	0.03465	9.0			3		
8608089	-	-	-	0.890	0.03504		9.0	3			
8599009	-	-	-	0.900	0.03543	9.0			3		
8608094	-	-	-	0.940	0.03701		9.0	3			
8608095	-	-	-	0.950	0.03740	9.0			3		
8608099	-	-	-	0.990	0.03898		9.0	3			
8599010	-	-	-	1.000	0.03937	9.0			3		
8608102	-	-	-	1.020	0.04016		9.0	3			
8608104	-	-	-	1.040	0.04094	9.0			3		
8608105	-	-	-	1.050	0.04134		9.0	3			
8608106	-	-	-	1.060	0.04173	9.0			3		
8608107	-	-	-	1.070	0.04213		9.0	3			
8608109	-	-	-	1.090	0.04291	9.0			3		
8608113	-	-	-	1.130	0.04449		9.0	3			
8608114	-	-	-	1.140	0.04488	9.0			3		
8608118	-	-	-	1.180	0.04646		9.0	3			
8608119	-	-	-	1.190	0.04685	9.0			3		
8608122	-	-	-	1.220	0.04803		9.0	3			
8608124	-	-	-	1.240	0.04882	9.0			3		
8608125	-	-	-	1.250	0.04921		9.0	3			
8608126	-	-	-	1.260	0.04961	9.0			3		
8608127	-	-	-	1.270	0.05000		9.0	3			
8608128	-	-	-	1.280	0.05039	9.0			3		
8608129	-	-	-	1.290	0.05079		9.0	3			
8599013	-	-	-	1.300	0.05118	9.0			3		
8608131	-	-	-	1.310	0.05157		9.0	3			
8608132	-	-	-	1.320	0.05197	9.0			3		
8599014	-	-	-	1.400	0.05512		9.0	3			
8608146	-	-	-	1.460	0.05748	9.0			3		
8608147	-	-	-	1.470	0.05787		9.0	3			
8608148	-	-	-	1.480	0.05827	9.0			3		

Packed: 1 pc.
Available V coating only.





List 1900 (Continued)

SPEED FEED P382-383	XPM	V	STUB	30°
------------------------	-----	---	------	-----

VPH-GDS, Ideal for Difficult to Machine Materials

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α		
	Fractional Size	Wire Gage	Letter Size	mm	Inch						
8599015	-	-	-	1.500	0.05906	9.0	41	3	130°		
8608151	-	-	-	1.510	0.05945	10.0	42				
8608153	-	-	-	1.530	0.06024						
8608155	-	-	-	1.550	0.06102						
8608159	-	-	-	1.590	0.06260						
8608161	-	-	-	1.610	0.06339						
8608162	-	-	-	1.620	0.06378						
8608163	-	-	-	1.630	0.06417						
8608164	-	-	-	1.640	0.06457						
8608166	-	-	-	1.660	0.06535						
8608169	-	-	-	1.690	0.06654						
8599017	-	-	-	1.700	0.06693	11.0	43	3	130°		
8608176	-	-	-	1.760	0.06929						
8608177	-	-	-	1.770	0.06969						
8608178	-	-	-	1.780	0.07008						
8599018	-	-	-	1.800	0.07087						
8608182	-	-	-	1.820	0.07165						
8608185	-	-	-	1.850	0.07283						
8608193	-	-	-	1.930	0.07598					12.0	44
8608198	-	-	-	1.980	0.07795						
8608199	-	-	-	1.990	0.07835						
9599020	-	-	-	2.000	0.07874						
8608203	-	-	-	2.030	0.07992						
8608204	-	-	-	2.040	0.08031						
8608206	-	-	-	2.060	0.08110						
8608208	-	-	-	2.080	0.08189						
9599021	-	-	-	2.100	0.08268						
8608213	-	-	-	2.130	0.08386	13.0	45	3	130°		
8608215	-	-	-	2.150	0.08465						
8608216	-	-	-	2.160	0.08504						
8608218	-	-	-	2.180	0.08583						
9599022	-	-	-	2.200	0.08661						
8608222	-	-	-	2.220	0.08740						
8608226	-	-	-	2.260	0.08898						
9599023	-	-	-	2.300	0.09055						
8608231	-	-	-	2.310	0.09094						
8608233	-	-	-	2.330	0.09173					14.0	46
8608237	-	-	-	2.370	0.09331						
8608238	-	-	-	2.380	0.09370						
9599024	-	-	-	2.400	0.09449						
8608244	-	-	-	2.440	0.09606						
8608246	-	-	-	2.460	0.09685						
8608249	-	-	-	2.490	0.09803						
9599025	-	-	-	2.500	0.09843						
8608253	-	-	-	2.530	0.09961						
8608258	-	-	-	2.580	0.10157						

Packed: 1 pc.
Available V coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1900	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best






List 1900 (Continued)

VPH-GDS, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	STUB	30°
-------------------------------	------------	----------	-------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
9599026	-	-	-	2.600	0.10236	14.0	46	3	130°
8608264	-	-	-	2.640	0.10394				
9599027	-	-	-	2.700	0.10630				
8608271	-	-	-	2.710	0.10669				
8608278	-	-	-	2.780	0.10945				
8608279	-	-	-	2.790	0.10984				
9599028	-	-	-	2.800	0.11024	16.0	48		
8608281	-	-	-	2.810	0.11063				
8608282	-	-	-	2.820	0.11102				
8608287	-	-	-	2.870	0.11299				
9599029	-	-	-	2.900	0.11417				
8608295	-	-	-	2.950	0.11614				
9599030	-	-	-	3.000	0.11811				
8608305	-	-	-	3.050	0.12008				
9599031	-	-	-	3.100	0.12205				
8608318	1/8	-	-	3.180	0.12520	18.0	50		
8608319	-	-	-	3.190	0.12559				
9599032	-	-	-	3.200	0.12598				
8608326	-	-	-	3.260	0.12835				
9599033	-	-	-	3.300	0.12992				
8608336	-	-	-	3.360	0.13228				
9599034	-	-	-	3.400	0.13386				
8608345	-	-	-	3.450	0.13583				
9599035	-	-	-	3.500	0.13780				
8608352	-	-	-	3.520	0.13858				
8608357	-	-	-	3.570	0.14055				
9599036	-	-	-	3.600	0.14173				
8608366	-	-	-	3.660	0.14409				
9599037	-	-	-	3.700	0.14567				
8608373	-	-	-	3.730	0.14685				
8608377	-	-	-	3.770	0.14843				
9599038	-	-	-	3.800	0.14961				
8608386	-	-	-	3.860	0.15197				
9599039	-	-	-	3.900	0.15354				
8608391	-	-	-	3.910	0.15394				
8608397	-	-	-	3.970	0.15630				
8608399	-	-	-	3.990	0.15709				
9599040	-	-	-	4.000	0.15748				
8608404	-	-	-	4.040	0.15906				
8608409	-	-	-	4.090	0.16102				
9599041	-	-	-	4.100	0.16142				
8608415	-	-	-	4.150	0.16339				
9599042	-	-	-	4.200	0.16535				
8608422	-	-	-	4.220	0.16614				
8608427	-	-	-	4.270	0.16811				
9599043	-	-	-	4.300	0.16929				
8608431	-	-	-	4.310	0.16969				
8608437	11/64	-	-	4.370	0.17205				
8608439	-	-	-	4.390	0.17283				
9599044	-	-	-	4.400	0.17323				

Packed: 1 pc.
Available V coating only.





List 1900 (Continued)

VPH-GDS, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	STUB	30°
------------------------	-----	---	------	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8608445	-	-	-	4.450	0.17520	24.0	68	6	130°
9599045	-	-	-	4.500	0.17717				
8608457	-	-	-	4.570	0.17992				
9599046	-	-	-	4.600	0.18110				
8608462	-	-	-	4.620	0.18189				
8608466	-	-	-	4.660	0.18346				
9599047	-	-	-	4.700	0.18504				
8608476	-	-	-	4.760	0.18740				
8608479	-	-	-	4.790	0.18858				
9599048	-	-	-	4.800	0.18898				
8608485	-	-	-	4.850	0.19094	26.0	70	6	130°
9599049	-	-	-	4.900	0.19291				
8608491	-	-	-	4.910	0.19331				
8608498	-	-	-	4.980	0.19606				
9599050	-	-	-	5.000	0.19685				
8608505	-	-	-	5.050	0.19882				
9599051	-	-	-	5.100	0.20079				
8608511	-	-	-	5.110	0.20118				
8608515	-	-	-	5.150	0.20276				
8608516	-	-	-	5.160	0.20315				
8608518	-	-	-	5.180	0.20394	28.00	72	6	130°
9599052	-	-	-	5.200	0.20472				
8608522	-	-	-	5.220	0.20551				
8608526	-	-	-	5.260	0.20709				
9599053	-	-	-	5.300	0.20866				
8608531	-	-	-	5.310	0.20906				
9599054	-	-	-	5.400	0.21260				
8608541	-	-	-	5.410	0.21299				
8608546	-	-	-	5.460	0.21496				
9599055	-	-	-	5.500	0.21654				
8608556	-	-	-	5.560	0.21890	31.0	75	8	130°
9599056	-	-	-	5.600	0.22047				
8608561	-	-	-	5.610	0.22087				
9599057	-	-	-	5.700	0.22441				
8608579	-	-	-	5.790	0.22795				
9599058	-	-	-	5.800	0.22835				
9599059	-	-	-	5.900	0.23228				
8608595	15/64	-	-	5.953	0.23438				
9599060	-	-	-	6.000	0.23622				
9599061	-	-	-	6.100	0.24016				
9598615	-	-	-	6.150	0.24213	31.0	75	8	130°
9599062	-	-	-	6.200	0.24409				
9599063	-	-	-	6.300	0.24803				
8608635	1/4	-	E	6.350	0.25000				
9599064	-	-	-	6.400	0.25197				
9599065	-	-	-	6.500	0.25591				

Packed: 1 pc.
Available V coating only.

continued on next page

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1900	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 1900 (Continued)

VPH-GDS, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	STUB	30°
-------------------------------	------------	----------	-------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α				
	Fractional Size	Wire Gage	Letter Size	mm	Inch								
9599066	-	-	-	6.600	0.25984	31.0	75	8	130°				
9598665	-	-	-	6.650	0.26181								
9599067	-	-	-	6.700	0.26378								
8608675	17/64	-	-	6.747	0.26563								
9599068	-	-	-	6.800	0.26772								
9598686	-	-	-	6.860	0.27008								
9599069	-	-	-	6.900	0.27165								
9599070	-	-	-	7.000	0.27559								
9598704	-	-	-	7.040	0.27717								
9599071	-	-	-	7.100	0.27953								
8608714	9/32	-	-	7.144	0.28125	34.0	78	8	130°				
9599072	-	-	-	7.200	0.28346								
9599073	-	-	-	7.300	0.28740								
9599074	-	-	-	7.400	0.29134								
9599075	-	-	-	7.500	0.29528								
8608754	19/64	-	-	7.541	0.29688								
9599076	-	-	-	7.600	0.29921					37.0	81	10	130°
9599077	-	-	-	7.700	0.30315								
9599078	-	-	-	7.800	0.30709								
9599079	-	-	-	7.900	0.31102								
8608794	5/16	-	-	7.938	0.31250								
9599080	-	-	-	8.000	0.31496								
9599081	-	-	-	8.100	0.31890								
9598815	-	-	-	8.150	0.32087								
9599082	-	-	-	8.200	0.32283								
9599083	-	-	-	8.300	0.32677								
8608833	21/64	-	-	8.334	0.32813	40.0	90	10	130°				
9599084	-	-	-	8.400	0.33071								
9599085	-	-	-	8.500	0.33465								
9598856	-	-	-	8.560	0.33701								
9599086	-	-	-	8.600	0.33858								
9598868	-	-	-	8.680	0.34173								
9599087	-	-	-	8.700	0.34252								
8608873	11/32	-	-	8.731	0.34375								
9599088	-	-	-	8.800	0.34646								
9598886	-	-	-	8.860	0.34882								
9599089	-	-	-	8.900	0.35039	43.0	93	10	130°				
9599090	-	-	-	9.000	0.35433								
9599091	-	-	-	9.100	0.35827								
8608913	23/64	-	-	9.128	0.35938								
9599092	-	-	-	9.200	0.36220								
9599093	-	-	-	9.300	0.36614								
9599094	-	-	-	9.400	0.37008								
9599095	-	-	-	9.500	0.37402								
8608952	3/8	-	-	9.525	0.37500								
9598955	-	-	-	9.550	0.37598								
9599096	-	-	-	9.600	0.37795								
9599097	-	-	-	9.700	0.38189								
9599098	-	-	-	9.800	0.38583								
9599099	-	-	-	9.900	0.38976								

Packed: 1 pc.
Available V coating only.



List 1900 (Continued)

VPH-GDS, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	STUB	30°
-------------------------------	------------	----------	-------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8608992	25/64	-	-	9.922	0.39063	43.0	93	10	130°
9599100	-	-	-	10.000	0.39370				
9599101	-	-	-	10.100	0.39764				
9599102	-	-	-	10.200	0.40157				
9599103	-	-	-	10.300	0.40551				
8609032	13/32	-	-	10.319	0.40625				
9599104	-	-	-	10.400	0.40945				
9599144	-	-	-	10.440	0.41102				
9599105	-	-	-	10.500	0.41339				
9599106	-	-	-	10.600	0.41732				
9599107	-	-	-	10.700	0.42126	47.0	104	12	130°
8609072	27/64	-	-	10.716	0.42188				
9599108	-	-	-	10.800	0.42520				
9599186	-	-	-	10.860	0.42756				
9599109	-	-	-	10.900	0.42913				
9599110	-	-	-	11.000	0.43307				
9599111	-	-	-	11.100	0.43701				
8609111	7/16	-	-	11.113	0.43750				
9599112	-	-	-	11.200	0.44094				
9599113	-	-	-	11.300	0.44488				
9599114	-	-	-	11.400	0.44882				
9599115	-	-	-	11.500	0.45276				
8609151	29/64	-	-	11.509	0.45313				
9599116	-	-	-	11.600	0.45669				
9599117	-	-	-	11.700	0.46063				
9599118	-	-	-	11.800	0.46457				
9599119	-	-	-	11.900	0.46850				
8609191	15/32	-	-	11.906	0.46875	51.0	108	16	120°
9599120	-	-	-	12.000	0.47244				
9599121	-	-	-	12.100	0.47638				
9599122	-	-	-	12.200	0.48031				
9599123	-	-	-	12.300	0.48425				
9599124	-	-	-	12.400	0.48819				
9599245	-	-	-	12.450	0.49016				
9599125	-	-	-	12.500	0.49213				
9599126	-	-	-	12.600	0.49606				
9599268	-	-	-	12.680	0.49921				
9599127	1/2	-	-	12.700	0.50000	54.0	111	16	120°
9599128	-	-	-	12.800	0.50394				
9599129	-	-	-	12.900	0.50787				
9599130	-	-	-	13.000	0.51181				
9599308	-	-	-	13.080	0.51496				
8609349	17/32	-	-	13.494	0.53125				
8599135	-	-	-	13.500	0.53150				
8599136	-	-	-	13.600	0.53543				
8608954	-	-	-	13.790	0.54291				

Packed: 1 pc.
Available V coating only.

continued on next page **EXD**

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1900	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 1900 (Continued)

VPH-GDS, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	STUB	30°
------------------------	-----	---	------	-----



Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
9599387	-	-	-	13.870	0.54606	54.0	114	16	
8599140	-	-	-	14.000	0.55118				
8599142	-	-	-	14.200	0.55906				
8609429	9/16	-	-	14.288	0.56250				
8599145	-	-	-	14.500	0.57087				
8599146	-	-	-	14.600	0.57480				
8608956	-	-	-	14.610	0.57520				
9599468	-	-	-	14.680	0.57795				
8599150	-	-	-	15.000	0.59055				
8599155	-	-	-	15.500	0.61024				
8599157	-	-	-	15.700	0.61811				
8609588	5/8	-	-	15.875	0.62500				
8599160	-	-	-	16.000	0.62992				
8599165	-	-	-	16.500	0.64961				
8609667	21/32	-	-	16.669	0.65625				
8608958	-	-	-	16.760	0.65984				
9599684	-	-	-	16.840	0.66299				
8599170	-	-	-	17.000	0.66929				
8599175	-	-	-	17.500	0.68898				
8608960	-	-	-	17.630	0.69409				
8608962	-	-	-	17.680	0.69606				
8599177	-	-	-	17.700	0.69685				
8599180	-	-	-	18.000	0.70866				
8599185	-	-	-	18.500	0.72835				
8608964	-	-	-	18.640	0.73386				
8599190	-	-	-	19.000	0.74803				
8609905	3/4	-	-	19.050	0.75000				
8599195	-	-	-	19.500	0.76772				
8608966	-	-	-	19.660	0.77402				
8608968	-	-	-	19.740	0.77717				
9599976	-	-	-	19.760	0.77795				
8599200	-	-	-	20.000	0.78740				

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1900	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1950

VPH-GDR, Ideal for Difficult to Machine Materials



SPEED FEED P382-383	XPM	V	JOBBERS	30°
-------------------------------	------------	----------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.99≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤17.46	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8612199	-	47	-	1.994	0.07850	24	56	3	130°
8612206	-	46	-	2.057	0.08100				
8612208	-	45	-	2.083	0.08200				
8612218	-	44	-	2.184	0.08600	27	59		
8612226	-	43	-	2.261	0.08900				
8612237	-	42	-	2.375	0.09350	30	62		
8612238	3/32	-	-	2.381	0.09375				
8612244	-	41	-	2.438	0.09600				
8612249	-	40	-	2.489	0.09800				
8612253	-	39	-	2.527	0.09950				
8612258	-	38	-	2.578	0.10150				
8612264	-	37	-	2.642	0.10400	33	65		
8612271	-	36	-	2.705	0.10650				
8612278	7/64	-	-	2.778	0.10938				
8612279	-	35	-	2.794	0.11000				
8612282	-	34	-	2.819	0.11100				
8612287	-	33	-	2.870	0.11300				
8612295	-	32	-	2.946	0.11600				
8612305	-	31	-	3.048	0.12000	36	68		
8612317	1/8	-	-	3.175	0.12500				
8612326	-	30	-	3.264	0.12850				
8612345	-	29	-	3.454	0.13600	39	71		
8612357	9/64	-	-	3.572	0.14063				
8612366	-	27	-	3.658	0.14400				
8612373	-	26	-	3.734	0.14700				
8612380	-	25	-	3.797	0.14950	43	75		
8612386	-	24	-	3.861	0.15200				
8612391	-	23	-	3.912	0.15400				
8612397	5/32	-	-	3.969	0.15625				
8612399	-	22	-	3.988	0.15700				
8612404	-	21	-	4.039	0.15900	87	6		
8612409	-	20	-	4.089	0.16100				
8612422	-	19	-	4.216	0.16600				
8612430	-	-	-	4.300	0.16929	47	91		
8612437	11/64	-	-	4.366	0.17188				
8612439	-	17	-	4.394	0.17300				
8612450	-	16	-	4.496	0.17700				
8612457	-	15	-	4.572	0.18000				
8612462	-	14	-	4.623	0.18200				
8612470	-	13	-	4.699	0.18500				

Packed: 1 pc.
Available V coating only.

continued on next page **EXD**

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1950	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1950 (Continued)

VPH-GDR, Ideal for Difficult to Machine Materials



SPEED FEED P382-383	XPM	V	JOBBERS	30°
------------------------	-----	---	---------	-----

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.99 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 17.46	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8612476	3/16	-	-	4.763	0.18750	52	96	6	130°
8612480	-	12	-	4.801	0.18900				
8612485	-	11	-	4.851	0.19100				
8612491	-	-	-	4.910	0.19331				
8612498	-	9	-	4.978	0.19600				
8612505	-	8	-	5.055	0.19900				
8612511	-	7	-	5.105	0.20100				
8612516	13/64	-	-	5.159	0.20313				
8612518	-	6	-	5.182	0.20400				
8612522	-	5	-	5.220	0.20550				
8612531	-	4	-	5.309	0.20900	57	101	8	130°
8612541	-	3	-	5.410	0.21300				
8612556	7/32	-	-	5.556	0.21875				
8612561	-	2	-	5.613	0.22100				
8612579	-	1	-	5.791	0.22800				
8612594	-	-	A	5.944	0.23400				
8612595	15/64	-	-	5.953	0.23438				
8612604	-	-	-	6.040	0.23780				
8612615	-	-	C	6.147	0.24200				
8612625	-	-	D	6.248	0.24600				
8612635	1/4	-	E	6.350	0.25000	63	107	8	130°
8612653	-	-	F	6.528	0.25700				
8612663	-	-	G	6.629	0.26100				
8612675	17/64	-	-	6.747	0.26563				
8612690	-	-	I	6.909	0.27200				
8612703	-	-	J	7.036	0.27700				
8612714	9/32	-	-	7.144	0.28125				
8612737	-	-	L	7.366	0.29000				
8612749	-	-	M	7.493	0.29500				
8612754	19/64	-	-	7.541	0.29688				
8612767	-	-	N	7.671	0.30200	75	119	10	130°
8612794	5/16	-	-	7.938	0.31250				
8612803	-	-	O	8.026	0.31600				
8612820	-	-	P	8.204	0.32300				
8612833	21/64	-	-	8.334	0.32813				
8612843	-	-	Q	8.433	0.33200				
8612861	-	-	R	8.611	0.33900				
8612873	11/32	-	-	8.731	0.34375				
8612884	-	-	S	8.839	0.34800				
8612909	-	-	T	9.093	0.35800				
8612913	23/64	-	-	9.128	0.35938				
8612934	-	-	-	9.340	0.36772				
8612952	3/8	-	-	9.525	0.37500				
8612957	-	-	V	9.576	0.37700				
8612980	-	-	W	9.804	0.38600				
8612992	25/64	-	-	9.922	0.39063				
8613008	-	-	X	10.084	0.39700				
8613026	-	-	Y	10.262	0.40400				
8613032	13/32	-	-	10.319	0.40625	87	144	12	130°
8613049	-	-	Z	10.490	0.41300				

Packed: 1 pc.
Available V coating only.





List 1950 (Continued)

VPH-GDR, Ideal for Difficult to Machine Materials

SPEED FEED P382-383	XPM	V	JOBBERS	30°
------------------------	-----	---	---------	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8613072	27/64	-	-	10.716	0.42188	94	151	12	130°
8613111	7/16	-	-	11.113	0.43750				
8613151	29/64	-	-	11.509	0.45313				
8613191	15/32	-	-	11.906	0.46875	101	158		
8613230	31/64	-	-	12.303	0.48438				
8613270	1/2	-	-	12.700	0.50000	106	166		
8613349	17/32	-	-	13.494	0.53125	109	169	16	120°
8613429	9/16	-	-	14.288	0.56250	115	175		
8613588	5/8	-	-	15.875	0.62500		118	181	
8613667	21/32	-	-	16.669	0.65625	118		184	
8613746	11/16	-	-	17.463	0.68750				

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1950	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 2000

VP-GDR, Parabolic



SPEED FEED P384	XPM	V	JOBBERS	40°
---------------------------	------------	----------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8593020	-	-	-	2.000	0.07874	24	56	3
8593021	-	-	-	2.100	0.08268			
8593022	-	-	-	2.200	0.08661	27	59	
8593023	-	-	-	2.300	0.09055			
8593024	-	-	-	2.400	0.09449	30	62	
8593025	-	-	-	2.500	0.09843			
8593026	-	-	-	2.600	0.10236	33	65	
8593027	-	-	-	2.700	0.10630			
8593028	-	-	-	2.800	0.11024	36	68	
8593029	-	-	-	2.900	0.11417			
8593030	-	-	-	3.000	0.11811	39	71	
8593031	-	-	-	3.100	0.12205			
8593032	-	-	-	3.200	0.12598	43	75	
8593033	-	-	-	3.300	0.12992			
8593034	-	-	-	3.400	0.13386	47	91	
8593035	-	-	-	3.500	0.13780			
8593036	-	-	-	3.600	0.14173	52	96	
8593037	-	-	-	3.700	0.14567			
8593038	-	-	-	3.800	0.14961	57	101	
8593039	-	-	-	3.900	0.15354			
8593040	-	-	-	4.000	0.15748	63	107	
8593041	-	-	-	4.100	0.16142			
8593042	-	-	-	4.200	0.16535	69	113	
8593043	-	-	-	4.300	0.16929			
8593044	-	-	-	4.400	0.17323	63	107	
8593045	-	-	-	4.500	0.17717			
8593046	-	-	-	4.600	0.18110	69	113	
8593047	-	-	-	4.700	0.18504			
8593048	-	-	-	4.800	0.18898	52	96	
8593049	-	-	-	4.900	0.19291			
8593050	-	-	-	5.000	0.19685	57	101	
8593051	-	-	-	5.100	0.20079			
8593052	-	-	-	5.200	0.20472	63	107	
8593053	-	-	-	5.300	0.20866			
8593054	-	-	-	5.400	0.21260	69	113	
8593055	-	-	-	5.500	0.21654			
8593056	-	-	-	5.600	0.22047	63	107	
8593057	-	-	-	5.700	0.22441			
8593058	-	-	-	5.800	0.22835	69	113	
8593059	-	-	-	5.900	0.23228			
8593060	-	-	-	6.000	0.23622	63	107	
8593061	-	-	-	6.100	0.24016			
8593062	-	-	-	6.200	0.24409	69	113	
8593063	-	-	-	6.300	0.24803			
8593064	-	-	-	6.400	0.25197	63	107	
8593065	-	-	-	6.500	0.25591			
8593066	-	-	-	6.600	0.25984	69	113	
8593067	-	-	-	6.700	0.26378			
8593068	-	-	-	6.800	0.26772	63	107	
8593069	-	-	-	6.900	0.27165			
8593070	-	-	-	7.000	0.27559	69	113	
8593071	-	-	-	7.100	0.27953			
8593072	-	-	-	7.200	0.28346			

Packed: 1 pc.
Available V coating only.





List 2000 (Continued)

VP-GDR, Parabolic

SPEED FEED P384	XPM	V	JOBBERS	40°
--------------------	-----	---	---------	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8593073	-	-	-	7.300	0.28740	69	113	8	
8593074	-	-	-	7.400	0.29134				
8593075	-	-	-	7.500	0.29528				
8593076	-	-	-	7.600	0.29921	75	119		8
8593077	-	-	-	7.700	0.30315				
8593078	-	-	-	7.800	0.30709				
8593079	-	-	-	7.900	0.31102				
8593080	-	-	-	8.000	0.31496				
8593081	-	-	-	8.100	0.31890				
8593082	-	-	-	8.200	0.32283	81	125	10	
8593083	-	-	-	8.300	0.32677				
8593084	-	-	-	8.400	0.33071				
8593085	-	-	-	8.500	0.33465	87	131		10
8593086	-	-	-	8.600	0.33858				
8593087	-	-	-	8.700	0.34252				
8593088	-	-	-	8.800	0.34646				
8593089	-	-	-	8.900	0.35039				
8593090	-	-	-	9.000	0.35433				
8593091	-	-	-	9.100	0.35827	88	137	12	
8593092	-	-	-	9.200	0.36220				
8593093	-	-	-	9.300	0.36614				
8593094	-	-	-	9.400	0.37008	89	144		12
8593095	-	-	-	9.500	0.37402				
8593096	-	-	-	9.600	0.37795				
8593097	-	-	-	9.700	0.38189				
8593098	-	-	-	9.800	0.38583				
8593099	-	-	-	9.900	0.38976				
8593100	-	-	-	10.000	0.39370	90	151	12	
8593101	-	-	-	10.100	0.39764				
8593102	-	-	-	10.200	0.40157				
8593103	-	-	-	10.300	0.40551	91	158		12
8593104	-	-	-	10.400	0.40945				
8593105	-	-	-	10.500	0.41339				
8593106	-	-	-	10.600	0.41732				
8593107	-	-	-	10.700	0.42126				
8593108	-	-	-	10.800	0.42520				
8593109	-	-	-	10.900	0.42913	92	165	12	
8593110	-	-	-	11.000	0.43307				
8593111	-	-	-	11.100	0.43701				
8593112	-	-	-	11.200	0.44094	93	172		12
8593113	-	-	-	11.300	0.44488				
8593114	-	-	-	11.400	0.44882				
8593115	-	-	-	11.500	0.45276				
8593116	-	-	-	11.600	0.45669				
8593117	-	-	-	11.700	0.46063				
8593118	-	-	-	11.800	0.46457	94	179	12	
8593119	-	-	-	11.900	0.46850				
8593120	-	-	-	12.000	0.47244				
8593121	-	-	-	12.100	0.47638				

Packed: 1 pc.
Available V coating only.

continued on next page **EXD**

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 2000 (Continued)

VP-GDR, Parabolic



SPEED FEED P384	XPM	V	JOBBERS	40°
---------------------------	------------	----------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8593122	-	-	-	12.200	0.48031	101	158	12	
8593123	-	-	-	12.300	0.48425				
8593124	-	-	-	12.400	0.48819				
8593125	-	-	-	12.500	0.49213				
8593126	-	-	-	12.600	0.49606				
8593127	1/2	-	-	12.700	0.50000				
8593128	-	-	-	12.800	0.50394				
8593129	-	-	-	12.900	0.50787				
8593130	-	-	-	13.000	0.51181				
8593135	-	-	-	13.500	0.53150				
8593140	-	-	-	14.000	0.55118	106	166	16	
8593145	-	-	-	14.500	0.57087	109	169		
8593150	-	-	-	15.000	0.59055	112	172		
8593155	-	-	-	15.500	0.61024	115	181		
8593160	-	-	-	16.000	0.62992	118	184	20	
8593165	-	-	-	16.500	0.64961	122	188		
8593170	-	-	-	17.000	0.66929	125	191		
8593175	-	-	-	17.500	0.68898	128	204		
8593180	-	-	-	18.000	0.70866	132	208		
8593185	-	-	-	18.500	0.72835	136	212		25
8593190	-	-	-	19.000	0.74803	140	216		
8593195	-	-	-	19.500	0.76772	145	225		
8593200	-	-	-	20.000	0.78740	150	230	32	
8593205	-	-	-	20.500	0.80709	155	235		
8593210	-	-	-	21.000	0.82677	160	240		
8593215	-	-	-	21.500	0.84646	165			
8593220	-	-	-	22.000	0.86614				
8593225	-	-	-	22.500	0.88583				
8593230	-	-	-	23.000	0.90551				
8593235	-	-	-	23.500	0.92520				
8593240	-	-	-	24.000	0.94488				
8593245	-	-	-	24.500	0.96457				
8593250	-	-	-	25.000	0.98425				
8593255	-	-	-	25.500	1.00394				
8593260	-	-	-	26.000	1.02362				
8593265	-	-	-	26.500	1.04331				
8593270	-	-	-	27.000	1.06299				
8593280	-	-	-	28.000	1.10236				
8593290	-	-	-	29.000	1.14173				
8593300	-	-	-	30.000	1.18110				
8593310	-	-	-	31.000	1.22047				
8593320	-	-	-	32.000	1.25984				

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 1700

V-HO-GDR, Coolant-Through

SPEED FEED P385	HSS-Co	V	JOBBERS		30°
---------------------------	---------------	----------	----------------	--	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
5.95<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤31.75	+0 / -0.039	+0 / -0.0015

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
17234408	15/64	-	-	5.953	0.23438	66	112	15/64
17236208	-	-	-	6.000	0.23622	69	115	6.00
17250008	1/4	-	E	6.350	0.25000			1/4
17257008	-	-	F	6.528	0.25700	73	119	6.53
17265608	17/64	-	-	6.747	0.26563			17/64
17272008	-	-	I	6.909	0.27200			6.91
17281208	9/32	-	-	7.144	0.28125	74	120	9/32
17296908	19/64	-	-	7.541	0.29688	77	123	19/64
17312508	5/16	-	-	7.938	0.31250	80	127	5/16
17315008	-	-	-	8.000	0.31496			8.00
17328108	21/64	-	-	8.334	0.32813	84	130	21/64
17343808	11/32	-	-	8.731	0.34375	87	133	11/32
17359408	23/64	-	-	9.128	0.35938	88	134	23/64
17375008	3/8	-	-	9.525	0.37500	92	138	3/8
17377008	-	-	V	9.576	0.37700			145
17390608	25/64	-	-	9.922	0.39063	95	148	25/64
17393708	-	-	-	10.000	0.39370			10.00
17406208	13/32	-	-	10.319	0.40625	98	151	13/32
17421908	27/64	-	-	10.716	0.42188	100	153	27/64
17437508	7/16	-	-	11.113	0.43750	103	156	7/16
17453108	29/64	-	-	11.509	0.45313	106	159	29/64
17468808	15/32	-	-	11.906	0.46875	109	162	15/32
17484408	31/64	-	-	12.303	0.48438	111	164	31/64
17500008	1/2	-	-	12.700	0.50000	114	167	1/2
17531208	17/32	-	-	13.494	0.53125	122	182	5/8
17562508	9/16	-	-	14.288	0.56250			
17578108	37/64	-	-	14.684	0.57813	131	192	3/4
17593808	19/32	-	-	15.081	0.59375			
17625008	5/8	-	-	15.875	0.62500	142	199	7/8
17656208	21/32	-	-	16.669	0.65625			
17687508	11/16	-	-	17.463	0.68750	149	210	1
17718808	23/32	-	-	18.256	0.71875			
17750008	3/4	-	-	19.050	0.75000	152	219	7/8
17781308	25/32	-	-	19.844	0.78125			
17812508	13/16	-	-	20.638	0.81250	155	223	1
17843808	27/32	-	-	21.431	0.84375			
17875008	7/8	-	-	22.225	0.87500	161	233	1
17906208	29/32	-	-	23.019	0.90625			
17937508	15/16	-	-	23.813	0.93750	165	242	1-1/4
17968808	31/32	-	-	24.606	0.96875			
18000008	1	-	-	25.400	1.00000			
18031208	1-1/32	-	-	26.194	1.03125			

Packed: 1 pc.
Available V coating only.

continued on next page

List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





V-HO GDR

Cobalt High Speed Steel

List 1700 (Continued)

V-HO-GDR, Coolant-Through

SPEED FEED	HSS-Co	V	JOBBERS		
	P385				



Cutting Diameter Tolerance (h8)		
Size	mm	inch
5.95<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤31.75	+0 / -0.039	+0 / -0.0015

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
18062508	1-1/16	-	-	26.988	1.06250	168	246	1-1/4
18093808	1-3/32	-	-	27.781	1.09375	174	252	
18125008	1-1/8	-	-	28.575	1.12500	180	258	
18218808	1-7/32	-	-	30.956	1.21875	190	268	
18250008	1-1/4	-	-	31.750	1.25000	200	277	

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1700	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 1750

TDXL-10D

SPEED FEED P386	HSS-Co	WXL	40°
---------------------------	---------------	------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.6 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 17.86	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8622816	-	-	-	1.600	0.06299	26	75	1.6
8622818	-	-	-	1.800	0.07087			1.8
17542411	5/64	-	-	1.984	0.07813			5/64
8622820	-	-	-	2.000	0.07874	2.0		
8622821	-	-	-	2.100	0.08268	2.1		
8622822	-	-	-	2.200	0.08661	2.2		
8622823	-	-	-	2.300	0.09055	2.3		
17543111	3/32	-	-	2.381	0.09375	33	3/32	
8622824	-	-	-	2.400	0.09449		2.4	
8622825	-	-	-	2.500	0.09843		2.5	
8622826	-	-	-	2.600	0.10236	2.6		
8622827	-	-	-	2.700	0.10630	2.7		
17543811	7/64	-	-	2.778	0.10938	40	7/64	
8622828	-	-	-	2.800	0.11024		2.8	
8622829	-	-	-	2.900	0.11417		2.9	
8622830	-	-	-	3.000	0.11811	3.0		
8622831	-	-	-	3.100	0.12205	3.1		
17544411	1/8	-	-	3.175	0.12500	45	1/8	
8622832	-	-	-	3.200	0.12598		3.2	
8622833	-	-	-	3.300	0.12992		3.3	
8622834	-	-	-	3.400	0.13386	3.4		
8622835	-	-	-	3.500	0.13780	3.5		
17544711	9/64	-	-	3.572	0.14063	50	9/64	
8622836	-	-	-	3.600	0.14173		3.6	
8622837	-	-	-	3.700	0.14567		3.7	
8622838	-	-	-	3.800	0.14961	3.8		
8622839	-	-	-	3.900	0.15354	3.9		
17545311	5/32	-	-	3.969	0.15625	55	5/32	
8622840	-	-	-	4.000	0.15748		4.0	
8622841	-	-	-	4.100	0.16142		4.1	
8622842	-	-	-	4.200	0.16535	4.2		
8622843	-	-	-	4.300	0.16929	4.3		
17545911	11/64	-	-	4.366	0.17188	60	11/64	
8622844	-	-	-	4.400	0.17323		4.4	
8622845	-	-	-	4.500	0.17717		4.5	
8622846	-	-	-	4.600	0.18110	4.6		
8622847	-	-	-	4.700	0.18504	4.7		
17546511	3/16	-	-	4.763	0.18750	65	3/16	
8622848	-	-	-	4.800	0.18898		4.8	
8622849	-	-	-	4.900	0.19291		4.9	
8622850	-	-	-	5.000	0.19685	5.0		
8622851	-	-	-	5.100	0.20079	70	128	5.1

Packed: 1 pc.
Available WXL® coating only.

➔ continued on next page ➔ **EXD**

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1750	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 1750 (Continued)

SPEED FEED P386	HSS-Co	WXL	40°
--------------------	--------	-----	-----

TDXL-10D



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.6≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤17.86	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
17547211	13/64	-	-	5.159	0.20313	70	128	13/64
8622852	-	-	-	5.200	0.20472			5.2
8622853	-	-	-	5.300	0.20866			5.3
8622854	-	-	-	5.400	0.21260	78		5.4
8622855	-	-	-	5.500	0.21654			5.5
17547711	7/32	-	-	5.556	0.21875			7/32
8622856	-	-	-	5.600	0.22047	87		5.6
8622857	-	-	-	5.700	0.22441			5.7
8622858	-	-	-	5.800	0.22835			5.8
8622859	-	-	-	5.900	0.23228	90		5.9
17548111	15/64	-	-	5.953	0.23438			15/64
8622860	-	-	-	6.000	0.23622			6.0
8622861	-	-	-	6.100	0.24016	87	6.1	
8622862	-	-	-	6.200	0.24409		6.2	
8622863	-	-	-	6.300	0.24803		6.3	
17548511	1/4	-	E	6.350	0.25000	90	1/4	
8622864	-	-	-	6.400	0.25197		6.4	
8622865	-	-	-	6.500	0.25591		6.5	
8622866	-	-	-	6.600	0.25984	100	6.6	
8622867	-	-	-	6.700	0.26378		6.7	
17548811	17/64	-	-	6.747	0.26563		17/64	
8622868	-	-	-	6.800	0.26772	105	6.8	
8622869	-	-	-	6.900	0.27165		6.9	
8622870	-	-	-	7.000	0.27559		7.0	
8622871	-	-	-	7.100	0.27953	110	7.1	
17549111	9/32	-	-	7.144	0.28125		9/32	
8622872	-	-	-	7.200	0.28346		7.2	
8622873	-	-	-	7.300	0.28740	115	7.3	
8622874	-	-	-	7.400	0.29134		7.4	
8622875	-	-	-	7.500	0.29528		7.5	
17549411	19/64	-	-	7.541	0.29688	125	19/64	
8622876	-	-	-	7.600	0.29921		7.6	
8622877	-	-	-	7.700	0.30315		7.7	
8622878	-	-	-	7.800	0.30709	110	7.8	
8622879	-	-	-	7.900	0.31102		7.9	
17549611	5/16	-	-	7.938	0.31250		5/16	
8622880	-	-	-	8.000	0.31496	115	8.0	
8622881	-	-	-	8.100	0.31890		8.1	
8622882	-	-	-	8.200	0.32283		8.2	
8622883	-	-	-	8.300	0.32677	125	8.3	
17549911	21/64	-	-	8.334	0.32813		21/64	
8622884	-	-	-	8.400	0.33071		8.4	
8622885	-	-	-	8.500	0.33465	115	8.5	
8622886	-	-	-	8.600	0.33858		8.6	
8622887	-	-	-	8.700	0.34252		8.7	
17550211	11/32	-	-	8.731	0.34375	125	11/32	
8622888	-	-	-	8.800	0.34646		8.8	
8622889	-	-	-	8.900	0.35039		8.9	
8622890	-	-	-	9.000	0.35433	125	9.0	
8622891	-	-	-	9.100	0.35827		9.1	
17550511	23/64	-	-	9.128	0.35938		23/64	
8622892	-	-	-	9.200	0.36220	9.2		

Packed: 1 pc.
Available WXL® coating only.



List 1750 (Continued)

SPEED FEED P386	HSS-Co	WXL	40°
--------------------	--------	-----	-----

TDXL-10D

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8622893	-	-	-	9.300	0.36614	125	190	9.3
8622894	-	-	-	9.400	0.37008			9.4
8622895	-	-	-	9.500	0.37402			9.5
17550711	3/8	-	-	9.525	0.37500	130	190	3/8
8622896	-	-	-	9.600	0.37795			9.6
8622897	-	-	-	9.700	0.38189			9.7
8622898	-	-	-	9.800	0.38583	140	205	9.8
8622899	-	-	-	9.900	0.38976			9.9
17551011	25/64	-	-	9.922	0.39063			25/64
8622900	-	-	-	10.000	0.39370	145	215	10.0
8622901	-	-	-	10.100	0.39764			10.1
8622902	-	-	-	10.200	0.40157			10.2
8622903	-	-	-	10.300	0.40551	155	215	10.3
17551311	13/32	-	-	10.319	0.40625			13/32
8622904	-	-	-	10.400	0.40945			10.4
8622905	-	-	-	10.500	0.41339	145	205	10.5
8622906	-	-	-	10.600	0.41732			10.6
8622907	-	-	-	10.700	0.42126			10.7
17551511	27/64	-	-	10.716	0.42188	155	215	27/64
8622908	-	-	-	10.800	0.42520			10.8
8622909	-	-	-	10.900	0.42913			10.9
8622910	-	-	-	11.000	0.43307	160	220	11.0
8622911	-	-	-	11.100	0.43701			11.1
17551611	7/16	-	-	11.113	0.43750			7/16
8622912	-	-	-	11.200	0.44094	175	225	11.2
8622913	-	-	-	11.300	0.44488			11.3
8622914	-	-	-	11.400	0.44882			11.4
8622915	-	-	-	11.500	0.45276	186	236	11.5
17551711	29/64	-	-	11.509	0.45313			29/64
8622916	-	-	-	11.600	0.45669			11.6
8622917	-	-	-	11.700	0.46063	233	283	11.7
8622918	-	-	-	11.800	0.46457			11.8
8622919	-	-	-	11.900	0.46850			11.9
17551811	15/32	-	-	11.906	0.46875	175	225	15/32
8622920	-	-	-	12.000	0.47244			12.0
17552011	1/2	-	-	12.700	0.50000			1/2
17525111	17/32	-	-	13.494	0.53125	186	236	17/32
17525311	9/16	-	-	14.288	0.56250			9/16
17525511	45/64	-	-	17.859	0.70313			45/64

Packed: 1 pc.
Available WXL® coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1750	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1760

TDXL-15D



SPEED FEED	HSS-Co	WXL	40°
P386			

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.6≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤17.86	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8623016	-	-	-	1.600	0.06299	30	70	1.6	
8623018	-	-	-	1.800	0.07087	34	75	1.8	
17502411	5/64	-	-	1.984	0.07813	36	80	5/64	
8623020	-	-	-	2.000	0.07874			2.0	
8623021	-	-	-	2.100	0.08268	38		2.1	
8623022	-	-	-	2.200	0.08661	40		2.2	
8623023	-	-	-	2.300	0.09055	42	85	2.3	
17503111	3/32	-	-	2.381	0.09375	44		3/32	
8623024	-	-	-	2.400	0.09449	46	100	2.4	
8623025	-	-	-	2.500	0.09843			48	2.5
8623026	-	-	-	2.600	0.10236	50		2.6	
8623027	-	-	-	2.700	0.10630			54	2.7
17503811	7/64	-	-	2.778	0.10938	56	105	7/64	
8623028	-	-	-	2.800	0.11024			58	2.8
8623029	-	-	-	2.900	0.11417	60		110	2.9
8623030	-	-	-	3.000	0.11811				62
8623031	-	-	-	3.100	0.12205	64	115		3.1
17504411	1/8	-	-	3.175	0.12500				66
8623032	-	-	-	3.200	0.12598	68		120	3.2
8623033	-	-	-	3.300	0.12992				70
8623034	-	-	-	3.400	0.13386	72	135		3.4
8623035	-	-	-	3.500	0.13780				74
17504711	9/64	-	-	3.572	0.14063	76		140	9/64
8623036	-	-	-	3.600	0.14173				78
8623037	-	-	-	3.700	0.14567	80	145		3.7
8623038	-	-	-	3.800	0.14961				82
8623039	-	-	-	3.900	0.15354	84		150	3.9
17505311	5/32	-	-	3.969	0.15625				86
8623040	-	-	-	4.000	0.15748	88	155		4.0
8623041	-	-	-	4.100	0.16142				90
8623042	-	-	-	4.200	0.16535	92		160	4.2
8623043	-	-	-	4.300	0.16929				94
17505911	11/64	-	-	4.366	0.17188	96	165		11/64
8623044	-	-	-	4.400	0.17323				98
8623045	-	-	-	4.500	0.17717	100		170	4.5
8623046	-	-	-	4.600	0.18110				102
8623047	-	-	-	4.700	0.18504	104	175		4.7
17506511	3/16	-	-	4.763	0.18750				106
8623048	-	-	-	4.800	0.18898	108		180	4.8
8623049	-	-	-	4.900	0.19291				110
8623050	-	-	-	5.000	0.19685	112	185		5.0
8623051	-	-	-	5.100	0.20079				114
17507211	13/64	-	-	5.159	0.20313	116		190	13/64
8623052	-	-	-	5.200	0.20472				118
8623053	-	-	-	5.300	0.20866	120	195		5.3
8623054	-	-	-	5.400	0.21260				122
8623055	-	-	-	5.500	0.21654	124		200	5.5
17507711	7/32	-	-	5.556	0.21875				126
8623056	-	-	-	5.600	0.22047	128	205		5.6
8623057	-	-	-	5.700	0.22441				130
8623058	-	-	-	5.800	0.22835	132		210	5.8
17508111	-	-	-	5.950	0.23425				134

Packed: 1 pc.
Available WXL® coating only.



List 1760 (Continued)

TDXL-15D

SPEED FEED P386	HSS-Co	WXL	40°
-----------------------	--------	-----	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8623060	-	-	-	6.000	0.23622	108	170	6.0
8623062	-	-	-	6.200	0.24409	112		6.2
8623063	-	-	-	6.300	0.24803	114	175	6.3
17508511	1/4	-	E	6.350	0.25000			118
8623065	-	-	-	6.500	0.25591	120	200	6.5
8623066	-	-	-	6.600	0.25984			124
17508811	17/64	-	-	6.747	0.26563	126	205	17/64
8623068	-	-	-	6.800	0.26772			130
8623069	-	-	-	6.900	0.27165	136	215	6.9
8623070	-	-	-	7.000	0.27559			144
8623071	-	-	-	7.100	0.27953	148	220	7.1
17509111	9/32	-	-	7.144	0.28125			150
8623075	-	-	-	7.500	0.29528	154	225	7.5
17509411	19/64	-	-	7.541	0.29688			156
17509611	5/16	-	-	7.938	0.31250	160	230	5/16
8623080	-	-	-	8.000	0.31496			162
8623081	-	-	-	8.100	0.31890	165	235	8.1
8623082	-	-	-	8.200	0.32283			168
17509911	21/64	-	-	8.334	0.32813	172	240	21/64
8623085	-	-	-	8.500	0.33465			176
8623086	-	-	-	8.600	0.33858	178	245	8.6
17510211	11/32	-	-	8.731	0.34375			180
8623088	-	-	-	8.800	0.34646	185	250	8.8
8623090	-	-	-	9.000	0.35433			188
17510511	23/64	-	-	9.128	0.35938	190	255	23/64
8623093	-	-	-	9.300	0.36614			195
8623095	-	-	-	9.500	0.37402	200	260	9.5
17510711	3/8	-	-	9.525	0.37500			208
8623097	-	-	-	9.700	0.38189	210	265	9.7
8623098	-	-	-	9.800	0.38583			214
17511011	25/64	-	-	9.922	0.39063	215	270	25/64
8623100	-	-	-	10.000	0.39370			216
17511311	13/32	-	-	10.319	0.40625	220	275	13/32
8623105	-	-	-	10.500	0.41339			225
17511511	27/64	-	-	10.716	0.42188	230	280	27/64
8623110	-	-	-	11.000	0.43307			235
17511611	7/16	-	-	11.113	0.43750	243	285	7/16
8623115	-	-	-	11.500	0.45276			247
17511711	29/64	-	-	11.509	0.45313	257	290	29/64
8623118	-	-	-	11.800	0.46457			261
17511811	15/32	-	-	11.906	0.46875	271	295	15/32
8623120	-	-	-	12.000	0.47244			275
17512011	1/2	-	-	12.700	0.50000	281	300	1/2
17525711	17/32	-	-	13.494	0.53125			285
17525911	9/16	-	-	14.288	0.56250	307	307	9/16
17526111	45/64	-	-	17.859	0.70313			322

Packed: 1 pc.
Available WXL® coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1760	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1770

TDXL-20D



SPEED FEED P386	HSS-Co	WXL	40°
---------------------------	---------------	------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.6≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤14.29	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8623216	-	-	-	1.600	0.06299	38	85	1.6
8623218	-	-	-	1.800	0.07087	42		1.8
17515311	5/64	-	-	1.984	0.07813	46	5/64	
8623220	-	-	-	2.000	0.07874	50	2.0	
8623221	-	-	-	2.100	0.08268	52	2.1	
8623222	-	-	-	2.200	0.08661	54	2.2	
8623223	-	-	-	2.300	0.09055	56	2.3	
17516011	3/32	-	-	2.381	0.09375	58	3/32	
8623224	-	-	-	2.400	0.09449	60	2.4	
8623225	-	-	-	2.500	0.09843	64	2.5	
8623226	-	-	-	2.600	0.10236	66	2.6	
8623227	-	-	-	2.700	0.10630	68	2.7	
17516711	7/64	-	-	2.778	0.10938	70	7/64	
8623228	-	-	-	2.800	0.11024	72	2.8	
8623229	-	-	-	2.900	0.11417	74	2.9	
8623230	-	-	-	3.000	0.11811	76	3.0	
8623231	-	-	-	3.100	0.12205	77	3.1	
17517311	1/8	-	-	3.175	0.12500	78	1/8	
8623232	-	-	-	3.200	0.12598	79	3.2	
8623233	-	-	-	3.300	0.12992	80	3.3	
8623234	-	-	-	3.400	0.13386	81	3.4	
8623235	-	-	-	3.500	0.13780	82	3.5	
17517611	9/64	-	-	3.572	0.14063	83	9/64	
8623237	-	-	-	3.700	0.14567	84	3.7	
8623238	-	-	-	3.800	0.14961	85	3.8	
17518211	5/32	-	-	3.969	0.15625	86	5/32	
8623240	-	-	-	4.000	0.15748	87	4.0	
8623241	-	-	-	4.100	0.16142	88	4.1	
8623242	-	-	-	4.200	0.16535	89	4.2	
8623243	-	-	-	4.300	0.16929	90	4.3	
17518811	11/64	-	-	4.366	0.17188	91	11/64	
8623245	-	-	-	4.500	0.17717	92	4.5	
8623246	-	-	-	4.600	0.18110	93	4.6	
17519411	3/16	-	-	4.763	0.18750	94	3/16	
8623248	-	-	-	4.800	0.18898	95	4.8	
8623250	-	-	-	5.000	0.19685	96	5.0	
8623251	-	-	-	5.100	0.20079	97	5.1	
17520111	13/64	-	-	5.159	0.20313	98	13/64	
8623252	-	-	-	5.200	0.20472	99	5.2	
8623255	-	-	-	5.500	0.21654	100	5.5	
17520611	7/32	-	-	5.556	0.21875	101	7/32	
8623257	-	-	-	5.700	0.22441	102	5.7	
8623258	-	-	-	5.800	0.22835	103	5.8	
17521011	15/64	-	-	5.953	0.23438	104	15/64	
8623260	-	-	-	6.000	0.23622	105	6.0	
17521411	1/4	-	E	6.350	0.25000	106	1/4	
8623265	-	-	-	6.500	0.25591	107	6.5	
17521711	17/64	-	-	6.747	0.26563	108	17/64	
8623270	-	-	-	7.000	0.27559	109	7.0	
17522011	9/32	-	-	7.144	0.28125	110	9/32	
8623275	-	-	-	7.500	0.29528	111	7.5	
17522311	19/64	-	-	7.541	0.29688	112	19/64	

Packed: 1 pc.
Available WXL® coating only.



List 1770 (Continued)

SPEED FEED P386	HSS-Co	WXL	40°
---------------------------	---------------	------------	------------

TDXL-20D

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm/in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
17522511	5/16	-	-	7.938	0.31250	184	255	5/16
8623280	-	-	-	8.000	0.31496			8.0
8623281	-	-	-	8.100	0.31890	188	260	8.1
8623282	-	-	-	8.200	0.32283	190		8.2
17522811	21/64	-	-	8.334	0.32813	192	265	21/64
8623285	-	-	-	8.500	0.33465	196		8.5
17523111	11/32	-	-	8.731	0.34375	200	270	11/32
8623290	-	-	-	9.000	0.35433	208		9.0
17523411	23/64	-	-	9.128	0.35938	210	275	23/64
17523611	3/8	-	-	9.525	0.37500	220		3/8
17523911	25/64	-	-	9.922	0.39063	230	300	25/64
8623300	-	-	-	10.000	0.39370			10.0
17524211	13/32	-	-	10.319	0.40625	238	340	13/32
17524411	27/64	-	-	10.716	0.42188	246		27/64
8623310	-	-	-	11.000	0.43307	254	350	11.0
17524511	7/16	-	-	11.113	0.43750	255		7/16
17524611	29/64	-	-	11.509	0.45313	265	360	29/64
17524711	15/32	-	-	11.906	0.46875	274		15/32
8623320	-	-	-	12.000	0.47244	276	378	12.0
17524911	1/2	-	-	12.700	0.50000	292		1/2
17526311	17/32	-	-	13.494	0.53125	310	378	17/32
17526511	9/16	-	-	14.288	0.56250	328		9/16

Packed: 1 pc.
Available WXL® coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1770	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1800

V-SDR

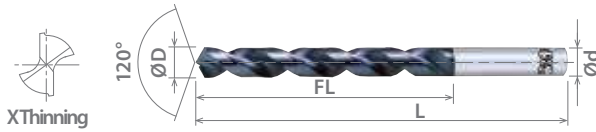

SPEED FEED	HSSE	V	JOBBERS	35°
P387				

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8594020	-	-	-	2.000	0.07874	24	49	2.0
8594021	-	-	-	2.100	0.08268			2.1
8594022	-	-	-	2.200	0.08661	27	53	2.2
8594023	-	-	-	2.300	0.09055			2.3
8594024	-	-	-	2.400	0.09449	30	57	2.4
8594025	-	-	-	2.500	0.09843			2.5
8594026	-	-	-	2.600	0.10236	33	61	2.6
8594027	-	-	-	2.700	0.10630			2.7
8594028	-	-	-	2.800	0.11024	36	65	2.8
8594029	-	-	-	2.900	0.11417			2.9
8594030	-	-	-	3.000	0.11811	39	70	3.0
8594031	-	-	-	3.100	0.12205			3.1
8594032	-	-	-	3.200	0.12598	43	75	3.2
8594033	-	-	-	3.300	0.12992			3.3
8594034	-	-	-	3.400	0.13386	47	80	3.4
8594035	-	-	-	3.500	0.13780			3.5
8594036	-	-	-	3.600	0.14173	52	86	3.6
8594037	-	-	-	3.700	0.14567			3.7
8594038	-	-	-	3.800	0.14961	57	93	3.8
8594039	-	-	-	3.900	0.15354			3.9
8594040	-	-	-	4.000	0.15748	63	101	4.0
8594041	-	-	-	4.100	0.16142			4.1
8594042	-	-	-	4.200	0.16535	69	109	4.2
8594043	-	-	-	4.300	0.16929			4.3
8594044	-	-	-	4.400	0.17323	71	111	4.4
8594045	-	-	-	4.500	0.17717			4.5
8594046	-	-	-	4.600	0.18110	77	117	4.6
8594047	-	-	-	4.700	0.18504			4.7
8594048	-	-	-	4.800	0.18898	83	123	4.8
8594049	-	-	-	4.900	0.19291			4.9
8594050	-	-	-	5.000	0.19685	89	129	5.0
8594051	-	-	-	5.100	0.20079			5.1
8594052	-	-	-	5.200	0.20472	95	135	5.2
8594053	-	-	-	5.300	0.20866			5.3
8594054	-	-	-	5.400	0.21260	101	141	5.4
8594055	-	-	-	5.500	0.21654			5.5
8594056	-	-	-	5.600	0.22047	107	147	5.6
8594057	-	-	-	5.700	0.22441			5.7
8594058	-	-	-	5.800	0.22835	113	153	5.8
8594059	-	-	-	5.900	0.23228			5.9
8594060	-	-	-	6.000	0.23622	119	159	6.0
8594061	-	-	-	6.100	0.24016			6.1
8594062	-	-	-	6.200	0.24409	125	165	6.2
8594063	-	-	-	6.300	0.24803			6.3
8594064	-	-	-	6.400	0.25197	131	171	6.4
8594065	-	-	-	6.500	0.25591			6.5
8594066	-	-	-	6.600	0.25984	137	177	6.6
8594067	-	-	-	6.700	0.26378			6.7
8594068	-	-	-	6.800	0.26772	143	183	6.8
8594069	-	-	-	6.900	0.27165			6.9
8594070	-	-	-	7.000	0.27559	149	189	7.0
8594071	-	-	-	7.100	0.27953			7.1

Packed: 1 pc.
Available V coating only.





List 1800 (Continued)

V-SDR

SPEED FEED P387	HSSE	V	JOBBER	35°
---------------------------	-------------	----------	---------------	------------

EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
	Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
8594072	-	-	-	7.200	0.28346	69	109	7.2
8594073	-	-	-	7.300	0.28740			7.3
8594074	-	-	-	7.400	0.29134			7.4
8594075	-	-	-	7.500	0.29528			7.5
8594076	-	-	-	7.600	0.29921			7.6
8594077	-	-	-	7.700	0.30315	75	117	7.7
8594078	-	-	-	7.800	0.30709			7.8
8594079	-	-	-	7.900	0.31102			7.9
8594080	-	-	-	8.000	0.31496			8.0
8594081	-	-	-	8.100	0.31890			8.1
8594082	-	-	-	8.200	0.32283			8.2
8594083	-	-	-	8.300	0.32677			8.3
8594084	-	-	-	8.400	0.33071			8.4
8594085	-	-	-	8.500	0.33465			8.5
8594086	-	-	-	8.600	0.33858			8.6
8594087	-	-	-	8.700	0.34252	8.7		
8594088	-	-	-	8.800	0.34646	8.8		
8594089	-	-	-	8.900	0.35039	8.9		
8594090	-	-	-	9.000	0.35433	9.0		
8594091	-	-	-	9.100	0.35827	9.1		
8594092	-	-	-	9.200	0.36220	9.2		
8594093	-	-	-	9.300	0.36614	9.3		
8594094	-	-	-	9.400	0.37008	9.4		
8594095	-	-	-	9.500	0.37402	9.5		
8594096	-	-	-	9.600	0.37795	9.6		
8594097	-	-	-	9.700	0.38189	9.7		
8594098	-	-	-	9.800	0.38583	9.8		
8594099	-	-	-	9.900	0.38976	9.9		
8594100	-	-	-	10.000	0.39370	10.0		
8594101	-	-	-	10.100	0.39764	10.1		
8594102	-	-	-	10.200	0.40157	10.2		
8594103	-	-	-	10.300	0.40551	10.3		
8594104	-	-	-	10.400	0.40945	10.4		
8594105	-	-	-	10.500	0.41339	10.5		
8594106	-	-	-	10.600	0.41732	10.6		
8594107	-	-	-	10.700	0.42126	10.7		
8594108	-	-	-	10.800	0.42520	10.8		
8594109	-	-	-	10.900	0.42913	10.9		
8594110	-	-	-	11.000	0.43307	11.0		
8594111	-	-	-	11.100	0.43701	11.1		
8594112	-	-	-	11.200	0.44094	11.2		
8594113	-	-	-	11.300	0.44488	11.3		
8594114	-	-	-	11.400	0.44882	11.4		
8594115	-	-	-	11.500	0.45276	11.5		
8594116	-	-	-	11.600	0.45669	11.6		
8594117	-	-	-	11.700	0.46063	11.7		
8594118	-	-	-	11.800	0.46457	11.8		
8594119	-	-	-	11.900	0.46850	101	151	11.9

Packed: 1 pc.
Available V coating only.

continued on next page **EXD**

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1800	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							

good best





List 1800 (Continued)

V-SDR



SPEED FEED	HSSE	V	JOBBERS	35°
P387				

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
8594120	-	-	-	12.000	0.47244	101	151	12.0
8594121	-	-	-	12.100	0.47638			12.1
8594122	-	-	-	12.200	0.48031			12.2
8594123	-	-	-	12.300	0.48425			12.3
8594124	-	-	-	12.400	0.48819			12.4
8594125	-	-	-	12.500	0.49213			12.5
8594126	-	-	-	12.600	0.49606			12.6
8594127	1/2	-	-	12.700	0.50000			12.7
8594128	-	-	-	12.800	0.50394			12.8
8594129	-	-	-	12.900	0.50787			12.9
8594130	-	-	-	13.000	0.51181			13.0

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1800	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						


good best





List 1150

NEXUS-GDS, Designed for a Wide Range of Materials

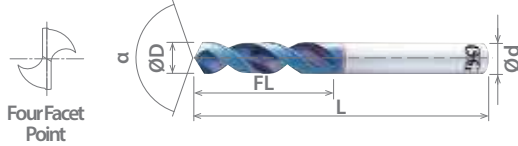

SPEED FEED P388-389	HSSE	WD1	STUB	40°
-------------------------------	-------------	------------	-------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8650100	-	-	-	1.000	0.03937	6	38	3	140°
11507615	-	-	-	1.250	0.04921	8	40		
11509115	-	54	-	1.397	0.05500	9	41		
8650150	-	-	-	1.500	0.05906	10	42		
11511115	-	-	-	1.600	0.06299	11	43		
11511615	-	-	-	1.650	0.06496	11	43		
11512915	-	50	-	1.778	0.07000	12	44		
8650180	-	-	-	1.800	0.07087	13	45		
8650181	-	-	-	1.810	0.07126	13	45		
8650183	-	-	-	1.830	0.07205	13	45		
11513615	-	49	-	1.854	0.07300	14	46		
11514915	5/64	-	-	1.984	0.07813	14	46		
8650200	-	-	-	2.000	0.07874	16	48		
11515915	-	45	-	2.083	0.08200	16	48		
8650211	-	-	-	2.110	0.08307	18	50		
8650213	-	-	-	2.130	0.08386	18	50		
11516915	-	44	-	2.184	0.08600	20	52		
11517715	-	43	-	2.261	0.08900	20	52		
8650228	-	-	-	2.280	0.08976	20	52		
8650230	-	-	-	2.300	0.09055	20	52		
11518815	-	42	-	2.375	0.09350	20	52		
8650238	-	-	-	2.380	0.09370	20	52		
8650240	-	-	-	2.400	0.09449	20	52		
8650250	-	-	-	2.500	0.09843	20	52		
11520415	-	39	-	2.527	0.09950	20	52		
11520915	-	38	-	2.578	0.10150	20	52		
8650260	-	-	-	2.600	0.10236	20	52		
11521515	-	37	-	2.642	0.10400	20	52		
11522215	-	36	-	2.705	0.10650	20	52		
8650276	-	-	-	2.760	0.10866	20	52		
8650278	-	-	-	2.780	0.10945	20	52		
8650280	-	-	-	2.800	0.11024	20	52		
11523815	-	33	-	2.870	0.11300	20	52		
11524115	-	-	-	2.900	0.11417	20	52		
8650300	-	-	-	3.000	0.11811	20	52		
11526115	-	-	-	3.100	0.12205	20	52		
11526915	1/8	-	-	3.175	0.12500	20	52		
8650320	-	-	-	3.200	0.12598	20	52		
8650325	-	-	-	3.250	0.12795	20	52		
8650330	-	-	-	3.300	0.12992	20	52		
8650340	-	-	-	3.400	0.13386	20	52		
11529615	-	29	-	3.454	0.13600	20	52		

Packed: 1 pc.
Available WD1 coating only.

continued on next page **EXD**

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1150 (Continued)

NEXUS-GDS, Designed for a Wide Range of Materials

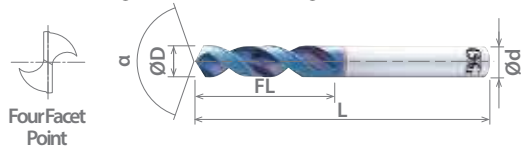

SPEED FEED P388-389	HSSE	WD1	STUB	40°
------------------------	------	-----	------	-----

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8650350	-	-	-	3.500	0.13780	20	52	4	130°
11530815	9/64	-	-	3.572	0.14063				
8650365	-	-	-	3.650	0.14370				
8650367	-	-	-	3.670	0.14449				
11533115	-	25	-	3.797	0.14950	22	54	4	130°
8650390	-	-	-	3.900	0.15354				
11534815	5/32	-	-	3.969	0.15625				
8650400	-	-	-	4.000	0.15748				
11535515	-	21	-	4.039	0.15900	24	68	4	130°
8650410	-	-	-	4.100	0.16142				
8650420	-	-	-	4.200	0.16535				
8650430	-	-	-	4.300	0.16929				
11538815	11/64	-	-	4.366	0.17188	26	70	6	120°
8650450	-	-	-	4.500	0.17717				
8650459	-	-	-	4.590	0.18071				
11541315	-	14	-	4.623	0.18200				
8650463	-	-	-	4.630	0.18228	28	72	6	120°
11542715	3/16	-	-	4.763	0.18750				
8650500	-	-	-	5.000	0.19685				
11545615	-	8	-	5.055	0.19900				
8650510	-	-	-	5.100	0.20079	31	75	8	120°
11546215	-	7	-	5.105	0.20100				
11546715	13/64	-	-	5.159	0.20313				
8650520	-	-	-	5.200	0.20472				
11549215	-	3	-	5.410	0.21300	34	78	8	120°
8650548	-	-	-	5.480	0.21575				
8650550	-	-	-	5.500	0.21654				
11550715	7/32	-	-	5.556	0.21875				
11551115	-	-	-	5.600	0.22047	37	87	10	120°
11553015	-	1	-	5.791	0.22800				
11554615	15/64	-	-	5.953	0.23438				
8650600	-	-	-	6.000	0.23622				
11555815	1/4	-	E	6.350	0.25000	40	90	10	120°
11556115	-	-	-	6.500	0.25591				
11556215	-	-	-	6.520	0.25669				
8650680	-	-	-	6.800	0.26772				
8650690	-	-	-	6.900	0.27165	37	81	10	120°
8650700	-	-	-	7.000	0.27559				
11557815	-	-	-	7.300	0.28740				
8650734	-	-	-	7.340	0.28898				
8650738	-	-	-	7.380	0.29055	40	90	10	120°
11558315	-	-	-	7.450	0.29331				
11559315	5/16	-	-	7.938	0.31250				
8650800	-	-	-	8.000	0.31496				
8650810	-	-	-	8.100	0.31890	40	90	10	120°
11559915	-	-	P	8.204	0.32300				
11560415	-	-	-	8.430	0.33189				
8650850	-	-	-	8.500	0.33465				
8650860	-	-	-	8.600	0.33858	40	90	10	120°
8650880	-	-	-	8.800	0.34646				
11561315	-	-	-	8.830	0.34764				
8650900	-	-	-	9.000	0.35433				

Packed: 1 pc.
Available WD1 coating only.



List 1150 (Continued)

SPEED FEED P388-389	HSSE	WD1	STUB	40°
-------------------------------	-------------	------------	-------------	------------

NEXUS-GDS, Designed for a Wide Range of Materials

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
11561815	-	-	-	9.050	0.35630	40	90	10	120°
8650918	-	-	-	9.180	0.36142				
8650920	-	-	-	9.200	0.36220				
8650924	-	-	-	9.240	0.36378				
8650934	-	-	-	9.340	0.36772				
8650936	-	-	-	9.360	0.36850				
11563215	3/8	-	-	9.525	0.37500				
11564115	25/64	-	-	9.922	0.39063				
8651000	-	-	-	10.000	0.39370				
11564715	-	-	-	10.200	0.40157				
8651030	-	-	-	10.300	0.40551	43	93	12	
11565015	13/32	-	-	10.319	0.40625				
8651040	-	-	-	10.400	0.40945				
8651050	-	-	-	10.500	0.41339				
11565915	27/64	-	-	10.716	0.42188				
8651100	-	-	-	11.000	0.43307	47	104	12	
11566815	7/16	-	-	11.113	0.43750				
11567715	29/64	-	-	11.509	0.45313				
11568415	-	-	-	11.850	0.46654	51	108	12	
8651200	-	-	-	12.000	0.47244				
11568815	-	-	-	12.100	0.47638				
11569415	1/2	-	-	12.700	0.50000				

Packed: 1 pc.
Available WD1 coating only.



Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1650

NEXUS-GDR, Designed for a Wide Range of Materials

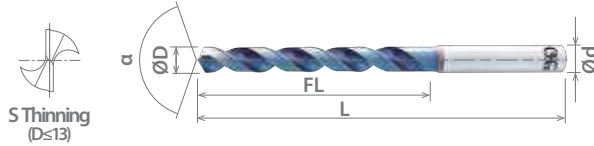

SPEED FEED P388-389	HSSE	WD1	JOBBERS	40°
------------------------	------	-----	---------	-----

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8655200	-	-	-	2.000	0.07874	24	56	3	130°
16502715	-	43	-	2.261	0.08900	27	59		
8655230	-	-	-	2.300	0.09055				
16503915	3/32	-	-	2.381	0.09375	30	62		
8655250	-	-	-	2.500	0.09843				
16505915	-	38	-	2.578	0.10150				
8655260	-	-	-	2.600	0.10236	33	65		
8655280	-	-	-	2.800	0.11024				
16508815	-	33	-	2.870	0.11300				
8655300	-	-	-	3.000	0.11811	36	68		
16511915	1/8	-	-	3.175	0.12500				
8655330	-	-	-	3.300	0.12992				
8655340	-	-	-	3.400	0.13386	39	71		
16514615	-	29	-	3.454	0.13600				
8655350	-	-	-	3.500	0.13780				
16515815	9/64	-	-	3.572	0.14063	43	75		
16518115	-	25	-	3.797	0.14950				
16519815	5/32	-	-	3.969	0.15625				
8655400	-	-	-	4.000	0.15748	47	91		
16520515	-	21	-	4.039	0.15900				
8655420	-	-	-	4.200	0.16535				
8655430	-	-	-	4.300	0.16929	52	96		
8655450	-	-	-	4.500	0.17717				
16527715	3/16	-	-	4.763	0.18750				
8655500	-	-	-	5.000	0.19685	57	101		
8655510	-	-	-	5.100	0.20079				
16531215	-	7	-	5.105	0.20100				
16531715	13/64	-	-	5.159	0.20313	63	107		
8655520	-	-	-	5.200	0.20472				
16534215	-	3	-	5.410	0.21300				
8655550	-	-	-	5.500	0.21654	69	113		
16535715	7/32	-	-	5.556	0.21875				
8655600	-	-	-	6.000	0.23622				
16540815	1/4	-	E	6.350	0.25000	75	119		
8655680	-	-	-	6.800	0.26772				
8655690	-	-	-	6.900	0.27165				
8655700	-	-	-	7.000	0.27559	81	131		
16544015	5/16	-	-	7.938	0.31250				
8655800	-	-	-	8.000	0.31496				
8655850	-	-	-	8.500	0.33465	87	144		
8655860	-	-	-	8.600	0.33858				
8655880	-	-	-	8.800	0.34646				
8655900	-	-	-	9.000	0.35433	87	137		
16547315	3/8	-	-	9.525	0.37500				
8656000	-	-	-	10.000	0.39370				
8656030	-	-	-	10.300	0.40551	87	144		
8656040	-	-	-	10.400	0.40945				

Packed: 1 pc.
Available WD1 coating only.



List 1650 (Continued)

SPEED FEED P388-389	HSSE	WD1	JOBBERS	40°
-------------------------------	-------------	------------	----------------	------------

NEXUS-GDR, Designed for a Wide Range of Materials

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
8656050	-	-	-	10.500	0.41339	87	144	12	120°
8656100	-	-	-	11.000	0.43307	94	151		
16550615	7/16	-	-	11.113	0.43750				
8656200	-	-	-	12.000	0.47244	101	158		
16553115	1/2	-	-	12.700	0.50000				

Packed: 1 pc.
Available WD1 coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1650	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1000

EX-GDS, Ideal for General Applications



SPEED FEED	HSS-Co	TiN	STUB	25°
P390				

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.99 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
10078505	-	47	-	1.994	0.07850	17	33	1/8
10081005	-	46	-	2.057	0.08100			
10082005	-	45	-	2.083	0.08200			
10086005	-	44	-	2.184	0.08600			
10089005	-	43	-	2.261	0.08900			
10093505	-	42	-	2.375	0.09350			
10093805	3/32	-	-	2.381	0.09375			
10096005	-	41	-	2.438	0.09600			
10098005	-	40	-	2.489	0.09800			
10099505	-	39	-	2.527	0.09950			
10101505	-	38	-	2.578	0.10150	20	52	3/16
10104005	-	37	-	2.642	0.10400			
10106505	-	36	-	2.705	0.10650			
10109405	7/64	-	-	2.778	0.10938			
10110005	-	35	-	2.794	0.11000			
10111005	-	34	-	2.819	0.11100			
10113005	-	33	-	2.870	0.11300			
10116005	-	32	-	2.946	0.11600			
10120005	-	31	-	3.048	0.12000			
10125005	1/8	-	-	3.175	0.12500			
10128505	-	30	-	3.264	0.12850			
10136005	-	29	-	3.454	0.13600			
10140505	-	28	-	3.569	0.14050			
10140605	9/64	-	-	3.572	0.14063			
10144005	-	27	-	3.658	0.14400			
10147005	-	26	-	3.734	0.14700			
10149505	-	25	-	3.797	0.14950			
10152005	-	24	-	3.861	0.15200			
10154005	-	23	-	3.912	0.15400			
10156205	5/32	-	-	3.969	0.15625			
10157005	-	22	-	3.988	0.15700			
10159005	-	21	-	4.039	0.15900			
10161005	-	20	-	4.089	0.16100			
10166005	-	19	-	4.216	0.16600			
10169505	-	18	-	4.305	0.16950			
10171905	11/64	-	-	4.366	0.17188			
10173005	-	17	-	4.394	0.17300			
10177005	-	16	-	4.496	0.17700			
10180005	-	15	-	4.572	0.18000			
10182005	-	14	-	4.623	0.18200			
10185005	-	13	-	4.699	0.18500			
10187505	3/16	-	-	4.763	0.18750			
10189005	-	12	-	4.801	0.18900			
10191005	-	11	-	4.851	0.19100			
10193505	-	10	-	4.915	0.19350			
10196005	-	9	-	4.978	0.19600			
10199005	-	8	-	5.055	0.19900			

Packed: 1 pc.
Available TiN coating only.





List 1000 (Continued)

EX-GDS, Ideal for General Applications

SPEED FEED P390	HSS-Co	TiN	STUB	25°
--------------------	--------	-----	------	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (in)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
10201005	-	7	-	5.105	0.20100	30	76	1/4		
10203105	13/64	-	-	5.159	0.20313					
10204005	-	6	-	5.182	0.20400					
10205505	-	5	-	5.220	0.20550	31	77		1/4	
10209005	-	4	-	5.309	0.20900					
10213005	-	3	-	5.410	0.21300					
10218805	7/32	-	-	5.556	0.21875	33	79			1/4
10221005	-	2	-	5.613	0.22100					
10228005	-	1	-	5.791	0.22800					
10234005	-	-	A	5.944	0.23400	34	80			
10234405	15/64	-	-	5.953	0.23438					
10238005	-	-	B	6.045	0.23800					
10242005	-	-	C	6.147	0.24200	36	82	3/8		
10246005	-	-	D	6.248	0.24600					
10250005	1/4	-	E	6.350	0.25000					
10257005	-	-	F	6.528	0.25700	38	84		3/8	
10261005	-	-	G	6.629	0.26100					
10265605	17/64	-	-	6.747	0.26563					
10272005	-	-	I	6.909	0.27200	39	85			3/8
10277005	-	-	J	7.036	0.27700					
10281205	9/32	-	-	7.144	0.28125					
10290005	-	-	L	7.366	0.29000	41	87			
10295005	-	-	M	7.493	0.29500					
10296905	19/64	-	-	7.541	0.29688					
10302005	-	-	N	7.671	0.30200	42	88	3/8		
10312505	5/16	-	-	7.938	0.31250					
10316005	-	-	O	8.026	0.31600					
10323005	-	-	P	8.204	0.32300	44	90		1/2	
10328105	21/64	-	-	8.334	0.32813					
10332005	-	-	Q	8.433	0.33200					
10339005	-	-	R	8.611	0.33900	46	92			1/2
10343805	11/32	-	-	8.731	0.34375					
10348005	-	-	S	8.839	0.34800					
10358005	-	-	T	9.093	0.35800	47	100			
10359405	23/64	-	-	9.128	0.35938					
10368005	-	-	U	9.347	0.36800					
10375005	3/8	-	-	9.525	0.37500	49	102	1/2		
10377005	-	-	V	9.576	0.37700					
10386005	-	-	W	9.804	0.38600					
10390605	25/64	-	-	9.922	0.39063	49	102		1/2	
10397005	-	-	X	10.084	0.39700					
10404005	-	-	Y	10.262	0.40400					
10406205	13/32	-	-	10.319	0.40625					

Packed: 1 pc.
Available TiN coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	


good best





List 1000 (Continued)

EX-GDS, Ideal for General Applications



SPEED FEED	HSS-Co	TiN	STUB	25°
P390				

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.99 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 12.7	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
10413005	-	-	Z	10.490	0.41300	50	103	1/2
10421905	27/64	-	-	10.716	0.42188			
10437505	7/16	-	-	11.113	0.43750	52	105	
10453105	29/64	-	-	11.509	0.45313	53	107	
10468805	15/32	-	-	11.906	0.46875			
10484405	31/64	-	-	12.303	0.48438	55	108	
10500005	1/2	-	-	12.700	0.50000	57	110	

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


good best





List 1500

EX-GDR, Ideal for General Applications



SPEED FEED P390	HSS-Co	TiN	JOBBERS	30°
---------------------------	---------------	------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.99≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤19.05	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (in)	
	Fractional Size	Wire Gage	Letter Size	mm	Inch				
15078505	-	47	-	1.994	0.07850	25	57	1/8	
15081005	-	46	-	2.057	0.08100	28	60		
15082005	-	45	-	2.083	0.08200				
15086005	-	44	-	2.184	0.08600				
15089005	-	43	-	2.261	0.08900				
15093505	-	42	-	2.375	0.09350	31	63		
15093805	3/32	-	-	2.381	0.09375	34	66		
15096005	-	41	-	2.438	0.09600				
15098005	-	40	-	2.489	0.09800				
15099505	-	39	-	2.527	0.09950	36	73		
15101505	-	38	-	2.578	0.10150				
15104005	-	37	-	2.642	0.10400				
15106505	-	36	-	2.705	0.10650				
15109405	7/64	-	-	2.778	0.10938				
15110005	-	35	-	2.794	0.11000			38	74
15111005	-	34	-	2.819	0.11100				
15113005	-	33	-	2.870	0.11300				
15116005	-	32	-	2.946	0.11600				
15120005	-	31	-	3.048	0.12000			41	77
15125005	1/8	-	-	3.175	0.12500				
15128505	-	30	-	3.264	0.12850				
15136005	-	29	-	3.454	0.13600				
15140505	-	28	-	3.569	0.14050	44	80		
15140605	9/64	-	-	3.572	0.14063				
15144005	-	27	-	3.658	0.14400				
15147005	-	26	-	3.734	0.14700				
15149505	-	25	-	3.797	0.14950	47	84		
15152005	-	24	-	3.861	0.15200				
15154005	-	23	-	3.912	0.15400				
15156205	5/32	-	-	3.969	0.15625			50	87
15157005	-	22	-	3.988	0.15700				
15159005	-	21	-	4.039	0.15900				
15161005	-	20	-	4.089	0.16100				
15166005	-	19	-	4.216	0.16600			53	90
15169505	-	18	-	4.305	0.16950				
15171905	11/64	-	-	4.366	0.17188				
15173005	-	17	-	4.394	0.17300	55	92		
15177005	-	16	-	4.496	0.17700				

Packed: 1 pc.
Available TiN coating only.

continued on next page

List No.	Work Material															
	P					M			K	N		S	H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels		
	Low	Med.	High				300	400		17-4 PH				6061	Casting	Inconel
1500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>			


good best





List 1500 (Continued)

EX-GDR, Ideal for General Applications

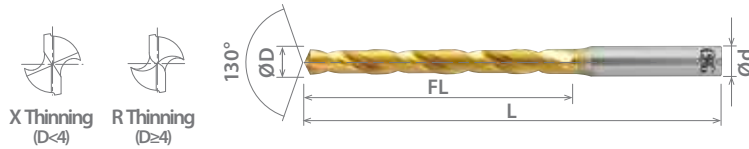

SPEED FEED P390	HSS-Co	TiN	JOBBERS	30°
---------------------------	---------------	------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.99 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 19.05	+0 / -0.033	+0 / -0.0013

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (in)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
15180005	-	15	-	4.572	0.18000	55	92	3/16
15182005	-	14	-	4.623	0.18200			
15185005	-	13	-	4.699	0.18500			
15187505	3/16	-	-	4.763	0.18750	58	95	
15189005	-	12	-	4.801	0.18900			
15191005	-	11	-	4.851	0.19100	61	104	
15193505	-	10	-	4.915	0.19350			
15196005	-	9	-	4.978	0.19600			
15199005	-	8	-	5.055	0.19900			
15201005	-	7	-	5.105	0.20100			
15203105	13/64	-	-	5.159	0.20313			
15204005	-	6	-	5.182	0.20400	63	109	1/4
15205505	-	5	-	5.220	0.20550			
15209005	-	4	-	5.309	0.20900			
15213005	-	3	-	5.410	0.21300			
15218805	7/32	-	-	5.556	0.21875			
15221005	-	2	-	5.613	0.22100			
15228005	-	1	-	5.791	0.22800			
15234005	-	-	A	5.944	0.23400			
15234405	15/64	-	-	5.953	0.23438			
15238005	-	-	B	6.045	0.23800			
15242005	-	-	C	6.147	0.24200	69	115	
15246005	-	-	D	6.248	0.24600			
15250005	1/4	-	E	6.350	0.25000	73	119	
15257005	-	-	F	6.528	0.25700			
15261005	-	-	G	6.629	0.26100			
15265605	17/64	-	-	6.747	0.26563			
15272005	-	-	I	6.909	0.27200			
15277005	-	-	J	7.036	0.27700			
15281205	9/32	-	-	7.144	0.28125			
15290005	-	-	L	7.366	0.29000			
15295005	-	-	M	7.493	0.29500			
15296905	19/64	-	-	7.541	0.29688			
15302005	-	-	N	7.671	0.30200	80	127	3/8
15312505	5/16	-	-	7.938	0.31250			
15316005	-	-	O	8.026	0.31600			
15323005	-	-	P	8.204	0.32300			
15328105	21/64	-	-	8.334	0.32813			
15332005	-	-	Q	8.433	0.33200			
15339005	-	-	R	8.611	0.33900			
15343805	11/32	-	-	8.731	0.34375			
15348005	-	-	S	8.839	0.34800			
15358005	-	-	T	9.093	0.35800			
15359405	23/64	-	-	9.128	0.35938	92	138	
15368005	-	-	U	9.347	0.36800			
15375005	3/8	-	-	9.525	0.37500			
15377005	-	-	V	9.576	0.37700		145	1/2

Packed: 1 pc.
Available TiN coating only.





List 1500 (Continued)

EX-GDR, Ideal for General Applications

SPEED FEED P390	HSS-Co	TiN	JOBBERS	30°
--------------------	--------	-----	---------	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (in)							
	Fractional Size	Wire Gage	Letter Size	mm	Inch										
15386005	-	-	W	9.804	0.38600	95	148	1/2							
15390605	25/64	-	-	9.922	0.39063										
15397005	-	-	X	10.084	0.39700										
15404005	-	-	Y	10.262	0.40400										
15406205	13/32	-	-	10.319	0.40625										
15413005	-	-	Z	10.490	0.41300										
15421905	27/64	-	-	10.716	0.42188										
15437505	7/16	-	-	11.113	0.43750										
15453105	29/64	-	-	11.509	0.45313										
15468805	15/32	-	-	11.906	0.46875										
15484405	31/64	-	-	12.303	0.48438										
15500005	1/2	-	-	12.700	0.50000	114	167	5/8							
15531205	17/32	-	-	13.494	0.53125	122	182								
15562505	9/16	-	-	14.288	0.56250										
15578105	37/64	-	-	14.684	0.57813										
15593805	19/32	-	-	15.081	0.59375										
15625005	5/8	-	-	15.875	0.62500				131	199	3/4				
15656205	21/32	-	-	16.669	0.65625										
15687505	11/16	-	-	17.463	0.68750										
15718805	23/32	-	-	18.256	0.71875							142	210	7/8	
15750005	3/4	-	-	19.050	0.75000										149

Packed: 1 pc.
Available TiN coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>		<input type="checkbox"/>				

good best






List 1100

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

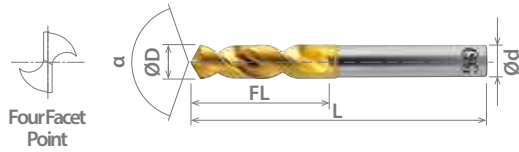

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
61505	6150511	-	-	-	0.500	0.01969	3	38	3	150°
8595051	859505111	-	-	-	0.510	0.02008				
8595052	-	-	-	-	0.520	0.02047				
8595053	-	-	-	-	0.530	0.02087				
8595054	-	-	-	-	0.540	0.02126				
8595055	-	-	-	-	0.550	0.02165				
8595056	-	-	-	-	0.560	0.02205				
8595057	859505711	-	-	-	0.570	0.02244				
8595058	-	-	-	-	0.580	0.02283				
8595059	-	-	-	-	0.590	0.02323				
61506	6150611	-	-	-	0.600	0.02362				
8595061	-	-	-	-	0.610	0.02402				
8595062	-	-	-	-	0.620	0.02441				
8595063	-	-	-	-	0.630	0.02480				
8595064	859506411	-	-	-	0.640	0.02520				
8595065	859506511	-	-	-	0.650	0.02559				
8595066	-	-	-	-	0.660	0.02598				
8595067	-	-	-	-	0.670	0.02638				
8595068	-	-	-	-	0.680	0.02677				
8595069	-	-	-	-	0.690	0.02717				
61507	6150711	-	-	-	0.700	0.02756				
8595071	859507111	-	-	-	0.710	0.02795				
8595072	-	-	-	-	0.720	0.02835				
8595073	-	-	-	-	0.730	0.02874				
8595074	-	-	-	-	0.740	0.02913				
8595075	-	-	-	-	0.750	0.02953				
8595076	-	-	-	-	0.760	0.02992				
8595077	-	-	-	-	0.770	0.03031				
8595078	-	-	-	-	0.780	0.03071				
8595079	859507911	-	-	-	0.790	0.03110				
61508	-	-	-	-	0.800	0.03150				
8595081	859508111	-	-	-	0.810	0.03189				
8595082	-	-	-	-	0.820	0.03228				
8595083	-	-	-	-	0.830	0.03268				
8595084	859508411	-	-	-	0.840	0.03307				
8595085	-	-	-	-	0.850	0.03346				
8595086	-	-	-	-	0.860	0.03386				
8595087	-	-	-	-	0.870	0.03425				
8595088	-	-	-	-	0.880	0.03465				
8595089	-	-	-	-	0.890	0.03504				
61509	-	-	-	-	0.900	0.03543				
8595091	859509111	-	-	-	0.910	0.03583				
8595092	-	-	-	-	0.920	0.03622				
8595093	-	-	-	-	0.930	0.03661				
8595094	-	-	-	-	0.940	0.03701				
8595095	-	-	-	-	0.950	0.03740				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
---------------------------	-------------	------------	--------------	-------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595096	-	-	-	-	0.960	0.03780	6	38	3	150°
8595097	-	-	-	-	0.970	0.03819				
8595098	-	-	-	-	0.980	0.03858				
8595099	-	-	-	-	0.990	0.03898				
61510	6151011	-	-	-	1.000	0.03937				
8595101	-	-	-	-	1.010	0.03976				
8595102	859510211	-	-	-	1.020	0.04016				
8595103	859510311	-	-	-	1.030	0.04055				
8595104	-	-	-	-	1.040	0.04094				
8595105	-	-	-	-	1.050	0.04134				
8595106	-	-	-	-	1.060	0.04173				
8595107	-	-	-	-	1.070	0.04213				
8595108	-	-	-	-	1.080	0.04252				
8595109	859510911	-	-	-	1.090	0.04291				
61511	6151111	-	-	-	1.100	0.04331				
8595111	-	-	-	-	1.110	0.04370				
8595112	-	-	-	-	1.120	0.04409				
8595113	-	-	-	-	1.130	0.04449				
8595114	859511411	-	-	-	1.140	0.04488				
8595115	-	-	-	-	1.150	0.04528				
8595116	-	-	-	-	1.160	0.04567				
8595117	-	-	-	-	1.170	0.04606				
8595118	859511811	-	-	-	1.180	0.04646				
8595119	859511911	-	-	-	1.190	0.04685				
61512	6151211	-	-	-	1.200	0.04724				
8595121	-	-	-	-	1.210	0.04764				
8595122	859512211	-	-	-	1.220	0.04803				
8595123	-	-	-	-	1.230	0.04843				
8595124	-	-	-	-	1.240	0.04882				
8595125	859512511	-	-	-	1.250	0.04921				
8595126	-	-	-	-	1.260	0.04961				
8595127	859512711	-	-	-	1.270	0.05000				
8595128	-	-	-	-	1.280	0.05039				
8595129	-	-	-	-	1.290	0.05079				
61513	-	-	-	-	1.300	0.05118				
8595131	-	-	-	-	1.310	0.05157				
8595132	859513211	-	-	-	1.320	0.05197				
8595133	-	-	-	-	1.330	0.05236				
8595134	-	-	-	-	1.340	0.05276				
8595135	859513511	-	-	-	1.350	0.05315				
8595136	-	-	-	-	1.360	0.05354				
8595137	-	-	-	-	1.370	0.05394				
8595138	-	-	-	-	1.380	0.05433				

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order: 11 = TiAlN.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1100 (Continued)

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

EX-SUS-GDS, Ideal for Stainless Steel

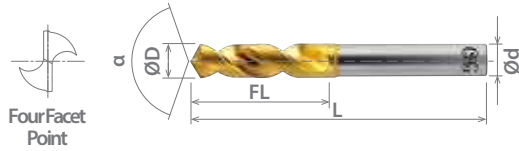

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595139	-	-	-	-	1.390	0.05472	9	41	3	140°
61514	6151411	-	-	-	1.400	0.05512				
8595141	859514111	-	-	-	1.410	0.05551				
8595142	-	-	-	-	1.420	0.05591				
8595143	-	-	-	-	1.430	0.05630				
8595144	859514411	-	-	-	1.440	0.05669				
8595145	859514511	-	-	-	1.450	0.05709				
8595146	-	-	-	-	1.460	0.05748				
8595147	-	-	-	-	1.470	0.05787				
8595148	-	-	-	-	1.480	0.05827				
8595149	-	-	-	-	1.490	0.05866				
61515	6151511	-	-	-	1.500	0.05906				
8595151	859515111	-	-	-	1.510	0.05945				
8595152	859515211	-	-	-	1.520	0.05984				
8595153	-	-	-	-	1.530	0.06024				
8595154	-	-	-	-	1.540	0.06063				
8595155	859515511	-	-	-	1.550	0.06102				
8595156	859515611	-	-	-	1.560	0.06142				
8595157	859515711	-	-	-	1.570	0.06181				
8595158	859515811	-	-	-	1.580	0.06220				
8595159	859515911	-	-	-	1.590	0.06260				
61516	6151611	-	-	-	1.600	0.06299				
8595161	859516111	-	-	-	1.610	0.06339				
8595162	859516211	-	-	-	1.620	0.06378				
8595163	-	-	-	-	1.630	0.06417				
8595164	-	-	-	-	1.640	0.06457				
8595165	859516511	-	-	-	1.650	0.06496				
8595166	-	-	-	-	1.660	0.06535				
8595167	-	-	-	-	1.670	0.06575				
8595168	-	-	-	-	1.680	0.06614				
8595169	-	-	-	-	1.690	0.06654				
61517	6151711	-	-	-	1.700	0.06693				
8595171	859517111	-	-	-	1.710	0.06732				
8595172	859517211	-	-	-	1.720	0.06772				
8595173	-	-	-	-	1.730	0.06811				
8595174	859517411	-	-	-	1.740	0.06850				
8595175	859517511	-	-	-	1.750	0.06890				
8595176	859517611	-	-	-	1.760	0.06929				
8595177	859517711	-	-	-	1.770	0.06969				
8595178	859517811	-	-	-	1.780	0.07008				
8595179	-	-	-	-	1.790	0.07047				
61518	6151811	-	-	-	1.800	0.07087				
8595181	-	-	-	-	1.810	0.07126				
8595182	-	-	-	-	1.820	0.07165				
8595183	-	-	-	-	1.830	0.07205				
8595184	-	-	-	-	1.840	0.07244				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
---------------------------	-------------	------------	--------------	-------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595185	859518511	-	-	-	1.850	0.07283	11	43	3	140°
8595186	-	-	-	-	1.860	0.07323				
8595187	-	-	-	-	1.870	0.07362				
8595188	-	-	-	-	1.880	0.07402				
8595189	-	-	-	-	1.890	0.07441				
61519	6151911	-	-	-	1.900	0.07480				
8595191	859519111	-	-	-	1.910	0.07520				
8595192	-	-	-	-	1.920	0.07559				
8595193	-	-	-	-	1.930	0.07598				
8595194	-	-	-	-	1.940	0.07638				
8595195	859519511	-	-	-	1.950	0.07677				
8595196	-	-	-	-	1.960	0.07717				
8595197	859519711	-	-	-	1.970	0.07756				
8595198	859519811	-	-	-	1.980	0.07795				
8595199	859519911	-	-	-	1.990	0.07835				
61520	6152011	-	-	-	2.000	0.07874				
8595201	-	-	-	-	2.010	0.07913				
8595202	-	-	-	-	2.020	0.07953				
8595203	-	-	-	-	2.030	0.07992				
8595204	-	-	-	-	2.040	0.08031				
8595205	859520511	-	-	-	2.050	0.08071				
8595206	-	-	-	-	2.060	0.08110				
8595207	-	-	-	-	2.070	0.08150				
8595208	859520811	-	-	-	2.080	0.08189				
8595209	-	-	-	-	2.090	0.08228				
61521	-	-	-	-	2.100	0.08268				
8595211	-	-	-	-	2.110	0.08307				
8595212	-	-	-	-	2.120	0.08346				
8595213	-	-	-	-	2.130	0.08386				
8595214	-	-	-	-	2.140	0.08425				
8595215	859521511	-	-	-	2.150	0.08465				
8595216	-	-	-	-	2.160	0.08504				
8595217	-	-	-	-	2.170	0.08543				
8595218	-	-	-	-	2.180	0.08583				
8595219	859521911	-	-	-	2.190	0.08622				
61522	6152211	-	-	-	2.200	0.08661				
8595221	-	-	-	-	2.210	0.08701				
8595222	-	-	-	-	2.220	0.08740				
8595223	-	-	-	-	2.230	0.08780				
8595224	-	-	-	-	2.240	0.08819				
8595225	859522511	-	-	-	2.250	0.08858				
8595226	859522611	-	-	-	2.260	0.08898				
8595227	-	-	-	-	2.270	0.08937				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

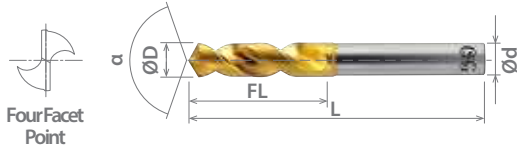

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595228	-	-	-	-	2.280	0.08976	13	45	3	130°
8595229	-	-	-	-	2.290	0.09016				
61523	6152311	-	-	-	2.300	0.09055				
8595231	-	-	-	-	2.310	0.09094				
8595232	-	-	-	-	2.320	0.09134				
8595233	-	-	-	-	2.330	0.09173				
8595234	-	-	-	-	2.340	0.09213				
8595235	-	-	-	-	2.350	0.09252				
8595236	-	-	-	-	2.360	0.09291				
8595237	859523711	-	-	-	2.370	0.09331				
8595238	859523811	-	-	-	2.380	0.09370				
8595239	859523911	-	-	-	2.390	0.09409				
61524	6152411	-	-	-	2.400	0.09449				
8595241	859524111	-	-	-	2.410	0.09488				
8595242	859524211	-	-	-	2.420	0.09528				
8595243	-	-	-	-	2.430	0.09567				
8595244	859524411	-	-	-	2.440	0.09606				
8595245	859524511	-	-	-	2.450	0.09646				
8595246	859524611	-	-	-	2.460	0.09685				
8595247	-	-	-	-	2.470	0.09724				
8595248	-	-	-	-	2.480	0.09764				
8595249	859524911	-	-	-	2.490	0.09803				
61525	6152511	-	-	-	2.500	0.09843				
8595251	-	-	-	-	2.510	0.09882				
8595252	859525211	-	-	-	2.520	0.09921				
8595253	859525311	-	-	-	2.530	0.09961				
8595254	-	-	-	-	2.540	0.10000				
8595255	859525511	-	-	-	2.550	0.10039				
8595256	-	-	-	-	2.560	0.10079				
8595257	-	-	-	-	2.570	0.10118				
8595258	859525811	-	-	-	2.580	0.10157				
8595259	-	-	-	-	2.590	0.10197				
61526	6152611	-	-	-	2.600	0.10236				
8595261	-	-	-	-	2.610	0.10276				
8595262	-	-	-	-	2.620	0.10315				
8595263	-	-	-	-	2.630	0.10354				
8595264	859526411	-	-	-	2.640	0.10394				
8595265	859526511	-	-	-	2.650	0.10433				
8595266	859526611	-	-	-	2.660	0.10472				
8595267	-	-	-	-	2.670	0.10512				
8595268	-	-	-	-	2.680	0.10551				
8595269	-	-	-	-	2.690	0.10591				
61527	6152711	-	-	-	2.700	0.10630				
8595271	859527111	-	-	-	2.710	0.10669				
8595272	-	-	-	-	2.720	0.10709				
8595273	-	-	-	-	2.730	0.10748				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.



List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
-----------------------	------	-----	-------	------	-----

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595274	-	-	-	-	2.740	0.10787	16	48	3	130°
8595275	-	-	-	-	2.750	0.10827				
8595276	-	-	-	-	2.760	0.10866				
8595277	-	-	-	-	2.770	0.10906				
8595278	859527811	-	-	-	2.780	0.10945				
8595279	859527911	-	-	-	2.790	0.10984				
61528	6152811	-	-	-	2.800	0.11024				
8595281	-	-	-	-	2.810	0.11063				
8595282	859528211	-	-	-	2.820	0.11102				
8595283	859528311	-	-	-	2.830	0.11142				
8595284	-	-	-	-	2.840	0.11181				
8595285	859528511	-	-	-	2.850	0.11220				
8595286	859528611	-	-	-	2.860	0.11260				
8595287	-	-	-	-	2.870	0.11299				
8595288	-	-	-	-	2.880	0.11339				
8595289	-	-	-	-	2.890	0.11378				
61529	6152911	-	-	-	2.900	0.11417				
8595291	-	-	-	-	2.910	0.11457				
8595292	-	-	-	-	2.920	0.11496				
8595293	-	-	-	-	2.930	0.11535				
8595294	-	-	-	-	2.940	0.11575				
8595295	859529511	-	-	-	2.950	0.11614				
8595296	-	-	-	-	2.960	0.11654				
8595297	-	-	-	-	2.970	0.11693				
8595298	-	-	-	-	2.980	0.11732				
8595299	-	-	-	-	2.990	0.11772				
61530	6153011	-	-	-	3.000	0.11811				
8595301	-	-	-	-	3.010	0.11850				
8595302	-	-	-	-	3.020	0.11890				
8595303	-	-	-	-	3.030	0.11929				
8595304	-	-	-	-	3.040	0.11969				
8595305	859530511	-	-	-	3.050	0.12008				
8595306	-	-	-	-	3.060	0.12047				
8595307	-	-	-	-	3.070	0.12087				
8595308	-	-	-	-	3.080	0.12126				
8595309	-	-	-	-	3.090	0.12165				
61531	6153111	-	-	-	3.100	0.12205				
8595311	-	-	-	-	3.110	0.12244				
8595312	-	-	-	-	3.120	0.12283				
8595313	-	-	-	-	3.130	0.12323				
8595314	-	-	-	-	3.140	0.12362				
8595315	859531511	-	-	-	3.150	0.12402				
8595316	-	-	-	-	3.160	0.12441				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

➔ continued on next page ➔ **EXD**

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1100	☉	○				☉	☉	○		☉	☉							


○ good ☉ best





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

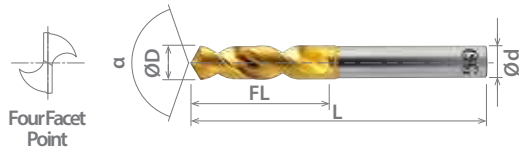

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595317	-	-	-	-	3.170	0.12480	18	50	4	130°
8595318	859531811	-	-	-	3.180	0.12520				
8595319	-	-	-	-	3.190	0.12559				
61532	6153211	-	-	-	3.200	0.12598				
8595321	-	-	-	-	3.210	0.12638				
8595322	859532211	-	-	-	3.220	0.12677				
8595323	-	-	-	-	3.230	0.12717				
8595324	-	-	-	-	3.240	0.12756				
8595325	859532511	-	-	-	3.250	0.12795				
8595326	859532611	-	-	-	3.260	0.12835				
8595327	859532711	-	-	-	3.270	0.12874				
8595328	-	-	-	-	3.280	0.12913				
8595329	859532911	-	-	-	3.290	0.12953				
61533	6153311	-	-	-	3.300	0.12992				
8595331	-	-	-	-	3.310	0.13031				
8595332	-	-	-	-	3.320	0.13071				
8595333	-	-	-	-	3.330	0.13110				
8595334	-	-	-	-	3.340	0.13150				
8595335	859533511	-	-	-	3.350	0.13189				
8595336	-	-	-	-	3.360	0.13228				
8595337	-	-	-	-	3.370	0.13268				
8595338	-	-	-	-	3.380	0.13307				
8595339	-	-	-	-	3.390	0.13346				
61534	6153411	-	-	-	3.400	0.13386				
8595341	-	-	-	-	3.410	0.13425				
8595342	-	-	-	-	3.420	0.13465				
8595343	-	-	-	-	3.430	0.13504				
8595344	-	-	-	-	3.440	0.13543				
8595345	859534511	-	-	-	3.450	0.13583				
8595346	859534611	-	-	-	3.460	0.13622				
8595347	859534711	-	-	-	3.470	0.13661				
8595348	-	-	-	-	3.480	0.13701				
8595349	-	-	-	-	3.490	0.13740				
61535	6153511	-	-	-	3.500	0.13780				
8595351	-	-	-	-	3.510	0.13819				
8595352	-	-	-	-	3.520	0.13858				
8595353	-	-	-	-	3.530	0.13898				
8595354	-	-	-	-	3.540	0.13937				
8595355	-	-	-	-	3.550	0.13976				
8595356	-	-	-	-	3.560	0.14016				
8595357	859535711	-	-	-	3.570	0.14055				
8595358	-	-	-	-	3.580	0.14094				
8595359	-	-	-	-	3.590	0.14134				
61536	-	-	-	-	3.600	0.14173				
8595361	-	-	-	-	3.610	0.14213				
8595362	-	-	-	-	3.620	0.14252				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
---------------------------	-------------	------------	--------------	-------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595363	-	-	-	-	3.630	0.14291	20	52	4	130°
8595364	-	-	-	-	3.640	0.14331				
8595365	-	-	-	-	3.650	0.14370				
8595366	859536611	-	-	-	3.660	0.14409				
8595367	-	-	-	-	3.670	0.14449				
8595368	-	-	-	-	3.680	0.14488				
8595369	-	-	-	-	3.690	0.14528				
61537	6153711	-	-	-	3.700	0.14567				
8595371	-	-	-	-	3.710	0.14606				
8595372	-	-	-	-	3.720	0.14646				
8595373	859537311	-	-	-	3.730	0.14685				
8595374	-	-	-	-	3.740	0.14724				
8595375	859537511	-	-	-	3.750	0.14764				
8595376	-	-	-	-	3.760	0.14803				
8595377	-	-	-	-	3.770	0.14843				
8595378	-	-	-	-	3.780	0.14882				
8595379	-	-	-	-	3.790	0.14921				
61538	6153811	-	-	-	3.800	0.14961				
8595381	-	-	-	-	3.810	0.15000				
8595382	-	-	-	-	3.820	0.15039				
8595383	-	-	-	-	3.830	0.15079				
8595384	-	-	-	-	3.840	0.15118				
8595385	859538511	-	-	-	3.850	0.15157				
8595386	859538611	-	-	-	3.860	0.15197				
8595387	-	-	-	-	3.870	0.15236				
8595388	-	-	-	-	3.880	0.15276				
8595389	-	-	-	-	3.890	0.15315				
61539	-	-	-	-	3.900	0.15354				
8595391	859539111	-	-	-	3.910	0.15394				
8595392	-	-	-	-	3.920	0.15433				
8595393	-	-	-	-	3.930	0.15472				
8595394	-	-	-	-	3.940	0.15512				
8595395	859539511	-	-	-	3.950	0.15551				
8595396	-	-	-	-	3.960	0.15591				
8595397	859539711	-	-	-	3.970	0.15630				
8595398	-	-	-	-	3.980	0.15669				
8595399	859539911	-	-	-	3.990	0.15709				
61540	6154011	-	-	-	4.000	0.15748				
8595401	-	-	-	-	4.010	0.15787				
8595402	-	-	-	-	4.020	0.15827				
8595403	-	-	-	-	4.030	0.15866				
8595404	859540411	-	-	-	4.040	0.15906				
8595405	-	-	-	-	4.050	0.15945				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						


good best





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

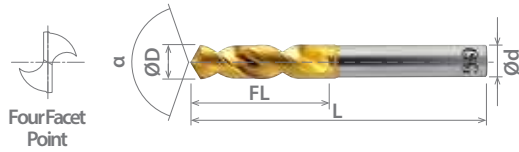

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595406	-	-	-	-	4.060	0.15984	22	66	6	120°
8595407	-	-	-	-	4.070	0.16024				
8595408	-	-	-	-	4.080	0.16063				
8595409	859540911	-	-	-	4.090	0.16102				
61541	6154111	-	-	-	4.100	0.16142				
8595411	-	-	-	-	4.110	0.16181				
8595412	-	-	-	-	4.120	0.16220				
8595413	-	-	-	-	4.130	0.16260				
8595414	-	-	-	-	4.140	0.16299				
8595415	859541511	-	-	-	4.150	0.16339				
8595416	-	-	-	-	4.160	0.16378				
8595417	859541711	-	-	-	4.170	0.16417				
8595418	-	-	-	-	4.180	0.16457				
8595419	-	-	-	-	4.190	0.16496				
61542	6154211	-	-	-	4.200	0.16535				
8595421	-	-	-	-	4.210	0.16575				
8595422	859542211	-	-	-	4.220	0.16614				
8595423	-	-	-	-	4.230	0.16654				
8595424	-	-	-	-	4.240	0.16693				
8595425	-	-	-	-	4.250	0.16732				
8595426	-	-	-	-	4.260	0.16772				
8595427	-	-	-	-	4.270	0.16811				
8595428	-	-	-	-	4.280	0.16850				
8595429	-	-	-	-	4.290	0.16890				
61543	6154311	-	-	-	4.300	0.16929				
8595431	-	-	-	-	4.310	0.16969				
8595432	-	-	-	-	4.320	0.17008				
8595433	859543311	-	-	-	4.330	0.17047				
8595434	-	-	-	-	4.340	0.17087				
8595435	-	-	-	-	4.350	0.17126				
8595436	-	-	-	-	4.360	0.17165				
8595437	859543711	-	-	-	4.370	0.17205				
8595438	-	-	-	-	4.380	0.17244				
8595439	-	-	-	-	4.390	0.17283				
61544	6154411	-	-	-	4.400	0.17323				
8595441	859544111	-	-	-	4.410	0.17362				
8595442	-	-	-	-	4.420	0.17402				
8595443	-	-	-	-	4.430	0.17441				
8595444	-	-	-	-	4.440	0.17480				
8595445	859544511	-	-	-	4.450	0.17520				
8595446	-	-	-	-	4.460	0.17559				
8595447	-	-	-	-	4.470	0.17598				
8595448	-	-	-	-	4.480	0.17638				
8595449	-	-	-	-	4.490	0.17677				
61545	6154511	-	-	-	4.500	0.17717				
8595451	-	-	-	-	4.510	0.17756				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.



List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter	Point Angle
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595452	-	-	-	-	4.520	0.17795	24	68	6	120°
8595453	-	-	-	-	4.530	0.17835				
8595454	-	-	-	-	4.540	0.17874				
8595455	-	-	-	-	4.550	0.17913				
8595456	-	-	-	-	4.560	0.17953				
8595457	859545711	-	-	-	4.570	0.17992				
8595458	-	-	-	-	4.580	0.18031				
8595459	-	-	-	-	4.590	0.18071				
61546	6154611	-	-	-	4.600	0.18110				
8595461	-	-	-	-	4.610	0.18150				
8595462	859546211	-	-	-	4.620	0.18189				
8595463	-	-	-	-	4.630	0.18228				
8595464	-	-	-	-	4.640	0.18268				
8595465	-	-	-	-	4.650	0.18307				
8595466	-	-	-	-	4.660	0.18346				
8595467	-	-	-	-	4.670	0.18386				
8595468	-	-	-	-	4.680	0.18425				
8595469	-	-	-	-	4.690	0.18465				
61547	6154711	-	-	-	4.700	0.18504				
8595471	-	-	-	-	4.710	0.18543				
8595472	-	-	-	-	4.720	0.18583				
8595473	-	-	-	-	4.730	0.18622				
8595474	-	-	-	-	4.740	0.18661				
8595475	859547511	-	-	-	4.750	0.18701				
8595476	859547611	-	-	-	4.760	0.18740				
8595477	-	-	-	-	4.770	0.18780				
8595478	-	-	-	-	4.780	0.18819				
8595479	-	-	-	-	4.790	0.18858				
61548	6154811	-	-	-	4.800	0.18898				
8595481	-	-	-	-	4.810	0.18937				
8595482	-	-	-	-	4.820	0.18976				
8595483	-	-	-	-	4.830	0.19016				
8595484	-	-	-	-	4.840	0.19055				
8595485	-	-	-	-	4.850	0.19094				
8595486	859548611	-	-	-	4.860	0.19134				
8595487	859548711	-	-	-	4.870	0.19173				
8595488	859548811	-	-	-	4.880	0.19213				
8595489	-	-	-	-	4.890	0.19252				
61549	6154911	-	-	-	4.900	0.19291				
8595491	-	-	-	-	4.910	0.19331				
8595492	-	-	-	-	4.920	0.19370				
8595493	-	-	-	-	4.930	0.19409				
8595494	-	-	-	-	4.940	0.19449				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

➔ continued on next page ➔

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

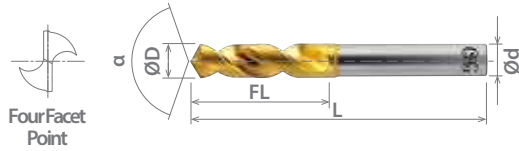

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595495	-	-	-	-	4.950	0.19488	26	70	6	120°
8595496	859549611	-	-	-	4.960	0.19528				
8595497	-	-	-	-	4.970	0.19567				
8595498	859549811	-	-	-	4.980	0.19606				
8595499	-	-	-	-	4.990	0.19646				
61550	6155011	-	-	-	5.000	0.19685				
8595501	-	-	-	-	5.010	0.19724				
8595502	-	-	-	-	5.020	0.19764				
8595503	-	-	-	-	5.030	0.19803				
8595504	-	-	-	-	5.040	0.19843				
8595505	859550511	-	-	-	5.050	0.19882				
8595506	-	-	-	-	5.060	0.19921				
8595507	-	-	-	-	5.070	0.19961				
8595508	-	-	-	-	5.080	0.20000				
8595509	-	-	-	-	5.090	0.20039				
61551	6155111	-	-	-	5.100	0.20079				
8595511	859551111	-	-	-	5.110	0.20118				
8595512	-	-	-	-	5.120	0.20157				
8595513	-	-	-	-	5.130	0.20197				
8595514	-	-	-	-	5.140	0.20236				
8595515	-	-	-	-	5.150	0.20276				
8595516	859551611	-	-	-	5.160	0.20315				
8595517	-	-	-	-	5.170	0.20354				
8595518	859551811	-	-	-	5.180	0.20394				
8595519	-	-	-	-	5.190	0.20433				
61552	6155211	-	-	-	5.200	0.20472				
8595521	-	-	-	-	5.210	0.20512				
8595522	859552211	-	-	-	5.220	0.20551				
8595523	-	-	-	-	5.230	0.20591				
8595524	-	-	-	-	5.240	0.20630				
8595525	-	-	-	-	5.250	0.20669				
8595526	-	-	-	-	5.260	0.20709				
8595527	-	-	-	-	5.270	0.20748				
8595528	-	-	-	-	5.280	0.20787				
8595529	-	-	-	-	5.290	0.20827				
61553	6155311	-	-	-	5.300	0.20866				
8595531	-	-	-	-	5.310	0.20906				
8595532	-	-	-	-	5.320	0.20945				
8595533	-	-	-	-	5.330	0.20984				
8595534	-	-	-	-	5.340	0.21024				
8595535	-	-	-	-	5.350	0.21063				
8595536	-	-	-	-	5.360	0.21102				
8595537	-	-	-	-	5.370	0.21142				
8595538	-	-	-	-	5.380	0.21181				
8595539	-	-	-	-	5.390	0.21220				
61554	-	-	-	-	5.400	0.21260				
8595541	-	-	-	-	5.410	0.21299				
						28	72			

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
---------------------------	-------------	------------	--------------	-------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595542	-	-	-	-	5.420	0.21339	28	72	6	120°
8595543	-	-	-	-	5.430	0.21378				
8595544	-	-	-	-	5.440	0.21417				
8595545	859554511	-	-	-	5.450	0.21457				
8595546	-	-	-	-	5.460	0.21496				
8595547	-	-	-	-	5.470	0.21535				
8595548	859554811	-	-	-	5.480	0.21575				
8595549	-	-	-	-	5.490	0.21614				
61555	6155511	-	-	-	5.500	0.21654				
8595551	-	-	-	-	5.510	0.21693				
8595552	-	-	-	-	5.520	0.21732				
8595553	-	-	-	-	5.530	0.21772				
8595554	-	-	-	-	5.540	0.21811				
8595555	-	-	-	-	5.550	0.21850				
8595556	859555611	-	-	-	5.560	0.21890				
8595557	-	-	-	-	5.570	0.21929				
8595558	-	-	-	-	5.580	0.21969				
8595559	-	-	-	-	5.590	0.22008				
61556	6155611	-	-	-	5.600	0.22047				
8595561	-	-	-	-	5.610	0.22087				
8595562	-	-	-	-	5.620	0.22126				
8595563	-	-	-	-	5.630	0.22165				
8595564	-	-	-	-	5.640	0.22205				
8595565	859556511	-	-	-	5.650	0.22244				
8595566	-	-	-	-	5.660	0.22283				
8595567	-	-	-	-	5.670	0.22323				
8595568	-	-	-	-	5.680	0.22362				
8595569	-	-	-	-	5.690	0.22402				
61557	-	-	-	-	5.700	0.22441				
8595571	-	-	-	-	5.710	0.22480				
8595572	859557211	-	-	-	5.720	0.22520				
8595573	-	-	-	-	5.730	0.22559				
8595574	-	-	-	-	5.740	0.22598				
8595575	859557511	-	-	-	5.750	0.22638				
8595576	-	-	-	-	5.760	0.22677				
8595577	-	-	-	-	5.770	0.22717				
8595578	859557811	-	-	-	5.780	0.22756				
8595579	859557911	-	-	-	5.790	0.22795				
61558	6155811	-	-	-	5.800	0.22835				
8595581	-	-	-	-	5.810	0.22874				
8595582	-	-	-	-	5.820	0.22913				
8595583	-	-	-	-	5.830	0.22953				
8595584	-	-	-	-	5.840	0.22992				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						


good best





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

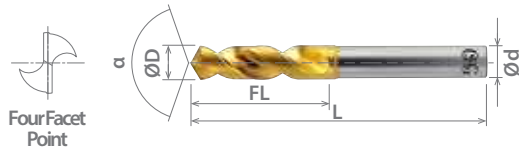

FourFacet Point

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595585	-	-	-	-	5.850	0.23031	28	72	6	120°
8595586	-	-	-	-	5.860	0.23071				
8595587	-	-	-	-	5.870	0.23110				
8595588	-	-	-	-	5.880	0.23150				
8595589	-	-	-	-	5.890	0.23189				
61559	6155911	-	-	-	5.900	0.23228				
8595591	-	-	-	-	5.910	0.23268				
8595592	-	-	-	-	5.920	0.23307				
8595593	-	-	-	-	5.930	0.23346				
8595594	-	-	-	-	5.940	0.23386				
8595595	859559511	-	-	-	5.950	0.23425				
8595596	-	-	-	-	5.960	0.23465				
8595597	859559711	-	-	-	5.970	0.23504				
8595598	-	-	-	-	5.980	0.23543				
8595599	-	-	-	-	5.990	0.23583				
61560	6156011	-	-	-	6.000	0.23622				
8595605	-	-	-	-	6.050	0.23819				
61561	6156111	-	-	-	6.100	0.24016				
8595615	-	-	-	-	6.150	0.24213				
61562	-	-	-	-	6.200	0.24409				
8595625	-	-	-	-	6.250	0.24606				
61563	6156311	-	-	-	6.300	0.24803				
8595635	859563511	1/4	-	E	6.350	0.25000				
61564	6156411	-	-	-	6.400	0.25197				
8595645	-	-	-	-	6.450	0.25394				
61565	6156511	-	-	-	6.500	0.25591				
8595655	859565511	-	-	-	6.550	0.25787				
61566	6156611	-	-	-	6.600	0.25984				
8595665	-	-	-	-	6.650	0.26181				
61567	6156711	-	-	-	6.700	0.26378				
8595675	859567511	-	-	-	6.750	0.26575				
61568	6156811	-	-	-	6.800	0.26772				
8595685	859568511	-	-	-	6.850	0.26969				
61569	6156911	-	-	-	6.900	0.27165				
8595695	-	-	-	-	6.950	0.27362				
61570	6157011	-	-	-	7.000	0.27559				
8595705	-	-	-	-	7.050	0.27756				
61571	6157111	-	-	-	7.100	0.27953				
8595715	859571511	-	-	-	7.150	0.28150				
61572	6157211	-	-	-	7.200	0.28346				
8595725	-	-	-	-	7.250	0.28543				
61573	6157311	-	-	-	7.300	0.28740				
8595735	-	-	-	-	7.350	0.28937				
61574	6157411	-	-	-	7.400	0.29134				
8595745	-	-	-	-	7.450	0.29331				
61575	6157511	-	-	-	7.500	0.29528				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.



List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter	Point Angle
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8595755	859575511	-	-	-	7.550	0.29724	37	81	8	120°
61576	-	-	-	-	7.600	0.29921				
8595765	859576511	-	-	-	7.650	0.30118				
61577	6157711	-	-	-	7.700	0.30315				
8595775	859577511	-	-	-	7.750	0.30512				
61578	-	-	-	-	7.800	0.30709				
8595785	-	-	-	-	7.850	0.30906				
61579	6157911	-	-	-	7.900	0.31102				
8595795	859579511	-	-	-	7.950	0.31299				
61580	6158011	-	-	-	8.000	0.31496				
8595805	-	-	-	-	8.050	0.31693				
61581	6158111	-	-	-	8.100	0.31890				
8595815	-	-	-	-	8.150	0.32087				
61582	6158211	-	-	-	8.200	0.32283				
8595825	-	-	-	-	8.250	0.32480				
61583	6158311	-	-	-	8.300	0.32677				
8595835	859583511	-	-	-	8.350	0.32874				
61584	-	-	-	-	8.400	0.33071				
8595845	-	-	-	-	8.450	0.33268				
61585	6158511	-	-	-	8.500	0.33465				
8595855	-	-	-	-	8.550	0.33661				
61586	6158611	-	-	-	8.600	0.33858				
8595865	-	-	-	-	8.650	0.34055				
61587	-	-	-	-	8.700	0.34252				
8595875	859587511	-	-	-	8.750	0.34449				
61588	6158811	-	-	-	8.800	0.34646				
8595885	-	-	-	-	8.850	0.34843				
61589	-	-	-	-	8.900	0.35039				
8595895	-	-	-	-	8.950	0.35236				
61590	6159011	-	-	-	9.000	0.35433				
8595905	-	-	-	-	9.050	0.35630				
61591	-	-	-	-	9.100	0.35827				
8595915	-	-	-	-	9.150	0.36024				
61592	-	-	-	-	9.200	0.36220				
8595925	-	-	-	-	9.250	0.36417				
61593	-	-	-	-	9.300	0.36614				
8595935	-	-	-	-	9.350	0.36811				
61594	-	-	-	-	9.400	0.37008				
8595945	-	-	-	-	9.450	0.37205				
61595	6159511	-	-	-	9.500	0.37402				
8595955	-	-	-	-	9.550	0.37598				
61596	6159611	-	-	-	9.600	0.37795				
8595965	859596511	-	-	-	9.650	0.37992				
							40	90		
							43	93		

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order: 11 = TiAlN.

➔ continued on next page ➔ **EXD**

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1100	☉	○				☉	☉	○		☉	☉							

○ good ☉ best






List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
-----------------------	------	-----	-------	------	-----

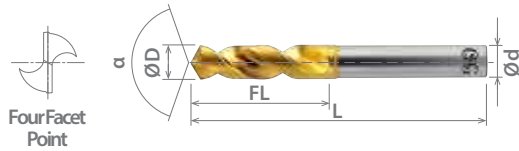

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
61597	-	-	-	-	9.700	0.38189	43	93	10	120°
8595975	-	-	-	-	9.750	0.38386				
61598	6159811	-	-	-	9.800	0.38583				
8595985	-	-	-	-	9.850	0.38780				
61599	6159911	-	-	-	9.900	0.38976				
8595995	-	-	-	-	9.950	0.39173				
61600	6160011	-	-	-	10.000	0.39370				
8596005	-	-	-	-	10.050	0.39567				
61601	-	-	-	-	10.100	0.39764				
8596015	859601511	-	-	-	10.150	0.39961				
61602	6160211	-	-	-	10.200	0.40157				
8596025	-	-	-	-	10.250	0.40354				
61603	6160311	-	-	-	10.300	0.40551				
8596035	859603511	-	-	-	10.350	0.40748				
61604	-	-	-	-	10.400	0.40945				
8596045	-	-	-	-	10.450	0.41142				
61605	6160511	-	-	-	10.500	0.41339				
8596055	-	-	-	-	10.550	0.41535				
61606	-	-	-	-	10.600	0.41732				
8596065	-	-	-	-	10.650	0.41929				
61607	6160711	-	-	-	10.700	0.42126				
8596075	-	-	-	-	10.750	0.42323				
61608	-	-	-	-	10.800	0.42520				
8596085	-	-	-	-	10.850	0.42717				
61609	-	-	-	-	10.900	0.42913				
8596095	-	-	-	-	10.950	0.43110				
61610	6161011	-	-	-	11.000	0.43307				
8596105	-	-	-	-	11.050	0.43504				
61611	6161111	-	-	-	11.100	0.43701				
8596115	-	-	-	-	11.150	0.43898				
61612	-	-	-	-	11.200	0.44094				
8596125	-	-	-	-	11.250	0.44291				
61613	-	-	-	-	11.300	0.44488				
8596135	-	-	-	-	11.350	0.44685				
61614	-	-	-	-	11.400	0.44882				
8596145	-	-	-	-	11.450	0.45079				
61615	6161511	-	-	-	11.500	0.45276				
8596155	-	-	-	-	11.550	0.45472				
61616	-	-	-	-	11.600	0.45669				
8596165	-	-	-	-	11.650	0.45866				
61617	-	-	-	-	11.700	0.46063				
8596175	-	-	-	-	11.750	0.46260				
61618	-	-	-	-	11.800	0.46457				
8596185	-	-	-	-	11.850	0.46654				
61619	-	-	-	-	11.900	0.46850				
8596195	-	-	-	-	11.950	0.47047				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	STUB	40°
---------------------------	-------------	------------	--------------	-------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
61620	6162011	-	-	-	12.000	0.47244	51	108	12	120°
61621	-	-	-	-	12.100	0.47638				
61622	-	-	-	-	12.200	0.48031				
61623	6162311	-	-	-	12.300	0.48425				
61624	6162411	-	-	-	12.400	0.48819				
61625	6162511	-	-	-	12.500	0.49213				
61626	6162611	-	-	-	12.600	0.49606				
61627	6162711	1/2	-	-	12.700	0.50000				
61628	6162811	-	-	-	12.800	0.50394				
61629	6162911	-	-	-	12.900	0.50787				
61630	6163011	-	-	-	13.000	0.51181	111			
61631	6163111	-	-	-	13.100	0.51575				
61632	-	-	-	-	13.200	0.51969				
61633	-	-	-	-	13.300	0.52362	54	114		
61634	-	-	-	-	13.400	0.52756				
61635	6163511	-	-	-	13.500	0.53150				
61636	-	-	-	-	13.600	0.53543				
61637	-	-	-	-	13.700	0.53937				
61638	-	-	-	-	13.800	0.54331				
61639	-	-	-	-	13.900	0.54724				
61640	6164011	-	-	-	14.000	0.55118	56	116		
61641	6164111	-	-	-	14.100	0.55512				
61642	-	-	-	-	14.200	0.55906				
61643	6164311	-	-	-	14.300	0.56299				
61644	-	-	-	-	14.400	0.56693				
61645	6164511	-	-	-	14.500	0.57087				
61646	-	-	-	-	14.600	0.57480				
61647	-	-	-	-	14.700	0.57874				
61648	-	-	-	-	14.800	0.58268				
61649	-	-	-	-	14.900	0.58661				
61650	6165011	-	-	-	15.000	0.59055	58	118		
61651	-	-	-	-	15.100	0.59449				
61652	-	-	-	-	15.200	0.59843				
61653	6165311	-	-	-	15.300	0.60236				
61654	-	-	-	-	15.400	0.60630				
61655	-	-	-	-	15.500	0.61024				
61656	-	-	-	-	15.600	0.61417				
61657	-	-	-	-	15.700	0.61811				
61658	-	-	-	-	15.800	0.62205				
61659	6165911	-	-	-	15.900	0.62598	60	126		
61660	6166011	-	-	-	16.000	0.62992				
61661	6166111	-	-	-	16.100	0.63386				
61662	-	-	-	-	16.200	0.63780				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page

Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						


good best





List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

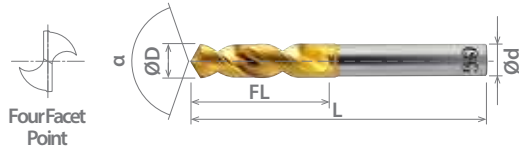

SPEED FEED	HSSE	TiN	TiAlN	STUB	40°
P391					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.5 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
61663	-	-	-	-	16.300	0.64173	60	126		
61664	-	-	-	-	16.400	0.64567				
61665	6166511	-	-	-	16.500	0.64961				
61666	-	-	-	-	16.600	0.65354				
61667	6166711	-	-	-	16.700	0.65748				
61668	-	-	-	-	16.800	0.66142				
61669	-	-	-	-	16.900	0.66535				
61670	-	-	-	-	17.000	0.66929				
61671	6167111	-	-	-	17.100	0.67323				
61672	6167211	-	-	-	17.200	0.67717				
61673	-	-	-	-	17.300	0.68110				
61674	-	-	-	-	17.400	0.68504				
61675	-	-	-	-	17.500	0.68898				
61676	-	-	-	-	17.600	0.69291				
61677	6167711	-	-	-	17.700	0.69685				
61678	-	-	-	-	17.800	0.70079				
61679	-	-	-	-	17.900	0.70472				
61680	6168011	-	-	-	18.000	0.70866				
61681	-	-	-	-	18.100	0.71260				
61682	-	-	-	-	18.200	0.71654				
61683	-	-	-	-	18.300	0.72047				
61684	-	-	-	-	18.400	0.72441				
61685	-	-	-	-	18.500	0.72835				
61686	-	-	-	-	18.600	0.73228				
61687	-	-	-	-	18.700	0.73622				
61688	-	-	-	-	18.800	0.74016				
61689	-	-	-	-	18.900	0.74409				
61690	-	-	-	-	19.000	0.74803				
61691	6169111	-	-	-	19.100	0.75197				
61692	-	-	-	-	19.200	0.75591				
61693	-	-	-	-	19.300	0.75984				
61694	-	-	-	-	19.400	0.76378				
61695	-	-	-	-	19.500	0.76772				
61696	-	-	-	-	19.600	0.77165				
61697	-	-	-	-	19.700	0.77559				
61698	-	-	-	-	19.800	0.77953				
61699	-	-	-	-	19.900	0.78346				
61700	-	-	-	-	20.000	0.78740				
61705	-	-	-	-	20.500	0.80709				
61710	6171011	-	-	-	21.000	0.82677				
61715	6171511	-	-	-	21.500	0.84646				
61720	-	-	-	-	22.000	0.86614				
61725	-	-	-	-	22.500	0.88583				
61730	6173011	-	-	-	23.000	0.90551				
61735	-	-	-	-	23.500	0.92520				
61740	-	-	-	-	24.000	0.94488				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.



List 1100 (Continued)

EX-SUS-GDS, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAIN	STUB	40°
--------------------	------	-----	-------	------	-----

TiN EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α				
		Fractional Size	Wire Gage	Letter Size	mm	Inch								
61745	-	-	-	-	24.500	0.96457	75	151	25	120°				
61750	-	-	-	-	25.000	0.98425								
61755	-	-	-	-	25.500	1.00394	78	158	120°					
61760	-	-	-	-	26.000	1.02362								
61765	-	-	-	-	26.500	1.04331								
61770	-	-	-	-	27.000	1.06299	81	161			120°			
61775	-	-	-	-	27.500	1.08268								
61780	-	-	-	-	28.000	1.10236	84	164				120°		
61785	-	-	-	-	28.500	1.12205								
61790	-	-	-	-	29.000	1.14173								
61795	-	-	-	-	29.500	1.16142								
61800	-	-	-	-	30.000	1.18110	87	167					120°	
61805	-	-	-	-	30.500	1.20079								
61810	-	-	-	-	31.000	1.22047	90	170						120°
61815	-	-	-	-	31.500	1.24016								
61820	-	-	-	-	32.000	1.25984								

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAIN.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum				Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1100	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						


good best





List 1600

EX-SUS-GDR, Ideal for Stainless Steel



SPEED FEED	HSSE	TiN	TiAlN	JOBBERS	40°
P391					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
62520	6252011	-	-	-	2.000	0.07874	24	56		
8597201	-	-	-	-	2.010	0.07913				
8597202	-	-	-	-	2.020	0.07953				
8597203	-	-	-	-	2.030	0.07992				
8597204	859720411	-	-	-	2.040	0.08031				
8597205	-	-	-	-	2.050	0.08071				
8597206	-	-	-	-	2.060	0.08110				
8597207	-	-	-	-	2.070	0.08150				
8597208	859720811	-	-	-	2.080	0.08189				
8597209	-	-	-	-	2.090	0.08228				
62521	-	-	-	-	2.100	0.08268				
8597211	-	-	-	-	2.110	0.08307				
8597212	-	-	-	-	2.120	0.08346				
8597213	-	-	-	-	2.130	0.08386				
8597214	-	-	-	-	2.140	0.08425				
8597215	-	-	-	-	2.150	0.08465				
8597216	-	-	-	-	2.160	0.08504				
8597217	-	-	-	-	2.170	0.08543				
8597218	859721811	-	-	-	2.180	0.08583				
8597219	-	-	-	-	2.190	0.08622				
62522	6252211	-	-	-	2.200	0.08661				
8597221	-	-	-	-	2.210	0.08701				
8597222	-	-	-	-	2.220	0.08740				
8597223	-	-	-	-	2.230	0.08780				
8597224	-	-	-	-	2.240	0.08819				
8597225	-	-	-	-	2.250	0.08858				
8597226	859722611	-	-	-	2.260	0.08898				
8597227	-	-	-	-	2.270	0.08937				
8597228	859722811	-	-	-	2.280	0.08976				
8597229	-	-	-	-	2.290	0.09016				
62523	-	-	-	-	2.300	0.09055				
8597231	-	-	-	-	2.310	0.09094				
8597232	-	-	-	-	2.320	0.09134				
8597233	-	-	-	-	2.330	0.09173				
8597234	-	-	-	-	2.340	0.09213				
8597235	-	-	-	-	2.350	0.09252				
8597236	-	-	-	-	2.360	0.09291				
8597237	-	-	-	-	2.370	0.09331				
8597238	859723811	-	-	-	2.380	0.09370				
8597239	-	-	-	-	2.390	0.09409				
62524	6252411	-	-	-	2.400	0.09449				
8597241	-	-	-	-	2.410	0.09488				
8597242	-	-	-	-	2.420	0.09528				
8597243	-	-	-	-	2.430	0.09567				
8597244	-	-	-	-	2.440	0.09606				
8597245	-	-	-	-	2.450	0.09646				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.



List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	JOBBERS	40°
P391					

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter	Point Angle
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597246	-	-	-	-	2.460	0.09685	30	62	3	130°
8597247	-	-	-	-	2.470	0.09724				
8597248	-	-	-	-	2.480	0.09764				
8597249	-	-	-	-	2.490	0.09803				
62525	6252511	-	-	-	2.500	0.09843				
8597251	-	-	-	-	2.510	0.09882				
8597252	-	-	-	-	2.520	0.09921				
8597253	-	-	-	-	2.530	0.09961				
8597254	-	-	-	-	2.540	0.10000				
8597255	859725511	-	-	-	2.550	0.10039				
8597256	-	-	-	-	2.560	0.10079				
8597257	-	-	-	-	2.570	0.10118				
8597258	859725811	-	-	-	2.580	0.10157				
8597259	-	-	-	-	2.590	0.10197				
62526	-	-	-	-	2.600	0.10236				
8597261	-	-	-	-	2.610	0.10276				
8597262	-	-	-	-	2.620	0.10315				
8597263	-	-	-	-	2.630	0.10354				
8597264	-	-	-	-	2.640	0.10394				
8597265	-	-	-	-	2.650	0.10433				
8597266	-	-	-	-	2.660	0.10472				
8597267	-	-	-	-	2.670	0.10512				
8597268	-	-	-	-	2.680	0.10551				
8597269	-	-	-	-	2.690	0.10591				
62527	-	-	-	-	2.700	0.10630				
8597271	-	-	-	-	2.710	0.10669				
8597272	-	-	-	-	2.720	0.10709				
8597273	-	-	-	-	2.730	0.10748				
8597274	-	-	-	-	2.740	0.10787				
8597275	-	-	-	-	2.750	0.10827				
8597276	-	-	-	-	2.760	0.10866				
8597277	-	-	-	-	2.770	0.10906				
8597278	859727811	-	-	-	2.780	0.10945				
8597279	859727911	-	-	-	2.790	0.10984				
62528	-	-	-	-	2.800	0.11024				
8597281	859728111	-	-	-	2.810	0.11063				
8597282	-	-	-	-	2.820	0.11102				
8597283	-	-	-	-	2.830	0.11142				
8597284	-	-	-	-	2.840	0.11181				
8597285	-	-	-	-	2.850	0.11220				
8597286	859728611	-	-	-	2.860	0.11260				
8597287	-	-	-	-	2.870	0.11299				
8597288	-	-	-	-	2.880	0.11339				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

➔ continued on next page ➔ **EXD**

Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum			Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting				Inconel	6Al4V	~35 HRC	35-45 HRC
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
---------------------------	-------------	------------	--------------	----------------	------------

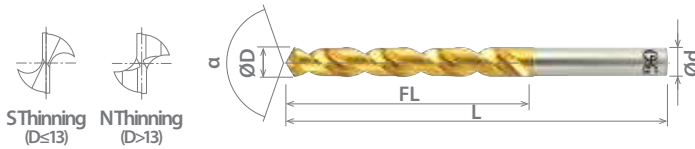

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597289	-	-	-	-	2.890	0.11378	33	65	3	130°
62529	6252911	-	-	-	2.900	0.11417				
8597291	-	-	-	-	2.910	0.11457				
8597292	-	-	-	-	2.920	0.11496				
8597293	-	-	-	-	2.930	0.11535				
8597294	859729411	-	-	-	2.940	0.11575				
8597295	-	-	-	-	2.950	0.11614				
8597296	-	-	-	-	2.960	0.11654				
8597297	-	-	-	-	2.970	0.11693				
8597298	-	-	-	-	2.980	0.11732				
8597299	-	-	-	-	2.990	0.11772				
62530	6253011	-	-	-	3.000	0.11811				
8597301	-	-	-	-	3.010	0.11850				
8597302	-	-	-	-	3.020	0.11890				
8597303	-	-	-	-	3.030	0.11929				
8597304	859730411	-	-	-	3.040	0.11969				
8597305	859730511	-	-	-	3.050	0.12008				
8597306	-	-	-	-	3.060	0.12047				
8597307	-	-	-	-	3.070	0.12087				
8597308	-	-	-	-	3.080	0.12126				
8597309	-	-	-	-	3.090	0.12165				
62531	6253111	-	-	-	3.100	0.12205				
8597311	-	-	-	-	3.110	0.12244				
8597312	-	-	-	-	3.120	0.12283				
8597313	-	-	-	-	3.130	0.12323				
8597314	-	-	-	-	3.140	0.12362				
8597315	-	-	-	-	3.150	0.12402				
8597316	-	-	-	-	3.160	0.12441				
8597317	-	-	-	-	3.170	0.12480				
8597318	859731811	-	-	-	3.180	0.12520				
8597319	-	-	-	-	3.190	0.12559				
62532	6253211	-	-	-	3.200	0.12598				
8597321	-	-	-	-	3.210	0.12638				
8597322	-	-	-	-	3.220	0.12677				
8597323	-	-	-	-	3.230	0.12717				
8597324	-	-	-	-	3.240	0.12756				
8597325	-	-	-	-	3.250	0.12795				
8597326	-	-	-	-	3.260	0.12835				
8597327	-	-	-	-	3.270	0.12874				
8597328	-	-	-	-	3.280	0.12913				
8597329	-	-	-	-	3.290	0.12953				
62533	6253311	-	-	-	3.300	0.12992				
8597331	-	-	-	-	3.310	0.13031				
8597332	-	-	-	-	3.320	0.13071				
8597333	-	-	-	-	3.330	0.13110				
8597334	-	-	-	-	3.340	0.13150				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
---------------------------	-------------	------------	--------------	----------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597335	-	-	-	-	3.350	0.13189	36	68	4	130°
8597336	-	-	-	-	3.360	0.13228				
8597337	-	-	-	-	3.370	0.13268				
8597338	-	-	-	-	3.380	0.13307				
8597339	-	-	-	-	3.390	0.13346				
62534	-	-	-	-	3.400	0.13386				
8597341	-	-	-	-	3.410	0.13425				
8597342	-	-	-	-	3.420	0.13465				
8597343	-	-	-	-	3.430	0.13504				
8597344	-	-	-	-	3.440	0.13543				
8597345	859734511	-	-	-	3.450	0.13583				
8597346	-	-	-	-	3.460	0.13622				
8597347	-	-	-	-	3.470	0.13661				
8597348	-	-	-	-	3.480	0.13701				
8597349	-	-	-	-	3.490	0.13740				
62535	6253511	-	-	-	3.500	0.13780				
8597351	-	-	-	-	3.510	0.13819				
8597352	-	-	-	-	3.520	0.13858				
8597353	-	-	-	-	3.530	0.13898				
8597354	-	-	-	-	3.540	0.13937				
8597355	-	-	-	-	3.550	0.13976				
8597356	-	-	-	-	3.560	0.14016				
8597357	859735711	-	-	-	3.570	0.14055				
8597358	859735811	-	-	-	3.580	0.14094				
8597359	-	-	-	-	3.590	0.14134				
62536	-	-	-	-	3.600	0.14173				
8597361	-	-	-	-	3.610	0.14213				
8597362	-	-	-	-	3.620	0.14252				
8597363	-	-	-	-	3.630	0.14291				
8597364	-	-	-	-	3.640	0.14331				
8597365	-	-	-	-	3.650	0.14370				
8597366	-	-	-	-	3.660	0.14409				
8597367	-	-	-	-	3.670	0.14449				
8597368	-	-	-	-	3.680	0.14488				
8597369	-	-	-	-	3.690	0.14528				
62537	6253711	-	-	-	3.700	0.14567				
8597371	-	-	-	-	3.710	0.14606				
8597372	-	-	-	-	3.720	0.14646				
8597373	-	-	-	-	3.730	0.14685				
8597374	-	-	-	-	3.740	0.14724				
8597375	-	-	-	-	3.750	0.14764				
8597376	-	-	-	-	3.760	0.14803				
8597377	-	-	-	-	3.770	0.14843				
							39	71		
							43	75		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page **EXD**

Work Material																		
List No.	P					M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1600 (Continued)

SPEED FEED	HSSE	TiN	TiAlN	JOBBERS	40°
P391					

EX-SUS-GDR, Ideal for Stainless Steel



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597378	-	-	-	-	3.780	0.14882	43	75	4	130°
8597379	-	-	-	-	3.790	0.14921				
62538	6253811	-	-	-	3.800	0.14961				
8597381	-	-	-	-	3.810	0.15000				
8597382	859738211	-	-	-	3.820	0.15039				
8597383	859738311	-	-	-	3.830	0.15079				
8597384	859738411	-	-	-	3.840	0.15118				
8597385	-	-	-	-	3.850	0.15157				
8597386	-	-	-	-	3.860	0.15197				
8597387	-	-	-	-	3.870	0.15236				
8597388	-	-	-	-	3.880	0.15276				
8597389	-	-	-	-	3.890	0.15315				
62539	-	-	-	-	3.900	0.15354				
8597391	-	-	-	-	3.910	0.15394				
8597392	-	-	-	-	3.920	0.15433				
8597393	-	-	-	-	3.930	0.15472				
8597394	-	-	-	-	3.940	0.15512				
8597395	-	-	-	-	3.950	0.15551				
8597396	-	-	-	-	3.960	0.15591				
8597397	859739711	-	-	-	3.970	0.15630				
8597398	-	-	-	-	3.980	0.15669				
8597399	859739911	-	-	-	3.990	0.15709				
62540	6254011	-	-	-	4.000	0.15748				
8597401	-	-	-	-	4.010	0.15787				
8597402	-	-	-	-	4.020	0.15827				
8597403	-	-	-	-	4.030	0.15866				
8597404	859740411	-	-	-	4.040	0.15906				
8597405	-	-	-	-	4.050	0.15945				
8597406	-	-	-	-	4.060	0.15984				
8597407	-	-	-	-	4.070	0.16024				
8597408	-	-	-	-	4.080	0.16063				
8597409	859740911	-	-	-	4.090	0.16102				
62541	-	-	-	-	4.100	0.16142				
8597411	-	-	-	-	4.110	0.16181				
8597412	-	-	-	-	4.120	0.16220				
8597413	-	-	-	-	4.130	0.16260				
8597414	-	-	-	-	4.140	0.16299				
8597415	-	-	-	-	4.150	0.16339				
8597416	-	-	-	-	4.160	0.16378				
8597417	-	-	-	-	4.170	0.16417				
8597418	-	-	-	-	4.180	0.16457				
8597419	-	-	-	-	4.190	0.16496				
62542	-	-	-	-	4.200	0.16535				
8597421	-	-	-	-	4.210	0.16575				
8597422	859742211	-	-	-	4.220	0.16614				
8597423	-	-	-	-	4.230	0.16654				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
---------------------------	-------------	------------	--------------	----------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597424	-	-	-	-	4.240	0.16693	43	87	6	120°
8597425	-	-	-	-	4.250	0.16732				
8597426	-	-	-	-	4.260	0.16772				
8597427	-	-	-	-	4.270	0.16811				
8597428	-	-	-	-	4.280	0.16850				
8597429	-	-	-	-	4.290	0.16890				
62543	-	-	-	-	4.300	0.16929				
8597431	-	-	-	-	4.310	0.16969				
8597432	-	-	-	-	4.320	0.17008				
8597433	-	-	-	-	4.330	0.17047				
8597434	-	-	-	-	4.340	0.17087				
8597435	-	-	-	-	4.350	0.17126				
8597436	-	-	-	-	4.360	0.17165				
8597437	859743711	-	-	-	4.370	0.17205				
8597438	-	-	-	-	4.380	0.17244				
8597439	-	-	-	-	4.390	0.17283				
62544	-	-	-	-	4.400	0.17323				
8597441	-	-	-	-	4.410	0.17362				
8597442	-	-	-	-	4.420	0.17402				
8597443	-	-	-	-	4.430	0.17441				
8597444	-	-	-	-	4.440	0.17480				
8597445	-	-	-	-	4.450	0.17520				
8597446	-	-	-	-	4.460	0.17559				
8597447	-	-	-	-	4.470	0.17598				
8597448	-	-	-	-	4.480	0.17638				
8597449	-	-	-	-	4.490	0.17677				
62545	6254511	-	-	-	4.500	0.17717				
8597451	-	-	-	-	4.510	0.17756				
8597452	-	-	-	-	4.520	0.17795				
8597453	-	-	-	-	4.530	0.17835				
8597454	-	-	-	-	4.540	0.17874				
8597455	-	-	-	-	4.550	0.17913				
8597456	-	-	-	-	4.560	0.17953				
8597457	859745711	-	-	-	4.570	0.17992				
8597458	-	-	-	-	4.580	0.18031				
8597459	-	-	-	-	4.590	0.18071				
62546	-	-	-	-	4.600	0.18110				
8597461	-	-	-	-	4.610	0.18150				
8597462	-	-	-	-	4.620	0.18189				
8597463	-	-	-	-	4.630	0.18228				
8597464	-	-	-	-	4.640	0.18268				
8597465	-	-	-	-	4.650	0.18307				
8597466	-	-	-	-	4.660	0.18346				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page

Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED	HSSE	TiN	TiAlN	JOBBERS	40°
P391					



Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597467	-	-	-	-	4.670	0.18386	47	91		
8597468	-	-	-	-	4.680	0.18425				
8597469	-	-	-	-	4.690	0.18465				
62547	-	-	-	-	4.700	0.18504				
8597471	-	-	-	-	4.710	0.18543				
8597472	-	-	-	-	4.720	0.18583				
8597473	-	-	-	-	4.730	0.18622				
8597474	-	-	-	-	4.740	0.18661				
8597475	859747511	-	-	-	4.750	0.18701				
8597476	859747611	-	-	-	4.760	0.18740				
8597477	-	-	-	-	4.770	0.18780				
8597478	-	-	-	-	4.780	0.18819				
8597479	-	-	-	-	4.790	0.18858				
62548	6254811	-	-	-	4.800	0.18898				
8597481	-	-	-	-	4.810	0.18937				
8597482	-	-	-	-	4.820	0.18976				
8597483	-	-	-	-	4.830	0.19016				
8597484	-	-	-	-	4.840	0.19055				
8597485	859748511	-	-	-	4.850	0.19094				
8597486	-	-	-	-	4.860	0.19134				
8597487	-	-	-	-	4.870	0.19173				
8597488	-	-	-	-	4.880	0.19213				
8597489	-	-	-	-	4.890	0.19252				
62549	-	-	-	-	4.900	0.19291				
8597491	-	-	-	-	4.910	0.19331				
8597492	-	-	-	-	4.920	0.19370				
8597493	-	-	-	-	4.930	0.19409				
8597494	-	-	-	-	4.940	0.19449				
8597495	-	-	-	-	4.950	0.19488				
8597496	-	-	-	-	4.960	0.19528				
8597497	-	-	-	-	4.970	0.19567				
8597498	859749811	-	-	-	4.980	0.19606				
8597499	-	-	-	-	4.990	0.19646				
62550	-	-	-	-	5.000	0.19685				
8597501	-	-	-	-	5.010	0.19724				
8597502	859750211	-	-	-	5.020	0.19764				
8597503	-	-	-	-	5.030	0.19803				
8597504	-	-	-	-	5.040	0.19843				
8597505	-	-	-	-	5.050	0.19882				
8597506	-	-	-	-	5.060	0.19921				
8597507	-	-	-	-	5.070	0.19961				
8597508	-	-	-	-	5.080	0.20000				
8597509	-	-	-	-	5.090	0.20039				
62551	-	-	-	-	5.100	0.20079				
8597511	859751111	-	-	-	5.110	0.20118				
8597512	-	-	-	-	5.120	0.20157				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
--------------------	------	-----	-------	---------	-----

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597513	-	-	-	-	5.130	0.20197	52	96	6	120°
8597514	-	-	-	-	5.140	0.20236				
8597515	-	-	-	-	5.150	0.20276				
8597516	859751611	-	-	-	5.160	0.20315				
8597517	-	-	-	-	5.170	0.20354				
8597518	-	-	-	-	5.180	0.20394				
8597519	-	-	-	-	5.190	0.20433				
62552	6255211	-	-	-	5.200	0.20472				
8597521	-	-	-	-	5.210	0.20512				
8597522	-	-	-	-	5.220	0.20551				
8597523	-	-	-	-	5.230	0.20591				
8597524	-	-	-	-	5.240	0.20630				
8597525	-	-	-	-	5.250	0.20669				
8597526	-	-	-	-	5.260	0.20709				
8597527	-	-	-	-	5.270	0.20748				
8597528	-	-	-	-	5.280	0.20787				
8597529	-	-	-	-	5.290	0.20827				
62553	-	-	-	-	5.300	0.20866				
8597531	859753111	-	-	-	5.310	0.20906				
8597532	-	-	-	-	5.320	0.20945				
8597533	-	-	-	-	5.330	0.20984				
8597534	-	-	-	-	5.340	0.21024				
8597535	-	-	-	-	5.350	0.21063				
8597536	-	-	-	-	5.360	0.21102				
8597537	-	-	-	-	5.370	0.21142				
8597538	-	-	-	-	5.380	0.21181				
8597539	-	-	-	-	5.390	0.21220				
62554	-	-	-	-	5.400	0.21260				
8597541	-	-	-	-	5.410	0.21299				
8597542	-	-	-	-	5.420	0.21339				
8597543	-	-	-	-	5.430	0.21378				
8597544	-	-	-	-	5.440	0.21417				
8597545	-	-	-	-	5.450	0.21457				
8597546	-	-	-	-	5.460	0.21496				
8597547	859754711	-	-	-	5.470	0.21535				
8597548	-	-	-	-	5.480	0.21575				
8597549	-	-	-	-	5.490	0.21614				
62555	6255511	-	-	-	5.500	0.21654				
8597551	-	-	-	-	5.510	0.21693				
8597552	-	-	-	-	5.520	0.21732				
8597553	-	-	-	-	5.530	0.21772				
8597554	-	-	-	-	5.540	0.21811				
8597555	-	-	-	-	5.550	0.21850				

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.

continued on next page

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						


good best





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel



SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
--------------------	------	-----	-------	---------	-----

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597556	-	-	-	-	5.560	0.21890	57	101	6	120°
8597557	-	-	-	-	5.570	0.21929				
8597558	-	-	-	-	5.580	0.21969				
8597559	-	-	-	-	5.590	0.22008				
62556	-	-	-	-	5.600	0.22047				
8597561	859756111	-	-	-	5.610	0.22087				
8597562	-	-	-	-	5.620	0.22126				
8597563	-	-	-	-	5.630	0.22165				
8597564	-	-	-	-	5.640	0.22205				
8597565	-	-	-	-	5.650	0.22244				
8597566	-	-	-	-	5.660	0.22283				
8597567	-	-	-	-	5.670	0.22323				
8597568	-	-	-	-	5.680	0.22362				
8597569	-	-	-	-	5.690	0.22402				
62557	-	-	-	-	5.700	0.22441				
8597571	-	-	-	-	5.710	0.22480				
8597572	-	-	-	-	5.720	0.22520				
8597573	-	-	-	-	5.730	0.22559				
8597574	-	-	-	-	5.740	0.22598				
8597575	-	-	-	-	5.750	0.22638				
8597576	-	-	-	-	5.760	0.22677				
8597577	-	-	-	-	5.770	0.22717				
8597578	-	-	-	-	5.780	0.22756				
8597579	-	-	-	-	5.790	0.22795				
62558	-	-	-	-	5.800	0.22835				
8597581	-	-	-	-	5.810	0.22874				
8597582	-	-	-	-	5.820	0.22913				
8597583	-	-	-	-	5.830	0.22953				
8597584	-	-	-	-	5.840	0.22992				
8597585	-	-	-	-	5.850	0.23031				
8597586	-	-	-	-	5.860	0.23071				
8597587	-	-	-	-	5.870	0.23110				
8597588	-	-	-	-	5.880	0.23150				
8597589	-	-	-	-	5.890	0.23189				
62559	-	-	-	-	5.900	0.23228				
8597591	-	-	-	-	5.910	0.23268				
8597592	-	-	-	-	5.920	0.23307				
8597593	-	-	-	-	5.930	0.23346				
8597594	-	-	-	-	5.940	0.23386				
8597595	859759511	-	-	-	5.950	0.23425				
8597596	-	-	-	-	5.960	0.23465				
8597597	-	-	-	-	5.970	0.23504				
8597598	-	-	-	-	5.980	0.23543				
8597599	-	-	-	-	5.990	0.23583				
62560	-	-	-	-	6.000	0.23622				
8597605	-	-	-	-	6.050	0.23819				
						63	107	8		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAlN.





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
---------------------------	-------------	------------	--------------	----------------	------------

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
62561	6256111	-	-	-	6.100	0.24016	63	107	8	120°
8597615	-	-	-	-	6.150	0.24213				
62562	-	-	-	-	6.200	0.24409				
8597625	-	-	-	-	6.250	0.24606				
62563	-	-	-	-	6.300	0.24803				
8597635	859763511	1/4	-	E	6.350	0.25000				
62564	-	-	-	-	6.400	0.25197				
8597645	-	-	-	-	6.450	0.25394				
62565	6256511	-	-	-	6.500	0.25591				
8597655	-	-	-	-	6.550	0.25787				
62566	6256611	-	-	-	6.600	0.25984				
8597665	-	-	-	-	6.650	0.26181				
62567	-	-	-	-	6.700	0.26378				
8597675	859767511	-	-	-	6.750	0.26575				
62568	6256811	-	-	-	6.800	0.26772				
8597685	-	-	-	-	6.850	0.26969				
62569	-	-	-	-	6.900	0.27165				
8597695	-	-	-	-	6.950	0.27362				
62570	6257011	-	-	-	7.000	0.27559				
8597705	-	-	-	-	7.050	0.27756				
62571	-	-	-	-	7.100	0.27953				
8597715	-	-	-	-	7.150	0.28150				
62572	-	-	-	-	7.200	0.28346				
8597725	859772511	-	-	-	7.250	0.28543				
62573	-	-	-	-	7.300	0.28740				
8597735	-	-	-	-	7.350	0.28937				
62574	6257411	-	-	-	7.400	0.29134				
8597745	-	-	-	-	7.450	0.29331				
62575	-	-	-	-	7.500	0.29528				
8597755	-	-	-	-	7.550	0.29724				
62576	-	-	-	-	7.600	0.29921				
8597765	-	-	-	-	7.650	0.30118				
62577	6257711	-	-	-	7.700	0.30315				
8597775	-	-	-	-	7.750	0.30512				
62578	-	-	-	-	7.800	0.30709				
8597785	-	-	-	-	7.850	0.30906				
62579	6257911	-	-	-	7.900	0.31102				
8597795	-	-	-	-	7.950	0.31299				
62580	-	-	-	-	8.000	0.31496				
8597805	-	-	-	-	8.050	0.31693				
62581	-	-	-	-	8.100	0.31890				
8597815	-	-	-	-	8.150	0.32087				
62582	-	-	-	-	8.200	0.32283				

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order: 11 = TiAlN.

continued on next page

List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							


good best





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel



SPEED FEED	HSSE	TiN	TiAlN	JOBBERS	40°
P391					

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤30	+0 / -0.033	+0 / -0.0013
30<D≤32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8597825	-	-	-	-	8.250	0.32480	75	125	10	120°
62583	-	-	-	-	8.300	0.32677				
8597835	-	-	-	-	8.350	0.32874				
62584	-	-	-	-	8.400	0.33071				
8597845	-	-	-	-	8.450	0.33268				
62585	6258511	-	-	-	8.500	0.33465				
8597855	-	-	-	-	8.550	0.33661				
62586	6258611	-	-	-	8.600	0.33858				
8597865	-	-	-	-	8.650	0.34055				
62587	-	-	-	-	8.700	0.34252				
8597875	-	-	-	-	8.750	0.34449				
62588	-	-	-	-	8.800	0.34646				
8597885	-	-	-	-	8.850	0.34843				
62589	-	-	-	-	8.900	0.35039				
8597895	-	-	-	-	8.950	0.35236				
62590	-	-	-	-	9.000	0.35433				
8597905	-	-	-	-	9.050	0.35630				
62591	6259111	-	-	-	9.100	0.35827				
8597915	-	-	-	-	9.150	0.36024				
62592	6259211	-	-	-	9.200	0.36220				
8597925	859792511	-	-	-	9.250	0.36417				
62593	-	-	-	-	9.300	0.36614				
8597935	859793511	-	-	-	9.350	0.36811				
62594	-	-	-	-	9.400	0.37008				
8597945	-	-	-	-	9.450	0.37205				
62595	6259511	-	-	-	9.500	0.37402				
8597955	-	-	-	-	9.550	0.37598				
62596	-	-	-	-	9.600	0.37795				
8597965	-	-	-	-	9.650	0.37992				
62597	-	-	-	-	9.700	0.38189				
8597975	-	-	-	-	9.750	0.38386				
62598	6259811	-	-	-	9.800	0.38583				
8597985	-	-	-	-	9.850	0.38780				
62599	-	-	-	-	9.900	0.38976				
8597995	-	-	-	-	9.950	0.39173				
62600	-	-	-	-	10.000	0.39370				
8598005	-	-	-	-	10.050	0.39567				
62601	-	-	-	-	10.100	0.39764				
8598015	-	-	-	-	10.150	0.39961				
62602	6260211	-	-	-	10.200	0.40157				
8598025	-	-	-	-	10.250	0.40354				
62603	-	-	-	-	10.300	0.40551				
8598035	-	-	-	-	10.350	0.40748				
62604	-	-	-	-	10.400	0.40945				
8598045	-	-	-	-	10.450	0.41142				
62605	-	-	-	-	10.500	0.41339				

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.





List 1600 (Continued)

EX-SUS-GDR, Ideal for Stainless Steel

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
--------------------	------	-----	-------	---------	-----

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
8598055	-	-	-	-	10.550	0.41535	87	144	12	120°
62606	-	-	-	-	10.600	0.41732				
8598065	-	-	-	-	10.650	0.41929				
62607	6260711	-	-	-	10.700	0.42126				
8598075	-	-	-	-	10.750	0.42323				
62608	-	-	-	-	10.800	0.42520				
8598085	-	-	-	-	10.850	0.42717				
62609	6260911	-	-	-	10.900	0.42913				
8598095	-	-	-	-	10.950	0.43110				
62610	6261011	-	-	-	11.000	0.43307				
8598105	-	-	-	-	11.050	0.43504				
62611	6261111	-	-	-	11.100	0.43701				
8598115	-	-	-	-	11.150	0.43898				
62612	-	-	-	-	11.200	0.44094				
8598125	-	-	-	-	11.250	0.44291				
62613	-	-	-	-	11.300	0.44488				
8598135	-	-	-	-	11.350	0.44685				
62614	-	-	-	-	11.400	0.44882				
8598145	-	-	-	-	11.450	0.45079				
62615	-	-	-	-	11.500	0.45276				
8598155	-	-	-	-	11.550	0.45472				
62616	-	-	-	-	11.600	0.45669				
8598165	-	-	-	-	11.650	0.45866				
62617	-	-	-	-	11.700	0.46063				
8598175	-	-	-	-	11.750	0.46260				
62618	-	-	-	-	11.800	0.46457				
8598185	-	-	-	-	11.850	0.46654				
62619	-	-	-	-	11.900	0.46850				
8598195	-	-	-	-	11.950	0.47047				
62620	-	-	-	-	12.000	0.47244				
62621	-	-	-	-	12.100	0.47638				
62622	-	-	-	-	12.200	0.48031				
62623	6262311	-	-	-	12.300	0.48425				
62624	6262411	-	-	-	12.400	0.48819				
62625	-	-	-	-	12.500	0.49213				
62626	6262611	-	-	-	12.600	0.49606				
62627	6262711	1/2	-	-	12.700	0.50000				
62628	-	-	-	-	12.800	0.50394				
62629	-	-	-	-	12.900	0.50787				
62630	-	-	-	-	13.000	0.51181				
62635	-	-	-	-	13.500	0.53150				
62640	-	-	-	-	14.000	0.55118				
62641	-	-	-	-	14.100	0.55512				
							106	166	16	
							109	169		

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order: 11 = TiAlN.

continued on next page

Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1600 (Continued)

SPEED FEED P391	HSSE	TiN	TiAlN	JOBBERS	40°
---------------------------	-------------	------------	--------------	----------------	------------

EX-SUS-GDR, Ideal for Stainless Steel

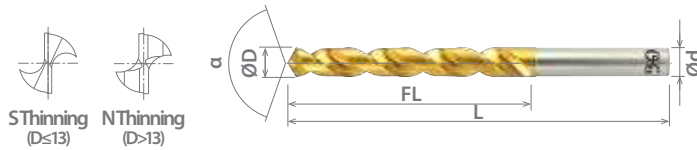

Cutting Diameter Tolerance (h8)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 30	+0 / -0.033	+0 / -0.0013
30 < D ≤ 32	+0 / -0.039	+0 / -0.0015

TiN EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)	Point Angle α
		Fractional Size	Wire Gage	Letter Size	mm	Inch				
62645	-	-	-	-	14.500	0.57087	109	169	16	120°
62650	6265011	-	-	-	15.000	0.59055	112	172		
62655	-	-	-	-	15.500	0.61024				
62656	-	-	-	-	15.600	0.61417				
62660	-	-	-	-	16.000	0.62992	115	181		
62665	-	-	-	-	16.500	0.64961				
62670	-	-	-	-	17.000	0.66929				
62675	-	-	-	-	17.500	0.68898	118	184		
62676	-	-	-	-	17.600	0.69291				
62680	-	-	-	-	18.000	0.70866				
62685	-	-	-	-	18.500	0.72835	122	188		
62690	-	-	-	-	19.000	0.74803				
62695	-	-	-	-	19.500	0.76772				
62696	-	-	-	-	19.600	0.77165	125	191		
62700	-	-	-	-	20.000	0.78740				
62705	-	-	-	-	20.500	0.80709				
62710	-	-	-	-	21.000	0.82677	128	204		
62715	-	-	-	-	21.500	0.84646				
62720	-	-	-	-	22.000	0.86614				
62725	-	-	-	-	22.500	0.88583	132	208		
62730	6273011	-	-	-	23.000	0.90551				
62735	-	-	-	-	23.500	0.92520				
62740	-	-	-	-	24.000	0.94488	140	216		
62745	-	-	-	-	24.500	0.96457				
62750	-	-	-	-	25.000	0.98425				
62755	-	-	-	-	25.500	1.00394	145	225		
62760	-	-	-	-	26.000	1.02362				
62765	-	-	-	-	26.500	1.04331				
62770	-	-	-	-	27.000	1.06299	150	230		
62780	-	-	-	-	28.000	1.10236				
62790	-	-	-	-	29.000	1.14173				
62800	-	-	-	-	30.000	1.18110	155	235		
62810	-	-	-	-	31.000	1.22047				
62820	-	-	-	-	32.000	1.25984				
						165	245	32		
						160	240			
						160	240			

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order: 11 = TiAlN.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1600	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 1200


TiN-NC-LDS, 60°, 90° & 120° Spot Drills

SPEED FEED P392	HSS	BR	TiN	STUB	20°
---------------------------	------------	-----------	------------	-------------	------------



EDP Number		Diameter					Min Drill Hole Size	Flute Length	Overall Length	Shank Diameter	Point Angle
Bright	TiN	Fractional Size	Wire Gage	Letter Size	mm	Inch		FL (mm)	L (mm)	d (mm)	α
-	63703	-	-	-	-	-	1.5	-	-	-	60°
62903	63603	-	-	-	3.000	0.11811	1.1	11	48	3	90°
62923	63653	-	-	-	-	-	-	-	-	-	120°
-	63704	-	-	-	-	-	1.7	-	-	-	60°
62904	63604	-	-	-	4.000	0.15748	1.3	15	54	4	90°
62924	63654	-	-	-	-	-	-	-	-	-	120°
-	63706	-	-	-	-	-	1.9	-	-	-	60°
62906	63606	-	-	-	6.000	0.23622	1.5	20	72	6	90°
62926	63656	-	-	-	-	-	-	-	-	-	120°
-	63708	-	-	-	-	-	1.9	-	-	-	60°
62908	63608	-	-	-	8.000	0.31496	1.6	26	81	8	90°
62928	63658	-	-	-	-	-	-	-	-	-	120°
-	63710	-	-	-	-	-	2.1	-	-	-	60°
62910	63610	-	-	-	10.000	0.39370	-	30	93	10	90°
62930	63660	-	-	-	-	-	-	-	-	-	120°
-	63712	-	-	-	-	-	2.1	-	-	-	60°
62912	63612	-	-	-	12.000	0.47244	-	36	108	12	90°
62932	63662	-	-	-	-	-	-	-	-	-	120°
62916	63616	-	-	-	16.000	0.62992	3	41	118	16	90°
62936	-	-	-	-	-	-	-	-	-	-	120°
62918	63618	-	-	-	20.000	0.78740	3	53	132	20	90°
62938	-	-	-	-	-	-	-	-	-	-	120°
62920	63620	-	-	-	25.000	0.98425	3	60	151	25	90°
62940	-	-	-	-	-	-	-	-	-	-	120°

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order: 11 = TiAIN.

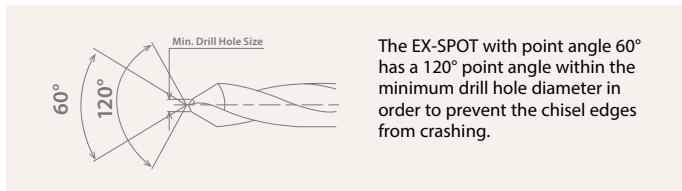

Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 1250

SPEED FEED P392	HSS	BR	STUB	20°
--------------------	-----	----	------	-----

LS-NC-LDS, Long Shank, 90° Spot Drill



EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
63503	-	-	-	3.000	0.11811	11	75	3
63504	-	-	-	4.000	0.15748	15	100	4
63506	-	-	-	6.000	0.23622	20	150	6
63508	-	-	-	8.000	0.31496	26		8
63510	-	-	-	10.000	0.39370	30	200	10
63512	-	-	-	12.000	0.47244	36		12
63516	-	-	-	16.000	0.62992	41	250	16
63518	-	-	-	20.000	0.78740	53		20
63520	-	-	-	25.000	0.98425	60		25

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order: 05 = TiN, 11 = TiAlN



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1250	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							

good best





List 163-SO

Parabolic Flute, Stub Drills

NEW SPEED FEED P393 HSS-Co5 TYPE FS BR TiAlN STUB 40°



Standard Point (D<1.5mm)
Split Point (D≥1.5mm)

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤14	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1630100-SO	1630100A-SO	-	-	-	1.000	0.03937	6	26	1.00
10	1630102-SO	1630102A-SO	-	60	-	1.016	0.04000			1.02
10	1630104-SO	1630104A-SO	-	59	-	1.041	0.04100			1.04
10	1630107-SO	1630107A-SO	-	58	-	1.067	0.04200	7	28	1.07
10	1630109-SO	1630109A-SO	-	57	-	1.092	0.04300			1.09
10	1630110-SO	1630110A-SO	-	-	-	1.100	0.04331			1.10
10	-	1630115A-SO	-	-	-	1.150	0.04528	8	30	1.15
10	1630118-SO	1630118A-SO	-	56	-	1.181	0.04650			1.18
10	1630119-SO	1630119A-SO	3/64	-	-	1.191	0.04688			1.19
10	1630120-SO	1630120A-SO	-	-	-	1.200	0.04724	9	32	1.20
10	1630125-SO	-	-	-	-	1.250	0.04921			1.25
10	1630130-SO	1630130A-SO	-	-	-	1.300	0.05118			1.30
10	1630132-SO	1630132A-SO	-	55	-	1.321	0.05200	10	34	1.32
10	1630135-SO	1630135A-SO	-	-	-	1.350	0.05315			1.35
10	1630139-SO	1630139A-SO	-	54	-	1.397	0.05500			1.40
10	1630140-SO	1630140A-SO	-	-	-	1.400	0.05512	11	36	1.45
10	1630145-SO	1630145A-SO	-	-	-	1.450	0.05709			1.50
10	1630150-SO	1630150A-SO	-	-	-	1.500	0.05906			1.51
10	1630152-SO	1630152A-SO	-	53	-	1.511	0.05950	12	38	1.55
10	1630155-SO	1630155A-SO	-	-	-	1.550	0.06102			1.59
10	1630159-SO	1630159A-SO	1/16	-	-	1.588	0.06250			1.60
10	1630160-SO	1630160A-SO	-	-	-	1.600	0.06299	10	34	1.61
10	1630161-SO	1630161A-SO	-	52	-	1.613	0.06350			1.65
10	1630165-SO	1630165A-SO	-	-	-	1.650	0.06496			1.67
10	1630167-SO	1630167A-SO	-	-	-	1.670	0.06575	11	36	1.70
10	1630169-SO	1630169A-SO	-	51	-	1.702	0.06700			1.75
10	1630170-SO	1630170A-SO	-	-	-	1.700	0.06693			1.78
10	1630175-SO	1630175A-SO	-	-	-	1.750	0.06890	12	38	1.80
10	1630178-SO	1630178A-SO	-	50	-	1.778	0.07000			1.85
10	1630180-SO	1630180A-SO	-	-	-	1.800	0.07087			1.90
10	1630185-SO	1630185A-SO	-	49	-	1.854	0.07300	10	34	1.93
10	1630190-SO	1630190A-SO	-	-	-	1.900	0.07480			1.95
10	1630193-SO	1630193A-SO	-	48	-	1.930	0.07600			1.98
10	1630195-SO	1630195A-SO	-	-	-	1.950	0.07677	12	38	1.99
10	1630198-SO	1630198A-SO	5/64	-	-	1.984	0.07813			2.00
10	1630199-SO	1630199A-SO	-	47	-	1.994	0.07850			2.05
10	1630200-SO	1630200A-SO	-	-	-	2.000	0.07874	10	34	2.06
10	1630205-SO	1630205A-SO	-	-	-	2.050	0.08071			2.08
10	1630206-SO	1630206A-SO	-	46	-	2.057	0.08100			2.08
10	1630208-SO	1630208A-SO	-	45	-	2.083	0.08200			

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels				Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	Alloy Steels		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
163-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best





List 163-SO (Continued)

Parabolic Flute, Stub Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAlN	STUB	40°
------------	---------------------------	----------------	----------------	-----------	--------------	-------------	------------



Standard Point (D<1.5mm)
Split Point (D≥1.5mm)

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤14	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1630210-SO	1630210A-SO	-	-	-	2.100	0.08268	12	38	2.10
10	1630215-SO	1630215A-SO	-	-	-	2.150	0.08465			2.15
10	1630218-SO	1630218A-SO	-	44	-	2.184	0.08600			2.18
10	1630220-SO	1630220A-SO	-	-	-	2.200	0.08661			2.20
10	1630225-SO	1630225A-SO	-	-	-	2.250	0.08858	13	40	2.25
10	1630226-SO	1630226A-SO	-	43	-	2.261	0.08900			2.26
10	1630230-SO	1630230A-SO	-	-	-	2.300	0.09055			2.30
10	1630235-SO	-	-	-	-	2.350	0.09252			2.35
10	1630237-SO	1630237A-SO	-	42	-	2.375	0.09350			2.37
10	1630238-SO	1630238A-SO	3/32	-	-	2.381	0.09375			2.38
10	1630240-SO	1630240A-SO	-	-	-	2.400	0.09449			2.40
10	1630244-SO	1630244A-SO	-	41	-	2.438	0.09600			2.44
10	1630245-SO	1630245A-SO	-	-	-	2.450	0.09646			2.45
10	-	1630248A-SO	-	-	-	2.480	0.09764			2.48
10	1630249-SO	1630249A-SO	-	40	-	2.489	0.09800	14	43	2.49
10	1630250-SO	1630250A-SO	-	-	-	2.500	0.09843			2.50
10	1630253-SO	1630253A-SO	-	39	-	2.527	0.09950			2.53
10	1630255-SO	-	-	-	-	2.550	0.10039			2.55
10	1630258-SO	1630258A-SO	-	38	-	2.578	0.10150			2.58
10	1630260-SO	1630260A-SO	-	-	-	2.600	0.10236			2.60
10	1630264-SO	1630264A-SO	-	37	-	2.642	0.10400			2.64
10	1630270-SO	1630270A-SO	-	-	-	2.700	0.10630			2.70
10	1630271-SO	1630271A-SO	-	36	-	2.705	0.10650			2.71
10	1630275-SO	1630275A-SO	-	-	-	2.750	0.10827			2.75
10	1630278-SO	1630278A-SO	7/64	-	-	2.778	0.10938			2.78
10	1630279-SO	1630279A-SO	-	35	-	2.794	0.11000			2.79
10	1630280-SO	1630280A-SO	-	-	-	2.800	0.11024			2.80
10	1630282-SO	1630282A-SO	-	34	-	2.819	0.11100	16	46	2.82
10	1630285-SO	1630285A-SO	-	-	-	2.850	0.11220			2.85
10	1630287-SO	1630287A-SO	-	33	-	2.870	0.11300			2.87
10	1630290-SO	1630290A-SO	-	-	-	2.900	0.11417			2.90
10	1630295-SO	1630295A-SO	-	32	-	2.946	0.11600			2.95
10	1630300-SO	1630300A-SO	-	-	-	3.000	0.11811			3.00
10	1630305-SO	1630305A-SO	-	31	-	3.048	0.12000			3.05
10	1630310-SO	1630310A-SO	-	-	-	3.100	0.12205			3.10
10	1630315-SO	1630315A-SO	-	-	-	3.150	0.12402			3.15
10	1630318-SO	1630318A-SO	1/8	-	-	3.175	0.12500			3.18
10	1630320-SO	1630320A-SO	-	-	-	3.200	0.12598			3.20
10	1630322-SO	1630322A-SO	-	-	-	3.220	0.12598	18	49	3.22
10	1630323-SO	1630323A-SO	-	-	-	3.230	0.12598			3.23
10	1630325-SO	1630325A-SO	-	-	-	3.250	0.12598			3.25
10	1630326-SO	1630326A-SO	-	30	-	3.264	0.12850			3.26
10	1630330-SO	1630330A-SO	-	-	-	3.300	0.12992			3.30
10	1630335-SO	1630335A-SO	-	-	-	3.350	0.13189			3.35
10	1630340-SO	1630340A-SO	-	-	-	3.400	0.13386			3.40
10	1630345-SO	1630345A-SO	-	29	-	3.454	0.13600			3.45
10	1630350-SO	1630350A-SO	-	-	-	3.500	0.13780			3.50
10	1630357-SO	1630357A-SO	9/64	-	-	3.572	0.14063	20	52	3.57
10	1630360-SO	1630360A-SO	-	-	-	3.600	0.14173			3.60
10	1630366-SO	1630366A-SO	-	27	-	3.658	0.14400			3.66

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 163-SO (Continued)

Parabolic Flute, Stub Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	STUB	40°
------------	---------------------------	----------------	----------------	-----------	--------------	-------------	------------

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1630370-SO	1630370A-SO	-	-	-	3.700	0.14567	20	52	3.70
10	1630373-SO	1630373A-SO	-	26	-	3.734	0.14700			3.73
10	1630379-SO	1630379A-SO	-	25	-	3.797	0.14950	22	55	3.80
10	1630380-SO	1630380A-SO	-	-	-	3.800	0.14961			3.86
10	1630386-SO	1630386A-SO	-	24	-	3.861	0.15200			3.90
10	1630390-SO	1630390A-SO	-	-	-	3.900	0.15354			3.91
10	1630391-SO	1630391A-SO	-	23	-	3.912	0.15400			3.97
10	1630397-SO	1630397A-SO	5/32	-	-	3.969	0.15625			3.99
10	1630399-SO	1630399A-SO	-	22	-	3.988	0.15700			4.00
10	1630400-SO	1630400A-SO	-	-	-	4.000	0.15748			4.04
10	1630404-SO	1630404A-SO	-	21	-	4.039	0.15900			4.09
10	1630409-SO	1630409A-SO	-	20	-	4.089	0.16100			4.10
10	1630410-SO	1630410A-SO	-	-	-	4.100	0.16142	4.20		
10	1630420-SO	1630420A-SO	-	-	-	4.200	0.16535	4.22		
10	1630422-SO	1630422A-SO	-	19	-	4.216	0.16600	4.25		
10	1630425-SO	1630425A-SO	-	-	-	4.250	0.16732	4.30		
10	1630430-SO	1630430A-SO	-	-	-	4.300	0.16929	4.31		
10	1630431-SO	1630431A-SO	-	18	-	4.305	0.16950	4.37		
10	1630437-SO	1630437A-SO	11/64	-	-	4.366	0.17188	4.39		
10	1630439-SO	1630439A-SO	-	17	-	4.394	0.17300	4.40		
10	1630440-SO	1630440A-SO	-	-	-	4.400	0.17323	4.45		
10	-	1630445A-SO	-	-	-	4.450	0.17520	4.50		
10	1630449-SO	1630449A-SO	-	16	-	4.496	0.17700	4.57		
10	1630450-SO	1630450A-SO	-	-	-	4.500	0.17717	4.60		
10	1630457-SO	1630457A-SO	-	15	-	4.572	0.18000	4.62		
10	1630460-SO	1630460A-SO	-	-	-	4.600	0.18110	4.69		
10	-	1630462A-SO	-	14	-	4.623	0.18200	4.75		
10	1630469-SO	1630469A-SO	-	13	-	4.699	0.18500	4.76		
10	1630475-SO	1630475A-SO	-	-	-	4.750	0.18701	4.80		
10	1630476-SO	1630476A-SO	3/16	-	-	4.763	0.18750	4.86		
10	1630480-SO	1630480A-SO	-	-	-	4.800	0.18898	4.90		
10	1630479-SO	1630479A-SO	-	12	-	4.801	0.18900	4.92		
10	1630485-SO	1630485A-SO	-	11	-	4.851	0.19100	4.98		
10	1630490-SO	1630490A-SO	-	-	-	4.900	0.19291	5.00		
10	1630492-SO	1630492A-SO	-	10	-	4.915	0.19350	5.05		
10	1630498-SO	1630498A-SO	-	9	-	4.978	0.19600	5.10		
10	1630500-SO	1630500A-SO	-	-	-	5.000	0.19685	5.11		
10	1630506-SO	1630506A-SO	-	8	-	5.055	0.19900	5.16		
10	1630510-SO	1630510A-SO	-	-	-	5.100	0.20079	5.18		
10	1630511-SO	1630511A-SO	-	7	-	5.105	0.20100	5.20		
10	1630516-SO	1630516A-SO	13/64	-	-	5.159	0.20313	5.22		
10	1630518-SO	1630518A-SO	-	6	-	5.182	0.20400	5.30		
10	1630520-SO	1630520A-SO	-	-	-	5.200	0.20472	5.31		
10	1630522-SO	1630522A-SO	-	5	-	5.220	0.20550			
10	1630530-SO	1630530A-SO	-	-	-	5.300	0.20866			
10	1630532-SO	1630532A-SO	-	4	-	5.309	0.20900			

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels				Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	Alloy Steels		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
163-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 163-SO (Continued)

Parabolic Flute, Stub Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	STUB	40°
------------	---------------------------	----------------	----------------	-----------	--------------	-------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 14	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1630540-SO	1630540A-SO	-	-	-	5.400	0.21260	28	66	5.40
10	1630541-SO	1630541A-SO	-	3	-	5.410	0.21300			5.41
10	1630550-SO	1630550A-SO	-	-	-	5.500	0.21654			5.50
10	1630556-SO	1630556A-SO	7/32	-	-	5.556	0.21875			5.56
10	1630560-SO	1630560A-SO	-	-	-	5.600	0.22047			5.60
10	1630561-SO	1630561A-SO	-	2	-	5.613	0.22100			5.61
10	1630570-SO	1630570A-SO	-	-	-	5.700	0.22441			5.70
10	1630575-SO	1630575A-SO	-	-	-	5.750	0.22638			5.75
10	1630579-SO	1630579A-SO	-	1	-	5.791	0.22800			5.79
10	1630580-SO	1630580A-SO	-	-	-	5.800	0.22835			5.80
10	1630590-SO	1630590A-SO	-	-	-	5.900	0.23228			5.90
10	1630594-SO	1630594A-SO	-	-	A	5.944	0.23400			5.94
10	1630595-SO	1630595A-SO	15/64	-	-	5.953	0.23438			5.95
10	1630600-SO	1630600A-SO	-	-	-	6.000	0.23622			6.00
10	1630605-SO	1630605A-SO	-	-	B	6.045	0.23800	6.05		
10	1630610-SO	1630610A-SO	-	-	-	6.100	0.24016	6.10		
10	1630615-SO	1630615A-SO	-	-	C	6.147	0.24200	6.15		
10	1630620-SO	1630620A-SO	-	-	-	6.200	0.24409	6.20		
10	1630625-SO	1630625A-SO	-	-	D	6.248	0.24600	6.25		
10	1630630-SO	1630630A-SO	-	-	-	6.300	0.24803	6.30		
10	1630634-SO	1630634A-SO	-	-	E	6.350	0.25000	6.35		
10	1630635-SO	1630635A-SO	1/4	-	-	6.350	0.25000	6.35		
10	1630640-SO	1630640A-SO	-	-	-	6.400	0.25197	6.40		
10	1630650-SO	1630650A-SO	-	-	-	6.500	0.25591	6.50		
10	1630653-SO	1630653A-SO	-	-	F	6.528	0.25700	6.53		
10	1630660-SO	1630660A-SO	-	-	-	6.600	0.25984	6.60		
10	1630663-SO	1630663A-SO	-	-	G	6.629	0.26100	6.63		
10	1630670-SO	1630670A-SO	-	-	-	6.700	0.26378	6.70		
10	1630677-SO	1630677A-SO	17/64	-	-	6.747	0.26563	6.75		
10	1630676-SO	1630676A-SO	-	-	H	6.756	0.26600	6.76		
10	1630680-SO	1630680A-SO	-	-	-	6.800	0.26772	6.80		
10	1630690-SO	1630690A-SO	-	-	-	6.900	0.27165	6.90		
10	1630691-SO	1630691A-SO	-	-	I	6.909	0.27200	6.91		
10	1630700-SO	1630700A-SO	-	-	-	7.000	0.27559	7.00		
10	1630704-SO	1630704A-SO	-	-	J	7.036	0.27700	7.04		
10	1630710-SO	1630710A-SO	-	-	-	7.100	0.27953	7.10		
10	1630713-SO	1630713A-SO	-	-	K	7.137	0.28100	7.14		
10	1630714-SO	1630714A-SO	9/32	-	-	7.144	0.28125	7.14		
10	1630720-SO	1630720A-SO	-	-	-	7.200	0.28346	7.20		
10	-	1630725A-SO	-	-	-	7.250	0.28543	7.25		
10	1630730-SO	1630730A-SO	-	-	-	7.300	0.28740	7.30		
10	1630737-SO	1630737A-SO	-	-	L	7.366	0.29000	7.37		
10	1630740-SO	1630740A-SO	-	-	-	7.400	0.29134	7.40		
10	1630749-SO	1630749A-SO	-	-	M	7.493	0.29500	7.49		
10	1630750-SO	1630750A-SO	-	-	-	7.500	0.29528	7.50		
10	1630754-SO	1630754A-SO	19/64	-	-	7.541	0.29688	7.54		
10	1630760-SO	1630760A-SO	-	-	-	7.600	0.29921	7.60		
10	1630767-SO	1630767A-SO	-	-	N	7.671	0.30200	7.67		
10	1630770-SO	1630770A-SO	-	-	-	7.700	0.30315	7.70		
10	1630780-SO	1630780A-SO	-	-	-	7.800	0.30709	7.80		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 163-SO (Continued)

Parabolic Flute, Stub Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	STUB	40°
------------	---------------------------	----------------	----------------	-----------	--------------	-------------	------------

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1630790-SO	1630790A-SO	-	-	-	7.900	0.31102	37	79	7.90
10	1630794-SO	1630794A-SO	5/16	-	-	7.938	0.31250			7.94
10	1630800-SO	1630800A-SO	-	-	-	8.000	0.31496			8.00
10	1630803-SO	1630803A-SO	-	-	O	8.026	0.31600			8.03
10	1630810-SO	1630810A-SO	-	-	-	8.100	0.31890			8.10
10	1630820-SO	1630820A-SO	-	-	-	8.200	0.32283			8.20
10	1630821-SO	1630821A-SO	-	-	P	8.204	0.32300			8.20
10	1630830-SO	1630830A-SO	-	-	-	8.300	0.32677			8.30
10	1630833-SO	1630833A-SO	21/64	-	-	8.334	0.32813			8.33
10	1630840-SO	1630840A-SO	-	-	-	8.400	0.33071			8.40
10	1630843-SO	1630843A-SO	-	-	Q	8.433	0.33200	8.43		
10	1630850-SO	1630850A-SO	-	-	-	8.500	0.33465	8.50		
10	1630860-SO	1630860A-SO	-	-	-	8.600	0.33858	8.60		
10	1630861-SO	1630861A-SO	-	-	R	8.611	0.33900	8.61		
10	1630870-SO	1630870A-SO	-	-	-	8.700	0.34252	8.70		
10	1630873-SO	1630873A-SO	11/32	-	-	8.731	0.34375	8.73		
10	1630880-SO	1630880A-SO	-	-	-	8.800	0.34646	8.80		
10	1630884-SO	1630884A-SO	-	-	S	8.839	0.34800	8.84		
10	1630890-SO	1630890A-SO	-	-	-	8.900	0.35039	8.90		
10	1630900-SO	1630900A-SO	-	-	-	9.000	0.35433	9.00		
10	1630909-SO	1630909A-SO	-	-	T	9.093	0.35800	9.09		
10	1630910-SO	1630910A-SO	-	-	-	9.100	0.35827	9.10		
10	1630913-SO	1630913A-SO	23/64	-	-	9.128	0.35938	9.13		
10	1630920-SO	1630920A-SO	-	-	-	9.200	0.36220	9.20		
10	1630930-SO	1630930A-SO	-	-	-	9.300	0.36614	9.30		
10	1630935-SO	1630935A-SO	-	-	U	9.347	0.36800	9.35		
10	1630940-SO	1630940A-SO	-	-	-	9.400	0.37008	9.40		
10	1630950-SO	1630950A-SO	-	-	-	9.500	0.37402	9.50		
10	1630953-SO	1630953A-SO	3/8	-	-	9.525	0.37500	9.53		
10	1630958-SO	1630958A-SO	-	-	V	9.576	0.37700	9.58		
10	1630960-SO	1630960A-SO	-	-	-	9.600	0.37795	9.60		
10	1630970-SO	1630970A-SO	-	-	-	9.700	0.38189	9.70		
10	1630980-SO	1630980A-SO	-	-	-	9.800	0.38583	9.80		
10	1630981-SO	1630981A-SO	-	-	W	9.804	0.38600	9.80		
10	1630990-SO	1630990A-SO	-	-	-	9.900	0.38976	9.90		
5	1630992-SO	1630992A-SO	25/64	-	-	9.922	0.39063	9.92		
5	1631000-SO	1631000A-SO	-	-	-	10.000	0.39370	10.00		
5	1631008-SO	1631008A-SO	-	-	X	10.084	0.39700	10.08		
5	1631020-SO	1631020A-SO	-	-	-	10.200	0.40157	10.20		
5	1631026-SO	1631026A-SO	-	-	Y	10.262	0.40400	10.26		
5	1631032-SO	1631032A-SO	13/32	-	-	10.319	0.40625	10.32		
5	1631049-SO	1631049A-SO	-	-	Z	10.490	0.41300	10.49		
5	1631050-SO	1631050A-SO	-	-	-	10.500	0.41339	10.50		
5	1631072-SO	1631072A-SO	27/64	-	-	10.716	0.42188	10.72		
5	1631080-SO	1631080A-SO	-	-	-	10.800	0.42520	10.80		
5	1631100-SO	1631100A-SO	-	-	-	11.000	0.43307	11.00		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH			6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
163-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 163-SO (Continued)

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	STUB	40°
------------	---------------------------	----------------	----------------	-----------	--------------	-------------	------------

Parabolic Flute, Stub Drills



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 14	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
5	1631111-SO	1631111A-SO	7/16	-	-	11.113	0.43750	47	95	11.11
5	1631120-SO	1631120A-SO	-	-	-	11.200	0.44094			11.20
5	1631150-SO	1631150A-SO	-	-	-	11.500	0.45276			11.50
5	1631151-SO	1631151A-SO	29/64	-	-	11.509	0.45313			11.51
5	-	1631191A-SO	15/32	-	-	11.906	0.46875	51	102	11.91
5	1631200-SO	1631200A-SO	-	-	-	12.000	0.47244			12.00
5	1631229-SO	1631229A-SO	31/64	-	-	12.303	0.48438			12.30
5	1631250-SO	1631250A-SO	-	-	-	12.500	0.49213			12.50
5	1631269-SO	1631269A-SO	1/2	-	-	12.700	0.50000			12.70
5	1631300-SO	1631300A-SO	-	-	-	13.000	0.51181			13.00
1	1631310-SO	1631310A-SO	33/64	-	-	13.097	0.51563			13.10
1	1631349-SO	-	17/32	-	-	13.494	0.53125			13.49
1	1631389-SO	1631389A-SO	35/64	-	-	13.891	0.54688			13.89
1	1631400-SO	-	-	-	-	14.000	0.55118			14.00

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
163-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 164-SO

Parabolic Flute, Jobber Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	JOBBERS	40°
------------	---------------------------	----------------	----------------	-----------	--------------	----------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 16	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Leng1 L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1640100-SO	1640100A-SO	-	-	-	1.000	0.03937	12	34	1.00
10	1640102-SO	1640102A-SO	-	60	-	1.016	0.04000			1.02
10	1640104-SO	1640104A-SO	-	59	-	1.041	0.04100			1.04
10	1640107-SO	1640107A-SO	-	58	-	1.067	0.04200	14	36	1.07
10	1640109-SO	1640109A-SO	-	57	-	1.092	0.04300			1.09
10	1640110-SO	1640110A-SO	-	-	-	1.100	0.04331			1.10
10	1640115-SO	1640115A-SO	-	-	-	1.150	0.04528	16	38	1.15
10	1640118-SO	1640118A-SO	-	56	-	1.181	0.04650			1.18
10	1640119-SO	1640119A-SO	3/64	-	-	1.191	0.04688			1.19
10	1640120-SO	1640120A-SO	-	-	-	1.200	0.04724	18	40	1.20
10	-	1640125A-SO	-	-	-	1.250	0.04921			1.25
10	1640130-SO	1640130A-SO	-	-	-	1.300	0.05118			1.30
10	1640132-SO	1640132A-SO	-	55	-	1.321	0.05200	20	43	1.32
10	1640139-SO	1640139A-SO	-	54	-	1.397	0.05500			1.40
10	1640140-SO	1640140A-SO	-	-	-	1.400	0.05512			1.45
10	1640145-SO	1640145A-SO	-	-	-	1.450	0.05709	22	46	1.45
10	1640150-SO	1640150A-SO	-	-	-	1.500	0.05906			1.50
10	1640152-SO	1640152A-SO	-	53	-	1.511	0.05950			1.51
10	1640155-SO	1640155A-SO	-	-	-	1.550	0.06102	24	49	1.55
10	1640159-SO	1640159A-SO	1/16	-	-	1.588	0.06250			1.59
10	1640160-SO	1640160A-SO	-	-	-	1.600	0.06299			1.60
10	1640161-SO	1640161A-SO	-	52	-	1.613	0.06350	20	43	1.61
10	1640162-SO	-	-	-	-	1.620	0.06378			1.62
10	1640165-SO	1640165A-SO	-	-	-	1.650	0.06496			1.65
10	1640167-SO	-	-	-	-	1.670	0.06575	22	46	1.67
10	1640170-SO	1640170A-SO	-	-	-	1.700	0.06693			1.70
10	1640169-SO	1640169A-SO	-	51	-	1.702	0.06700			24
10	-	1640175A-SO	-	-	-	1.750	0.06890	1.78		
10	1640178-SO	1640178A-SO	-	50	-	1.778	0.07000	1.80		
10	1640180-SO	1640180A-SO	-	-	-	1.800	0.07087	20	43	1.80
10	1640185-SO	1640185A-SO	-	49	-	1.854	0.07300			1.85
10	1640190-SO	1640190A-SO	-	-	-	1.900	0.07480			1.90
10	1640193-SO	1640193A-SO	-	48	-	1.930	0.07600	22	46	1.93
10	1640198-SO	1640198A-SO	5/64	-	-	1.984	0.07813			1.98
10	1640199-SO	1640199A-SO	-	47	-	1.994	0.07850			1.99
10	1640200-SO	1640200A-SO	-	-	-	2.000	0.07874	24	49	2.00
10	1640205-SO	-	-	-	-	2.050	0.08071			2.05
10	1640206-SO	1640206A-SO	-	46	-	2.057	0.08100			2.06
10	1640208-SO	1640208A-SO	-	45	-	2.083	0.08200	20	43	2.08
10	1640210-SO	1640210A-SO	-	-	-	2.100	0.08268			2.10

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P				M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
164-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 164-SO (Continued)

Parabolic Flute, Jobber Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	JOBBERS	40°
------------	---------------------------	----------------	----------------	-----------	--------------	----------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 16	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Leng1 L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1640215-SO	1640215A-SO	-	-	-	2.150	0.08465	27	53	2.15
10	1640218-SO	1640218A-SO	-	44	-	2.184	0.08600			2.18
10	1640220-SO	1640220A-SO	-	-	-	2.200	0.08661			2.20
10	1640226-SO	1640226A-SO	-	43	-	2.261	0.08900			2.26
10	1640230-SO	1640230A-SO	-	-	-	2.300	0.09055			2.30
10	1640235-SO	1640235A-SO	-	-	-	2.350	0.09252			2.35
10	1640237-SO	1640237A-SO	-	42	-	2.375	0.09350	2.37		
10	1640238-SO	1640238A-SO	3/32	-	-	2.381	0.09375	2.38		
10	1640240-SO	1640240A-SO	-	-	-	2.400	0.09449	2.40		
10	1640244-SO	1640244A-SO	-	41	-	2.438	0.09600	2.44		
10	1640245-SO	1640245A-SO	-	-	-	2.450	0.09646	2.45		
10	1640249-SO	1640249A-SO	-	40	-	2.489	0.09800	2.49		
10	1640250-SO	1640250A-SO	-	-	-	2.500	0.09843	2.50		
10	1640253-SO	1640253A-SO	-	39	-	2.527	0.09950	2.53		
10	1640258-SO	1640258A-SO	-	38	-	2.578	0.10150	2.58		
10	1640260-SO	1640260A-SO	-	-	-	2.600	0.10236	2.60		
10	1640264-SO	1640264A-SO	-	37	-	2.642	0.10400	2.64		
10	1640270-SO	1640270A-SO	-	-	-	2.700	0.10630	2.70		
10	1640271-SO	1640271A-SO	-	36	-	2.705	0.10650	2.71		
10	-	1640275A-SO	-	-	-	2.750	0.10827	2.75		
10	1640278-SO	1640278A-SO	7/64	-	-	2.778	0.10938	2.78		
10	1640279-SO	1640279A-SO	-	35	-	2.794	0.11000	2.79		
10	1640280-SO	1640280A-SO	-	-	-	2.800	0.11024	2.80		
10	1640282-SO	1640282A-SO	-	34	-	2.819	0.11100	2.82		
10	1640287-SO	1640287A-SO	-	33	-	2.870	0.11300	2.87		
10	1640290-SO	1640290A-SO	-	-	-	2.900	0.11417	2.90		
10	1640295-SO	1640295A-SO	-	32	-	2.946	0.11600	2.95		
10	1640300-SO	1640300A-SO	-	-	-	3.000	0.11811	3.00		
10	1640305-SO	1640305A-SO	-	31	-	3.048	0.12000	3.05		
10	1640310-SO	1640310A-SO	-	-	-	3.100	0.12205	3.10		
10	1640315-SO	1640315A-SO	-	-	-	3.150	0.12402	3.15		
10	1640318-SO	1640318A-SO	1/8	-	-	3.175	0.12500	3.18		
10	1640320-SO	1640320A-SO	-	-	-	3.200	0.12598	3.20		
10	1640326-SO	1640326A-SO	-	30	-	3.264	0.12850	3.26		
10	1640330-SO	1640330A-SO	-	-	-	3.300	0.12992	3.30		
10	1640335-SO	1640335A-SO	-	-	-	3.350	0.13189	3.35		
10	1640340-SO	1640340A-SO	-	-	-	3.400	0.13386	3.40		
10	1640345-SO	1640345A-SO	-	29	-	3.454	0.13600	3.45		
10	1640350-SO	1640350A-SO	-	-	-	3.500	0.13780	3.50		
10	1640357-SO	1640357A-SO	9/64	-	-	3.572	0.14063	3.57		
10	1640360-SO	-	-	-	-	3.600	0.14173	3.60		
10	1640366-SO	1640366A-SO	-	27	-	3.658	0.14400	3.66		
10	1640370-SO	1640370A-SO	-	-	-	3.700	0.14567	3.70		
10	1640373-SO	1640373A-SO	-	26	-	3.734	0.14700	3.73		
10	1640379-SO	1640379A-SO	-	25	-	3.797	0.14950	3.80		
10	1640380-SO	1640380A-SO	-	-	-	3.800	0.14961	3.80		
10	1640386-SO	1640386A-SO	-	24	-	3.861	0.15200	3.86		
10	1640390-SO	1640390A-SO	-	-	-	3.900	0.15354	3.90		
10	1640391-SO	1640391A-SO	-	23	-	3.912	0.15400	3.91		
10	1640397-SO	1640397A-SO	5/32	-	-	3.969	0.15625	3.97		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 164-SO (Continued)

Parabolic Flute, Jobber Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAIN	JOBBERS	40°
------------	---------------------------	----------------	----------------	-----------	--------------	----------------	------------

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Leng1 L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1640399-SO	1640399A-SO	-	22	-	3.988	0.15700	43	75	3.99
10	1640400-SO	1640400A-SO	-	-	-	4.000	0.15748			4.00
10	1640404-SO	1640404A-SO	-	21	-	4.039	0.15900			4.04
10	1640409-SO	1640409A-SO	-	20	-	4.089	0.16100			4.09
10	1640410-SO	1640410A-SO	-	-	-	4.100	0.16142			4.10
10	1640420-SO	1640420A-SO	-	-	-	4.200	0.16535			4.20
10	1640422-SO	1640422A-SO	-	19	-	4.216	0.16600			4.22
10	1640430-SO	1640430A-SO	-	-	-	4.300	0.16929			4.30
10	1640431-SO	1640431A-SO	-	18	-	4.305	0.16950			4.31
10	1640437-SO	1640437A-SO	11/64	-	-	4.366	0.17188			4.37
10	1640439-SO	1640439A-SO	-	17	-	4.394	0.17300	4.39		
10	1640440-SO	1640440A-SO	-	-	-	4.400	0.17323	4.40		
10	1640445-SO	-	-	-	-	4.450	0.17520	4.45		
10	1640449-SO	1640449A-SO	-	16	-	4.496	0.17700	4.50		
10	1640450-SO	1640450A-SO	-	-	-	4.500	0.17717	-		
10	1640457-SO	1640457A-SO	-	15	-	4.572	0.18000	4.57		
10	-	1640460A-SO	-	-	-	4.600	0.18110	4.60		
10	1640462-SO	1640462A-SO	-	14	-	4.623	0.18200	4.62		
10	1640469-SO	1640469A-SO	-	13	-	4.699	0.18500	4.69		
10	1640476-SO	1640476A-SO	3/16	-	-	4.763	0.18750	4.76		
10	1640480-SO	1640480A-SO	-	-	-	4.800	0.18898	-		
10	1640479-SO	1640479A-SO	-	12	-	4.801	0.18900	4.80		
10	1640485-SO	1640485A-SO	-	11	-	4.851	0.19100	4.86		
10	1640490-SO	1640490A-SO	-	-	-	4.900	0.19291	4.90		
10	1640492-SO	1640492A-SO	-	10	-	4.915	0.19350	4.92		
10	1640498-SO	1640498A-SO	-	9	-	4.978	0.19600	4.98		
10	1640500-SO	1640500A-SO	-	-	-	5.000	0.19685	5.00		
10	1640506-SO	1640506A-SO	-	8	-	5.055	0.19900	5.05		
10	1640510-SO	1640510A-SO	-	-	-	5.100	0.20079	5.10		
10	1640511-SO	1640511A-SO	-	7	-	5.105	0.20100	5.11		
10	1640516-SO	1640516A-SO	13/64	-	-	5.159	0.20313	5.16		
10	1640518-SO	1640518A-SO	-	6	-	5.182	0.20400	5.18		
10	1640520-SO	1640520A-SO	-	-	-	5.200	0.20472	5.20		
10	1640522-SO	1640522A-SO	-	5	-	5.220	0.20550	5.22		
10	1640530-SO	1640530A-SO	-	-	-	5.300	0.20866	5.30		
10	1640532-SO	1640532A-SO	-	4	-	5.309	0.20900	5.31		
10	1640540-SO	1640540A-SO	-	-	-	5.400	0.21260	5.40		
10	1640541-SO	1640541A-SO	-	3	-	5.410	0.21300	5.41		
10	1640550-SO	1640550A-SO	-	-	-	5.500	0.21654	5.50		
10	1640556-SO	1640556A-SO	7/32	-	-	5.556	0.21875	5.56		
10	1640560-SO	1640560A-SO	-	-	-	5.600	0.22047	5.60		
10	1640561-SO	1640561A-SO	-	2	-	5.613	0.22100	5.61		
10	1640570-SO	1640570A-SO	-	-	-	5.700	0.22441	5.70		
10	1640575-SO	1640575A-SO	-	-	-	5.750	0.22638	5.75		
10	1640579-SO	1640579A-SO	-	1	-	5.791	0.22800	5.79		
10	1640580-SO	1640580A-SO	-	-	-	5.800	0.22835	5.80		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
164-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 164-SO (Continued)

Parabolic Flute, Jobber Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	TiAlN	JOBBERS	40°
------------	---------------------------	----------------	----------------	-----------	--------------	----------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤16	+0 / -0.027	+0 / -0.0011

Pcs per Pack	Bright EDP Number	TiAlN EDP Number	Diameter					Flute Length FL (mm)	Overall Leng1 L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1640590-SO	1640590A-SO	-	-	-	5.900	0.23228	57	93	5.90
10	1640594-SO	1640594A-SO	-	-	A	5.944	0.23400			5.94
10	1640595-SO	1640595A-SO	15/64	-	-	5.953	0.23438			5.95
10	1640600-SO	1640600A-SO	-	-	-	6.000	0.23622			6.00
10	1640605-SO	1640605A-SO	-	-	B	6.045	0.23800			6.05
10	1640610-SO	1640610A-SO	-	-	-	6.100	0.24016	6.10		
10	1640615-SO	1640615A-SO	-	-	C	6.147	0.24200	6.15		
10	1640620-SO	1640620A-SO	-	-	-	6.200	0.24409	6.20		
10	1640625-SO	1640625A-SO	-	-	D	6.248	0.24600	6.25		
10	1640630-SO	1640630A-SO	-	-	-	6.300	0.24803	6.30		
10	1640634-SO	1640634A-SO	-	-	E	6.350	0.25000	6.35		
10	1640635-SO	1640635A-SO	1/4	-	-	-	-	6.35	6.35	
10	1640640-SO	1640640A-SO	-	-	-	6.400	0.25197	6.40		
10	1640650-SO	1640650A-SO	-	-	-	6.500	0.25591	6.50		
10	1640653-SO	1640653A-SO	-	-	F	6.528	0.25700	6.53		
10	1640660-SO	1640660A-SO	-	-	-	6.600	0.25984	6.60		
10	1640663-SO	1640663A-SO	-	-	G	6.629	0.26100	6.63		
10	1640670-SO	1640670A-SO	-	-	-	6.700	0.26378	6.70		
10	1640677-SO	1640677A-SO	17/64	-	-	6.747	0.26563	6.75		
10	1640676-SO	1640676A-SO	-	-	H	6.756	0.26600	6.76		
10	1640680-SO	1640680A-SO	-	-	-	6.800	0.26772	6.80		
10	1640690-SO	1640690A-SO	-	-	-	6.900	0.27165	6.90		
10	1640691-SO	1640691A-SO	-	-	-	6.910	0.27205	6.91		
10	1640700-SO	1640700A-SO	-	-	-	7.000	0.27559	7.00		
10	1640704-SO	1640704A-SO	-	-	J	7.036	0.27700	7.04		
10	1640710-SO	1640710A-SO	-	-	-	7.100	0.27953	7.10		
10	1640713-SO	1640713A-SO	-	-	K	7.137	0.28100	7.14		
10	1640714-SO	1640714A-SO	9/32	-	-	7.144	0.28125	7.14		
10	1640720-SO	1640720A-SO	-	-	-	7.200	0.28346	7.20		
10	1640725-SO	1640725A-SO	-	-	-	7.250	0.28543	7.25		
10	1640730-SO	1640730A-SO	-	-	-	7.300	0.28740	7.30		
10	1640737-SO	1640737A-SO	-	-	L	7.366	0.29000	7.37		
10	1640740-SO	1640740A-SO	-	-	-	7.400	0.29134	7.40		
10	1640749-SO	1640749A-SO	-	-	M	7.493	0.29500	7.49		
10	1640750-SO	1640750A-SO	-	-	-	7.500	0.29528	7.50		
10	1640754-SO	1640754A-SO	19/64	-	-	7.541	0.29688	7.54		
10	1640760-SO	1640760A-SO	-	-	-	7.600	0.29921	7.60		
10	1640767-SO	1640767A-SO	-	-	N	7.671	0.30200	7.67		
10	1640770-SO	1640770A-SO	-	-	-	7.700	0.30315	7.70		
10	1640780-SO	1640780A-SO	-	-	-	7.800	0.30709	7.80		
10	1640790-SO	1640790A-SO	-	-	-	7.900	0.31102	7.90		
10	1640794-SO	1640794A-SO	5/16	-	-	7.938	0.31250	7.94		
10	1640800-SO	1640800A-SO	-	-	-	8.000	0.31496	8.00		
10	1640803-SO	1640803A-SO	-	-	O	8.026	0.31600	8.03		
10	1640810-SO	1640810A-SO	-	-	-	8.100	0.31890	8.10		
10	1640821-SO	1640821A-SO	-	-	P	8.204	0.32300	8.21		
10	1640833-SO	-	21/64	-	-	8.334	0.32813	8.33		
10	1640843-SO	1640843A-SO	-	-	Q	8.433	0.33200	8.43		
10	1640850-SO	1640850A-SO	-	-	-	8.500	0.33465	8.50		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 164-SO (Continued)

Parabolic Flute, Jobber Drills

NEW SPEED FEED P393 HSS-Co5 TYPE FS BR TiAIN JOBBERS 40°

Pcs per Pack	Bright EDP Number	TiAIN EDP Number	Diameter					Flute Length FL (mm)	Overall Leng1 L (mm)	Shank Diameter d (mm)
			Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	-	1640861A-SO	-	-	R	8.611	0.33900	81	125	8.61
10	1640870-SO	-	-	-	-	8.700	0.34252			8.70
10	1640873-SO	1640873A-SO	11/32	-	-	8.731	0.34375			8.73
10	1640880-SO	-	-	-	-	8.800	0.34646			8.80
10	1640884-SO	1640884A-SO	-	-	S	8.839	0.34800			8.84
10	1640900-SO	1640900A-SO	-	-	-	9.000	0.35433			9.00
10	1640913-SO	1640913A-SO	23/64	-	-	9.128	0.35938			9.13
10	1640920-SO	1640920A-SO	-	-	-	9.200	0.36220			9.20
10	-	1640930A-SO	-	-	-	9.300	0.36614			9.30
10	1640935-SO	1640935A-SO	-	-	U	9.347	0.36800			9.35
10	1640950-SO	1640950A-SO	-	-	-	9.500	0.37402			9.50
10	1640953-SO	1640953A-SO	3/8	-	-	9.525	0.37500			9.53
10	1640958-SO	1640958A-SO	-	-	V	9.576	0.37700			9.58
10	1640960-SO	1640960A-SO	-	-	-	9.600	0.37795			9.60
10	1640970-SO	1640970A-SO	-	-	-	9.700	0.38189	9.70		
10	1640981-SO	1640981A-SO	-	-	W	9.804	0.38600	9.81		
5	1640992-SO	1640992A-SO	25/64	-	-	9.922	0.39063	9.92		
5	1641000-SO	1641000A-SO	-	-	-	10.000	0.39370	10.00		
5	-	1641026A-SO	-	-	Y	10.262	0.40400	10.26		
5	1641032-SO	1641032A-SO	13/32	-	-	10.319	0.40625	10.32		
5	-	1641049A-SO	-	-	Z	10.490	0.41300	10.49		
5	1641050-SO	1641050A-SO	-	-	-	10.500	0.41339	10.50		
5	1641072-SO	1641072A-SO	27/64	-	-	10.716	0.42188	10.72		
5	1641100-SO	1641100A-SO	-	-	-	11.000	0.43307	11.00		
5	1641111-SO	1641111A-SO	7/16	-	-	11.113	0.43750	11.11		
5	1641150-SO	1641150A-SO	-	-	-	11.500	0.45276	11.50		
5	1641151-SO	-	29/64	-	-	11.509	0.45313	11.51		
5	1641191-SO	-	15/32	-	-	11.906	0.46875	11.91		
5	1641200-SO	1641200A-SO	-	-	-	12.000	0.47244	12.00		
5	1641229-SO	1641229A-SO	31/64	-	-	12.303	0.48438	12.29		
5	1641250-SO	1641250A-SO	-	-	-	12.500	0.49213	12.50		
5	1641269-SO	1641269A-SO	1/2	-	-	12.700	0.50000	12.70		
5	1641300-SO	1641300A-SO	-	-	-	13.000	0.51181	13.00		
1	1641310-SO	-	33/64	-	-	13.097	0.51563	13.10		
1	1641349-SO	1641349A-SO	17/32	-	-	13.494	0.53125	13.49		
1	1641389-SO	-	35/64	-	-	13.891	0.54690	13.89		
1	-	1641400A-SO	-	-	-	14.000	0.55118	14.00		
1	1641429-SO	1641429A-SO	9/16	-	-	14.288	0.56250	14.29		
1	1641450-SO	-	-	-	-	14.500	0.57087	14.50		
1	1641468-SO	-	37/64	-	-	14.684	0.57813	14.68		
1	-	1641508A-SO	19/32	-	-	15.081	0.59375	15.08		
1	1641548-SO	-	39/64	-	-	15.478	0.60938	15.48		
1	1641588-SO	-	5/8	-	-	15.875	0.62500	15.88		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
Low	Med.	High	4140 4340	300	400	17-4 PH	6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
164-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best





List 164-SO (Continued)

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	JOBBERS	40°
------------	---------------------------	----------------	----------------	-----------	----------------	------------

SET, Parabolic Flute, Jobber Drills



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 16	+0 / -0.027	+0 / -0.0011

Drill Set EDP Bright Finish	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1640025-SO	-	-	-	1.00	0.03937	12	34	1.0
	-	-	-	1.50	0.05906	18	40	1.5
	-	-	-	2.00	0.07874	24	49	2.0
	-	-	-	2.50	0.09843	30	57	2.5
	-	-	-	3.00	0.11811	33	61	3.0
	-	-	-	3.50	0.13780	39	70	3.5
	-	-	-	4.00	0.15748	43	75	4.0
	-	-	-	4.50	0.17717	47	80	4.5
	-	-	-	5.00	0.19685	52	86	5.0
	-	-	-	5.50	0.21654	57	93	5.5
	-	-	-	6.00	0.23622			6.0
	-	-	-	6.50	0.25591	63	101	6.5
	-	-	-	7.00	0.27559	69	109	7.0
	-	-	-	7.50	0.29528	75	117	7.5
	-	-	-	8.00	0.31496			8.0
	-	-	-	8.50	0.33465	81	125	8.5
	-	-	-	9.00	0.35433			9.0
	-	-	-	9.50	0.37402	87	133	9.5
	-	-	-	10.00	0.39370			10.0
	-	-	-	10.50	0.41339	94	142	10.5
-	-	-	11.00	0.43307	11.0			
-	-	-	11.50	0.45276	101	151	11.5	
-	-	-	12.00	0.47244			12.0	
-	-	-	12.50	0.49213	101	151	12.5	
-	-	-	13.00	0.51181			13.0	

EDP's listed above are stocked standard, TiAlN coating is available upon request. Specify treatment at time of order.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum			Nickel Alloy Inconel	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
164-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 110-SO

Parabolic Flute, Long Series Drills

NEW SPEED FEED P393 HSS-Co5 TYPE FS BR LONG 40°

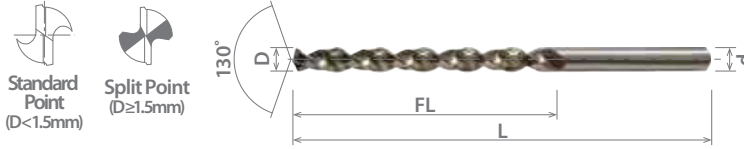

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gauge	Letter Size	mm	Inch			
10	1100100-SO	-	-	-	1.000	0.03937	33	56	1.00
10	1100102-SO	-	60	-	1.016	0.04000			1.02
10	1100104-SO	-	59	-	1.041	0.04100			1.04
10	1100107-SO	-	58	-	1.067	0.04200	37	60	1.07
10	1100109-SO	-	57	-	1.092	0.04300			1.09
10	1100110-SO	-	-	-	1.100	0.04331			1.10
10	1100118-SO	-	56	-	1.181	0.04650	41	65	1.18
10	1100120-SO	-	-	-	1.200	0.04724			1.20
10	1100130-SO	-	-	-	1.300	0.05118			1.30
10	1100132-SO	-	55	-	1.321	0.05200	45	70	1.32
10	1100139-SO	-	54	-	1.397	0.05500			1.39
10	1100140-SO	-	-	-	1.400	0.05512			1.40
10	1100150-SO	-	-	-	1.500	0.05906	50	76	1.50
10	1100152-SO	-	53	-	1.511	0.05950			1.52
10	1100159-SO	1/16	-	-	1.588	0.06250			1.59
10	1100160-SO	-	-	-	1.600	0.06299	53	80	1.60
10	1100161-SO	-	52	-	1.613	0.06350			1.61
10	1100169-SO	-	-	-	1.690	0.06654			1.70
10	1100170-SO	-	51	-	1.702	0.06700	56	85	1.70
10	1100178-SO	-	50	-	1.778	0.07000			1.78
10	1100180-SO	-	-	-	1.800	0.07087			1.80
10	1100185-SO	-	49	-	1.854	0.07300	59	90	1.85
10	1100190-SO	-	-	-	1.900	0.07480			1.90
10	1100193-SO	-	48	-	1.930	0.07600			1.93
10	1100198-SO	5/64	-	-	1.984	0.07813	59	90	1.98
10	1100199-SO	-	47	-	1.994	0.07850			1.99
10	1100200-SO	-	-	-	2.000	0.07874			2.00
10	1100206-SO	-	46	-	2.057	0.08100	59	90	2.06
10	1100208-SO	-	45	-	2.083	0.08200			2.08
10	1100210-SO	-	-	-	2.100	0.08268			2.10
10	1100218-SO	-	44	-	2.184	0.08600	59	90	2.18
10	1100220-SO	-	-	-	2.200	0.08661			2.20
10	1100226-SO	-	43	-	2.261	0.08900			2.26
10	1100230-SO	-	-	-	2.300	0.09055			2.30

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels				Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	Alloy Steels 4140 4340			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
110-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 110-SO (Continued)

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	LONG	40°
------------	---------------------------	----------------	----------------	-----------	-------------	------------

Parabolic Flute, Long Series Drills

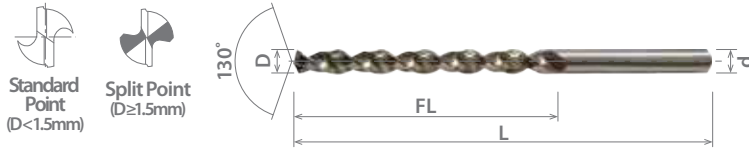

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1100237-SO	-	42	-	2.375	0.09350	62	95	2.37
10	1100238-SO	3/32	-	-	2.381	0.09375			2.38
10	1100240-SO	-	-	-	2.400	0.09449			2.40
10	1100244-SO	-	41	-	2.438	0.09600			2.44
10	1100249-SO	-	40	-	2.489	0.09800			2.49
10	1100250-SO	-	-	-	2.500	0.09843			2.50
10	1100253-SO	-	39	-	2.527	0.09950			2.53
10	1100258-SO	-	38	-	2.578	0.10150			2.58
10	1100260-SO	-	-	-	2.600	0.10236			2.60
10	1100264-SO	-	37	-	2.642	0.10400			2.64
10	1100270-SO	-	-	-	2.700	0.10630	2.70		
10	1100271-SO	-	36	-	2.705	0.10650	2.71		
10	1100278-SO	7/64	-	-	2.779	0.10940	2.78		
10	1100279-SO	-	35	-	2.794	0.11000	2.79		
10	1100280-SO	-	-	-	2.800	0.11024	2.80		
10	1100282-SO	-	34	-	2.819	0.11100	2.82		
10	1100287-SO	-	33	-	2.870	0.11300	2.87		
10	1100290-SO	-	-	-	2.900	0.11417	2.90		
10	1100295-SO	-	32	-	2.946	0.11600	2.95		
10	1100300-SO	-	-	-	3.000	0.11811	3.00		
10	1100305-SO	-	31	-	3.048	0.12000	3.05		
10	1100310-SO	-	-	-	3.100	0.12205	3.10		
10	1100318-SO	1/8	-	-	3.175	0.12500	3.18		
10	1100320-SO	-	-	-	3.200	0.12598	3.20		
10	1100326-SO	-	30	-	3.264	0.12850	3.26		
10	1100330-SO	-	-	-	3.300	0.12992	3.30		
10	1100340-SO	-	-	-	3.400	0.13386	3.40		
10	1100345-SO	-	29	-	3.454	0.13600	3.45		
10	1100350-SO	-	-	-	3.500	0.13780	3.50		
10	1100356-SO	-	28	-	3.569	0.14050	3.56		
10	1100357-SO	9/64	-	-	3.572	0.14063	3.57		
10	1100360-SO	-	-	-	3.600	0.14173	3.60		
10	1100366-SO	-	27	-	3.658	0.14400	3.66		
10	1100370-SO	-	-	-	3.700	0.14567	3.70		
10	1100373-SO	-	26	-	3.734	0.14700	3.73		
10	1100379-SO	-	25	-	3.797	0.14950	3.79		
10	1100380-SO	-	-	-	3.800	0.14961	3.80		
10	1100386-SO	-	24	-	3.861	0.15200	3.86		
10	1100390-SO	-	-	-	3.900	0.15354	3.90		
10	1100391-SO	-	23	-	3.912	0.15400	3.91		
10	1100397-SO	5/32	-	-	3.969	0.15625	3.97		
10	1100399-SO	-	22	-	3.988	0.15700	3.99		
10	1100400-SO	-	-	-	4.000	0.15748	4.00		
10	1100404-SO	-	21	-	4.039	0.15900	4.04		
10	1100409-SO	-	20	-	4.089	0.16100	4.09		
10	1100410-SO	-	-	-	4.100	0.16142	4.10		
10	1100420-SO	-	-	-	4.200	0.16535	4.20		
10	1100422-SO	-	19	-	4.216	0.16600	4.22		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 110-SO (Continued)

Parabolic Flute, Long Series Drills

NEW SPEED FEED P393 HSS-Co5 TYPE FS BR LONG 40°

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1100430-SO	-	-	-	4.300	0.16929	82	126	4.30
10	1100431-SO	-	18	-	4.305	0.16950			4.31
10	1100437-SO	11/64	-	-	4.366	0.17188			4.37
10	1100439-SO	-	17	-	4.394	0.17300			4.39
10	1100440-SO	-	-	-	4.400	0.17323			4.40
10	1100449-SO	-	16	-	4.496	0.17700			4.49
10	1100450-SO	-	-	-	4.500	0.17717			4.50
10	1100457-SO	-	15	-	4.572	0.18000			4.57
10	1100460-SO	-	-	-	4.600	0.18110			4.60
10	1100462-SO	-	14	-	4.623	0.18200			4.62
10	1100469-SO	-	13	-	4.699	0.18500			4.69
10	1100470-SO	-	-	-	4.700	0.18504			4.70
10	1100476-SO	3/16	-	-	4.763	0.18750			4.76
10	1100480-SO	-	-	-	4.800	0.18898			4.80
10	1100479-SO	-	12	-	4.801	0.18900			4.79
10	1100485-SO	-	11	-	4.851	0.19100			4.85
10	1100490-SO	-	-	-	4.900	0.19291	4.90		
10	1100492-SO	-	10	-	4.915	0.19350	4.92		
10	1100498-SO	-	9	-	4.978	0.19600	4.98		
10	1100500-SO	-	-	-	5.000	0.19685	5.00		
10	1100506-SO	-	8	-	5.055	0.19900	5.06		
10	1100510-SO	-	-	-	5.100	0.20079	5.10		
10	1100511-SO	-	7	-	5.105	0.20100	5.11		
10	1100516-SO	13/64	-	-	5.159	0.20313	5.16		
10	1100518-SO	-	6	-	5.182	0.20400	5.18		
10	1100520-SO	-	-	-	5.200	0.20472	5.20		
10	1100522-SO	-	5	-	5.220	0.20550	5.22		
10	1100530-SO	-	-	-	5.300	0.20866	5.30		
10	1100532-SO	-	4	-	5.309	0.20900	5.32		
10	1100540-SO	-	-	-	5.400	0.21260	5.40		
10	1100541-SO	-	3	-	5.410	0.21300	5.41		
10	1100550-SO	-	-	-	5.500	0.21654	5.50		
10	1100556-SO	7/32	-	-	5.556	0.21875	5.56		
10	1100560-SO	-	-	-	5.600	0.22047	5.60		
10	1100561-SO	-	2	-	5.613	0.22100	5.61		
10	1100570-SO	-	-	-	5.700	0.22441	5.70		
10	1100579-SO	-	1	-	5.791	0.22800	5.79		
10	1100580-SO	-	-	-	5.800	0.22835	5.80		
10	1100590-SO	-	-	-	5.900	0.23228	5.90		
10	1100595-SO	15/64	-	-	5.953	0.23438	5.95		
10	1100600-SO	-	-	-	6.000	0.23622	6.00		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels				Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
110-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 110-SO (Continued)

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	LONG	40°
------------	---------------------------	----------------	----------------	-----------	-------------	------------

Parabolic Flute, Long Series Drills

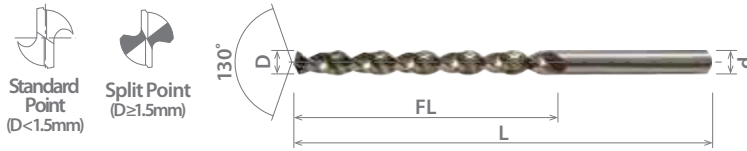

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1100610-SO	-	-	-	6.100	0.24016	97	148	6.10
10	1100620-SO	-	-	-	6.200	0.24409			6.20
10	1100630-SO	-	-	-	6.300	0.24803			6.30
10	1100635-SO	1/4	-	E	6.350	0.25000			6.35
10	1100640-SO	-	-	-	6.400	0.25197			6.40
10	1100650-SO	-	-	-	6.500	0.25591			6.50
10	1100660-SO	-	-	-	6.600	0.25984			6.60
10	1100670-SO	-	-	-	6.700	0.26378			6.70
10	1100677-SO	17/64	-	-	6.747	0.26563			6.75
10	1100680-SO	-	-	-	6.800	0.26772			6.80
10	1100690-SO	-	-	-	6.900	0.27165	6.90		
10	1100700-SO	-	-	-	7.000	0.27559	7.00		
10	1100710-SO	-	-	-	7.100	0.27953	7.10		
10	1100714-SO	9/32	-	-	7.144	0.28125	7.14		
10	1100720-SO	-	-	-	7.200	0.28346	7.20		
10	1100730-SO	-	-	-	7.300	0.28740	7.30		
10	1100740-SO	-	-	-	7.400	0.29134	7.40		
10	1100750-SO	-	-	-	7.500	0.29528	7.50		
10	1100754-SO	19/64	-	-	7.541	0.29688	7.54		
10	1100760-SO	-	-	-	7.600	0.29921	7.60		
10	1100770-SO	-	-	-	7.700	0.30315	7.70		
10	1100780-SO	-	-	-	7.800	0.30709	7.80		
10	1100790-SO	-	-	-	7.900	0.31102	7.90		
10	1100794-SO	5/16	-	-	7.938	0.31250	7.94		
10	1100800-SO	-	-	-	8.000	0.31496	8.00		
10	1100810-SO	-	-	-	8.100	0.31890	8.10		
10	1100820-SO	-	-	-	8.200	0.32283	8.20		
10	1100830-SO	-	-	-	8.300	0.32677	8.30		
10	1100833-SO	21/64	-	-	8.334	0.32813	8.33		
10	1100840-SO	-	-	-	8.400	0.33071	8.40		
10	1100850-SO	-	-	-	8.500	0.33465	8.50		
10	1100860-SO	-	-	-	8.600	0.33858	8.60		
10	1100870-SO	-	-	-	8.700	0.34252	8.70		
10	1100873-SO	11/32	-	-	8.731	0.34375	8.73		
10	1100880-SO	-	-	-	8.800	0.34646	8.80		
10	1100890-SO	-	-	-	8.900	0.35039	8.90		
10	1100900-SO	-	-	-	9.000	0.35433	9.00		
10	1100910-SO	-	-	-	9.100	0.35827	9.10		
10	1100913-SO	-	-	-	9.130	0.35945	9.13		
10	1100920-SO	-	-	-	9.200	0.36220	9.20		
10	1100930-SO	-	-	-	9.300	0.36614	9.30		
10	1100940-SO	-	-	-	9.400	0.37008	9.40		
10	1100950-SO	-	-	-	9.500	0.37402	9.50		
10	1100953-SO	3/8	-	-	9.525	0.37500	9.53		
10	1100960-SO	-	-	-	9.600	0.37795	9.60		
10	1100970-SO	-	-	-	9.700	0.38189	9.70		
10	1100980-SO	-	-	-	9.800	0.38583	9.80		
10	1100990-SO	-	-	-	9.900	0.38976	9.90		

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



List 110-SO (Continued)

Parabolic Flute, Long Series Drills

NEW	SPEED FEED P393	HSS-Co5	TYPE FS	BR	LONG	40°
------------	---------------------------	---------	---------	----	------	-----

Pcs per Pack	EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
		Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
5	1100992-SO	25/64	-	-	9.922	0.39063	121	184	9.92
5	1101000-SO	-	-	-	10.000	0.39370			10.00
5	1101032-SO	13/32	-	-	10.319	0.40625			10.32
5	1101072-SO	27/64	-	-	10.716	0.42188	128	195	10.72
5	1101111-SO	7/16	-	-	11.113	0.43750			11.11
5	1101151-SO	29/64	-	-	11.509	0.45313			11.51
5	1101191-SO	15/32	-	-	11.906	0.46875	134	205	11.91
5	1101230-SO	31/64	-	-	12.303	0.48438			12.30
5	1101270-SO	1/2	-	-	12.700	0.50000			12.70

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
110-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				

good best





List 1R5-SO

RED BAND, Ideal for Alloy Steels



NEW	RED BAND TAPS P561-563 P648-650	SPEED FEED P394-395	HSS-Co5	TYPE H	TYPE FS	TiAlN	JOBBERS	30°
------------	--	-------------------------------	----------------	---------------	----------------	--------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
1R50100-SO	-	-	-	1.000	0.03937	12	34	1.00		
1R50150-SO	-	-	-	1.500	0.05906	18	40	1.50		
1R50160-SO	-	-	-	1.600	0.06299	20	43	1.60		
1R50198-SO	5/64	-	-	1.984	0.07813	24	49	1.98		
1R50199-SO	-	47	-	1.994	0.07850			1.99		
1R50200-SO	-	-	-	2.000	0.07874			2.00		
1R50206-SO	-	46	-	2.057	0.08100			2.06		
1R50208-SO	-	45	-	2.083	0.08200			2.08		
1R50210-SO	-	-	-	2.100	0.08268			2.10		
1R50218-SO	-	44	-	2.184	0.08600			2.18		
1R50226-SO	-	43	-	2.261	0.08900			2.26		
1R50237-SO	-	42	-	2.375	0.09350	30	57	2.37		
1R50238-SO	3/32	-	-	2.381	0.09375			2.38		
1R50244-SO	-	41	-	2.438	0.09600			2.44		
1R50249-SO	-	40	-	2.489	0.09800			2.49		
1R50250-SO	-	-	-	2.500	0.09843			2.50		
1R50253-SO	-	39	-	2.527	0.09950			2.53		
1R50258-SO	-	38	-	2.578	0.10150			2.58		
1R50264-SO	-	37	-	2.642	0.10400			2.64		
1R50271-SO	-	36	-	2.705	0.10650	33	61	2.71		
1R50278-SO	7/64	-	-	2.778	0.10938			2.78		
1R50279-SO	-	35	-	2.794	0.11000			2.79		
1R50282-SO	-	34	-	2.819	0.11100			2.82		
1R50287-SO	-	33	-	2.870	0.11300			2.87		
1R50290-SO	-	-	-	2.900	0.11417			2.90		
1R50295-SO	-	32	-	2.946	0.11600			2.95		
1R50300-SO	-	-	-	3.000	0.11811			3.00		
1R50305-SO	-	31	-	3.048	0.12000	36	65	3.05		
1R50318-SO	1/8	-	-	3.175	0.12500			3.18		
1R50326-SO	-	30	-	3.264	0.12850			3.26		
1R50330-SO	-	-	-	3.300	0.12992			3.30		
1R50345-SO	-	29	-	3.454	0.13600			3.45		
1R50350-SO	-	-	-	3.500	0.13780			3.50		
1R50356-SO	-	28	-	3.569	0.14050			39	70	3.57
1R50357-SO	9/64	-	-	3.572	0.14063					3.57
1R50366-SO	-	27	-	3.658	0.14400	3.66				
1R50370-SO	-	-	-	3.700	0.14567	3.70				
1R50373-SO	-	26	-	3.734	0.14700	3.73				
1R50379-SO	-	25	-	3.797	0.14950	43	75			3.80
1R50386-SO	-	24	-	3.861	0.15200					3.86
1R50391-SO	-	23	-	3.912	0.15400					3.91
1R50397-SO	5/32	-	-	3.969	0.15625			3.97		
1R50399-SO	-	22	-	3.988	0.15700			3.99		
1R50400-SO	-	-	-	4.000	0.15748			4.00		
1R50404-SO	-	21	-	4.039	0.15900			4.04		
1R50409-SO	-	20	-	4.089	0.16100			4.09		
1R50420-SO	-	-	-	4.200	0.16535	43	75	4.20		
1R50422-SO	-	19	-	4.216	0.16600			4.22		

Packed: 1 pc.
Available TiAlN coating only.





List 1R5-SO (Continued)

RED BAND, Ideal for Alloy Steels

NEW	RED BAND TAPS P561-563 648-650	SPEED FEED P394-395	HSS-Co5	TYPE H	TYPE FS	TiAIN	JOBBER	30°
------------	---	-------------------------------	----------------	---------------	----------------	--------------	---------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1R50431-SO	-	18	-	4.305	0.16950	47	80	4.31
1R50437-SO	11/64	-	-	4.366	0.17188			4.37
1R50439-SO	-	17	-	4.394	0.17300			4.39
1R50449-SO	-	16	-	4.496	0.17700			4.50
1R50450-SO	-	-	-	4.500	0.17717			4.57
1R50457-SO	-	15	-	4.572	0.18000			4.62
1R50462-SO	-	14	-	4.623	0.18200			4.70
1R50469-SO	-	13	-	4.699	0.18500			4.76
1R50476-SO	3/16	-	-	4.763	0.18750			4.80
1R50479-SO	-	12	-	4.801	0.18900			4.86
1R50485-SO	-	11	-	4.851	0.19100	4.92		
1R50492-SO	-	10	-	4.915	0.19350	4.98		
1R50498-SO	-	9	-	4.978	0.19600	5.00		
1R50500-SO	-	-	-	5.000	0.19685	5.05		
1R50506-SO	-	8	-	5.055	0.19900	5.11		
1R50511-SO	-	7	-	5.105	0.20100	5.16		
1R50516-SO	13/64	-	-	5.159	0.20313	5.18		
1R50518-SO	-	6	-	5.182	0.20400	5.22		
1R50522-SO	-	5	-	5.220	0.20550	5.31		
1R50532-SO	-	4	-	5.309	0.20900	5.41		
1R50541-SO	-	3	-	5.410	0.21300	5.50		
1R50550-SO	-	-	-	5.500	0.21654	5.56		
1R50556-SO	7/32	-	-	5.556	0.21875	5.61		
1R50561-SO	-	2	-	5.613	0.22100	5.79		
1R50579-SO	-	1	-	5.791	0.22800	5.95		
1R50595-SO	15/64	-	-	5.953	0.23438	6.00		
1R50600-SO	-	-	-	6.000	0.23622	6.35		
1R50635-SO	1/4	-	E	6.350	0.25000	6.50		
1R50650-SO	-	-	-	6.500	0.25591	6.53		
1R50653-SO	-	-	F	6.528	0.25700	6.75		
1R50675-SO	17/64	-	-	6.747	0.26563	6.80		
1R50680-SO	-	-	-	6.800	0.26772	6.90		
1R50691-SO	-	-	I	6.909	0.27200	7.00		
1R50700-SO	-	-	-	7.000	0.27559	7.14		
1R50714-SO	9/32	-	-	7.144	0.28125	7.50		
1R50750-SO	-	-	-	7.500	0.29528	7.54		
1R50754-SO	19/64	-	-	7.541	0.29688	7.94		
1R50794-SO	5/16	-	-	7.938	0.31250	8.00		
1R50800-SO	-	-	-	8.000	0.31496	8.33		
1R50833-SO	21/64	-	-	8.334	0.32810	8.43		
1R50843-SO	-	-	Q	8.433	0.33200	8.50		
1R50850-SO	-	-	-	8.500	0.33465	8.73		
1R50873-SO	11/32	-	-	8.731	0.34375	9.00		
1R50900-SO	-	-	-	9.000	0.35433	9.13		
1R50913-SO	23/64	-	-	9.128	0.35938	9.50		
1R50950-SO	-	-	-	9.500	0.37402			

Packed: 1 pc.
Available TiAIN coating only.

continued on next page

List No.	Work Material															
	P					M			K	N		S		H		
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels		
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
1R5-SO	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>								<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 1R5-SO (Continued)

RED BAND, Ideal for Alloy Steels



NEW	RED BAND TAPS P561-563 648-650	SPEED FEED P394-395	HSS-Co5	TYPE H	TYPE FS	TiAIN	JOBBERS	30°
------------	---	-------------------------------	----------------	---------------	----------------	--------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1R50953-SO	3/8	-	-	9.525	0.37500	87	133	9.53
1R50992-SO	25/64	-	-	9.922	0.39063			9.92
1R51000-SO	-	-	-	10.000	0.39370			10.00
1R51020-SO	-	-	-	10.200	0.40157			10.20
1R51032-SO	13/32	-	-	10.319	0.40625			10.32
1R51050-SO	-	-	-	10.500	0.41339			10.50
1R51072-SO	27/64	-	-	10.716	0.42188	94	142	10.72
1R51100-SO	-	-	-	11.000	0.43307			11.00
1R51111-SO	7/16	-	-	11.113	0.43750			11.11
1R51150-SO	-	-	-	11.500	0.45276	101	151	11.50
1R51200-SO	-	-	-	12.000	0.47244			12.00
1R51250-SO	-	-	-	12.500	0.49213			12.50
1R51269-SO	1/2	-	-	12.700	0.50000			12.70
1R51300-SO	-	-	-	13.000	0.51181			13.00

Packed: 1 pc.
Available TiAIN coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1R5-SO	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>								<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 1BB-SO

BLUE BAND, Ideal for Stainless Steels



NEW	BLUE BAND TAPS P564-566 651-653	SPEED FEED P394-395	HSS-Co5	TYPE VA	TiAIN	JOBBERS	35°
------------	--	-------------------------------	----------------	----------------	--------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1BB0100-SO	-	-	-	1.000	0.03937	12	34	1.00
1BB0150-SO	-	-	-	1.500	0.05906	18	40	1.50
1BB0160-SO	-	-	-	1.600	0.06299	20	43	1.60
1BB0198-SO	5/64	-	-	1.984	0.07813	24	49	1.98
1BB0199-SO	-	47	-	1.994	0.07850			1.99
1BB0200-SO	-	-	-	2.000	0.07874			2.00
1BB0206-SO	-	46	-	2.057	0.08100			2.06
1BB0208-SO	-	45	-	2.083	0.08200			2.08
1BB0210-SO	-	-	-	2.100	0.08268			2.10
1BB0218-SO	-	44	-	2.184	0.08600			2.18
1BB0226-SO	-	43	-	2.261	0.08900			2.26
1BB0237-SO	-	42	-	2.375	0.09350			2.37
1BB0238-SO	3/32	-	-	2.381	0.09375			2.38
1BB0244-SO	-	41	-	2.438	0.09600	2.44		
1BB0249-SO	-	40	-	2.489	0.09800	2.49		
1BB0250-SO	-	-	-	2.500	0.09843	2.50		
1BB0253-SO	-	39	-	2.527	0.09950	2.53		
1BB0258-SO	-	38	-	2.578	0.10150	2.58		
1BB0264-SO	-	37	-	2.642	0.10400	2.64		
1BB0270-SO	-	-	-	2.700	0.10630	2.70		
1BB0271-SO	-	36	-	2.705	0.10650	2.71		
1BB0278-SO	7/64	-	-	2.779	0.10940	2.78		
1BB0279-SO	-	35	-	2.794	0.11000	2.79		
1BB0282-SO	-	34	-	2.819	0.11100	2.82		
1BB0287-SO	-	33	-	2.870	0.11300	2.87		
1BB0290-SO	-	-	-	2.900	0.11417	2.90		
1BB0295-SO	-	32	-	2.946	0.11600	2.95		
1BB0300-SO	-	-	-	3.000	0.11811	3.00		
1BB0305-SO	-	31	-	3.048	0.12000	3.05		
1BB0318-SO	1/8	-	-	3.175	0.12500	3.18		
1BB0326-SO	-	30	-	3.264	0.12850	3.26		
1BB0330-SO	-	-	-	3.300	0.12992	3.30		
1BB0345-SO	-	29	-	3.454	0.13600	3.45		
1BB0350-SO	-	-	-	3.500	0.13780	3.50		
1BB0356-SO	-	28	-	3.569	0.14050	3.57		
1BB0357-SO	9/64	-	-	3.571	0.14060	3.57		
1BB0366-SO	-	27	-	3.658	0.14400	3.66		
1BB0370-SO	-	-	-	3.700	0.14567	3.70		
1BB0373-SO	-	26	-	3.734	0.14700	3.73		

Packed: 1 pc.
Available TiAIN coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
1BB-SO	Low	Med.	High	4140	300	400	17-4 PH	Inconel	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010	1035	1065	4340													

good best





List 1BB-SO (Continued)

BLUE BAND, Ideal for Stainless Steels



NEW	BLUE BAND TAPS P564-566 651-653	SPEED FEED P394-395	HSS-Co5	TYPE VA	TiAIN	JOBBERS	35°
------------	--	-------------------------------	----------------	----------------	--------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1BB0379-SO	-	25	-	3.797	0.14950	43	75	3.80
1BB0386-SO	-	24	-	3.861	0.15200			3.86
1BB0391-SO	-	23	-	3.912	0.15400			3.91
1BB0397-SO	5/32	-	-	3.969	0.15625			3.97
1BB0399-SO	-	22	-	3.988	0.15700			3.99
1BB0400-SO	-	-	-	4.000	0.15748			4.00
1BB0404-SO	-	21	-	4.039	0.15900			4.04
1BB0409-SO	-	20	-	4.089	0.16100			4.09
1BB0420-SO	-	-	-	4.200	0.16535			4.20
1BB0422-SO	-	19	-	4.216	0.16600			4.22
1BB0431-SO	-	18	-	4.305	0.16950	4.31		
1BB0437-SO	11/64	-	-	4.366	0.17188	47	80	4.37
1BB0439-SO	-	17	-	4.394	0.17300			4.39
1BB0449-SO	-	16	-	4.496	0.17700			4.50
1BB0450-SO	-	-	-	4.500	0.17717			4.57
1BB0457-SO	-	15	-	4.572	0.18000			4.62
1BB0462-SO	-	14	-	4.623	0.18200			4.62
1BB0469-SO	-	13	-	4.699	0.18500			4.70
1BB0476-SO	3/16	-	-	4.763	0.18750			4.76
1BB0479-SO	-	12	-	4.801	0.18900			4.80
1BB0485-SO	-	11	-	4.851	0.19100			4.86
1BB0492-SO	-	10	-	4.915	0.19350	4.92		
1BB0498-SO	-	9	-	4.978	0.19600	4.98		
1BB0500-SO	-	-	-	5.000	0.19685	52	86	5.00
1BB0506-SO	-	8	-	5.055	0.19900			5.05
1BB0511-SO	-	7	-	5.105	0.20100			5.11
1BB0516-SO	13/64	-	-	5.159	0.20313			5.16
1BB0518-SO	-	6	-	5.182	0.20400			5.18
1BB0522-SO	-	5	-	5.220	0.20550			5.22
1BB0530-SO	-	-	-	5.300	0.20866			5.30
1BB0532-SO	-	4	-	5.309	0.20900			5.31
1BB0541-SO	-	3	-	5.410	0.21300			5.41
1BB0550-SO	-	-	-	5.500	0.21654			5.50
1BB0556-SO	7/32	-	-	5.556	0.21875	5.56		
1BB0561-SO	-	2	-	5.613	0.22100	5.61		
1BB0579-SO	-	1	-	5.791	0.22800	5.79		
1BB0595-SO	15/64	-	-	5.953	0.23438	5.95		
1BB0600-SO	-	-	-	6.000	0.23622	6.00		
1BB0634-SO	1/4	-	E	6.350	0.25000	63	101	6.35
1BB0650-SO	-	-	-	6.500	0.25591			6.50
1BB0653-SO	-	-	F	6.528	0.25700			6.53
1BB0675-SO	17/64	-	-	6.747	0.26563	69	109	6.75
1BB0680-SO	-	-	-	6.800	0.26772			6.80
1BB0691-SO	-	-	I	6.909	0.27200			6.90
1BB0700-SO	-	-	-	7.000	0.27559			7.00
1BB0714-SO	9/32	-	-	7.144	0.28125			7.14
1BB0730-SO	-	-	-	7.300	0.28740			7.30
1BB0750-SO	-	-	-	7.500	0.29528			7.50

Packed: 1 pc.
Available TiAIN coating only.



List 1BB-SO (Continued)

BLUE BAND, Ideal for Stainless Steels

NEW	BLUE BAND TAPS P564-566 651-653	SPEED FEED P394-395	HSS-Co5	TYPE VA	TiAIN	JOBBERS	35°
------------	--	-------------------------------	----------------	----------------	--------------	----------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1BB0754-SO	19/64	-	-	7.541	0.29688	75	117	7.54
1BB0780-SO	-	-	-	7.800	0.30709			7.80
1BB0794-SO	5/16	-	-	7.938	0.31250			7.94
1BB0800-SO	-	-	-	8.000	0.31496			8.00
1BB0833-SO	21/64	-	-	8.334	0.32813	81	125	8.33
1BB0843-SO	-	-	Q	8.433	0.33200			8.43
1BB0850-SO	-	-	-	8.500	0.33465			8.50
1BB0873-SO	11/32	-	-	8.731	0.34375			8.73
1BB0880-SO	-	-	-	8.800	0.34646	87	133	8.80
1BB0900-SO	-	-	-	9.000	0.35433			9.00
1BB0913-SO	23/64	-	-	9.128	0.35938			9.13
1BB0950-SO	-	-	-	9.500	0.37402			9.50
1BB0953-SO	3/8	-	-	9.525	0.37500	94	142	9.53
1BB0992-SO	25/64	-	-	9.922	0.39063			9.92
1BB1000-SO	-	-	-	10.000	0.39370			10.00
1BB1020-SO	-	-	-	10.200	0.40157			10.20
1BB1032-SO	13/32	-	-	10.319	0.40625	101	151	10.32
1BB1050-SO	-	-	-	10.500	0.41339			10.50
1BB1072-SO	27/64	-	-	10.716	0.42188			10.72
1BB1080-SO	-	-	-	10.800	0.42520			10.80
1BB1100-SO	-	-	-	11.000	0.43307	75	117	11.00
1BB1111-SO	7/16	-	-	11.113	0.43750			11.11
1BB1150-SO	-	-	-	11.500	0.45276			11.50
1BB1151-SO	29/64	-	-	11.509	0.45313			11.51
1BB1191-SO	15/32	-	-	11.906	0.46875	81	125	11.91
1BB1200-SO	-	-	-	12.000	0.47244			12.00
1BB1229-SO	31/64	-	-	12.303	0.48438			12.30
1BB1250-SO	-	-	-	12.500	0.49213			12.50
1BB1269-SO	1/2	-	-	12.700	0.50000	87	133	12.70
1BB1300-SO	-	-	-	13.000	0.51181			13.00

Packed: 1 pc.
Available TiAIN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1BB-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>				


good best





List 1AQ-SO

YELLOW BAND, Ideal for Aluminum

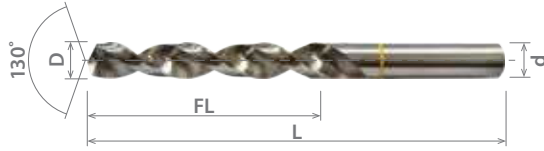

NEW	YELLOW BAND TAPS P567-569 654-656	SPEED FEED P394-395	HSS	TYPE W	BR	JOBBERS	40°
------------	--	-------------------------------	------------	---------------	-----------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.9≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1AQ0090-SO	-	-	-	0.900	0.03543	11	32	0.90
1AQ0100-SO	-	-	-	1.000	0.03937	12	34	1.00
1AQ0110-SO	-	-	-	1.100	0.04331	14	36	1.10
1AQ0120-SO	-	-	-	1.200	0.04724	16	38	1.20
1AQ0130-SO	-	-	-	1.300	0.05118	18	40	1.30
1AQ0140-SO	-	-	-	1.400	0.05512	20	43	1.40
1AQ0150-SO	-	-	-	1.500	0.05906	22	46	1.50
1AQ0160-SO	-	-	-	1.600	0.06299	24	49	1.60
1AQ0170-SO	-	-	-	1.700	0.06693	26	51	1.70
1AQ0175-SO	-	-	-	1.750	0.06890	27	53	1.75
1AQ0180-SO	-	-	-	1.800	0.07087	28	54	1.80
1AQ0190-SO	-	-	-	1.900	0.07480	29	55	1.90
1AQ0198-SO	5/64	-	-	1.984	0.07813	30	57	1.98
1AQ0199-SO	-	47	-	1.994	0.07850	31	58	1.99
1AQ0200-SO	-	-	-	2.000	0.07874	32	59	2.00
1AQ0206-SO	-	46	-	2.057	0.08100	33	61	2.06
1AQ0208-SO	-	45	-	2.083	0.08200	34	62	2.08
1AQ0210-SO	-	-	-	2.100	0.08268	35	63	2.10
1AQ0218-SO	-	44	-	2.184	0.08600	36	65	2.18
1AQ0220-SO	-	-	-	2.200	0.08661	37	66	2.20
1AQ0225-SO	-	-	-	2.250	0.08858	38	67	2.25
1AQ0226-SO	-	43	-	2.261	0.08900	39	68	2.26
1AQ0230-SO	-	-	-	2.300	0.09055	40	69	2.30
1AQ0237-SO	-	42	-	2.375	0.09350	41	70	2.37
1AQ0238-SO	3/32	-	-	2.381	0.09375	42	71	2.38
1AQ0240-SO	-	-	-	2.400	0.09449	43	72	2.40
1AQ0244-SO	-	41	-	2.438	0.09600	44	73	2.44
1AQ0249-SO	-	40	-	2.489	0.09800	45	74	2.49
1AQ0250-SO	-	-	-	2.500	0.09843	46	75	2.50
1AQ0253-SO	-	39	-	2.527	0.09950	47	76	2.53
1AQ0258-SO	-	38	-	2.578	0.10150	48	77	2.58
1AQ0260-SO	-	-	-	2.600	0.10236	49	78	2.60
1AQ0264-SO	-	37	-	2.642	0.10400	50	79	2.64
1AQ0270-SO	-	-	-	2.700	0.10630	51	80	2.70
1AQ0271-SO	-	36	-	2.705	0.10650	52	81	2.71
1AQ0275-SO	-	-	-	2.750	0.10827	53	82	2.75
1AQ0278-SO	7/64	-	-	2.778	0.10938	54	83	2.78
1AQ0279-SO	-	35	-	2.794	0.11000	55	84	2.79
1AQ0280-SO	-	-	-	2.800	0.11024	56	85	2.80
1AQ0282-SO	-	34	-	2.819	0.11100	57	86	2.82
1AQ0287-SO	-	33	-	2.870	0.11300	58	87	2.87
1AQ0290-SO	-	-	-	2.900	0.11417	59	88	2.90
1AQ0295-SO	-	32	-	2.946	0.11600	60	89	2.95
1AQ0300-SO	-	-	-	3.000	0.11811	61	90	3.00
1AQ0305-SO	-	31	-	3.048	0.12000	62	91	3.05
1AQ0310-SO	-	-	-	3.100	0.12205	63	92	3.10
1AQ0318-SO	1/8	-	-	3.175	0.12500	64	93	3.18
1AQ0320-SO	-	-	-	3.200	0.12598	65	94	3.20
1AQ0326-SO	-	30	-	3.264	0.12850	66	95	3.26
1AQ0330-SO	-	-	-	3.300	0.12992	67	96	3.30

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 1AQ-SO (Continued)

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND TAPS P567-569 654-656	SPEED FEED P394-395	HSS	TYPE W	BR	JOBBERS	40°
------------	--	-------------------------------	------------	---------------	-----------	----------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1AQ0340-SO	-	-	-	3.400	0.13386	39	70	3.40
1AQ0345-SO	-	29	-	3.454	0.13600			3.45
1AQ0350-SO	-	-	-	3.500	0.13780			3.50
1AQ0356-SO	-	28	-	3.569	0.14050			3.57
1AQ0357-SO	9/64	-	-	3.572	0.14063			3.60
1AQ0360-SO	-	-	-	3.600	0.14173			3.66
1AQ0366-SO	-	27	-	3.658	0.14400			3.70
1AQ0370-SO	-	-	-	3.700	0.14567			3.73
1AQ0373-SO	-	26	-	3.734	0.14700			3.80
1AQ0379-SO	-	25	-	3.797	0.14950			3.86
1AQ0380-SO	-	-	-	3.800	0.14961			3.90
1AQ0386-SO	-	24	-	3.861	0.15200			3.91
1AQ0390-SO	-	-	-	3.900	0.15354			3.97
1AQ0391-SO	-	23	-	3.912	0.15400			3.99
1AQ0397-SO	5/32	-	-	3.969	0.15625	4.00		
1AQ0399-SO	-	22	-	3.988	0.15700	4.04		
1AQ0400-SO	-	-	-	4.000	0.15748	4.09		
1AQ0404-SO	-	21	-	4.039	0.15900	4.10		
1AQ0409-SO	-	20	-	4.089	0.16100	4.20		
1AQ0410-SO	-	-	-	4.100	0.16142	4.22		
1AQ0420-SO	-	-	-	4.200	0.16535	4.30		
1AQ0422-SO	-	19	-	4.216	0.16600	4.31		
1AQ0430-SO	-	-	-	4.300	0.16929	4.37		
1AQ0431-SO	-	18	-	4.305	0.16950	4.39		
1AQ0437-SO	11/64	-	-	4.366	0.17188	4.40		
1AQ0439-SO	-	17	-	4.394	0.17300	4.50		
1AQ0440-SO	-	-	-	4.400	0.17323	4.57		
1AQ0449-SO	-	16	-	4.496	0.17700	4.60		
1AQ0450-SO	-	-	-	4.500	0.17717	4.62		
1AQ0457-SO	-	15	-	4.572	0.18000	4.70		
1AQ0460-SO	-	-	-	4.600	0.18110	4.76		
1AQ0462-SO	-	14	-	4.623	0.18200	4.80		
1AQ0469-SO	-	13	-	4.699	0.18500	4.86		
1AQ0470-SO	-	-	-	4.700	0.18504	4.90		
1AQ0476-SO	3/16	-	-	4.763	0.18750	4.92		
1AQ0479-SO	-	12	-	4.801	0.18900	4.98		
1AQ0480-SO	-	-	-	4.800	0.18898	5.00		
1AQ0485-SO	-	11	-	4.851	0.19100	5.05		
1AQ0490-SO	-	-	-	4.900	0.19291	5.10		
1AQ0492-SO	-	10	-	4.915	0.19350	5.11		
1AQ0498-SO	-	9	-	4.978	0.19600	5.16		
1AQ0500-SO	-	-	-	5.000	0.19685			
1AQ0506-SO	-	8	-	5.055	0.19900			
1AQ0510-SO	-	-	-	5.100	0.20079			
1AQ0511-SO	-	7	-	5.105	0.20100			
1AQ0516-SO	13/64	-	-	5.159	0.20313			

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

List No.	Work Material															
	P					M			K	N		S		H		
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels		
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC
1AQ-SO	<input type="checkbox"/>								<input checked="" type="checkbox"/>	<input type="checkbox"/>						


good best





List 1AQ-SO (Continued)

YELLOW BAND, Ideal for Aluminum

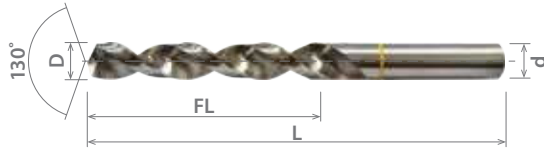

NEW	YELLOW BAND TAPS P567-569 654-656	SPEED FEED P394-395	HSS	TYPE W	BR	JOBBERS	40°
------------	--	-------------------------------	------------	---------------	-----------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.9≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1AQ0518-SO	-	6	-	5.182	0.20400	52	86	5.18
1AQ0520-SO	-	-	-	5.200	0.20472			5.20
1AQ0522-SO	-	5	-	5.220	0.20550			5.22
1AQ0530-SO	-	-	-	5.300	0.20866			5.30
1AQ0532-SO	-	4	-	5.309	0.20900	57	93	5.31
1AQ0540-SO	-	-	-	5.400	0.21260			5.40
1AQ0541-SO	-	3	-	5.410	0.21300			5.41
1AQ0550-SO	-	-	-	5.500	0.21654			5.50
1AQ0556-SO	7/32	-	-	5.556	0.21875			5.56
1AQ0560-SO	-	-	-	5.600	0.22047			5.60
1AQ0561-SO	-	2	-	5.613	0.22100			5.61
1AQ0570-SO	-	-	-	5.700	0.22441			5.70
1AQ0579-SO	-	1	-	5.791	0.22800			5.79
1AQ0580-SO	-	-	-	5.800	0.22835			5.80
1AQ0590-SO	-	-	-	5.900	0.23228			5.90
1AQ0595-SO	15/64	-	-	5.953	0.23438			5.95
1AQ0600-SO	-	-	-	6.000	0.23622			6.00
1AQ0610-SO	-	-	-	6.100	0.24016			6.10
1AQ0620-SO	-	-	-	6.200	0.24409			6.20
1AQ0630-SO	-	-	-	6.300	0.24803			6.30
1AQ0635-SO	1/4	-	E	6.350	0.25000	6.35		
1AQ0640-SO	-	-	-	6.400	0.25197	6.40		
1AQ0650-SO	-	-	-	6.500	0.25591	6.50		
1AQ0653-SO	-	-	F	6.528	0.25700	6.53		
1AQ0660-SO	-	-	-	6.600	0.25984	6.60		
1AQ0670-SO	-	-	-	6.700	0.26378	6.70		
1AQ0675-SO	17/64	-	-	6.747	0.26563	6.75		
1AQ0680-SO	-	-	-	6.800	0.26772	6.80		
1AQ0690-SO	-	-	-	6.900	0.27165	6.90		
1AQ0691-SO	-	-	I	6.909	0.27200	6.90		
1AQ0700-SO	-	-	-	7.000	0.27559	7.00		
1AQ0710-SO	-	-	-	7.100	0.27953	7.10		
1AQ0714-SO	9/32	-	-	7.144	0.28125	7.14		
1AQ0720-SO	-	-	-	7.200	0.28346	7.20		
1AQ0730-SO	-	-	-	7.300	0.28740	7.30		
1AQ0740-SO	-	-	-	7.400	0.29134	7.40		
1AQ0750-SO	-	-	-	7.500	0.29528	7.50		
1AQ0754-SO	19/64	-	-	7.541	0.29688	7.54		
1AQ0760-SO	-	-	-	7.600	0.29921	7.60		
1AQ0770-SO	-	-	-	7.700	0.30315	7.70		
1AQ0780-SO	-	-	-	7.800	0.30709	7.80		
1AQ0790-SO	-	-	-	7.900	0.31102	7.90		
1AQ0794-SO	5/16	-	-	7.938	0.31250	7.94		
1AQ0800-SO	-	-	-	8.000	0.31496	8.00		
1AQ0810-SO	-	-	-	8.100	0.31890	8.10		
1AQ0820-SO	-	-	-	8.200	0.32283	8.20		
1AQ0830-SO	-	-	-	8.300	0.32677	8.30		
1AQ0833-SO	21/64	-	-	8.334	0.32813	8.33		
1AQ0840-SO	-	-	-	8.400	0.33071	8.40		
1AQ0843-SO	-	-	Q	8.433	0.33200	8.43		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 1AQ-SO (Continued)

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND TAPS P567-569 654-656	SPEED FEED P394-395	HSS	TYPE W	BR	JOBBERS	40°
------------	--	-------------------------------	------------	---------------	-----------	----------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1AQ0850-SO	-	-	-	8.500	0.33465	75	117	8.50
1AQ0860-SO	-	-	-	8.600	0.33858	81	125	8.60
1AQ0870-SO	-	-	-	8.700	0.34252			8.70
1AQ0873-SO	11/32	-	-	8.731	0.34375			8.73
1AQ0880-SO	-	-	-	8.800	0.34646			8.80
1AQ0890-SO	-	-	-	8.900	0.35039			8.90
1AQ0900-SO	-	-	-	9.000	0.35433			9.00
1AQ0910-SO	-	-	-	9.100	0.35827			9.10
1AQ0913-SO	23/64	-	-	9.128	0.35938			9.13
1AQ0920-SO	-	-	-	9.200	0.36220			9.20
1AQ0930-SO	-	-	-	9.300	0.36614			9.30
1AQ0940-SO	-	-	-	9.400	0.37008			9.40
1AQ0950-SO	-	-	-	9.500	0.37402			9.50
1AQ0953-SO	3/8	-	-	9.525	0.37500			9.53
1AQ0960-SO	-	-	-	9.600	0.37795	9.60		
1AQ0970-SO	-	-	-	9.700	0.38189	9.70		
1AQ0980-SO	-	-	-	9.800	0.38583	9.80		
1AQ0990-SO	-	-	-	9.900	0.38976	9.90		
1AQ0992-SO	25/64	-	-	9.922	0.39063	9.92		
1AQ1000-SO	-	-	-	10.000	0.39370	10.00		
1AQ1020-SO	-	-	-	10.200	0.40157	10.20		
1AQ1032-SO	13/32	-	-	10.319	0.40625	10.32		
1AQ1050-SO	-	-	-	10.500	0.41339	10.50		
1AQ1072-SO	27/64	-	-	10.716	0.42188	10.72		
1AQ1100-SO	-	-	-	11.000	0.43307	11.00		
1AQ1111-SO	7/16	-	-	11.113	0.43750	11.11		
1AQ1150-SO	-	-	-	11.500	0.45276	11.50		
1AQ1200-SO	-	-	-	12.000	0.47244	12.00		
1AQ1229-SO	31/64	-	-	12.303	0.48438	12.30		
1AQ1250-SO	-	-	-	12.500	0.49213	12.50		
1AQ1269-SO	1/2	-	-	12.690	0.49961	12.70		
1AQ1270-SO	-	-	-	12.700	0.50000	12.70		
1AQ1300-SO	-	-	-	13.000	0.51181	13.00		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
List No.	P				M			K	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH	Cast Iron	6061 7075			Casting	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1AQ-SO	<input type="checkbox"/>								<input checked="" type="checkbox"/>	<input type="checkbox"/>							

good best





List 1W6-SO

WHITE BAND, Ideal for Cast Iron

NEW	WHITE BAND TAPS P570-572	SPEED FEED P394-395	HSS-Co5	TYPE FS	TYPE GG	TiAlN	JOBBERS	30°
------------	------------------------------------	-------------------------------	----------------	----------------	----------------	--------------	----------------	------------



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1.98 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1W60198-SO	5/64	-	-	1.984	0.07813	24	49	1.98
1W60199-SO	-	47	-	1.994	0.07850			1.99
1W60206-SO	-	46	-	2.057	0.08100			2.06
1W60208-SO	-	45	-	2.083	0.08200			2.08
1W60218-SO	-	44	-	2.184	0.08600	27	53	2.18
1W60226-SO	-	43	-	2.261	0.08900			2.26
1W60237-SO	-	42	-	2.375	0.09350			2.37
1W60238-SO	3/32	-	-	2.381	0.09375			2.38
1W60244-SO	-	41	-	2.438	0.09600	30	57	2.44
1W60249-SO	-	40	-	2.489	0.09800			2.49
1W60250-SO	-	-	-	2.500	0.09843			2.50
1W60253-SO	-	39	-	2.527	0.09950			2.53
1W60258-SO	-	38	-	2.578	0.10150			2.58
1W60264-SO	-	37	-	2.642	0.10400			2.64
1W60271-SO	-	36	-	2.705	0.10650			2.71
1W60278-SO	7/64	-	-	2.778	0.10938			2.78
1W60279-SO	-	35	-	2.794	0.11000	33	61	2.79
1W60282-SO	-	34	-	2.819	0.11100			2.82
1W60287-SO	-	33	-	2.870	0.11300			2.87
1W60295-SO	-	32	-	2.946	0.11600			2.95
1W60305-SO	-	31	-	3.048	0.12000	36	65	3.05
1W60318-SO	1/8	-	-	3.175	0.12500			3.18
1W60326-SO	-	30	-	3.264	0.12850			3.26
1W60330-SO	-	-	-	3.300	0.12992			3.30
1W60345-SO	-	29	-	3.454	0.13600	39	70	3.45
1W60356-SO	-	28	-	3.569	0.14050			3.57
1W60357-SO	9/64	-	-	3.572	0.14063			3.57
1W60366-SO	-	27	-	3.658	0.14400			3.66
1W60373-SO	-	26	-	3.734	0.14700	43	75	3.73
1W60379-SO	-	25	-	3.797	0.14950			3.80
1W60386-SO	-	24	-	3.861	0.15200			3.86
1W60391-SO	-	23	-	3.912	0.15400			3.91
1W60397-SO	5/32	-	-	3.969	0.15625	47	80	3.97
1W60399-SO	-	22	-	3.988	0.15700			3.99
1W60400-SO	-	-	-	4.000	0.15748			4.00
1W60404-SO	-	21	-	4.039	0.15900			4.04
1W60409-SO	-	20	-	4.089	0.16100			4.09
1W60420-SO	-	-	-	4.200	0.16535			4.20
1W60422-SO	-	19	-	4.216	0.16600			4.22
1W60431-SO	-	18	-	4.305	0.16950			4.31
1W60437-SO	11/64	-	-	4.366	0.17188	52	86	4.37
1W60439-SO	-	17	-	4.394	0.17300			4.39
1W60449-SO	-	16	-	4.496	0.17700			4.50
1W60450-SO	-	-	-	4.500	0.17717			4.50
1W60457-SO	-	15	-	4.572	0.18000	52	86	4.57
1W60462-SO	-	14	-	4.623	0.18200			4.62
1W60469-SO	-	13	-	4.699	0.18500			4.70
1W60476-SO	3/16	-	-	4.763	0.18750			4.76
1W60479-SO	-	12	-	4.801	0.18900			4.80
1W60485-SO	-	11	-	4.851	0.19100			4.86
1W60492-SO	-	10	-	4.915	0.19350			4.92
1W60498-SO	-	9	-	4.978	0.19600			4.98

Packed: 1 pc.
Available TiAlN coating only.





List 1W6-SO (Continued)

WHITE BAND, Ideal for Cast Iron

NEW	WHITE BAND TAPS P570-572	SPEED FEED P394-395	HSS-Co5	TYPE FS	TYPE GG	TiAIN	JOBBERS	30°
------------	-----------------------------	------------------------	---------	---------	---------	-------	---------	-----

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1W60500-SO	-	-	-	5.000	0.19685	52	86	5.00
1W60506-SO	-	8	-	5.055	0.19900			5.05
1W60511-SO	-	7	-	5.105	0.20100			5.11
1W60516-SO	13/64	-	-	5.159	0.20313			5.16
1W60518-SO	-	6	-	5.182	0.20400			5.18
1W60522-SO	-	5	-	5.220	0.20550			5.22
1W60532-SO	-	4	-	5.309	0.20900	5.31		
1W60541-SO	-	3	-	5.410	0.21300	5.41		
1W60550-SO	-	-	-	5.500	0.21654	5.50		
1W60556-SO	7/32	-	-	5.556	0.21875	5.56		
1W60561-SO	-	2	-	5.613	0.22100	5.61		
1W60579-SO	-	1	-	5.791	0.22800	5.79		
1W60595-SO	15/64	-	-	5.953	0.23438	5.95		
1W60600-SO	-	-	-	6.000	0.23622	6.00		
1W60634-SO	1/4	-	E	6.350	0.25000	6.35		
1W60650-SO	-	-	-	6.500	0.25591	6.50		
1W60653-SO	-	-	F	6.528	0.25700	6.53		
1W60675-SO	17/64	-	-	6.747	0.26563	6.75		
1W60680-SO	-	-	-	6.800	0.26772	6.80		
1W60691-SO	-	-	I	6.909	0.27200	6.90		
1W60700-SO	-	-	-	7.000	0.27559	7.00		
1W60714-SO	9/32	-	-	7.144	0.28128	7.14		
1W60750-SO	-	-	-	7.500	0.29528	7.50		
1W60754-SO	19/64	-	-	7.541	0.29688	7.54		
1W60794-SO	5/16	-	-	7.938	0.31250	7.94		
1W60800-SO	-	-	-	8.000	0.31496	8.00		
1W60833-SO	21/64	-	-	8.334	0.32813	8.33		
1W60843-SO	-	-	Q	8.433	0.33200	8.43		
1W60850-SO	-	-	-	8.500	0.33465	8.50		
1W60873-SO	11/32	-	-	8.731	0.34375	8.73		
1W60900-SO	-	-	-	9.000	0.35433	9.00		
1W60913-SO	23/64	-	-	9.128	0.35938	9.13		
1W60950-SO	-	-	-	9.500	0.37402	9.50		
1W60953-SO	3/8	-	-	9.525	0.37500	9.53		
1W60992-SO	25/64	-	-	9.922	0.39063	9.92		
1W61000-SO	-	-	-	10.000	0.39370	10.00		
1W61020-SO	-	-	-	10.200	0.40157	10.20		
1W61030-SO	13/32	-	-	10.319	0.40625	10.32		
1W61050-SO	-	-	-	10.500	0.41339	10.50		
1W61072-SO	27/64	-	-	10.716	0.42188	10.72		
1W61100-SO	-	-	-	11.000	0.43307	11.00		
1W61111-SO	7/16	-	-	11.113	0.43750	11.11		
1W61191-SO	15/32	-	-	11.906	0.46875	11.91		
1W61200-SO	-	-	-	12.000	0.47244	12.00		
1W61269-SO	1/2	-	-	12.700	0.50000	12.70		

Packed: 1 pc.
Available TiAIN coating only.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels					
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
1W6-SO									<input checked="" type="checkbox"/>										


good best





List 1G7-SO

GREEN BAND, Ideal for Carbon Steels

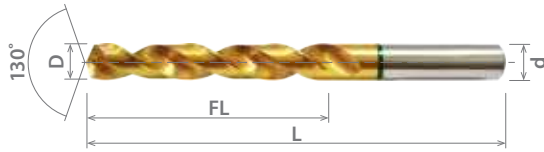

NEW	GREEN BAND TAPS P573-576 657-659	SPEED FEED P394-395	HSS-Co5	TYPE UNI	TiN	JOBBERS	33°
------------	---	-------------------------------	----------------	-----------------	------------	----------------	------------

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1G70100-SO	-	-	-	1.000	0.03937	12	34	1.00
1G70150-SO	-	-	-	1.500	0.05906	18	40	1.50
1G70160-SO	-	-	-	1.600	0.06299	20	43	1.60
1G70170-SO	-	-	-	1.700	0.06693			1.70
1G70190-SO	-	-	-	1.900	0.07480	22	46	1.90
1G70198-SO	5/64	-	-	1.984	0.07813	24	49	1.98
1G70199-SO	-	47	-	1.994	0.07850			1.99
1G70200-SO	-	-	-	2.000	0.07874			2.00
1G70206-SO	-	46	-	2.057	0.08100			2.06
1G70208-SO	-	45	-	2.083	0.08200			2.08
1G70210-SO	-	-	-	2.100	0.08268			2.10
1G70218-SO	-	44	-	2.184	0.08600	27	53	2.18
1G70226-SO	-	43	-	2.261	0.08900			2.26
1G70237-SO	-	42	-	2.375	0.09350	30	57	2.37
1G70238-SO	3/32	-	-	2.381	0.09375			2.38
1G70244-SO	-	41	-	2.438	0.09600			2.44
1G70249-SO	-	40	-	2.489	0.09800			2.49
1G70250-SO	-	-	-	2.500	0.09843			2.50
1G70253-SO	-	39	-	2.527	0.09950			2.53
1G70258-SO	-	38	-	2.578	0.10150	2.58		
1G70260-SO	-	-	-	2.600	0.10236	2.60		
1G70264-SO	-	37	-	2.642	0.10400	2.64		
1G70270-SO	-	-	-	2.700	0.10630	2.70		
1G70271-SO	-	36	-	2.705	0.10650	33	61	2.71
1G70278-SO	7/64	-	-	2.778	0.10938			2.78
1G70279-SO	-	35	-	2.794	0.11000			2.79
1G70280-SO	-	-	-	2.800	0.11024			2.80
1G70282-SO	-	34	-	2.819	0.11100			2.82
1G70287-SO	-	33	-	2.870	0.11300			2.87
1G70290-SO	-	-	-	2.900	0.11417	2.90		
1G70295-SO	-	32	-	2.946	0.11600	2.95		
1G70300-SO	-	-	-	3.000	0.11811	3.00		
1G70305-SO	-	31	-	3.048	0.12000	3.05		
1G70310-SO	-	-	-	3.100	0.12205	3.10		
1G70318-SO	1/8	-	-	3.175	0.12500	36	65	3.18
1G70320-SO	-	-	-	3.200	0.12598			3.20
1G70326-SO	-	30	-	3.264	0.12850			3.26
1G70330-SO	-	-	-	3.300	0.12992			3.30
1G70340-SO	-	-	-	3.400	0.13386			3.40
1G70345-SO	-	29	-	3.454	0.13600			3.45
1G70350-SO	-	-	-	3.500	0.13780	3.50		
1G70356-SO	-	28	-	3.569	0.14050	39	70	3.57
1G70357-SO	9/64	-	-	3.572	0.14063			3.57
1G70360-SO	-	-	-	3.600	0.14173			3.60
1G70366-SO	-	27	-	3.658	0.14400			3.66
1G70370-SO	-	-	-	3.700	0.14567			3.70
1G70373-SO	-	26	-	3.734	0.14700			3.73
1G70379-SO	-	25	-	3.797	0.14950	43	75	3.80
1G70380-SO	-	-	-	3.800	0.14961			3.80
1G70386-SO	-	24	-	3.861	0.15200			3.86

Packed: 1 pc.
Available TiN coating only.





List 1G7-SO (Continued)

GREEN BAND, Ideal for Carbon Steels

NEW	GREEN BAND TAPS P573-576 657-659	SPEED FEED P394-395	HSS-Co5	TYPE UNI	TiN	JOBBERS	33°
------------	---	-------------------------------	----------------	-----------------	------------	----------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)		
	Fractional Size	Wire Gage	Letter Size	mm	Inch					
1G70390-SO	-	-	-	3.900	0.15354	43	75	3.90		
1G70391-SO	-	23	-	3.912	0.15400			3.91		
1G70397-SO	5/32	-	-	3.969	0.15625			3.97		
1G70399-SO	-	22	-	3.988	0.15700			3.99		
1G70400-SO	-	-	-	4.000	0.15748			4.00		
1G70404-SO	-	21	-	4.039	0.15900			4.04		
1G70409-SO	-	20	-	4.089	0.16100			4.09		
1G70410-SO	-	-	-	4.100	0.16142			4.10		
1G70420-SO	-	-	-	4.200	0.16535			4.20		
1G70422-SO	-	19	-	4.216	0.16600			4.22		
1G70430-SO	-	-	-	4.300	0.16929	47	80	4.30		
1G70431-SO	-	18	-	4.305	0.16950			4.31		
1G70437-SO	11/64	-	-	4.366	0.17188			4.37		
1G70439-SO	-	17	-	4.394	0.17300			4.39		
1G70449-SO	-	16	-	4.496	0.17700			52	86	4.50
1G70450-SO	-	-	-	4.500	0.17717					4.57
1G70457-SO	-	15	-	4.572	0.18000					4.62
1G70462-SO	-	14	-	4.623	0.18200					4.70
1G70469-SO	-	13	-	4.699	0.18500					4.76
1G70476-SO	3/16	-	-	4.763	0.18750					57
1G70479-SO	-	12	-	4.801	0.18900	4.86				
1G70480-SO	-	-	-	4.800	0.18898	4.92				
1G70485-SO	-	11	-	4.851	0.19100	4.98				
1G70492-SO	-	10	-	4.915	0.19350	5.00				
1G70498-SO	-	9	-	4.978	0.19600	5.05				
1G70500-SO	-	-	-	5.000	0.19685	5.10				
1G70506-SO	-	8	-	5.055	0.19900	5.11				
1G70510-SO	-	-	-	5.100	0.20079	5.16				
1G70511-SO	-	7	-	5.105	0.20100	5.18				
1G70516-SO	13/64	-	-	5.159	0.20313	5.20				
1G70518-SO	-	6	-	5.182	0.20400	5.22				
1G70520-SO	-	-	-	5.200	0.20472	5.30				
1G70522-SO	-	5	-	5.220	0.20550	5.31				
1G70530-SO	-	-	-	5.300	0.20866	5.41				
1G70532-SO	-	4	-	5.309	0.20900	5.50				
1G70541-SO	-	3	-	5.410	0.21300	5.56				
1G70550-SO	-	-	-	5.500	0.21654	5.61				
1G70556-SO	7/32	-	-	5.556	0.21875	5.79				
1G70561-SO	-	2	-	5.613	0.22100	5.80				
1G70579-SO	-	1	-	5.791	0.22800	5.90				
1G70580-SO	-	-	-	5.800	0.22835	5.95				
1G70590-SO	-	-	-	5.900	0.23228	6.00				
1G70595-SO	15/64	-	-	5.953	0.23438	6.10				
1G70600-SO	-	-	-	6.000	0.23622	6.20				
1G70610-SO	-	-	-	6.100	0.24016					
1G70620-SO	-	-	-	6.200	0.24409					

Packed: 1 pc.
Available TiN coating only.

continued on next page

List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1G7-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>														

good best






List 1G7-SO (Continued)

NEW	GREEN BAND TAPS P573-576 657-659	SPEED FEED P394-395	HSS-Co5	TYPE UNI	TiN	JOBBERS	33°
------------	---	-------------------------------	----------------	-----------------	------------	----------------	------------

GREEN BAND, Ideal for Carbon Steels

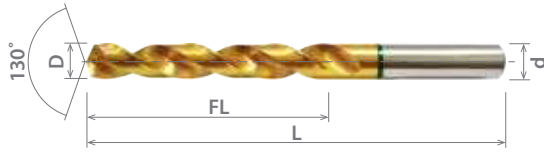

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 13	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1G70630-SO	-	-	-	6.300	0.24803	63	101	6.30
1G70635-SO	1/4	-	E	6.350	0.25000			6.35
1G70640-SO	-	-	-	6.400	0.25197			6.40
1G70650-SO	-	-	-	6.500	0.25591			6.50
1G70653-SO	-	-	F	6.528	0.25700	69	109	6.53
1G70675-SO	17/64	-	-	6.747	0.26563			6.75
1G70680-SO	-	-	-	6.800	0.26772			6.80
1G70690-SO	-	-	-	6.900	0.27165			6.90
1G70691-SO	-	-	I	6.909	0.27200	75	117	6.90
1G70700-SO	-	-	-	7.000	0.27559			7.00
1G70714-SO	9/32	-	-	7.144	0.28128			7.14
1G70730-SO	-	-	-	7.300	0.28740			7.30
1G70750-SO	-	-	-	7.500	0.29528	81	125	7.50
1G70754-SO	19/64	-	-	7.541	0.29688			7.54
1G70770-SO	-	-	-	7.700	0.30315			7.70
1G70780-SO	-	-	-	7.800	0.30709			7.80
1G70790-SO	-	-	-	7.900	0.31102	87	133	7.90
1G70794-SO	5/16	-	-	7.938	0.31250			7.94
1G70800-SO	-	-	-	8.000	0.31496			8.00
1G70810-SO	-	-	-	8.100	0.31890			8.10
1G70820-SO	-	-	-	8.200	0.32283	94	142	8.20
1G70833-SO	21/64	-	-	8.334	0.32813			8.33
1G70840-SO	-	-	-	8.400	0.33071			8.40
1G70843-SO	-	-	Q	8.433	0.33200			8.43
1G70850-SO	-	-	-	8.500	0.33465	99	149	8.50
1G70870-SO	-	-	-	8.700	0.34252			8.70
1G70873-SO	11/32	-	-	8.731	0.34375			8.73
1G70880-SO	-	-	-	8.800	0.34646			8.80
1G70890-SO	-	-	-	8.900	0.35039	105	155	8.90
1G70900-SO	-	-	-	9.000	0.35433			9.00
1G70913-SO	23/64	-	-	9.128	0.35938			9.13
1G70930-SO	-	-	-	9.300	0.36614			9.30
1G70950-SO	-	-	-	9.500	0.37402	111	161	9.50
1G70953-SO	3/8	-	-	9.525	0.37500			9.53
1G70960-SO	-	-	-	9.600	0.37795			9.60
1G70992-SO	25/64	-	-	9.922	0.39063			9.92
1G71000-SO	-	-	-	10.000	0.39370	117	167	10.00
1G71010-SO	-	-	-	10.100	0.39764			10.10
1G71020-SO	-	-	-	10.200	0.40157			10.20
1G71030-SO	-	-	-	10.300	0.40551			10.30
1G71032-SO	13/32	-	-	10.319	0.40625	123	173	10.32
1G71050-SO	-	-	-	10.500	0.41339			10.50
1G71060-SO	-	-	-	10.600	0.41732			10.60
1G71070-SO	-	-	-	10.700	0.42126			10.70
1G71072-SO	27/64	-	-	10.716	0.42188	129	179	10.72
1G71080-SO	-	-	-	10.800	0.42520			10.80
1G71100-SO	-	-	-	11.000	0.43307			11.00
1G71111-SO	7/16	-	-	11.113	0.43750			11.11
1G71130-SO	-	-	-	11.300	0.44488	135	185	11.30
1G71150-SO	-	-	-	11.500	0.45276			11.50

Packed: 1 pc.
Available TiN coating only.



List 1G7-SO (Continued)

GREEN BAND, Ideal for Carbon Steels

NEW	GREEN BAND TAPS P573-576 657-659	SPEED FEED P394-395	HSS-Co5	TYPE UNI	TIN	JOBBER	33°
------------	---	-------------------------------	----------------	-----------------	------------	---------------	------------

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1G71170-SO	-	-	-	11.700	0.46063	94	142	11.70
1G71180-SO	-	-	-	11.800	0.46457			11.80
1G71200-SO	-	-	-	12.000	0.47244	101	151	12.00
1G71250-SO	-	-	-	12.500	0.49213			12.50
1G71269-SO	-	-	-	12.690	0.49961			12.70
1G71270-SO	1/2	-	-	12.700	0.50000			12.80
1G71280-SO	-	-	-	12.800	0.50394			12.90
1G71290-SO	-	-	-	12.900	0.50787			13.00
1G71300-SO	-	-	-	13.000	0.51181			

Packed: 1 pc.
Available TIN coating only.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1G7-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>													

good best






List 101-SO, 102-SO

NEW	SPEED FEED P396	HSS	TYPE N	S/O	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------

Jobber Drills

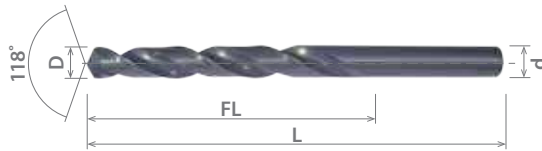

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.3≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1010030-SO	-	-	-	0.300	0.01181	3	19	0.30
10	1010035-SO	-	-	-	0.350	0.01378	4		0.35
10	1020040-SO	1/64	-	-	0.397	0.01563	5	20	0.40
10	1010040-SO	-	-	-	0.400	0.01575			0.45
10	1010045-SO	-	-	-	0.450	0.01772	6	22	0.50
10	1010050-SO	-	-	-	0.500	0.01969			0.55
10	1010055-SO	-	-	-	0.550	0.02165	7	24	0.60
10	1010060-SO	-	-	-	0.600	0.02362			0.70
10	1010070-SO	-	-	-	0.700	0.02756	9	28	0.75
10	1010075-SO	-	-	-	0.750	0.02953			0.79
10	1020079-SO	1/32	-	-	0.794	0.03125	10	30	0.80
10	1010080-SO	-	-	-	0.800	0.03150			0.90
10	1010090-SO	-	-	-	0.900	0.03543	11	32	1.00
10	1010100-SO	-	-	-	1.000	0.03937			1.05
10	1010105-SO	-	-	-	1.050	0.04134	12	34	1.10
10	1010110-SO	-	-	-	1.100	0.04331			1.15
10	1010115-SO	-	-	-	1.150	0.04528	14	36	1.19
10	1020119-SO	3/64	-	-	1.191	0.04688			1.20
10	1010120-SO	-	-	-	1.200	0.04724	16	38	1.25
10	1010125-SO	-	-	-	1.250	0.04921			1.30
10	1010130-SO	-	-	-	1.300	0.05118	18	40	1.35
10	1010135-SO	-	-	-	1.350	0.05315			1.40
10	1010140-SO	-	-	-	1.400	0.05512	20	43	1.45
10	1010145-SO	-	-	-	1.450	0.05709			1.50
10	1010150-SO	-	-	-	1.500	0.05906	22	46	1.55
10	1010155-SO	-	-	-	1.550	0.06102			1.59
10	1020159-SO	1/16	-	-	1.588	0.06250	24	49	1.60
10	1010160-SO	-	-	-	1.600	0.06299			1.65
10	1010165-SO	-	-	-	1.650	0.06496	27	53	1.70
10	1010170-SO	-	-	-	1.700	0.06693			1.75
10	1010175-SO	-	-	-	1.750	0.06890	22	46	1.80
10	1010180-SO	-	-	-	1.800	0.07087			1.85
10	1010185-SO	-	-	-	1.850	0.07283	24	49	1.90
10	1010190-SO	-	-	-	1.900	0.07480			1.95
10	1010195-SO	-	-	-	1.950	0.07677	27	53	1.98
10	1020198-SO	5/64	-	-	1.984	0.07813			2.00
10	1010200-SO	-	-	-	2.000	0.07874	27	53	2.05
10	1010205-SO	-	-	-	2.050	0.08071			2.10
10	1010210-SO	-	-	-	2.100	0.08268	27	53	2.15
10	1010215-SO	-	-	-	2.150	0.08465			2.20
10	1010220-SO	-	-	-	2.200	0.08661	27	53	2.25
10	1010225-SO	-	-	-	2.250	0.08858			2.30
10	1010230-SO	-	-	-	2.300	0.09055	27	53	2.35
10	1010235-SO	-	-	-	2.350	0.09252			

Available Steam Oxide only.





List 101-SO, 102-SO (Continued)

NEW SPEED FEED P396 HSS TYPE N S/O JOBBERS 30°

Jobber Drills

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)		
		Fractional Size	Wire Gage	Letter Size	mm	Inch					
10	1020238-SO	3/32	-	-	2.381	0.09375	30	57	2.38		
10	1010240-SO	-	-	-	2.400	0.09449			2.40		
10	1010245-SO	-	-	-	2.450	0.09646			2.45		
10	1010250-SO	-	-	-	2.500	0.09843			2.50		
10	1010255-SO	-	-	-	2.550	0.10039			2.55		
10	1010260-SO	-	-	-	2.600	0.10236			2.60		
10	1010265-SO	-	-	-	2.650	0.10433			2.65		
10	1010270-SO	-	-	-	2.700	0.10630	2.70				
10	1010275-SO	-	-	-	2.750	0.10827	2.75				
10	1020278-SO	7/64	-	-	2.778	0.10938	33	61	2.78		
10	1010280-SO	-	-	-	2.800	0.11024			2.80		
10	1010285-SO	-	-	-	2.850	0.11220			2.85		
10	1010290-SO	-	-	-	2.900	0.11417			2.90		
10	1010295-SO	-	-	-	2.950	0.11614			2.95		
10	1010300-SO	-	-	-	3.000	0.11811			3.00		
10	1010310-SO	-	-	-	3.100	0.12205			3.10		
10	1020318-SO	1/8	-	-	3.175	0.12500	36	65	3.18		
10	1010320-SO	-	-	-	3.200	0.12598			3.20		
10	1010325-SO	-	-	-	3.250	0.12795			3.25		
10	1010330-SO	-	-	-	3.300	0.12992			3.30		
10	1010340-SO	-	-	-	3.400	0.13386			3.40		
10	1010350-SO	-	-	-	3.500	0.13780			3.50		
10	1020357-SO	9/64	-	-	3.572	0.14063			39	70	3.57
10	1010360-SO	-	-	-	3.600	0.14173	3.60				
10	1010370-SO	-	-	-	3.700	0.14567	3.70				
10	1010380-SO	-	-	-	3.800	0.14961	3.80				
10	1010390-SO	-	-	-	3.900	0.15354	3.90				
10	1020397-SO	5/32	-	-	3.969	0.15625	43	75			3.97
10	1010400-SO	-	-	-	4.000	0.15748					4.00
10	1010410-SO	-	-	-	4.100	0.16142			4.10		
10	1010420-SO	-	-	-	4.200	0.16535			4.20		
10	1010425-SO	-	-	-	4.250	0.16732			4.25		
10	1010430-SO	-	-	-	4.300	0.16929			4.30		
10	1020437-SO	11/64	-	-	4.366	0.17188			47	80	4.37
10	1010440-SO	-	-	-	4.400	0.17323	4.40				
10	1010450-SO	-	-	-	4.500	0.17717	4.50				
10	1010460-SO	-	-	-	4.600	0.18110	4.60				
10	1010470-SO	-	-	-	4.700	0.18504	4.70				

Available Steam Oxide only.

continued on next page

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
101-SO, 102-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 101-SO, 102-SO (Continued)

NEW	SPEED FEED P396	HSS	TYPE N	S/O	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------


Jobber Drills



Standard Point
(D<3mm)



Split Point
(D≥3mm)

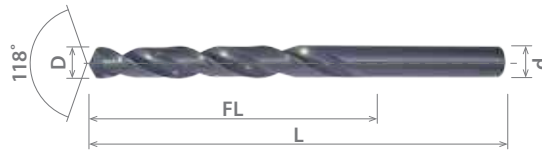

Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.3≤D≤3	+0 / -0.014	+0 / -0.0006
3<D≤6	+0 / -0.018	+0 / -0.0007
6<D≤10	+0 / -0.022	+0 / -0.0009
10<D≤18	+0 / -0.027	+0 / -0.0011
18<D≤20	+0 / -0.033	+0 / -0.0013

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1020476-SO	3/16	-	-	4.763	0.18750	52	86	4.76
10	1010480-SO	-	-	-	4.800	0.18898			4.80
10	1010490-SO	-	-	-	4.900	0.19291			4.90
10	1010500-SO	-	-	-	5.000	0.19685			5.00
10	1010510-SO	-	-	-	5.100	0.20079			5.10
10	1020516-SO	13/64	-	-	5.159	0.20313			5.16
10	1010520-SO	-	-	-	5.200	0.20472			5.20
10	1010525-SO	-	-	-	5.250	0.20669			5.25
10	1010530-SO	-	-	-	5.300	0.20866			5.30
10	1010540-SO	-	-	-	5.400	0.21260			5.40
10	1010550-SO	-	-	-	5.500	0.21654	5.50		
10	1020556-SO	7/32	-	-	5.556	0.21875	5.56		
10	1010560-SO	-	-	-	5.600	0.22047	5.60		
10	1010570-SO	-	-	-	5.700	0.22441	5.70		
10	1010575-SO	-	-	-	5.750	0.22638	5.75		
10	1010580-SO	-	-	-	5.800	0.22835	5.80		
10	1010590-SO	-	-	-	5.900	0.23228	5.90		
10	1020595-SO	15/64	-	-	5.953	0.23438	5.95		
10	1010600-SO	-	-	-	6.000	0.23622	6.00		
10	1010610-SO	-	-	-	6.100	0.24016	6.10		
10	1010620-SO	-	-	-	6.200	0.24409	6.20		
10	1010625-SO	-	-	-	6.250	0.24606	6.25		
10	1010630-SO	-	-	-	6.300	0.24803	6.30		
10	1020635-SO	1/4	-	E	6.350	0.25000	6.35		
10	1010640-SO	-	-	-	6.400	0.25197	6.40		
10	1010650-SO	-	-	-	6.500	0.25591	6.50		
10	1010660-SO	-	-	-	6.600	0.25984	6.60		
10	1010670-SO	-	-	-	6.700	0.26378	6.70		
10	1020675-SO	17/64	-	-	6.747	0.26563	6.75		
10	1010675-SO	-	-	-	6.750	0.26575	6.80		
10	1010680-SO	-	-	-	6.800	0.26772	6.80		
10	1010690-SO	-	-	-	6.900	0.27165	6.90		
10	1010700-SO	-	-	-	7.000	0.27559	7.00		
10	1010710-SO	-	-	-	7.100	0.27953	7.10		
10	1020714-SO	9/32	-	-	7.144	0.28125	7.14		
10	1010720-SO	-	-	-	7.200	0.28346	7.20		
10	1010730-SO	-	-	-	7.300	0.28740	7.30		
10	1010740-SO	-	-	-	7.400	0.29134	7.40		
10	1010750-SO	-	-	-	7.500	0.29528	7.50		
10	1020754-SO	19/64	-	-	7.541	0.29688	7.54		
10	1010760-SO	-	-	-	7.600	0.29921	7.60		
10	1010770-SO	-	-	-	7.700	0.30315	7.70		
10	1010780-SO	-	-	-	7.800	0.30709	7.80		
10	1010790-SO	-	-	-	7.900	0.31102	7.90		
10	1020794-SO	5/16	-	-	7.938	0.31250	7.94		
10	1010800-SO	-	-	-	8.000	0.31496	8.00		
10	1010810-SO	-	-	-	8.100	0.31890	8.10		
10	1010820-SO	-	-	-	8.200	0.32283	8.20		
10	1010825-SO	-	-	-	8.250	0.32480	8.25		
10	1010830-SO	-	-	-	8.300	0.32677	8.30		

Available Steam Oxide only.



List 101-SO, 102-SO (Continued)

Jobber Drills

NEW	SPEED FEED P396	HSS	TYPE N	S/O	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------

Pcs per Pack	EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
		Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
10	1020833-SO	21/64	-	-	8.334	0.32813	75	117	8.33
10	1010840-SO	-	-	-	8.400	0.33071			8.40
10	1010850-SO	-	-	-	8.500	0.33465			8.50
10	1010860-SO	-	-	-	8.600	0.33858			8.60
10	1010870-SO	-	-	-	8.700	0.34252			8.70
10	1020873-SO	11/32	-	-	8.731	0.34375			8.73
10	1010875-SO	-	-	-	8.750	0.34449			8.75
10	1010880-SO	-	-	-	8.800	0.34646			8.80
10	1010890-SO	-	-	-	8.900	0.35039			8.90
10	1010900-SO	-	-	-	9.000	0.35433			9.00
10	1010910-SO	-	-	-	9.100	0.35827	9.10		
10	1020913-SO	23/64	-	-	9.128	0.35938	9.12		
10	1010920-SO	-	-	-	9.200	0.36220	9.20		
10	1010925-SO	-	-	-	9.250	0.36417	9.25		
10	1010930-SO	-	-	-	9.300	0.36614	9.30		
10	1010940-SO	-	-	-	9.400	0.37008	9.40		
10	1010950-SO	-	-	-	9.500	0.37402	9.50		
10	1020953-SO	3/8	-	-	9.525	0.37500	9.53		
10	1010960-SO	-	-	-	9.600	0.37795	9.60		
10	1010970-SO	-	-	-	9.700	0.38189	9.70		
10	1010975-SO	-	-	-	9.750	0.38386	9.75		
10	1010980-SO	-	-	-	9.800	0.38583	9.80		
10	1010990-SO	-	-	-	9.900	0.38976	9.90		
5	1020992-SO	25/64	-	-	9.922	0.39063	9.92		
5	1011000-SO	-	-	-	10.000	0.39370	10.00		
5	1011010-SO	-	-	-	10.100	0.39764	10.10		
5	1011020-SO	-	-	-	10.200	0.40157	10.20		
5	1011025-SO	-	-	-	10.250	0.40354	10.25		
5	1011030-SO	-	-	-	10.300	0.40551	10.30		
5	1021032-SO	13/32	-	-	10.319	0.40625	10.32		
5	1011040-SO	-	-	-	10.400	0.40945	10.40		
5	1011050-SO	-	-	-	10.500	0.41339	10.50		
5	1011060-SO	-	-	-	10.600	0.41732	10.60		
5	1011070-SO	-	-	-	10.700	0.42126	10.70		
5	1021072-SO	27/64	-	-	10.716	0.42188	10.72		
5	1011075-SO	-	-	-	10.750	0.42323	10.75		
5	1011080-SO	-	-	-	10.800	0.42520	10.80		
5	1011090-SO	-	-	-	10.900	0.42913	10.90		
5	1011100-SO	-	-	-	11.000	0.43307	11.00		
5	1011110-SO	-	-	-	11.100	0.43701	11.10		
5	1021111-SO	7/16	-	-	11.113	0.43750	11.11		
5	1011120-SO	-	-	-	11.200	0.44094	11.20		
5	1011130-SO	-	-	-	11.300	0.44488	11.30		
5	1011140-SO	-	-	-	11.400	0.44882	11.40		
5	1011150-SO	-	-	-	11.500	0.45276	11.50		
5	1021151-SO	29/64	-	-	11.509	0.45313	11.51		

Available Steam Oxide only.

continued on next page 

List No.	Work Material																		
	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
101-SO, 102-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 101-SO, 102-SO (Continued)

NEW	SPEED FEED P396	HSS	TYPE N	S/O	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------

Jobber Drills



Cutting Diameter Tolerance (h8)		
Size	mm	inch
0.3 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 18	+0 / -0.027	+0 / -0.0011
18 < D ≤ 20	+0 / -0.033	+0 / -0.0013

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)		
		Fractional Size	Wire Gage	Letter Size	mm	Inch					
5	1011160-SO	-	-	-	11.600	0.45669	94	142	11.60		
5	1011170-SO	-	-	-	11.700	0.46063			11.70		
5	1011180-SO	-	-	-	11.800	0.46457			11.80		
5	1011190-SO	-	-	-	11.900	0.46850			11.90		
5	1021191-SO	15/32	-	-	11.906	0.46875			11.91		
5	1011200-SO	-	-	-	12.000	0.47244			12.00		
5	1011210-SO	-	-	-	12.100	0.47638			12.10		
5	1011220-SO	-	-	-	12.200	0.48031			12.20		
5	1011225-SO	-	-	-	12.250	0.48228			12.25		
5	1011230-SO	-	-	-	12.300	0.48425			101	151	12.30
5	1021230-SO	31/64	-	-	12.303	0.48438					12.30
5	1011240-SO	-	-	-	12.400	0.48819					12.40
5	1011250-SO	-	-	-	12.500	0.49213					12.50
5	1011260-SO	-	-	-	12.600	0.49606					12.60
5	1021270-SO	1/2	-	-	12.700	0.50000	12.70				
5	1011270-SO	1/2	-	-	12.700	0.50000	12.70				
5	1011275-SO	-	-	-	12.750	0.50197	12.75				
5	1011280-SO	-	-	-	12.800	0.50394	12.80				
5	1011290-SO	-	-	-	12.900	0.50787	12.90				
5	1011300-SO	-	-	-	13.000	0.51181	13.00				
1	1021310-SO	33/64	-	-	13.097	0.51563	108	160			13.10
1	1011310-SO	-	-	-	13.100	0.51575					13.10
1	1011320-SO	-	-	-	13.200	0.51969					13.20
1	1011325-SO	-	-	-	13.250	0.52165			13.25		
1	1011330-SO	-	-	-	13.300	0.52362			13.30		
1	1011340-SO	-	-	-	13.400	0.52756			13.40		
1	1021349-SO	17/32	-	-	13.494	0.53125			13.49		
1	1011350-SO	-	-	-	13.500	0.53150			13.50		
1	1011360-SO	-	-	-	13.600	0.53543			13.60		
1	1011370-SO	-	-	-	13.700	0.53937			13.70		
1	1011380-SO	-	-	-	13.800	0.54331			13.80		
1	1021389-SO	35/64	-	-	13.891	0.54688			13.89		
1	1011400-SO	-	-	-	14.000	0.55118			14.00		
1	1011425-SO	-	-	-	14.250	0.56102			14.25		
1	1021429-SO	9/16	-	-	14.288	0.56250	14.29				
1	1011450-SO	-	-	-	14.500	0.57087	14.50				
1	1021468-SO	37/64	-	-	14.684	0.57813	14.68				
1	1011475-SO	-	-	-	14.750	0.58071	14.75				
1	1011500-SO	-	-	-	15.000	0.59055	15.00				
1	1011525-SO	-	-	-	15.250	0.60039	15.25				
1	1011550-SO	-	-	-	15.500	0.61024	15.50				
1	1011575-SO	-	-	-	15.750	0.62008	15.75				
1	1021588-SO	5/8	-	-	15.875	0.62500	15.88				
1	1011600-SO	-	-	-	16.000	0.62992	16.00				
1	1011650-SO	-	-	-	16.500	0.64961	16.50				
1	1011700-SO	-	-	-	17.000	0.66929	17.00				
1	1011750-SO	-	-	-	17.500	0.68898	17.50				
1	1011800-SO	-	-	-	18.000	0.70866	18.00				
1	1011850-SO	-	-	-	18.500	0.72835	18.50				
1	1011900-SO	-	-	-	19.000	0.74803	19.00				

Available Steam Oxide only.



List 101-SO, 102-SO (Continued)

NEW SPEED FEED P396 HSS TYPE N S/O JOBBERS 30°

Jobber Drills

Pcs per Pack	EDP Number	Diameter					Flute Length	Overall Length	Shank Diameter
		Fractional Size	Wire Gage	Letter Size	mm	Inch	FL (mm)	L (mm)	d (mm)
1	1011950-SO	-	-	-	19.500	0.76772	140	205	19.50
1	1012000-SO	-	-	-	20.000	0.78740			20.00

Available Steam Oxide only.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum 6061 7075 Casting	Hardened Steels			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH									
101-SO, 102-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			

good best





List 1X6-SO

NEW	SPEED FEED P396	HSS	TYPE N	TiN	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------

Jobber Drills



Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 16	+0 / -0.027	+0 / -0.0011

Pcs per Pack	EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
		Fractional Size	Wire Gage	Letter Size	mm	Inch			
10	1X60318-SO	1/8	-	-	3.175	0.12500	36	65	3.18
10	1X60357-SO	9/64	-	-	3.572	0.14063	39	70	3.57
10	1X60397-SO	5/32	-	-	3.969	0.15625	43	75	3.97
10	1X60437-SO	11/64	-	-	4.366	0.17188	47	80	4.37
10	1X60476-SO	3/16	-	-	4.763	0.18750	52	86	4.76
10	1X60516-SO	13/64	-	-	5.159	0.20313			5.16
10	1X60556-SO	7/32	-	-	5.556	0.21875	57	93	5.56
10	1X60595-SO	15/64	-	-	5.953	0.23438			5.95
10	1X60635-SO	1/4	-	E	6.350	0.25000	63	101	6.35
10	1X60675-SO	17/64	-	-	6.747	0.26563			6.75
10	1X60714-SO	9/32	-	-	7.144	0.28125	69	109	7.14
10	1X60754-SO	19/64	-	-	7.541	0.29688			7.54
10	1X60794-SO	5/16	-	-	7.938	0.31250	75	117	7.94
10	1X60833-SO	21/64	-	-	8.334	0.32813			8.33
10	1X60873-SO	11/32	-	-	8.731	0.34375	81	125	8.73
10	1X60913-SO	23/64	-	-	9.128	0.35938			9.13
10	1X60953-SO	3/8	-	-	9.525	0.37500	87	133	9.53
5	1X60992-SO	25/64	-	-	9.922	0.39063			9.92
5	1X61032-SO	13/32	-	-	10.319	0.40625	94	142	10.32
5	1X61072-SO	27/64	-	-	10.716	0.42188			10.72
5	1X61111-SO	7/16	-	-	11.113	0.43750	101	151	11.11
5	1X61151-SO	29/64	-	-	11.509	0.45313			11.51
5	1X61191-SO	15/32	-	-	11.906	0.46875	108	160	11.91
5	1X61229-SO	31/64	-	-	12.303	0.48438			12.30
5	1X61269-SO	1/2	-	-	12.700	0.50000	114	169	12.70
1	1X61309-SO	33/64	-	-	13.097	0.51563			13.10
1	1X61349-SO	17/32	-	-	13.494	0.53125	118	178	13.49
1	1X61389-SO	35/64	-	-	13.891	0.54688			13.89
1	1X61429-SO	9/16	-	-	14.288	0.56250	120	178	14.29
1	1X61468-SO	37/64	-	-	14.684	0.57813			14.68
1	1X61588-SO	5/8	-	-	15.875	0.62500			15.88

Available TiN coating only.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels				Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High	4140			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
1X6-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 1X6-SO (Continued)

INCH SET, Jobber Drills

NEW	SPEED FEED P396	HSS	TYPE N	TiN	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------

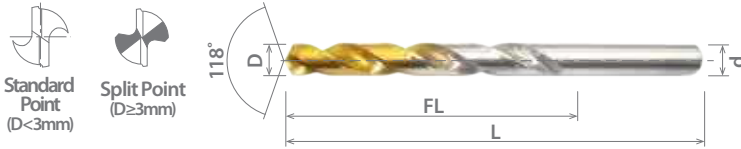

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 16	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1X60030-SO	1/16	-	-	1.588	0.06250	20	43	1.59
	5/64	-	-	1.984	0.07813	24	49	1.98
	3/32	-	-	2.381	0.09375	30	57	2.38
	7/64	-	-	2.778	0.10938	33	61	2.78
	1/8	-	-	3.175	0.12500	36	65	3.18
	9/64	-	-	3.572	0.14063	39	70	3.57
	5/32	-	-	3.969	0.15625	43	75	3.97
	11/64	-	-	4.366	0.17188	47	80	4.37
	3/16	-	-	4.763	0.18750	52	86	4.76
	13/64	-	-	5.159	0.20313			5.16
	7/32	-	-	5.556	0.21875	57	93	5.56
	15/64	-	-	5.953	0.23438			5.95
	1/4	-	E	6.350	0.25000	63	101	6.35
	17/64	-	-	6.747	0.26563	69	109	6.75
	9/32	-	-	7.144	0.28125			7.14
	19/64	-	-	7.541	0.29688	75	117	7.54
	5/16	-	-	7.938	0.31250			7.94
	21/64	-	-	8.334	0.32813	81	125	8.33
	11/32	-	-	8.731	0.34375			8.73
	23/64	-	-	9.128	0.35938	87	133	9.13
	3/8	-	-	9.525	0.37500			9.53
	25/64	-	-	9.922	0.39063	94	142	9.92
	13/32	-	-	10.319	0.40625			10.32
	27/64	-	-	10.716	0.42188	101	151	10.72
	7/16	-	-	11.113	0.43750			11.11
	29/64	-	-	11.509	0.45313	101	151	11.51
	15/32	-	-	11.906	0.46875			11.91
	31/64	-	-	12.303	0.48438	101	151	12.30
	1/2	-	-	12.700	0.50000			12.70

Packed: 1 pc.
Available TiN coating only.

continued on next page



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1X6-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 1X6-SO (Continued)

NEW	SPEED FEED P396	HSS	TYPE N	TiN	JOBBERS	30°
------------	---------------------------	------------	---------------	------------	----------------	------------

METRIC SET, Jobber Drills

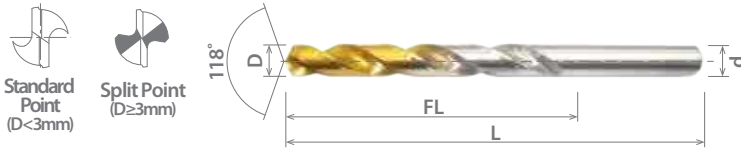

Cutting Diameter Tolerance (h8)		
Size	mm	inch
1 ≤ D ≤ 3	+0 / -0.014	+0 / -0.0006
3 < D ≤ 6	+0 / -0.018	+0 / -0.0007
6 < D ≤ 10	+0 / -0.022	+0 / -0.0009
10 < D ≤ 16	+0 / -0.027	+0 / -0.0011

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
1X60040-SO	-	-	-	1.000	0.03937	12	34	1.00
	-	-	-	1.500	0.05906	18	40	1.50
	-	-	-	2.000	0.07874	24	49	2.00
	-	-	-	2.500	0.09843	30	57	2.50
	-	-	-	3.000	0.11811	33	61	3.00
	-	-	-	3.500	0.13780	39	70	3.50
	-	-	-	4.000	0.15748	43	75	4.00
	-	-	-	4.500	0.17717	47	80	4.50
	-	-	-	5.000	0.19685	52	86	5.00
	-	-	-	5.500	0.21654	57	93	5.50
	-	-	-	6.000	0.23622			6.00
	-	-	-	6.500	0.25591	63	101	6.50
	-	-	-	7.000	0.27559	69	109	7.00
	-	-	-	7.500	0.29528	75	117	7.50
	-	-	-	8.000	0.31496			8.00
	-	-	-	8.500	0.33465	81	125	8.50
	-	-	-	9.000	0.35433			9.00
	-	-	-	9.500	0.37402	87	133	9.50
	-	-	-	10.000	0.39370			10.00
	-	-	-	10.500	0.41339	94	142	10.50
-	-	-	11.000	0.43307	11.00			
-	-	-	11.500	0.45276	101	151	11.50	
-	-	-	12.000	0.47244			12.00	
-	-	-	12.500	0.49213	101	151	12.50	
-	-	-	13.000	0.51181			13.00	

Packed: 1 pc.
Available TiN coating only.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1X6-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 1NA-SO

NEW	SPEED FEED	HSS	BR
	P397		

Center Drills



EDP Number	Diameter	Tool Number	Flute Length	Overall Length	Shank Diameter
			FL (in)	L (in)	d (in)
1NA0001-SO	3/64	1	0.047	1.260	1/8
1NA0002-SO	5/64	2	0.078	1.890	3/16
1NA0003-SO	7/64	3	0.110	2.008	1/4
1NA0004-SO	1/8	4	0.126	2.126	5/16
1NA0005-SO	3/16	5	0.189	2.756	7/16
1NA0006-SO	7/32	6	0.217	2.992	1/2
1NA0007-SO	1/4	7	0.252	3.268	5/8

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Titanium	H				
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum			6Al4V (30 HRC)	Hardened Steels			
	Low 1010	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			Inconel	~35 HRC	35-45 HRC	45-50 HRC
1NA-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					

good best






List 751-SO, 752-SO

Parallel Shank Machine Chucking Reamers

NEW	SPEED FEED	HSS-Co5	BR	LHS	10°
	P398				



Cutting Diameter Tolerance (h7)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.010	+0 / -0.0003
3 < D ≤ 6	+0 / -0.012	+0 / -0.0004
6 < D ≤ 10	+0 / -0.015	+0 / -0.0005
10 < D ≤ 18	+0 / -0.018	+0 / -0.0007
18 < D ≤ 20	+0 / -0.021	+0 / -0.0008

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
7510200-SO	-	-	-	2.000	0.07874	11	49	2.00
7510240-SO	-	-	-	2.400	0.09449			2.40
7510250-SO	-	-	-	2.500	0.09843	14	57	2.50
7510260-SO	-	-	-	2.600	0.10236			2.60
7510270-SO	-	-	-	2.700	0.10630			2.70
7510280-SO	-	-	-	2.800	0.11024	15	61	2.80
7510300-SO	-	-	-	3.000	0.11811			3.00
7510310-SO	-	-	-	3.100	0.12205			3.10
7520318-SO	1/8	-	-	3.175	0.12500	16	65	3.20
7510320-SO	-	-	-	3.200	0.12598			
7510340-SO	-	-	-	3.400	0.13386			3.40
7510350-SO	-	-	-	3.500	0.13780	18	70	3.50
7510360-SO	-	-	-	3.600	0.14173			3.60
7510380-SO	-	-	-	3.800	0.14961			
7510400-SO	-	-	-	4.000	0.15748	19	75	4.00
7510410-SO	-	-	-	4.100	0.16142			
7510420-SO	-	-	-	4.200	0.16535			
7510430-SO	-	-	-	4.300	0.16929			
7510440-SO	-	-	-	4.400	0.17323	21	80	4.50
7510450-SO	-	-	-	4.500	0.17717			
7520476-SO	3/16	-	-	4.763	0.18750			
7510480-SO	-	-	-	4.800	0.18898			
7510490-SO	-	-	-	4.900	0.19291			
7510500-SO	-	-	-	5.000	0.19685	23	86	5.00
7510510-SO	-	-	-	5.100	0.20079			
7510520-SO	-	-	-	5.200	0.20472			
7510530-SO	-	-	-	5.300	0.20866			
7510540-SO	-	-	-	5.400	0.21260			
7510550-SO	-	-	-	5.500	0.21654			
7510560-SO	-	-	-	5.600	0.22047	26	93	5.60
7510570-SO	-	-	-	5.700	0.22441			
7510580-SO	-	-	-	5.800	0.22835			
7510600-SO	-	-	-	6.000	0.23622			
7510610-SO	-	-	-	6.100	0.24016			
7510620-SO	-	-	-	6.200	0.24409			
7510630-SO	-	-	-	6.300	0.24803			
7520635-SO	1/4	-	E	6.350	0.25000	28	101	6.30
7510640-SO	-	-	-	6.400	0.25197			
7510650-SO	-	-	-	6.500	0.25591			
7510660-SO	-	-	-	6.600	0.25984			
7510670-SO	-	-	-	6.700	0.26378			
7510680-SO	-	-	-	6.800	0.26772			
7510700-SO	-	-	-	7.000	0.27559	31	109	7.10
7510710-SO	-	-	-	7.100	0.27953			
7510720-SO	-	-	-	7.200	0.28346			
7510730-SO	-	-	-	7.300	0.28740			
7510750-SO	-	-	-	7.500	0.29528			

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.





List 751-SO, 752-SO (Continued)

Parallel Shank Machine Chucking Reamers

NEW SPEED FEED P398 HSS-Co5 BR LHS 10°

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
7510780-SO	-	-	-	7.800	0.30709	33	117	8.00
7510790-SO	-	-	-	7.900	0.31102			
7520794-SO	5/16	-	-	7.938	0.31250			
7510800-SO	-	-	-	8.000	0.31496			
7510810-SO	-	-	-	8.100	0.31890			
7510820-SO	-	-	-	8.200	0.32283			
7510830-SO	-	-	-	8.300	0.32677			
7510840-SO	-	-	-	8.400	0.33071			
7510850-SO	-	-	-	8.500	0.33465			
7510860-SO	-	-	-	8.600	0.33858			
7510880-SO	-	-	-	8.800	0.34646	36	125	9.00
7510890-SO	-	-	-	8.900	0.35039			
7510900-SO	-	-	-	9.000	0.35433			
7510910-SO	-	-	-	9.100	0.35827			
7510950-SO	-	-	-	9.500	0.37402			
7520953-SO	3/8	-	-	9.525	0.37500			
7510960-SO	-	-	-	9.600	0.37795			
7510970-SO	-	-	-	9.700	0.38189			
7510980-SO	-	-	-	9.800	0.38583			
7510990-SO	-	-	-	9.900	0.38976			
7511000-SO	-	-	-	10.000	0.39370	38	133	10.00
7511010-SO	-	-	-	10.100	0.39764			
7511020-SO	-	-	-	10.200	0.40157			
7511030-SO	-	-	-	10.300	0.40551			
7511050-SO	-	-	-	10.500	0.41339			
7511060-SO	-	-	-	10.600	0.41732			
7511070-SO	-	-	-	10.700	0.42126			
7511080-SO	-	-	-	10.800	0.42520			
7511090-SO	-	-	-	10.900	0.42913			
7511100-SO	-	-	-	11.000	0.43307			
7511110-SO	-	-	-	11.100	0.43701	41	142	10.00
7521111-SO	7/16	-	-	11.113	0.43750			
7511150-SO	-	-	-	11.500	0.45276			
7511170-SO	-	-	-	11.700	0.46063			
7511180-SO	-	-	-	11.800	0.46457			
7511190-SO	-	-	-	11.900	0.46850			
7511200-SO	-	-	-	12.000	0.47244			
7511210-SO	-	-	-	12.100	0.47638			
7511220-SO	-	-	-	12.200	0.48031			
7511230-SO	-	-	-	12.300	0.48425			
7511240-SO	-	-	-	12.400	0.48819	44	151	10.00
7511250-SO	-	-	-	12.500	0.49213			
7511260-SO	-	-	-	12.600	0.49606			
7511270-SO	-	-	-	12.700	0.50000			
7521270-SO	1/2	-	-	12.700	0.50000			

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
751-SO, 752-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 751-SO, 752-SO (Continued)

Parallel Shank Machine Chucking Reamers

NEW	SPEED FEED	HSS-Co5	BR	LHS	10°
	P398				



Cutting Diameter Tolerance (h7)		
Size	mm	inch
2 ≤ D ≤ 3	+0 / -0.010	+0 / -0.0003
3 < D ≤ 6	+0 / -0.012	+0 / -0.0004
6 < D ≤ 10	+0 / -0.015	+0 / -0.0005
10 < D ≤ 18	+0 / -0.018	+0 / -0.0007
18 < D ≤ 20	+0 / -0.021	+0 / -0.0008

EDP Number	Diameter					Flute Length FL (mm)	Overall Length L (mm)	Shank Diameter d (mm)
	Fractional Size	Wire Gage	Letter Size	mm	Inch			
7511280-SO	-	-	-	12.800	0.50394	44	151	10.00
7511290-SO	-	-	-	12.900	0.50787			
7511300-SO	-	-	-	13.000	0.51181			
7511350-SO	-	-	-	13.500	0.53150	47	160	12.50
7511400-SO	-	-	-	14.000	0.55118			
7521429-SO	9/16	-	-	14.288	0.56250	50	162	
7511450-SO	-	-	-	14.500	0.57087			
7511500-SO	-	-	-	15.000	0.59055			
7511550-SO	-	-	-	15.500	0.61024	52	170	
7521588-SO	5/8	-	-	15.875	0.62500			
7511600-SO	-	-	-	16.000	0.62992	54	175	
7511700-SO	-	-	-	17.000	0.66929			
7511800-SO	-	-	-	18.000	0.70866			
7521905-SO	3/4	-	-	19.050	0.75000	56	182	14.00
7512000-SO	-	-	-	20.000	0.78740	60	195	16.00

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
751-SO, 752-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



DRILLING

Technical





List 6600 - A Brand[®] ADO-TRS: 3D List 6610 - A Brand[®] ADO-TRS: 5D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 400SS, 17-4PH		Cast Iron		Ductile Cast Iron	
Drilling Speed		260-395 SFM		260-395 SFM		130-200 SFM		260-395 SFM		195-330 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
3	-	10,700	0.004 - 0.006	10,700	0.004 - 0.006	5,200	0.004 - 0.006	10,700	0.004 - 0.007	8,400	0.004 - 0.006
-	1/8	10,100	0.004 - 0.006	10,100	0.004 - 0.006	4,900	0.004 - 0.006	10,100	0.004 - 0.007	7,900	0.004 - 0.006
4	-	7,900	0.005 - 0.009	7,900	0.005 - 0.009	4,000	0.005 - 0.007	7,900	0.005 - 0.009	6,350	0.005 - 0.009
-	3/16	6,700	0.007 - 0.010	6,700	0.007 - 0.010	3,300	0.007 - 0.009	6,700	0.007 - 0.011	5,300	0.007 - 0.010
6	-	5,300	0.007 - 0.013	5,300	0.007 - 0.013	2,650	0.007 - 0.009	5,300	0.008 - 0.014	4,250	0.007 - 0.013
-	1/4	5,000	0.007 - 0.014	5,000	0.007 - 0.014	2,500	0.007 - 0.010	5,000	0.009 - 0.015	4,000	0.007 - 0.014
8	-	3,950	0.009 - 0.017	3,950	0.009 - 0.017	2,000	0.009 - 0.013	3,950	0.011 - 0.019	3,200	0.009 - 0.017
-	3/8	3,300	0.012 - 0.021	3,300	0.012 - 0.021	1,700	0.011 - 0.015	3,300	0.013 - 0.023	2,650	0.012 - 0.021
10	-	3,150	0.012 - 0.022	3,150	0.012 - 0.022	1,600	0.012 - 0.016	3,150	0.014 - 0.024	2,550	0.012 - 0.022
-	7/16	2,850	0.013 - 0.023	2,850	0.013 - 0.023	1,450	0.013 - 0.017	2,850	0.015 - 0.026	2,300	0.013 - 0.023
12	-	2,650	0.014 - 0.024	2,650	0.014 - 0.024	1,350	0.014 - 0.019	2,650	0.017 - 0.028	2,100	0.014 - 0.024
-	1/2	2,500	0.015 - 0.025	2,500	0.015 - 0.025	1,250	0.015 - 0.020	2,500	0.018 - 0.028	2,000	0.015 - 0.025
14	-	2,250	0.017 - 0.028	2,250	0.017 - 0.028	1,150	0.017 - 0.022	2,250	0.019 - 0.030	1,800	0.017 - 0.028
-	5/8	2,000	0.019 - 0.031	2,000	0.019 - 0.031	1,000	0.019 - 0.025	2,000	0.022 - 0.034	1,600	0.019 - 0.031
16	-	2,000	0.019 - 0.031	2,000	0.019 - 0.031	1,000	0.019 - 0.025	2,000	0.022 - 0.034	1,600	0.019 - 0.031
-	-	1,750	0.021 - 0.032	1,750	0.021 - 0.032	900	0.021 - 0.028	1,750	0.025 - 0.035	1,400	0.021 - 0.032
18	-	1,650	0.023 - 0.034	1,650	0.023 - 0.034	850	0.023 - 0.030	1,650	0.026 - 0.037	1,300	0.023 - 0.034
-	3/4	1,600	0.024 - 0.035	1,600	0.024 - 0.035	800	0.024 - 0.031	1,600	0.028 - 0.039	1,250	0.024 - 0.035
20	-	1,600	0.024 - 0.035	1,600	0.024 - 0.035	800	0.024 - 0.031	1,600	0.028 - 0.039	1,250	0.024 - 0.035

General Drilling Operations

Work Material		Cast Aluminum		Special Alloy Steels, Hardened Steels					
Hardness				26-30 HRC		30-34 HRC		34-43 HRC	
Drilling Speed		260-660 SFM		195-295 SFM		160-230 SFM		130-160 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
3	-	14,900	0.004 - 0.009	7,900	0.004 - 0.006	6,500	0.004 - 0.006	4,700	0.004 - 0.005
-	1/8	14,100	0.005 - 0.009	7,500	0.004 - 0.006	6,100	0.004 - 0.006	4,400	0.004 - 0.005
4	-	11,150	0.006 - 0.012	5,590	0.005 - 0.008	4,750	0.005 - 0.008	3,500	0.005 - 0.007
-	3/16	9,400	0.007 - 0.014	5,000	0.006 - 0.009	4,100	0.006 - 0.009	3,000	0.006 - 0.008
6	-	7,450	0.009 - 0.019	3,950	0.007 - 0.012	3,150	0.007 - 0.012	2,350	0.007 - 0.009
-	1/4	7,000	0.010 - 0.020	3,750	0.007 - 0.012	3,000	0.007 - 0.012	2,200	0.007 - 0.010
8	-	5,600	0.013 - 0.025	2,950	0.009 - 0.016	2,350	0.009 - 0.016	1,750	0.009 - 0.013
-	3/8	4,700	0.015 - 0.030	2,500	0.011 - 0.019	2,000	0.011 - 0.019	1,450	0.011 - 0.015
10	-	4,450	0.016 - 0.031	2,400	0.012 - 0.020	1,900	0.012 - 0.020	1,400	0.012 - 0.016
-	7/16	4,000	0.017 - 0.035	2,150	0.013 - 0.022	1,700	0.013 - 0.022	1,250	0.013 - 0.017
12	-	3,700	0.019 - 0.038	2,000	0.014 - 0.024	1,550	0.014 - 0.024	1,150	0.014 - 0.019
-	1/2	3,500	0.020 - 0.040	1,850	0.015 - 0.024	1,500	0.015 - 0.024	1,100	0.015 - 0.020
14	-	3,200	0.022 - 0.044	1,700	0.017 - 0.025	1,350	0.017 - 0.025	1,000	0.017 - 0.022
-	5/8	2,800	0.025 - 0.050	1,500	0.019 - 0.025	1,200	0.019 - 0.025	900	0.019 - 0.025
16	-	2,800	0.025 - 0.050	1,500	0.019 - 0.025	1,200	0.019 - 0.025	900	0.019 - 0.025
18	-	2,500	0.028 - 0.057	1,300	0.021 - 0.028	1,050	0.021 - 0.028	800	0.021 - 0.028
-	3/4	2,350	0.030 - 0.060	1,250	0.023 - 0.030	1,000	0.023 - 0.030	750	0.023 - 0.030
20	-	2,250	0.031 - 0.063	1,200	0.024 - 0.031	950	0.024 - 0.031	700	0.024 - 0.031





List 5720 - A Brand® ADFO: 3D


General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron		Ductile Cast Iron		Aluminum Alloy 5052,7075	
Hardness				28-35 HRC									
Drilling Speed		200-330 SFM		100-300 SFM		130-200 SFM		200-400 SFM		165-260 SFM		265-650 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
3	-	10,650	0.002 - 0.004	7,530	0.002 - 0.004	5,300	0.002 - 0.004	10,650	0.002 - 0.004	8,570	0.002 - 0.004	17,000	0.002 - 0.004
-	1/8	10,080	0.002 - 0.004	7,120	0.002 - 0.004	5,040	0.002 - 0.004	10,080	0.002 - 0.004	8,100	0.002 - 0.004	16,040	0.002 - 0.004
4	-	8,000	0.002 - 0.005	5,650	0.002 - 0.005	4,000	0.002 - 0.005	8,000	0.002 - 0.005	6,430	0.002 - 0.005	12,730	0.002 - 0.005
-	3/16	6,720	0.002 - 0.006	4,750	0.002 - 0.006	3,360	0.002 - 0.006	6,720	0.002 - 0.006	5,400	0.002 - 0.006	10,690	0.002 - 0.006
6	-	5,300	0.002 - 0.007	3,770	0.002 - 0.007	2,660	0.002 - 0.007	5,300	0.002 - 0.007	4,280	0.002 - 0.007	8,490	0.002 - 0.007
-	1/4	5,040	0.003 - 0.008	3,560	0.003 - 0.008	2,520	0.003 - 0.008	5,040	0.003 - 0.008	4,050	0.003 - 0.008	8,020	0.003 - 0.008
8	-	4,000	0.003 - 0.009	2,830	0.003 - 0.009	2,000	0.003 - 0.009	4,000	0.003 - 0.009	3,210	0.003 - 0.009	6,370	0.003 - 0.009
-	3/8	3,360	0.004 - 0.011	2,370	0.004 - 0.011	1,680	0.004 - 0.011	3,360	0.004 - 0.011	2,700	0.004 - 0.011	5,350	0.004 - 0.011
10	-	3,200	0.004 - 0.012	2,260	0.004 - 0.012	1,600	0.004 - 0.012	3,200	0.004 - 0.012	2,570	0.004 - 0.012	5,100	0.004 - 0.012
-	7/16	2,880	0.004 - 0.013	2,030	0.004 - 0.013	1,440	0.004 - 0.013	2,880	0.004 - 0.013	2,310	0.004 - 0.013	4,580	0.004 - 0.013
12	-	2,650	0.005 - 0.014	1,880	0.005 - 0.014	1,330	0.005 - 0.014	2,650	0.005 - 0.014	2,140	0.005 - 0.014	4,240	0.005 - 0.014
-	1/2	2,520	0.005 - 0.015	1,780	0.005 - 0.015	1,260	0.005 - 0.015	2,520	0.005 - 0.015	2,020	0.005 - 0.015	4,010	0.005 - 0.015
14	-	2,290	0.006 - 0.017	1,620	0.006 - 0.017	1,140	0.006 - 0.017	2,290	0.006 - 0.017	1,840	0.006 - 0.017	3,640	0.006 - 0.017
-	5/8	2,010	0.006 - 0.019	1,420	0.006 - 0.019	1,010	0.006 - 0.019	2,010	0.006 - 0.019	1,620	0.006 - 0.019	3,210	0.006 - 0.019
16	-	2,000	0.006 - 0.019	1,410	0.006 - 0.019	1,000	0.006 - 0.019	2,000	0.006 - 0.019	1,610	0.006 - 0.019	3,180	0.006 - 0.019
18	-	1,775	0.007 - 0.021	1,260	0.007 - 0.021	890	0.007 - 0.021	1,775	0.007 - 0.021	1,430	0.007 - 0.021	2,830	0.007 - 0.021
-	3/4	1,680	0.008 - 0.023	1,190	0.008 - 0.023	840	0.008 - 0.023	1,680	0.008 - 0.023	1,350	0.008 - 0.023	2,670	0.008 - 0.023
20	-	1,600	0.008 - 0.024	1,130	0.008 - 0.024	800	0.008 - 0.024	1,600	0.008 - 0.024	1,280	0.008 - 0.024	2,550	0.008 - 0.024

General Drilling Operations

Work Material		Cast Aluminum		Hardened Steel- Pre Hardened Steels		Plastic Mold Steels	
Hardness				Up to 50 HRC		Up to 40 HRC	
Drilling Speed		265-650 SFM		65-100 SFM		65-130 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR
3	-	17,000	0.002 - 0.004	2,670	0.001 - 0.004	3,150	0.002 - 0.004
-	1/8	16,040	0.002 - 0.004	2,520	0.001 - 0.004	2,980	0.002 - 0.004
4	-	12,730	0.002 - 0.005	2,000	0.002 - 0.005	2,360	0.002 - 0.005
-	3/16	10,690	0.002 - 0.006	1,680	0.002 - 0.006	1,980	0.002 - 0.006
6	-	8,490	0.002 - 0.007	1,330	0.002 - 0.007	1,580	0.002 - 0.007
-	1/4	8,020	0.003 - 0.008	1,260	0.003 - 0.008	1,490	0.003 - 0.008
8	-	6,370	0.003 - 0.009	1,000	0.003 - 0.009	1,180	0.003 - 0.009
-	3/8	5,350	0.004 - 0.011	840	0.004 - 0.011	990	0.004 - 0.011
10	-	5,100	0.004 - 0.012	800	0.004 - 0.012	950	0.004 - 0.012
-	7/16	4,580	0.004 - 0.013	720	0.004 - 0.013	850	0.004 - 0.013
12	-	4,240	0.005 - 0.014	670	0.005 - 0.014	790	0.005 - 0.014
-	1/2	4,010	0.005 - 0.015	630	0.005 - 0.015	740	0.005 - 0.015
14	-	3,640	0.006 - 0.017	570	0.006 - 0.017	680	0.006 - 0.017
-	5/8	3,210	0.006 - 0.019	500	0.006 - 0.019	600	0.006 - 0.019
16	-	3,180	0.006 - 0.019	500	0.006 - 0.019	590	0.006 - 0.019
18	-	2,830	0.007 - 0.021	450	0.007 - 0.021	530	0.007 - 0.021
-	3/4	2,670	0.008 - 0.023	420	0.008 - 0.023	500	0.008 - 0.023
20	-	2,550	0.008 - 0.024	400	0.008 - 0.024	470	0.008 - 0.024

Note:



- The table above assumes a milled-flat surface and water soluble coolant.
- Use a rigid and precise machine and holder.
- Please minimize overhang length as much as possible during machining.
- Adjust the rotational speed and feed in accordance with conditions such as the machining shape, machine rigidity, or work holding.
- Please set up the drill so that the runout of the cutting edge is under 0.0008".
- Please select a cutting fluid that is most suitable for the work material with minimal smoke formation.
- In the case of dry machining, please use air blow to remove chips to prevent clogging.
 - Please do not machine stainless steel dry.
- When machining an inclined plane, adjust the rotational speed and feed in accordance with the angle of the incline (β).
 - When the machining incline angle (β) is less than 30°, please reduce the feed to 40-60%.
 - When the machining incline angle (β) is over 30°, please reduce the speed to 60-80%, the feed to 20-40%.
- Please use step drilling when drilling in pre-drilled holes to improve chip separation.
- If it is necessary to ensure the locating precision of the hole to be machined, adjust the rotational speed and feed as indicated above (in accordance with the machining precision requirement).
- Please always use the appropriate cutting fluid recommended by the cutting fluid manufacturer in the machining of magnesium alloys. Be cautious with the cutting chips as they are highly flammable and may pose a serious fire risk if not properly handled.






List 5700 - A Brand[®] ADF: 2D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130 28-35 HRC		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron		Ductile Cast Iron	
Hardness											
Drilling Speed		100-330 SFM		100-300 SFM		35-100 SFM		100-400 SFM		100-260 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
0.2	-	25,000	0.00004 - 0.0002	25,000	0.00004 - 0.0002	25,000	0.00004 - 0.00015	25,000	0.00004 - 0.00024	25,000	0.00004 - 0.00024
-	1/64	25,000	0.00004 - 0.0002	25,000	0.00004 - 0.0002	20,000	0.00004 - 0.00015	25,000	0.00004 - 0.00024	25,000	0.00004 - 0.00024
0.5	-	25,000	0.0001 - 0.0006	25,000	0.0001 - 0.0006	15,900	0.00012 - 0.0004	25,000	0.00012 - 0.0006	25,000	0.00012 - 0.0006
-	1/32	22,000	0.0001 - 0.0006	20,200	0.0001 - 0.0006	10,000	0.00012 - 0.0004	25,000	0.00012 - 0.0006	20,100	0.00012 - 0.0006
1	-	17,500	0.0002 - 0.0012	15,900	0.0002 - 0.0012	8,000	0.0002 - 0.0008	22,500	0.0002 - 0.0012	15,900	0.0002 - 0.0012
-	3/64	14,700	0.0002 - 0.0012	13,500	0.0002 - 0.0012	6,700	0.0002 - 0.0008	21,400	0.0002 - 0.0012	14,200	0.0002 - 0.0012
1.5	-	13,800	0.0003 - 0.0018	12,700	0.0003 - 0.0018	5,300	0.0003 - 0.0012	17,000	0.0003 - 0.0018	11,500	0.0003 - 0.0018
-	1/16	13,100	0.0003 - 0.0018	12,200	0.0003 - 0.0018	5,000	0.0003 - 0.0012	16,000	0.0003 - 0.0018	10,700	0.0003 - 0.0018
2	-	12,850	0.0012 - 0.002	9,700	0.0012 - 0.002	3,980	0.0012 - 0.002	14,550	0.0016 - 0.002	10,310	0.0016 - 0.002
3	-	8,570	0.002 - 0.003	6,470	0.002 - 0.003	2,650	0.002 - 0.003	9,700	0.002 - 0.004	6,870	0.002 - 0.004
-	1/8	8,100	0.002 - 0.003	6,110	0.002 - 0.003	2,500	0.002 - 0.003	9,170	0.002 - 0.004	6,500	0.002 - 0.004
4	-	6,430	0.002 - 0.004	4,850	0.002 - 0.004	1,990	0.002 - 0.004	7,280	0.003 - 0.005	5,150	0.003 - 0.005
-	3/16	5,400	0.002 - 0.004	4,070	0.002 - 0.004	1,670	0.002 - 0.004	6,110	0.003 - 0.005	4,330	0.003 - 0.005
6	-	4,280	0.004 - 0.006	3,230	0.004 - 0.006	1,325	0.004 - 0.006	4,850	0.005 - 0.007	3,440	0.005 - 0.007
-	1/4	4,050	0.004 - 0.006	3,060	0.004 - 0.006	1,250	0.004 - 0.006	4,580	0.005 - 0.007	3,250	0.005 - 0.007
8	-	3,210	0.005 - 0.008	2,430	0.005 - 0.008	995	0.005 - 0.008	3,640	0.006 - 0.009	2,580	0.006 - 0.009
-	3/8	2,700	0.005 - 0.008	2,040	0.005 - 0.008	835	0.005 - 0.008	3,060	0.006 - 0.009	2,160	0.006 - 0.009
10	-	2,570	0.006 - 0.010	1,940	0.006 - 0.010	795	0.006 - 0.010	2,910	0.008 - 0.012	2,060	0.008 - 0.012
-	7/16	2,300	0.006 - 0.010	1,750	0.006 - 0.010	715	0.006 - 0.010	2,620	0.008 - 0.012	1,860	0.008 - 0.012
12	-	2,140	0.007 - 0.012	1,620	0.007 - 0.012	660	0.007 - 0.012	2,430	0.009 - 0.014	1,720	0.009 - 0.014
-	1/2	2,020	0.007 - 0.012	1,530	0.007 - 0.012	625	0.007 - 0.012	2,290	0.009 - 0.014	1,620	0.009 - 0.014
14	-	1,840	0.008 - 0.014	1,390	0.008 - 0.014	570	0.008 - 0.014	2,080	0.011 - 0.017	1,470	0.011 - 0.017
-	5/8	1,620	0.009 - 0.016	1,220	0.009 - 0.016	500	0.009 - 0.016	1,830	0.013 - 0.019	1,300	0.013 - 0.019
16	-	1,610	0.009 - 0.016	1,210	0.009 - 0.016	440	0.009 - 0.016	1,820	0.013 - 0.019	1,290	0.013 - 0.019
18	-	1,430	0.011 - 0.018	1,080	0.011 - 0.018	420	0.011 - 0.018	1,620	0.014 - 0.021	1,150	0.014 - 0.021
-	3/4	1,350	0.012 - 0.020	1,020	0.012 - 0.020	400	0.012 - 0.020	1,530	0.016 - 0.024	1,090	0.016 - 0.024
20	-	1,280	0.012 - 0.020	970	0.012 - 0.020	500	0.012 - 0.020	1,450	0.016 - 0.024	1,030	0.016 - 0.024

Note:

- The speeds and feeds in the table above apply when drilling on a flat surface with water-soluble coolant.
- When using non-water soluble oil or water-emulsifiable (over 20 times dilution), reduce cutting speed by 30%.
- Use a rigid and precise machine and holder.
- Please minimize tool overhang as much as possible during machining.
- Adjust the rotational speed and the feed rate in accordance with conditions such as the machining shape, machine rigidity, or work holding.
- Please set up the drill so that the runout of the cutting edge is under 0.0004 in.
- When machining an inclined plane, adjust the rotational speed and the feed rate in accordance with the angle of the incline (β).
 - When the machining incline angle(β) is less than 30°, please reduce the feed to 40-60%.
 - When the machining incline angle(β) is over 30°, please reduce the speed to 60-80% , the feed to 40-60%.
- Please use step drilling in pilot holes to improve cutting chip separation.
- If it is necessary to ensure the locating precision of the hole to be machined, adjust the rotational speed and the feed rate as indicated above (in accordance with the machining precision requirement).





General Drilling Operations

Work Material		Aluminum Alloy 5052,7075		Cast Aluminum		Hardened Steel-Pre Hardened Steel		Plastic Mold Steels	
Hardness						Up to 50 HRC		Up to 40 HRC	
Drilling Speed		100-650 SFM		100-650 SFM		65-100 SFM		65-130 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
0.2	-	25,000	0.00004 - 0.00024	25,000	0.00004 - 0.00024	25,000	0.00004 - 0.00016	25,000	0.00004 - 0.00016
-	1/64	25,000	0.00004 - 0.00024	25,000	0.00004 - 0.00024	20,000	0.00004 - 0.00016	24,400	0.00004 - 0.00016
0.5	-	25,000	0.00012 - 0.0006	25,000	0.00012 - 0.0006	15,900	0.00012 - 0.0004	19,000	0.00012 - 0.0004
-	1/32	25,000	0.00012 - 0.0006	25,000	0.00012 - 0.0006	10,000	0.00012 - 0.0004	12,200	0.00012 - 0.0004
1	-	25,000	0.0002 - 0.0012	25,000	0.0002 - 0.0012	7,950	0.0002 - 0.0008	9,550	0.0002 - 0.0008
-	3/64	25,000	0.0002 - 0.0012	25,000	0.0002 - 0.0012	6,700	0.0002 - 0.0008	8,150	0.0002 - 0.0008
1.5	-	25,000	0.0003 - 0.0018	25,000	0.0003 - 0.0018	5,300	0.0003 - 0.0012	6,350	0.0003 - 0.0012
-	1/16	25,000	0.0003 - 0.0018	25,000	0.0003 - 0.0018	5,000	0.0003 - 0.0012	6,100	0.0003 - 0.0012
2	-	22,200	0.0004 - 0.002	22,200	0.0004 - 0.002	4,000	0.0008 - 0.002	4,720	0.0012 - 0.002
3	-	14,800	0.001 - 0.004	14,800	0.001 - 0.004	2,660	0.001 - 0.002	3,150	0.0018 - 0.002
-	1/8	13,980	0.001 - 0.004	13,980	0.001 - 0.004	2,520	0.001 - 0.002	2,980	0.0018 - 0.002
4	-	11,100	0.001 - 0.005	11,100	0.001 - 0.005	2,000	0.002 - 0.003	2,360	0.002 - 0.003
-	3/16	9,320	0.001 - 0.005	9,320	0.001 - 0.005	1,680	0.002 - 0.003	1,980	0.002 - 0.003
6	-	7,400	0.001 - 0.007	7,400	0.001 - 0.007	1,330	0.002 - 0.005	1,570	0.004 - 0.005
-	1/4	6,990	0.001 - 0.007	6,990	0.001 - 0.007	1,260	0.002 - 0.005	1,490	0.004 - 0.005
8	-	5,550	0.002 - 0.009	5,550	0.002 - 0.009	1,000	0.003 - 0.006	1,180	0.005 - 0.006
-	3/8	4,660	0.002 - 0.009	4,660	0.002 - 0.009	840	0.003 - 0.006	990	0.005 - 0.006
10	-	4,440	0.002 - 0.012	4,440	0.002 - 0.012	800	0.004 - 0.008	950	0.006 - 0.008
-	7/16	3,990	0.002 - 0.012	3,990	0.002 - 0.012	720	0.004 - 0.008	850	0.006 - 0.008
12	-	3,700	0.002 - 0.014	3,700	0.002 - 0.014	670	0.005 - 0.009	790	0.007 - 0.009
-	1/2	3,500	0.002 - 0.014	3,500	0.002 - 0.014	630	0.005 - 0.009	744	0.007 - 0.009
14	-	3,170	0.003 - 0.017	3,170	0.003 - 0.017	570	0.006 - 0.011	670	0.008 - 0.011
-	5/8	2,800	0.003 - 0.019	2,800	0.003 - 0.019	500	0.006 - 0.013	590	0.009 - 0.013
16	-	2,790	0.003 - 0.019	2,790	0.003 - 0.019	500	0.006 - 0.013	590	0.009 - 0.013
18	-	2,470	0.004 - 0.021	2,470	0.004 - 0.021	450	0.007 - 0.014	520	0.011 - 0.014
-	3/4	2,330	0.004 - 0.024	2,330	0.004 - 0.024	420	0.008 - 0.016	500	0.012 - 0.016
20	-	2,250	0.004 - 0.024	2,250	0.004 - 0.024	400	0.008 - 0.016	470	0.012 - 0.016






List 5705 - A Brand[®] ADFLS: 2D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130 28-35 HRC		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron		Ductile Cast Iron		Aluminum Alloy 5052,7075	
Hardness		200-330 SFM		100-300 SFM		65-140 SFM		200-400 SFM		165-260 SFM		265-650 SFM	
Drilling Speed		200-330 SFM		100-300 SFM		65-140 SFM		200-400 SFM		165-260 SFM		265-650 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
2	-	12,850	0.0012 - 0.002	9,700	0.0012 - 0.002	4,980	0.0012 - 0.002	14,550	0.0016 - 0.002	10,310	0.0016 - 0.002	22,200	0.0004 - 0.002
3	-	8,570	0.002 - 0.003	6,470	0.002 - 0.003	3,320	0.002 - 0.003	9,700	0.002 - 0.004	6,870	0.002 - 0.004	14,800	0.001 - 0.004
-	1/8	8,100	0.002 - 0.003	6,110	0.002 - 0.003	3,140	0.002 - 0.003	9,170	0.002 - 0.004	6,500	0.002 - 0.004	13,980	0.001 - 0.004
4	-	6,430	0.002 - 0.004	4,850	0.002 - 0.004	2,890	0.002 - 0.004	7,280	0.003 - 0.005	5,150	0.003 - 0.005	11,100	0.001 - 0.005
-	3/16	5,400	0.002 - 0.004	4,070	0.002 - 0.004	2,090	0.002 - 0.004	6,110	0.003 - 0.005	4,330	0.003 - 0.005	9,320	0.001 - 0.005
6	-	4,280	0.004 - 0.006	3,230	0.004 - 0.006	1,660	0.004 - 0.006	4,850	0.005 - 0.007	3,440	0.005 - 0.007	7,400	0.001 - 0.007
-	1/4	4,050	0.004 - 0.006	3,060	0.004 - 0.006	1,570	0.004 - 0.006	4,580	0.005 - 0.007	3,250	0.005 - 0.007	6,990	0.001 - 0.007
8	-	3,210	0.005 - 0.008	2,430	0.005 - 0.008	1,240	0.005 - 0.008	3,640	0.006 - 0.009	2,580	0.006 - 0.009	5,550	0.002 - 0.009
-	3/8	2,700	0.005 - 0.008	2,040	0.005 - 0.008	1,040	0.005 - 0.008	3,060	0.006 - 0.009	2,160	0.006 - 0.009	4,660	0.002 - 0.009
10	-	2,570	0.006 - 0.010	1,940	0.006 - 0.010	1,000	0.006 - 0.010	2,910	0.008 - 0.012	2,060	0.008 - 0.012	4,440	0.002 - 0.012
-	7/16	2,300	0.006 - 0.010	1,750	0.006 - 0.010	900	0.006 - 0.010	2,620	0.008 - 0.012	1,860	0.008 - 0.012	3,990	0.002 - 0.012
12	-	2,140	0.007 - 0.012	1,620	0.007 - 0.012	830	0.007 - 0.012	2,430	0.009 - 0.014	1,720	0.009 - 0.014	3,700	0.002 - 0.014
-	1/2	2,020	0.007 - 0.012	1,530	0.007 - 0.012	780	0.007 - 0.012	2,290	0.009 - 0.014	1,620	0.009 - 0.014	3,500	0.002 - 0.014
14	-	1,840	0.008 - 0.014	1,390	0.008 - 0.014	710	0.008 - 0.014	2,080	0.011 - 0.017	1,470	0.011 - 0.017	3,170	0.003 - 0.017
-	5/8	1,620	0.009 - 0.016	1,220	0.009 - 0.016	630	0.009 - 0.016	1,830	0.013 - 0.019	1,300	0.013 - 0.019	2,800	0.003 - 0.019
16	-	1,610	0.009 - 0.016	1,210	0.009 - 0.016	620	0.009 - 0.016	1,820	0.013 - 0.019	1,290	0.013 - 0.019	2,790	0.003 - 0.019
18	-	1,430	0.011 - 0.018	1,080	0.011 - 0.018	550	0.011 - 0.018	1,620	0.014 - 0.021	1,150	0.014 - 0.021	2,470	0.004 - 0.021
-	3/4	1,350	0.012 - 0.020	1,020	0.012 - 0.020	520	0.012 - 0.020	1,530	0.016 - 0.024	1,090	0.016 - 0.024	2,330	0.004 - 0.024
20	-	1,280	0.012 - 0.020	970	0.012 - 0.020	500	0.012 - 0.020	1,450	0.016 - 0.024	1,030	0.016 - 0.024	2,250	0.004 - 0.024

General Drilling Operations

Work Material		Cast Aluminum		Hardened Steel-Pre Hardened Steel		Plastic Mold Steels	
Hardness				Up to 50 HRC		Up to 40 HRC	
Drilling Speed		265-650 SFM		65-100 SFM		65-130 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR
2	-	22,200	0.0004 - 0.002	4,000	0.0008 - 0.002	4,720	0.0012 - 0.002
3	-	14,800	0.001 - 0.004	2,660	0.001 - 0.002	3,150	0.0018 - 0.002
-	1/8	13,980	0.001 - 0.004	2,520	0.001 - 0.002	2,980	0.0018 - 0.002
4	-	11,100	0.001 - 0.005	2,000	0.002 - 0.003	2,360	0.002 - 0.003
-	3/16	9,320	0.001 - 0.005	1,680	0.002 - 0.003	1,980	0.002 - 0.003
6	-	7,400	0.001 - 0.007	1,330	0.002 - 0.005	1,570	0.004 - 0.005
-	1/4	6,990	0.001 - 0.007	1,260	0.002 - 0.005	1,490	0.004 - 0.005
8	-	5,550	0.002 - 0.009	1,000	0.003 - 0.006	1,180	0.005 - 0.006
-	3/8	4,660	0.002 - 0.009	840	0.003 - 0.006	990	0.005 - 0.006
10	-	4,440	0.002 - 0.012	800	0.004 - 0.008	950	0.006 - 0.008
-	7/16	3,990	0.002 - 0.012	720	0.004 - 0.008	850	0.006 - 0.008
12	-	3,700	0.002 - 0.014	670	0.005 - 0.009	790	0.007 - 0.009
-	1/2	3,500	0.002 - 0.014	630	0.005 - 0.009	744	0.007 - 0.009
14	-	3,170	0.003 - 0.017	570	0.006 - 0.011	670	0.008 - 0.011
-	5/8	2,800	0.003 - 0.019	500	0.006 - 0.013	590	0.009 - 0.013
16	-	2,790	0.003 - 0.019	500	0.006 - 0.013	590	0.009 - 0.013
18	-	2,470	0.004 - 0.021	450	0.007 - 0.014	520	0.011 - 0.014
-	3/4	2,330	0.004 - 0.024	420	0.008 - 0.016	500	0.012 - 0.016
20	-	2,250	0.004 - 0.024	400	0.008 - 0.016	470	0.012 - 0.016



Note:

- The speeds and feeds in the table above apply when drilling on a flat surface with water-soluble coolant.
- When using non-water soluble oil or water-emulsifiable (over 20 times dilution), reduce cutting speed by 30%.
- Use a rigid and precise machine and holder.
- Please minimize tool overhang as much as possible during machining.
- Adjust the rotational speed and the feed rate in accordance with conditions such as the machining shape, machine rigidity, or work holding.
- Please set up the drill so that the runout of the cutting edge is under 0.0004 in.
- When machining an inclined plane, adjust the rotational speed and the feed rate in accordance with the angle of the incline (β).
 - When the machining incline angle (β) is less than 30°, please reduce the feed to 40-60%.
 - When the machining incline angle (β) is over 30°, please reduce the speed to 60-80%, the feed to 40-60%.
- Please use step drilling in pilot holes to improve cutting chip separation.
- If it is necessary to ensure the locating precision of the hole to be machined, adjust the rotational speed and the feed rate as indicated above (in accordance with the machining precision requirement).





List 6500 - A Brand[®] ADO: 3D List 6510 - A Brand[®] ADO: 5D List 6520 - A Brand[®] ADO: 8D

General Drilling Operations

Work Material	Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		High Heat Material						
							Ti-Alloy, Ti-6Al-4V		Fe-Base Material, A286		Ni-Base Material, Inconel		
Drilling Speed	260-395 SFM		260-395 SFM		130-230 SFM		100 - 180 SFM		80 - 130 SFM		65 - 110 SFM		
Drill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	
mm	Inch												
2	-	15,870	0.002-0.004	15,870	0.002-0.004	8,740	0.002-0.004	6,790	0.002-0.003	5,080	0.001-0.002	4,250	0.001-0.002
3	-	10,580	0.002-0.005	10,580	0.002-0.005	5,820	0.002-0.005	4,530	0.002-0.003	3,390	0.002-0.002	2,840	0.001-0.002
-	1/8	10,000	0.003-0.005	10,000	0.003-0.005	5,500	0.003-0.005	4,280	0.002-0.004	3,200	0.002-0.003	2,680	0.002-0.002
4	-	7,940	0.003-0.006	7,940	0.003-0.006	4,370	0.003-0.006	3,400	0.002-0.004	2,540	0.002-0.003	2,130	0.002-0.002
-	3/16	6,670	0.004-0.007	6,670	0.004-0.007	3,670	0.004-0.007	2,850	0.003-0.005	2,130	0.003-0.004	1,790	0.002-0.003
6	-	5,290	0.005-0.009	5,290	0.005-0.009	2,910	0.005-0.009	2,269	0.004-0.005	1,690	0.004-0.005	1,420	0.002-0.004
-	1/4	5,000	0.006-0.009	5,000	0.006-0.009	2,750	0.006-0.009	2,140	0.004-0.006	1,600	0.004-0.006	1,340	0.002-0.004
8	-	3,970	0.006-0.011	3,970	0.006-0.011	2,180	0.006-0.011	1,700	0.005-0.007	1,270	0.005-0.006	1,060	0.003-0.005
-	3/8	3,330	0.008-0.012	3,330	0.008-0.012	1,830	0.008-0.012	1,430	0.005-0.008	1,070	0.005-0.007	890	0.004-0.005
10	-	3,170	0.008-0.012	3,170	0.008-0.012	1,750	0.008-0.012	1,360	0.006-0.009	1,020	0.006-0.008	850	0.004-0.006
-	7/16	2,860	0.008-0.012	2,860	0.008-0.012	1,570	0.008-0.012	1,220	0.007-0.010	910	0.007-0.009	770	0.004-0.007
12	-	2,650	0.008-0.012	2,650	0.008-0.012	1,460	0.008-0.012	1,130	0.007-0.011	850	0.007-0.009	710	0.005-0.007
-	1/2	2,500	0.008-0.012	2,500	0.008-0.012	1,380	0.008-0.012	1,070	0.008-0.012	800	0.008-0.010	670	0.005-0.008
14	-	2,270	0.009-0.014	2,270	0.009-0.014	1,250	0.009-0.014	970	0.008-0.013	730	0.008-0.011	610	0.005-0.008
-	5/8	2,000	0.010-0.014	2,000	0.010-0.014	1,100	0.010-0.014	860	0.009-0.013	640	0.006-0.009	540	0.005-0.008
16	-	2,000	0.010-0.014	2,000	0.010-0.014	1,100	0.010-0.014	860	0.009-0.013	640	0.006-0.009	540	0.005-0.008
18	-	1,760	0.011-0.015	1,760	0.011-0.015	1,090	0.011-0.015	750	0.010-0.014	560	0.008-0.011	470	0.005-0.008
-	3/4	1,670	0.012-0.015	1,670	0.012-0.015	920	0.012-0.015	710	0.011-0.015	530	0.008-0.011	450	0.005-0.008
20	-	1,590	0.012-0.016	1,590	0.012-0.016	870	0.012-0.016	680	0.012-0.016	510	0.008-0.012	420	0.005-0.008

General Drilling Operations

Work Material	Cast Iron		Ductile Cast Iron		Special Alloy Steels, Hardened Steels								
					26-30 HRC		30-34 HRC		34-43 HRC		43-48 HRC		
Drilling Speed	260-395 SFM		195-330 SFM		195-295 SFM		130-200 SFM		130-160 SFM		82-115 HRC		
Drill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	
mm	Inch												
2	-	15,870	0.002-0.004	12,700	0.002-0.004	11,890	0.002-0.004	8,000	0.002-0.003	7,040	0.002-0.003	4,770	0.001-0.002
3	-	10,580	0.002-0.005	8,470	0.002-0.005	7,920	0.002-0.005	5,330	0.002-0.003	4,690	0.002-0.003	3,180	0.002-0.002
-	1/8	10,000	0.003-0.005	8,000	0.003-0.005	7,490	0.003-0.005	5,040	0.002-0.004	4,430	0.002-0.004	3,010	0.002-0.003
4	-	7,940	0.003-0.006	6,350	0.003-0.006	5,940	0.003-0.006	4,000	0.003-0.004	3,520	0.003-0.004	2,390	0.002-0.003
-	3/16	6,670	0.004-0.007	5,330	0.004-0.007	4,990	0.004-0.007	3,360	0.003-0.005	2,950	0.003-0.005	2,000	0.003-0.004
6	-	5,290	0.005-0.009	4,230	0.005-0.009	3,960	0.005-0.009	2,700	0.005-0.006	2,340	0.005-0.006	1,590	0.004-0.005
-	1/4	5,000	0.006-0.009	4,000	0.006-0.009	3,740	0.006-0.010	2,520	0.005-0.007	2,220	0.005-0.007	1,500	0.004-0.006
8	-	3,970	0.006-0.011	3,170	0.006-0.011	2,970	0.006-0.011	2,000	0.006-0.008	1,760	0.006-0.008	1,190	0.005-0.007
-	3/8	3,330	0.008-0.012	2,670	0.008-0.012	2,500	0.007-0.012	1,680	0.008-0.009	1,480	0.008-0.009	1,000	0.006-0.008
10	-	3,170	0.008-0.012	2,540	0.008-0.012	2,380	0.008-0.012	1,600	0.008-0.010	1,410	0.008-0.010	950	0.007-0.009
-	7/16	2,860	0.008-0.012	2,290	0.008-0.012	2,140	0.008-0.012	1,440	0.009-0.011	1,270	0.009-0.011	860	0.007-0.009
12	-	2,650	0.008-0.012	2,120	0.008-0.012	1,980	0.008-0.012	1,330	0.009-0.012	1,170	0.009-0.012	800	0.007-0.009
-	1/2	2,500	0.008-0.012	2,000	0.008-0.012	1,870	0.008-0.012	1,260	0.010-0.013	1,110	0.010-0.013	750	0.008-0.010
14	-	2,270	0.009-0.014	1,810	0.009-0.014	1,700	0.009-0.014	1,140	0.011-0.014	1,000	0.011-0.014	680	0.008-0.011
-	5/8	2,000	0.010-0.014	1,600	0.010-0.014	1,500	0.010-0.014	1,010	0.012-0.015	890	0.012-0.015	600	0.009-0.013
16	-	2,000	0.010-0.014	1,600	0.010-0.014	1,500	0.010-0.014	1,010	0.012-0.015	890	0.012-0.015	600	0.009-0.013
18	-	1,760	0.011-0.015	1,410	0.011-0.015	1,320	0.011-0.015	890	0.014-0.018	780	0.014-0.018	530	0.010-0.014
-	3/4	1,670	0.012-0.015	1,330	0.012-0.015	1,250	0.012-0.015	840	0.015-0.019	740	0.015-0.019	500	0.011-0.015
20	-	1,590	0.012-0.016	1,270	0.012-0.016	1,190	0.012-0.016	800	0.016-0.020	700	0.016-0.020	480	0.012-0.016

Note:

- The indicated speeds and feeds are for drilling with **water-soluble oil** or **MQL**.
- Suitable cutting fluid is water-soluble high density oil (less than 20 times dilution).
- When using non-water-soluble oil or water-soluble oil (over 20 times dilution), reduce cutting speed by 30%.
- These conditions are for drilling depth under 8 times the drill diameter.
- 1D-2D step feeding may be required for drilling high hardened steels and mid-range (8D) work.





- List 6530 - A Brand[®] ADO: 10D**
- List 6535 - A Brand[®] ADO: 15D**
- List 6540 - A Brand[®] ADO: 20D**
- List 6550 - A Brand[®] ADO: 30D**

General Drilling Operations

Work Material	Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		High Heat Material						
							Ti-Alloy, Ti-6Al-4V		Fe-Base Material, A286		Ni-Base Material, Inconel		
Drilling Speed	260-395 SFM		260-395 SFM		130-230 SFM		100 - 180 SFM		80 - 130 SFM		65 - 110 SFM		
Drill Dia.	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
													mm
2	-	15,870	0.002-0.004	15,870	0.002-0.004	8,740	0.002-0.004	6,790	0.001-0.003	5,080	0.001-0.002	4,250	0.001-0.002
3	-	10,580	0.002-0.005	10,580	0.002-0.005	5,820	0.002-0.005	4,530	0.002-0.003	3,390	0.002-0.002	2,840	0.001-0.002
-	1/8	10,000	0.003-0.005	10,000	0.003-0.005	5,500	0.003-0.005	4,280	0.002-0.003	3,200	0.002-0.003	2,680	0.002-0.002
4	-	7,940	0.003-0.006	7,940	0.003-0.006	4,370	0.003-0.006	3,400	0.002-0.004	2,540	0.002-0.003	2,130	0.002-0.002
-	3/16	6,670	0.004-0.007	6,670	0.004-0.007	3,670	0.004-0.007	2,850	0.003-0.004	2,130	0.002-0.004	1,790	0.002-0.003
6	-	5,290	0.005-0.009	5,290	0.005-0.009	2,910	0.005-0.009	2,269	0.004-0.005	1,690	0.004-0.005	1,420	0.002-0.004
-	1/4	5,000	0.005-0.010	5,000	0.005-0.010	2,750	0.005-0.010	2,140	0.004-0.006	1,600	0.004-0.006	1,340	0.002-0.005
8	-	3,970	0.006-0.011	3,970	0.006-0.011	2,180	0.006-0.011	1,700	0.005-0.007	1,270	0.005-0.006	1,060	0.003-0.005
-	3/8	3,330	0.007-0.012	3,330	0.007-0.012	1,830	0.007-0.012	1,430	0.005-0.008	1,070	0.005-0.007	890	0.003-0.005
10	-	3,170	0.008-0.012	3,170	0.008-0.012	1,750	0.008-0.012	1,360	0.006-0.009	1,020	0.006-0.008	850	0.004-0.006
-	7/16	2,860	0.008-0.012	2,860	0.008-0.012	1,570	0.008-0.012	1,220	0.007-0.010	910	0.007-0.009	770	0.004-0.007
12	-	2,650	0.008-0.012	2,650	0.008-0.012	1,460	0.008-0.012	1,130	0.007-0.011	850	0.007-0.009	710	0.005-0.007
-	1/2	2,500	0.008-0.012	2,500	0.008-0.012	1,380	0.008-0.012	1,070	0.008-0.012	800	0.008-0.010	670	0.005-0.008
-	9/16	2,220	0.009-0.014	2,220	0.009-0.014	1,220	0.009-0.014	950	0.008-0.013	710	0.008-0.011	600	0.005-0.008

Note:

- The indicated speeds and feeds are for drilling with **water-soluble oil** or **MQL**. (We do not recommend mist drilling with stainless steels.)
- Water-soluble oil (20-30 times dilution) is recommended.
- When using non-water-soluble oil, set the cutting speed between 70-100% of the lowest limit.
- Make a pilot hole before deep drilling; recommended operation is on pages 355-356.
- A clogged oil hole can lead to breakage. Make sure that a filter is attached to the oil feeder.
- Peck drilling of 1D-2D is strongly recommended in high hardness materials.





General Drilling Operations

Work Material		Cast Iron		Ductile Cast Iron		Special Alloy Steels, Hardened Steels							
Hardness						26-30 HRC		30-34 HRC		34-43 HRC		43-48 HRC	
Drilling Speed		260-395 SFM		195-330 SFM		195-295 SFM		130-200 SFM		130-160 SFM		82-115 HRC	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
2	-	15,870	0.002-0.004	12,700	0.002-0.004	11,890	0.002-0.004	8,000	0.002-0.003	7,040	0.002-0.003	4,770	0.001-0.002
3	-	10,580	0.002-0.005	8,470	0.002-0.005	7,920	0.002-0.005	5,330	0.002-0.003	4,690	0.002-0.003	3,180	0.002-0.002
-	1/8	10,000	0.003-0.005	8,000	0.003-0.005	7,490	0.003-0.005	5,040	0.003-0.004	4,430	0.003-0.004	3,010	0.002-0.003
4	-	7,940	0.003-0.006	6,350	0.003-0.006	5,940	0.003-0.006	4,000	0.003-0.004	3,520	0.003-0.004	2,390	0.002-0.003
-	3/16	6,670	0.004-0.007	5,330	0.004-0.007	4,990	0.004-0.007	3,360	0.003-0.005	2,950	0.003-0.005	2,000	0.003-0.004
6	-	5,290	0.005-0.009	4,230	0.005-0.009	3,960	0.005-0.009	2,700	0.005-0.006	2,340	0.005-0.006	1,590	0.004-0.005
-	1/4	5,000	0.005-0.010	4,000	0.005-0.010	3,740	0.005-0.010	2,520	0.005-0.007	2,220	0.005-0.007	1,500	0.004-0.006
8	-	3,970	0.006-0.011	3,170	0.006-0.011	2,970	0.006-0.011	2,000	0.006-0.008	1,760	0.006-0.008	1,190	0.005-0.007
-	3/8	3,330	0.007-0.012	2,670	0.007-0.012	2,500	0.007-0.012	1,680	0.007-0.009	1,480	0.007-0.009	1,000	0.006-0.008
10	-	3,170	0.008-0.012	2,540	0.008-0.012	2,380	0.008-0.012	1,600	0.008-0.010	1,410	0.008-0.010	950	0.007-0.009
-	7/16	2,860	0.008-0.012	2,290	0.008-0.012	2,140	0.008-0.012	1,440	0.009-0.011	1,270	0.009-0.011	860	0.007-0.009
12	-	2,650	0.008-0.012	2,120	0.008-0.012	1,980	0.008-0.012	1,330	0.009-0.012	1,170	0.009-0.012	800	0.007-0.009
-	1/2	2,500	0.008-0.012	2,000	0.008-0.012	1,870	0.008-0.012	1,260	0.010-0.013	1,110	0.010-0.013	750	0.008-0.010
-	9/16	2,220	0.009-0.014	1,780	0.009-0.014	1,660	0.009-0.014	1,120	0.011-0.014	980	0.011-0.014	670	0.008-0.011





List 6560 - A Brand[®] ADO: 40D List 6570 - A Brand[®] ADO: 50D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron	
Drilling Speed		195-295 SFM		195-295 SFM		130-195 SFM		195-295 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
3	-	7,500	0.002-0.005	7,500	0.002-0.005	5,300	0.002-0.005	7,500	0.002-0.005
-	1/8	7,100	0.003-0.005	7,100	0.003-0.005	5,000	0.003-0.005	7,100	0.003-0.005
4	-	5,600	0.003-0.006	5,600	0.003-0.006	4,000	0.003-0.006	5,600	0.003-0.006
-	3/16	4,700	0.004-0.008	4,700	0.004-0.008	3,300	0.004-0.008	4,700	0.004-0.008
6	-	3,700	0.005-0.009	3,700	0.005-0.009	2,700	0.005-0.009	3,700	0.005-0.009
-	1/4	3,500	0.005-0.010	3,500	0.005-0.010	2,500	0.005-0.010	3,500	0.005-0.010
8	-	2,800	0.006-0.011	2,800	0.006-0.011	2,000	0.006-0.011	2,800	0.006-0.011
-	3/8	2,400	0.008-0.013	2,400	0.008-0.013	1,700	0.008-0.013	2,400	0.008-0.013
10	-	2,300	0.008-0.014	2,300	0.008-0.014	1,600	0.008-0.014	2,300	0.008-0.014

General Drilling Operations

Work Material		Ductile Cast Iron		Special Alloy Steels, Hardened Steels			
Hardness				26-30 HRC		30-34 HRC	
Drilling Speed		165-260 SFM		165-260 SFM		130-230 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch						
3	-	6,400	0.002-0.005	6,400	0.002-0.005	5,300	0.002-0.004
-	1/8	6,000	0.003-0.005	6,000	0.003-0.005	5,000	0.003-0.005
4	-	4,800	0.003-0.006	4,800	0.003-0.006	4,000	0.003-0.006
-	3/16	4,000	0.004-0.008	4,000	0.004-0.008	3,300	0.004-0.007
6	-	3,200	0.005-0.009	3,200	0.005-0.009	2,700	0.005-0.008
-	1/4	3,000	0.005-0.010	3,000	0.005-0.010	2,500	0.005-0.009
8	-	2,400	0.006-0.011	2,400	0.006-0.011	2,000	0.006-0.009
-	3/8	2,000	0.008-0.013	2,000	0.008-0.013	1,700	0.008-0.011
10	-	1,900	0.008-0.014	1,900	0.008-0.014	1,600	0.008-0.012

Note:

- The indicated speeds and feeds are for drilling with **water-soluble oil** or **MQL**. (We do not recommend mist drilling with stainless steels.)
- Water-soluble oil (20-30 times dilution) is recommended.
- When using non-water-soluble oil, set the cutting speed between 70-100% of the lowest limit.
- Make a pilot hole before deep drilling; recommended operation is on pages 355-356.
- A clogged oil hole can lead to breakage. Make sure that a filter is attached to the oil feeder.
- Peck drilling of 1D-2D is strongly recommended in high hardness materials.
- If, after piloting with ADO-5D and drilling with ADO-40D/50D, hole condition or accuracy is poor or machining is difficult, ADO-20D/30D may be used as an intermediate drilling step. This three-step process may improve accuracy and condition as well as permit more aggressive parameters than stated above.






Deep Hole Operational Guidelines


1. Make a pilot hole. (For 10-30D)

For a pilot hole, select 0.0008"-0.0031" (0.02-0.08mm) larger size drill than ADO 10D, ADO 15D, ADO 20D and ADO 30D. If the needed pilot drill size is not available, we recommend using the same diameter drill from ADO 3D.

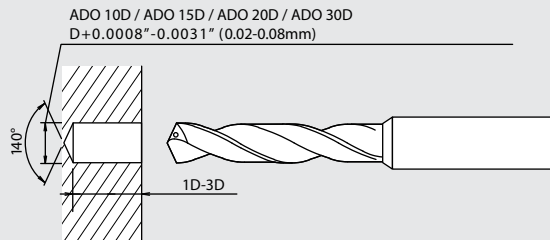


1. Make a pilot hole. (For 40 & 50D)

For a pilot hole, select 0.0008"-0.0031" (0.02-0.08mm) larger size drill than ADO 40D and ADO 50D. If the needed pilot drill size is not available, we recommend using the same diameter drill from ADO 5D or ADO-TRS.

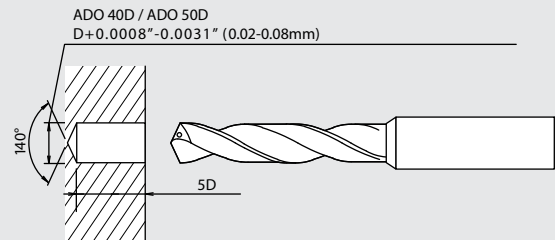


Remaining Steps are the Same for 10-50D


2. Insert the extra long drill into a pilot hole with zero or low revolution (below 500rpm).



3. Increase the revolution to the designated speed and start drilling.




4. After drilling, move the drill away from the bottom of the hole, then reduce its speed while pulling it out of the hole.



Make sure to use an internal coolant supply when drilling.

Drilling a Curved Surface

When working on a curved surface, we recommend piloting with A Brand[®] ADF flat drill.



Improve Accuracy & Hole Condition

If, after piloting with ADO-5D and drilling with ADO-40D/50D, hole condition or accuracy is poor or machining is difficult, ADO-20D/30D may be used as an intermediate drilling step. This three-step process may improve accuracy and condition as well as permit more aggressive parameters.

continued on next page






Stable Drilling with Long Drills

The runout of a gripped cutting tool increases with the speed, as shown in the graph on the right. To ensure a higher level of work stability, OSG recommends making +0.0008"-0.0031" (+0.02-0.08mm) pilot holes and inserting long drills stopped or at low speeds.

The reason for this is made evident in the graph on the right. Increasing the speed increases the dynamic runout, posing a higher risk of the drill not fitting properly in the pilot hole. Therefore, reducing the speed and minimizing static runout is the recommended drilling method for long drills.

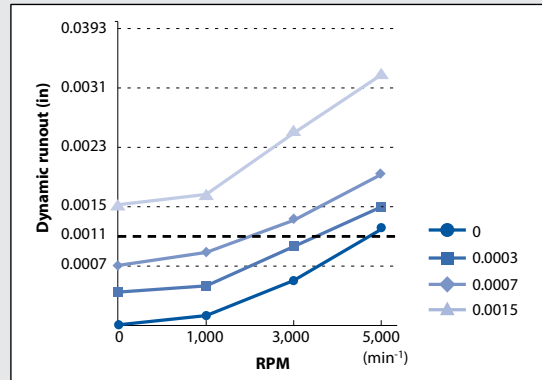

Static runout RPM (min ⁻¹)	0"	0.0003"	0.0007"	0.0015"
1,000	0.0001	0.0005	0.0009	0.0018
3,000	0.0005	0.0010	0.0014	0.0025
5,000	0.0012	0.0015	0.0019	0.0034

Dynamic runout values for Ø6mm 30xD drill.



List 6300 - A Brand[®] AD: 2D

List 6310 - A Brand[®] AD: 4D

General Drilling Operations

Work Material	Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		High Heat Material						
	210-315 SFM		210-315 SFM		100-185 SFM		Ti-Alloy, Ti-6Al-4V		Fe-Base Material, A286		Ni-Base Material, Inconel		
Drilling Speed	210-315 SFM		210-315 SFM		100-185 SFM		80-145 SFM		65-100 SFM		50-90 SFM		
Drill Dia.	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
													mm
2	-	12,700	0.002-0.004	12,700	0.002-0.004	6,900	0.002-0.004	5,460	0.002-0.003	4,000	0.001-0.002	3,390	0.001-0.002
3	-	8,470	0.002-0.005	8,470	0.002-0.005	4,610	0.002-0.005	3,640	0.002-0.003	2,670	0.002-0.002	2,260	0.001-0.002
-	1/8	8,000	0.002-0.005	8,000	0.002-0.005	4,350	0.003-0.005	3,440	0.002-0.003	2,520	0.002-0.003	2,140	0.001-0.002
4	-	6,350	0.003-0.006	6,350	0.003-0.006	3,450	0.003-0.006	2,730	0.002-0.004	2,000	0.002-0.003	1,700	0.002-0.002
-	3/16	5,330	0.003-0.006	5,330	0.003-0.006	2,900	0.004-0.007	2,290	0.003-0.005	1,680	0.002-0.004	1,420	0.002-0.003
6	-	4,230	0.005-0.009	4,230	0.005-0.009	2,300	0.005-0.009	1,820	0.004-0.005	1,330	0.004-0.005	1,130	0.002-0.004
-	1/4	4,000	0.005-0.009	4,000	0.005-0.009	2,180	0.005-0.010	1,720	0.004-0.006	1,260	0.004-0.005	1,070	0.002-0.004
8	-	3,170	0.006-0.011	3,170	0.006-0.011	1,730	0.006-0.011	1,360	0.005-0.007	1,000	0.005-0.006	850	0.003-0.005
-	3/8	2,670	0.007-0.012	2,670	0.007-0.012	1,450	0.008-0.012	1,150	0.005-0.008	840	0.006-0.008	710	0.004-0.006
10	-	2,540	0.008-0.012	2,540	0.008-0.012	1,380	0.008-0.012	1,090	0.006-0.009	800	0.006-0.008	680	0.004-0.006
-	7/16	2,290	0.008-0.012	2,290	0.008-0.012	1,240	0.008-0.012	980	0.007-0.010	720	0.007-0.009	610	0.004-0.007
12	-	2,120	0.008-0.012	2,120	0.008-0.012	1,150	0.008-0.012	910	0.007-0.011	670	0.007-0.009	560	0.005-0.007
-	1/2	2,000	0.008-0.012	2,000	0.008-0.012	1,090	0.008-0.012	860	0.008-0.011	630	0.008-0.009	530	0.005-0.008
14	-	1,810	0.009-0.014	1,810	0.009-0.014	990	0.009-0.014	780	0.008-0.013	570	0.008-0.011	480	0.005-0.008
-	5/8	1,600	0.010-0.014	1,600	0.010-0.014	870	0.009-0.014	690	0.009-0.013	500	0.008-0.011	430	0.005-0.008
16	-	1,600	0.010-0.014	1,600	0.010-0.014	870	0.009-0.014	690	0.009-0.013	500	0.008-0.011	430	0.005-0.008
18	-	1,410	0.011-0.015	1,410	0.011-0.015	770	0.011-0.015	610	0.010-0.014	440	0.008-0.011	380	0.005-0.008
-	3/4	1,330	0.012-0.016	1,330	0.012-0.016	720	0.011-0.015	570	0.011-0.015	420	0.008-0.012	360	0.005-0.008
20	-	1,270	0.012-0.016	1,270	0.012-0.016	690	0.012-0.016	550	0.012-0.016	400	0.008-0.012	340	0.005-0.008

General Drilling Operations

Work Material	Cast Iron		Ductile Cast Iron		Special Alloy Steels, Hardened Steels								
	210-315 SFM		156-265 SFM		155-235 SFM		100-160 SFM		100-130 SFM		65-95 SFM		
Drilling Speed	210-315 SFM		156-265 SFM		155-235 SFM		100-160 SFM		100-130 SFM		65-95 SFM		
Drill Dia.	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
													mm
2	-	12,700	0.002-0.004	10,190	0.002-0.004	9,460	0.002-0.004	6,310	0.002-0.003	5,570	0.002-0.003	3,890	0.001-0.002
3	-	8,470	0.002-0.005	6,790	0.002-0.005	6,310	0.002-0.005	4,210	0.002-0.003	3,720	0.002-0.003	2,590	0.002-0.002
-	1/8	8,000	0.002-0.005	6,420	0.003-0.005	5,960	0.002-0.005	3,980	0.002-0.003	3,510	0.002-0.003	2,450	0.002-0.003
4	-	6,350	0.003-0.006	5,100	0.003-0.006	4,730	0.003-0.006	3,160	0.003-0.004	2,780	0.003-0.004	1,940	0.002-0.003
-	3/16	5,330	0.003-0.006	4,280	0.004-0.007	3,980	0.003-0.006	2,650	0.003-0.005	2,340	0.003-0.005	1,630	0.003-0.004
6	-	4,230	0.005-0.009	3,400	0.005-0.009	3,150	0.005-0.009	2,100	0.005-0.006	1,860	0.005-0.006	1,290	0.004-0.005
-	1/4	4,000	0.005-0.009	3,210	0.006-0.009	2,980	0.005-0.009	1,990	0.005-0.007	1,760	0.005-0.007	1,220	0.004-0.006
8	-	3,170	0.006-0.011	2,550	0.006-0.011	2,360	0.006-0.011	1,580	0.006-0.008	1,390	0.006-0.008	970	0.005-0.007
-	3/8	2,670	0.007-0.012	2,140	0.008-0.012	1,990	0.007-0.012	1,320	0.008-0.009	1,170	0.008-0.009	820	0.006-0.008
10	-	2,540	0.008-0.012	2,040	0.008-0.012	1,890	0.008-0.012	1,260	0.008-0.010	1,110	0.008-0.010	780	0.007-0.009
-	7/16	2,290	0.008-0.012	1,830	0.008-0.012	1,700	0.008-0.012	1,140	0.009-0.011	1,000	0.009-0.011	700	0.007-0.009
12	-	2,120	0.008-0.012	1,700	0.008-0.012	1,580	0.008-0.012	1,050	0.009-0.012	930	0.009-0.012	650	0.007-0.009
-	1/2	2,000	0.008-0.012	1,600	0.008-0.012	1,490	0.008-0.012	990	0.010-0.012	880	0.010-0.012	610	0.008-0.010
14	-	1,810	0.009-0.014	1,460	0.009-0.014	1,350	0.009-0.014	900	0.011-0.014	800	0.011-0.014	550	0.008-0.011
-	5/8	1,600	0.010-0.014	1,280	0.010-0.014	1,190	0.010-0.014	790	0.012-0.015	700	0.012-0.015	490	0.009-0.012
16	-	1,600	0.010-0.014	1,280	0.010-0.014	1,190	0.010-0.014	790	0.012-0.015	700	0.012-0.015	490	0.009-0.012
18	-	1,410	0.011-0.015	1,130	0.011-0.015	1,050	0.011-0.015	700	0.014-0.018	620	0.014-0.018	430	0.010-0.014
-	3/4	1,330	0.012-0.016	1,070	0.012-0.016	990	0.012-0.016	660	0.015-0.019	680	0.015-0.019	410	0.011-0.015
20	-	1,270	0.012-0.016	1,020	0.012-0.016	940	0.012-0.016	630	0.016-0.020	560	0.016-0.020	390	0.012-0.016

Note:

- The indicated speeds and feeds are for drilling with **water-soluble oil**.
- Suitable cutting fluid is water-soluble high density oil (less than 20 times dilution).
- When using non-water-soluble oil or water-soluble oil (over 20 times dilution), reduce cutting speed by 30%.
- These conditions are for drilling depth under 3 times the drill diameter.
- For machines that cannot achieve the speeds indicated in the table please set rotation as high as possible. Tool life may be reduced.





List 5200 - A Brand[®] ADO-SUS: 3D

List 5210 - A Brand[®] ADO-SUS: 5D

List 5220 - A Brand[®] ADO-SUS: 8D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		300 Series Austenitic Stainless Steels				400 Series Ferritic Stainless Steels Martensitic Stainless Steels			
Hardness						≤15HRC		> 15 HRC		≤15HRC		> 15 HRC	
Drilling Speed		260-325 SFM		260-325 SFM		200-330 SFM		130-260 SFM		200-330 SFM		130-260 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch												
2	-	14,190	0.0013 - 0.003	14,190	0.0013 - 0.003	12,850	0.0013 - 0.003	9,460	0.0013 - 0.003	12,850	0.0013 - 0.003	9,460	0.0013 - 0.003
3	-	9,450	0.002 - 0.005	9,450	0.002 - 0.005	8,570	0.002 - 0.005	6,310	0.002 - 0.005	8,570	0.002 - 0.005	6,310	0.002 - 0.005
-	1/8	8,940	0.002 - 0.005	8,940	0.002 - 0.005	8,100	0.002 - 0.005	5,960	0.002 - 0.005	8,100	0.002 - 0.005	5,960	0.002 - 0.005
4	-	7,090	0.003 - 0.006	7,090	0.003 - 0.006	6,430	0.003 - 0.006	4,730	0.003 - 0.006	6,430	0.003 - 0.006	4,730	0.003 - 0.006
-	3/16	5,960	0.004 - 0.007	5,960	0.004 - 0.007	5,400	0.004 - 0.007	3,970	0.004 - 0.007	5,400	0.004 - 0.007	3,970	0.004 - 0.007
6	-	4,730	0.005 - 0.009	4,730	0.005 - 0.009	4,280	0.005 - 0.008	3,150	0.005 - 0.008	4,280	0.005 - 0.008	3,150	0.005 - 0.008
-	1/4	4,470	0.005 - 0.009	4,470	0.005 - 0.009	4,050	0.005 - 0.008	2,980	0.005 - 0.008	4,050	0.005 - 0.008	2,980	0.005 - 0.008
8	-	3,550	0.006 - 0.011	3,550	0.006 - 0.011	3,210	0.006 - 0.009	2,360	0.006 - 0.009	3,210	0.006 - 0.009	2,360	0.006 - 0.009
-	3/8	2,980	0.007 - 0.012	2,980	0.007 - 0.012	2,700	0.007 - 0.011	1,990	0.007 - 0.011	2,700	0.007 - 0.011	1,990	0.007 - 0.011
10	-	2,840	0.008 - 0.012	2,840	0.008 - 0.012	2,570	0.008 - 0.012	1,890	0.007 - 0.011	2,570	0.007 - 0.011	1,890	0.007 - 0.011
-	7/16	2,550	0.008 - 0.012	2,550	0.008 - 0.012	2,310	0.008 - 0.012	1,700	0.007 - 0.011	2,310	0.007 - 0.011	1,700	0.007 - 0.011
12	-	2,360	0.008 - 0.012	2,360	0.008 - 0.012	2,140	0.008 - 0.012	1,580	0.007 - 0.012	2,140	0.007 - 0.012	1,580	0.007 - 0.012
-	1/2	2,230	0.008 - 0.013	2,230	0.008 - 0.013	2,020	0.008 - 0.012	1,490	0.008 - 0.012	2,020	0.008 - 0.012	1,490	0.008 - 0.012
14	-	2,030	0.009 - 0.014	2,030	0.009 - 0.014	1,840	0.008 - 0.013	1,350	0.008 - 0.013	1,840	0.008 - 0.013	1,350	0.008 - 0.013
-	5/8	1,790	0.010 - 0.015	1,790	0.010 - 0.015	1,620	0.009 - 0.015	1,190	0.009 - 0.015	1,620	0.009 - 0.015	1,190	0.009 - 0.015
16	-	1,770	0.010 - 0.015	1,770	0.010 - 0.015	1,610	0.009 - 0.015	1,180	0.009 - 0.015	1,610	0.009 - 0.015	1,180	0.009 - 0.015
18	-	1,580	0.011 - 0.015	1,580	0.011 - 0.015	1,430	0.010 - 0.016	1,050	0.010 - 0.016	1,430	0.010 - 0.016	1,050	0.010 - 0.016
-	3/4	1,490	0.012 - 0.016	1,490	0.012 - 0.016	1,350	0.011 - 0.016	990	0.011 - 0.016	1,350	0.011 - 0.016	990	0.011 - 0.016
20	-	1,420	0.012 - 0.016	1,420	0.012 - 0.016	1,280	0.011 - 0.016	950	0.011 - 0.016	1,280	0.011 - 0.016	950	0.011 - 0.016

General Drilling Operations

Work Material		Duplex Stainless Steels				Precipitation Hardened Stainless Steels 15-5, 17-4		Ductile Cast Iron/ Cast Iron		Cast Aluminum		Titanium Alloy	
Hardness		≤ 30 HRC		> 30 HRC		≤ 45 HRC						30-35 HRC	
Drilling Speed		130-260 SFM		100-165 SFM		130-200 SFM		195-330 SFM		325-700 SFM		100-165 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch												
2	-	9,460	0.0013 - 0.003	6,430	0.0013 - 0.003	8,000	0.0013 - 0.003	12,700	0.0013 - 0.003	24,900	0.002 - 0.004	6,430	0.0013 - 0.003
3	-	6,310	0.002 - 0.005	4,280	0.002 - 0.005	5,330	0.002 - 0.005	8,470	0.002 - 0.005	16,600	0.004 - 0.006	4,280	0.002 - 0.005
-	1/8	5,960	0.002 - 0.005	4,050	0.002 - 0.005	5,040	0.002 - 0.005	8,000	0.002 - 0.005	15,680	0.004 - 0.006	4,050	0.002 - 0.005
4	-	4,730	0.003 - 0.006	3,210	0.003 - 0.006	4,000	0.003 - 0.006	6,350	0.003 - 0.006	12,450	0.005 - 0.007	3,210	0.003 - 0.006
-	3/16	3,970	0.004 - 0.007	2,700	0.004 - 0.007	3,360	0.004 - 0.007	5,330	0.004 - 0.007	10,450	0.006 - 0.008	2,700	0.004 - 0.007
6	-	3,150	0.005 - 0.008	2,140	0.005 - 0.008	2,670	0.005 - 0.008	4,230	0.005 - 0.009	8,300	0.008 - 0.010	2,140	0.005 - 0.008
-	1/4	2,980	0.005 - 0.008	2,020	0.005 - 0.008	2,520	0.005 - 0.008	4,000	0.005 - 0.009	7,840	0.009 - 0.011	2,020	0.005 - 0.008
8	-	2,360	0.006 - 0.009	1,600	0.006 - 0.009	2,000	0.006 - 0.009	3,170	0.006 - 0.011	6,220	0.012 - 0.014	1,600	0.006 - 0.009
-	3/8	1,990	0.007 - 0.011	1,350	0.007 - 0.011	1,680	0.007 - 0.011	2,670	0.007 - 0.012	5,230	0.014 - 0.016	1,350	0.007 - 0.011
10	-	1,890	0.008 - 0.012	1,280	0.007 - 0.011	1,600	0.008 - 0.012	2,540	0.008 - 0.012	4,980	0.015 - 0.017	1,280	0.007 - 0.011
-	7/16	1,700	0.008 - 0.012	1,160	0.007 - 0.011	1,440	0.008 - 0.012	2,290	0.008 - 0.012	4,480	0.017 - 0.019	1,160	0.007 - 0.011
12	-	1,580	0.008 - 0.012	1,070	0.007 - 0.012	1,330	0.008 - 0.012	2,120	0.008 - 0.012	4,150	0.018 - 0.020	1,070	0.007 - 0.012
-	1/2	1,490	0.008 - 0.012	1,010	0.008 - 0.012	1,260	0.008 - 0.012	2,000	0.008 - 0.013	3,920	0.019 - 0.021	1,010	0.008 - 0.012
14	-	1,350	0.008 - 0.013	920	0.008 - 0.013	1,140	0.008 - 0.013	1,810	0.009 - 0.014	3,560	0.021 - 0.023	920	0.008 - 0.013
-	5/8	1,190	0.009 - 0.015	810	0.009 - 0.015	1,010	0.009 - 0.015	1,600	0.010 - 0.015	3,140	0.023 - 0.026	810	0.009 - 0.015
16	-	1,180	0.009 - 0.015	800	0.009 - 0.015	1,000	0.009 - 0.015	1,590	0.010 - 0.015	3,110	0.023 - 0.026	800	0.009 - 0.015
18	-	1,050	0.010 - 0.016	710	0.010 - 0.016	890	0.010 - 0.016	1,410	0.011 - 0.015	2,770	0.026 - 0.030	710	0.010 - 0.016
-	3/4	990	0.011 - 0.016	670	0.011 - 0.016	840	0.011 - 0.016	1,330	0.012 - 0.016	2,610	0.027 - 0.031	670	0.011 - 0.016
20	-	950	0.011 - 0.016	640	0.011 - 0.016	800	0.011 - 0.016	1,270	0.012 - 0.016	2,490	0.028 - 0.032	640	0.011 - 0.016





List 5190 - A Brand[®] AD-LDS

General Drilling Operations

Work Material	Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Cast Iron		Cast Aluminum Alloy		Special Alloy Steels, Hardened Steels				
	Hardness								26-30 HRC		30-34 HRC		
Drilling Speed	200-260 SFM		100-165 SFM		200-325 SFM		260-525 SFM		65-90 SFM		50-75 SFM		
Drill Dia.	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
													mm
0.5	-	25,000	0.0002-0.0008	25,000	0.0002-0.0008	25,000	0.0002-0.0006	25,000	0.0008-0.0020	15,000	0.0002-0.0008	12,000	0.0002-0.0008
1.0	-	22,300	0.0004-0.0012	12,600	0.0004-0.0012	25,000	0.0004-0.0012	25,000	0.001-0.004	7,500	0.0004-0.0012	6,000	0.0004-0.0012
2.0	-	11,000	0.001-0.002	6,300	0.001-0.002	12,500	0.001-0.002	19,150	0.002-0.008	3,800	0.001-0.002	3,000	0.001-0.002
3.0	-	7,500	0.001-0.003	4,200	0.001-0.003	8,400	0.002-0.003	12,600	0.004-0.009	2,500	0.001-0.003	2,000	0.001-0.003
4.0	-	5,700	0.002-0.004	3,150	0.002-0.004	6,300	0.003-0.005	9,500	0.005-0.010	1,900	0.002-0.004	1,500	0.002-0.004
6.0	-	3,800	0.002-0.005	2,100	0.002-0.005	4,200	0.005-0.007	6,300	0.005-0.011	1,250	0.002-0.005	1,000	0.002-0.005
-	1/4	3,500	0.002-0.005	2,030	0.002-0.005	4,000	0.005-0.007	6,000	0.005-0.011	1,180	0.002-0.005	950	0.002-0.005
8.0	-	2,800	0.003-0.006	1,575	0.003-0.006	3,200	0.005-0.008	4,730	0.007-0.012	940	0.003-0.006	750	0.003-0.006
-	3/8	2,340	0.004-0.007	1,350	0.004-0.007	2,670	0.007-0.010	4,000	0.009-0.014	785	0.004-0.007	630	0.004-0.007
10.0	-	2,300	0.004-0.007	1,250	0.004-0.007	2,500	0.007-0.010	3,800	0.009-0.014	750	0.004-0.007	600	0.004-0.007
12.0	-	1,900	0.005-0.008	1,050	0.005-0.008	2,100	0.008-0.012	3,150	0.010-0.016	625	0.005-0.008	500	0.005-0.008
-	1/2	1,760	0.005-0.008	1,000	0.005-0.008	2,000	0.008-0.012	3,000	0.010-0.016	590	0.005-0.008	470	0.005-0.008
-	5/8	1,400	0.006-0.011	800	0.006-0.011	1,600	0.009-0.013	3,400	0.012-0.019	470	0.006-0.011	380	0.006-0.011
16.0	-	1,400	0.006-0.011	800	0.006-0.011	1,600	0.009-0.013	2,400	0.012-0.019	470	0.006-0.011	380	0.006-0.011
-	3/4	1,170	0.008-0.013	680	0.008-0.013	1,330	0.010-0.016	2,000	0.016-0.024	390	0.008-0.013	315	0.008-0.013
20.0	-	1,150	0.008-0.013	630	0.008-0.013	1,300	0.010-0.016	1,900	0.016-0.024	375	0.008-0.013	300	0.008-0.013
25.0	-	900	0.010-0.018	500	0.010-0.018	1,000	0.012-0.019	1,500	0.020-0.030	300	0.010-0.018	240	0.010-0.018

1. The indicated speeds and feeds are for drilling with water soluble oil.
2. When using non-water soluble oil, reduce the drilling speed by 20%.
3. When centering on a curved or inclined surface, reduce the feed rate accordingly.
4. For machines that cannot achieve the speeds indicated in the table, please set rotation as high as possible.





List 5600 - EXOPRO® Mega Muscle®: 3D List 5610 - EXOPRO® Mega Muscle®: 5D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Cast Iron		Ductile Cast Iron		Cast Aluminum	
Drilling Speed		260-395 SFM		200-295 SFM		260-395 SFM		195-330 SFM		260-660 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
4	-	8,000	0.005 - 0.009	6,000	0.005 - 0.009	8,000	0.005 - 0.009	6,300	0.005 - 0.009	11,100	0.006 - 0.012
6	-	5,300	0.008 - 0.012	4,000	0.007 - 0.013	5,300	0.008 - 0.014	4,200	0.008 - 0.013	7,400	0.009 - 0.019
-	1/4	5,000	0.009 - 0.014	3,775	0.007 - 0.014	5,000	0.009 - 0.016	4,000	0.007 - 0.014	7,000	0.010 - 0.020
8	-	4,000	0.011 - 0.016	3,000	0.009 - 0.017	4,000	0.011 - 0.019	3,200	0.009 - 0.017	5,600	0.013 - 0.025
-	3/8	3,300	0.012 - 0.021	2,500	0.012 - 0.021	3,300	0.013 - 0.023	2,700	0.012 - 0.021	4,700	0.015 - 0.030
10	-	3,200	0.013 - 0.020	2,400	0.012 - 0.022	3,200	0.014 - 0.024	2,500	0.012 - 0.022	4,500	0.016 - 0.031
-	7/16	2,900	0.013 - 0.023	2,150	0.013 - 0.023	2,900	0.015 - 0.026	2,300	0.013 - 0.023	4,000	0.017 - 0.035
12	-	2,700	0.016 - 0.024	2,000	0.014 - 0.024	2,700	0.017 - 0.028	2,100	0.014 - 0.024	3,700	0.019 - 0.038
-	1/2	2,500	0.016 - 0.025	1,900	0.015 - 0.025	2,500	0.018 - 0.028	2,000	0.015 - 0.025	3,500	0.020 - 0.040
14	-	2,300	0.019 - 0.028	1,700	0.017 - 0.028	2,300	0.019 - 0.030	1,800	0.017 - 0.028	3,200	0.022 - 0.044
-	5/8	2,000	0.019 - 0.031	1,500	0.019 - 0.031	2,000	0.022 - 0.034	1,600	0.019 - 0.031	2,800	0.025 - 0.050
18	-	1,800	0.021 - 0.032	1,350	0.021 - 0.032	1,800	0.025 - 0.035	1,400	0.021 - 0.032	2,500	0.028 - 0.057
-	3/4	1,700	0.023 - 0.034	1,250	0.023 - 0.034	1,700	0.026 - 0.037	1,330	0.023 - 0.034	2,300	0.030 - 0.060
20	-	1,600	0.024 - 0.035	1,200	0.024 - 0.035	1,600	0.028 - 0.039	1,270	0.024 - 0.035	2,200	0.031 - 0.063

General Drilling Operations

Work Material		Special Alloy Steels, Hardened Steels					
Hardness		26-30 HRC		30-34 HRC		34-43 HRC	
Drilling Speed		195-295 SFM		160-230 SFM		130-160 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch						
4	-	6,000	0.005 - 0.008	4,730	0.005 - 0.008	3,500	0.005 - 0.007
6	-	4,000	0.007 - 0.012	3,200	0.007 - 0.012	2,350	0.007 - 0.009
-	1/4	3,700	0.007 - 0.012	3,000	0.007 - 0.012	2,200	0.007 - 0.010
8	-	3,000	0.009 - 0.016	2,400	0.009 - 0.016	1,750	0.009 - 0.013
-	3/8	2,500	0.011 - 0.019	2,000	0.011 - 0.019	1,500	0.011 - 0.015
10	-	2,400	0.012 - 0.020	1,900	0.012 - 0.020	1,400	0.012 - 0.016
-	7/16	2,100	0.013 - 0.022	1,700	0.013 - 0.022	1,300	0.013 - 0.017
12	-	2,000	0.014 - 0.024	1,600	0.014 - 0.024	1,200	0.014 - 0.019
-	1/2	1,900	0.015 - 0.024	1,500	0.015 - 0.024	1,100	0.015 - 0.020
14	-	1,700	0.017 - 0.025	1,350	0.017 - 0.025	1,000	0.017 - 0.022
-	5/8	1,500	0.019 - 0.025	1,200	0.019 - 0.025	900	0.019 - 0.025
18	-	1,300	0.021 - 0.028	1,050	0.021 - 0.028	800	0.021 - 0.028
-	3/4	1,250	0.023 - 0.030	1,000	0.023 - 0.030	700	0.023 - 0.030
20	-	1,200	0.024 - 0.031	950	0.024 - 0.031	700	0.024 - 0.031





List 5630 - EXOPRO® Mega Muscle®: 10D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Cast Iron		Ductile Cast Iron		Cast Aluminum	
Drilling Speed		260-395 SFM		200-295 SFM		260-395 SFM		195-330 SFM		260-660 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
5	-	6,350	0.007 - 0.009	5,750	0.007 - 0.009	6,350	0.007 - 0.011	5,100	0.007 - 0.009	8,900	0.008 - 0.016
6	-	5,300	0.008 - 0.011	4,800	0.008 - 0.011	5,300	0.008 - 0.014	4,200	0.008 - 0.011	7,400	0.009 - 0.019
-	1/4	5,000	0.009 - 0.012	4,550	0.009 - 0.012	5,000	0.009 - 0.016	4,000	0.007 - 0.012	7,000	0.010 - 0.020
8	-	4,000	0.011 - 0.015	3,600	0.011 - 0.015	4,000	0.011 - 0.018	3,200	0.009 - 0.015	5,600	0.013 - 0.025
-	3/8	3,300	0.012 - 0.017	3,050	0.012 - 0.017	3,300	0.012 - 0.020	2,700	0.012 - 0.017	4,700	0.015 - 0.030
10	-	3,200	0.013 - 0.019	2,900	0.013 - 0.019	3,200	0.013 - 0.023	2,500	0.012 - 0.019	4,500	0.016 - 0.031
-	7/16	2,900	0.014 - 0.021	2,600	0.014 - 0.021	2,900	0.014 - 0.025	2,300	0.013 - 0.021	4,000	0.017 - 0.035
12	-	2,700	0.016 - 0.023	2,400	0.016 - 0.023	2,700	0.016 - 0.028	2,100	0.014 - 0.023	3,700	0.019 - 0.038
-	1/2	2,500	0.016 - 0.024	2,250	0.016 - 0.024	2,500	0.016 - 0.028	2,000	0.015 - 0.024	3,500	0.020 - 0.040
14	-	2,300	0.017 - 0.026	2,050	0.017 - 0.026	2,300	0.017 - 0.029	1,800	0.017 - 0.026	3,200	0.022 - 0.044
-	5/8	2,000	0.018 - 0.029	1,800	0.018 - 0.029	2,000	0.018 - 0.030	1,600	0.019 - 0.029	2,800	0.025 - 0.050

General Drilling Operations

Work Material		Special Alloy Steels, Hardened Steels			
Hardness		26-30 HRC		30-34 HRC	
Drilling Speed		195-295 SFM		160-230 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch				
5	-	4,750	0.006 - 0.007	3,750	0.005 - 0.007
6	-	4,000	0.007 - 0.010	3,200	0.007 - 0.010
-	1/4	3,700	0.007 - 0.010	3,000	0.007 - 0.010
8	-	3,000	0.009 - 0.014	2,400	0.009 - 0.014
-	3/8	2,500	0.011 - 0.017	2,000	0.011 - 0.017
10	-	2,400	0.012 - 0.018	1,900	0.012 - 0.018
-	7/16	2,100	0.013 - 0.020	1,700	0.013 - 0.020
12	-	2,000	0.014 - 0.022	1,600	0.014 - 0.022
-	1/2	1,900	0.015 - 0.022	1,500	0.015 - 0.022
14	-	1,700	0.017 - 0.023	1,350	0.017 - 0.023
-	5/8	1,500	0.019 - 0.024	1,200	0.018 - 0.023





List 5950Ni - EXOPRO® WHO-Ni: 3D

List 5955Ni - EXOPRO® WHO-Ni: 5D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Cast Iron		Ductile Cast Iron		Ni-Base Material, Inconel 38-43 HRC	
Hardness											
Drilling Speed		260-395 SFM		260-395 SFM		260-395 SFM		195-330 SFM		35-100 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
3	-	10,600	0.002 - 0.005	10,600	0.002 - 0.005	10,600	0.002 - 0.005	8,500	0.002 - 0.005	2,150	0.001 - 0.002
-	1/8	10,000	0.002 - 0.005	10,000	0.002 - 0.005	10,000	0.002 - 0.005	8,000	0.002 - 0.005	2,050	0.001 - 0.002
4	-	7,900	0.003 - 0.006	7,900	0.003 - 0.006	7,900	0.003 - 0.006	6,350	0.003 - 0.006	1,625	0.001 - 0.003
-	3/16	6,650	0.004 - 0.008	6,650	0.004 - 0.008	6,650	0.004 - 0.008	5,300	0.004 - 0.008	1,350	0.002 - 0.004
6	-	5,300	0.005 - 0.009	5,300	0.005 - 0.009	5,300	0.005 - 0.009	4,200	0.005 - 0.009	1,100	0.002 - 0.005
-	1/4	5,000	0.005 - 0.009	5,000	0.005 - 0.009	5,000	0.005 - 0.009	4,000	0.005 - 0.009	1,025	0.002 - 0.005
8	-	4,000	0.006 - 0.011	4,000	0.006 - 0.011	4,000	0.006 - 0.011	3,200	0.006 - 0.011	800	0.003 - 0.006
-	3/8	3,350	0.007 - 0.012	3,350	0.007 - 0.012	3,350	0.007 - 0.012	2,700	0.007 - 0.012	680	0.003 - 0.007
10	-	3,200	0.008 - 0.012	3,200	0.008 - 0.012	3,200	0.008 - 0.012	2,550	0.008 - 0.012	650	0.004 - 0.008
-	7/16	2,850	0.008 - 0.012	2,850	0.008 - 0.012	2,850	0.008 - 0.012	2,300	0.008 - 0.012	585	0.004 - 0.009
12	-	2,650	0.008 - 0.012	2,650	0.008 - 0.012	2,650	0.008 - 0.012	2,100	0.008 - 0.012	550	0.005 - 0.009
-	1/2	2,500	0.008 - 0.012	2,500	0.008 - 0.012	2,500	0.008 - 0.012	2,000	0.008 - 0.012	500	0.005 - 0.010

General Drilling Operations

Work Material		Special Alloy Steels, Hardened Steels					
Hardness		35-40 HRC		40-45 HRC		45-56 HRC	
Drilling Speed		130-160 SFM		115-150 SFM		65-100 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch						
3	-	4,700	0.002 - 0.003	4,250	0.001 - 0.002	2,650	0.001 - 0.002
-	1/8	4,400	0.002 - 0.003	4,025	0.001 - 0.002	2,500	0.001 - 0.002
4	-	3,500	0.003 - 0.004	3,200	0.001 - 0.003	2,000	0.001 - 0.003
-	3/16	2,950	0.004 - 0.005	2,700	0.002 - 0.004	1,650	0.002 - 0.004
6	-	2,350	0.005 - 0.006	2,100	0.002 - 0.005	1,300	0.002 - 0.005
-	1/4	2,200	0.005 - 0.006	2,000	0.002 - 0.005	1,250	0.002 - 0.005
8	-	1,750	0.006 - 0.008	1,600	0.003 - 0.006	1,000	0.003 - 0.006
-	3/8	1,475	0.007 - 0.009	1,350	0.003 - 0.007	850	0.003 - 0.007
10	-	1,400	0.008 - 0.010	1,300	0.004 - 0.008	800	0.004 - 0.008
-	7/16	1,250	0.009 - 0.011	1,150	0.004 - 0.009	715	0.004 - 0.009
12	-	1,200	0.009 - 0.012	1,050	0.005 - 0.009	660	0.005 - 0.009
-	1/2	1,100	0.010 - 0.013	1,000	0.005 - 0.010	625	0.005 - 0.010



List 5171 - EXOCARB® WH70

Work Material	Hardened Steels			
	D2-S7 55-60 HRC		D2, CPM-9V 60-70 HRC	
Drilling Speed	33-52 SFM		26-42 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR
2	2,080	0.001 - 0.002	1,670	0.001 - 0.002
3	1,375	0.001 - 0.002	1,100	0.001 - 0.002
4	1,030	0.001 - 0.002	825	0.001 - 0.002
5	825	0.001 - 0.002	660	0.001 - 0.002
6	680	0.001 - 0.002	550	0.001 - 0.002
7	590	0.001 - 0.002	470	0.001 - 0.002
8	515	0.001 - 0.002	410	0.001 - 0.002
9	450	0.001 - 0.002	360	0.001 - 0.002
10	410	0.001 - 0.002	260	0.001 - 0.002
11	375	0.001 - 0.002	300	0.001 - 0.002
12	340	0.001 - 0.002	275	0.001 - 0.002
14	290	0.001 - 0.002	235	0.001 - 0.002
15	270	0.001 - 0.002	220	0.001 - 0.002
16	260	0.001 - 0.002	205	0.001 - 0.002
17	240	0.001 - 0.002	195	0.001 - 0.002
18	230	0.001 - 0.002	180	0.001 - 0.002

1. Use a water soluble oil with high density (5 to 10 times dilution).
2. Tight clamping is critical.
3. For drilling depth > 3D, use a step feed.
4. For materials susceptible to chip packing in the flute, apply a step feed.

List 5172 - EXOCARB® XH

Work Material	Broken Taps & Drills
Drilling Speed	65-80 SFM
Drill Dia. mm	Speed RPM
2	3,190 - 3,930
3	2,100 - 2,590
4	1,580 - 1,940
5	1,260 - 1,550
6	1,050 - 1,290
7	900 - 1,110
8	790 - 970
9	700 - 860
10	630 - 780
11	570 - 705
12	530 - 650


1. Use a drilling speed of 65-80 SFM.
2. Hand feed of 0.0005~0.001 in/rev is normal.
3. Use a rigid holder.
4. Select a high quality cutting oil and apply in sufficient amounts.
5. This tool should not be used to drill soft steels, aluminum alloys or other soft materials.
6. Resharpening should be done periodically.
7. For through hole processing of heat treated steels, use a spare piece of material underneath the material being drilled as this will prevent breakage caused by sudden torque.
8. Cannot be used to remove forming taps.



List 5275 - EXOCARB® MAX-OIL-AL: 15D-30D

Work Material	Aluminum Alloy 2025, 5052		Aluminum Alloy Casting		Copper Alloy C1020	
Drilling Speed	200-390 SFM		260-650 SFM		190-400 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
3	9,500	0.0035 – 0.0059	14,700	0.0035 - 0.0059	9,500	0.0020 - 0.0035
4	7,150	0.0047 – 0.0079	11,000	0.0047 - 0.0079	7,150	0.0024 - 0.0039
5	5,700	0.0059 – 0.0098	8,800	0.0059 - 0.0098	5,700	0.0024 - 0.0039
6	4,770	0.0071 – 0.0118	7,350	0.0071 - 0.0118	4,770	0.0024 - 0.0039
8	3,575	0.0079 – 0.0157	5,500	0.0079 - 0.0157	3,575	0.0031 - 0.0059
10	2,850	0.0098 – 0.0197	4,400	0.0098 - 0.0197	2,850	0.0031 - 0.0059

Recommended Coolant Pressure

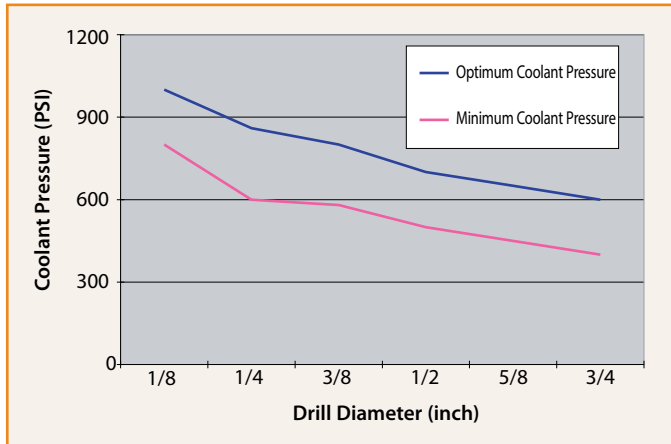



List 5310 - EXOCARB® MAX-MINI FHL-GDTS

Work Material	Hardened Steel, Pre-Hardened Steels			Tool Steels H13, D2			Stainless Steels 440		
Drilling Speed	130-160 SFM			110-150 SFM			100-130 SFM		
Drill Dia. mm	Speed RPM	Feed IPR	Pecking (In)	Speed RPM	Feed IPR	Pecking (In)	Speed RPM	Feed IPR	Pecking (In)
1.0	14,000	0.0008-0.0020	0.0008-0.0020	13,000	0.0008-0.0020	0.0008-0.0020	11,000	0.0008-0.0020	0.0008-0.0020
1.1	13,000	0.0008-0.0020	0.0008-0.0020	12,000	0.0008-0.0020	0.0008-0.0020	10,000	0.0008-0.0020	0.0008-0.0020
1.2	12,000	0.0008-0.0020	0.0008-0.0020	11,000	0.0008-0.0020	0.0008-0.0020	9,000	0.0008-0.0020	0.0008-0.0020
1.3	11,000	0.0008-0.0020	0.0008-0.0020	10,000	0.0008-0.0020	0.0008-0.0020	8,600	0.0008-0.0020	0.0008-0.0020
1.4	10,000	0.0008-0.0020	0.0008-0.0020	9,000	0.0008-0.0020	0.0008-0.0020	8,000	0.0008-0.0020	0.0008-0.0020
1.5	9,500	0.0008-0.0020	0.0008-0.0020	8,500	0.0008-0.0020	0.0008-0.0020	7,400	0.0008-0.0020	0.0008-0.0020
1.6	9,000	0.0008-0.0020	0.0008-0.0020	8,000	0.0008-0.0020	0.0008-0.0020	7,000	0.0008-0.0020	0.0008-0.0020
1.7	8,400	0.0008-0.0020	0.0008-0.0020	7,500	0.0008-0.0020	0.0008-0.0020	6,600	0.0008-0.0020	0.0008-0.0020
1.8	8,000	0.0008-0.0020	0.0008-0.0020	7,100	0.0008-0.0020	0.0008-0.0020	6,200	0.0008-0.0020	0.0008-0.0020
1.9	7,500	0.0008-0.0020	0.0008-0.0020	6,700	0.0008-0.0020	0.0008-0.0020	5,900	0.0008-0.0020	0.0008-0.0020
2.0	7,200	0.0008-0.0020	0.0008-0.0020	6,400	0.0008-0.0020	0.0008-0.0020	5,600	0.0008-0.0020	0.0008-0.0020
2.5	5,700	0.0008-0.0020	0.0008-0.0020	5,100	0.0008-0.0020	0.0008-0.0020	4,500	0.0008-0.0020	0.0008-0.0020
3.0	4,800	0.0008-0.0020	0.0008-0.0020	4,200	0.0008-0.0020	0.0008-0.0020	3,700	0.0008-0.0020	0.0008-0.0020

1. Please use in a machine with precise spindle rotation. Tight clamping is critical.
2. The indicated speeds and feeds are for drilling with water-soluble fluid.
3. Please use water-soluble high density fluid (less than 20 times dilution).
4. We recommend the pilot hole operation prior to EXOCARB® MAX-MINI (List 5310).
5. The run out with a drill in the spindle should be less than 0.0001".
6. OSG's Shrink Fit System is the recommended tool holder for these drills.

For machines that cannot achieve the speeds indicated in the above table, please set rotation as high as possible. Tool life may be decreased.



List 5315 - EXOCARB® MAX-MINI UVM-LDS

List 5320 - EXOCARB® MAX-MINI UVM-DRL: 5D

List 5325 - EXOCARB® MAX-MINI UVM-DRL: 10D

Work Material	Stainless Steels 300SS, 400SS, 17-4PH			Special Alloy Steels, Hardened Steels			Aluminum Alloys, Cast Aluminum		
Drilling Speed	2-20 SFM			2-20 SFM			2-30 SFM		
Drill Dia. mm	Speed RPM	Feed IPR	Pecking (In)	Speed RPM	Feed IPR	Pecking (In)	Speed RPM	Feed IPR	Pecking (In)
0.02	25,000	0.00004 - 0.00006	0.00008	25,000	0.00004 - 0.00006	0.00008	25,000	0.0002 - 0.0004	0.00008
0.03	25,000	0.00004 - 0.00006	0.00012	25,000	0.00004 - 0.00006	0.00012	25,000	0.0002 - 0.0004	0.00012
0.04	25,000	0.00004 - 0.00006	0.00016	25,000	0.00004 - 0.00006	0.00016	25,000	0.0002 - 0.0004	0.00016
0.05	21,350	0.00004 - 0.00006	0.00020	21,350	0.00004 - 0.00006	0.00020	25,000	0.0002 - 0.0004	0.00020
0.06	17,790	0.00004 - 0.00006	0.00024	17,790	0.00004 - 0.00006	0.00024	25,000	0.0002 - 0.0004	0.00024
0.07	15,250	0.00004 - 0.00006	0.00027	15,250	0.00004 - 0.00006	0.00027	22,180	0.0002 - 0.0004	0.00027
0.08	13,340	0.00004 - 0.00006	0.00031	13,340	0.00004 - 0.00006	0.00031	19,400	0.0002 - 0.0004	0.00031
0.09	11,860	0.00004 - 0.00006	0.00035	11,860	0.00004 - 0.00006	0.00035	17,250	0.0002 - 0.0004	0.00035
0.10	10,670	0.00004 - 0.00006	0.00040	10,670	0.00004 - 0.00006	0.00040	15,520	0.0002 - 0.0004	0.00040

Work Material	High Heat Material					
	Ti-Alloy			Inconel, Waspaloy		
Drilling Speed	2-7 SFM			2-5 SFM		
Drill Dia. mm	Speed RPM	Feed IPR	Pecking (In)	Speed RPM	Feed IPR	Pecking (In)
0.02	21,830	0.000012 - 0.000028	0.00008	15,650	0.000012 - 0.000028	0.00008
0.03	14,550	0.000012 - 0.000028	0.00012	10,430	0.000012 - 0.000028	0.00012
0.04	10,910	0.000012 - 0.000028	0.00016	7,820	0.000012 - 0.000028	0.00016
0.05	8,730	0.000012 - 0.000028	0.00020	6,260	0.000012 - 0.000028	0.00020
0.06	7,280	0.000012 - 0.000028	0.00024	5,210	0.000012 - 0.000028	0.00024
0.07	6,240	0.000012 - 0.000028	0.00027	4,470	0.000012 - 0.000028	0.00027
0.08	5,460	0.000012 - 0.000028	0.00031	3,910	0.000012 - 0.000028	0.00031
0.09	4,850	0.000012 - 0.000028	0.00035	3,480	0.000012 - 0.000028	0.00035
0.10	4,370	0.000012 - 0.000028	0.00040	3,130	0.000012 - 0.000028	0.00040

1. Please use in a machine with precise spindle rotation. Tight clamping is critical.
2. The indicated feeds and speeds are for drilling with water-soluble fluid.
3. Please use water-soluble high density fluid (less than 20 times dilution).
4. Please utilize pecking cycle as specified in table.
5. The run out with a drill in the spindle should be less than 0.0001".
6. OSG's Shrink Fit System is the recommended tool holder for these drills.

For machines that cannot achieve the speeds indicated in the above table, please set rotation as high as possible. Tool life may be decreased.





List 5330 - EXOCARB® MAX-MINI WX-MS

General Drilling Operations

Work Material	Carbon Steels 1010, 1050		Alloy Steels 4140, 4130		Martensitic, Ferritic Stainless Steels 420, 430, 430F, 440		Aluminum Alloy 6061, 7075	
Drilling Speed	65-260 SFM		65-180 SFM		65-120 SFM		100-260 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
0.2	25,000	0.00008	25,000	0.00008	25,000	0.00008	25,000	0.0001
0.3	25,000	0.00012	25,000	0.00012	25,000	0.00012	25,000	0.0003
0.5	25,000	0.0003	20,000	0.0003	15,000	0.0003	25,000	0.0006
1.0	15,000	0.0008	11,000	0.0008	6,400	0.0004	15,000	0.0012
1.5	10,000	0.0008 - 0.0016	8,400	0.0008 - 0.0016	4,800	0.0005 - 0.0012	10,000	0.0012 - 0.0031
2.0	8,000	0.0012 - 0.0019	6,500	0.0012 - 0.0019	4,000	0.0006 - 0.0016	8,000	0.0016 - 0.0040
3.0	5,500	0.0016 - 0.0028	4,500	0.0016 - 0.0028	3,000	0.0009 - 0.0024	6,500	0.0024 - 0.0059
4.0	4,000	0.0024 - 0.0040	3,200	0.0024 - 0.0040	2,500	0.0012 - 0.0031	5,000	0.0031 - 0.0079
5.0	3,200	0.0027 - 0.0047	2,600	0.0027 - 0.0047	2,000	0.0016 - 0.004	4,000	0.0040 - 0.0098

General Drilling Operations

Work Material	Cast Aluminum		Copper, Copper Alloys C1020, S2600	
Drilling Speed	100-200 SFM		65-150 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR
0.2	25,000	0.00008	25,000	0.00008
0.3	25,000	0.0001	25,000	0.00012
0.5	25,000	0.0003	20,000	0.0003
1.0	14,500	0.0004	10,000	0.0004
1.5	10,000	0.0005 - 0.0012	4,800	0.0005 - 0.0012
2.0	8,000	0.0006 - 0.0016	4,000	0.0006 - 0.0016
3.0	6,500	0.0009 - 0.0024	3,000	0.0009 - 0.0024
4.0	5,000	0.0012 - 0.0031	2,500	0.0012 - 0.0031
5.0	4,000	0.0016 - 0.0040	2,000	0.0016 - 0.0040

1. Please use in a machine with precise spindle rotation. Tight clamping is critical.
2. The indicated feeds and speeds are for drilling with water-soluble fluid.
3. Please use water-soluble high density fluid (less than 20 times dilution).
4. These tables are applicable for less than 3xD deep drilling operations.
When drilling deeper than 3xD, please peck every 0.25-0.5xD accordingly.
5. The run out with a drill in the spindle should be less than 0.0001".
6. OSG's Shrink Fit System is the recommended tool holder for these drills.

For machines that cannot achieve the speeds indicated in the above table, please set rotation as high as possible. Tool life may be decreased.



List 5340 - EXOCARB[®] MAX-MINI MRS

General Drilling Operations

Work Material	Carbon Steels 1015, 1050		Alloy Steels 4140, 4130		Austenitic Stainless Steels 304, 316		Martensitic, Ferritic Stainless Steels 420, 430, 430F, 440		Precipitation Hardened Stainless Steels 17-4, 15-5	
Drilling Speed	65-260 SFM		65-180 SFM		50-130 SFM		65-165 SFM		50-130 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
0.5	25,000	0.0003	23,300	0.0003	17,465	0.0002 - 0.0006	22,300	0.0002 - 0.0006	17,465	0.0002 - 0.0006
1.0	15,700	0.0008	11,600	0.0008	8,730	0.0004 - 0.0012	11,150	0.0004 - 0.0012	8,730	0.0004 - 0.0012
1.5	10,000	0.0008 - 0.0016	7,750	0.0008 - 0.0016	5,820	0.0006 - 0.0018	7,440	0.0006 - 0.0018	5,820	0.0006 - 0.0018
2.0	8,000	0.0012 - 0.0019	5,800	0.0012 - 0.0019	4,365	0.0008 - 0.0024	5,580	0.0008 - 0.0024	4,365	0.0008 - 0.0024
2.5	6,400	0.0014 - 0.0025	4,660	0.0014 - 0.0025	3,500	0.0009 - 0.0030	4,460	0.0009 - 0.0030	3,500	0.0009 - 0.0030
3.0	5,500	0.0016 - 0.0028	3,900	0.0016 - 0.0028	2,900	0.0012 - 0.0035	3,720	0.0012 - 0.0035	2,900	0.0012 - 0.0035

General Drilling Operations

Work Material	Aluminum Alloy 6061, 7075		Cast Aluminum		Copper, Copper Alloys C1020, S2600		Special Alloy Steels, Hardened Steels	
Drilling Speed	100-260 SFM		100-200 SFM		65-150 SFM		65-120 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
0.5	25,000	0.0006	25,000	0.0003	21,000	0.0003	17,500	0.0003
1.0	16,000	0.0012	14,500	0.0004	10,600	0.0004	8,800	0.0008
1.5	10,000	0.0012 - 0.0031	9,700	0.0005 - 0.0012	7,100	0.0005 - 0.0012	5,850	0.0012 - 0.0019
2.0	8,000	0.0016 - 0.0040	7,300	0.0006 - 0.0016	5,300	0.0006 - 0.0016	4,400	0.0016 - 0.0024
2.5	6,400	0.0020 - 0.0049	5,800	0.0007 - 0.0020	4,270	0.0007 - 0.0020	3,500	0.0020 - 0.0030
3.0	5,300	0.0024 - 0.0059	4,800	0.0009 - 0.0024	3,560	0.0009 - 0.0024	2,900	0.0024 - 0.0035

1. Please use in a machine with precise spindle rotation. Tight clamping is critical.
2. The indicated feeds and speeds are for drilling with water-soluble fluid.
3. Please use water-soluble high density fluid (less than 20 times dilution).
4. These tables are applicable for less than 3xD deep drilling operations.
When drilling deeper than 3xD, please peck every 0.25-0.5xD accordingly.
5. The run out with a drill in the spindle should be less than 0.0001".
6. OSG's Shrink Fit System is the recommended tool holder for these drills.

For machines that cannot achieve the speeds indicated in the above table, please set rotation as high as possible. Tool life may be decreased.





List 7501 - EXOPRO® AERO-STAD

List 7520 - EXOPRO® AERO-LHX

List 7500 - EXOPRO® AERO-D-REAM

List 257 - CARBIDE AERO-D-REAM

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	165 - 260 SFM	
Drill Diameter (in)	Speed RPM	Feed IPR
#40	8,000	0.0008 - 0.0020
#30	6,100	0.0008 - 0.0030
#20	4,900	0.0012 - 0.0030
#11	4,100	0.0012 - 0.0030
#2	3,550	0.0014 - 0.0040
1/4	3,100	0.0016 - 0.0040
5/16	3,170	0.0016 - 0.0040
3/8	2,100	0.0020 - 0.0040
7/16	1,790	0.0020 - 0.0040
1/2	1,570	0.0020 - 0.0040

1. Coolant is not needed, however, make sure dust is efficiently collected.
2. Peck drilling is not needed if drilling depth is less than 3D.
3. The machinability of CFRP depends on physical makeup and percentage of contents, both speed & feed may need adjustments depending on material.
4. Feed rate can be and should be adjusted depending on surface layer makeup.
5. Feed rates can be increased when an approved coolant is utilized.
6. Please contact OSG for specific application questions.

List 7530 - EXOPRO® AERO-S

Work Material	Carbon & Glass Fiber Reinforced Plastics		CFRP + Aluminum Stack	
Cutting Speed	165 - 260 SFM		200-400 SFM	
Drill Diameter (in)	Speed RPM	Feed IPR	Speed RPM	Feed IPR
#40	8,000	0.0008 - 0.0020	11,700	0.0010 - 0.0030
#30	6,100	0.0008 - 0.0030	8,900	0.0030 - 0.0040
#20	4,900	0.0012 - 0.0030	7,100	0.0040 - 0.0050
#11	4,100	0.0012 - 0.0030	6,000	0.0040 - 0.0050
#2	3,550	0.0014 - 0.0040	5,200	0.0050 - 0.0060
1/4	3,100	0.0016 - 0.0040	4,500	0.0060 - 0.0070
5/16	3,170	0.0016 - 0.0040	3,600	0.0070 - 0.0080
3/8	2,100	0.0020 - 0.0040	3,000	0.0090 - 0.0100
7/16	1,790	0.0020 - 0.0040	2,600	0.0100 - 0.0110
1/2	1,570	0.0020 - 0.0040	2,300	0.0120 - 0.0130

1. Feed rates can and should be adjusted depending on stack makeup, with higher feed rates in the composite portion and lower feeds in the metal portion.
2. Peck drilling may be necessary for enhanced quality and proper chip evacuation.
3. There are many factors that can effect successful stack drilling; please contact OSG about your specific application for best recommendation.



List 7532 - EXOPRO® AERO-H List 5732 - EXOCARB® AERO-H

Work Material	Carbon & Glass Fiber Reinforced Plastics		CFRP + Aluminum Stack		CFRP + Titanium Stack		CFRP + CRES Stack	
Cutting Speed	165 - 260 SFM		200-400 SFM		40-60 SFM		30-50 SFM	
Drill Dia. (in)	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
#40	8,000	0.0008 - 0.0020	11,700	0.0010 - 0.0030	1,900	0.0002 - 0.0007	1,550	0.0002 - 0.0007
#30	6,100	0.0008 - 0.0030	8,900	0.0030 - 0.0040	1,500	0.0004 - 0.0009	1,150	0.0004 - 0.0009
#20	4,900	0.0012 - 0.0030	7,100	0.0040 - 0.0050	1,225	0.0006 - 0.0011	950	0.0006 - 0.0011
#11	4,100	0.0012 - 0.0030	6,000	0.0040 - 0.0050	1,000	0.0007 - 0.0012	800	0.0007 - 0.0012
#2	3,550	0.0014 - 0.0040	5,200	0.0050 - 0.0060	875	0.0009 - 0.0014	675	0.0009 - 0.0014
1/4	3,100	0.0016 - 0.0040	4,500	0.0060 - 0.0070	750	0.0010 - 0.0015	600	0.0010 - 0.0015
5/16	3,170	0.0016 - 0.0040	3,600	0.0070 - 0.0080	625	0.0013 - 0.0018	475	0.0013 - 0.0018
3/8	2,100	0.0020 - 0.0040	3,000	0.0090 - 0.0100	500	0.0016 - 0.0021	400	0.0016 - 0.0021
7/16	1,790	0.0020 - 0.0040	2,600	0.0100 - 0.0110	425	0.0019 - 0.0024	350	0.0019 - 0.0024
1/2	1,570	0.0020 - 0.0040	2,300	0.0120 - 0.0130	375	0.0023 - 0.0028	275	0.0023 - 0.0028

1. Feed rates can and should be adjusted depending on stack makeup, with higher feed rates in the composite portion and lower feeds in the metal portion.
2. Peck drilling may be necessary for enhanced quality and proper chip evacuation.
3. There are many factors that can effect successful stack drilling; please contact OSG about your specific application for best recommendation.



List HP700 - HY-PRO® CARB NEPTUNE®

Work Material	Carbon & Glass Fiber Reinforced Plastics		CFRP + Aluminum Stack		CFRP + Titanium Stack		CFRP + CRES Stack	
Cutting Speed	150-300 SFM		200-400 SFM		40-60 SFM		30-50 SFM	
Drill Diameter (in)	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
#40	8,900	0.001-0.002	11,690	0.001-0.003	1,900	0.0002-0.0007	1,550	0.0002-0.0007
#30	6,700	0.001-0.002	9,000	0.003-0.004	1,500	0.0004-0.0009	1,190	0.0004-0.0009
#20	5,250	0.001-0.002	7,000	0.004-0.005	1,180	0.0006-0.0011	950	0.0006-0.0011
#11	4,500	0.001-0.002	6,000	0.004-0.005	1,000	0.0007-0.0012	800	0.0007-0.0012
1/4	3,350	0.001-0.003	4,500	0.006-0.007	750	0.0010-0.0015	600	0.0009-0.0014



List HP243 - HY-PRO® CARB: 3D

List HP245 - HY-PRO® CARB: 5D

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron		Ductile Cast Iron		Aluminum Alloy	
Drilling Speed		240-350 SFM		230-325 SFM		130-200 SFM		240-385 SFM		175-300 SFM		200-380 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1	-	25,000	0.001-0.002	25,000	0.001-0.002	16,010	0.001-0.002	25,000	0.001-0.002	23,090	0.001-0.002	25,000	0.001-0.002
-	1/16	18,030	0.001-0.002	16,930	0.001-0.002	10,080	0.001-0.002	19,620	0.001-0.002	14,550	0.001-0.002	17,720	0.001-0.002
2	-	14,310	0.002-0.003	13,430	0.001-0.003	8,010	0.001-0.003	15,130	0.001-0.003	11,540	0.001-0.003	14,070	0.002-0.003
-	3/32	12,020	0.002-0.004	11,280	0.002-0.004	6,720	0.002-0.003	13,080	0.002-0.004	9,700	0.002-0.004	11,820	0.002-0.004
3	-	9,540	0.002-0.005	8,960	0.002-0.005	5,340	0.002-0.004	10,090	0.002-0.005	7,700	0.002-0.005	9,380	0.003-0.005
-	1/8	9,010	0.003-0.005	8,460	0.003-0.005	5,040	0.003-0.004	9,810	0.002-0.005	7,270	0.003-0.005	8,860	0.004-0.005
4	-	7,160	0.003-0.006	6,720	0.003-0.006	4,000	0.003-0.005	7,560	0.003-0.006	5,770	0.003-0.006	7,040	0.004-0.006
-	3/16	6,010	0.004-0.008	5,640	0.004-0.008	3,360	0.004-0.006	6,540	0.004-0.007	4,850	0.004-0.007	5,910	0.005-0.007
6	-	4,770	0.005-0.009	4,480	0.005-0.009	2,670	0.005-0.007	5,040	0.005-0.009	3,850	0.005-0.009	4,690	0.006-0.008
-	1/4	4,510	0.005-0.010	4,230	0.005-0.010	2,520	0.006-0.008	4,910	0.005-0.010	3,640	0.005-0.010	4,430	0.007-0.009
8	-	3,580	0.006-0.011	3,360	0.006-0.011	2,000	0.006-0.009	3,780	0.006-0.011	2,890	0.006-0.011	3,520	0.008-0.010
-	3/8	3,010	0.007-0.011	2,820	0.007-0.011	1,680	0.007-0.009	3,270	0.007-0.011	2,420	0.007-0.011	2,950	0.009-0.011
10	-	2,860	0.008-0.012	2,680	0.008-0.012	1,600	0.008-0.010	3,030	0.008-0.012	2,310	0.008-0.012	2,810	0.011-0.013
-	7/16	2,580	0.008-0.012	2,420	0.008-0.012	1,440	0.008-0.010	2,800	0.008-0.012	2,080	0.008-0.012	2,530	0.012-0.014
12	-	2,380	0.008-0.012	2,240	0.008-0.012	1,330	0.008-0.010	2,520	0.008-0.012	1,920	0.008-0.012	2,340	0.013-0.015
-	1/2	2,250	0.009-0.013	2,120	0.009-0.013	1,260	0.008-0.011	2,450	0.008-0.013	1,820	0.008-0.013	2,210	0.014-0.016
14	-	2,040	0.009-0.014	1,920	0.009-0.014	1,140	0.009-0.011	2,160	0.009-0.014	1,650	0.009-0.014	2,010	0.016-0.018
-	5/8	1,810	0.010-0.014	1,690	0.010-0.014	1,010	0.010-0.012	1,960	0.010-0.014	1,450	0.010-0.014	1,770	0.018-0.020
16	-	1,810	0.010-0.014	1,690	0.010-0.014	1,010	0.010-0.012	1,960	0.010-0.014	1,450	0.010-0.014	1,770	0.018-0.020
18	-	1,590	0.011-0.015	1,490	0.011-0.015	890	0.011-0.013	1,682	0.011-0.015	1,280	0.011-0.015	1,560	0.020-0.022
-	3/4	1,500	0.012-0.015	1,410	0.012-0.015	840	0.011-0.013	1,580	0.011-0.015	1,210	0.012-0.015	1,480	0.021-0.023
20	-	1,430	0.012-0.016	1,340	0.012-0.016	800	0.012-0.014	1,514	0.012-0.016	1,150	0.012-0.016	1,410	0.022-0.024

continued on next page



General Drilling Operations

Work Material Hardness		Cast Aluminum		Copper		Special Alloy Steels, Hardened Steels							
						26-30 HRC		30-34 HRC		34-43 HRC		43-48 HRC	
Drilling Speed		260- 640 SFM		190-320 SFM		160-240 SFM		110-185 SFM		100-150 SFM		75-100 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch												
1	-	25,000	0.002-0.003	24,740	0.001-0.002	19,400	0.001-0.002	14,260	0.001-0.002	12,130	0.001-0.001	8,440	0.0005-0.001
-	1/16	25,000	0.002-0.003	15,580	0.001-0.002	12,220	0.001-0.002	8,980	0.001-0.002	7,640	0.001-0.002	5,320	0.0005-0.001
2	-	21,831	0.003-0.004	12,370	0.002-0.003	9,700	0.001-0.003	7,130	0.001-0.003	6,060	0.001-0.002	4,220	0.001-0.001
-	3/32	18,336	0.004-0.005	10,390	0.002-0.004	8,150	0.002-0.004	5,990	0.002-0.003	5,090	0.002-0.003	3,540	0.001-0.002
3	-	14,550	0.004-0.006	8,250	0.003-0.005	6,470	0.002-0.005	4,750	0.002-0.003	4,040	0.002-0.003	2,810	0.001-0.002
-	1/8	13,750	0.005-0.006	7,790	0.003-0.005	6,110	0.003-0.005	4,490	0.003-0.004	3,820	0.003-0.004	2,660	0.002-0.003
4	-	10,920	0.005-0.007	6,180	0.004-0.006	4,850	0.003-0.006	3,560	0.003-0.004	3,030	0.003-0.004	2,110	0.002-0.003
-	3/16	9,170	0.006-0.008	5,190	0.005-0.007	4,070	0.004-0.008	2,990	0.004-0.005	2,550	0.004-0.005	1,770	0.002-0.003
6	-	7,270	0.008-0.010	4,120	0.006-0.008	3,230	0.005-0.009	2,380	0.005-0.006	2,020	0.005-0.006	1,410	0.002-0.004
-	1/4	6,870	0.010-0.012	3,890	0.007-0.009	3,050	0.005-0.010	2,240	0.006-0.007	1,910	0.006-0.007	1,330	0.002-0.004
8	-	5,460	0.012-0.014	3,090	0.008-0.010	2,420	0.006-0.011	1,780	0.006-0.008	1,520	0.006-0.008	1,050	0.003-0.005
-	3/8	4,580	0.013-0.015	2,590	0.009-0.011	2,040	0.007-0.011	1,490	0.007-0.009	1,270	0.007-0.009	880	0.003-0.005
10	-	4,360	0.015-0.017	2,470	0.011-0.013	1,940	0.008-0.012	1,420	0.008-0.010	1,210	0.008-0.010	840	0.004-0.006
-	7/16	3,930	0.016-0.018	2,220	0.012-0.014	1,740	0.008-0.012	1,280	0.008-0.011	1,090	0.009-0.011	760	0.004-0.006
12	-	3,640	0.018-0.020	2,060	0.013-0.015	1,620	0.008-0.012	1,190	0.009-0.012	1,010	0.009-0.012	700	0.005-0.007
-	1/2	3,440	0.019-0.021	1,950	0.014-0.016	1,530	0.009-0.013	1,120	0.010-0.013	950	0.010-0.013	660	0.005-0.007
14	-	3,120	0.021-0.023	1,770	0.016-0.018	1,390	0.009-0.014	1,020	0.011-0.014	860	0.011-0.014	600	0.006-0.008
-	5/8	2,750	0.022-0.026	1,560	0.018-0.020	1,220	0.010-0.014	900	0.012-0.016	760	0.013-0.016	530	0.006-0.008
16	-	2,750	0.022-0.026	1,560	0.018-0.020	1,220	0.010-0.014	900	0.012-0.016	760	0.013-0.016	530	0.006-0.008
18	-	2,420	0.026-0.030	1,370	0.020-0.022	1,080	0.011-0.015	790	0.014-0.018	670	0.015-0.018	470	0.007-0.009
-	3/4	2,290	0.027-0.031	1,300	0.021-0.023	1,020	0.012-0.015	750	0.015-0.019	640	0.016-0.019	440	0.008-0.010
20	-	2,180	0.028-0.032	1,240	0.022-0.024	970	0.012-0.016	710	0.016-0.020	610	0.016-0.020	420	0.008-0.011



List HP253 - HY-PRO® CARB: 3D Coolant-Through
List HP255 - HY-PRO® CARB: 5D Coolant-Through
List HP258 - HY-PRO® CARB: 8D Coolant-Through

General Drilling Operations

Work Material		Carbon Steels, Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron		Ductile Cast Iron		Aluminum Alloy	
Drilling Speed		310-455 SFM		265-380 SFM		145-220 SFM		285-420 SFM		215-350 SFM		260-450 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
3	-	12,370	0.002-0.005	10,430	0.002-0.005	5,900	0.002-0.004	11,400	0.002-0.005	9,140	0.002-0.005	11,480	0.003-0.005
-	1/8	11,690	0.002-0.005	9,860	0.002-0.005	5,580	0.002-0.004	10,770	0.002-0.005	8,630	0.002-0.005	10,850	0.003-0.005
4	-	9,280	0.003-0.006	7,820	0.003-0.006	4,430	0.003-0.005	8,550	0.003-0.006	6,850	0.003-0.006	8,610	0.004-0.006
-	3/16	7,790	0.004-0.007	6,570	0.004-0.007	3,720	0.004-0.006	7,180	0.004-0.007	5,760	0.004-0.007	7,230	0.005-0.007
6	-	6,190	0.005-0.009	5,220	0.005-0.009	2,950	0.005-0.007	5,700	0.005-0.009	4,570	0.005-0.009	5,740	0.006-0.008
-	1/4	5,840	0.005-0.010	4,930	0.005-0.010	2,790	0.006-0.008	5,390	0.005-0.010	4,320	0.005-0.010	5,420	0.007-0.009
8	-	4,640	0.006-0.011	3,910	0.006-0.011	2,210	0.006-0.009	4,280	0.006-0.011	3,430	0.006-0.011	4,310	0.008-0.010
-	3/8	3,900	0.007-0.011	3,290	0.007-0.011	1,860	0.007-0.009	3,590	0.007-0.011	2,880	0.007-0.011	3,620	0.009-0.011
10	-	3,710	0.008-0.012	3,130	0.008-0.012	1,770	0.008-0.010	3,420	0.008-0.012	2,740	0.008-0.012	3,440	0.011-0.013
-	7/16	3,340	0.008-0.012	2,820	0.008-0.012	1,590	0.008-0.010	3,080	0.008-0.012	2,470	0.008-0.012	3,100	0.012-0.014
12	-	3,090	0.008-0.012	2,610	0.008-0.012	1,480	0.008-0.010	2,850	0.008-0.012	2,280	0.008-0.012	2,870	0.013-0.015
-	1/2	2,920	0.008-0.013	2,460	0.008-0.013	1,390	0.008-0.010	2,690	0.008-0.013	2,160	0.008-0.013	2,710	0.014-0.016
14	-	2,650	0.009-0.014	2,240	0.009-0.014	1,260	0.009-0.011	2,440	0.009-0.014	1,960	0.009-0.014	2,460	0.016-0.018
-	5/8	2,340	0.010-0.014	1,970	0.010-0.014	1,120	0.010-0.012	2,150	0.010-0.014	1,730	0.010-0.014	2,170	0.018-0.020
16	-	2,340	0.010-0.014	1,970	0.010-0.014	1,120	0.010-0.012	2,150	0.010-0.014	1,730	0.010-0.014	2,170	0.018-0.020
18	-	2,060	0.011-0.015	1,740	0.011-0.015	980	0.011-0.013	1,900	0.011-0.015	1,520	0.011-0.015	1,910	0.020-0.022
-	3/4	1,950	0.011-0.015	1,640	0.011-0.015	930	0.011-0.013	1,800	0.011-0.015	1,440	0.011-0.015	1,810	0.021-0.023
20	-	1,860	0.012-0.016	1,560	0.012-0.016	890	0.012-0.014	1,710	0.012-0.016	1,370	0.012-0.016	1,720	0.022-0.024

continued on next page





General Drilling Operations



Work Material		Cast Aluminum		Copper		Special Alloy Steels, Hardened Steels							
						26-30 HRC		30-34 HRC		34-43 HRC		43-48 HRC	
Hardness		325- 700 SFM		230-380 SFM		185-295 SFM		130-210 SFM		120-180 SFM		80-110 SFM	
Drilling Speed		325- 700 SFM		230-380 SFM		185-295 SFM		130-210 SFM		120-180 SFM		80-110 SFM	
Drill Dia.	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
													mm
3	-	16,580	0.004-0.006	9,860	0.003-0.005	7,760	0.002-0.005	5,500	0.002-0.003	4,850	0.002-0.003	3,090	0.001-0.002
-	1/8	15,660	0.004-0.006	9,320	0.003-0.005	7,330	0.002-0.005	5,200	0.002-0.003	4,560	0.002-0.003	2,930	0.001-0.003
4	-	12,430	0.005-0.007	7,400	0.004-0.006	5,820	0.003-0.006	4,120	0.003-0.004	3,640	0.003-0.004	2,320	0.002-0.003
-	3/16	10,440	0.006-0.008	6,210	0.005-0.007	4,890	0.004-0.007	3,460	0.004-0.005	3,040	0.004-0.005	1,950	0.002-0.004
6	-	8,290	0.008-0.010	4,930	0.006-0.008	3,880	0.005-0.009	2,750	0.005-0.006	2,410	0.005-0.006	1,550	0.002-0.004
-	1/4	7,830	0.009-0.011	4,660	0.007-0.009	3,670	0.005-0.010	2,600	0.005-0.007	2,290	0.005-0.007	1,460	0.003-0.005
8	-	6,220	0.012-0.014	3,700	0.008-0.010	2,910	0.006-0.011	2,060	0.006-0.008	1,810	0.006-0.008	1,160	0.003-0.005
-	3/8	5,220	0.013-0.015	3,110	0.009-0.011	2,440	0.007-0.011	1,730	0.007-0.009	1,520	0.007-0.009	980	0.003-0.005
10	-	4,970	0.015-0.017	2,960	0.011-0.013	2,330	0.008-0.012	1,650	0.008-0.010	1,450	0.008-0.010	930	0.004-0.006
-	7/16	4,470	0.016-0.018	2,660	0.012-0.014	2,090	0.008-0.012	1,480	0.008-0.011	1,300	0.008-0.011	840	0.004-0.006
12	-	4,140	0.018-0.020	2,470	0.013-0.015	1,940	0.008-0.012	1,370	0.009-0.012	1,210	0.009-0.012	770	0.005-0.007
-	1/2	3,920	0.019-0.021	2,330	0.014-0.016	1,830	0.008-0.013	1,300	0.010-0.013	1,140	0.010-0.013	730	0.005-0.007
14	-	3,550	0.021-0.023	2,110	0.016-0.018	1,660	0.009-0.014	1,180	0.011-0.014	1,030	0.011-0.014	660	0.006-0.008
-	5/8	3,130	0.022-0.024	1,860	0.018-0.020	1,470	0.010-0.014	1,040	0.012-0.015	900	0.013-0.016	580	0.006-0.008
16	-	3,130	0.022-0.024	1,860	0.018-0.020	1,470	0.010-0.014	1,040	0.012-0.015	900	0.013-0.016	580	0.006-0.008
18	-	2,760	0.026-0.030	1,640	0.020-0.022	1,290	0.011-0.015	920	0.014-0.018	810	0.015-0.018	520	0.007-0.009
-	3/4	2,610	0.027-0.031	1,550	0.021-0.023	1,220	0.011-0.015	870	0.015-0.019	760	0.015-0.019	490	0.007-0.009
20	-	2,490	0.028-0.032	1,480	0.022-0.024	1,160	0.012-0.016	820	0.016-0.020	720	0.016-0.020	460	0.008-0.011



List 738

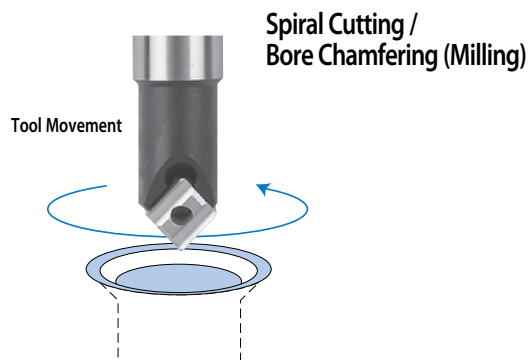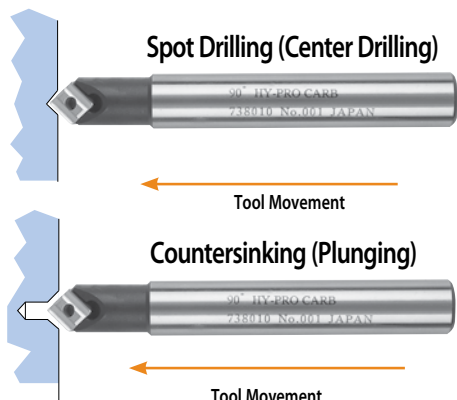

"V" Grooving / Corner Chamfering (Milling)

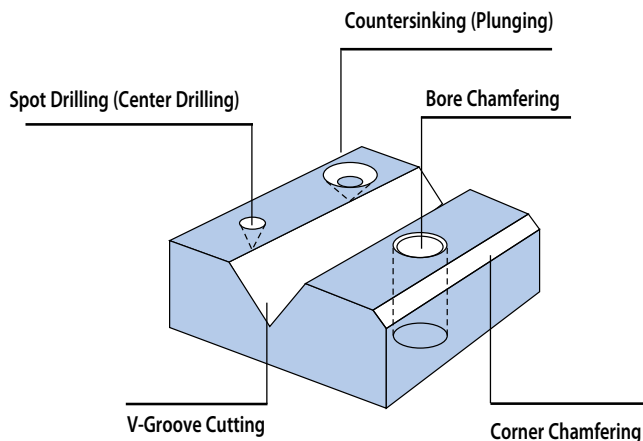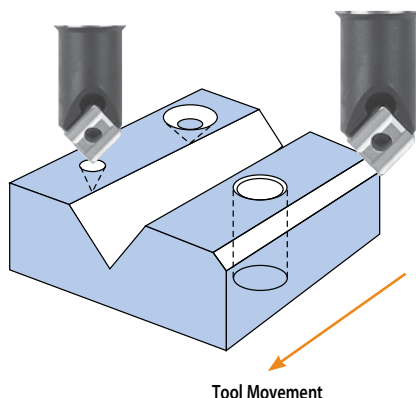

Eccentric Pin Lock (Pat. Pend.)



Place insert over Eccentric Pin in loading position. Rotate pin **counter-clockwise**, with supplied allen wrench, to lock insert solidly against machined faces of tool holder.

Center Drilling & V-Grooving

Materials	RPM	IPM	Grade
Mild Steels	3,000	3.20	NK2020
Stainless	2,000	2.00	NK2020
Die Steels	3,000	2.00	NK2020
Cast Iron	3,200	8.00	NK1010
Aluminum	4,000	6.00	NK1010

Chamfer Milling (Down Cut)

Materials	RPM	IPM	Grade
Mild Steels	3,000	8.00	NK2020
Stainless	2,500	6.00	NK2020
Die Steels	3,000	6.00	NK2020
Cast Iron	3,000	8.00	NK1010
Aluminum	4,000	12.00	NK1010



List 215, 220D, 200 & 233*

General Drilling Operations

Work Material		Mild Steels, Carbon Steels		Alloy Tool Steels, Tool Steels		Cast Iron		Aluminum	
Hardness				Up to 30 HRC					
Drilling Speed		280-320 SFM		250-270 SFM		250-350 SFM		550-650 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
1	-	25,000	0.0010 - 0.0012	25,000	0.0003 - 0.0005	25,000	0.0007 - 0.0009	25,000	0.0006 - 0.0008
-	1/16	18,300	0.0016 - 0.0018	15,900	0.0004 - 0.0006	18,300	0.0011 - 0.0013	25,000	0.0010 - 0.0012
2	-	14,600	0.0020 - 0.0022	12,600	0.0006 - 0.0008	14,600	0.0014 - 0.0016	25,000	0.0013 - 0.0015
-	3/32	12,200	0.0024 - 0.0026	10,600	0.0007 - 0.0009	12,200	0.0017 - 0.0019	24,400	0.0015 - 0.0017
3	-	9,700	0.0027 - 0.0029	8,400	0.0012 - 0.0014	9,700	0.0021 - 0.0023	19,400	0.0020 - 0.0022
-	1/8	9,200	0.0028 - 0.0030	7,950	0.0012 - 0.0015	9,200	0.0022 - 0.0024	18,300	0.0022 - 0.0024
4	-	7,300	0.0030 - 0.0032	6,300	0.0013 - 0.0015	7,300	0.0023 - 0.0025	14,500	0.0029 - 0.0031
-	3/16	6,100	0.0035 - 0.0037	5,300	0.0015 - 0.0017	6,100	0.0027 - 0.0029	12,200	0.0034 - 0.0036
6	-	4,850	0.0040 - 0.0042	4,200	0.0020 - 0.0022	4,850	0.0037 - 0.0039	9,700	0.0045 - 0.0047
-	1/4	4,600	0.0042 - 0.0044	3,950	0.0021 - 0.0023	4,600	0.0039 - 0.0041	9,150	0.0047 - 0.0049
8	-	3,650	0.0048 - 0.0050	3,150	0.0024 - 0.0026	3,650	0.0044 - 0.0046	7,250	0.0054 - 0.0056
-	3/8	3,050	0.0065 - 0.0067	2,650	0.0033 - 0.0035	3,050	0.0047 - 0.0049	6,100	0.0066 - 0.0068
10	-	2,900	0.0067 - 0.0069	2,500	0.0033 - 0.0036	2,900	0.0048 - 0.0050	5,800	0.0068 - 0.0070
-	7/16	2,600	0.0068 - 0.0070	2,250	0.0034 - 0.0036	2,600	0.0049 - 0.0051	5,200	0.0072 - 0.0074
12	-	2,400	0.0074 - 0.0076	2,100	0.0034 - 0.0036	2,400	0.0054 - 0.0056	4,800	0.0078 - 0.0080
-	1/2	2,250	0.0078 - 0.0080	1,950	0.0035 - 0.0036	2,250	0.0057 - 0.0059	4,550	0.0082 - 0.0084

General Drilling Operations

Work Material		Titanium Alloys (Annealed)		Inconel, Titanium Alloys (Solution Treated and Aged)		Hardened Steels, Prehardened Steels			
Hardness						30-38 HRC		38-45 HRC	
Drilling Speed		120-140 SFM		50-70 SFM		210-230 SFM		160-180 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
1	-	12,600	0.0003 - 0.0005	5,800	0.0002 - 0.0004	20,850	0.0002 - 0.0004	16,500	0.0002 - 0.0004
-	1/16	8,000	0.0004 - 0.0006	3,700	0.0003 - 0.0005	13,150	0.0004 - 0.0006	10,400	0.0004 - 0.0006
2	-	6,300	0.0006 - 0.0008	2,900	0.0004 - 0.0006	10,400	0.0005 - 0.0007	8,250	0.0005 - 0.0007
-	3/32	5,300	0.0007 - 0.0009	2,400	0.0005 - 0.0007	8,750	0.0007 - 0.0009	6,950	0.0007 - 0.0009
3	-	4,200	0.0010 - 0.0012	1,900	0.0008 - 0.0010	6,950	0.0011 - 0.0013	5,500	0.0011 - 0.0013
-	1/8	4,000	0.0011 - 0.0012	1,850	0.0008 - 0.0010	6,600	0.0012 - 0.0014	5,200	0.0012 - 0.0014
4	-	3,150	0.0011 - 0.0013	1,450	0.0009 - 0.0010	5,200	0.0013 - 0.0015	4,100	0.0013 - 0.0015
-	3/16	2,650	0.0013 - 0.0015	1,200	0.0010 - 0.0012	4,400	0.0015 - 0.0017	3,450	0.0015 - 0.0017
6	-	2,100	0.0015 - 0.0017	950	0.0013 - 0.0015	3,500	0.0023 - 0.0025	2,750	0.0023 - 0.0025
-	1/4	2,000	0.0016 - 0.0018	900	0.0014 - 0.0015	3,300	0.0024 - 0.0026	2,600	0.0024 - 0.0026
8	-	1,550	0.0018 - 0.0020	730	0.0015 - 0.0017	2,600	0.0028 - 0.0030	2,050	0.0028 - 0.0030
-	3/8	1,300	0.0023 - 0.0025	600	0.0018 - 0.0020	2,200	0.0039 - 0.0041	1,700	0.0039 - 0.0041
10	-	1,250	0.0024 - 0.0026	580	0.0019 - 0.0021	2,130	0.0040 - 0.0042	1,650	0.0040 - 0.0042
-	7/16	1,140	0.0025 - 0.0026	520	0.0019 - 0.0021	1,920	0.0041 - 0.0043	1,450	0.0041 - 0.0043
12	-	1,050	0.0025 - 0.0027	490	0.0020 - 0.0022	1,780	0.0041 - 0.0043	1,350	0.0041 - 0.0043
-	1/2	990	0.0026 - 0.0027	460	0.0020 - 0.0022	1,680	0.0042 - 0.0043	1,300	0.0042 - 0.0043

*When using our List 233 three flute drills, we recommend the same RPM but feed rates should be increased by 25-35%.

▶ continued on next page ▶



List 215, 220D, 200 & 233* (Continued)

Aerospace Operations

Work Material		Graphite Composite		Epoxy Fiber		Acrylic Plastics		Graphite Composite Titanium Stack	
Drilling Speed		200-220 SFM		200-220 SFM		150-170 SFM		12-20 SFM	
Drill Dia. mm	Inch	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
		3	-	6,800	0.0017-0.0022	6,800	0.0017-0.0022	5,200	0.0017-0.0022
-	1/8	6,400	0.0015-0.0025	6,400	0.0015-0.0025	4,900	0.0015-0.0025	490	0.0010-0.0015
4	-	5,100	0.0020-0.0030	5,100	0.0020-0.0030	3,900	0.0020-0.0030	390	0.0010-0.0020
-	3/16	4,250	0.0025-0.0035	4,250	0.0025-0.0035	3,250	0.0025-0.0035	325	0.0015-0.0025
6	-	3,400	0.0035-0.0045	3,400	0.0035-0.0045	2,580	0.0035-0.0045	260	0.0015-0.0025
-	1/4	3,200	0.0035-0.0045	3,200	0.0035-0.0045	2,450	0.0035-0.0045	245	0.0020-0.0030
8	-	2,550	0.0045-0.0055	2,550	0.0045-0.0055	1,950	0.0045-0.0055	195	0.0025-0.0035
-	3/8	2,140	0.0055-0.0065	2,140	0.0055-0.0065	1,630	0.0055-0.0065	165	0.0030-0.0040
10	-	2,030	0.0055-0.0065	2,030	0.0055-0.0065	1,550	0.0055-0.0065	155	0.0035-0.0045
-	7/16	1,830	0.0060-0.0070	1,830	0.0060-0.0070	1,400	0.0060-0.0070	140	0.0035-0.0045
12	-	1,700	0.0065-0.0075	1,700	0.0065-0.0075	1,280	0.0065-0.0075	130	0.0040-0.0050
-	1/2	1,600	0.0065-0.0075	1,600	0.0065-0.0075	1,200	0.0065-0.0075	120	0.0040-0.0050

The chart above is for materials typically used in aircraft structures. Speeds may be less than optimal because of limitations in the portable machine tools utilized.

*When using our List 233 three flute drills we recommend the same RPM but feed rates should be increased by 25-35%.

Hole Depth Diameters	Reduce Spindle Speed	Reduce Feed Rate
3 x Dia.	10%	10%
4 x Dia.	20%	10%
5 x Dia.	30%	20%
6 x Dia.	35%	20%
8 x Dia.	40%	20%

When drilling deep holes, the recommended speeds and feeds should be reduced proportionately based on the hole depth. To the left are guidelines for reducing the speeds and feeds.



List 300D

General Drilling Operations

Work Material		Mild Steels, Carbon Steels		Alloy Tool Steels, Tool Steels		Cast Iron		Aluminum	
Hardness				Up to 30 HRC					
Drilling Speed		200-230 SFM		160-190 SFM		250-350 SFM		370-470 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
1	-	20,850	0.0010-0.0014	16,950	0.0010-0.0014	25,000	0.0007-0.0012	25,000	0.0008-0.0013
-	1/16	13,150	0.0015-0.0021	10,700	0.0015-0.0021	18,340	0.0012-0.0017	25,000	0.0012-0.0018
2	-	10,400	0.0022-0.0028	8,500	0.0022-0.0028	14,550	0.0017-0.0023	20,350	0.0017-0.0022
-	3/32	8,750	0.0026-0.0033	7,150	0.0026-0.0033	12,220	0.0022-0.0028	17,100	0.0023-0.0027
3	-	6,950	0.0033-0.0040	5,650	0.0032-0.0040	9,700	0.0032-0.0038	13,550	0.0027-0.0033
-	1/8	6,550	0.0034-0.0042	5,350	0.0033-0.0042	9,170	0.0035-0.0042	12,800	0.0028-0.0036
4	-	5,200	0.0040-0.0050	4,250	0.0040-0.0050	7,280	0.0044-0.0052	10,200	0.0034-0.0044
-	3/16	4,400	0.0048-0.0058	3,550	0.0045-0.0055	6,110	0.0056-0.0064	8,550	0.0040-0.0050
6	-	3,450	0.0060-0.0070	2,830	0.0057-0.0067	4,850	0.0070-0.0080	6,800	0.0051-0.0061
-	1/4	3,300	0.0062-0.0072	2,670	0.0060-0.0070	4,580	0.0070-0.0080	6,400	0.0055-0.0065
8	-	2,600	0.0076-0.0086	2,120	0.0070-0.0080	3,640	0.0080-0.0090	5,100	0.0065-0.0075
-	3/8	2,200	0.0090-0.0100	1,780	0.0082-0.0092	3,060	0.0100-0.0110	4,250	0.0075-0.0085
10	-	2,050	0.0095-0.0105	1,690	0.0087-0.0097	2,910	0.0110-0.0120	4,050	0.0080-0.0090
-	7/16	1,850	0.0105-0.0115	1,520	0.0090-0.0100	2,620	0.0120-0.0130	3,650	0.0090-0.0100
12	-	1,700	0.0115-0.0125	1,400	0.0105-0.0115	2,430	0.0130-0.0140	3,350	0.0095-0.0105
-	1/2	1,600	0.0120-0.0130	1,320	0.0108-0.0118	2,290	0.0133-0.0143	3,150	0.0100-0.0112

General Drilling Operations

Work Material		Titanium Alloys (Annealed)		Inconel, Titanium Alloys		Hardened Steels, Prehardened Steels			
Hardness						30-38 HRC		38-45 HRC	
Drilling Speed		75-90 SFM		45-50 SFM		135-155 SFM		100-120 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
1	-	7,950	0.0008-0.0013	4,650	0.0008-0.0013	14,050	0.0010-0.0014	10,650	0.0008-0.0013
-	1/16	5,000	0.0012-0.0018	2,950	0.0012-0.0018	8,850	0.0015-0.0021	6,700	0.0012-0.0018
2	-	3,950	0.0017-0.0022	2,300	0.0017-0.0022	7,000	0.0022-0.0028	5,300	0.0017-0.0022
-	3/32	3,350	0.0023-0.0027	1,950	0.0023-0.0027	5,900	0.0026-0.0033	4,500	0.0020-0.0028
3	-	2,650	0.0027-0.0033	1,550	0.0027-0.0033	4,700	0.0032-0.0040	3,550	0.0025-0.0033
-	1/8	2,500	0.0028-0.0036	1,450	0.0028-0.0036	4,450	0.0033-0.0042	3,350	0.0025-0.0035
4	-	1,950	0.0031-0.0041	1,160	0.0032-0.0040	3,500	0.0040-0.0050	2,650	0.0033-0.0043
-	3/16	1,650	0.0037-0.0047	970	0.0036-0.0046	2,950	0.0045-0.0055	2,250	0.0040-0.0050
6	-	1,300	0.0048-0.0058	770	0.0048-0.0058	2,350	0.0057-0.0067	1,750	0.0048-0.0058
-	1/4	1,250	0.0049-0.0059	730	0.0049-0.0059	2,200	0.0060-0.0070	1,650	0.0050-0.0060
8	-	1,000	0.0058-0.0068	580	0.0058-0.0068	1,750	0.0070-0.0080	1,300	0.0060-0.0070
-	3/8	830	0.0068-0.0078	480	0.0068-0.0078	1,450	0.0082-0.0092	1,100	0.0070-0.0080
10	-	790	0.0073-0.0083	460	0.0073-0.0083	1,400	0.0087-0.0097	1,050	0.0073-0.0083
-	7/16	710	0.0080-0.0090	410	0.0080-0.0090	1,250	0.0090-0.0100	950	0.0080-0.0090
12	-	660	0.0087-0.0097	380	0.0087-0.0097	1,150	0.0105-0.0115	880	0.0088-0.0098
-	1/2	620	0.0090-0.0100	360	0.0090-0.0100	1,100	0.0108-0.0118	830	0.0093-0.0103

List OCS-SO

List OCJ-SO

List O1S-SO

List O1J-SO

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300, 400, 17-4PH		Cast Iron		Ductile Cast Iron	
Drilling Speed		395-500 SFM		165-400 SFM		130-295 SFM		245-495 SFM		245-495 SFM	
Drill Dia. mm	Inch	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
		RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1	-	42,970	0.0010-0.0012	27,058	0.0007-0.0008	20,692	0.0007-0.0008	35,813	0.0008-0.0010	35,813	0.0008-0.0010
2	-	21,485	0.0020-0.0024	13,529	0.0014-0.0016	10,346	0.0014-0.0016	17,906	0.0016-0.0020	17,906	0.0016-0.0020
-	3/32	18,045	0.0023-0.0028	11,363	0.0017-0.0019	8,689	0.0017-0.0019	15,039	0.0019-0.0023	15,039	0.0019-0.0023
3	-	14,323	0.0030-0.0035	9,019	0.0021-0.0024	6,897	0.0021-0.0024	11,938	0.0024-0.0030	11,938	0.0024-0.0030
-	1/8	13,534	0.0031-0.0038	8,522	0.0023-0.0025	6,517	0.0023-0.0025	11,280	0.0025-0.0031	11,280	0.0025-0.0031
4	-	10,743	0.0039-0.0047	6,765	0.0029-0.0031	5,173	0.0029-0.0031	8,953	0.0031-0.0039	8,953	0.0031-0.0039
-	3/16	9,023	0.0047-0.0056	5,682	0.0034-0.0038	4,345	0.0034-0.0038	7,520	0.0038-0.0047	7,520	0.0038-0.0047
6	-	7,162	0.0059-0.0071	4,510	0.0043-0.0047	3,449	0.0043-0.0047	5,969	0.0047-0.0059	5,969	0.0047-0.0059
-	1/4	6,767	0.0063-0.0075	4,261	0.0045-0.0050	3,259	0.0045-0.0050	5,640	0.0050-0.0063	5,640	0.0050-0.0063
8	-	5,371	0.0079-0.0094	3,382	0.0057-0.0063	2,586	0.0057-0.0063	4,477	0.0063-0.0079	4,477	0.0063-0.0079
-	3/8	4,511	0.0094-0.0113	2,841	0.0068-0.0075	2,172	0.0068-0.0075	3,760	0.0075-0.0094	3,760	0.0075-0.0094
10	-	4,297	0.0098-0.0118	2,706	0.0071-0.0079	2,069	0.0071-0.0079	3,581	0.0079-0.0098	3,581	0.0079-0.0098
-	7/16	3,867	0.0109-0.0131	2,435	0.0079-0.0088	1,862	0.0079-0.0088	3,223	0.0088-0.0109	3,223	0.0088-0.0109
12	-	3,581	0.0118-0.0142	2,255	0.0086-0.0094	1,724	0.0086-0.0094	2,984	0.0094-0.0118	2,984	0.0094-0.0118
-	1/2	3,383	0.0125-0.0150	2,131	0.0091-0.0100	1,629	0.0091-0.0100	2,820	0.0100-0.0125	2,820	0.0100-0.0125
14	-	3,069	0.0138-0.0165	1,933	0.0100-0.0110	1,478	0.0100-0.0110	2,558	0.0110-0.0138	2,558	0.0110-0.0138

continued on next page 

Work Material	Aluminum				Copper	Synthetics	High Heat Material						
	Alloy		Casting				Ti-Alloy, Ti-6Al-4V		Ni-Base Material, Inconel				
Drilling Speed	495-655 SFM		150-490 SFM		165-260 SFM		325-985 SFM		65-200 SFM		65-230 SFM		
Drill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
mm	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	
1	-	55,708	0.0010-0.0012	31,038	0.0010-0.0012	20,692	0.0010-0.0012	63,667	0.0012-0.0018	12,733	0.0007-0.0008	14,325	0.0007-0.0008
2	-	27,854	0.0020-0.0024	15,519	0.0020-0.0024	10,346	0.0020-0.0024	31,833	0.0025-0.0033	6,367	0.0014-0.0016	7,163	0.0014-0.0016
-	3/32	23,395	0.0023-0.0028	13,034	0.0023-0.0028	8,689	0.0023-0.0028	26,737	0.0034-0.0039	5,347	0.0017-0.0019	6,016	0.0017-0.0019
3	-	18,569	0.0030-0.0035	10,346	0.0030-0.0035	6,897	0.0030-0.0035	21,222	0.0044-0.0050	4,244	0.0021-0.0024	4,775	0.0021-0.0024
-	1/8	17,546	0.0031-0.0038	9,776	0.0031-0.0038	6,517	0.0031-0.0038	20,052	0.0044-0.0050	4,010	0.0023-0.0025	4,512	0.0023-0.0025
4	-	13,927	0.0039-0.0047	7,759	0.0039-0.0047	5,173	0.0039-0.0047	15,917	0.0060-0.0065	3,183	0.0029-0.0031	3,581	0.0029-0.0031
-	3/16	11,697	0.0047-0.0056	6,517	0.0047-0.0056	4,345	0.0047-0.0056	13,368	0.0070-0.0075	2,674	0.0034-0.0038	3,008	0.0034-0.0038
6	-	9,285	0.0059-0.0071	5,173	0.0059-0.0071	3,449	0.0059-0.0071	10,611	0.0090-0.0095	2,122	0.0043-0.0047	2,388	0.0043-0.0047
-	1/4	8,773	0.0063-0.0075	4,888	0.0063-0.0075	3,259	0.0063-0.0075	10,026	0.0093-0.0100	2,005	0.0045-0.0050	2,256	0.0045-0.0050
8	-	6,964	0.0079-0.0094	3,880	0.0079-0.0094	2,586	0.0079-0.0094	7,958	0.0120-0.0126	1,592	0.0057-0.0063	1,791	0.0057-0.0063
-	3/8	5,849	0.0094-0.0113	3,259	0.0094-0.0113	2,172	0.0094-0.0113	6,684	0.0145-0.0150	1,337	0.0068-0.0075	1,504	0.0068-0.0075
10	-	5,571	0.0098-0.0118	3,104	0.0098-0.0118	2,069	0.0098-0.0118	6,367	0.0154-0.0157	1,273	0.0071-0.0079	1,433	0.0071-0.0079
-	7/16	5,013	0.0109-0.0131	2,793	0.0109-0.0131	1,862	0.0109-0.0131	5,729	0.0169-0.0175	1,146	0.0079-0.0088	1,289	0.0079-0.0088
12	-	4,642	0.0118-0.0142	2,586	0.0118-0.0142	1,724	0.0118-0.0142	5,306	0.0184-0.0189	1,061	0.0086-0.0094	1,194	0.0086-0.0094
-	1/2	4,386	0.0125-0.0150	2,444	0.0125-0.0150	1,629	0.0125-0.0150	5,013	0.0195-0.0200	1,003	0.0091-0.0100	1,128	0.0091-0.0100
14	-	3,979	0.0138-0.0165	2,217	0.0138-0.0165	1,478	0.0138-0.0165	4,548	0.0210-0.0220	910	0.0100-0.0110	1,023	0.0100-0.0110



List 1900 - VPH GDS: **Stub** List 1950 - VPH GDR: **Jobbers**

General Drilling Operations

Work Material		Low Carbon Steels 1010, 1018		Carbon Steels 1045, 1050		Alloy Steels 4140, 4330		Tool Steels D2, H13		Cast Iron	
Drilling Speed		125-160 SFM		80-120 SFM		80-100 SFM		30-50 SFM		130-200 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
0.5	-	25,000	0.001-0.002	19,410	0.001-0.002	17,470	0.001-0.002	7,760	0.001-0.002	25,000	0.001-0.002
-	3/64	11,610	0.001-0.003	8,150	0.002-0.003	7,330	0.002-0.003	3,260	0.002-0.003	13,450	0.002-0.003
2	-	6,910	0.002-0.004	4,850	0.002-0.004	4,370	0.002-0.004	1,940	0.002-0.004	8,000	0.003-0.004
-	3/32	5,810	0.003-0.005	4,070	0.003-0.005	3,670	0.003-0.005	1,630	0.003-0.005	6,720	0.003-0.005
3	-	4,610	0.003-0.005	3,230	0.003-0.005	2,910	0.003-0.005	1,290	0.003-0.005	5,340	0.004-0.006
-	1/8	4,350	0.003-0.005	3,060	0.003-0.005	2,750	0.003-0.005	1,220	0.003-0.005	5,040	0.004-0.006
4	-	3,460	0.004-0.006	2,430	0.004-0.006	2,180	0.004-0.006	970	0.004-0.006	4,000	0.005-0.007
-	3/16	2,900	0.005-0.007	2,040	0.005-0.007	1,830	0.005-0.007	810	0.005-0.007	3,360	0.006-0.008
6	-	2,300	0.005-0.007	1,620	0.005-0.007	1,460	0.005-0.007	650	0.005-0.007	2,670	0.007-0.010
-	1/4	2,180	0.005-0.008	1,530	0.005-0.008	1,380	0.005-0.008	610	0.005-0.008	2,520	0.007-0.010
8	-	1,730	0.006-0.009	1,210	0.006-0.009	1,090	0.006-0.009	490	0.006-0.009	2,000	0.008-0.012
-	3/8	1,450	0.008-0.011	1,020	0.008-0.011	920	0.008-0.011	410	0.008-0.011	1,680	0.010-0.013
10	-	1,380	0.008-0.011	970	0.008-0.011	870	0.008-0.011	390	0.008-0.011	1,600	0.010-0.014
-	7/16	1,240	0.009-0.012	870	0.009-0.012	790	0.009-0.012	350	0.009-0.012	1,440	0.011-0.016
12	-	1,150	0.009-0.013	810	0.009-0.013	730	0.009-0.013	320	0.009-0.013	1,330	0.012-0.017
-	1/2	1,090	0.010-0.014	760	0.010-0.014	690	0.010-0.014	310	0.010-0.014	1,260	0.012-0.017
14	-	990	0.011-0.014	690	0.011-0.014	620	0.011-0.014	280	0.011-0.014	1,140	0.014-0.019
-	5/8	870	0.012-0.016	610	0.012-0.016	550	0.012-0.016	240	0.012-0.016	1,010	0.016-0.021
16	-	870	0.012-0.016	610	0.012-0.016	550	0.012-0.016	240	0.012-0.016	1,010	0.016-0.021
18	-	770	0.014-0.018	540	0.014-0.018	490	0.014-0.018	220	0.014-0.018	890	0.018-0.025
-	3/4	730	0.015-0.019	510	0.015-0.019	460	0.015-0.019	200	0.015-0.019	840	0.019-0.026
20	-	690	0.016-0.020	490	0.016-0.020	440	0.016-0.020	190	0.016-0.020	800	0.020-0.027

1. The indicated speeds and feeds are when water soluble oil is used.
2. Suitable cutting fluid is water-emulsifiable, high density oil (less than 20 times dilution).
3. When using non-water soluble oil or water-emulsifiable oil (over 20 times dilution), reduce drilling speed by 20%.
4. Pecking is necessary when drilling depth of the hole exceeds 3 times drill diameter for lathe/horizontal machines.

D: Drill Diameter

Drilling Depth	≤4D	≤5D	≤6D
Coefficient for reducing RPM	x0.9	x0.8	x0.75

continued on next page



Work Material	High Heat Material						Hardened Steels						
	Ti Alloy Ti-6Al-4V		Fe Base Material Incoloy 901, A286		Ni & Co Base Material Inconel718, Waspaloy		33-43 HRC		43-48 HRC		48-53 HRC		
	20-26 SFM		20-26 SFM		20-26 SFM		40-60 SFM		20-32 SFM		15-25 SFM		
Drilling Speed		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
Drill Dia.													
mm	Inch												
0.5	-	4,460	0.0005-0.0008	4,460	0.0005-0.0008	3,880	0.0005-0.0008	9,700	0.001	5,040	0.001	3,880	0.001
-	3/64	1,870	0.0006-0.0010	1,870	0.0006-0.0010	1,630	0.0006-0.0010	4,070	0.001-0.002	2,120	0.001	1,630	0.001
2	-	1,120	0.0008-0.0012	1,120	0.0008-0.0012	970	0.0008-0.0012	2,430	0.001-0.002	1,250	0.001-0.002	970	0.001-0.002
-	3/32	940	0.0010-0.0014	940	0.0010-0.0014	810	0.0010-0.0014	2,040	0.001-0.003	1,060	0.001-0.002	810	0.001-0.002
3	-	740	0.0012-0.0018	740	0.0012-0.0018	650	0.0012-0.0018	1,620	0.001-0.003	850	0.001-0.002	650	0.001-0.002
-	1/8	700	0.0013-0.0019	700	0.0013-0.0019	610	0.0013-0.0019	1,530	0.001-0.003	800	0.001-0.002	610	0.001-0.002
4	-	560	0.0016-0.0024	560	0.0016-0.0024	490	0.0016-0.0024	1,210	0.002-0.004	640	0.002-0.003	490	0.002-0.003
-	3/16	470	0.0019-0.0028	470	0.0019-0.0028	410	0.0019-0.0028	1,020	0.002-0.005	540	0.002-0.004	410	0.002-0.004
6	-	370	0.0024-0.0035	370	0.0024-0.0035	320	0.0024-0.0035	810	0.002-0.006	430	0.002-0.005	320	0.002-0.005
-	1/4	350	0.0026-0.0037	350	0.0026-0.0037	310	0.0026-0.0037	760	0.002-0.006	400	0.002-0.005	310	0.002-0.005
8	-	280	0.0031-0.0047	280	0.0031-0.0047	240	0.0031-0.0047	610	0.003-0.008	320	0.003-0.006	240	0.003-0.006
-	3/8	230	0.0037-0.0056	230	0.0037-0.0056	200	0.0037-0.0056	510	0.004-0.009	260	0.004-0.008	200	0.004-0.008
10	-	220	0.0039-0.0059	220	0.0039-0.0059	190	0.0039-0.0059	490	0.004-0.010	250	0.004-0.008	190	0.004-0.008
-	7/16	200	0.0043-0.0066	200	0.0043-0.0066	170	0.0043-0.0066	440	0.004-0.011	230	0.004-0.009	170	0.004-0.009
12	-	190	0.0047-0.0071	190	0.0047-0.0071	160	0.0047-0.0071	400	0.005-0.012	210	0.005-0.009	160	0.005-0.009
-	1/2	180	0.0050-0.0075	180	0.0050-0.0075	150	0.0050-0.0075	380	0.005-0.013	200	0.005-0.010	150	0.005-0.010
14	-	160	0.0055-0.0083	160	0.0055-0.0083	140	0.0055-0.0083	350	0.005-0.014	180	0.005-0.011	140	0.005-0.011
-	5/8	140	0.0062-0.0093	140	0.0062-0.0093	120	0.0062-0.0093	310	0.006-0.016	160	0.006-0.012	120	0.006-0.012
16	-	140	0.0062-0.0093	140	0.0062-0.0093	120	0.0062-0.0093	310	0.006-0.016	160	0.006-0.012	120	0.006-0.012
18	-	120	0.0071-0.0106	120	0.0071-0.0106	110	0.0071-0.0106	270	0.007-0.018	140	0.007-0.014	110	0.007-0.014
-	3/4	115	0.0075-0.0112	115	0.0075-0.0112	105	0.0075-0.0112	250	0.007-0.019	130	0.007-0.015	105	0.007-0.015
20	-	110	0.0079-0.0118	110	0.0079-0.0118	100	0.0079-0.0118	240	0.008-0.020	125	0.008-0.016	100	0.008-0.016



List 2000 - VP® GDR

General Drilling Operations

Work Material		Low Carbon Steels 1010, 1018		Carbon Steels 1045, 1050		Alloy Steels 4140, 4330		Tool Steels D2, H13		Cast Iron		Cast Aluminum	
Drilling Speed		125-160 SFM		80-120 SFM		80-100 SFM		30-50 SFM		130-200 SFM		230-400 SFM	
Drill Dia. mm	Inch	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
		RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
2	-	6,900	0.002-0.004	4,840	0.002-0.004	4,360	0.002-0.004	1,940	0.002-0.004	8,000	0.003-0.004	15,270	0.005-0.007
3	-	4,600	0.004-0.005	3,230	0.004-0.005	2,900	0.004-0.005	1,290	0.004-0.005	5,330	0.004-0.006	10,180	0.008-0.011
-	1/8	4,350	0.004-0.005	3,050	0.004-0.005	2,740	0.004-0.005	1,220	0.004-0.005	5,030	0.004-0.006	9,620	0.008-0.012
4	-	3,450	0.004-0.006	2,420	0.004-0.006	2,180	0.004-0.006	970	0.004-0.006	4,000	0.005-0.007	7,630	0.009-0.015
-	3/16	2,900	0.005-0.007	2,030	0.005-0.007	1,830	0.005-0.007	810	0.005-0.007	3,360	0.006-0.008	6,410	0.011-0.016
6	-	2,300	0.005-0.007	1,610	0.005-0.007	1,450	0.005-0.007	640	0.005-0.007	2,660	0.007-0.010	5,090	0.013-0.019
-	1/4	2,170	0.005-0.008	1,520	0.005-0.008	1,370	0.005-0.008	610	0.005-0.008	2,520	0.007-0.010	4,810	0.013-0.019
8	-	1,700	0.006-0.009	1,210	0.006-0.009	1,090	0.006-0.009	480	0.006-0.009	2,000	0.008-0.012	3,820	0.015-0.021
-	3/8	1,450	0.007-0.011	1,010	0.007-0.011	910	0.007-0.011	400	0.007-0.011	1,680	0.009-0.013	3,200	0.017-0.024
10	-	1,380	0.008-0.011	960	0.008-0.011	870	0.008-0.011	390	0.008-0.011	1,600	0.010-0.014	3,050	0.018-0.025
-	7/16	1,240	0.009-0.012	870	0.009-0.012	780	0.009-0.012	350	0.009-0.012	1,440	0.011-0.015	2,750	0.020-0.028
12	-	1,150	0.009-0.013	800	0.009-0.013	720	0.009-0.013	320	0.009-0.013	1,330	0.012-0.017	2,550	0.021-0.030
-	1/2	1,080	0.010-0.014	760	0.010-0.014	680	0.010-0.014	300	0.010-0.014	1,260	0.012-0.017	2,400	0.021-0.031
14	-	980	0.011-0.015	690	0.011-0.015	620	0.011-0.015	270	0.011-0.015	1,140	0.013-0.017	2,180	0.022-0.032
-	5/8	870	0.012-0.016	610	0.012-0.016	550	0.012-0.016	240	0.012-0.016	1,010	0.013-0.018	1,920	0.023-0.033
16	-	860	0.012-0.017	600	0.012-0.017	540	0.012-0.017	240	0.012-0.017	1,000	0.013-0.018	1,910	0.024-0.033
18	-	760	0.013-0.019	540	0.013-0.019	480	0.013-0.019	210	0.013-0.019	890	0.014-0.020	1,700	0.025-0.035
-	3/4	720	0.013-0.020	510	0.013-0.020	450	0.013-0.020	200	0.013-0.020	840	0.015-0.021	1,600	0.026-0.037
20	-	690	0.014-0.020	480	0.014-0.020	430	0.014-0.020	190	0.014-0.020	800	0.016-0.022	1,530	0.027-0.039
22	-	620	0.016-0.022	440	0.016-0.022	400	0.016-0.022	170	0.016-0.022	730	0.017-0.023	1,390	0.029-0.042
24	-	570	0.016-0.024	400	0.016-0.024	370	0.016-0.024	160	0.016-0.024	660	0.018-0.026	1,270	0.030-0.044
26	-	530	0.017-0.026	370	0.017-0.026	340	0.017-0.026	150	0.017-0.026	610	0.019-0.027	1,170	0.032-0.047
28	-	490	0.018-0.028	340	0.018-0.028	320	0.018-0.028	140	0.018-0.028	570	0.020-0.029	1,090	0.033-0.050
30	-	460	0.019-0.030	320	0.019-0.030	300	0.019-0.030	130	0.019-0.030	530	0.021-0.031	1,020	0.034-0.052
32	-	430	0.020-0.031	300	0.020-0.031	280	0.020-0.031	120	0.020-0.031	500	0.023-0.033	960	0.035-0.054

1. The indicated speeds and feeds are when water soluble oil is used.
2. Suitable cutting fluid is water-emulsifiable, high density oil (less than 10 times dilution).
3. With the exception of using milling chucks, pay careful attention to ensure that drill is rigidly clamped and keep deflection at a minimum.
4. In case of drilling depth: >4D, reduce drilling speed as below.
5. When using non-water soluble oil or water-emulsifiable oil (over 10 times dilution), reduce drilling speed by 20%.
6. Step process should be used when drilling depth of the hole exceeds 4 times drill diameter for vertical machines or 3 times drill diameter for horizontal lathe machines.

D: Drill Diameter

Drilling Depth	≤5D	≤6D
Coefficient for reducing RPM	x0.9	x0.7



List 1700 - V-HO GDR: Coolant-Through

General Drilling Operations

Work Material	Low Carbon Steels 1010, 1018		Carbon Steels 1045, 1050		Tool Steels D2, H13		Tool Steels H13 (20 HRC)		Cast Iron		Cast Aluminum	
Drilling Speed	120-160 SFM		100-140 SFM		83-120 SFM		50-90 SFM		150-200 SFM		250-400 SFM	
Drill Dia. Inch	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
1/4	2,140	0.005-0.007	1,830	0.005-0.007	1,530	0.005-0.007	1,070	0.005-0.007	2,680	0.008-0.010	4,970	0.013-0.019
9/32	1,900	0.006-0.008	1,630	0.006-0.008	1,360	0.006-0.008	950	0.006-0.008	2,380	0.008-0.011	4,420	0.014-0.020
5/16	1,710	0.007-0.009	1,470	0.007-0.009	1,220	0.007-0.009	860	0.007-0.009	2,140	0.008-0.012	3,970	0.015-0.021
11/32	1,560	0.007-0.009	1,330	0.007-0.009	1,110	0.007-0.009	780	0.007-0.009	1,950	0.009-0.013	3,610	0.016-0.022
3/8	1,430	0.008-0.011	1,220	0.008-0.011	1,020	0.008-0.011	710	0.008-0.011	1,780	0.010-0.014	3,310	0.017-0.025
13/32	1,320	0.008-0.011	1,130	0.008-0.011	940	0.008-0.011	660	0.008-0.011	1,650	0.010-0.014	3,060	0.018-0.026
7/16	1,220	0.009-0.012	1,050	0.009-0.012	870	0.009-0.012	610	0.009-0.012	1,530	0.011-0.015	2,840	0.019-0.027
15/32	1,140	0.009-0.012	980	0.009-0.012	820	0.009-0.012	570	0.009-0.012	1,430	0.011-0.015	2,650	0.020-0.028
1/2	1,070	0.010-0.013	920	0.010-0.013	760	0.010-0.013	540	0.010-0.013	1,340	0.013-0.017	2,480	0.021-0.030
9/16	950	0.011-0.014	820	0.011-0.014	680	0.011-0.014	480	0.011-0.014	1,190	0.013-0.017	2,210	0.022-0.031
5/8	860	0.012-0.015	730	0.012-0.015	610	0.012-0.015	430	0.011-0.014	1,070	0.014-0.018	1,990	0.023-0.032
11/16	780	0.013-0.016	670	0.013-0.016	560	0.013-0.016	390	0.012-0.015	970	0.014-0.018	1,810	0.024-0.033
3/4	710	0.014-0.017	610	0.014-0.017	510	0.014-0.017	360	0.013-0.016	890	0.015-0.019	1,660	0.025-0.034
13/16	660	0.016-0.021	560	0.016-0.021	470	0.016-0.021	330	0.015-0.020	820	0.017-0.022	1,530	0.028-0.040
7/8	610	0.017-0.022	520	0.017-0.022	440	0.017-0.022	310	0.017-0.022	760	0.018-0.023	1,420	0.030-0.042
15/16	570	0.018-0.023	490	0.018-0.023	410	0.018-0.023	290	0.018-0.023	710	0.020-0.025	1,320	0.032-0.044
1	540	0.019-0.024	460	0.019-0.024	380	0.019-0.024	270	0.019-0.024	670	0.021-0.026	1,240	0.033-0.045
1-1/8	480	0.020-0.025	410	0.020-0.025	340	0.020-0.025	240	0.020-0.025	590	0.022-0.027	1,100	0.034-0.046
1-1/4	430	0.021-0.026	370	0.021-0.026	310	0.021-0.026	210	0.020-0.025	540	0.023-0.028	990	0.035-0.047

1. Speeds and feeds are based on using soluble oil where applicable 1:5 to 1:10 concentration.
2. When other than an end mill collet is used, make sure the drill shank is firmly attached.
3. For deep holes (4 times the drill diameter or deeper) use the lower recommended feed rate as a starting point and increase as needed for the best result.
4. Recommended feeds and speeds are starting points only. Actual performance will be determined by specific material, the condition of equipment being used, and coolant.



List 1750 - HELIOS®:10D

List 1760 - HELIOS®:15D

List 1770 - HELIOS®:20D

General Drilling Operations

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Tool Steels Die Steels D2, H13, P20, S7		Stainless Steels 300, 400, 17-4 PH	
Drilling Speed		65-80 SFM		60-75 SFM		40-55 SFM		20-45 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
2	-	3,510	0.001-0.002	3,270	0.001-0.002	2,300	0.001-0.002	1,570	0.001-0.002
-	3/32	2,950	0.001-0.002	2,750	0.001-0.002	1,930	0.001-0.002	1,320	0.001-0.002
3	-	2,340	0.001-0.003	2,180	0.001-0.003	1,530	0.001-0.003	1,050	0.001-0.003
-	1/8	2,210	0.001-0.003	2,060	0.001-0.003	1,450	0.001-0.003	990	0.001-0.003
4	-	1,750	0.002-0.004	1,630	0.002-0.004	1,150	0.002-0.004	790	0.002-0.004
-	3/16	1,470	0.002-0.005	1,370	0.002-0.005	970	0.002-0.005	660	0.002-0.005
5	-	1,400	0.002-0.005	1,310	0.002-0.005	920	0.002-0.005	630	0.002-0.005
-	7/32	1,260	0.002-0.005	1,180	0.002-0.005	830	0.002-0.005	570	0.002-0.005
6	-	1,170	0.002-0.006	1,090	0.002-0.006	770	0.002-0.006	520	0.002-0.006
-	1/4	1,100	0.003-0.006	1,030	0.003-0.006	720	0.003-0.006	500	0.003-0.006
8	-	880	0.003-0.008	820	0.003-0.008	580	0.003-0.008	400	0.003-0.007
-	3/8	740	0.004-0.009	690	0.004-0.009	480	0.004-0.009	330	0.004-0.009
10	-	700	0.004-0.010	650	0.004-0.010	460	0.004-0.010	315	0.004-0.009
-	7/16	630	0.004-0.011	590	0.004-0.011	410	0.004-0.011	280	0.004-0.010
12	-	580	0.005-0.012	550	0.005-0.012	380	0.005-0.012	260	0.005-0.011
-	1/2	550	0.005-0.012	520	0.005-0.012	360	0.005-0.012	250	0.005-0.011
14	-	500	0.005-0.014	470	0.005-0.014	330	0.005-0.014	225	0.005-0.012
-	9/16	490	0.006-0.014	460	0.006-0.014	320	0.006-0.014	220	0.006-0.012

For Stainless Steel and Aluminum Alloys, peck cycles may be necessary.

General Drilling Operations

Work Material		Ductile Cast Iron		Cast Iron		Aluminum Alloy, Cast Aluminum	
Drilling Speed		55-65 SFM		60-80 SFM		105-205 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch						
2	-	2,910	0.001-0.002	3,390	0.001-0.002	7,510	0.002-0.003
-	3/32	2,440	0.001-0.002	2,850	0.002-0.003	6,310	0.003-0.004
3	-	1,940	0.001-0.003	2,260	0.002-0.004	5,010	0.004-0.005
-	1/8	1,830	0.001-0.003	2,140	0.002-0.004	4,730	0.004-0.005
4	-	1,450	0.001-0.004	1,700	0.003-0.005	3,760	0.005-0.006
-	3/16	1,220	0.001-0.005	1,420	0.004-0.006	3,150	0.006-0.007
5	-	1,160	0.001-0.005	1,350	0.004-0.006	3,000	0.006-0.008
-	7/32	1,050	0.001-0.005	1,225	0.004-0.007	2,700	0.007-0.009
6	-	970	0.001-0.006	1,130	0.005-0.008	2,500	0.007-0.009
-	1/4	920	0.002-0.006	1,070	0.005-0.008	2,360	0.008-0.010
8	-	730	0.002-0.008	850	0.006-0.010	1,880	0.009-0.013
-	3/8	610	0.002-0.009	710	0.008-0.012	1,580	0.011-0.015
10	-	580	0.002-0.010	680	0.008-0.013	1,500	0.012-0.016
-	7/16	525	0.003-0.011	610	0.009-0.014	1,350	0.013-0.018
12	-	485	0.003-0.012	570	0.009-0.015	1,250	0.014-0.019
-	1/2	460	0.003-0.012	535	0.010-0.016	1,180	0.015-0.020
14	-	415	0.003-0.014	485	0.011-0.018	1,070	0.016-0.022
-	9/16	405	0.003-0.014	475	0.011-0.018	1,050	0.017-0.022

For Stainless Steel and Aluminum Alloys, peck cycles may be necessary.
For deep hold drilling procedure please refer to page: 347.



List 1800 - V-Select

General Drilling Operations

Work Material	Low Carbon Steels 1010, 1018		Carbon Steels		Alloy Steels 4140, 4340		Tool Steels D2, H13		Cast Iron		Cast Aluminum	
Drilling Speed	72-132 SFM		52-99 SFM		40-82 SFM		26-52 SFM		72-131 SFM		164-328 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
2	4,950	0.002-0.004	3,660	0.002-0.004	2,960	0.002-0.004	1,900	0.002-0.004	4,920	0.003-0.004	12,000	0.005-0.007
3	3,300	0.004-0.005	2,800	0.004-0.005	2,400	0.004-0.005	1,320	0.004-0.005	3,850	0.004-0.006	10,000	0.008-0.011
4	2,470	0.004-0.006	2,100	0.004-0.006	1,800	0.004-0.006	950	0.004-0.006	2,900	0.005-0.007	7,500	0.009-0.015
5	1,980	0.005-0.007	1,600	0.005-0.007	1,400	0.005-0.007	750	0.005-0.007	2,260	0.006-0.009	6,300	0.011-0.016
6	1,650	0.005-0.007	1,320	0.005-0.007	1,180	0.005-0.007	630	0.005-0.007	1,900	0.007-0.010	5,000	0.013-0.019
8	1,240	0.006-0.009	1,000	0.006-0.009	900	0.006-0.009	480	0.006-0.009	1,400	0.008-0.012	4,000	0.015-0.021
10	990	0.008-0.011	800	0.008-0.011	710	0.008-0.011	380	0.008-0.011	1,120	0.010-0.014	3,150	0.018-0.025
12	820	0.009-0.013	670	0.009-0.013	600	0.009-0.013	320	0.009-0.013	950	0.012-0.017	2,650	0.021-0.030
13	760	0.010-0.014	620	0.010-0.014	550	0.010-0.014	300	0.010-0.014	880	0.012-0.017	2,450	0.022-0.031



List 1150 - NEXUS GDS: **Stub** List 1650 - NEXUS GDR: **Jobbers**

General Drilling Operations

Work Material	Low Carbon Steels Mild Steels 1010, 1018		Medium Carbon Steels 1035, 1045		Alloy Steels 4140, 4130		Tool Steels D2, H13		Stainless Steels				
									Austenitic 304 (Sulfur < 0.02%)		Austenitic 304 (Sulfur > 0.02%) 303, 317		
Drilling Speed	130-195 SFM		80-150 SFM		60-125 SFM		40-80 SFM		40-50 SFM		41-50 SFM		
Drill Dia. mm Inch	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
	1	-	15,750	0.001-0.002	11,160	0.001-0.002	8,970	0.001-0.002	5,820	0.001-0.002	4,360	0.0005-0.001	4,410
-	1/16	9,920	0.001-0.003	7,000	0.001-0.003	5,650	0.001-0.003	3,650	0.001-0.003	2,750	0.0005-0.001	2,780	0.001-0.002
2	-	7,880	0.002-0.004	5,580	0.002-0.004	4,480	0.002-0.004	2,910	0.002-0.004	2,180	0.001-0.002	2,200	0.002-0.003
-	3/32	6,620	0.003-0.004	4,680	0.003-0.004	3,760	0.003-0.004	2,440	0.003-0.004	1,830	0.001-0.002	1,850	0.002-0.003
3	-	5,250	0.004-0.005	3,720	0.004-0.005	2,990	0.004-0.005	1,940	0.004-0.005	1,450	0.001-0.003	1,470	0.003-0.004
-	1/8	4,960	0.004-0.005	3,500	0.004-0.005	2,820	0.004-0.005	1,830	0.004-0.005	1,370	0.001-0.003	1,390	0.003-0.004
4	-	3,940	0.004-0.006	2,790	0.004-0.006	2,240	0.004-0.006	1,455	0.004-0.006	1,090	0.002-0.003	1,100	0.003-0.005
-	3/16	3,310	0.005-0.007	2,340	0.005-0.007	1,880	0.005-0.007	1,220	0.005-0.007	915	0.002-0.004	925	0.004-0.006
6	-	2,630	0.005-0.008	1,860	0.005-0.008	1,490	0.005-0.008	970	0.005-0.008	725	0.003-0.005	735	0.005-0.007
-	1/4	2,480	0.005-0.008	1,750	0.005-0.008	1,410	0.005-0.008	910	0.005-0.008	685	0.003-0.005	695	0.005-0.007
8	-	1,970	0.007-0.009	1,395	0.007-0.009	1,120	0.007-0.009	725	0.007-0.009	545	0.003-0.006	550	0.006-0.009
-	3/8	1,650	0.008-0.011	1,170	0.008-0.011	940	0.008-0.011	610	0.008-0.011	460	0.004-0.007	460	0.007-0.011
10	-	1,575	0.008-0.011	1,115	0.008-0.011	900	0.008-0.011	580	0.008-0.011	435	0.004-0.008	440	0.008-0.011
-	7/16	1,420	0.009-0.012	1,000	0.009-0.012	810	0.009-0.012	520	0.009-0.012	390	0.005-0.009	400	0.009-0.012
12	-	1,310	0.009-0.013	930	0.009-0.013	750	0.009-0.013	485	0.009-0.013	365	0.005-0.009	370	0.009-0.013
-	1/2	1,240	0.010-0.014	870	0.010-0.014	705	0.010-0.014	450	0.010-0.014	345	0.005-0.010	350	0.010-0.014

1. The indicated speeds and feeds are for drilling with water soluble coolant.
2. The most suitable cutting fluid is water-emulsifiable high density oil (less than 10 times dilution)
3. When drilling cast surface (ie.not ground surface), reduce drilling speed by 20%.
4. For drilling depth>3D, reduce drilling speed (using the table below).
5. Step feeding is required for drilling depth>4D.
6. When using non-water soluble coolant or water-emulsifiable (over 10 times dilution), reduce the drilling speed by 20%.

D: Drill Diameter

Drilling Depth	≤4D	≤5D	≤6D
Coefficient for reducing RPM	x0.9	x0.8	x0.75

continued on next page



Work Material	Stainless Steels						Cast Iron	Aluminum Alloy 5052, 7075	Cast Aluminum	Copper Copper Alloy					
	Martensitic 420, 440		Ferritic 430, 405		15-5PH 17-4PH										
Drilling Speed	42-50 SFM		43-50 SFM		44-50 SFM		110-195 SFM		105-205 SFM		205-325 SFM		130-195 SFM		
Drill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
mm Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	
1	-	4,460	0.0005-0.001	4,510	0.0005-0.001	4,550	0.0005-0.001	14,780	0.001-0.002	15,000	0.001-0.002	25,000	0.001-0.002	15,750	0.0005-0.001
-	1/16	2,810	0.0005-0.001	2,840	0.0005-0.001	2,870	0.0005-0.001	9,310	0.002-0.003	9,460	0.001-0.003	16,180	0.001-0.003	9,920	0.001-0.002
2	-	2,230	0.001-0.002	2,250	0.001-0.002	2,280	0.001-0.002	7,390	0.003-0.004	7,510	0.002-0.005	12,840	0.002-0.005	7,870	0.001-0.002
-	3/32	1,870	0.001-0.002	1,900	0.001-0.002	1,915	0.001-0.002	6,210	0.003-0.004	6,310	0.002-0.006	10,790	0.002-0.006	6,600	0.002-0.003
3	-	1,490	0.002-0.003	1,500	0.002-0.003	1,520	0.002-0.003	4,930	0.004-0.006	5,010	0.003-0.007	8,560	0.003-0.007	5,250	0.002-0.004
-	1/8	1,405	0.002-0.003	1,420	0.002-0.003	1,435	0.002-0.003	4,660	0.004-0.006	4,730	0.003-0.007	8,100	0.003-0.007	4,960	0.002-0.004
4	-	1,115	0.002-0.003	1,130	0.002-0.003	1,140	0.002-0.003	3,700	0.006-0.008	3,760	0.003-0.009	6,420	0.003-0.009	3,940	0.003-0.004
-	3/16	935	0.002-0.004	950	0.003-0.004	960	0.003-0.004	3,100	0.006-0.009	3,150	0.004-0.011	5,400	0.004-0.011	3,310	0.004-0.005
6	-	740	0.002-0.005	750	0.004-0.005	760	0.004-0.005	2,460	0.008-0.010	2,500	0.005-0.014	4,280	0.005-0.014	2,620	0.005-0.006
-	1/4	700	0.002-0.005	710	0.004-0.005	720	0.004-0.005	2,330	0.008-0.010	2,360	0.005-0.015	4,050	0.005-0.015	2,480	0.005-0.006
8	-	560	0.003-0.006	565	0.005-0.006	570	0.005-0.006	1,850	0.008-0.012	1,880	0.006-0.018	3,210	0.006-0.018	1,970	0.006-0.008
-	3/8	470	0.003-0.007	475	0.006-0.007	480	0.006-0.007	1,550	0.009-0.013	1,580	0.007-0.021	2,700	0.007-0.021	1,650	0.007-0.009
10	-	445	0.004-0.008	450	0.006-0.008	455	0.006-0.008	1,480	0.010-0.014	1,500	0.008-0.022	2,570	0.008-0.022	1,570	0.008-0.010
-	7/16	400	0.004-0.009	405	0.007-0.009	410	0.007-0.009	1,330	0.010-0.015	1,350	0.009-0.024	2,310	0.009-0.024	1,420	0.009-0.011
12	-	370	0.005-0.009	375	0.007-0.009	380	0.007-0.009	1,230	0.011-0.015	1,250	0.009-0.026	2,140	0.009-0.026	1,310	0.009-0.012
-	1/2	350	0.005-0.010	355	0.008-0.010	360	0.008-0.010	1,160	0.011-0.015	1,180	0.010-0.027	2,020	0.010-0.027	1,240	0.010-0.013





List 1000 - EX-GOLD®: Stub List 1500 - EX-GOLD®: Jobbers

General Drilling Operations

Work Material	Low Carbon Steels 1010, 1018		Medium Carbon Steels 1035, 1045		Alloy Steels 4140, 4340		Tool Steels D2, H13		Cast Iron		Cast Aluminum		
Drilling Speed	105-130 SFM		70-100 SFM		65-80 SFM		25-40 SFM		105-130 SFM		205-330 SFM		
Drill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	
mm	Inch												
2	-	5,710	0.002-0.004	4,120	0.002-0.004	3,520	0.002-0.004	1,570	0.002-0.004	5,700	0.003-0.004	13,000	0.006-0.008
-	3/32	4,790	0.003-0.004	3,460	0.003-0.004	2,960	0.003-0.004	1,320	0.003-0.004	4,790	0.003-0.004	10,900	0.007-0.009
3	-	3,800	0.004-0.005	2,750	0.004-0.005	2,350	0.004-0.005	1,050	0.004-0.005	3,800	0.004-0.006	8,650	0.008-0.011
-	1/8	3,590	0.004-0.005	2,600	0.004-0.005	2,220	0.004-0.005	990	0.004-0.005	3,590	0.004-0.006	8,180	0.008-0.011
4	-	2,850	0.004-0.006	2,060	0.004-0.006	1,760	0.004-0.006	790	0.004-0.006	2,850	0.006-0.008	6,480	0.010-0.013
-	3/16	2,390	0.005-0.007	1,730	0.005-0.007	1,480	0.005-0.007	660	0.005-0.007	2,390	0.006-0.009	5,450	0.011-0.016
6	-	1,900	0.005-0.007	1,370	0.005-0.007	1,170	0.005-0.007	530	0.005-0.007	1,900	0.007-0.010	4,320	0.013-0.018
-	1/4	1,800	0.005-0.007	1,300	0.005-0.007	1,110	0.005-0.007	500	0.005-0.007	1,800	0.008-0.010	4,090	0.013-0.019
8	-	1,430	0.007-0.009	1,030	0.007-0.009	880	0.007-0.009	390	0.007-0.009	1,430	0.008-0.012	3,240	0.015-0.021
-	3/8	1,200	0.008-0.011	870	0.008-0.011	740	0.008-0.011	330	0.008-0.011	1,200	0.010-0.014	2,730	0.017-0.025
10	-	1,140	0.008-0.011	820	0.008-0.011	700	0.008-0.011	320	0.008-0.011	1,140	0.010-0.014	2,600	0.018-0.025
-	7/16	1,030	0.009-0.012	740	0.009-0.012	630	0.009-0.012	280	0.009-0.012	1,030	0.011-0.015	2,340	0.019-0.027
12	-	950	0.009-0.012	680	0.009-0.012	580	0.009-0.012	260	0.009-0.012	950	0.011-0.016	2,160	0.020-0.028
-	1/2	900	0.010-0.013	650	0.010-0.013	550	0.010-0.013	250	0.010-0.013	900	0.012-0.017	2,040	0.021-0.030
14	-	810	0.011-0.014	590	0.011-0.014	500	0.011-0.014	230	0.011-0.014	820	0.012-0.017	1,850	0.022-0.031
-	5/8	720	0.012-0.015	520	0.012-0.015	440	0.012-0.015	200	0.011-0.014	720	0.013-0.018	1,640	0.023-0.032
18	-	630	0.013-0.016	450	0.013-0.016	390	0.013-0.016	180	0.012-0.015	630	0.013-0.018	1,440	0.024-0.033
-	3/4	600	0.014-0.017	430	0.014-0.017	370	0.014-0.017	170	0.013-0.016	600	0.014-0.019	1,360	0.025-0.034

1. Speeds and feeds are based on using soluble oil where applicable 1:5 to 1:10 concentration.
2. When other than an end mill collet is used, make sure the drill shank is firmly attached.
3. For deep holes (4 times the drill diameter or deeper) use the lower recommended feed rate as a starting point and increase as needed for the best result.
4. Recommended feeds and speeds are starting points only. Actual performance will be determined by specific material, the condition of equipment being used, and coolant.



List 1100 - EX-SUS-GOLD: **Stub**

List 1600 - EX-SUS-GOLD: **Jobbers**

General Drilling Operations

Work Material	Low Carbon Steels Mild Steels 1010, 1018		Stainless Steels								Aluminum 5052, 7075		Cast Aluminum		Copper Copper Alloy		
			Austenitic 304, 316		Martensitic 420, 440		Ferritic 430, 405		15-5PH 17-4PH								
Drilling Speed	100-130 SFM		40-60 SFM		50-65 SFM		50-65 SFM		25-40 SFM		105 - 205 SFM		205-325 SFM		80 - 160 SFM		
Drill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
mm Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	
1	-	11,150	0.001-0.002	4,800	0.001-0.002	5,550	0.001-0.002	5,550	0.0005-0.001	3,200	0.0005-0.001	15,000	0.001-0.002	25,000	0.001-0.002	11,630	0.0005-0.001
-	1/16	7,020	0.002-0.003	3,000	0.001-0.003	3,600	0.001-0.003	3,600	0.0005-0.001	2,000	0.0005-0.001	9,460	0.001-0.004	16,180	0.002-0.004	7,330	0.001-0.002
2	-	5,570	0.002-0.004	2,400	0.002-0.003	2,850	0.002-0.003	2,850	0.001-0.002	1,600	0.001-0.002	7,510	0.002-0.005	12,840	0.002-0.005	5,820	0.001-0.002
-	3/32	4,680	0.003-0.004	2,000	0.002-0.003	2,400	0.002-0.003	2,400	0.001-0.002	1,350	0.001-0.002	6,310	0.002-0.006	10,790	0.002-0.006	4,890	0.001-0.003
3	-	3,710	0.004-0.005	1,600	0.002-0.004	1,900	0.002-0.004	1,900	0.002-0.003	1,100	0.002-0.003	5,010	0.002-0.007	8,560	0.002-0.007	3,880	0.002-0.004
-	1/8	3,510	0.004-0.005	1,500	0.003-0.004	1,800	0.002-0.004	1,800	0.002-0.003	1,000	0.002-0.003	4,730	0.003-0.007	8,090	0.003-0.007	3,660	0.002-0.004
4	-	2,790	0.004-0.006	1,200	0.003-0.005	1,450	0.003-0.005	1,450	0.002-0.003	800	0.002-0.003	3,760	0.003-0.009	6,420	0.003-0.009	2,910	0.003-0.004
-	3/16	2,340	0.005-0.007	1,000	0.004-0.006	1,200	0.004-0.006	1,200	0.003-0.004	680	0.003-0.004	3,150	0.004-0.011	5,390	0.004-0.011	2,440	0.004-0.005
6	-	1,860	0.005-0.008	800	0.005-0.007	950	0.006-0.007	950	0.004-0.005	550	0.004-0.005	2,500	0.005-0.014	4,280	0.005-0.014	1,940	0.005-0.006
-	1/4	1,750	0.006-0.008	750	0.005-0.007	900	0.006-0.007	900	0.004-0.005	510	0.004-0.005	2,360	0.005-0.015	4,050	0.005-0.015	1,830	0.005-0.007
8	-	1,400	0.007-0.009	600	0.006-0.009	720	0.008-0.009	720	0.005-0.006	400	0.005-0.006	1,880	0.006-0.018	3,210	0.006-0.018	1,450	0.006-0.008
-	3/8	1,170	0.008-0.010	500	0.007-0.010	600	0.009-0.011	600	0.006-0.007	340	0.006-0.007	1,580	0.007-0.021	2,700	0.007-0.021	1,220	0.007-0.009
10	-	1,110	0.008-0.011	480	0.008-0.011	570	0.010-0.012	570	0.006-0.008	320	0.006-0.008	1,500	0.008-0.022	2,570	0.008-0.022	1,160	0.008-0.010
-	7/16	1,000	0.009-0.012	430	0.008-0.012	520	0.011-0.013	520	0.006-0.009	300	0.006-0.009	1,350	0.008-0.024	2,310	0.008-0.024	1,050	0.009-0.011
12	-	930	0.009-0.013	400	0.009-0.013	480	0.012-0.014	480	0.007-0.009	280	0.007-0.009	1,250	0.009-0.026	2,140	0.009-0.026	970	0.009-0.012
-	1/2	880	0.010-0.014	380	0.010-0.014	450	0.013-0.015	450	0.007-0.010	260	0.007-0.010	1,180	0.010-0.027	2,020	0.010-0.027	920	0.010-0.012
14	-	800	0.011-0.015	340	0.011-0.015	410	0.014-0.018	410	0.008-0.012	225	0.008-0.012	1,070	0.011-0.029	1,830	0.011-0.029	830	0.010-0.013
-	5/8	700	0.011-0.016	300	0.012-0.017	360	0.015-0.020	360	0.009-0.012	200	0.009-0.012	950	0.012-0.032	1,620	0.012-0.032	735	0.011-0.014
16	-	695	0.011-0.017	300	0.012-0.017	355	0.015-0.020	355	0.009-0.013	200	0.009-0.013	940	0.012-0.033	1,600	0.012-0.033	725	0.011-0.015
18	-	620	0.013-0.019	265	0.013-0.019	320	0.016-0.021	320	0.010-0.014	175	0.010-0.014	835	0.013-0.037	1,420	0.013-0.037	650	0.011-0.016
-	3/4	585	0.013-0.020	250	0.013-0.019	300	0.016-0.021	300	0.010-0.015	165	0.010-0.015	790	0.013-0.038	1,350	0.013-0.038	610	0.012-0.016
20	-	555	0.013-0.021	240	0.013-0.020	285	0.016-0.022	285	0.010-0.016	160	0.010-0.016	750	0.014-0.039	1,280	0.014-0.039	580	0.012-0.017
22	-	510	0.015-0.022	215	0.014-0.021	260	0.017-0.024	260	0.011-0.017	145	0.011-0.017	680	0.015-0.043	1,170	0.015-0.043	530	0.013-0.019
24	-	465	0.015-0.024	200	0.015-0.022	240	0.017-0.026	240	0.012-0.019	135	0.012-0.019	625	0.016-0.045	1,070	0.016-0.045	480	0.013-0.021
26	-	430	0.016-0.026	185	0.016-0.024	220	0.018-0.028	220	0.013-0.021	120	0.013-0.021	580	0.017-0.048	990	0.017-0.048	450	0.013-0.022
28	-	400	0.017-0.028	170	0.016-0.025	200	0.018-0.029	200	0.013-0.022	115	0.013-0.022	535	0.018-0.051	920	0.018-0.051	410	0.014-0.023
30	-	370	0.018-0.030	160	0.017-0.026	190	0.018-0.031	190	0.014-0.024	105	0.014-0.024	500	0.019-0.053	860	0.019-0.053	390	0.014-0.025
32	-	350	0.019-0.032	150	0.017-0.028	180	0.018-0.032	180	0.015-0.025	100	0.015-0.025	470	0.020-0.056	800	0.020-0.056	360	0.015-0.026



List 1200 - EX-SPOT TiN-NC-LDS List 1250 - EX-SPOT LS-NC-LDS

General Drilling Operations

Work Material	Carbon Steels, Mild Steel 1010, 1050		Alloy Steels 4140, 4130		Stainless Steels 300SS, 400SS, 17-4PH		Cast Iron		Cast Aluminum		Tool Steels, Hardened Steels			
	Hardness										26-30 HRC		30-34 HRC	
Drilling Speed	105-130 SFM		65-85 SFM		25-40 SFM		85-105 SFM		165-325 SFM		30-45 SFM		25-40 SFM	
Drill Dia. mm	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
3	3,850	0.001-0.003	2,400	0.001-0.003	1,060	0.001-0.003	3,100	0.001-0.003	8,000	0.004-0.009	1,220	0.001-0.003	1,060	0.001-0.003
4	2,900	0.002-0.004	1,800	0.002-0.004	800	0.002-0.004	2,400	0.002-0.005	6,000	0.005-0.010	910	0.002-0.004	800	0.002-0.004
6	1,900	0.002-0.005	1,180	0.002-0.005	530	0.002-0.005	1,600	0.002-0.005	4,000	0.005-0.011	610	0.002-0.005	530	0.002-0.005
8	1,400	0.003-0.006	900	0.003-0.006	400	0.003-0.006	1,200	0.003-0.006	3,000	0.007-0.012	450	0.003-0.006	400	0.003-0.006
10	1,120	0.004-0.007	710	0.004-0.007	320	0.004-0.007	950	0.004-0.007	2,400	0.009-0.014	360	0.004-0.007	320	0.004-0.007
12	950	0.005-0.008	600	0.005-0.008	270	0.005-0.008	800	0.005-0.008	2,000	0.010-0.016	300	0.005-0.008	270	0.005-0.008
16	720	0.006-0.011	450	0.006-0.011	200	0.006-0.011	600	0.006-0.011	1,500	0.012-0.019	220	0.006-0.011	200	0.006-0.011
20	560	0.008-0.013	360	0.008-0.013	160	0.008-0.013	480	0.008-0.013	1,200	0.016-0.024	180	0.008-0.013	160	0.008-0.013
25	450	0.010-0.018	290	0.010-0.018	130	0.010-0.018	380	0.010-0.018	960	0.020-0.029	150	0.010-0.018	130	0.010-0.018

1. The indicated speeds and feeds are for drilling with water soluble oil.
2. When using non-water soluble oil, reduce the drilling speed by 20%.
3. When entering on a curved or inclined surface, reduce the feed rate accordingly.
4. When using a coated tool, the drilling speed can be increased by 1.2 times the value in the table.



List 163-SO

List 164-SO

List 110-SO

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300, 400, 17-4PH		Cast Iron		Ductile Cast Iron	
Drilling Speed		80-230 SFM		66-130 SFM		25-105 SFM		80-180 SFM		40-115 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch										
1	-	15,119	0.0008-0.0010	9,550	0.0004-0.0007	6,367	0.0004-0.0012	12,733	0.0006-0.0007	7,481	0.0004-0.0006
2	-	7,559	0.0016-0.0020	4,775	0.0009-0.0014	3,183	0.0008-0.0024	6,367	0.0012-0.0014	3,740	0.0009-0.0012
-	3/32	6,349	0.0019-0.0023	4,010	0.0010-0.0017	2,674	0.0010-0.0029	5,347	0.0014-0.0017	3,142	0.0010-0.0014
3	-	5,040	0.0024-0.0030	3,183	0.0013-0.0021	2,122	0.0012-0.0036	4,244	0.0018-0.0021	2,494	0.0013-0.0018
-	1/8	4,762	0.0025-0.0031	3,008	0.0014-0.0023	2,005	0.0013-0.0038	4,010	0.0019-0.0023	2,356	0.0014-0.0019
4	-	3,780	0.0031-0.0039	2,388	0.0017-0.0028	1,592	0.0017-0.0048	3,183	0.0024-0.0028	1,870	0.0017-0.0024
-	3/16	3,175	0.0038-0.0047	2,005	0.0021-0.0034	1,337	0.0020-0.0058	2,674	0.0028-0.0034	1,571	0.0021-0.0028
6	-	2,520	0.0047-0.0059	1,592	0.0026-0.0043	1,061	0.0025-0.0073	2,122	0.0035-0.0043	1,247	0.0026-0.0035
-	1/4	2,381	0.0050-0.0063	1,504	0.0028-0.0045	1,003	0.0027-0.0077	2,005	0.0038-0.0045	1,178	0.0028-0.0038
8	-	1,890	0.0063-0.0079	1,194	0.0035-0.0057	796	0.0034-0.0097	1,592	0.0047-0.0057	935	0.0035-0.0047
-	3/8	1,587	0.0075-0.0094	1,003	0.0041-0.0068	668	0.0041-0.0116	1,337	0.0056-0.0068	785	0.0041-0.0056
10	-	1,512	0.0079-0.0098	955	0.0043-0.0071	637	0.0043-0.0122	1,273	0.0059-0.0071	748	0.0043-0.0059
-	7/16	1,361	0.0088-0.0109	859	0.0048-0.0079	573	0.0048-0.0135	1,146	0.0066-0.0079	673	0.0048-0.0066
12	-	1,260	0.0094-0.0118	796	0.0052-0.0085	531	0.0051-0.0146	1,061	0.0071-0.0085	623	0.0052-0.0071
-	1/2	1,190	0.0100-0.0125	752	0.0055-0.0090	501	0.0055-0.0155	1,003	0.0075-0.0090	589	0.0055-0.0075
14	-	1,080	0.0110-0.0138	682	0.0061-0.0099	455	0.0060-0.0170	910	0.0083-0.0099	534	0.0061-0.0083
-	19/32	1,002	0.1190-0.0148	633	0.0065-0.0107	422	0.0065-0.0184	844	0.0089-0.0106	496	0.0065-0.0089
16	-	945	0.0126-0.0157	597	0.0069-0.0113	398	0.0069-0.0195	796	0.0094-0.0113	468	0.0069-0.0094

Work Material		Aluminum				Copper		Synthetics		High Heat Material			
		Alloy		Casting						Ti-Alloy, Ti-6Al-4V		Ni-Base Material, Inconel	
Drilling Speed		245-410 SFM		90-380 SFM		90-350 SFM		50-410 SFM		15-115 SFM		15-80 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch												
1	-	31,833	0.0009-0.0018	22,602	0.0009-0.0018	21,010	0.0009-0.0018	22,283	0.0007-0.0018	6,367	0.0003-0.0004	4,775	0.0003-0.0007
2	-	15,917	0.0018-0.0035	11,301	0.0017-0.0035	10,505	0.0017-0.0035	11,142	0.0015-0.0035	3,183	0.0005-0.0009	2,388	0.0005-0.0014
-	3/32	13,368	0.0022-0.0042	9,492	0.0021-0.0042	8,823	0.0021-0.0042	9,358	0.0018-0.0042	2,674	0.0006-0.0010	2,005	0.0006-0.0017
3	-	10,611	0.0027-0.0053	7,534	0.0026-0.0053	7,003	0.0026-0.0053	7,428	0.0022-0.0053	2,122	0.0008-0.0013	1,592	0.0008-0.0021
-	1/8	10,026	0.0029-0.0056	7,119	0.0028-0.0056	6,617	0.0028-0.0056	7,018	0.0024-0.0056	2,005	0.0008-0.0014	1,504	0.0008-0.0023
4	-	7,958	0.0036-0.0071	5,650	0.0035-0.0071	5,253	0.0035-0.0071	5,571	0.0030-0.0071	1,592	0.0010-0.0017	1,194	0.0010-0.0028
-	3/16	6,684	0.0043-0.0084	4,746	0.0041-0.0084	4,412	0.0041-0.0084	4,679	0.0036-0.0084	1,337	0.0012-0.0021	1,003	0.0012-0.0034
6	-	5,306	0.0054-0.0106	3,767	0.0052-0.0106	3,502	0.0052-0.0106	3,714	0.0045-0.0106	1,061	0.0015-0.0026	796	0.0015-0.0043
-	1/4	5,013	0.0058-0.0113	3,559	0.0055-0.0113	3,309	0.0055-0.0113	3,509	0.0048-0.0113	1,003	0.0016-0.0028	752	0.0016-0.0045
8	-	3,979	0.0072-0.0142	2,825	0.0069-0.0142	2,626	0.0069-0.0142	2,785	0.0060-0.0142	796	0.0020-0.0035	597	0.0020-0.0057
-	3/8	3,342	0.0086-0.0169	2,373	0.0083-0.0169	2,206	0.0083-0.0169	2,339	0.0071-0.0169	668	0.0024-0.0041	501	0.0024-0.0068
10	-	3,183	0.0091-0.0177	2,260	0.0087-0.0177	2,101	0.0087-0.0177	2,228	0.0075-0.0177	637	0.0026-0.0043	478	0.0026-0.0071
-	7/16	2,865	0.0101-0.0197	2,034	0.0096-0.0197	1,891	0.0096-0.0197	2,005	0.0083-0.0197	573	0.0028-0.0048	430	0.0028-0.0079
12	-	2,653	0.0109-0.0213	1,883	0.0104-0.0213	1,751	0.0104-0.0213	1,857	0.0090-0.0213	531	0.0031-0.0052	398	0.0031-0.0085
-	1/2	2,507	0.0115-0.0225	1,780	0.0110-0.0225	1,654	0.0110-0.0225	1,755	0.0095-0.0225	501	0.0033-0.0055	376	0.0033-0.0090
14	-	2,274	0.0127-0.0248	1,614	0.0121-0.0248	1,501	0.0121-0.0248	1,592	0.0105-0.0248	455	0.0036-0.0061	341	0.0036-0.0099
-	19/32	2,110	0.0136-0.0267	1,500	0.0136-0.0267	1,390	0.0130-0.0267	1,480	0.0112-0.0267	420	0.0038-0.0065	320	0.0038-0.0106
16	-	1,990	0.0144-0.0283	1,410	0.0144-0.0283	1,310	0.0138-0.0283	1,390	0.0119-0.0283	400	0.0040-0.0069	300	0.0040-0.0113



List 1R5-SO
List 1BB-SO
List 1AQ-SO
List 1W6-SO
List 1G7-SO

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300, 400, 17-4PH		Cast Iron		Ductile Cast Iron	
Drilling Speed		80-165 SFM		30-100 SFM		30-75 SFM		115-150 SFM		50-115 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1	-	11,936	0.0004-0.0016	6,367	0.0004-0.0008	5,093	0.0004-0.0011	12,733	0.0007-0.0016	7,958	0.0004-0.0008
2	-	5,968	0.0008-0.0031	3,183	0.0008-0.0016	2,547	0.0008-0.0022	6,367	0.0014-0.0031	3,979	0.0008-0.0016
-	3/32	5,012	0.0010-0.0038	2,674	0.0010-0.0019	2,139	0.0010-0.0027	5,347	0.0017-0.0038	3,342	0.0010-0.0019
3	-	3,979	0.0012-0.0047	2,122	0.0012-0.0024	1,698	0.0012-0.0033	4,244	0.0021-0.0047	2,653	0.0012-0.0024
-	1/8	3,759	0.0013-0.0050	2,005	0.0013-0.0026	1,604	0.0013-0.0035	4,010	0.0023-0.0050	2,507	0.0013-0.0026
4	-	2,984	0.0017-0.0063	1,592	0.0017-0.0033	1,273	0.0017-0.0045	3,183	0.0028-0.0063	1,990	0.0017-0.0033
-	3/16	2,506	0.0020-0.0075	1,337	0.0020-0.0039	1,069	0.0020-0.0053	2,674	0.0034-0.0075	1,671	0.0020-0.0039
6	-	1,989	0.0025-0.0094	1,061	0.0025-0.0049	849	0.0025-0.0067	2,122	0.0043-0.0094	1,326	0.0025-0.0049
-	1/4	1,880	0.0026-0.0100	1,003	0.0026-0.0052	802	0.0026-0.0071	2,005	0.0045-0.0100	1,253	0.0026-0.0052
8	-	1,492	0.0033-0.0126	796	0.0033-0.0065	637	0.0033-0.0089	1,592	0.0057-0.0126	995	0.0033-0.0065
-	3/8	1,253	0.0039-0.0150	668	0.0039-0.0078	535	0.0039-0.0106	1,337	0.0068-0.0150	836	0.0039-0.0078
10	-	1,194	0.0041-0.0157	637	0.0041-0.0081	509	0.0041-0.0112	1,273	0.0071-0.0157	796	0.0041-0.0081
-	7/16	1,074	0.0046-0.0175	573	0.0046-0.0090	458	0.0046-0.0124	1,146	0.0079-0.0175	716	0.0046-0.0090
12	-	995	0.0050-0.0189	531	0.0050-0.0098	424	0.0050-0.0134	1,061	0.0085-0.0189	663	0.0050-0.0098
-	1/2	940	0.0053-0.0200	501	0.0053-0.0103	401	0.0053-0.0142	1,003	0.0090-0.0200	627	0.0053-0.0103
13	-	918	0.0054-0.0205	490	0.0054-0.0106	392	0.0054-0.0145	979	0.0092-0.0205	612	0.0054-0.0106

continued on next page 

Work Material	Aluminum				Copper	High Heat Material					
	6061, 7075		Casting			Ti-Alloy, Ti-6Al-4V		Ni-Base Material, Inconel			
Drilling Speed	115-200 SFM		75-130 SFM		50-90 SFM		20-105 SFM		15-50 SFM		
Drill Dia.	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	
mm	Inch										
1	-	15,121	0.0006-0.0016	10,028	0.0006-0.0011	6,844	0.0004-0.0008	6,048	0.0004-0.0008	3,024	0.0003-0.0011
2	-	7,560	0.0011-0.0031	5,014	0.0011-0.0022	3,422	0.0008-0.0016	3,024	0.0008-0.0016	1,512	0.0006-0.0022
-	3/32	6,350	0.0013-0.0038	4,211	0.0013-0.0027	2,874	0.0010-0.0019	2,540	0.0010-0.0019	1,270	0.0008-0.0027
3	-	5,040	0.0017-0.0047	3,343	0.0017-0.0033	2,281	0.0012-0.0024	2,016	0.0012-0.0024	1,008	0.0009-0.0033
-	1/8	4,762	0.0018-0.0050	3,158	0.0018-0.0035	2,156	0.00130-0.0026	1,905	0.0013-0.0026	952	0.0010-0.0035
4	-	3,780	0.0022-0.0063	2,507	0.0022-0.0045	1,711	0.0017-0.0033	1,512	0.0017-0.0033	756	0.0013-0.0045
-	3/16	3,175	0.0026-0.0075	2,106	0.0026-0.0053	1,437	0.0020-0.0039	1,270	0.0020-0.0039	635	0.0015-0.0053
6	-	2,520	0.0033-0.0094	1,671	0.0033-0.0067	1,141	0.0025-0.0049	1,008	0.0025-0.0049	504	0.0019-0.0067
-	1/4	2,381	0.0035-0.0100	1,579	0.0035-0.0071	1,078	0.0026-0.0052	952	0.0026-0.0052	476	0.0020-0.0071
8	-	1,890	0.0044-0.0126	1,253	0.0044-0.0089	856	0.0033-0.0065	756	0.0033-0.0065	378	0.0025-0.0089
-	3/8	1,587	0.0053-0.0150	1,053	0.0053-0.0106	719	0.0039-0.0078	635	0.0039-0.0078	317	0.0030-0.0106
10	-	1,512	0.0055-0.0157	1,003	0.0055-0.0112	684	0.0041-0.0081	605	0.0041-0.0081	302	0.0031-0.0112
-	7/16	1,361	0.0061-0.0175	902	0.0061-0.0124	616	0.0046-0.0090	544	0.0046-0.0090	272	0.0035-0.0124
12	-	1,260	0.0066-0.0189	836	0.0066-0.0134	570	0.0050-0.0098	504	0.0050-0.0098	252	0.0038-0.0134
-	1/2	1,191	0.0070-0.0200	790	0.0070-0.0142	539	0.0053-0.0103	476	0.0053-0.0103	238	0.0040-0.0142
13	-	1,163	0.0072-0.0205	771	0.0072-0.0145	526	0.0054-0.0106	465	0.0054-0.0106	233	0.0041-0.0145



List 101-SO, 102-SO List 1X6-SO

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300, 400, 17-4PH		Cast Iron		Ductile Cast Iron	
Drilling Speed		30-100 SFM		30-100 SFM		30-50 SFM		80-115 SFM		50-100 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1	-	6,366	0.0003-0.0010	4,457	0.0004-0.0008	3,502	0.0002-0.0007	9,550	0.0004-0.0008	7,163	0.0004-0.0008
2	-	3,183	0.0005-0.0020	2,228	0.0009-0.0016	1,751	0.0005-0.0014	4,775	0.0009-0.0016	3,581	0.0009-0.0016
-	3/32	2,673	0.0006-0.0023	1,872	0.0010-0.0019	1,471	0.0006-0.0017	4,010	0.0010-0.0019	3,008	0.0010-0.0019
3	-	2,122	0.0008-0.0030	1,486	0.0013-0.0024	1,167	0.0007-0.0021	3,183	0.0013-0.0024	2,388	0.0013-0.0024
-	1/8	2,005	0.0008-0.0031	1,404	0.0014-0.0026	1,103	0.0008-0.0023	3,008	0.0014-0.0026	2,256	0.0014-0.0026
4	-	1,591	0.0010-0.0039	1,114	0.0017-0.0033	875	0.0009-0.0028	2,388	0.0017-0.0033	1,791	0.0017-0.0033
-	3/16	1,337	0.0012-0.0047	936	0.0021-0.0039	735	0.0011-0.0034	2,005	0.0021-0.0039	1,504	0.0021-0.0039
6	-	1,061	0.0015-0.0059	743	0.0026-0.0049	584	0.0014-0.0043	1,592	0.0026-0.0049	1,194	0.0026-0.0049
-	1/4	1,002	0.0016-0.0063	702	0.0028-0.0052	551	0.0015-0.0045	1,504	0.0028-0.0052	1,128	0.0028-0.0052
8	-	796	0.0020-0.0079	557	0.0035-0.0065	438	0.0019-0.0057	1,194	0.0035-0.0065	895	0.0035-0.0065
-	3/8	668	0.0024-0.0094	468	0.0041-0.0078	368	0.0023-0.0068	1,003	0.0041-0.0078	752	0.0041-0.0078
10	-	637	0.0026-0.0098	446	0.0043-0.0081	350	0.0024-0.0071	955	0.0043-0.0081	716	0.0043-0.0081
-	7/16	573	0.0028-0.0109	401	0.0048-0.0090	315	0.0026-0.0079	859	0.0048-0.0090	645	0.0048-0.0090
12	-	530	0.0031-0.0118	371	0.0052-0.0098	292	0.0028-0.0085	796	0.0052-0.0098	597	0.0052-0.0098
-	1/2	501	0.0033-0.0125	351	0.0055-0.0103	276	0.0030-0.0090	752	0.0055-0.0103	564	0.0055-0.0103
14	-	455	0.0036-0.0138	318	0.0061-0.0114	250	0.0033-0.0099	682	0.0061-0.0114	512	0.0061-0.0114
-	9/16	446	0.0036-0.0140	312	0.0061-0.0116	245	0.0033-0.0101	668	0.0078-0.0116	501	0.0065-0.0118
16	-	398	0.0040-0.0157	279	0.0069-0.0130	219	0.0037-0.0113	597	0.0081-0.0132	448	0.0072-0.0132
18	-	354	0.0046-0.0177	248	0.0077-0.0146	195	0.0042-0.0127	531	0.0085-0.0148	398	0.0078-0.0148
20	-	318	0.0051-0.0197	223	0.0087-0.0163	175	0.0047-0.0142	478	0.0087-0.0163	358	0.0087-0.0163

Work Material		Aluminum				Copper		High Heat Material			
		6061, 7075		Casting				Ti-Alloy, Ti-6Al-4V		Ni-Base Material, Inconel	
Drilling Speed		30-100 SFM		100-330 SFM		50-165 SFM		25-80 SFM		15-35 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1	-	11,938	0.0010-0.0013	20,692	0.0010-0.0013	10,346	0.0010-0.0013	5,093	0.0003-0.0006	2,388	0.0001-0.0004
2	-	5,969	0.0020-0.0025	10,346	0.0020-0.0025	5,173	0.0020-0.0025	2,547	0.0005-0.0011	1,194	0.0005-0.0009
-	3/32	5,013	0.0023-0.0030	8,689	0.0023-0.0030	4,345	0.0023-0.0030	2,139	0.0006-0.0013	1,003	0.0005-0.0010
3	-	3,979	0.0030-0.0038	6,897	0.0030-0.0038	3,449	0.0030-0.0038	1,698	0.0008-0.0017	796	0.0010-0.0013
-	1/8	3,760	0.0031-0.0040	6,517	0.0031-0.0040	3,259	0.0031-0.0040	1,604	0.0008-0.0018	752	0.0010-0.0014
4	-	2,984	0.0039-0.0050	5,173	0.0039-0.0050	2,586	0.0039-0.0050	1,273	0.0010-0.0022	597	0.0014-0.0017
-	3/16	2,507	0.0047-0.0060	4,345	0.0047-0.0060	2,172	0.0047-0.0060	1,069	0.0012-0.0026	501	0.0018-0.0021
6	-	1,990	0.0059-0.0076	3,449	0.0059-0.0076	1,724	0.0059-0.0076	849	0.0015-0.0033	398	0.0020-0.0026
-	1/4	1,880	0.0063-0.0080	3,259	0.0063-0.0080	1,629	0.0063-0.0080	802	0.0016-0.0035	376	0.0024-0.0028
8	-	1,492	0.0079-0.0101	2,586	0.0079-0.0101	1,293	0.0079-0.0101	637	0.0020-0.0044	298	0.0030-0.0035
-	3/8	1,253	0.0094-0.0120	2,172	0.0094-0.0120	1,086	0.0094-0.0120	535	0.0024-0.0053	251	0.0037-0.0041
10	-	1,194	0.0098-0.0126	2,069	0.0098-0.0126	1,035	0.0098-0.0126	509	0.0026-0.0055	239	0.0039-0.0043
-	7/16	1,074	0.0109-0.0140	1,862	0.0109-0.0140	931	0.0109-0.0140	458	0.0028-0.0061	215	0.0044-0.0048
12	-	995	0.0118-0.0151	1,724	0.0118-0.0151	862	0.0118-0.0151	424	0.0031-0.0066	199	0.0047-0.0052
-	1/2	940	0.0125-0.0160	1,629	0.0125-0.0160	815	0.0125-0.0160	401	0.0033-0.0070	188	0.0050-0.0055
14	-	853	0.0138-0.0176	1,478	0.0138-0.0176	739	0.0138-0.0176	364	0.0036-0.0077	171	0.0055-0.0061
-	9/16	836	0.0140-0.0180	1,448	0.0140-0.0182	724	0.0140-0.0180	356	0.0036-0.0078	167	0.0061-0.0065
16	-	746	0.0157-0.0187	1,293	0.0157-0.0191	647	0.0157-0.0201	318	0.0040-0.0088	149	0.0065-0.0077
18	-	663	0.0177-0.0195	1,150	0.0177-0.0187	575	0.0177-0.0226	283	0.0046-0.0099	133	0.0077-0.0081
20	-	597	0.0197-0.0252	1,035	0.0197-0.0252	517	0.0197-0.0252	255	0.0051-0.0110	119	0.0081-0.0087

List 1NA-SO

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Stainless Steels 300, 400, 17-4PH		Cast Iron		Ductile Cast Iron	
Drilling Speed		30-100 SFM		15-80 SFM		20-50 SFM		50-115 SFM		50-100 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1.19	No. 1	5,349	0.0014-0.0035	3,745	0.0014-0.0035	2,943	0.0014-0.0035	8,025	0.0014-0.0035	6,019	0.0014-0.0035
1.98	No. 2	3,215	0.0023-0.0058	2,251	0.0023-0.0058	1,769	0.0023-0.0058	4,823	0.0023-0.0058	3,617	0.0023-0.0058
2.78	No. 3	2,290	0.0033-0.0082	1,603	0.0033-0.0082	1,260	0.0033-0.0082	3,435	0.0033-0.0082	2,576	0.0033-0.0082
3.18	No. 4	2,002	0.0063-0.0225	1,401	0.0063-0.0225	1,101	0.0063-0.0225	3,003	0.0063-0.0225	2,252	0.0063-0.0225
4.76	No. 5	1,337	0.0094-0.0337	936	0.0094-0.0337	736	0.0094-0.0337	2,006	0.0094-0.0337	1,505	0.0094-0.0337
5.56	No. 6	1,145	0.0219-0.0613	802	0.0219-0.0613	630	0.0219-0.0613	1,718	0.0219-0.0613	1,288	0.0219-0.0613
6.35	No. 7	1,002	0.0250-0.0700	702	0.0250-0.0700	551	0.0250-0.0700	1,504	0.0250-0.0700	1,128	0.0250-0.0700

Work Material		Aluminum				Copper		High Heat Material			
		6061, 7075		Casting				Ti-Alloy, Ti-6Al-4V		Ni-Base Material, Inconel	
Drilling Speed		30-100 SFM		100-330 SFM		50-165 SFM		25-80 SFM		15-20 SFM	
Drill Dia.		Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed
mm	Inch	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR	RPM	IPR
1.19	No. 1	10,032	0.0014-0.0035	17,388	0.0014-0.0035	8,694	0.0014-0.0035	4,280	0.0014-0.0035	1,338	0.0014-0.0035
1.98	No. 2	6,029	0.0023-0.0058	10,450	0.0023-0.0058	5,225	0.0023-0.0058	2,572	0.0023-0.0058	804	0.0023-0.0058
2.78	No. 3	4,294	0.0033-0.0082	7,443	0.0033-0.0082	3,722	0.0033-0.0082	1,832	0.0033-0.0082	573	0.0033-0.0082
3.18	No. 4	3,754	0.0063-0.0225	6,507	0.0063-0.0225	3,253	0.0063-0.0225	1,602	0.0063-0.0225	501	0.0063-0.0225
4.76	No. 5	2,508	0.0094-0.0337	4,347	0.0094-0.0337	2,173	0.0094-0.0337	1,070	0.0094-0.0337	334	0.0094-0.0337
5.56	No. 6	2,147	0.0219-0.0613	3,722	0.0219-0.0613	1,861	0.0219-0.0613	916	0.0219-0.0613	286	0.0219-0.0613
6.35	No. 7	1,880	0.0250-0.0700	3,259	0.0250-0.0700	1,629	0.0250-0.0700	802	0.0250-0.0700	251	0.0250-0.0700

List 751-SO

List 752-SO

Work Material		Carbon Steels Mild Steels 1010, 1050, 12L14		Alloy Steels 4140, 4130		Tool Steel		Stainless Steels 300, 400, 17-4PH	
Drilling Speed		50-80 SFM		15-50 SFM		15-25 SFM		20-40 SFM	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
2	-	3,155	0.003-0.004	1,575	0.002-0.004	970	0.002-0.003	1,455	0.002-0.004
-	3/32	2,650	0.003-0.005	1,325	0.003-0.004	815	0.002-0.003	1,220	0.003-0.005
3	-	2,100	0.004-0.007	1,505	0.003-0.005	645	0.002-0.004	970	0.003-0.007
-	1/8	1,985	0.005-0.008	995	0.004-0.006	610	0.003-0.004	915	0.004-0.008
4	-	1,575	0.005-0.008	790	0.004-0.007	485	0.003-0.005	730	0.004-0.008
-	3/16	1,325	0.005-0.009	660	0.004-0.007	405	0.003-0.005	610	0.004-0.009
6	-	1,050	0.006-0.010	525	0.005-0.008	325	0.004-0.006	485	0.005-0.010
-	1/4	995	0.006-0.010	495	0.005-0.008	305	0.004-0.007	460	0.005-0.010
8	-	790	0.006-0.011	395	0.005-0.009	245	0.004-0.007	365	0.005-0.011
-	3/8	660	0.007-0.012	330	0.006-0.010	205	0.005-0.008	305	0.006-0.012
10	-	630	0.008-0.013	315	0.006-0.010	195	0.005-0.008	290	0.006-0.013
-	7/16	570	0.008-0.013	285	0.007-0.011	175	0.005-0.009	260	0.007-0.013
12	-	525	0.008-0.014	265	0.007-0.012	160	0.005-0.009	245	0.007-0.014
-	1/2	495	0.009-0.015	250	0.008-0.013	155	0.006-0.010	230	0.008-0.015
14	-	450	0.010-0.016	225	0.008-0.013	140	0.006-0.010	210	0.008-0.016
-	3/4	330	0.010-0.016	165	0.008-0.014	100	0.006-0.011	155	0.008-0.016
20	-	315	0.012-0.019	160	0.009-0.015	95	0.007-0.012	145	0.009-0.019

Work Material		Cast Iron		Ductile Cast Iron		High Heat Material			
Drilling Speed		40-60 SFM		30-50 SFM		Ti-Alloy, Ti-6Al-4V		Ni-Base Material, Inconel	
Drill Dia.		Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR	Speed RPM	Feed IPR
mm	Inch								
2	-	2,425	0.003-0.007	1,940	0.003-0.004	1,215	0.002-0.004	485	0.003-0.005
-	3/32	2,035	0.004-0.008	1,630	0.003-0.005	1,020	0.003-0.005	405	0.003-0.007
3	-	1,615	0.005-0.009	1,295	0.004-0.007	810	0.003-0.007	325	0.004-0.008
-	1/8	1,530	0.005-0.011	1,220	0.005-0.008	765	0.004-0.008	305	0.005-0.009
4	-	1,215	0.006-0.011	970	0.005-0.008	605	0.004-0.008	245	0.005-0.009
-	3/16	1,020	0.006-0.012	815	0.005-0.009	510	0.004-0.009	205	0.005-0.010
6	-	810	0.007-0.015	645	0.006-0.010	405	0.005-0.010	160	0.006-0.012
-	1/4	765	0.007-0.016	610	0.006-0.010	380	0.005-0.010	155	0.006-0.012
8	-	605	0.008-0.017	485	0.006-0.011	305	0.005-0.011	120	0.006-0.013
-	3/8	510	0.009-0.018	405	0.007-0.012	255	0.006-0.012	100	0.007-0.015
10	-	485	0.009-0.019	390	0.008-0.013	245	0.006-0.013	95	0.008-0.016
-	7/16	435	0.010-0.020	350	0.008-0.013	220	0.007-0.013	85	0.008-0.017
12	-	405	0.011-0.021	325	0.008-0.014	200	0.007-0.014	80	0.008-0.018
-	1/2	380	0.011-0.023	305	0.009-0.015	190	0.008-0.015	75	0.009-0.019
14	-	345	0.012-0.024	275	0.010-0.016	175	0.008-0.016	70	0.010-0.020
-	3/4	255	0.012-0.025	205	0.010-0.016	125	0.008-0.016	50	0.010-0.020
20	-	245	0.014-0.026	195	0.012-0.019	120	0.009-0.019	50	0.012-0.023


Drill Reconditioning





OSG Tool Reconditioning

OSG's Bensenville facility is the special cutting tool and regrinding authority based in the Chicago area. Through accurate and expedient regrinds of high-end cutting tools, OSG helps customers extend tool life and save money by restoring their used cutting tools to their original condition. In addition to regrinding, the Bensenville facility also manufactures custom drills, reamers, and other special cutting tools, performs product modifications and provides premium coating services.

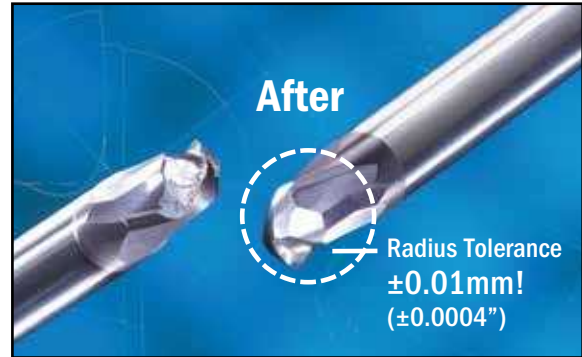

Before:

After:



As part of the OSG Corporation (headquartered in Japan), the regrind facility is the only OSG authorized regrinding source in America. The regrinding program uses the same OSG manufacturing drawings, adheres to OSG's strict quality control standards and uses the same equipment for OSG manufacturing and inspection procedures. As one of the world's leading cutting tool manufacturers, OSG offers a global network of support to our customers.

Tool Reconditioning Lowers Costs

The primary benefit of tool reconditioning is clear: the reduction in overall tooling costs. As part of normal production, tool wear, chipping and breakage occurs often affecting tool performance and increasing manufacturing costs. By reconditioning high performance drills, end mills and taps, OSG helps manufacturers realize substantial cost savings through extended tool life without jeopardizing production quality or performance. Because OSG's reconditioned tools are manufactured to the same high level of quality and held to the same exacting standards that new tools are, customers of OSG's tool reconditioning services can expect the same high performance and quality they are accustomed with OSG's new tools even after regrinding multiple times.

Engineering & Sales Support

OSG reconditions OSG tools using the same prints as the original tools made in our plants around the world. By using original part drawings, tools are accurately reconditioned to the original specifications, so customers are assured that reconditioned tools realize the same high level of performance. Manufacturers can also work directly with OSG design engineers to customize tools for enhanced performance or to meet specific requirements.

OSG's national sales team provides tooling expertise in the field for onsite evaluations and recommendations for manufacturers to implement a customized reconditioning program. The goal is to help manufacturers reduce tool costs and inventory, optimize performance and enhance overall profits.



Contact your OSG representative or distributor to review your tool reconditioning program.





CNC Training

OSG CNC technicians are extensively trained on proper setup methodologies and reconditioning processes by an on-staff CNC trainer. Through their development, the CNC Technician training program moves operators through three levels where they are diligently monitored and certified/reevaluated annually to maintain consistency and quality in our tools. Technicians are also trained and certified/reevaluated annually by Quality Assurance to perform inspections to print on first piece and in process tools.

Inspector Training

In order to guarantee that our tools are reconditioned to the highest standards, inspectors also undergo annual training and certifications which involve standardized procedures. These are the same methods that are used in the OSG manufacturing facilities in Japan and around the world. Inspectors are trained to inspect and measure tools completely to the original tool prints.

Throughout the reconditioning process, the tools are also continuously inspected until 100% visual inspection ensures that no chipped or defective tools are received by the customer. The high tech inspection equipment used at the reconditioning facility is the same equipment used at all OSG locations. This includes in-house developed tool analyzers and state-of-the-art equipment with up to 300x magnification capabilities. The key to inspecting high performance, accurate reconditioned tools is assuring that they are held to the same inspection standards through the use of the same inspection methods as new OSG tools.

The Bensenville plant is subject to OSG's stringent JQA regrinding standards and is certified regularly by OSG Japan.

Equipment and Facility

In 2015, OSG opened a reconditioning facility which is equipped with state-of-the-art production and inspection equipment. The facility uses high precision 5-Axis CNC grinders throughout the reconditioning process for improved repeatability and precision.

OSG's weekly equipment Preventive Maintenance (PM) program ensures consistency and accuracy throughout the reconditioning process. Through this PM program, OSG's tool reconditioning performance will be consistent year after year.



THREADING

The A Brand®

OSG's premium tooling brand. Features products that are designed to exceed the evolving manufacturing needs of our customers.

EXOPRO®

OSG's ultra-premium tooling series. Features supreme performance threading products with OSG's proprietary coatings for maximum cost-efficiency and productivity.

EXOCARB® Thread Mill

Premium sub-micrograin carbide thread mills suited for cast iron, steels, exotics and difficult-to-machine materials.

EXOCARB®

Ultra-high performance taps made from premium micrograin carbide used in automotive production, tapping hardened steels and threading the most abrasive of composite materials.

EXOTAP®

Ultra-premium taps made from VC-10 powdered metal high speed steel. EXOTAP® is the industry solution for difficult materials and applications, when no other tap seems to do the job.

HY-PRO®

Premium taps made from vanadium high speed steel and designed for a wide range of applications and industries.

HY-PRO® SEVEN

Semi-premium taps made from premium high speed steel for general purpose tapping applications.

GENERAL PURPOSE

Premium general purpose taps for general machining applications. Available in a variety of styles and coatings.

SOMTA


Value taps for a wide range of applications.







Featured Threading Products

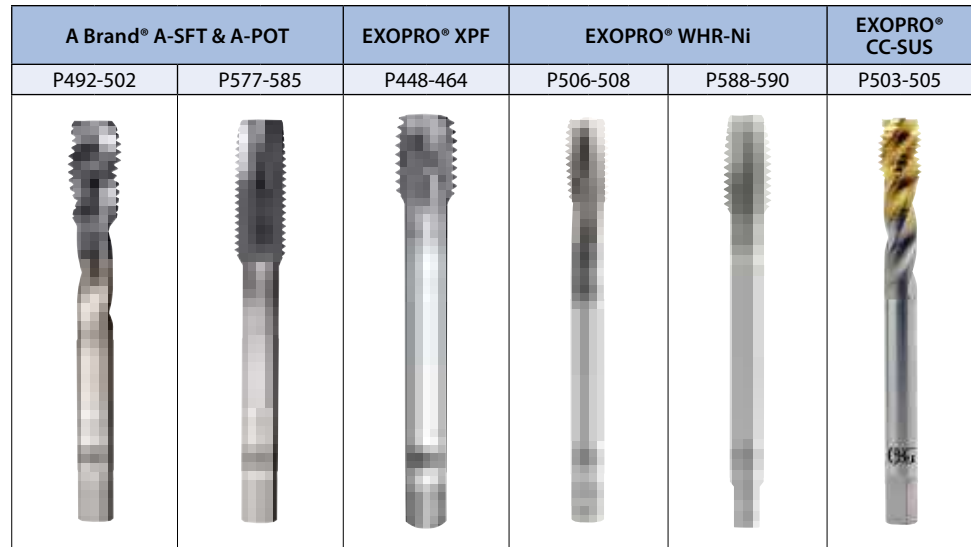

Inch/Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric
Size Range	No. 4 - 2"	M1.4 - M56	No. 2 - 1"	M1.4 - M24	No. 0 - 1-3/4"	M1 - M45	No. 2 - 1"	M2.5 - M24	No. 2 - 1"	M2.5 - M24	No. 2 - 1"	M2 - M24
Type	Spiral Flute		Spiral Point		Form Tap		Spiral Flute		Spiral Point		Spiral Flute	
Number of Flutes	2, 3 & 4				Fluteless		2, 3 & 4	3 & 4	2, 3 & 4		2, 3 & 4	
Solid/Coolant-Through	Solid & Coolant-Through				Solid & Coolant-Through		Solid				Solid	
Overall Length	DIN & Long Shank				DIN & Long Shank		DIN				DIN	
Limit/Tolerance	H	D	H	D	H	D	H	D	H	D	H	D
Substrate	VC-10				HSS-CO		VC-10				HSSE	
Coating	V				V		HR				TiN	
Chamfer Length	Bottom & Modified Bottom		Plug		Bottom, Modified Bottom & Plug		Modified Bottom		Plug		Modified Bottom	

P	Carbon Steels (1010, 1018)			
	Mild Steels, Alloy Steels (1050, 4140)			
	Die Steels (H13, D2)			
M	Stainless Steel (304SS, 420SS)			
K	Cast Iron			
	Ductile Cast Iron			
N	Aluminum Alloys (6061, 7075)			
S	Heat Resistant Alloys (Inconel 718)			
	Titanium Alloy (Ti-6Al-4V)			
H	Pre-Hardened Steel (P20)			
	Die Cast Steels (A2, S7)			
	Hardened Steels (D2)			





Threading Application Guide

	Work Material	Material Designation	Material Condition	Hardness	
				BHN	HRC
P	Low Carbon Steel	1010, 1018	Normalized	~190	~10
	Medium Carbon Steel	1035, 1045	Normalized	~208	~15
	High Carbon Steel	1065, 1095	Normalized	~253	~25
	Alloy Steel	4140, 4340, 8620	Normalized	253~301	25~32
4140, 4340, 8620		Hardened	327~390	35~42	
M	Stainless Steel	300 Series / 400 Series	Annealed	~253	~25
		300 Series / 400 Series	Hardened	327~390	35~42
		17-4, 15-5, A286	Annealed	~253	~25
		17-4, 15-5, A286	Hardened	327~390	35~42
K	Cast Iron	Nodular, Grey	As Cast	~208	~15
N	Aluminum Alloy	6061, 7075, 2011	Normalized	~150	
	Die Cast Aluminum	356AL, 390AL	As Cast	~150	
S	Nickel Based Alloy	Inconel 718, 625	Annealed	253~301	25~32
		Inconel 718	Hardened	327~390	35~42
		Hastelloy, Waspaloy	Normalized		25~40
		Kovar	Normalized		25~40
	Titanium Alloy	6Al4V	Annealed	253~301	25~32
		6Al4V, 6Al6V	Hardened	327~390	35~42
H	Tool Steel	D2, H13, P20, S7	Annealed	190~253	10~25
		H13	Hardened	327~450	35~48
		D2, A2	Hardened		48~55
		D2, A2	Hardened		55~70



OSG **TOOL SELECTOR**
 Find the Tapping Solution for your Application
www.osgtool.com/toolselector





Form Taps				Cut Taps									Pipe Taps	
468-488	453-464	488-452	465-467	See Index	See Index	492-497 500-502	498-499	577-580 583-585	581-582	623-624	662-663	See Index	735-739	740-751
EXOTAP® NRT & HY-PRO® NRT	EXOPRO® XPF	EXOPRO® XPF-OIL <i>Coolant-Through</i>	EXOCARB® Carbide	General	General <i>Coolant-Through</i>	A Brand® A-SFT	A Brand® A-OIL-SFT <i>Coolant-Through</i>	A Brand® A-POT	A Brand® A-OIL-POT <i>Coolant-Through</i>	HY-PRO® Synchro AL	EXOCARB® VX	Carbide	A Brand® A-Pipe Taps	Pipe Taps
35-130	50-115	75-130	40-145	25-80	50-120	80-120	100-200	80-120	100-200	85-105	-	35-100	5-35	15-40
20-50	50-115	75-130	25-60	20-50	45-110	80-120	100-200	80-120	100-200	85-105	-	30-70	5-35	10-25
15-30	50-85	65-100	20-35	20-45	40-100	80-120	100-200	80-120	100-200	70-85	-	30-60	5-35	10-20
15-30	50-85	65-100	20-35	20-50	45-110	35-50	50-100	40-65	50-120	70-85	-	30-70	5-20	10-25
-	10-40	20-50	-	15-20	20-60	20-40	40-80	35-55	45-110	-	-	20-35	5-20	10-15
15-40	15-40	20-50	20-60	20-45	30-70	15-35	25-70	25-75	40-120	-	-	25-55	5-20	10-25
15-35	15-35	20-45	20-50	12-20	20-50	15-35	25-70	25-75	40-120	-	-	15-30	5-20	8-12
15-25	15-30	20-40	20-40	15-20	20-50	15-25	25-50	25-60	40-100	-	-	20-35	-	8-12
-	10-25	15-30	-	8-20	15-40	15-25	25-50	25-60	40-100	-	-	10-25	-	8-12
-	-	-	-	25-75	40-100	50-80	60-150	60-100	80-160	-	-	40-90	-	15-50
50-150	65-115	80-130	60-160	40-80	50-125	70-120	90-220	70-120	90-220	300-800	-	50-100	5-20	15-40
45-130	65-90	75-110	55-120	40-65	50-110	70-120	90-220	70-120	90-220	200-700	-	50-80	5-35	20-35
-	8-12	8-10	-	8-15	-	-	-	-	-	-	-	10-20	-	-
-	8-10	-	-	8-15	-	-	-	-	-	-	-	10-20	-	-
-	-	-	-	8-15	-	-	-	-	-	-	-	10-20	-	-
-	-	-	-	8-15	-	-	-	-	-	-	-	10-20	5-10	-
-	8-15	8-10	-	15-20	-	-	-	-	-	-	-	20-30	5-10	-
-	8-12	-	-	3-10	-	-	-	-	-	-	-	5-12	-	-
20-45	15-50	20-65	25-60	15-35	20-60	30-55	50-110	40-65	60-120	-	-	20-50	5-35	10-20
10-15	12-25	20-35	15-30	8-15	15-50	-	-	20-50	30-80	-	-	10-20	-	8-12
-	-	-	-	3-10	-	-	-	15-40	25-75	-	5-12	5-12	-	-
-	-	-	-	3-8	-	-	-	-	-	-	3-10	3-10	-	-

For Thread Mills please refer to page 787-791.
For conversions to RPM please refer to page 762.





List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-------------	----------	---------	------------	----------	----------------------------

Thread Mills

16625		A Brand® AT-1	Inch	Carbide	EgiAs	1/4" - 1"	Helical Flute	432	789
16620		A Brand® AT-1	Metric	Carbide	EgiAs	M6 - M24	Helical Flute	433	789
16630		A Brand® AT-1	Inch	Carbide	EgiAs	1/16" - 2"	NPT, Helical Flute	434	789
16631		A Brand® AT-1	Inch	Carbide	EgiAs	1/16" - 2"	NPTF, Helical Flute	435	789
41200		EXOCARB® Mini	Inch	Carbide	WXS® SS	No. 0 - No. 8	Miniature, Helical Flute	436	791
41300		EXOCARB® Mini	Metric	Carbide	WXS® SS	M1 - M5	Miniature, Helical Flute	437	791
41000		EXOCARB®	Inch	Carbide	EXO®	No. 10 - 1"	Helical Flute	438- 439	790
41100		EXOCARB®	Metric	Carbide	EXO®	M6 - M24	Helical Flute	440	790
41050		EXOCARB® Oil	Inch	Carbide	EXO®	1/4" - 1"	Coolant-Through, Helical Flute	441	790
41150		EXOCARB® Oil	Metric	Carbide	EXO®	M6 - M24	Coolant-Through, Helical Flute	442	790
42000		EXOCARB® Pipe	Inch	Carbide	EXO®	1/16" - 2-1/2"	NPT, Helical Flute	443	790
42001		EXOCARB® Pipe	Inch	Carbide	EXO®	1/16" - 2-1/2"	NPTF, Helical Flute	444	790

Diameter Correction Tool

15015		NEW	GENERAL	Inch	HSS	TiN	No. 5 - 1"	Diameter Correction Tool	445
15010		NEW	GENERAL	Metric	HSS	TiN	M3 - M16	Diameter Correction Tool	446
15020		NEW	GENERAL	-	-	-	-	Diameter Correction Tool Accessories	447

Forming Taps

16050		EXOPRO® XPF-OIL	Inch	HSS-Co	V	1/4" - 1-3/4"	Coolant-Through, DIN OAL	448-449
16150		EXOPRO® XPF-OIL	Metric	HSS-Co	V	M6 - M45	Coolant-Through, DIN OAL	450-452
16250		EXOPRO® XPF	Inch	HSS-Co	V	No. 0 - 1-3/4"	DIN OAL	453-456
16350		EXOPRO® XPF	Metric	HSS-Co	V	M1 - M45	DIN OAL	457-460
16255		EXOPRO® XPF-LS	Inch	HSS-Co	V	No. 5 - 1"	Long Shank	461-462
16355		EXOPRO® XPF-LS	Metric	HSS-Co	V	M3 - M20	Long Shank	463-464





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Thread Mills

16625	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
16620	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
16630	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
16631	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
41200	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
41300	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
41000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
41100	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
41050	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
41150	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
42000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
42001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		

Forming Taps

16050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
16150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
16250	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
16350	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
16255	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
16355	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

good best





List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page/Tech Page
------	------	-------	-------------	----------	---------	------------	----------	------------------------

Forming Taps

14153		EXOCARB®	Metric	Carbide	Bright	M6 - M10	Carbide Inlaid, DIN/DIN	465
369		EXOCARB®	Metric	Carbide	Bright	M3 - M12	JIS	466
357		EXOCARB®	Metric	Carbide	Bright	M6 - M12	JIS, Long Shank	467
14050		EXOTAP® NRT®	Inch	VC-10	V	No. 0 - 3/8"		468-470
14150		EXOTAP® NRT®	Metric	VC-10	V	M1.6 - M12		471-472
14001		HY-PRO® NRT®	Inch	HSS-CO	TiCN, TiN, Bright, S/O	No. 0 - 3/4"		473-485
14101		HY-PRO® NRT®	Metric	HSS-CO	TiCN, TiN, Bright, S/O	M1.6 - M12		486-488
285		HY-PRO® SEVEN	Inch	HSS	TiCN, TiN, Bright	No. 0 - 1/2"		489
286		HY-PRO® SEVEN	Metric	HSS	TiCN, TiN, Bright	M3 - M12		489

Spiral Fluted Taps

16605		A Brand® A-CSF	Inch	Carbide	Bright	1/4" - 1/2"	Coolant-Through, DIN OAL	490
16600		A Brand® A-CSF	Metric	Carbide	Bright	M5 - M12	Coolant-Through, DIN OAL	491
16505		A Brand® A-SFT	Inch	VC-10	V	No. 4 - 2"	Variable Helix, DIN OAL	492-494
16500		A Brand® A-SFT	Metric	VC-10	V	M1.4 - M56	Variable Helix, DIN OAL	495-497
16545		A Brand® A-OIL-SFT	Inch	VC-10	V	1/4" - 2"	Variable Helix, Coolant-Through, DIN OAL	498
16540		A Brand® A-OIL-SFT	Metric	VC-10	V	M6 - M56	Variable Helix, Coolant-Through, DIN OAL	499
16525		A Brand® A-LT-SFT	Inch	VC-10	V	No. 4 - 1"	Variable Helix, Long Shank	500
16520		A Brand® A-LT-SFT	Metric	VC-10	V	M3 - M24	Variable Helix, Long Shank	501-502
16450		EXOPRO® CC-SUS	Inch	HSSE	TiN	No. 2 - 1"	Variable Helix, DIN OAL	503-504
16455		EXOPRO® CC-SUS	Metric	HSSE	TiN	M2 - M24	Variable Helix, DIN OAL	505
335Ni		EXOPRO® WHR-Ni	Inch	VC10	HR	No. 2 - 1"	DIN OAL	506-507
336Ni		EXOPRO® WHR-Ni	Metric	VC10	HR	M2.5 - M24	DIN OAL	508
389		EXOCARB®	Metric	Carbide	Bright	M3 - M12	JIS	509





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Forming Taps

14153										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
369										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
357										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
14050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			
14150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			
14101	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			
285	<input checked="" type="checkbox"/>	<input type="checkbox"/>								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
286	<input checked="" type="checkbox"/>	<input type="checkbox"/>								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

Spiral Fluted Taps

16605									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
16600									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
16505	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16545	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16525	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
16455	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
335Ni								<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>
336Ni								<input type="checkbox"/>				<input checked="" type="checkbox"/>					<input type="checkbox"/>
389								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Spiral Fluted Taps

313Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1"		510-511
345Ti		EXOTAP® VC-10 Ti	Metric	VC-10	V	M2.5 - M12		512
317Ti		EXOTAP® VC-10 Ti Oil	Inch	VC-10	V	1/4" - 1"	Coolant-Through, DIN OAL	513
348Ti		EXOTAP® VC-10 Ti Oil	Metric	VC-10	V	M8 - M24	Coolant-Through, DIN OAL	514
313Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V, S/O	No. 2 - 1"		515-516
345Ni		EXOTAP® VC-10 Ni	Metric	VC-10	S/O	M2.5 - M12		517
313		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 3/4"		518-519
345		EXOTAP® VC-10	Metric	VC-10	V, S/O	M3 - M12		520
317		EXOTAP® VC-10 Oil	Inch	VC-10	V	5/16" - 1"	Coolant-Through, DIN OAL	521
351		EXOTAP® VC-10 Oil	Metric	VC-10	V	M8 - M24	Coolant-Through, DIN OAL	522
303		EXOTAP VA-3®	Inch	HSSE	V, TiN, S/O	No. 2 - 1"		523-525
343		EXOTAP VA-3®	Metric	HSSE	V, TiN, S/O	M3 - M18		526
307		EXOTAP VA-3® Oil	Inch	HSSE	V	1/4" - 1"	Coolant-Through, DIN OAL	527
347		EXOTAP VA-3® Oil	Metric	HSSE	V	M6 - M24	Coolant-Through, DIN OAL	528
398		EXOTAP VA-3®	Inch	HSSE	S/O	No. 4 - 5/8"	Long Shank	529
220		HY-PRO® DIN	Inch	HSSE	S/O	No. 4 - 2"	DIN OAL	530
229		HY-PRO® DIN	Metric	HSSE	S/O	M3 - M20	DIN OAL	531
230		HY-PRO® DIN	Inch	HSSE	TiN	1/4" - 1"	Coolant-Through, DIN OAL	532
239		HY-PRO® DIN	Metric	HSSE	TiN	M6 - M20	Coolant-Through, DIN OAL	533
13013		HY-PRO® ALLOY	Inch	HSSE	V	1/4" - 3/4"	Coolant-Through, DIN OAL	534
13113		HY-PRO® ALLOY	Metric	HSSE	V	M6 - M20	Coolant-Through, DIN OAL	535
13014		HY-PRO® HXL	Inch	HSSE	S/O	1/2" - 2-1/2"	DIN OAL	536
13024		HY-PRO® HXL-OIL	Inch	HSSE	S/O	1/2" - 2-1/2"	Coolant-Through, DIN OAL	537





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Spiral Fluted Taps

313Ti				○				○				○	○	○	○		
345Ti				○				○				○	○	○	○		
317Ti				○				○				○	○	○	○		
348Ti				○				○				○	○	○	○		
313Ni								○				○	○	○	○		
345Ni								○				○	○	○	○		
313				○	○		○	○				○	○	○	○		
345				○	○		○	○				○	○	○	○		
317				○	○		○	○				○	○	○	○		
351				○	○		○	○				○	○	○	○		
303	○	○	○			○	○	○									
343	○	○	○			○	○	○									
307	○	○	○			○	○	○									
347	○	○	○			○	○	○									
398	○	○	○			○	○	○									
220	○	○	○	○	○	○	○	○	○					○			
229	○	○	○	○	○	○	○	○	○					○			
230	○	○	○	○	○	○	○	○	○	○	○			○			
239	○	○	○	○	○	○	○	○	○	○	○			○			
13013			○	○	○				○		○			○	○		
13113			○	○	○				○		○			○	○		
13014	○	○	○	○	○	○	○	○	○					○	○		
13024	○	○	○	○	○	○	○	○	○					○	○		

○ good ○ best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Spiral Fluted Taps

13015		HY-PRO® VXL	Inch	HSSE	S/O	1/2" - 2-1/2"	DIN OAL	538
13025		HY-PRO® VXL-OIL	Inch	HSSE	S/O	1/2" - 2-1/2"	Coolant-Through, DIN OAL	539
13116		HY-PRO® HXL-W	Metric	HSSE	S/O	M16 - M42	DIN OAL	540
13126		HY-PRO® HXL-W-OIL	Metric	HSSE	S/O	M16 - M42	Coolant-Through, DIN OAL	541
13117		HY-PRO® VXL-W	Metric	HSSE	S/O	M16 - M42	DIN OAL	542
13127		HY-PRO® VXL-W-OIL	Metric	HSSE	S/O	M16 - M42	Coolant-Through, DIN OAL	543
13058		HY-PRO® SYNCHRO AL	Inch	HSSE	V	No. 6 - 1/2"	Synchronized	544
13158		HY-PRO® SYNCHRO AL	Metric	HSSE	V	M3 - M12	Synchronized	545
295		HY-PRO® AL	Inch	HSSE	Bright	No. 4 - 3/8"		546
296		HY-PRO® AL	Metric	HSSE	Bright	M3 - M10		547
13019		HY-PRO® AL-DIN	Inch	HSSE	N	No. 2 - 1/2"	DIN OAL	548
13119		HY-PRO® AL-DIN	Metric	HSSE	N	M3 - M12	DIN OAL	549
290		HY-PRO®	Inch	HSSE	TiCN, S/O, Bright	No. 2 - 1-1/2"		550-552
299		HY-PRO®	Metric	HSSE	TiCN, S/O, Bright	M3 - M30		553
297		HY-PRO® SEVEN	Inch	HSS	TiN, S/O, Bright	No. 3 - 1/2"		554
298		HY-PRO® SEVEN	Metric	HSS	TiN, S/O, Bright	M3 - M12		555
107		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	No. 3 - 3/4"		556
143		GENERAL PURPOSE	Metric	HSS	TiCN, TiN, S/O, Bright	M3 - M12		557
13020		GENERAL PURPOSE	Inch	HSSE	S/O	No. 6 - 5/8"		558
123		GENERAL PURPOSE	Metric	HSSE	Bright	M3 - M24	JIS	559
918		GENERAL PURPOSE	Inch	HSS	Bright	No. 4 - 5/8"	Long Shank	560
5BA-SO, 5BL-SO	NEW	SOMTA	Inch	HSSE-V3	TiAlN	No. 4 - 1-1/4"	Red Band , Ideal for Alloy Steel	561-562
5EA-SO, 5EL-SO	NEW	SOMTA	Metric	HSSE-V3	TiAlN	M3 - M24	Red Band , Ideal for Alloy Steel	563





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Spiral Fluted Taps

13015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>		
13025	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>		
13116	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>		
13126	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>		
13117	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>		
13127	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>		
13058										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
13158										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
295										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
296										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
13019										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
13119										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
290	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>			
299	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>			
297	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								<input type="checkbox"/>	<input type="checkbox"/>						
298	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								<input type="checkbox"/>	<input type="checkbox"/>						
107	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
143	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
13020	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
123	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
918	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
5BA-SO, 5BL-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
5EA-SO, 5EL-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		

good best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Spiral Fluted Taps

5BB-SO, 5BM-SO		NEW	SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4"	Blue Band, Ideal for Stainless Steel	564-565
5EB-SO, 5EM-SO		NEW	SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Blue Band, Ideal for Stainless Steel	566
5BC-SO, 5BN-SO		NEW	SOMTA	Inch	HSSE-V3	Bright	No. 4 - 1-1/4"	Yellow Band, Ideal for Aluminum	567-568
5EC-SO, 5EN-SO		NEW	SOMTA	Metric	HSSE-V3	Bright	M3 - M24	Yellow Band, Ideal for Aluminum	569
5BD-SO, 5BP-SO		NEW	SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4"	White Band, Ideal for Cast Iron	570-571
5ED-SO, 5EP-SO		NEW	SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	White Band, Ideal for Cast Iron	572
5BE-SO, 5BK-SO		NEW	SOMTA	Inch	HSSE-V3	TiN	No. 4 - 1-1/4"	Green Band, Ideal for Carbon Steel	573-574
5EV-SO		NEW	SOMTA	Metric	HSSE-V3	TiN	M3 - M24	Green Band, Ideal for Carbon Steel	575
5EW-SO		NEW	SOMTA	Metric	HSSE-V3	TiN	M3 - M24	Green Band, Ideal for Carbon Steel	576

Spiral Pointed Taps

16515		A Brand® A-POT	Inch	VC-10	V	No. 2 - 1"	DIN OAL	577-578
16510		A Brand® A-POT	Metric	VC-10	V	M1.4 - M24	DIN OAL	579-580
16555		A Brand® A-OIL-POT	Inch	VC-10	V	1/4" - 1"	Coolant-Through, DIN OAL	581
16550		A Brand® A-OIL-POT	Metric	VC-10	V	M6 - M24	Coolant-Through, DIN OAL	582
16535		A Brand® A-LT-POT	Inch	VC-10	V	No. 4 - 1"	Long Shank	583
16530		A Brand® A-LT-POT	Metric	VC-10	V	M3 - M24	Long Shank	584-585
13063		EXOPRO® Ti	Inch	VC-10	V	No. 2 - 1/2"	RHC/LHS	586
13163		EXOPRO® Ti	Metric	VC-10	V	M2.5 - M12	RHC/LHS	587
337Ni		EXOPRO® WHR-Ni	Inch	VC-10	HR	No. 2 - 1"	DIN OAL	588-589
338Ni		EXOPRO® WHR-Ni	Metric	VC-10	HR	M2.5 - M24	DIN OAL	590
312Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1"		591-592
344Ti		EXOTAP® VC-10 Ti	Metric	VC-10	V	M3 - M12		593
316Ti		EXOTAP® VC-10 Ti Oil	Inch	VC-10	V	1/4" - 1"	Coolant-Through, DIN OAL	594





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Spiral Fluted Taps

5BB-SO, 5BM-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>				
5EB-SO, 5EM-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>				
5BC-SO, 5BN-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
5EC-SO, 5EN-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
5BD-SO, 5BP-SO									<input checked="" type="checkbox"/>								
5ED-SO, 5EP-SO									<input checked="" type="checkbox"/>								
5BE-SO, 5BK-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					
5EV-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					
5EW-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					

Spiral Pointed Taps

16515	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16555	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16550	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16535	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
16530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
13063				<input type="checkbox"/>				<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>			
13163				<input type="checkbox"/>				<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>			
337Ni								<input type="checkbox"/>					<input checked="" type="checkbox"/>				<input type="checkbox"/>
338Ni								<input type="checkbox"/>					<input checked="" type="checkbox"/>				<input type="checkbox"/>
312Ti				<input type="checkbox"/>				<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
344Ti				<input type="checkbox"/>				<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
316Ti				<input type="checkbox"/>				<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Spiral Pointed Taps

347Ti		EXOTAP® VC-10 Ti Oil	Metric	VC-10	V	M8 - M24	Coolant-Through, DIN OAL	595
312Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V, S/O	No. 2 - 1"		596-597
344Ni		EXOTAP® VC-10 Ni	Metric	VC-10	V, S/O	M2.5 - M12		598
312		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 3/4"		599-600
344		EXOTAP® VC-10	Metric	VC-10	V, S/O	M3 - M12		601
316		EXOTAP® VC-10 Oil	Inch	VC-10	V	1/4" - 1"	Coolant-Through, DIN OAL	602
350		EXOTAP® VC-10 Oil	Metric	VC-10	V	M6 - M24	Coolant-Through, DIN OAL	603
300		EXOTAP VA-3®	Inch	HSSE	V, TiN, S/O	No. 2 - 1"		604-605
342		EXOTAP VA-3®	Metric	HSSE	V, TiN, S/O	M3 - M18		606
306		EXOTAP VA-3® Oil	Inch	HSSE	V	1/4" - 1"	Coolant-Through, DIN OAL	607
346		EXOTAP VA-3® Oil	Metric	HSSE	V	M6 - M24	Coolant-Through, DIN OAL	608
397		EXOTAP VA-3®	Inch	HSSE	S/O	No. 4 - 5/8"	Long Shank	609
320		EXOTIN	Inch	HSSE	TiN	No. 4 - 3/4"		610
250		HY-PRO® DIN	Inch	HSSE	S/O	No. 4 - 3/4"	DIN OAL	611
259		HY-PRO® DIN	Metric	HSSE	S/O	M3 - M20	DIN OAL	612
260		HY-PRO® DIN	Inch	HSSE	TiN	1/4" - 1"	Coolant-Through, DIN OAL	613
269		HY-PRO® DIN	Metric	HSSE	TiN	M6 - M20	Coolant-Through, DIN OAL	614
11015		HY-PRO® AERO-F	Inch	HSS-Co	TiN	No. 4 - 1"		615-619
11115		HY-PRO® AERO-F	Metric	HSS-Co	TiN	M3 - M14		620-621
13118		HY-PRO® RXL-W	Metric	HSSE	V	M16 - M42	DIN OAL & Extended OAL, For Through Holes, LHS	622
13059		HY-PRO® SYNCHRO AL	Inch	HSSE	V	No. 6 - 1/2"	Synchronized, RHC/LHS	623
13159		HY-PRO® SYNCHRO AL	Metric	HSSE	V	M3 - M12	Synchronized, RHC/LHS	624





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Spiral Pointed Taps

347Ti				○				○				○	○	○	○		
312Ni								○				○	○	○	○		
344Ni								○				○	○	○	○		
312				○	○		○	○				○	○	○	○		
344				○	○		○	○				○	○	○	○		
316				○	○		○	○				○	○	○	○		
350				○	○		○	○				○	○	○	○		
300	○	○	○				○	○	○								
342	○	○	○				○	○	○								
306	○	○	○				○	○	○								
346	○	○	○				○	○	○								
397	○	○	○				○	○	○								
320	○	○	○	○	○		○	○	○	○	○			○			
250	○	○	○	○	○		○	○	○	○				○			
259	○	○	○	○	○		○	○	○	○				○			
260	○	○	○	○	○		○	○	○	○	○			○			
269	○	○	○	○	○		○	○	○	○	○			○			
11015	○	○	○	○	○		○	○	○	○	○	○	○	○			
11115	○	○	○	○	○		○	○	○	○	○	○	○	○			
13118	○	○	○	○	○		○	○	○	○	○			○	○		
13059										○	○						
13159										○	○						

○ good ○ best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Spiral Pointed Taps

11016		HY-PRO® AL-DIN	Inch	HSSE	N	No. 2 - 1/2"	DIN OAL	625
11116		HY-PRO® AL-DIN	Metric	HSSE	N	M3 - M12	DIN OAL	626
11017		HY-PRO® V DIN	Inch	HSSE	V	No. 4 - 1/2"	DIN OAL	627
11117		HY-PRO® V DIN	Metric	HSSE	V	M3 - M12	DIN OAL	628
280		HY-PRO®	Inch	HSSE	TiCN, S/O, Bright	No. 2 - 1-1/2"		629-631
289		HY-PRO®	Metric	HSSE	TiCN, S/O, Bright	M3 - M30		632
287		HY-PRO® SEVEN	Inch	HSS	TiN, S/O, Bright	No. 0 - 1/2"		633
288		HY-PRO® SEVEN	Metric	HSS	TiN, S/O, Bright	M3 - M12		634
105		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	No. 0 - 3/4"		635-637
105B		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 0 - 7/16"		638
105A		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 4 - 1/2"	Assembly Type Taps	639
105+		GENERAL PURPOSE	Inch	HSS	TiN, Bright	No. 4 - No. 10	H7 Taps	640
105H		GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	No. 6 - 3/4"	+0.005" Oversize	641
142H		GENERAL PURPOSE	Metric	HSS	Bright	M4 - M12	+0.005" Oversize	642
142		GENERAL PURPOSE	Metric	HSS	TiCN, TiN, S/O, Bright	M1.6 - M20		643
122		GENERAL PURPOSE	Metric	HSSE	S/O, Bright	M3 - M24	JIS	644
917		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 4 - 5/8"	Long Shank	645
11118		GENERAL PURPOSE	Metric	HSS	S/O	M4 - M12	Extended Length	646
S111		GENERAL PURPOSE	Inch	HSS	Bright	No. 00	Miniature	647
5BF-SO, 5BS-SO		NEW SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4"	Red Band , Ideal for Alloy Steel	648-649
5EF-SO, 5ES-SO		NEW SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Red Band , Ideal for Alloy Steel	650
5BG-SO, 5BT-SO		NEW SOMTA	Inch	HSSE-V3	TiALN	No. 4 - 1-1/4"	Blue Band , Ideal for Stainless Steel	651-652





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Spiral Pointed Taps

11016										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
11116										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
11017	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
11117	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>			
280	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>			
289	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>			
287	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									<input type="checkbox"/>	<input type="checkbox"/>					
288	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									<input type="checkbox"/>	<input type="checkbox"/>					
105	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
105B	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
105A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
105+	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
105H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
142H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
142	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
122	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
917	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
11118	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
S111	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
5BF-SO, 5BS-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
5EF-SO, 5ES-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
5BG-SO, 5BT-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>				

good best





List	Item	Brand	Inch/Metric	Material	Coating	Size Range	Features	Product Page/Tech Page
------	------	-------	-------------	----------	---------	------------	----------	------------------------

Spiral Pointed Taps

5EG-SO, 5ET-SO		NEW	SOMTA	Metric	HSSE-V3	TiALN	M3 - M24	Blue Band, Ideal for Stainless Steel	653
5BH-SO, 5BU-SO		NEW	SOMTA	Inch	HSSE-V3	Bright	No. 4 - 1-1/4"	Yellow Band, Ideal for Aluminum	654-655
5EH-SO, 5EU-SO		NEW	SOMTA	Metric	HSSE-V3	Bright	M3 - M24	Yellow Band, Ideal for Aluminum	656
5BJ-SO, 5BV-SO		NEW	SOMTA	Inch	HSSE-V3	TiN	No. 4 - 1-1/4"	Green Band, Ideal for Carbon Steel	657-658
5EX-SO		NEW	SOMTA	Metric	HSSE-V3	TiN	M3 - M24	Green Band, Ideal for Carbon Steel	659

Straight Fluted Taps

16615		A Brand® A-CHT	Inch	Carbide	Bright	No. 12 - 1/2"	Coolant-Through, DIN OAL	660
16610		A Brand® A-CHT	Metric	Carbide	Bright	M5 - M12	Coolant-Through, DIN OAL	661
311		EXOCARB® VX	Inch	Carbide	V	No. 4 - 1/2"	DIN OAL	662
341		EXOCARB® VX	Metric	Carbide	V	M2.6 - M20	JIS	663
329		EXOCARB® Diamond	Inch	Carbide	DIA	No. 4 - 1/2"	UNJC, UNJF, DIN OAL	664
359		EXOCARB® Diamond	Metric	Carbide	DIA	M3 - M12	JIS	665
319		EXOCARB®	Inch	Carbide	Bright	No. 4 - 1/2"	DIN OAL	666
10059		EXOCARB®	Inch	Carbide	Bright	No. 10 - 3/8"		667
10061		EXOCARB®	Metric	Carbide	Bright	M3 - M10	DIN OAL	668
349		EXOCARB®	Metric	Carbide	Bright	M1.4 - M24	JIS	669
356		EXOCARB®	Metric	Carbide	Bright	M6 - M12	JIS, Long Shank	670
10051		EXOTAP® VCX	Inch	XPM	V	No. 6 - 1"		671
11051		EXOTAP® VCX	Metric	XPM	V	M3 - M24		672
305		EXOTAP-MOLD®	Inch	HSS-CO	Bright	No. 4 - 3/4"		673
10052		EXOTAP® DC	Inch	VC-10	V	1/4" - 1"	DIN OAL	674
11052		EXOTAP® DC	Metric	VC-10	V	M6 - M24	DIN OAL	675
10053		EXOTAP® DC-OIL	Inch	VC-10	V	1/4" - 1"	Coolant-Through, DIN OAL	676





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010	1035	1065	4140	4340			7075									

Spiral Pointed Taps

5EG-SO, 5ET-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>				
5BH-SO, 5BU-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
5EH-SO, 5EU-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
5BJ-SO, 5BV-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					
5EX-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					

Straight Fluted Taps

16615									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
16610									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
311															<input type="checkbox"/>	<input checked="" type="checkbox"/>
341															<input type="checkbox"/>	<input checked="" type="checkbox"/>
329										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
359										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
319									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
10059									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
10061									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
349									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
356									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
10051				<input type="checkbox"/>											<input checked="" type="checkbox"/>	
11051				<input type="checkbox"/>											<input checked="" type="checkbox"/>	
305				<input type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input type="checkbox"/>			
10052									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>					
11052									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>					
10053									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>					

good best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Straight Fluted Taps

11053		EXOTAP® DC-OIL	Metric	VC-10	V	M6 - M24	Coolant-Through, DIN OAL	677
11054		EXOTAP® DC	Metric	VC-10	V	M6 - M10	DIN Shank, DIN OAL	678
11055		EXOTAP® DC-OIL	Metric	VC-10	V	M6 - M12	Coolant-Through, DIN Shank, DIN OAL	679
10056		EXOTAP® DC	Inch	VC-10	V	1/4" - 3/4"		680
11056		EXOTAP® DC	Metric	VC-10	V	M6 - M14		681
10057		EXOTAP® DC-OIL	Inch	VC-10	V	1/4" - 1/2"	Coolant-Through	682
11057		EXOTAP® DC-OIL	Metric	VC-10	V	M6 - M14	Coolant-Through	683
240		HYPRO® DC	Inch	HSSE	N, Bright	No. 2 - 1/2"		684
241		HYPRO® DC	Metric	HSSE	N	M3 - M12		685
101C		GENERAL PURPOSE	Inch	HSS	N, S/O	1/4" - 3/4"		686
141C		GENERAL PURPOSE	Metric	HSS	N, S/O	M6 - M12		687
101		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	1/4" - 1-1/2"		688-689
101H		GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	1/4" - 3/4"	+0.005" Oversize	690
102		GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	No. 0 - No. 12		691-692
102H		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 6 - No. 10	+0.005" Oversize	693
103		GENERAL PURPOSE	Inch	HSS	TiN, S/O, Bright	No. 8 - 1/2"	Three Flutes	694
104		GENERAL PURPOSE	Inch	HSS	S/O, Bright	No. 2 - 5/16"	Two Flutes	695
101N		GENERAL PURPOSE	Inch	HSS	Bright	No. 12 - 1"	UNEF	696
141		GENERAL PURPOSE	Metric	HSS	S/O, Bright	M1.6 - M36		697
121		GENERAL PURPOSE	Metric	HSS	S/O, Bright	M2 - M36	JIS	698-699
916		GENERAL PURPOSE	Inch	HSS	S/O	1/4" - 3/4"	Pulley Taps, Long Shank	700
S110		GENERAL PURPOSE	Inch	HSS	Bright	No. 00 - No. 000	Miniature	701
114		GENERAL PURPOSE	Inch	HSS-CO	N	No. 2 - 1/4"	For Plastics	702





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													

Straight Fluted Taps

11053									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
11054									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
11055									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
10056									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
11056									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
10057									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
11057									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
240									<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
241									<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>						
101C									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
141C									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>						
101	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
101H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
102	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
102H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
103	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
104	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
101N	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
141	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
121	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
916	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>								
S110	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
114																	



good best





List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Straight Fluted Taps

180		GENERAL PURPOSE	Inch	HSS	Bright	1-1/8" - 2-1/4"	8 Pitch	703
101L		GENERAL PURPOSE	Inch	HSS	Bright	No. 6 - 1"	Left Hand	704

Screw Thread Insert Taps

16260		EXOPRO® XPF	Inch	HSS-CO	V	No. 2 - 1"	STI, Forming Tap, DIN OAL	705-706
16360		EXOPRO® XPF	Metric	HSS-CO	V	M2 - M24	STI, Forming Tap, DIN OAL	707
315Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Fluted	708
315Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Fluted	709
315		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 1"	STI, Spiral Fluted	710-711
345STI		EXOTAP® VC-10	Metric	VC-10	V, S/O	M2 - M24	STI, Spiral Fluted	712
302		EXOTAP VA-3®	Inch	HSSE	V, S/O	No. 2 - 1"	STI, Spiral Fluted	713-714
343STI		EXOTAP VA-3®	Metric	HSSE	V, S/O	M2 - M24	STI, Spiral Fluted	715
13039		HYPRO® AL	Inch	HSSE	Bright, V	No. 2 - 1/2"	STI, Spiral Fluted	716
S108		GENERAL PURPOSE	Inch	HSS	Bright	No. 2 - 1"	STI, Spiral Fluted	717-718
S109		GENERAL PURPOSE	Metric	HSS	Bright	M2 - M24	STI, Spiral Fluted	719
314Ti		EXOTAP® VC-10 Ti	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Pointed	720
314Ni		EXOTAP® VC-10 Ni	Inch	VC-10	V	No. 2 - 1/2"	STI, Spiral Pointed	721
314		EXOTAP® VC-10	Inch	VC-10	V, S/O	No. 2 - 1"	STI, Spiral Pointed	722-723
344STI		EXOTAP® VC-10	Metric	VC-10	V, S/O	M2 - M24	STI, Spiral Pointed	724
301		EXOTAP VA-3®	Inch	HSSE	V, S/O	No. 2 - 1"	STI, Spiral Pointed	725-726
342STI		EXOTAP VA-3®	Metric	HSSE	V, S/O	M2 - M24	STI, Spiral Pointed	727
11036		HYPRO® AL	Inch	HSSE	Bright, V	No. 2 - 1/2"	STI, Spiral Pointed	728
125		GENERAL PURPOSE	Inch	HSS	Bright	No. 2 - 1"	STI, Spiral Pointed	729-730





List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010	1018	1035	1045	1065	4140	4340										

Straight Fluted Taps

180	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
101L	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						

Screw Thread Insert Taps




16260	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
16360	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
315Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
315Ni								<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
315				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
345STI				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
302	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>								
343STI	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>								
13039										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
S108	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
S109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
314Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
314Ni								<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
314				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
344STI				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
301	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>								
342STI	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>								
13036										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
125	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						

good best



List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Screw Thread Insert Taps

127		GENERAL PURPOSE	Metric	HSS	Bright	M2 - M24	STI, Spiral Pointed	731
126		GENERAL PURPOSE	Inch	HSS	Bright	No. 2 - 1"	STI, Straight Fluted	732-733
128		GENERAL PURPOSE	Metric	HSS	Bright	M2 - M24	STI, Straight Fluted	734

Pipe Taps

16570		NEW	A Brand® A-NPT	Inch	HSSE	V	1/16" - 1"	NPT, Interrupted	735
16575		NEW	A Brand® A-LT-NPT	Inch	HSSE	V	1/16" - 1"	NPT, Long shank, Interrupted	736
16590		NEW	A Brand® A-NPS	Inch	HSSE	V	1/16" - 1"	NPS	737
16585		NEW	A Brand® A-BSPT	Inch	HSSE	V	1/8" - 1"	BSPT	738
16580		NEW	A Brand® A-BSPP	Inch	HSSE	V	1/8" - 1"	BSPP	739
308			EXOPIPE®	Inch	HSSE	TiN, S/O	1/16" - 1"	NPT	740
318			EXOPIPE®	Inch	HSSE	TiN, S/O	1/16" - 1"	NPTF	741
12053			HY-PRO® PIPE	Inch	HSSE	TiCN	1/8" - 1"	NPT, Interrupted	742
12054			HY-PRO® PIPE	Inch	HSSE	TiCN	1/8" - 1"	NPTF, Interrupted	742
328			EXOTAP-MOLD®	Inch	HSS-CO	Bright	1/8" - 3/4"	NPT, ANPT	743
108			GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	1/16" - 2"	NPT, ANPT	744
108AL			GENERAL PURPOSE	Inch	HSS	Bright	1/8" - 1"	NPT	745
118			GENERAL PURPOSE	Inch	HSS	TiCN, TiN, S/O, Bright	1/16" - 2"	NPTF	746
108G			GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	1/8" - 2"	NPT, NPTF, ANPT, Interrupted Thread	747
S125			GENERAL PURPOSE	Inch	HSS	TiCN, S/O, Bright	1/8" - 1"	NPT, NPTF, Short Projection	748
12006			GENERAL PURPOSE	Inch	HSS	Bright	1/8" - 3/4"	NPTF, Special Short Projection	749
12007			GENERAL PURPOSE	Inch	HSS	Bright	1/8" - 3/4"	NPT	750
109			GENERAL PURPOSE	Inch	HSS	S/O, Bright	1/8" - 1"	NPS, NPSF	751



List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Screw Thread Insert Taps

127	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
126	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
128	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						

Pipe Taps

16570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			
16575	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			
16590	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			
16585	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			
16580	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			
308	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									
318	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									
12053	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>		
12054	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>		
328	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input checked="" type="checkbox"/>	<input type="checkbox"/>		
108	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
108AL										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
118	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
108G	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
S125	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
12006	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
12007	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						




good best







List	Item	Brand	Inch/ Metric	Material	Coating	Size Range	Features	Product Page/ Tech Page
------	------	-------	-----------------	----------	---------	---------------	----------	----------------------------

Round Dies

134		GENERAL	Inch	HSS	Bright	No. 0 - 1-1/2"	Solid & Adjustable Round Split Dies	752-754
134P		GENERAL	Inch	HSS	Bright	1/8" - 1/2"	Adjustable Round Split Dies, Taper Pipe	755
135		GENERAL	Metric	HSS	Bright	M2 - M30	Adjustable Round Split Dies	756

Thread Gages

15001		GENERAL	Inch	HSS	Bright	No. 2 - 1-1/2"	GO/NOGO Set, Class 2B	757
15002		GENERAL	Metric	HSS	Bright	M3 - M24	GO/NOGO Set, Class 6H	758





List No.	P					M			K	N		S		H												
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels												
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC							
	1010	1035	1065	4140																						
	1018	1045		4340																						

good best






A Brand® AT-1

Advanced Performance One Pass Thread Mill

List 16625

SPEED FEED P789	CARBIDE	EgiAs	11°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

AT-1, Helical Flute

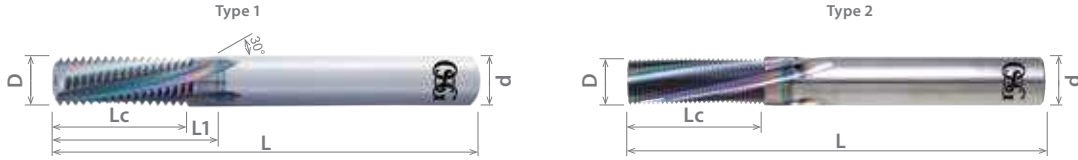

Units: Inch

Size	Threads Per Inch	Cutter Diameter D	Overall Length L	Length of Cut Lc	Neck Length L1	Shank Diameter d	No. of Flutes	Type	EDP Number
									EgiAs
1/4	20	0.179	3.000	0.600	0.700	1/4	4	1	1662500017
	28			0.607	0.680				1662500117
	32			0.563	0.625				1662500217
5/16	18	0.224		0.778	0.889				1662500317
	24			0.750	0.833				1662500417
	32			0.688	0.750				1662500517
3/8	16	0.264	3.500	0.875	1.000	5/16	4	1	1662500617
	24			0.813	0.958				1662500717
	32			0.875	0.875				1662500817
7/16	14	0.303		1.071	-				1662500917
	20			1.000	-				1662501017
	28			0.964	-				1662501117
1/2	13	0.343	1.154	1.308	1662501217				
	20		1.100	1.200	1662501317				
	28		1.107	1.178	1662501417				
9/16	12	0.382	5.000	1.333	1.500	1/2	5	1	1662501517
	18			1.278	1.389				1662501617
	24			1.250	1.333				1662501717
5/8	11	0.421		1.454	1.636				1662501817
	18			1.389	1.500				1662501917
	24			1.374	1.458				1662502017
3/4	10	0.461	1.700	1.900	1662502117				
	16		1.626	1.750	1662502217				
	20		1.600	1.700	1662502317				
7/8	9	0.539	5.500	2.000	2.222	5/8	5	1	1662502417
	14			1.928	2.071				1662502517
	20			1.850	1.950				1662502617
1	8	0.736		2.250	2.500				1662502717
	12			2.167	2.334				1662502817
	20			2.100	2.200				1662502917

Packed: 1 pc.
Available in EgiAs coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16625	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best






List 16620

AT-1, Helical Flute

SPEED FEED P789	CARBIDE	EgiAs	11°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

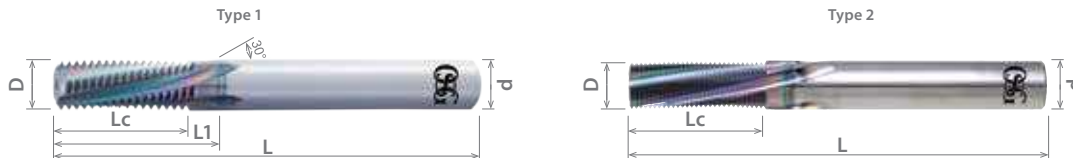

Units: mm

Size	Pitch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			EgiAs
M6	1.00	4.50	75.00	14.00	16.00	6.00	4	1	8331001
	0.75			13.50					8331000
M8	1.25	5.70	75.00	18.75	-	8.00	4	1	8331004
	1.00			18.00	-				8331003
M10	1.50	7.70	85.00	24.00	-	10.00	5	2	8331007
	1.25			22.50	-				8331006
	1.00			22.00	-				8331005
M12	1.75	9.70	100.00	28.00	-	12.00	5	2	8331011
	1.50			27.00	-				8331010
	1.25			27.50	-				8331009
	1.00			26.00	-				8331008
M14	2.00	9.70	100.00	32.00	-	16.00	5	1	8331016
	1.50	10.70	120.00	31.50	34.50				8331015
M16	2.00	11.70	120.00	-	-	16.00	5	2	8331019
	1.50	13.70	135.00	36.00	39.00				8331018
M18	2.50	11.70	120.00	42.50	-	16.00	5	2	8331020
	2.50	13.70	135.00	45.00	50.00				8331022
M20	1.50	15.70	135.00	43.50	-	20.00	6	2	8331021
	3.00	19.70	150.00	54.00	-				8331025
M24	2.00	19.70	150.00	52.00	-	20.00	6	2	8331024

Packed: 1 pc.
Available in EgiAs coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16620	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






A Brand[®] AT-1

Advanced Performance One Pass Thread Mill

List 16630

SPEED FEED P789	CARBIDE	EgiAs	11°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

AT-1, NPT

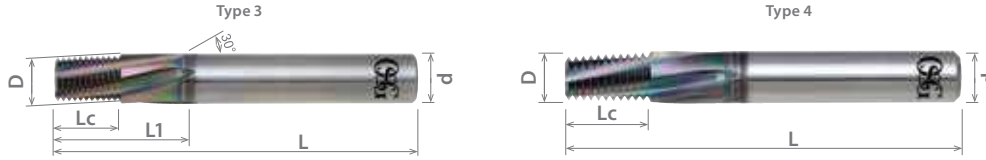

Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut		Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			EgiAs
1/16 or 1/8 1/8	27	0.223	3.000	0.407	0.480	1/4	4	3	1663000017
		0.302			-	5/16			4
1/4 or 3/8 3/8	18	0.381	3.500	0.611	0.720	1/2	5	3	1663000217
		0.461							1663000317
1/2 or 3/4 1 thru 2	14 11-1/2	0.617 0.737	4.000	0.786	-	5/8	6	4	1663000417
				0.957	-	3/4			1663000517

Packed: 1 pc.
Available in EgiAs coating only.
For internal and external threads.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16630	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 16631

SPEED FEED P789	CARBIDE	EgiAs	11°	SHANK h6
---------------------------	----------------	--------------	------------	--------------------

AT-1, NPTF

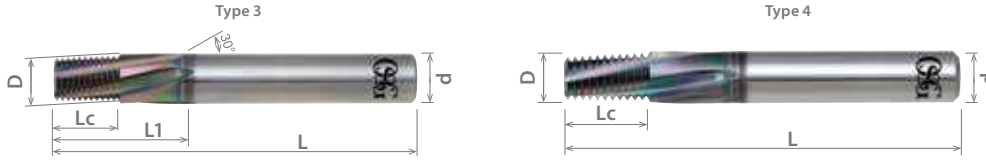

Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			EgiAs
1/16 or 1/8 1/8	27	0.223	3.000	0.407	0.480	1/4	4	3	1663100017
		0.302			-	5/16			4
1/4 or 3/8 3/8	18	0.381	3.500	0.611	0.720	1/2	5	3	1663100217
		0.459							1663100317
1/2 or 3/4 1 thru 2	14 11-1/2	0.617	4.000	0.786	-	5/8	6	4	1663100417
		0.737		0.957	-	3/4			1663100517

Packed: 1 pc.
Available in EgiAs coating only.
For internal and external threads.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16631	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






EXOCARB® Thread Mill

Ideal for Steels, Exotics and Difficult to Machine Materials

List 41200

SPEED FEED P791	CARBIDE	SS	WXS	11°	SHANK h6
---------------------------	----------------	-----------	------------	------------	--------------------

WH-VM-PNC, Miniature, Helical Flute



Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number	
		D	L	Lc	L1	d			SS	WXS®
0	80	0.045	1.625	0.013	0.162	1/8	3	5	4120000115	-
1	64	0.055		0.016	0.198				-	4120000315
1	72			0.014	0.196				-	-
2	64	0.064	1.661	0.047	0.189	1/4		6	-	4120000513
2, 3	56			0.054					-	-
3, 4	48	0.074		0.063	0.220				-	4120000613
4, 5, 6	40	0.083		0.075	0.248	-	4120000713			
5	44	0.096		0.068	0.272	-	4120000813			
6, 8	32	0.103		0.094	0.307	-	4120000913			
8	36	0.129	0.083	0.354	-	4120001013				

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Super Smooth or WXS® coatings as shown above.

For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
41200	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 41300

WH-VM-PNC, Miniature, Helical Flute

SPEED FEED P791	CARBIDE	SS	WXS	11°	SHANK h6
---------------------------	----------------	-----------	------------	------------	--------------------



Units: mm

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number	
		D	L	Lc	L1	d			SS	WXS®
M1	0.25	0.72	40.00	0.26	2.75	3.00	3	5	3900495	-
M1.2		0.91			3.25				3900496	-
M1.4	0.30	1.05		0.31	3.80				3900497	-
M1.6	0.35	1.20		0.36	4.35				3900498	-
M1.7, M1.8		1.30			4.85				3900499	-
M2	0.40	1.50		1.20	4.40				-	3900500
M2.5, M2.6	0.45	1.90	1.35	5.60	-	3900501				
M3	0.50	2.40	1.50	6.50	-	3900502				
M4	0.70	3.10	2.10	8.70	-	3900503				
M5	0.80	4.00	2.40	10.80	-	3900504				

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Super Smooth or WXS® coatings as shown above.

For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
41300	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

good best






EXOCARB® Thread Mill

Ideal for Steels, Exotics and Difficult to Machine Materials

List 41000

SPEED FEED P790	CARBIDE	EXO	11-30°	SHANK h6
---------------------------	----------------	------------	---------------	--------------------

OT-SFT-PNGT, UNC/UNF/UNEF/UNS, Regular & Long Length, Helical Flute

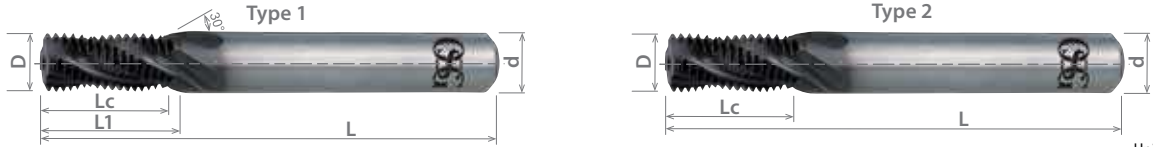

Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			
10	24 UNC	0.130	2.500	0.374	0.437	3/16	3	1	4100000411
	32 UNF								4100000511
12	24 UNC	0.160	3.000	0.331	0.374	1/4	3	1	4100000611
	28 UNF			0.402	0.449				4100000711
1/4	20 UNC	0.180	3.000	0.402	0.449	1/4	3	1	4100000811
				28 UNF	0.551				0.598
	32 UNEF	0.190		0.394	0.429				4100000911
				0.535	0.571				4100003311
5/16	18 UNC	0.245	3.000	0.374	0.406	5/16	3	2	4100002811
				24 UNF	0.500				-
	32 UNEF	0.250		0.720	-				4100003411
				0.500	-				4100001111
3/8	16 UNC	0.300	3.000	0.752	-	3/8	3	2	4100003511
				24 UNF	0.469				-
	32 UNEF	0.310		0.594	-				4100001211
				0.874	-				4100003611
7/16	14 UNC	0.350	3.000	0.583	-	7/16	3	1	4100001311
				20 UNF	0.874				-
	32 UNS	0.375		0.563	-				4100003011
				0.713	0.783				4100001411
1/2	13 UNC	0.370	3.000	1.071	1.142	1/2	3	2	4100003811
				20 UNF	0.701				0.752
	32 UNS	0.375		1.051	1.098				4100003911
				0.768	-				4100001611
9/16	12 UNC	0.430	3.000	1.079	-	9/16	3	1	4100004011
				18 UNF	0.750				-
	32 UNS	0.430		1.098	-				4100004111
				0.752	-				4100003111
5/8	11 UNC	0.430	3.000	0.917	1.000	5/8	3	2	4100001811
				18 UNF	1.335				1.417
	32 UNS	0.495		0.890	0.945				4100001911
				1.390	1.445				4100004311
3/4	10 UNC	0.620	3.000	1.000	1.091	3/4	3	1	4100002011
				16 UNF	1.453				1.547
	32 UNS	0.620		0.945	-				4100002111
				1.500	-				4100004511
7/8	9 UNC	0.745	3.000	1.201	-	7/8	3	2	4100002211
				14 UNF	1.701				-
	32 UNS	0.745		1.126	-				4100002311
				1.689	-				4100004711
1 1/8	9 UNC	0.745	3.000	4.500	-	1 1/8	3	1	4100002411
				14 UNF	4.000				-
	32 UNS	0.745		5.000	2.000				4100002511
				4.000	2.000				4100004911

Packed: 1 pc.
Available EXO® coating only.
For internal threads only.





List 41000 (Continued)

SPEED FEED P790	CARBIDE	EXO	11-30°	SHANK h6
---------------------------	----------------	------------	---------------	--------------------

OT-SFT-PNGT, UNC/UNF/UNEF/UNS, Regular & Long Length, Helical Flute


Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			
1	8 UNC	0.745	4.000	1.626	-	3/4	4	2	4100002611
			5.000	2.000	-				4100005011
	12 UNF		4.000	1.583	-				4100002711
			5.000	2.000	-				4100005111

Packed: 1 pc.
Available EXO® coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V	~35 HRC	35-45 HRC
41000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best







EXOCARB® Thread Mill

Ideal for Steels, Exotics and Difficult to Machine Materials

List 41100

OT-SFT-PNGT & WX-PNC, Regular & Long Length, Helical Flute

SPEED FEED P790	CARBIDE	EXO®	11-30°	SHANK h6
---------------------------	----------------	-------------	---------------	--------------------

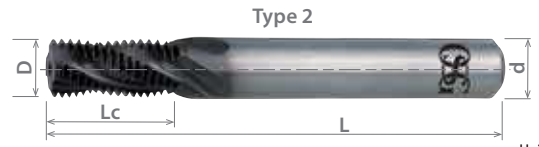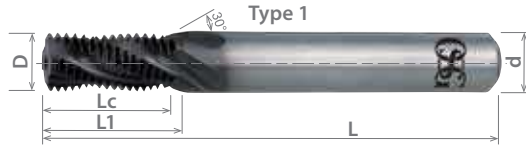

Units: mm

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number	
		D	L	Lc	L1	d				
M6	1.00	4.50	60.00	10.00	15.00	6.00	3	1	4110000111	
				13.00					3900001	
M8	1.25	6.00	65.00	13.80	-	8.00	3	2	4110000311	
	1.00			17.50	-				3900012	
				13.00	-				4110000211	
	17.00			-	3900011					
M10	1.50	7.50	70.00	16.50	26.00	10.00	3	1	4110000611	
	1.25			22.50					-	3900023
				16.25					-	4110000511
	1.00			16.00					-	4110000411
M12	1.75	9.50	85.00	21.00	28.00	10.00	3	1	3900021	
	1.25			26.30					-	4110000811
				20.00					-	3900034
	26.30			-					4110000711	
M14	2.00	10.00	95.00	24.00	-	12.00	3	2	3900032	
	1.50			30.00	-				4110001011	
				22.50	-				3900044	
	30.00			-	4110000911					
M16	2.00	12.00	105.00	34.00	-	16.00	3	2	3900054	
	1.50			25.50	-				4110001111	
				34.50	-				3900053	
M20	2.50	16.00	120.00	42.50	-	20.00	3	2	3900075	
	1.50			31.50	-				4110001211	
				42.00	-				3900073	
M24	3.00	20.00	120.00	51.00	-	20.00	5	2	3900086	
M27	2.00			50.00	-				3900084	

Packed: 1 pc.
Available EXO® coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P				Die Steels	M			K	N		S	H						
	Carbon Steels			Alloy Steels		Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH			6061				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
41100	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best







List 41050

WXO-ST-PNC, UNC/UNF, Coolant-Through, Helical Flute

SPEED FEED P790		CARBIDE	EXO®	11°	SHANK h6
---------------------------	--	----------------	-------------	------------	--------------------

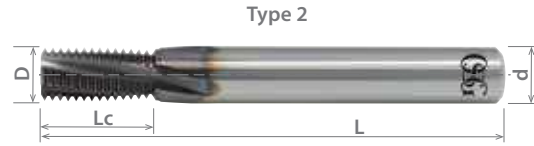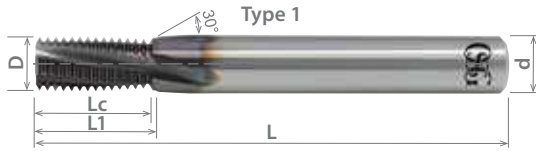

Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			
1/4	20 UNC	0.180	3.000	0.401	0.448	1/4	4	1	4105000111
	28 UNF			0.393	0.429				4105000211
5/16	18 UNC	0.245		0.500	-	5/16		2	4105000311
	24 UNF			-	-				4105000411
3/8	16 UNC	0.300		0.562	-	3/8	1	4105000511	
	24 UNF			0.582	-			4105000611	
7/16	14 UNC	0.350		0.712	0.783	7/16	1	4105000711	
	20 UNF			0.700	0.751			4105000811	
1/2	13 UNC	0.370		0.767	-	1/2	2	4105000911	
	20 UNF			0.750	-			4105001011	
9/16	12 UNC	0.430		0.917	1.000	9/16	1	4105001111	
	18 UNF			0.889	0.944			4105001211	
5/8	11 UNC	0.430	1.000	1.090	5/8	5	4105001311		
	18 UNF		0.944	-			4105001411		
3/4	10 UNC	0.620	1.200	-	3/4	2	4105001511		
	16 UNF		1.125	-			4105001611		
7/8	9 UNC	0.745	1.330	-	7/8	6	4105001711		
	14 UNF		1.358	-			4105001811		
1	8 UNC	0.745	1.625	-	1	6	4105001911		
	12 UNF		1.582	-			4105002011		

Packed: 1 pc.
Available EXO® coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
41050	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best






EXOCARB® Thread Mill

Ideal for Steels, Exotics and Difficult to Machine Materials

List 41150

WXO-ST-PNC, Coolant-through, Helical Flute

SPEED FEED P790		CARBIDE	EXO	11°	SHANK h6
---------------------------	--	----------------	------------	------------	--------------------

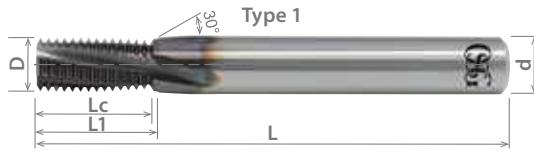

Units: mm

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			
M6	1.00	4.50	60.00	13.00	15.00	6.00	4	1	8304701
M8		6.00	65.00	17.00	-			2	8304711
	1.25			17.50	-				8304712
M10	1.50	7.50	70.00	22.50	26.00	8.00		1	8304723
	1.00			21.00				8304721	
M12	1.75	9.50	85.00	26.30	28.00	10.00	5	1	8304734
	1.25								
M14	2.00	10.00	30.00	-	-	12.00		2	8304744
	1.50			-	-				
M16	2.00	12.00	95.00	34.00	-	16.00			8304754
	1.50			34.50	-			8304753	
M20	2.50	16.00	105.00	42.50	-	20.00	6	2	8304775
	1.50								42.00
M24	3.00	20.00	120.00	51.00	-				8304786
	2.00			50.00	-				8304784

Packed: 1 pc.
Available EXO® coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
41150	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 42000

OT-SFT-PNGT, NPT, Helical Flute

SPEED FEED P790	CARBIDE	EXO [®]	30°	SHANK h6
--------------------	---------	------------------	-----	-------------

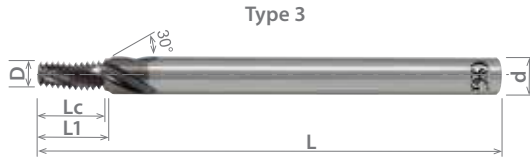

Type 3



Type 4

Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number
		D	L	Lc	L1	d			
1/16	27	0.186	3.000	0.409	0.440	1/4	3	3	4200000111
1/8		0.286			-	5/16			4200000211
1/4 or 3/8	18	0.334	4.000	0.610	-	3/8	4	4	4200000311
1/2 or 3/4	14	0.575		0.787	-	5/8		4200000411	
1 thru 2	11-1/2	0.785		0.957	1.040	1		3	4200000511
2-1/2	8	0.917		1.358	-	4		4200000611	

Packed: 1 pc.
Available EXO[®] coating only.
For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
42000	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






EXOCARB® Thread Mill

Ideal for Steels, Exotics and Difficult to Machine Materials

List 42001

OT-SFT-PNGT, NPTF, Helical Flute

SPEED FEED P790	CARBIDE	EXO®	30°	SHANK h6
---------------------------	----------------	-------------	------------	--------------------

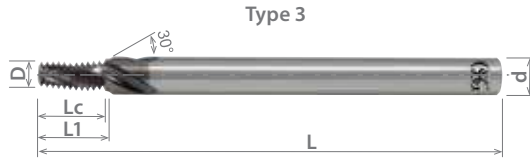

Type 3



Type 4

Units: Inch

Size	Threads Per Inch	Cutter Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	No. of Flutes	Type	EDP Number	
		D	L	Lc	L1	d				
1/16	27	0.186	3.000	0.409	0.440	1/4	3	3	4200100111	
1/8		0.286			-	5/16			4200100211	
1/4 or 3/8	18	0.335	4.000	0.610	-	3/8	4	4	4200100311	
1/2	14	0.575			0.787	-			5/8	4200100411
3/4					-	-			4200100711	
1 or 1-1/4	11-1/2	0.785			0.957	1.040			1	3
1-1/2 or 2			4200100811							
2-1/2			8	0.917	-	4	4200100611			

Packed: 1 pc.
 Available EXO® coating only.
 For internal threads only.



For more information on thread mill applications, including ThreadPro software, visit: www.osgtool.com/ThreadPro.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
42001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best



List 15015

DCT75

NEW

HSS

TiN



Size (Inch)	Thread Length (mm)	Shank Diameter (mm)	EDP
No.5 - 44 UNF	5.0	6.0	1501500105
No.6 - 32 UNC	5.0		1501500205
No.10 - 24 UNC	5.9		1501500305
No.10 - 32 UNF	5.0		1501500405
1/4 - 20 UNC	7.0		9342028
1/4 - 28 UNF	5.0	9342029	
1/4 - 32 UNEF	5.0	10.0	1501500505
5/16 - 18 UNC	7.8		9342030
5/16 - 24UNF	7.0		9342031
3/8 - 16 UNC	8.8		9342033
3/8 - 24 UNF	7.0		9342034
7/16 - 14 UNC	10.0	12.0	9342035
7/16 - 20 UNF	7.0		9342036
1/2 - 13 UNC	10.8	13.0	9342037
1/2 - 20 UNF	7.0		9342038
1/2 - 32 UN	5.0		1501500605
9/16 - 18 UNF	7.8	15.0	1501500705
5/8 - 11 UNC	12.7	16.0	1501500805
5/8 - 18 UNF	7.8		1501500905
3/4 - 10 UNC	14.0	20.0	1501501005
3/4 - 16 UNF	8.8		1501501105
7/8 - 9 UNC	15.6	23.0	1501501205
7/8 - 14 UNF	10.0		1501501305
1 - 8 UNC	17.5		1501501405
1 - 12 UNF	11.7	25.5	1501501505

Since it is made to measure class 2B, it can also be used as is for 3B. If the internal thread is a blind hole, please confirm that the internal thread length is longer than the screw length of DCT75. The selection of the Height Master is required if the nominal diameter of the internal thread has a chamfer or counterbore over 1.5mm. Please consult with your local sales representative.



Sleeve and Height Master Selection Chart

Shank Diameter	Inch Sizes	Sleeve Hole Dia.	Height Master Dia.
6mm	No. 5 - No.10	6.5mm	6mm
10mm - 16mm	1/4" - 5/8"	17.5mm (included with the Digimatic Indicator)	16mm
20mm - 25.5mm	3/4" - 1	26.5mm	



List 15010

NEW**HSS****TIN**

DCT75



Units: mm

Size	Thread Length	Shank Diameter	EDP
M3 x 0.5	5.0	6	1501000105
M4 x 0.7	5.0	6	1501000205
M6 x 1	6.2	10	9342019
M8 x 1.25	7.3	10	9342020
M8 x 1	6.2	10	9342021
M10 x 1.5	8.3	10	9342022
M12 x 1.75	9.7	12	9342025
M16 x 1.5	8.7	16	9342027

Packed: 1 pcs.

Since it is made to measure class 6H, it can also be used as is for 4H, 5H, JIS I and JIS II. If the internal thread is a blind hole, please confirm that the internal thread length is longer than the screw length of DCT75. The selection of the Height Master is required if the nominal diameter of the internal thread has a chamfer or counterbore over 1.5mm. Please consult with your local sales representative.



Sleeve and Height Master Selection Chart

Shank Diameter	Metric Sizes	Sleeve Hole Dia.	Height Master Dia.
6mm	M3 - M4	6.5mm	6mm
10mm - 16mm	M6 - M16	17.5mm (included with the Digimatic Indicator)	16mm





List 15020

NEW

DCT75 Accessories

Units: mm

	Item Name	Size	EDP No.
	Digimatic Indicator with 17.5mm Sleeve	-	9342054
	Sleeve for Digimatic Indicator	6.5mm Hole Dia.	1502000100
		26.5mm Hole Dia.	1502000200
	Height Master	D 6mm x L 29mm	1502000300
		D 6mm x L 29.25mm	1502000400
		D 6mm x L 29.5mm	1502000500
		D 6mm x L 29.75mm	1502000600
		D 6mm x L 30mm	1502000700
		D 16mm x L 29mm	9342047
		D 16mm x L 29.25mm	9342048
	D 16mm x L 29.5mm	9342049	
	D 16mm x L 29.75mm	9342050	
	D 16mm x L 30mm	9342051	

Please be sure to purchase the DCT75 and the Height Master as a set.

EXT

1. Hold the sleeve against the entrance of the internal thread. Please confirm the position of the sleeve and ensure that it is not in the way.
2. After confirming the shape of the internal thread, the sleeve's outer diameter and the hole diameter, please confirm the shape of the internal thread's entrance where the sleeve is fitted against.
3. The digital unit uses the Digimatic Indicator manufactured by Mitutoyo, paired with programs exclusively made for the DCT75.



List 16050



OIL-S-XPF, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit									
				V	Lc	Ln	d	k	lk	Min	Max	2B	3B								
				L	Lc	Ln	d	k	lk			2B	3B								
1/4 -20 UNC	1.5P	H6	1605014216	3.150	0.500	1.181	0.255	0.191	0.311	0.2245	0.2295	H6	H4								
	2.5P	H4	1605014204																		
	4.5P	H6	1605014246																		
1/4 - 28 UNF	1.5P	H6	1605014816							3.150	0.500			1.181	0.255	0.191	0.311	0.2318	0.2354	H6	H4
	2.5P	H4	1605014284																		
	4.5P	H6	1605014846																		
5/16 - 18 UNC	1.5P	H7	1605051617	3.543	0.555	1.378	0.318	0.238	0.374			0.2842	0.2898					H7	H4		
	2.5P	H5	1605056185																		
	4.5P	H7	1605056187																		
5/16 - 24 UNF	1.5P	H7	1605051647							3.543	0.555	1.378	0.318	0.238	0.374	0.2912	0.0296			H7	H4
	2.5P	H5	1605056217																		
	4.5P	H7	1605056245																		
3/8-16 UNC	1.5P	H5	1605056247	3.937	0.626	1.575	0.381	0.286	0.437							0.3431	0.3495	H7	H4		
	2.5P	H5	1605038117																		
	4.5P	H7	1605038165																		
3/8 - 24 UNF	1.5P	H5	1605038167							3.937	0.626	1.575	0.381	0.286	0.437	0.3537	0.3580			H7	H4
	2.5P	H5	1605038147																		
	4.5P	H7	1605038217																		
7/16 - 14 UNC	1.5P	H8	1605038245	3.937	0.713	1.713	0.323	0.242	0.406							0.4011	0.4084	H5	H4		
	2.5P	H5	1605076118																		
	4.5P	H8	1605076145																		
7/16 - 20 UNF	1.5P	H5	1605076148							3.937	0.713	1.713	0.323	0.242	0.406	0.4120	0.4171			H8	H4
	2.5P	H5	1605076448																		
	4.5P	H8	1605076218																		
1/2 - 13 UNC	1.5P	H5	1605076205	4.331	0.768	1.933	0.367	0.275	0.437							0.4608	0.4686	H8	H4		
	2.5P	H5	1605076208																		
	4.5P	H8	1605076248																		
1/2-20 UNF	1.5P	H5	1605012118							3.937	0.768	1.933	0.367	0.275	0.437	0.4745	0.4796			H8	H4
	2.5P	H5	1605012135																		
	4.5P	H8	1605012138																		
9/16 - 12 UNC	1.5P	H8	1605012148	4.331	0.835	1.972	0.429	0.322	0.500							0.5200	0.5285	H10	H7		
	2.5P	H7	1605012218																		
	4.5P	H10	1605091110																		
9/16 - 18 UNF	1.5P	H10	1605096127							3.937	0.835	1.972	0.429	0.322	0.500	0.5342	0.5398			H10	H7
	2.5P	H7	1605096120																		
	4.5P	H10	1605091140																		
5/8 - 11 UNC	1.5P	H7	1605091810	4.331	0.909	2.126	0.480	0.360	0.563							0.5787	0.5879	H10	H7		
	2.5P	H7	1605096187																		
	4.5P	H10	1605096180																		
5/8 - 11 UNC	1.5P	H10	1605091840							4.331	0.909	2.126	0.480	0.360	0.563	0.5787	0.5879			H10	H7
	2.5P	H7	1605058150																		
	4.5P	H10	1605058117																		
5/8 - 11 UNC	1.5P	H10	1605058110	4.331	0.909	2.126	0.480	0.360	0.563							0.5787	0.5879	H10	H7		
	2.5P	H7	1605058110																		
	4.5P	H10	1605058140																		

Packed: 1 pc.
Available V coating only.





List 16050 (Continued)



OIL-S-XPF, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit							
			V	L	Lc	Ln	d	k	lk	Min	Max	2B	3B						
5/8 - 18 UNF	1.5P	H10	1605058810	3.937	0.909	2.126	0.480	0.360	0.563	0.5967	0.6023								
	2.5P	H7	1605058187																
	4.5P	H10	1605058180																
3/4 - 10 UNC	1.5P	H10	1605058840	4.921	1.000	2.433	0.590	0.442	0.689	0.6990	0.7092	H10	H7						
	2.5P	H7	1605034110																
	4.5P	H10	1605034107																
3/4 - 16 UNF	1.5P	H10	1605034100	4.331						0.7181	0.7245								
	2.5P	H7	1605034140																
	4.5P	H10	1605034610																
7/8 - 9 UNC	1.5P	H11	1605034167	5.512						0.8183	0.8297								
	2.5P	H8	1605078911																
	4.5P	H11	1605078908																
7/8 - 14 UNF	1.5P	H11	1605078901	4.920	1.110	2.654	0.697	0.523	0.752	0.8386	0.8459	H11	H8						
	2.5P	H8	1605078941																
	4.5P	H11	1605078111																
1 - 8 UNC	1.5P	H8	1605078148	6.300	1.252	3.012	0.800	0.600	0.811	0.9363	0.9490								
	2.5P	H11	1605001088																
	4.5P	H11	1605001081																
1 - 12 UNF	1.5P	H8	1605018411	5.510			1.194			0.9575	0.9660								
	2.5P	H8	1605011211																
	4.5P	H11	1605001128																
1, 1/8 - 7 UNC	2.5P	H13	160501121	7.087	0.858	2.835	0.896	0.672	0.874	1.0521	1.0667	H13	-						
1, 1/8 - 8 UNS		H11	1605011878							1.0613	1.0740	H11	-						
1, 1/8 - 12 UNF		H11	1605011888							5.906	0.835	2.362	1.0825	1.0910	H11	-			
1, 1/4 - 7 UNC		H13	1605011826							7.087	0.858	2.835	1.021	0.766	1.000	1.1771	1.1917	H13	-
1, 1/4 - 8 UNS		H11	1605012578							5.906	0.835	2.362	0.961	1.1863	1.1990	H11	-		
1, 1/4 - 12 UNF		H11	1605012588							7.874	1.000	3.150	1.108	0.831	1.063	1.2075	1.2160	H11	-
1, 3/8 - 6 UNC		H14	1605012526							6.693	0.835	2.677	1.233	0.925	1.126	1.2900	1.3070	H14	-
1, 3/8 - 8 UNS		H13	1605013768							7.874	1.000	3.150	1.305	0.979	1.4150	1.4320	H13	-	
1, 3/8 - 12 UNF		H11	1605013788							6.693	0.835	2.677	1.4363	1.4490	H13	-			
1, 1/2 - 6 UNC		H15	1605013126							7.874	1.000	3.150	1.4575	1.4660	H11	-			
1, 1/2 - 8 UNS		H13	1605011268							7.874	1.000	3.150	1.5613	1.5740	H13	-			
1, 1/2 - 12 UNF		H11	1605011288							6.693	0.835	2.677	1.6480	1.6684	H16	-			
1, 5/8 - 8 UNS		H13	1605012126							7.874	1.000	3.150	1.6863	1.6990	H13	-			
1, 3/4 - 5 UNC		H16	1605016288							8.661	1.201	3.465	1.430	1.072	1.252	1.6480	1.6684	H16	-
1, 3/4 - 8 UNS		H13	1605017558							8.661	1.201	3.150	1.430	1.072	1.252	1.6863	1.6990	H13	-

Packed: 1 pc.
Available V coating only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	75-130	75-130	65-100	65-100	20-65	20-50	20-45	15-40		80-130	75-110	8-10	8-10	50-100	8-20			

*For Stainless Steel, please use non-water-soluble coolant.

good best





List 16150



OIL-S-XPF, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				L						Lc	Ln	d	k
M6 x 1.0	1.5P	D8	1615060118	80.00	10.00	30.00	6.47	4.85	7.30	5.49	5.59	D8	D5
	2.5P	D5	1615006015										
	4.5P	D8	1615006018										
M6 x 0.75	1.5P	D7	1615067517	80.00	10.00	30.00	6.47	4.85	7.30	5.62	5.69	D7	D4
	2.5P	D4	1615006754										
	4.5P	D7	1615006757										
M7 x 1.0	1.5P	D8	1615070118	90.00	12.00	35.00	8.07	6.05	9.50	6.49	6.59	D8	D5
	2.5P	D5	1615007015										
	4.5P	D8	1615007018										
M8 x 1.25	1.5P	D9	1615081219	90.00	12.00	35.00	8.07	6.05	9.50	7.36	7.49	D9	D5
	2.5P	D5	1615008255										
	4.5P	D9	1615008259										
M8 x 1.0	1.5P	D8	1615080118	80.00	12.00	35.00	8.07	6.05	9.50	7.49	7.59	D8	D4
	2.5P	D5	1615008015										
	4.5P	D8	1615080148										
M8 x 0.75	1.5P	D7	1615087517	80.00	12.00	35.00	8.07	6.05	9.50	7.62	7.69	D7	D4
	2.5P	D4	1615008754										
	4.5P	D7	1615008757										
M10 X 1.5	1.5P	D10	1615010110	100.00	15.00	39.00	9.67	7.26	11.10	9.24	9.39	D10	D6
	2.5P	D6	1615010156										
	4.5P	D10	1615010150										
M10 x 1.25	1.5P	D9	1615010119	90.00	15.00	35.00	9.67	7.26	11.10	9.36	9.49	D9	D5
	2.5P	D5	1615010255										
	4.5P	D9	1615010259										
M10 x 1.0	1.5P	D8	1615010118	90.00	15.00	35.00	9.67	7.26	11.10	9.49	9.59	D8	D5
	2.5P	D5	1615010015										
	4.5P	D8	1615010148										
M12 x 1.75	1.5P	D11	1615012711	100.00	17.00	49.10	9.32	6.98	11.10	11.11	11.23	D11	D6
	2.5P	D6	1615012756										
	4.5P	D11	1615010751										
M12 x 1.5	1.5P	D11	1615012541	100.00	17.00	49.10	9.32	6.98	11.10	11.24	11.39	D11	D6
	2.5P	D6	1615012156										
	4.5P	D11	1615012151										
M12 x 1.25	1.5P	D10	1615012141	100.00	17.00	49.10	9.32	6.98	11.10	11.36	11.49	D10	D6
	2.5P	D6	1615012210										
	4.5P	D10	1615012250										
M12 x 1.0	1.5P	D10	1615012240	100.00	17.00	49.10	9.32	6.98	11.10	11.49	11.59	D10	D6
	2.5P	D6	1615012110										
	4.5P	D10	1615012100										

Packed: 1 pc.
Available V coating only.





List 16150 (Continued)



OIL-S-XPF, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)

Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit																
			V	L	Lc	Ln	d	k	lk	Min	Max	2B	3B															
M14 x 2.0	1.5P	D12	1615014212	110.00	20.00	50.10	10.89	8.18	12.70	12.98	13.18	D12	D7															
	2.5P	D7	1615014027																									
	4.5P	D12	1615014022																									
M14 x 1.5	1.5P	D11	1615014242	100.00						20.00	50.10	10.89	8.18	12.70	13.24	13.39	D11	D6										
	2.5P	D6	1615014511																									
	4.5P	D11	1615014156																									
M16 x 2.0	1.5P	D12	1615014151	100.00											20.00	54.00	12.19	9.14	14.30	14.98	15.18	D12	D7					
	2.5P	D7	1615016212																									
	4.5P	D12	1615016207																									
M16 x 1.5	1.5P	D11	1615016202	100.00																20.00	54.00	12.19	9.14	14.30	15.24	15.39	D11	D6
	2.5P	D6	1615016242																									
	4.5P	D11	1615016111																									
M18 x 2.5	1.5P	D12	1615016152	125.00	25.00	55.00	13.76	10.31	15.90																16.73	16.98	D12	D7
	2.5P	D7	1615018111																									
	4.5P	D12	1615018257																									
M18 x 1.5	1.5P	D11	1615018252	110.00						25.00	55.00	13.76	10.31	15.90											17.24	17.39	D11	D6
	2.5P	D6	1615018242																									
	4.5P	D11	1615018156																									
M20 x 2.5	1.5P	D12	1615018151	140.00											25.00	61.80	16.56	12.42	17.50						18.73	18.98	D12	D7
	2.5P	D7	1615020212																									
	4.5P	D12	1615020257																									
M20 x 1.5	1.5P	D11	1615020252	125.00																25.00	61.80	16.56	12.42	17.50	19.24	19.39	D11	D6
	2.5P	D6	1615020242																									
	4.5P	D11	1615020111																									
M22 x 2.5	1.5P	D12	1615020156	140.00	25.00	67.40	17.70	13.28	19.10																20.73	20.98	D12	D7
	2.5P	D7	1615020151																									
	4.5P	D12	1615020141																									
M22 x 2.0	1.5P	D11	1615020141	125.00						25.00	67.40	17.70	13.28	19.10											20.98	21.18	D11	D6
	2.5P	D6	1615022512																									
	4.5P	D11	1615022257																									
M22 x 1.5	1.5P	D12	1615022252	140.00											25.00	67.40	17.70	13.28	19.10						21.24	21.39	D12	D7
	2.5P	D7	1615022542																									
	4.5P	D12	1615022212																									
M22 x 1.5	1.5P	D11	1615022207	125.00																25.00	67.40	17.70	13.28	19.10	21.24	21.39	D11	D6
	2.5P	D6	1615022202																									
	4.5P	D11	1615022242																									

Packed: 1 pc.
Available V coating only.

continued on next page



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	75-130	75-130	65-100	65-100	20-65	20-50	20-45	15-40		80-130	75-110	8-10	8-10	50-100	8-20			

*For Stainless Steel, please use non-water-soluble coolant.

good best





List 16150 (Continued)



OIL-S-XPF, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
			V	L	Lc	Ln	d	k	lk	Min	Max	2B	3B
M24 x 3.0	1.5P	D15	1615024315	160.00	30.00	68.40	19.30	14.48	19.10	22.47	22.78	D15	D9
	2.5P	D9	1615024309										
		D15	1615024305										
	4.5P	D9	1615024349										
		D15	1615024345										
M24 x 2.0	1.5P	D13	1615024223	140.00	25.00	68.40	19.30	14.48	19.10	22.98	23.18	D13	D7
	2.5P	D7	1615024207										
		D13	1615024203										
	4.5P	D13	1615024243										
M24 x 1.5	1.5P	D11	1615024111	140.00	25.00	68.40	19.30	14.48	19.10	22.98	23.18	D11	D6
	2.5P	D6	1615024156										
		D11	1615024151										
	4.5P	D11	1615024141										
M27 x 3.0	2.5P	D15	1615027309	160.00	18.00	64.00	22.75	17.07	22.20	25.47	25.78	D15	-
M30 x 3.5			1615030350	180.00	21.00	72.00	25.93	19.46	25.40	28.22	28.57	D16	-
M33 x 3.5		1615033350	180.00	21.00	72.00	28.14	21.11	27.00	31.22	31.57	D16	-	
M36 x 4.0		1615036411	200.00	24.00	80.00	31.31	23.50	28.60	33.96	34.37	D17	-	
M42 x 4.5		1615042451	200.00	27.00	88.00	36.32	27.23	31.80	39.71	40.16	D17	-	
M45 x 4.5		1615045451	220.00	27.00	88.00	38.58	28.93	31.80	42.71	43.16	D17	-	

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			Cast Iron	N		Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	75-130	75-130	65-100	65-100	20-65	20-50	20-45	15-40		80-130	75-110	8-10	8-10	50-100	8-20		

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16250

HSS-Co **V**

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				L	Lc	Ln				Min	Max	2B	3B
0 - 80 UNF	1.5P	H3	1625008013	1.575	0.324	0.363	0.141	0.110	0.188	0.0536	0.0549	H3	H2
	2.5P	H2	162500802		0.321	0.360							
			162500803										
1 - 64 UNC	4.5P	H3	1625008043	1.772	0.315	0.354							
	1.5P		1625016413		0.329	0.369							
	2.5P	H2	1625001642		0.326	0.365							
1 - 72 UNF	4.5P	H3	1625016443	1.969	0.315	0.354							
	1.5P		1625017213		0.327	0.366							
	2.5P	H2	1625001722		0.324	0.363							
2 - 56 UNC	4.5P	H3	1625017243	2.205	0.323	0.363							
	1.5P		1625025613		0.315	0.354							
	2.5P	H2	1625002562		0.389	0.428							
2 - 64 UNF	4.5P	H3	1625002563	2.205	0.385	0.424							
	1.5P		1625025643		0.384	0.424							
	4.5P	H3	1625026413		0.374	0.413							
3 - 48 UNC	1.5P		162502642	2.205	0.385	0.424							
	2.5P	H2	1625002643		0.381	0.421							
	4.5P	H3	1625026443		0.374	0.413							
3 - 56 UNF	1.5P		1625034813	2.205	0.390	0.429							
	2.5P	H2	1625003482		0.385	0.424							
	4.5P	H3	1625003483		0.370	0.409							
4 - 40 UNC	1.5P		1625034843	2.205	0.385	0.425							
	2.5P	H2	1625003562		0.381	0.421							
	4.5P	H3	1625003563		0.370	0.409							
4 - 48 UNF	1.5P		1625035613	2.205	0.385	0.425							
	2.5P	H2	1625003562		0.381	0.421							
	4.5P	H3	1625003563		0.370	0.409							
5 - 40 UNC	1.5P	H5	1625044015	2.205	0.317	0.727							
	2.5P	H3	1625004403		0.312	0.721							
	4.5P	H5	1625004405		0.311	0.721							
5 - 40 UNC	1.5P		1625044045	2.205	0.295	0.705							
	2.5P	H3	1625004483		0.315	0.724							
	4.5P	H5	1625004485		0.311	0.720							
5 - 40 UNC	1.5P		1625044815	2.205	0.311	0.720							
	2.5P	H3	1625004483		0.310	0.720							
	4.5P	H5	1625044845		0.299	0.709							
5 - 40 UNC	1.5P		1625054015	2.205	0.318	0.728							
	2.5P	H3	1625005403		0.313	0.722							
	4.5P	H5	1625005405		0.312	0.722							

Packed: 1 pc.
Available V coating only.

[continued on next page](#) **EP**

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16250	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16250 (Continued)

HSS-Co

V

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				L						Lc	Ln	d	k
5 - 40 UNC	4.5P	H5	1625054045	2.205	0.299	0.709	0.141	0.110	0.188	0.1123	0.1148	H5	H3
	1.5P		1625054415		0.315	0.724							
5 - 44 UNF	2.5P	H3	1625005443		0.310	0.719							
	4.5P	H5	1625005445		0.309	0.709							
6 - 32 UNC	1.5P	H3	1625063215		0.399	0.812							
	2.5P		1625006323		0.392	0.805							
	4.5P	H5	1625006325		0.391	0.783							
	1.5P	1625064015	0.370		0.783								
6 - 40 UNF	2.5P	H3	1625006403		0.394	0.807							
	4.5P	H5	1625006405		0.388	0.802							
	1.5P	1625064045	0.374		0.787								
8 - 32 UNC	2.5P	H3	1625083215		0.400	0.853				0.168	0.131		
	4.5P	H5	1625008323	0.393	0.846								
	1.5P	1625083245	0.374	0.827									
8 - 36 UNF	2.5P	H3	1625083615	0.395	0.848								
	4.5P	H5	1625008363	0.389	0.842								
	1.5P	1625083645	0.374	0.827									
10 - 24 UNC	1.5P	H6	1625010216	0.530	0.975	0.194	0.152	0.250	0.1688	0.1729	H7	H5	
	2.5P	H4	1625010244	0.521	0.966								
	4.5P	H6	1625010246	0.520	0.965								
	1.5P	1625010316	0.492	0.937									
10 - 32 UNF	2.5P	H4	1625010324	0.523	0.968								
	4.5P	H6	1625010326	0.516	0.961								
	1.5P	1625010346	0.500	0.945									
12 - 24 UNC	1.5P	H7	1625012417	0.532	1.134	0.220	0.165	0.281	0.1948	0.1989	H7	H5	
	2.5P	H5	1625012245	0.522	1.124								
	4.5P	H7	1625012247	0.496	1.098								
	1.5P	1625012817	0.523	1.130									
12 - 28 UNF	2.5P	H5	1625012285	0.519	1.121								
	4.5P	H7	1625012287	0.500	1.102								
	1.5P	1625012847	0.538	1.219									
	2.5P	H4	1625014216	0.526	1.207								
1/4 - 20 UNC	4.5P	H6	1625014204	0.496	1.374	0.255	0.191	0.313	0.2245	0.2295	H6	H4	
	1.5P	1625014206	0.517	1.198									
	2.5P	H4	1625014246	0.509	1.190								
1/4 - 28 UNF	4.5P	H6	1625014816	0.508	1.189								
	1.5P	H7	1625014284	0.496	1.177								
	2.5P	H4	1625014284	0.509	1.190								
5/16 - 18 UNC	1.5P	H7	1625051617	3.543	0.555	1.378	0.318	0.238	0.375	0.2842	0.2898	H7	H5
	2.5P	H5	1625056185										
	4.5P	H7	1625056187										
	1.5P	1625056187											

Packed: 1 pc.
Available V coating only.





List 16250 (Continued)

HSS-Co **V**

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				V						L	Lc	Ln	d
5/16 - 24 UNF	1.5P	H7	1625056217	3.543	0.555	1.378	0.318	0.238	0.375	0.2912	0.2955		
	2.5P	H5	1625056245										
	4.5P	H7	1625056247										
3/8 - 16 UNC	1.5P	H7	1625056249	3.937	0.625	1.575	0.381	0.286	0.438	0.3431	0.3495	H7	
	2.5P	H5	1625038117										
	4.5P	H7	1625038165										
3/8 - 24 UNF	1.5P	H7	1625038167	3.937	0.712	1.693	0.323	0.242	0.406	0.3537	0.3580		
	2.5P	H5	1625038147										
	4.5P	H7	1625038217										
7/16 - 14 UNC	1.5P	H8	1625038245	4.331	0.767	1.929	0.367	0.275	0.438	0.4011	0.4084	H5	
	2.5P	H5	1625038247										
	4.5P	H7	1625038249										
7/16 - 20 UNF	1.5P	H8	1625076118	3.937	0.767	1.929	0.367	0.275	0.438	0.4120	0.4171	H8	
	2.5P	H5	1625076145										
	4.5P	H7	1625076148										
1/2 - 13 UNC	1.5P	H8	1625076149	4.331	0.767	1.929	0.367	0.275	0.438	0.4608	0.4686		
	2.5P	H5	1625076218										
	4.5P	H7	1625076205										
1/2 - 20 UNF	1.5P	H8	1625076208	3.937	0.767	1.929	0.367	0.275	0.438	0.4745	0.4796		
	2.5P	H5	1625012118										
	4.5P	H7	1625012135										
9/16 - 12 UNC	1.5P	H5	1625012138	4.331	0.834	1.969	0.429	0.322	0.500	0.5200	0.5280		
	2.5P	H7	1625012148										
	4.5P	H8	1625012188										
9/16 - 18 UNF	1.5P	H5	1625012205	3.937	0.834	1.969	0.429	0.322	0.500	0.5342	0.5398	H10	H7
	2.5P	H7	1625012208										
	4.5P	H8	1625012248										
5/8 - 11 UNC	1.5P	H7	1625091117	4.331	0.909	2.126	0.480	0.360	0.563	0.5787	0.5879		
	2.5P	H5	1625091127										
	4.5P	H7	162509120										
5/8 - 18 UNF	1.5P	H10	1625091147	3.937	0.909	2.126	0.480	0.360	0.563	0.5967	0.6023		
	2.5P	H7	1625091810										
	4.5P	H10	162509187										
5/8 - 11 UNC	1.5P	H10	162509180	4.331	0.909	2.126	0.480	0.360	0.563	0.5787	0.5879		
	2.5P	H7	1625091840										
	4.5P	H10	1625058410										
5/8 - 18 UNF	1.5P	H7	1625058117	3.937	0.909	2.126	0.480	0.360	0.563	0.5967	0.6023		
	2.5P	H5	1625058110										
	4.5P	H7	1625058140										
5/8 - 18 UNF	1.5P	H10	1625058810	4.331	0.909	2.126	0.480	0.360	0.563	0.5787	0.5879		
	2.5P	H7	1625058810										
	4.5P	H10	1625058187										
5/8 - 18 UNF	1.5P	H10	1625058180	3.937	0.909	2.126	0.480	0.360	0.563	0.5967	0.6023		
	2.5P	H7	1625058180										
	4.5P	H10	1625058840										

Packed: 1 pc.
Available V coating only.

continued on next page



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16250	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25			

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16250 (Continued)

HSS-Co

V

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit								
				V	Lc	Ln				d	k	lk	Min	Max	2B	3B				
3/4 - 10 UNC	1.5P	H10	1625034110	4.921	1.00	2.441	0.590	0.442	0.688	0.6990	0.7092	H10	H7							
	2.5P	H7	1625034107																	
	4.5P	H10	1625034100																	
3/4 - 16 UNF	1.5P	H10	1625034140	4.331	1.00	2.441	0.590	0.442	0.688	0.7181	0.7245	H10	H7							
	2.5P	H7	1625034610																	
	4.5P	H10	1625034160																	
7/8 - 9 UNC	1.5P	H11	1625078911	5.512	1.110	2.638	0.697	0.523	0.750	0.8183	0.8297	H11	H8							
	2.5P	H8	1625078908																	
	4.5P	H11	1625078901																	
7/8 - 14 UNF	1.5P	H11	1625078941	4.921	1.110	2.638	0.697	0.523	0.750	0.8386	0.8459	H11	H8							
	2.5P	H8	1625078111																	
	4.5P	H11	1625078148																	
1 - 8 UNC	1.5P	H11	1625078141	6.299	1.251	2.992	0.800	0.600	0.813	0.9363	0.9490	H11	H8							
	2.5P	H8	1625018111																	
	4.5P	H11	1625001088																	
1 - 12 UNF	1.5P	H11	1625001081	5.512	1.251	2.992	0.800	0.600	0.813	0.9575	0.9660	H11	H8							
	2.5P	H8	1625018411																	
	4.5P	H11	1625011211																	
1, 1/8 - 7 UNC	2.5P	H13	1625011212	7.087	0.858	2.834	0.896	0.672	0.875	1.0521	1.0667	H13	-							
1, 1/8 - 8 UNS		H11	1625011878							1.0613	1.0740	H11	-							
1, 1/8 - 12 UNF		H11	1625011888							5.906	0.835	2.362	1.0825	1.0910	H11	-				
1, 1/4 - 7 UNC		H13	1625011826							7.087	0.858	2.834	1.1771	1.1917	H13	-				
1, 1/4 - 8 UNS		H11	1625012578							7.087	0.858	2.834	1.1863	1.1990	H11	-				
1, 1/4 - 12 UNF		H11	1625012588							5.906	0.835	2.362	1.2075	1.2160	H11	-				
1, 3/8 - 6 UNC		H14	1625012526							7.870	1.000	3.149	1.2900	1.3070	H14	-				
1, 3/8 - 8 UNS		H13	1625013768							6.693	0.835	2.677	1.3113	1.3240	H13	-				
1, 3/8 - 12 UNF		H11	1625013788							6.693	0.835	2.677	1.3325	1.3410	H11	-				
1, 1/2 - 6 UNC		H15	1625013126							7.874	1.000	3.149	1.4150	1.4320	H15	-				
1, 1/2 - 8 UNS		H13	1625012688							7.874	1.000	3.149	1.4363	1.4490	H13	-				
1, 1/2 - 12 UNF		H11	1625011288							6.693	0.835	2.677	1.4575	1.4660	H11	-				
1, 5/8 - 8 UNS		H13	1625012126							7.874	1.000	3.149	1.5613	1.5740	H13	-				
1, 3/4 - 5 UNC		H16	1625016288							8.661	1.201	3.464	1.6480	1.6684	H16	-				
1, 3/4 - 8 UNS		H13	1625017558							8.661	1.201	3.464	1.6863	1.6990	H13	-				
										1625017588	7.874	1.000	3.149							

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16250	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16350

HSS-Co **V**

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit			
										V	L	Lc	Ln	d	k
M1 x 0.25	1.5P	D5	1635012515	40.00	5.50	6.50	3.581	2.79	4.80	0.88	0.90	D5	D3		
	2.5P		1635012525												
	4.5P		1635012545												
M1.2 x 0.25	1.5P		1635012215												
	2.5P		1635012225												
	4.5P		1635012245												
M1.4 x 0.3	1.5P		1635014315		7.00	8.00								1.26	1.28
	2.5P		1635014325												
	4.5P		1635014345												
M1.6 x 0.35	1.5P	1635016315	40.00	8.00	9.00	1.42	1.46								
	2.5P	1635016353													
	4.5P	1635016345													
M1.7 x 0.35	1.5P	1635017315	D3			1.52	1.56								
	2.5P	1635017353													
	4.5P	1635017355													
M1.8 X 0.35	1.5P	1635017345	D5	1.62	1.66										
	2.5P	1635018353													
	4.5P	1635018355													
M2 x 0.4	1.5P	1635018345	45.00	1.80	1.84										
	2.5P	1635024155													
	4.5P	1635024455													
M2.5 x 0.45	1.5P	1635025415	50.00	9.80	10.80	2.27	2.32								
	2.5P	1635025453													
	4.5P	1635025455													
M2.6 x 0.45	1.5P	1635026415	D5	2.38	2.42										
	2.5P	1635026425													
	4.5P	1635026445													
M3 x 0.5	1.5P	1635030515	56.00	6.00	18.00	2.75	2.80								
	2.5P	1635003053													
	4.5P	1635003055													
M3 x 0.35	1.5P	1635033515	D3	2.83	2.89										
	2.5P	1635003353													
	4.5P	1635003355													

Packed: 1 pc.
Available V coating only.

continued on next page



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16350	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best






HSS-Co	V
--------	---

List 16350 (Continued)

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				L	Lc	Ln				d	k	lk	Min
M3.5 x 0.6	1.5P	D6	1635035616	56.00	7.20	20.30	3.581	2.79	4.80	3.19	3.26		
	2.5P	D4	1635035064										
	4.5P	D6	1635035646										
M4 x 0.7	1.5P	D6	1635040716	63.00	8.50	21.10	4.267	3.33	6.40	3.64	3.71		
	2.5P	D4	1635004074										
	4.5P	D6	1635040746										
M4 x 0.5	1.5P	D6	1635040516	63.00	8.50	21.10	4.267	3.33	6.40	3.75	3.80	D6	D4
	2.5P	D4	1635004054										
	4.5P	D6	1635040546										
M4.5 x 0.75	1.5P	D6	1635045716	70.00	9.10	25.10	4.928	3.86	7.90	4.13	4.19		
	2.5P	D4	1635045754										
	4.5P	D6	1635045756										
M5 x 0.8	1.5P	D7	1635050817	70.00	9.60	25.00	4.928	3.86	7.90	4.59	4.67		
	2.5P	D4	1635005084										
	4.5P	D7	1635050847										
M5 x 0.5	1.5P	D5	1635050515	70.00	9.60	25.00	4.928	3.86	7.90	4.75	4.80	D5	D3
	2.5P	D3	1635005053										
	4.5P	D5	1635005055										
M6 x 1.0	1.5P	D8	1635060118	80.00	10.00	30.00	6.477	4.85	7.90	5.49	5.59	D8	D5
	2.5P	D5	1635006015										
	4.5P	D8	1635006018										
M6 X 0.75	1.5P	D8	1635060148	80.00	10.00	30.00	6.477	4.85	7.90	5.62	5.69	D6	D4
	2.5P	D7	1635067517										
	4.5P	D4	1635006754										
M7 x 1.0	1.5P	D7	1635067547	80.00	10.00	30.00	6.477	4.85	7.90	6.49	6.59	D8	
	2.5P	D5	1635007015										
	4.5P	D8	1635007018										
M8 x 1.25	1.5P	D8	1635070118	90.00	12.00	35.00	8.077	6.05	9.50	7.36	7.49	D9	D5
	2.5P	D5	1635081219										
	4.5P	D9	1635008255										
M8 x 1.0	1.5P	D9	1635008259	90.00	12.00	35.00	8.077	6.05	9.50	7.49	7.59	D8	
	2.5P	D5	1635081249										
	4.5P	D9	1635008259										
M8 x 0.75	1.5P	D8	1635080118	80.00	12.00	30.00	8.077	6.05	9.50	7.62	7.69	D6	D4
	2.5P	D5	1635080118										
	4.5P	D8	1635080148										

Packed: 1 pc.
Available V coating only.





List 16350 (Continued)



S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)

Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit									
			V	L	Lc	Ln	d	k	lk	Min	Max	6H	4H								
M10 x 1.5	1.5P	D10	1635010110	100.00	15.00	39.00	9.677	7.26	11.10	9.24	9.39	D10	D6								
	2.5P	D6	1635010156																		
	4.5P	D10	1635010150																		
M10 x 1.25	1.5P	D9	1635010119																		
	2.5P	D5	1635010255																		
	4.5P	D9	1635010259																		
M10 x 1.0	1.5P	D8	1635010118	90.00	35.00						9.49	9.59	D8	D5							
	2.5P	D5	1635010015																		
	4.5P	D8	1635010018																		
M12 x 1.75	1.5P	D11	1635012171	110.00	17.00	49.10	9.322	6.98			11.11	11.23	D11	D6							
	2.5P	D6	1635012756																		
	4.5P	D11	1635012751																		
M12 x 1.5	1.5P	D11	1635012541																		
	2.5P	D6	1635012111																		
	4.5P	D11	1635012156																		
M12 x 1.25	1.5P	D10	1635012151	100.00						11.24	11.39	D10									
	2.5P		1635012151																		
	4.5P		1635012141																		
M12 x 1.0	1.5P		1635012210																		
	2.5P		1635012220																		
	4.5P		1635012240																		
M14 x 2.0	1.5P	D12	1635012110	110.00	20.00	50.10	10.897	8.18	12.70	11.49	11.59	D10									
	2.5P		1635012140																		
	4.5P		1635012140																		
M14 x 1.5	1.5P		D12							1635014212											
	2.5P		D7							1635014027											
	4.5P		D12							1635014022											
M16 x 2.0	1.5P	D12	1635014242	110.00						12.98	13.18	D12	D7								
	2.5P		D11											1635014511							
	4.5P		D12											1635014242							
M16 x 1.5	1.5P		D6							1635014156	100.00						13.24	13.39	D11	D6	
	2.5P		D11							1635014151											
	4.5P		D11							1635014541											
M18 x 2.5	1.5P	D12	1635016212	110.00		54.00	12.192	9.14	14.30	14.98	15.18	D12	D7								
	2.5P		D7											1635016207							
	4.5P		D12											1635016202							
M16 x 1.5	1.5P		D11							1635016242	100.00						15.24	15.39	D11	D6	
	2.5P									D6											1635016156
	4.5P									D11											1635016151
M18 x 2.5	1.5P	D12		1635016141	125.00	25.00	55.00	13.767	10.31	15.90							16.73	16.98	D12	D7	
	2.5P			D7																	1635018212
	4.5P			D12																	1635018252

Packed: 1 pc.
Available V coating only.

continued on next page




Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16350	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best





List 16350 (Continued)

S-XPF, DIN Overall Length, Bottom (1.5P-2P), Modified Bottom (2.5P-3P), Plug (4P-4.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				L	Lc	Ln	d	k	lk	Min	Max	6H	4H
M18 x 1.5	1.5P	D11	1635018111	110.00	25.00	55.00	13.767	10.31	15.90	17.24	17.39	D11	D6
	2.5P	D6	1635018156										
	4.5P	D11	1635018151										
M20 x 2.5	1.5P	D12	1635020212	140.00	25.00	61.80	16.561	12.42	17.50	18.73	18.98	D12	D7
	2.5P	D7	1635020257										
	4.5P	D12	1635020252										
M20 x 1.5	1.5P	D11	1635020111	125.00	25.00	61.80	16.561	12.42	17.50	19.24	19.39	D11	D6
	2.5P	D6	1635020156										
	4.5P	D11	1635020151										
M22 x 2.5	1.5P	D12	1635022512	140.00	25.00	67.40	17.704	13.28	19.10	20.73	20.98	D12	-
	2.5P		1635022522										-
	4.5P		1635022542										-
M22 x 2.0	1.5P	D12	1635022212	140.00	25.00	67.40	17.704	13.28	19.10	20.98	21.18	D12	-
	2.5P		1635022222										-
	4.5P		1635022242										-
M22 x 1.5	1.5P	D11	1635022111	125.00	25.00	67.40	17.704	13.28	19.10	21.24	21.39	D11	-
	2.5P		1635022121										-
	4.5P		1635022141										-
M24 x 3.0	1.5P	D15	1635024315	160.00	30.00	68.40	19.304	14.48	19.10	22.47	22.78	D15	-
	2.5P		1635024325										-
	4.5P		1635024345										-
M24 x 2.0	1.5P	D13	1635024123	140.00	25.00	68.40	19.304	14.48	19.10	22.98	23.18	D13	-
	2.5P		1635024223										-
	4.5P		1635024243										-
M24 x 1.5	1.5P	D11	1635024111	140.00	25.00	68.40	19.304	14.48	19.10	23.24	23.39	D11	-
	2.5P		1635024121										-
	4.5P		1635024141										-
M27 x 3.0	2.5P	D15	1635027039	160.00	18.00	64.00	22.758	17.07	22.2	22.47	22.78	D15	-
M30 x 3.5			1635030350	180.00	21.00	72.00	22.933	19.46	25.4	28.22	28.57	D15	-
M33 x 3.5		D16	1635033350	200.00	24.00	80.00	28.143	21.11	27.0	31.22	31.57	D16	-
M36 x 4.0			1635036411	200.00	27.00	88.00	31.318	23.50	28.6	33.96	34.37	D17	-
M42 x 4.5		D17	1635042451	220.00	27.00	88.00	36.322	27.23	31.8	39.71	40.16	D17	-
M45 x 4.5			1635045451	220.00	27.00	88.00	38.583	28.93	31.8	42.71	43.16	D17	-

Packed: 1 pc.
Available V coating only.



List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High	4140		300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16350	☐	☐	☐	☐	☐	☐*	☐*	☐*		☐	☐	☐	☐	☐				
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25			

*For Stainless Steel, please use non-water-soluble coolant.

☐ good ☐ best






List 16255

HSS-Co **V**

LT-S-XPF, Long Shank, Modified Bottom (2.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number		Long Overall Length	Thread Length		Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
			V	L		Lc	Ln				Min	Max	2B	3B
5 - 40 UNC	2.5P	H5	1625554025	3.150	0.312	0.722	0.141	0.110	0.188	0.1123	0.1148	H5	H3	
			1625554255	4.724										0.1134
5 - 44 UNF			1625554425	3.150	0.391	0.805				0.1221	0.1252			
6 - 32 UNC			1625554205	4.724										0.1253
6 - 40 UNF			1625563225	3.150	0.388	0.801				0.1481	0.1512			
8 - 32 UNC			1625564255	4.724										0.393
8 - 36 UNF			1625583225	3.150	0.389	0.841				0.1688	0.1729			
10 - 24 UNC			1625583255	4.724										0.520
10 - 32 UNF			1625510226	3.937	0.194	0.152				0.1948	0.1989			
12 - 24 UNC			1625510426	5.906										0.516
12 - 28 UNF		1625510326	3.937	0.220	0.165	0.2245	0.2295							
1/4 - 20 UNC		1625512227	3.937					0.522	1.124	0.2318	0.2354			
1/4 - 28 UNF		1625512427	5.906	0.519	1.121	0.2842	0.2898							
5/16 - 18 UNC		1625512827	3.937					0.526	1.207	0.2912	0.2955			
5/16 - 24 UNF		1625512257	5.906	0.381	0.286	0.3431	0.3495							
3/8 - 16 UNC		1625514226	3.937					0.626	1.575	0.3537	0.3580			
3/8 - 24 UNF		1625514026	5.906	0.713	1.713	0.4011	0.4084							
7/16 - 14 UNC		1625514826	3.937					0.768	1.933	0.4120	0.4171			
7/16 - 20 UNF		1625514256	5.906	0.367	0.275	0.4608	0.4686							
1/2 - 13 UNC		1625511127	4.331					0.555	1.378	0.323	0.242	0.406		
	1625556127	5.906	0.626	1.575	0.381	0.286	0.438							
	1625551227	4.331						0.626	1.575	0.381	0.286	0.438		
	1625551427	5.906	0.626	1.575	0.381	0.286	0.438							
	1625538127	4.724						0.626	1.575	0.381	0.286	0.438		
	1625538627	5.906	0.626	1.575	0.381	0.286	0.438							
	1625538227	4.724						0.626	1.575	0.381	0.286	0.438		
	1625538427	5.906	0.626	1.575	0.381	0.286	0.438							
	1625571128	4.724						0.626	1.575	0.381	0.286	0.438		
	1625576128	5.906	0.626	1.575	0.381	0.286	0.438							
	1625571228	4.724						0.626	1.575	0.381	0.286	0.438		
	1625576228	5.906	0.626	1.575	0.381	0.286	0.438							
	1625512128	5.906						0.626	1.575	0.381	0.286	0.438		
	1625512328	7.087	0.626	1.575	0.381	0.286	0.438							

Packed: 1 pc.
Available V coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16255	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best





List 16255 (Continued)

HSS-Co **V**

LT-S-XPF, Long Shank, Modified Bottom (2.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number		Long Overall Length		Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
			V	L	Lc	Ln	d	k	lk	Min	Max	2B	3B		
1/2 - 20 UNF	2.5P	H8	1625512228	5.906	0.768	1.933	0.367	0.275	0.438	0.4745	0.4796	H8	H5		
			1625512028	7.087											
9/16 - 12 UNC		H7	1625591127	5.906	0.835	1.972	0.429	0.322	0.500	0.5200	0.5285	H10	H7		
			1625591227	7.087						0.5342	0.5398				
9/16 - 18 UNF		H7	1625591827	5.906	0.909	2.126	0.480	0.360	0.563	0.5787	0.5879	H10	H7		
			1625596827	7.087						0.5967	0.6023				
5/8 - 11 UNC		H7	1625558127	5.906	1.000	2.433	0.590	0.442	0.688	0.6990	0.7092	H10	H7		
5/8 - 18 UNF			1625558257	7.087						0.7181	0.7245				
3/4 - 10 UNC		H8	1625534127	7.087	1.110	2.654	0.697	0.523	0.750	0.8183	0.8297	H11	H8		
			1625534027	8.661						0.8386	0.8459				
3/4 - 16 UNF		H8	1625534627	7.087	1.252	3.012	0.800	0.600	0.813	0.9363	0.9490	H11	H8		
			1625531627	8.661						0.9575	0.9660				
7/8 - 9 UNC		H8	1625579828	7.087	1.110	2.654	0.697	0.523	0.750	0.8183	0.8297	H11	H8		
7/8 - 14 UNF			1625575258	8.661						0.8386	0.8459				
1 - 8 UNC		H8	1625578128	7.087	1.252	3.012	0.800	0.600	0.813	0.9363	0.9490	H11	H8		
			1625578428	8.661						0.9575	0.9660				
1 - 12 UNF		H8	1625518208	7.087	1.252	3.012	0.800	0.600	0.813	0.9363	0.9490	H11	H8		
			1625518258	8.661						0.9575	0.9660				
1 - 12 UNF		H8	1625511428	7.087	1.252	3.012	0.800	0.600	0.813	0.9363	0.9490	H11	H8		
			1625514208	8.661						0.9575	0.9660				

Packed: 1 pc.
Available V coating only.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16255	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25				

*For Stainless Steel, please use non-water-soluble coolant.


good best



List 16355

HSS-Co 

LT-S-XPF, Long Shank, Modified Bottom (2.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number		Long Overall Length	Thread Length		Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit									
			V	L		Lc	Ln					Min	Max	2B	3B								
M3 x 0.5	2.5P	D5	1635530525	80.00	6.00	18.00	3.581	2.79	4.80	2.75	2.80	D5	D3										
M3 x 0.35			1635535025	120.00																			
M3.5 x 0.6			1635530325	80.00																			
			1635533525	120.00																			
M4 x 0.7		D6	1635535226	80.00	7.20	20.30	4.267	3.33	6.40	3.64	3.71	D6	D4										
			M4 x 0.5	1635547256										120.00									
M4.5 x 0.75			1635540526	80.00																			
			1635545256	120.00																			
M5 x 0.8			D7	1635545726										90.00	9.10	25.00	4.928	3.86	6.40	4.13	4.19	D7	D3
				M5 x 0.5										1635550827									
M6 x 1.0		D8	1635550257	150.00	9.60	30.00	6.477	4.85	7.30	4.59	4.67	D8	D5										
			M6 x 0.75	1635550525										100.00									
M7 x 1.0		D9	1635550255	150.00	10.00	35.00	8.077	6.05	9.50	5.49	5.59	D9	D4										
			M8 x 1.25	1635561028										100.00									
M8 x 1.0		D7	1635561258	150.00	12.00	30.00	9.677	7.26	11.10	5.62	5.69	D7	D5										
			M8 x 0.75	1635560727										100.00									
M10 x 1.5		D8	1635567527	150.00	15.00	35.00	9.322	6.98	11.10	6.49	6.59	D8	D6										
			M10 x 1.25	1635571258										100.00									
M10 x 1.0		D9	1635571028	150.00	17.00	49.10	11.24	11.39	11.10	7.36	7.49	D9	D4										
			M12 x 1.75	1635581229										150.00									
M12 x 1.5		D8	1635581258	110.00	15.00	35.00	9.677	7.26	11.10	9.49	9.59	D8	D5										
			M12 x 1.0	1635580727										110.00									
M12 x 1.5		D10	1635587527	150.00	17.00	49.10	9.322	6.98	11.10	11.11	11.23	D10	D6										
			M12 x 1.25	1635510120										120.00									
M12 x 1.0	D11	1635510520	150.00	17.00	49.10	9.322	6.98	11.10	11.24	11.39	D11	D6											
		M12 x 1.5	1635510129										120.00										
M12 x 1.5	D11	1635510229	150.00	17.00	49.10	9.322	6.98	11.10	11.24	11.39	D11	D6											
		M12 x 1.5	1635510128										120.00										
M12 x 1.5	D11	1635510258	150.00	17.00	49.10	9.322	6.98	11.10	11.24	11.39	D11	D6											
		M12 x 1.5	1635512721										180.00										
M12 x 1.5	D11	1635512751	180.00	17.00	49.10	9.322	6.98	11.10	11.24	11.39	D11	D6											
		M12 x 1.5	1635512121										150.00										
M12 x 1.5	D11	1635512251	180.00	17.00	49.10	9.322	6.98	11.10	11.24	11.39	D11	D6											

Packed: 1 pc.
Available V coating only.

 continued on next page 



Work Material

List No.	P					M			K Cast Iron	N		S Titanium	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
16355	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25			

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16355 (Continued)

HSS-Co

V

LT-S-XPF, Long Shank, Modified Bottom (2.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number		Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit		
			V	L						Min	Max	2B	3B	
M12 x 1.25	2.5P	D10	1635512520	150.00	17.00	49.10	9.322	6.98	11.10	11.41	11.49	D10	D6	
M12 x 1.0			1635512250	180.00						11.52	11.59			
M14 x 2.0			D12	1635512120						150.00	12.98			13.18
				1635512210						180.00				
M14 x 1.5		D11	1635514222	150.00	20.00	51.10	10.897	8.18	12.70	13.24	13.39	D11	D6	
			1635514521	180.00										
M16 x 2.0		D12	1635516222	150.00	25.00	54.00	12.192	9.14	14.30	14.98	15.18	D12	D7	
			1635516252	180.00										
M16 x 1.5		D11	1635516121	150.00	25.00	55.00	13.767	10.31	15.90	15.24	15.39	D11	D6	
			1635516521	180.00										
M18 x 2.5		D12	1635518252	150.00	25.00	61.80	16.561	12.42	17.50	16.73	16.98	D12	D7	
			1635518552	180.00										
M18 x 1.5		D11	1635518121	150.00	25.00	61.80	16.561	12.42	17.50	17.24	17.39	D11	D6	
			1635518521	180.00										
M20 x 2.5		D12	1635520252	220.00	25.00	61.80	16.561	12.42	17.50	18.73	18.98	D12	D7	
			1635520222	220.00										
M20 x 1.5	D11	1635520121	180.00	25.00	61.80	16.561	12.42	17.50	19.24	19.39	D11	D6		
		1635520521	220.00											

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16355	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	8-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 14153

CARBIDE BR

OTC-NRT, JIS, Carbide Inlaid, DIN/DIN, Bottom (1.5P - 2P)

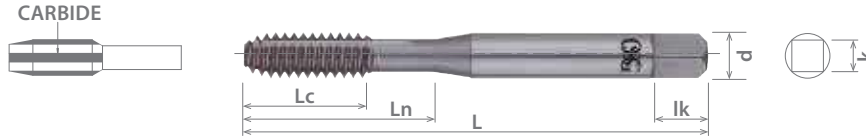

Units: mm

Tap Size	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		Bottom (1.5P-2P)						
		Bright						
		L	Lc	Ln	d	k	lk	
M6 x 1.0	RH7	1415310100	80.00	12.00	30.00	6.00	4.90	8.00
M8 x 1.25		1415310200	90.00	15.00	35.00	8.00	6.20	9.00
M10 x 1.5		1415310400	100.00	18.00	39.00	10.00	8.00	11.00
M10 x 1.25		1415310300						

Packed: 1 pc.
Available Bright finish only.
See page 784 for tap drill recommendations.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
14153										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM										<input type="checkbox"/>	<input type="checkbox"/>						

good best






List 369

CARBIDE BR

OT-NRT, JIS, Plug (4P - 4.5P), Bottom (1.5P - 2P)



Units: mm

Tap Size	Thread Limit	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		Plug	Bottom						
		Bright	Bright						
L	Lc	Ln	d	k	lk				
M3 x 0.5	RH5	8315054	-	46.00	10.00	19.00	4.00	3.20	6.00
		-	8315055						
M4 x 0.7	RH6	8315060	-	52.00	13.00	21.00	5.00	4.00	7.00
		-	8315061						
M5 x 0.8		8315066	-	60.00	15.90	23.90	5.50	4.50	
		-	8315067						
M6 x 1.0	RH7	8315072	8315073	62.00	19.00	29.00	6.00	5.00	8.00
M8 x 1.25		8315084	8315085	70.00	22.00	-	6.20		
M10 x 1.5		8315096	8315097						
M10x 1.25		8315102	8315103	75.00	24.00	-	7.00	5.50	
M12 x 1.75	RH8	8315114	8315115			-			
M12 x 1.5	RH7	8315120	8315121	82.00	29.00	-	8.50	6.50	9.00
M12 x 1.25			8315126	8315127			-		

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.
 See page 784 for tap drill recommendations.



Work Material																			
List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V	~35	35-45	45-50	50-70
369	1010	1035	1065	4140															
SFM	1018	1045	1065	4340						65-150	50-120								


good best



List 357

CARBIDE BR

OT-LT-NRT, JIS, Long Shank, Bottom (1.5P - 2P)



Units: mm

Tap Size	Thread Limit	EDP Number	Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		Bottom (1.5P-2P)						
		Bright						
		L			d	k	lk	
M6 x 1.0	RH7	8315633	100.00	19.00	29.00	6.00	4.50	7.00
M8 x 1.25		8315639		22.00	-	6.20	5.00	
M10 x 1.5		8315645		24.00	-	7.00	5.50	8.00
M10 x 1.25		8315649			-			
M12 x 1.75	RH8	8315653	150.00	-	-	8.50	6.50	9.00
M12 x 1.5	RH7	8315657		29.00	-			
M12 x 1.25	RH8	8315661		-	-			

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

See page 784 for tap drill recommendations.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
357	1010	1035	1065	4140														
SFM	1018	1045		4340						65-150	50-120							


good best





List 14050

VP-NRT, Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit												
										V	L	Lc	Ln	d	k	lk	Min	Max	2B	3B				
0 - 80 UNF	1.5P	H2	1405000008	1.625	0.311	0.350	0.141	0.110	0.188	0.0536	0.0549	H3	H2											
		H3	1405000108																					
	2.5P	H2	1405000208																					
		H3	1405000308																					
1 - 64 UNC	1.5P	H2	1405000408	1.688	0.374	0.413				0.141	0.110			0.188	0.0650	0.0666	H3	H2						
		H3	1405000508																					
	2.5P	H2	1405000608																					
		H3	1405000708																					
2 - 56 UNC	1.5P	H2	1405000808	1.750	0.437	0.476						0.141	0.110		0.188	0.0769			0.0787	H3	H2			
		H3	1405000908																					
	2.5P	H2	1405001108																					
		H3	1405001208																					
3 - 48 UNC	1.5P	H4	1405001008	1.813	0.496	0.535										0.141	0.110	0.188	0.0884			0.0905	H3	H2
		H2	1405001108																					
	2.5P	H3	1405001208																					
		H4	1405001308																					
4 - 40 UNC	1.5P	H2	1405001408	1.875	0.295	0.559	0.141	0.110	0.188										0.0993	0.1018	H3	H2		
		H3	1405001508																					
	2.5P	H4	1405001608																					
		H2	1405001708																					
5 - 40 UNC	1.5P	H3	1405001808	1.938	0.299	0.626				0.141	0.110			0.188					0.1123	0.1148			H3	H2
		H4	1405001908																					
	2.5P	H3	1405002008																					
		H4	1405002108																					
6 - 32 UNC	1.5P	H5	1405002208	2.000	0.370	0.685						0.141	0.110		0.188				0.1221	0.1253	H5	H3		
		H3	1405002308																					
	2.5P	H4	1405002408																					
		H5	1405002508																					
8 - 32 UNC	1.5P	H3	1405002608	2.125	0.374	0.752										0.168	0.131	0.250	0.1481	0.1513			H5	H3
		H4	1405002708																					
	2.5P	H5	1405002808																					
		H3	1405002908																					
8 - 32 UNC	1.5P	H4	1405003008	2.125	0.374	0.752	0.168	0.131	0.250										0.1481	0.1513	H5	H3		
		H5	1405003108																					
	2.5P	H3	1405003208																					
		H4	1405003308																					
8 - 32 UNC	1.5P	H5	1405003408	2.125	0.374	0.752				0.168	0.131			0.250					0.1481	0.1513			H5	H3
		H6	1405003508																					
	2.5P	H3	1405003608																					
		H4	1405003708																					
8 - 32 UNC	1.5P	H5	1405003808	2.125	0.374	0.752						0.168	0.131		0.250				0.1481	0.1513	H5	H3		
		H6	1405003908																					
	2.5P	H3	1405004008																					
		H4	1405004108																					
8 - 32 UNC	1.5P	H5	1405004208	2.125	0.374	0.752										0.168	0.131	0.250	0.1481	0.1513			H5	H3
		H6	1405004308																					
	2.5P	H3	1405004408																					
		H4	1405004508																					
8 - 32 UNC	1.5P	H5	1405004608	2.125	0.374	0.752	0.168	0.131	0.250										0.1481	0.1513	H5	H3		
		H6	1405004708																					
	2.5P	H3	1405004808																					
		H4	1405004908																					

Packed: 1 pc.
Available V coating only.





List 14050 (Continued)



VC10	V
------	---

VP-NRT, Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit		
										V	L	Lc	Ln	d
10 - 24 UNC	1.5P	H3	1405004808	2.375	0.492	0.866	0.194	0.152	0.250	0.1688	0.1730	H6	H4	
		H4	1405004908											
		H5	1405005008											
	H6	1405005108												
	2.5P	H3	1405005208											
		H4	1405005308											
H5		1405005408												
10 - 32 UNF	1.5P	H3	1405005608											
		H4	1405005708											
		H5	1405005808											
	2.5P	H6	1405005908											
		H3	1405006008											
		H4	1405006108											
12 - 24 UNC	1.5P	H5	1405006408	0.496	0.933	0.220	0.165	0.281	0.1948	0.1990	H7	H5		
		H7	1405006508											
	2.5P	H5	1405006608											
		H7	1405006708											
1/4 - 20 UNC	1.5P	H5	1405006808	2.500	0.594	0.996	0.255	0.191	0.313	0.2245	0.2296	H6	H4	
		H6	1405006908											
		H7	1405007008											
	2.5P	H8	1405007108											
		H5	1405007208											
		H6	1405007308											
1/4 - 28 UNF	1.5P	H7	1405007408											
		H8	1405007508											
		H4	1405007608											
	2.5P	H5	1405007708											
		H6	1405007808											
		H7	1405007908											
5/16 - 18 UNC	1.5P	H4	1405008008	2.719	0.665	1.126	0.318	0.238	0.375	0.2318	0.2354	H7	H5	
		H5	1405008108											
		H6	1405008208											
		H7	1405008308											
		1.5P	H5											1405008408
			H6											1405008508
H7	1405008608													
1.5P	H8	1405008708												
	H9	1405008808												

Packed: 1 pc.
Available V coating only.

continued on next page

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
14050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>				
SFM	35-130	20-50	15-30	15-30	15-20	15-50	15-50	15-40		65-150	65-130			10-15				


good best





List 14050 (Continued)

VP-NRT, Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
										V	L	Lc	Ln
5/16 - 18 UNC	2.5P	H5	1405008908	2.719	0.665	1.126	0.318	0.238	0.375	0.2842	0.2898	H7	H5
		H6	1405009008										
		H7	1405009108										
		H8	1405009208										
		H9	1405009308										
5/16 - 24 UNF	1.5P	H4	1405009408										
		H5	1405009508										
		H6	1405009608										
		H7	1405009708										
	2.5P	H8	1405009808										
		H4	1405009908										
		H5	1405010008										
		H6	1405010108										
3/8 - 16 UNC	1.5P	H7	1405010208										
		H8	1405010308										
		H5	1405010408										
		H6	1405010508										
		H7	1405010608										
	2.5P	H8	1405010708										
		H9	1405010808										
		H5	1405010908										
		H6	1405011008										
3/8 - 24 UNF	1.5P	H7	1405011108										
		H8	1405011208										
		H9	1405011308										
		H4	1405011408										
		H5	1405011508										
		H6	1405011608										
	2.5P	H7	1405011708										
		H8	1405011808										
		H4	1405011908										
		H5	1405012008										
		H6	1405012108										
		H7	1405012208										
H8	1405012308												

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
14050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-130	20-50	15-30	15-30	15-20	15-50	15-50	15-40		65-150	65-130		10-15				



good best





List 14150

VP-NRT, Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit		
										V	L	Lc	Ln	d
M1.6 x 0.35		D3	141500008	41.30	7.90	8.90					1.42	1.46		
		D5	1415000108											
M1.7 x 0.35		D3	1415000208	42.90	9.50	10.50					1.52	1.56		
		D5	1415000308											
M2 x 0.4	2.5P	D3	1415000408	44.50	11.10	12.10					1.80	1.84		
		D5	1415000508											
M2.5 x 0.45		D3	1415000608	46.00	12.80	13.80					2.27	2.32	D5	D3
		D5	1415000708											
M2.6 x 0.45		D3	1415000808	47.60	12.70	13.70	3.581	2.79	4.80		2.37	2.42		
		D5	1415000908											
M3 x 0.5	1.5P	D3	1415001008	49.20	6.20	16.00					2.75	2.80		
		D5	1415001108											
	2.5P	D3	1415001208											
		D5	1415001308											
M3.5 x 0.6	1.5P	D4	1415001408	50.80	6.20	17.50					3.19	3.26	D6	
		D6	1415001508											
	2.5P	D4	1415001608											
		D6	1415001708											
M4 x 0.7	1.5P	D4	1415001808	54.00	8.40	19.60	4.267	3.33			3.64	3.71	D4	
		D6	1415001908											
	2.5P	D4	1415002008											
		D6	1415002108											
M5 x 0.8	1.5P	D4	1415002208	60.30	9.60	22.20	4.928	3.86			4.59	4.67	D7	
		D7	1415002308											
	2.5P	D4	1415002408											
		D7	1415002508											
M6 x 1.0	1.5P	D5	1415002608	63.50	12.00	25.40	6.477	4.85	7.80		5.49	5.59	D8	D5
		D8	1415002708											
	2.5P	D5	1415002808											
		D8	1415002908											
M8 x 1.25	1.5P	D5	1415003008	69.10	15.00	28.60	8.077	6.05	9.50		7.36	7.49	D9	
		D9	1415003108											
	2.5P	D5	1415003208											
		D9	1415003308											
M10 x 1.5	1.5P	D6	1415003808	74.60	18.00	31.80	9.677	7.26	11.10		9.24	9.39	D10	D6
		D10	1415003908											
	2.5P	D6	1415004008											
		D10	1415004108											

Packed: 1 pc.
Available V coating only.

continued on next page

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
14150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>				
SFM	35-130	20-50	15-30	15-30	15-20	15-50	15-50	15-40		65-150	65-130			10-15				

good best






List 14150 (Continued)

VP-NRT, Bottom (2P-2.5P), Short Bottom (1P-1.5P)



VC10

V



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
										Min	Max	2B	3B
M10 x 1.25	1.5P	D5	1415004608	74.60	18.00	31.80	9.677	7.26	11.10	9.36	9.49	D9	D5
		D9	1415004708										
	2.5P	D5	1415004808										
		D9	1415004908										
M10 x 1.0	1.5P	D5	1415003408	85.70	21.00	49.00	9.322	6.98		9.49	9.59	D11	D6
		D9	1415003508										
	2.5P	D5	1415003608										
		D9	1415003708										
M12 x 1.75	1.5P	D6	1415004208	85.70	21.00	49.00	9.322	6.98	11.11	11.29	D11	D6	
		D11	1415004308										
	2.5P	D6	1415004408										
		D11	1415004508										

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
14150	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-130	20-50	15-30	15-30	15-20	15-50	15-50	15-40		65-150	65-130		10-15				

good best






List 14001



HSS-Co	TIN	S/O	BR
--------	---	--	--

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN	L	Lc	Ln				Min	Max	2B	3B
0 - 80 UNF	1.5P	H2	14001000	00	01	05	1.625	0.311	0.350				0.0536	0.0549		
		H3	14001001	00	01	05										
		H2	14001002	00	01	05										
	2.5P	H3	14001003	00	01	05										
		H4	14001004	00	01	05										
		H5	14001005	00	01	05										
		H6	14001006	00	01	-										
1 - 64 UNC	2.5P	H7	14001007	00	01	-										
		H2	14001008	00	01	05										
		H3	14001009	00	01	05										
		H4	14001010	00	01	05										
		H5	14001011	00	01	05										
		H6	14001012	00	01	-										
1 - 72 UNF	1.5P	H7	14001013	00	01	-	1.688	0.374	0.413	0.141	0.110	0.188	0.0659	0.0673	H3	H2
		H2	14001014	00	01	05										
		H3	14001015	00	01	05										
	2.5P	H2	14001016	00	01	05										
		H3	14001017	00	01	05										
		H4	14001018	00	01	05										
		H5	14001019	00	01	05										
2 - 56 UNC	1.5P	H6	14001020	00	01	05	1.750	0.437	0.476				0.0769	0.0787		
		H2	14001021	00	01	-										
		H2	14001022	00	01	05										
	2.5P	H3	14001023	00	01	05										
		H4	14001024	00	01	05										
		H2	14001025	00	01	05										
		H3	14001026	00	01	05										
		H4	14001027	00	01	05										
		H5	14001028	00	01	05										
2 - 64 UNF	2.5P	H6	14001029	00	01	05							0.0780	0.0796		
		H7	14001030	00	01	05										
		H8	14001578	00	-	-										
		H9	14001579	00	-	-										
		H2	14001031	00	01	05										
		H3	14001032	00	01	05										
		H4	14001033	00	01	05										

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

[continued on next page](#)

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100			10-15			

good best






List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit																						
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk	Min	Max	2B	3B																					
3 - 48 UNC	2.5P	H2	14001037	00	01	05	1.813	0.496	0.535				0.0884	0.0905																							
		H3	14001038	00	01	05																															
		H4	14001039	00	01	05																															
		H5	14001040	00	01	-																															
		H6	14001041	00	01	-																															
		H7	14001042	00	01	-																															
		H2	14001043	00	01	05																															
3 - 56 UNF	2.5P	H3	14001044	00	01	05	1.813	0.496	0.535				0.0899	0.0917		H3	H2																				
		H4	14001045	00	01	05																															
		H5	14001046	00	01	05																															
		H6	14001047	00	01	05																															
		H7	14001048	00	01	-																															
		H3	14001049	00	01	05																															
		H4	14001050	00	01	05																															
4 - 40 UNC	1.5P	H5	14001051	00	01	05	1.875	0.295	0.559	0.141	0.110	0.188	0.0993	0.1018																							
		H6	14001573	00	01	05																															
		H7	14001574	00	01	05																															
		H2	14001052	00	01	05																															
		H3	14001053	00	01	05																															
		H4	14001054	00	01	05																															
		H5	14001055	00	01	05																															
	2.5P	H6	14001056	00	01	05											1.875	0.295	0.559	0.141	0.110	0.188	0.0993	0.1018													
		H7	14001057	00	01	05																															
		H8	14001580	00	-	-																															
		H9	14001581	00	-	-																															
		H10	14001582	00	-	-																															
		H14	14001598	00	-	-																															
		4.5P	H2	14001058	00	01																					05	1.875	0.295	0.559	0.141	0.110	0.188	0.0993	0.1018		
H3	14001059		00	01	05																																
H4	14001060		00	01	05																																
H5	14001061		00	01	05																																
H6	14001062		00	01	05																																
H7	14001063		00	01	05																																
4 - 48 UNF	2.5P		H2	14001064	00	01	05	1.938	0.299	0.626				0.1014	0.1035																						
		H3	14001065	00	01	05																															
		H4	14001066	00	01	05																															
		H5	14001067	00	01	05																															
		H6	14001068	00	01	-																															
		H7	14001069	00	01	-																															
		4.5P	H2	14001070	00	01	05										1.938	0.299	0.626				0.1014	0.1035													
	H3		14001071	00	01	05																															
	H4		14001072	00	01	-																															
	H5		14001073	00	01	-																															
	H6		14001074	00	01	-																															
	H7		14001075	00	01	-																															
	5 - 40 UNC		2.5P	H2	14001076	00	01																					05	1.938	0.299	0.626				0.1123	0.1148	
		H3		14001077	00	01	05																														
H4		14001078		00	01	-																															
H5		14001079		00	01	05																															
H6		14001080		00	01	05																															

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14001 (Continued)



HSS-Co			
	TiN	S/O	BR

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	2B	3B
5 - 40 UNC	2.5P	H7	14001081	00	01	05	1.938	0.299	0.626		0.110	0.188	0.1123	0.1148	H5	H3
		H2	14001082	00	01	05										
		H3	14001083	00	01	05										
	4.5P	H4	14001084	00	01	05										
		H5	14001085	00	01	05										
		H6	14001086	00	01	05										
		H7	14001087	00	01	05										
5 - 44 UNF	2.5P	H2	14001088	00	01	05										
		H3	14001089	00	01	05										
		H4	14001090	00	01	05										
		H5	14001091	00	01	05										
		H6	14001092	00	01	05										
		H7	14001093	00	01	05										
		4.5P	H2	14001094	00	01							05			
	H3		14001095	00	01	05										
	H4		14001096	00	01	05										
	H5		14001097	00	01	05										
	H6		14001098	00	01	05										
	H7		14001099	00	01	05										
	6 - 32 UNC		1.5P	H3	14001100	00	01	05								
		H4		14001101	00	01	05									
H5		14001102		00	01	05										
H6		14001575		00	01	-										
H7		14001576		00	01	-										
H8		14001577		00	01	-										
2.5P		H2		14001103	00	01	05									
		H3		14001104	00	01	05									
		H4	14001105	00	01	05										
		H5	14001106	00	01	05										
		H6	14001107	00	01	05										
		H7	14001108	00	01	05										
		H8	14001109	00	01	05										
		H9	14001110	00	01	05										
		H10	14001111	00	01	05										
		H11	14001583	00	-	-										
		H12	14001584	00	-	-										
		H14	14001599	00	-	-										
		4.5P	H2	14001112	00	01	05									
H3			14001113	00	01	05										
H4			14001114	00	01	05										
H5	14001115		00	01	05											
H6	14001116		00	01	05											
H7	14001117		00	01	05											
H8	14001118		00	01	05											
H9	14001119		00	01	05											

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			4140 4340	300	400		17-4 PH	6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				

good best






List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	2B	3B
6 - 32 UNC	4.5P	H10	14001120	00	01	05	2.000	0.370	0.685	0.141	0.110	0.188	0.1221	0.1253		
		H2	14001121	00	01	05										
		H3	14001122	00	01	05										
		H4	14001123	00	01	05										
		H5	14001124	00	01	05										
		H6	14001125	00	01	05										
		H7	14001126	00	01	05										
		H8	14001127	00	01	05										
		H9	14001128	00	01	05										
		H10	14001129	00	01	05										
	2.5P	H2	14001130	00	01	05										
		H3	14001131	00	01	05										
		H4	14001132	00	01	05										
		H5	14001133	00	01	05										
		H6	14001134	00	01	05										
		H7	14001135	00	01	05										
		H8	14001136	00	01	05										
		H9	14001137	00	01	05										
		H10	14001138	00	01	05										
		6 - 40 UNF	4.5P	H3	14001139	00							01	05		
H4	14001140			00	01	05										
H5	14001141			00	01	05										
H2	14001142			00	01	05										
H3	14001143			00	01	05										
H4	14001144			00	01	05										
H5	14001145			00	01	05										
H6	14001146			00	01	05										
H7	14001147			00	01	05										
H8	14001148			00	01	05										
1.5P	H9		14001149	00	01	05										
	H10		14001150	00	01	05										
	H11		14001585	00	-	-										
	H12		14001586	00	-	-										
	H14		14001600	00	-	-										
	H2		14001151	00	01	05										
	H3		14001152	00	01	05										
	H4		14001153	00	01	05										
	H5		14001154	00	01	05										
	H6		14001155	00	01	05										
2.5P	H7	14001156	00	01	05											
	H8	14001157	00	01	05											
	H9	14001158	00	01	05											
	H10	14001159	00	01	05											
	H2	14001160	00	01	05											
	H3	14001161	00	01	05											
	H4	14001162	00	01	05											
	H5	14001163	00	01	05											
	H6	14001164	00	01	05											
	H7	14001165	00	01	05											
8 - 32 UNC	4.5P	H8	14001166	00	01	05										
		H2	14001160	00	-	-										
		H3	14001152	00	01	05										
		H4	14001153	00	01	05										
	2.5P	H5	14001154	00	01	05										
		H6	14001155	00	01	05										
		H7	14001156	00	01	05										
		H8	14001157	00	01	05										
8 - 36 UNF	2.5P	H9	14001158	00	01	05										
		H10	14001159	00	01	05										
		H2	14001160	00	01	05										
		H3	14001161	00	01	05										
		H4	14001162	00	01	05										
		H5	14001163	00	01	05										
		H6	14001164	00	01	05										
		H7	14001165	00	01	05										
H8	14001166	00	01	05												

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14001 (Continued)



HSS-Co	 TiN	 S/O	 BR
--------	--	---	---

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit		
				Bright	S/O	TiN							Min	Max	2B	3B	
8 - 36 UNF	2.5P	H9	14001167	00	01	05	2.125	0.374	0.752	0.168	0.131	0.1498	0.1527	H5	H3		
		H10	14001168	00	01	05											
	4.5P	H2	14001169	00	01	05											
		H3	14001170	00	01	05											
		H4	14001171	00	01	05											
		H5	14001172	00	01	05											
		H6	14001173	00	01	05											
		H7	14001174	00	01	05											
		H8	14001175	00	01	05											
		H9	14001176	00	01	05											
H10	14001177	00	01	05													
10 - 24 UNC	1.5P	H3	14001178	00	01	05	2.375	0.492	0.866	0.194	0.152	0.250	0.1688	0.1730	H6	H4	
		H4	14001179	00	01	05											
		H5	14001180	00	01	05											
		H6	14001571	00	01	05											
		H2	14001181	00	01	05											
	2.5P	H3	14001182	00	01	05											
		H4	14001183	00	01	05											
		H5	14001184	00	01	05											
		H6	14001185	00	01	05											
		H7	14001186	00	01	05											
		H8	14001187	00	01	05											
		H9	14001188	00	01	05											
		H10	14001189	00	01	05											
		4.5P	H2	14001190	00	01											05
			H3	14001191	00	01											05
	H4		14001192	00	01	05											
	H5		14001193	00	01	05											
	H6		14001194	00	01	05											
	H7		14001195	00	01	05											
	H8		14001196	00	01	05											
H9	14001197		00	01	05												
H10	14001198		00	01	05												
10 - 32 UNF	1.5P		H3	14001199	00	01	05	0.1741	0.1776								
		H4	14001200	00	01	05											
		H5	14001201	00	01	05											
		H6	14001572	00	01	05											
	2.5P	H2	14001202	00	01	05											
		H3	14001203	00	01	05											
		H4	14001204	00	01	05											
		H5	14001205	00	01	05											
		H6	14001206	00	01	05											
		H7	14001207	00	01	05											
		H8	14001208	00	01	05											
		H9	14001209	00	01	05											

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

[continued on next page](#)

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				

good best






List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk	Min	Max	2B	3B
10 - 32 UNF	2.5P	H10	14001210	00	01	05	2.375	0.492	0.866	0.194	0.152	0.250	0.1741	0.1776	H6	H4
		H11	14001587	00	-	-										
		H12	14001588	00	-	-										
		H14	14001601	00	-	-										
	4.5P	H2	14001211	00	01	05										
		H3	14001212	00	01	05										
		H4	14001213	00	01	05										
		H5	14001214	00	01	05										
		H6	14001215	00	01	05										
		H7	14001216	00	01	05										
		H8	14001217	00	01	05										
		H9	14001218	00	01	05										
H10	14001219	00	01	05												
12 - 24 UNC	2.5P	H2	14001220	00	01	05	2.375	0.496	0.933	0.220	0.165	0.281	0.1948	0.1990	H7	H5
		H3	14001221	00	01	05										
		H4	14001222	00	01	05										
		H5	14001223	00	01	05										
		H6	14001224	00	01	05										
		H7	14001225	00	01	05										
		H8	14001226	00	01	05										
		H9	14001227	00	01	05										
		H10	14001228	00	01	05										
		4.5P	H2	14001229	00	01										
	H3		14001230	00	01	05										
	H4		14001231	00	01	05										
	H5		14001232	00	01	05										
	H6		14001233	00	01	05										
	H7		14001234	00	01	05										
	H8		14001235	00	01	05										
	H9		14001236	00	01	05										
	H10	14001237	00	01	05											
12 - 28 UNF	2.5P	H2	14001238	00	01	05	2.500	0.594	0.996	0.255	0.191	0.313	0.1978	0.2014	H6	H4
		H3	14001239	00	01	05										
		H4	14001240	00	01	05										
		H5	14001241	00	01	05										
		H6	14001242	00	01	05										
		H7	14001243	00	01	05										
		H8	14001244	00	01	05										
		H9	14001245	00	01	05										
		H10	14001246	00	01	05										
		4.5P	H2	14001247	00	01										
	H3		14001248	00	01	05										
	H4		14001249	00	01	05										
	H5		14001250	00	01	05										
	H6		14001251	00	01	05										
	H7		14001252	00	01	05										
	H8		14001253	00	01	05										
	H9		14001254	00	01	05										
	H10	14001255	00	01	05											
1/4 - 20 UNC	1.5P	H5	14001256	00	01	05	2.500	0.594	0.996	0.255	0.191	0.313	0.2245	0.2296	H6	H4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	2B	3B
1/4 - 20 UNC	1.5P	H6	14001257	00	01	05	2.375	0.496	0.933	0.255	0.191	0.281	0.2245	0.2296	H6	H4
		H7	14001258	00	01	05										
		H8	14001259	00	01	05										
	2.5P	H2	14001260	00	01	05										
		H3	14001261	00	01	05										
		H4	14001262	00	01	05										
		H5	14001263	00	01	05										
		H6	14001264	00	01	05										
		H7	14001265	00	01	05										
		H8	14001266	00	01	05										
		H9	14001267	00	01	05										
		H10	14001268	00	01	05										
		H11	14001589	00	-	-										
	4.5P	H12	14001590	00	-	-										
		H13	14001591	00	-	-										
		H2	14001269	00	01	05										
		H3	14001270	00	01	05										
		H4	14001271	00	01	05										
		H5	14001272	00	01	05										
		H6	14001273	00	01	05										
1/4 - 28 UNF	1.5P	H7	14001274	00	01	05	2.375	0.496	0.933	0.255	0.191	0.281	0.2318	0.2354	H6	H4
		H8	14001275	00	01	05										
		H9	14001276	00	01	05										
		H10	14001277	00	01	05										
	2.5P	H4	14001278	00	01	05										
		H5	14001279	00	01	05										
		H6	14001280	00	01	05										
		H7	14001281	00	01	05										
		H2	14001282	00	01	05										
		H3	14001283	00	01	05										
		H4	14001284	00	01	05										
		H5	14001285	00	01	05										
		H6	14001286	00	01	05										
		H7	14001287	00	01	05										
		H8	14001288	00	01	05										
	4.5P	H9	14001289	00	01	05										
		H10	14001290	00	01	05										
		H11	14001592	00	-	-										
		H2	14001291	00	01	05										
		H3	14001292	00	01	05										
4.5P	H4	14001293	00	01	05											
	H5	14001294	00	01	05											
	H6	14001295	00	01	05											
	H7	14001296	00	01	05											
H8	14001297	00	01	05												

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100			10-15				

good best






List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk	Min	Max	2B	3B
1/4 - 28 UNF	4.5P	H9	14001298	00	01	05	2.375	0.496	0.933	0.255	0.191	0.281	0.2318	0.2354	H6	H4
		H10	14001299	00	01	05										
5/16 - 18 UNC	1.5P	H6	14001300	00	01	05	2.719	0.665	1.126	0.318	0.238	0.375	0.2842	0.2898	H7	H5
		H7	14001301	00	01	05										
		H8	14001302	00	01	05										
		H9	14001303	00	01	05										
		H2	14001304	00	01	05										
	2.5P	H3	14001305	00	01	05										
		H4	14001306	00	01	05										
		H5	14001307	00	01	05										
		H6	14001308	00	01	05										
		H7	14001309	00	01	05										
		H8	14001310	00	01	05										
	4.5P	H9	14001311	00	01	05										
		H10	14001312	00	01	05										
		H11	14001593	00	-	-										
		H2	14001313	00	01	05										
		H3	14001314	00	01	05										
		H4	14001315	00	01	05										
		H5	14001316	00	01	05										
		H6	14001317	00	01	05										
		H7	14001318	00	01	05										
5/16 - 24 UNF	1.5P	H8	14001319	00	01	05										
		H9	14001320	00	01	05										
		H10	14001321	00	01	05										
		H4	14001322	00	01	05										
	2.5P	H5	14001323	00	01	05										
		H6	14001324	00	01	05										
		H7	14001325	00	01	05										
		H8	14001326	00	01	05										
		H2	14001327	00	01	05										
		H3	14001328	00	01	05										
	4.5P	H4	14001329	00	01	05										
		H5	14001330	00	01	05										
H6		14001331	00	01	05											
H7		14001332	00	01	05											
H8		14001333	00	01	05											
H9		14001334	00	01	05											
H10		14001335	00	01	05											
H2		14001336	00	01	05											
H3	14001337	00	01	05												
		H4	14001338	00	01	05										
		H5	14001339	00	01	05										
		H6	14001340	00	01	05										
		H7	14001341	00	01	05										
		H8	14001342	00	01	05										
		H9	14001343	00	01	05										
		H10	14001344	00	01	05										
		H12	14001594	00	-	-										

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14001 (Continued)



HSS-Co	TIN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	2B	3B
3/8 - 16 UNC	1.5P	H5	14001345	00	01	05	2.938	0.752	1.252	0.381	0.286	0.438	0.3431	0.3495	H7	H5
		H6	14001346	00	01	05										
		H7	14001347	00	01	05										
		H8	14001348	00	01	05										
		H9	14001349	00	01	05										
	2.5P	H4	14001350	00	01	05										
		H5	14001351	00	01	05										
		H6	14001352	00	01	05										
		H7	14001353	00	01	05										
		H8	14001354	00	01	05										
		H9	14001355	00	01	05										
		H10	14001356	00	01	05										
	4.5P	H11	14001357	00	01	05										
		H12	14001358	00	01	05										
		H4	14001359	00	01	05										
		H5	14001360	00	01	05										
		H6	14001361	00	01	05										
		H7	14001362	00	01	05										
	3/8 - 24 UNF	1.5P	H8	14001363	00	01							05			
			H9	14001364	00	01							05			
			H10	14001365	00	01							05			
			H11	14001366	00	01							05			
			H12	14001367	00	01							05			
		2.5P	H4	14001368	00	01							05			
H5			14001369	00	01	05										
H6			14001370	00	01	05										
H7			14001371	00	01	05										
H8			14001372	00	01	05										
H4			14001373	00	01	05										
4.5P	H5	14001374	00	01	05											
	H6	14001375	00	01	05											
	H7	14001376	00	01	05											
	H8	14001377	00	01	05											
	H9	14001378	00	01	05											
	H10	14001379	00	01	05											
	H11	14001380	00	01	05											
3/8 - 24 UNF	1.5P	H12	14001381	00	01	05										
		H4	14001382	00	01	05										
		H5	14001383	00	01	05										
		H6	14001384	00	01	05										
		H7	14001385	00	01	05										
	2.5P	H8	14001386	00	01	05										
		H9	14001387	00	01	05										
		H10	14001388	00	01	05										
		H11	14001389	00	01	05										

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				

good best






List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	2B	3B
3/8 - 24 UNF	4.5P	H12	14001390	00	01	05	2.938	0.752	1.252	0.381	0.286	0.438	0.3538	0.358	H7	
		H13	14001595	00	-	-										
7/16 - 14 UNC	2.5P	H4	14001391	00	01	05	3.156	0.858	1.713	0.323	0.242	0.406	0.4011	0.4084	H8	H5
		H5	14001392	00	01	05										
		H6	14001393	00	01	05										
		H7	14001394	00	01	05										
		H8	14001395	00	01	05										
		H9	14001396	00	01	05										
	4.5P	H10	14001397	00	01	05										
		H11	14001398	00	01	05										
		H12	14001399	00	01	05										
		H4	14001400	00	01	05										
		H5	14001401	00	01	05										
		H6	14001402	00	01	05										
7/16 - 20 UNF	2.5P	H7	14001403	00	01	05	3.156	0.858	1.713	0.323	0.242	0.406	0.4120	0.4171	H8	H5
		H8	14001404	00	01	05										
		H9	14001405	00	01	05										
		H10	14001406	00	01	05										
		H11	14001407	00	01	05										
		H12	14001408	00	01	05										
	4.5P	H4	14001409	00	01	05										
		H5	14001410	00	01	05										
		H6	14001411	00	01	05										
		H7	14001412	00	01	05										
		H8	14001413	00	01	05										
		H9	14001414	00	01	05										
1/2 - 13 UNC	2.5P	H10	14001415	00	01	05	3.375	0.921	1.933	0.367	0.275	0.438	0.4608	0.4686		
		H11	14001416	00	01	05										
		H12	14001417	00	01	05										
		H4	14001418	00	01	05										
		H5	14001419	00	01	05										
		H6	14001420	00	01	05										
	4.5P	H7	14001421	00	01	05										
		H8	14001422	00	01	05										
		H9	14001423	00	01	05										
		H10	14001424	00	01	05										
		H11	14001425	00	01	05										
		H12	14001426	00	01	05										
	2.5P	H4	14001427	00	01	05	3.375	0.921	1.933	0.367	0.275	0.438	0.4608	0.4686		
		H5	14001428	00	01	05										
		H6	14001429	00	01	05										
		H7	14001430	00	01	05										
		H8	14001431	00	01	05										
		H9	14001432	00	01	05										
	4.5P	H10	14001433	00	01	05	3.375	0.921	1.933	0.367	0.275	0.438	0.4608	0.4686		
		H11	14001434	00	01	05										
		H12	14001435	00	01	05										
		H4	14001436	00	01	05										
		H5	14001437	00	01	05										
		H6	14001438	00	01	05										

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14001 (Continued)



HSS-Co	TIN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit											
				Bright	S/O	TiN							Min	Max	2B	3B										
1/2 - 13 UNC	4.5P	H7	14001439	00	01	05	3.375	0.921	1.933	0.367	0.275	0.438	0.4608	0.4686												
		H8	14001440	00	01	05																				
		H9	14001441	00	01	05																				
		H10	14001442	00	01	05																				
		H11	14001443	00	01	05																				
		H12	14001444	00	01	05																				
1/2 - 20 UNF	2.5P	H4	14001445	00	01	05	3.375	0.921	1.933	0.367	0.275	0.438	0.4745	0.4796	H8	H5										
		H5	14001446	00	01	05																				
		H6	14001447	00	01	05																				
		H7	14001448	00	01	05																				
		H8	14001449	00	01	05																				
		H9	14001450	00	01	05																				
	H10	14001451	00	01	05																					
	H11	14001452	00	01	05																					
	H12	14001453	00	01	05																					
	4.5P	H4	14001454	00	01	05											3.375	0.921	1.933	0.367	0.275	0.438	0.4745	0.4796	H8	H5
		H5	14001455	00	01	05																				
		H6	14001456	00	01	05																				
		H7	14001457	00	01	05																				
		H8	14001458	00	01	05																				
		H9	14001459	00	01	05																				
	H10	14001460	00	01	05																					
	H11	14001461	00	01	05																					
	H12	14001462	00	01	05																					
H13	14001596	00	-	-																						
H14	14001597	00	-	-																						
9/16 - 12 UNC	2.5P	H4	14001463	00	01	05	3.594	1.000	1.972	0.429	0.322	0.500	0.5200	0.5285	H10	H7										
		H5	14001464	00	01	05																				
		H6	14001465	00	01	05																				
		H7	14001466	00	01	05																				
		H8	14001467	00	01	05																				
		H9	14001468	00	01	05																				
	H10	14001469	00	01	05																					
	H11	14001470	00	01	05																					
	H12	14001471	00	01	05																					
	4.5P	H4	14001472	00	01	05											3.594	1.000	1.972	0.429	0.322	0.500	0.5200	0.5285	H10	H7
		H5	14001473	00	01	05																				
		H6	14001474	00	01	05																				
		H7	14001475	00	01	05																				
		H8	14001476	00	01	05																				
		H9	14001477	00	01	05																				
	H10	14001478	00	01	05																					
	H11	14001479	00	01	05																					
	H12	14001480	00	01	05																					
9/16 - 18 UNF	2.5P	H4	14001481	00	01	05							0.5342	0.5398												

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				

good best






List 14001 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk	Min	Max	2B	3B
9/16 - 18 UNF	2.5P	H5	14001482	00	01	05	3.594	1.000	1.972	0.429	0.322	0.500	0.5342	0.5398		
		H6	14001483	00	01	05										
		H7	14001484	00	01	05										
		H8	14001485	00	01	05										
		H9	14001486	00	01	05										
		H10	14001487	00	01	05										
	H11	14001488	00	01	05											
	H12	14001489	00	01	05											
	4.5P	H4	14001490	00	01	05										
		H5	14001491	00	01	05										
		H6	14001492	00	01	05										
		H7	14001493	00	01	05										
H8		14001494	00	01	05											
H9		14001495	00	01	05											
H10	14001496	00	01	05												
H11	14001497	00	01	05												
H12	14001498	00	01	05												
5/8 - 11 UNC	2.5P	H4	14001499	00	01	05	3.813	1.091	2.126	0.480	0.360	0.563	0.5786	0.5879	H10	H7
		H5	14001500	00	01	05										
		H6	14001501	00	01	05										
		H7	14001502	00	01	05										
		H8	14001503	00	01	05										
		H9	14001504	00	01	05										
	H10	14001505	00	01	05											
	H11	14001506	00	01	05											
	H12	14001507	00	01	05											
	4.5P	H4	14001508	00	01	05										
		H5	14001509	00	01	05										
		H6	14001510	00	01	05										
H7		14001511	00	01	05											
H8		14001512	00	01	05											
H9		14001513	00	01	05											
H10	14001514	00	01	05												
H11	14001515	00	01	05												
H12	14001516	00	01	05												
5/8 - 18 UNF	2.5P	H4	14001517	00	01	05	0.5967	0.6023								
		H5	14001518	00	01	05										
		H6	14001519	00	01	05										
		H7	14001520	00	01	05										
		H8	14001521	00	01	05										
		H9	14001522	00	01	05										
	H10	14001523	00	01	05											
	H11	14001524	00	01	05											
	H12	14001525	00	01	05											
	4.5P	H4	14001526	00	01	05										
		H5	14001527	00	01	05										
		H6	14001528	00	01	05										
H7		14001529	00	01	05											
H8		14001530	00	01	05											
H9		14001531	00	01	05											

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14001 (Continued)



HSS-Co	TIN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	2B	3B
5/8 - 18 UNF	4.5P	H10	14001532	00	01	05	3.813	1.091	2.126	0.480	0.360	0.563	0.5967	0.6023		
		H11	14001533	00	01	05										
		H12	14001534	00	01	05										
3/4 - 10 UNC	2.5P	H6	14001535	00	01	05	4.250	1.201	2.433	0.590	0.442	0.688	0.6990	0.7092	H10	H7
		H7	14001536	00	01	05										
		H8	14001537	00	01	05										
		H9	14001538	00	01	05										
		H10	14001539	00	01	05										
		H11	14001540	00	01	05										
		H12	14001541	00	01	05										
	H13	14001542	00	01	05											
	4.5P	H6	14001544	00	01	05										
		H7	14001545	00	01	05										
		H8	14001546	00	01	05										
		H9	14001547	00	01	05										
		H10	14001548	00	01	05										
		H11	14001549	00	01	05										
H12		14001550	00	01	05											
3/4 - 16 UNF	2.5P	H6	14001553	00	01	05	4.250	1.201	2.433	0.590	0.442	0.688	0.7181	0.7245	H10	H7
		H7	14001554	00	01	05										
		H8	14001555	00	01	05										
		H9	14001556	00	01	05										
		H10	14001557	00	01	05										
		H11	14001558	00	01	05										
		H12	14001559	00	01	05										
	H13	14001560	00	01	05											
	4.5P	H6	14001562	00	01	05										
		H7	14001563	00	01	05										
		H8	14001564	00	01	05										
		H9	14001565	00	01	05										
		H10	14001566	00	01	05										
		H11	14001567	00	01	05										
H12		14001568	00	01	05											
H13	14001569	00	01	05												
H14	14001570	00	01	05												

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
List No.	P					M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum			Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
14001	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				


good best





List 14101

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit																			
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk	Min	Max	6H	4H																		
M1.6 x 0.35	2.5P	D3	14101000	00	01	05	41.30	7.90	8.90	3.581	2.79	4.80	1.42	1.46	D5	D3																		
		D5	14101001	00	01	05							1.52	1.56																				
M1.7 x 0.35	2.5P	D3	14101002	00	01	05	42.90	9.50	10.50				3.581	2.79			4.80	1.52	1.56	D5	D3													
		D5	14101003	00	01	05												1.52	1.56															
M2 x 0.4	1.5P	D3	14101004	00	01	05	44.30	11.10	12.10									3.581	2.79			4.80	1.8	1.84	D5	D3								
		D5	14101005	00	01	05																												
		D3	14101006	00	01	05																												
		D4	14101061	00	-	-																												
	2.5P	D5	14101007	00	01	05																												
		D6	14101062	00	-	-																												
		D7	14101063	00	-	-																												
		D8	14101064	00	-	-																												
M2.5 x 0.45	1.5P	D3	14101008	00	01	05	46.00	12.80	13.80														3.581	2.79			4.80	2.27	2.32	D5	D3			
		D5	14101009	00	01	05																												
		D3	14101010	00	01	05																												
		D4	14101065	00	-	-																												
	2.5P	D5	14101011	00	01	05																												
		D6	14101066	00	-	-																												
		D7	14101067	00	-	-																												
		D8	14101068	00	-	-																												
M2.6 x 0.45	2.5P	D3	14101012	00	01	05	49.20	6.20	16.00	3.581	2.79	4.80			2.37	2.42												D5	D3					
		D5	14101013	00	01	05																												
M3 x 0.5	1.5P	D3	14101014	00	01	05							49.20	6.20	16.00	3.581	2.79			4.80	2.75											2.80	D5	D3
		D5	14101015	00	01	05																												
		D6	14101060	00	-	-																												
		D3	14101016	00	01	05																												
		D4	14101069	00	-	-																												
		D5	14101017	00	01	05																												
	2.5P	D6	14101070	00	-	-																												
		D7	14101071	00	-	-																												
		D8	14101072	00	-	-																												
		D9	14101073	00	-	-																												
		D10	14101074	00	-	-																												
		D11	14101075	00	-	-																												
		4.5P	D5	14101107	00	-												-																
			D5	14101107	00	-												-																
M3.5 x 0.6	1.5P	D4	14101018	00	01	05							50.80	6.20	17.50			3.581	2.79		4.80	3.19	3.26	D5	D3									
		D6	14101019	00	01	05																												
		D4	14101020	00	01	05																												
		D5	14101076	00	-	-																												
	2.5P	D6	14101021	00	01	05																												
		D7	14101077	00	-	-																												
		D8	14101078	00	-	-																												
		D4	14101022	00	01	05																												
4.5P	D6	14101023	00	01	05																													
	D6	14101023	00	01	05																													
M4 x 0.7	1.5P	D4	14101024	00	01	05	54.00	8.40	19.60	3.581	2.79	4.80	3.64	3.71	D5	D3																		
		D6	14101025	00	01	05																												
		D4	14101026	00	01	05																												
	2.5P	D5	14101079	00	-	-																												
		D6	14101027	00	01	05																												
		D7	14101080	00	-	-																												
		D7	14101080	00	-	-																												

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 14101 (Continued)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)

Units: mm

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN							Min	Max	6H	4H
M4 x 0.7	2.5P	D8	14101081	00	-	-	54.00	8.40	19.60	4.267	3.33	6.40	3.64	3.71	D6	
		D9	14101082	00	-	-										
		D10	14101083	00	-	-										
	4.5P	D11	14101084	00	-	-										
		D4	14101028	00	01	05										
M5 x 0.8	1.5P	D4	14101030	00	01	05	60.30	10.00	22.20	4.920	3.86	6.40	4.59	4.67	D7	D4
		D7	14101031	00	01	05										
	2.5P	D4	14101032	00	01	05										
		D5	14101085	00	-	-										
		D6	14101086	00	-	-										
		D7	14101033	00	01	05										
		D8	14101087	00	-	-										
		D9	14101088	00	-	-										
		D10	14101089	00	-	-										
		D11	14101090	00	-	-										
	4.5P	D14	14101105	00	-	-										
		D4	14101034	00	01	05										
		D7	14101035	00	01	05										
		D5	14101036	00	01	05										
M6 x 1.0	1.5P	D8	14101037	00	01	05	63.50	12.00	25.40	6.477	4.85	7.9	5.49	5.59	D8	D5
		D5	14101038	00	01	05										
	2.5P	D6	14101091	00	-	-										
		D7	14101092	00	-	-										
		D8	14101039	00	01	05										
		D9	14101093	00	-	-										
		D10	14101094	00	-	-										
		D11	14101095	00	-	-										
		D12	14101096	00	-	-										
		D13	14101097	00	-	-										
	4.5P	D14	14101106	00	-	-										
		D5	14101040	00	01	05										
		D8	14101041	00	01	05										
		D5	14101042	00	01	05										
M8 x 1.25	1.5P	D9	14101043	00	01	05	69.10	15.00	28.60	8.077	6.05	9.5	7.36	7.49	D9	
		D5	14101044	00	01	05										
	2.5P	D9	14101045	00	01	05										
		D5	14101046	00	01	05										
	4.5P	D9	14101047	00	01	05										
		D6	14101048	00	01	05										
M10 x 1.5	1.5P	D10	14101049	00	01	05	74.60	18.00	31.80	9.677	7.26	11.10	9.24	9.39	D10	D6
		D6	14101050	00	01	05										
	2.5P	D7	14101098	00	-	-										
		D8	14101099	00	-	-										
		D9	14101100	00	-	-										

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page **HYT**

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
14101	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				

good best






List 14101 (Continued)

NRT, Plug (4P-4.5P), Bottom (2P-2.5P), Short Bottom (1P-1.5P)



HSS-Co	TiN	S/O	BR
--------	-----	-----	----



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk	Min	Max	6H	4H
M10 x 1.5	2.5P	D10	14101051	00	01	05	74.60	18.00	31.80	9.677	7.26	11.10	9.24	9.39	D10	D6
		D11	14101101	00	-	-										
		D12	14101102	00	-	-										
	D13	14101103	00	-	-											
	4.5P	D6	14101052	00	01	05										
D10		14101053	00	01	05											
M12 x 1.75	1.5P	D6	14101054	00	01	05	85.70	21.00	49.1	9.322	6.98	11.11	11.29	D11		
		D11	14101055	00	01	05										
	2.5P	D6	14101056	00	01	05										
		D11	14101057	00	01	05										
	4.5P	D6	14101058	00	01	05										
		D11	14101059	00	01	05										

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
14101	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>				
SFM	35-100	20-50	15-25	15-25	15-20	15-40	15-40	10-25		50-90	45-100		10-15				


good best





List 285

NRT, Bottom (1.5P-2P)



Units: Inch

Tap Size	Class of Fit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P-2P)								
			Bright	TiN	TiCN						
0 - 80 UNF	2B	28642	00	05	08	1.625	0.311	0.350	0.141	0.11	0.188
2 - 56 UNC		28644	00	05	08	1.750	0.437	0.476			
3 - 48 UNC		28646	00	05	08	1.813	0.496	0.535			
4 - 40 UNC		28648	00	05	08	1.875	0.295	0.559			
6 - 32 UNC		28650	00	05	08	2.000	0.370	0.685			
8 - 32 UNC		28652	00	05	08	2.125	0.374	0.752	0.168	0.131	0.250
10 - 24 UNC		28654	00	05	08	2.375	0.492	0.866			
10 - 32 UNF		28656	00	05	08						
1/4 - 20 UNC		28658	00	05	08	2.500	0.594	0.996	0.255	0.191	0.313
1/4 - 28 UNF		28660	00	05	08						
5/16 - 18 UNC		28662	00	05	08	2.719	0.665	1.126	0.318	0.238	0.375
5/16 - 24 UNF		28664	00	05	08						
3/8 - 16 UNC		28666	00	05	08	2.938	0.752	1.252	0.381	0.286	0.438
3/8 - 24 UNF		28668	00	05	08						
7/16 - 14 UNC		28670	00	05	08	3.156	0.858	1.713	0.323	0.242	0.406
7/16 - 20 UNF		28672	00	05	08						
1/2 - 13 UNC		28674	00	05	08	3.375	0.921	1.933	0.367	0.275	0.438
1/2 - 20 UNF		28676	00	05	08						

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

See page 782 for tap drill recommendations.



List 286

NRT, Bottom (1.5P-2P)



Units: mm

Tap Size	Class of Fit	EDP Number	Coating Suffix			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P-2P)								
			Bright	TiN	TiCN						
M3 x 0.5	6H	28681	00	05	08	50.00	6.00	16.00	3.581	2.79	4.80
M4 x 0.7		28683	00	05	08	55.00	8.40	19.10	4.267	3.33	6.40
M5 x 0.8		28685	00	05	08	62.00	9.60	22.20	4.928	3.86	
M6 x 1.0		28687	00	05	08	65.00	12.00	25.40	6.477	4.85	7.30
M8 x 1.25		28689	00	05	08	75.00	15.00	28.60	8.077	6.05	8.70
M10 x 1.5		28691	00	05	08	82.00	18.00	31.80	9.677	7.26	10.10
M12 x 1.75		28693	00	05	08	85.00	21.00	49.10	9.322	6.98	11.10

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

See page 784 for tap drill recommendations.



Work Material

List No.	P														M	K	N		S		H			
	Carbon Steels					Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy			Titanium	Hardened Steels						
	Low	Med.	High	4140 4340	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC				
	1010 1018	1035 1045	1065																					
285	<input checked="" type="checkbox"/>	<input type="checkbox"/>									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>												
286	<input checked="" type="checkbox"/>	<input type="checkbox"/>									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>												
SFM	35-100	20-50									45-100	45-100												

good best






List 16605



A-CSF, Coolant - Through, DIN Overall Length, Modified Bottom (2.5P), Bottom (1.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			Bright	Bright						
1/4 - 20 UNC	H5	3	1660500100	1660500000	3.140	0.598	1.181	0.255	0.191	0.313
1/4 - 28 UNF	H4		1660500300	1660500200						
5/16 - 18 UNC	H5		1660500500	1660500400	3.540	0.665	1.377	0.318	0.238	0.375
3/8 - 16 UNC			1660500700	1660500600	3.930	0.751		0.381	0.286	0.438
7/16 - 14 UNC			1660500900	1660500800	4.330	0.858	-	0.322	0.242	0.406
1/2 - 13 UNC			1660501100	1660501000	4.330	0.921	-	0.367	0.275	0.438

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.
 Note: Reduce SFM 50% - 70% while using external coolant.



Work Material																			
List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
16605									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								
SFM									<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>								

good best






List 16600



A-CSF, Coolant - Through, DIN Overall Length, Modified Bottom (2.5P), Bottom (1.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			Bright	Bright						
M5 x 0.8	D4	3	1660000000	1660000100	70.00	10.00	25.00	4.928	3.86	6.4
M6 x 1.0	D5		1660000200	1660000300	80.00	12.00	31.00	6.477	4.85	7.9
M8 x 1.25			1660000400	1660000500	90.00	15.00	35.00	8.077	6.05	9.5
M10 x 1.5	D6		1660000600	1660000700	100.00	18.00	39.00	9.677	7.26	11.1
M10 x 1.25	D5		1660000800	1660000900						
M12 x 1.75	D6		1660001000	1660001100	110.00	21.00	-	9.322	6.98	

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.
 Note: Reduce SFM 50% - 70% while using external coolant.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
16600									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM									<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							

good best






List 16505



A-SFT, DIN Overall Length, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Bottom (1.5P)	Mod Bottom (2.5P)							
			V	V							
4 - 40 UNC	H2	2	1650508908	1650500108	2.205	0.196	0.704	0.141	0.110	0.188	
4 - 48 UNF			1650509008	1650500208							
5 - 40 UNC			1650509108	1650500308							
5 - 44 UNF			1650509208	1650500408							
6 - 32 UNC	H3	3	1650509308	1650513108	2.480	0.200	0.708	0.141	0.110	0.188	
	H2	2	1650509408	-							
	H3	2	1650513208	1650500608							
6 - 40 UNF	H2	3	1650509508	-	2.480	0.248	0.783	0.141	0.110	0.188	
		2	-	1650500708							
8 - 32 UNC	H3	3	1650509608	-	2.480	0.251	0.826	0.168	0.131	0.250	
		H2	2	1650509708							-
		H3	2	-							1650500908
8 - 36 UNF	H2	3	1650509808	-	2.756	0.326	0.976	0.194	0.152	0.250	
		2	-	1650501008							
10 - 24 UNC	H3	3	1650509908	-	2.756	0.326	1.059	0.194	0.152	0.250	
		2	-	1650501108							
10 - 32 UNF	H2	3	1650510008	-	2.756	0.326	0.976	0.194	0.152	0.250	
		H3	2	1650510108							-
		H2	2	-							1650501308
12 - 24 UNC	H3	3	1650510208	-	3.150	0.397	1.177	0.255	0.191	0.313	
		2	-	1650501408							
12 - 28 UNF	H3	3	1650510308	-	3.150	0.397	1.177	0.255	0.191	0.313	
		2	-	1650501508							
12 - 32 UNEF	H3	3	1650510408	-	3.150	0.397	1.177	0.255	0.191	0.313	
		2	-	1650505608							
1/4 - 20 UNC	H5	3	1650510608	-	3.150	0.397	1.177	0.255	0.191	0.313	
		H3	2	1650510708							-
		H5	2	-							1650501708
1/4 - 28 UNF	H3	3	1650510908	-	3.150	0.397	1.177	0.255	0.191	0.313	
			H4	2							1650510808
		H3	2	-							1650501908
		H4		-							1650501808
1/4 - 32 UNEF	H3	3	1650510508	1650505708	3.543	0.444	1.377	0.318	0.238	0.375	
		2	1650511008	-							
5/16 - 18 UNC	H5	3	1650511108	1650502108	3.543	0.444	1.377	0.318	0.238	0.375	
			2	1650511208							1650502008
5/16 - 24 UNF	H3	3	1650511308	1650502308	3.150	0.500	1.535	0.310	0.286	0.438	
			2	1650511408							1650502208
5/16 - 32 UNEF	H3	3	1650511508	1650505808	3.150	0.500	1.377	0.310	0.286	0.438	
			2	1650511608							1650502508
3/8 - 16 UNC	H5	3	1650511708	1650502408	3.937	0.500	1.377	0.310	0.286	0.438	
			2	1650511808							1650502708
3/8 - 24 UNF	H3	3	1650511908	1650502608	3.543	0.500	1.377	0.310	0.286	0.438	
			2	1650512008							-
3/8 - 32 UNEF	H3	3	-	1650505908	3.543	0.500	1.377	0.310	0.286	0.438	

Packed: 1 pc.
Available V coating only.





List 16505 (Continued)



A-SFT, DIN Overall Length, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			V	V						
				L	Lc	Ln	d	k	lk	
7/16 - 14 UNC	H3	3	1650512108	1650502908	3.937	0.570	1.712	0.323	0.242	0.406
	H5		1650512208	1650502808						
7/16 - 20 UNF	H3		1650512308	1650503108						
	H5		1650512408	1650503008						
7/16 - 28 UNEF	H4		1650512508	1650506008	3.543					
1/2 - 13 UNC	H3		1650512608	1650503308	4.331	0.614	1.933	0.367	0.275	0.438
	H5		1650512708	1650503208						
1/2 - 20 UNF	H3		1650512808	1650503508	3.937	0.728	2.125	0.480	0.360	0.563
	H5		1650512908	1650503408						
1/2 - 28 UNEF	H4		1650513008	1650506108						
9/16 - 12 UNC	H3		-	1650503708	4.331	0.665	1.972	0.429	0.322	0.500
	H5		-	1650503608						
9/16 - 18 UNF	H3		-	1650503908	3.937	0.728	2.125	0.480	0.360	0.563
	H5		-	1650503808						
9/16 - 24 UNEF	H4		-	1650506208						
5/8-11 UNC	H3		-	1650504108	4.331	0.909	2.165	0.542	0.406	0.625
	H5		-	1650504008						
5/8 - 18 UNF	H3		-	1650504308	3.937	1.000	2.433	0.590	0.442	0.688
	H5		-	1650504208						
5/8 - 24 UNEF	H4		-	1650506308						
11/16 - 24 UNEF	H4	-	1650506408	4.331						
3/4 - 10 UNC	H3	-	1650504508	4.921	1.110	2.653	0.697	0.523	0.750	
	H5	-	1650504408							
3/4 - 16 UNF	H3	-	1650504708	4.331	0.944	3.818	0.896	0.672	0.875	
	H5	-	1650504608							
3/4 - 20 UNEF	H5	-	1650506508							
13/16 - 20 UNEF	H4	-	1650506608	4.921			0.652	0.489		
7/8 - 9 UNC	H4	-	1650504908	5.512	1.251	3.011	0.800	0.600	0.813	
	H6	-	1650504808							
7/8 - 14 UNF	H4	-	1650505108	4.921	0.944	3.818	0.896	0.672	0.875	
	H6	-	1650505008							
7/8 - 20 UNEF	H5	-	1650506708							
15/16 - 20 UNEF	H5	-	1650506808	5.512			2.692	0.760	0.570	
1 - 8 UNC	H4	-	1650505308	6.299	1.251	3.011	0.800	0.600	0.813	
	H6	-	1650505208							
	H8	-	1650507008							
1 - 12 UNF	H6	-	1650505408	6.299	0.944	3.818	0.896	0.672	0.875	
	H4	-	1650505508							
1 - 14 UNS	H6	-	1650513308	5.512						
1 - 20 UNEF	H5	-	1650506908							
1,1/8 - 7 UNC	H9	-	1650507108	7.087	0.826	3.070	1.021	0.766	1.000	
		-	1650507208							
1,1/8 - 12 UNF	H8	-	1650507308	5.906						
1,1/4 - 7 UNC	H10	-	1650507408	7.087	0.944	3.937	1.021	0.766	1.000	
		-	1650507508							

Packed: 1 pc.
Available V coating only.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16505	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120			30-55			

good best






List 16505 (Continued)



A-SFT, DIN Overall Length, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			V	V						
1,1/4 - 12 UNF	H8	4	-	1650507608	5.906	0.826	3.070	1.021	0.766	1.000
1,3/8 - 6 UNC	H10		-	1650507708	7.874	1.102	4.527	1.108	0.831	1.063
1,3/8 - 8 UN	H9		-	1650507808		0.826				
1,3/8 - 12 UNF	H8		-	1650507908	6.693	1.102	4.527	1.233	0.925	1.125
1,1/2 - 6 UNC	H10		-	1650508008	7.874					
1,1/2 - 8 UN	H9		-	1650508108	6.693	0.826	3.582	1.305	0.979	1.250
1,1/2 - 12 UNF	H8		-	1650508208	7.874					
1,5/8 - 8 UN	H10		-	1650508308	8.661	1.299	4.724	1.430	1.072	1.250
1,3/4 - 5 UNC	H11		-	1650508408	7.874	0.826	3.976	1.519	1.139	
1,3/4 - 8 UN	H10		-	1650508508	8.858					
1,7/8 - 8 UN	H10		-	1650508608	9.843	1.456	5.511	1.644	1.233	1.375
2 - 4,1/2 UNC	H12		-	1650508708	8.858	0.826	4.803			
2 - 8 UN	H10		-	1650508808						

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16505	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120		30-55				

good best






List 16500



A-SFT, DIN Overall Length, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			V	V						
M1.4 x 0.3	D2	2	-	1650003008	40.00	6.00	11.50	3.581	2.79	4.80
M1.6 x 0.35	D3		-	1650003108		7.00	13.60			
M1.7 x 0.35			-	1650003208		8.00	13.40			
M2 x 0.4	D2		-	1650003408	45.00	3.30	10.00			
M2 x 0.25			-	1650003308						
M2.2 x 0.45			D3	-			1650003608			
M2.2 x 0.25	D2		-	1650003508						
M2.3 x 0.4	D3		-	1650003708	50.00	3.20	11.90			
M2.5 x 0.45			-	1650003908		3.70	13.00			
M2.5 x 0.35			-	1650003808						
M2.6 x 0.45		-	1650004008							
M3 x 0.5	D2	1650009808	1650000108	56.00	4.00	18.00				
M3 x 0.35		1650009708	-							
M3.5 x 0.6	D3	-	1650004108	63.00	4.80	20.00				
M3.5 x 0.35		1650010008	1650004308							
M4 x 0.7	D4	1650009908	1650004208	70.00	6.10	24.90	4.928	3.86	6.40	
M4 x 0.5	D3	1650010208	1650000308							
M4.5 x 0.75	D4	1650010108	1650000208	80.00	8.00	29.90	6.477	4.85	7.90	
M4.5 x 0.5	D3	1650010408	1650004508							
M5 x 0.8	D4	1650010308	1650004408	90.00	10.00	35.00	8.077	6.05	9.50	
M5 x 0.5	D3	1650010608	1650000508							
M5.5 x 0.5	D5	1650010508	1650000408	80.00	8.00	30.00	5.588	4.19	7.10	
M6 x 1.0		D5	1650010708							1650004608
M6 x 0.75	D4	1650011008	1650000808	90.00	10.00	35.00	6.477	4.85	7.90	
M6 x 0.5	D3	1650010908	1650000708							
M7 x 1.0	D5	1650010808	1650000608	80.00	8.00	33.00	8.077	6.05	9.50	
M7 x 0.75	D4	1650011208	1650004808							
M8 x 1.25	D5	1650011108	1650004708	90.00	10.00	35.00	8.077	6.05	9.50	
M8 x 1.0		D5	1650011508							1650001008
M8 x 0.75	D4	1650011408	1650000908	80.00	8.00	33.00	9.677	7.26	11.10	
M9 x 1.25	D5	1650011308	1650004908							
M9 x 1.0		D5	1650011808	1650005208	90.00	10.00	35.00	9.677	7.26	11.10
M9 x 0.75	D4	1650011708	1650005108							
M10 x 1.5	D6	1650011608	1650005008	100.00	12.00	39.00	9.677	7.26	11.10	
M10 x 1.25	D5	1650012208	1650001308							
M10 x 1.0	D4	1650012108	1650001208	90.00	10.00	35.00	9.677	7.26	11.10	
M10 X 0.75		D4	1650012008							1650001108
			1650011908	1650005308						

Packed: 1 pc.
Available V coating only.

continued on next page

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
16500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120			30-55				

good best






List 16500 (Continued)



A-SFT, DIN Overall Length, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			V	V						
M11 x 1.5	D6	3	1650012608	1650005608	100.00	12.00	43.50	8.204	6.15	10.30
M11 x 1.25	D5		1650012508	-						
M11 X 1.0	D5		1650012408	1650005508	90.00	8.00	49.10	9.322	6.98	11.10
M11 x 0.75	D4		1650012308	1650005408						
M12 x 1.75	D6		1650013008	1650001708	110.00	14.00	54.00	12.192	9.14	14.30
M12 x 1.5			1650012908	1650001608						
M12 x 1.25	D6		1650012808	1650001508	100.00	12.00	54.00	12.192	9.14	14.30
M12 x 1.0	D5		1650012708	1650001408						
M14 x 2.0	D7		-	1650001908	110.00	16.00	54.00	12.192	9.14	14.30
M14 x 1.5	D5		-	1650001808						
M14 x 1.25	D6		-	1650005808	100.00	12.00	54.00	12.192	9.14	14.30
M14 x 1.0	D5		-	1650005708						
M15 x 1.25	D6		-	1650013208	110.00	16.00	54.00	12.192	9.14	14.30
M15 X 1.5	D6		-	1650006008						
M15 x 2	D7		-	1650013108	110.00	16.00	54.00	12.192	9.14	14.30
M15 x 1.0	D5		-	1650005908	100.00	12.00				
M16 x 2.0	D7		-	1650002108	110.00	16.00	54.00	12.192	9.14	14.30
M16 x 1.25	D6		-	1650013308	100.00	12.00				
M16 x 1.5	D6		-	1650002008			100.00	16.00	54.00	12.192
M16 x 1.0	D5		-	1650006108	100.00	12.00				
M17 x 1.5	D6	-	1650006208	100.00			16.00	54.00	12.192	9.14
M17 x 1.25	D6	-	1650013408		100.00	12.00				
M17 x 1.0	D5	-	1650006308	100.00			16.00	54.00	12.192	9.14
M18 x 2.5	D7	-	1650002308		125.00	25.00				
M18 x 2.0	D7	-	1650006508	125.00			25.00	55.00	13.767	9.31
M18 x 1.5	D6	-	1650002208		110.00	16.00				
M18 x 1.25	D6	-	1650013508	110.00			16.00	55.00	13.767	10.31
M18 x 1.0	D5	-	1650006408		100.00	16.00				
M20 x 2.5	D7	-	1650002508	140.00			25.00	61.80	16.561	12.42
M20 x 2.0	D7	-	1650006708		140.00	25.00				
M20 x 1.5	D6	-	1650002408	125.00			16.00	61.80	16.561	12.42
M20 x 1.0	D5	-	1650006608		125.00	16.00				
M22 x 2.5	D7	-	1650002708	140.00			25.00	67.40	17.704	13.28
M22 x 2.0	D7	-	1650006908		140.00	25.00				
M22 x 1.5	D6	-	1650002608	125.00			16.00	67.40	17.704	13.28
M22 x 1.0	D5	-	1650006808		125.00	16.00				
M24 x 3.0	D8	-	1650002908	160.00			30.00	68.40	19.304	14.48
M24 x 2.0	D7	-	1650007108		160.00	30.00				
M24 x 1.5	D6	-	1650002808	140.00			16.00	68.40	19.304	14.48
M24 x 1.0	D5	-	1650007008		140.00	16.00				
M27 x 3.0	D10	-	1650007408	160.00			36.00	80.00	22.758	17.07
M27 x 2.0	D8	-	1650007308		160.00	36.00				
M27 x 1.5	D8	-	1650007208	140.00			24.00	60.00	25.933	19.46
M30 x 3.5	D11	-	1650007708		180.00	42.00				
M30 x 2.0	D9	-	1650007608	150.00			36.00	70.00	25.933	19.46
M30 x 1.5	D8	-	1650007508		150.00	36.00				
M33 x 3.5	D11	-	1650008008	180.00			42.00	95.00	28.143	21.11
M33 x 2.0	D9	-	1650007908		160.00	36.00				
M33 x 1.5	D8	-	1650007808	160.00			36.00	75.00	28.143	21.11

Packed: 1 pc.
Available V coating only.





List 16500 (Continued)



A-SFT, DIN Overall Length, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)

Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Mod Bottom (2.5P)						
			V	V						
M36 x 4.0	D11	4	-	1650008408	200.00	48.00	115.00	31.318	23.50	28.60
M36 X 3.0	D10		-	1650008308		36.00				
M36 x 2.0	D9		-	1650008208	170.00	85.00	33.147	24.87	31.80	
M36 x 1.5	D8		-	1650008108						
M39 x 4.0	D11		-	1650008508	200.00	110.00	36.322	27.23	31.80	
M42 x 3.0	D10		-	1650008808						48.00
M42 x 2.0	D9		-	1650008708	170.00	70.00	38.583	28.93	34.90	
M42 x 4.5	D12		-	1650008908						54.00
M42 x 1.5	D8		-	1650008608	170.00	70.00	41.758	31.32	34.90	
M45 x 4.5	D12		-	1650009108						220.00
M45 x 3.0	D10		-	1650009008	200.00	100.00	48.108	36.07	36.50	
M48 x 5.0	D13		-	1650009508						250.00
M48 x 3.0	D11		-	1650009408	225.00	115.00	48.108	36.07	36.50	
M48 x 2.0	D9		-	1650009308						190.00
M48 x 1.5	D8		-	1650009208	190.00	80.00	48.108	36.07	36.50	
M56 x 5.5	D14		-	1650009608						250.00

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16500	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120		30-55				


good best





List 16545

A-OIL-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2.5P-3P)						
			V						
1/4 - 20 UNC	H5	3	1654500108	3.150	0.402	1.181	0.255	0.191	0.313
1/4 - 28 UNF	H4		1654500208		0.402	1.181			
5/16 - 18 UNC	H5		3.543	1654500308	0.445	1.378	0.318	0.238	0.375
5/16 - 24 UNF	H4			1654500408	0.445	1.378			
3/8 - 16 UNC	H5		3.937	1654500508	0.500	1.535	0.381	0.286	0.438
3/8 - 24 UNF	H4			1654500608	0.500	1.378			
7/16 - 14 UNC	H5		3.937	1654500708	0.571	1.713	0.323	0.242	0.406
7/16 - 20 UNF				1654500808	0.571	1.713			
1/2 - 13 UNC			4.331	1654500908	0.614	1.933	0.367	0.275	0.438
1/2 - 20 UNF				1654501008	0.614	1.933			
9/16 - 12 UNC			4.331	1654501108	0.665	1.972	0.429	0.322	0.500
9/16 - 18 UNF				1654501208	0.665	1.972			
5/8 - 11 UNC		4.331	1654501308	0.728	2.126	0.480	0.360	0.563	
5/8 - 18 UNF			1654501408	0.728	2.126				
3/4 - 10 UNC		H6	4.921	1654501508	1.000	2.433	0.590	0.442	0.688
3/4 - 16 UNF				1654501608	4.331	1.000			
7/8 - 9 UNC			5.512	1654501708	1.110	2.654	0.697	0.523	0.750
7/8 - 14 UNF				1654501808	4.921	1.110			
1 - 8 UNC	H8		6.299	1654501908	1.252	3.012	0.800	0.600	0.813
1 - 12 UNF				H6	1654502008	1.252			
1,1/8 - 7 UNC	H9		7.087	1654502108	1.252	3.012	0.896	0.672	0.875
1,1/8 - 8 UN				1654502208	1.732	3.819			
1,1/8 - 12 UNF	H8		5.906	1654502308	1.496	3.819	1.021	0.766	1.000
1,1/4 - 7 UNC				H10	1654502408	1.496			
1,1/4 - 8 UN	H9		7.087	1654502508	1.732	3.937	1.108	0.831	1.063
1,1/4 - 12 UNF				H8	1654502608	1.496			
1,3/8 - 6 UNC	H10	5.906	1654502708	1.496	3.071	1.108	0.831	1.063	
1,3/8 - 8 UN			H9	1654502808	2.008				4.528
1,3/8 - 12 UNF	H8	7.874	1654502908	1.496	4.528	1.233	0.925	1.125	
1,1/2 - 6 UNC			H10	1654503008	6.693				1.496
1,1/2 - 8 UN	H9	7.874	1654503108	2.008	4.528	1.430	1.072	1.250	
1,1/2 - 12 UNF			H8	1654503208	1.496				4.528
1,5/8 - 8 UN	H10	6.693	1654503308	1.496	3.583	1.305	0.979	1.125	
1,3/4 - 5 UNC			H11	1654503408	7.874				1.496
1,3/4 - 8 UN	H10	8.661	1654503508	2.402	4.724	1.430	1.072	1.250	
1,7/8 - 8 UN			H10	1654503608	7.874				2.008
2 - 4,1/2 UNC	H12	8.858	1654503708	2.008	4.921	1.519	1.139	1.375	
2 - 8 UN			H10	1654503808	9.843				2.677
			1654503908	8.858	2.008	4.803			

Packed: 1 pc.
Available V coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16545	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>				
SFM	100-200	100-200	100-200	50-100	40-80	25-70	25-70	25-50	60-150	90-220	90-220			50-100			


good best





List 16540

A-OIL-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2.5P-3P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
M6 x 1.0	D5	3	1654000208	80.00	8.00	30.00	6.48	4.85	7.90
M6 x 0.75	D4		1654000108						
M7 x 1.0	D5		1654000308	90.00	10.00	35.00	8.08	6.05	9.50
M8 x 1.25			1654000608						
M8 x 1.0	D4		1654000508	80.00	8.00	33.00	9.68	7.26	11.10
M8 X 0.75			1654000408						
M9 x 1.25	D5		1654000708	90.00	10.00	35.00	8.20	6.15	10.30
M10 x 1.5	D6		1654001008	100.00	12.00	39.00			
M10 x 1.25	D5		1654000908	90.00	10.00	35.00	9.68	7.26	11.10
M10 x 1.0			1654000808						
M11 x 1.5	D6		1654001108	100.00	12.00	43.50	8.20	6.15	10.30
M12 x 1.75			1654001508	110.00	14.00	49.10			
M12 x 1.5	D5		1654001408	100.00			12.00	16.00	50.10
M12 x 1.25			1654001308		110.00	16.00			
M12 x 1.0	D7		1654001208	100.00	16.00		54.00	12.19	9.14
M14 x 2.0	D6		1654001708	110.00		16.00			
M14 x 1.5			1654001608	100.00	16.00		54.00	12.19	9.14
M15 x 1.5	D7		1654001808	110.00		16.00			
M16 x 2.0			1654002008	100.00	16.00		54.00	12.19	9.14
M16 x 1.5	D6		1654001908	125.00		25.00			
M17 x 1.5		1654002108	110.00		16.00		55.00	13.77	10.31
M18 x 2.5	D7	1654002308	110.00	16.00		61.80			
M18 x 1.5	D6	1654002208	125.00	25.00	61.80		16.56	12.42	17.50
M20 x 2.5	D7	1654002508	125.00	16.00		67.40			
M20 x 1.5	D6	1654002408	140.00	30.00	67.40		17.70	13.28	19.10
M22 x 2.5	D7	1654002808	140.00	25.00		67.40			
M22 x 2.0		1654002708			125.00		16.00	68.40	19.30
M22 x 1.5	D6	1654002608	160.00	30.00	68.40	19.30			
M24 x 3.0	D8	1654003108	140.00				16.00	68.40	19.30
M24 x 2.0	D7	1654003008	160.00	16.00	68.40	19.30			
M24 x 1.5	D6	1654002908	180.00				42.00	80.00	22.76
M27 x 3.0	D10	1654003208	180.00	42.00	80.00	22.76			
M30 x 3.5	D11	1654003308	200.00				48.00	100.00	25.93
M33 x 3.5		1654003408	200.00	48.00	100.00	25.93			
M36 x 4.0	D12	1654003508	200.00				48.00	100.00	25.93
M39 x 4.0		1654003608		200.00	48.00	100.00			
M42 x 4.5	D13	1654003708	220.00	54.00			100.00	25.93	19.46
M45 x 4.5		1654003808			220.00	54.00			
M48 x 5.0	D14	1654003908	250.00	60.00	140.00		41.76	31.32	34.90
M56 x 5.5		1654004008				250.00			
				66.00	130.00	48.11	36.07	36.50	

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>				
SFM	100-200	100-200	100-200	50-100	40-80	25-70	25-70	25-50	60-150	90-220	90-220			50-100			

good best





List 16525



A-LT-SFT, Long Shank, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length					
			Mod Bottom (2.5P-3P)											
			V											
			L	Lc	Ln	d	k	lk						
4 - 40 UNC	H2	2	1652505608	3.150	0.197	0.705	0.141	0.110	0.188					
4 - 48 UNF			1652505708											
5 - 40 UNC			1652500308											
5 - 44 UNF			1652505908											
6 - 32 UNC	H3		1652500608	4.724	0.248	0.783	0.168	0.131	0.250					
6 - 40 UNF	H2		1652500708	3.937										
8 - 32 UNC	H3		1652500908	4.724	0.252	0.827	0.194	0.152	0.281					
8 - 36 UNF	H2		1652501008	3.937										
10 - 24 UNC	H3		1652501108	4.921	0.327	0.976	0.194	0.152	0.281					
10 - 32 UNF			1652501308	5.906										
12 - 24 UNC			1652501408	4.921						0.331	1.177	0.220	0.165	0.281
12 - 28 UNF			1652501508											
1/4 - 20 UNC	H5	1652501708	5.906	0.398	1.378	0.318	0.238	0.375						
1/4 - 28 UNF	H4	1652501908												
5/16 - 18 UNC	H5	1652502108												
5/16 - 24 UNF	H4	1652502308												
3/8 - 16 UNC	H5	1652502508	0.500	1.535	0.381	0.286	0.438							
3/8 - 24 UNF	H4	1652502708												
7/16 - 14 UNC	H5	1652502908	7.087	0.571	2.362	0.323	0.242	0.406						
7/16 - 20 UNF		1652503108												
1/2 - 13 UNC		1652503308												
1/2 - 20 UNF		1652503508												
9/16 - 12 UNC		H5	1652503708	7.087	0.614	2.835	0.367	0.275	0.438					
9/16 - 18 UNF			1652503908											
5/8 - 11 UNC			1652504108											
5/8 - 18 UNF			1652504308											
3/4 - 10 UNC		H6	1652504508	7.874	1.000	3.150	0.590	0.442	0.688					
3/4 - 16 UNF			1652504708											
7/8 - 9 UNC			1652504908											
7/8 - 14 UNF			1652505108											
1 - 8 UNC	H6	1652505308	7.874	1.110	3.465	0.697	0.523	0.750						
1 - 12 UNF		1652505508							1.252	3.465	0.800	0.600	0.813	

Packed: 1 pc.
Available V coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16525	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120			30-55			

good best






List 16520



A-LT-SFT, Long Shank, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2.5P-3P)							
			V	L						
M3 x 0.5	D3	3	1652001308	L	100.00	4.10	18.10	3.58	2.79	4.80
M3 x 0.35			1652001208	4.80		20.00				
M3.5 x 0.6			1652001508							
M3.5 x 0.35	D4		1652001408	125.00	5.60	21.00	4.27	3.33	6.40	
M4 x 0.7	D3		1652001708							
M4 x 0.5	D4		1652001608	150.00	6.10	25.10	4.93	3.86		
M4.5 x 0.75	D3		1652001908							
M4.5 x 0.5	D4		1652001808	125.00	6.40	25.00	5.59	4.19		7.10
M5 x 0.8	D5		1652002108							
M5 x 0.5	D4		1652002008	150.00	7.30	30.10	6.48	4.85	7.90	
M5.5 x 0.5	D3		1652002208							
M6 x 1.0	D4		1652002708	125.00	8.00	30.00	6.48	4.85	7.90	
M6 x 0.75	D3		1652002508							
M6 x 0.5	D5		1652002308	150.00	10.00	35.00	8.08	6.05	9.50	
M8 x 1.25	D4		1652003708							
M8 x 1.0	D6		1652003508							
M8 x 0.75	D5		1652003308	150.00	8.00	33.00	9.68	7.26	11.10	
M10 x 1.5	D4		1652003108							
M10 x 1.25	D5		1652005108							
M10 x 1.0	D6		1652004908	180.00	12.00	39.00	9.32	6.98		
M10 x 0.75	D5		1652004708							
M12 x 1.75	D4		1652004508							
M12 x 1.5	D6		1652006708	150.00	14.00	72.00	10.90	8.18	12.70	
M12 x 1.25	D5		1652006508							
M12 x 1.0	D7		1652006308							
M14 x 2	D6		1652006108	160.00	12.00	60.00	12.19	9.14		14.30
M14 x 1.5	D5		1652007108							
M14 x 1.25	D6		1652007008							
M14 x 1.0	D5		1652006908	180.00	16.00	72.00	12.19	9.14		
M15 x 1.5	D6		1652006808							
M15 x 1.0	D5	1652007308								
M16 x 2.0	D7	1652007208	160.00	12.00	64.00	12.19	9.14	14.30		
M16 x 1.5	D6	1652007708								
M16 x 1.0	D5	1652007508								
M18 x 2.5	D7	1652007408	200.00	16.00	64.00	13.77	10.31		15.90	
M18 x 2.0	D5	1652008308								
M18 x 1.5	D6	1652008208								
M18 x 1.0	D7	1652008108	180.00	25.00	72.00	16.56	12.42	17.50		
M20 x 2.5	D5	1652008008								
M20 x 2.0	D7	1652008708								
			1652008608							

Packed: 1 pc.
Available V coating only.

continued on next page


Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120			30-55			

good best






List 16520 (Continued)



A-LT-SFT, Long Shank, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			Mod Bottom (2.5P-3P)		Lc	Ln					
			V		L	L					
M20 x 1.5	D6	4	1652008508	200.00	16.00	80.00	16.56	12.42	17.50		
M20 x 1.0	D5		1652008408								
M22 x 2.5	D7		1652009108								
M22 x 2.0			1652009008								
M22 x 1.5			D6		1652008908						
M22 x 1.0	D5		1652008808		16.00		83.00	19.30		14.48	19.10
M24 x 3.0	D8		1652009508								
M24 x 2.0	D7		1652009408								
M24 x 1.5	D6		1652009308		16.00						
M24 x 1.0	D5		1652009208								

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
SFM	80-120	80-120	80-120	35-50	20-40	15-35	15-35	15-25	50-80	70-120	70-120			30-55			

good best





List 16450

HSSE	TiN	Var.°
------	-----	-------

CC-SUS-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			TiN						
			L	Lc	Ln	d	k	lk	
2 - 56 UNC	H2	2	1645002562	1.772	0.142	0.472	0.141	0.110	0.188
3 - 48 UNC			1645003482	1.969	0.161	0.531			
4 - 40 UNC			1645004402	2.205	0.197	0.705			
4 - 48 UNF			1645004482		0.201	0.709			
5 - 40 UNC			1645005402		0.248	0.783			
6 - 32 UNC	H3		1645006322	2.480	0.252	0.827	0.168	0.131	0.250
6 - 40 UNF	H2		1645006323						
8 - 32 UNC	H3		1645008322	2.756	0.327	0.976	0.194	0.152	0.281
8 - 36 UNF	H2		1645008323						
10 - 24 UNC	H3		1645010242	3.150	0.398	1.177	0.255	0.191	0.313
10 - 32 UNF	H2		1645010243						
12 - 24 UNC	H3		1645010322	3.543	0.445	1.378	0.318	0.238	0.375
12 - 28 UNF			1645010323						
1/4 - 20 UNC			1645012243						
1/4 - 28 UNF	H5		1645012283	3.937	0.500	1.535	0.381	0.286	0.438
5/16 - 18 UNC	H3		1645014203						
5/16 - 24 UNF	H5		1645014205	3.543	0.571	1.713	0.323	0.242	0.406
3/8 - 16 UNC	H3		1645014283						
3/8 - 24 UNF	H4		1645014284	4.331	0.614	1.933	0.367	0.275	0.438
7/16 - 14 UNC	H3		1645056183						
7/16 - 20 UNF	H5	1645056185	3.937	0.614	1.933	0.367	0.275	0.438	
1/2 - 13 UNC	H3	1645056243							
1/2 - 20 UNF	H5	1645056244	3.937	0.614	1.933	0.367	0.275	0.438	
3/8 - 24 UNF	H3	1645038163							
7/16 - 14 UNC	H5	1645038165	4.331	0.614	1.933	0.367	0.275	0.438	
7/16 - 20 UNF	H3	1645038243							
1/2 - 13 UNC	H5	1645038244	3.937	0.614	1.933	0.367	0.275	0.438	
1/2 - 20 UNF	H3	1645076143							
	H5	1645076145	3.937	0.614	1.933	0.367	0.275	0.438	
	H3	1645076203							
	H5	1645076205	3.937	0.614	1.933	0.367	0.275	0.438	
	H3	1645012133							
	H5	1645012135	3.937	0.614	1.933	0.367	0.275	0.438	
	H3	1645012203							
	H5	1645012205							

Packed: 1 pc.
Available TiN coating only.
*Recommended drill is ADO-SUS drills for stainless steel.

continued on next page **EP**

List No.	Work Material																	
	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	50-80	50-80	30-80	50-100		20-35	20-35	15-25										

good best





List 16450 (Continued)

HSSE	TiN	Var.°
------	-----	-------

CC-SUS-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length					
			Modified Bottom (2.5P-3P)											
			TiN											
			L	Lc	Ln	d	k	lk						
9/16 - 12 UNC	H3	3	1645096123	4.331	0.665	1.972	0.429	0.322	0.500					
	H5		1645096125											
9/16 - 18 UNF	H3		1645096183	3.937										
	H5		1645096185											
5/8 - 11 UNC	H3		1645058113	4.331						0.728	2.126	0.480	0.360	0.563
	H5		1645058115											
5/8 - 18 UNF	H3	1645058183	3.937											
	H5	1645058185												
3/4 - 10 UNC	H3	1645034103	4.921	1.000	2.433	0.590	0.442	0.688						
	H5	1645034105												
3/4 - 16 UNF	H3	1645034163	4.331											
	H5	1645034165												
7/8 - 9 UNC	H4	1645078094	5.512						1.110	2.654	0.697	0.523	0.750	
	H6	1645078096												
7/8 - 14 UNF	H4	1645078144	4.921											
	H6	1645078146												
1 - 8 UNC	H4	1645010084	6.299	1.252	3.012	0.800	0.600	0.813						
	H6	1645010086												
1 - 12 UNF	H4	1645010124	5.512											
	H6	1645010126												

Packed: 1 pc.
 Available TiN coating only.
 *Recommended drill is ADO-SUS drills for stainless steel.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	50-80	50-80	30-80	50-100		20-35	20-35	15-25									

good best





List 16455

HSSE	TiN	Var.°
------	-----	-------

CC-SUS-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units:mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	L	Lc	Ln	d	k	lk
			TiN	L	Lc	Ln	d	k	lk
M2 x 0.4	D3	2	1645502043	45.00	3.20	12.00	3.58	2.79	4.80
M2.5 x 0.45			1645525453	50.00	3.70	14.10			
M2.6 x 0.45			1645526453		3.60	16.00			
M3 x 0.5	D4		1645503054	56.00	4.10	18.10	4.27	3.33	6.40
M4 x 0.7			1645504074	63.00	5.60	21.00			
M5 x 0.8			1645505084	70.00	6.40	25.00			
M6 x 1	D3	1645506103	80.00	8.00	30.00	6.48	4.85	7.90	
	D5	1645506105							
M8 X 1.25	D4	1645508124	90.00	10.00	35.00	8.08	6.05	9.50	
	D6	1645508126							
M10 x 1.5	D4	1645510154	100.00	12.00	39.00	9.68	7.26	11.10	
	D6	1645510156							
M12 x 1.75	D4	1645512174	110.00	14.00	49.10	9.32	6.98	12.70	
		1645512176							
	D6	1645514205							
M14 x 2	D5	1645514207	110.00	16.00	50.10	10.90	8.18	14.30	
	D7	1645516205							
M16 x 2	D5	1645516207	110.00	16.00	54.00	12.19	9.14	14.30	
		1645516207							
M18 x 2.5	D7	1645518257	125.00	25.00	55.00	13.77	10.31	15.90	
M20 x 2.5	D8	1645520258	140.00		61.80	16.56	12.42	17.50	
		1645524309	160.00		30.00	68.40	19.30	14.48	19.10

Packed: 1 pc.

Available TiN coating only.

*Recommended drill is ADO-SUS drills for stainless steel.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16455	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	50-80	50-80	30-80	50-100		20-35	20-35	15-25									

good best





List 335Ni



WHR-Ni-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			HR						
			L	Lc	Ln	d	k	lk	
2 - 56 UNC	H2	2	3350002562	1.772	0.437	-	0.141	0.110	0.188
4 - 40 UNC			3350004402	2.205	0.563	-			
6 - 32 UNC	H3	3	3350006322		2.480	0.689	-	0.168	0.131
	H2		3350008322	-					
8 - 32 UNC	H3	3	3350010243	2.756	0.874	-	0.194	0.152	0.313
	H2		3350010245		-				
10 - 24 UNC	H5	3	3350010322	3.150	0.866	-	0.255	0.191	0.375
	H2		3350010323		-				
10 - 32 UNF	H3	3	3350014203	3.543	1.000	-	0.381	0.286	0.438
	H5		3350014205		-				
1/4 - 20 UNC	H3	3	3350014283	3.937	0.992	-	0.323	0.242	0.406
	H4		3350014284		-				
1/4 - 28 UNF	H3	3	3350516183	3.937	0.752	1.535	0.367	0.275	0.438
	H5		3350516185		1.378				
5/16 - 18 UNC	H3	3	3350516243	4.331	0.921	1.933	0.429	0.322	0.500
	H5		3350516245						
5/16 - 24 UNF	H3	3	3350038163	4.331	1.091	2.126	0.480	0.360	0.563
	H5		3350038165						
3/8 - 16 UNC	H3	3	3350038243	4.331	1.201	2.433	0.590	0.442	0.688
	H5		3350038244						
3/8 - 24 UNF	H3	3	3350716143	4.331	1.335	2.654	0.697	0.523	0.750
	H5		3350716145						
7/16 - 14 UNC	H3	3	3350716203	4.921	1.201	2.433	0.590	0.442	0.688
	H5		3350716205						
7/16 - 20 UNF	H3	3	3350012133	5.512	1.335	2.654	0.697	0.523	0.750
	H5		3350012135						
1/2 - 13 UNC	H3	3	3350012203	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350012205						
1/2 - 20 UNF	H3	3	3350096183	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350096185						
9/16 - 18 UNF	H3	3	3350058113	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350058115						
5/8 - 11 UNC	H3	3	3350058183	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350058185						
5/8 - 18 UNF	H3	3	3350034103	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350034105						
3/4 - 10 UNC	H3	3	3350034163	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350034165						
3/4 - 16 UNF	H3	3	3350078093	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350078095						
7/8 - 9 UNC	H3	3	3350078143	4.921	1.335	2.654	0.697	0.523	0.750
	H5		3350078145						

Packed: 1 pc.
Available HR coating only.





List 335Ni (Continued)

VC10	HR	11°
------	----	-----

WHR-Ni-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)							
			HR	L	Lc	Ln	d	k	lk	
1 - 8 UNC	H3	4	3350001083	6.299	1.500	3.012	0.800	0.600	0.813	
	H5		3350001085							
1 - 12 UNF	H3		3350001123	5.512						
	H5		3350001125							

Packed: 1 pc.
Available HR coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010 1018	1035 1045	1065	4140 4340													
335Ni											<input checked="" type="checkbox"/>						<input type="checkbox"/>
SFM							8-20					8-15					8-12

good best





List 336Ni



WHR-Ni-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length				
			Modified Bottom (2.5P-3P)										
			HR										
			L	Lc	Ln	d	k	lk					
M2.5 x 0.45	D3	3	3360250453	50.00	12.70	-	3.58	2.79	4.80				
M3 x 0.5			3360003053	56.00	15.90	-							
M4 x 0.7			3360004074	63.00	19.00	-							
M5 x 0.8	D4		3360005084	70.00	22.20	-	4.93	3.86	6.40				
M6 x 1.0			3360006105	80.00	25.40	-							
M6 x 0.75	D5		3360006755	90.00	25.30	-	6.48	4.85	7.90				
M8 x 1.25			3360008255										
M8 x 1.0			3360008105										
M10 x 1.5	D6		3360010156	100.00	18.00	39.00	9.68	7.26	11.10				
M10 x 1.25	D5		3360010255										
M12 x 1.75	D6		3360012756	110.00	21.00	49.10	9.32	6.98					
M12 x 1.5			3360012156	100.00									
M14 x 2.0	D7		3360014207	110.00	24.00	50.10	10.90	8.18		12.70			
M14 x 1.5	D6		3360014156	100.00									
M16 x 2.0	D7		3360016207	110.00			12.19	9.14	14.30				
M16 x 1.5	D6		3360016156	100.00									
M18 x 2.5	D7		3360018257	125.00			54.00	13.77	10.31	15.90			
M18 x 1.5	D6		3360018156	110.00									
M20 x 2.5	D8	3360020258	140.00	30.00	61.80	16.56	12.42	17.50					
M20 x 1.5	D6	3360020156	125.00										
M22 x 2.5	D8	3360022258	140.00										
M22 x 1.5	D6	3360022156	125.00										
M24 x 3.0	D8	3360024308	160.00						36.00	68.40	19.30	14.48	19.10
M24 x 1.5	D6	3360024156	140.00										

Packed: 1 pc.
Available HR coating only.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
336Ni																		
SFM								8-20										8-12

good best





List 389



OT-SFT, JIS, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P-2P)	Modified Bottom (2.5P-3P)						
			Bright	Bright	L	Lc	Ln	d	k	lk
M3 x 0.5	OH3	3	8315255	8315254	46.00	11.00	19.00	4.00	3.20	6.00
M4 x 0.7			8315261	8315260	52.00	13.00	21.00	5.00	4.00	7.00
M5 x 0.8			8315267	8315266	60.00	15.90	23.90	5.50	4.50	
M6 x 1.0			8315273	8315272	62.00	19.00	29.00	6.00	5.00	
M8 x 1.25			OH4	8315285	8315284	70.00	22.00	-	6.20	5.00
M10 x 1.5	8315297			8315296	75.00	24.00	-	7.00	5.50	
M10 x 1.25	8315303			8315302			-			
M12 x 1.75	8315315			8315314	82.00	29.00	-	8.50	6.50	9.00

Packed: 1 pc.
Other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Aluminum	Titanium		Hardened Steels				
	Low	Med.	High				300	400	17-4 PH					6061 7075	Casting	6Al4V (30 HRC)	~35 HRC	35-45 HRC
389										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best





List 313Ti

V-Ti-SFT, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			V						
			L	Lc	Ln	d	k	lk	
2 - 56 UNC	H2	3	1305710108	1.750	0.437	-	0.141	0.110	0.188
4 - 40 UNC			1305710208	1.875	0.559	-			
6 - 32 UNC			1305710408	2.000	0.685	-			
6 - 40 UNF	1305710508								
8 - 32 UNC	1305710608								
8 - 36 UNF	H2		1305710708	2.125	0.752	-	0.168	0.131	0.250
10 - 24 UNC	H3		1305710808						
10 - 32 UNF	H2		1305710908						
1/4 - 20 UNC	H3		1305711008	2.375	0.866	-	0.194	0.152	0.313
	H5		1305711108						
	H3		1305711208						
1/4 - 28 UNF	H3		1305711308	2.500	0.996	-	0.255	0.191	0.375
	H4	1305711408							
	H5	1305711508							
5/16 - 18 UNC	H3	1305711608	2.719	0.445	1.126	0.318	0.238	0.438	
	H5	1305711708							
	H3	1305711808							
5/16 - 24 UNF	H3	1305711908	2.938	0.500	1.252	0.381	0.286	0.406	
	H4	1305712008							
	H5	1305712108							
3/8 - 16 UNC	H3	1305712208	3.156	0.571	1.713	0.323	0.242	0.438	
	H5	1305712308							
	H3	1305712408							
3/8 - 24 UNF	H3	1305712508	3.375	0.614	1.933	0.367	0.275	0.500	
	H5	1305712608							
	H3	1305712708							
7/16 - 14 UNC	H3	1305712808	3.594	0.665	1.972	0.429	0.322	0.563	
	H5	1305712908							
	H3	1305713008							
7/16 - 20 UNF	H3	1305713108	3.813	0.728	2.126	0.480	0.360	0.688	
	H5	1305713208							
	H3	1305713308							
1/2 - 13 UNC	H3	1305713408	4.250	0.799	2.433	0.590	0.442	0.688	
	H5	1305713508							
	H3	1305713608							
1/2 - 20 UNF	H3	1305713708	3.594	0.665	1.972	0.429	0.322	0.500	
	H5	1305713808							
	H3	1305713908							
9/16 - 18 UNF	H3	1305714008	3.813	0.728	2.126	0.480	0.360	0.563	
	H5	1305713308							
	H3	1305713408							
5/8 - 11 UNC	H3	1305713508	4.250	0.799	2.433	0.590	0.442	0.688	
5/8 - 18 UNF	H5	1305713608							
	H3	1305713708							
3/4 - 10 UNC	H3	1305713808	3.813	0.728	2.126	0.480	0.360	0.563	
3/4 - 16 UNF	H5	1305713908							
	H3	1305714008							

Packed: 1 pc.
Available V coating only.





List 313Ti (Continued)

V-Ti-SFT, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			V						
7/8 - 9 UNC	H3	4	1305714208	4.688	0.890	2.654	0.697	0.523	0.750
	H5		1305714308						
7/8 - 14 UNF	H3		1305714408						
	H5		1305714508						
1 - 8 UNC			1305714108	5.125	1.000	3.012	0.800	0.600	0.813

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
313Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30			8-20					8-15	8-15	15-35	10-20			

good best





EXOTAP® VC-10 Ti

Taps Designed for Titanium Alloys

List 345Ti

V-Ti-SFT, Modified Bottom (2.5P-3P)



VC10

V

10°



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			V						
			L	Lc	Ln	d	k	lk	
M2.5 x 0.45	D3	3	1316210008	46.00	12.70	-	3.58	2.79	4.80
M3 x 0.5			1316210108	49.20	16.00	-			
M4 x 0.7	D4		1316210208	54.00	19.10	-	4.27	3.33	6.40
M5 x 0.8			1316210308	60.30	22.20	-	4.93	3.86	
M6 x 1.0	D5		1316210408	63.50	25.40	-	6.48	4.85	7.90
M8 x 1.25			1316210508	69.10	10.00	28.60	8.08	6.05	9.50
M10 x 1.5	D6		1316210708	74.60	12.00	31.80	9.68	7.26	11.10
M10 x 1.25	D5		1316210608						
M12 x 1.75	D6		1316210808	85.70	14.00	49.10	9.32	6.98	
M12 x 1.25	D5		1316210908						

Packed: 1 pc.

Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
345Ti				<input type="checkbox"/>				<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30			8-20				8-15	8-15	15-35	10-20			

good best





List 317Ti

VPO-Ti-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)							
			V	L						
1/4 - 28 UNF	H3	3	31721408	3.150	1.000	-	0.255	0.191	0.313	
	H4		31721508							
5/16 - 24 UNF	H3		31721808	3.543	0.445	1.378	0.318	0.238	0.375	
	H4		31721908							
3/8 - 24 UNF	H3		31722208	3.937	0.500	1.713	0.323	0.242	0.406	
	H4		31722308							
7/16 - 20 UNF	H3		31722608	4.331	0.571	1.933	0.367	0.275	0.438	
	H5		31722708							
1/2 - 20 UNF	H3		31723008	4.921	0.614	1.972	0.429	0.322	0.500	
	H5		31723108							
9/16 - 18 UNF	H3		31723408	4.331	0.665	2.126	0.480	0.360	0.563	
	H5		31723508							
5/8 - 18 UNF	H3	31723808	4.921	0.728	2.433	0.590	0.442	0.688		
	H5	31723908								
3/4 - 16 UNF	H3	31724208	5.512	0.799	2.654	0.697	0.523	0.750		
	H5	31724308								
7/8 - 14 UNF	H4	31724608	5.512	0.890	3.012	0.800	0.600	0.813		
	H6	31724708								
1 - 12 UNF	H4	31725008	5.512	1.000	3.012	0.800	0.600	0.813		
	H6	31725108								

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
317Ti				<input type="checkbox"/>			<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30			8-20				8-15	8-15	15-35	10-20			

good best





EXOTAP® VC-10 Ti Oil

Coolant-Through Taps Designed for Titanium Alloys

List 348Ti

VPO-Ti-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Modified Bottom (2.5P-3P)							
			V							
M8 x 1.0	D5	3	34820608	90.00	10.00	35.00	8.08	6.05	9.50	
M10 x 1.25			34820808							
M12 x 1.25			34821008							
M12 x 1.5	D6	3	34821108	100.00	14.00	49.10	9.32	6.98	11.10	
M14 x 1.5			34821308							
M16 x 1.5			34821508							
M18 x 1.5		4	4	34821708	110.00	20.00	55.00	13.77	10.31	15.90
M20 x 1.5				34821908						
M22 x 1.5				34822108						
M24 x 1.5	34822308									
				125.00		61.80	16.56	12.42	17.50	
				140.00	24.00	67.40	17.70	13.28	19.10	
						68.40	19.30	14.48		

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
348Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30			8-20					8-15	8-15	15-35	10-20		



good best





List 313Ni

Ni-SFT, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)		Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix S/O	EDP Number	Coating Suffix							
						S/O	V						
2 - 56 UNC	H2	2	-	-	17707	01	-	1.750	0.437	-	0.141	0.110	0.188
4 - 40 UNC			H3	17705	01	17190	01	08	1.875	0.559			
6 - 32 UNC	H2			01401	01	17207	01	-					
	H3		17700	01	17091	01	08	-					
	H5		-	-	17092	01	-	-					
8 - 32 UNC	H7		-	-	17701	01	-	2.125	0.752	-			
	H2		01402	01	-	-	-			-			
	H3		-	-	17093	01	08			-			
10 - 24 UNC	H5		-	-	17094	01	-	2.375	0.866	-	0.194	0.152	0.250
	H3		-	-	17195	01	08			-			
10 - 32 UNF	H5		-	-	17196	01	-	2.500	0.996	-	0.255	0.191	0.313
	H2		01403	01	17702	01	-			-			
	H3	17703	01	17095	01	08	-						
1/4 - 20 UNC	H4	-	-	17704	01	-	2.719	0.445	1.126	0.318	0.238	0.375	
	H5	-	-	17096	01	-							-
	H3	01404	01	17197	01	08							-
1/4 - 28 UNF	H7	-	-	17198	01	-	2.938	0.500	1.252	0.381	0.286	0.438	
	H3	01405	01	17097	01	08							-
	H4	01406	01	-	-	-							-
5/16 - 18 UNC	H5	-	-	17098	01	-	3.156	0.571	1.713	0.323	0.242	0.406	
	H3	-	-	17199	01	08							-
	H7	-	-	17200	01	-							-
5/16 - 24 UNF	H5	-	-	17712	01	-	2.938	0.500	1.252	0.381	0.286	0.438	
	H3	01407	01	17099	01	08							-
	H4	-	-	01408	01	-							-
3/8 - 16 UNC	H5	-	-	17100	01	-	3.156	0.571	1.713	0.323	0.242	0.406	
	H3	17710	01	17201	01	08							-
	H5	-	-	17202	01	-							-
3/8 - 24 UNF	H7	-	-	17711	01	-	3.156	0.571	1.713	0.323	0.242	0.406	
	H3	01409	01	17101	01	08							-
	H4	01410	01	-	-	-							-
7/16 - 14 UNC	H5	-	-	17102	01	-	3.156	0.571	1.713	0.323	0.242	0.406	
	H3	-	-	17203	01	-							-
	H5	-	-	17204	01	-							-

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.

[continued on next page](#) **EXT**

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			4140 4340	300	400		17-4 PH	6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
313Ni								<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
SFM							8-20					8-15	8-15	15-35	10-20		

good best





EXOTAP[®] VC-10 Ni

Taps Designed for Nickel Based Alloys



List 313Ni (Continued)

Ni-SFT, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)		Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk																																																																																																																																																																																		
			EDP Number	Coating Suffix S/O	EDP Number	Coating Suffix																																																																																																																																																																																									
						S/O	V																																																																																																																																																																																								
7/16 - 20 UNF	H3	3	01411	01	17103	01	-	3.156	0.571	1.713	0.323	0.242	0.406																																																																																																																																																																																		
	H5		01412	01	17104	01	-							1/2 - 13 UNC	H3	17709	01	17205	01	08	3.375	0.614	1.933	0.367	0.275	0.438	H5	-	-	17206	01	-	1/2 - 20 UNF	H3	01413	01	17105	01	08	3.594	0.665	1.972	0.429	0.322	0.500	H5	01414	01	17106	01	-	H7	-	-	17713	01	-	9/16 - 18 UNF	H3	01415	01	-	-	-	3.813	0.728	2.126	0.480	0.360	0.563	H5	01416	01	-	-	-	5/8 - 11 UNC	H3	-	-	17107	01	-	4.250	0.799	2.433	0.590	0.442	0.688	5/8 - 18 UNF	H5	-	-	17108	01	-	3/4 - 10 UNC	H3	-	-	17109	01	-	4.688	0.890	2.654	0.697	0.523	0.750	H5	-	-	17708	01	-	3/4 - 16 UNF	H3	-	-	17110	01	-	5.125	1.000	3.012	0.800	0.600	0.813	H5	-	-	17111	01	-	7/8 - 9 UNC	H3	-	-	17112	01	-	-	-	-	-	-	-	H5	-	-	17114	01	-	7/8 - 14 UNF	H3	-	-	17115	01	-	-	-	-	-	-	-	H5	-	-	17116	01	-	1 - 8 UNC	H5	-	-	17117	01	-	-	-	-	-	-	-				-	-	17113
1/2 - 13 UNC	H3		17709	01	17205	01	08	3.375	0.614	1.933	0.367	0.275	0.438																																																																																																																																																																																		
	H5		-	-	17206	01	-							1/2 - 20 UNF	H3	01413	01	17105	01	08	3.594	0.665	1.972	0.429	0.322	0.500	H5	01414	01	17106	01	-		H7	-	-	17713	01	-							9/16 - 18 UNF	H3	01415	01	-	-	-	3.813	0.728	2.126	0.480	0.360	0.563	H5	01416	01	-	-	-	5/8 - 11 UNC	H3	-	-	17107	01	-	4.250	0.799	2.433	0.590	0.442	0.688	5/8 - 18 UNF	H5	-	-	17108	01	-	3/4 - 10 UNC	H3	-	-	17109	01	-	4.688	0.890	2.654	0.697	0.523	0.750	H5	-	-	17708	01	-	3/4 - 16 UNF	H3	-	-	17110	01	-	5.125	1.000	3.012	0.800	0.600	0.813	H5	-	-	17111	01	-	7/8 - 9 UNC	H3	-	-	17112	01	-	-	-	-	-	-	-	H5	-	-	17114	01	-	7/8 - 14 UNF	H3	-	-	17115	01	-	-	-	-	-	-	-	H5	-	-	17116	01	-	1 - 8 UNC	H5	-	-	17117	01	-	-	-	-	-	-	-				-	-	17113	01	-	-	-	-	-	-					
1/2 - 20 UNF	H3		01413	01	17105	01	08	3.594	0.665	1.972	0.429	0.322	0.500																																																																																																																																																																																		
	H5		01414	01	17106	01	-																																																																																																																																																																																								
	H7		-	-	17713	01	-																																																																																																																																																																																								
9/16 - 18 UNF	H3		01415	01	-	-	-	3.813	0.728	2.126	0.480	0.360	0.563																																																																																																																																																																																		
	H5		01416	01	-	-	-																																																																																																																																																																																								
5/8 - 11 UNC	H3		-	-	17107	01	-	4.250	0.799	2.433	0.590	0.442	0.688																																																																																																																																																																																		
5/8 - 18 UNF			H5	-	-	17108	01							-																																																																																																																																																																																	
3/4 - 10 UNC	H3		-	-	17109	01	-	4.688	0.890	2.654	0.697	0.523	0.750																																																																																																																																																																																		
	H5	-	-	17708	01	-																																																																																																																																																																																									
3/4 - 16 UNF	H3	-	-	17110	01	-	5.125	1.000	3.012	0.800	0.600	0.813																																																																																																																																																																																			
	H5	-	-	17111	01	-																																																																																																																																																																																									
7/8 - 9 UNC	H3	-	-	17112	01	-	-	-	-	-	-	-																																																																																																																																																																																			
	H5	-	-	17114	01	-																																																																																																																																																																																									
7/8 - 14 UNF	H3	-	-	17115	01	-	-	-	-	-	-	-																																																																																																																																																																																			
	H5	-	-	17116	01	-																																																																																																																																																																																									
1 - 8 UNC	H5	-	-	17117	01	-	-	-	-	-	-	-																																																																																																																																																																																			
			-	-	17113	01	-	-	-	-	-	-																																																																																																																																																																																			

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
313Ni											<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM							8-20				8-15	8-15	15-35	10-20			

good best





List 345Ni

Ni-SFT, Modified Bottom (2.5P-3P)



VC10

S/O

10°



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Modified Bottom (2.5P-3.P)							
			S/O							
M2.5 x 0.45	D3	3	1316110001	46.00	12.70	-	3.58	2.79	4.80	
M3 x 0.5			1316110101	49.20	16.00	-				
M4 x 0.7			1316110201	54.00	19.10	-				
M5 x 0.8	D4		1316110301	60.30	22.20	-	4.93	3.86	6.40	
M6 x 1.0			1316110401	63.50	25.40	-	6.48	4.85	7.90	
M8 x 1.25	D5		1316110501	69.10	10.00	28.60	8.08	6.05	9.50	
M10 x 1.5			D6	1316110701	74.60	12.00	31.80	9.68	7.26	11.10
M10 x 1.25			D5	1316110601						
M12 x 1.75	D6		1316110801	85.70	14.00	49.10	9.32	6.98		

Packed: 1 pc.

Available Steam Oxide finish only.

EXT

Work Material

List No.	P			Alloy Steels 4140 4340	Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels					Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
345Ni																	
SFM						8-20					8-15	8-15	15-35	10-20			

good best





List 313

Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P-2P)			Modified Bottom (2.5P-3.P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
				S/O	V		S/O	V						
2 - 56 UNC	H2	2	01417	01	08	17540	01	08	1.750	0.437	-	0.141	0.110	0.188
4 - 40 UNC	H3		01418	01	08	17520	01	08	1.875	0.157	0.559			
	H4		-	-	-	17541	01	08						
	-		-	-	-	17542	01	08						
5 - 40 UNC	H2		-	-	-	17521	01	08	1.938	0.201	0.634			
6 - 32 UNC	H2		-	-	-	17543	01	08	2.000	0.248	0.685			
	H3		01419	01	08	17522	01	08						
	H4		01420	01	08	17544	01	08						
	H5		-	-	-	17545	01	08						
8 - 32 UNC	H2		01421	01	08	17546	01	08	2.125	0.252	0.752	0.168	0.131	
	H3		01422	01	08	17523	01	08						
	H4		01423	01	08	17547	01	08						
	H5		-	-	-	17548	01	08						
10 - 24 UNC	H6		-	-	-	17549	01	08	2.375	0.327	0.866	0.194	0.152	
	H3		-	-	-	17524	01	08						
10 - 32 UNF	H5		-	-	-	17030	01	08	2.500	0.398	0.996	0.255	0.191	0.313
	H2		01424	01	08	17031	01	08						
	H3		01425	01	08	17525	01	08						
	H4		01426	01	08	17032	01	08						
	H5		-	-	-	17033	01	08						
1/4 - 20 UNC	H6		-	-	-	17034	01	08	2.719	0.445	1.126	0.318	0.238	0.375
	H3		-	-	-	17526	01	08						
	H5		-	-	-	17035	01	08						
	H3		01427	01	08	17527	01	08						
1/4 - 28 UNF	H4	01428	01	08	17036	01	08	2.938	0.500	1.252	0.381	0.286	0.438	
	H5	-	-	-	17037	01	08							
	H6	-	-	-	17038	01	08							
	H3	-	-	-	17528	01	08							
5/16 - 18 UNC	H5	-	-	-	17039	01	08	3.156	0.571	1.713	0.323	0.242	0.406	
5/16 - 24 UNF	H3	01429	01	08	17529	01	08							
	H4	01430	01	08	17040	01	08							
	H5	-	-	-	17041	01	08							
3/8 - 16 UNC	H6	-	-	-	17042	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H3	-	-	-	17530	01	08							
3/8 - 24 UNF	H5	-	-	-	17043	01	08	3.156	0.571	1.713	0.323	0.242	0.406	
	H3	01431	01	08	17531	01	08							
3/8 - 24 UNF	H4	01432	01	08	17044	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H5	-	-	-	17045	01	08							
	H6	-	-	-	17046	01	08							
7/16 - 14 UNC	H3	-	-	-	17532	01	08	3.156	0.571	1.713	0.323	0.242	0.406	
	H5	-	-	-	17047	01	08							
7/16 - 20 UNF	H3	01433	01	08	17533	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H5	01434	01	08	17048	01	08							
1/2 - 13 UNC	H3	-	-	-	17534	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H5	-	-	-	17049	01	08							
1/2 - 20 UNF	H3	01435	01	08	17535	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H5	01436	01	08	17050	01	08							


Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.





List 313 (Continued)

Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P-2P)			Modified Bottom (2.5P-3.P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
				S/O	V		S/O	V						
5/8 - 11 UNC	H3	4	-	-	-	17536	01	08	3.813	0.728	2.126	0.480	0.360	0.563
5/8 - 18 UNF	H5		-	-	-	17537	01	08						
3/4 - 10 UNC	H3		-	-	-	17538	01	08	4.250	0.799	2.433	0.590	0.442	0.688
3/4 - 16 UNF			-	-	-	17539	01	08						

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
313				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20			

good best





EXOTAP[®] VC-10

Ideal for Difficult to Machine Materials



VC10	V	S/O	15°
------	---	-----	-----

List 345

Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P-3P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V	L	Lc	Ln	d	k	lk
M3 x 0.5	D3	3	17055	01	08	49.20	4.10	16.00	3.58	2.79	4.80
M4 x 0.7	D4		17056	01	08	54.00	5.60	19.10	4.27	3.33	6.40
M5 x 0.8			17057	01	08	60.30	6.40	22.20	4.93	3.86	
M6 x 1.0			17058	01	08	63.50	8.00	25.40	6.48	4.85	
M8 x 1.25	D5		17059	01	08	69.10	10.00	28.60	8.08	6.05	9.50
M10 x 1.5	D6		17061	01	08	74.60	12.00	31.80	9.68	7.26	11.10
M10 x 1.25	D5		17060	01	08						
M12 x 1.75	D6		17062	01	08						

Packed: 1 pc.
 EDP's listed above are stocked standard.
 Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P																K	N		S		H			
	Carbon Steels					Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels									
	Low	Med.	High	4140 4340	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC		45-50 HRC	50-70 HRC						
	1010 1018	1035 1045	1065																						
345				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>									
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20										

good best





List 317

VPO-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			V						
			L	Lc	Ln	d	k	lk	
5/16 - 18 UNC	H3	3	31701508	3.543	0.445	1.378	0.318	0.238	0.375
	H5		31701608						
5/16 - 24 UNF	H3		31701708	3.937	0.500	1.535	0.381	0.286	0.438
	H4		31701808						
3/8 - 16 UNC	H3		31701908	3.543	0.500	1.378	0.381	0.286	0.438
	H5		31702008						
3/8 - 24 UNF	H3		31702108	3.937	0.571	1.713	0.323	0.242	0.406
	H4		31702208						
7/16 - 14 UNC	H3		31702308	4.331	0.614	1.933	0.367	0.275	0.438
	H5		31702408						
7/16 - 20 UNF	H3		31702508	3.937	0.665	1.972	0.429	0.322	0.500
	H5		31702608						
1/2 - 13 UNC	H3		31702708	3.937	0.728	2.126	0.480	0.360	0.563
	H5		31702808						
1/2 - 20 UNF	H3		31702908	4.921	0.799	2.433	0.590	0.442	0.688
	H5		31703008						
9/16 - 12 UNC	H3	31704908	4.331	0.890	2.654	0.697	0.523	0.750	
	H5	31705008							
9/16 - 18 UNF	H3	31703108	4.331	1.000	3.012	0.800	0.600	0.813	
	H5	31703208							
5/8 - 11 UNC	H3	31703308	4.331	5.512	0.890	0.697	0.523	0.750	
	H5	31703408							
5/8 - 18 UNF	H3	31703508	4.921	6.299	3.012	0.800	0.600	0.813	
	H5	31703608							
3/4 - 10 UNC	H3	31703708	4.331	5.512	0.890	0.697	0.523	0.750	
	H5	31703808							
3/4 - 16 UNF	H3	31703908	4.331	5.512	0.890	0.697	0.523	0.750	
	H5	31704008							
7/8 - 9 UNC	H4	31704108	4.921	6.299	3.012	0.800	0.600	0.813	
	H6	31704208							
7/8 - 14 UNF	H4	31704308	4.921	5.512	0.890	0.697	0.523	0.750	
	H6	31704408							
1 - 8 UNC	H4	31704508	4.331	5.512	0.890	0.697	0.523	0.750	
	H6	31704608							
1 - 12 UNF	H4	31704708	4.331	5.512	0.890	0.697	0.523	0.750	
	H6	31704808							

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
317				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>				
SFM				15-30	10-25			12-45	8-20				8-15	8-15	15-35	10-20		

good best





EXOTAP® VC-10 Oil

Coolant-Through Taps Designed for Difficult to Machine Materials

List 351

VPO-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Modified Bottom (2.5P-3P)							
			V							
M8 x 1.0	D5	3	35100608	90.00	10.00	35.00	8.08	6.05	9.50	
M8 x 1.25			35100708							
M10 x 1.25			35100808							
M10 x 1.5	D6		35100908	100.00	12.00	39.00	9.68	7.26	11.10	
M12 x 1.25	D5									35101008
M12 x 1.5	D6									35101108
M12 x 1.75			35101208							
M14 x 1.5			35101308							
M14 x 2.0	D7		35101408	110.00	16.00	50.10	10.90	8.18	12.70	
M16 x 1.5	D6		35101508	100.00						
M16 x 2.0	D7		35101608	110.00						
M18 x 1.5	D6		4	35101708	125.00	20.00	55.00	13.77	10.31	15.90
M18 x 2.5	D7	35101808								
M20 x 1.5	D6	35101908								
M20 x 2.5	D7	35102008		140.00						
M22 x 1.5	D6	35102108		125.00						
M22 x 2.5	D7	35102208		140.00						
M24 x 1.5	D6	35102308	160.00	24.00	68.40	19.30	14.48	19.10		
M24 x 3.0	D8	35102408								

Packed: 1 pc.
Available V coating only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
351				☐	☐							☐	☐					
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20			

☐ good ☐ best






List 303

Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



HSSE	V	TiN	S/O	45°
------	---	-----	-----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Modified Bottom (2.5P - 3P)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk			
			EDP Number	Coating Suffix		EDP Number	Coating Suffix											
				S/O	V		S/O	TiN	V									
2 - 56 UNC	H2	2	01354	01	08	17489	01	-	-	1.750	0.437	0.476	0.141	0.110	0.188			
3 - 48 UNC			01355	01	08	17487	01	-	-	1.813	0.496	0.535						
4 - 40 UNC	H3	3	-	-	-	17639	01	05	08	1.875	0.197	0.559				0.141	0.110	0.188
			01356	01	08	17320	01	-	08									
	2	-	-	-	17480	01	-	-										
	3	01357	01	08	17220	01	-	08										
	H4	-	-	-	17481	01	-	-										
	H5	17483	01	-	17482	01	-	-										
4 - 48 UNF	H2	2	-	-	-	17484	01	-	-	1.938	0.201	0.626				0.141	0.110	0.188
5 - 40 UNC			01358	01	08	-	-	-	-									
6 - 32 UNC	H2	2	01359	01	08	17321	01	-	08	2.000	0.248	0.685				0.141	0.110	0.188
			01360	01	08	17242	01	-	08									
			H3	01361	01	08	17322	01	05				08					
			H4	-	-	-	17467	01	-				-					
			H5	17468	01	-	17222	01	-				08					
6 - 40 UNF	H2	2	-	-	-	17469	01	-	-	2.125	0.252	0.752	0.168	0.131	0.250			
	H3	3	01362	01	08	17485	01	-	-									
8 - 32 UNC	H2	3	-	-	-	17486	01	-	-	2.375	0.327	0.866	0.194	0.152	0.250			
			01363	01	08	17243	01	-	08									
			H3	01364	01	08	17323	01	05							08		
			H4	-	-	-	17470	01	-							-		
			H5	17471	01	-	17223	01	-							08		
			H6	-	-	-	17472	01	-							-		
			H7	-	-	-	17473	01	-							-		
8 - 36 UNF	H3	3	01365	01	08	-	-	-	-	2.375	0.327	0.866	0.194	0.152	0.250			
10 - 24 UNC	H2	2	01366	01	08	17245	01	-	08									
	H3	3	01367	01	08	17324	01	05	08									
	H5	5	17495	01	-	17494	01	-	-									
	H7	7	-	-	-	17496	01	-	-									
10 - 32 UNF	H2	3	01368	01	08	17246	01	-	08	2.375	0.327	0.866	0.194	0.152	0.250			
			01369	01	08	17325	01	05	08									
			H3	-	-	-	17474	01	-							-		
			H4	17475	01	-	17225	01	-							08		
			H5	-	-	-	17476	01	-							-		
			H6	-	-	-	17477	01	-							-		
12 - 24 UNC	H3	3	-	-	-	17477	01	-	-	2.375	0.327	0.866	0.194	0.152	0.250			
12 - 28 UNF			01370	01	08	17497	01	-	-									
			-	-	-	17498	01	-	-	0.331	0.933	0.220	0.165	0.281				

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide, V or TiN coatings as shown above.

continued on next page **EXT**

Work Material																		
List No.	P					Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Aluminum	Nickel Alloy	Hardened Steels					
	Low	Med.	High				300	400	17-4 PH				6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
303	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45				20-45	20-45	8-20									


good best





List 303 (Continued)

Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Modified Bottom (2.5P - 3P)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix								
				S/O	V		S/O	TiN	V						
1/4 - 20 UNC	H2	3	-	-	-	17626	01	-	-	2.500	0.398	0.996	0.255	0.191	0.313
	H3		01371	01	08	17326	01	05	08						
	H5		01372	01	08	17226	01	-	08						
	H7		-	-	-	17627	01	-	-						
1/4 - 28 UNF	H2		-	-	-	17634	01	-	-						
	H3		01373	01	08	17327	01	05	08						
	H4		01374	01	08	17227	01	-	08						
	H5		17636	01	-	17635	01	-	-						
	H6		-	-	-	17637	01	-	-						
	H7		-	-	-	17638	01	-	-						
5/16 - 18 UNC	H3		01375	01	08	17328	01	05	08						
	H5		01376	01	08	17228	01	-	08						
	H7		-	-	-	17622	01	-	-						
5/16 - 24 UNF	H3		01377	01	08	17329	01	05	08						
	H4		01378	01	08	17229	01	-	08						
	H5		17632	01	-	17631	01	-	-						
	H7		-	-	-	17633	01	-	-						
3/8 - 16 UNC	H3		01379	01	08	17330	01	05	08						
	H5		01380	01	08	17230	01	-	08						
	H7		-	-	-	17618	01	-	-						
3/8 - 24 UNF	H3		01381	01	08	17331	01	05	08						
	H4		01382	01	08	17231	01	-	08						
	H5		17630	01	-	17629	01	-	-						
7/16 - 14 UNC	H3		01383	01	08	17332	01	05	08						
	H5		-	-	-	17232	01	-	08						
	H7		-	-	-	17617	01	-	-						
7/16 - 20 UNF	H3		01384	01	08	17333	01	05	08						
	H5		01385	01	08	17233	01	-	08						
	H7	-	-	-	17628	01	-	-							
1/2 - 13 UNC	H3	01386	01	08	17334	01	05	08							
	H5	01387	01	08	17234	01	-	08							
	H7	-	-	-	17500	01	-	-							
1/2 - 20 UNF	H3	01388	01	08	17335	01	05	08							
	H5	01389	01	08	17235	01	-	08							
	H6	-	-	-	17624	01	-	-							
	H7	-	-	-	17625	01	-	-							
9/16 - 12 UNC	H3	3	-	-	-	17499	01	05	08						
		4	01390	01	08	17260	01	-	08						
9/16 - 18 UNF	H3	3	-	-	-	17623	01	05	08						
		4	01391	01	08	17261	01	-	08						

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide, V or TiN coatings as shown above.





List 303 (Continued)

Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Modified Bottom (2.5P - 3P)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix								
				S/O	V		S/O	TiN	V						
5/8 - 11 UNC	H3	3	-	-	-	17491	01	05	08	3.813	0.728	2.126	0.480	0.360	0.563
		4	01392	01	08	17336	01	-	08						
	H5	3	-	-	-	17492	01	-	-						
		4	01393	01	08	-	-	-	-						
5/8 - 18 UNF	H3	3	-	-	-	17493	01	-	-						
		4	01394	01	08	17337	01	-	08						
	H5	3	-	-	-	17620	01	-	-						
		4	01395	01	08	-	-	-	-						
3/4 - 10 UNC	H3	4	-	-	-	17621	01	-	-						
			01396	01	08	17338	01	05	08						
3/4 - 16 UNF	H3	4	01397	01	08	-	-	-	-						
			01398	01	08	17339	01	05	08						
7/8 - 9 UNC	H4	4	01399	01	08	-	-	-	-						
7/8 - 14 UNF			01400	01	08	17263	01	-	08						
1 - 8 UNC			-	-	-	17264	01	-	08						
1 - 12 UNF			-	-	-	17490	01	-	-						

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide, V or TiN coatings as shown above.



Work Material																		
List No.	P					Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Aluminum	Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High				300	400	17-4 PH					6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC
303	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45				20-45	20-45	8-20									



good best





List 343

Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)		Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk		
			EDP Number	Coating Suffix S/O	EDP Number	Coating Suffix									
						S/O	TiN							V	
M3 x 0.5	D3	3	17550	01	17551	01	-	-	49.21	4.10	16.00	3.58	2.79	4.80	
M3.5 x 0.6	D4		-	-	17464	01	-	-							
M4 x 0.7			17553	01	17554	01	05	08	53.98	5.60	19.10	4.27	3.33	6.40	
M5 x 0.8			17556	01	17557	01	05	08	60.33	6.40	22.20	4.93	3.86		
M6 x 1.0	D5		17559	01	17560	01	05	08	63.50	8.00	25.40	6.48	4.85		7.90
M8 x 1.25			17562	01	17563	01	05	08	69.06	10.00	28.60	8.08	6.05	9.50	
M8 x 1.0			17465	01	17466	01	-	-							
M10 x 1.5	D6		17565	01	17566	01	05	08							74.61
M10 X 1.25	D5		-	-	17457	01	-	-							
M12 x 1.75	D6		17568	01	17569	01	05	08	85.73	14.00	49.10	9.32	6.98		
M12 x 1.25	D5		-	-	17458	01	-	-							
M14 x 2.0	D7		17558	01	17460	01	-	-	91.28	16.00	50.10	10.90	8.18	12.70	
M14 x 1.5	D6		17561	01	17459	01	-	-							
M16 x 2.0	D7		17555	01	17462	01	-	-	96.84		54.00	12.19	9.14	14.30	
M16 x 1.5	D6		17552	01	17461	01	-	-							
M18 x 1.5			4	-	-	17463	01	-	-		102.39	20.00	55.00	13.77	10.31

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide, V or TiN coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum			Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
343	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45			20-45	20-45	8-20									

good best



List 307

OIL-V-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Modified Bottom (2.5P-3P)							
			V							
			L	Lc	Ln	d	k	lk		
1/4 - 20 UNC	H3	3	30701708	3.150	0.402	1.181	0.255	0.191	0.313	
	H5		30701808							
1/4 - 28 UNF	H3		30701908							
	H4		30702008							
5/16 - 18 UNC	H3		30702108	3.543	0.445	1.378	0.318	0.238	0.375	
	H5		30702208							
5/16 - 24 UNF	H4		30702308							
	H5		30702408							
3/8 - 16 UNC	H3		30702508	3.937	0.500	1.535	0.381	0.286	0.438	
	H5		30702608							
3/8 - 24 UNF	H3		30702708	3.543						1.378
	H4		30702808							
7/16 - 14 UNC	H3	30702908	3.937	0.571	1.291	0.323	0.242	0.406		
	H5	30703008								
7/16 - 20 UNF	H3	30703108								
	H5	30703208								
1/2 - 13 UNC	H3	30703308	4.331	0.614	1.354	0.367	0.275	0.438		
	H5	30703408								
1/2 - 20 UNF	H3	30703508	3.397						30703608	
	H5	30703608								
9/16 - 12 UNC	H3	30703708	4.331	0.665	1.472	0.429	0.322	0.500		
	H5	30703808								
9/16 - 18 UNF	H3	30703908	3.937						30704008	
	H5	30704008								
5/8 - 11 UNC	H3	30704108	4.331	0.728	1.563	0.480	0.360	0.563		
	H5	30704208								
5/8 - 18 UNF	H3	30704308	3.937						30704408	
	H5	30704408								
3/4 - 10 UNC	H3	30704508	4.921	0.799	1.713	0.590	0.442	0.688		
	H5	30704608								
3/4 - 16 UNF	H3	30704708	4.331						30704808	
	H5	30704808								
7/8 - 9 UNC	H4	30704908	5.512	0.890	1.886	0.697	0.523	0.750		
	H6	30705008								
7/8 - 14 UNF	H4	30705108	4.921						30705208	
	H6	30705208								
1 - 8 UNC	H4	30705308	6.299	1.000	2.091	0.800	0.600	0.813		
	H6	30705408								
1 - 12 UNF	H4	30705508	5.512						30705608	
	H6	30705608								

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
307	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45			20-45	20-45	8-20									

good best





EXOTAP VA-3® Oil

Coolant-Through Taps Designed for Stainless Steel

List 347

OIL-V-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)							
			V	L						
M6 x 1.0	D5	3	34700508	80.00	8.00	30.00	6.48	4.85	7.90	
M8 x 1.0			34700608	90.00						
M8 x 1.25			34700708							
M10 x 1.25	D6		34700808	100.00	12.00	39.00	9.68	7.26	11.10	
M10 x 1.5			34700908							
M12 x 1.25			34701008							
M12 x 1.5	D6		34701108	110.00	14.00	49.10	9.32	6.98	11.10	
M12 x 1.75			34701208							
M14 x 1.5			34701308							
M14 x 2.0	D7	4	34701408	110.00	16.00	50.10	10.90	8.18	12.70	
M16 x 1.5	D6		34701508	100.00						
M16 x 2.0	D7		34701608	110.00						
M18 x 1.5	D6		34701708	125.00	20.00	55.00	13.77	10.31	15.90	
M18 x 2.5	D7		34701808							
M20 x 1.5	D6		34701908							
M20 x 2.5	D7		34702008	140.00	24.00	68.40	19.30	14.48	19.10	
M22 x 1.5	D6		34702108	125.00						
M22 x 2.5	D7		34702208	140.00						
M24 x 1.5	D6	34702308	160.00	24.00	68.40	19.30	14.48	19.10		
M24 x 3.0	D8	34702408								

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
347	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45			20-45	20-45	8-20									

good best





List 398

Long Shank, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



HSSE	S/O	45°
------	-----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Modified Bottom (2.5P - 3P)						
			S/O	S/O						
4 - 40 UNC	H2	3	-	1766101	4.000	0.197	0.839	0.141	0.110	0.188
0143701			-	6.000						
6 - 32 UNC	H3		-	1766301	4.000	0.248	1.028	0.168	0.131	0.250
0143801			1766501	6.000						
8 - 32 UNC	H3		-	1766701	4.000	0.252	1.126	0.194	0.152	0.250
0143901			1766901	6.000						
10 - 24 UNC	H3		-	1767101	4.000	0.327	1.303	0.255	0.191	0.313
-			1767301	6.000						
10 - 32 UNF	H3		-	1767501	4.000	0.398	1.496	0.318	0.238	0.375
0144001			1767701	6.000						
1/4 - 20 UNC	H3		-	1767901	4.000	0.445	1.689	0.381	0.286	0.438
0144101			1768101	6.000						
1/4 - 28 UNF	H3		-	1768301	4.000	0.500	1.874	0.323	0.242	0.406
0144201			1768301	6.000						
5/16 - 18 UNC	H3		-	1768501	4.000	0.571	1.713	0.367	0.275	0.438
0144301			1768501	6.000						
5/16 - 24 UNF	H3		-	1768601	4.000	0.614	1.933	0.480	0.360	0.563
0144401			1768701	6.000						
3/8 - 16 UNC	H3		-	1768801	4.000	0.728	2.126	0.480	0.360	0.563
0144501			1768801	6.000						
3/8 - 24 UNF	H3	-	1768901	4.000	0.728	2.126	0.480	0.360	0.563	
0144601		1768901	6.000							
7/16 - 14 UNC	H3	-	1769001	4.000	0.728	2.126	0.480	0.360	0.563	
-		1769001	6.000							
7/16 - 20 UNF	H3	-	1769101	4.000	0.728	2.126	0.480	0.360	0.563	
0144701		1769101	6.000							
1/2 - 13 UNC	H3	-	1769201	4.000	0.728	2.126	0.480	0.360	0.563	
0144801		1769201	6.000							
1/2 - 20 UNF	H3	-	1769301	4.000	0.728	2.126	0.480	0.360	0.563	
0144901		1769301	6.000							
5/8 - 11 UNC	H3	4	-	1769301	4.000	0.728	2.126	0.480	0.360	0.563

Packed: 1 pc.
Available Steam Oxide finish only.
Neck length is designed for reaching 50% deeper holes than ANSI standard taps.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
398	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best





List 220

DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	S/O						
4 - 40UNC	2B	3	2211401	L	2.205	Lc	Ln	d	k	lk
6 - 32 UNC			2212401	0.196	0.704	0.141	0.110	0.188		
8 - 32 UNC			2217801	2.480	0.248	0.783	0.168	0.131	0.250	
10 - 24 UNC			2213401	0.326	0.976	0.194	0.152	0.250		
10 - 32 UNF			2218801							
1/4 - 20 UNC			2230001	3.150	0.397	1.177	0.255	0.191	0.313	
1/4 - 28 UNF			2230401							
5/16 - 18 UNC			2230801	3.543	0.444	1.377	0.318	0.238	0.375	
5/16 - 24 UNF			2231201							
3/8 - 16 UNC			2231601	3.937	0.500	1.712	0.381	0.286	0.438	
3/8 - 24 UNF			2231801							
7/16 - 14 UNC			2232001							
7/16 - 20 UNF			2232201							
1/2 - 13 UNC			2232401	4.331	0.614	1.933	0.367	0.275	0.438	
1/2 - 20 UNF			2232601	3.937						
5/8 - 11 UNC			2233201	4.331	0.728	2.125	0.480	0.360	0.563	
5/8 - 18 UNF		2233401	3.937							
3/4 - 10 UNC		2233601	4.921	0.799	2.433	0.590	0.442	0.688		
3/4 - 16 UNF		2233801	4.331							
7/8 - 9 UNC		2244001	5.512	0.889	2.952	0.697	0.523	0.750		
7/8 - 14 UNF		2239201	4.921							
1 - 8 UNC		2244401	6.299	1.000	3.543	0.800	0.600	0.813		
1 - 12 UNF		2239601	5.512							
1,1/8 - 7 UNC		2247201	7.087	1.141	3.937	0.896	0.672	0.875		
1,1/8 - 12 UNF		2245001	5.906							
1,1/8 - 8 UN		2247601	7.087	1.141	3.937	1.021	0.766	1.000		
1,1/4 - 7 UNC		2247701								
1,1/4 - 12 UNF		2245601	5.906	1.334	3.074	1.108	0.831	1.063		
1,1/4 - 8 UN		2247901	7.087							
1,3/8 - 6 UNC		2248001	7.874	1.334	4.527	1.233	0.925	1.125		
1,3/8 - 8 UN		2248201								
1,3/8 - 12 UNF		2246201	6.693	1.598	3.590	1.430	1.072	1.250		
1,1/2 - 6 UNC	2248301	7.874								
1,1/2 - 8 UN	2248501	6.693	1.598	4.527	1.233	0.925	1.125			
1,1/2 - 12 UNF	2246801									
1,5/8 - 8 UN	2248601	7.874	1.779	4.330	1.305	0.979	1.250			
1,3/4 - 5 UNC	2248701	8.661								
1,3/4 - 8 UN	2248801	7.874	1.779	4.724	1.430	1.072	1.250			
1,7/8 - 8 UN	2248901	8.858								
2 - 4,1/2 UNC	2249001	9.843	1.779	4.921	1.519	1.139	1.375			
2 - 8 UN	2249101	8.858								

Packed: 1 pc.
Available Steam Oxide finish only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
220	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>			
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-40	15-20	25-75					15-35			

good best





List 229



DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	S/O						
			L	Lc	Ln	d	k	lk		
M3 x 0.5	6H	3	2290401	56.00	4.10	18.10	3.58	2.79	4.80	
M4 x 0.7			2290601	63.00	5.60	21.00	4.27	3.33	6.40	
M5 x 0.8			2290801	70.00	6.40	25.00	4.93	3.86		
M6 x 1.0			2291001	80.00	8.00	30.00	6.48	4.85	7.90	
M8 x 1.25			2291401	90.00	10.00	35.00	8.08	6.05	9.50	
M10 x 1.5			2291801	100.00	12.00	39.00	9.68	7.26		
M10 x 1.25			2291701							
M12 x 1.75			2292301	110.00	14.00	49.10	9.32	6.98	11.10	
M12 x 1.5			2292201	100.00						
M12 x 1.25			2292101							
M14 x 2.0			2292601	110.00	16.00	50.10	10.90	8.18	12.70	
M14 x 1.5			2292501	100.00						
M16 x 2.0		2292901	110.00	54.00		12.19	9.14	14.30		
M16 x 1.5		2292801	100.00							
M18 x 2.5		2293201	125.00	20.00	55.00	13.77	10.31	15.90		
M18 x 1.5		2293001	110.00							
M20 x 2.5		2293601	140.00		61.80	16.56	12.42	17.50		
M20 x 1.5		2293401	125.00							

Packed: 1 pc.
Available Steam Oxide finish only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010	1035	1045	1065	4140	4340												
229	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>				
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-40	15-20	25-75					15-35			

good best





List 230

OIL-TIN-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)							
			TiN	L						
1/4 - 20 UNC	2B	3	2330005	3.150	0.402	1.181	0.255	0.191	0.313	
1/4 - 28 UNF			2330405							
5/16 - 18 UNC			2330805	3.543	0.445	1.378	0.318	0.238	0.375	
5/16 - 24 UNF			2331205							
3/8 - 16 UNC			2331605	3.937	0.500	1.713	0.381	0.286	0.438	
3/8 - 24 UNF			2331805							
7/16 - 14 UNC			2332005							
7/16 - 20 UNF			2332205							
1/2 - 13 UNC			2332405	4.331	0.614	1.933	0.367	0.275	0.438	
1/2 - 20 UNF			2332605							
9/16 - 18 UNF		2333005	3.937	0.665	1.972	0.429	0.322	0.500		
5/8 - 11 UNC		2333205								
5/8 - 18 UNF		2333405	3.937	0.728	2.126	0.480	0.360	0.563		
3/4 - 10 UNC		2333605								
3/4 - 16 UNF		2333805	4.331	0.799	2.433	0.590	0.442	0.688		
7/8 - 9 UNC		2334005								
7/8 - 14 UNF		2334205	4.921	0.890	2.654	0.697	0.523	0.750		
1 - 8 UNC		2334405								
				6.299	1.000	3.012	0.800	0.600	0.813	

Packed: 1 pc.
Available TiN finish only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
230	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				
SFM	50-120	45-110	40-100	45-110	20-60	20-70	30-50	20-50	40-100	50-125	50-110			20-60			

good best





List 239

OIL-TIN-SFT, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length				
			Modified Bottom (2.5P - 3P)										
			TiN	L	Lc	Ln	d	k	lk				
M6 x 1.0	6H	3	2391005	80.00	8.00	30.00	6.48	4.85	7.90				
M8 x 1.25			2391405	90.00	10.00	35.00	8.08	6.05	9.50				
M10 x 1.5			2391805	100.00	12.00	39.00	9.68	7.26	11.10				
M10 x 1.25			2391705										
M12 x 1.75			2392305	110.00	14.00	49.10	9.32	6.98					
M12 x 1.5			2392205										
M12 x 1.25		2392105											
M14 x 2.0		2392605	110.00	16.00	50.10	10.90	8.18	12.70					
M14 x 1.5		2392505	100.00										
M16 x 2.0		2392905	110.00						16.00	54.00	12.19	9.14	14.30
M16 x 1.5		2392805	100.00										
M18 x 2.5		2393205	125.00						20.00	55.00	13.77	10.31	15.90
M18 x 1.5		2393005	110.00										
M20 x 2.5		2393605	140.00	20.00	61.80	16.56	12.42	17.50					
M20 x 1.5		2393405	125.00										

Packed: 1 pc.
Available TiN finish only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
239	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				
SFM	50-120	45-110	40-100	45-110	20-60	20-70	30-50	20-50	40-100	50-125	50-110			20-60			

good best





List 13013



OIL-V-SFT, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)							
			V	L						
1/4 - 20 UNC	2B	3	1301300508	3.150	3.937	0.402	1.181	0.255	0.191	0.313
1/4 - 28 UNF			1301300608							
5/16 - 18 UNC			1301300708	3.543		0.445	1.378	0.318	0.238	0.375
5/16 - 24 UNF			1301300808							
3/8 - 16 UNC			1301300908	3.937		0.500	0.381	0.286	0.438	
3/8 - 24 UNF			1301301008							
7/16 - 14 UNC			1301301108	0.571		1.713	0.323	0.242	0.406	
7/16 - 20 UNF			1301301208							
1/2 - 13 UNC		4	4	1301301308	4.331	0.614	1.933	0.367	0.275	0.438
1/2 - 20 UNF				1301301408	3.937					
5/8 - 11 UNC				1301301508	4.331	0.728	2.126	0.480	0.360	0.563
5/8 - 18 UNF				1301301608	3.937					
3/4 - 10 UNC				1301301708	4.921	0.799	2.433	0.590	0.442	0.688
3/4 - 16 UNF				1301301808	4.331					

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13013			<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>					
SFM			40-100	45-110	20-60				40-100		50-110			20-60	15-50			

good best





List 13113

OIL-V-SFT, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	V						
			L	Lc						
M6 x 1.0	6H	3	1311300508	80.00	8.00	30.00	6.48	4.85	7.90	
M8 x 1.25			1311300608	90.00	10.00	35.00	8.08	6.05	9.50	
M10 x 1.5			1311300808	100.00	12.00	38.90	9.67	7.26	11.10	
M10 x 1.25			1311300708							
M12 x 1.75			1311301108	110.00	14.00	49.00	9.32	6.98		
M12 x 1.5			1311301008							
M12 x 1.25			1311300908	100.00	16.00	50.00	10.89	8.18		
M14 x 2.0			1311301308	110.00						
M14 x 1.5			1311301208	100.00						
M16 x 2.0			1311301508	110.00	16.00	54.00	12.19	9.14	14.30	
M16 x 1.5			1311301408	100.00						
M18 x 2.5			1311301708	125.00	20.00	54.90	13.76	10.31	15.90	
M18 x 1.5		1311301608	110.00							
M20 x 2.5		1311301908	140.00							
M20 x 1.5		1311301808	125.00	61.80						16.56

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum	Nickel Alloy		Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH						6061 7075	Casting	Inconel	6Al4V (30 HRC)
13113			<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			
SFM			40-100	45-110	20-60				40-100		50-110		20-60	15-50			

good best





List 13014

HXL-SFT, Horizontal Applications, DIN Overall Length, Modified Bottom (2.5P-3P)



HSSE

S/O

15°



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Modified Bottom (2.5P-3P)	L	Lc	Ln	d	k	lk	
			S/O	L	Lc	Ln	d	k	lk	
1/2 - 13 UNC	2B	4	1301402601	4.331	0.614	-	0.367	0.275	0.438	
1/2 - 20 UNF			1301402701	3.937	-	1.000	-	-	-	
9/16 - 12 UNC			1301400101	4.331	-	-	-	0.429	0.322	0.500
9/16 - 18 UNF			1301400201	3.937	-	-	1.126	-	-	-
5/8 - 11 UNC			1301400301	4.331	-	-	-	0.480	0.360	0.563
5/8 - 18 UNF			1301400401	3.937	-	-	1.252	-	-	-
3/4 - 10 UNC			1301400501	4.921	-	-	-	0.590	0.442	0.688
3/4 - 16 UNF			1301402801	4.331	-	-	1.500	-	-	-
7/8 - 9 UNC			1301400601	5.512	-	-	-	0.697	0.523	0.750
7/8 - 14 UNF			1301402901	4.921	-	-	1.752	-	-	-
1 - 8 UNC			1301400701	6.299	-	-	-	0.800	0.600	0.813
1 - 12 UNF			1301403001	5.512	-	-	2.000	-	-	-
1,1/8 - 7 UNC		1301400901	-	7.087	1.142	-	-	-	-	
1,1/8 - 8 UN		1301401101	-	-	1.000	-	0.896	0.672	0.875	
1,1/8 - 12 UNF		1301403101	-	5.906	0.665	-	2.252	-	-	
1,1/4 - 7 UNC		1301401201	-	-	1.142	-	-	-	-	
1,1/4 - 8 UN		1301401401	-	7.087	1.000	-	2.500	1.021	0.766	1.000
1,1/4 - 12 UNF		1301403201	-	5.906	0.665	-	-	-	-	-
1,3/8 - 6 UNC		1301401501	-	-	1.335	-	-	-	-	-
1,3/8 - 8 UN		1301401701	-	7.874	-	-	1.108	0.831	1.063	-
1,3/8 - 12 UNF		1301403901	-	6.693	1.000	-	2.752	-	-	-
1,1/2 - 6 UNC		1301401801	-	-	1.335	-	-	-	-	-
1,1/2 - 8 UN		1301402001	-	7.874	1.000	-	-	1.233	0.925	-
1,1/2 - 12 UNF		1301403301	-	6.693	0.665	-	3.000	-	-	1.125
1,5/8 - 8 UN		1301402101	-	7.874	1.000	-	3.252	1.305	0.979	-
1,3/4 - 5 UNC		1301403501	-	8.661	1.598	-	-	-	1.072	-
1,3/4 - 8 UN		1301402201	-	7.874	-	-	3.500	1.430	-	1.250
1,7/8 - 8 UN		1301402301	-	8.858	1.000	-	3.752	1.519	1.138	-
2 - 4,1/2 UNC		1301403601	-	9.843	1.780	-	-	-	-	-
2 - 8 UN		1301402401	-	8.858	1.000	-	4.000	1.644	1.233	1.375
2,1/4 - 4,1/2 UNC		1301403701	-	11.024	1.780	-	-	1.894	1.420	1.438
2,1/4 - 8 UN		1301404001	-	9.843	1.000	-	4.500	-	-	-
2,1/2 - 4 UNC		1301403801	-	12.402	2.000	-	-	2.100	1.575	1.500
2,1/2 - 8 UN	1301402501	-	10.827	1.000	-	5.000	-	-	-	

Packed: 1 pc.
Available Steam Oxide finish only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels				Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13014	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	25-80	20-50	20-45	20-50	15-20	20-45	20-45	15-20	25-75					15-35	8-15			

good best





List 13024

HXL-OIL-SFT, Horizontal Applications, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	L	Lc	Ln	d	k	lk
			S/O	L	Lc	Ln	d	k	lk
1/2 - 13 UNC	2B	4	1302402601	4.331	0.614	-	0.367	0.275	0.438
1/2 - 20 UNF			1302402701	3.937		1.000			
9/16 - 12 UNC			1302400101	4.331	0.665	-	0.429	0.322	0.500
9/16 - 18 UNF			1302400201	3.937		1.125			
5/8 - 11 UNC			1302400301	4.331	0.728	-	0.480	0.360	0.563
5/8 - 18 UNF			1302400401	3.937		1.251			
3/4 - 10 UNC			1302400501	4.921	0.799	-	0.590	0.442	0.688
3/4 - 16 UNF			1302402801	4.331		1.500			
7/8 - 9 UNC			1302400601	5.512	0.889	-	0.697	0.523	0.750
7/8 - 14 UNF			1302402901	4.921		1.751			
1 - 8 UNC			1302400701	6.299	1.000	-	0.800	0.600	0.813
1 - 12 UNF			1302403001	5.512	0.665	2.000			
1,1/8 - 7 UNC		1302400901	7.087	1.141	-	0.896	0.672	0.875	
1,1/8 - 8 UN		1302401101		1.000	2.251				
1,1/8 - 12 UNF		1302403101	5.906	0.665	2.500	1.021	0.766	1.000	
1,1/4 - 7 UNC		1302401201	7.087	1.141					
1,1/4 - 8 UN		1302401401	5.906	1.000	-	1.108	0.831	1.063	
1,1/4 - 12 UNF		1302403201		0.665					2.751
1,3/8 - 6 UNC		1302401501	7.874	1.334	-	1.233	0.925	1.125	
1,3/8 - 8 UN		1302401701		1.000					3.000
1,3/8 - 12 UNF		1302403901	6.693	1.334	-	1.305	0.979	1.250	
1,1/2 - 6 UNC		1302401801	7.874	1.000	3.000				
1,1/2 - 8 UN		1302402001	6.693	1.000	-	1.430	1.138	1.375	
1,1/2 - 12 UNF		1302403301		0.665					3.251
1,5/8 - 8 UN		1302402101	7.874	1.000	3.251	1.644	1.233	1.375	
1,3/4 - 5 UNC		1302403501	8.661	1.598	-				1.894
1,3/4 - 8 UN		1302402201	7.874	1.000	3.500				
1,7/8 - 8 UN		1302402301	8.858	1.779	3.751	2.100	1.575	1.500	
2 - 4,1/2 UNC		1302403601	9.843	1.000	4.000				
2 - 8 UN		1302402401	8.858	1.000	4.000	-	-	-	
2,1/4 - 4,1/2 UNC	1302403701	11.024	1.779	-					
2,1/4 - 8 UN	1302404001	9.843	1.000	4.500	-	-	-		
2,1/2 - 4 UNC	1302403801	12.402	2.000	-					
2,1/2 - 8 UN	1302402501	10.827	1.000	5.000					

Packed: 1 pc.
Available Steam Oxide finish only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
13024	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>				
SFM	50-120	45-110	40-100	45-110	20-60	30-70	30-70	20-50	40-100					20-60	15-50		

good best





List 13015



VXL-SFT, Vertical Applications, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)							
			S/O	L						
1/2 - 13 UNC	2B	3	1301502601	4.331	0.614	-	0.367	0.275	0.438	
1/2 - 20 UNF			1301502701	3.937		1.000				
9/16 - 12 UNC			1301500101	4.331		-				
9/16 - 18 UNF		1301500201	3.937	0.665	1.125	0.429	0.322	0.500		
5/8 - 11 UNC		1301500301	4.331		-					
5/8 - 18 UNF		1301500401	3.937		1.251					
3/4 - 10 UNC		1301500501	4.921	0.728	-	0.480	0.360	0.563		
3/4 - 16 UNF		1301502801	4.331		1.500					
7/8 - 9 UNC		1301500601	5.512		-					
7/8 - 14 UNF		1301502901	4.921	0.889	1.751	0.697	0.523	0.750		
1 - 8 UNC		1301500701	6.299		1.000					
1 - 12 UNF		1301503001	5.512		0.665				2.000	0.800
1,1/8 - 7 UNC		1301500901	-	1.141	-					
1,1/8 - 8 UN		1301501101	7.087	1.000	2.251	0.896	0.672	0.875		
1,1/8 - 12 UNF		1301503101	5.906	0.665	-					
1,1/4 - 7 UNC		1301501201	7.087	1.141	-					
1,1/4 - 8 UN		1301501401	-	1.000	2.500	1.021	0.766	1.000		
1,1/4 - 12 UNF		1301503201	5.906	0.665	-					
1,3/8 - 6 UNC		1301501501	7.874	1.334	-					
1,3/8 - 8 UN		1301501701	7.874	1.000	2.751	1.108	0.831	1.063		
1,3/8 - 12 UNF		1301503401	6.693		1.000				-	
1,1/2 - 6 UNC		1301501801	-		1.334				-	
1,1/2 - 8 UN		1301502001	7.874	1.000	3.000	1.233	0.925	1.125		
1,1/2 - 12 UNF		1301503301	6.693	0.665	-					
1,5/8 - 8 UN		1301502101	7.874	1.000	3.251				1.305	0.979
1,3/4 - 5 UNC		1301503501	8.661	1.598	-					
1,3/4 - 8 UN		1301502201	7.874	1.000	3.500	1.430	1.072	1.250		
1,7/8 - 8 UN		1301502301	8.858	1.000	3.751				1.519	1.138
2 - 4,1/2 UNC		1301503601	9.843	1.779	-					
2 - 8 UN		1301502401	8.858	1.000	4.000	1.644	1.233	1.375		
2,1/4 - 4,1/2 UNC	1301503701	11.024	1.779	-						
2,1/4 - 8 UN	1301504001	9.843	1.000	4.500	1.894				1.420	1.438
2,1/2 - 4 UNC	1301503801	12.402	2.000	-						
2,1/2 - 8 UN	1301502501	10.827	1.000	5.000		2.100	1.575	1.500		

Packed: 1 pc.
Available Steam Oxide finish only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
13015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>			
SFM	25-80	20-50	20-45	20-50	15-20	20-45	20-45	15-20	25-75					15-35	8-15		

good best





List 13025

VXL-OIL-SFT, Vertical Applications, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	DIN Overall Length					
			S/O	L					
1/2 - 13 UNC	2B	3	1302502601	4.331	0.614	-	0.367	0.275	0.438
1/2 - 20 UNF			1302502701	3.937		1.000			
9/16 - 12 UNC			1302500101	4.331		-			
9/16 - 18 UNF		1302500201	3.937	0.665	1.125	0.429	0.322	0.500	
5/8 - 11 UNC		1302500301	4.331		-				
5/8 - 18 UNF		1302500401	3.937		1.251				
3/4 - 10 UNC		1302500501	4.921	0.799	-	0.590	0.442	0.688	
3/4 - 16 UNF		1302502801	4.331		1.500				
7/8 - 9 UNC		1302500601	5.512		-				
7/8 - 14 UNF		1302502901	4.921	0.889	1.751	0.697	0.523	0.750	
1 - 8 UNC		1302500701	6.299		-				
1 - 12 UNF		1302503001	5.512		2.000				
1,1/8 - 7 UNC		1302500901	7.087	1.000	1.141	0.896	0.672	0.875	
1,1/8 - 8 UN		1302501101	7.087		-				
1,1/8 - 12 UNF		1302503101	5.906		2.251				
1,1/4 - 7 UNC		1302501201	7.087	1.000	1.141	1.021	0.766	1.000	
1,1/4 - 8 UN		1302501401	7.087		-				
1,1/4 - 12 UNF		1302503201	5.906		2.500				
1,3/8 - 6 UNC		1302501501	7.874	1.000	1.334	1.108	0.831	1.063	
1,3/8 - 8 UN		1302501701	7.874		-				
1,3/8 - 12 UNF		1302503901	6.693		2.751				
1,1/2 - 6 UNC		1302501801	7.874	1.000	1.334	1.233	0.925	1.125	
1,1/2 - 8 UN		1302502001	7.874		-				
1,1/2 - 12 UNF		1302503301	6.693		3.000				
1,5/8 - 8 UN		1302502101	7.874	1.000	3.251	1.305	0.979	1.250	
1,3/4 - 5 UNC		1302503501	8.661		1.598				
1,3/4 - 8 UN		1302502201	7.874		3.500				
1,7/8 - 8 UN		1302502301	8.858	1.000	3.751	1.644	1.233	1.375	
2 - 4,1/2 UNC		1302503601	9.843		1.779				
2 - 8 UN		1302502401	8.858		4.000				
2,1/4 - 4,1/2 UNC		1302503701	11.024	1.000	1.779	1.894	1.420	1.438	
2,1/4 - 8 UN		1302504001	9.843		4.500				
2,1/2 - 4 UNC	1302503801	12.402	2.000						
2,1/2 - 8 UN	1302502501	10.827	1.000	5.000	2.100	1.575	1.500		

Packed: 1 pc.
Available Steam Oxide finish only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
13025	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-120	45-110	40-100	45-110	20-60	30-70	30-70	20-50	40-100					20-60	15-50		

good best





List 13116

HXL-SFT, Horizontal Applications, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)							
			S/O	L						
M16 x 2.0	D7	4	1311602401	110.00	16.00	58.00	12.19	9.14	14.30	
	D17 (6H +0.005")		1311602501	180.00						93.00
			1311602301	110.00						58.00
M20 x 2.5	D8		1311600101	140.00	20.00	73.00	16.56	12.42	17.50	
	D18 (6H +0.005")		1311600201	200.00						103.00
			1311601601	140.00						73.00
M24 x 3.0	D9	1311600401	160.00	24.00	88.00	19.30	14.48	19.10		
	D19 (6H +0.005")	1311600501	200.00						108.00	
		1311601701	160.00						88.00	
M27 x 3.0	D9	1311600601	180.00	28.00	103.00	22.76	17.07	22.20		
	D19 (6H +0.005")	1311600701	200.00						108.00	
		1311601801	160.00						88.00	
M30 x 3.5	D10	1311600801	180.00	32.00	103.00	25.93	19.46	25.40		
	D20 (6H +0.005")	1311600901	250.00						138.00	
		1311601901	180.00						103.00	
M33 x 3.5	D10	1311601001	180.00	36.00	93.00	28.14	21.11	27.00		
	D20 (6H +0.005")	1311601101	250.00						128.00	
		1311602001	180.00						93.00	
M36 x 4.0	D11	1311601201	200.00	36.00	118.00	31.32	23.50	28.60		
	D21 (6H +0.005")	1311601301	250.00						143.00	
		1311602101	200.00						118.00	
M42 x 4.5	D11	1311601401	200.00	36.00	98.00	36.32	27.23	31.80		
	D21 (6H +0.005")	1311601501	300.00						148.00	
		1311602201	200.00						98.00	

Packed: 1 pc.
 Available Steam Oxide finish only.
 Note: +0.005" available for threads that will be heat treated after tapping.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
13116	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
SFM	25-80	20-50	20-45	20-50	15-20	20-45	20-45	15-20	25-75					15-35	8-15		

good best





List 13126

HXL-OIL-SFT, Horizontal Applications, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



HSSE

S/O

15°



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)							
			S/O	L						
M16 x 2.0	D7	4	1312602401	110.00	16.00	58.00	12.19	9.14	14.30	
	D17 (6H +0.005")		1312602501	180.00						96.00
M20 x 2.5	D8		1312602301	110.00	20.00	73.00	16.56	12.42	17.50	
	D18 (6H +0.005")		1312600101	140.00						103.00
M24 x 3.0	D9	5	1312600201	200.00	24.00	88.00	19.30	14.48	19.10	
	D19 (6H +0.005")		1312601601	140.00						73.00
M27 x 3.0	D9		1312600401	160.00	28.00	108.00	22.76	17.07	22.20	
	D19 (6H +0.005")		1312600501	200.00						108.00
M30 x 3.5	D10		1312601701	160.00	32.00	118.00	31.32	23.50	28.60	
	D20 (6H +0.005")		1312600601	200.00						108.00
M33 x 3.5	D10	6	1312600701	200.00	36.00	98.00	36.32	27.23	31.80	
	D20 (6H +0.005")		1312601801	160.00						88.00
M36 x 4.0	D11		1312600801	180.00	36.00	103.00	36.32	27.23	31.80	
	D21 (6H +0.005")		1312600901	250.00						138.00
M42 x 4.5	D11	1312601901	180.00	36.00	103.00	36.32	27.23	31.80		
	D21 (6H +0.005")	1312601001	180.00						93.00	

Packed: 1 pc.

Available Steam Oxide finish only.

Note: +0.005" available for threads that will be heat treated after tapping.



Work Material																		
List No.	P				Die Steels	M			K	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
13126	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
SFM	50-120	45-110	40-100	45-110	20-60	30-70	30-70	20-50	40-100					20-60	15-50			

good best





List 13117



HSSE

S/O

45°

VXL-SFT, Vertical Applications, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)							
			S/O	L						
M16 x 2.0	D7	4	1311702401	110.00	16.00	-	12.19	9.14	14.30	
	D17 (6H +0.005")		1311702501	180.00						
			1311702301	110.00						
M20 x 2.5	D8		1311700101	140.00	20.00	-	16.56	12.42	17.50	
	D18 (6H +0.005")		1311700201	200.00						
			1311701601	140.00						
M24 x 3.0	D9	5	1311700401	160.00	24.00	-	19.30	14.48	19.10	
	D19 (6H +0.005")		1311700501	200.00						
			1311701701	160.00						
M27 x 3.0	D9		1311700601	160.00	28.00	-	22.76	17.07	22.20	
	D19 (6H +0.005")		1311700701	200.00						
			1311701801	160.00						
M30 x 3.5	D10	5	1311700801	180.00	28.00	-	25.93	19.46	25.40	
	D20 (6H + 0.005)		1311700901	250.00						
			1311701901	180.00						
M33 x 3.5	D10		1311701001	180.00	32.00	-	28.14	21.11	27.00	
	D20 (6H + 0.005)		1311701101	250.00						
			1311702001	180.00						
M36 x 4.0	D11	6	1311701201	200.00	36.00	-	31.32	23.50	28.60	
	D21 (6H + 0.005)		1311701301	250.00						
			1311702101	200.00						
M42 x 4.5	D11		1311701401	200.00	36.00	-	36.32	27.23	31.80	
			1311701501	300.00						
			1311702201	200.00						

Packed: 1 pc.

Available Steam Oxide finish only.

Note: +0.005" available for threads that will be heat treated after tapping.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
13117	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	25-80	20-50	20-45	20-50	15-20	20-45	20-45	15-20	25-75					15-35	8-15		

good best





List 13127

VXL-OIL-SFT, Vertical Applications, Coolant-Through, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)							
			S/O	L						
M16 x 2.0	D7	4	1312702401	110.00	16.00	-	12.19	9.14	14.30	
	D17 (6H +0.005")		1312702501	180.00						
			1312702301	110.00						
M20 x 2.5	D8	4	1312700101	140.00	19.00	-	16.56	12.42	17.50	
	D18 (6H +0.005")		1312700201	200.00						
			1312701601	140.00						
M24 x 3.0	D9	5	1312700401	160.00	24.00	-	19.30	14.48	19.10	
	D19 (6H +0.005")		1312700501	200.00						
			1312701701	160.00						
M27 x 3.0	D9	5	1312700601	160.00	27.00	-	22.76	17.07	22.20	
	D19 (6H +0.005")		1312700701	200.00						
			1312701801	160.00						
M30 x 3.5	D10	5	1312700801	180.00	27.00	-	25.93	19.46	25.40	
	D20 (6H +0.005")		1312700901	250.00						
			1312701901	180.00						
M33 x 3.5	D10	5	1312701001	180.00	27.00	-	28.14	21.11	27.00	
	D20 (6H +0.005")		1312701101	250.00						
			1312702001	180.00						
M36 x 4.0	D11	5	1312701201	199.00	32.00	-	31.32	23.50	28.60	
	D21 (6H +0.005")		1312701301	250.00						
			1312702101	200.00						
M42 x 4.5	D11	6	1312701401	200.00	36.00	-	36.32	27.23	31.80	
			1312701501	300.00						
			1312702201	200.00						

Packed: 1 pc.

Available Steam Oxide finish only.

Note: +0.005" available for threads that will be heat treated after tapping.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
13127	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-120	45-110	40-100	45-110	20-60	30-70	30-70	20-50	40-100					20-60	15-50		

good best





HY-PRO[®] SYNCHRO AL

High Speed Tapping of Aluminum and Aluminum Alloy

List 13058

US-AL-SFT, Modified Bottom (2.5P-3P)



HSSE

V

45°



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)						
			V						
6 - 32 UNC	2B	2	1305800108	2.000	0.248	0.685	0.141	0.110	0.188
8 - 32 UNC			1305800208	2.125	0.252	0.752	0.168	0.131	
10 - 24 UNC			1305800308	2.375	0.327	0.866	0.194	0.152	
10 - 32 UNF			1305800408						
1/4 - 20 UNC			1305800508	2.500	0.398	0.996	0.255	0.191	0.281
1/4 - 28 UNF			1305800608						
5/16 - 18 UNC			1305800708						
5/16 - 24 UNF			1305800808	2.719	0.445	1.126	0.318	0.238	0.375
3/8 - 16 UNC			1305800908						
3/8 - 24 UNF			1305801008						
1/2 - 13 UNC			1305801108	3.375	0.614	1.933	0.367	0.275	0.438
1/2 - 20 UNF			1305801208						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13058	1010	1035	1065	4140														
SFM	1018	1045		4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
										300-800	200-700							

good best





List 13158



US-AL-SFT, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			V						
M3 x 0.5	6H	2	1315800108	49.20	4.10	16.00	3.58	2.79	4.80
M4 x 0.7			1315800208	54.00	5.60	19.10	4.26	3.33	6.40
M5 x 0.8			1315800308	60.30	6.40	22.20	4.92	3.86	9.50
M6 x 1.0			1315800408	63.50	8.00	25.40	6.47	4.85	11.10
M8 x 1.25			1315800508	69.10	10.00	28.60	8.07	6.05	11.10
M10 x 1.5			1315800708	74.60	12.00	31.80	9.67	7.26	6.98
M10 x 1.25			1315800608						
M12 x 1.75			1315800908						
M12 x 1.5			1315800808						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13158	1010	1035	1065	4140						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM	1018	1045	1065	4340						<input type="checkbox"/>	<input type="checkbox"/>							

good best





List 295



EX-AL-SFT, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			Bright						
L	Lc	Ln	d	k	lk				
4 - 40 UNC	H2	2	2951300	1.875	0.196	0.559	0.141	0.110	0.188
	H3		2951400						
6 - 32 UNC	H2		2952500	2.000	0.248	0.685	0.168	0.131	0.250
	H3		2952600						
8 - 32 UNC	H2		2953100	2.125	0.251	0.751	0.194	0.152	0.313
	H3		2953200						
10 - 24 UNC	H3		2953800	2.375	0.326	0.866	0.255	0.191	0.375
	H2		2954300						
10 - 32 UNF	H3		2954400	2.500	0.397	0.996	0.318	0.238	0.438
	H5		2954600						
1/4 - 20 UNC	H3		2955000	2.719	0.444	1.125	0.381	0.286	0.438
	H5		2955200						
1/4 - 28 UNF	H3		2955600	2.938	0.500	1.251	0.381	0.286	0.438
	H3		2956200						
5/16 - 18 UNC	H5		2956400	2.938	0.500	1.251	0.381	0.286	0.438
	H3		2956800						
5/16 - 24 UNF	H3		2956900	2.938	0.500	1.251	0.381	0.286	0.438
	H4		2957400						
3/8 - 16 UNC	H3		2957400	2.938	0.500	1.251	0.381	0.286	0.438
	H5		2957600						
3/8 - 24 UNF	H3	2958000	2.938	0.500	1.251	0.381	0.286	0.438	

Packed: 1 pc.
Other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
295										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best





List 296

EX-AL-SFT, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	Bright						
			L	Lc	Ln	d	k	lk		
M3 x 0.5	D3	2	2963300	49.20	4.10	16.00	3.58	2.79	4.80	
M4 x 0.7	D4		2963400	54.00	5.60	19.10	4.26	3.33	6.40	
M5 x 0.8	D5		2963500	60.30	6.40	22.19	4.92	3.86		
M6 x 1.0			2963600	63.50	8.00	25.40	6.47	4.85	7.90	
M8 x 1.25			2963800	69.10	10.00	28.60	8.07	6.05	9.50	
M10 x 1.5	D6		2964100	74.60	11.98	31.80	9.67	7.26	11.10	
M10 x 1.25	D5		2964000							

Packed: 1 pc.
Other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
296										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best



List 13019



EX-AL-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)	L	Lc	Ln	d	k	lk
			N	L	Lc	Ln	d	k	lk
2 - 56 UNC	H2	2	1301900103	1.772	0.437	-	0.141	0.110	0.188
4 - 40 UNC			1301900203	2.205	0.196	0.704			
6 - 32 UNC			1301900303		0.248	0.783			
8 - 32 UNC	H3	2	1301900403	2.480	0.251	0.826	0.168	0.131	0.250
10 - 24 UNC			1301900503	2.756	0.326	0.976	0.194	0.152	
10 - 32 UNF			1301900603						
1/4 - 20 UNC	H5	3	1301900703	3.150	0.397	1.177	0.255	0.191	0.313
1/4 - 28 UNF	H3		1301900803						
5/16 - 18 UNC	H5		1301900903						
5/16 - 24 UNF	H3		1301901003	3.543	0.444	1.377	0.318	0.238	0.375
			1301901103						
3/8 - 16 UNC	H5		1301901203	3.937	0.500	1.535	0.381	0.286	0.438
3/8 - 24 UNF	H3		1301901303						
7/16 - 14 UNC	H5		1301901403	3.543	1.377	1.535	0.381	0.286	0.438
			1301901503						
7/16 - 20 UNF	H3		1301901603	3.937	0.570	1.712	0.323	0.242	0.406
1/2 - 13 UNC	H5		1301901703						
1/2 - 20 UNF	H3		1301901803	4.331	0.614	1.933	0.367	0.275	0.438
		1301901903							
1/2 - 20 UNF	H3	1301902003	3.937	0.614	1.933	0.367	0.275	0.438	
1/2 - 20 UNF	H3	1301902103							

Packed: 1 pc.
Available Nitride finish only.



Work Material

List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
13019	1010	1035	1065	4140															
SFM	1018	1045		4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								
										40-80	40-65								

good best





List 13119



EX-AL-SFT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)							
			N	L						
M3 x 0.5	D3	3	1311900103	56.00	5.00	19.30	3.58	2.79	4.80	
M4 x 0.7	D4		1311900303	63.00						
M5 x 0.8	D5		1311900403	70.00	10.00	27.20	4.93	3.86	6.40	
M6 x 1.0			1311900503	80.00						
M8 x 1.25	1311900803		90.00	12.00	39.00	9.68	7.26	11.10		
M10 x 1.5	D6		1311901003						100.00	
M10 x 1.25	D5		1311900903	110.00	14.00	49.10	9.32	6.98		
M12 x 1.75	D6		1311901303	110.00						
M12 x 1.5	D5		1311901203	100.00						
M12 x 1.25			1311901103	100.00						

Packed: 1 pc.
Available Nitride finish only.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13119										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best





List 290

Modified Bottom (2.5P-3P)




HSSE

TiCN

S/O

BR

45°



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix								
				Bright	S/O	TiCN						
2 - 56 UNC	H2	2	29056	00	01	08	1.750	0.437	0.476	0.141	0.110	0.188
3 - 48 UNC			29060	00	01	08	1.813	0.496	0.535			
4 - 40 UNC	H2	2	29064	00	01	08	1.875	0.196	0.559	0.141	0.110	0.188
			29114	00	01	08						
			29165	00	01	08						
4 - 48 UNF	H2	2	29166	00	01	08	1.938	0.200	0.625	0.141	0.110	0.188
5 - 40 UNC			29070	00	01	08						
6 - 32 UNC	H2	2	29074	00	01	08	2.000	0.248	0.685	0.141	0.110	0.188
			29124	00	01	08						
			29174	00	01	08						
			29175	00	01	08						
			29177	00	01	08						
6 - 40 UNF	H2	2	29072	00	01	08	2.125	0.251	0.751	0.168	0.131	0.188
29078			00	01	08							
8 - 32 UNC	H2	2	29128	00	01	08	2.125	0.251	0.751	0.168	0.131	0.188
			29178	00	01	08						
			29180	00	01	08						
			29181	00	01	08						
10 - 24 UNC	H2	2	29134	00	01	08	2.375	0.326	0.866	0.194	0.152	0.250
			29184	00	01	08						
			29234	00	01	08						
10 - 32 UNF	H2	3	29088	00	01	08	2.375	0.326	0.866	0.194	0.152	0.250
			29138	00	01	08						
			29188	00	01	08						
			29190	00	01	08						
			29191	00	01	08						
12 - 24 UNC	H3	3	29236	00	01	08	2.500	0.397	0.996	0.255	0.191	0.313
12 - 28 UNF			29238	00	01	08						
1/4 - 20 UNC	H2	3	29280	00	01	08	2.500	0.397	0.996	0.255	0.191	0.313
			29300	00	01	08						
			29400	00	01	08						
			29402	00	01	08						
			29403	00	01	08						
1/4 - 28 UNF	H2	3	29303	00	01	08	2.500	0.397	0.996	0.255	0.191	0.313
			29304	00	01	08						
			29354	00	01	08						
			29404	00	01	08						
			29406	00	01	08						
5/16 - 18 UNC	H2	3	29407	00	01	08	2.719	0.444	1.125	0.318	0.238	0.375
			29306	00	01	08						
			29308	00	01	08						
			29408	00	01	08						
			29410	00	01	08						
			29411	00	01	08						

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 290 (Continued)



Modified Bottom (2.5P-3P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P-3P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix								
				Bright	S/O	TiCN	L	Lc	Ln	d	k	lk
5/16 - 24 UNF	H2	3	29264	00	01	08	2.719	0.444	1.125	0.318	0.238	0.375
	H3		29312	00	01	08						
	H4		29362	00	01	08						
	H5		29412	00	01	08						
	H6		29413	00	01	08						
	H7		29414	00	01	08						
H11	29415		00	01	08							
3/8 - 16 UNC	H2		29315	00	01	08	2.938	0.500	1.251	0.381	0.286	0.438
	H3		29316	00	01	08						
	H5		29416	00	01	08						
	H7		29421	00	01	08						
3/8 - 24 UNF	H2		29268	00	01	08	2.938	0.500	1.251	0.381	0.286	0.438
	H3		29318	00	01	08						
	H4		29368	00	01	08						
	H5		29418	00	01	08						
	H7		29417	00	01	08						
	H11		29423	00	01	08						
7/16 - 14 UNC	H3		29320	00	01	08	3.156	0.570	1.712	0.323	0.242	0.406
	H5		29420	00	01	08						
	H7		29431	00	01	08						
	H11	29433	00	01	08							
7/16 - 20 UNF	H3	29322	00	01	08	3.156	0.570	1.712	0.323	0.242	0.406	
	H5	29422	00	01	08							
	H7	29490	00	01	08							
	H11	29428	00	01	08							
1/2 - 13 UNC	H3	29324	00	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H5	29424	00	01	08							
	H7	29425	00	01	08							
	H11	29427	00	01	08							
1/2 - 20 UNF	H2	29276	00	01	08	3.375	0.614	1.933	0.367	0.275	0.438	
	H3	29326	00	01	08							
	H5	29426	00	01	08							
	H7	29429	00	01	08							
	H11	29430	00	01	08							
9/16 - 12 UNC	H3	4	29486	00	01	08	3.594	0.665	1.972	0.429	0.322	0.500
9/16 - 18 UNF	H3		29488	00	01	08						
5/8 - 11 UNC	H5		29332	00	01	08	3.813	0.728	2.125	0.480	0.360	0.563
			29432	00	01	08						
5/8 - 18 UNF	H3		29334	00	01	08	4.250	0.799	2.433	0.590	0.442	0.688
			29336	00	01	08						
3/4 - 10 UNC	H5		29436	00	01	08	4.250	0.818	2.433	0.590	0.442	0.688
			29338	00	01	08						
3/4 - 16 UNF	H3		29438	00	01	08	4.688	0.889	2.653	0.697	0.523	0.750
			29440	00	01	08						
7/8 - 9 UNC	H5	29440	00	01	08	4.688	0.889	2.653	0.697	0.523	0.750	
7/8 - 14 UNF	H4	29392	00	01	08							

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

[continued on next page](#) 

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
290	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60			

good best






List 290 (Continued)



Modified Bottom (2.5P - 3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix								
				Bright	S/O	TiCN	L	Lc	Ln	d	k	lk
1 - 8 UNC	H5	4	29444	00	01	08	5.125	1.000	3.011	0.800	0.600	0.813
1 - 12 UNF	H4		29396	00	01	08						
1,1/8 - 7 UNC	H6		29472	-	01	-	5.438	1.141	3.074	0.896	0.672	0.875
1,1/8 - 8 UNC			29476	-	01	-						
1,1/8 - 12 UNF	H5		29450	-	01	-	5.750	1.141	3.074	1.021	0.766	1.000
1,1/4 - 7 UNC	H6		29477	-	01	-						
1,1/4 - 8 UNC			29479	-	01	-						
1,1/4 - 12 UNF	H5		29456	-	01	-	6.063	1.334	3.590	1.108	0.831	1.063
1,3/8 - 6 UNC	H6		29480	-	01	-						
1,3/8 - 8 UNS			29482	-	01	-	6.375	1.334	3.590	1.233	0.925	1.125
1,3/8 - 12 UNF	H5		29462	-	01	-						
1,1/2 - 6 UNC	H6		29483	-	01	-						
1,1/2 - 8 UNS			29485	-	01	-						
1,1/2 - 12 UNF	H5		29468	-	01	-						

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material


List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
290	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80				20-60				

good best



List 299

Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P-3P)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix								
				Bright	S/O	TiCN						
M3 x 0.5	D3	3	29904	00	01	08	49.20	4.08	16.00	3.58	2.79	4.80
	D11		29931	-	01	-						
M3.5 x 0.6	D4		29905	00	01	08	50.80	4.08	17.50	3.58	2.79	4.80
	D11		29933	-	01	-						
M4 x 0.7	D4		29906	00	01	08	54.00	4.80	19.10	4.27	3.33	6.40
	D11		29935	-	01	-						
M5 x 0.8	D4		29908	00	01	08	60.30	5.58	22.19	4.93	3.86	7.90
	D11		29937	-	01	-						
M6 x 1.0	D5		29910	00	01	08	63.50	8.00	25.40	6.48	4.85	9.50
	D11		29939	-	01	-						
M7 x 1.0	D5		29911	00	01	08	69.10	10.00	28.60	8.08	6.05	9.50
	D11		29941	-	01	-						
M8 x 1.25	D5		29914	00	01	08	74.60	11.98	31.80	9.68	7.26	11.10
	D11		29945	-	01	-						
M8 x 1.0	D5		29913	00	01	08	85.70	13.99	49.09	9.32	6.98	11.10
	D11		29943	-	01	-						
M10 x 1.5	D6		29918	00	01	08	91.30	16.00	50.08	10.90	8.18	12.70
	D11		29951	-	01	-						
M10 x 1.25	D5		29917	00	01	08	96.80	19.98	54.00	12.19	9.14	14.30
	D11		29949	-	01	-						
M10 x 1.0	D5		29916	00	01	08	102.40	24.00	68.40	19.30	14.48	22.20
	D11		29947	-	01	-						
M12 x 1.75	D6		29923	00	01	08	101.60	27.99	78.10	25.93	19.46	25.40
	D11		29957	-	01	-						
M12 x 1.5	D6	29922	00	01	08	113.50	19.98	61.79	16.56	12.42	17.50	
	D11	29955	-	01	-							
M12 x 1.25	D5	29921	00	01	08	119.10	24.00	76.50	22.76	17.07	22.20	
	D11	29952	-	01	-							
M14 x 2.0	D7	29926	-	01	-	124.60	24.00	68.40	19.30	14.48	22.20	
M14 x 1.5	D6	29925	-	01	-							
M16 x 2.0	D7	29929	-	01	-	130.20	27.99	78.10	25.93	19.46	25.40	
M16 x 1.5	D6	29928	-	01	-							
M18 x 2.5	D7	29932	-	01	-	138.10	27.99	78.10	25.93	19.46	25.40	
	M18 x 1.5	D6	29930	-	01							-
M20 x 2.5	D8	29936	-	01	-	138.10	27.99	78.10	25.93	19.46	25.40	
M20 x 1.5	D6	29934	-	01	-							
M22 x 2.5	D8	29940	-	01	-	138.10	27.99	78.10	25.93	19.46	25.40	
M22 x 1.5	D6	29938	-	01	-							
M24 x 3.0	D8	29944	-	01	-	138.10	27.99	78.10	25.93	19.46	25.40	
M24 x 1.5	D6	29942	-	01	-							
M27 x 3.0	D8	29948	-	01	-	138.10	27.99	78.10	25.93	19.46	25.40	
M27 x 1.5	D6	29946	-	01	-							
M30 x 3.5	D9	29953	-	01	-	138.10	27.99	78.10	25.93	19.46	25.40	
M30 x 1.5	D6	29950	-	01	-							

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
299	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60			

good best






HY-PRO® SEVEN

General Purpose Class of Fit Taps

List 297

Bottom (1.5P-2P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	Bottom (1.5P - 2P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix								
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk
3 - 48 UNC	2B	2	29845	00	01	05	1.813	0.496	0.535	0.141	0.110	0.188
3 - 56 UNF			29846	00	01	05						
4 - 40 UNC			29850	00	01	05						
4 - 48 UNF			29854	00	01	05						
5 - 40 UNC			29865	00	01	05						
6 - 32 UNC			29852	00	01	05						
6 - 40 UNF		29866	00	01	05							
8 - 32 UNC		29853	3	00	01	05	2.125	0.374	0.751	0.168	0.131	0.250
8 - 36 UNF		29867		00	01	05						
10 - 24 UNC		29854		00	01	05						
10 - 32 UNF		29855		00	01	05						
12 - 24 UNC		29868		00	01	05	2.375	0.492	0.866	0.194	0.152	0.281
1/4 - 20 UNC		29856		00	01	05						
1/4 - 28 UNF		29857		00	01	05	2.500	0.594	0.996	0.255	0.191	0.313
5/16 - 18 UNC		29858		00	01	05						
5/16 - 24 UNF		29859		00	01	05	2.719	0.665	1.125	0.318	0.238	0.375
3/8 - 16 UNC		29860		00	01	05						
3/8 - 24 UNF		29861		00	01	05	2.938	0.751	1.251	0.381	0.286	0.438
7/16 - 14 UNC		29869		00	01	05						
7/16 - 20 UNF		29870		00	01	05	3.156	0.858	1.712	0.323	0.242	0.406
1/2 - 13 UNC	29862	00		01	05							
1/2 - 20 UNF	29863	00	01	05	3.375	0.921	1.933	0.367	0.275	0.438		

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
297	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								<input type="checkbox"/>	<input type="checkbox"/>							
SFM	50-90	40-80								30-80	30-80							

good best






List 298

Bottom (1.5P-2P)



HSS	TiN	S/O	BR	50°
-----	-----	-----	----	-----



Units: mm

Tap Size	Class of Fit	No. of Flutes	Bottom (1.5P - 2P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix								
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk
M3 x 0.5	6H	2	29880	00	01	05	49.20	8.00	16.00	3.58	2.79	4.80
M4 x 0.7			29881	00	01	05	54.00	8.97	19.10	4.27	3.33	6.40
M5 x 0.8		3	29882	00	01	05	60.30	12.70	22.19	4.93	3.86	7.90
M6 x 1.0			29883	00	01	05	63.50	15.18	25.40	6.48	4.85	7.90
M8 x 1.25			29884	00	01	05	69.10	16.89	28.60	8.08	6.05	9.50
M10 x 1.5			29885	00	01	05	74.60	19.10	31.80	9.68	7.26	11.10
M12 x 1.75			29886	00	01	05	85.70	21.00	49.09	9.32	6.98	11.10

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
298	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								<input type="checkbox"/>	<input type="checkbox"/>							
SFM	50-90	40-80								30-80	30-80							

good best





GENERAL PURPOSE

List 107

Plug (4P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P-2P)				Plug (4P-4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length								
			EDP Number	Coating Suffix			EDP Number	Coating Suffix																
				Bright	S/O	TiN		TiCN	Bright	S/O							TiN	TiCN						
3 - 48 UNC	H2	2	14061	00	-	-	-	14060	00	-	-	-	1.813	0.496	0.535	0.141	0.110	0.188						
4 - 40 UNC			14065	00	01	05	08	14064	00	01	05	08	1.875	0.326										
5 - 40 UNC			14071	00	-	-	-	-	14070	00	-	-	-	1.938					0.330					
6 - 32 UNC	H3		50015	00	-	05	08	50014	00	-	05	-	2.000	0.397	0.685									
			14125	00	01	05	08	14124	00	01	05	08												
8 - 32 UNC	H2	3	50019	00	-	-	-	50018	00	-	-	-	2.125	0.401	0.759	0.168	0.131	0.250						
			14129	00	01	05	08	14128	00	-	05	08												
10 - 24 UNC	H3		14133	00	01	05	08	14132	00	-	05	08												
10 - 32 UNF	H2		50027	00	-	05	08	50026	00	-	-	-							2.375	0.511	0.874	0.194	0.152	
			14135	00	01	05	08	14134	00	-	05	08												
12 - 24 UNC	H3		14137	00	01	-	-	-	14136	00	-	-							-	0.515	0.937	0.220	0.165	0.281
1/4 - 20 UNC	H5		14301	00	01	05	08	14300	00	01	05	08							2.500	0.645	1.007	0.255	0.191	0.313
				50035	00	-	05	08	50034	00	-	05												
1/4 - 28 UNF	H3		14303	00	-	05	08	14302	00	-	05	08							2.719	0.708	1.129	0.318	0.238	0.375
5/16 - 18 UNC	H5		14305	00	01	05	08	14304	00	01	05	08												
			50047	00	-	05	08	50046	00	-	-	08												
5/16 - 24 UNF	H3		14307	00	-	05	08	14306	00	-	05	08							2.938	0.771	1.251	0.381	0.286	0.438
		14309	00	01	05	08	14308	00	01	05	08													
3/8 - 16 UNC	H5	50055	00	-	05	08	50054	00	-	-	08													
3/8 - 24 UNF	H3	14311	00	-	05	08	14310	00	-	05	08	3.156	0.901	1.708	0.323	0.242	0.406							
7/16 - 14 UNC	H5	14313	00	-	05	08	14312	00	-	05	08													
			50062	00	-	05	-	-	-	-	-													
7/16 - 20 UNF	H3	14317	00	-	05	08	14316	00	-	05	08	3.375	0.960	1.929	0.367	0.275	0.438							
1/2 - 13 UNC	H5	14321	00	01	05	08	14320	00	01	05	08													
			50071	00	-	-	-	50070	00	-	-							08						
1/2 - 20 UNF	H3	4	14325	00	-	05	08	14324	00	-	05	08	3.813	1.110	2.129	0.480	0.360	0.563						
5/8 - 11 UNC			14329	00	-	05	08	14328	00	-	-	08												
5/8 - 18 UNF			14333	00	-	05	08	14332	00	-	-	08												
3/4 - 10 UNC			14337	00	-	05	08	14336	00	-	05	08												
3/4 - 16 UNF			14341	00	-	05	08	14340	00	-	-	08	4.250	1.240	2.429	0.590	0.442	0.688						

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
107	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 143

Plug (4P-4.5P), Bottom (1.5P-2P)

HSS	TiCN	TiN	S/O	BR	50°
-----	------	-----	-----	----	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)				Plug (4P - 4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix			EDP Number	Coating Suffix								
				Bright	S/O	TiCN		Bright	TiN	TiCN						
M3 x 0.5	D3	2	19852	00	01	08	19851	00	05	-	49.20	8.30	15.79	3.58	2.79	4.80
M4 x 0.7	D4		19855	00	01	08	19854	00	05	08	54.00	10.00	19.30	4.27	3.33	6.40
M5 x 0.8			19858	00	01	08	19857	00	05	08	60.30	13.00	22.40	4.93	3.86	
M6 x 1.0	D5		19861	00	01	08	19860	00	05	08	63.50	16.30	25.70	6.48	4.85	7.90
M8 x 1.25			19864	00	01	08	19863	00	05	08	69.10	18.00	28.70	8.08	6.05	9.50
M10 x 1.5	D6		19867	00	01	08	19866	00	05	08	74.60	19.50	31.69	9.68	7.26	11.10
M12 x 1.75			19870	00	01	08	19869	00	05	08	85.70	24.40	48.99	9.32	6.98	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
143	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





GENERAL PURPOSE

List 13020

Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P-2P)	Plug (3.5P-4.5P)						
			S/O	S/O						
6 - 32 UNC	H3	3	1302001401	1302000101	2.000	0.248	0.685	0.141	0.110	0.188
8 - 32 UNC			1302001501	1302000201	2.125	0.251	0.751	0.168	0.131	0.250
10 - 24 UNC			1302001601	1302000301	2.375	0.326	0.866	0.194	0.152	
10 - 32 UNF			1302001701	1302000401						
1/4 - 20 UNC			1302001801	1302000501	2.500	0.397	0.996	0.255	0.191	0.313
1/4 - 28 UNF			1302001901	1302000601						
5/16 - 18 UNC			1302002001	1302000701	2.719	0.444	1.125	0.318	0.238	0.375
5/16 - 24 UNF			1302002101	1302000801						
3/8 - 16 UNC			1302002201	1302000901	2.938	0.500	1.251	0.381	0.286	0.438
3/8 - 24 UNF			1302002301	1302001001						
1/2 - 13 UNC			1302002401	1302001101	3.375	0.614	1.933	0.367	0.275	0.563
5/8 - 11 UNC			1302002501	1302001201	3.813	0.728	2.125	0.480	0.360	
5/8 - 18 UNF		1302002601	1302001301							

Packed: 1 pc.
Available Steam Oxide only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13020	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 123

HSSE

BR

50°

EX-SFT, JIS, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)						
			Bright						
			L	Lc	Ln	d	k	lk	
M3 x 0.5	2	3	11544	47.00	6.00	19.00	4.00	3.20	6.00
M4 x 0.7			11556	55.00	8.40	22.70	5.00	4.00	7.00
M5 x 0.8			11571	64.00	10.00	26.10	5.50	4.50	
M6 x 1.0			11583	67.00	12.00	31.60	6.00		
M8 x 1.25			11601	70.00	15.00	37.00	6.20	5.00	8.00
M10 x 1.5			11621	75.00	18.00	41.00	7.00	5.50	
M10 x 1.25			11624						
M12 x 1.75			11650	82.00	21.00	48.00	8.50	6.50	9.00
M12 x 1.5			11653						
M14 x 2.0			11680	88.00	30.00	10.50	8.00	11.00	
M14 x 1.5			11683						
M16 x 2.0			11705	95.00	32.00	52.00	12.50	10.00	13.00
M16 x 1.5		11708							
M18 x 2.5		11730	4	100.00	37.00	55.00	14.00	11.00	14.00
M18 x 1.5		11735							
M20 x 2.5		11757		105.00	58.00	15.00	12.00	15.00	
M20 x 1.5		11762							
M22 x 2.5		11772		115.00	38.00	63.00	17.00	13.00	16.00
M24 x 3.0		11799		120.00	45.00	66.00	19.00	15.00	18.00

Packed: 1 pc.

Other coatings available upon request.

Specify treatment at time of order.

Note: List 123 Taps will normally produce JIS Class II and ISO 6H Limits.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
123	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>		<input type="checkbox"/>							
SFM	25-80	20-50	20-45					25-75	40-80	40-65							

good best






GENERAL PURPOSE LS

List 918



Long Shank, Plug (4P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Plug (4P - 4.5P)						
			Bright	Bright						
4 - 40 UNC	H2	2	1296100	1296000	4	0.326	0.555	0.141	0.110	0.188
6 - 32 UNC	1296300		1296200							
8 - 32 UNC	H3	3	1296500	1296400	6	0.397	0.685	0.168	0.131	0.250
			1296700	1296600						
10 - 24 UNC	H3	3	1296900	1296800	6	0.472	0.830	0.194	0.152	0.250
			1297100	1297000						
10 - 32 UNF	H3	3	1297300	1297200	6	0.511	0.874	0.255	0.191	0.313
			1297500	1297400						
1/4 - 20 UNC	H3	3	1297700	1297600	6	0.645	1.007	0.318	0.238	0.375
1/4 - 28 UNF			1297900	1297800						
5/16 - 18 UNC	H3	3	1298100	1298000	6	0.771	1.251	0.381	0.286	0.438
3/8 - 16 UNC			1298300	1298200						
7/16 - 14 UNC	H3	3	1298500	1298400	6	0.901	1.708	0.323	0.242	0.406
1/2 - 13 UNC			1298700	1298600						
5/8 - 11 UNC	H3	3	1298900	1298800	6	0.960	1.929	0.367	0.275	0.438
			1299100	1299000						
		4	1299300	1299200		1.110	2.129	0.480	0.360	0.563

Packed: 1 pc.
Other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
918	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





List 5BA-SO, 5BL-SO

RED BAND, Ideal for Alloy Steel

NEW RED BAND DRILLS P316-318 HSSE V3 TYPE H TiAIN 15°



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiAIN					
			L	Lc	d	k	lk	
4 - 40 UNC	H3	3	5BA0280-SO	1.890	0.236	0.141	0.110	0.197
	H5		5BA0290-SO					
4 - 48 UNF	H3		5BL0280-SO					
	H5		5BL0290-SO					
5 - 40 UNC	H3		5BA0320-SO					
	H5		5BA0330-SO					
5 - 44 UNF	H3		5BL0320-SO					
	H5		5BL0330-SO					
6 - 32 UNC	H3		5BA0350-SO					
	H5		5BA0360-SO					
6 - 40 UNF	H3		5BL0350-SO					
	H5		5BL0360-SO					
8 - 32 UNC	H3		5BA0420-SO					
	H5		5BA0430-SO					
8 - 36 UNF	H3		5BL0420-SO					
	H5		5BL0430-SO					
10 - 24 UNC	H3		5BA0480-SO					
	H5		5BA0490-SO					
10 - 32 UNF	H3		5BL0480-SO					
	H5		5BL0490-SO					
12 - 24 UNC	H3		5BA0550-SO					
	H5		5BA0560-SO					
12 - 28 UNF	H3		5BL0550-SO					
	H5		5BL0560-SO					
1/4 - 20 UNC	H3		5BA0640-SO					
	H5		5BA0650-SO					
1/4 - 28 UNF	H3		5BL0640-SO					
	H5		5BL0650-SO					
5/16 - 18 UNC	H3	5BA0790-SO						
	H5	5BA0800-SO						
5/16 - 24 UNF	H3	5BL0790-SO						
	H5	5BL0800-SO						
3/8 - 16 UNC	H3	5BA0950-SO						
	H5	5BA0960-SO						
3/8 - 24 UNF	H3	5BL0950-SO						
	H5	5BL0960-SO						

Packed: 1 pc.
Available TiAIN only.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5BA-SO, 5BL-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
SFM	59-89	59-89	59-89	59-79	59-79				59-88	78-118		16-36	20-40	30-50	30-50		

good best





List 5BA-SO, 5BL-SO (Continued)

NEW	RED BAND DRILLS P316-318	HSSE V3	TYPE H	TiAIN	15°
------------	------------------------------------	----------------	---------------	--------------	------------

RED BAND, Ideal for Alloy Steel



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiAIN					
			L	Lc	d	k	lk	
7/16 - 14 UNC	H3	4	5BA1110-SO	3.228	0.709	0.323	0.242	0.413
	H5		5BA1120-SO					
	H3		5BL1110-SO					
7/16 - 20 UNF	H3		5BL1120-SO	3.425	0.827	0.367	0.275	0.433
	H5		5BA1270-SO					
	H3		5BA1280-SO					
1/2 - 13 UNC	H3		5BL1270-SO	3.661	0.866	0.429	0.322	0.492
	H5		5BL1280-SO					
	H3		5BA1430-SO					
1/2 - 20 UNF	H3		5BA1440-SO	3.878	0.906	0.480	0.360	0.571
	H5		5BL1430-SO					
	H3		5BL1440-SO					
9/16 - 12 UNC	H3	5BA1590-SO	4.252	0.984	0.590	0.442	0.689	
	H5	5BA1600-SO						
	H3	5BL1590-SO						
9/16 - 18 UNF	H3	5BL1600-SO	4.685	1.102	0.697	0.523	0.748	
	H5	5BA1910-SO						
	H3	5BA1920-SO						
5/8 - 11 UNC	H3	5BL1910-SO	5.118	1.260	0.800	0.600	0.807	
	H5	5BA2220-SO						
	H3	5BA2230-SO						
5/8 - 18 UNF	H3	5BL2220-SO	5.433	1.417	0.896	0.672	0.866	
	H5	5BL2230-SO						
	H3	5BA2540-SO						
3/4 - 10 UNC	H3	5BA2550-SO	5.748	1.021	0.766	1.004		
	H5	5BL2540-SO						
	H3	5BL2550-SO						
3/4 - 16 UNF	H3	5BA2860-SO	5.433	1.417	0.896	0.672	0.866	
	H5	5BA2870-SO						
	H3	5BL2860-SO						
7/8 - 9 UNC	H3	5BL2870-SO	5.748	1.021	0.766	1.004		
	H5	5BA3180-SO						
	H3	5BA3190-SO						
7/8 - 14 UNF	H3	5BL3180-SO	5.748	1.021	0.766	1.004		
	H5	5BA3190-SO						
	H3	5BL3190-SO						
1 - 8 UNC	H3	5BL3190-SO	5.748	1.021	0.766	1.004		
	H5							
	H3							
1 - 12 UNF	H3		5.748	1.021	0.766	1.004		
	H5							
	H3							
1,1/8 - 7 UNC	H3		5.748	1.021	0.766	1.004		
	H5							
	H3							
1,1/8 - 12 UNF	H3		5.748	1.021	0.766	1.004		
	H5							
	H3							
1,1/4 - 7 UNC	H3		5.748	1.021	0.766	1.004		
	H5							
	H3							
1,1/4 - 12 UNF	H3		5.748	1.021	0.766	1.004		
	H5							
	H3							

Packed: 1 pc.
Available TiAIN only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BA-SO, 5BL-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
SFM	59-89	59-89	59-89	59-79	59-79				59-88	78-118		16-36	20-40	30-50	30-50		

good best



List 5EA-SO, 5EL-SO

RED BAND, Ideal for Alloy Steel

NEW RED BAND DRILLS P316-318 HSSE V3 TYPE H TiAlN 15°



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)						
			TiAlN			L	Lc	d	k
M3 x 0.5	D4	3	5EA0300-SO		48.00	6.00	3.58	2.79	5.00
M3.5 x 0.6			5EA0350-SO		50.00	8.00			
M4 x 0.7			5EA0400-SO		53.00				
M5 x 0.8			5EA0500-SO		58.50	10.00	4.93	4.93	6.50
M6 x 1.0			5EA0600-SO		65.00	12.00	6.48	4.85	
M6 x 0.75			5EL0600-SO						
M7 x 1.0			5EA0700-SO		69.00	14.00	8.08	6.05	9.50
M8 x 1.25			5EA0800-SO						
M8 x 1.0			5EL0800-SO						
M10 x 1.5			5EA1000-SO		77.00	16.00	9.68	7.26	11.00
M10 x 1.25	5EL1010-SO								
M12 x 1.75	D6	4	5EA1200-SO		87.00	18.00	9.32	9.32	
M12 x 1.5			5EA1214-SO						
M12 x 1.25	D4		5EL1200-SO		93.00	22.00	10.90	10.90	
M14 x 2.0			5EL1190-SO						
M14 x 1.5	D6		5EA1400-SO		98.50	23.00	12.19	12.19	
			5EA1414-SO						
			5EL1400-SO						
M16 x 2.0	D6		5EL1414-SO		108.00	25.00	13.76	13.76	
			5EA1600-SO						
			5EA1614-SO						
M16 x 1.5	D4	5EL1600-SO		114.00	16.56	16.56	17.50		
		5EL1614-SO							
		5EA1800-SO							
M18 x 2.5	D6	5EA1814-SO		119.00	28.00	17.70	13.28		
		5EL1800-SO							
		5EL1814-SO							
M18 x 1.5	D6	5EA2000-SO		125.00	30.00	19.30	14.48		
		5EL2000-SO							
		5EA2200-SO							
M20 x 2.5	D4	5EL2200-SO							
		5EA2400-SO							
		5EL2400-SO							
M20 x 1.5									
M22 x 2.5									
M22 x 1.5									
M24 x 3.0									

Packed: 1 pc.
Available TiAlN coating only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5EA-SO, 5EL-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
SFM	59-89	59-89	59-89	59-79	59-79				59-88	78-118		16-36	20-40	30-50	30-50			

good best






List 5BB-SO, 5BM-SO

BLUE BAND, Ideal for Stainless Steel

NEW	BLUE BAND DRILLS P319-321	HSSE V3	TYPE VA	TiAlN	40°
------------	-------------------------------------	----------------	----------------	--------------	------------



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length					
			Mod Bottom (2P-3P)										
			TiAlN										
			L	Lc	d	k	lk						
4 - 40 UNC	H3	3	5BB0284-SO	1.890	0.236	0.141	0.110	0.197					
	H5		5BM0284-SO										
4 - 48 UNF	H3		5BB0324-SO										
	H5		5BM0324-SO										
5 - 40 UNC	H3		5BB0334-SO						1.969	0.315	0.168	0.131	0.256
	H5		5BM0334-SO										
5 - 44 UNF	H3		5BB0354-SO										
	H5		5BM0354-SO										
6 - 32 UNC	H3		5BB0364-SO	2.087	0.394	0.194	0.152	0.276					
	H5		5BM0364-SO										
6 - 40 UNF	H3		5BB0424-SO										
	H5		5BM0424-SO										
8 - 32 UNC	H3		5BB0434-SO						2.303	0.472	0.255	0.191	0.315
	H5		5BM0434-SO										
8 - 36 UNF	H3		5BB0484-SO										
	H5		5BM0484-SO										
10 - 24 UNC	H3		5BB0494-SO	2.402	0.551	0.318	0.238	0.374					
	H5		5BM0494-SO										
10 - 32 UNF	H3		5BB0554-SO										
	H5		5BM0554-SO										
12 - 24 UNC	H3		5BB0564-SO						2.559	0.630	0.381	0.286	0.433
	H5		5BM0564-SO										
12 - 28 UNF	H3		5BB0644-SO										
	H5		5BM0644-SO										
1/4 - 20 UNC	H3		5BB0654-SO	2.756	0.709	0.323	0.242	0.413					
	H5		5BM0654-SO										
5/16 - 18 UNC	H3		5BB0794-SO										
	H5		5BM0794-SO										
5/16 - 24 UNF	H3		5BB0804-SO						3.031	0.827	0.367	0.275	0.433
	H5		5BM0804-SO										
3/8 - 16 UNC	H3	5BB0954-SO											
	H5	5BM0954-SO											
3/8 - 24 UNF	H3	5BB0964-SO											
	H5	5BM0964-SO											
7/16 - 14 UNC	H3	5BB1114-SO	3.228	0.827	0.367	0.275	0.433						
	H5	5BM1114-SO											
7/16 - 20 UNF	H3	5BB1124-SO											
	H5	5BM1124-SO											
1/2 - 13 UNC	H3	5BB1274-SO						3.425	0.827	0.367	0.275	0.433	
	H5	5BM1274-SO											
1/2 - 20 UNF	H3	5BB1284-SO											
	H5	5BM1284-SO											

Packed: 1 pc.
Available TiAlN coating only.



List 5BB-SO, 5BM-SO (Continued)

BLUE BAND, Ideal for Stainless Steel

NEW BLUE BAND DRILLS P319-321 HSSE V3 TYPE VA TiAIN 40°

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length					
			Mod Bottom (2P-3P)										
			TiAIN										
			L	Lc	d	k	lk						
9/16 - 12 UNC	H3	3	5BB1434-SO	3.661	0.866	0.429	0.322	0.492					
	H5		5BB1444-SO										
9/16 - 18 UNF	H3		5BM1434-SO										
	H5		5BM1444-SO										
5/8 - 11 UNC	H3		5BB1594-SO						3.878	0.906	0.480	0.360	0.571
	H5		5BB1604-SO										
5/8 - 18 UNF	H3		5BM1594-SO										
	H5		5BM1604-SO										
3/4 - 10 UNC	H3		5BB1914-SO	4.252	0.984	0.590	0.442	0.689					
	H5		5BB1924-SO										
3/4 - 16 UNF	H3		5BM1914-SO										
	H5		5BM1924-SO										
7/8 - 9 UNC	H3	5BB2224-SO	4.685						1.102	0.697	0.523	0.748	
	H5	5BB2234-SO											
7/8 - 14 UNF	H3	5BM2224-SO											
	H5	5BM2234-SO											
1 - 8 UNC	H3	5BB2544-SO		5.118	1.260	0.800	0.600	0.807					
	H5	5BB2554-SO											
1 - 12 UNF	H3	5BM2544-SO											
	H5	5BM2554-SO											
1,1/8 - 7 UNC	H3	5BB2864-SO	5.433						1.417	0.896	0.672	0.866	
	H5	5BB2874-SO											
1,1/8 - 12 UNF	H3	5BM2864-SO											
	H5	5BM2874-SO											
1,1/4 - 7 UNC	H3	5BB3184-SO		5.748	1.021	0.766	1.004						
	H5	5BB3194-SO											
1,1/4 - 12 UNF	H3	5BM3184-SO											
	H5	5BM3194-SO											

Packed: 1 pc.
Available TiAIN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BB-SO, 5BM-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
SFM						29-49	26-49	25-45				20-60					

good best






List 5EB-SO, 5EM-SO

BLUE BAND, Ideal for Stainless Steel

NEW	BLUE BAND DRILLS P319-321	HSSE V3	TYPE VA	TiAlN	40°
------------	-------------------------------------	----------------	----------------	--------------	------------

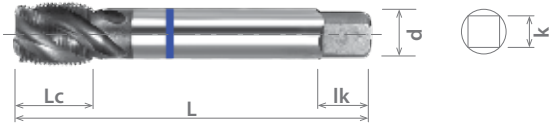

Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiAlN					
M3 x 0.5	D4	3	5EB0304-SO	48.00	6.00	3.58	2.79	5.00
M3.5 x 0.6			5EB0354-SO	50.00	8.00			
M4 x 0.7			5EB0404-SO	53.00		4.27	3.33	6.50
M5 x 0.8			5EB0504-SO	58.50	10.00			
M6 x 1.0	D6		5EB0604-SO	65.00		12.00	6.48	4.85
M6 x 0.75	D4		5EM0604-SO					
M7 x 1.0	D6		5EB0704-SO	69.00	8.08	6.05	9.50	
M8 x 1.25	D4		5EB0804-SO	70.00				14.00
M8 x 1.0	D6		5EB0814-SO		77.00	16.00	9.68	
	D4		5EM0804-SO					
M10 x 1.5	D4		5EM0814-SO	87.00	18.00	9.32	6.99	
M10 x 1.25	D6		5EB1004-SO					
M10 x 1	D4		5EM1004-SO	93.00	22.00	10.90	8.18	13.00
M12 x 1.75	D6		5EB1204-SO					
M12 x 1.5	D4		5EB1214-SO	98.50	23.00	12.19	9.14	14.00
M12 x 1.25			5EM1204-SO					
M14 x 2.0	D6		5EM1194-SO	108.00	25.00	13.76	10.30	15.88
	D4		5EB1404-SO					
M14 x 1.5	D6		5EB1414-SO	114.00	16.56	12.42	17.50	
M16 x 2.0	D4		5EM1404-SO					
	D6	5EB1604-SO	119.00	28.00	17.70	13.28		
M16 x 1.5	D4	5EB1614-SO						
M18 x 2.5	D6	5EM1604-SO	125.00	30.00	19.30	14.48		
	D4	5EB1804-SO						
M18 x 1.5	D6	5EB1814-SO	125.00	30.00	19.30	14.48		
M20 x 2.5	D4	5EM1814-SO						
	M20 x 1.5	D4	5EB2004-SO	114.00	16.56	12.42	17.50	
M22 x 2.5	5EM2004-SO							
M22 x 1.5	5EB2204-SO		119.00	28.00	17.70	13.28		
M24 x 3.0	5EM2204-SO							
		4	5EB2404-SO	125.00	30.00	19.30	14.48	19.05

Packed: 1 pc.
Available TiAlN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340	300	400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5EB-SO, 5EM-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
SFM						29-49	26-49	25-45				20-60					


good best



List 5BC-SO, 5BN-SO

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND DRILLS P322-325	HSSE V3	TYPE W	BR	40°
------------	---------------------------------------	----------------	---------------	-----------	------------



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length					
			Mod Bottom (2P-3P)										
			Bright										
			L	Lc	d	k	lk						
4 - 40 UNC	H3	2	5BC0280-SO	1.890	0.236	0.141	0.110	0.197					
	H5		5BC0290-SO										
4 - 48 UNF	H3		5BN0280-SO										
	H5		5BN0290-SO										
5 - 40 UNC	H3		5BC0320-SO						1.969	0.315	0.168	0.131	0.256
	H5		5BC0330-SO										
5 - 44 UNF	H3		5BN0320-SO										
	H5		5BN0330-SO										
6 - 32 UNC	H3		5BC0350-SO	2.087	0.394	0.194	0.152	0.276					
	H5		5BC0360-SO										
6 - 40 UNF	H3		5BN0350-SO										
	H5		5BN0360-SO										
8 - 32 UNC	H3		5BC0420-SO						2.303	0.472	0.220	0.165	0.315
	H5		5BC0430-SO										
8 - 36 UNF	H3		5BN0420-SO										
	H5		5BN0430-SO										
10 - 24 UNC	H3		5BC0480-SO	2.402	0.551	0.255	0.191	0.374					
	H5		5BC0490-SO										
10 - 32 UNF	H3		5BN0480-SO										
	H5		5BN0490-SO										
12 - 24 UNC	H3		5BC0550-SO						2.559	0.630	0.286	0.286	0.433
	H5		5BC0560-SO										
12 - 28 UNF	H3		5BN0550-SO										
	H5		5BN0560-SO										
1/4 - 20 UNC	H3	5BC0640-SO	2.756	0.781	0.318	0.238	0.374						
	H5	5BC0650-SO											
1/4 - 28 UNF	H3	5BN0640-SO											
	H5	5BN0650-SO											
5/16 - 18 UNC	H3	5BC0790-SO						3.031	0.630	0.381	0.286	0.433	
	H5	5BC0800-SO											
5/16 - 24 UNF	H3	5BN0790-SO											
	H5	5BN0800-SO											
3/8 - 16 UNC	H3	5BC0950-SO	3.031	0.630	0.381	0.286	0.433						
	H5	5BC0960-SO											
3/8 - 24 UNF	H3	5BN0950-SO											
	H5	5BN0960-SO											

Packed: 1 pc.
EDPs listed above are stock standard, other coatings available upon request.
Specify treatment at the time of order.

▶ continued on next page ▶ **SOM**

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BC-SO,5BN-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM	58-88	58-88	58-88							78-170	40-65						

good best






List 5BC-SO, 5BN-SO (Continued)

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND DRILLS P322-325	HSSE V3	TYPE W	BR	40°
-----	--------------------------------	---------	--------	----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			Bright					
				L	Lc	d	k	lk
7/16 - 14 UNC	H3	3	5BC1110-SO	3.228	0.709	0.323	0.242	0.413
	H5		5BC1120-SO					
	H3		5BN1110-SO					
7/16 - 20 UNF	H3		5BN1120-SO	3.425	0.827	0.367	0.275	0.433
	H5		5BC1270-SO					
	H3		5BC1280-SO					
1/2 - 13 UNC	H3		5BN1270-SO	3.661	0.866	0.429	0.322	0.492
	H5		5BN1280-SO					
	H3		5BC1430-SO					
1/2 - 20 UNF	H3		5BC1440-SO	3.878	0.906	0.480	0.360	0.571
	H5		5BN1590-SO					
	H3		5BN1600-SO					
9/16 - 12 UNC	H3		5BN1910-SO	4.252	0.984	0.590	0.442	0.689
	H5		5BC1910-SO					
	H3		5BC1920-SO					
9/16 - 18 UNF	H3	5BN1920-SO	4.685	1.102	0.697	0.523	0.748	
	H5	5BC2220-SO						
	H3	5BC2230-SO						
5/8 - 11 UNC	H3	5BN2220-SO	5.118	1.260	0.800	0.600	0.807	
	H5	5BN2230-SO						
	H3	5BC2540-SO						
5/8 - 18 UNF	H3	5BC2550-SO	5.433	1.417	0.896	0.672	0.866	
	H5	5BN2540-SO						
	H3	5BN2550-SO						
3/4 - 10 UNC	H3	5BC2860-SO	5.748	1.021	0.766	1.004		
	H5	5BC2870-SO						
	H3	5BN2860-SO						
3/4 - 16 UNF	H3	5BN2870-SO	5.748	1.021	0.766	1.004		
	H5	5BC3180-SO						
	H3	5BC3190-SO						
7/8 - 9 UNC	H3	5BN3180-SO	5.748	1.021	0.766	1.004		
	H5	5BN3190-SO						
	H3	5BN3190-SO						

Packed: 1 pc.
EDPs listed above are stock standard, other coatings available upon request.
Specify treatment at the time of order.



List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5BC-SO,5BN-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM	58-88	58-88	58-88							78-170	40-65							


good best



List 5EC-SO, 5EN-SO

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND DRILLS P322-325	HSSE V3	TYPE W	BR	40°
-----	--------------------------------	---------	--------	----	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length	
			Mod Bottom (2P-3P)						
			Bright						
				L	Lc	d	k	lk	
M3 x 0.5	D4	2	5EC0300-SO	48.00	6.00	3.58	2.79	5.00	
M4 x 0.7			5EC0400-SO	53.00	8.00	4.27	3.33		
M5 x 0.8			5EC0500-SO	58.50	10.00	4.93	3.86		
M6 x 1.0	D4		D6	5EC0514-SO	65.00	12.00	6.48	4.85	8.00
M6 x 1.0	5EC0600-SO								
M6 x 0.75	5EC0614-SO								
M7 x 1.0	D4		D6	5EN0600-SO	69.00	14.00	8.08	6.05	9.50
M8 x 1.25	5EC0700-SO								
M8 x 1.0	5EC0800-SO								
M8 x 1.0	D4	D6	5EN0800-SO	70.00	14.00	8.08	6.05	9.50	
M8 x 1.0	5EN0814-SO								
M8 x 1.0	5EN0814-SO								
M10 x 1.5	D4	3	5EC1000-SO	77.00	16.00	9.68	7.26	11.00	
M10 x 1.5	D6		5EC1014-SO						
M10 x 1.25	D4		5EN1010-SO						
M10 x 1.0	D6		5EN1000-SO	87.00	18.00	9.32	6.99	13.00	
M10 x 1.0			5EN1014-SO						
M12 x 1.75			D4						5EC1200-SO
M12 x 1.5	D6		5EN1200-SO	93.00	22.00	10.90	8.18	13.00	
M12 x 1.5			5EN1214-SO						
M14 x 2.0			D4						5EC1400-SO
M14 x 1.5	D4	3	5EN1400-SO	98.50	23.00	12.19	9.14	14.00	
M16 x 2.0			5EC1600-SO						
M16 x 2.0			5EN1600-SO						
M16 x 1.5			D6	5EC1800-SO	108.00	25.00	13.76	10.30	15.88
M18 x 2.5				5EN1800-SO					
M18 x 1.5				5EC2000-SO					
M20 x 2.5			D6	5EN2000-SO	114.00	28.00	17.70	13.28	19.05
M20 x 1.5				5EC2200-SO					
M22 x 2.5				5EN2200-SO					
M22 x 1.5	D6	3	5EC2400-SO	119.00	30.00	19.30	14.48	19.05	
M24 x 3.0			5EN2400-SO						125.00

Packed: 1 pc.
EDPs listed above are stock standard, other coatings available upon request.
Specify treatment at the time of order.



List No.	Work Material																
	P				M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340													
5EC-SO, 5EN-SO	☐	☐	☐						☐	☐							
SFM	58-88	58-88	58-88						78-170	40-65							

☐ good ☐ best





List 5BD-SO, 5BP-SO

WHITE BAND, Ideal for Cast Iron

NEW	WHITE BAND DRILLS P326-327	HSSE V3	TYPE GG	TiAIN	15°
------------	-------------------------------	---------	---------	-------	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length					
			Mod Bottom (2P-3P)										
			TiAIN										
			L	Lc	d	k	lk						
4 - 40 UNC	H3	3	5BD0285-SO	1.890	0.236	0.141	0.110	0.197					
	H5		5BD0295-SO										
4 - 48 UNF	H3		5BP0285-SO										
	H5		5BP0295-SO										
5 - 40 UNC	H3		5BD0325-SO						1.969	0.315	0.168	0.131	0.256
	H5		5BD0335-SO										
5 - 44 UNF	H3		5BP0325-SO										
	H5		5BP0335-SO										
6 - 32 UNC	H3		5BD0355-SO	2.087	0.394	0.220	0.165	0.276					
	H5		5BD0365-SO										
6 - 40 UNF	H3		5BP0355-SO										
	H5		5BP0365-SO										
8 - 32 UNC	H3		5BD0425-SO						2.303	0.472	0.255	0.191	0.315
	H5		5BD0435-SO										
8 - 36 UNF	H3		5BP0425-SO										
	H5		5BP0435-SO										
10 - 24 UNC	H3		5BD0485-SO	2.402	0.551	0.318	0.238	0.374					
	H5		5BD0495-SO										
10 - 32 UNF	H3		5BP0485-SO										
	H5		5BP0495-SO										
12 - 24 UNC	H3		5BD0555-SO						2.559	0.630	0.323	0.242	0.413
	H5		5BD0565-SO										
12 - 28 UNF	H3		5BP0555-SO										
	H5		5BP0565-SO										
1/4 - 20 UNC	H3	5BD0645-SO	3.031	0.709	0.367	0.275	0.433						
	H5	5BD0655-SO											
1/4 - 28 UNF	H3	5BP0645-SO											
	H5	5BP0655-SO											
5/16 - 18 UNC	H3	5BD0795-SO						3.228	0.827	0.381	0.286	0.433	
	H5	5BD0805-SO											
5/16 - 24 UNF	H3	5BP0795-SO											
	H5	5BP0805-SO											
3/8 - 16 UNC	H3	5BD0955-SO	3.425	0.827	0.367	0.275	0.433						
	H5	5BD0965-SO											
3/8 - 24 UNF	H3	5BP0955-SO											
	H5	5BP0965-SO											
7/16 - 14 UNC	H3	5BD1115-SO						3.425	0.827	0.367	0.275	0.433	
	H5	5BD1125-SO											
7/16 - 20 UNF	H3	5BP1115-SO											
	H5	5BP1125-SO											
1/2 - 13 UNC	H3	5BD1275-SO	3.425	0.827	0.367	0.275	0.433						
	H5	5BD1285-SO											
1/2 - 20 UNF	H3	5BP1275-SO											
	H5	5BP1285-SO											

Packed: 1 pc.
Available TiAIN coating only.



List 5BD-SO, 5BP-SO (Continued)

WHITE BAND, Ideal for Cast Iron

NEW	WHITE BAND DRILLS P326-327	HSSE V3	TYPE GG	TiAIN	15°
------------	-------------------------------	---------	---------	-------	-----

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiAIN					
			L	Lc	d	k	lk	
9/16 - 12 UNC	H3	4	5BD1435-SO	3.661	0.866	0.429	0.322	0.492
	H5		5BD1445-SO					
9/16 - 18 UNF	H3		5BP1435-SO	3.878	0.906	0.480	0.360	0.571
	H5		5BP1445-SO					
5/8 - 11 UNC	H3		5BD1595-SO	4.252	0.984	0.590	0.442	0.689
	H5		5BD1605-SO					
5/8 - 18 UNF	H3		5BP1595-SO	4.685	1.102	0.697	0.523	0.748
	H5		5BP1605-SO					
3/4 - 10 UNC	H3		5BD1915-SO	5.118	1.260	0.800	0.600	0.807
	H5		5BD1925-SO					
3/4 - 16 UNF	H3		5BP1915-SO	5.433	1.417	0.896	0.672	0.866
	H5		5BP1925-SO					
7/8 - 9 UNC	H3		5BD2225-SO	5.748	1.021	0.766	1.004	1.004
	H5		5BD2235-SO					
7/8 - 14 UNF	H3		5BP2225-SO	5.433	1.417	0.896	0.672	0.866
	H5		5BP2235-SO					
1 - 8 UNC	H3		5BD2545-SO	5.748	1.021	0.766	1.004	1.004
	H5		5BD2555-SO					
1 - 12 UNF	H3		5BP2545-SO	5.433	1.417	0.896	0.672	0.866
	H5		5BP2555-SO					
1,1/8 - 7 UNC	H3	5BD2865-SO	5.748	1.021	0.766	1.004	1.004	
	H5	5BD2875-SO						
1,1/8 - 12 UNF	H3	5BP2865-SO	5.433	1.417	0.896	0.672	0.866	
	H5	5BP2875-SO						
1,1/4 - 7 UNC	H3	5BD3185-SO	5.748	1.021	0.766	1.004	1.004	
	H5	5BD3195-SO						
1,1/4 - 12 UNF	H3	5BP3185-SO	5.433	1.417	0.896	0.672	0.866	
	H5	5BP3195-SO						

Packed: 1 pc.
Available TiAIN coating only.



Work Material																			
List No.	P				Die Steels	M			K Cast Iron	N		S		H					
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BD-SO, 5BP-SO	1010	1035	1065	4140															
SFM	1018	1045		4340					<input checked="" type="checkbox"/>										

good best





List 5ED-SO, 5EP-SO

WHITE BAND, Ideal for Cast Iron

NEW	WHITE BAND DRILLS P326-327	HSSE V3	TYPE GG	TiAlN	15°
------------	-------------------------------	---------	---------	-------	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiAlN					
M3 x 0.5	D4	3	5ED0305-SO	48.00	6.00	3.58	2.79	5.00
M3.5 X 6			5ED0355-SO	50.00	8.00			
M4 x 0.7			5ED0405-SO	53.00		4.27	3.33	6.50
M5 x 0.8			5ED0505-SO	58.00	4.93			
M6 x 1.0			5ED0605-SO	65.00		6.48	4.85	8.00
M6 x 0.75			5EP0605-SO					
M7 x 1.0			5ED0705-SO	69.00	8.08	6.05	9.50	
M7 x 0.75			5EP0705-SO					
M8 x 1.25			5ED0805-SO	70.00	14.00	9.68	7.26	11.00
M8 x 1.0			5EP0805-SO					
M10 x 1.5	D6	4	5ED1005-SO	77.00	16.00	9.68	7.26	11.00
M10 x 1.25			5EP0995-SO					
M10 x 1.0	D4	4	5EP1005-SO	87.00	18.00	9.32	6.99	13.00
M12 x 1.75			5ED1205-SO					
M12 x 1.5	D6	4	5EP1214-SO	93.00	22.00	10.90	8.18	13.00
M12 x 1.25			5EP1235-SO					
M14 x 2.0	D4	4	5EP1205-SO	98.50	23.00	12.19	9.14	13.00
M14 x 1.5			5ED1405-SO					
M16 x 2.0			5EP1405-SO	108.00	25.00	13.76	10.30	14.00
M16 x 1.5			5ED1605-SO					
M18 x 2.5			5EP1605-SO	114.00	16.56	12.42	17.50	
M18 x 1.5			5ED1805-SO					
M20 x 2.5			5EP1805-SO	119.00	28.00	17.70	13.28	19.05
M20 x 1.5			5ED2005-SO					
M22 x 2.5			5EP2005-SO	125.00	30.00	19.30	14.48	
M22 x 1.5			5ED2205-SO					
M24 x 3.0			5EP2205-SO					
			5ED2405-SO					

Packed: 1 pc.
Available TiAlN coating only.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
5ED-SO, 5EP-SO																		
SFM									<input checked="" type="checkbox"/>									

good best





List 5BE-SO, 5BK-SO

GREEN BAND, Ideal for Carbon Steel

NEW	GREEN BAND DRILLS P328-331	HSSE V3	TYPE UNI	TiN	35°
------------	--------------------------------------	----------------	-----------------	------------	------------



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiN					
			L	Lc	d	k	lk	
4 - 40 UNC	H3	3	5BE0280-SO	1.890	0.236	0.141	0.110	0.197
	H5		5BE0290-SO					
4 - 48 UNF	H3		5BK0280-SO					
	H5		5BK0290-SO					
5 - 40 UNC	H3		5BE0320-SO					
	H5		5BE0330-SO					
5 - 44 UNF	H3		5BK0320-SO					
	H5		5BK0330-SO					
6 - 32 UNC	H3		5BE0350-SO	1.969	0.315	0.168	0.131	0.256
	H5		5BE0360-SO					
6 - 40 UNF	H3		5BK0350-SO					
	H5		5BK0360-SO					
8 - 32 UNC	H3		5BE0420-SO	2.087	0.394	0.194	0.152	0.276
	H5		5BE0430-SO					
8 - 36 UNF	H3		5BK0420-SO					
	H5		5BK0430-SO					
10 - 24 UNC	H3		5BE0480-SO	2.303	0.472	0.255	0.191	0.315
	H5		5BE0490-SO					
10 - 32 UNF	H3		5BK0480-SO					
	H5		5BK0490-SO					
12 - 24 UNC	H3	5BE0550-SO	2.402	0.551	0.318	0.238	0.374	
	H5	5BE0560-SO						
12 - 28 UNF	H3	5BK0550-SO						
	H5	5BK0560-SO						
1/4 - 20 UNC	H3	5BE0640-SO	2.559	0.630	0.381	0.286	0.433	
	H5	5BE0650-SO						
1/4 - 28 UNF	H3	5BK0640-SO						
	H5	5BK0650-SO						
5/16 - 18 UNC	H3	5BE0790-SO	2.756	0.78	0.42	0.28	0.38	
	H5	5BE0800-SO						
5/16 - 24 UNF	H3	5BK0790-SO						
	H5	5BK0800-SO						
3/8 - 16 UNC	H3	5BE0950-SO	3.031	0.85	0.48	0.30	0.40	
	H5	5BE0960-SO						
3/8 - 24 UNF	H3	5BK0950-SO						
	H5	5BK0960-SO						

Packed: 1 pc.
Available TiN coating only.

[continued on next page](#)

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5BE-SO, 5BK-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 5BE-SO, 5BK-SO (Continued)

GREEN BAND, Ideal for Carbon Steel

NEW	GREEN BAND DRILLS P328-331	HSSE V3	TYPE UNI	TiN	35°
-----	-------------------------------	---------	----------	-----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiN					
			L	Lc	d	k	lk	
7/16 - 14 UNC	H3	3	5BE1110-SO	3.228	0.709	0.323	0.242	0.413
	H5		5BE1120-SO					
	H3		5BK1110-SO					
7/16 - 20 UNF	H3		5BK1120-SO	3.425	0.827	0.367	0.275	0.433
	H5		5BE1270-SO					
1/2 - 13 UNC	H3		5BE1280-SO	3.661	0.866	0.429	0.322	0.492
	H5		5BK1270-SO					
1/2 - 20 UNF	H3		5BK1280-SO	3.878	0.906	0.480	0.360	0.571
	H5		5BE1430-SO					
9/16 - 12 UNC	H3		5BE1440-SO	4.252	0.984	0.590	0.442	0.689
	H5		5BK1430-SO					
9/16 - 18 UNF	H3		5BK1440-SO	4.685	1.102	0.697	0.523	0.748
	H5	5BE1590-SO						
5/8 - 11 UNC	H3	5BE1600-SO	5.118	1.260	0.800	0.600	0.807	
	H5	5BK1590-SO						
5/8 - 18 UNF	H3	5BK1600-SO	5.433	1.417	0.896	0.672	0.807	
	H5	5BE1910-SO						
3/4 - 10 UNC	H3	5BE1920-SO	5.748	1.021	0.766	1.004		
	H5	5BK1910-SO						
3/4 - 16 UNF	H3	5BK1920-SO	5.433	1.417	0.896	0.672	0.807	
	H5	5BE2220-SO						
7/8 - 9 UNC	H3	5BE2230-SO	5.748	1.021	0.766	1.004		
	H5	5BK2220-SO						
7/8 - 14 UNF	H3	5BK2230-SO	5.433	1.417	0.896	0.672	0.807	
	H5	5BE2540-SO						
1 - 8 UNC	H3	5BE2550-SO	5.748	1.021	0.766	1.004		
	H5	5BK2540-SO						
1 - 12 UNF	H3	5BK2550-SO	5.433	1.417	0.896	0.672	0.807	
	H5	5BE2860-SO						
1,1/8 - 7 UNC	H3	5BE2870-SO	5.748	1.021	0.766	1.004		
	H5	5BK2860-SO						
1,1/8 - 12 UNF	H3	5BK2870-SO	5.433	1.417	0.896	0.672	0.807	
	H5	5BE3180-SO						
1,1/4 - 7 UNC	H3	5BE3190-SO	5.748	1.021	0.766	1.004		
	H5	5BK3180-SO						
1,1/4 - 12 UNF	H3	5BK3190-SO	5.433	1.417	0.896	0.672	0.807	
	H5	5BE3190-SO						

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BE-SO, 5BK-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 5EV-SO

GREEN BAND, Ideal for Carbon Steel

NEW GREEN BAND DRILLS P328-331 HSSE V3 TYPE UNI TiN 15°



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiN	L	Lc	d	k	lk
M3 x 0.5	D4	3	5EV0300-SO	48.00	6.00	3.58	2.79	5.00
M4 x 0.7			5EV0400-SO	53.00	8.00	4.27	3.33	6.50
M5 x 0.8			5EV0500-SO	58.50	10.00	4.93	3.86	
M6 x 1.0			5EV0600-SO	65.00	12.00	6.48	4.85	8.00
M8 x 1.25			5EV0800-SO	70.00	14.00	8.08	6.05	9.50
M10 x 1.5	D6	3	5EV1000-SO	77.00	16.00	9.68	7.26	11.00
M12 x 1.75			5EV1200-SO	87.00	18.00	9.32	6.99	
M14 x 2.0			5EV1400-SO	93.00	22.00	10.90	8.18	13.00
M16 x 2.0			5EV1600-SO	98.50	23.00	12.19	9.14	14.00
M18 x 2.5			5EV1800-SO	108.00	25.00	13.76	10.30	15.88
M20 x 2.5	D4	4	5EV2000-SO	114.00		16.56	12.42	17.50
M22 x 2.5			5EV2200-SO	119.00	28.00	17.70	13.28	19.05
M24 x 3.0			5EV2400-SO	125.00	30.00	19.30	14.48	

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5EV-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 5EW-SO

GREEN BAND, Ideal for Carbon Steel

NEW	GREEN BAND DRILLS P328-331	HSSE V3	TYPE UNI	TiN	35°
-----	-------------------------------	---------	----------	-----	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Mod Bottom (2P-3P)					
			TiN	L	Lc	d	k	lk
M3 x 0.5	D4	3	5EW0300-SO	48.00	6.00	3.58	2.79	5.00
M4 x 0.7			5EW0400-SO	53.00	8.00	4.27	3.33	6.50
M5 x 0.8			5EW0500-SO	58.50	10.00	4.93	3.86	
M6 x 1.0			5EW0600-SO	65.00	12.00	6.48	4.85	8.00
M8 x 1.25			5EW0800-SO	70.00	14.00	8.08	6.05	9.50
M10 x 1.5	D6	3	5EW1000-SO	77.00	16.00	9.68	7.26	11.00
M12 x 1.75			5EW1200-SO	87.00	18.00	9.32	6.99	
M14 x 2.0			5EW1400-SO	93.00	22.00	10.90	8.18	13.00
M16 x 2.0			5EW1600-SO	98.50	23.00	12.19	9.14	14.00
M18 x 2.5			5EW1800-SO	108.00	25.00	13.76	10.30	15.88
M20 x 2.5	D4	4	5EW2000-SO	114.00		16.56	12.42	17.50
M22 x 2.5			5EW2200-SO	119.00	28.00	17.70	13.28	19.05
M24 x 3.0			5EW2400-SO	125.00	30.00	19.30	14.48	

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5EW-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 16515

VC10

V

A-POT, DIN Overall Length, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length											
			Plug (3.5P - 4.5P)																	
			V	L	Lc	Ln	d	k	lk											
2 - 56 UNC	H2	2	1651505608	1.772	0.437	0.476	0.141	0.110	0.188											
2 - 64 UNF			1651505708																	
3 - 48 UNC			1651505808	1.969	0.500	0.539														
3 - 56 UNF			1651505908																	
4 - 40 UNC			1651500108	2.205	0.295	0.704														
4 - 48 UNF			1651500208																	
5 - 40 UNC			1651500308																	
5 - 44 UNF			1651500408																	
6 - 32 UNC			1651500608																	
6 - 40 UNF			1651500508																	
6 - 40 UNF	H3	3	1651500708	2.480	0.374	0.826	0.168	0.131												
8 - 32 UNC	H2		1651500908																	
8 - 36 UNF	H3		1651500808																	
10 - 24 UNC	H2		1651501008	2.756	0.492	0.976			0.194	0.152										
10 - 32 UNF	H3		1651501108																	
12 - 24 UNC	H2		1651501308	3.150	0.496	1.177					0.220	0.165	0.281							
12 - 28 UNF	H3		1651501208																	
12 - 32 UNEF	H2		1651501408																	
12 - 32 UNEF	H3		1651501508																	
1/4 - 20 UNC	H5		1651506008																	
1/4 - 20 UNC	H3	1651501708																		
1/4 - 28 UNF	H4	1651501608	3.543	0.665	1.377	0.318	0.238	0.375												
1/4 - 28 UNF	H3	1651501908																		
1/4 - 32 UNEF	H4	1651501808	3.150	0.653	1.366				0.381	0.286				0.438						
5/16 - 18 UNC	H3	1651506108																		
5/16 - 24 UNF	H5	1651502108	3.937	0.751	1.535						0.323	0.242	0.406							
5/16 - 32 UNEF	H3	1651502008																		
3/8 - 16 UNC	H4	1651502308	3.543	0.744	1.370										0.381	0.286	0.438			
3/8 - 24 UNF	H3	1651502208																		
3/8 - 32 UNEF	H5	1651506208	3.937	0.858	1.291													0.323	0.242	0.406
7/16 - 14 UNC	H3	1651502508																		
7/16 - 20 UNF	H5	1651502708	3.937	0.858	1.291	0.323	0.242	0.406												
7/16 - 20 UNF	H3	1651502608																		
7/16 - 20 UNF	H5	1651506308	3.937	0.858	1.291				0.323	0.242				0.406						
7/16 - 20 UNF	H3	1651502908																		
7/16 - 20 UNF	H5	1651502808	3.937	0.858	1.291						0.323	0.242	0.406							
7/16 - 20 UNF	H3	1651503108																		
7/16 - 20 UNF	H5	1651503008																		

Packed: 1 pc.
Available V coating only.

continued on next page



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
16515	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	40-65	35-55	25-75	25-60	25-60	60-100	70-120	70-120			40-65				

good best





VC10 **V**

List 16515 (Continued)

A-POT, DIN Overall Length, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk	
			V	L	Lc	Ln	d	k	lk	
7/16 - 28 UNEF	H4	3	1651506408	3.543	0.858	1.291	0.323	0.242	0.406	
1/2 - 13 UNC	H3		1651503308	4.331						
	H5		1651503208							
1/2 - 20 UNF	H3		1651503508	3.937		0.921	1.354	0.367	0.275	0.438
	H5		1651503408							
1/2 - 28 UNEF	H4		1651506508	4.331						
9/16 - 12 UNC	H3		1651503708							
	H5		1651503608							
9/16 - 18 UNF	H3		1651503908	3.937		1.000	1.472	0.429	0.322	0.500
	H5		1651503808							
9/16 - 24 UNEF	H4		1651506608	4.331						
5/8 - 11 UNC	H3		1651504108							
	H5		1651504008							
5/8 - 18 UNF	H3		1651504308	3.937		1.090	1.562	0.480	0.360	0.563
	H5		1651504208							
5/8 - 24 UNEF	H4		1651506708	4.331				0.542	0.406	0.625
11/16 - 24 UNEF	H3		1651506808							
3/4 - 10 UNC	H3		1651504508	4.921						
	H5		1651504408							
3/4 - 16 UNF	H3		1651504708	4.331		1.200	1.712	0.590	0.442	0.688
	H5		1651504608							
3/4 - 20 UNEF	H5		1651506908	4.921				0.652	0.489	
13/16 - 20 UNEF	H4		1651507008							
7/8 - 9 UNC	H4		1651504908	5.512						
	H6		1651504808							
7/8 - 14 UNF	H4		1651505108	4.921		1.334	1.885	0.697	0.523	0.750
	H6		1651505008							
7/8 - 20 UNEF	H5		1651507108	5.512				0.760	0.570	0.750
15/16 - 20 UNEF	H4	1651507208								
1 - 8 UNC	H4	1651505308	6.299							
	H6	1651505208								
1 - 12 UNF	H4	1651505508	5.512		1.500	2.090	0.800	0.600	0.813	
	H6	1651505408								
1 - 14 UNS	H6	1651507408	5.512							
1 - 20 UNEF	H5	1651507308								

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16515	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>			
SFM	80-120	80-120	80-120	40-65	35-55	25-75	25-60	25-60	60-100	70-120	70-120			40-65			

good best





List 16510

VC10

V

A-POT, DIN Overall Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln			
			V	L	Lc	Ln		k	lk
M1.4 x 0.3	D2	2	1651003008	40.00	7.90	8.90	3.58	2.79	4.80
M1.6 x 0.35	D3		1651003108						
M1.7 x 0.35			1651003208						
M2 x 0.4	1651003408								
M2 x 0.25	D2		1651003308						
M2.2 x 0.45	D3		1651003608						
M2.2 x 0.25	D2		1651003508						
M2.3 x 0.4	D3		1651003708						
M2.5 x 0.45			1651003908						
M2.5 x 0.35			1651003808						
M2.6 x 0.45		1651004008							
M3 x 0.5		56.00	1651000108						
M3 x 0.35			1651004108						
M3.5 x 0.6		1651004308							
M3.5 x 0.35		1651004208							
M4 x 0.7		D4	1651000308						
M4 x 0.5		D3	1651000208						
M4.5 x 0.75	D4	1651004508							
M4.5 x 0.5	D3	1651004408							
M5 x 0.8	D4	1651000508							
M5 x 0.5	D3	1651000408							
M5.5 x 0.5		1651004608							
M6 x 1.0	D5	1651000808							
M6 x 0.75	D4	1651000708							
M6 x 0.5	D3	1651000608							
M7 x 1.0	D5	1651004808							
M7 x 0.75	D4	1651004708							
M8 x 1.25	D5	1651001008							
M8 x 1.0		1651000908							
M8 x 0.75	D4	1651004908							
M9 x 1.25	D5	1651005208							
M9 x 1.0		1651005108							
M9 x 0.75	D4	1651005008							
M10 x 1.5	D6	1651001308							
M10 x 1.25	D5	1651001208							
M10 x 1.0		1651001108							
M10 x 0.75	D4	1651005308							
M11 x 1.5	D6	1651005608							
M11 x 1.0	D5	1651005508							

Packed: 1 pc.
Available V coating only.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	40-65	35-55	25-75	25-60	25-60	60-100	70-120	70-120			40-65			

good best





List 16510 (Continued)

VC10

V

A-POT, DIN Overall Length, Plug (3.5P-4.5P)



Units:mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	Ik
			V	L	Lc	Ln	d	k	Ik
M11 x 0.75	D4	3	1651005408	90.00	18.00	29.00	8.20	6.15	10.30
M12 x 1.75	D6		1651001708	110.00	21.00	32.00	9.32	6.98	11.10
M12 x 1.5			1651001608	100.00					
M12 x 1.25	D5	1651001508	110.00		24.00	36.00	12.19	9.14	14.30
M12 x 1.0		1651001408							
M14 x 2.0	D7	4	1651001908	110.00	30.00	43.00	13.77	10.31	15.90
M14 x 1.5	D6		1651001808	100.00					
M14 x 1.25			1651005808						
M14 x 1.0	D5	1651005708	110.00	24.00	36.00	12.19	9.14	14.30	
M15 x 2.0	D7	1651007208							
M15 x 1.5	D6	4	1651006008	100.00	30.00	44.00	17.70	13.28	19.10
M15 x 1.25			1651007308						
M15 x 1.0	D5	1651005908	110.00	24.00	36.00	12.19	9.14	14.30	
M16 x 2.0	D7	1651002108							
M16 x 1.5	D6	4	1651002008	100.00	30.00	44.00	17.70	13.28	19.10
M16 x 1.25			1651007408						
M16 x 1.0	D5	1651006108	110.00	24.00	36.00	12.19	9.14	14.30	
M17 x 1.5	D6	1651006308							
M17 x 1.25	D5	4	1651007508	100.00	30.00	44.00	17.70	13.28	19.10
M17 x 1.0			1651006208						
M18 x 2.5	D7	3	1651002308	125.00	30.00	43.00	13.77	10.31	15.90
M18 x 2.0			1651006508						
M18 x 1.25	D6	4	1651007608	110.00	30.00	44.00	17.70	13.28	19.10
M18 x 1.5			1651002208						
M18 x 1.0	D5	1651006408	140.00	24.00	36.00	51.00	19.30	14.48	
M20 x 2.5	D7	1651002508							
M20 x 2.0	D6	4	1651006708	125.00	30.00	44.00	17.70	13.28	19.10
M20 x 1.5			1651002408						
M20 x 1.0	D5	1651006608	140.00	24.00	36.00	51.00	19.30	14.48	
M22 x 2.5	D7	1651002708							
M22 x 2.0	D6	4	1651006908	125.00	30.00	44.00	17.70	13.28	19.10
M22 x 1.5			1651002608						
M22 x 1.0	D5	1651006808	160.00	24.00	36.00	51.00	19.30	14.48	
M24 x 3.0	D8	1651002908							
M24 x 2.0	D7	1651007108	140.00	24.00	36.00	51.00	19.30	14.48	
M24 x 1.5	D6	1651002808							
M24 x 1.0	D5	1651007008							

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	40-65	35-55	25-75	25-60	25-60	60-100	70-120	70-120		40-65				

good best





List 16555



A-OIL-POT, Coolant-Through, DIN Overall Length, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk	
			V	L	Lc	Ln	d	k	lk	
1/4 - 20 UNC	H5	3	1655500108	3.150	0.598	1.181	0.255	0.191	0.313	
1/4 - 28 UNF	H4		1655500208							
5/16 - 18 UNC	H5		1655500308	3.543	0.665	1.377	0.318	0.238	0.375	
5/16 - 24 UNF	H4		1655500408							
3/8 - 16 UNC	H5		1655500508	3.937	0.751	1.535	0.381	0.286	0.438	
3/8 - 24 UNF	H4		1655500608			1.377				
7/16 - 14 UNC	H5		1655500708	3.937	0.858	1.291	0.323	0.242	0.406	
7/16 - 20 UNF			1655500808							
1/2 - 13 UNC			1655500908	4.331	0.921	1.354	0.367	0.275	0.438	
1/2 - 20 UNF			1655501008							
9/16 - 12 UNC			1655501108	4.331	1.000	1.472	0.429	0.322	0.500	
9/16 - 18 UNF			1655501208							
5/8 - 11 UNC			1655501308	4.331	1.090	1.562	0.480	0.360	0.563	
5/8 - 18 UNF			1655501408							
3/4 - 10 UNC			H6	1655501508	4.921	1.200	1.712	0.590	0.442	0.688
3/4 - 16 UNF				1655501608						
7/8 - 9 UNC				1655501708	5.512	1.334	1.885	0.697	0.523	0.750
7/8 - 14 UNF				1655501808						
1 - 8 UNC	1655501908			6.299	1.500	2.090	0.800	0.600	0.813	
1 - 12 UNF	1655502008									

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16555	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	100-200	100-200	100-200	50-120	45-110	40-120	40-120	40-100	80-160	90-220	90-220			60-120			

good best





A Brand[®] A-OIL-POT

Advanced Performance Taps for a Variety of Materials

List 16550



A-OIL-POT, Coolant-Through, DIN Overall Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
M6 x 1.0	D5	3	1655000208	80.00	12.00	30.00	6.48	4.85	7.90
M6 x 0.75	D4		1655000108						
M7 x 1.0	D5		1655000308						
M8 x 1.25			1655000608						
M8 x 1.0			1655000508						
M8 x 0.75			1655000408						
M9 x 1.25	D5		1655000708	90.00	15.00	30.00	8.08	6.05	9.50
M10 x 1.5	D6		1655001008	100.00		35.00			
M10 x 1.25	D5		1655000908	100.00	18.00	39.00	9.68	7.26	11.10
M10 x 1.0			1655000808	90.00		35.00			
M11 x 1.5			1655001108	100.00		29.00			
M12 x 1.75	D6		1655001508	110.00	21.00	32.00	9.32	6.98	11.10
M12 x 1.5		1655001408	100.00						
M12 x 1.25		1655001308							
M12 x 1.0	D5	1655001208	110.00	24.00	36.00	10.90	8.18	12.70	
M14 x 2.0	D7	1655001708							
M14 x 1.5	D6	1655001608	100.00	30.00	43.00	13.77	10.31	15.90	
M15 x 1.5		1655001808	100.00						
M16 x 2.0	D7	1655002008	110.00	36.00	44.00	16.56	12.42	17.50	
M16 x 1.5	D6	1655001908	100.00						
M17 x 1.5		1655002108	100.00						
M18 x 2.5	D7	1655002308	125.00	30.00	51.00	19.30	14.48	19.10	
M18 x 1.5	D6	1655002208	110.00						
M20 x 2.5	D7	1655002508	140.00	36.00	51.00	19.30	14.48	19.10	
M20 x 1.5	D6	1655002408	125.00						
M22 x 2.5	D7	1655002808	140.00	36.00	51.00	19.30	14.48	19.10	
M22 x 2.0		1655002708	140.00						
M22 x 1.5	D6	1655002608	125.00	36.00	51.00	19.30	14.48	19.10	
M24 x 3.0	D8	1655003108	160.00						
M24 x 2.0	D7	1655003008	140.00	36.00	51.00	19.30	14.48	19.10	
M24 x 1.5	D6	1655002908	140.00						

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16550	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	100-200	100-200	100-200	50-120	45-110	40-120	40-120	40-100	80-160	90-220	90-220			60-120			

good best





List 16535

VC10

V

A-LT-POT, Long Shank, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length			
			Plug (3.5P - 4.5P)									
			V	L	Lc	Ln	d	k	lk			
4 - 40 UNC	H2	2	1653506008	3.149	0.342	0.751	0.140	0.109	0.188			
4 - 48 UNF			1653506108									
5 - 40 UNC			1653500708									
5 - 44 UNF			1653506308									
6 - 32 UNC	H3	3	1653501008	4.724	0.429	0.842	0.194	0.151	0.251			
6 - 40 UNF	H2		1653501108	3.937	0.433	0.846						
8 - 32 UNC	H3		1653501308	4.724	0.444	0.897						
8 - 36 UNF	H2		1653501408	3.937								
10 - 24 UNC	H3	3	1653501508	4.921	0.574	1.059	0.220	0.164	0.279			
10 - 32 UNF			1653501708	5.906	0.582	1.066						
12 - 24 UNC			1653501808	4.921	0.590	1.271						
12 - 28 UNF			1653501908									
1/4 - 20 UNC	H5	3	1653502108	5.906	0.704	1.366	0.255	0.190	0.287			
1/4 - 28 UNF	H4		1653502308									
5/16 - 18 UNC	H5		1653502508									
5/16 - 24 UNF	H4		1653502708		0.803	1.633	0.317	0.238	0.342			
3/8 - 16 UNC	H5		1653502908									
3/8 - 24 UNF	H4		1653503108									
7/16 - 14 UNC	H5		3		1653503308	7.087	0.858	2.362	0.322	0.242	0.405	
7/16 - 20 UNF					1653503508							
1/2 - 13 UNC					1653503708							
1/2 - 20 UNF					1653503908		0.921	2.834	0.367	0.274	0.437	
9/16 - 12 UNC					1653504108							
9/16 - 18 UNF					1653504308							
5/8 - 11 UNC		H6		3	1653504508		7.874	1.090	1.897	0.380	0.285	0.397
5/8 - 18 UNF					1653504708							
3/4 - 10 UNC					1653504908							
3/4 - 16 UNF					1653505108			0.921	2.834	0.429	0.322	0.500
7/8 - 9 UNC					1653505308							
7/8 - 14 UNF					1653505508							
1 - 8 UNC	H6	3	1653505708	1.200	3.149	0.590	0.442	0.688				
1 - 12 UNF			1653505908									
							0.697	0.522	0.751			
							0.800	0.600	0.811			

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16535	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	40-65	35-55	25-75	25-60	25-60	60-100	70-120	70-120			40-65			

good best





VC10 **V**

List 16530

A-LT-POT, Long Shank, Plug (3.5P-4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
M3 x 0.5	D3	3	1653001308	100.00	6.00	20.00	3.58	2.79	4.80
M3 x 0.35			1653001208						
M3.5 x 0.6			1653001508						
M3.5 x 0.35	D4	3	1653001408	100.00	7.00	23.00	4.26	3.32	6.40
M4 x 0.7			1653001708						
M4 x 0.5	D3	3	1653001608	100.00	8.00	27.00	4.92	3.86	6.40
M4.5 x 0.75	D4		1653001908						
M4.5 x 0.5			1653001808						
M5 x 0.8	D3	3	1653002108	125.00	9.00	32.90	5.58	4.19	7.10
M5 x 0.5			1653002008						
M5.5 x 0.5			1653002208						
M6 x 1.0	D5	3	1653002708	150.00	11.00	40.00	6.47	4.85	7.80
M6 x 0.75	D4		1653002508						
M6 x 0.5	D3		1653002308						
M8 x 1.25	D5	3	1653003708	150.00	15.00	51.90	8.07	6.04	9.40
M8 x 1.0			1653003508						
M8 x 0.75	D4	3	1653003308	150.00	18.00	59.90	9.67	7.26	11.00
M10 x 1.5	D6		1653005108						
M10 x 1.25	D5		1653004908						
M10 x 1.0		1653004708							
M10 x 0.75	D4	3	1653004508	180.00	21.00	72.00	9.32	6.98	11.00
M12 x 1.75	D6		1653006708						
M12 x 1.5			1653006508						
M12 x 1.25	D5	3	1653006308	180.00	21.00	72.00	9.32	6.98	11.00
M12 x 1.0			1653006108						
M14 x 2.0			D7						
M14 x 1.5	D6	4	1653007008	150.00	24.00	59.90	10.89	8.17	12.70
M14 x 1.25			1653006908						
M14 x 1.0			D5						
M15 x 1.5	D6	3	1653007308	160.00	24.00	64.00	12.19	9.14	14.30
M15 x 1.0	D5		1653007208						
M16 x 2.0	D7		1653007708						
M16 x 1.5	D6	3	1653007508	180.00	29.00	72.00	13.76	10.31	15.90
M16 x 1.0	D4		1653007408						
M18 x 2.5	D7	3	1653008308	180.00	29.00	80.00	16.56	12.42	17.50
M18 x 2.0			1653008208						
M18 x 1.5			D6						
M18 x 1.0	D5	3	1653008008	200.00	29.00	80.00	17.70	13.28	19.10
M20 x 2.5	D7		1653008708						
M20 x 2.0	D6		1653008608						
M20 x 1.5		1653008508							
M20 x 1.0	D5	3	1653008408	200.00	29.00	80.00	17.70	13.28	19.10
M22 x 2.5	D7		1653009108						
M22 x 2.0	D6	4	1653009008	200.00	29.00	80.00	17.70	13.28	19.10
M22 x 1.5			1653008908						
M22 x 1.0	D5	4	1653008808	200.00	29.00	80.00	17.70	13.28	19.10

Packed: 1 pc.
Available V coating only.





List 16530 (Continued)

VC10

V

A-LT-POT, Long Shank, Plug (3.5P-4.5P)

Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)						
			V						
M24 x 3.0	D8	3	1653009508	200.00	35.00	80.00	19.30	14.47	19.10
M24 x 2.0	D7	4	1653009408						
M24 x 1.5	D6		1653009308						
M24 x 1.0	D5		1653009208						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010	1035	1065	4140	4340												
16530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>				
SFM	80-120	80-120	80-120	40-65	35-55	25-75	25-60	25-60	60-100	70-120	70-120		40-65				

good best





List 13063



V-CPM-RFT, RHC/LHS for Through Hole, Plug (4P - 4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (4P - 4.5P)							
			V							
			L	Lc	Ln	d	k	lk		
2 - 56 UNC	H2	2	1306300108	1.752	0.437	0.476	0.141	0.110	0.189	
4 - 40 UNC			1306300208	1.874	0.295	0.559				
6 - 32 UNC			1306300308	2.000	0.370	0.685				
8 - 32 UNC	H3	3	1306300408	2.126	0.374	0.752	0.168	0.131	0.252	
10 - 24 UNC			1306300508	2.374	0.492	0.866				
10 - 32 UNF			1306300608							
1/4 - 20 UNC	H5	3	1306300708	2.500	0.594	0.996	0.255	0.191	0.287	
1/4 - 28 UNF	H3		1306300808							
	H5		1306300908							
5/16 - 18 UNC	H3	3	1306301008	2.720	0.665	1.126	0.318	0.238	0.374	
5/16 - 24 UNF			H5							1306301108
			H3							1306301208
3/8 - 16 UNC	H5	3	1306301308	2.937	0.752	1.252	0.381	0.286	0.437	
3/8 - 24 UNF			H3							1306301408
			H5							1306301508
7/16 - 14 UNC	H3	3	1306301608	3.157	0.858	1.291	0.323	0.242	0.406	
7/16 - 20 UNF			H5							1306301708
			H3							1306301808
1/2 - 13 UNC	H5	3	1306301908	3.374	0.921	1.354	0.367	0.275	0.437	
1/2 - 20 UNF			H3							1306302008

Packed: 1 pc.
Available V coating only.



Work Material																			
List No.	P					Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Aluminum	Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High				300	400	17-4 PH					6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
13063				<input type="checkbox"/>					<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-50				8-20						8-20	15-35				

good best





List 13163



V-CPM-RFT, RHC/LHS for Through Hole, Plug (4P - 4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4P - 4.5P)						
			V						
M2.5 x 0.45	D3	3	1316300108	47.60	12.00	13.80	3.58	2.79	4.80
M3 x 0.5			1316300208	50.80	6.00	16.00			
M4 x 0.7	D4		1316300308	55.80	8.00	19.10	4.26	3.33	6.40
M5 x 0.8			1316300408	62.40	9.00	22.20	4.92	3.86	
M6 x 1.0	D5		1316300508	65.50	12.00	25.40	6.47	4.85	7.30
M8 x 1.25			1316300808	69.10	15.00	28.60	8.07	6.05	9.50
M10 x 1.5	D6		1316301008	74.60	18.00	31.80	9.67	7.26	11.10
M10 x 1.25	D5		1316300908						
M12 x 1.75	D6		1316301308	85.70	21.00	32.00	9.32	6.98	
M12 x 1.25	D5		1316301108						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
13163				4140 4340								<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-50			8-20					8-20	15-35				

good best





VC10
HR

List 337Ni

WHR-Ni-POT, DIN Overall Length, Plug (5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)						
			HR	L	Lc	Ln	d	k	lk
2 - 56 UNC	H2	2	3370002562	1.772	0.437	0.476	0.140	0.109	0.188
4 - 40 UNC	H3		3370004402						
4 - 48 UNF	H2	2	3370004403	2.205	0.562	0.602	0.140	0.109	0.188
6 - 32 UNC	H3		3370006322						
8 - 32 UNC	H2	2	3370008322	2.480	0.751	-	0.167	0.131	0.251
10 - 24 UNC	H3		3370008323						
10 - 32 UNF	H2	2	3370010242	2.756	0.874	-	0.194	0.151	0.251
10 - 32 UNF	H3		3370010243						
1/4 - 20 UNC	H5	2	3370010322	3.150	1.000	-	0.255	0.190	0.287
1/4 - 28 UNF	H4		3370014203						
5/16 - 18 UNC	H3	3	3370014205	3.543	0.665	1.377	0.317	0.238	0.342
5/16 - 24 UNF	H5		3370014283						
3/8 - 16 UNC	H3	3	3370014284	3.937	0.992	-	0.380	0.285	0.397
3/8 - 24 UNF	H5		3370516183						
7/16 - 14 UNC	H3	3	3370516185	3.543	0.740	1.377	0.317	0.238	0.342
7/16 - 20 UNF	H5		3370516243						
1/2 - 13 UNC	H3	3	3370516245	3.937	0.858	1.291	0.322	0.242	0.405
1/2 - 20 UNF	H5		3370038163						
9/16 - 18 UNF	H3	3	3370038165	4.331	0.921	1.354	0.367	0.274	0.437
5/8 - 11 UNC	H5		3370038243						
5/8 - 18 UNF	H3	3	3370038245	3.937	1.000	1.472	0.429	0.322	0.500
3/4 - 10 UNC	H5		3370716143						
3/4 - 16 UNF	H3	4	3370716145	4.921	1.090	1.562	0.480	0.359	0.562
	H5		3370716203						
	H3	4	3370716205	4.331	1.200	1.712	0.590	0.442	0.688
	H5		3370012133						
	H3	4	3370012135	4.331	0.921	1.354	0.367	0.274	0.437
	H5		3370012203						
	H3	4	3370012205	3.937	1.000	1.472	0.429	0.322	0.500
	H5		3370916183						
	H3	4	3370916185	4.331	1.090	1.562	0.480	0.359	0.562
	H5		3370058113						
	H3	4	3370058115	3.937	1.200	1.712	0.590	0.442	0.688
	H5		3370058183						
	H3	4	3370058185	4.921	1.200	1.712	0.590	0.442	0.688
	H5		3370034103						
	H3	4	3370034105	4.331	1.200	1.712	0.590	0.442	0.688
	H5		3370034163						
	H3	4	3370034165	4.331	1.200	1.712	0.590	0.442	0.688
	H5		3370034165						

Packed: 1 pc.
Available HR coating only.





List 337Ni (Continued)

VC10

HR

WHR-Ni-POT, DIN Overall Length, Plug (5P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)	L	Lc	Ln	d	k	lk
			HR	L	Lc	Ln	d	k	lk
7/8 - 9 UNC	H3	4	3370078093	5.512	1.334	1.885	0.697	0.522	0.751
	H5		3370078095						
7/8 - 14 UNF	H3		3370078143	4.921					
	H5		3370078145						
1 - 8 UNC	H3		3370001083	6.299	1.500	2.090	0.800	0.600	0.811
	H5		3370001085						
1 - 12 UNF	H3		3370001123	5.512					
	H5		3370001125						

Packed: 1 pc.
Available HR coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
337Ni																		
SFM								8-20				8-15						8-12

good best





VC10 HR

List 338Ni

WHR-Ni-POT, DIN Overall Length, Plug (5P)



Units:mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)						
			HR						
			L	Lc	Ln	d	k	lk	
M2.5 x 0.45	D3	2	3380250453	50.00	12.00	13.80	3.58	2.79	4.80
M3 x 0.5			3380003053	56.00	16.00	21.00			
M4 x 0.7	D4	2	3380004074	63.00	19.00	25.50	4.26	3.33	6.40
M5 x 0.8			3380005084	70.00	22.00	-	4.92	3.86	
M6 x 1.0	D5	2	3380006105	80.00	25.00	33.90	6.47	4.85	7.30
M6 x 0.75			3380006755						
M8 x 1.25			3380008255						
M8 x 1.0	D6	2	3380008105	90.00	15.00	35.00	8.07	6.05	8.70
M10 x 1.5			3380010156						
M10 x 1.25	D5	2	3380010255	100.00	22.00	43.50	9.67	7.26	10.10
M12 x 1.75	3380012756								
M12 x 1.5	D6	3	3380012156	100.00	21.00	32.00	9.32	6.98	11.10
M14 x 2.0			3380014207						
M14 x 1.5	D6	3	3380014156	100.00	24.00	36.00	10.89	8.18	12.70
M16 x 2.0	D7		3380016207	110.00					
M16 x 1.5	D6	3	3380016156	100.00	24.00	36.00	12.19	9.14	14.30
M18 x 2.5	D7		3380018257	125.00					
M18 x 1.5	D6	3	3380018156	110.00	30.00	43.00	13.76	10.31	15.90
M20 x 2.5	D8		3380020258	140.00					
M20 x 1.5	D6	3	3380020156	125.00	30.00	44.00	16.56	12.42	17.50
M22 x 2.5	D8		3380022258	140.00					
M22 x 1.5	D6	3	3380022156	125.00	30.00	44.00	17.70	13.28	19.10
M24 x 3.0	D8		3380024308	160.00					
M24 x 1.5	D6	4	3380024156	140.00	36.00	51.00	19.30	14.48	

Packed: 1 pc.
Available HR coating only.



Work Material																				
List No.	P				Die Steels	M			K Cast Iron	N		S		H						
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels						
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
338Ni																				
SFM							8-20					<input checked="" type="checkbox"/>							<input type="checkbox"/>	

good best





List 312Ti

V-Ti-POT, Plug (4.5P-5.5P)



VC10

V



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length			
			Plug (4.5P-5.5P)									
			V									
			L	Lc	Ln	d	k	lk				
2 - 56 UNC	H2	3	1105610108	1.752	0.437	-	0.140	0.109	0.188			
4 - 40 UNC			1105610208	1.874	0.562	-						
6 - 32 UNC	H3		1105610408	2.000	0.688	-						
6 - 40 UNF	H2		1105610508			-						
8 - 32 UNC	H3		1105610708	2.126	0.751	-	0.167	0.131	0.251			
8 - 36 UNF	H2		1105610808			-						
10 - 24 UNC	H3		1105610908	2.374	0.874	-						
10 - 32 UNF	H2		1105611008			-						
1/4 - 20 UNC	H3		1105611108	2.500	0.866	-	0.194	0.151	0.311			
	H5		1105611208			-						
1/4 - 28 UNF	H3		1105611308	2.720	1.000	-						
	H4		1105611408			-						
5/16 - 18 UNC	H3		1105611508	2.937	0.988	-	0.255	0.190	0.374			
	H5		1105611608			-						
5/16 - 24 UNF	H3		1105611708	2.720	0.665	1.125						
	H4		1105611808			1.118						
3/8 - 16 UNC	H3		1105611908	2.937	0.751	1.251	0.317	0.238	0.437			
	H5		1105612008			1.240						
3/8 - 24 UNF	H3		1105612108	3.157	0.858	1.291				0.380	0.285	0.405
	H5		1105612208									
7/16 - 14 UNC	H3		1105612308	3.374	0.921	1.354	0.322	0.242	0.437			
	H5		1105612408									
7/16 - 20 UNF	H3		1105612508	3.594	1.000	1.472				0.367	0.274	0.500
	H5		1105612608									
1/2 - 13 UNC	H3	1105612708	3.811	1.090	1.562	0.429	0.322	0.562				
	H5	1105612808							1.291			
1/2 - 20 UNF	H3	1105612908	3.594	1.000	1.472				0.480	0.359	0.562	
	H5	1105613008										1.291
9/16 - 18 UNF	H3	1105613108	3.811	1.090	1.562	0.429	0.322	0.500				
	H5	1105613208										1.291
5/8 - 11 UNC	H3	1105613308	3.811	1.090	1.562				0.480	0.359	0.562	
5/8 - 18 UNF	H3	1105613408										1.291
		H5	1105613508	1.291								
	H5	1105613608	1.291									
	H5	1105613708	1.291									

Packed: 1 pc.
Available V coating only.

continued on next page **EXT**

Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
312Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30				8-20				8-15	8-15	15-35	10-20			

good best





EXOTAP® VC-10 Ti

Taps Designed for Titanium Alloys



VC10

V

List 312Ti (Continued)

V-Ti-POT, Plug (4.5P-5.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (4.5P-5.5P)							
			V							
			L	Lc	Ln	d	k	lk		
3/4 - 10 UNC	H5	4	1105613808	4.252	1.200	1.712	0.590	0.442	0.688	
	H3		1105613908							
	H5		1105614008							
7/8 - 9 UNC	H3		1105614208	4.689	1.334	1.885	0.697	0.522	0.751	
	H5		1105614308							
	H3		1105614408							
7/8 - 14 UNF	H3		1105614508	5.126	1.500	1.956	0.800	0.600	0.811	
	H5		1105614108			2.090				
1 - 8 UNC	H5									

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
312Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
SFM				15-30			8-20					8-15	8-15	15-35	10-20		

good best






List 344Ti

V-Ti-POT, Plug (4.5P-5.5P)



VC10

V



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4.5P-5.5P)						
			V						
M3 x 0.5	D3	3	1115810108	49.20	15.90	20.90	3.58	2.79	4.80
M4 x 0.7	D4		1115810208	54.00	19.00	25.40	4.26	3.33	6.40
M5 x 0.8			1115810308	60.30	22.20	-	4.92	3.86	
M6 x 1.0	D5		1115810408	63.50	25.30	33.80	6.47	4.85	7.90
M8 x 1.25			1115810508	69.10	15.00	28.60	8.07	6.05	9.50
M10 x 1.5	D6		1115810708	74.00	18.00	31.80	9.67	7.26	11.10
M10 x 1.25	D5		1115810608						
M12 x 1.75	D6		1115810808	85.70	21.00	32.00	9.32	6.98	

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
344Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30			8-20					8-15	8-15	15-35	10-20			

good best





EXOTAP® VC-10 Ti Oil

Coolant-Through Taps Designed for Titanium Alloys

List 316Ti

VPO-Ti-POT, Coolant-Through, DIN Overall Length, Plug (5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)						
			V						
				L	Lc	Ln	d	k	lk
1/4 - 28 UNF	H3	3	31621408	3.140	1.000	-	0.255	0.191	0.313
	H4		31621508						
5/16 - 24 UNF	H3		31621808	3.540	0.665	1.378	0.318	0.238	0.375
	H4		31621908						
3/8 - 24 UNF	H3		31622208	3.930	0.752	1.291	0.381	0.286	0.438
	H4		31622308						
7/16 - 20 UNF	H3		31622608	4.330	0.858	1.354	0.323	0.242	0.406
	H4		31622708						
1/2 - 20 UNF	H3		31623008	4.920	0.921	1.472	0.367	0.275	0.438
	H5		31623108						
9/16 - 18 UNF	H3		31623408	5.510	1.000	1.563	0.429	0.322	0.500
	H5		31623508						
5/8 - 18 UNF	H3	31623808	4.330	1.091	1.713	0.480	0.360	0.563	
	H4	31623908							
3/4 - 16 UNF	H3	31624208	4.920	1.201	1.886	0.590	0.442	0.688	
	H4	31624308							
7/8 - 14 UNF	H4	31624608	5.510	1.335	2.091	0.697	0.523	0.750	
	H6	31624708							
1 - 12 UNF	H4	31625008	5.510	1.500	2.091	0.800	0.600	0.813	
	H6	31625108							

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1065	4140	4340	300	400	17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
316Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
SFM				15-30			8-20					8-15	8-15	15-35	10-20		

good best





List 347Ti

VPO-Ti-POT, Coolant-Through, DIN Overall Length, Plug (5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)						
			V						
				L	Lc	Ln	d	k	lk
M8 x 1.0	D5	3	34720508	90.00	15.00	35.00	8.07	6.04	9.50
M10 x 1.25			34720708		18.00	39.00	9.67	11.10	
M12 x 1.25			34720908		21.00	32.00	9.32		
M12 x 1.5	34721008								
M14 x 1.5	34721208								
M16 x 1.5	34721408		24.00	36.00	10.89	8.17	12.70		
M18 x 1.5	34721608				12.19	9.14	14.20		
M20 x 1.5	34721808				30.00	43.00	13.76	10.31	15.80
M22 x 1.5	34722008		125.00	44.00			16.56	12.42	17.40
M24 x 1.5	34722208		140.00				17.70	13.28	19.00
M24 x 1.5	4	34722208	140.00	36.00	51.00	19.30	14.47		

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
347Ti				4140 4340														
SFM				15-30			8-20					8-15	8-15	15-35	10-20			

good best





EXOTAP® VC-10 Ni

Taps Designed for Nickel Based Alloys



VC10	V	S/O
------	---	-----

List 312Ni

Ni-POT, Plug (4.5P-5.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P-5.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length																			
			EDP Number	Coating Suffix																										
				S/O	V	L	Lc	Ln	d	k	lk																			
2 - 56 UNC	H2	2	17722	01	-	1.752	0.472	-	0.140	0.109	0.188																			
4 - 40 UNC	H3	3	17762	01	08	1.874	0.606	-																						
	H4		17763	01	-			-																						
	17720		01	-	-																									
4 - 48 UNF	H2	2	17721	01	-	2.000	0.744	-																						
6 - 32 UNC	H3	3	17715	01	-			-																						
	H5		17063	01	08			-																						
	H7		17064	01	-			-																						
	17716		01	-	-																									
8 - 32 UNC	H3	3	17065	01	08			2.126				0.822	-	0.167	0.131	0.251														
	H4		17717	01	-								-																	
	H5		17066	01	-								-																	
10 - 24 UNC	H3	2	17067	01	08			2.374	0.948	-	0.194	0.151																		
	H5		17068	01	-					-																				
10 - 32 UNF	H2	4	17718	01	-					-																				
	H3		17069	01	08					-																				
	H4		17719	01	-	-																								
	H5		17070	01	-	-																								
1/4 - 20 UNC	H3	3	17071	01	08	2.500	1.102			-			0.255	0.190	0.311															
	H5		17072	01	-					-																				
	H7		17723	01	-					-																				
1/4 - 28 UNF	H3	3	17073	01	08					-																				
	H4		17724	01	-					-																				
	H5		17074	01	-					-																				
5/16 - 18 UNC	H3	3	17075	01	08			2.720	0.799	1.259	0.317	0.238				0.374														
	H5		17076	01	-												-													
	H7		17077	01	08												-													
5/16 - 24 UNF	H3	3	17078	01	-												-													
	H5		17079	01	08												-													
	H7		17080	01	-												-													
3/8 - 16 UNC	H3	3	17081	01	08	2.937	0.917						1.417	0.380	0.285		0.437													
	H5		17082	01	-													-												
	H7		17083	01	-													-												
7/16 - 14 UNC	H3	3	17084	01	-													3.157	0.858	1.291	0.322	0.242	0.405							
	H5		17085	01	08																			-						
	H7		17086	01	-																			-						
7/16 - 20 UNF	H3	3	17087	01	08			-																						
	H5		17088	01	-			-																						
	H7		17089	01	08			-																						
1/2 - 13 UNC	H3	3	17090	01	-			3.374	0.921	1.354	0.367	0.274				0.437														
	H5		17172	01	-																			-						
	H7		17173	01	-																			-						
9/16 - 18 UNF	H3	3	17174	01	-	3.594	1.000						1.472	0.429	0.322		0.500													
	H5		17175	01	-																			-						
	H7		17176	01	-																			-						
5/8 - 11 UNC	H3	3	17177	01	-													3.811	1.090	1.562	0.480	0.359	0.562							
	H5		17178	01	-																			-						
	H7		17179	01	-																			-						
5/8 - 18 UNF	H3	3	17725	01	-																			4.252	1.200	1.712	0.590	0.442	0.688	
	H5		17180	01	-																									-
	H7		17181	01	-																									-
3/4 - 10 UNC	H3	3	17182	01	-			-																						
	H5		17183	01	-			-																						
	H7		17184	01	-			-																						

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.





List 312Ni (Continued)



VC10	V	S/O
------	---	-----

Ni-POT, Plug (4.5P-5.5P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P-5.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V	L	Lc	Ln	d	k	lk
3/4 - 16 UNF	H3	4	17178	01	-	4.252	1.200	1.712	0.590	0.442	0.688
	H5		17179	01	-						
7/8 - 9 UNC	H3		17181	01	-	4.689	1.334	1.885	0.697	0.522	0.751
	H5		17182	01	-						
7/8 - 14 UNF	H3		17183	01	-						
	H5		17184	01	-						
1 - 8 UNC	H5		17180	01	-	5.126	1.500	2.090	0.800	0.600	0.811

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
312Ni	1010	1035	1065	4140															
SFM	1018	1045		4340															

good best





EXOTAP® VC-10 Ni


Taps Designed for Nickel Based Alloys



VC10	V	S/O
------	---	-----

List 344Ni

Ni-POT, Plug (4.5P-5.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P-5.5P)		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix							
				S/O							V
M2.5 x 0.45	D3	2	11157100	01	08	46.00	12.00	13.70	3.58	2.79	4.80
M3 x 0.5			11157101	01	08	49.20	16.00	23.10			
M4 x 0.7	D4	3	11157102	01	08	54.00	19.00	25.70	4.26	3.32	6.40
M5 x 0.8			11157103	01	08	60.30	22.00	-			
M6 x 1.0	D5		11157104	01	08	63.50	25.00	33.70	6.47	4.85	7.80
M8 x 1.25			11157105	01	08	69.09	15.00	28.80	8.07	6.04	9.40
M10 x 1.25	D6	11157106	01	08	74.60	18.00	32.00	9.67	7.26	11.00	
M10 x 1.5		11157107	01	08							
M12 x 1.75		11157108	01	08	85.70	21.00		9.32	6.98		

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High	4140		4340	300	400		17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
344Ni								<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM								8-20				8-15	8-15	15-35	10-20			

good best






List 312

Plug (4.5P-5.5P)



VC10	V	S/O
------	---	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P-5.5P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix							
				S/O	V						
2 - 56 UNC	H2	2	17590	01	08	1.752	0.437	0.476	0.140	0.109	0.188
4 - 40 UNC			17570	01	08	1.874	0.303	0.566			
	H3		17591	01	08						
	H4		17592	01	08						
5 - 40 UNC	H5		17593	01	08	1.937	0.307	0.633			
	H2		17571	01	08						
6 - 32 UNC	H3		17594	01	08	2.000	0.377	0.692			
	H4		17572	01	08						
	H5		17595	01	08						
	H6		17596	01	08						
	H6	17597	01	08							
8 - 32 UNC	H2	17598	01	08	2.126	0.381	0.759	0.167	0.131		
	H3	17573	01	08							
	H4	17599	01	08							
	H5	17600	01	08							
	H6	17601	01	08							
10 - 24 UNC	H3	17574	01	08	2.374	0.500	0.874	0.194	0.151	0.251	
	H5	17602	01	08							
10 - 32 UNF	H2	17603	01	08	2.500	0.602	1.003	0.255	0.190		
	H3	17575	01	08							
	H4	17604	01	08							
	H5	17605	01	08							
	H6	17606	01	08							
1/4 - 20 UNC	H3	17576	01	08	2.720	0.669	1.129	0.317	0.238		
	H5	17002	01	08							
1/4 - 28 UNF	H3	17577	01	08	2.937	0.759	1.259	0.380	0.285		0.437
	H4	17003	01	08							
	H5	17004	01	08							
	H6	17005	01	08							
5/16 - 18 UNC	H3	17578	01	08	2.720	0.669	1.129	0.317	0.238		
	H5	17006	01	08							
5/16 - 24 UNF	H3	17579	01	08	2.937	0.759	1.259	0.380	0.285		
	H4	17007	01	08							
	H5	17008	01	08							
	H6	17009	01	08							
3/8 - 16 UNC	H3	17580	01	08	2.937	0.759	1.259	0.380	0.285		
	H5	17010	01	08							

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.

[continued on next page](#) **EXT**

Work Material																	
List No.	P					M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum 6061 7075 Casting	Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH					6061 7075	8-15	8-15	~35 HRC	35-45 HRC
312				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20		

good best





VC10	<input checked="" type="checkbox"/> V	<input type="checkbox"/> S/O
------	---------------------------------------	------------------------------

List 312 (Continued)

Plug (4.5P-5.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P-5.5P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix							
				S/O	V						
3/8 - 24 UNF	H3	3	17581	01	08	2.937	0.759	1.259	0.380	0.285	0.437
	H4		17011	01	08						
	H5		17012	01	08						
	H6		17013	01	08						
7/16 - 14 UNC	H3		17582	01	08	3.157	0.893	1.291	0.322	0.242	0.405
	H5		17014	01	08						
7/16 - 20 UNF	H3		17583	01	08	3.374	0.960	1.354	0.367	0.274	0.437
	H5		17015	01	08						
1/2 - 13 UNC	H3		17584	01	08	3.811	1.137	1.562	0.480	0.359	0.562
	H5		17016	01	08						
1/2 - 20 UNF	H3		17585	01	08	4.252	1.251	1.712	0.590	0.442	0.688
	H5		17017	01	08						
5/8 - 11 UNC	H3	17586	01	08	4.252	1.232	1.712	0.590	0.442	0.688	
5/8 - 18 UNF	H3	17587	01	08							
	H5	17018	01	08							
3/4 - 10 UNC	H3	4	17588	01	08	4.252	1.251	1.712	0.590	0.442	0.688
3/4 - 16 UNF			17589	01	08						

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
312				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20		

good best





List 344

Plug (4.5P-5.5P)



VC10

V

S/O



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P-5.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V						
M3 x 0.5	D3	3	17022	01	08	49.20	6.00	16.00	3.58	2.79	4.80
M4 x 0.7	D4		17023	01	08	54.00	8.00	19.10	4.26	3.33	6.40
M5 x 0.8			17024	01	08	60.30	9.00	22.20	4.92	3.86	
M6 x 1.0	D5		17025	01	08	63.50	12.00	25.40	6.47	4.85	7.90
M8 x 1.25			17026	01	08	69.10	15.00	28.60	8.07	6.05	9.50
M10 x 1.5	D6		17028	01	08	74.60	17.00	31.70	9.67	7.26	11.10
M10 x 1.25	D5		17027	01	08			31.60			
M12 x 1.75	D6		17029	01	08	85.70	21.00	32.00	9.32	6.98	

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
344				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20			

good best





EXOTAP® VC-10 Oil

Coolant-Through Taps Designed for Difficult to Machine Materials



List 316

VPO-POT, Coolant-Through, DIN Overall Length, Plug (5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
1/4 - 20 UNC	H3	3	31601108	3.140	0.598	1.181	0.318	0.238	0.375
	H5		31601208						
1/4 - 28 UNF	H3		31601308						
	H4		31601408						
5/16 - 18 UNC	H3		31601508	3.540	0.665	1.378	0.318	0.238	0.375
	H5		31601608						
H3	31601708								
5/16 - 24 UNF	H3		31601808						
	H4		31601808						
3/8 - 16 UNC	H3		31601908	3.930	0.752	1.535	0.381	0.275	0.438
	H5		31602008						
3/8 - 24 UNF	H3		31602108	3.540	0.752	1.535	0.381	0.275	0.438
	H4		31602208						
7/16 - 14 UNC	H3		31602308	3.930	0.858	1.291	0.323	0.242	0.406
	H5		31602408						
H3	31602508								
7/16 - 20 UNF	H3		31602608						
	H5		31602608						
1/2 - 13 UNC	H3		31602708	4.330	0.921	1.354	0.367	0.275	0.438
	H5		31602808						
1/2 - 20 UNF	H3	31602908	3.930	0.921	1.354	0.367	0.275	0.438	
	H5	31603008							
9/16 - 12 UNC	H3	31603108	4.330	1.000	1.472	0.429	0.322	0.500	
	H5	31603208							
9/16 - 18 UNF	H3	31603308	3.930	1.000	1.472	0.429	0.322	0.500	
	H5	31603408							
5/8 - 11 UNC	H3	31603508	4.330	1.091	1.563	0.480	0.360	0.563	
	H5	31603608							
5/8 - 18 UNF	H3	31603708	3.930	1.091	1.563	0.480	0.360	0.563	
	H5	31603808							
3/4 - 10 UNC	H3	31603908	4.920	1.201	1.713	0.590	0.442	0.688	
	H5	31605008							
3/4 - 16 UNF	H3	31604008	4.330	1.201	1.713	0.590	0.442	0.688	
	H5	31604108							
7/8 - 9 UNC	H4	31604208	5.510	1.335	1.886	0.697	0.523	0.750	
	H6	31604308							
7/8 - 14 UNF	H4	31604408	4.920	1.335	1.886	0.697	0.523	0.750	
	H6	31604508							
1 - 8 UNC	H4	31604608	6.290	1.500	2.091	0.800	0.600	0.813	
	H6	31604708							
1 - 12 UNF	H4	31604808	5.510	1.500	2.091	0.800	0.600	0.813	
	H6	31604908							

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
316				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20			

good best





List 350

VPO-POT, Coolant-Through, DIN Overall Length, Plug (5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5P)	V						
			L	Lc	Ln	d	k	lk		
M6 x 1.0	D5	3	35000408	35000408	80.00	12.00	30.00	6.47	4.85	7.90
M8 x 1.0			35000508	35000508	90.00	15.00	35.00	8.07	6.04	9.50
M8 x 1.25			35000608	35000608						
M10 x 1.25	35000708		100.00	18.00	39.00	9.67	7.26	11.10		
M10 x 1.5	35000808									
M12 x 1.25	35000908									
M12 x 1.5	D6		35001008	35001008	110.00	21.00	32.00	9.32	6.98	
M12 x 1.75			35001108	35001108	110.00					
M14 x 1.5	D7		35001208	35001208	100.00	24.00	36.00	10.89	8.17	12.70
M14 x 2.0			35001308	35001308	110.00			12.19	9.14	14.20
M16 x 1.5	D6		35001408	35001408	100.00	30.00	43.00	13.76	10.31	15.80
M16 x 2.0	D7		35001508	35001508	110.00					
M18 x 1.5	D6	35001608	35001608	125.00	30.00	44.00	16.56	12.42	17.40	
M18 x 2.5	D7	35001708	35001708							
M20 x 1.5	D6	35001808	35001808	140.00	36.00	51.00	19.30	14.47	19.00	
M20 x 2.5	D7	35001908	35001908	140.00						
M22 x 1.5	D6	35002008	35002008	125.00	36.00	51.00	19.30	14.47	19.00	
M22 x 2.5	D7	35002108	35002108	140.00						
M24 x 1.5	D6	35002208	35002208	140.00	36.00	51.00	19.30	14.47	19.00	
M24 x 3.0	D8	35002308	35002308	160.00						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
350				4140 4340	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30	10-25		12-45	8-20			8-15	8-15	15-35	10-20			


good best





List 300

Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix								
				S/O	TiN	V						
2 - 56 UNC	H2	2	17346	01	-	08	1.752	0.437	0.476	0.140	0.109	0.188
	H3		17347	01	-	08						
	H4		17255	01	-	-						
3 - 48 UNC	H2		17256	01	-	-	1.811	0.496	0.535			
			17300	01	05	08	1.874	0.303	0.566			
4 - 40 UNC	H3		17348	01	-	08						
	H4		17258	01	-	-						
	H5		17349	01	-	08						
	H6		17268	01	-	-						
4 - 48 UNF	H2		17269	01	-	-						
			17270	01	-	-						
5 - 40 UNC	H2		17301	01	-	08	1.937	0.307	0.633			
		17358	01	-	08	2.000	0.377	0.692				
6 - 32 UNC	H3	17302	01	-	08							
		17398	01	05	08							
		17271	01	-	-							
		17371	01	-	08							
6 - 40 UNF	H2	17273	01	-	-				0.370	0.685		
		17274	01	-	-							
8 - 32 UNC	H2	17359	01	-	08	2.126	0.381	0.759	0.167	0.131		
		17303	01	05	08							
		17275	01	-	-							
		17372	01	-	08							
		17276	01	-	-							
8 - 36 UNF	H2	17277	01	-	-	0.374	0.752					
		17304	01	05	08	2.374	0.500	0.874	0.194	0.151		
10 - 24 UNC	H3	17278	01	-	-							
		17279	01	-	-							
		17365	01	-	08							
10 - 32 UNF	H3	17305	01	05	08							
		17764	01	-	08							
		17373	01	-	08							
		17280	01	-	-							
		17281	01	-	-							
		17282	01	-	-							
12 - 24 UNC	H3	17283	01	-	-	0.508	0.937	0.220	0.164	0.279		
12 - 28 UNF		17283	01	-	-	0.503	0.940					
1/4 - 20 UNC	H2	17366	01	-	08	2.500	0.602	1.003	0.255	0.190	0.311	
		17306	01	05	08							
		17374	01	-	08							
		17284	01	-	-							
1/4 - 28 UNF	H2	17367	01	-	08							
		17307	01	05	08							
		17368	01	-	08							
		17285	01	-	-							
		17286	01	-	-							
		17287	01	-	-							

Packed: 1 pc.
 EDP's listed above are stocked standard.
 Available in Steam Oxide, TiN or V coatings as shown above.





List 300 (Continued)

Plug (3.5P-4.5P)



HSSE	V	TiN	S/O
------	---	-----	-----

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk						
			EDP Number	Coating Suffix														
				S/O	TiN	V												
5/16 - 18 UNC	H3	3	17308	01	05	08	2.720	0.669	1.129	0.317	0.238	0.374						
	H5		17383	01	-	08												
	H7		17288	01	-	-												
5/16 - 24 UNF	H3		17309	01	05	08												
	H4		17369	01	-	08												
	H5		17289	01	-	-												
	H6		17290	01	-	-												
3/8 - 16 UNC	H3		17310	01	05	08							2.937	0.759	1.259	0.380	0.285	0.437
	H5		17384	01	-	08												
	H7		17292	01	-	-												
3/8 - 24 UNF	H3		17311	01	05	08												
	H4		17370	01	-	08												
	H5		17293	01	-	-												
	H7		17294	01	-	-												
7/16 - 14 UNC	H3		17312	01	05	08	3.157	0.893	1.291	0.322	0.242	0.405						
	H5		17385	01	-	08		0.881										
7/16 - 20 UNF	H3		17313	01	05	08												
	H5		17386	01	-	08												
1/2 - 13 UNC	H3		17314	01	05	08		3.374										
	H5		17387	01	-	08												
	H7		17295	01	-	-												
1/2 - 20 UNF	H3		17315	01	05	08	0.944											
	H5		17388	01	-	08	0.921											
9/16 - 12 UNC	H3		17250	01	05	08	3.594		1.043	1.472	0.429	0.322	0.500					
9/16 - 18 UNF			17251	01	05	08		1.027										
5/8 - 11 UNC			H5	17316	01	05		08						3.811	1.137	1.562	0.480	0.359
	H7		17389	01	-	08												
	H3		17296	01	-	-												
5/8 - 18 UNF	H3		17317	01	05	08	1.118											
	H5		17297	01	-	-												
	H7	17298	01	-	-													
3/4 - 10 UNC	H3	17318	01	05	08	4.252	1.251	1.712	0.590	0.442	0.688							
3/4 - 16 UNF		17319	01	05	08		1.232											
7/8 - 9 UNC	H4	17252	01	05	08	4.689	1.389	1.885	0.697	0.522	0.751							
7/8 - 14 UNF		17253	01	05	08		1.370											
1 - 8 UNC		17254	01	05	08		1.562											
1 - 12 UNF		17299	01	-	-							1.543						

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide, TiN or V coatings as shown above.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
300	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best






HSSE	V	TiN	S/O
------	---	-----	-----

List 342

Plug (3.5P-4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix								
				S/O	TiN	V						
M3 x 0.5	D3	3	17501	01	-	08	49.20	6.00	16.00	3.58	2.79	4.80
M3.5 x 0.6	D4		17729	01	-	-	50.80	7.00	17.50			
M4 x 0.7			17504	01	05	08	54.00	8.00	19.10	4.26	3.33	
M5 x 0.8			17507	01	05	08	60.30	9.00	22.20	4.92	3.86	
M6 x 1.0	D5		17510	01	05	08	63.50	12.00	25.40	6.47	4.85	7.90
M7 x 1.0			17734	01	-	-			28.70			
M8 x 1.25			17513	01	05	08	69.10	15.00	28.60	8.07	6.05	9.50
M8 x 1.0	17732		01	-	-							
M10 x 1.5	D6		17516	01	05	08	74.60	18.00	31.80	9.67	7.26	11.10
M10 x 1.25	D5		17731	01	-	-						
M12 x 1.75	D6		17519	01	05	08	85.70	21.00	32.00	9.32	6.98	12.70
M12 x 1.25	D5		17727	01	-	-						
M14 x 2.0	D7		17726	01	-	-	91.30	24.00	36.00	10.89	8.18	14.30
M14 x 1.5	D6		17728	01	-	-						
M16 x 1.5			17730	01	-	-	96.80	30.00	43.00	13.76	10.31	15.90
M16 x 2.0	D7		17735	01	-	-						
M18 x 1.5	D6		17733	01	-	-	102.40	30.00	43.00	13.76	10.31	15.90

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide, TiN or V coatings as shown above.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
342	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best





List 306

OIL-V-POT, Coolant-Through, DIN Overall Length, Plug (4P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length																																																																																																																																																																																																										
			Plug (4P)	L	Lc	Ln	d	k	lk																																																																																																																																																																																																										
			V	L	Lc	Ln	d	k	lk																																																																																																																																																																																																										
1/4 - 20 UNC	H3	3	30601708	3.140	0.598	1.181	0.255	0.191	0.287																																																																																																																																																																																																										
	H5		30601808							1/4 - 28 UNF	H3	30601908	3.540	0.665	1.378	0.318	0.238	0.375	H4	30602008	5/16 - 18 UNC	H3	30602108	3.930	0.752	1.535	0.381	0.286	0.438	H5	30602208	5/16 - 24 UNF	H3	30602308	3.540	0.858	1.291	0.323	0.242	0.406	H4	30602408	3/8 - 16 UNC	H3	30602508	4.330	0.921	1.354	0.367	0.275	0.438	H5	30602608	3/8 - 24 UNF	H3	30602708	3.930	1.000	1.472	0.429	0.322	0.500	H4	30602808	7/16 - 14 UNC	H3	30602908	4.330	1.091	1.563	0.480	0.360	0.563	H5	30603008	7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510
1/4 - 28 UNF	H3		30601908	3.540	0.665	1.378	0.318	0.238	0.375																																																																																																																																																																																																										
	H4		30602008							5/16 - 18 UNC	H3	30602108	3.930	0.752	1.535	0.381	0.286	0.438	H5	30602208	5/16 - 24 UNF	H3	30602308	3.540	0.858	1.291	0.323	0.242	0.406	H4	30602408	3/8 - 16 UNC	H3	30602508	4.330	0.921	1.354	0.367	0.275	0.438	H5	30602608	3/8 - 24 UNF	H3	30602708	3.930	1.000	1.472	0.429	0.322	0.500	H4	30602808	7/16 - 14 UNC	H3	30602908	4.330	1.091	1.563	0.480	0.360	0.563	H5	30603008	7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608				
5/16 - 18 UNC	H3		30602108	3.930	0.752	1.535	0.381	0.286	0.438																																																																																																																																																																																																										
	H5		30602208							5/16 - 24 UNF	H3	30602308	3.540	0.858	1.291	0.323	0.242	0.406	H4	30602408	3/8 - 16 UNC	H3	30602508	4.330	0.921	1.354	0.367	0.275	0.438	H5	30602608	3/8 - 24 UNF	H3	30602708	3.930	1.000	1.472	0.429	0.322	0.500	H4	30602808	7/16 - 14 UNC	H3	30602908	4.330	1.091	1.563	0.480	0.360	0.563	H5	30603008	7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608															
5/16 - 24 UNF	H3		30602308	3.540	0.858	1.291	0.323	0.242	0.406																																																																																																																																																																																																										
	H4		30602408							3/8 - 16 UNC	H3	30602508	4.330	0.921	1.354	0.367	0.275	0.438	H5	30602608	3/8 - 24 UNF	H3	30602708	3.930	1.000	1.472	0.429	0.322	0.500	H4	30602808	7/16 - 14 UNC	H3	30602908	4.330	1.091	1.563	0.480	0.360	0.563	H5	30603008	7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																										
3/8 - 16 UNC	H3		30602508	4.330	0.921	1.354	0.367	0.275	0.438																																																																																																																																																																																																										
	H5		30602608							3/8 - 24 UNF	H3	30602708	3.930	1.000	1.472	0.429	0.322	0.500	H4	30602808	7/16 - 14 UNC	H3	30602908	4.330	1.091	1.563	0.480	0.360	0.563	H5	30603008	7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																					
3/8 - 24 UNF	H3		30602708	3.930	1.000	1.472	0.429	0.322	0.500																																																																																																																																																																																																										
	H4		30602808							7/16 - 14 UNC	H3	30602908	4.330	1.091	1.563	0.480	0.360	0.563	H5	30603008	7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																
7/16 - 14 UNC	H3		30602908	4.330	1.091	1.563	0.480	0.360	0.563																																																																																																																																																																																																										
	H5		30603008							7/16 - 20 UNF	H3	30603108	4.920	1.201	1.713	0.590	0.442	0.688	H5	30603208	1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																											
7/16 - 20 UNF	H3		30603108	4.920	1.201	1.713	0.590	0.442	0.688																																																																																																																																																																																																										
	H5		30603208							1/2 - 13 UNC	H3	30603308	4.330	1.335	1.886	0.697	0.523	0.750	H5	30603408	1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																						
1/2 - 13 UNC	H3		30603308	4.330	1.335	1.886	0.697	0.523	0.750																																																																																																																																																																																																										
	H5		30603408							1/2 - 20 UNF	H3	30603508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30603608	9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																	
1/2 - 20 UNF	H3		30603508	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																										
	H5		30603608							9/16 - 12 UNC	H3	30603708	4.920	1.335	1.886	0.697	0.523	0.750	H5	30603808	9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																												
9/16 - 12 UNC	H3		30603708	4.920	1.335	1.886	0.697	0.523	0.750																																																																																																																																																																																																										
	H5		30603808							9/16 - 18 UNF	H3	30603908	4.920	1.335	1.886	0.697	0.523	0.750	H5	30604008	5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																							
9/16 - 18 UNF	H3		30603908	4.920	1.335	1.886	0.697	0.523	0.750																																																																																																																																																																																																										
	H5		30604008							5/8 - 11 UNC	H3	30604108	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604208	5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																		
5/8 - 11 UNC	H3		30604108	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																										
	H5		30604208							5/8 - 18 UNF	H3	30604308	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604408	3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																													
5/8 - 18 UNF	H3		30604308	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																										
	H5		30604408							3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604608	3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																																								
3/4 - 10 UNC	H3	30604508	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																											
	H5	30604608							3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813	H5	30604808	7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																																																				
3/4 - 16 UNF	H3	30604708	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																											
	H5	30604808							7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605008	7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																																																															
7/8 - 9 UNC	H4	30604908	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																											
	H6	30605008							7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605208	1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																																																																										
7/8 - 14 UNF	H4	30605108	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																											
	H6	30605208							1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605408	1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																																																																																					
1 - 8 UNC	H4	30605308	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																											
	H6	30605408							1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813	H6	30605608																																																																																																																																																																																																
1 - 12 UNF	H4	30605508	5.510	1.500	2.091	0.800	0.600	0.813																																																																																																																																																																																																											
	H6	30605608																																																																																																																																																																																																																	

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
306	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best





EXOTAP VA-3® Oil

Coolant-Through Taps Designed for Stainless Steel

List 346

OIL-V-POT, Coolant-Through, DIN Overall Length, Plug (4P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (4P)							
			V							
M6 x 1.0	D5	3	34600508	80.00	12.00	30.00	6.48	4.85	7.90	
M8 x 1.0			34600608	90.00	15.00	35.00	8.08	6.04	9.50	
M8 x 1.25			34600708		100.00	18.00	39.00	9.68	7.26	11.10
M10 x 1.25	34600808		21.00	32.00		9.32	6.98			
M10 x 1.5	34600908			110.00		24.00	36.00	10.90	8.18	
M12 x 1.25	34601008		12.19			9.14	14.30			
M12 x 1.5	34601108			110.00	30.00	43.00	13.77	10.31	15.90	
M12 x 1.75	34601208		125.00				44.00	16.56	12.42	17.50
M14 x 1.5	34601308			140.00	36.00	51.00			19.30	14.48
M14 x 2.0	34601408		125.00				36.00	51.00	19.30	14.48
M16 x 1.5	34601508			140.00	36.00	51.00			19.30	14.48
M16 x 2.0	34601608		125.00				36.00	51.00	19.30	14.48
M18 x 1.5	34601708			140.00	36.00	51.00			19.30	14.48
M18 x 2.5	34601808		125.00				36.00	51.00	19.30	14.48
M20 x 1.5	34601908			140.00	36.00	51.00			19.30	14.48
M20 x 2.5	34602008		125.00				36.00	51.00	19.30	14.48
M22 x 1.5	34602108			140.00	36.00	51.00			19.30	14.48
M22 x 2.5	34602208		125.00				36.00	51.00	19.30	14.48
M24 x 1.5	34602308			140.00	36.00	51.00			19.30	14.48
M24 x 3.0	34602408		125.00				36.00	51.00	19.30	14.48

Packed: 1 pc.
Available V coating only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
346	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best






List 397

Long Shank, Plug (3.5P-4.5P)



HSSE S/O



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length					
			Plug (3.5P - 4.5P)	S/O											
				L	Lc	Ln	d	k	lk						
4 - 40 UNC	H2	2	1764001	4.000	0.295	0.839	0.141	0.110	0.188						
			1766201	6.000											
			1764101	4.000											
			1764201	6.000											
6 - 32 UNC			1764301	4.000	0.370	1.039	0.168	0.131							
			1764401	6.000		1.028									
8 - 32 UNC			1764501	4.000	0.492	1.303	0.194	0.152	0.250						
10 - 24 UNC			1764601	6.000											
10 - 32 UNF			1764701	4.000	0.594	1.496	0.255	0.191	0.313						
1/4 - 20 UNC			1764801	6.000											
1/4 - 28 UNF	H3	3	1764901	4.000	6.000	0.752	1.874	0.381	0.286	0.438					
5/16 - 18 UNC			1765001								0.858	1.291	0.323	0.242	0.406
5/16 - 24 UNF			1765101												
3/8 - 16 UNC			1765201												
3/8 - 24 UNF			1765701												
7/16 - 14 UNC			1765301												
7/16 - 20 UNF			1765801												
1/2 - 13 UNC			1765401												
1/2 - 20 UNF			1765901												
5/8 - 11 UNC			1765501												
	1766001														
	1765601														
					0.921	1.354	0.367	0.275	0.438						
					1.091	1.563	0.480	0.360	0.563						

Packed: 1 pc.
Available Steam Oxide finish only.
Note: Neck length is designed for reaching 50% deeper holes than ANSI standard taps.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
397	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best





HSSE

TiN

List 320

Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			Plug (3.5P - 4.5P)	TiN								
			L	Lc	L	Lc	Ln	d	k	lk		
4 - 40 UNC	H2	2	1740005	1.874	1.874	0.295	0.559	0.141	0.110	0.188		
5 - 40 UNC			1740105	1.937							0.299	0.626
6 - 32 UNC	H3		1740205	2.000	0.370	0.685						
	H5		1742005									
	H7		1742105									
8 - 32 UNC	H3		3	1740305	2.126	2.126	0.374				0.752	0.168
10 - 24 UNC		1740405										
10 - 32 UNF	H5	1740505		2.374	0.492	0.866						
	H7	1742205										
	H7	1742305										
1/4 - 20 UNC	H3	1740605		2.500	0.594	0.996						
1/4 - 28 UNF	H5	1740705										
	H7	1742405										
	H7	1742505										
5/16 - 18 UNC	H3	3		1740805	2.720	2.720	0.665	1.126	0.318	0.238	0.375	
5/16 - 24 UNF				H5			1740905	0.657				1.118
	H7			1742605								
	H7		1742705									
3/8 - 16 UNC	H3		3	1741005	2.937	2.937	0.752	1.252	0.381	0.286	0.438	
3/8 - 24 UNF				H5			1741105	0.740				1.240
	H5			1742805								
	H5			1741205								
7/16 - 14 UNC	H3			3	1741305	3.157	3.157	0.858	1.291	0.323	0.242	0.406
7/16 - 20 UNF					1741405							
1/2 - 13 UNC		1741505	3.374		0.921	1.354	0.367	0.275	0.438			
1/2 - 20 UNF		1741605										
5/8 - 11 UNC		1741705	3.811		1.091	1.563	0.480	0.360	0.563			
5/8 - 18 UNF		1741805										
3/4 - 10 UNC		1741905	4.252		1.201	1.713	0.590	0.442	0.688			

Packed: 1 pc.
Available TiN coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
320	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				
SFM	25-80	20-50	20-45	20-50	15-20	20-45	15-20	8-20	25-75	40-80	40-65			15-35			

good best






List 250

DIN Overall Length, Plug (3.5P-4.5P)



HSSE

S/O



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk
4 - 40 UNC	2B	2	2511401	2.205	0.295	0.705	0.141	0.110	0.188
6 - 32 UNC			2512401		0.370				
8 - 32 UNC		2517801	2.480	0.374	0.827	0.168	0.131	0.250	
10 - 24 UNC		2513401							0.976
10 - 32 UNF		2518801	2.756	0.492	0.984	0.194	0.152		
1/4 - 20 UNC		2530001						1.177	
1/4 - 28 UNF		2530401	3.150	0.594	1.189	0.255	0.191	0.313	
5/16 - 18 UNC		2530801							0.665
5/16 - 24 UNF		2531201	3.543	0.657	1.378	0.318	0.238	0.375	
3/8 - 16 UNC		2531601							0.752
3/8 - 24 UNF		2531801	3.937	0.740	1.291	0.381	0.286	0.438	
7/16 - 14 UNC		2532001							0.858
7/16 - 20 UNF		2532201	4.331	0.921	1.354	0.323	0.242	0.406	
1/2 - 13 UNC		2532401							0.921
1/2 - 20 UNF		2532601	3.937	1.091	1.563	0.367	0.275	0.438	
5/8 - 11 UNC		2533201							0.921
5/8 - 18 UNF		2533401	4.331	1.091	1.563	0.480	0.360	0.563	
3/4 - 10 UNC		2533601							0.921
3/4 - 16 UNF		2533801	4.331	1.201	1.713	0.590	0.442	0.688	

Packed: 1 pc.
Available Steam Oxide finish only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
250	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-40	15-20	25-75				15-35				

good best






List 259



HSSE

S/O

DIN Overall Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk
M3 x 0.5	6H	3	2590401	56.00	6.00	18.00	3.58	2.79	4.80
M4 x 0.7			2590601	63.00	8.40	21.00	4.27	3.33	6.40
M5 x 0.8			2590801	70.00	9.60	25.00	4.93	3.86	7.90
M6 x 1.0			2591001	80.00	12.00	30.00	6.48	4.85	9.50
M8 x 1.25			2591401	90.00	15.00	35.00	8.08	6.05	11.10
M10 x 1.5			2591801	100.00	18.00	39.00	9.68	7.26	
M10 x 1.25			2591701						
M12 x 1.75			2592301	110.00	21.00	32.00	9.32	6.98	
M12 x 1.5			2592201						
M12 x 1.25			2592101	100.00	24.00	36.00	10.90	8.18	12.70
M14 x 2.0			2592601	110.00					
M14 x 1.5			2592501	100.00	30.00	43.00	13.77	10.31	15.90
M16 x 2.0			2592901	110.00					
M16 x 1.5			2592801	100.00	44.00	16.56	12.42		
M18 x 2.5			2593201	125.00					
M18 x 1.5			2593001	110.00					
M20 x 2.5			2593601	140.00					
M20 x 1.5			2593401	125.00					

Packed: 1 pc.
Available Steam Oxide finish only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
259	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>				
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-40	15-20	25-75					15-35			

good best





List 260



OIL-TiN-POT, Coolant-Through, DIN Overall Length, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)						
			TiN	L	Lc	Ln	d	k	lk
1/4 - 20 UNC	2B	3	2630005	3.150	0.598	1.181	0.255	0.191	0.313
1/4 - 28 UNF			2630405						
5/16 - 18 UNC			2630805	3.543	0.665	1.378	0.318	0.238	0.375
5/16 - 24 UNF			2631205						
3/8 - 16 UNC			2631605	3.937	0.752	1.291	0.381	0.286	0.438
3/8 - 24 UNF			2631805						
7/16 - 14 UNC			2632005						
7/16 - 20 UNF			2632205						
1/2 - 13 UNC			2632405	4.331	0.921	1.354	0.367	0.275	0.438
1/2 - 20 UNF			2632605	3.937					
9/16 - 18 UNF			2633005	4.331	1.000	1.472	0.429	0.322	0.500
5/8 - 11 UNC			2633205						
5/8 - 18 UNF			2633405	3.937	1.091	1.563	0.480	0.360	0.563
3/4 - 10 UNC			2633605	4.921					
3/4 - 16 UNF			2633805	4.331	1.201	1.713	0.590	0.442	0.688
7/8 - 9 UNC			2634005	5.512					
7/8 - 14 UNF			2634205	4.921	1.335	1.886	0.697	0.523	0.750
1 - 8 UNC			2634405	6.299					

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
260	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				
SFM	50-120	45-110	40-100	45-110	20-60	20-70	30-50	20-50	40-100	50-125	50-110			20-60			

good best






List 269



HSSE



OIL-TiN-POT, Coolant-Through, DIN Overall Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)	L	Lc	Ln	d	k	lk
M6 x 1.0	6H	3	2691005	80.00	12.00	30.00	6.48	4.85	7.90
M8 x 1.25			2691405	90.00	15.00	35.00	8.08	6.04	9.50
M10 x 1.5			2691805	100.00	18.00	38.90	9.68	7.26	11.10
M10 x 1.25			2691705						
M12 x 1.75			2692305	110.00	21.00	32.00	9.32	6.98	
M12 x 1.5			2692205	100.00					
M12 x 1.25			2692105						
M14 x 2.0			2692605	110.00	24.00	35.90	10.90	8.17	
M14 x 1.5			2692505	100.00					
M16 x 2.0			2692905	110.00			12.19	9.14	14.30
M16 x 1.5			2692805	100.00					
M18 x 2.5			2693205	125.00	30.00	43.00	13.77	10.31	15.90
M18 x 1.5			2693005	110.00					
M20 x 2.5			2693605	140.00					
M20 x 1.5			2693405	125.00	43.90	16.56	12.42	17.50	

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
269	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>				
SFM	50-120	45-110	40-100	45-110	20-60	20-70	30-50	20-50	40-100	50-125	50-110			20-60			

good best





List 11015



HSS-Co

TiN

Plug (4P-5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)						
			TiN	L	Lc	Ln	d	k	lk
4 - 40 UNC	H3	3	1101500105	1.875	0.382	0.693	0.141	0.110	0.188
	H4		1101505605						
	H5		1101500205						
	H6		1101500305						
	H7		1101505705						
	H8		1101515505						
4 - 48 UNF	H3		1101515605						
	H4		1101515705						
	H5		1101515805						
	H6		1101515905						
	H7		1101506505						
6 - 32 UNC	H3	1101500405							
	H4	1101505805							
	H5	1101500505							
	H6	1101500605							
	H7	1101500705							
	H8	1101500805							
	H9	1101506705							
	H10	1101506805							
6 - 40 UNF	H3	1101507005							
	H4	1101507105							
	H5	1101507205							
	H6	1101507305							
	H7	1101507405							
	H8	1101507505							
	H9	1101507605							
	H10	1101507705							
	H11	1101507805							
	8 - 32 UNC	H3	1101500905						
		H4	1101501005						
H5		1101501105							
H6		1101501205							
H7		1101501305							
H8		1101501405							
H9		1101507905							
H10		1101508005							
H11		1101508105							

Packed: 1 pc.
Available TiN coating only.

continued on next page

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
11015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-45	15-20	25-75	40-80	40-65	8-15	8-15	15-35			

good best





HSS-Co

TiN

List 11015 (Continued)

Plug (4P-5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length								
			Plug (4P-5P)														
			TiN	L	Lc	Ln	d	k	lk								
8 - 36 UNF	H3	3	1101508205	2.125	0.437	0.878	0.168	0.131									
	H4		1101508305														
	H5		1101508405														
	H6		1101508505														
	H7		1101508605														
	H8		1101508705														
	H9		1101508805														
	H10		1101508905														
	H11		1101509005														
	H3		1101509105														
	H4		1101509205														
10 - 24 UNC	H5	3	1101509305	2.374	0.630	1.000	0.194	0.152	0.250								
	H6		1101509405														
	H7		1101509505														
	H8		1101509605														
	H9		1101509705														
	H10		1101509805														
	H11		1101509905														
10 - 32 UNF	H3	3	1101501505	2.374	0.508	1.000	0.194	0.152	0.250								
	H4		1101501605														
	H5		1101501705														
	H6		1101501805														
	H7		1101501905														
	H8		1101502005														
	H9		1101502105														
	H10		1101506005														
	H11		1101506105														
	H12		1101506205														
	H13		1101516005														
	12 - 28 UNC		H3							3	1101516105	2.500	0.543	1.067	0.220	0.165	0.281
			H4								1101516205						
H5		1101516305															
H6		1101516405															
H7		1101516505															
H8		1101516605															
H9		1101516705															
H10		1101516805															
H11		1101516905															
1/4 - 20 UNC		H3	3	1101510005	2.500	0.752	1.122	0.255	0.191		0.313						
		H4		1101510105													
	H5	1101510205															
	H6	1101510305															
	H7	1101510405															
	H8	1101510505															
	H9	1101510605															
	H10	1101510705															
	H11	1101510805															

Packed: 1 pc.
Available TiN coating only.





List 11015 (Continued)



HSS-Co TiN

Plug (4P-5P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4P - 5P)						
			TiN						
			L	Lc	Ln	d	k	lk	
1/4 - 28 UNF	H3	3	1101502205	2.500	0.563	1.114	0.255	0.191	0.313
	H4		1101505505						
	H5		1101502305						
	H6		1101502405						
	H7		1101502505						
	H8		1101502605						
	H9		1101502705						
	H10		1101502805						
	H11		1101506305						
	H12		1101506405						
	H3		1101510905						
	H4		1101511005						
5/16 - 18 UNC	H5	3	1101511105	2.719	0.874	1.283	0.318	0.238	0.375
	H6		1101511205						
	H7		1101511305						
	H8		1101511405						
	H9		1101511505						
	H10		1101511605						
	H11		1101511705						
	H3		1101502905						
	H4		1101505905						
	H5		1101503005						
	H6		1101503105						
	H7		1101503205						
H8	1101503305								
H9	1101503405								
H10	1101503505								
H11	1101511805								
5/16 - 24 UNF	H3	3	1101502905	2.719	0.689	1.244	0.318	0.238	0.375
	H4		1101505905						
	H5		1101503005						
	H6		1101503105						
	H7		1101503205						
	H8		1101503305						
	H9		1101503405						
	H10		1101503505						
	H11		1101511805						
	H3		1101511905						
	H4		1101512005						
	H5		1101512105						
H6	1101512205								
H7	1101512305								
H8	1101512405								
H9	1101512505								
H10	1101512605								
H11	1101512705								
H12	1101512805								
3/8 - 16 UNC	H3	3	1101503605	2.938	0.976	1.417	0.381	0.286	0.438
	H4		1101512905						
	H5		1101503705						
	H6		1101503805						
	H7		1101503905						
	H8		1101504005						
	H9		1101504105						
	H10		1101504205						
	H11		1101513005						
	H3		1101511905						
	H4		1101512005						
	H5		1101512105						
H6	1101512205								
H7	1101512305								
H8	1101512405								
H9	1101512505								
H10	1101512605								
H11	1101512705								
H12	1101512805								
3/8 - 24 UNF	H3	3	1101503605	2.938	0.831	1.406	0.381	0.286	0.438
	H4		1101512905						
	H5		1101503705						
	H6		1101503805						
	H7		1101503905						
	H8		1101504005						
	H9		1101504105						
	H10		1101504205						
	H11		1101513005						
	H3		1101511905						
	H4		1101512005						
	H5		1101512105						
H6	1101512205								
H7	1101512305								
H8	1101512405								
H9	1101512505								
H10	1101512605								
H11	1101512705								
H12	1101512805								

Packed: 1 pc.
Available TiN coating only.

[continued on next page](#)

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
11015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-45	15-20	25-75	40-80	40-65	8-15	8-15	15-35				

good best





List 11015 (Continued)



HSS-Co
TiN

Plug (4P-5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)						
			TiN	L	Lc	Ln	d	k	lk
7/16 - 14 UNC	H3	3	1101513105	3.157	1.098	1.496	0.323	0.242	0.406
	H4		1101513205						
	H5		1101513305						
	H6		1101513405						
	H7		1101513505						
	H8		1101513605						
	H9		1101513705						
	H10		1101513805						
	H11		1101513905						
	H3		1101504305						
	H4		1101514005						
H5	1101504405								
H6	1101504505								
H7	1101504605								
H8	1101504705								
H9	1101504805								
H10	1101514105								
H11	1101514205								
1/2 - 13 UNC	H3	3	1101514305	3.375	1.197	1.591	0.367	0.275	0.438
	H4		1101514405						
	H5		1101514505						
	H6		1101514605						
	H7		1101514705						
	H8		1101514805						
	H9		1101514905						
	H10		1101515005						
	H11		1101515105						
	H3		1101504905						
	H4		1101515205						
H5	1101505005								
H6	1101505105								
H7	1101505205								
H8	1101505305								
H9	1101505405								
H10	1101515305								
H11	1101515405								
1/2 - 20 UNF	H3	3	1101517005	3.594	0.862	1.307	0.429	0.322	0.500
	H5		1101517105						
	H6		1101517205						
	H7		1101517305						
	H8		1101517405						
	H9		1101517505						
	H3		1101517605						
	H5		1101517705						
	H3		1101517005						
	H5		1101517105						
	H6		1101517205						
H7	1101517305								
H8	1101517405								
H9	1101517505								
H3	1101517605								
H5	1101517705								

Packed: 1 pc.
Available TiN coating only.





List 11015 (Continued)



HSS-Co

TiN

Plug (4P-5P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length						
			Plug (4P-5P)												
			TiN												
			L	Lc	Ln	d	k	lk							
5/8 - 18 UNF	H3	4	1101517805	3.813	0.862	1.307	0.480	0.360	0.563						
	H5		1101517905												
	H6		1101518005												
	H7		1101518105												
	H8		1101518205												
	H9		1101518305												
	H10		1101518405												
	H11		1101518505												
3/4 - 10 UNC	H3		1101518605							4.250	0.969	1.449	0.590	0.442	0.688
	H5		1101518705												
3/4 - 16 UNF	H3		1101518805							4.688	1.106	1.622	0.697	0.523	0.750
	H5	1101518905													
	H6	1101519005													
	H7	1101519105													
	H8	1101519205													
	H9	1101519305													
	H10	1101519405													
H11	1101519505														
7/8 - 9 UNC	H6	1101519605	5.125	1.291	1.843	0.800	0.600	0.813							
7/8 - 14 UNF	H7	1101519705													
	H8	1101519805													
	H9	1101519905													
	H10	1101520005													
	H11	1101520105													
	H12	1101520205													
1 - 12 UNF	H6	1101520305	5.125	1.291	1.843	0.800	0.600	0.813							
	H7	1101520405													
	H8	1101520505													
	H9	1101520605													
	H10	1101520705													
	H11	1101520805													
H12	1101520905														
			1101521005												

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
11015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-45	15-20	25-75	40-80	40-65	8-15	8-15	15-35			

good best





HSS-Co

TiN

List 11115

Plug (4P-5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length								
			Plug (4P - 5P)														
			TiN														
			L	Lc	Ln	d	k	lk									
M3 x 0.5	H3	3	1111500105	49.20	9.60	19.20	3.58	2.79	4.80								
	H5		1111500205														
	H4		1111500905														
	H6		1111501005														
	H7		1111501105														
	H8		1111501205														
	H9		1111501305														
	H10		1111501405														
	H11		1111501505														
	M4 x 0.7		H4							3	1111500305	54.00	11.10	20.60	4.27	3.33	6.40
			H5								1111500405						
H6		1111501605															
H7		1111501705															
H8		1111501805															
H9		1111501905															
H10		1111502005															
H11	1111502105																
M5 x 0.8	H4	3	1111500505	60.30	12.70	25.40	4.93	3.86	6.40								
	H5		1111500605														
	H6		1111502205														
	H7		1111502305														
	H8		1111502405														
	H9		1111502505														
	H10		1111502605														
H11	1111502705																
M6 x 1.0	H5	3	1111500705	63.50	14.30	28.60	6.48	4.85	7.90								
	H6		1111502805														
	H7		1111502905														
	H8		1111503005														
	H9		1111503105														
	H10		1111503205														
	H11		1111503305														
H12	1111503405																
M8 x 1.25	H5	3	1111500805	69.00	17.60	31.90	8.08	6.05	9.50								
	H6		1111503505														
	H7		1111503605														
	H8		1111503705														
	H9		1111503805														
	H10		1111503905														
	H11		1111504005														
H12	1111504105																
M8 x 1.0	H5	3	1111507005	69.00	15.00	29.50	8.08	6.05	9.50								
	H6		1111507105														
	H7		1111507205														
	H8		1111507305														
	H9		1111507405														
	H10		1111507505														
H11	1111507605																

Packed: 1 pc.

Available TiN coating only.

Note: List 11115 metric taps are manufactured to H-limits rather than D-limits.





List 11115 (Continued)



HSS-Co

TiN

Plug (4P-5P)

Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length							
			Plug (4P - 5P)													
			TiN													
				L	Lc	Ln	d	k	lk							
M10 x 1.5	H5	3	1111504905	74.60	22.20	35.00	9.68	7.26	11.10							
	H6		1111505005													
	H7		1111505105													
	H8		1111505205													
	H9		1111505305													
	H10		1111505405													
	H11		1111505505													
H12	1111505605															
M10 x 1.25	H5									1111504205	19.10	34.80				
	H6		1111504305													
	H7		1111504405													
	H8	1111504505														
	H9	1111504605														
	H10	1111504705														
H11	1111504805															
M12 x 1.75	H6		1111507705	26.30	37.30											
	H7	1111507805														
	H8	1111507905														
	H9	1111508005														
	H10	1111508105														
	H11	1111508205														
M12 x 1.5	H6		1111506405	85.70	22.20	35.00	9.32	6.98								
	H7	1111506505														
	H8	1111506605														
	H9	1111506705														
	H10	1111506805														
H11	1111506905															
M12 x 1.25	H5		1111505705	19.10												
	H6	1111505805														
	H7	1111505905														
	H8	1111506005														
	H9	1111506105														
	H10	1111506205														
H11	1111506305															
M14 x 1.5	H6	4	1111508305	91.30	22.50	34.50	10.90	8.18	12.70							
	H7		1111508405													
	H8		1111508505													
	H9		1111508605													
	H10		1111508705													
	H11		1111508805													

Packed: 1 pc.
Available TiN coating only.

Note: List 11115 metric taps are manufactured to H-limits rather than D-limits.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
11115	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
SFM	25-80	20-50	20-45	20-50	15-30	20-45	20-45	15-20	25-75	40-80	40-65	8-15	8-15	15-35			

good best





List 13118



RXL-RFT, DIN Overall Length & Extended Length, Plug (4.5P-5.5P),
RHC/LHS for Through Holes



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4.5P - 5.5P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
M16 x 2.0	D7 D17 (6H+0.005")	4	1311802408	110.00	24.00	-	12.19	9.14	14.30
			1311802508	180.00		-			
			1311802308	110.00		-			
M20 x 2.5	D8 D18 (6H+0.005")	4	1311800108	140.00	30.00	-	16.56	12.42	17.50
			1311800208	200.00		-			
			1311801608	140.00		-			
M24 x 3.0	D9 D19 (6H+0.005")	4	1311800408	160.00	36.00	-	19.30	14.48	19.10
			1311800508	200.00		-			
			1311801708	160.00		-			
M27 x 3.0	D9 D19 (6H+0.005")	5	1311800608	200.00	42.00	-	22.76	17.07	22.20
			1311800708	200.00		-			
			1311801808	160.00		-			
M30 x 3.5	D10 D20 (6H+0.005")	5	1311800808	180.00	42.00	-	25.93	19.46	25.40
			1311800908	250.00		-			
			1311801908	180.00		-			
M33 x 3.5	D10 D20 (6H+0.005")	5	1311801008	180.00	42.00	-	28.14	21.11	27.00
			1311801108	250.00		-			
			1311802008	180.00		-			
M36 x 4.0	D11 D21 (6H+0.005")	6	1311801208	200.00	48.00	-	31.32	23.50	28.60
			1311801308	250.00		-			
			1311802108	200.00		-			
M42 x 4.5	D11 D21 (6H+0.005")	6	1311801408	200.00	54.00	-	36.32	27.23	31.80
			1311801508	300.00		-			
			1311802208	200.00		-			

Packed: 1 pc.
Available V coating only.
Note: +0.005" available for threads that will be heat treated after tapping.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
13118	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
SFM	50-120	45-110	40-100	45-110	20-60	30-70	30-70	20-50	40-100	30-80	30-80			20-60	15-50		

good best





List 13059



HSSE	V	LHS	20°
------	---	-----	-----

US-AL-RFT, Synchronized, Plug (5.5P-6.5P), RHC/LHS for Through Holes



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5.5P - 6.5P)						
			V						
			L	Lc	Ln	d	k	lk	
6 - 32 UNC	2B	2	1305900108	1.992	0.370	0.685	0.141	0.110	0.188
8 - 32 UNC			1305900208	2.118	0.374	0.752	0.168	0.131	0.250
10 - 24 UNC			1305900308	2.358	0.492	0.866	0.194	0.152	
10 - 32 UNF			1305900408						
1/4 - 20 UNC			1305900508	2.457	0.594	0.996	0.255	0.191	0.313
1/4 - 28 UNF			1305900608						
5/16 - 18 UNC			1305900708	2.457	0.665	1.126	0.318	0.238	0.375
5/16 - 24 UNF			1305900808						
3/8 - 16 UNC			1305900908	2.937	0.752	1.252	0.381	0.286	0.438
3/8 - 24 UNF			1305901008						
1/2 - 13 UNC			1305901108	3.374	0.921	1.933	0.367	0.275	
1/2 - 20 UNF			1305901208						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	Work Material																			
	P					M			K	N		S		H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels						
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
13059																				
SFM																				

good best





HY-PRO[®] SYNCHRO AL

High Speed Tapping of Aluminum and Aluminum Alloy

List 13159

US-AL-RFT, Synchronized, Plug (5.5P-6.5P), RHC/LHS for Through Holes



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (5.5P - 6.5P)						
			V						
			L	Lc	Ln	d	k	lk	
M3 x 0.5	6H	2	1315900108	49.20	6.10	16.00	3.58	2.79	4.80
M4 x 0.7			1315900208	53.80	8.40	19.10	4.27	3.33	6.40
M5 x 0.8			1315900308	60.10	9.60	22.20	4.93	3.86	
M6 x 1.0			1315900408	62.50	12.00	25.40	6.48	4.85	7.90
M8 x 1.25			1315900508	69.10	15.00	28.60	8.08	6.05	9.50
M10 x 1.5			1315900708	74.60	18.00	31.80	9.68	7.26	11.10
M10 x 1.25			1315900608						
M12 x 1.75			1315900908						
M12 x 1.5			1315900808		85.70	21.00	49.10	9.32	

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
13159	1010	1035	1065	4140						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM	1018	1045		4340						<input type="checkbox"/>	<input type="checkbox"/>							

good best





List 11016



HSSE

N

DIN Overall Length, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)							
			N	L						
2 - 56 UNC	H2	2	1101600103	1.772	0.437	0.476	0.141	0.110	0.188	
4 - 40 UNC			1101600203	2.201	0.295	0.705				
6 - 32 UNC	H3	3	1101600303	2.480	0.370	0.783	0.168	0.131	0.250	
8 - 32 UNC			1101600403		0.374	0.827				
10 - 24 UNC			1101600503	2.748	0.492	1.059	0.194	0.152		
10 - 32 UNF			1101600603		0.984					
1/4 - 20 UNC	H5	1101600703	3.146	0.594	1.177	0.255	0.191	0.313		
1/4 - 28 UNF	H3	1101600803			1.189					
5/16 - 18 UNC	H5	3	1101600903	3.677	0.799	1.512	0.318	0.238	0.375	
5/16 - 24 UNF			H3			1101601003				1.520
3/8 - 16 UNC	H5	3	1101601103	4.102	0.917	1.543	0.381	0.286	0.438	
3/8 - 24 UNF			H3			1101601203				1.555
7/16 - 14 UNC	H5	3	1101601303	3.937	0.858	1.291	0.323	0.242	0.406	
7/16 - 20 UNF			H3			1101601403				1.291
1/2 - 13 UNC	H5	3	1101601503	4.331	0.921	1.354	0.367	0.275	0.438	
1/2 - 20 UNF			H3							1101601603
			1101601703							
			1101601803							
			1101601903							
			1101602003							
			1101602103							

Packed: 1 pc.
Available Nitride treatment only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
11016	1010	1035	1065	4140						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM	1018	1045		4340						<input type="checkbox"/>	<input type="checkbox"/>							

good best





HSSE

N

List 11116

DIN Overall Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)							
			N	L						
M3 x 0.5	D3	3	1111600103	56.00	7.30	19.30	3.58	2.79	4.80	
M4 x 0.7	D4		1111600303	63.00	10.10	22.70	4.27	3.33	6.40	
M5 x 0.8			1111600403	70.00	11.80	27.20	4.93	3.86		
M6 x 1.0	D5		1111600503	80.00	14.60	32.60	6.48	4.85	7.90	
M8 x 1.25			1111600803	90.00	18.50	38.50	8.08	6.05	9.50	
M10 x 1.5	D6		1111601003	100.00	22.50	43.50	9.68	7.26	11.10	
M10 x 1.25	D5		1111600903							
M12 x 1.75	D6		1111601303	110.00	21.00	32.00	9.32	6.98		
M12 x 1.5	D5		1111601203	100.00						
M12 x 1.25			1111601103	100.00						

Packed: 1 pc.

Available Nitride treatment only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
11116										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM										<input type="checkbox"/>	<input type="checkbox"/>						

 good best




List 11017



HSSE **V**

DIN Overall Length, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (3.5P - 4.5P)								
			V	L							
4 - 40 UNC	H2	2	1101700108	2.205	2.205	0.303	0.713	0.141	0.110	0.188	
6 - 32 UNC			1101700208			0.378	0.791				
8 - 32 UNC			1101700308			0.382	0.835				
10 - 24 UNC	H3	3	1101700408	2.756	2.756	0.500	0.984	0.194	0.152	0.250	
10 - 32 UNF			1101700508				0.992				
1/4 - 20 UNC			1101700608	3.150	3.150	0.602	1.185	0.255	0.191	0.313	
1/4 - 28 UNF			1101700708				1.197				
5/16 - 18 UNC			1101700808	3.543	3.543	0.669	1.382	0.318	0.238	0.375	
5/16 - 24 UNF			1101700908				1.390				
3/8 - 16 UNC			1101701008	3.937	3.937	3.937	0.760	1.386	0.381	0.286	0.438
3/8 - 24 UNF			1101701108					1.398			
7/16 - 14 UNC			1101701208				0.894	1.291			
7/16 - 20 UNF			1101701308	0.858							
1/2 - 13 UNC	1101701408	4.331	4.331	4.331	0.961	1.354	0.367	0.275	0.438		
1/2 - 20 UNF	1101701508	3.937	3.937	3.937	0.921						

Packed: 1 pc.
Available V coating only.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
11017	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input type="checkbox"/>				
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60				

good best





List 11117



HSSE

V

DIN Overall Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)							
			V	L	Lc	Ln	d	k	lk	
M3 x 0.5	D3	3	1111700108	56.00	6.30	18.30	3.58	2.79	4.80	
M4 x 0.7	D4		1111700308	63.00	8.60	21.20	4.27	3.33	6.40	
M5 x 0.8			1111700408	70.00	9.80	25.20	4.93	3.86		
M6 x 1.0	D5		1111700508	80.00	12.20	30.20	6.48	4.85	7.90	
M8 x 1.25			1111700808	90.00	15.20	35.20	8.08	6.05	9.50	
M10 x 1.5	D6		1111701008	100.00	18.20	39.20	9.68	7.26	11.10	
M12 x 1.75			1111701308	110.00	21.90	32.00	9.32	6.98		

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P															M			K	N		S		H			
	Carbon Steels				Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels												
	Low	Med.	High	300			400	17-4 PH	6061 7075		Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC								
	1010 1018	1035 1045	1065	4140 4340			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC									
11117	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>														
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60													

good best





List 280

Plug (3.5P-4.5P)



HSSE	TiCN	S/O	BR
------	------	-----	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix								
				Bright	S/O	TiCN						
2 - 56 UNC	H2	2	28056	00	01	08	1.752	0.437	-	0.141	0.110	0.188
3 - 48 UNC			28060	00	01	08	1.811	0.500	-			
4 - 40 UNC	H3		28064	00	01	08	1.874	0.295	0.559			
			28114	00	01	08						
			28163	00	01	08						
			28164	00	01	08						
4 - 48 UNF	H2		28165	00	01	08	1.937	0.299	0.626			
5 - 40 UNC			28070	00	01	08						
6 - 32 UNC	H2		28074	00	01	08	2.000	0.370	0.685			
			28124	00	01	08						
			28125	00	01	08						
			28174	00	01	08						
		28175	00	01	08							
		28176	00	01	08							
6 - 40 UNF	H2	28177	00	01	08	2.126	0.374	0.752				
		28076	00	01	08							
		28078	00	01	08							
		28128	00	01	08							
		28129	00	01	08							
		28178	00	01	08							
8 - 32 UNC	H2	28179	00	01	08	2.374	0.492	0.866				
		28180	00	01	08							
		28181	00	01	08							
		28080	00	01	08							
		28134	00	01	08							
		28184	00	01	08							
8 - 36 UNF	H2	28234	00	01	08	2.500	0.594	0.996				
		28088	00	01	08							
		28138	00	01	08							
		28139	00	01	08							
10 - 24 UNC	H3	28188	00	01	08	2.500	0.594	0.996				
		28189	00	01	08							
		28190	00	01	08							
		28191	00	01	08							
		28090	00	01	08							
		28092	00	01	08							
10 - 32 UNF	H3	28094	00	01	08	2.500	0.594	0.996				
		28138	00	01	08							
		28139	00	01	08							
		28188	00	01	08							
		28189	00	01	08							
		28190	00	01	08							
12 - 24 UNC	H3	28191	00	01	08	2.500	0.594	0.996				
		28090	00	01	08							
		28092	00	01	08							
		28094	00	01	08							
12 - 28 UNF	H3	28300	00	01	08	2.500	0.594	0.996				
		28300	00	01	08							
		28400	00	01	08							
1/4 - 20 UNC	H5	28400	00	01	08	2.500	0.594	0.996				
		28400	00	01	08							
		28400	00	01	08							

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
280	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>					
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60				

good best





List 280 (Continued)

Plug (3.5P-4.5P)



HSSE	TiCN	S/O	BR
------	------	-----	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length																																																																																																																																																																																																																																																																																																																																																																																																																																								
			EDP Number	Coating Suffix																																																																																																																																																																																																																																																																																																																																																																																																																																																
				Bright	S/O	TiCN																																																																																																																																																																																																																																																																																																																																																																																																																																														
1/4 - 20 UNC	H7	3	28548	00	01	08	2.500	0.594	0.996	0.255	0.191	0.313																																																																																																																																																																																																																																																																																																																																																																																																																																								
	H11		28550	00	01	08							1/4 - 28 UNF	H2	28096	00	01	08	H3	28304	00	01	08	H4	28354	00	01	08	H5	28404	00	01	08	H6	28405	00	01	08	H7	28406	00	01	08	H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01	08	2.720	0.665	1.126	0.318	0.238	0.375	H5	28408	00	01	08	H7	28556	00	01	08	H11	28558	00	01	08	5/16 - 24 UNF	H2	28264	00	01	08	H3	28312	00	01	08	0.657	1.118	H4	28362	00	01	08	H5	28412	00	01	08	H6	28413	00	01	08	H7	28414	00	01	08	H11	28415	00	01	08	3/8 - 16 UNC	H3	28316	00	01	08	2.937	0.752	1.252	0.381	0.285	0.438	H5	28416	00	01	08	H7	28564	00	01	08	H11	28566	00	01	08	3/8 - 24 UNF	H2	28268	00	01	08	0.740	1.240	H3	28318	00	01	08	H4	28368	00	01	08	H5	28418	00	01	08	H6	28419	00	01	08	H7	28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323	0.242	0.406	H5	28420	00	01	08	H7	28421	00	01	08	H11	28423	00	01	08	7/16 - 20 UNF	H3	28322	00	01	08	0.921	1.354	H5	28422	00	01	08	H7	28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275	0.438	H5	28424	00	01	08	H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																				
1/4 - 28 UNF	H2		28096	00	01	08								H3	28304	00	01	08	H4	28354	00	01	08	H5	28404	00	01	08	H6	28405	00	01	08	H7	28406	00	01	08	H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01		08	2.720	0.665	1.126	0.318							0.238	0.375	H5	28408	00	01	08	H7	28556	00	01	08	H11	28558	00		01	08	5/16 - 24 UNF	H2	28264	00	01	08	H3	28312			00	01	08	0.657	1.118	H4	28362	00	01	08	H5	28412	00	01	08	H6	28413	00	01	08	H7	28414	00	01	08		H11	28415	00	01	08							3/8 - 16 UNC	H3	28316	00	01	08	2.937	0.752	1.252	0.381	0.285	0.438	H5	28416	00		01	08	H7	28564	00			01	08	H11	28566	00	01	08	3/8 - 24 UNF	H2	28268	00	01	08	0.740	1.240	H3	28318	00	01	08	H4	28368	00	01	08	H5	28418	00	01	08		H6	28419	00	01	08							H7	28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01		08	3.157	0.858	1.291	0.323			0.242	0.406	H5	28420	00	01	08	H7	28421	00	01	08	H11	28423	00		01	08	7/16 - 20 UNF	H3	28322							00	01	08	0.921	1.354	H5	28422	00	01	08	H7	28425	00	01	08		H11	28430	00	01	08							1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275	0.438	H5	28424	00	01	08	H7	28428	00	01		08	H11	28574	00							01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																						
	H3		28304	00	01	08								H4	28354	00	01	08	H5	28404	00	01	08	H6	28405	00	01	08	H7	28406	00	01	08	H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01		08	2.720	0.665	1.126		0.318													0.238	0.375	H5	28408	00	01	08	H7	28556	00	01	08	H11		28558	00		01	08	5/16 - 24 UNF	H2	28264	00	01			08	H3	28312			00	01	08	0.657	1.118	H4	28362	00	01	08	H5	28412	00	01	08	H6	28413	00	01	08		H7	28414	00	01	08								H11	28415	00	01	08							3/8 - 16 UNC	H3	28316		00	01	08	2.937	0.752			1.252	0.381	0.285	0.438	H5	28416	00		01	08	H7	28564	00			01	08	H11	28566	00	01	08	3/8 - 24 UNF	H2	28268	00	01	08	0.740	1.240		H3	28318	00	01	08							H4	28368	00	01	08	H5	28418	00	01	08		H6	28419	00	01		08									H7	28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320		00	01		08	3.157							0.858	1.291	0.323			0.242	0.406	H5	28420	00	01	08	H7	28421	00		01	08	H11	28423	00								01	08	7/16 - 20 UNF	H3	28322							00	01	08	0.921	1.354	H5	28422	00	01	08	H7	28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3		28324	00	01	08	3.374							0.921	1.354	0.367	0.275	0.438	H5	28424	00	01	08	H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF		H2	28276	00	01							08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																															
	H4		28354	00	01	08								H5	28404	00	01	08	H6	28405	00	01	08	H7	28406	00	01	08	H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01		08	2.720	0.665	1.126		0.318																				0.238	0.375	H5	28408	00	01	08	H7	28556	00	01		08	H11		28558	00		01	08	5/16 - 24 UNF	H2			28264	00	01			08	H3	28312			00	01	08	0.657	1.118	H4	28362	00	01	08	H5	28412	00	01	08		H6	28413	00	01	08								H7	28414	00	01	08								H11	28415		00	01	08									3/8 - 16 UNC	H3	28316		00	01	08	2.937	0.752			1.252	0.381	0.285	0.438	H5	28416	00		01	08	H7	28564	00				01	08	H11	28566	00							01	08	3/8 - 24 UNF	H2	28268	00	01	08	0.740	1.240		H3	28318	00	01		08									H4	28368	00	01	08	H5	28418	00	01	08		H6	28419		00	01		08															H7	28417	00	01	08	H11	28568	00		01	08	7/16 - 14 UNC	H3	28320								00	01		08	3.157							0.858	1.291	0.323			0.242	0.406	H5	28420	00	01	08	H7	28421	00	01	08	H11	28423	00		01		08	7/16 - 20 UNF	H3	28322													00	01	08	0.921	1.354	H5	28422	00	01	08	H7	28425	00	01	08		H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374							0.921	1.354	0.367	0.275	0.438	H5	28424	00	01	08	H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF		H2	28276	00	01							08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08								
	H5		28404	00	01	08								H6	28405	00	01	08	H7	28406	00	01	08	H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01		08	2.720	0.665	1.126		0.318									0.238							0.375	H5										28408	00	01	08	H7	28556	00	01	08		H11	28558		00	01		08	5/16 - 24 UNF		H2			28264	00	01			08	H3	28312			00	01	08			0.657	1.118	H4	28362	00	01	08	H5	28412	00	01	08	H6	28413	00	01		08	H7					28414	00	01	08	H11								28415	00		01	08	3/8 - 16 UNC										H3	28316		00	01	08									2.937	0.752	1.252		0.381	0.285	0.438	H5	28416			00	01	08	H7	28564	00							01	08		H11	28566	00	01	08				3/8 - 24 UNF	H2	28268	00	01	08					0.740	1.240			H3	28318	00	01	08	H4	28368	00	01	08		H5	28418	00	01	08		H6		28419	00	01	08	H7	28417								00	01	08	H11	28568	00	01	08		7/16 - 14 UNC	H3		28320	00								01	08		3.157															0.858	1.291	0.323	0.242	0.406	H5	28420	00	01	08	H7	28421	00		01		08		H11	28423													00	01	08			7/16 - 20 UNF	H3	28322	00	01	08	0.921	1.354	H5	28422		00	01	08	H7	28425		00	01	08	H11	28430													00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275	0.438		H5	28424	00	01	08	H7	28428	00	01	08	H11	28574							00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5		28426	00	01	08							H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576
	H6		28405	00	01	08								H7	28406	00	01	08	H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01		08	2.720	0.665	1.126		0.318									0.238								0.375	H5				28408										00	01	08	H7	28556	00	01	08	H11		28558	00		01	08		5/16 - 24 UNF			H2			28264	00	01			08	H3	28312			00	01	08					0.657	1.118	H4	28362	00	01	08	H5	28412	00	01	08	H6	28413		00	01				08	H7	28414	00	01	08		H11	28415					00	01		08	3/8 - 16 UNC											H3	28316		00	01	08																2.937	0.752			1.252	0.381	0.285	0.438	H5	28416							00	01		08	H7	28564	00	01			08		H11	28566	00	01	08									3/8 - 24 UNF	H2	28268	00	01	08	0.740	1.240	H3	28318		00	01	08	H4	28368	00	01		08	H5	28418	00	01	08				H6	28419			00	01	08	H7	28417	00	01	08	H11		28568		00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858				1.291	0.323	0.242	0.406	H5	28420													00	01	08	H7	28421	00	01	08		H11		28423		00	01													08	7/16 - 20 UNF	H3				28322	00	01	08	0.921			1.354	H5		28422	00	01	08	H7		28425	00	01	08	H11													28430	00	01		08	1/2 - 13 UNC	H3	28324	00								01	08	3.374	0.921	1.354	0.367	0.275	0.438	H5	28424	00	01							08	H7	28428		00	01	08	H11	28574							00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00		01
	H7		28406	00	01	08								H11	28407	00	01	08	5/16 - 18 UNC	H3	28308	00	01		08	2.720	0.665	1.126		0.318									0.238								0.375	H5					28408				00										01	08	H7	28556	00	01	08	H11	28558	00	01	08		5/16 - 24 UNF	H2					28264	00	01	08	H3	28312			00	01	08			0.657	1.118	H4							28362	00	01	08	H5	28412	00	01	08	H6	28413	00		01	08				H7	28414	00	01	08	H11		28415	00				01	08	3/8 - 16 UNC	H3	28316				00	01	08	2.937					0.752	1.252		0.381	0.285	0.438																								H5	28416							00	01		08	H7	28564	00	01			08		H11	28566	00	01	08										3/8 - 24 UNF	H2	28268	00	01			08	0.740	1.240	H3	28318	00	01	08	H4	28368		00	01	08	H5	28418	00				01	08			H6	28419	00	01	08	H7	28417	00	01		08		H11	28568	00		01	08	7/16 - 14 UNC	H3	28320			00							01	08				3.157	0.858								1.291	0.323	0.242	0.406	H5	28420	00	01	08	H7	28421	00		01	08	H11	28423	00	01	08	7/16 - 20 UNF	H3	28322	00	01	08	0.921	1.354		H5				28422	00	01	08					H7		28425	00	01	08	H11		28430	00	01	08	1/2 - 13 UNC													H3	28324	00		01		08	3.374	0.921								1.354	0.367							0.275	0.438	H5	28424							00	01	08		H7	28428	00	01	08							H11	28574	00		01	08	1/2 - 20 UNF	H2	28276							00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5
	H11		28407	00	01	08							5/16 - 18 UNC	H3	28308	00	01	08		2.720	0.665	1.126	0.318		0.238									0.375								H5	28408					00					01				08										H7	28556	00	01	08	H11	28558	00	01	08	5/16 - 24 UNF	H2	28264		00					01	08	H3	28312	00	01	08	0.657	1.118	H4	28362					00							01	08	H5	28412	00	01	08	H6	28413	00	01	08		H7	28414				00	01	08	H11	28415	00		01	08				3/8 - 16 UNC	H3		28316	00				01	08	2.937					0.752			1.252					0.381	0.285	0.438	H5																			28416	00							01	08		H7	28564	00	01	08			H11		28566	00	01	08	3/8 - 24 UNF											H2	28268	00	01			08			0.740	1.240	H3	28318	00	01	08		H4	28368	00	01	08	H5				28418	00			01	08	H6	28419	00	01	08	H7	28417		00	01	08	H11	28568		00	01		08	7/16 - 14 UNC			H3							28320	00																	01	08	3.157	0.858	1.291	0.323	0.242	0.406	H5	28420	00	01	08	H7	28421	00		01	08	H11	28423	00				01	08	7/16 - 20 UNF		H3	28322	00	01					08	0.921	1.354	H5	28422	00	01	08	H7	28425	00	01		08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354		0.367		0.275																				0.438	H5							28424	00	01		08	H7	28428	00	01							08	H11	28574		00	01		08	1/2 - 20 UNF							H2	28276	00							01	08	3.594	1.000	1.472	0.429
5/16 - 18 UNC	H3		28308	00	01	08								2.720	0.665	1.126	0.318	0.238											0.375																																																																																																																																																																																																																																																																																																																																																																																																																							
	H5		28408	00	01	08																		H7								28556	00				01	08				H11	28558					00			01		08	5/16 - 24 UNF	H2		28264	00	01	08	H3	28312					00	01	08	0.657	1.118	H4	28362	00	01	08		H5	28412		00	01			08	H6	28413	00	01	08	H7	28414			00	01	08	H11			28415	00	01					08	3/8 - 16 UNC	H3	28316	00	01	08	2.937	0.752	1.252	0.381	0.285	0.438	H5	28416	00	01	08	H7	28564	00	01	08	H11	28566	00	01	08	3/8 - 24 UNF	H2		28268		00	01	08	0.740		1.240	H3																	28318					00	01	08					H4	28368	00	01				08	H5	28418	00	01	08	H6	28419	00	01	08	H7	28417	00	01	08	H11	28568	00		01	08	7/16 - 14 UNC	H3		28320	00	01	08			3.157	0.858			1.291	0.323	0.242	0.406			H5					28420	00	01	08	H7		28421	00	01	08	H11	28423				00	01			08	7/16 - 20 UNF	H3	28322	00	01	08	0.921	1.354	H5	28422	00	01	08	H7	28425	00	01		08				H11							28430	00																	01	08							1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921		1.354	0.367	0.275	0.438	H5			28424	00	01		08	H7	28428	00	01	08	H11	28574	00	01			08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000		1.472	0.429	0.322	0.500	H3	28326		00	01	08	H5	28426				00		01				08	H7	28427	00	01	08	H11			28429	00	01	08	9/16 - 12 UNC	H3				28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																					
	H7		28556	00	01	08													H11					28558			00	01				08	5/16 - 24 UNF				H2	28264				00	01			08		H3		28312	00		01		08		0.657	1.118	H4	28362	00	01	08	H5			28412	00	01			08	H6	28413	00	01		08	H7		28414	00		01	08	H11	28415	00	01	08	3/8 - 16 UNC	H3			28316	00	01	08			2.937	0.752	1.252	0.381	0.285			0.438		H5	28416	00	01	08							H7	28564	00	01	08	H11	28566	00	01	08	3/8 - 24 UNF	H2	28268	00	01		08		0.740	1.240	H3	28318	00		01		08			H4	28368	00		01	08									H5					28418	00	01					08	H6	28419	00				01	08	H7	28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323		0.242		0.406	H5	28420	00	01	08											H7					28421	00	01	08	H11	28423	00	01	08	7/16 - 20 UNF	H3	28322	00	01	08	0.921	1.354	H5	28422	00		01	08	H7	28425	00			01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00				01							08	3.374																	0.921	1.354								0.367	0.275	0.438	H5	28424			00					01	08	H7	28428	00	01		08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00			01		08	3.594	1.000	1.472	0.429			0.322					0.500	H3		28326	00	01	08	H5				28426		00		01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00		01	08		3.594	1.000	1.472	0.429							0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																			
	H11		28558	00	01	08							5/16 - 24 UNF						H2		28264	00		01			08	H3				28312					00	01			08	0.657	1.118		H4	28362		00		01	08		H5		28412				00	01	08	H6	28413	00	01	08	H7	28414	00			01	08	H11	28415	00		01	08		3/8 - 16 UNC	H3	28316	00	01	08	2.937	0.752	1.252	0.381		0.285			0.438	H5	28416	00								01	08			H7	28564	00	01	08							H11	28566	00	01	08	3/8 - 24 UNF	H2	28268	00	01		08	0.740	1.240	H3		28318	00			01	08	H4		28368		00			01	08	H5	28418	00	01	08				H6				28419	00	01	08		H7	28417	00					01	08	H11	28568				00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291		0.323	0.242	0.406	H5	28420									00	01	08	H7	28421			00						01	08	H11					28423	00	01	08	7/16 - 20 UNF	H3	28322	00	01		08	0.921	1.354	H5	28422			00	01	08		H7	28425	00	01	08			H11	28430	00	01	08	1/2 - 13 UNC	H3		28324	00	01	08			3.374		0.921					1.354		0.367	0.275	0.438			H5	28424																						00	01			08					H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276		00	01	08	3.594	1.000	1.472		0.429													0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01		08	3.594	1.000	1.472	0.429	0.322					0.500	9/16 - 18 UNF	28578	00	01	08																																										
5/16 - 24 UNF	H2		28264	00	01	08									H3	28312			00		01	08		0.657			1.118	H4				28362				00	01	08		H5	28412				00	01		08	H6	28413	00		01		08	H7			28414	00	01	08	H11	28415	00	01	08	3/8 - 16 UNC	H3			28316	00	01	08	2.937		0.752	1.252	0.381		0.285	0.438	H5	28416	00										01	08	H7	28564	00						01	08			H11	28566	00	01	08							3/8 - 24 UNF	H2	28268	00	01		08	0.740	1.240	H3		28318			00		01	08			H4	28368	00		01		08			H5	28418	00	01	08	H6	28419				00				01	08	H7	28417	00	01	08	H11	28568	00	01		08	7/16 - 14 UNC	H3	28320				00	01	08		3.157	0.858	1.291	0.323	0.242								0.406	H5									28420	00	01	08	H7			28421	00					01	08	H11	28423	00			01	08	7/16 - 20 UNF	H3		28322	00	01	08		0.921			1.354	H5			28422	00	01		08	H7	28425	00	01			08	H11	28430	00	01		08		1/2 - 13 UNC	H3	28324	00				01													08	3.374	0.921	1.354	0.367	0.275	0.438																	H5	28424			00					01	08	H7	28428	00	01	08	H11	28574	00		01	08		1/2 - 20 UNF	H2	28276																				00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427		00	01	08	H11	28429						00	01	08	9/16 - 12 UNC		H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																															
	H3		28312	00	01	08	0.657	1.118	H4	28362	00	01			08	H5			28412		00	01						08			H6	28413			00	01	08	H7		28414	00			01	08	H11		28415	00	01	08	3/8 - 16 UNC	H3		28316	00			01	08	2.937	0.752	1.252	0.381	0.285	0.438	H5		28416			00	01	08	H7		28564							00	01	08							H11	28566		00	01	08	3/8 - 24 UNF	H2						28268	00		01	08	0.740	1.240	H3	28318		00	01					08	H4	28368	00		01			08		H5			28418		00	01			08	H6	28419		00		01			08	H7	28417	00	01	08	H11				28568				00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323		0.242	0.406	H5	28420	00	01	08	H7															28421					00		01		08	H11	28423	00	01			08	7/16 - 20 UNF					H3	28322	00	01	08	0.921	1.354	H5	28422		00		01	08	H7	28425						00			01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354		0.367			0.275	0.438	H5	28424	00		01		08	H7	28428	00								01																			08				H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326		00	01			08	H5																				28426	00	01							08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																															
	H4		28362	00	01	08			H5	28412	00	01			08	H6			28413		00	01				08		H7		28414	00	01			08	H11	28415	00	01	08	3/8 - 16 UNC			H3	28316	00	01	08	2.937	0.752	1.252		0.381		0.285	0.438			H5	28416							00		01			08	H7	28564	00		01							08	H11	28566					00		01	08		3/8 - 24 UNF	H2	28268		00		01	08			0.740	1.240		H3	28318			00	01		08	H4					28368	00	01	08		H5			28418		00			01		08	H6			28419	00	01		08		H7		28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320				00	01	08		3.157	0.858	1.291	0.323	0.242								0.406	H5	28420	00	01	08										H7					28421					00		01		08	H11	28423	00	01			08						7/16 - 20 UNF	H3	28322	00	01			08	0.921		1.354		H5	28422	00	01	08					H7	28425	00	01	08	H11	28430	00	01	08		1/2 - 13 UNC	H3	28324	00	01						08				3.374	0.921	1.354		0.367		0.275	0.438	H5	28424		00				01	08	H7							28428	00	01	08	H11	28574							00	01	08	1/2 - 20 UNF	H2	28276	00	01	08		3.594	1.000	1.472	0.429	0.322							0.500	H3		28326	00			01	08				H5						28426	00		01	08	H7	28427				00	01	08							H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594		1.000	1.472	0.429	0.322							0.500	9/16 - 18 UNF	28578	00	01	08																																														
	H5		28412	00	01	08			H6	28413	00	01			08	H7			28414	00	01	08	H11		28415	00		01		08	3/8 - 16 UNC	H3		28316	00	01	08	2.937	0.752	1.252				0.381	0.285	0.438	H5	28416						00					01	08							H7		28564	00	01	08	H11	28566	00		01				08			3/8 - 24 UNF	H2	28268		00	01		08		0.740	1.240			H3	28318		00		01	08						H4	28368			00	01		08	H5					28418	00	01	08		H6			28419		00			01	08	H7	28417			00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291		0.323	0.242	0.406	H5	28420	00	01	08															H7	28421	00	01	08	H11									28423					00					01		08		7/16 - 20 UNF	H3	28322	00	01			08							0.921	1.354	H5	28422			00				01	08	H7	28425	00	01		08	H11		28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08			3.374	0.921	1.354	0.367				0.275		0.438							H5		28424			00	01	08	H7	28428	00	01	08	H11	28574							00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500		H3	28326	00	01	08														H5		28426	00	01		08	H7				28427		00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00			01	08	3.594							1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF		28578	00	01	08																																																																
	H6		28413	00	01	08			H7	28414	00	01		08	H11	28415	00	01	08	3/8 - 16 UNC	H3	28316	00		01	08		2.937	0.752	1.252		0.381	0.285	0.438	H5	28416	00										01	08						H7			28564	00	01	08							H11	28566	00	01	08	3/8 - 24 UNF	H2	28268	00		01	08	0.740		1.240				H3	28318		00	01		08						H4	28368		00		01	08						H5	28418			00	01		08	H6					28419	00	01	08		H7			28417	00	01			08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858		1.291	0.323	0.242	0.406	H5								28420	00	01	08	H7											28421				00	01	08	H11	28423	00									01					08					7/16 - 20 UNF		H3			28322	00	01	08			0.921									1.354	H5			28422		00		01	08	H7	28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3		28324	00	01	08	3.374													0.921						1.354		0.367			0.275	0.438	H5	28424	00	01	08	H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2		28276	00	01	08	3.594								1.000	1.472	0.429	0.322	0.500														H3	28326	00	01	08		H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC		H3	28576	00	01	08	3.594													1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																												
	H7		28414	00	01	08			H11	28415	00	01	08	3/8 - 16 UNC	H3	28316	00	01	08		2.937	0.752	1.252		0.381	0.285									0.438	H5	28416					00	01				08	H7				28564		00			01	08	H11	28566		00	01				08	3/8 - 24 UNF	H2	28268	00		01	08	0.740		1.240	H3							28318	00		01	08		H4						28368	00		01		08	H5						28418	00			01	08	H6	28419	00	01	08	H7		28417	00	01	08	H11	28568			00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858		1.291	0.323	0.242	0.406	H5								28420								00	01	08	H7	28421	00										01				08	H11	28423	00	01	08									7/16 - 20 UNF					H3							28322			00	01	08	0.921	1.354	H5		28422	00	01	08	H7					28425	00	01	08		H11		28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921		1.354		0.367	0.275	0.438	H5		28424						00	01	08		H7			28428	00											01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000		1.472		0.429	0.322	0.500	H3																											28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00		01	08	3.594	1.000		1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																									
H11	28415		00	01	08	3/8 - 16 UNC			H3	28316	00	01	08		2.937	0.752	1.252	0.381	0.285					0.438			H5									28416	00				01	08	H7				28564	00		01	08	H11		28566			00	01	08	3/8 - 24 UNF		H2	28268				00		01	08	0.740		1.240	H3				28318							00	01		08	H4		28368						00	01		08	H5	28418	00	01	08			H6	28419	00			01	08	H7	28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858		1.291	0.323	0.242	0.406	H5								28420								00				01				08	H7	28421	00	01	08										H11				28423	00	01	08	7/16 - 20 UNF	H3														28322	00	01	08	0.921		1.354	H5	28422		00	01	08			H7		28425	00	01	08	H11	28430				00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921		1.354	0.367	0.275	0.438	H5									28424		00	01					08	H7	28428		00			01	08	H11	28574	00		01		08	1/2 - 20 UNF			H2	28276	00	01	08	3.594	1.000		1.472	0.429	0.322	0.500	H3									28326														00						01	08	H5	28426	00	01		08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472		0.429	0.322	0.500	9/16 - 18 UNF	28578			00					01	08																																																																												
3/8 - 16 UNC	H3	28316	00	01	08		2.937	0.752	1.252	0.381	0.285	0.438																																																																																																																																																																																																																																																																																																																																																																																																																																								
	H5	28416	00	01	08								H7							28564							00		01	08	H11					28566	00		01	08	3/8 - 24 UNF	H2	28268				00	01		08	0.740	1.240		H3			28318	00	01			08	H4				28368		00	01				08		H5		28418		00		01	08		H6	28419	00	01	08	H7	28417	00			01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323	0.242	0.406	H5	28420	00	01	08	H7	28421	00	01	08	H11		28423	00	01	08	7/16 - 20 UNF								H3			28322					00			01					08				0.921				1.354	H5	28422	00	01	08										H7				28425	00	01	08		H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00		01	08	3.374	0.921	1.354	0.367	0.275	0.438		H5		28424	00	01	08	H7	28428			00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08		3.594	1.000	1.472	0.429	0.322								0.500			H3		28326				00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08		3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF								28578					00				01		08																																																																																																																																							
	H7	28564	00	01	08								H11	28566						00		01	08				3/8 - 24 UNF		H2	28268	00					01	08		0.740	1.240		H3	28318				00	01		08				H4			28368	00	01		08	H5	28418	00	01	08	H6		28419	00				01		08		H7		28417		00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323	0.242	0.406		H5	28420	00	01	08							H7	28421	00	01	08	H11	28423	00	01	08	7/16 - 20 UNF		H3	28322	00	01				08					0.921			1.354					H5			28422					00									01	08	H7	28425	00						01	08	H11	28430	00	01	08		1/2 - 13 UNC	H3	28324	00		01	08	3.374	0.921	1.354		0.367	0.275	0.438	H5	28424	00								01		08	H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01		08	3.594	1.000	1.472	0.429									0.322						0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08		3.594	1.000	1.472	0.429								0.322								0.500			9/16 - 18 UNF		28578				00	01	08																																																																																																																																							
	H11	28566	00	01	08	3/8 - 24 UNF							H2	28268		00	01			08		0.740	1.240						H3	28318	00					01	08					H4	28368				00	01	08	H5			28418	00	01	08	H6	28419	00		01	08	H7	28417	00	01	08		H11	28568		00		01		08		7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323	0.242	0.406		H5	28420	00	01	08								H7	28421	00	01	08							H11	28423	00	01	08	7/16 - 20 UNF	H3	28322	00	01		08	0.921	1.354	H5	28422				00													01			08					H7									28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354		0.367	0.275	0.438	H5	28424	00								01	08	H7							28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01		08	3.594	1.000	1.472		0.429					0.322						0.500	H3		28326	00	01	08			H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08		3.594	1.000	1.472	0.429	0.322						0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																											
3/8 - 24 UNF	H2	28268	00	01	08			0.740	1.240				H3	28318		00	01			08									H4	28368	00					01	08	H5				28418	00	01	08	H6	28419	00	01	08			H7	28417	00	01	08	H11	28568		00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157		0.858		1.291	0.323	0.242	0.406		H5	28420	00	01	08								H7	28421	00	01	08								H11	28423	00	01	08							7/16 - 20 UNF	H3	28322	00	01		08	0.921	1.354	H5		28422			00	01				08													H7			28425					00	01	08	H11		28430	00	01		08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921		1.354	0.367	0.275	0.438	H5								28424	00	01								08	H7	28428							00	01	08	H11	28574	00	01	08	1/2 - 20 UNF		H2	28276	00	01		08																	3.594		1.000	1.472	0.429	0.322			0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08		H11	28429	00	01	08						9/16 - 12 UNC	H3	28576	00	01		08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																				
	H3	28318	00	01	08								H4	28368		00	01			08								H5	28418	00	01	08	H6	28419		00	01	08				H7	28417	00	01	08	H11	28568	00	01			08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858	1.291	0.323		0.242	0.406	H5	28420	00		01		08						H7	28421	00	01	08								H11	28423	00	01	08							7/16 - 20 UNF	H3	28322	00	01	08								0.921	1.354	H5	28422		00			01		08			H7	28425	00			01													08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275	0.438		H5	28424	00	01	08								H7								28428	00	01				08				H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500			H3	28326	00	01		08																										H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500		9/16 - 18 UNF	28578	00	01	08																																																																																																																																																															
	H4	28368	00	01	08								H5	28418		00	01			08	H6				28419	00		01	08	H7	28417	00	01	08	H11	28568	00	01				08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858			1.291		0.323	0.242	0.406	H5	28420								00	01	08		H7		28421						00	01	08	H11	28423							00	01	08	7/16 - 20 UNF	H3	28322								00	01	08	0.921	1.354										H5	28422		00			01	08	H7			28425	00	01			08					H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354		0.367	0.275	0.438	H5	28424								00	01	08	H7	28428								00				01				08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472		0.429	0.322	0.500	H3	28326									00	01	08	H5		28426				00							01	08	H7	28427	00								01			08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429		0.322	0.500	9/16 - 18 UNF	28578							00	01	08																																																																																																																																																																		
	H5	28418	00	01	08								H6	28419	00	01	08	H7	28417	00	01			08	H11	28568		00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858			1.291	0.323		0.242	0.406	H5	28420	00			01	08						H7	28421								00	01	08		H11		28423					00	01	08	7/16 - 20 UNF	H3	28322							00	01	08		0.921	1.354								H5	28422	00												01	08	H7	28425			00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275	0.438		H5	28424	00	01	08								H7	28428								00	01	08	H11	28574			00					01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500		H3	28326	00	01	08								H5	28426									00	01	08	H7	28427	00				01		08	H11	28429	00		01	08	9/16 - 12 UNC	H3	28576			00					01	08		3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF		28578	00	01	08																																																																																																																																																																																				
	H6	28419	00	01	08		H7			28417	00	01	08	H11	28568	00	01	08	7/16 - 14 UNC	H3	28320			00	01	08	3.157	0.858	1.291	0.323		0.242	0.406	H5	28420	00			01	08						H7	28421	00			01	08						H11	28423					00			01	08	7/16 - 20 UNF		H3		28322					00	01	08		0.921	1.354							H5	28422	00											01	08	H7									28425			00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08		3.374	0.921	1.354	0.367	0.275								0.438	H5	28424	00	01								08	H7							28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08		3.594	1.000	1.472	0.429	0.322								0.500	H3	28326	00	01								08	H5								28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08		3.594	1.000		1.472					0.429	0.322								0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																				
	H7	28417	00	01	08	H11	28568			00	01	08	7/16 - 14 UNC	H3	28320	00	01	08		3.157	0.858	1.291	0.323	0.242	0.406	H5								28420	00	01			08	H7						28421	00	01			08	H11		28423				00	01					08			7/16 - 20 UNF	H3			28322		00					01	08	0.921										1.354	H5	28422										00	01	08	H7			28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921		1.354	0.367	0.275	0.438	H5															28424	00	01	08				H7				28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000		1.472	0.429	0.322	0.500	H3															28326	00	01	08								H5	28426							00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576		00	01	08	3.594	1.000			1.472		0.429	0.322	0.500	9/16 - 18 UNF			28578	00	01	08																																																																																																																																																																																													
H11	28568	00	01	08	7/16 - 14 UNC	H3	28320	00	01	08	3.157	0.858		1.291	0.323	0.242	0.406	H5								28420								00	01	08			H7	28421			00			01	08	H11			28423	00		01				08	7/16 - 20 UNF					H3				28322			00		01					08	0.921												1.354	H5	28422			00	01	08	H7	28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921		1.354	0.367	0.275	0.438	H5								28424													00		01	08	H7	28428	00	01	08	H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000		1.472	0.429	0.322	0.500	H3								28326															00	01	08	H5				28426				00	01	08	H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472		0.429	0.322	0.500	9/16 - 18 UNF	28578			00	01		08																																																																																																																																																																																																							
7/16 - 14 UNC	H3	28320	00	01		08	3.157	0.858	1.291	0.323								0.242								0.406																																																																																																																																																																																																																																																																																																																																																																																																																										
	H5	28420	00	01		08													H7												28421			00	01	08			H11	28423			00			01	08	7/16 - 20 UNF			H3	28322		00				01						08				0.921	1.354	H5	28422	00	01	08	H7	28425	00	01			08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324			00	01	08	3.374	0.921	1.354	0.367	0.275	0.438	H5	28424	00	01	08	H7	28428	00		01	08	H11	28574	00								01			08					1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00	01	08	H7	28427	00	01	08		H11	28429	00	01	08								9/16 - 12 UNC								H3	28576						00	01	08	3.594	1.000	1.472	0.429		0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																																																																													
	H7	28421	00	01		08							H11						28423												00			01	08	7/16 - 20 UNF			H3	28322			00			01	08				0.921	1.354		H5				28422		00	01	08	H7	28425	00	01	08			H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00		01	08	3.374	0.921	1.354	0.367	0.275		0.438	H5	28424		00	01	08							H7	28428	00	01	08	H11	28574	00		01	08	1/2 - 20 UNF	H2	28276			00					01	08	3.594	1.000	1.472	0.429	0.322	0.500		H3	28326	00	01	08							H5	28426	00	01	08	H7	28427	00	01	08	H11	28429	00	01	08		9/16 - 12 UNC	H3	28576	00	01								08			3.594						1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01					08																																																																																																																																																																																																																																																				
	H11	28423	00	01	08	7/16 - 20 UNF							H3						28322												00			01	08				0.921	1.354			H5			28422	00		01	08			H7	28425	00	01	08	H11	28430	00	01	08	1/2 - 13 UNC	H3	28324	00	01			08	3.374	0.921	1.354	0.367		0.275	0.438	H5	28424	00	01								08	H7	28428	00	01	08							H11	28574	00	01	08	1/2 - 20 UNF	H2	28276	00	01	08		3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08								H5	28426	00	01	08							H7	28427	00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01		08		3.594	1.000	1.472			0.429					0.322	0.500	9/16 - 18 UNF		28578	00	01	08																																																																																																																																																																																																																																																																			
7/16 - 20 UNF	H3	28322	00	01	08								0.921						1.354												H5			28422	00		01	08			H7	28425	00	01	08	H11	28430		00	01			08	1/2 - 13 UNC	H3	28324	00	01	08	3.374	0.921	1.354		0.367	0.275	0.438	H5			28424								00	01	08	H7								28428	00	01	08	H11	28574							00	01	08	1/2 - 20 UNF	H2		28276	00	01	08	3.594								1.000	1.472	0.429	0.322	0.500								H3	28326	00	01	08							H5	28426	00	01	08	H7	28427	00	01	08	H11		28429	00	01	08	9/16 - 12 UNC	H3				28576	00		01	08	3.594	1.000			1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																																																																																																
	H5	28422	00	01	08																						H7	28425	00	01	08	H11	28430	00	01		08	1/2 - 13 UNC			H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275			0.438		H5	28424	00	01	08								H7	28428	00	01								08	H11	28574	00						01		08	1/2 - 20 UNF	H2	28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326		00		01	08	H5	28426																					00	01	08	H7	28427							00	01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472		0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																																																																																																													
	H7	28425	00	01	08															H11	28430	00	01	08	1/2 - 13 UNC		H3	28324	00	01	08	3.374	0.921	1.354	0.367	0.275	0.438				H5	28424	00	01	08						H7	28428			00	01	08	H11	28574								00	01	08	1/2 - 20 UNF					H2			28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326		00	01	08	H5	28426							00	01		08		H7	28427	00	01																				08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00		01	08																																																																																																																																																																																																																																																																																											
	H11	28430	00	01	08	1/2 - 13 UNC					H3	28324		00	01	08	3.374			0.921	1.354	0.367	0.275	0.438			H5	28424	00	01	08								H7	28428	00	01	08	H11	28574						00	01			08	1/2 - 20 UNF	H2	28276	00				01				08	3.594	1.000		1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426							00	01		08	H7	28427	00	01							08	H11		28429		00	01	08	9/16 - 12 UNC		H3												28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00		01	08																																																																																																																																																																																																																																																																																																									
1/2 - 13 UNC	H3	28324	00	01	08		3.374	0.921	1.354	0.367	0.275	0.438																																																																																																																																																																																																																																																																																																																																																																																																																																								
	H5	28424	00	01	08								H7	28428	00	01		08	H11							28574	00	01	08	1/2 - 20 UNF	H2							28276	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08	H5	28426	00		01	08	H7	28427	00	01	08	H11	28429	00	01								08	9/16 - 12 UNC	H3	28576	00	01	08							3.594	1.000		1.472	0.429	0.322	0.500	9/16 - 18 UNF							28578	00	01	08																																																																																																																																																																																																																																																																																																																																											
	H7	28428	00	01	08								H11	28574	00	01		08	1/2 - 20 UNF						H2	28276	00	01	08		3.594	1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08							H5	28426	00	01	08	H7	28427	00		01	08	H11	28429	00	01	08	9/16 - 12 UNC	H3	28576	00								01	08		3.594	1.000	1.472	0.429									0.322					0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																																																																																																																																																																																
	H11	28574	00	01	08	1/2 - 20 UNF							H2	28276	00	01	08	3.594		1.000	1.472	0.429	0.322	0.500	H3	28326	00	01	08								H5	28426	00	01	08							H7	28427	00	01	08	H11	28429	00		01	08	9/16 - 12 UNC	H3	28576	00	01	08		3.594	1.000			1.472					0.429	0.322	0.500					9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																																																																																																																																																																																														
1/2 - 20 UNF	H2	28276	00	01	08		3.594	1.000	1.472	0.429	0.322	0.500																																																																																																																																																																																																																																																																																																																																																																																																																																								
	H3	28326	00	01	08								H5	28426	00	01	08								H7	28427	00	01	08								H11	28429	00	01	08							9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF	28578	00	01	08																																																																																																																																																																																																																																																																																																																																																																																				
	H5	28426	00	01	08								H7	28427	00	01	08								H11	28429	00	01	08	9/16 - 12 UNC							H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF		28578	00	01	08																																																																																																																																																																																																																																																																																																																																																																																															
	H7	28427	00	01	08								H11	28429	00	01	08		9/16 - 12 UNC						H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF		28578	00	01	08																																																																																																																																																																																																																																																																																																																																																																																																											
	H11	28429	00	01	08	9/16 - 12 UNC							H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500	9/16 - 18 UNF		28578	00	01	08																																																																																																																																																																																																																																																																																																																																																																																																																							
9/16 - 12 UNC	H3	28576	00	01	08	3.594	1.000	1.472	0.429	0.322	0.500																																																																																																																																																																																																																																																																																																																																																																																																																																									
9/16 - 18 UNF		28578	00	01	08																																																																																																																																																																																																																																																																																																																																																																																																																																															

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.





List 280 (Continued)

Plug (3.5P-4.5P)



HSSE	TiCN	S/O	BR
------	------	-----	----

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length						
			EDP Number	Coating Suffix														
				Bright	S/O	TiCN												
L	Lc	Ln	d	k	lk													
5/8 - 11 UNC	H3	3	28332	00	01	08	3.811	1.091	1.563	0.480	0.360	0.563						
	H5		28432	00	01	08												
5/8 - 18 UNF	H3		28334	00	01	08												
	H5		28434	00	01	08												
	H7		28580	00	01	08												
3/4 - 10 UNC	H3		28336	00	01	08							4.252	1.201	1.713	0.590	0.442	0.688
	H5		28436	00	01	08												
3/4 - 16 UNF	H3		28338	00	01	08												
	H5		28438	00	01	08												
7/8 - 9 UNC	H5		28440	00	01	08	4.689	1.335	1.886	0.697	0.523	0.750						
7/8 - 14 UNF	H4		28392	00	01	08												
1 - 8 UNC	H5		28444	00	01	08	5.126	1.500	2.091	0.800	0.600	0.813						
1 - 12 UNF	H4	28396	00	01	08													
1,1/8 - 7 UNC	H6	4	28498	-	01	-	5.437	1.713	2.303	0.896	0.672	0.875						
1,1/8 - 8 UNS			28502	-	01	-												
1,1/8 - 12 UNF	H5		28450	-	01	-												
1,1/4 - 7 UNC	H6		28504	-	01	-	5.752		2.000	2.382	1.021	0.766	1.000					
1,1/4 - 8 UNS			H6	28508	-	01								-				
1,1/4 - 12 UNF	H5		28456	-	01	-	6.063			2.748	1.108	0.831	1.063					
1,3/8 - 6 UNC	H6		28510	-	01	-												
1,3/8 - 8 UNS			H6	28514	-	01		-										
1,3/8 - 12 UNF	H5		28462	-	01	-	6.374	2.787			1.233	0.925	1.125					
1,1/2 - 6 UNC	H6		28516	-	01	-												
1,1/2 - 8 UNS			H6	28520	-	01			-									
1,1/2 - 12 UNF	H5		28468	-	01	-												

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
280	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60			

good best





List 289

Plug (3.5P-4.5P)



HSSE	TiCN	S/O	BR
------	------	-----	----



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length																																																																																																																																																																																																																																																																																																																																																																						
			EDP Number	Coating Suffix																																																																																																																																																																																																																																																																																																																																																																														
				Bright	S/O	TiCN																																																																																																																																																																																																																																																																																																																																																																												
M3 x 0.5	D3	3	28904	00	01	08	49.20	6.00	15.90	3.58	2.79	4.80																																																																																																																																																																																																																																																																																																																																																																						
	D11		28931	-	01	08							M3.5 x 0.6	D4	28905	00	01	08	50.80	7.20	17.50	3.58	2.79	4.80	D11	28933	-	01	08	M4 x 0.7	D4	28906	00	01	08	54.00	8.30	19.00	4.27	3.33	6.40	D11	28935	-	01	08	M5 x 0.8	D4	28908	00	01	08	60.30	9.70	22.30	4.93	3.86	6.40	D11	28937	-	01	08	M6 x 1.0	D5	28910	00	01	08	63.50	11.90	25.30	6.48	4.85	7.90	D11	28939	-	01	08	M7 x 1.0	D5	28911	00	01	08	63.50	12.10	25.30	6.48	4.85	7.90	D11	28941	-	01	08	M8 x 1.25	D5	28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28945	-	01	08	M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46
M3.5 x 0.6	D4		28905	00	01	08	50.80	7.20	17.50	3.58	2.79	4.80																																																																																																																																																																																																																																																																																																																																																																						
	D11		28933	-	01	08							M4 x 0.7	D4	28906	00	01	08	54.00	8.30	19.00	4.27	3.33	6.40	D11	28935	-	01	08	M5 x 0.8	D4	28908	00	01	08	60.30	9.70	22.30	4.93	3.86	6.40	D11	28937	-	01	08	M6 x 1.0	D5	28910	00	01	08	63.50	11.90	25.30	6.48	4.85	7.90	D11	28939	-	01	08	M7 x 1.0	D5	28911	00	01	08	63.50	12.10	25.30	6.48	4.85	7.90	D11	28941	-	01	08	M8 x 1.25	D5	28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28945	-	01	08	M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-										
M4 x 0.7	D4		28906	00	01	08	54.00	8.30	19.00	4.27	3.33	6.40																																																																																																																																																																																																																																																																																																																																																																						
	D11		28935	-	01	08							M5 x 0.8	D4	28908	00	01	08	60.30	9.70	22.30	4.93	3.86	6.40	D11	28937	-	01	08	M6 x 1.0	D5	28910	00	01	08	63.50	11.90	25.30	6.48	4.85	7.90	D11	28939	-	01	08	M7 x 1.0	D5	28911	00	01	08	63.50	12.10	25.30	6.48	4.85	7.90	D11	28941	-	01	08	M8 x 1.25	D5	28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28945	-	01	08	M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																											
M5 x 0.8	D4		28908	00	01	08	60.30	9.70	22.30	4.93	3.86	6.40																																																																																																																																																																																																																																																																																																																																																																						
	D11		28937	-	01	08							M6 x 1.0	D5	28910	00	01	08	63.50	11.90	25.30	6.48	4.85	7.90	D11	28939	-	01	08	M7 x 1.0	D5	28911	00	01	08	63.50	12.10	25.30	6.48	4.85	7.90	D11	28941	-	01	08	M8 x 1.25	D5	28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28945	-	01	08	M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																												
M6 x 1.0	D5		28910	00	01	08	63.50	11.90	25.30	6.48	4.85	7.90																																																																																																																																																																																																																																																																																																																																																																						
	D11		28939	-	01	08							M7 x 1.0	D5	28911	00	01	08	63.50	12.10	25.30	6.48	4.85	7.90	D11	28941	-	01	08	M8 x 1.25	D5	28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28945	-	01	08	M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																													
M7 x 1.0	D5		28911	00	01	08	63.50	12.10	25.30	6.48	4.85	7.90																																																																																																																																																																																																																																																																																																																																																																						
	D11		28941	-	01	08							M8 x 1.25	D5	28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28945	-	01	08	M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																														
M8 x 1.25	D5		28914	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50																																																																																																																																																																																																																																																																																																																																																																						
	D11		28945	-	01	08							M8 x 1.0	D5	28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50	D11	28943	-	01	08	M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																															
M8 x 1.0	D5		28913	00	01	08	69.10	15.00	28.60	8.08	6.05	9.50																																																																																																																																																																																																																																																																																																																																																																						
	D11		28943	-	01	08							M10 x 1.5	D6	28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28951	-	01	08	M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																
M10 x 1.5	D6		28918	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10																																																																																																																																																																																																																																																																																																																																																																						
	D11		28951	-	01	08							M10 x 1.25	D5	28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28949	-	01	08	M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																	
M10 x 1.25	D5		28917	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10																																																																																																																																																																																																																																																																																																																																																																						
	D11		28949	-	01	08							M10 x 1.0	D5	28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10	D11	28947	-	01	08	M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																		
M10 x 1.0	D5		28916	00	01	08	74.60	18.00	31.80	9.68	7.26	11.10																																																																																																																																																																																																																																																																																																																																																																						
	D11		28947	-	01	08							M12 x 1.75	D6	28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28957	-	01	08	M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																			
M12 x 1.75	D6		28923	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10																																																																																																																																																																																																																																																																																																																																																																						
	D11		28957	-	01	08							M12 x 1.5	D6	28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28955	-	01	08	M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																				
M12 x 1.5	D6		28922	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10																																																																																																																																																																																																																																																																																																																																																																						
	D11		28955	-	01	08							M12 x 1.25	D5	28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10	D11	28952	-	01	08	M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																					
M12 x 1.25	D5		28921	00	01	08	85.70	21.00	32.00	9.32	6.98	11.10																																																																																																																																																																																																																																																																																																																																																																						
	D11		28952	-	01	08							M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70	M14 x 1.5	D6	28925	-	01	08	M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																						
M14 x 2.0	D7	28926	-	01	08	91.30	24.00	36.00	10.90	8.18	12.70																																																																																																																																																																																																																																																																																																																																																																							
M14 x 1.5	D6	28925	-	01	08							M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30	M16 x 1.5	D6	28928	-	01	08	M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																									
M16 x 2.0	D7	28929	-	01	08	96.80	24.00	36.00	12.19	9.14	14.30																																																																																																																																																																																																																																																																																																																																																																							
M16 x 1.5	D6	28928	-	01	08							M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90	M18 x 1.5	D6	28930	-	01	08	M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																											
M18 x 2.5	D7	28932	-	01	08	102.40	30.00	43.00	13.77	10.31	15.90																																																																																																																																																																																																																																																																																																																																																																							
M18 x 1.5	D6	28930	-	01	08							M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50	M20 x 1.5	D6	28934	-	01	08	M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																																													
M20 x 2.5	D8	28936	-	01	08	113.50	30.00	44.00	16.56	12.42	17.50																																																																																																																																																																																																																																																																																																																																																																							
M20 x 1.5	D6	28934	-	01	08							M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10	M22 x 1.5	D6	28938	-	01	-	M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																																																															
M22 x 2.5	D8	28940	-	01	-	119.10	36.00	51.00	17.70	13.28	19.10																																																																																																																																																																																																																																																																																																																																																																							
M22 x 1.5	D6	28938	-	01	-							M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20	M24 x 1.5	D6	28942	-	01	-	M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																																																																																	
M24 x 3.0	D8	28944	-	01	-	124.60	36.00	51.00	19.30	14.48	22.20																																																																																																																																																																																																																																																																																																																																																																							
M24 x 1.5	D6	28942	-	01	-							M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40	M27 x 1.5	D6	28946	-	01	-	M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																																																																																																			
M27 x 3.0	D8	28948	-	01	-	130.20	42.00	58.00	25.93	19.46	25.40																																																																																																																																																																																																																																																																																																																																																																							
M27 x 1.5	D6	28946	-	01	-							M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40	M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																																																																																																																					
M30 x 3.5	D9	28953	-	01	-	138.10	38.10	54.10	25.93	19.46	25.40																																																																																																																																																																																																																																																																																																																																																																							
M30 x 1.5	D6	28950	-	01	-																																																																																																																																																																																																																																																																																																																																																																													

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
289	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				
SFM	50-90	40-80	40-60	40-80	20-60	40-80	40-80	30-50	30-80					20-60			

good best





List 287

Plug (4.5P-5.5P)



HSS	TiN	S/O	BR
-----	-----	-----	----



Units: Inch

Tap Size	Class of Fit	No. of Flutes	Plug (4.5P - 5.5P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk		
			EDP Number	Coating Suffix									
			Bright	S/O	TiN								
0 - 80 UNF	2B	2	28841	00	01	05	1.625	0.311	-	0.141	0.110	0.188	
1 - 64 UNC			28842	00	01	05	1.688	0.374	-				
1 - 72 UNF			28843	00	01	05			-				
2 - 56 UNC			28844	00	01	05	1.750	0.437	-				
3 - 48 UNC			28845	00	01	05	1.813	0.496	-				
3 - 56 UNF			28846	00	01	05			-				
4 - 40 UNC			3B	28850	00	01	05	1.875	0.319				0.559
4 - 48 UNF				28800	00	01	05						
5 - 40 UNC				28864	00	01	05						
6 - 32 UNC			3B	28865	00	01	05	1.938	0.323				0.618
6 - 40 UNF	28852	00		01	05								
8 - 32 UNC	3B	28802	00	01	05	2.000	0.390	0.685					
8 - 36 UNF		28866	00	01	05								
10 - 24 UNC	3B	28853	00	01	05	2.125	0.756	0.168	0.131				
10 - 32 UNF		28803	00	01	05								
12 - 24 UNC	3B	28867	00	01	05	2.375	0.504	0.874	0.194	0.152			
1/4 - 20 UNC		28854	00	01	05								
1/4 - 28 UNC	3B	28804	00	01	05	2.500	0.638	1.008	0.255	0.191	0.313		
5/16 - 18 UNC		28855	00	01	05								
5/16 - 24 UNF	3B	28805	00	01	05	2.719	0.720	1.150	0.318	0.238	0.375		
3/8 - 16 UNC		28868	00	01	05								
3/8 - 24 UNF	3B	28856	00	01	05	2.938	0.787	1.276	0.381	0.286	0.438		
7/16 - 14 UNC		28806	00	01	05								
7/16 - 20 UNF	3B	28857	00	01	05	3.156	0.882	1.315	0.323	0.242	0.406		
1/2 - 13 UNC		28807	00	01	05								
1/2 - 20 UNF	3B	28858	00	01	05	3.375	0.941	1.374	0.367	0.275	0.438		
		28808	00	01	05								
	3B	28859	00	01	05	3.156	0.882	1.315	0.323	0.242	0.406		
		28809	00	01	05								
	3B	28860	00	01	05	2.938	0.776	1.264	0.381	0.286	0.438		
		28810	00	01	05								
	3B	28861	00	01	05	3.156	0.882	1.315	0.323	0.242	0.406		
		28811	00	01	05								
	3B	28869	00	01	05	3.375	0.941	1.374	0.367	0.275	0.438		
		28870	00	01	05								
	3B	28862	00	01	05	3.375	0.941	1.374	0.367	0.275	0.438		
		28812	00	01	05								
	3B	28863	00	01	05	3.375	0.941	1.374	0.367	0.275	0.438		
		28813	00	01	05								

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
287	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input type="checkbox"/>	<input type="checkbox"/>								
SFM	50-90	40-80							30-80	30-80								

good best





HY-PRO® SEVEN

General Purpose Class of Fit Taps

List 288

Plug (4.5P-5.5P)



HSS

TiN

S/O

BR



Units: mm

Tap Size	Class of Fit	No. of Flutes	Plug (4.5P - 5.5P)				Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix								
				Bright	S/O	TiN	L	Lc	Ln	d	k	lk
M3 x 0.5	6H	2	28880	00	01	05	49.20	8.30	15.80	3.58	2.79	4.80
M4 x 0.7			28881	00	01	05	54.00	10.00	19.30	4.27	3.33	6.40
M5 x 0.8			28882	00	01	05	60.30	13.00	22.40	4.93	3.86	
M6 x 1.0			28883	00	01	05	63.50	16.50	25.90	6.48	4.85	7.90
M8 x 1.25			28884	00	01	05	69.10	18.00	28.80	8.08	6.05	9.50
M10 x 1.5			28885	00	01	05	74.60	20.10	32.50	9.68	7.26	11.10
M12 x 1.75			28886	00	01	05	85.70	23.90	34.90	9.32	6.98	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P												M			K Cast Iron	N		S		H			
	Carbon Steels					Alloy Steels Die Steels	Stainless Steels			Aluminum		Nickel Alloy	Titanium	Hardened Steels										
	Low	Med.	High	4140 4340	300		400	17-4 PH	6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC		50-70 HRC							
	1010 1018	1035 1045	1065		300		400	17-4 PH	6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC		50-70 HRC							
288	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input type="checkbox"/>	<input type="checkbox"/>														
SFM	50-90	40-80							30-80	30-80														


good best



List 105

No. 0 ~ No. 6 (4.5P-5.5P), >No. 8 (3.5P-4.5P)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)				Plug (3.5P - 4.5P)					Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix			EDP Number	Coating Suffix									
				Bright	S/O	TiN		TiCN	Bright	S/O	TiN						
0 - 80 UNF	H1	2	12000	00	01	-	08	-	-	-	-	1.625	0.350	-	0.141	0.110	0.188
	H2		12050	00	01	05	08	-	-	-	-						
	H3		12100	00	01	-	08	-	-	-	-						
1 - 64 UNC	H1		12002	00	01	-	08	-	-	-	-	1.688	0.370	-			
	H2		12052	00	01	-	08	-	-	-	-						
1 - 72 UNF	H1		12004	00	01	-	08	-	-	-	-	1.750	0.441	-			
	H2		12054	00	01	05	08	-	-	-	-						
2 - 56 UNC	H1		12006	00	-	05	08	-	-	-	-	1.750	0.429	-			
	H2		12056	00	01	05	08	-	-	-	-						
	H3		12106	00	01	-	08	-	-	-	-						
	H5		12156	00	01	-	08	-	-	-	-						
2 - 64 UNF	H1		12008	00	-	-	08	-	-	-	-	1.813	0.496	-			
	H2		12058	00	01	05	08	-	-	-	-						
3 - 48 UNC	H1		12010	00	-	-	08	-	-	-	-	1.875	0.319	0.559			
	H2		12060	00	01	05	08	-	-	-	-						
	H3		12110	00	01	-	08	-	-	-	-						
	H5		20021	00	-	-	08	-	-	-	-						
3 - 56 UNF	H1		12012	00	-	-	08	-	-	-	-	1.938	0.323	0.618			
	H2		12062	00	01	05	08	-	-	-	-						
4 - 36 UNS	H1		12014	00	-	05	08	-	-	-	-	2.000	0.390	0.685			
	H2	12064	00	01	05	08	-	-	-	-							
4 - 40 UNC	H1	12016	00	-	-	08	-	-	-	-	2.000	0.390	0.685				
	H2	12066	00	01	05	08	-	-	-	-							
	H3	12114	00	01	-	08	-	-	-	-							
	H5	12164	00	01	-	08	-	-	-	-							
4 - 48 UNF	H1	12020	00	-	-	08	-	-	-	-	1.938	0.323	0.618				
	H2	12070	00	01	05	08	-	-	-	-							
5 - 40 UNC	H1	12024	00	-	05	08	-	-	-	-	2.000	0.390	0.685				
	H2	12074	00	01	05	08	-	-	-	-							
	H5	20033	00	-	-	08	-	-	-	-							
5 - 44 UNF	H1	12024	00	-	05	08	-	-	-	-	2.000	0.390	0.685				
	H2	12074	00	01	05	08	-	-	-	-							
	H3	12124	00	01	05	08	-	-	-	-							
	H4	12126	-	-	-	08	-	-	-	-							
6 - 32 UNC	H1	20039	00	-	05	08	-	-	-	-	2.000	0.390	0.685				
	H2	12174	00	01	-	08	-	-	-	-							
	H3	12026	00	-	-	08	-	-	-	-							
	H4	12076	00	01	05	08	-	-	-	-							
	H5	20042	00	-	-	08	-	-	-	-							
6 - 40 UNF	H1	12026	00	-	-	08	-	-	-	-	2.000	0.390	0.685				
	H2	12076	00	01	05	08	-	-	-	-							
	H5	20042	00	-	-	08	-	-	-	-							

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

[continued on next page](#) 

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
105	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best



GENERAL PURPOSE

List 105 (Continued)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----

No. 0 ~ No. 6 (4.5P-5.5P), >No. 8 (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)					Plug (3.5P - 4.5P)					Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk																		
			EDP Number	Coating Suffix				EDP Number	Coating Suffix																											
				Bright	S/O	TiN	TiCN		Bright	S/O	TiN	TiCN																								
8 - 32 UNC	H1	2	-	-	-	-	12028	00	-	05	08	2.125	0.390	0.756	0.168	0.131																				
	H2		-	-	-	-	12078	00	01	05	08																									
	H3		-	-	-	-	12128	00	01	05	08																									
	H4	3	-	-	-	-	20050	00	-	05	08																									
	H5		-	-	-	-	12132	-	01	-	-																									
8 - 36 UNF	H1	2	-	-	-	-	12032	00	-	-	08							2.375	0.504	0.874	0.194	0.152	0.250													
	H2		-	-	-	-	12082	00	01	05	08																									
10 - 24 UNC	H1	3	-	-	-	-	12034	00	-	05	08													2.375	0.520	0.949	0.220	0.165	0.281							
	H2		-	-	-	-	12136	-	01	-	-																									
	H3	2	-	-	-	-	12084	00	01	05	08																									
	H4		-	-	-	-	12134	00	01	05	08																									
	H5		-	-	-	-	20065	00	-	-	08																									
10 - 32 UNF	H1	3	-	-	-	-	20066	00	-	05	08	2.500	0.638	1.008	0.255	0.191	0.313																			
	H2		-	-	-	-	12038	00	-	05	08																									
	H3		-	-	-	-	12140	-	01	-	-																									
	H4		-	-	-	-	12088	00	01	-	08																									
	H5		-	-	-	-	12138	00	01	05	08																									
12 - 24 UNC	H1	2	-	-	-	-	20060	00	-	-	08							2.500	0.724	1.154	0.318	0.238	0.375													
	H3		-	-	-	-	12188	00	01	-	08																									
12 - 28 UNF	H1	2	-	-	-	-	12042	00	-	-	-													2.719	0.724	1.154	0.318	0.238	0.375							
	H3		-	-	-	-	12142	00	01	05	08																									
1/4 - 20 UNC	H1	3	-	-	-	-	12144	00	01	05	08																			2.719	0.724	1.154	0.318	0.238	0.375	
	H2		-	-	-	-	12200	00	01	05	08																									
	H3		-	-	-	-	12250	00	01	05	08																									
	1/4 - 28 UNF	H1	2	-	-	-	-	12300	00	01	05	08	2.719	0.724	1.154	0.318	0.238																			0.375
		H2		-	-	-	-	12302	00	01	05	08																								
5/16 - 18 UNC	H1	3	-	-	-	-	12400	00	01	05	08	2.719																								
	H2		-	-	-	-	12402	00	-	-	08																									
	H3		-	-	-	-	12204	00	-	-	08																									
	5/16 - 24 UNF	H1	2	-	-	-	-	12254	00	-	05							08	2.719	0.724	1.154	0.318	0.238	0.375												
		H2		-	-	-	-	12256	00	-	05							08																		
5/16 - 18 UNC	H3	3	-	-	-	-	12304	00	01	05	08							2.719							0.724	1.154	0.318	0.238	0.375							
	H4		-	-	-	-	12354	00	-	-	08																									
	H5		-	-	-	-	12356	00	-	-	08																									
	5/16 - 24 UNF	H1	2	-	-	-	-	12208	00	-	05		08	2.719	0.724	1.154	0.318													0.238	0.375					
		H2		-	-	-	-	12258	00	-	05		08																							
5/16 - 18 UNC	H3	3	-	-	-	-	12308	00	01	05	08	2.719	0.724																			1.154	0.318	0.238	0.375	
	H4		-	-	-	-	12310	00	01	05	08																									
	H5		-	-	-	-	12408	00	-	05	08																									
	5/16 - 24 UNF	H1	2	-	-	-	-	12410	00	01	05								08	2.719	0.724	1.154	0.318	0.238												0.375
		H2		-	-	-	-	12212	00	-	-								08																	
5/16 - 18 UNC	H3	3	-	-	-	-	12262	00	-	05	08							2.719	0.724						1.154	0.318	0.238	0.375								
	H4		-	-	-	-	12264	00	-	05	08																									
	H5		-	-	-	-	12264	00	-	05	08																									
	5/16 - 24 UNF	H1	2	-	-	-	-	12312	00	01	05			08	2.719	0.724	1.154												0.318	0.238	0.375					
		H2		-	-	-	-	12362	00	-	-			08																						
5/16 - 18 UNC	H3	3	-	-	-	-	12362	00	-	-	08	2.719	0.724	1.154																		0.318	0.238	0.375		
	H4		-	-	-	-	12364	00	-	-	08																									
	H5		-	-	-	-	12364	00	-	-	08																									
	5/16 - 24 UNF	H1	2	-	-	-	-	12364	00	-	-									08	2.719	0.724	1.154	0.318											0.238	0.375
		H2		-	-	-	-	12364	00	-	-									08																

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 105 (Continued)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----

No. 0 ~ No. 6 (4.5P-5.5P), >No. 8 (3.5P-4.5P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)					Plug (3.5P - 4.5P)					Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk											
			EDP Number	Coating Suffix				EDP Number	Coating Suffix																				
				Bright	S/O	TiN	TiCN		Bright	S/O	TiN	TiCN																	
3/8 - 16 UNC	H1	3	-	-	-	-	12216	00	-	-	08	2.938	0.787	1.276	0.381	0.286	0.438												
	H2		-	-	-	-	12266	00	01	05	08																		
	H3		-	-	-	-	12316	00	01	05	08																		
	H5		-	-	-	-	12416	00	01	05	08																		
3/8 - 24 UNF	H1		-	-	-	-	12218	00	-	-	08																		
	H2		-	-	-	-	12268	00	-	05	08																		
	H3		-	-	-	-	12318	00	01	05	08																		
	H4		-	-	-	-	12368	00	-	05	08																		
7/16 - 14 UNC	H2		-	-	-	-	12270	00	-	-	08							3.156	0.882	1.315	0.323	0.242	0.406						
	H3		-	-	-	-	12320	00	01	05	08																		
	H5		-	-	-	-	12420	00	-	05	08																		
7/16 - 20 UNF	H2		-	-	-	-	12272	00	-	-	08																		
	H3		-	-	-	-	12322	00	01	05	08																		
	H5		-	-	-	-	12422	00	-	05	08																		
1/2 - 13 UNC	H1		-	-	-	-	12224	00	-	-	08													3.375	0.941	1.374	0.367	0.275	0.438
	H2		-	-	-	-	12274	00	-	05	08																		
	H3		-	-	-	-	12324	00	01	05	08																		
	H5		-	-	-	-	12424	00	-	05	08																		
1/2 - 20 UNF	H1		-	-	-	-	12226	00	-	-	08																		
	H2		-	-	-	-	12276	00	-	-	08																		
	H3	-	-	-	-	12326	00	01	05	08																			
	H5	-	-	-	-	12426	00	-	-	08																			
5/8 - 11 UNC	H3	-	-	-	-	12332	00	01	05	08	3.813	1.091	1.563	0.480	0.360	0.563													
	H5	-	-	-	-	12432	00	-	05	08																			
5/8 - 18 UNF	H3	-	-	-	-	12334	00	01	05	08																			
	H5	-	-	-	-	20130	00	-	05	08																			
3/4 - 10 UNC	H3	-	-	-	-	12336	00	01	05	08							4.250	1.220	1.713	0.590	0.442	0.688							
	H5	-	-	-	-	12436	00	-	05	08																			
3/4 - 16 UNF	H3	-	-	-	-	12338	00	01	-	08																			
	H5	-	-	-	-	20134	00	-	05	08																			

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
105	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






GENERAL PURPOSE

List 105B

HSS	S/O	BR
-----	-----	----

Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P-2P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix							
				Bright	S/O						
0 - 80 UNF	H1	2	12001	00	-	1.625	0.311	-	0.141	0.110	0.188
1 - 64 UNC	H2		30001	00	-						
			12053	00	-						
1 - 72 UNC	H1		12005	00	-	1.680	0.370	-			
	H2		12055	00	-						
2 - 56 UNC	H1		12007	00	-	1.750	0.441	-			
			12057	00	01						
3 - 48 UNC	H2		12061	00	01	1.813	0.496	-			
3 - 56 UNF			12063	00	-						
4 - 40 UNC			12065	00	01	1.875	0.319	0.559			
4 - 48 UNF			12067	00	-						
5 - 40 UNC			12071	00	01	1.938	0.323	0.618			
5 - 44 UNF			12073	00	-						
6 - 32 UNC			H3	12075	00	-	2.000	0.390	0.685		
			H7	12125	00	01					
6 - 40 UNF				30031	00	-					
			H2	12077	00	01				0.168	0.131
8 - 32 UNC	H3		12079	00	-						
	H7		12129	00	01	2.125	0.390	0.756			
8 - 36 UNF			12147	00	-						
	H2		12083	00	-						
10 - 24 UNC	H3		12085	00	-	2.375	0.504	0.874	0.194		
			12135	00	01						
10 - 32 UNF	H1		12009	00	-						
	H2		12089	00	-				0.220	0.165	0.281
12 - 24 UNC	H3		12139	00	01						
12 - 28 UNF			12143	00	01						
			12145	00	01						
1/4 - 20 UNC	H2	12301	00	01	2.500	0.638	1.008	0.255	0.191	0.313	
1/4 - 28 UNF		12255	00	-							
		12305	00	01							
5/16 - 18 UNC	H3	12309	00	01	2.719	0.724	1.154	0.318	0.238	0.375	
5/16 - 24 UNF		12313	00	01							
	H4	12365	00	-							
3/8 - 16 UNC	H3	12317	00	01	2.938	0.787	1.276	0.381	0.286	0.438	
7/16 - 14 UNC		12321	00	-	3.156	0.882	1.315	0.323	0.242	0.406	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
105B	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 105A

HSS	S/O	BR
-----	-----	----

Assembly Type Tap, Plug (4P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4P - 4.5P)			Overall Length L	Thread Length		Shank Dia. d	Square Width k	Square Length lk				
			EDP Number	Coating Suffix			Lc	Ln							
				Bright	S/O										
4 - 40 UNC	H2	2	16054	00	01	1.875	0.319	0.559	0.141	0.110	0.188				
5 - 40 UNC			16060	00	-	1.938	0.323	0.618							
6 - 32 UNC			16114	00	01	2.000	0.390	0.685							
8 - 32 UNC	H3		2	16118	00	01	2.125	0.390	0.756	0.168	0.131	0.250			
10 - 24 UNC				16122	00	01	2.375		0.500				0.874		
10 - 32 UNF				16124	00	01									
12 - 24 UNC				16126	00	01		0.508		0.937	0.220			0.165	0.281
1/4 - 20 UNC				3	3	16300	00	01	2.500	0.638	1.008		0.255	0.191	0.313
5/16 - 18 UNC						16304	00	-	2.719	0.724	1.154		0.318	0.238	0.375
3/8 - 16 UNC	16308	00	-			2.938	0.787	1.276	0.381	0.286	0.438				
1/2 - 13 UNC	16316	00	-			3.375	0.941	1.374	0.367	0.275					

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
105A	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





GENERAL PURPOSE

List 105+ (H7)

HSS

TiN

BR

No. 4 ~ No. 6 (4.5P-5.5P), >No. 8 (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)			Plug (3.5P - 4.5P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
4 - 40 UNC	H7	2	20031	00	-	-	-	-	1.875	0.319	0.559	0.141	0.110	0.188
6 - 32 UNC			17208	00	05	-	-	-	2.000	0.390	0.685			
8 - 32 UNC			-	-	-	17212	00	05	2.125		0.756	0.168	0.131	
10 - 24 UNC			-	-	-	17216	00	-	2.375		0.504	0.874	0.194	
10 - 32 UNF			-	-	-	17218	00	05						

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
105+	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





List 105H

+0.005" Oversize, Plug (4P-4.5P)

HSS	TiCN	S/O	BR
-----	------	-----	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4P - 4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix								
				Bright	S/O	TiCN	L	Lc	Ln	d	k	lk
6 - 32 UNC	+0.005	2	15920	00	01	08	2.000	0.390	0.685	0.141	0.110	0.188
8 - 32 UNC			15928	00	01	08	2.125		0.756	0.168	0.131	0.250
10 - 24 UNC			15934	00	01	08	2.375	0.504	0.874	0.194	0.152	
10 - 32 UNF			15936	00	01	08						
1/4 - 20 UNC			15900	00	01	08	2.500	0.638	1.008	0.255	0.191	0.313
1/4 - 28 UNF			15902	00	01	08						
5/16 - 18 UNC		15908	00	01	08	2.719	0.724	1.154	0.318	0.238	0.375	
5/16 - 24 UNF		15912	00	-	08							
3/8 - 16 UNC		15916	00	01	08	2.938	0.787	1.276	0.381	0.286	0.438	
3/8 - 24 UNF		15918	00	01	08							
7/16 - 14 UNC		15940	00	01	08	3.156	0.882	1.315	0.323	0.242	0.406	
7/16 - 20 UNF		15942	00	01	08							
1/2 - 13 UNC		15924	00	01	08	3.375	0.941	1.374	0.367	0.275	0.438	
1/2 - 20 UNF		15926	00	01	08							
5/8 - 11 UNC		15932	00	01	08	3.813	1.091	1.563	0.480	0.360	0.563	
3/4 - 10 UNF		15938	00	01	08	4.250	1.220	1.713	0.590	0.442	0.688	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
105H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





GENERAL PURPOSE

List 142H

HSS

BR

+0.005" Oversize, Plug (3.5P-4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5 - 4.5P)						
			Bright						
			L	Lc	Ln	d	k	lk	
M4 x 0.7	+0.005"	2	1101200100	54.00	10.20	19.30	4.27	3.33	6.40
M5 x 0.8			1101200300	60.30	13.20	22.40	4.93	3.86	
M6 x 1.0			1101200500	63.50	16.50	25.70	6.48	4.85	
M8 x 1.25		3	1101200700	69.10	18.00	28.70	8.08	6.05	9.50
M10 x 1.5			1101200900	74.60	20.40	32.60	9.68	7.26	
M12 x 1.75			1101201100	85.70	24.40	34.80	9.32	6.98	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
142H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45					25-75	40-80	40-65							

good best





List 142

Plug (3.5P-4.5P)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)					Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk					
			EDP Number	Coating Suffix														
				Bright	S/O	TiN	TiCN											
M1.6 x 0.35	D3	2	19815	00	-	-	-	41.30	7.90	-	3.58	2.79	4.80					
M2 x 0.4			19820	00	01	-	-	44.50	11.10									
M2.5 x 0.45			19821	00	01	-	-	46.00	12.80									
M3 x 0.5			19801	00	01	05	08	49.20	8.30					15.80				
M3.5 x 0.6	D4		19822	00	01	-	-	50.80	17.50	4.27	3.33	6.40						
M4 x 0.7			19804	00	01	05	08	54.00	10.00				19.30					
M4.5 x 0.75			19823	00	01	-	-	60.30	12.80				22.20					
M5 x 0.8			19807	00	01	05	-	63.50	13.00				22.40					
M6 x 1.0	D5	3	19810	00	01	05	08	63.50	16.30	25.70	6.48	4.85	7.90					
M7 x 1.0			19824	00	01	-	-	69.10	17.90	28.70	8.08	6.05	9.50					
M8 x 1.25			19813	00	01	05	08	74.60	18.00	32.20				9.68	7.26	11.10		
M8 x 1.0			19814	00	01	-	-	85.70	23.90	34.90							9.32	6.98
M10 x 1.5	D6		19825	00	01	-	-	91.30	25.40	37.40								
M10 x 1.25	D5		19816	00	01	05	08	96.80	27.70	39.70	12.19	9.14	14.30					
M10 x 1.0			19826	00	01	-	-	102.40	40.70	45.00	13.77	10.31	15.90					
M12 x 1.75	D6		19819	00	01	05	08	102.40	40.70	45.00	13.77	10.31	15.90					
M12 x 1.5		19829	00	-	-	-	113.50	31.00	45.00	16.56	12.42	17.50						
M12 x 1.25	D5	19828	00	01	-	-												
M14 x 2.0	D7	19831	00	01	-	-												
M14 x 1.5	D6	19838	00	-	-	-												
M14 x 1.25	D5	19830	00	01	-	-												
M16 x 2.0	D7	19833	00	-	-	-												
M16 x 1.5	D6	19832	00	01	-	-												
M18 x 2.5	D7	19835	00	-	-	-												
M18 x 1.5	D6	19834	00	01	-	-												
M20 x 2.5	D7	19837	00	-	-	-												
M20 x 1.5	D6	19839	00	-	-	-												
		19836	00	-	-	-												

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
142	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best





GENERAL PURPOSE

List 122

EX-POT, JIS, Plug (4.5P-5.5P)

HSSE	S/O	BR
------	-----	----



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (4.5P - 5.5P)							
			Bright	S/O	L	Lc	Ln	d	k	lk
M3 x 0.5	JIS 2	3	15368	16710	46.00	11.00	19.00	4.00	6.00	3.20
M4 x 0.7			15386	16714	52.00	13.00	21.00	5.00	4.00	
M5 x 0.8			15401	-	60.00	15.90	23.90	5.50	7.00	4.50
M6 x 1.0			15413	16722	62.00	19.00	29.00	6.00	5.00	
M8 x 1.25			15431	16728	70.00	22.00	37.00	6.20	8.00	5.50
M10 x 1.5			15456	16734	75.00	24.00	41.00	7.00	8.00	5.50
M10 x 1.25			15460	-						
M12 x 1.75			15480	-	82.00	29.00	48.00	8.50	9.00	6.50
M12 x 1.5			15483	-						
M14 x 2.0			15509	-	88.00	30.00	10.50	11.00	8.00	
M14 x 1.5			15512	-						
M16 x 2.0			15557	-	95.00	32.00	52.00	12.50	13.00	10.00
M16 x 1.5			15560	-						
M18 x 2.5			15593	-	100.00	37.00	55.00	14.00	14.00	11.00
M18 x 1.5			15601	-						
M20 x 2.5			15629	-	105.00	58.00	15.00	15.00	12.00	
M20 x 1.5			15637	-						
M22 x 2.5			15645	-	115.00	38.00	63.00	17.00	16.00	13.00
M24 x 3.0			15673	-	120.00	45.00	66.00	19.00	18.00	15.00

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
122	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 917

Long Shank*, Plug (3.5P-4.5P)

HSS	<input checked="" type="checkbox"/> S/O	<input type="checkbox"/> BR
-----	---	-----------------------------



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)			Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				Bright	S/O		L	Lc	Ln	d	k
4 - 40 UNC	H2	2	12940	00	-	4.000	0.319	0.559	0.141	0.110	0.188
6 - 32 UNC			12941	00	-						
8 - 32 UNC			12942	00	01	6.000	0.390	0.685	0.168	0.131	
			12943	00	01	4.000					
10 - 24 UNC			12944	00	01	6.000	0.516	0.886	0.194	0.152	
			12945	00	01	4.000					
10 - 32 UNF			12946	00	01	6.000	0.638	1.008	0.255	0.191	0.313
			12947	00	01	4.000					
1/4 - 20 UNC			12948	00	01	6.000	0.724	1.154	0.318	0.238	0.375
			12949	00	01	4.000					
1/4 - 28 UNF			12950	00	01	6.000	0.787	1.276	0.381	0.286	0.438
			12939	-	01	4.000					
5/16 - 18 UNC			12951	00	01	6.000	0.882	1.315	0.323	0.242	0.406
			21030	00	-	4.000					
5/16 - 24 UNF	12952	00	-	6.000	0.941	1.374	0.367	0.275	0.438		
	12935	-	01	4.000							
3/8 - 16 UNC	12937	-	01	6.000	1.091	1.563	0.480	0.360	0.563		
	12957	-	01	4.000							
3/8 - 24 UNF	21036	00	-	6.000	6.000	6.000	6.000	6.000	6.000		
	12933	-	01	6.000							
7/16 - 14 UNC	21038	00	01	4.000	6.000	6.000	6.000	6.000	6.000		
	12953	00	01	6.000							
7/16 - 20 UNF	12958	-	01	4.000	6.000	6.000	6.000	6.000	6.000		
	21044	00	01	6.000							
1/2 - 13 UNC	12954	00	01	6.000	6.000	6.000	6.000	6.000	6.000		
	12952	00	-	6.000							
1/2 - 20 UNF	12994	-	01	4.000	6.000	6.000	6.000	6.000	6.000		
	12955	00	01	6.000							
5/8 - 11 UNC	21060	00	-	6.000	6.000	6.000	6.000	6.000	6.000		
	12956	00	-	6.000							

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
917	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





GENERAL PURPOSE LS

List 11118

HSS

S/O

Extended Length, Plug (3.5P-4.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			Plug (3.5P - 4.5P)	S/O								
			L	Lk								
M4 x 0.7	D4	2	1111800201	101.60	10.00	19.30	4.27	3.33	6.40			
M5 x 0.8			1111800301	152.40								
M6 x 1.0			1111800401	101.60								
M8 x 1.25	D5		1111800501	152.40	13.00	22.40	4.93	3.86				
			1111800601	101.60								
M10 x 1.5	D6		3	1111800701	152.40	16.30	26.00	6.48		4.85		
M12 x 1.75		1111800801		101.60	18.00				29.80		8.08	6.05
		1111800901		152.40								
M12 x 1.75		1111801001	101.60	20.10	32.50				9.68		7.26	
	1111801101	152.40										
	1111801201	101.60	23.90			34.90	9.32	6.98				
	1111801301	152.40										

Packed: 1 pc.
Available Steam Oxide coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
11118	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45					25-75	40-80	40-65							

good best





List S111

HSS

BR

Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)						
			Bright						
			L	Lc	Ln	d	k	lk	
00 - 90 UNS	H1	2	1050000	1.625	0.256	-	0.141	0.110	0.188
	H2		1320000						
00 - 96 UNS	H1		1080000						
	H2		2056000						

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Suggested Hole Size Limits for Different Lengths of Engagement

Tap Size	Basic O.D.	Basic P.D.	Depth of Thread Hole					
			Up to 1/3D		1/3 to 1/2D		1/2 to 3D	
			Min.	Max.	Min.	Max.	Min.	Max.
00-90	0.047	0.0398	0.0373	0.0385	0.0380	0.0392	0.0388	0.0400
00-96	0.047	0.0402	0.0379	0.0393	0.0388	0.0406	0.0397	0.0415

Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H					
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010 1018	1035 1045	1065																
S111	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45					25-75	40-80	40-65									

good best





List 5BF-SO, 5BS-SO

RED BAND, Ideal for Alloy Steel

NEW	RED BAND DRILLS P316-318	HSSE V3	TYPE H	TiAIN
-----	--------------------------------	---------	--------	-------



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			TiAIN					
			L	Lc	d	k	lk	
4 - 40 UNC	H3	3	5BF0280-SO	1.890	0.433	0.141	0.110	0.197
	H5		5BF0290-SO					
4 - 48 UNF	H3		5BS0280-SO					
	H5		5BS0290-SO					
5 - 40 UNC	H3		5BF0320-SO					
	H5		5BF0330-SO					
5 - 44 UNF	H3		5BS0320-SO					
	H5		5BS0330-SO					
6 - 32 UNC	H3		5BF0350-SO	1.969	0.512	0.168	0.131	0.256
	H5		5BF0360-SO					
6 - 40 UNF	H3		5BS0350-SO					
	H5		5BS0360-SO					
8 - 32 UNC	H3		5BF0420-SO	2.087	0.630	0.194	0.152	0.276
	H5		5BF0430-SO					
8 - 36 UNF	H3		5BS0420-SO					
	H5		5BS0430-SO					
10 - 24 UNC	H3		5BF0480-SO	2.303	0.630	0.220	0.165	0.276
	H5		5BF0490-SO					
10 - 32 UNF	H3		5BS0480-SO					
	H5		5BS0490-SO					
12 - 24 UNC	H3		5BF0550-SO	2.402	0.748	0.255	0.191	0.315
	H5		5BF0560-SO					
12 - 28 UNF	H3		5BS0550-SO					
	H5		5BS0560-SO					
1/4 - 20 UNC	H3		5BF0640-SO	2.559	0.866	0.318	0.238	0.374
	H5		5BF0650-SO					
1/4 - 28 UNF	H3		5BS0640-SO					
	H5		5BS0650-SO					
5/16 - 18 UNC	H3	5BF0790-SO	2.756	0.945	0.381	0.286	0.433	
	H5	5BF0800-SO						
5/16 - 24 UNF	H3	5BS0790-SO						
	H5	5BS0800-SO						
3/8 - 16 UNC	H3	5BF0950-SO	3.031	0.984	0.323	0.242	0.413	
	H5	5BF0960-SO						
3/8 - 24 UNF	H3	5BS0950-SO						
	H5	5BS0960-SO						
7/16 - 14 UNC	H3	5BF1110-SO	3.228	1.142	0.367	0.275	0.433	
	H5	5BF1120-SO						
7/16 - 20 UNF	H3	5BS1110-SO						
	H5	5BS1120-SO						
1/2 - 13 UNC	H3	5BF1270-SO	3.425	1.181	0.429	0.322	0.492	
	H5	5BF1280-SO						
1/2 - 20 UNF	H3	5BS1270-SO						
	H5	5BS1280-SO						
9/16 - 12 UNC	H3	5BF1430-SO	3.661	1.181	0.429	0.322	0.492	
	H5	5BF1440-SO						
9/16 - 18 UNF	H3	5BS1430-SO						
	H5	5BS1440-SO						

Packed: 1 pc.
Available TiAIN coating only.



List 5BF-SO, 5BS-SO (Continued)

RED BAND, Ideal for Alloy Steel

NEW	RED BAND DRILLS P316-318	HSSE V3	TYPE H	TiAlN
-----	--------------------------------	---------	--------	-------

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			TiAlN					
			L	Lc	d	k	lk	
5/8 - 11 UNC	H3	4	5BF1590-SO	3.878	1.260	0.480	0.360	0.571
	H5		5BF1600-SO					
5/8 - 18 UNF	H3		5BS1590-SO					
	H5		5BS1600-SO					
3/4 - 10 UNC	H3		5BF1910-SO	4.252	1.457	0.590	0.442	0.689
	H5		5BF1920-SO					
3/4 - 16 UNF	H3		5BS1910-SO					
	H5		5BS1920-SO					
7/8 - 9 UNC	H3		5BF2220-SO	4.685	1.339	0.697	0.523	0.748
	H5		5BF2230-SO					
7/8 - 14 UNF	H3		5BS2220-SO					
	H5		5BS2230-SO					
1 - 8 UNC	H3		5BF2540-SO	5.118	1.772	0.800	0.600	0.807
	H5		5BF2550-SO					
1 - 12 UNF	H3		5BS2540-SO					
	H5		5BS2550-SO					
1,1/8 - 7 UNC	H3		5BF2860-SO	5.433	1.890	0.896	0.672	0.866
	H5		5BF2870-SO					
1,1/8 - 12 UNF	H3		5BS2860-SO					
	H5		5BS2870-SO					
1,1/4 - 7 UNC	H3	5BF3180-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BF3190-SO						
1,1/4 - 12 UNF	H3	5BS3180-SO						
	H5	5BS3190-SO						

Packed: 1 pc.
Available TiAlN coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5BF-SO, 5BS-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
SFM	59-89	59-89	59-89	59-79	59-79				59-88	78-118		16-36	20-40	30-50	30-50		

good best





List 5EF-SO, 5ES-SO

RED BAND, Ideal for Alloy Steel

NEW	RED BAND DRILLS P316-318	HSSE V3	TYPE H	TiAIN
-----	--------------------------------	---------	--------	-------



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length		
			Plug (4P-5P)							
			TiAIN						L	Lc
M3 x 0.5	D4	3	5EF0300-SO	48.00	11.00	3.58	2.79	5.00		
M3.5 x 0.6			5EF0350-SO	50.00	13.00					
M4 x 0.7			5EF0400-SO	53.00						
M4.5 X 0.75			5EF0450-SO	58.50	16.00	4.93	3.86	6.50		
M5 x 0.8			5EF0500-SO							
M6 x 1.0			5EF0600-SO	65.00	19.00	6.48	4.85	8.00		
M6 x 0.75			5ES0600-SO							
M7 x 1.0			5EF0700-SO	69.00	22.00	8.08	6.05	9.50		
M8 x 1.25			5EF0800-SO							
M8 x 1.0			5ES0800-SO							
M10 x 1.5			D6	5	5EF1000-SO	77.00	24.00	9.68	7.26	11.00
M10 x 1.25					5ES1010-SO					
M10 x 1	D4	5	5ES1000-SO	87.00	29.00	9.32	6.99	11.00		
M12 x 1.75			5EF1200-SO							
M12 x 1.5			5ES1200-SO							
M12 x 1.25	D6	5	5ES1210-SO	93.00	30.00	10.90	8.18	13.00		
M14 x 2.0	D4		5EF1400-SO							
M14 x 1.5	D6	5	5EF1410-SO	98.50	32.00	12.19	9.14	14.00		
	D4		5ES1400-SO							
M16 x 2.0	D6	5	5ES1410-SO	108.00	37.00	13.76	10.31	15.88		
	D4		5EF1600-SO							
M16 x 1.5	D6	5	5EF1610-SO	114.00	34.00	16.56	12.42	17.50		
	D4		5ES1600-SO							
M18 x 2.5	D6	5	5EF1800-SO	119.00	17.70	13.28	19.05			
	D4		5ES1800-SO							
M18 x 1.5	D6	5	5EF1810-SO	125.00	45.00	19.30	14.48			
	D4		5ES1810-SO							
M20 x 2.5	D4	5	5EF2000-SO	114.00	34.00	16.56	12.42	17.50		
M20 x 1.5			5ES2000-SO							
M22 x 2.5			5EF2200-SO	119.00	17.70	13.28	19.05			
M22 x 1.5			5ES2200-SO							
M24 x 3.0	D6	5	5EF2400-SO	125.00	45.00	19.30	14.48			

Packed: 1 pc.
Available TiAIN coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5EF-SO, 5ES-SO	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
SFM	59-89	59-89	59-89	59-79	59-79				59-88	78-118		16-36	20-40	30-50	30-50		

good best



List 5BG-SO, 5BT-SO

BLUE BAND, Ideal for Stainless Steel

NEW	BLUE BAND DRILLS P319-321	HSSE V3	TYPE VA	TiAlN
------------	-------------------------------------	----------------	----------------	--------------



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length					
			Plug (4P-5P)										
			TiAlN						L	Lc	d	k	lk
4 - 40 UNC	H3	3	5BG0284-SO	1.890	0.433	0.141	0.110	0.197					
	H5		5BG0294-SO										
4 - 48 UNF	H3		5BT0284-SO										
	H5		5BT0294-SO										
5 - 40 UNC	H3		5BG0324-SO						1.969	0.512	0.168	0.131	0.256
	H5		5BG0334-SO										
5 - 44 UNF	H3		5BT0324-SO										
	H5		5BT0334-SO										
6 - 32 UNC	H3		5BG0354-SO	2.087	0.630	0.194	0.152	0.276					
	H5		5BG0364-SO										
6 - 40 UNF	H3		5BT0354-SO										
	H5		5BT0364-SO										
8 - 32 UNC	H3		5BG0424-SO						2.303	0.748	0.220	0.165	0.315
	H5		5BG0434-SO										
8 - 36 UNF	H3		5BT0424-SO										
	H5		5BT0434-SO										
10 - 24 UNC	H3		5BG0484-SO	2.402	0.866	0.255	0.191	0.374					
	H5		5BG0494-SO										
10 - 32 UNF	H3		5BT0484-SO										
	H5		5BT0494-SO										
12 - 24 UNC	H3		5BG0554-SO						2.559	0.945	0.286	0.286	0.433
	H5		5BG0564-SO										
12 - 28 UNF	H3		5BT0554-SO										
	H5		5BT0564-SO										
1/4 - 20 UNC	H3	5BG0644-SO	2.756	0.866	0.318	0.238	0.374						
	H5	5BG0654-SO											
1/4 - 28 UNF	H3	5BT0644-SO											
	H5	5BT0654-SO											
5/16 - 18 UNC	H3	5BG0794-SO						3.031	0.945	0.381	0.286	0.433	
	H5	5BG0804-SO											
5/16 - 24 UNF	H3	5BT0794-SO											
	H5	5BT0804-SO											
3/8 - 16 UNC	H3	5BG0954-SO	3.031	0.945	0.381	0.286	0.433						
	H5	5BG0964-SO											
3/8 - 24 UNF	H3	5BT0954-SO											
	H5	5BT0964-SO											

Packed: 1 pc.
Available TiAlN coating only.

[continued on next page](#) 

Work Material																	
List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum			Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BG-SO, 5BT-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>				
SFM						29-49	26-49	25-45					20-60				

good best






List 5BG-SO, 5BT-SO (Continued)

NEW	BLUE BAND DRILLS P319-321	HSSE V3	TYPE VA	TiAIN
-----	---------------------------------	---------	---------	-------

BLUE BAND, Ideal for Stainless Steel



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			TiAIN					
			L	Lc	d	k	lk	
7/16 - 14 UNC	H3	3	5BG1114-SO	3.228	0.984	0.323	0.242	0.413
	H5		5BG1124-SO					
	H3		5BT1114-SO					
7/16 - 20 UNF	H3		5BT1124-SO	3.425	1.142	0.367	0.275	0.433
	H5		5BG1274-SO					
1/2 - 13 UNC	H3		5BG1284-SO	3.661	1.181	0.429	0.322	0.492
	H5		5BT1274-SO					
1/2 - 20 UNF	H3		5BT1284-SO	3.878	1.260	0.480	0.360	0.571
	H5		5BG1434-SO					
9/16 - 12 UNC	H3		5BG1444-SO	4.252	1.457	0.590	0.442	0.689
	H5		5BT1434-SO					
9/16 - 18 UNF	H3		5BT1444-SO	4.685	1.339	0.697	0.523	0.748
	H5	5BG1594-SO						
5/8 - 11 UNC	H3	5BG1604-SO	5.118	1.772	0.800	0.600	0.807	
	H5	5BT1594-SO						
5/8 - 18 UNF	H3	5BT1604-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BG1914-SO						
3/4 - 10 UNC	H3	5BG1924-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BT1914-SO						
3/4 - 16 UNF	H3	5BT1924-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BG2224-SO						
7/8 - 9 UNC	H3	5BG2234-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BT2224-SO						
7/8 - 14 UNF	H3	5BT2234-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BG2544-SO						
1 - 8 UNC	H3	5BG2554-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BT2544-SO						
1 - 12 UNF	H3	5BT2554-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BG2864-SO						
1,1/8 - 7 UNC	H3	5BG2874-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BT2864-SO						
1,1/8 - 12 UNF	H3	5BT2874-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BG3184-SO						
1,1/4 - 7 UNC	H3	5BG3194-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BT3184-SO						
1,1/4 - 12 UNF	H3	5BT3194-SO	5.748	2.008	1.021	0.766	1.004	

Packed: 1 pc.
Available TiAIN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5BG-SO, 5BT-SO						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
SFM						29-49	26-49	25-45				20-60					


good best



List 5EG-SO, 5ET-SO

BLUE BAND, Ideal for Stainless Steel

NEW	BLUE BAND DRILLS P319-321	HSSE V3	TYPE VA	TiAIN
-----	------------------------------	---------	---------	-------



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			TiAIN					
			L	Lc	d	k	lk	
M3 x 0.5	D4	3	5EG0304-SO	48.00	11.00	3.58	2.79	5.00
M3.5 x 0.6	D6		5EG0354-SO	50.00	13.00			
M4 x 0.7	D4		5EG0404-SO	53.00		16.00	4.27	3.33
M4.5 x 0.75			5EG0454-SO					
M5 x 0.8			5EG0504-SO					
M6 x 1.0			5EG0604-SO					
M6 x 1.0	D6		5EG0614-SO	65.00	19.00	6.48	4.85	8.00
M6 x 0.75	D4		5ET0604-SO					
M7 x 1.0	D6		5EG0704-SO	69.00	22.00	8.08	6.05	9.50
M8 x 1.25	D4		5EG0804-SO					
M8 x 1.0	D6		5EG0814-SO	70.00	22.00	8.08	6.05	9.50
	D4		5ET0804-SO					
M10 x 1.5	D4		5EG1004-SO	77.00	24.00	9.68	7.26	11.00
	D6		5EG1014-SO					
M10 x 1.25	D4		5ET1014-SO	87.00	29.00	9.32	6.99	13.00
M10 x 1			5ET1004-SO					
M12 x 1.75	D6		5EG1204-SO	93.00	30.00	10.90	8.18	13.00
	D4		5EG1214-SO					
M12 x 1.5	D4		5ET1204-SO	98.50	32.00	12.19	9.14	14.00
M12 x 1.25			5EG1404-SO					
M14 x 2.0	D6		5EG1414-SO	108.00	37.00	13.76	10.31	15.88
	D4		5ET1404-SO					
M14 x 1.5	D6		5ET1414-SO	114.00	34.00	16.56	12.42	17.50
	D4		5EG1604-SO					
M16 x 2.0	D6	5EG1614-SO	119.00	45.00	19.30	14.48	19.05	
	D4	5ET1604-SO						
M16 x 1.5	D6	5ET1614-SO	125.00	45.00	19.30	14.48	19.05	
	D4	5EG1804-SO						
M18 x 2.5	D6	5EG1814-SO	108.00	37.00	13.76	10.31	15.88	
	D4	5ET1804-SO						
M18 x 1.5	D6	5ET1814-SO	114.00	34.00	16.56	12.42	17.50	
	D4	5EG2004-SO						
M20 x 2.5	D4	5ET2004-SO	119.00	45.00	19.30	14.48	19.05	
		5EG2204-SO						
M22 x 1.5	D4	5ET2204-SO	125.00	45.00	19.30	14.48	19.05	
M24 x 3.0		5EG2404-SO						

Packed: 1 pc.
Available TiAIN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	300		400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
5EG-SO, 5ET-SO						☑	☑	☐				☑					
SFM						29-49	26-49	25-45				20-60					

☐ good ☑ best






List 5BH-SO, 5BU-SO

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND DRILLS P322-325	HSSE V3	TYPE W	BR
-----	-----------------------------	---------	--------	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			Bright					
			L	Lc	d	k	lk	
4 - 40 UNC	H3	2	5BH0280-SO	1.890	0.433	0.141	0.110	0.197
	H5		5BH0290-SO					
4 - 48 UNF	H3		5BU0280-SO					
	H5		5BU0290-SO					
5 - 40 UNC	H3		5BH0320-SO					
	H5		5BH0330-SO					
5 - 44 UNF	H3		5BU0320-SO					
	H5		5BU0330-SO					
6 - 32 UNC	H3		5BH0350-SO	1.969	0.512	0.168	0.131	0.256
	H5		5BH0360-SO					
6 - 40 UNF	H3		5BU0350-SO					
	H5		5BU0360-SO					
8 - 32 UNC	H3		5BH0420-SO	2.087	0.630	0.194	0.152	0.276
	H5		5BH0430-SO					
8 - 36 UNF	H3		5BU0420-SO					
	H5		5BU0430-SO					
10 - 24 UNC	H3		5BH0480-SO	2.303	0.630	0.220	0.165	0.276
	H5		5BH0490-SO					
10 - 32 UNF	H3		5BU0480-SO					
	H5		5BU0490-SO					
12 - 24 UNC	H3		5BH0550-SO	2.402	0.748	0.255	0.191	0.315
	H5		5BH0560-SO					
12 - 28 UNF	H3		5BU0550-SO					
	H5		5BU0560-SO					
1/4 - 20 UNC	H3	5BH0640-SO	2.559	0.866	0.318	0.238	0.374	
	H5	5BH0650-SO						
1/4 - 28 UNF	H3	5BU0640-SO						
	H5	5BU0650-SO						
5/16 - 18 UNC	H3	5BH0790-SO	2.756	0.945	0.381	0.286	0.433	
	H5	5BH0800-SO						
5/16 - 24 UNF	H3	5BU0790-SO						
	H5	5BU0800-SO						
3/8 - 16 UNC	H3	5BH0950-SO	3.031	0.984	0.323	0.242	0.413	
	H5	5BH0960-SO						
3/8 - 24 UNF	H3	5BU0950-SO						
	H5	5BU0960-SO						
7/16 - 14 UNC	H3	5BH1110-SO	3.228	1.142	0.367	0.275	0.433	
	H5	5BH1120-SO						
7/16 - 20 UNF	H3	5BU1110-SO						
	H5	5BU1120-SO						
1/2 - 13 UNC	H3	5BH1270-SO	3.425	1.181	0.429	0.322	0.492	
	H5	5BH1280-SO						
1/2 - 20 UNF	H3	5BU1270-SO						
	H5	5BU1280-SO						
9/16 - 12 UNC	H3	5BH1430-SO	3.661	1.181	0.429	0.322	0.492	
	H5	5BH1440-SO						
9/16 - 18 UNF	H3	5BU1430-SO						
	H5	5BU1440-SO						

Packed: 1 pc.
 EDPs listed above are stock standard, other coatings available upon request.
 Specify treatment at the time of order.



List 5BH-SO, 5BU-SO (Continued)

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND DRILLS P322-325	HSSE V3	TYPE W	BR
-----	--------------------------------	---------	--------	----

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			Bright					
			L	Lc	d	k	lk	
5/8 - 11 UNC	H3	3	5BH1590-SO	3.878	1.260	0.480	0.360	0.571
	H5		5BH1600-SO					
5/8 - 18 UNF	H3		5BU1590-SO					
	H5		5BU1600-SO					
3/4 - 10 UNC	H3		5BH1910-SO	4.252	1.457	0.590	0.442	0.689
	H5		5BH1920-SO					
3/4 - 16 UNF	H3		5BU1910-SO					
	H5		5BU1920-SO					
7/8 - 9 UNC	H3		5BH2220-SO	4.685	1.339	0.697	0.523	0.748
	H5		5BH2230-SO					
7/8 - 14 UNF	H3		5BU2220-SO					
	H5		5BU2230-SO					
1 - 8 UNC	H3		5BH2540-SO	5.118	1.772	0.800	0.600	0.807
	H5		5BH2541-SO					
1 - 12 UNF	H3		5BU2540-SO					
	H5		5BU2550-SO					
1,1/8 - 7 UNC	H3		5BH2860-SO	5.433	1.890	0.896	0.672	0.866
	H5		5BH2870-SO					
1,1/8 - 12 UNF	H3		5BU2860-SO					
	H5		5BU2870-SO					
1,1/4 - 7 UNC	H3	5BH3180-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BH3190-SO						
1,1/4 - 12 UNF	H3	5BU3180-SO						
	H5	5BU3190-SO						

Packed: 1 pc.
EDPs listed above are stock standard, other coatings available upon request.
Specify treatment at the time of order.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5BH-SO, 5BU-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM	58-88	58-88	58-88							78-170	40-65						

good best






List 5EH-SO, 5EU-SO

YELLOW BAND, Ideal for Aluminum

NEW	YELLOW BAND DRILLS P322-325	HSSE V3	TYPE W	BR
-----	--------------------------------	---------	--------	----



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length				
			Plug (4P-5P)									
			Bright						L	Lc	d	k
M3 x 0.5	D4	2	5EH0300-SO	48.00	11.00	3.58	2.79	5.00				
M4 x 0.7			5EH0400-SO	53.00	13.00	4.27	3.33	6.50				
M5 x 0.8			5EH0500-SO	58.50	16.00	4.93	3.86					
M6 x 1.0	D6		2	5EH0600-SO	65.00	19.00	6.48	4.85	8.00			
M6 x 0.75	5EH0610-SO											
M7 x 1.0	5EU0600-SO											
M8 x 1.25	D4		3	5EH0700-SO	69.00	22.00	8.08	6.05	9.50			
M8 x 1.0				5EH0800-SO								
M8 x 1.0				5EH0810-SO								
M10 x 1.5	D4			3	5EU0800-SO	77.00	24.00	9.68	7.26	11.00		
M10 x 1	D4				5EH1000-SO							
M10 x 1	D4				5EU1000-SO							
M12 x 1.75	D4	3			5EH1010-SO	87.00	29.00	9.32	6.99	11.00		
M12 x 1.5					D4						5EH1200-SO	
M12 x 1.5					D4						5EU1200-SO	
M14 x 2.0	D6				3	5EH1210-SO	93.00	30.00	10.90	8.18	13.00	
M14 x 1.5						D6						5EH1400-SO
M16 x 2.0						D6						5EU1400-SO
M16 x 1.5	D4		3			5EH1600-SO	98.50	32.00	12.19	9.14	14.00	
M18 x 2.5						D4						5EU1600-SO
M18 x 1.5						D4						5EH1800-SO
M20 x 2.5	D4			3		5EU1800-SO	108.00	37.00	13.76	10.31	15.88	
M20 x 1.5						D4						5EH2000-SO
M22 x 2.5						D4						5EU2000-SO
M22 x 1.5	D4	3				5EH2200-SO	114.00	34.00	16.56	12.42	17.50	
M24 x 3.0						D4						5EU2200-SO
M24 x 3.0						D4						5EH2400-SO
M24 x 3.0	D4				3	5EU2400-SO	119.00	34.00	17.70	13.28	19.05	
M24 x 3.0						D4						5EH2400-SO
M24 x 3.0						D4						5EU2400-SO
M24 x 3.0	D4		3			5EH2400-SO	125.00	45.00	19.30	14.48	19.05	
M24 x 3.0						D4						5EH2400-SO
M24 x 3.0						D4						5EU2400-SO

Packed: 1 pc.
EDPs listed above are stock standard, other coatings available upon request.
Specify treatment at the time of order.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
5EH-SO, 5EU-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM	58-88	58-88	58-88							78-170	40-65						

good best



List 5BJ-SO, 5BV-SO

GREEN BAND, Ideal for Carbon Steel

NEW	GREEN BAND DRILLS P328-331	HSSE V3	TYPE UNI	TiN
-----	-------------------------------	---------	----------	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Shank Dia.	Square Width	Square Length					
			Plug (4P-5P)											
			TiN		L	Lc	d	k	lk					
4 - 40 UNC	H3	3	5BJ0280-SO		1.890	0.433	0.141	0.110	0.197					
	H5		5BJ0290-SO											
4 - 48 UNF	H3		5BV0280-SO											
	H5		5BV0290-SO											
5 - 40 UNC	H3		5BJ0320-SO							1.969	0.512	0.168	0.131	0.256
	H5		5BJ0330-SO											
5 - 44 UNF	H3		5BV0320-SO											
	H5		5BV0330-SO											
6 - 32 UNC	H3		5BJ0350-SO		2.087	0.630	0.194	0.152	0.276					
	H5		5BJ0360-SO											
6 - 40 UNF	H3		5BV0350-SO											
	H5		5BV0360-SO											
8 - 32 UNC	H3		5BJ0420-SO							2.303	0.748	0.220	0.165	0.315
	H5		5BJ0430-SO											
8 - 36 UNF	H3		5BV0420-SO											
	H5		5BV0430-SO											
10 - 24 UNC	H3		5BJ0480-SO		2.402	0.866	0.255	0.191	0.374					
	H5		5BJ0490-SO											
10 - 32 UNF	H3		5BV0480-SO											
	H5		5BV0490-SO											
12 - 24 UNC	H3		5BJ0550-SO							2.559	0.945	0.286	0.286	0.433
	H5		5BJ0560-SO											
12 - 28 UNF	H3		5BV0550-SO											
	H5		5BV0560-SO											
1/4 - 20 UNC	H3		5BJ0640-SO		2.756	0.866	0.318	0.238	0.374					
	H5		5BJ0650-SO											
1/4 - 28 UNF	H3		5BV0640-SO											
	H5		5BV0650-SO											
5/16 - 18 UNC	H3		5BJ0790-SO							3.031	0.945	0.381	0.286	0.433
	H5		5BJ0800-SO											
5/16 - 24 UNF	H3	5BV0790-SO												
	H5	5BV0800-SO												
3/8 - 16 UNC	H3	5BJ0950-SO		3.031	0.945	0.381	0.286	0.433						
	H5	5BJ0960-SO												
3/8 - 24 UNF	H3	5BV0950-SO												
	H5	5BV0960-SO												

Packed: 1 pc.
Available TiN coating only.

[continued on next page](#) 

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BJ-SO, 5BV-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 5BJ-SO, 5BV-SO

GREEN BAND, Ideal for Carbon Steel

NEW	GREEN BAND DRILLS P328-331	HSSE V3	TYPE UNI	TiN
-----	-------------------------------	---------	----------	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			TiN					
			L	Lc	d	k	lk	
7/16 - 14 UNC	H3	3	5BJ1110-SO	3.228	0.984	0.323	0.242	0.413
	H5		5BJ1120-SO					
	H3		5BV1110-SO					
7/16 - 20 UNF	H3		5BV1120-SO	3.425	1.142	0.367	0.275	0.433
	H5		5BJ1280-SO					
1/2 - 13 UNC	H3		5BV1270-SO	3.661	1.181	0.429	0.322	0.492
	H5		5BV1280-SO					
1/2 - 20 UNF	H3		5BJ1430-SO	3.878	1.260	0.480	0.360	0.571
	H5		5BJ1440-SO					
9/16 - 12 UNC	H3		5BV1430-SO	4.252	1.457	0.590	0.442	0.689
	H5		5BV1440-SO					
9/16 - 18 UNF	H3		5BJ1590-SO	4.685	1.339	0.697	0.523	0.748
	H5	5BJ1600-SO						
5/8 - 11 UNC	H3	5BV1590-SO	5.118	1.772	0.800	0.600	0.807	
	H5	5BV1600-SO						
5/8 - 18 UNF	H3	5BJ1910-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BJ1920-SO						
3/4 - 10 UNC	H3	5BV1910-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BV1920-SO						
3/4 - 16 UNF	H3	5BJ2220-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BJ2230-SO						
7/8 - 9 UNC	H3	5BV2220-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BV2230-SO						
7/8 - 14 UNF	H3	5BJ2540-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BJ2550-SO						
1 - 8 UNC	H3	5BV2540-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BV2550-SO						
1 - 12 UNF	H3	5BJ2860-SO	5.433	1.890	0.896	0.672	0.866	
	H5	5BJ2870-SO						
1,1/8 - 7 UNC	H3	5BV2860-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BV2870-SO						
1,1/8 - 12 UNF	H3	5BJ3180-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BJ3190-SO						
1,1/4 - 7 UNC	H3	5BV3180-SO	5.748	2.008	1.021	0.766	1.004	
	H5	5BV3190-SO						

Packed: 1 pc.
Available TiN coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5BJ-SO, 5BV-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 5EX-SO

GREEN BAND, Ideal for Carbon Steel

NEW	GREEN BAND DRILLS P328-331	HSSE V3	TYPE UNI	TiN
-----	-------------------------------	---------	----------	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Plug (4P-5P)					
			TiN	L	Lc	d	k	lk
M3 x 0.5	D4	3	5EX0300-SO	48.00	11.00	3.58	2.79	5.00
M4 x 0.7			5EX0400-SO	53.00	13.00	4.27	3.33	6.50
M5 x 0.8			5EX0500-SO	58.50	16.00	4.93	3.86	
M6 x 1.0			5EX0600-SO	65.00	19.00	6.48	4.85	8.00
M8 x 1.25			5EX0800-SO	70.00	22.00	8.08	6.05	9.50
M10 x 1.5	D6	3	5EX1000-SO	77.00	24.00	9.68	7.26	11.00
M12 x 1.75			5EX1200-SO	87.00	29.00	9.32	6.99	
M14 x 2.0			5EX1400-SO	93.00	30.00	10.90	8.18	13.00
M16 x 2.0			5EX1600-SO	98.50	32.00	12.18	9.14	14.00
M18 x 2.5			5EX1800-SO	108.00	37.00	13.76	10.31	15.88
M20 x 2.5		4	5EX2000-SO	114.00	34.00	16.56	12.42	17.50
M22 x 2.5			5EX2200-SO	119.00		17.70	13.28	19.05
M24 x 3.0			5EX2400-SO	125.00	45.00	19.30	14.48	

Packed: 1 pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
5EX-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	59-88	59-88	59-79			59-79			30-85	78-170	30-80	19-39					

good best





List 16615



A-CHT, Coolant-Through, DIN Overall Length, Bottom (1.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Bright						
			L	Lc	Ln	d	k	lk		
12 - 24 UNC	H3	3	1661500200	3.150	0.500	0.945	0.220	0.165	0.281	
12 - 28 UNF			1661500300							
1/4 - 20 UNC			1661500400							
1/4 - 28 UNF	H4	4	1661500500	3.543	0.665	1.378	0.318	0.238	0.375	
5/16 - 18 UNC	H5		1661500600							
5/16 - 24 UNF	H4		1661500700	3.937	0.752	0.381	0.286	0.438		
3/8 - 16 UNC	H5		1661500800							
3/8 - 24 UNF	H4		1661500900	3.937	0.858	0.323	0.242	0.406		
7/16 - 14 UNC	H5		1661501000							
7/16 - 20 UNF			1661501100	4.331	0.921	0.367	0.275	0.438		
1/2 - 13 UNC			1661501200							
1/2 - 20 UNF			1661501300							

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.
 Note: Reduce SFM 50% - 70% while using external coolant.



Work Material																			
List No.	P				Die Steels	M			K Cast Iron	N		S		H					
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16615																			
SFM									15-50		30-330								

good best





List 16610



A-CHT, Coolant-Through, DIN Overall Length, Bottom (1.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)						
			Bright	L	Lc	Ln	d	k	lk
M5 x 0.8	D4	3	1661000000	70.00	10.00	25.00	4.93	3.86	6.35
M6 x 1.0	D5		1661000100	80.00	12.00	31.00	6.48	4.85	7.92
M8 x 1.25			1661000200	90.00	15.00	35.00	8.08	6.05	9.52
M10 x 1.5	D6	4	1661000300	100.00	18.00	39.00	9.68	7.26	11.11
M10 x 1.25	D5		1661000400						
M12 x 1.75	D6		1661000500	110.00					
M12 x 1.5			100.00	1661000600	21.00	-	9.32	6.98	
M12 x 1.25				1661000700					

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

Note: Reduce SFM 50% - 70% while using external coolant.



Work Material																			
List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
16610									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>								
SFM									<input type="checkbox"/>		<input type="checkbox"/>								

good best






List 311



VX-OT, DIN Overall Length, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Recommended WH-70 Drill Size	
			Modified Bottom (2.5P-3P)								
			V								
4 - 40 UNC	2B	4	3110108	2.205	0.295	0.705	0.141	0.110	0.188	2.3mm	
6 - 32 UNC			3110208		0.370	0.783				2.8mm	
8 - 32 UNC			3110308	2.480	0.374	0.827	0.194	0.152	0.250	3.5mm	
10 - 24 UNC			3110408	2.756	0.492	0.976				4.0mm	
10 - 32 UNF			3110508		0.500	0.984	4.2mm				
1/4 - 20 UNC			3110608	3.150		0.594	1.177	0.255	0.191	0.313	5.3mm
1/4 - 28 UNF		3110708			0.606	1.189	5.6mm				
5/16 - 18 UNC		3110808	5	3.543	0.665	1.378	0.318	0.238	0.375	6.8mm	
5/16 - 24 UNF		3110908									
3/8 - 16 UNC		3111008		3.937	0.752		0.381	0.286	0.438	8.2mm	
3/8 - 24 UNF		3111108									
7/16 - 14 UNC		3111208				0.858		0.323	0.242	0.406	9.6mm
7/16 - 20 UNF		3111308									
1/2 - 13 UNC		3111408		4.331	0.921			0.367	0.275	0.438	11.1mm
1/2 - 20 UNF		3111508									

Packed: 1 pc.
Available V coating only.



Tapping Guidelines

1. Set tapping speed between 3 ~ 10 SFM.
2. Choose largest hole-size possible, within the recommended tolerance range.
3. Use a non-water soluble cutting fluid.
4. Use highly rigid machine and tool holders.
5. Tapping by hand is NOT recommended.
6. For tapping length over 1.5D, step feed is recommended.

Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
311	1010	1035	1065	4140															
SFM	1018	1045		4340						7075									

good best





List 341

CARBIDE V

VX-OT, JIS, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Recommended WH-70 Drill Size			
			Modified Bottom (2.5P - 3P)	V										
			L	Lc								Ln	d	k
M2.6 x 0.45	OH3	4	8330049	44.00	14.00	-	3.00	2.50	5.00	2.2mm				
M3 x 0.5			8330055	45.90	11.00	19.00	4.00	3.20	6.00	2.6mm				
M4 x 0.7			8330061	51.90	13.00	21.00	5.00	4.00	7.00	3.4mm				
M5 x 0.8			8330067	59.90	15.90	23.90	5.50	4.50	7.00	4.3mm				
M6 x 1.0		8330073	61.80	19.00	29.00	6.00	6.00	8.00	5.2mm					
M8 x 1.25		8330085	5	70.00	22.00	-	6.20	5.00	8.00	7.0mm				
M8 x 1.0		8330087								7.2mm				
M10 x 1.5		8330097								8.8mm				
M10 x 1.25		8330099								9.0mm				
M10 x 1.0		8330101		9.2mm										
M12 x 1.75		8330115		10.6mm										
M12 x 1.5		8330117		10.8mm										
M12 x 1.25		OH4	82.00	29.00	-	8.50	6.50	9.00	11.0mm					
M12 x 1.0		OH3							8330119	11.2mm				
				8330121										
M14 x 2.0		OH4	6	8330123	88.00	30.00	-	10.50	8.00	11.00	12.4mm			
M14 x 1.5		OH3									8330125	12.8mm		
M16 x 2.0	OH4	8330131		95.00	32.00	-	12.50	10.00	13.00	14.4mm				
M16 x 1.5	OH3									8330133	14.8mm			
M18 x 2.5	OH4									8330139	100.00	37.00	-	14.00
M18 x 1.5		8330141		16.8mm										
M20 x 2.5		8330147		105.00	-	15.00	12.00	15.00	18.0mm					
M20 x 1.5		8330149		18.8mm										

Packed: 1 pc.
Available V coating only.



Tapping Guidelines

- Set tapping speed between 3 ~ 10 SFM.
- Choose largest hole-size possible, within the recommended tolerance range.
- Use a non-water soluble cutting fluid.
- Use highly rigid machine and tool holders.
- Tapping by hand is NOT recommended.
- For tapping length over 1.5D, step feed is recommended.

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			4140 4340	300	400		17-4 PH	6061 7075			Casting	Inconel	6Al4V (30 HRC)	~35 HRC
341																	
SFM														3-10	3-10		

good best





List 329

CARBIDE DIA

DIA-OTT, UNJF, DIN Overall Length, Bottom (1.5P), Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P)	Modified Bottom (2.5P - 3P)						
			Diamond							
4 - 40 UNC	2B	3	-	3297016	2.205	0.295	0.705	0.141	0.110	0.188
	3B		3291216	-						
6 - 32 UNC	2B		-	3297116	2.480	0.370	0.783	0.168	0.131	0.250
	3B		3291316	-						
8 - 32 UNC	2B		-	3297216	2.756	0.500	0.984	0.194	0.152	0.250
	3B		3291416	-						
10 - 24 UNC	2B	-	3297316	3.150	0.606	1.189	0.255	0.191	0.313	
	3B	3291516	-							
10 - 32 UNF	2B	-	3297416	3.543	0.665	1.378	0.318	0.238	0.375	
	3B	3291616	-							
1/4 - 20 UNC	2B	-	3297516	3.937	0.752	1.378	0.381	0.286	0.438	
	3B	3291716	-							
1/4 - 28 UNF	2B	-	3297616	4.331	0.921	-	0.367	0.275	0.438	
	3B	3291816	-							
5/16 - 18 UNC	2B	-	3297716	4.331	0.921	-	0.367	0.275	0.438	
	3B	3298516	-							
5/16 - 24 UNF	2B	-	3297816	4.331	0.921	-	0.367	0.275	0.438	
	3B	3298616	-							
3/8 - 16 UNC	2B	-	3297916	4.331	0.921	-	0.367	0.275	0.438	
	3B	3298716	-							
3/8 - 24 UNF	2B	-	3298016	4.331	0.921	-	0.367	0.275	0.438	
	3B	3298816	-							
7/16 - 14 UNC	2B	-	3298116	4.331	0.921	-	0.367	0.275	0.438	
	3B	3298916	-							
7/16 - 20 UNF	2B	-	3298216	4.331	0.921	-	0.367	0.275	0.438	
	3B	3299016	-							
1/2 - 13 UNC	2B	-	3298316	4.331	0.921	-	0.367	0.275	0.438	
	3B	3299116	-							
1/2 - 20 UNF	2B	-	3298416	4.331	0.921	-	0.367	0.275	0.438	
	3B	3299216	-							

Packed: 1 pc.
Available Diamond coating only.
*3B fit taps conform to UNJ Aerospace internal threading applications.



Work Material																	
List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting						
329										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
SFM										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 359

CARBIDE DIA

DIA-OTT, JIS, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Class of Fit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			Diamond	L	Lc	Ln	d	k	lk
M3 x 0.5	6H	3	3590116	46.00	11.00	19.00	4.00	3.20	6.00
M4 x 0.7			3590216	52.00	13.00	21.00	5.00	4.00	7.00
M5 x 0.8		4	3590316	60.00	16.00	24.00	5.50	4.50	7.00
M6 x 1.0			3590416	62.00	19.00	29.00	6.00	4.50	7.00
M8 x 1.25			3590516	70.00	22.00	-	6.20	5.00	8.00
M10 x 1.5			5	3590616	75.00	24.00	-	7.00	5.50
M12 x 1.75		3590716		82.00	29.00	-	8.50	6.50	9.00

Packed: 1 pc.
Available Diamond coating only.



Work Material

List No.	P					M			K	N		S	Other				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel					
359	1010	1035	1065	4140						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
SFM	1018	1045		4340						<input type="checkbox"/>	<input type="checkbox"/>			30-60	40-80	30-60	

good best





List 319

CARBIDE BR

DIN Overall Length, Bottom (1.5P-2P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Bright						
			L	Lc	Ln	d	k	lk		
4 - 40 UNC	2B	3	3190000		2.205	0.295	0.704	0.141	0.110	0.188
6 - 32 UNC			3190100	0.370		0.783				
8 - 32 UNC			3190200	2.480	0.374	0.826	0.168	0.131		
10 - 24 UNC			3190300		0.492	0.976				
10 - 32 UNF			3190400	2.756	0.500	0.984	0.194	0.152		
1/4 - 20 UNC			3190500		0.594	1.177				
1/4 - 28 UNF		3190600	3.150	0.606	1.188	0.255	0.191	0.313		
5/16 - 18 UNC		3190700		0.665	1.377				0.318	0.238
5/16 - 24 UNF		3191500	0.751							
3/8 - 16 UNC		3190900	3.937	0.381		0.286	0.438			
3/8 - 24 UNF		3191000	3.543	3.937	0.858	0.323	0.242	0.406		
7/16 - 14 UNC		3191100								
7/16 - 20 UNF		3191200	4.331	0.921	-	0.367	0.275	0.438		
1/2 - 13 UNC		3191300								
1/2 - 20 UNF		3191400	3.937	-	-	-	-	-		

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		Other				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome	
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)					
1010	1035	1045	1065	4140	4340													
319									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM									<input checked="" type="checkbox"/>	40-90	60-160	55-120						

good best





List 10059

CARBIDE

BR

Bottom (1.5P-2P)



Units: Inch

Tap Size	Class of Fit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Bottom (1.5P - 2P)	Bright							
			L	Lc	Ln	d	k	lk			
10 - 24 UNC	2B	4	1005910100	2.375	0.492	0.866	0.194	0.152	0.250		
10 - 32 UNF			1005910200							0.500	0.874
12 - 24 UNC			1005910300							0.496	0.933
1/4 - 20 UNC			1005910400	2.500	0.594	0.996	0.255	0.191	0.313		
1/4 - 28 UNF			1005910500							0.606	1.007
5/16 - 18 UNC			1005910600	2.719	0.665	1.125	0.318	0.238	0.375		
5/16 - 24 UNF			1005910700								
3/8 - 16 UNC			1005910800	2.938	0.751	1.251	0.381	0.286	0.438		
3/8 - 24 UNF			1005910900								

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061	Casting						
10059	1010	1035	1065	4140					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
SFM	1018	1045		4340					40-90	60-160	55-120				40-80	30-60	15-40

good best





CARBIDE

BR

List 10061

DIN Overall Length, Plug (4P-4.5P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Plug (4P - 4.5P)						
			Bright	Bright						
M3 x 0.5	D3	3	1006101100	1006100100	49.20	6.20	16.00	3.581	2.79	4.80
M4 x 0.7	D4	4	1006101300	1006100300	54.00	8.40	19.10	4.267	3.33	6.40
M5 x 0.8			1006101400	1006100400	60.30	9.60	22.20	4.928	3.86	
M6 x 1.0	1006101500		1006100500	63.50	12.00	25.80	6.477	4.85	7.90	
M8 x 1.25	D5		1006101800	1006100800	69.10	15.00	28.60	8.077	6.05	9.50
M8 x 1.0	1006101700	1006100700								
M10 x 1.5	D6	1006102000	1006101000	74.60	18.00	31.80	9.677	7.26	11.10	
M10 x 1.25	D5	1006101900	1006100900							

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		Other				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome	
	Low	Med.	High			300	400	17-4 PH		6061	Casting							Inconel
10061	1010	1035	1065	4140														
SFM	1018	1045		4340					40-90	60-160	55-120				40-80	30-60	15-40	

good best






List 349

CARBIDE BR

JIS, Modified Bottom (2.5P-3.5P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length				
			Bottom (1.5P - 2P)	Modified Bottom (2.5P - 3.5P)										
			Bright	Bright										
M1.4 x 0.3	OH2	3	22800	24000	34.00	9.00	11.50	3.00	2.50	5.00				
M1.6 x 0.35	OH3		22801	24001	36.00	10.00	13.50							
M1.7 x 0.35			22802	24002		11.00								
M1.8 x 0.35			22803	24003	40.00	12.00	16.00							
M2 x 0.4			22804	24004		13.00								
M2.3 x 0.4			22806	24006	44.00	14.00	17.00							
M2.5 x 0.45			22807	24007		46.00					11.00	13.00		
M2.6 x 0.45			22808	24008	12.00									
M3 x 0.5			OH4	22810	24010	52.00	13.00				14.30	5.00	4.00	8.00
M4 x 0.7				22814	24014		16.00				17.80	5.50	7.00	
M5 x 0.8				22817	24017	62.00	19.00				-	6.00		
M6 x 1.0				22820	24020		70.00				22.00	-	6.20	
M8 x 1.25				22830	24030	75.00					24.00	-	7.00	
M8 x 1.0				22831	24031		20.00				-			
M10 x 1.5	OH4	22833	24033	82.00	29.00	-	8.50	6.50	9.00					
M10 x 1.25		22834	24034		24.00	-								
M10 x 1.0	OH3	22835	24035	80.00	24.00	-	8.00	5.00	10.90					
M12 x 1.75	OH5	22837	24037		29.00	-								
M12 x 1.5	OH4	22839	24039	88.00	29.00	-	10.50	8.00	10.90					
M12 x 1.25		22840	24040		29.00	-								
M12 x 1.0	OH3	22841	24041	95.00	29.00	-	12.50	10.00	13.00					
*M14 x 2.0	OH4	24046	24045		35.00	-				14.00	11.00	13.90		
*M14 x 1.5		24048	24047	29.00	-									
*M16 x 2.0	OH5	24052	24051	100.00	35.00	-	15.00	12.00	15.00					
*M16 x 1.5	OH4	24054	24053		29.00	-								
*M18 x 2.5	OH5	24056	24055	105.00	35.00	-	17.00	13.00	16.00					
*M18 x 1.5	OH4	24060	24059		29.00	-								
*M20 x 2.5	OH5	24062	24061	115.00	35.00	-	19.00	15.00	18.00					
*M20 x 1.5	OH4	24066	24065		29.00	-								
*M22 x 2.5	OH5	24068	24067	120.00	35.00	-	19.00	15.00	18.00					
*M22 x 1.5	OH4	24072	24071		29.00	-								
*M24 x 3.0	OH5	24074	24073	95.00	29.00	-	19.00	15.00	18.00					
*M24 x 1.5	OH4	24078	24077		29.00	-								

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
*Brazed Carbide



Work Material																			
List No.	P					Die Steels	M			K Cast Iron	N		S		Other				
	Carbon Steels			Alloy Steels	High		Stainless Steels				Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome	
	Low	Med.	High				300	400	17-4 PH		6061 7075	Casting							Inconel
349	1010	1035	1065	4140	4340														
SFM	1018	1045																	

good best





CARBIDE

BR

List 356

LT-OTT, JIS, Long Shank, Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Bright					
			L	Lc					
M6 x 1.0	OH3	3	22929		100.00	24.00	6.00	4.50	7.00
M8 x 1.25			22933			22.00	6.20	5.00	
M10 x 1.5	OH4	4	22941		150.00	24.00	7.00	5.50	8.00
M10 x 1.25			22945						
M10 x 1.0			22949						
M12 x 1.75			22953			29.00	8.50	6.50	

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	MMC	Copper Alloys	Fiberglass	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061	Casting						
356	1010	1035	1065	4140					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SFM	1018	1045		4340					40-90	60-160	55-120				40-80	30-60	15-40

good best






List 10051

V-XPМ-HT, Modified Bottom (2.5P-3P)



XPM

V



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)						
			V	L	Lc	Ln	d	k	lk
6 - 32 UNC	H3	4	1005110508	2.000	0.374	0.688	0.141	0.110	0.188
8 - 32 UNC			1005110808	2.125		0.751	0.168		
10 - 24 UNC			1005111008	2.375	0.500	0.874	0.194	0.152	
10 - 32 UNF			1005111208						
1/4 - 20 UNC	H5	4	1005111408	2.500	0.598	1.000	0.255	0.191	0.313
1/4 - 28 UNF	H4		1005111608		0.586	0.988			
5/16 - 18 UNC	H5	5	1005111808	2.719	0.665	1.125	0.318	0.238	0.375
5/16 - 24 UNF	H4		1005112008						
3/8 - 16 UNC	H5		1005112208	2.938	0.751	1.251	0.381	0.286	
3/8 - 24 UNF	H4		1005112408						
1/2 - 13 UNC	H5	5	1005113008	3.375	0.921	1.933	0.367	0.275	
1/2 - 20 UNF			1005113208						
9/16 - 12 UNC			1005113408	3.594	1.000	1.972	0.429	0.322	0.500
9/16 - 18 UNF			1005113608						
5/8 - 11 UNC	H6	1005113808	3.813	1.091	2.126	0.480	0.360	0.563	
5/8 - 18 UNF	H5	1005114008							
3/4 - 10 UNC	H6	5	1005114208	4.250	1.201	2.433	0.590	0.442	0.688
3/4 - 16 UNF	H5		1005114408						
7/8 - 9 UNC	H7		1005114608	4.688	1.335	2.654	0.697	0.523	
7/8 - 14 UNF	H6		1005114808						
1 - 8UNC	H7	1005115008	5.125	1.500	3.012	0.800	0.600	0.813	
1 - 12 UNF	H6	1005115208							

Packed: 1 pc.
Available V coating only.



Work Material																			
List No.	P				Die Steels	M			K Cast Iron	N		S		H					
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
10051				4140 4340															
SFM				15-20															8-15

good best





XPM

V

List 11051

V-XPM-HT, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Modified Bottom (2.5P-3P)							
			V							
				L	Lc	Ln	d	k	lk	
M3 x 0.5	D3	4	1105100108	49.20	6.20	16.10	3.581	2.79	4.80	
M4 x 0.7	D4		1105100208	54.00	8.40	19.10	4.267	3.33	6.40	
M5 x 0.8	D4		1105100308	60.30	9.60	22.20	4.928	3.86	7.90	
M6 x 1.0	D5		1105100408	63.00	12.00	25.40	6.477	4.85	9.50	
M8 x 1.25	D5	5	1105100508	69.10	15.00	28.60	8.077	6.05	11.10	
M8 x 1.0	D6		1105100608							
M10 x 1.5	D6		1105100708							
M10 x 1.25	D5		1105100808							
M10 x 1.0	D5		1105100908	74.60	18.00	31.80	9.677	7.26		
M12 x 1.75	D6		1105101008	85.70	21.00	49.10	9.322	6.98		
M12 x 1.5			1105101108							
M12 x 1.25			1105101208							
M14 x 2.0			D7							1105101308
M14 x 1.5	D6		1105101408	91.30	24.00	50.10	10.897	8.17		12.70
M16 x 2.0	D7		1105101508							
M16 x 1.5	D6		1105101608	96.80						
M18 x 2.5	D7	1105101708								
M18 x 1.5	D6	1105101808	102.40	30.00	61.80	16.561	12.42	17.50		
M20 x 2.5	D7	1105101908								
M20 x 1.5	D6	1105102008								
M22 x 2.5	D7	1105102108								
M22 x 1.5	D6	1105102208	119.10	36.00	67.40	17.704	13.28	19.10		
M24 x 3.0	D8	1105102308								
M24 x 1.5	D6	1105102408	124.60							

Packed: 1 pc.
Available V coating only.



List No.	Work Material																			
	P					M			K	N		S		H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels						
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
11051				4140																
SFM				4340																8-15

good best






List 305

Plug (3.5P-4.5P)



HSS-Co BR



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			Plug (3.5P - 4.5P)							
			Bright							
			L	Lc	Ln	d	k	lk		
4 - 40 UNC	H2	3	1745000	1.875	0.562	0.598	0.141	0.110	0.188	
6 - 32 UNC			1745100	2.000	0.688	-				
8 - 32 UNC			1745200	2.125	0.751	-				
10 - 24 UNC			1745300	2.375	0.874	-				
10 - 32 UNF			1745400			-				
1/4 - 20 UNC	H3	4	1745500	2.500	1.000	-	0.255	0.191	0.313	
1/4 - 28 UNF		3	1734000			-				
			1745600			-				
			1739000			-				
			1734100	2.719	1.125	-	0.318	0.238	0.375	
5/16 - 18 UNC			1739100			-				
5/16 - 24 UNF			1734200	2.938	1.251	-	0.381	0.286	0.438	
3/8 - 16 UNC			1739200			-				
3/8 - 24 UNF			1739600	3.156	1.437	-	0.323	0.242	0.406	
7/16 - 14 UNC			1739700			-				
7/16 - 20 UNF		4	1734300	3.375	1.657	-	0.367	0.275	0.438	
1/2 - 13 UNC						1739300				-
1/2 - 20 UNF				1734400	3.813	1.811	-	0.480	0.360	0.563
5/8 - 11 UNC				1739400			-			
5/8 - 18 UNF				1734500	4.250	2.000	-	0.590	0.442	0.688
3/4 - 10 UNC			1739500	-						
3/4 - 16 UNF						-				

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
305				☐	☑								☑	☐			
SFM				20-40	15-20								15-35	8-15			

☐ good ☑ best






List 10052

VP-DC-HT, DIN Overall Length, Bottom (1.5P-2P)



VC10

V



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
1/4 - 20 UNC	H3	4	1005200108	3.150	0.598	1.181	0.255	0.191	0.313
	H5		1005200208						
1/4 - 28 UNF	H3		1005200308	3.543	0.665	1.377	0.318	0.238	0.375
5/16 - 18 UNC	H5		1005200408						
	H3		1005200508						
5/16 - 24 UNF	H3		1005200608						
3/8 - 16 UNC	H5		1005200708						
	H3		1005200808						
3/8 - 24 UNF	H3		1005200908	4.331	0.921	1.933	0.367	0.275	0.438
7/16 - 14 UNC	H5		1005201008						
	H3		1005201108						
7/16 - 20 UNF	H3		1005201208	3.937	0.858	1.000	0.429	0.322	0.500
	H5	1005201308							
1/2 - 13 UNC	H3	1005201408	4.331	1.090	2.125	0.480	0.360	0.563	
	H5	1005201508							
1/2 - 20 UNF	H3	1005201608	3.937	1.200	2.433	0.590	0.442	0.688	
	H5	1005201708							
9/16 - 12 UNC	H3	1005201808	4.331	1.334	2.653	0.697	0.523	0.750	
	H5	1005201908							
9/16 - 18 UNF	H3	1005202008	3.937	4.921	5.512	3.011	0.600	0.813	
	H5	1005202108							
5/8 - 11 UNC	H3	1005202208	4.331	1.500	3.011	0.800	0.600	0.813	
	H5	1005202308							
5/8 - 18 UNF	H3	1005202408	3.937	1.200	2.433	0.590	0.442	0.688	
	H5	1005202508							
3/4 - 10 UNC	H3	1005202608	4.921	1.334	2.653	0.697	0.523	0.750	
	H5	1005202708							
3/4 - 16 UNF	H3	1005202808	4.331	4.921	5.512	3.011	0.600	0.813	
	H5	1005202908							
7/8 - 9 UNC	H3	1005203008	5.512	1.334	2.653	0.697	0.523	0.750	
	H5	1005203108							
7/8 - 14 UNF	H3	1005203208	4.921	1.500	3.011	0.800	0.600	0.813	
	H5	1005203308							
1 - 8 UNC	H3	1005203408	6.299	1.500	3.011	0.800	0.600	0.813	
	H5	1005203508							

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
10052									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM								25-75			40-65							

good best




List 11052

VP-DC-HT, DIN Overall Length, Bottom (1.5P-2P)



VC10

V



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	L	Lc	Ln	d	k	lk
			V	L	Lc	Ln	d	k	lk
M6 x 1.0	D5	3	1105200108	80.00	12.00	30.00	6.477	4.85	7.90
M8 x 1.25			1105200208	90.00	15.00	35.00	8.077	6.05	9.50
M10 x 1.5			1105200508	100.00	18.00	39.00	9.677	7.26	11.10
M10 x 1.25	1105200408								
M10 x 1.0	D5	4	1105200308	90.00	21.00	49.10	9.322	6.98	
M12 x 1.75	1105200808		110.00						
M12 x 1.5	D6		1105200708	100.00					
M12 x 1.25	D7	5	1105200608	110.00	24.00	50.10	10.897	8.18	12.70
M14 x 2.0			1105201008						
M14 x 1.5			1105200908						
M16 x 2.0	D6	5	1105201208	110.00	30.00	54.00	12.192	9.14	14.30
M16 x 1.5			1105201108	100.00					
M18 x 2.5	D7	5	1105201508	125.00	36.00	61.80	16.561	12.42	17.50
M18 x 2.0	D6		1105201408	110.00					
M18 x 1.5	D7		1105201308	110.00					
M20 x 2.5	D7	5	1105201808	140.00	30.00	61.80	16.561	12.42	17.50
M20 x 2.0			1105201708	125.00					
M20 x 1.5	D6	5	1105201608	125.00	36.00	68.40	19.304	14.48	19.10
M22 x 2.5	D8		1105202108	140.00					
M22 x 2.0	D6		1105202008	140.00					
M22 x 1.5	D8	5	1105201908	125.00	36.00	68.40	19.304	14.48	19.10
M24 x 3.0			1105202408	160.00					
M24 x 2.0	D6	5	1105202308	140.00	36.00	68.40	19.304	14.48	19.10
M24 x 1.5			1105202208	140.00					

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
11052	1010	1035	1065	4140					<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM	1018	1045		4340					25-75		40-65							

good best





EXOTAP® DC-OIL

Premium Design for Cast Iron and Cast Aluminum

List 10053

VPO-DC-HT, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length					
			Bottom (1.5P - 2P)	L	Lc	Ln	d	k	lk					
			V	L	Lc	Ln	d	k	lk					
1/4 - 20 UNC	H3	4	1005300108	3.150	0.598	1.181	0.255	0.190	0.313					
	H5		1005300208											
1/4 - 28 UNF	H3		1005300308											
5/16 - 18 UNC	H3		4	1005300408	3.543	0.665	1.377	0.318	0.238	0.375				
	H5			1005300508										
5/16 - 24 UNF	H3			1005300608										
3/8 - 16 UNC	H3			4	1005300708	3.937	0.751	1.712	0.380	0.286	0.438			
	H5				1005300808									
3/8 - 24 UNF	H3				1005300908									
7/16 - 14 UNC	H3				4	1005301008	3.937	0.858	1.712	0.323	0.242	0.406		
	H5					1005301108								
7/16 - 20 UNF	H3					4							1005301208	4.331
	H5	1005301308												
1/2 - 13 UNC	H3	1005301408												
1/2 - 20 UNF	H3	4					1005301508	4.331	1.000	1.972	0.429	0.322	0.500	
	H5		1005301608											
9/16 - 12 UNC	H3		4				1005301708							3.937
	H5						1005301808							
9/16 - 18 UNF	H3			4			1005301908	4.331	1.200	2.433	0.590	0.442	0.688	
	H5						1005302008							
5/8 - 11 UNC	H3						4							1005302108
	H5				1005302208									
5/8 - 18 UNF	H3				4			1005302308	3.937	4.921	4.921	6.299	1.500	3.011
	H5					1005302408								
3/4 - 10 UNC	H3					4		1005302508						
	H5							1005302608						
3/4 - 16 UNF	H3	4						1005302708	4.921	5.512	1.334	2.653	0.697	0.750
	H5							1005302808						
7/8 - 9 UNC	H3		4					1005302908						
	H5							1005303008						
7/8 - 14 UNF	H3			4				1005303108	5.512	1.334	2.653	0.697	0.750	
	H5							1005303208						
1 - 8 UNC	H3						4	1005303308						4.921
	H5							1005303408						
								1005303508						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H					
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
10053									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>								
SFM									40-100		50-110								

good best





List 11053

VPO-DC-HT, Coolant-Through, DIN Overall Length, Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)						
			V	L	Lc	Ln	d	k	lk
M6 x 1.0	D5	3	1105300108	80.00	12.00	30.00	6.477	4.85	7.90
M8 x 1.25			1105300208	90.00	15.00	35.00	8.077	6.05	9.50
M10 x 1.5			1105300408	100.00	18.00	39.00	9.677	7.26	11.10
M10 x 1.25	1105300308								
M12 x 1.75	D6	4	1105300608	110.00	21.00	49.10	9.322	6.98	
M12 x 1.5			1105300508						
M12 x 1.25			1105302508						
M14 x 2.0	D7	5	1105300808	110.00	24.00	50.10	10.897	8.18	12.70
M14 x 1.5			1105300708	100.00					
M16 x 2.0			1105301208	110.00					
M16 x 1.5	D6	5	1105301108	100.00	30.00	54.00	12.192	9.14	14.30
M18 x 2.5	D7		1105301508	125.00					
M18 x 2.0	D7		1105301408	125.00					
M18 x 1.5	D6	5	1105301308	110.00	30.00	61.80	16.561	12.42	17.50
M20 x 2.5	D7		1105301808	140.00					
M20 x 2.0	D7		1105301708	140.00					
M20 x 1.5	D6	5	1105301608	125.00	36.00	67.40	17.704	13.28	19.10
M22 x 2.5	D8		1105302108	140.00					
M22 x 2.0	D8		1105302008	140.00					
M22 x 1.5	D6	5	1105301908	125.00	36.00	68.40	19.304	14.48	19.10
M24 x 3.0	D8		1105302408	160.00					
M24 x 2.0	D8		1105302308	140.00					
M24 x 1.5	D6	5	1105302208	140.00					

Packed: 1 pc.
Available V coating only.



Work Material																				
List No.	P					M			K	N		S		H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels						
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
11053									<input checked="" type="checkbox"/>											
SFM									40-100											

good best





VC10

V

List 11054

VP-DC-HT, DIN Shank, DIN Overall Length, Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	DIN Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)						
			V						
			L	Lc	Ln	d	k	lk	
M6 x 1.0	D5	3	1105400108	80.00	12.00	30.00	6.00	4.90	8.00
M8 x 1.25		4	1105400208	90.00	15.00	35.00	8.00	6.20	8.90
M10 x 1.5	D6		1105400308	100.00	18.00	39.00	10.00	8.00	10.90

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P															M			K	N		S		H			
	Carbon Steels					Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels											
	Low	Med.	High	4140 4340	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC									
	1010 1018	1035 1045	1065																								
11054											<input checked="" type="checkbox"/>																
SFM											25-75		40-65														

good best





List 11055

VPO-DC-HT, Coolant-Through, DIN Shank, DIN Overall Length, Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	DIN Overall Length	Thread Length	Neck Length	DIN Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)						
			V						
			L	Lc	Ln	d	k	lk	
M6 x 1.0	D5	3	1105500108	80.00	12.00	30.00	6.00	4.90	8.00
M8 x 1.25			1105500208	90.00	14.00	34.90	8.00	6.20	9.00
M10 x 1.5	D6	4	1105500308	100.00	17.00	38.90	10.00	8.00	11.00
M12 x 1.75			1105500408	110.00	20.00	43.90	9.00	7.00	10.00

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P			Alloy Steels 4140 4340	Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels					Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
11055									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM									40-100		50-110							

good best





VC10

V

List 10056

VP-DC-HT, Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)						
			V						
			L	Lc	Ln	d	k	lk	
1/4 - 20 UNC	H3	4	1005600108	2.500	0.598	1.000	0.255	0.191	0.313
	H5		1005600208						
1/4 - 28 UNF	H3		1005600308						
5/16 - 18 UNC	H3		1005600408	2.720	0.665	1.125	0.318	0.238	0.375
	H5		1005600508						
5/16 - 24 UNF	H3		1005600608						
3/8 - 16 UNC	H3		1005600708	2.930	0.751	1.251	0.381	0.286	0.438
	H5		1005600808						
3/8 - 24 UNF	H3		1005600908						
7/16 - 14 UNC	H3		1005601008	3.150	0.858	1.712	0.323	0.242	0.406
	H5		1005601108						
7/16 - 20 UNF	H3		1005601208						
1/2 - 13 UNC	H3	1005601308	3.370	0.921	1.933	0.367	0.275	0.438	
	H5	1005601408							
1/2 - 20 UNF	H3	1005601508							
9/16 - 12 UNC	H3	1005601608	3.590	1.000	1.972	0.429	0.322	0.500	
	H5	1005601708							
9/16 - 18 UNF	H3	1005601808							
5/8 - 11 UNC	H3	1005601908	3.810	1.090	2.125	0.480	0.360	0.563	
	H5	1005602008							
5/8 - 18 UNF	H3	1005602108							
3/4 - 10 UNC	H3	1005602208	4.250	1.200	2.433	0.590	0.442	0.688	
	H5	1005602308							
3/4 - 16 UNF	H3	1005602408							4.250
	H5	1005602508							
			1005602608						
			1005602708						
			1005602808						
			1005602908						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
10056									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM									25-75		40-65							

good best





List 11056

VP-DC-HT, Bottom (1.5P-2P)



VC10

V



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)						
			V						
				L	Lc	Ln	d	k	lk
M6 x 1.0	D5	3	1105600108	63.50	12.00	25.40	6.477	4.85	7.90
M8 x 1.25			1105600208	69.10	15.00	28.60	8.077	6.05	9.50
M10 x 1.5			1105600508	74.60	18.00	31.80	9.677	7.26	11.10
M10 x 1.25	1105600408								
M10 x 1.0	1105600308								
M12 x 1.75	D6	4	1105600808	85.70	21.00	49.10	9.322	6.98	12.70
M12 x 1.5			1105600708						
M12 x 1.25			1105600608						
M14 x 2.0	D7	5	1105601008	91.30	24.00	50.10	10.897	8.18	12.70
M14 x 1.5			1105600908						

Packed: 1 pc.

Available V coating only.



Work Material

List No.	P														M			K	N		S		H			
	Carbon Steels				Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels											
	Low	Med.	High	300			400	17-4 PH	6061 7075		Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC							
	1010 1018	1035 1045	1065																	4140 4340						
11056																										
SFM									<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>														

good best






EXOTAP® DC-OIL

Premium Design for Cast Iron and Cast Aluminum

List 10057

VPO-DC-HT, Coolant-Through, Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	V						
			L	Lc						
1/4 - 20 UNC	H3	4	1005700108	2.500	0.598	1.000	0.255	0.191	0.313	
	H5		1005700208							
1/4 - 28 UNF	H3		1005700308							
5/16 - 18 UNC	H3		1005700408	2.719	0.665	1.125	0.318	0.238	0.375	
	H5		1005700508							
5/16 - 24 UNF	H3		1005700608							
3/8 - 16 UNC	H3		1005700708	2.938	0.751	1.251	0.381	0.286	0.438	
	H5		1005700808							
3/8 - 24 UNF	H3		1005700908							
7/16 - 14 UNC	H3		1005701008	3.156	0.858	1.712	0.323	0.242	0.406	
	H5		1005701108							
7/16 - 20 UNF	H3		1005701208							
	H5		1005701308							
1/2 - 13 UNC	H3		1005701408	3.375	0.921	1.933	0.367	0.275	0.438	
	H5		1005701508							
1/2 - 20 UNF	H3		1005701608							
	H5	1005701708								

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
10057									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM									40-100		50-110							

good best





List 11057

VPO-DC-HT, Coolant-Through, Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)						
			V						
			L	Lc	Ln	d	k	lk	
M6 x 1.0	D5	3	1105700108	63.50	12.00	25.40	6.48	4.85	7.90
M8 x 1.25			1105700208	69.10	15.00	28.60	8.08	6.05	9.50
M10 x 1.5			1105700408	74.60	18.00	31.80	9.68	7.26	11.10
M10 x 1.25	D6	4	1105700308	85.70	21.00	49.10	9.32	6.98	
M12 x 1.75			1105700608						
M12 x 1.5			1105700508						
M14 x 2.0	D7	5	1105700808	91.30	24.00	50.10	10.90	8.18	12.70
M14 x 1.5			1105700708						

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
11057	1010	1035	1065	4140					<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM	1018	1045	1065	4340					<input type="checkbox"/>	40-100	<input type="checkbox"/>	50-110						

good best






HSSE	N	BR
------	---	----

List 240

EX-DC-HT, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Plug (3.5P - 4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
				Bright	Nitride		Bright	Nitride						
2 - 56 UNC	H2	3	24929	00	-	24928	00	-	1.811	0.437	0.476	0.141	0.110	0.189
4 - 40 UNC			24931	00	-	24930	00	-	1.874	0.295	0.559			
5 - 40 UNC	H3		24012	-	03	24011	-	03	1.937	0.299	0.626	0.168	0.131	0.252
6 - 32 UNC			24016	-	03	24015	-	03	2.000	0.370	0.685			
8 - 32 UNC			24932	-	03	24019	-	03	2.126	0.374	0.752			
10 - 24 UNC			24024	-	03	24023	-	03	2.374	0.492	0.866			
10 - 32 UNF			24028	-	03	24027	-	03						
1/4 - 20 UNC			H5	24032	-	03	24933	-	03	2.500	0.594			
1/4 - 28 UNF	H3		24036	-	03	24934	-	03						
5/16 - 18 UNC	H5		24936	-	03	24935	-	03	2.720	0.665	1.126	0.318	0.238	0.374
5/16 - 24 UNF	H3	24044	-	03	24043	-	03							
3/8 - 16 UNC	H5	24938	-	03	24937	-	03	2.937	0.752	1.252	0.381	0.286	0.437	
3/8 - 24 UNF	H3	24940	-	03	24939	-	03							
7/16 - 14 UNC	H3	24942	-	03	24941	-	03	3.157	0.858	1.713	0.323	0.242	0.406	
7/16 - 20 UNF		24944	-	03	24943	-	03							
1/2 - 13 UNC		24064	-	03	24063	-	03							
1/2 - 20 UNF		24946	-	03	24945	-	03							
			24948	-	03	24947	-	03	3.374	0.921	1.933	0.367	0.275	0.437
			24076	-	03	24075	-	03						
			24080	-	03	24079	-	03						

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
240	1010	1035	1065	4140					<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM	1018	1045		4340					25-75	40-80	40-65							

good best






List 241



HSSE

N

EX-DC-HT, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Nitride	Nitride						
M3 x 0.5	D3	3	2410203	2494903	49.20	7.30	17.20	3.58	2.79	4.80
M4 x 0.7	D4		2495003	2410303	54.00	10.10	20.80	4.27	3.33	6.40
M5 x 0.8	D5		2410603	2495103	60.30	11.80	24.40	4.93	3.86	
M6 x 1.0		D5	4	2410803	2495203	63.50	14.60	28.00	6.48	4.85
M8 x 1.25	2411203			2411103	69.10	15.00	28.60	8.08	6.05	9.50
M10 x 1.5	D6	4	2495403	2411703	74.60	18.00	31.80	9.68	7.26	11.10
M10 x 1.25	D5		2411603	2495303						
M12 x 1.75	D6		2495503	2412103	85.70	21.00	49.10	9.32	6.98	

Packed: 1 pc.
Available Nitride treatment only.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H					
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
241									<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM									<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							

good best





GENERAL PURPOSE

Ideal for Cast Iron

List 101C

HSS

N S/O

Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Nitride-S/O	Nitride-S/O						
			L	Lc	Ln	d	k	lk		
1/4 - 20 UNC	H3	4	1600207	1600107	2.500	0.756	1.189	0.255	0.191	0.311
	H5		1600407	1600307						
1/4 - 28 UNF	H3		1600607	1600507	2.720	0.835	1.323	0.318	0.238	0.374
	H5		1600807	1600707						
5/16 - 18 UNC	H3		1601007	1600907	2.937	0.937	1.413	0.381	0.286	0.437
	H5		1601207	1601107						
5/16 - 24 UNF	H3		1601407	1601307	3.157	1.071	1.689	0.323	0.242	0.406
	H5		1601607	1601507						
3/8 - 16 UNC	H3		1601807	1601707	3.374	1.177	1.811	0.367	0.275	0.437
	H5		1602007	1601907						
3/8 - 24 UNF	H3		1602207	1602107	3.594	1.280	1.941	0.429	0.322	0.500
	H5		1602407	1602307						
7/16 - 14 UNC	H3		1602607	1602507	3.811	1.390	2.000	0.480	0.360	0.563
	H5		1602807	1602707						
7/16 - 20 UNF	H3		1603007	1602907	4.252	1.531	2.220	0.590	0.442	0.689
	H5		1603207	1603107						
1/2 - 13 UNC	H3		1603407	1603307	4.252	1.531	2.220	0.590	0.442	0.689
	H5		1603607	1603507						
1/2 - 20 UNF	H3		1603807	1603707	4.252	1.531	2.220	0.590	0.442	0.689
	H5		1600007	-						
9/16 - 12 UNC	H3	1604007	1603907	4.252	1.531	2.220	0.590	0.442	0.689	
	H5	1604807	1604707							
9/16 - 18 UNF	H3	1604207	1604107	4.252	1.531	2.220	0.590	0.442	0.689	
	H5	1605207	-							
5/8 - 11 UNC	H3	1604407	1604307	4.252	1.531	2.220	0.590	0.442	0.689	
	H5	1604607	1604507							
5/8 - 18 UNF	H3	1605007	1604907	4.252	1.531	2.220	0.590	0.442	0.689	
	H5									

Packed: 1 pc.
Available Nitride/Steam Oxide treatment only.



Work Material

List No.	P					Die Steels	M			K Cast Iron	N		S		H					
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Aluminum		Nickel Alloy	Hardened Steels						
	Low	Med.	High				300	400	17-4 PH		6061 7075	Casting		Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
101C																				
SFM									25-75			40-65								

good best





List 141C

HSS

N S/O

Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Nitride-S/O	Nitride-S/O						
M6 x 1.0	D5	3	1608207	1608107	63.50	17.80	30.90	6.48	4.85	7.90
M8 x 1.25			1608407	1608307	69.10	18.80	33.60	8.08	6.05	9.50
M10 x 1.5	D6	4	1608607	1608507	74.60	22.50	35.10	9.68	7.26	11.10
M12 x 1.75			1608807	1608707	85.70	27.20	46.00	9.32	6.98	

Packed: 1 pc.

Available Nitride/Steam Oxide treatment only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
141C									<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>							
SFM									25-75		40-65							

good best





GENERAL PURPOSE

List 101

Taper (5P and up), Plug (3.5P-4.5P), Bottom (1.5P-2P)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)				Plug (3.5P - 4.5P)				Taper (5P and up)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	
			EDP Number	Coating Suffix			EDP Number	Coating Suffix			EDP Number	Coating Suffix									
				Bright	S/O	TiCN		Bright	S/O	TiN		TiCN	Bright	S/O							TiCN
1/4 - 20 UNC	H1	4	11002	00	-	08	11001	00	-	-	08	11000	00	-	08	2.500	0.748	1.181	0.255	0.191	0.311
	H2		11102	00	-	08	11101	00	-	-	08	11100	00	-	08						
	H3		11202	00	01	08	11201	00	01	05	08	11200	00	01	08						
	H5		11402	00	-	08	11401	00	-	-	08	-	-	-	-						
1/4 - 28 UNF	H1	4	11005	00	-	-	11004	00	-	-	-	-	-	-	2.500	0.748	1.181	0.255	0.191	0.311	
	H2		11105	00	-	08	11104	00	-	-	-	-	-	-							
	H3		11205	00	01	08	11204	00	01	05	08	11203	00	-							08
	H4		11305	00	-	-	11304	00	-	-	-	-	-	-							-
5/16 - 18 UNC	H1	4	11008	00	-	-	11007	00	-	-	-	-	-	-	2.720	0.835	1.323	0.318	0.238	0.374	
	H2		11108	00	-	-	11107	00	-	-	08	10088	00	-							-
	H3		11208	00	01	08	11207	00	01	05	08	11206	00	01							08
	H5		11408	00	-	08	11407	00	-	-	08	-	-	-							-
5/16 - 24 UNF	H1	4	11011	00	-	-	11010	00	-	-	-	-	-	-	2.720	0.835	1.323	0.318	0.238	0.374	
	H2		11111	00	-	08	11110	00	-	-	-	-	-	-							
	H3		11211	00	01	08	11210	00	01	05	08	11209	00	01							08
	H4		11311	00	-	08	11310	00	-	-	-	-	-	-							-
3/8 - 16 UNC	H1	4	11014	00	-	-	11013	00	-	-	-	-	-	-	2.937	0.937	1.413	0.381	0.286	0.437	
	H2		11114	00	-	-	11113	00	-	-	-	-	-	-							
	H3		11214	00	01	08	11213	00	01	05	08	11212	00	01							08
	H5		11414	00	-	08	11413	00	-	-	08	-	-	-							-
3/8 - 24 UNF	H1	4	11017	00	-	08	11016	00	-	-	-	-	-	-	2.937	0.937	1.413	0.381	0.286	0.437	
	H2		11117	00	-	-	11116	00	-	-	08	-	-	-							-
	H3		11217	00	01	08	11216	00	01	05	08	11215	00	01							08
	H4		11317	00	-	08	11316	00	-	-	08	-	-	-							-
7/16 - 14 UNC	H2	4	-	-	-	-	10516	00	-	-	08	-	-	-	3.157	1.071	1.689	0.323	0.242	0.406	
	H3		11220	00	-	08	11219	00	-	-	08	11218	00	-							08
	H5		11420	00	-	-	11419	00	-	-	-	-	-	-							-
	H2		-	-	-	-	11122	00	-	-	-	-	-	-							-
7/16 - 20 UNF	H3	4	11223	00	01	08	11222	00	01	05	08	11221	00	01	08	3.157	1.071	1.689	0.323	0.242	0.406
	H5		11423	00	-	08	11422	00	-	-	08	-	-	-	-						
	H1		11026	00	-	-	11025	00	-	-	-	-	-	-	-						
	H2		11126	00	-	-	11125	00	-	-	-	-	-	-	-						
1/2 - 13 UNC	H3	4	11226	00	01	08	11225	00	01	05	08	11224	00	01	08	3.374	1.154	1.811	0.367	0.275	0.437
	H5		11426	00	-	-	11425	00	-	-	08	-	-	-	-						
	H1		11029	00	-	-	11028	00	-	-	-	-	-	-	-						
	H2		11129	00	-	-	11128	00	-	-	-	-	-	-	-						
1/2 - 20 UNF	H3	4	11229	00	01	08	11228	00	01	05	08	11227	00	01	08	3.374	1.154	1.811	0.367	0.275	0.437
	H5		11429	00	-	08	11428	00	-	-	08	-	-	-	-						
	H1		11026	00	-	-	11025	00	-	-	-	-	-	-	-						
	H2		11126	00	-	-	11125	00	-	-	-	-	-	-	-						
9/16 - 12 UNC	H3	4	11232	00	01	08	11231	00	01	-	08	11230	00	01	08	3.594	1.252	1.941	0.429	0.322	0.500
	H5		10611	00	-	08	11431	00	-	-	08	-	-	-	-						
	H2		-	-	-	-	11134	00	-	-	-	-	-	-	-						
	H3		11235	00	01	08	11234	00	01	-	08	11233	00	01	08						
9/16 - 18 UNF	H5	4	11435	00	-	08	11434	00	-	-	08	-	-	-	3.594	1.252	1.941	0.429	0.322	0.500	
	H1		-	-	-	-	11037	00	-	-	-	-	-	-							
	H2		10632	00	-	-	11137	00	-	-	-	-	-	-							
	H3		11238	00	01	08	11237	00	01	05	08	11236	00	01							08
5/8 - 11 UNC	H5	4	11438	00	-	08	11437	00	-	-	08	-	-	-	3.811	1.362	2.000	0.480	0.360	0.563	
	H1		-	-	-	-	11040	00	-	-	-	-	-	-							
	H2		-	-	-	-	11140	00	-	-	-	-	-	-							
	H3		11241	00	01	08	11240	00	01	05	08	11239	00	01							08
5/8 - 18 UNF	H5	4	11441	00	-	08	11440	00	-	-	08	-	-	-	3.811	1.362	2.000	0.480	0.360	0.563	
	H1		-	-	-	-	11040	00	-	-	-	-	-	-							
	H2		-	-	-	-	11140	00	-	-	-	-	-	-							
	H3		11241	00	01	08	11240	00	01	05	08	11239	00	01							08
11/16 - 11 UNS	H5	4	11444	00	-	08	11440	00	-	-	08	-	-	-	4.031	1.362	2.000	0.480	0.360	0.563	
	H3		11244	00	-	08	11243	00	-	-	08	11242	00	-							-

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 101 (Continued)

Taper (5P and up), Plug (3.5P-4.5P), Bottom (1.5P-2P)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Plug (3.5P - 4.5P)				Taper (5P and up)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk					
			EDP Number	Coating Suffix			EDP Number	Coating Suffix			EDP Number	Coating Suffix												
				Bright	S/O	TiCN		Bright	S/O	TiN		TiCN	Bright							S/O	TiCN			
11/16 - 16 UNS	H3	4	11247	00	-	08	11246	00	-	-	08	11245	00	-	08	4.031	1.362	2.130	0.542	0.406	0.626			
3/4 - 10 UNC	H1		10665	00	-	-	10089	00	-	-	-	-	-	-	-							-		
	H2		-	-	-	-	11149	00	-	-	-	-	-	-	-							-		
	H3		11250	00	01	08	11249	00	01	05	08	11248	00	-	08							-	-	-
	H5		11450	00	-	08	11449	00	-	-	08	-	-	-	-	-	-							
3/4 - 16 UNF	H1		-	-	-	-	11052	00	-	-	08	-	-	-	-	-	4.252	1.500	2.220	0.590	0.442	0.689		
	H2		-	-	-	-	11152	00	-	-	-	-	-	-	-									
	H3		11253	00	01	08	11252	00	01	05	08	11251	00	-	08	-							-	-
	H5		11453	00	-	08	11452	00	-	-	08	-	-	-	-	-								
7/8 - 9 UNC	H1		10692	00	-	-	-	-	-	-	-	-	-	-	-	-	4.689	1.665	2.500	0.697	0.523	0.752		
	H2		-	-	-	-	10090	00	-	-	-	-	-	-	-									
	H4		11356	00	01	08	11355	00	01	05	08	11354	00	-	08	-							-	-
	H6		-	-	-	-	11455	00	-	08	-	-	-	-	-	-								
7/8 - 14 UNF	H2		-	-	-	-	11158	00	-	-	-	-	-	-	-	5.126	1.874	2.720	0.800	0.600	0.811			
	H4		11359	00	01	08	11358	00	01	05	08	11357	00	-	08							-	-	-
	H6		-	-	-	-	11458	00	-	-	08	-	-	-	-							-		
	H1		10719	00	-	-	10718	00	-	-	08	-	-	-	-							-		
1 - 8 UNC	H2		-	-	-	-	11161	00	-	-	-	-	-	-	-	5.437	2.142	2.941	0.896	0.672	0.874			
	H4		11362	00	01	08	11361	00	01	05	08	11360	00	01	08							-	-	-
	H6		-	-	-	-	11461	00	-	-	08	-	-	-	-							-		
	H1		11365	00	-	08	11364	00	-	-	08	11363	00	-	08							-	-	-
1 - 12 UNF	H4		-	-	-	-	11167	00	-	-	08	-	-	-	-	5.752	2.142	3.000	1.021	0.766	1.000			
1 - 14 UNS	H2		-	-	-	-	11367	00	01	-	08	11366	00	01	08							-	-	-
1, 1/8 - 7 UNC	-		11371	00	01	08	11370	00	01	-	08	11369	00	-	08							-	-	-
1, 1/8 - 12 UNF	-		11374	00	01	08	11373	00	01	-	08	11372	00	01	08							-	-	-
1, 1/4 - 7 UNC	-		11377	00	01	08	11376	00	-	-	08	11375	00	-	08	-	-	-						
1, 1/4 - 12 UNF	H4		6	11380	00	01	08	11379	00	01	-	08	11378	00	-	08	6.063	2.500	3.161	1.108	0.831	1.063		
1, 3/8 - 6 UNC	4		11383	00	-	08	11382	00	-	-	08	11381	00	01	-	-							-	-
1, 3/8 - 12 UNF	6	11386	00	01	08	11385	00	01	-	08	11384	00	01	08	-	-							-	
1, 1/2 - 6 UNC	4	11389	00	01	08	11388	00	01	-	08	11387	00	01	08	-	-							-	
1, 1/2 - 12 UNF	6	11392	00	01	08	11391	00	01	-	08	11390	00	01	08	6.374	2.500	3.382	1.233	0.925	1.126				
															1.874									

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																					
List No.	P					M			K	N		S	H								
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels							
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC				
101	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>											
SFM	25-80	20-50	20-45						25-75	40-80	40-65										

good best





GENERAL PURPOSE

List 101H

HSS	TiCN	S/O	BR
-----	------	-----	----

+0.005" Oversize, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Plug (3.5P - 4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			EDP Number	Coating Suffix		EDP Number	Coating Suffix									
				Bright	TiCN		Bright	S/O							TiCN	
L	Lc	Ln	Lk	L	Lc	Ln	d	k	lk							
1/4 - 20 UNC		+ 0.005	4	10091	00	08	15901	00	01	08	2.500	0.748	1.181	0.255	0.191	0.311
1/4 - 28 UNF	-			-	-	15903	00	01	08							
5/16 - 18 UNC	10092			00	08	15907	00	01	08							
5/16 - 24 UNF	-			-	-	15911	00	-	08	2.720	0.835	1.323	0.318	0.238	0.374	
3/8 - 16 UNC	10093			00	08	15913	00	-	08							
3/8 - 24 UNF	-			-	-	15915	00	-	08							
7/16 - 14 UNC	-			-	-	15919	00	-	-	3.157	1.071	1.689	0.323	0.242	0.406	
7/16 - 20 UNF	-			-	-	15921	00	-	-							
1/2 - 13 UNC	10094			00	08	15925	00	-	08	3.374	1.154	1.811	0.367	0.275	0.437	
1/2 - 20 UNF	-			-	-	15927	00	-	08							
5/8 - 11 UNC	11257			00	08	15937	00	-	08	3.811	1.362	2.000	0.480	0.360	0.563	
5/8 - 18 UNF	-			-	-	11259	00	01	08							
3/4 - 10 UNC	-			-	-	15947	00	01	-							

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
101H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





List 102

Taper (5P and up), Plug (3.5P-4.5P), Bottom (1.5P-2P)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P-2P)				Plug (3.5P-4.5P)				Taper (5P and up)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk			
			EDP Number	Coating Suffix				EDP Number	Coating Suffix				EDP Number	Coating Suffix									
				Bright	S/O	TiN	TiCN		Bright	S/O	TiN	TiCN		Bright							S/O	TiN	TiCN
0 - 80 UNF	H1	2	10002	00	01	05	08	10001	00	01	05	08	10000	00	01	-	08	1.626	0.311				
	H2		10102	00	-	-	08	10101	00	-	05	08	-	-	-	-	-						
1 - 64 UNC	H1	2	10005	00	01	-	-	10004	00	01	-	-	10003	00	-	-	-	1.689	0.370				
	H2		10080	00	-	-	08	10104	00	-	-	08	-	-	-	-	-						
1 - 72 UNF	H1	2	10008	00	01	-	-	10007	00	01	-	-	10006	00	01	-	08	1.752	0.437				
	H2		10108	00	-	-	08	10107	00	-	-	08	-	-	-	-	-						
2 - 56 UNC	H1	2	10011	00	-	-	08	10010	00	-	-	-	10009	00	-	-	-	1.811	0.496				
	H2		10111	00	01	05	08	10110	00	01	05	08	10109	00	01	-	08						
2 - 64 UNF	H1	2	10014	00	01	-	-	10013	00	-	-	-	-	-	-	-	-	1.874	0.370	0.681	0.141	0.110	0.189
	H2		10114	00	01	-	-	10113	00	01	-	-	10112	00	-	-	-						
3 - 48 UNC	H1	2	-	-	-	-	-	10016	00	-	-	-	-	-	-	-	-	1.937	0.374	0.744			
	H2		10117	00	01	-	08	10116	00	01	-	08	10115	00	01	-	08						
3 - 56 UNF	H1	2	-	-	-	-	-	10019	00	-	-	-	-	-	-	-	-	1.937	0.374	0.744			
	H2		10120	00	01	-	08	10119	00	01	-	08	10118	00	01	-	-						
4 - 36 UNS	H2	3	10129	00	01	-	-	10128	00	-	-	-	10127	00	-	-	-	2.000	0.465	0.799			
4 - 40 UNC	H1		10023	00	-	-	-	10022	00	-	-	-	10021	00	-	-	-						
	H2	10123	00	01	05	08	10122	00	01	05	08	10121	00	01	-	08							
4 - 48 UNF	H1	3	-	-	-	-	-	10025	00	-	-	-	-	-	-	-	-	2.126	0.469	0.933	0.168	0.131	0.252
	H2		10126	00	01	-	08	10125	00	01	-	08	10124	00	-	-	-						
5 - 40 UNC	H1	3	10032	00	-	-	-	10031	00	-	-	-	-	-	-	-	-	2.126	0.469	0.933	0.168	0.131	0.252
	H2		10132	00	01	05	08	10131	00	01	05	08	10130	00	01	-	08						
5 - 44 UNF	H1	3	-	-	-	-	-	10034	00	-	-	08	-	-	-	-	-	2.126	0.469	0.933	0.168	0.131	0.252
	H2		10135	00	01	-	08	10134	00	01	-	08	10133	00	01	-	08						
6 - 32 UNC	H1	3	10038	00	-	-	-	10037	00	-	-	-	10036	00	-	-	-	2.000	0.465	0.799			
	H2		10138	00	-	05	08	10137	00	-	05	08	10136	00	-	-	08						
	H3		10238	00	01	05	08	10237	00	01	05	08	10236	00	01	-	08						
6 - 40 UNF	H2	2	-	-	-	-	-	10681	-	-	05	-	-	-	-	-	-	2.126	0.469	0.933	0.168	0.131	0.252
	H2	3	10141	00	01	05	-	10140	00	01	05	-	10139	00	-	-							
8 - 32 UNC	H1	4	10044	00	-	-	-	10043	00	-	-	08	10042	00	-	-	-	2.126	0.469	0.933	0.168	0.131	0.252
	H2		10144	00	-	05	-	10143	00	-	05	08	10142	00	-	-	-						
	H3		10244	00	01	05	08	10243	00	01	05	08	10242	00	01	-	08						
	H7		10199	00	-	-	-	10198	00	-	-	-	-	-	-	-	-						
8 - 36 UNF	H1	4	-	-	-	-	-	10046	00	-	-	-	-	-	-	-	-	2.126	0.469	0.933	0.168	0.131	0.252
	H2		10147	00	01	05	-	10146	00	01	05	-	10145	00	01	-	-						

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

Work Material																			
List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
102	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65								

good best





GENERAL PURPOSE

List 102 (Continued)

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----

Taper (5P and up), Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)				Plug (3.5P - 4.5P)				Taper (5P and up)				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk											
			EDP Number	Coating Suffix				EDP Number	Coating Suffix				EDP Number	Coating Suffix																	
				Bright	S/O	TiN	TiCN		Bright	S/O	TiN	TiCN		Bright							S/O	TiN	TiCN								
10 - 24 UNC	H1	4	10050	00	01	-	-	10049	00	-	-	-	10048	00	-	-	-	2.374	0.618	1.047	0.194	0.152	0.252								
	H2		10150	00	-	-	08	10149	00	-	-	-	10148	00	-	05	08														
	H3		10250	00	01	05	08	10249	00	01	05	08	10248	00	01	-	-														
	H7		10087	00	-	-	-	10086	00	-	-	-	-	-	-	-	-														
10 - 32 UNF	H1	4	10053	00	-	-	-	10052	00	-	-	-	10051	00	-	-	-							2.374	0.618	1.047	0.194	0.152	0.252		
	H2		10153	00	-	05	08	10152	00	-	-	08	10151	00	-	05	-														
	H3		10253	00	01	05	08	10252	00	01	05	08	10251	00	01	05	08														
	H7		10286	00	-	-	-	10285	00	-	-	-	-	-	-	-	-														
12 - 24 UNC	H1	4	-	-	-	-	-	10055	00	-	-	-	-	-	-	-	-		2.374	0.622	1.110	0.220	0.165							0.280	
	H3		10256	00	01	-	08	10255	00	01	05	08	10254	00	01	-	08														
12 - 28 UNF	H1		-	-	-	-	-	10058	00	-	-	-	-	-	-	-	-														-
	H3		10259	00	01	05	08	10258	00	01	-	08	10257	00	01	-	08														

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
102	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65								

good best





List 102H

HSS	<input checked="" type="checkbox"/> S/O	<input type="checkbox"/> BR
-----	---	-----------------------------

+0.005" Oversize, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)							
			Bright	S/O						
6 - 32 UNC	+ 0.005	3	1593500	-	2.000	0.465	0.799	0.141	0.110	0.189
8 - 32 UNC			1594300	-	2.126	0.469	0.933	0.168	0.131	
10 - 24 UNC		4	1594900	-	2.374	0.618	1.047	0.194	0.152	0.252
10 - 32 UNF			1595100	1595101						

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
102H	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best





GENERAL PURPOSE

List 103

HSS	TiN	S/O	BR
-----	-----	-----	----

Three Flute, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Plug (3.5P - 4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			EDP Number	Coating Suffix			EDP Number	Coating Suffix								
				Bright	S/O	TiN		Bright							S/O	TiN
8 - 32 UNC	H1	3	10402	00	-	-	10401	00	-	-	2.126	0.469	0.933	0.168	0.131	
	H2		10452	00	-	-	10451	00	-	-						
	H3		10502	00	-	-	10501	00	-	-						
10 - 24 UNC	H1	3	-	-	-	-	10407	00	-	-	2.374	0.618	1.047	0.194	0.152	
	H2		-	-	-	-	10457	00	-	-						
	H3		10508	00	-	-	10507	00	-	-						
10 - 32 UNF	H2	3	10461	00	-	-	10460	00	-	-	2.500	0.748	1.181	0.255	0.191	
	H3		10511	00	01	05	10510	00	01	05						
1/4 - 20 UNC	H1	3	10593	00	-	-	11601	00	-	-	2.720	0.835	1.323	0.318	0.238	
	H2		10356	00	-	-	11651	00	-	-						
	H3		11702	00	01	05	11701	00	01	05						
	H5		11802	00	-	-	11801	00	-	-						
1/4 - 28 UNF	H3	3	11705	00	01	05	11704	00	01	05	2.937	0.937	1.413	0.381	0.286	
5/16 - 18 UNC	H1	-	-	-	-	11607	00	-	-							
	H3	11708	00	-	-	11707	00	-	05							
	H5	11808	00	-	-	11807	00	-	-							
5/16 - 24 UNF	H3	3	11711	00	01	05	11710	00	01	05	3.157	1.071	1.689	0.323	0.242	
3/8 - 16 UNC	H1	10462	00	-	-	11613	00	-	-							
	H3	11714	00	01	05	11713	00	01	05							
	H5	11814	00	-	-	11813	00	-	-							
3/8 - 24 UNF	H3	3	11717	00	01	05	11716	00	01	05	3.374	1.154	1.811	0.367	0.275	
7/16 - 14 UNC	H3	11720	00	-	-	11719	00	-	-							
7/16 - 20 UNF		10547	00	-	-	11722	00	-	-							
1/2 - 13 UNC		11726	00	01	05	11725	00	01	05							
1/2 - 20 UNF	H3	3	10593	00	-	-	11728	00	-	-						

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
103	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best





List 104

HSS

S/O

BR

Two Flute, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Plug (3.5P - 4.5P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
				Bright	S/O		Bright	S/O						
2 - 56 UNC	H1	2	10602	00	-	10601	00	-	1.752	0.472	0.512	0.141	0.110	0.189
3 - 48 UNC	H2		10652	00	-	10651	00	-						
4 - 40 UNC	H1		10658	00	-	10657	00	-	1.811	0.539	0.579			
			10079	00	-	10613	00	-						
5 - 40 UNC	H2		10664	00	-	10663	00	-	1.874	0.370	0.681			
5 - 44 UNF			10673	00	-	10672	00	-						
6 - 32 UNC	H1		10081	00	-	10628	00	-	2.000	0.524	0.858			
			10679	00	-	10678	00	-						
			10729	00	01	10728	00	01						
6 - 40 UNF	H2		10164	00	-	10681	00	-	2.126	0.539	1.004			
8 - 32 UNC	H3		10685	00	-	10684	00	-						
			10735	00	01	10734	00	01						
10 - 24 UNC	H2		10691	00	-	10690	00	-	2.374	0.701	1.130	0.194	0.152	
	H3		10741	00	01	10740	00	01						
10 - 32 UNF	H1		10262	00	-	10261	00	-	2.500	0.854	1.287	0.255	0.191	0.311
			10694	00	-	10693	00	-						
1/4 - 20 UNC	H3		10744	00	01	10743	00	01	2.720	0.854	1.323	0.318	0.238	0.374
1/4 - 28 UNF			11952	00	01	11951	00	01						
5/16 - 18 UNC			11955	00	01	11954	00	01						
			11958	00	-	11957	00	-						

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
104	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best





GENERAL PURPOSE

List 101N

HSS

BR

UNEF, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Bright	Bright						
12 - 32 UNEF	H3	4	1670200	1670100	2.374	0.622	1.110	0.220	0.165	0.280
1/4 - 32 UNEF			1680200	1680100	2.500	0.748	1.181	0.255	0.191	0.311
5/16 - 32 UNEF			1680400	1680300	2.720	0.835	1.323	0.318	0.238	0.374
3/8 - 32 UNEF			1680600	1680500	2.937	0.937	1.413	0.381	0.286	0.437
7/16 - 28 UNEF			1680800	1680700	3.157	0.992	1.689	0.323	0.242	0.406
1/2 - 28 UNEF			1681000	1680900	3.374	1.154	1.811	0.367	0.275	0.437
9/16 - 24 UNEF			1681200	1681100	3.594	1.252	1.941	0.429	0.322	0.500
5/8 - 24 UNEF			1681400	1681300	3.811	1.362	2.000	0.480	0.360	0.563
11/16 - 24 UNEF		1681600	1681500	4.031	2.130		0.542	0.406	0.626	
3/4 - 20 UNEF		1681800	1681700	4.252	1.500	2.220	0.590	0.442	0.689	
13/16 - 20 UNEF		1682000	1681900	4.469		2.382	0.652	0.489		
7/8 - 20 UNEF		1682200	1682100	4.689	1.665	2.500	0.697	0.523	0.752	
15/16 - 20 UNEF		1682400	1682300	4.906	1.500		0.760	0.570	0.752	
1 - 20 UNEF		1682600	1682500	5.126	1.874	2.720	0.800	0.600	0.811	

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
101N	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best





List 141

HSS S/O BR

Taper (5P and up), Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Plug (3.5P - 4.5P)			Taper (5P and up)	Overall Length	Thread Length	Neck Length	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix		EDP Number						
				Bright	S/O		Bright	S/O	Bright						
M1.6 x 0.35	D3	3	-	-	-	19788	00	-	-	41.30	7.90	8.90	3.58	2.79	4.80
M2 x 0.4			19774	00	-	19773	00	-	-	44.50	11.10	12.10			
M2.5 x 0.45			19723	00	01	19722	00	01	-	46.00	12.80	13.80			
M3 x 0.5			19702	00	01	19701	00	01	1970000	49.20	7.50	18.90			
M3.5 x 0.6	D4	4	19726	00	01	19725	00	01	-	50.80	9.00	20.40	4.27	3.33	6.40
M4 x 0.7			19705	00	01	19704	00	01	1970300	54.00	10.50	23.70			
M4.5 x 0.75			19729	00	01	19728	00	01	-	60.30	12.20	26.70			
M5 x 0.8	D5	5	19708	00	01	19707	00	01	1970600	63.50	15.90	30.00	4.93	3.86	9.50
M6 x 1.0			19711	00	01	19710	00	01	1970900	69.10	18.80	33.60			
M7 x 1.0	D6	6	19732	00	01	19731	00	01	-	74.60	22.50	35.10	9.68	7.26	11.10
M8 x 1.25			19714	00	01	19713	00	01	1971200	85.70	27.20	46.00			
M8 x 1.0			19735	00	01	19734	00	01	-	91.30	30.80	49.30			
M10 x 1.5	D5	5	19717	00	01	19716	00	01	1971500	96.80	31.00	50.80	12.19	9.14	14.30
M10 x 1.25			19741	00	01	19740	00	01	-	102.40	38.80	54.10			
M10 x 1.0	D6	4	19738	00	01	19737	00	01	-	113.50	37.50	60.50	16.56	12.42	17.50
M12 x 1.75			19720	00	01	19719	00	01	1971800	124.60	45.00	63.50			
M12 x 1.5			19747	00	-	19746	00	-	-	124.60	52.50	74.70			
M12 x 1.25	D7	7	19744	00	01	19743	00	01	-	138.10	52.50	74.70	25.93	19.46	25.40
M14 x 2.0			19753	00	-	19752	00	01	1975100	154.00	60.00	80.00			
M14 x 1.5	D8	8	19777	00	-	19776	00	-	-	154.00	60.00	80.00	31.32	23.50	28.60
M14 x 1.25			19750	00	-	19749	00	-	-	154.00	60.00	80.00			
M16 x 2.0	D9	9	19759	00	01	19758	00	01	1975700	154.00	60.00	80.00	31.32	23.50	28.60
M16 x 1.5			19756	00	01	19755	00	01	-	154.00	60.00	80.00			
M18 x 2.5	D7	7	19765	00	-	19764	00	01	-	154.00	60.00	80.00	31.32	23.50	28.60
M18 x 1.5			19762	00	01	19761	00	-	-	154.00	60.00	80.00			
M20 x 2.5	D8	8	19771	00	01	19770	00	01	1966900	154.00	60.00	80.00	31.32	23.50	28.60
M20 x 1.5			19768	00	01	19767	00	-	-	154.00	60.00	80.00			
M24 x 3.0	D9	9	19772	00	-	19775	00	-	1978000	154.00	60.00	80.00	31.32	23.50	28.60
M30 x 3.5			19782	00	-	19783	00	-	1978400	154.00	60.00	80.00			
M36 x 4.0	D9	9	-	-	-	19786	00	-	1978700	154.00	60.00	80.00	31.32	23.50	28.60
M36 x 4.0			-	-	-	19786	00	-	1978700	154.00	60.00	80.00			

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
141	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






GENERAL PURPOSE

List 121

HSS S/O BR

JIS, Taper (5P and up), Plug (4.5P-5.5P), Bottom (1.5P-2P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			Bottom (1.5P - 2P)		Plug (4.5P - 5.5P)							Taper (5P and up)	
			Bright	S/O	Bright							S/O	Bright
M2 x 0.4		3	233	-	232	-	-	40.00	8.00	12.00	3.00	2.50	5.00
M2.3 x 0.4			293	-	292	-	-	42.00	9.00	-			
M2.6 x 0.45			353	-	352	-	-	44.00		-			
M3 x 0.5			393	22606	392	22605	391	46.00	11.00	19.00	4.00	3.20	6.00
M3.5 x 0.6			413	-	412	-	411	48.00	13.00	20.00			
M4 x 0.7			453	22612	452	22611	451	52.00		21.00	5.00	4.00	
M4.5 x 0.75			-	-	482	-	-	55.00		24.00			
M5 x 0.8			513	22618	512	22617	511	60.00	16.00	24.00	5.50	4.50	
M6 x 1.0			583	22622	582	22621	581	62.00	19.00	29.00			
M6 x 0.75			593	-	592	-	591	65.00		33.00	6.00	4.50	
M7 x 1.0			-	-	612	-	-	70.00	22.00	6.20			5.00
M8 x 1.25			643	22628	642	22627	641	70.00	37.00				
M8 x 1.0		653	-	652	-	651	20.00		35.00				
M8 x 0.75		-	-	662	-	-	72.00	22.00	38.00	7.00	5.50		
M9 x 1.25		-	-	692	-	-	75.00	24.00	41.00				
M10 x 1.5		733	22634	732	22633	731							
M10 x 1.25		743	22638	742	22637	741							
M10 x 1.0		753	-	752	-	751	80.00	25.00	8.00	6.00			
M11 x 1.5		-	-	792	-	-							
M12 x 1.75		853	22644	852	22643	851							
M12 x 1.5		-	-	862	-	-	82.00	29.00	48.00	8.50	6.50		
M12 x 1.25		873	-	872	-	871							
M12 x 1.0		883	-	882	-	881							
M14 x 2.0		983	-	982	-	981	88.00	30.00	10.50	8.00	11.00		
M14 x 1.5		993	-	992	-	991							
M14 x 1.25		1003	-	1002	-	1001							
M16 x 2.0		1113	-	1112	-	1111	95.00	32.00	52.00	12.50	10.00		
M16 x 1.5		1123	-	1122	-	1121							
M16 x 1.0		-	-	1142	-	-							
M18 x 2.5		1253	-	1252	-	1251	100.00	37.00	55.00	14.00	11.00		
M18 x 2.0		-	-	1262	-	-							
M18 x 1.5		1273	-	1272	-	1271							
M20 x 2.5		1393	-	1392	-	1391	105.00	37.00	58.00	15.00	12.00		
M20 x 1.5		1413	-	1412	-	1411							
M22 x 2.5		1503	-	1502	-	1501							
M22 x 1.5		1523	-	1522	-	-	115.00	38.00	63.00	17.00	13.00		
M24 x 3.0		1603	-	1602	-	1601							
M24 x 1.5		-	-	1632	-	-							
M26 x 3.0		1713	-	1712	-	1711	120.00	45.00	66.00	19.00	15.00		
M26 x 1.5		1733	-	1732	-	1731							
M28 x 1.5		1823	-	1822	-	1821							
M30 x 3.5		1843	-	1842	-	1841	130.00	51.00	74.00	23.00	17.00		
M30 x 1.5		1873	-	1872	-	1871							
M32 x 1.5		1933	-	1932	-	1931							
M33 x 1.5		1983	-	1982	-	1981	135.00	45.00	60.00	19.00	20.00		
							105.00	37.00	47.00	24.00	19.00	22.00	
							110.00		25.00				

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.





List 121 (Continued)

HSS	<input checked="" type="checkbox"/> S/O	<input type="checkbox"/> BR
-----	---	-----------------------------

JIS, Taper (5P and up), Plug (4.5P-5.5P), Bottom (1.5P-2P)

Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number					Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)		Plug (4.5P - 5.5P)		Taper (5P and up)						
			Bright	S/O	Bright	S/O	Bright						
M34 x 1.5	JIS 2	4	2033	-	2032	-	2031	110.00	37.00	47.00	26.00	21.00	24.00
M36 x 1.5			2143	-	2142	-	2141				28.00		

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
121	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





GENERAL PURPOSE LS

HSS S/O

List 916

Long Shank, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Long Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)							
			S/O	L						
1/4 - 20 UNC	H3	4	1290001	6.000	1.000	1.689	0.255	0.191	0.311	
			1290201	8.000						
5/16 - 18 UNC			1290401	6.000	1.126	1.756	0.318	0.238	0.374	
			1290601	8.000						
3/8 - 16 UNC			1290801	6.000	1.252	1.882	0.381	0.286	0.437	
			1291001	8.000						
7/16 - 14 UNC			1291201	10.000	1.437	2.224	0.444	0.333	0.500	
			1291401	6.000						
1/2 - 13 UNC			1291601	8.000	1.657	2.445	0.507	0.380	0.563	
			1292001	6.000						
			1292201	8.000						
			1292401	10.000						
5/8 - 11 UNC			1292601	12.000	1.811	2.598	0.633	0.475	0.689	
			1292801	6.000						
			1293001	8.000						
			1293201	10.000						
3/4 - 10 UNC			1293401	12.000	2.000	2.787	0.759	0.569	0.748	
			1293601	10.000						
			1293801	12.000						

Packed: 1 pc.
Available Steam Oxide finish only.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
916	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>									
SFM	25-80	20-50	20-45						25-75									

good best





List S110

HSS

BR

Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	Basic O.D.	Basic P.D.
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)								
			Bright	Bright								
000 - 120 UNC	H1	2	1020000	1010000	1.571	0.201	0.260	0.141	0.110	0.189	0.034	0.0286
	H2		2054000	1929000								
00 - 90 UNC	H1		1040000	1030000	1.728	0.280	0.339				0.047	0.0402
	H2		2055000	3370000								
00 - 96 UNC	H1		1070000	1060000	1.322000	3380000	0.0398					
	H2		1322000	3380000								

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Suggested Hole Size Limits for Different Lengths of Engagement

Tap Size	Basic O.D.	Basic P.D.	Depth of Thread Hole					
			Up to 1/3D		1/3 to 1/2D		1/2 to 3D	
			Min.	Max.	Min.	Max.	Min.	Max.
000-120	0.0340	0.0286	0.0260	0.0270	0.0270	0.0280	0.0275	0.0285
00-90	0.0470	0.0398	0.0373	0.0385	0.0380	0.0392	0.0388	0.0400
00-96	0.0470	0.0402	0.0379	0.0393	0.0388	0.0406	0.0397	0.0415

Work Material

List No.	P			Alloy Steels 4140 4340	Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels					Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010 1018	1035 1045	1065														
S110	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						

good best






GENERAL PURPOSE

Designed for Plastic

List 114

HSS-Co **N**

Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Nitride	Nitride						
2 - 56 UNC	2B+	3	3141903	3141803	1.752	0.437	-	0.141	0.110	0.189
	H7		3141303	3141203			-			
4 - 40 UNC	2B+	4	3142903	3142803	1.874	0.295	0.559	0.168	0.131	0.252
	H7		3142303	3142203						
6 - 32 UNC	2B+		3144903	3144803	2.000	0.370	0.685	0.194	0.152	0.311
	H7		3144303	3144203						
8 - 32 UNC	2B+		3145903	3145803	2.126	0.374	0.752	0.194	0.152	0.311
	H7		3145303	3145203						
10 - 24 UNC	2B+		3146903	3146803	2.374	0.492	0.866	0.194	0.152	0.311
	H7		3146303	3146203						
10 - 32 UNF	2B+		3146503	3146403	2.500	0.594	0.996	0.255	0.191	0.311
	H7		3146703	3146603						
1/4 - 20 UNC	2B+	3147903	3147803	2.500	0.594	0.996	0.255	0.191	0.311	
	H7	3147303	3147203							

Packed: 1 pc.
Available Nitride treatment only.



The H7 series are designed for tapping thermoplastic materials such as nylon and vinyl.

The 2B+ are designed for tapping thermosetting, reinforced plastics and laminated plastics such as epoxy, bakelite, fiberglass, etc. The 2B+ limit is based on the actual products limit and machining properties, taking the guess work out of H limit selection.

Oversize 2B+ Series = +.0005"~.001" over 2B thread limit.

Work Material															
List No.	P					M			K	N		S	Other		
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Thermo Plastics	Thermosetting Plastics
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel			
114	1010	1035	1065	4140											
SFM	1018	1045		4340										33-66	33-66

good best






List 180

HSS

BR

Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Bright	Bright						
1,1/8 - 8	H5	4	1690200	1690100	5.437	1.874	2.941	0.896	0.672	0.874
1,1/4 - 8			1690500	1690400	5.752		3.000	1.021	0.766	1.000
1,3/8 - 8			1690800	1690700	6.063		3.161	1.108	0.831	1.063
1,1/2 - 8			1691100	1691000	6.374		3.382	1.233	0.925	1.126
1,5/8 - 8	1691400	1691300	6.689	1.305	0.979					
1,3/4 - 8	H6	6	1691700	1691600	7.000		3.591	1.430	1.072	1.252
2 - 8			1692300	1692200	7.626		3.811	1.644	1.233	1.374
2,1/4 - 8			8020000	8019000	8.252		4.000	1.894	1.420	1.437

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
180	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





GENERAL PURPOSE

Left Hand Taps


List 101L

HSS

BR

LH

Left Hand, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk		
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)								
			Bright	Bright								
6 - 32 UNC	H3	3	1650200	1650100	2.000	0.523	0.858	0.140	0.109	0.188		
6 - 40 UNF	H2		1650400	1650300								
8 - 32 UNC	H3		1650600	1650500								
8 - 36 UNF	H2	4	1650800	1650700	2.126	0.539	1.003	0.167	0.131	0.251		
10 - 24 UNC	H3		1651000	1650900								
10 - 32 UNF			1651200	1651100								
1/4 - 20 UNC			1660200	1660100	2.500	0.854	1.287	0.255	0.190	0.311		
1/4 - 28 UNF			1660400	1660300								
5/16 - 18 UNC			1660600	1660500	2.720	0.834	1.322	0.317	0.238	0.374		
5/16 - 24 UNF			1660800	1660700								
3/8 - 16 UNC			H3	1661000	1660900	2.937	0.937	1.413	0.380	0.285	0.437	
3/8 - 24 UNF				1661200	1661100							
7/16 - 14 UNC				1661400	1661300	3.157	1.070	1.688	0.322	0.242	0.405	
7/16 - 20 UNF				1661600	1661500							
1/2 - 13 UNC				1661800	1661700	3.374	1.153	1.811	0.367	0.274	0.437	
1/2 - 20 UNF				1662000	1661900							
9/16 - 12 UNC				H4	1662200	1662100	3.594	1.251	1.940	0.429	0.322	0.500
9/16 - 18 UNF					1662400	1662300						
5/8 - 11 UNC			1662600		1662500	3.811	1.362	2.000	0.480	0.359	0.562	
5/8 - 18 UNF		1662800	1662700									
3/4 - 10 UNC	1663400	1663300	4.252		1.500	2.220	0.590	0.442	0.688			
3/4 - 16 UNF	1663600	1663500										
7/8 - 9 UNC	H4	1663800	1663700		4.689	1.665	2.500	0.697	0.522	0.751		
7/8 - 14 UNF		1664000	1663900									
1 - 8 UNC		1664200	1664100	5.126	1.874	2.720	0.800	0.600	0.811			
1 - 12 UNF		1664400	1664300									

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
101L	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 16260

HSS-Co	V	STI
--------	---	-----

HL-S-XPF, DIN Overall Length, Modified Bottom (2.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
			Modified Bottom (2.5P)							Min	Max	2B	3B
			V							L	Lc	Ln	d
2 - 56 UNC	2.5P	H1	1626000108	2.274	0.261	0.718	0.140	0.109	0.188	0.0994	0.1013	H2	H1
		H2	1626000208							0.1309	0.1333	H3	H2
4 - 40 UNC	2.5P	H3	1626000308	2.554	0.365	0.841	0.140	0.109	0.188	0.1309	0.1333		
		H2	1626000408		0.362					0.800	0.1281	0.1299	
4 - 48 UNF	2.5P	H2	1626000508	2.274	0.362	0.800	0.140	0.109	0.188	0.1281	0.1299	H3	H2
		H3	1626000608							0.1613	0.1637		
6 - 32 UNC	2.5P	H2	1626000708	2.858	0.456	1.003	0.194	0.151	0.251	0.1613	0.1637	H3	H2
		H3	1626000808							0.1569	0.1590		
6 - 40 UNF	2.5P	H2	1626000908	2.839	0.449	0.996	0.167	0.131	0.251	0.1569	0.1590	H3	H2
		H3	1626001008							0.1873	0.1895		
8 - 32 UNC	2.5P	H2	1626001108	3.257	0.452	1.196	0.220	0.164	0.279	0.1873	0.1895	H3	H2
		H3	1626001208							0.1849	0.1870		
8 - 36 UNF	2.5P	H2	1626001308	3.257	0.452	1.196	0.220	0.164	0.279	0.1849	0.1870	H3	H2
		H3	1626001408							0.2210	0.2238		
10 - 24 UNC	2.5P	H4	1626001508	3.246	0.605	1.203	0.255	0.190	0.287	0.2210	0.2238	H4	H3
H3		1626001608	0.2138							0.2160			
10 - 32 UNF	2.5P	H3	1626001708	3.246	0.600	1.199	0.255	0.190	0.287	0.2138	0.2160	H4	H3
H4		1626001808	0.2868							0.2899			
1/4 - 20 UNC	2.5P	H3	1626001908	3.543	0.500	1.377	0.317	0.238	0.374	0.2868	0.2899	H4	H3
H4		1626002008	0.2769							0.2789			
1/4 - 28 UNF	2.5P	H3	1626002108	3.543	0.500	1.377	0.317	0.238	0.374	0.2769	0.2789	H4	H3
H4		1626002208	0.3537							0.3568			
5/16 - 18 UNC	2.5P	H5	1626002308	3.937	0.555	1.535	0.380	0.285	0.437	0.3537	0.3568	H5	H4
H4		1626002408	0.3440							0.3462			
5/16 - 24 UNF	2.5P	H4	1626002508	3.543	0.555	1.377	0.380	0.285	0.437	0.3440	0.3462	H5	H4
H5		1626002608	0.4215							0.4248			
3/8 - 16 UNC	2.5P	H6	1626002708	3.937	0.625	1.933	0.367	0.274	0.437	0.4215	0.4248	H6	H5
H5		1626002808	0.4070							0.4091			
3/8 - 24 UNF	2.5P	H5	1626002908	3.543	0.625	1.712	0.322	0.242	0.405	0.4070	0.4091	H6	H5
H6		1626003008	0.4907							0.4938			
7/16 - 14 UNC	2.5P	H5	1626003108	4.331	0.712	1.972	0.429	0.322	0.500	0.4907	0.4938	H7	H5
H7		1626003208	0.4758							0.4777			
7/16 - 20 UNF	2.5P	H5	1626003308	3.937	0.712	1.933	0.367	0.274	0.437	0.4758	0.4777	H7	H5
H7		1626003408	0.5570							0.5600			
1/2 - 13 UNC	2.5P	H5	1626003508	4.331	0.767	2.125	0.480	0.359	0.562	0.5570	0.5600	H7	H5
H7		1626003608											

Packed: 1 pc.
Available V coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16260	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	12-25		

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16260 (Continued)

HSS-Co	V	STI
--------	---	-----

HL-S-XPF, DIN Overall Length, Modified Bottom (2.5P)



Units: Inch

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size		Class of Fit	
			Modified Bottom (2.5P)							Min	Max	2B	3B
			V							L	Lc	Ln	d
1/2 - 20 UNF 9/16 - 12 UNC 9/16 - 18 UNF 5/8 - 11 UNC 5/8 - 18 UNF 3/4 - 10 UNC 3/4 - 16 UNF 7/8 - 9 UNC 7/8 - 14 UNF 1 - 8 UNC 1 - 12 UNF	2.5P	H5	1626003708	3.937	0.767	1.972	0.429	0.322	0.500	0.5383	0.5402	H7	H5
		H7	1626003808										
		H9	1626003908	4.331	0.834	2.165	0.542	0.405	0.625	0.6251	0.6282	H9	H7
		H7	1626004108										
		H9	1626004208	4.921	0.909	2.433	0.590	0.442	0.688	0.6928	0.6961	H10	H8
		H7	1626004308										
		H9	1626004408	4.331	1.000	2.165	0.542	0.405	0.625	0.6682	0.6702	H11	H8
		H7	1626004508										
		H9	1626004608	6.299	1.110	3.011	0.800	0.600	0.811	0.9573	0.9606	H12	H9
		H7	1626004708										
		H9	1626004808	5.512	1.251	3.114	1.020	0.766	1.000	1.0925	1.0966	H13	H10
		H7	1626004908										
		H9	1626005008	7.087	1.251	3.114	0.895	0.672	0.874	1.0636	1.0658	H14	H11
		H7	1626005108										
		H10	1626005208	5.512	5.512	5.512	0.895	0.672	0.874	1.0636	1.0658	H15	H12
		H7	1626005308										
		H10	1626005408	7.087	7.087	7.087	1.020	0.766	1.000	1.0925	1.0966	H16	H13
		H7	1626005508										
H11	1626005608	5.512	5.512	5.512	0.895	0.672	0.874	1.0636	1.0658	H17	H14		
H8	1626005708												
H11	1626005808												

Packed: 1 pc.
Available V coating only.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16260	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	12-25			

*For Stainless Steel, please use non-water-soluble coolant.

good best






List 16360

HSS-Co	V	STI
--------	---	-----

HL-S-XPF, DIN Overall Length, Modified Bottom (2.5P)



Units: mm

Tap Size	Lead	Thread Limit	EDP Number	DIN Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Tap Drill Size	
			Modified Bottom (2.5P)	L	Lc	Ln	d	k	lk	Min	Max
			V	L	Lc	Ln	d	k	lk	Min	Max
M2 x 0.4	2.5P	D3	1636000108	50.00	8.00	9.21	3.58	2.79	4.80	2.32	2.35
M2.5 x 0.45			1636000208	56.00	6.00	18.26				2.85	2.89
M3 x 0.5			1636000308	63.00	7.00	21.32				3.39	3.43
M4 x 0.7		D4	1636000408	70.00	10.00	25.37	4.92	3.86	6.40	4.54	4.59
M5 x 0.8			1636000508	80.00	11.00	30.46	6.47	4.85	7.30	5.61	5.67
M6 x 1.0		D5	1636000608	90.00	10.00	35.00	8.07	6.05	9.50	6.76	6.83
M8 x 1.25			1636000708	100.00	12.00	39.00	9.67	7.26	11.10	8.95	9.03
M10 x 1.5			1636000808		15.00	49.10	9.32	6.98		11.15	11.23
M12 x 1.75		D9	1636000908	110.00	17.00	50.10	10.89	8.18	12.70	13.33	13.43
M14 x 2.0			1636001008							20.00	55.00
M16 x 2.0		D10	1636001108	125.00	25.00	61.80	14.98	11.23	17.50		17.52
M18 x 2.5			1636001208	140.00		67.40	17.70	13.28	19.10	19.87	20.00
M20 x 2.5			1636001308	160.00		68.40	19.30	14.48		21.87	22.00
M22 x 2.5			1636001408			76.50	20.32	15.24	20.60	23.87	24.00
M24 x 3.0		D11	1636001508		30.00	79.10	22.75	17.07	22.20	26.23	26.38

Packed: 1 pc.
Available V coating only.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
16360	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	50-115	50-115	50-85	50-85	20-65	15-40	15-35	10-30		65-115	65-90	8-12	8-15	50-100	12-25			


*For Stainless Steel, please use non-water-soluble coolant.

good best





List 315Ti



V-HL-Ti-SFT, Spiral Fluted, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)							
			V	L	Lc	Ln	d	k	lk	
2 - 56 UNC	H2	3	31540108	1.944	0.574	0.614	0.140	0.109	0.188	
4 - 40 UNC			31540208	2.058	0.688	-				
6 - 32 UNC	H3		31540308	2.451	0.870	1.066	0.194	0.151	0.251	
8 - 32 UNC			31540408	2.464	0.937	-	0.220	0.164	0.279	
10 - 32 UNF			31540508	2.500	1.000	1.196	0.255	0.190	0.287	
1/4 - 28 UNF			31540608	2.720	0.500	1.125	0.317	0.238	0.374	
5/16 - 24 UNF			31540708	2.937	0.555	1.251	0.380	0.285	0.437	
3/8 - 24 UNF			31540808	3.157	0.625	1.712	0.322	0.242	0.405	
7/16 - 20 UNF	H4		31540908	3.374	0.712	1.933	0.367	0.274	0.437	
1/2 - 20 UNF			31541008	3.594	0.767	1.972	0.429	0.322	0.500	

Packed: 1 pc.
Available V coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
315Ti				<input type="checkbox"/>				<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30			8-20					8-15	8-15	15-35	10-20		


good best





List 315Ni

V-HL-Ni-SFT, Spiral Fluted, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P-3P)	V						
			L	Lc	Ln	Lk	d	k	lk	
2 - 56 UNC	H2	3	31520108	1.880	0.559	0.598	0.140	0.109	0.188	
4 - 40 UNC			31520208	2.058	0.688	-				
6 - 32 UNC	H3		31520308	2.380	0.870	1.067	0.194	0.151	0.251	
8 - 32 UNC			31520408		0.937	-	0.220	0.164	0.279	
10 - 32 UNF			31520508	2.500	1.000	1.197	0.255	0.190	0.311	
1/4 - 28 UNF			31520608	2.720	0.500	1.125	0.317	0.238	0.374	
5/16 - 24 UNF			31520708	2.937	0.555	1.251	0.380	0.285	0.437	
3/8 - 24 UNF			31520808	3.157	0.625	1.712	0.322	0.242	0.405	
7/16 - 20 UNF	H4		31520908	3.374	0.712	1.933	0.367	0.274	0.437	
1/2 - 20 UNF			31521008	3.594	0.767	1.972	0.429	0.322	0.500	

Packed: 1 pc.
Available V coating only.



Work Material																										
List No.	P					M			K	N		S		H												
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels												
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC									
315Ni	1010	1035	1065	4140																						
SFM	1018	1045		4340				8-20																		



good best





List 315

V-HL-SFT, Spiral Fluted, Modified Bottom (2.5P-3P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix							
				S/O	V						
2 - 56 UNC	H2	2	17157	01	08	1.933	0.177	0.562	0.140	0.109	0.188
3 - 48 UNC			315001	01	08	1.996	0.208	0.625			
4 - 40 UNC			17158	01	08	2.059	0.251	0.688			
4 - 48 UNF			315002	01	08	2.075	0.267	0.704			
6 - 32 UNC	H3	2	17159	01	08	2.457	0.311	0.874	0.194	0.151	0.251
6 - 40 UNF			315003	01	08						
8 - 32 UNC	H3	2	17161	01	08	2.465	0.311	0.937	0.220	0.164	0.279
8 - 36 UNF			315004	01	08						
10 - 24 UNC	H3	2	315005	01	08	2.524	0.440	1.023	0.255	0.190	0.287
10 - 32 UNF			315006	01	08						
1/4 - 20 UNC	H3	2	315007	01	08	2.720	0.500	1.125	0.317	0.238	0.374
1/4 - 28 UNF			315008	01	08						
5/16 - 18 UNC	H4	3	315009	01	08	2.937	0.555	1.251	0.380	0.285	0.437
5/16 - 24 UNF			315010	01	08						
3/8 - 16 UNC	H4	3	315012	01	08	3.374	0.625	1.933	0.367	0.274	0.405
3/8 - 24 UNF			315013	01	08						
7/16 - 14 UNC	H4	3	315016	01	08	3.594	0.712	1.972	0.429	0.322	0.500
7/16 - 20 UNF			315017	01	08						
1/2 - 13 UNC	H4	3	315020	01	08	3.811	0.767	2.125	0.480	0.359	0.562
1/2 - 20 UNF			315021	01	08						
9/16 - 12 UNC	H4	4	315024	01	08	4.031	0.834	2.165	0.542	0.405	0.625
9/16 - 18 UNF			315025	01	08						
5/8 - 11 UNC	H4	4	315028	01	08	4.252	0.909	2.433	0.590	0.442	0.688
5/8 - 18 UNF			315029	01	08						
3/4 - 10 UNC	H5	4	315032	01	08	4.689	1.000	2.653	0.697	0.522	0.751
3/4 - 16 UNF			315033	01	08						
7/8 - 9 UNC	H5	4	315036	01	08	5.126	1.110	3.011	0.800	0.600	0.811
			315037	01	08						

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.





List 315 (Continued)



VC10	V	S/O	STI	15°
------	---	-----	-----	-----

V-HL-SFT, Spiral Fluted, Modified Bottom (2.5P-3P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V	L	Lc	Ln	d	k	lk
7/8 - 14 UNF	H3	4	315038	01	08	5.126	1.110	3.011	0.800	0.600	0.811
	H4		315039	01	08						
1 - 8 UNC	H4		315040	01	08	5.572	1.251	3.114	1.020	0.766	1.000
	H6		315041	01	08						
1 - 12 UNF	H4		315042	01	08	5.437			0.895	0.672	0.874
	H6		315043	01	08						

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
315				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20			


good best





List 345STI

Spiral Fluted, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix								
				S/O	V							
M2 x 0.4	D2	2	345001	01	08	47.80	12.00	13.90	3.58	2.79	4.80	
M2.5 x 0.45			345002	01	08	49.30	4.00	15.90				
M3 x 0.5	D3	3	345003	01	08	50.80	5.00	17.60	4.92	3.86	6.40	
M4 x 0.7			345004	01	08	60.50	7.00	22.20				
M5 x 0.8			345005	01	08	63.50	8.00	25.50				
M6 x 1			345006	01	08	69.10	10.00	28.60				
M8 x 1.25	D4	3	345007	01	08	74.70	12.00	31.80	9.67	7.26	11.10	
M10 x 1.5			345008	01	08	85.90	15.00	49.10	9.32	6.98	11.10	
M12 x 1.75	D5	4	345009	01	08	91.30	17.00	50.10	10.89	8.18	12.70	
M14 x 2			345010	01	08	102.40	20.00	55.00	13.76	10.31	15.90	
M16 x 2			345011	01	08	108.00		61.80	14.98	11.23	17.50	
M18 x 2.5			345012	01	08	119.10	25.00	67.40	17.70	13.28	19.10	
M20 x 2.5			345013	01	08	124.60		68.40	19.30	14.48	20.60	
M22 x 2.5			345014	01	08	130.20	76.50	20.32	15.24	20.60		
M24 x 3			D6	345015	01	08	138.10	30.00	79.10	22.75	17.07	22.20

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
345STI				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30	10-25		12-45	8-20			8-15	8-15	15-35	10-20			

good best






List 302

Spiral Fluted, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



HSSE	V	S/O	STI	45°
------	---	-----	-----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
				S/O	V		S/O	V						
2 - 56 UNC	H2	2	01447	01	08	17135	01	-	1.882	0.176	0.565	0.141	0.110	0.189
3 - 48 UNC			302001	01	08	-	-	-	1.941	0.209	0.626			
4 - 40 UNC			01448	01	08	17136	01	-	2.000	0.252	0.689			
4 - 48 UNF			302002	01	08	-	-	-						
6 - 32 UNC	H3	3	01449	01	08	17137	01	-	2.382	0.313	0.876	0.194	0.152	0.252
6 - 40 UNF			01450	01	08	17138	01	-						
8 - 32 UNC	H2	3	01451	01	08	302003	01	08	2.382	0.311	0.937	0.220	0.165	0.280
8 - 36 UNF			01452	01	08	17139	01	-						
10 - 24 UNC	H3	3	01453	01	08	17140	01	-	2.500	0.418	1.000	0.255	0.191	0.311
10 - 32 UNF			01454	01	08	302004	01	08						
1/4 - 20 UNC	H2	3	01456	01	08	302008	01	08	2.720	0.500	1.126	0.318	0.238	0.374
1/4 - 28 UNF			01457	01	08	17141	01	-						
5/16 - 18 UNC	H3	3	01460	01	08	302010	01	08	2.941	0.555	1.252	0.381	0.286	0.437
5/16 - 24 UNF			01461	01	08	302011	01	08						
3/8 - 16 UNC	H4	3	01463	01	08	17144	01	-	3.382	0.626	1.933	0.367	0.275	0.406
3/8 - 24 UNF			01464	01	08	302012	01	08						
7/16 - 14 UNC	H2	3	01466	01	08	17145	01	-	3.591	0.713	1.972	0.429	0.322	0.500
7/16 - 20 UNF			01467	01	08	302014	01	08						
1/2 - 13 UNC	H3	3	01468	01	08	302015	01	08	3.811	0.768	2.126	0.480	0.360	0.563
1/2 - 20 UNF			01469	01	08	302016	01	08						
9/16 - 12 UNC	H4	3	01470	01	08	302017	01	08	3.911	0.713	1.972	0.429	0.322	0.500
			01471	01	08	302018	01	08						
	H3	4	01472	01	08	302021	01	08	4.031	0.835	2.126	0.542	0.406	0.626
			01473	01	08	302022	01	08						
	H4	4	01474	01	08	302022	01	08	3.591	0.768	1.972	0.429	0.322	0.500
			01475	01	08	302023	01	08						
	H3	4	01476	01	08	302024	01	08	3.811	0.768	2.126	0.480	0.360	0.563
			01477	01	08	302025	01	08						
	H4	4	01478	01	08	302026	01	08	3.591	0.768	1.972	0.429	0.322	0.500
			01479	01	08	302027	01	08						
	H3	4	302029	01	08	302028	01	08	4.031	0.835	2.126	0.542	0.406	0.626
			302032	01	08	302031	01	08						

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.

continued on next page



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
302	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										


good best





List 302 (Continued)

Spiral Fluted, Modified Bottom (2.5P-3P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Bottom (1.5P - 2P)			Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix		EDP Number	Coating Suffix							
				S/O	V		S/O	V						
9/16 - 18 UNF	H3	4	01480	01	08	302033	01	08	3.810	0.835	2.126	0.480	0.360	0.563
	H4		302035	01	08	302034	01	08						
5/8 - 11 UNC	H3		302037	01	08	302036	01	08	4.252	0.909	2.433	0.590	0.442	0.689
	H4		302039	01	08	302038	01	08						
5/8 - 18 UNF	H3		01481	01	08	302041	01	08	4.031	1.000	2.165	0.542	0.406	0.626
	H4		302043	01	08	302042	01	08						
3/4 - 10 UNC	H3		302045	01	08	302044	01	08	4.689	1.110	2.654	0.697	0.523	0.752
	H5		302047	01	08	302046	01	08						
3/4 - 16 UNF	H3		302049	01	08	302048	01	08	4.467	3.012	0.800	0.600	0.811	
	H4		01482	01	08	302051	01	08						
7/8 - 9 UNC	H3		302053	01	08	302052	01	08	5.130	1.252	3.075	1.021	0.766	1.000
	H5		302055	01	08	302054	01	08						
7/8 - 14 UNF	H3		302057	01	08	302056	01	08	5.752	0.896	0.672	0.874		
	H4		01483	01	08	302059	01	08						
1 - 8 UNC	H3		302063	01	08	302062	01	08	5.441	0.896	0.672	0.874		
	H6		302065	01	08	302064	01	08						
1 - 12 UNF	H4	302067	01	08	302066	01	08	5.441	0.896	0.672	0.874			
	H6	302069	01	08	302068	01	08							

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
302	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>										
SFM	25-80	20-50	20-45			20-45	20-45	8-20										

good best





List 343STI

Spiral Fluted, Modified Bottom (2.5P-3P)



HSSE	V	S/O	STI	45°
------	---	-----	-----	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V						
M2 x 0.4	D2	2	343001	01	08	46.00	12.70	13.70	3.58	2.79	4.80
M2.5 x 0.45			343002	01	08	49.30	4.60	16.00			
M3 x 0.5	D3	3	343003	01	08	50.80	5.20	17.70	4.92	3.86	6.40
M4 x 0.7			343004	01	08	60.50	7.10	22.30			
M5 x 0.8			343005	01	08	63.50	8.10	25.50			
M6 x 1.0	D4	3	343006	01	08	69.10	10.00	28.60	8.07	6.05	9.50
M8 x 1.25			343007	01	08	74.70	12.50	31.80	9.67	7.26	11.10
M10 x 1.5	D5	4	343008	01	08	85.90	15.00	49.10	9.32	6.98	11.10
M12 x 1.75			343009	01	08	91.20	17.50	50.10	10.89	8.18	
M14 x 2.0	D6	4	343010	01	08	102.40	20.00	55.00	13.76	10.31	15.90
M16 x 2.0			343011	01	08	108.00		61.80	14.98	11.23	17.50
M18 x 2.5	D5	4	343012	01	08	119.10	25.00	67.40	17.70	13.28	19.10
M20 x 2.5			343013	01	08	124.60		68.40	19.30	14.48	
M22 x 2.5			343014	01	08	130.20		76.50	20.32	15.24	
M24 x 3.0	D6	4	343015	01	08	138.10	30.00	79.10	22.75	17.07	22.20

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
343STI	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45			20-45	20-45	8-20									

good best





List 13039



Spiral Fluted, Modified Bottom (2.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Modified Bottom (2.5P - 3P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix							
				Bright	V						
2 - 56 UNC	H2	2	13039001	00	08	1.882	0.177	0.562	0.140	0.109	0.188
4 - 40 UNC			13039002	00	08	2.000	0.251	0.688			
6 - 32 UNC			13039003	00	08	2.382	0.311	0.874	0.194	0.151	0.251
8 - 32 UNC			13039004	00	08			0.937	0.220	0.164	0.279
10 - 32 UNF			H3	13039005	00	08	2.500	0.417	1.000	0.255	0.190
1/4 - 20 UNC	13039006			00	08	2.720	0.500	1.125	0.317	0.238	0.374
1/4 - 28 UNF	13039007			00	08						
5/16 - 18 UNC	13039008			00	08	2.941	0.555	1.251	0.380	0.285	0.437
5/16 - 24 UNF	13039009			00	08						
3/8 - 16 UNC	13039010			00	08						
3/8 - 24 UNF	13039011	00		08	3.161	1.712	0.322	0.242	0.405		
7/16 - 20 UNF	H4	13039012		00	08	3.382	0.712	1.933	0.367	0.274	0.437
1/2 - 20 UNF		13039013	00	08	3.591	0.767	1.972	0.429	0.322	0.500	

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H								
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels							
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC				
13039	1010	1035	1065	4140																	
SFM	1018	1045	1065	4340																	


good best





List S108

Spiral Fluted, Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)								
			Bright			L	Lc	Ln	d	k	lk
2 - 56 UNC	H2	2	8003000	1.882	0.188	0.574	0.140	0.109	0.188		
3 - 48 UNC			10800100	1.941	0.208	0.625					
4 - 40 UNC			8003600	2.000	0.251	0.688					
4 - 48 UNF			10800200								
6 - 32 UNC	H3	2	8005400	2.382	0.314	0.885	0.194	0.151	0.251		
6 - 40 UNF	H2		8005700							10800300	2.130
8 - 32 UNC	H3	2	8006900	2.382	0.311	0.940	0.220	0.164	0.279		
8 - 36 UNF	H2		8007200							10800400	0.937
10 - 24 UNC	H3		8007800							2.500	0.417
10 - 32 UNF	H2	8008100									
	H3	8008700									
1/4 - 20 UNC	H2	3	8009000	2.720	0.500	1.129	0.317	0.238	0.338		
1/4 - 28 UNF	H3		8010900								
	H2		8011200								
5/16 - 18 UNC	H3	3	8011800	2.937	0.555	1.251	0.380	0.285	0.397		
5/16 - 24 UNF	H4		8012100								
	H2		8013000								
3/8 - 16 UNC	H3	3	8013300	3.374	0.625	1.933	0.367	0.274	0.437		
3/8 - 24 UNF	H4		8013600								
	H2		8013700								
7/16 - 14 UNC	H3	4	8015400	3.594	0.712	1.972	0.429	0.322	0.500		
7/16 - 20 UNF	H4		8015700								
	H2		8015800								
1/2 - 13 UNC	H3	4	8015900	3.811	0.767	2.125	0.480	0.359	0.562		
1/2 - 20 UNF	H4		8017000								
	H3		10800500								
9/16 - 12 UNC	H3	4	8017400	3.811	0.834	2.125	0.542	0.405	0.625		
9/16 - 18 UNF	H4		8017500								
	H3		8018000								
	H4	10800600	3.594	1.972	0.429	0.322	0.500				
	H3	10800700	4.031	0.542	0.405	0.625					
	H4	10800800	3.811	0.480	0.359	0.562					
	H3	10800900									
	H4	10801000									
	H3	10801100									

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

[continued on next page](#)

Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
S108	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65						


good best





List S108 (Continued)

Spiral Fluted, Bottom (1.5P-2P)

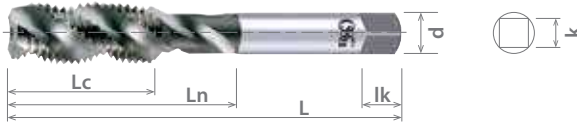

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Bright						
			L	Lc						
5/8 - 11 UNC	H3	4	10801200	4.252	0.909	2.433	0.590	0.442	0.688	
	H4		10801300							
5/8 - 18 UNF	H3		10801400	4.031	1.000	2.165	0.542	0.405	0.625	
	H4		10801500							
3/4 - 10 UNC	H3		10801600	4.689	1.000	2.653	0.697	0.522	0.751	
	H5		10801700							
3/4 - 16 UNF	H3		10801800	4.469	1.110	3.011	0.800	0.600	0.811	
	H4		10801900							
7/8 - 9 UNC	H3		10802000	5.126	1.251	3.074	1.020	0.766	1.000	
	H5		10802100							
7/8 - 14 UNF	H3		10802200	5.752	1.251	3.074	0.895	0.672	0.874	
	H4		10802300							
1 - 8 UNC	H6		10802400	5.437	1.251	3.074	1.020	0.766	1.000	
	H4		10802500							
1 - 12 UNF	H4		10802600	5.437	1.251	3.074	0.895	0.672	0.874	
	H6		10802700							

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
S108	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	25-80	20-50	20-45						25-75	40-80	40-65						


good best





List S109

Spiral Fluted, Modified Bottom (2.5P-3P)

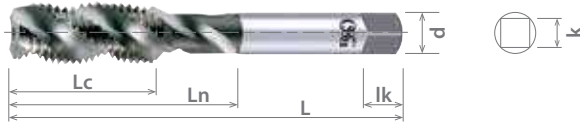

Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)							
			Bright		L	Lc	Ln	d	k	lk
M2 x 0.4	D2	2	10900100		46.00	12.70	-	3.58	2.79	4.80
M2.5 x 0.45			10900200		49.30	4.50	15.90			
M3 x 0.5			10900300		50.80	5.00	17.50			
M4 x 0.7	D3	3	10900400		60.50	7.00	22.20	4.92	3.86	6.40
M5 x 0.8			10900500		63.50	8.00	25.40	6.47	4.85	7.90
M6 x 1.0			10900600		69.10	10.00	28.60	8.07	6.05	9.50
M8 x 1.25	D4	3	10900700		74.70	12.50	31.80	9.67	7.26	11.10
M10 x 1.5			10900800		85.90	15.00	49.10	9.32	6.98	
M12 x 1.75			10900900		91.20	17.50	50.10	10.89	8.18	12.70
M14 x 2.0	D5	4	10901000		102.40	20.00	55.00	13.76	10.31	15.90
M16 x 2.0			10901100		108.00		61.80	14.98	11.23	17.50
M18 x 2.5			10901200		119.10	25.00	67.40	17.70	13.28	19.10
M20 x 2.5			10901300		124.60		68.40	19.30	14.48	
M22 x 2.5	D6	4	10901400		130.20		76.50	20.32	15.24	20.60
M24 x 3.0			10901500		138.10	30.00	79.10	22.75	17.07	22.20

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
S109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best





List 314Ti

V-HL-Ti-POT, Spiral Pointed, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)						
			V						
			L	Lc	Ln	d	k	lk	
2 - 56 UNC	H2	2	31440108	1.882	0.562	0.601	0.140	0.109	0.188
4 - 40 UNC			31440208	2.000	0.688	-			
6 - 32 UNC	H3	3	31440308	2.382	0.874	1.071	0.194	0.151	0.251
8 - 32 UNC			31440408		0.933	-	0.220	0.164	0.279
10 - 32 UNF			31440508	2.500	1.000	1.197	0.255	0.190	0.311
1/4 - 28 UNF			31440608	2.720	0.696	1.122	0.317	0.238	0.374
5/16 - 24 UNF			31440708	2.941	0.779	1.251	0.380	0.285	0.437
3/4 - 24 UNF			31440808	3.161	0.874	1.307	0.322	0.242	0.405
7/16 - 20 UNF	H4	3	31440908	3.382	1.000	1.433	0.367	0.274	0.437
1/2 - 20 UNF			31441008	3.591	1.078	1.551	0.429	0.322	0.500

Packed: 1 pc.
Available V coating only.



Work Material

List No.	P																M	K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels												
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC			50-70 HRC							
	1010	1035	1065			4140	4340	300		400	17-4 PH	6061	7075	8-15	8-15	15-35			10-20							
314Ti				<input type="checkbox"/>								<input checked="" type="checkbox"/>	<input type="checkbox"/>													
SFM				15-30			8-20				8-15	8-15	15-35	10-20												

good best






List 314Ni

V-HL-Ni-POT, Spiral Pointed, Plug (3.5P-4.5P)



VC10	V	STI
------	---	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)						
			V						
2 - 56 UNC	H2	3	31420108	1.933	0.562	0.602	0.140	0.109	0.188
4 - 40 UNC			31420208	2.059	0.688	-			
6 - 32 UNC			31420308	2.457	0.874	1.070	0.194	0.151	0.251
8 - 32 UNC	H3		31420408	2.461	0.933	-	0.220	0.164	0.279
10 - 32 UNF			31420508	2.579	1.000	1.196	0.255	0.190	0.287
1/4 - 28 UNF			31420608	2.815	0.696	1.122	0.317	0.238	0.342
5/16 - 24 UNF			31420708	3.055	0.779	1.251	0.380	0.285	0.397
3/8 - 24 UNF	H4		31420808	3.157	0.874	1.307	0.322	0.242	0.405
7/16 - 20 UNF			31420908	3.374	1.000	1.433	0.367	0.274	0.437
1/2 - 20 UNF			31421008	3.594	1.078	1.551	0.429	0.322	0.500

Packed: 1 pc.
Available V coating only.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
314Ni																		
SFM								8-20				8-15	8-15	15-35	10-20			


good best





List 314

Spiral Pointed, Plug (4.5P-5.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V						
2 - 56 UNC	H2	2	17146	01	08	1.882	0.299	0.610	0.140	0.109	0.188
3 - 48 UNC			314001	01	08	1.941	0.346	0.681			
4 - 40 UNC			17147	01	08	2.000	0.413	0.751			
4 - 48 UNF			314002	01	08						
6 - 32 UNC	H3	3	17148	01	08	2.382	0.515	0.952	0.194	0.151	0.251
6 - 40 UNF			17149	01	08			0.830			
8 - 32 UNC	H3	3	17150	01	08	2.382	0.527	1.027	0.220	0.164	0.279
8 - 36 UNF			17151	01	08						
10 - 24 UNC	H3	3	314003	01	08	2.500	0.688	1.106	0.255	0.190	0.287
10 - 32 UNF			314004	01	08						
1/4 - 20 UNC	H3	3	314005	01	08	2.720	0.842	1.267	0.317	0.238	0.342
1/4 - 28 UNC			314006	01	08						
5/16 - 18 UNC	H3	3	17152	01	08	2.941	0.956	1.429	0.380	0.285	0.397
5/16 - 24 UNF			17153	01	08			1.425			
3/8 - 16 UNC	H4	3	314007	01	08	3.382	0.874	1.307	0.367	0.274	0.437
3/8 - 24 UNF			314008	01	08						
7/16 - 14 UNC	H4	3	17154	01	08	3.594	1.000	1.472	0.429	0.322	0.500
7/16 - 20 UNF			17155	01	08						
1/2 - 13 UNC	H4	3	314009	01	08	3.811	1.078	1.551	0.480	0.359	0.562
1/2 - 20 UNF			314010	01	08						
9/16 - 12 UNC	H4	3	314011	01	08	4.031	1.165	1.677	0.542	0.405	0.625
9/16 - 18 UNF			314012	01	08						
5/8 - 11 UNC	H4	3	314013	01	08	4.252	1.271	1.822	0.590	0.442	0.688
5/8 - 18 UNF			314014	01	08						
3/4 - 10 UNC	H5	3	314015	01	08	4.689	1.401	1.992	0.697	0.522	0.751
3/4 - 16 UNF			314016	01	08						
7/8 - 9 UNC	H5	3	314017	01	08	5.126	1.555	2.145	0.800	0.600	0.811
			314018	01	08						

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.





List 314 (Continued)



VC10	V	S/O	STI
------	---	-----	-----

Spiral Pointed, Plug (4.5P-5.5P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
			EDP Number	Coating Suffix							
				S/O	V						
7/8 - 14 UNF	H3	4	314038	01	08	5.126	1.555	2.145	0.800	0.600	0.811
	H4		314039	01	08						
1 - 8 UNC	H4		314040	01	08	5.752	1.751	2.381	1.020	0.766	1.000
	H6		314041	01	08						
1 - 12 UNF	H4		314042	01	08	5.441			0.895	0.672	0.874
	H6		314043	01	08						

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
314				<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
SFM				15-30	10-25		12-45	8-20			8-15	8-15	15-35	10-20			

good best





List 344STI

Spiral Pointed, Plug (4.5P-5.5P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (4.5P - 5.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V						
M2 X 0.4	D2	2	344001	01	08	48.59	12.65	-	3.58	2.79	4.80
M2.5 X 0.45			344002	01	08	49.30	6.30	15.90			
M3 X 0.5	D3	3	344003	01	08	50.80	7.21	17.70	4.92	3.86	6.40
M4 X 0.7			344004	01	08	60.50	9.93	22.35			
M5 X 0.8			344005	01	08	63.50	11.38	25.58			
M6 X 1.0			344006	01	08	69.09	14.22	28.83			
M8 X 1.25	D4	3	344007	01	08	74.70	17.91	32.00	9.67	7.26	11.10
M10 X 1.5			344008	01	08	85.90	21.01	9.32	6.98		
M12 X 1.75	D5	4	344009	01	08	91.21	24.51	36.50	10.89	8.17	12.70
M14 X 2.0			344010	01	08	102.39	27.99	41.00	13.76	10.31	15.90
M16 X 2.0			344011	01	08	108.00		42.01	14.98	11.22	17.50
M18 X 2.5			344012	01	08	119.10	35.00	49.00	17.70	13.28	19.10
M20 X 2.5			344013	01	08	124.61		19.30	14.47		
M22 X 2.5			344014	01	08	130.20		20.32	15.24	20.60	
M24 X 3.0	D6	344015	01	08	138.10	42.01		57.99	22.75	17.06	22.20

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P				Die Steels	M			K	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
344STI				<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM				15-30	10-25		12-45	8-20				8-15	8-15	15-35	10-20			

good best






List 301

Spiral Pointed, Plug (3.5P-4.5P)



HSSE	V	S/O	STI
------	---	-----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P-4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			EDP Number	Coating Suffix									
				S/O	V								
2 - 56 UNC	H2	2	17124	01	08	1.882	0.259	0.570	0.140	0.109	0.188		
3 - 48 UNC			301001	01	08	1.941	0.307	0.633					
4 - 40 UNC			17125	01	08	2.000	0.362	0.700					
4 - 48 UNF			301002	01	08								
6 - 32 UNC	H3		17126	01	08	2.382	0.440	0.877	0.194	0.151	0.251		
6 - 40 UNF			17127	01	08	2.130	0.381	0.759	0.167	0.131			
			301003	01	08								
8 - 32 UNC	H2		17128	01	08	2.382	0.440	0.940	0.220	0.164	0.279		
8 - 36 UNF	H3		17129	01	08								
10 - 24 UNC	H2		301004	01	08	2.500	0.590	1.007	0.255	0.190	0.311		
10 - 32 UNF			H3		301005							01	08
			H3		301006							01	08
1/4 - 20 UNC	H2		17130	01	08	2.720	0.708	1.133	0.317	0.238	0.374		
1/4 - 28 UNF			H3		17131							01	08
			H3		301007							01	08
5/16 - 18 UNC	H4	3	301008	01	08	2.941	0.791	1.263	0.380	0.285	0.397		
5/16 - 24 UNF			H2		17132							01	08
			H3		17133							01	08
3/8 - 16 UNC	H4		301009	01	08	3.374	0.921	1.354	0.367	0.274	0.437		
3/8 - 24 UNF			H2		301010							01	08
			H3		301011							01	08
7/16 - 14 UNC	H3		301012	01	08	3.594	1.000	1.472	0.429	0.322	0.500		
7/16 - 20 UNF			H4		17134							01	08
			H4		301013							01	08
1/2 - 13 UNC	H3		301014	01	08	3.811	1.090	1.562	0.480	0.359	0.562		
1/2 - 20 UNF			H4		301015							01	08
			H4		301016							01	08
9/16 - 12 UNC	H3		301017	01	08	4.031	1.200	1.712	0.542	0.405	0.629		
			H4		301018							01	08
			H4		301019							01	08
9/16 - 18 UNF	H3		301020	01	08	3.811	1.090	1.562	0.480	0.359	0.562		
			H4		301021							01	08
			H4		301022							01	08
	H4		301023	01	08	3.594	1.000	1.472	0.429	0.322	0.500		
			H3		301024							01	08
			H3		301025							01	08
	H3		301026	01	08	4.031	1.200	1.712	0.542	0.405	0.629		
			H4		301027							01	08
			H4		301028							01	08
	H4		301029	01	08	3.811	1.090	1.562	0.480	0.359	0.562		
			H4										

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.

continued on next page **EXT**

Work Material																			
List No.	P					Die Steels	M			K	N		S		H				
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Hardened Steels				
	Low	Med.	High				300	400	17-4 PH			6061 7075	Casting		Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
301	☉	○	○				☉	☉	○										
SFM	25-80	20-50	20-45				20-45	20-45	8-20										

○ good ☉ best






List 301 (Continued)

Spiral Pointed, Plug (3.5P-4.5P)



HSSE	V	S/O	STI
------	---	-----	-----



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	
			EDP Number	Coating Suffix							
				S/O	V	L	Lc	Ln	d	k	lk
5/8 - 11 UNC	H3	3	301031	01	08	4.252	1.200	1.712	0.590	0.442	0.688
	H4		301032	01	08						
5/8 - 18 UNF	H3		301033	01	08	4.031	1.334	1.885	0.542	0.405	0.629
	H4		301034	01	08						
3/4 - 10 UNC	H3		301035	01	08	4.689	1.500	2.090	0.697	0.522	0.751
	H5		301036	01	08						
3/4 - 16 UNF	H3		301037	01	08	4.469	5.126	2.381	1.020	0.766	1.000
	H4		301038	01	08						
7/8 - 9 UNC	H3		301039	01	08	5.126	1.712	2.303	0.800	0.600	0.811
	H5		301041	01	08						
7/8 - 14 UNF	H3		301042	01	08	5.752	2.381	1.020	0.766	0.600	0.811
	H4		301043	01	08						
1 - 8 UNC	H4	301044	01	08	5.752	1.712	2.381	1.020	0.766	1.000	
	H6	301045	01	08							
1 - 12 UNF	H4	301046	01	08	5.437	2.303	0.895	0.672	0.672	0.874	
	H6	301047	01	08							

Packed: 1 pc.
 EDP's listed above are stocked standard.
 Available in Steam Oxide or V coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
301	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45			20-45	20-45	8-20									

good best





List 342STI

Spiral Pointed, Plug (3.5P-4P)



HSSE	V	S/O	STI
------	---	-----	-----



Units: mm

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			EDP Number	Coating Suffix							
				S/O	V						
M2 x 0.4	D2	2	342001	01	08	46.00	6.40	13.10	3.58	2.79	4.80
M2.5 x 0.45			342002	01	08	49.30	7.60	15.90			
M3 x 0.5			342003	01	08	50.80	9.50	17.50			
M4 x 0.7	D3	3	342004	01	08	60.50	12.70	22.20	4.92	3.86	6.40
M5 x 0.8			342005	01	08	63.50	15.20	25.40	6.47	4.85	7.90
M6 x 1.0			342006	01	08	69.10	16.90	28.60	8.07	6.05	9.50
M8 x 1.25	342007		01	08	74.70	19.20	31.90	9.67	7.26	11.10	
M10 x 1.5	342008		01	08	85.90	23.40	34.40	9.32	6.98		
M12 x 1.75	D4		342009	01	08	91.20	25.40	37.40	10.89	8.18	12.70
M14 x 2.0	D5	342010	01	08	102.40	27.70	40.70	13.76	10.31	16.00	
M16 x 2.0		342011	01	08	108.00	30.50	43.50	14.98	11.23	17.50	
M18 x 2.5		342012	01	08	119.10	33.90	47.90	17.70	13.28	19.10	
M20 x 2.5	342013	01	08	124.60	19.30			14.48			
M22 x 2.5	D6	342014	01	08	130.20	38.10	53.10	20.32	15.24	20.60	
M24 x 3.0		342015	01	08	138.10	43.50	58.50	22.75	17.07	22.20	

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or V coatings as shown above.



Work Material																		
List No.	P					Die Steels	M			K Cast Iron	N		S Nickel Alloy	Titanium	H			
	Carbon Steels			Alloy Steels	Stainless Steels			Aluminum			Inconel	6Al4V (30 HRC)			Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065		300		400	17-4 PH	6061 7075				Casting	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
342STI	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>									
SFM	25-80	20-50	20-45				20-45	20-45	8-20									

good best





List 11036

Spiral Pointed, Plug (3.5P - 4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	Plug (3.5P - 4.5P)			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
			EDP Number	Coating Suffix									
				Bright	V	L	Lc	Ln	d	k	lk		
2 - 56 UNC	H2	2	11036001	00	08	1.882	0.295	0.559	0.140	0.109	0.188		
4 - 40 UNC			11036002	00	08	2.000	0.366	0.681					
6 - 32 UNC			11036003	00	08	2.382	0.492	0.874				0.194	0.151
8 - 32 UNC	11036004	00	08	0.500	0.937		0.220	0.164	0.279				
10 - 32 UNF	H3	3	11036005	00	08	2.500	0.598	1.000	0.255	0.190	0.311		
1/4 - 20 UNC			11036006	00	08	2.720	0.669	1.129	0.317	0.238	0.374		
1/4 - 28 UNF			11036007	00	08								
5/16 - 18 UNC			11036008	00	08							2.941	0.417
5/16 - 24 UNF			11036009	00	08	0.751							
3/8 - 16 UNC			11036010	00	08	3.382	0.921	1.354	0.367	0.274	0.405		
3/8 - 24 UNF			11036011	00	08	3.161	0.858	1.291	0.322	0.242			
7/16 - 20 UNF			11036012	00	08	3.382	0.921	1.354	0.367	0.274		0.437	
1/2 - 20 UNF			H4		11036013	00	08	3.591	1.000	1.472	0.429	0.322	0.500

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
11036	1010	1035	1065	4140															
SFM	1018	1045	1065	4340															

good best






List 125

HSS BR STI

Spiral Pointed, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)							
			Bright	L						
2 - 56 UNC	H2	2	7002600	1.882	0.322	0.559	0.140	0.109	0.188	
3 - 48 UNC			7003200	1.941						0.618
4 - 40 UNC	H1		1820400	2.000	0.389	0.688	0.167	0.131	0.251	
4 - 48 UNF	H2		1824000							
5 - 40 UNC			7004400	2.130	0.755	0.194	0.151	0.279		
6 - 32 UNC	H3		7005000							
6 - 40 UNF	H2		1824800	2.382	0.507	0.877	0.220	0.164	0.311	
8 - 32 UNC			1830400							
8 - 36 UNF	H3		7007100	2.130	0.393	0.759	0.167	0.131	0.279	
10 - 24 UNC			1825200							
10 - 32 UNF	H2		1830800	2.382	0.511	0.940	0.220	0.164	0.279	
10 - 32 UNF			H3							7008600
1/4 - 20 UNC	H2		3	1825600	2.500	0.641	1.007	0.255	0.190	0.311
1/4 - 20 UNC				H3						
1/4 - 28 UNF	H2			7014700	2.720	0.700	1.129	0.317	0.238	0.374
1/4 - 28 UNF				H3						
5/16 - 18 UNC	H4			1832200	2.941	0.763	1.251	0.380	0.285	0.437
5/16 - 24 UNF				H2						
3/8 - 16 UNC	H3			7015900	3.382	0.940	1.374	0.367	0.274	0.405
3/8 - 24 UNF				H2						
7/16 - 14 UNC	H4	7017100		3.161	0.881	1.314	0.322	0.242	0.405	
7/16 - 20 UNF		H3								7017400
1/2 - 13 UNC	H3	7018000		3.591	1.000	1.472	0.429	0.322	0.500	
1/2 - 20 UNF		H4								7018300
9/16 - 12 UNC	H3	12500100		3.382	0.940	1.374	0.367	0.274	0.437	
9/16 - 12 UNC		H4								12500200
	H3	12500300		3.811	1.090	1.562	0.480	0.359	0.562	
		H4								12500500
	H3	12500600		3.591	1.000	1.472	0.429	0.322	0.500	
		H4								12500700
	H3	12500800		4.031	1.090	1.562	0.542	0.405	0.625	
		H4								12500900
		12501000								

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
125	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>								
SFM	25-80	20-50	20-45					25-75	40-80	40-65								

good best





List 125 (Continued)

HSS	BR	STI
-----	----	-----

Spiral Pointed, Plug (3.5P-4.5P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4.5P)						
			Bright	L	Lc	Ln	d	k	lk
9/16 - 18 UNF	H3	3	12501100	3.811	1.090	1.562	0.480	0.359	0.562
	H4		12501200						
5/8 - 11 UNC	H3		12501300	4.252	1.220	1.712	0.590	0.442	0.688
	H4		12501400						
5/8 - 18 UNF	H3		12501500	4.031	1.090	1.562	0.542	0.405	0.625
	H4		12501600						
3/4 - 10 UNC	H3		12501700	4.689	1.334	1.885	0.697	0.522	0.751
	H5		12501800						
3/4 - 16 UNF	H3		12501900	4.469	1.417	1.771	0.652	0.488	0.688
	H4		12502000						
7/8 - 9 UNC	H3		12502100	5.130	1.500	2.090	0.800	0.600	0.811
	H5		12502200						
7/8 - 14 UNF	H3	12502300	5.752	1.712	2.381	1.020	0.766	1.000	
	H4	12502400							
1 - 8 UNC	H6	12502500	5.441	1.712	2.303	0.895	0.672	0.874	
1 - 12 UNF	H4	12502700							
		H6	12502800						

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material																		
List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
125	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 127

HSS BR STI

Spiral Pointed, Plug (3.5P-4P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Plug (3.5P - 4P)						
			Bright						
			L	Lc	Ln	d	k	lk	
M2 x 0.4	D2	2	12700100	46.00	6.40	13.10	3.58	2.79	4.80
M2.5 x 0.45			12700200	49.30	8.20	15.70			
M3 x 0.5			12700300	50.80	10.00	17.50			
M4 x 0.7	D3		12700400	60.50	13.00	22.40	4.93	3.86	6.40
M5 x 0.8			12700500	63.50	16.30	25.70	6.48	4.85	7.90
M6 x 1.0			12700600	69.10	17.80	28.70	8.08	6.05	9.50
M8 x 1.25	D4	3	12700700	74.70	19.40	31.80	9.68	7.26	11.10
M10 x 1.5			12700800	85.90	23.90	34.90	9.32	6.98	
M12 x 1.75			12700900	91.20	25.40	37.40	10.90	8.18	
M14 x 2.0	D5		12701000	102.40	27.70	40.70	13.77	10.31	15.90
M16 x 2.0			12701100	108.00	31.00	43.50	14.99	11.23	17.50
M18 x 2.5			12701200	119.10	33.90	47.90	17.70	13.28	19.10
M20 x 2.5	12701300	124.60	33.90	19.30	14.48				
M22 x 2.5	D5	12701400	130.20	38.10	53.10	20.32	15.24	20.60	
M24 x 3.0		D6	12701500	138.10	43.50	58.50	22.76	17.07	22.20

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																		
List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
127	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45						25-75	40-80	40-65							

good best






List 126



Straight Fluted, Plug (3.5P-4.5P), Bottom (1.5P-2P)



Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)						
			Bright	Bright						
2 - 56 UNC	H2	3	6002700	6002600	1.886	0.279	0.696	0.140	0.109	0.188
3 - 48 UNC			6003300	6003200	1.941	0.314	0.748			
4 - 40 UNC	H1		6004600	6004500	2.000	0.374	0.803			
4 - 48 UNF	12600200		12600100	2.059						
5 - 40 UNC	H2		6006100	6006000	2.197	0.444	1.003	0.167	0.131	0.251
6 - 32 UNC	H3		6006700	-	2.268					
6 - 40 UNF	H2		-	6006600	2.382	0.476	1.055	0.194	0.167	0.251
8 - 32 UNC			1810500	1810400	2.201					
8 - 36 UNF	H2		-	6007500	2.276	0.547	1.011	0.220	0.164	0.279
10 - 24 UNC			H3	6008200	-	2.465	0.468			
10 - 32 UNF	H2		-	6008100	2.555	0.559	1.204	0.255	0.190	0.287
10 - 32 UNF			H3	1810900	-	2.465	0.468			
1/4 - 20 UNC	H2		-	1810800	2.555	0.559	1.204	0.317	0.238	0.374
1/4 - 28 UNF			H3	12600400	-	2.465	0.468			
5/16 - 18 UNC	H2		-	12600300	2.555	0.559	1.204	0.380	0.285	0.437
5/16 - 24 UNF			H3	1805700	-	2.496	0.625			
3/8 - 16 UNC	H2		-	1805600	2.602	0.732	1.291	0.367	0.274	0.437
3/8 - 24 UNF			H3	6010300	-	2.575	0.625			
7/16 - 14 UNC	H2		-	6010200	2.602	0.732	1.291	0.322	0.242	0.405
7/16 - 20 UNF			H3	1805900	-	2.496	0.625			
1/2 - 13 UNC	H2	-	1805800	2.602	0.732	1.291	0.429	0.322	0.500	
1/2 - 20 UNF		H3	1811500	-	2.496	0.625				1.185
9/16 - 12 UNC	H4	-	1811400	2.602	0.732	1.291	0.542	0.405	0.625	
1/4 - 20 UNC	H2	4	6013300	6013200	2.720	0.751	1.322	0.317	0.238	0.374
1/4 - 28 UNF			1812100	1812000						
5/16 - 18 UNC	H2		1806700	1806600	2.937	0.834	1.413	0.380	0.285	0.437
5/16 - 24 UNF			H3	6014500						
3/8 - 16 UNC	H2		1812500	1812400	3.37	0.937	1.811	0.367	0.274	0.437
3/8 - 24 UNF			H3	6015700						
7/16 - 14 UNC	H2		12600600	12600500	3.157	1.070	1.940	0.429	0.322	0.500
7/16 - 20 UNF			H3	6016600						
1/2 - 13 UNC	H2		1812900	1812800	3.594	1.153	1.940	0.429	0.322	0.500
1/2 - 20 UNF			H3	12600800						
9/16 - 12 UNC	H2		6018400	6018300	4.031	1.165	2.165	0.542	0.405	0.625
9/16 - 12 UNC			H3	6018700						
1/2 - 13 UNC	H2		6019600	1813200	3.811	1.153	2.000	0.480	0.359	0.562
1/2 - 20 UNF			H3	6019900						
9/16 - 12 UNC	H2		1813500	1813400	3.374	1.070	1.811	0.367	0.274	0.437
9/16 - 12 UNC			H3	12601000						
1/2 - 13 UNC	H2		6022000	1813600	3.811	1.153	2.000	0.480	0.359	0.562
1/2 - 20 UNF			H3	12601200						
9/16 - 12 UNC	H2		1813900	1813800	3.594	1.153	1.940	0.429	0.322	0.500
9/16 - 12 UNC			H3	12601400						
1/2 - 13 UNC	H2	12601600	12601500	4.031	1.165	2.165	0.542	0.405	0.625	
1/2 - 20 UNF		H3	12601800							12601700

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 126 (Continued)

HSS **BR** STI

Straight Fluted, Plug (3.5P-4.5P), Bottom (1.5P-2P)

Units: Inch

Tap Size	Thread Limit	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length			
			Bottom (1.5P - 2P)	Plug (3.5P - 4.5P)									
			Bright	Bright									
9/16 - 18 UNF	H3	4	12602000	12601900	3.811	1.165	2.125	0.480	0.359	0.562			
	H4		12602200	12602100									
5/8 - 11 UNC	H3		12602400	12602300	4.252	1.271	2.433	0.590	0.442	0.688			
	H4		12602600	12602500									
5/8 - 18 UNF	H3		12602800	12602700	4.031		2.165	0.542	0.405	0.625			
	H4		12603000	12602900									
3/4 - 10 UNC	H3		12603200	12603100	4.689	1.401	2.653	0.697	0.522	0.751			
	H5		12603400	12603300									
3/4 - 16 UNF	H3		12603600	12603500	4.469		2.433	0.652	0.488	0.688			
	H4		12603800	12603700									
7/8 - 9 UNC	H3		12604000	12603900	5.126	1.555	3.011	0.800	0.600	0.811			
	H5		12604200	12604100									
7/8 - 14 UNF	H3		12604400	12604300									
	H4		12604600	12604500									
1 - 8 UNC	H4		12604800	12604700	5.752	1.751	3.074	1.020	0.766	1.000			
	H6		12605000	12604900									
1 - 12 UNF	H4		12605200	12605100	5.437						0.895	0.672	0.881
	H6		12605400	12605300									

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
126	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45					25-75	40-80	40-65							

good best






List 128

HSS **BR** STI

Straight Fluted, Modified Bottom (2.5P-3P)



Units: mm

Tap Size	Thread Limit	No. of Flutes	EDP Number	Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
			Modified Bottom (2.5P - 3P)						
			Bright	L	Lc	Ln	d	k	lk
M2 x 0.4	D2	2	12800100	47.80	13.00	14.00	3.58	2.79	4.80
M2.5 x 0.45			12800200	49.30	6.70	16.30			
M3 x 0.5			12800300	50.80	7.10	17.60			
M4 x 0.7	D3	3	12800400	60.50	10.30	22.70	4.92	3.86	6.40
M5 x 0.8			12800500	63.50	11.30	25.50	6.47	4.85	7.90
M6 x 1.0			12800600	69.10	14.00	28.60	8.07	6.05	9.50
M8 x 1.25	D4	4	12800700	74.70	17.50	31.80	9.67	7.26	11.10
M10 x 1.5			12800800	85.90	21.00	49.10	9.32	6.98	
M12 x 1.75			12800900	91.20	24.50	50.10	10.89	8.18	
M14 x 2.0	D5	4	12801000	102.40	28.00	55.00	13.76	10.31	15.90
M16 x 2.0			12801100	108.00	28.00	61.80	14.98	11.23	17.50
M18 x 2.5			12801200	119.10	35.00	67.40	17.70	13.28	19.10
M20 x 2.5	12801300	124.60	35.00	68.40	19.30	14.48			
M22 x 2.5	12801400	130.20	35.00	76.50	20.32	15.24	20.60		
M24 x 3.0	D6		12801500	138.10	42.00	79.10	22.75	17.07	22.40

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
128	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	25-80	20-50	20-45					25-75	40-80	40-65							

 good best

List 16570

NEW

HSSE

V

40°

A-NPT, Interrupted



Units: Inch

Size	Number of Flutes	EDP Number	Overall Length	Length of Cut	Neck Length	Shank Diameter	Square Width	Square Length
		NPT	L	Lc	Ln	d	k	lk
		V	L	Lc	Ln	d	k	lk
1/16 - 27	3	1657001008	3.543	0.689	1.417	0.313	0.234	0.374
1/8 - 27 (Sm. Shk)		1657002008		0.752	1.457			
1/8 - 27 (Lg. Shk)		1657003008						
1/4 - 18	4	1657004008	3.937	1.063	1.929	0.563	0.421	0.437
3/8 - 18		1657005008			1.969	0.700	0.531	0.500
1/2 - 14		1657006008	4.921	1.374	2.362	0.688	0.515	0.626
3/4 - 14		1657007008	5.511		2.913	0.906	0.679	0.689
1 - 1 1/2		1657008008	6.299		3.150	1.125	0.843	0.811

Packed: 1 pc.

Available in V coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340	300	400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
SFM	5-35	5-35	5-35	5-20	5-20	5-20	5-20	5-20		5-35		5-10	5-20				

good best





List 16575

NEW	HSSE	V	40°
------------	-------------	----------	------------

A-LT-NPT, Long Shank, NPT, Interrupted



Units: Inch

Size	Number of Flutes	EDP Number	Overall Length	Length of Cut	Neck Length	Shank Diameter	Square Width	Square Length	
		NPT	L	Lc	Ln	d	k	lk	
		V	L	Lc	Ln	d	k	lk	
1/16 - 27	3	1657501008	4.000	0.689	1.614	0.313	0.234	0.374	
		1657502008	6.000		2.402				
1657503008		4.000	1.614						
1657504008		6.000	2.402						
1657505008		4.000	1.614						
1657506008		6.000	2.402						
1/8 - 27 (Sm. Shk)		1657507008	4.000	1.063	1.929	0.563	0.421	0.437	
1657508008		6.000	2.402						
1/8 - 27 (Lg. Shk)		1657509008	4.000	1.969	0.700	0.531	0.500		
1/4 - 18		1657510008	6.000	2.402					
3/8 - 18		4	1657511008	4.000	1.374	2.362	0.688	0.515	0.626
			1657512008	6.000		2.402			
1/2 - 14	1657513008		4.000	2.504		0.906	0.679	0.689	
	1657514008		6.000	2.913					
3/4 - 14	1657515008		4.000	1.752		2.504	1.125	0.843	0.811
	1657516008		6.000			3.150			
1 - 11,1/2									

Packed: 1 pc.
Available in V coating only.



List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16575	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	5-35	5-35	5-35	5-20	5-20	5-20		5-20		5-35		5-10	5-20					

good best



List 16590

NEW

HSSE

V

40°

A-NPS



Units: Inch

Size	Number of Flutes	EDP Number	Overall Length	Length of Cut	Neck Length	Shank Diameter	Square Width	Square Length
		NPS	L	Lc	Ln	d	k	lk
		V	L	Lc	Ln	d	k	lk
1/16 - 27	3	1659001008	3.543	0.551	1.417	0.313	0.234	0.374
1/8 - 27 (Sm. Shk)		1659002008			1.457			
1/8 - 27 (Lg. Shk)		1659003008			0.438			
1/4 - 18	4	1659004008	3.937	0.748	1.929	0.563	0.421	0.437
3/8 - 18		1659005008		0.827	1.969	0.700	0.531	0.500
1/2 - 14		1659006008	4.921	1.024	2.362	0.688	0.515	0.626
3/4 - 14		1659007008	5.511	1.102	2.913	0.906	0.679	0.689
1 - 11,1/2		1659008008	6.299	1.299	3.150	1.125	0.843	0.811

Packed: 1 pc.
Available in V coating only.

ATP

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
16590	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
SFM	5-35	5-35	5-35	5-20	5-20	5-20	5-20		5-20		5-35		5-10	5-20			

good best



List 16585

NEW	HSSE	V	40°
-----	------	---	-----

A-BSPT, Interrupted Thread



Units: Inch

Size	Number of Flutes	EDP Number	Overall Length	Length of Cut	Neck Length	Shank Diameter	Square Width	Square Length
		NPT	L	Lc	Ln	d	k	lk
		V	L	Lc	Ln	d	k	lk
1/8 - 28	3	1658501008	3.543	0.591	1.457	0.313	0.234	0.374
1/4 - 19		1658502008	3.937	0.748	1.929	0.563	0.421	0.437
3/8 - 19	1658503008	0.827		1.969	0.700	0.531	0.500	
1/2 - 14	4	1658504008	4.921	1.024	2.362	0.688	0.515	0.626
3/4 - 14		1658505008	5.511	1.102	2.913	0.906	0.679	0.689
1 - 11		1658506008	6.299	1.299	3.150	1.125	0.843	0.811

Packed: 1 pc.
Available in V coating only.



List No.	Work Material																	
	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
16585	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
SFM	5-35	5-35	5-35	5-20	5-20	5-20		5-20		5-35		5-10	5-20					

good best



List 16580

A-BSPP

NEW

HSSE

V

40°



Units: Inch

Size	Number of Flutes	EDP Number	Overall Length	Length of Cut	Neck Length	Shank Diameter	Square Width	Square Length
		NPT	L	Lc	Ln	d	k	lk
		V	L	Lc	Ln	d	k	lk
1/8 - 28	3	1658001008	3.543	0.591	1.457	0.313	0.234	0.374
1/4 - 19		1658002008	3.937	0.748	1.929	0.563	0.421	0.437
3/8 - 19		1658003008		0.827	1.969	0.700	0.531	0.500
1/2 - 14	4	1658004008	4.921	1.024	2.362	0.688	0.515	0.626
3/4 - 14		1658005008	5.511	1.102	2.913	0.906	0.679	0.689
1 - 11		1658006008	6.299	1.299	3.150	1.125	0.843	0.811

Packed: 1 pc.
Available in V coating only.

ATP

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
16580	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
SFM	5-35	5-35	5-35	5-20	5-20	5-20	5-20		5-20		5-35		5-10	5-20			

good best






HSSE	TiN	S/O	15°
------	-----	-----	-----

List 308

NPT



Units: Inch

Tap Size	No. of Flutes	NPT			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	
		EDP Number	Coating Suffix								
			S/O	TiN							
1/16 - 27	4	17350	01	05	2.126	0.689	0.925	0.313	0.234	0.374	
1/8 - 27 (Sm. Shk)		17352	01	05		-					
1/8 - 27 (Lg. Shk)		17351	01	05		0.752	0.988	0.438	0.328		
1/4 - 18		17353	01	05	2.437	1.091	1.346	0.563	0.421	0.437	
3/8 - 18		17354	01	05	2.563			0.700	0.531	0.500	
1/2 - 14		17355	01	05	3.126	1.409	-	0.688	0.515	0.626	
3/4 - 14		17448	-	05	3.252	1.374	-	0.906	0.679	0.689	
		17356	01	-							
1 - 11,1/2		4	17449	-	05	3.752	1.752	-	1.125	0.843	0.811
		5	17357	01	-						

Packed: 1 pc.

EDP's listed above are stocked standard.

Available in Steam Oxide or TiN coatings as shown above.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
308	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									
SFM	15-40	10-25				10-25	10-25	8-12									

good best






List 318

NPTF



HSSE	TiN	S/O	15°
------	-----	-----	-----



Units: Inch

Tap Size	No. of Flutes	NPTF			Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk
		EDP Number	Coating Suffix							
			S/O	TiN						
1/16 - 27	4	17375	01	05	2.126	0.688	0.312	0.233	0.374	
1/8 - 27 (Sm. Shk)		17377	01	05		-				
1/8 - 27 (Lg. Shk)		17376	01	05		0.751	0.988	0.437		0.327
1/4 - 18		17378	01	05	2.437	1.090	1.346	0.562	0.420	0.437
3/8 - 18		17379	01	05	2.563		1.346	0.700	0.531	0.500
1/2 - 14		17380	01	05	3.126	1.374	-	0.687	0.514	0.625
3/4 - 14		17399	-	05	3.252		-	0.906	0.679	0.688
		17381	01	-			-			
1 - 11,1/2		4	17446	-	05	3.752	1.751	1.125	0.842	0.811
		5	17382	01	-					

Packed: 1 pc.
EDP's listed above are stocked standard.
Available in Steam Oxide or TiN coatings as shown above.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
318	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>									
SFM	15-40	10-25				10-25	10-25	8-12									


good best



List 12053



NPT, Interrupted



Units: Inch

Tap Size	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		NPT, Interrupted							
		TiCN	L						
1/8 - 27 (Sm. Shk)	3	1205300108	2.126	0.751	-	1.007	0.312	0.233	0.374
1/8 - 27 (Lg. Shk)		1205300208					0.437	0.327	
1/4 - 18		1205300308					0.562	0.420	
3/8 - 18	5	1205300408	2.563	1.062	1.318	-	0.700	0.531	0.500
1/2 - 14		1205300508					0.687	0.514	0.625
3/4 - 14		1205300608					0.906	0.679	0.688
1 - 11,1/2		1205300708					1.125	0.842	0.811


Packed: 1 pc.
Available TiCN coating only.



List 12054



NPTF, Interrupted



Units: Inch

Tap Size	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		NPTF, Interrupted							
		TiCN	L						
1/8 - 27 (Sm. Shk)	3	1205400108	2.126	0.751	-	1.007	0.312	0.233	0.374
1/8 - 27 (Lg. Shk)		1205400208					0.437	0.327	
1/4 - 18		1205400308					0.562	0.420	
3/8 - 18	5	1205400408	2.563	1.062	1.318	-	0.700	0.531	0.500
1/2 - 14		1205400508					0.687	0.514	0.625
3/4 - 14		1205400608					0.906	0.679	0.688
1 - 11,1/2		1205400708					1.125	0.842	0.811

Packed: 1 pc.
Available TiCN coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
12053	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>		
12054	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>		
SFM	15-40	10-25	10-20	10-25	10-15	10-25	10-25	8-12	15-50					10-20	8-12		

good best






List 328

NPT, ANPT



HSS-Co

BR



Units: Inch

Tap Size	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		NPT, ANPT							
		Bright	L						
1/8 - 27 (Lg. Shk)	4	1736000	2.126	0.751	0.992	0.437	0.327	0.374	
1/4 - 18		1736100	2.437	1.062	1.318	0.562	0.420	0.437	
3/8 - 18		1736200	2.563	-	-	0.700	0.531	0.500	
1/2 - 14		1736300	3.126	1.374	-	0.687	0.514	0.625	
3/4 - 14	5	1736400	3.252	-	-	0.906	0.679	0.688	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
328	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input type="checkbox"/>			
SFM	15-40	10-25	10-20	10-25	10-15	10-25	10-25	8-12					10-20	8-12			

good best






GENERAL PURPOSE

List 108

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----

NPT, ANPT



Units: Inch

Tap Size	No. of Flutes	NPT, ANPT					Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		EDP Number	Coating Suffix									
			Bright	S/O	TiN	TiCN						
1/16 - 27	4	13100	00	01	05	08	2.126	0.688	0.925	0.312	0.233	0.374
1/8 - 27 (Sm. Shk)		13102	00	01	05	08		0.751				
1/8 - 27 (Lg. Shk)		13101	00	01	05	08	1.062	-	0.437	0.327		
1/4 - 18		13103	00	01	05	08		2.437	1.318	0.562	0.420	
3/8 - 18		13104	00	01	05	08	2.563	-	0.700	0.531	0.500	
1/2 - 14		13105	00	01	05	08	3.126	1.374	-	0.687	0.514	
3/4 - 14	13106	00	01	05	08	3.252	-	0.906	0.679	0.688		
1 - 11, 1/2	5	13107	00	01	05	08	3.752	-	1.125	0.842	0.811	
1, 1/4 - 11, 1/2		13108	00	01	-	08	4.000	-	1.312	0.983	0.937	
1, 1/2 - 11, 1/2	7	13109	00	01	-	08	4.252	1.751	-	1.500	1.125	1.000
2 - 11, 1/2		13110	00	01	-	08	4.500	-	1.875	1.405	1.125	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P										M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels								
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
	1010 1018	1035 1045	1065	4140 4340																		
108	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>												
SFM	15-40	10-25	10-20						15-50	15-40	20-35											

good best






List 108AL

HSS

BR

NPT, For Aluminum



Units: Inch

Tap Size	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		NPT							
		Bright							
1/8 - 27 (Lg. Shk)	4	1311100		2.126	0.752	0.988	0.438	0.328	0.374
1/4 - 18		1311200		2.437	1.063	1.319	0.563	0.421	0.437
3/8 - 18		1311400		2.563			0.700	0.531	0.500
1/2 - 14		1311800		3.126	1.374	-	0.688	0.515	0.626
3/4 - 14	1311500		3.252	-		0.906	0.679	0.689	
1 - 11,1/2	1311600		3.752	-		1.125	0.843	0.811	

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
108AL										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
SFM										<input type="checkbox"/>	<input type="checkbox"/>							

good best






GENERAL PURPOSE

List 118

HSS	TiCN	TiN	S/O	BR
-----	------	-----	-----	----

NPTF



Units: Inch

Tap Size	No. of Flutes	NPTF				Overall Length L	Thread Length Lc	Neck Length Ln	Shank Dia. d	Square Width k	Square Length lk	
		EDP Number	Coating Suffix									
			Bright	S/O	TiN							TiCN
1/16 - 27	4	13125	00	01	05	08	2.126	0.688	0.885	0.312	0.233	
1/8 - 27 (Sm. Shk)		13127	00	01	05	08		0.751	0.948			
1/8 - 27 (Lg. Shk)		13126	00	01	05	08	1.062	1.279	0.437	0.327		
1/4 - 18		13128	00	01	05	08			2.437	0.562	0.420	0.437
3/8 - 18		13129	00	01	05	08			2.563	0.700	0.531	0.500
1/2 - 14		13130	00	01	05	08	3.126	1.374	-	0.687	0.514	0.625
3/4 - 14	13131	00	01	05	08	3.252	-		0.906	0.679	0.688	
1 - 11,1/2	5	13132	00	01	-	08	3.752	1.751	-	1.125	0.842	0.811
1,1/4 - 11,1/2		13133	00	01	-	08	4.000		-	1.312	0.983	0.937
1,1/2 - 11,1/2	7	13134	00	01	-	08	4.252		-	1.500	1.125	1.000
2 - 11,1/2		13135	00	01	-	08	4.500		-	1.875	1.405	1.125

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
118	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						
SFM	15-40	10-25	10-20						15-50	15-40	20-35						

good best





List 108G


HSS

TiCN

S/O

BR

Interrupted Thread, NPT, NPTF, ANPT



Units: Inch

Tap Size	No. of Flutes	NPT, ANPT, Interrupted Thread			NPTF, Interrupted Thread			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length		
		EDP Number	Coating Suffix			EDP Number	Coating Suffix								
			Bright	S/O	TiCN		Bright	S/O	TiCN	L	Lc	Ln	d	k	lk
1/8 - 27 (Sm. Shk)	5	13152	00	01	08	33105	00	01	08	2.126	0.752	-	0.313	0.234	0.374
1/8 - 27 (Lg. Shk)		13151	00	01	08	33101	00	01	08			-	0.988	0.438	
1/4 - 18		13153	00	01	08	33109	00	01	08	2.437	1.063	1.319	0.563	0.421	0.437
3/8 - 18		13154	00	01	08	13113	00	01	08				2.563	-	0.700
1/2 - 14		13155	00	01	08	13117	00	01	08	3.126	1.374	-	0.688	0.515	0.626
3/4 - 14		13156	00	01	08	13121	00	01	08	3.252		-	0.906	0.679	0.689
1 - 11,1/2		13157	00	01	08	33125	00	01	08	3.752	1.752	-	1.125	0.843	0.811
1,1/4 - 11,1/2	13158	00	01	08	33129	00	01	08	4.000	-		1.313	0.984	0.937	
1,1/2 - 11,1/2	13159	00	01	08	-	-	-	-	4.252	-		1.500	1.125	1.000	
2 - 11,1/2	7	13160	00	01	-	-	-	-	4.500	-	-	1.875	1.406	1.126	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
108G	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	15-40	10-25	10-20						15-50	15-40	20-35							

good best






GENERAL PURPOSE

List S125

HSS	TiCN	S/O	BR	15°
-----	------	-----	----	-----

Short Projection, NPT, NPTF

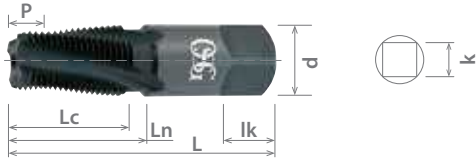

Units: Inch

Tap Size	No. of Flutes	NPT, ANPT			NPTF			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Projection		
		EDP Number	Coating Suffix			EDP Number	Coating Suffix									
			Bright	S/O	TiCN		Bright								S/O	TiCN
1/8 - 27 (Lg. Shk)	4	12505	00	01	08	12506	00	01	08	2.126	0.751	0.988	0.437	0.327	0.374	0.234
1/4 - 18		12513	00	01	08	12514	00	01	08	2.437	1.062	1.318	0.562	0.420	0.437	0.375
3/8 - 18		12517	00	01	08	12518	00	01	08	2.563			0.700	0.531	0.500	
1/2 - 14		12521	00	01	08	12522	00	01	08	3.126	1.374	-	0.687	0.514	0.625	0.468
3/4 - 14	5	12525	00	01	08	12526	00	01	08	3.252	1.751	-	0.906	0.679	0.688	0.453
1 - 11,1/2		12529	00	01	08	12530	00	01	08	3.752			1.125	0.842	0.811	0.578

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum				Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
S125	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>							
SFM	15-40	10-25	10-20					15-50	15-40	20-35							

good best






List 12006

HSS

BR

Short Projection, NPTF

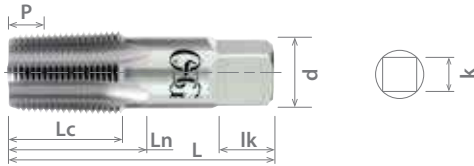

Units: Inch

Tap Size	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length	Projection
		NPTF, Short Projection								
		Bright								
		L	Lc	Ln	d	k	lk	P		
1/8 - 27 (Lg. Shk)	4	1200600100	1200600600	2.126	0.752	0.988	0.438	0.328	0.374	0.204
										0.167
1/4 - 18		1200600200	1200600700	2.437	1.063	1.319	0.563	0.421	0.437	0.306
3/8 - 18		1200600300	1200600800	2.563	1.374	-	0.700	0.531	0.500	0.306
1/2 - 14		1200600400	1200600900	3.126	-	-	0.688	0.515	0.626	0.393
3/4 - 14	1200600500	1200601000	3.252	-	-	0.906	0.679	0.689	0.393	
										0.322

Packed: 1 pc.
Available Bright finish only.



Work Material

List No.	P															M			K	N		S		H			
	Carbon Steels				Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels												
	Low	Med.	High	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC										
	1010 1018	1035 1045	1065	4140 4340																							
12006	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>																	
SFM	15-40	10-25	10-20						15-50	15-40	20-35																

good best






GENERAL PURPOSE

List 12007

HSS	BR	15°
-----	----	-----

NPT

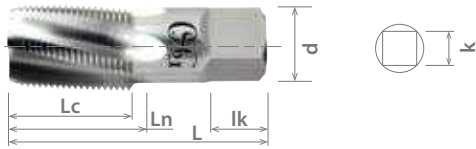

Units: Inch

Tap Size	No. of Flutes	EDP Number		Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		NPT							
		Bright	L						
1/8 - 27 (Lg. Shk)	4	1200700200		2.126	0.751	0.948	0.437	0.327	0.374
1/4 - 18		1200700400		2.437	1.062	1.279	0.562	0.420	0.437
3/8 - 18		1200700500		2.563			0.700	0.531	0.500
1/2 - 14		1200700600		3.126			-	0.687	0.514
3/4 - 14	5	1200700700		3.252	1.374	-	0.906	0.679	0.688

Packed: 1 pc.
Available Bright finish only.



Work Material

List No.	P										M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels								
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
	1010 1018	1035 1045	1065	4140 4340																		
12007	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>												
SFM	15-40	10-25	10-20						15-50	15-40	20-35											

good best






List 109

HSS	<input checked="" type="checkbox"/> S/O	<input type="checkbox"/> BR
-----	---	-----------------------------

NPS, NPSF



Units: Inch

Tap Size	No. of Flutes	NPS			NPSF			Overall Length	Thread Length	Neck Length	Shank Dia.	Square Width	Square Length
		EDP Number	Coating Suffix		EDP Number	Coating Suffix							
			Bright	S/O		Bright	S/O						
1/8 - 27 (Sm. Shk)	4	13302	00	01	13327	00	01	2.126	0.752	-	0.313	0.234	0.374
1/8 - 27 (Lg. Shk)		13301	00	01	13326	00	01			0.949	0.438	0.328	
1/4 - 18		13303	00	01	13328	00	01	2.437	1.063	1.260	0.563	0.421	0.437
3/8 - 18		13304	00	01	13329	00	01	2.563			0.700	0.531	
1/2 - 14		13305	00	01	13330	00	01	3.126	1.374	-	0.688	0.515	0.626
3/4 - 14		13306	00	01	13331	00	01	3.252		-	0.906	0.679	
1 - 11,1/2	13307	00	01	13332	00	01	3.752	1.752	-	1.125	0.843	0.811	

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Nickel Alloy Inconel	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>							
SFM	15-40	10-25	10-20					15-50	15-40	20-35							

good best





List 134

HSS

BR

Solid Round Dies, Special Alloy Tool Steel



Units: Inch

Size	Major Diameter	Outside Diameter	Thickness	EDP Number
0 - 80 UNF	0.060	5/8	1/4	2723000
1 - 72 UNF	0.073			2723300
2 - 56 UNC	0.086			2723400
2 - 64 UNF				2723500
3 - 56 UNF	0.099			2723700
4 - 40 UNC	0.112			2724000
4 - 48 UNF				2724100

Packed: 1 pc.
Available Bright finish only.



Size	Major Diameter	Outside Diameter	Thickness	EDP Number
5 - 40 UNC	0.125	5/8	1/4	2724200
6 - 32 UNC	0.138			2724400
6 - 40 UNF				2724600
8 - 32 UNC	0.164			2724700

Packed: 1 pc.
Available Bright finish only.



List 134 (Continued)

HSS

BR

Adjustable Round Split Dies, Special Alloy Tool Steel



Units: Inch

Size	Major Diameter	Outside Diameter	Thickness	EDP Number	
0 - 80 UNF	0.060	13/16	1/4	2726000	
1/16 - 64 UNC	0.062			2700100	
1 - 64 UNC	0.073			2726200	
1 - 72 UNF				2726300	
2 - 56 UNC	0.086			2726400	
2 - 64 UNF				2726500	
3/32 - 48 UNC	0.093			2700200	
3 - 48 UNC				2726600	
3 - 56 UNF				2726700	
4 - 36 UNS	0.099			2726900	
4 - 40 UNC				2727000	
4 - 48 UNF				2727100	
5 - 40 UNC	0.112			2727200	
5 - 44 UNF				2727300	
1/8 - 40 UNC				2700300	
6 - 32 UNC	0.138			1	2727400
6 - 40 UNF					2728800
5/32 - 32 UNC	0.156			13/16	2727600
5/32 - 36 UNF		2700400			
		2700500			
8 - 32 UNC	0.164	1	2727700		
8 - 36 UNF		13/16	2729100		
		1/4	2727800		
3/16 - 24 UNC	0.187	1	2700600		
3/16 - 32 UNF		13/16	2702400		
		1/4	2700700		
10 - 24 UNC	0.190	1	2702500		
10 - 32 UNF		13/16	2728000		
		1/4	2729400		
12 - 24 UNC	0.216	13/16	2728200		
12 - 28 UNF		1	2729600		
		3/8	2728300		
7/32 - 24 UNC	0.218	13/16	2729700		
		1	2728400		
		1/4	2700800		
1/4 - 20 UNC	0.250	1	2701000		
		1 - 5/16	2702800		
		1 - 1/2	2704100		
		1/2	2706100		
1/4 - 24 UNS	0.250	2	2710000		
		1	2702900		
		13/16	2701200		
		1/4	2701200		
1/4 - 28 UNF	0.250	1	2703000		
		1 - 5/16	2704300		
		1 - 1/2	2706300		
		2	2710100		
1/4 - 32 UNEF	0.250	1	2703100		

Packed: 1 pc.
Available Bright finish only.



Size	Major Diameter	Outside Diameter	Thickness	EDP Number
5/16 - 18 UNC	0.312	13/16	1/4	2701400
		1	3/8	2703200
		1 - 5/16	7/16	2704500
		1 - 1/2	1/2	2706500
5/16 - 24 UNF	0.312	2	5/8	2710400
		13/16	1/4	2701500
		1	3/8	2703300
		1 - 5/16	7/16	2704600
5/16 - 32 UNEF	0.312	1 - 1/2	1/2	2706600
		2	5/8	2710500
		1	3/8	2703400
		1 - 5/16	7/16	2704800
3/8 - 16 UNC	0.375	1 - 1/2	1/2	2706800
		2	5/8	2710700
		1	3/8	2703600
		1 - 5/16	7/16	2704900
3/8 - 24 UNF	0.375	1 - 1/2	1/2	2706900
		2	5/8	2710800
		1	3/8	2703700
		1 - 5/16	7/16	2705000
7/16 - 14 UNC	0.437	1 - 1/2	1/2	2707000
		2	5/8	2710900
		1	3/8	2703800
		1 - 5/16	7/16	2705100
7/16 - 20 UNF	0.437	1 - 1/2	1/2	2707100
		2	5/8	2711000
		1 - 5/16	7/16	2705200
		1 - 1/2	1/2	2707200
1/2 - 13 UNC	0.500	2	5/8	2711100
		1 - 5/16	7/16	2705300
		1 - 1/2	1/2	2707300
		2	5/8	2711200
1/2 - 20 UNF	0.500	1 - 1/2	1/2	2707400
		2	5/8	2711300
		1 - 1/2	1/2	2707500
		2	5/8	2711400
9/16 - 12 UNC	0.562	1 - 1/2	1/2	2707600
		2	5/8	2711500
		1 - 1/2	1/2	2707700
		2	5/8	2711600
9/16 - 18 UNF	0.562	1 - 1/2	1/2	2707800
		2	5/8	2711700
		1 - 1/2	1/2	2707900
		2	5/8	2711800
5/8 - 11 UNC	0.625	1 - 1/2	1/2	2712000
		2	5/8	2713800
		2 - 1/2	3/4	2713400
		1 - 1/2	1/2	2707700
5/8 - 18 UNF	0.625	1 - 1/2	1/2	2711600
		2	5/8	2711700
		11/16 - 11 UNS	5/8	2711800
		11/16 - 16 UNS	5/8	2712000
3/4 - 10 UNC	0.750	2 - 1/2	3/4	2713800
		2	5/8	2712100
		2 - 1/2	3/4	2713900
		2	5/8	2712200
7/8 - 9 UNC	0.875	2 - 1/2	3/4	2714000
		2	5/8	2712300
		2 - 1/2	3/4	2714100
		2 - 1/2	3/4	2714100

Packed: 1 pc.
Available Bright finish only.

continued on next page





List 134 (Continued)

HSS

BR

Adjustable Round Split Dies, Special Alloy Tool Steel



Units: Inch

Size	Major Diameter	Outside Diameter	Thickness	EDP Number
1 - 8 UNC	1.000	2 - 1/2	3/4	2714200
		3	1	2715000
2 - 1/2		3/4	2714300	
3		1	2715100	
1 - 14 UNS		2 - 1/2	3/4	2714400
				2715200
1,1/8 - 7 UNC	1.125	3	1	2715300
1,1/8 - 12 UNF				2715400

Packed: 1 pc.
Available Bright finish only.



Size	Major Diameter	Outside Diameter	Thickness	EDP Number
1,1/4 - 7 UNC	1.250	3	1	2715500
1,1/4 - 12 UNF				2715600
1,3/8 - 6 UNC	1.375			2715700
1,3/8 - 12 UNF	1.500			2715800
1,1/2 - 6 UNC				2715900
1,1/2 - 12 UNF				2716000

Packed: 1 pc.
Available Bright finish only.



List 134P

HSS

BR

Adjustable Round Split Dies, Taper Pipe



Units: Inch

Size	Outside Diameter	Thickness	EDP Number
1/8 - 27	1	3/8	2734000
			2734100
1/4 - 18	1-1/2	1/2	2734200
			2734400
	2	5/8	

Size	Outside Diameter	Thickness	EDP Number
3/8 - 18	1-1/2	1/2	2734300
			2734500
1/2 - 14	2	5/8	2734600

Packed: 1 pc.
Available Bright finish only.



Packed: 1 pc.
Available Bright finish only.





List 135

HSS

BR

Adjustable Round Split Dies



Units: Inch

Size	Outside Diameter	Thickness	EDP Number
M2 X 0.4	20	7	46011
M2.3 X 0.4			46015
M2.5 X 0.45			46017
M2.6 X 0.45			46020
M3 X 0.5			46023
M3.5 X 0.6	25	9	46064
M4 X 0.7	20	7	46029
M4 X 0.7	25	9	46068
M4.5 X 0.75			46070
M5 X 0.8	20	7	46034
M5 X 0.8	25	9	46074
M6 X 1.0	20	7	46038
			46079
M6 X 0.75	25	9	46080
M7 X 1.0			46082
M8 X 1.25			46085
M8 X 1.0			46086
M8 X 0.75			46087
M9 X 1.25			46089
M10 X 1.5			46093
M10 X 1.5	38	13	46142
			46143
			46144
			46147

Packed: 1 pc.
Available Bright finish only.



Size	Outside Diameter	Thickness	EDP Number	
M12 X 1.75	25	9	1351120	
M12 X 1.75			46152	
M12 X 1.5	38	13	46153	
M12 X 1.25			46154	
M12 X 1.0			46155	
M14 X 2.0			46163	
M14 X 1.5			46164	
M14 X 1.25	50	16	46165	
M16 X 2.0			46227	
M16 X 1.5			46228	
M16 X 1.0			46230	
M18 X 2.5			46239	
M18 X 1.5			46241	
M20 X 2.5			46251	
M20 X 1.5			46253	
M22 X 2.5			46263	
M22 X 1.5			46265	
M24 X 3.0			46276	
M24 X 1.5			46279	
M26 X 3.0	57	20	46329	
			M26 X 1.5	46331
			M28 X 1.5	46341
			M30 X 3.5	46344
			M30 X 1.5	46347

Packed: 1 pc.
Available Bright finish only.





List 15001

HSS

BR

Go/NoGo, Class 2B



Units: Inch

Gage Size	Class of Fit	Gage Length (Inch)		Pitch Diameter (Inch)		EDP Number
		Go	NoGo	Go	NoGo	Short Form*
2 - 56 UNC	2B	1/4	3/16	0.0744	0.0772	1500100100
2 - 64 UNF				0.0759	0.0786	1500100200
3 - 48 UNC				0.0855	0.0885	1500100300
3 - 56 UNF		5/16	7/32	0.0874	0.0902	1500100400
4 - 40 UNC				0.0958	0.0991	1500100500
4 - 48 UNF				0.0985	0.1016	1500100600
5 - 40 UNC				0.1088	0.1121	1500100700
5 - 44 UNF				0.1102	0.1134	1500100800
6 - 32 UNC				0.1177	0.1214	1500100900
6 - 40 UNF		13/32	9/32	0.1218	0.1252	1500101000
8 - 32 UNC				0.1437	0.1475	1500101100
8 - 36 UNF				0.1460	0.1496	1500101200
10 - 24 UNC				0.1629	0.1672	1500101300
10 - 32 UNF				0.1697	0.1736	1500101400
12 - 24 UNC				0.1889	0.1933	1500101500
12 - 28 UNF		1/2	5/16	0.1928	0.1970	1500101600
1/4 - 20 UNC				0.2175	0.2224	1500101700
1/4 - 28 UNF				0.2268	0.2311	1500101800
5/16 - 18 UNC				0.2764	0.2817	1500101900
5/16 - 24 UNF				0.2854	0.2902	1500102000
3/8 - 16 UNC				0.3344	0.3401	1500102100
3/8 - 24 UNF		0.3479	0.3528	1500102200		
7/16 - 14 UNC		3/4	3/8	0.3911	0.3972	1500102300
7/16 - 20 UNF				0.4050	0.4104	1500102400
1/2 - 13 UNC				0.4500	0.4565	1500102500
1/2 - 20 UNF				0.4675	0.4731	1500102600
9/16 - 12 UNC				0.5084	0.5152	1500102700
9/16 - 18 UNF				0.5264	0.5323	1500102800
5/8 - 11 UNC		7/8	1/2	0.5660	0.5732	1500102900
5/8 - 18 UNF				0.5889	0.5949	1500103000
3/4 - 10 UNC				0.6850	0.6927	1500103100
3/4 - 16 UNF				0.7094	0.7159	1500103200
7/8 - 9 UNC				0.8028	0.8110	1500103300
7/8 - 14 UNF				0.8286	0.8356	1500103400
1 - 8 UNC		1	5/8	0.9188	0.9276	1500103500
1 - 12 UNF				0.9459	0.9535	1500103600
1 - 14 UNS				0.9536	0.9609	1500103700
1,1/8 - 7 UNC				1.0322	1.0416	1500103800
1,1/8 - 12 UNF				1.0709	1.0787	1500103900
1,1/4 - 7 UNC				1.1572	1.1668	1500104000
1,1/4 - 12 UNF		1	3/4	1.1959	1.2039	1500104100
1,3/8 - 6 UNC		1 1/4		1.2667	1.2771	1500104200
1,3/8 - 12 UNF		1		1.3209	1.3291	1500104300
1,1/2 - 6 UNC		1 1/4		1.3917	1.4022	1500104400
1,1/2 - 12 UNF		1		1.4459	1.4542	1500104500

Packed: 1 pc.
Available Bright finish only.



OSG Inch Thread Plug Gages are manufactured to Class X tolerances per ANSI B1.2 (Unified Inch Screw Threads).
OSG Thread Gages are made from High Speed Steel (HSS) to 64 HRC.
Short Form Certificates of Conformance are available with gages for no charge.

*Long Form Certificates available upon request.





Thread Gages

List 15002

HSS	BR
-----	----

Go/NoGo, Class 6H



Units: mm

Gage Size	Class of Fit	Gage Length (mm)		Pitch Diameter (mm)		EDP Number
		Go	NoGo	Go	NoGo	Short Form*
M3 x 0.5	6H	7.9	5.6	2.675	2.775	1500200100
M3.5 x 0.6				3.110	3.222	1500200200
M4 x 0.7		10.3	7.1	3.545	3.663	1500200300
M5 x 0.8				4.480	4.605	1500200400
M6 x 0.75		12.7	7.9	5.513	5.645	1500200500
M6 x 1.0				5.350	5.500	1500200600
M7 x 1.0				6.350	6.500	1500200700
M8 x 1.0				7.350	7.500	1500200800
M8 x 1.25				7.188	7.348	1500200900
M10 x 1.0				19	9.5	9.350
M10 x 1.25		9.188	9.348			1500201100
M10 x 1.5		9.026	9.206			1500201200
M12 x 1.25		11.188	11.368			1500201300
M12 x 1.5		11.026	11.216			1500201400
M12 x 1.75		10.863	11.063			1500201500
M14 x 1.5		22.2	12.7	13.026	13.216	1500201600
M14 x 2.0				12.701	12.913	1500201700
M16 x 1.5				15.026	15.216	1500201800
M16 x 2.0				14.701	14.913	1500201900
M18 x 1.5				17.026	17.216	1500202000
M18 x 2.5				16.376	16.600	1500202100
M20 x 1.5		25.4	15.9	19.026	19.216	1500202200
M20 x 2.5				18.376	18.600	1500202300
M22 x 1.5				21.026	21.216	1500202400
M22 x 2.5				20.376	20.600	1500202500
M24 x 1.5				23.026	23.226	1500202600
M24 x 2.0				22.701	22.925	1500202700
M24 x 3.0				22.051	22.316	1500202800

Packed: 1 pc.
Available Bright finish only.



OSG Metric Thread Plug Gages are manufactured to Class X tolerances per ANSI B1.16M (Metric M Series Screw Threads).
OSG Thread Gages are made from High Speed Steel (HSS) to 64 HRC.
Short Form Certificates of Conformance are available with gages for no charge.

***Long Form Certificates available upon request.**



THREADING

Technical





Tap and Screw Thread Terminology

Allowance: The minimum clearance or maximum interference which is intended between mating parts.

Angle of Thread: The angle included between the flanks of a thread measured in an axial plane.

Back Taper: A slight taper on the threaded portion of the tap, making the pitch diameter near the shank smaller than that at the chamfer.

Basic: The theoretical or nominal standard size from which all variations are made.

Chamfer: The tapered and relieved cutting teeth at the front end of the threaded section. Common types of chamfer are taper (8 to 10 threads long), plug (3 to 5 threads), semi (or modified) bottom (2.5 to 3 threads), and bottoming (1-1/2 threads).

Crest: The top surface joining the two sides or flanks of a thread.

Cutting Face: The leading side of the land.

Flute: The longitudinal channels formed on a tap to create cutting edges on the thread profile.

Heel: The following side of the land.

Height of Thread: In profile, distance between crest and bottom section of thread measured to the axis.

Hook Face: A concave cutting face of the land. This may be varied for different materials and conditions.

Interrupted Thread: Alternate teeth are removed in the thread helix on a tap having an odd number of flutes.

Land: Threaded sections between the flutes of a tap.

Lead of Thread: The distance a screw thread advances axially in one turn.

Major Diameter: The largest diameter of the screw or nut on a straight screw thread.

Minor Diameter: The smallest diameter of the screw or nut on a straight screw thread.

Neck: The reduced diameter, on some taps, between the threaded portion and the shank.

Pitch: The distance from a point on one thread to a corresponding point on the next thread, measured parallel to the axis of rotation.

Pitch Diameter: On a straight screw thread, the diameter of an imaginary cylinder where the width of the thread and the width of the space between threads is equal.

Point Diameter: The diameter at the leading end of the chamfered portion.

Rake Angle: The angle of the cutting face of the land in relation to an axial plane intersecting the cutting face at the major diameter.

Relief: The removal of metal behind the cutting edge to provide clearance between the part being threaded and a portion of the threaded land. Also, see back taper.

Chamfer Relief: The gradual decrease in land height from cutting edge to heel on the chamfered portion of the tap land to provide radial clearance for the cutting edge.

Con-eccentric Relief: Radial relief in the thread form starting back of a concentric margin.

Eccentric Thread Relief: Radial relief in the thread form starting at the cutting edge and continuing to the heel.

Root: The bottom surface joining the flanks of two adjacent threads.

Side or Flank Thread: The surface of the thread which connects the crest to the root.

Shank: The portion of the tap by which it is held.

Spiral Point: An oblique cutting edge ground into the lands to provide a shear cutting action on the first few threads.

Square: The squared end of the tap shank by which the tap is driven.

Thread: The helical formed portion of the tap which produces the pitch in a pre-existing hole.

Thread Lead Angle: The angle made by the helix of the thread at the pitch diameter, with a plane perpendicular to the axis.

Threads per Inch: The number of threads in one inch of length.

Thread:

Single: A thread in which lead is equal to pitch.



Double: A thread in which lead is equal to twice the pitch.

Triple: A thread in which lead is equal to triple the pitch.







Illustration of Tap Terms

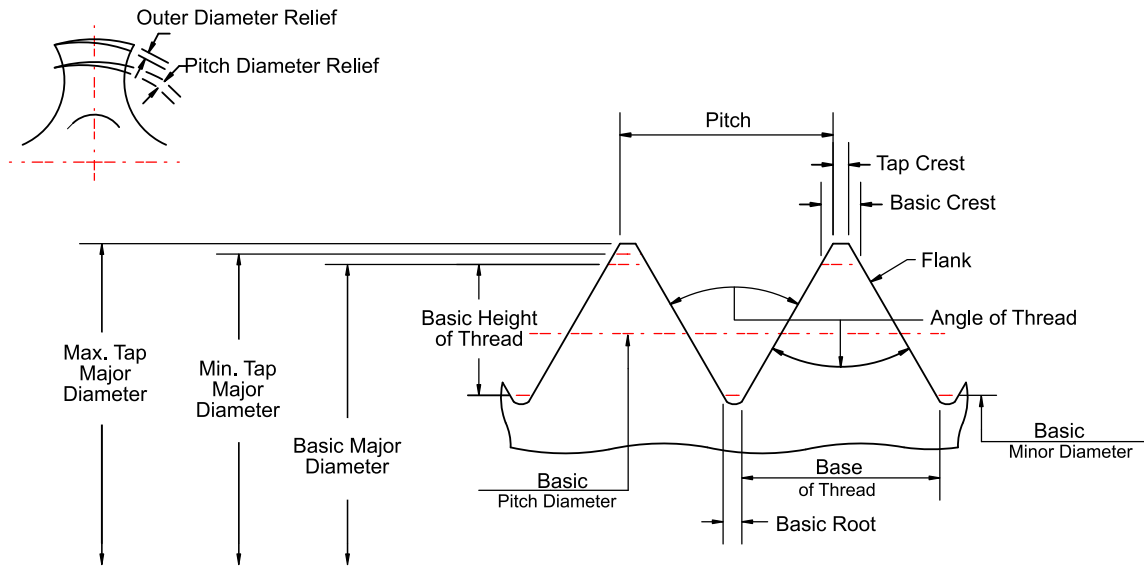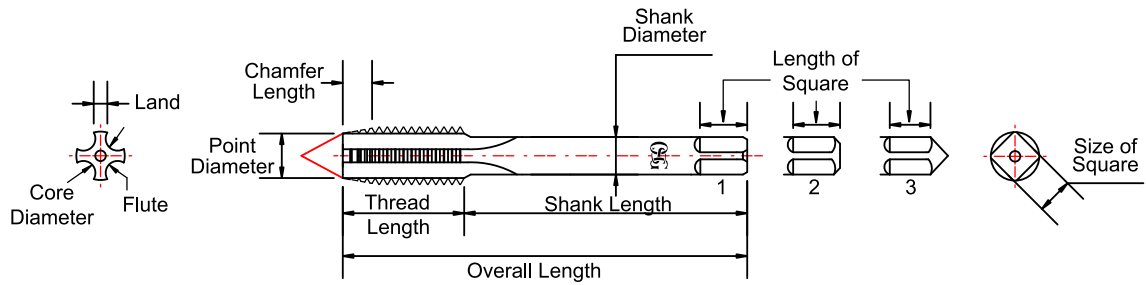

Relief Styles

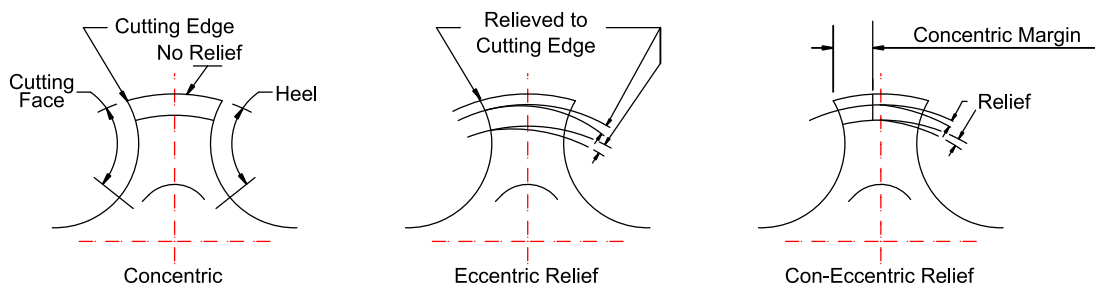

Cutting Angles

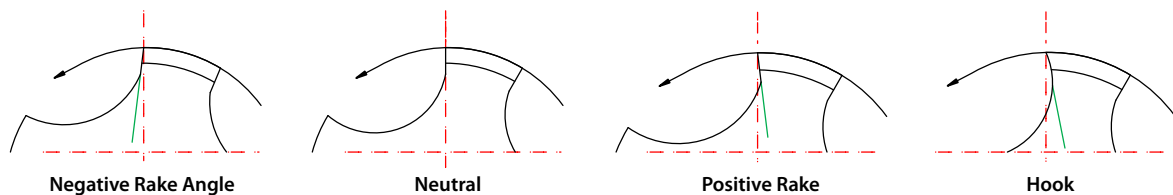



Tapping Speed Guide

SFM to RPM Conversion charts

Surface Footage	Conversion Table - Surface Feet Per Minute (SFM) to Revolutions Per Minute (RPM) - Inch														
	5	10	15	20	25	30	40	50	60	70	80	90	100	125	150
Tap Size	Revolutions Per Minute														
0	318	637	955	1273	1592	1910	2547	3183	3820	4457	5093	5730	6367	7958	9550
1	262	523	785	1047	1308	1570	2093	2616	3140	3663	4186	4710	5233	6541	7849
2	222	444	666	888	1110	1333	1777	2221	2665	3109	3553	3998	4442	5552	6663
3	193	386	579	772	965	1158	1543	1929	2315	2701	3087	3473	3859	4823	5788
4	171	341	512	682	853	1023	1364	1705	2046	2388	2729	3070	3411	4263	5116
5	153	306	458	611	764	917	1222	1528	1834	2139	2445	2750	3056	3820	4584
6	138	277	415	554	692	830	1107	1384	1661	1938	2214	2491	2768	3460	4152
8	116	233	349	466	582	699	932	1165	1398	1630	1863	2086	2329	2912	3494
10	101	201	302	402	503	603	804	1005	1206	1407	1608	1809	2011	2513	3016
12	88	177	265	354	442	531	707	884	1061	1238	1415	1592	1769	2211	2653
1/4	76	153	229	306	382	458	611	764	917	1070	1222	1375	1528	1910	2292
5/16	61	122	183	244	306	367	489	611	733	856	978	1100	1222	1528	1834
3/8	51	102	153	204	255	306	407	509	611	713	815	917	1019	1273	1528
7/16	44	87	131	175	218	262	349	437	524	611	699	786	873	1091	1310
1/2	38	76	115	153	191	229	306	382	458	535	611	688	764	955	1146
9/16	34	68	102	136	170	204	272	340	407	475	543	611	679	849	1019
5/8	31	61	92	122	153	183	244	306	367	428	489	550	611	764	914
3/4	25	51	76	102	127	153	204	255	306	357	407	458	509	637	764
7/8	22	44	65	87	109	131	175	218	262	306	349	393	437	546	655
1	19	38	57	76	96	115	153	191	229	267	306	344	382	478	573
1 1/8	17	34	51	68	85	102	136	170	204	238	272	306	340	424	509
1 1/4	15	31	46	61	76	92	122	153	183	214	244	275	306	382	458
1 3/8	14	28	42	56	69	83	111	139	167	194	222	250	278	347	417
1 1/2	13	25	38	51	64	76	102	127	153	178	204	229	255	318	382
1 5/8	12	24	35	47	59	71	94	118	141	165	188	212	235	294	353
1 3/4	11	22	33	44	55	65	87	109	131	153	175	196	218	273	327
2	10	19	29	38	48	57	76	96	115	134	153	172	191	239	287
2 1/8	9	18	27	36	45	54	72	90	108	126	144	162	180	225	270

Surface Footage	Conversion Table - Surface Feet Per Minute (SFM) to Revolutions Per Minute (RPM) - Metric														
	5	10	15	20	25	30	40	50	60	70	80	90	100	125	150
Tap Size	Revolutions Per Minute														
M2	243	485	728	970	1213	1455	1941	2426	2911	3396	3881	4366	4851	6064	7277
M3	162	323	485	647	809	970	1294	1617	1941	2264	2587	2911	3234	4043	4851
M4	121	243	364	485	606	728	970	1213	1455	1698	1941	2183	2426	3032	3639
M5	97	194	291	388	485	582	776	970	1164	1358	1552	1747	1941	2426	2911
M6	81	162	243	323	404	485	647	809	970	1132	1294	1455	1617	2021	2426
M8	61	121	182	243	303	364	485	606	728	849	970	1092	1213	1516	1819
M10	49	97	146	194	243	291	388	485	582	679	776	873	970	1213	1455
M12	40	81	121	162	202	243	323	404	485	566	647	728	809	1011	1213
M14	35	69	104	139	173	208	277	347	416	485	554	624	693	866	1040
M16	30	61	91	121	152	182	243	303	364	424	485	546	606	758	910
M18	27	54	81	108	135	162	216	270	323	377	431	485	539	674	809
M20	24	49	73	97	121	146	194	243	291	340	388	437	485	606	728
M24	20	40	61	81	101	121	162	202	243	283	323	364	404	505	606
M27	18	36	54	72	90	108	144	180	216	252	287	323	359	449	539
M30	16	32	49	65	81	97	129	162	194	226	259	291	323	404	485
M33	15	29	44	59	74	88	118	147	176	206	235	265	294	368	441
M36	13	27	40	54	67	81	108	135	162	189	216	243	270	337	404
M39	12	25	37	50	62	75	100	124	149	174	199	224	249	311	373
M42	12	23	35	46	58	69	92	116	139	162	185	208	231	289	347
M45	11	22	32	43	54	65	86	108	129	151	172	194	216	270	323
M48	10	20	30	40	51	61	81	101	121	142	162	182	202	253	303
M56	9	17	26	35	43	52	69	87	104	121	139	156	173	217	260

Formulas

SFM (Surface Feet per Minute) = 0.262 x RPM x D

RPM (Revolutions Per Minute) = (3.82 x SFM) / D


Note: D = Diameter (Must be in inches)






ANSI General Tap Dimensions (USCTI Table 302)


Blank Style 1



Blank Style 2



Blank Style 3



Nominal Diameter Range - Inches		Mach. Screw Size No.	Nominal Fractional Diameter Inches	Nominal Metric Diameter Millimeters	Style	Tap Dimensions - Inches				
Over	To (Incl.)					Overall Length A	Thread Length B	Square Length C	Shank Diameter D	Size of Square
0.052	0.065	0	1/16	-	1	1 5/8	5/16	3/16	0.141	0.110
0.065	0.078	1	-	M1.8	1	1 11/16	3/8	3/16	0.141	0.110
0.078	0.091	2	-	M2, M2.2	1	1 3/4	7/16	3/16	0.141	0.110
0.091	0.104	3	3/32	M2.5	1	1 13/16	1/2	3/16	0.141	0.110
0.104	0.117	4	-	-	1	1 7/8	9/16	3/16	0.141	0.110
0.117	0.130	5	1/8	M3, M3.15	1	1 15/16	5/8	3/16	0.141	0.110
0.130	0.145	6	-	M3.5	1	2	11/16	3/16	0.141	0.110
0.145	0.171	8	5/32	M4	1	2 1/8	3/4	1/4	0.168	0.131
0.171	0.197	10	3/16	M4.5, M5	1	2 3/8	7/8	1/4	0.194	0.152
0.197	0.223	12	7/32	-	1	2 3/8	15/16	9/32	0.220	0.165
0.223	0.260	14	1/4	M6, M6.3	2	2 1/2	1	5/16	0.255	0.191
0.260	0.323	-	5/16	M7, M8	2	2 23/32	1 1/8	3/8	0.318	0.238
0.323	0.385	-	3/8	M10	2	2 15/16	1 1/4	7/16	0.381	0.286
0.385	0.448	-	7/16	-	3	3 5/32	1 7/16	13/32	0.323	0.242
0.448	0.510	-	1/2	M12, M12.5	3	3 3/8	1 21/32	7/16	0.367	0.275
0.510	0.573	-	9/16	M14	3	3 19/32	1 21/32	1/2	0.429	0.322
0.573	0.635	-	5/8	M16	3	3 13/16	1 13/16	9/16	0.480	0.360
0.635	0.709	-	11/16	M18	3	4 1/32	1 13/16	5/8	0.542	0.406
0.709	0.760	-	3/4	-	3	4 1/4	2	11/16	0.590	0.442
0.760	0.823	-	13/16	M20	3	4 15/32	2	11/16	0.652	0.489
0.823	0.885	-	7/8	M22	3	4 11/16	2 7/32	3/4	0.697	0.523
0.885	0.948	-	15/16	M24	3	4 29/32	2 7/32	3/4	0.760	0.570
0.948	1.010	-	1	M25	3	5 1/8	2 1/2	13/16	0.800	0.600
1.010	1.073	-	1 1/16	M27	3	5 1/8	2 1/2	7/8	0.896	0.672
1.073	1.135	-	1 1/8	-	3	5 7/16	2 9/16	7/8	0.896	0.672
1.135	1.198	-	1 3/16	M30	3	5 7/16	2 9/16	1	1.021	0.766
1.198	1.260	-	1 1/4	-	3	5 3/4	2 9/16	1	1.021	0.766
1.260	1.323	-	1 5/16	M33	3	5 3/4	2 9/16	1 1/16	1.108	0.831
1.323	1.385	-	1 3/8	-	3	6 1/16	3	1 1/16	1.108	0.831
1.385	1.448	-	1 7/16	M36	3	6 1/16	3	1 1/8	1.233	0.925
1.448	1.510	-	1 1/2	-	3	6 3/8	3	1 1/8	1.233	0.925
1.510	1.635	-	1 5/8	M39	3	6 11/16	3 3/16	1 1/8	1.305	0.979
1.635	1.760	-	1 3/4	M42	3	7	3 3/16	1 1/4	1.430	1.072
1.760	1.885	-	1 7/8	-	3	7 5/16	3 9/16	1 1/4	1.519	1.139
1.885	2.010	-	2	M48	3	7 5/8	3 9/16	1 3/8	1.644	1.233
2.010	2.135	-	2 1/8	-	3	8	3 9/16	1 3/8	1.769	1.327
2.135	2.260	-	2 1/4	M56	3	8 1/4	3 9/16	1 7/16	1.894	1.420
2.260	2.385	-	2 3/8	-	3	8 1/2	4	1 7/16	2.019	1.514
2.385	2.510	-	2 1/2	-	3	8 3/4	4	1 1/2	2.100	1.575
2.510	2.635	-	2 5/8	M64	3	8 3/4	4	1 1/2	2.250	1.669
2.635	2.760	-	2 3/4	-	3	9 1/4	4	1 9/16	2.350	1.762
2.760	2.885	-	2 7/8	M72	3	9 1/4	4	1 9/16	2.475	1.856
2.885	3.010	-	3	-	3	9 3/4	4 9/16	1 5/8	2.543	1.907
3.010	3.135	-	3 1/8	-	3	9 3/4	4 9/16	1 5/8	2.668	2.001
3.135	3.260	-	3 1/4	M80	3	10	4 9/16	1 3/4	2.793	2.095
3.260	3.385	-	3 3/8	-	3	10	4 9/16	1 3/4	2.883	2.162
3.385	3.510	-	3 1/2	-	3	10 1/4	4 15/16	2	3.008	2.256
3.510	3.635	-	3 5/8	M90	3	10 1/4	4 15/16	2	3.133	2.350
3.635	3.760	-	3 3/4	-	3	10 1/2	5 5/16	2 1/8	3.217	2.413
3.760	3.885	-	3 7/8	-	3	10 1/2	5 5/16	2 1/8	3.342	2.506
3.885	4.010	-	4	M100	3	10 3/4	5 5/16	2 1/2	3.467	2.600

Note: Unless otherwise specified, all OSG taps conform to the dimensions listed above in USCTI Table 302.





Spiral Pointed and Spiral Fluted, JIS (Table 350)


Diameter	Pitch	General Dimensions - Metric					Ground Thread Limits Class	Pitch Diameter Limit		
		Overall Length A	Length of Thread B	Length of Square C	Shank Diam. D	Size of Square E		Basic	Minimum	Maximum
M2	0.4	40	15	5	3	2.5	2	1.740	1.750	1.770
M2.3	0.4	42	15	5	3	2.5	2	2.040	2.050	2.070
M2.6	0.45	44	16	5	3	2.5	2	2.308	2.318	2.333
M3	0.5	46	18	6	4	3.2	2	2.675	2.685	2.700
M3.5	0.6	48	18	6	4	3.2	2	3.110	3.120	3.135
M4	0.7	52	20	7	5	4	2	3.545	3.555	3.575
M4.5	0.75	55	20	7	5	4	2	4.013	4.023	4.043
M5	0.8	60	22	7	5.5	4.5	2	4.480	4.490	4.510
M6	0.75	62	20	7	6	4.5	2	5.513	5.523	5.543
	1	62	24	7	6	4.5	2	5.350	5.360	5.380
M7	1	65	6	8	6.2	5	2	6.350	6.360	6.380
	0.75	62	20	8	6.2	5	2	7.513	7.525	7.550
M8	1	70	30	8	6.2	5	2	7.350	7.360	7.380
	1.25	70	30	8	6.2	5	2	7.188	7.198	7.223
M9	1.25	72	30	8	7	5.5	2	8.188	8.198	8.223
	1	70	30	8	7	5.5	2	9.350	9.362	9.387
M10	1.25	75	32	8	7	5.5	2	9.188	9.198	9.223
	1.5	75	32	8	7	5.5	2	9.026	9.041	9.066
M11	1.5	80	38	9	8	6	2	10.026	10.041	10.066
	1	70	30	9	8.5	6.5	2	11.350	11.365	11.395
M12	1.25	80	38	9	8.5	6.5	2	11.188	11.203	11.233
	1.5	82	38	9	8.5	6.5	2	11.026	11.041	11.071
	1.75	82	38	9	8.5	6.5	2	10.863	10.878	10.908
M14	1.25	80	38	11	10.5	8	2	13.188	13.203	13.233
	1.5	88	42	11	10.5	8	2	13.026	13.041	13.071
	2	88	42	11	10.5	8	2	12.701	12.716	12.746
M16	1	75	30	13	12.5	10	2	15.350	15.365	15.395
	1.5	95	45	13	12.5	10	2	15.026	15.041	15.071
	2	95	45	13	12.5	10	2	14.701	14.716	14.746
M18	1.5	95	45	14	14	11	2	17.026	17.041	17.071
	2	95	45	14	14	11	2	16.701	16.716	16.751
M20	2.5	100	48	14	14	11	2	16.376	16.396	16.431
	1.5	95	45	15	15	12	2	19.026	19.041	19.076
M22	2.5	100	48	15	15	12	2	18.376	19.396	18.431
	1.5	95	45	16	17	13	2	21.026	21.041	21.076
M24	2.5	115	55	16	17	13	2	20.376	20.396	20.431
	1.5	95	45	18	19	15	2	23.026	23.041	23.076
M26	3	120	58	18	19	15	2	22.051	22.071	22.111
	1.5	95	45	18	20	15	2	25.026	25.041	25.076
M28	3	130	62	18	20	15	2	24.051	24.071	24.076
	1.5	105	45	8	21	17	2	27.026	27.041	27.076
M30	1.5	105	45	20	23	17	2	29.026	29.041	29.076
	3.5	135	65	20	23	17	2	27.727	27.747	27.787
M32	1.5	105	45	22	24	19	2	31.026	31.041	31.076
M33	1.5	110	45	22	25	19	2	32.026	32.041	32.076
M34	1.5	110	45	24	26	21	2	33.026	33.041	33.076
M36	1.5	110	45	24	28	21	2	35.026	35.041	35.076

Note: Dimensions are in millimeters





Screw Thread Inserts General Tap Dimensions - Inch (USCTI Table 322)

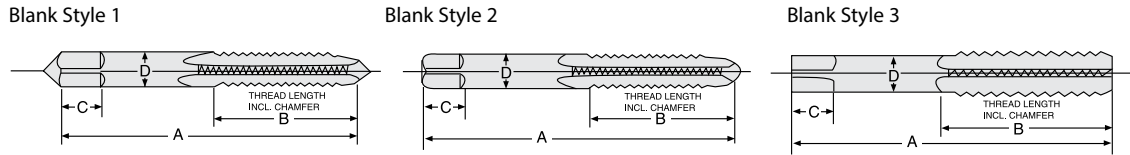

Nominal Size	Threads Per Inch		Blank Design No.	Tap Dimensions (Inch)					Table 302 Blank Equivalent
	UNC	UNF		A	B	C	D	Size of Square	
1	64	–	1	1.810	0.500	0.190	0.141	0.110	No. 3
2	56	–	1	1.880	0.560	0.190	0.141	0.110	No. 4
	–	64	1	1.880	0.560	0.190	0.141	0.110	No. 4
3	48	–	1	1.940	0.630	0.190	0.141	0.110	No. 5
	–	56	1	1.940	0.630	0.190	0.141	0.110	No. 5
4	40	–	1	2.000	0.690	0.190	0.141	0.110	No. 6
	–	48	1	2.000	0.690	0.190	0.141	0.110	No. 6
5	40	–	1	2.130	0.750	0.250	0.168	0.131	No. 8
6	32	–	1	2.380	0.880	0.250	0.194	0.152	No. 10
	–	40	1	2.130	0.750	0.250	0.168	0.131	No. 8
8	32	–	1	2.380	0.940	0.280	0.220	0.165	No. 12
	–	36	1	2.380	0.940	0.280	0.220	0.165	No. 12
10	24	–	2	2.500	1.000	0.310	0.255	0.191	1/4
	–	32	2	2.500	1.000	0.310	0.255	0.191	1/4
12	12	–	2	2.720	1.130	0.380	0.318	0.238	5/16
	–	–	2	2.720	1.130	0.380	0.318	0.238	5/16
1/4	20	–	2	2.720	1.130	0.380	0.318	0.238	5/16
	–	28	2	2.720	1.130	0.380	0.318	0.238	5/16
5/16	18	–	2	2.940	1.250	0.440	0.381	0.286	3/8
	–	24	2	2.940	1.250	0.440	0.381	0.286	3/8
3/8	16	–	3	3.380	1.660	0.440	0.367	0.275	1/2
	–	24	3	3.160	1.440	0.410	0.323	0.242	7/16
7/16	14	–	3	3.590	1.660	0.500	0.429	0.322	9/16
	–	20	3	3.380	1.660	0.440	0.367	0.275	1/2
1/2	13	–	3	3.810	1.810	0.560	0.480	0.360	5/8
	–	20	3	3.590	1.660	0.500	0.429	0.322	9/16
9/16	12	–	3	4.030	1.810	0.630	0.542	0.406	11/16
	–	18	3	3.810	1.810	0.560	0.480	0.360	5/8
5/8	11	–	3	4.250	2.000	0.690	0.590	0.442	3/4
	–	18	3	4.030	1.810	0.630	0.542	0.406	11/16
3/4	10	–	3	4.690	2.220	0.750	0.697	0.523	7/8
	–	16	3	4.470	2.000	0.690	0.652	0.489	13/16
7/8	9	–	3	5.130	2.500	0.810	0.800	0.600	1"
	–	14	3	5.130	2.500	0.810	0.800	0.600	1"
1	8	–	3	5.750	2.560	1.000	1.021	0.766	1 1/4
	–	12	3	5.440	2.560	0.880	0.896	0.672	1 1/8


These taps are oversize to the extent that the internal thread they produce will accommodate a helical coil screw thread insert, which, at final assembly, will accept a screw thread of the normal size and pitch.






Screw Thread Inserts General Tap Dimensions - Metric (USCTI Table 322A)


Blank Style 1



Blank Style 2



Blank Style 3



Nominal Size	Pitch		Blank Design No.	Tap Dimensions (Inch)					Table 302 Blank Equivalent
	M	MF		A	B	C	D	Size of Square	
M2.2	0.45	-	1	1.880	0.560	0.190	0.141	0.110	No. 4
M2.5	0.45	-	1	1.940	0.630	0.190	0.141	0.110	No. 5
M3	0.5	-	1	2.000	0.690	0.190	0.141	0.110	No. 6
M3.5	0.6	-	1	2.130	0.750	0.250	0.117	0.131	No. 8
M4	0.7	-	1	2.380	0.880	0.250	0.194	0.152	No. 10
M5	0.8	-	2	2.500	1.000	0.310	0.255	0.191	1/4
M6	1	-	2	2.720	1.130	0.380	0.318	0.238	5/16
M7	1	-	2	2.940	1.250	0.440	0.381	0.286	3/8
M8	1.25	-	2	2.940	1.250	0.440	0.381	0.286	3/8
	-	1	2	2.940	1.250	0.440	0.381	0.286	3/8
M10	1.5	-	3	3.380	1.660	0.440	0.367	0.275	1/2
	-	1.25	3	3.380	1.660	0.440	0.367	0.275	1/2
	-	1	3	3.160	1.440	0.410	0.323	0.242	7/16
M12	1.75	-	3	3.590	1.660	0.500	0.429	0.322	9/16
	-	1.5	3	3.590	1.660	0.500	0.429	0.322	9/16
	-	1.25	3	3.590	1.660	0.500	0.429	0.322	9/16
M14	2	-	3	4.030	1.810	0.630	0.542	0.406	11/16
	-	1.5	3	3.810	1.810	0.560	0.480	0.360	5/8
M16	2	-	3	4.250	2.000	0.690	0.590	0.442	3/4
	-	1.5	3	4.030	1.810	0.630	0.542	0.406	11/16
M18	2.5	-	3	4.690	2.220	0.750	0.697	0.523	7/8
	-	2	3	4.470	2.000	0.690	0.652	0.489	13/16
	-	1.5	3	4.470	2.000	0.690	0.652	0.489	13/16
M20	2.5	-	3	4.910	2.220	0.750	0.760	0.570	15/16
	-	2	3	4.910	2.220	0.750	0.760	0.570	15/16
	-	1.5	3	4.690	2.220	0.750	0.697	0.523	7/8
M22	2.5	-	3	5.130	2.500	0.810	0.800	0.600	1"
	-	2	3	5.130	2.500	0.810	0.800	0.600	1"
	-	1.5	3	4.910	2.220	0.750	0.760	0.570	15/16
M24	3	-	3	5.440	2.560	0.880	0.896	0.672	1 1/8
	-	2	3	5.130	2.500	0.880	0.896	0.672	1 1/16

These taps are oversize to the extent that the internal thread they produce will accommodate a helical coil screw thread insert, which, at final assembly, will accept a screw thread of the normal size and pitch.





Classes and Tap Recommendations

Size	Threads Per Inch		Basic Pitch Diameter	Unified Classes of Thread				American National Classes of Thread			
				CLASS 2B For General Applications		CLASS 3B For Closer Fits		CLASS 2		CLASS 3	
	NC UNC	NF UNF	All Classes Minimum	Pitch Diam. Limits Maximum	Rec. Taps	Pitch Diam. Limits Maximum	Rec. Taps	Pitch Diam. Limits Maximum	Rec. Taps	Pitch Diam. Limits Maximum	Rec. Taps
0	—	80	0.0519	0.0542	H2	0.0536	H1	0.0536	H1	0.0532	H1
1	64	—	0.0629	0.0655	H2	0.0648	H1	0.0648	H1	0.0643	H1
1	—	72	0.0640	0.0665	H2	0.0659	H1	0.0658	H1	0.0653	H1
2	56	—	0.0744	0.0772	H2	0.0765	H1	0.0764	H1	0.0759	H1
2	—	64	0.0759	0.0786	H2	0.0779	H1	0.0778	H1	0.0773	H1
3	48	—	0.0855	0.0885	H2	0.0877	H1	0.0877	H1	0.0871	H1
3	—	56	0.0874	0.0902	H2	0.0895	H1	0.0894	H1	0.0889	H1
4	40	—	0.0958	0.0991	H2	0.0982	H2	0.0982	H2	0.0975	H1
4	—	48	0.0985	0.1016	H2	0.1008	H1	0.1007	H1	0.1001	H1
5	40	—	0.1088	0.1121	H2	0.1113	H2	0.1112	H2	0.1105	H1
5	—	44	0.1102	0.1134	H2	0.1126	H1	0.1125	H1	0.1118	H1
6	32	—	0.1177	0.1214	H3	0.1204	H2	0.1204	H2	0.1196	H1
6	—	40	0.1218	0.1252	H2	0.1243	H2	0.1242	H2	0.1235	H1
8	32	—	0.1437	0.1475	H3	0.1465	H2	0.1464	H2	0.1456	H1
8	—	36	0.1460	0.1496	H2	0.1487	H2	0.1485	H2	0.1478	H1
10	24	—	0.1629	0.1672	H3	0.1661	H3	0.1662	H3	0.1653	H1
10	—	32	0.1697	0.1736	H3	0.1726	H2	0.1724	H2	0.1716	H1
12	24	—	0.1889	0.1933	H3	0.1922	H3	0.1922	H3	0.1913	H1
12	—	28	0.1928	0.1970	H3	0.1959	H3	0.1959	H3	0.1950	H1
1/4	20	—	0.2175	0.2224	H5	0.2211	H3	0.2211	H3	0.2201	H2
1/4	—	28	0.2268	0.2311	H4	0.2300	H3	0.2299	H3	0.2290	H1
5/16	18	—	0.2764	0.2817	H5	0.2803	H3	0.2805	H3	0.2794	H2
5/16	—	24	0.2854	0.2902	H4	0.2890	H3	0.2887	H3	0.2878	H1
3/8	16	—	0.3344	0.3401	H5	0.3387	H3	0.3389	H3	0.3376	H2
3/8	—	24	0.3479	0.3528	H4	0.3516	H3	0.3512	H3	0.3503	H1
7/16	14	—	0.3911	0.3972	H5	0.3957	H3	0.3960	H5	0.3947	H3
7/16	—	20	0.4050	0.4104	H5	0.4091	H3	0.4086	H3	0.4076	H1
1/2	13	—	0.4500	0.4565	H5	0.4548	H3	0.4552	H5	0.4537	H3
1/2	—	20	0.4675	0.4731	H5	0.4717	H3	0.4711	H3	0.4701	H1
9/16	12	—	0.5084	0.5152	H5	0.5135	H3	0.5140	H5	0.5124	H3
9/16	—	18	0.5264	0.5333	H5	0.5308	H3	0.5305	H3	0.5294	H2
5/8	11	—	0.5660	0.5732	H5	0.5714	H3	0.5719	H5	0.5702	H3
5/8	—	18	0.5889	0.5949	H5	0.5934	H3	0.5930	H3	0.5919	H2
3/4	10	—	0.6850	0.6927	H5	0.6907	H5	0.6914	H5	0.6895	H3
3/4	—	16	0.7094	0.7159	H5	0.7143	H3	0.7139	H3	0.7126	H2
7/8	9	—	0.8028	0.8110	H6	0.8089	H4	0.8098	H6	0.8077	H4
7/8	—	14	0.8286	0.8356	H6	0.8339	H4	0.8335	H4	0.8322	H2
1	8	—	0.9188	0.9276	H6	0.9254	H4	0.9264	H4	0.9242	H4
1	—	12	0.9459	0.9535	H6	0.9516	H4	0.9515	H4	0.9499	H4
1	—	14	0.9536	0.9609	H6	0.9590	H4	0.9585	H4	0.9572	H4
1-1/8	7	—	1.0322	1.0416	H8	1.0393	H4	1.0407	H4	1.0381	H4
1-1/8	—	12	1.0709	1.0787	H6	1.0768	H4	1.0765	H4	1.0749	H4
1-1/4	7	—	1.1572	1.1668	H8	1.1644	H4	1.1657	H4	1.1631	H4
1-1/4	—	12	1.1959	1.2039	H6	1.2019	H4	1.2015	H4	1.1999	H4
1-3/8	6	—	1.2667	1.2771	H8	1.2745	H4	1.2768	H4	1.2738	H4
1-3/8	—	12	1.3209	1.3291	H6	1.3270	H4	1.3265	H4	1.3249	H4
1-1/2	6	—	1.3917	1.4022	H8	1.3996	H4	1.4018	H4	1.3988	H4
1-1/2	—	12	1.4459	1.4542	H6	1.4522	H4	1.4515	H4	1.4499	H4
1-1/2	—	8	1.4188	1.4283	H7	1.4259	H5	1.4278	H7	1.4251	H5
1-5/8	—	8	1.5438	1.5535	H8	1.5510	H6	1.5531	H7	1.5503	H5
1-3/4	5	—	1.6201	1.6317	H9	1.6288	H7	1.6317	H9	1.6283	H7
1-3/4	8	8	1.6688	1.6786	H8	1.6762	H6	1.6785	H8	1.6756	H5
1-7/8	8	8	1.7938	1.8037	H8	1.8013	H6	1.8038	H8	1.8008	H6
2	4.5	—	1.8557	1.8681	H10	1.8650	H7	1.8684	H10	1.8646	H7
2	—	8	1.9188	1.9289	H8	1.9264	H6	1.9292	H8	1.9261	H6

ISO Metric Class of Threads				
CLASS 6H For Commercial Threads				
Size mm	Pitch mm	Pitch Dia. Limits (Inch)		Rec. Taps
		Min.	Max.	
M1.6	0.35	0.0541	0.0574	D3
M2	0.4	0.0686	0.0720	D3
M2.5	0.45	0.0870	0.0906	D3
M3	0.5	0.1054	0.1092	D3
M3.5	0.6	0.1225	0.1268	D4
M4	0.7	0.1396	0.1442	D4
M5	0.8	0.1764	0.1812	D4
M6	1.0	0.2107	0.2165	D5
M8	1.25	0.2830	0.2892	D5
M10	1.5	0.3554	0.3624	D6
M12	1.75	0.4277	0.4355	D6
M14	2.0	0.5001	0.5083	D7
M16	2.0	0.5788	0.5871	D7
M20	2.5	0.7235	0.7322	D7
M24	3.0	0.8682	0.8785	D8
M30	3.5	1.0917	1.1026	D9
M36	4.0	1.3151	1.3268	D9
M39	4.0	1.4331	1.4450	D9
M42	4.5	1.5385	1.5509	D10
M42	3.0	1.5768	1.5873	D8
M42	2.0	1.6024	1.6112	D7
M42	1.5	1.6152	1.6231	D6
M45	4.5	1.6566	1.6690	D10
M45	3.0	1.6949	1.7054	D8
M48	5.0	1.7619	1.7751	D10
M48	3.0	1.8130	1.8241	D9
M48	2.0	1.8386	1.8479	D7
M48	1.5	1.8514	1.8598	D6
M56	5.5	2.0641	2.0781	D11

FORMULAS

- D3 = Basic PD + 0.0009" to Basic PD + 0.0015"
- D4 = Basic PD + 0.0012" to Basic PD + 0.0020"
- D5 = Basic PD + 0.0015" to Basic PD + 0.0025"
- D6 = Basic PD + 0.0018" to Basic PD + 0.0030"
- D7 = Basic PD + 0.0019" to Basic PD + 0.0035"
- D8 = Basic PD + 0.0024" to Basic PD + 0.0040"
- D9 = Basic PD + 0.0025" to Basic PD + 0.0045"

Sizes Through 1" Dia.

- H1 = Basic PD to Basic PD + 0.0005"
- H2 = Basic PD + 0.0005" to Basic PD + 0.0010"
- H3 = Basic PD + 0.0010" to Basic PD + 0.0015"
- H4 = Basic PD + 0.0015" to Basic PD + 0.0020"
- H5 = Basic PD + 0.0020" to Basic PD + 0.0025"
- H6 = Basic PD + 0.0025" to Basic PD + 0.0030"

Sizes Above 1" Through 1-1/2" Dia.

- H4 = Basic PD + 0.0010" to Basic PD + 0.0020"





Pitch Diameter Limits

For External and Internal Screw Threads

Classes 2A, 3A and 2B, 3B, Unified Thread Form Classes 2 and 3, American National Thread Form

Size	Threads Per Inch		External Thread (Bolt)							Internal Thread (Nut)				
			Unified				American National			Basic Pitch Dia.	Unified		American National	
	NC UNC	NF UNF	Maximum		Minimum		Max.	Minimum			All Classes Min. Size No.	Maximum		Minimum
			Class 2A	Class 3A Basic No.	Class 2A	Class 3A	Classes 2, 3 Basic Size No.	Class 2 No.	Class 3	2B Size No.		3B Size No.	2 Size No.	3 Size No.
0	-	80	0.0514	0.0519	0.0496	0.0506	0.0519	0.0502	0.0506	0.0519	0.0542	0.0536	0.0536	0.0532
1	64	-	0.0623	0.0629	0.0603	0.0614	0.0629	0.0610	0.0615	0.0629	0.0655	0.0648	0.0648	0.0643
	-	72	0.0634	0.0640	0.0615	0.0626	0.0640	0.0622	0.0627	0.0640	0.0665	0.0659	0.0658	0.0653
2	56	-	0.0738	0.0744	0.0717	0.0728	0.0744	0.0724	0.0729	0.0744	0.0772	0.0765	0.0764	0.0759
	-	64	0.0753	0.0759	0.0733	0.0744	0.0759	0.0740	0.0745	0.0759	0.0786	0.0779	0.0778	0.0773
3	48	-	0.0848	0.0855	0.0825	0.0838	0.0855	0.0833	0.0839	0.0855	0.0885	0.0877	0.0877	0.0871
	-	56	0.0867	0.0874	0.0845	0.0858	0.0874	0.0854	0.0859	0.0874	0.0902	0.0895	0.0894	0.0889
4	40	-	0.0950	0.0958	0.0925	0.0939	0.0958	0.0934	0.0941	0.0958	0.0991	0.0982	0.0982	0.0975
	-	48	0.0978	0.0985	0.0954	0.0967	0.0985	0.0963	0.0969	0.0985	0.1016	0.1008	0.1007	0.1001
5	40	-	0.1080	0.1088	0.1054	0.1069	0.1088	0.1064	0.1071	0.1088	0.1121	0.1113	0.1112	0.1105
	-	44	0.1095	0.1102	0.1070	0.1083	0.1102	0.1079	0.1086	0.1102	0.1134	0.1126	0.1125	0.1118
6	32	-	0.1169	0.1177	0.1141	0.1156	0.1177	0.1150	0.1158	0.1177	0.1214	0.1204	0.1204	0.1196
	-	40	0.1210	0.1218	0.1184	0.1198	0.1218	0.1194	0.1201	0.1218	0.1252	0.1243	0.1242	0.1235
8	32	-	0.1428	0.1437	0.1399	0.1415	0.1437	0.1410	0.1418	0.1437	0.1475	0.1465	0.1464	0.1456
	-	36	0.1452	0.1460	0.1424	0.1439	0.1460	0.1435	0.1442	0.1460	0.1496	0.1487	0.1485	0.1478
10	24	-	0.1619	0.1629	0.1586	0.1604	0.1629	0.1596	0.1605	0.1629	0.1672	0.1661	0.1662	0.1653
	-	32	0.1688	0.1697	0.1658	0.1674	0.1697	0.1670	0.1678	0.1697	0.1736	0.1726	0.1724	0.1716
12	24	-	0.1879	0.1889	0.1845	0.1863	0.1889	0.1856	0.1865	0.1889	0.1933	0.1922	0.1922	0.1913
	-	28	0.1918	0.1928	0.1886	0.1904	0.1928	0.1897	0.1906	0.1928	0.1970	0.1959	0.1959	0.1950
1/4	20	-	0.2164	0.2175	0.2127	0.2147	0.2175	0.2139	0.2149	0.2175	0.2224	0.2211	0.2211	0.2201
	-	28	0.2258	0.2268	0.2225	0.2243	0.2268	0.2237	0.2246	0.2268	0.2311	0.2300	0.2299	0.2290
5/16	18	-	0.2752	0.2764	0.2712	0.2734	0.2764	0.2723	0.2734	0.2764	0.2817	0.2803	0.2805	0.2794
	-	24	0.2843	0.2854	0.2806	0.2827	0.2854	0.2821	0.2830	0.2854	0.2902	0.2890	0.2887	0.2878
3/8	16	-	0.3331	0.3344	0.3287	0.3311	0.3344	0.3299	0.3312	0.3344	0.3401	0.3387	0.3389	0.3376
	-	24	0.3468	0.3479	0.3430	0.3450	0.3479	0.3446	0.3455	0.3479	0.3528	0.3516	0.3512	0.3503
7/16	14	-	0.3897	0.3911	0.3850	0.3876	0.3911	0.3862	0.3875	0.3911	0.3972	0.3957	0.3960	0.3947
	-	20	0.4037	0.4050	0.3995	0.4019	0.4050	0.4014	0.4024	0.4050	0.4104	0.4091	0.4086	0.4076
1/2	13	-	0.4485	0.4500	0.4435	0.4463	0.4500	0.4448	0.4463	0.4500	0.4565	0.4548	0.4552	0.4537
	-	20	0.4662	0.4675	0.4619	0.4643	0.4675	0.4639	0.4649	0.4675	0.4731	0.4717	0.4711	0.4701
9/16	12	-	0.5068	0.5084	0.5016	0.5045	0.5084	0.5028	0.5044	0.5084	0.5152	0.5135	0.5140	0.5124
	-	18	0.5250	0.5264	0.5205	0.5230	0.5264	0.5223	0.5234	0.5264	0.5323	0.5308	0.5305	0.5294
5/8	11	-	0.5644	0.5660	0.5589	0.5619	0.5660	0.5601	0.5618	0.5660	0.5732	0.5714	0.5719	0.5702
	-	18	0.5875	0.5889	0.5828	0.5854	0.5889	0.5848	0.5859	0.5889	0.5949	0.5934	0.5930	0.5919
3/4	10	-	0.6832	0.6850	0.6773	0.6806	0.6850	0.6786	0.6805	0.6850	0.6927	0.6907	0.6914	0.6985
	-	16	0.7079	0.7094	0.7029	0.7056	0.7094	0.7049	0.7062	0.7094	0.7159	0.7143	0.7139	0.7126
7/8	9	-	0.8009	0.8028	0.7946	0.7981	0.8028	0.7958	0.7979	0.8028	0.8110	0.8089	0.8098	0.8077
	-	14	0.8270	0.8286	0.8216	0.8245	0.8286	0.8237	0.8250	0.8286	0.8356	0.8339	0.8335	0.8322
1	8	-	0.9168	0.9188	0.9100	0.9137	0.9188	0.9112	0.9134	0.9188	0.9276	0.9254	0.9264	0.9242
	-	12	0.9441	0.9459	0.9382	0.9415	0.9459	0.9403	0.9419	0.9459	0.9535	0.9516	0.9515	0.9499
-	14NS	0.9519	0.9536	0.9463	0.9494	0.9536	0.9487	0.9500	0.9536	0.9609	0.9590	0.9585	0.9572	
1 1/8	7	-	1.0300	1.0322	1.0228	1.0268	1.0322	1.0237	1.0263	1.0322	1.0416	1.0393	1.0407	1.0381
	-	12	1.0691	1.0709	1.0631	1.0664	1.0709	1.0653	1.0669	1.0709	1.0787	1.0768	1.0765	1.0749
1 1/4	7	-	1.1550	1.1572	1.1476	1.1517	1.1572	1.1487	1.1513	1.1572	1.1668	1.1644	1.1657	1.1631
	-	12	1.1941	1.1959	1.1879	1.1913	1.1959	1.1903	1.1919	1.1959	1.2039	1.2019	1.2015	1.1999
1 3/8	6	-	1.2643	1.2667	1.2563	1.2607	1.2667	1.2566	1.2596	1.2667	1.2771	1.2745	1.2768	1.2738
	-	12	1.3190	1.3321	1.3127	1.3162	1.3209	1.3153	1.3169	1.3209	1.3291	1.3270	1.3265	1.3249
1 1/2	6	-	1.3893	1.3917	1.3812	1.3856	1.3917	1.3816	1.3846	1.3917	1.4022	1.3996	1.4018	1.3988
	-	12	1.4440	1.4459	1.4376	1.4411	1.4459	1.4403	1.4419	1.4459	1.4542	1.4522	1.4515	1.4499





Classes and Tap Recommendations (USCTI Table 323)

Size	Threads Per Inch		Tap Major Diameter		Unified Classes of Thread					
					Class 2B For General Applications			Class 3B For Closer Fits		
	NC UNC	NF UNF	Minimum	Maximum	H Limit	Minimum	Maximum	H Limit	Minimum	Maximum
2	56	-	0.1107	0.1117	H2	0.0981	0.0986	H1	0.0976	0.0981
3	48	-	0.1279	0.1289	H2	0.1131	0.1136	H1	0.1126	0.1131
4	40	-	0.1463	0.1473	H2	0.1288	0.1293	H1	0.1283	0.1288
4	-	48	0.1409	0.1419	H2	0.1261	0.1266	H1	0.1256	0.1261
6	32	-	0.1807	0.1817	H3	0.1593	0.1598	H2	0.1588	0.1593
6	-	40	0.1723	0.1733	H2	0.1548	0.1553	H1	0.1543	0.1548
8	32	-	0.2067	0.2077	H3	0.1853	0.1858	H2	0.1848	0.1853
8	-	36	0.2022	0.2032	H2	0.1826	0.1831	H1	0.1821	0.1826
10	24	-	0.2465	0.2475	H3	0.2180	0.2185	H2	0.2175	0.2180
10	-	32	0.2327	0.2337	H3	0.2113	0.2118	H2	0.2108	0.2113
1/4	20	-	0.3177	0.3187	H3	0.2835	0.2840	H2	0.2830	0.2835
1/4	-	28	0.2985	0.2995	H3	0.2742	0.2747	H2	0.2737	0.2742
5/16	18	-	0.3874	0.3884	H4	0.3501	0.3506	H3	0.3496	0.3501
5/16	-	24	0.3690	0.3700	H3	0.3405	0.3410	H2	0.3400	0.3405
3/8	16	-	0.4592	0.4602	H4	0.4171	0.4176	H3	0.4166	0.4171
3/8	-	24	0.4315	0.4325	H3	0.4030	0.4035	H2	0.4025	0.4030
7/16	14	-	0.5333	0.5343	H4	0.4854	0.4859	H3	0.4849	0.4854
7/16	-	20	0.5052	0.5062	H4	0.4715	0.4720	H3	0.4710	0.4715
1/2	13	-	0.6032	0.6042	H4	0.5514	0.5519	H3	0.5509	0.5514
1/2	-	20	0.5677	0.5687	H4	0.5340	0.5345	H3	0.5335	0.5340
9/16	12	-	0.6741	0.6751	H4	0.6182	0.6187	H3	0.6177	0.6182
9/16	-	18	0.6374	0.6384	H4	0.6001	0.6006	H3	0.5996	0.6001
5/8	11	-	0.7467	0.7477	H4	0.6856	0.6861	H3	0.6851	0.6856
5/8	-	18	0.6999	0.7009	H4	0.6626	0.6631	H3	0.6621	0.6626
3/4	10	-	0.8835	0.8850	H5	0.8169	0.8174	H3	0.8159	0.8164
3/4	-	16	0.8342	0.8352	H4	0.7921	0.7926	H3	0.7916	0.7921
7/8	9	-	1.0232	1.0247	H5	0.9491	0.9496	H3	0.9481	0.9486
7/8	-	14	0.9708	0.9718	H4	0.9234	0.9239	H3	0.9224	0.9229
1	8	-	1.1666	1.1681	H6	1.0832	1.0842	H4	1.0822	1.0832
1	-	12	1.1116	1.1126	H6	1.0562	1.0572	H4	1.0552	1.0562

ISO Metric Class of Threads				
Class 6H For Commercial Threads				
Size mm	Pitch mm	Pitch Diameter Limits		Recommended Taps
		Min.	Max	
M2	0.40	0.0889	0.0909	D2
M2.5	0.45	0.1099	0.1120	D2
M3	0.50	0.1309	0.1332	D2
M4	0.70	0.1753	0.1783	D3
M5	0.80	0.2173	0.2203	D3
M6	1.00	0.2618	0.2654	D3
M8	1.25	0.3469	0.3508	D3
M10	1.50	0.4320	0.4357	D4
M12	1.75	0.5172	0.5224	D4
M14	2.00	0.6023	0.6078	D5
M16	2.00	0.6810	0.6867	D5
M18	2.50	0.7725	0.7786	D5
M20	2.50	0.8371	0.8574	D5
M22	2.50	0.9300	0.9361	D5
M24	3.00	1.0216	1.0289	D6





Machine Screw Taps – Ground Thread Unified and American National Form (USCTI Table 329)

Tap Size In	Threads Per Inch			Major Diameter			Basic Pitch Diam.	Pitch Diameter Limits							
	NC UNC	UF UNF	NS	Basic	Min.	Max.		H1 Limit		H2 Limit		H3 Limit		H7 Limit*	
								Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
0	-	80	-	0.0600	0.0605	0.0616	0.0519	0.0519	0.0524	0.0524	0.0529	-	-	-	-
1	64	-	-	0.0730	0.0736	0.0750	0.0629	0.0629	0.0634	0.0634	0.0639	-	-	-	-
1	-	72	-	0.0730	0.0736	0.0748	0.0640	0.0640	0.0645	0.0645	0.0650	-	-	-	-
2	56	-	-	0.0860	0.0867	0.0883	0.0744	0.0744	0.0749	0.0749	0.0754	-	-	-	-
2	-	64	-	0.0860	0.0866	0.0880	0.0759	0.0759	0.0764	0.0764	0.0769	-	-	-	-
3	48	-	-	0.0990	0.0999	0.1017	0.0855	0.0855	0.0860	0.0860	0.0865	-	-	-	-
3	-	56	-	0.0990	0.0997	0.1013	0.0874	0.0874	0.0879	0.0879	0.0884	-	-	-	-
4	-	-	36	0.1120	0.1135	0.1156	0.0940	-	-	0.0945	0.0950	-	-	-	-
4	40	-	-	0.1120	0.1133	0.1152	0.0958	0.0958	0.0963	0.0963	0.0968	-	-	-	-
4	-	48	-	0.1120	0.1129	0.1147	0.0985	0.0985	0.0990	0.0990	0.0995	-	-	-	-
5	40	-	-	0.1250	0.1263	0.1282	0.1088	0.1088	0.1093	0.1093	0.1098	-	-	-	-
5	-	44	-	0.1250	0.1263	0.1280	0.1102	-	-	0.1107	0.1112	-	-	-	-
6	32	-	-	0.1380	0.1401	0.1421	0.1177	0.1177	0.1182	0.1182	0.1187	0.1187	0.1192	0.1207	0.1212
6	-	40	-	0.1380	0.1393	0.1412	0.1218	0.1218	0.1223	0.1223	0.1228	-	-	-	-
8	32	-	-	0.1640	0.1661	0.1681	0.1437	0.1437	0.1442	0.1442	0.1447	0.1447	0.1452	0.1467	0.1472
8	-	36	-	0.1640	0.1655	0.1676	0.1460	0.1460	0.1465	0.1465	0.1470	-	-	-	-
10	24	-	-	0.1900	0.1927	0.1954	0.1629	0.1629	0.1634	0.1634	0.1639	0.1639	0.1644	0.1659	0.1664
10	-	32	-	0.1900	0.1921	0.1941	0.1697	0.1697	0.1702	0.1702	0.1707	0.1707	0.1712	0.1727	0.1732
12	24	-	-	0.2160	0.2187	0.2214	0.1889	0.1889	0.1894	-	-	0.1899	0.1904	-	-
12	-	28	-	0.2160	0.2183	0.2206	0.1928	0.1928	0.1933	-	-	0.1938	0.1943	-	-

LEAD TOLERANCE

A maximum lead deviation of plus or minus 0.0005" within any two threads not farther apart than one inch is permitted.

ANGLE TOLERANCE

6 to 9 threads per inch incl. = ±25' in 1/2 angle.
10 to 80 threads per inch incl. = ±30' in 1/2 angle.

FORMULA

Maximum major diameter = Basic +A.

Minimum major diameter = Basic +B.

For values of A and B see table 331.

PITCH DIAMETER LIMITS FOR TAPS THROUGH 1" DIAMETER

H1 Limit = Basic PD to basic PD + 0.0005".

H2 Limit = Basic PD + 0.0005" to Basic PD + 0.0010".

H3 Limit = Basic PD + 0.0010" to Basic PD + 0.0015".

H4 Limit = Basic PD + 0.0015" to Basic PD + 0.0020".

H5 Limit = Basic PD + 0.0020" to Basic PD + 0.0025".

H6 Limit = Basic PD + 0.0025" to Basic PD + 0.0030".

PITCH DIAMETER LIMITS FOR TAPS OVER 1" DIAMETER THROUGH 1-1/2" DIAMETER

H4 Limit = Basic PD + 0.0010" to Basic PD + 0.0020".

*Major diameter for H7 Limit Taps is 0.002" larger than values shown in min. and max. columns.

Fractional Size Taps – Ground Thread Unified and American National Form (USCTI Table 327)

Tap Size Inches	Threads Per Inch			Major Diameter			Basic Pitch Diam.	Pitch Diameter Limits											
	NC UNC	UF UNF	NS	Basic	Min.	Max.		H1 Limit		H2 Limit		H3 Limit		H4 Limit		H5 Limit		H6 Limit	
								Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1/4	20	-	-	0.2500	0.2533	0.2565	0.2175	0.2175	0.2180	0.2180	0.2185	0.2185	0.2190	-	-	0.2195	0.2200	-	-
1/4	-	28	-	0.2500	0.2523	0.2546	0.2268	0.2268	0.2273	0.2273	0.2278	0.2278	0.2283	0.2283	0.2288	-	-	-	-
5/16	18	-	-	0.3125	0.3161	0.3197	0.2764	0.2764	0.2769	0.2769	0.2774	0.2774	0.2779	-	-	0.2784	0.2789	-	-
5/16	-	24	-	0.3125	0.3152	0.3179	0.2854	0.2854	0.2859	0.2859	0.2864	0.2864	0.2869	0.2869	0.2874	-	-	-	-
3/8	16	-	-	0.3750	0.3790	0.3831	0.3344	0.3344	0.3349	0.3349	0.3354	0.3354	0.3359	-	-	0.3364	0.3369	-	-
3/8	-	24	-	0.3750	0.3777	0.3804	0.3479	0.3479	0.3484	0.3484	0.3489	0.3489	0.3494	0.3494	0.3499	-	-	-	-
7/16	14	-	-	0.4375	0.4422	0.4468	0.3911	0.3911	0.3916	0.3916	0.3921	0.3921	0.3926	-	-	0.3931	0.3936	-	-
7/16	-	20	-	0.4375	0.4408	0.4440	0.4050	0.4050	0.4055	0.4055	0.4060	0.4060	0.4065	-	-	0.4070	0.4075	-	-
1/2	13	-	-	0.5000	0.5050	0.5100	0.4500	0.4500	0.4505	0.4505	0.4510	0.4510	0.4515	-	-	0.4520	0.4525	-	-
1/2	-	20	-	0.5000	0.5033	0.5065	0.4675	0.4675	0.4680	0.4680	0.4685	0.4685	0.4690	-	-	0.4695	0.4700	-	-
9/16	12	-	-	0.5625	0.5679	0.5733	0.5084	0.5084	0.5089	0.5089	0.5094	0.5094	0.5099	-	-	0.5104	0.5109	-	-
9/16	-	18	-	0.5625	0.5661	0.5697	0.5264	0.5264	0.5269	0.5269	0.5274	0.5274	0.5279	-	-	0.5284	0.5289	-	-
5/8	11	-	-	0.6250	0.6309	0.6368	0.5660	0.5660	0.5665	0.5665	0.5670	0.5670	0.5675	-	-	0.5680	0.5685	-	-
5/8	-	18	-	0.6250	0.6286	0.6322	0.5889	0.5889	0.5894	0.5894	0.5899	0.5899	0.5904	-	-	0.5909	0.5914	-	-
11/16	-	-	11	0.6875	0.6934	0.6993	0.6285	-	-	-	-	0.6295	0.6300	-	-	-	-	-	-
11/16	-	-	16	0.6875	0.6915	0.6956	0.6469	-	-	-	-	0.6479	0.6484	-	-	-	-	-	-
3/4	10	-	-	0.7500	0.7565	0.7630	0.6850	0.6850	0.6855	0.6855	0.6860	0.6860	0.6865	-	-	0.6870	0.6875	-	-
3/4	-	16	-	0.7500	0.7540	0.7581	0.7094	0.7094	0.7099	0.7099	0.7104	0.7104	0.7109	-	-	0.7114	0.7119	-	-
7/8	9	-	-	0.8750	0.8822	0.8894	0.8028	0.8028	0.8033	0.8033	0.8038	-	-	0.8043	0.8048	-	-	0.8053	0.8058
7/8	-	14	-	0.8750	0.8797	0.8843	0.8286	0.8286	0.8291	0.8291	0.8296	-	-	0.8301	0.8306	-	-	0.8311	0.8316
1	8	-	-	1.0000	1.0081	1.0162	0.9188	0.9188	0.9193	0.9193	0.9198	-	-	0.9203	0.9208	-	-	0.9213	0.9218
1	-	12	-	1.0000	1.0054	1.0108	0.9459	-	-	-	-	-	-	0.9464	0.9469	-	-	-	-
1	-	-	14	1.0000	1.0047	1.0093	0.9536	-	-	0.9541	0.9546	-	-	0.9551	0.9556	-	-	0.9561	0.9566
1 1/8	7	-	-	1.1250	1.1343	1.1436	1.0322	-	-	-	-	-	-	1.0327	1.0332	-	-	-	-
1 1/8	-	12	-	1.1250	1.1304	1.1358	1.0709	-	-	-	-	-	-	1.0714	1.0719	-	-	-	-
1 1/4	7	-	-	1.2500	1.2593	1.2686	1.1572	-	-	-	-	-	-	1.1577	1.1582	-	-	-	-
1 1/4	-	12	-	1.2500	1.2554	1.2608	1.1959	-	-	-	-	-	-	1.1964	1.1969	-	-	-	-
1 3/8	6	-	-	1.3750	1.3859	1.3967	1.2667	-	-	-	-	-	-	1.2672	1.2677	-	-	-	-
1 3/8	-	12	-	1.3750	1.3804	1.3858	1.3209	-	-	-	-	-	-	1.3214	1.3219	-	-	-	-
1 1/2	6	-	-	1.5000	1.5109	1.5217	1.3917	-	-	-	-	-	-	1.3922	1.3927	-	-	-	-
1 1/2	-	12	-	1.5000	1.5054	1.5108	1.4459	-	-	-	-	-	-	1.4464	1.4469	-	-	-	-





Ground Thread Taps (USCTI Table 331)

The following tables and formula are used in determining the limits and tolerances for ground thread taps having a thread lead angle not in excess of 5°, unless otherwise specified.

LEAD TOLERANCE

A maximum lead deviation of $\pm 0.0005''$, within any two threads not farther apart than 1" is permitted.

ANGLE TOLERANCE

Threads Per Inch	Deviation in Half Angle
4 to 5-1/2 incl.	$\pm 20'$
6 to 9 incl.	$\pm 25'$
10 to 80 incl.	$\pm 30'$

FORMULA

Max. Major Dia. = Basic + A

Max. Pitch Dia. = Min. + D

Min. Major Dia. = Basic + B

Min. Pitch Dia. = Basic + C

In the above formula:

A = Constant to add = 0.130P for all Pitches

B = Major Diameter Tolerance = 0.087P for 48 Through 80 TPI
 = 0.076P for 36 Through 47 TPI
 = 0.065P for 4 Through 35 TPI

C = Amount over basic for minimum pitch diameter

D = Pitch diameter tolerance

Note: When the tap major diameter must be determined from a specified tap pitch diameter, the maximum major diameter equals the minimum specified pitch diameter minus Constant C, plus 0.64952P, plus Constant A.

Threads Per Inch	A	B	C			D			
			To 5/8" Incl.	Over 5/8" to 2 1/2 Incl.	Over 2 1/2"	To 1" Incl.	Over 1" to 1 1/2" Incl.	Over 1 1/2" to 2 1/2" Incl.	Over 2 1/2"
80	0.0016	0.0011	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
72	0.0018	0.0012	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
64	0.0020	0.0014	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
56	0.0023	0.0016	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
48	0.0027	0.0018	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
44	0.0030	0.0017	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
40	0.0032	0.0019	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
36	0.0036	0.0021	0.0005	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
32	0.0041	0.0020	0.0010	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
28	0.0046	0.0023	0.0010	0.0010	0.0015	0.0005	0.0010	0.0010	0.0015
24	0.0054	0.0027	0.0010	0.0010	0.0015	0.0005	0.0010	0.0015	0.0015
20	0.0065	0.0032	0.0010	0.0010	0.0015	0.0005	0.0010	0.0015	0.0015
18	0.0072	0.0036	0.0010	0.0010	0.0015	0.0005	0.0010	0.0015	0.0015
16	0.0081	0.0041	0.0010	0.0010	0.0015	0.0005	0.0010	0.0015	0.0020
14	0.0093	0.0046	0.0010	0.0015	0.0015	0.0005	0.0010	0.0015	0.0020
13	0.0100	0.0050	0.0010	0.0015	0.0015	0.0005	0.0010	0.0015	0.0020
12	0.0108	0.0054	0.0010	0.0015	0.0015	0.0005	0.0010	0.0015	0.0020
11	0.0118	0.0059	0.0010	0.0015	0.0020	0.0005	0.0010	0.0015	0.0020
10	0.0130	0.0065	-	0.0015	0.0020	0.0005	0.0010	0.0015	0.0020
9	0.0144	0.0072	-	0.0015	0.0020	0.0005	0.0010	0.0015	0.0020
8	0.0162	0.0081	-	0.0015	0.0020	0.0005	0.0010	0.0015	0.0020
7	0.0186	0.0093	-	0.0015	0.0020	0.0010	0.0010	0.0020	0.0025
6	0.0217	0.0108	-	0.0015	0.0020	0.0010	0.0010	0.0020	0.0025
5 1/2	0.0236	0.0118	-	0.0015	0.0020	0.0010	0.0015	0.0020	0.0025
5	0.0260	0.0130	-	0.0015	0.0020	0.0010	0.0015	0.0020	0.0025
4 1/2	0.0289	0.0144	-	0.0015	0.0020	0.0010	0.0015	0.0020	0.0025
4	0.0325	0.0162	-	0.0015	0.0020	0.0010	0.0015	0.0020	0.0025

For intermediate pitches, use values for next coarser pitch for C and D, but use formulas for A and B.





Metric Size Taps – Ground Thread (USCTI Table 337)

Nominal Size	Pitch	Major Diameter Inches			Standard Pitch Diameter Limits Inches														
		Basic	Min.	Max.	Basic Pitch Diam.	D3 Limits		D4 Limits		D5 Limits		D6 Limits		D7 Limits		D8 Limits		D9 Limits	
						Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1.6	0.35	0.062992	0.0641	0.0651	0.054042	0.0550	0.0556	-	-	-	-	-	-	-	-	-	-	-	-
2.0	0.4	0.078740	0.0801	0.0811	0.068511	0.0695	0.0701	-	-	-	-	-	-	-	-	-	-	-	-
2.5	0.45	0.098425	0.0999	0.1009	0.086918	0.0879	0.0885	-	-	-	-	-	-	-	-	-	-	-	-
3.0	0.5	0.118110	0.1198	0.1208	0.105324	0.1063	0.1069	-	-	-	-	-	-	-	-	-	-	-	-
3.5	0.6	0.137795	0.1397	0.1407	0.122452	-	-	0.1237	0.1245	-	-	-	-	-	-	-	-	-	-
4.0	0.7	0.157480	0.1597	0.1613	0.139580	-	-	0.1408	0.1416	-	-	-	-	-	-	-	-	-	-
5.0	0.8	0.196850	0.1994	0.2010	0.176393	-	-	0.1776	0.1784	-	-	-	-	-	-	-	-	-	-
6.0	1.0	0.236220	0.2395	0.2411	0.210648	-	-	-	-	0.2122	0.2132	-	-	-	-	-	-	-	-
8.0	1.25	0.314960	0.3189	0.3214	0.282995	-	-	-	-	0.2843	0.2855	-	-	-	-	-	-	-	-
10	1.5	0.393700	0.3985	0.4010	0.355343	-	-	-	-	-	-	0.3572	0.3584	-	-	-	-	-	-
12	1.75	0.472440	0.4780	0.4805	0.427690	-	-	-	-	-	-	0.4295	0.4307	-	-	-	-	-	-
14	2.0	0.551180	0.5575	0.5600	0.500037	-	-	-	-	-	-	-	-	0.5020	0.5036	-	-	-	-
16	2.0	0.629920	0.6363	0.6388	0.578777	-	-	-	-	-	-	-	-	0.5807	0.5823	-	-	-	-
20	2.5	0.787400	0.7954	0.7979	0.723471	-	-	-	-	-	-	-	-	0.7254	0.7270	-	-	-	-
24	3.0	0.944880	0.9544	0.9583	0.868165	-	-	-	-	-	-	-	-	-	-	0.8706	0.8722	-	-
30	3.5	1.181100	1.1922	1.1961	1.091599	-	-	-	-	-	-	-	-	-	-	-	-	1.0942	1.0962
36	4.0	1.417320	1.4300	1.4339	1.315034	-	-	-	-	-	-	-	-	-	-	-	-	1.3176	1.3196

LEAD TOLERANCE

A maximum lead deviation of ± 0.013 mm within any two threads not farther apart than 25 mm is permitted.

ANGLE TOLERANCE

Pitch (mm)	Deviation in Half Angle
Over 0.25 to 2.5 Incl.	$\pm 30'$
Over 2.5 to 4 Incl.	$\pm 25'$
Over 4 to 6 Incl.	$\pm 20''$


FORMULA

Min. Major Dia. = Basic + W	Max. Pitch Dia. = Basic + Y
Max. Major Dia. = Min. + X	Min. Pitch Dia. = Max. - Z
For Values of W, Y & Z, See Table 341	


In all cases, the tap major and pitch diameter inch conversions have been rounded upwards to the next ten thousandth of an inch. Basic values agree with B1 Report—ISO Metric Screw Threads, Table 9B.

OH Tap Limits

OH Limits for Taps with a pitch ≤ 0.6

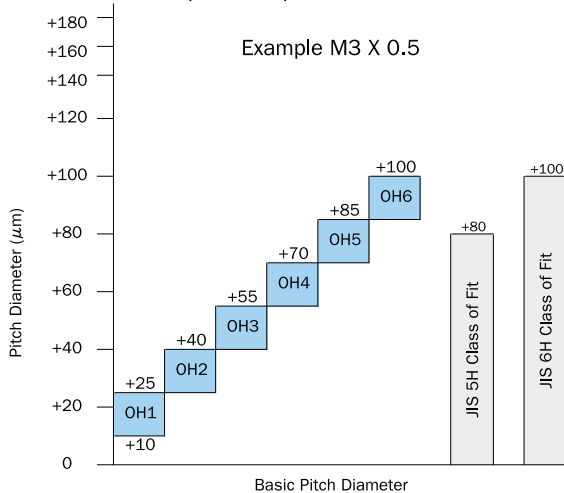

OH Limits for Taps with a pitch ≥ 0.7

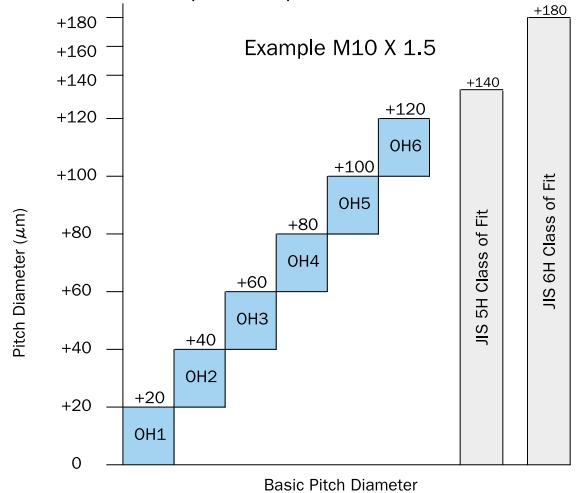



Ground Thread Tap Limits (USCTI Table 341)

The following tables and formula are used in determining the limits and tolerances for ground thread metric taps unless otherwise specified. They apply only to metric threads having a 60° form with a P/8 flat at the major diameter of the basic thread form.

LEAD TOLERANCE

A maximum lead deviation of ±0.013 mm within any two threads not farther apart than 25 mm is permitted.

ANGLE TOLERANCE

Pitch (mm)	Deviation in Half Angle
Over 0.25 to 2.5 incl.	±30'
Over 2.5 to 4. incl.	±25'
Over 4 to 6 incl.	±20'

FORMULA

Min. Major Dia = Basic + W	Max. Pitch Dia. = Basic + Y
Max. Major Dia. = Min. + X	Min. Pitch Dia. = Max. - Z

W = Constant to add to Basic Major Diameter*

X = Major Diameter Tolerance

Y = Amount over Basic for Maximum Pitch Diameter

Z = Pitch Diameter Tolerance

*W = .080P Converted to inches

Note: When the tap major diameter must be determined from a specified tap pitch diameter, the minimum major diameter equals the maximum specified tap pitch diameter minus constant Y, plus the basic single height of thread, plus constant W.

Pitch		Symmetrical Thread Height	Tap Limits for Metric Threads (inch)									
			W	X	Y				Z			
					M1.6 To M6.3 Incl.	Over M6.3 to M25 Incl.	Over M25 To M90 Incl.	Over M90	M1.6 To M6.3 Incl.	Over M6.3 to M25 Incl.	Over M25 To M90 Incl.	Over M90
mm	Inch Equiv.	0.64952P (Inch)										
0.3	0.011811	0.007671	0.0009	0.0010	0.0015	0.0015	0.0020	0.0020	0.0006	0.0006	0.0008	0.0008
0.35	0.013779	0.008950	0.0011	0.0010	0.0015	0.0015	0.0020	0.0020	0.0006	0.0006	0.0008	0.0008
0.4	0.015748	0.010229	0.0013	0.0010	0.0015	0.0020	0.0020	0.0020	0.0006	0.0006	0.0008	0.0010
0.45	0.017716	0.011507	0.0014	0.0010	0.0015	0.0020	0.0020	0.0020	0.0006	0.0008	0.0008	0.0010
0.5	0.019685	0.012786	0.0016	0.0010	0.0015	0.0020	0.0020	0.0025	0.0006	0.0008	0.0010	0.0010
0.6	0.236220	0.015343	0.0019	0.0010	0.0020	0.0020	0.0025	0.0025	0.0008	0.0008	0.0010	0.0010
0.7	0.027559	0.017900	0.0022	0.0016	0.0020	0.0020	0.0025	0.0025	0.0008	0.0008	0.0010	0.0010
0.75	0.029527	0.019178	0.0024	0.0016	0.0020	0.0025	0.0025	0.0030	0.0008	0.0010	0.0010	0.0012
0.8	0.031496	0.020457	0.0025	0.0016	0.0020	0.0025	0.0025	0.0030	0.0008	0.0010	0.0010	0.0012
0.9	0.035433	0.023014	0.0028	0.0016	0.0020	0.0025	0.0025	0.0030	0.0008	0.0010	0.0010	0.0012
1.0	0.039370	0.025572	0.0032	0.0016	0.0025	0.0025	0.0030	0.0030	0.0010	0.0010	0.0012	0.0012
1.25	0.049212	0.031964	0.0039	0.0025	0.0025	0.0025	0.0030	0.0035	0.0010	0.0012	0.0012	0.0016
1.5	0.059055	0.038357	0.0047	0.0025	0.0025	0.0030	0.0030	0.0035	0.0010	0.0012	0.0012	0.0016
1.75	0.068897	0.044750	0.0055	0.0025	-	0.0030	0.0035	0.0040	-	0.0012	0.0016	0.0016
2.0	0.078740	0.051143	0.0063	0.0025	-	0.0035	0.0035	0.0040	-	0.0016	0.0016	0.0016
2.5	0.098425	0.063929	0.0079	0.0025	-	0.0035	0.0040	0.0045	-	0.0016	0.0016	0.0020
3.0	0.118110	0.076715	0.0095	0.0039	-	0.0040	0.0040	0.0050	-	0.0016	0.0020	0.0020
3.5	0.137795	0.089501	0.0110	0.0039	-	0.0040	0.0045	0.0050	-	0.0016	0.0020	0.0020
4.0	0.157480	0.102286	0.0126	0.0039	-	0.0040	0.0045	0.0055	-	0.0020	0.0020	0.0025
4.5	0.177165	0.115072	0.0142	0.0039	-	-	0.0050	0.0055	-	0.0020	0.0020	0.0025
5.0	0.196850	0.127858	0.0158	0.0039	-	-	0.0050	0.0060	-	-	0.0025	0.0025
5.5	0.216535	0.140644	0.0173	0.0039	-	-	0.0055	0.0060	-	-	0.0025	0.0025
6.0	0.236220	0.153430	0.0189	0.0039	-	-	0.0055	0.0060	-	-	0.0025	0.0025

For intermediate pitches use value for next coarser pitch.

Symmetrical Thread Height; Equivalent to the basic height, h, of the original American National Form.





ISO TOLERANCE SYSTEM

The ISO Metric Screw Thread Tolerance System provides for tolerance grades and tolerance positions (allowances) for the pitch diameter and crest diameter.

TOLERANCE GRADES

A series of numbers, 3 through 9, were established as symbols, to reflect the size of the tolerance; the higher the number the larger the tolerance.

FOR EXTERNAL THREADS - (LOWER CASE LETTER SYMBOLS)

- Tolerance Position "e" has a large allowance. The upper limit is below basic by a large amount.
- Tolerance Position "g" has a small allowance. The upper limit is below basic by a small amount.
- Tolerance Position "h" has no allowance and the upper limit is basic.

FOR INTERNAL THREADS - (CAPITAL LETTER SYMBOLS)

- Tolerance Position "G" has a small allowance. The lower limit is above basic by a small amount.
- Tolerance Position "H" has no allowance and the lower limit is basic.

SELECTION OF TOLERANCE CLASSES

Two factors determine the selection of a suitable tolerance class:

1. Length of thread engagement (short, normal or long)
2. Quality requirement (fine, medium or coarse) See table below for preferred tolerance classes.

TOLERANCE POSITIONS

They define the maximum-material limits of the pitch and crest diameters and indicate their relationship to the basic profile. For plating requirements and ease of assembly, a series of tolerance positions were established.

PREFERRED TOLERANCE CLASSES

Quality Requirement	External Thread (Bolts)									Internal Thread (Nuts)					
	Tolerance Position e (Large Allowance)			Tolerance Position g (Small Allowance)			Tolerance Position h (No Allowance)			Tolerance Position G (Small Allowance)			Tolerance Position H (No Allowance)		
	Length of Thread Engagement			Length of Thread Engagement			Length of Thread Engagement			Length of Thread Engagement			Length of Thread Engagement		
	Short	Normal	Long	Short	Normal	Long	Short	Normal	Long	Short	Normal	Long	Short		
FINE Close Fit Applications							3h-4h	4h	5h-4h				4H		
MEDIUM General Purpose Applications		6e	7e-6e	5g-6g	6g	7g-6g	5h-6h	6h	7h-6h	5G	6G	7G	5H		
COARSE Difficult Manufacturing Applications					8g	9g-8g					7G	8G			

Tolerance Position "e" is not to be applied to pitches finer than 0.5 mm. Tolerance classes 6g and 6H are for commercial screw, bolt and nut threads.

THREAD DESIGNATIONS

Basic Designations: The letter "M" and the nominal size (basic major diameter in millimeters) followed by "X" and the pitch in millimeters, designates metric screw threads. For coarse series thread, the "X" and pitch may be omitted.

Example: Coarse series threads; M6
other threads; M8 x 1

A complete designation comprises, in addition to the basic designation, the tolerance class symbol separated by a dash. When the pitch and crest diameter tolerance classes are identical, the symbol need only be given once.

Example: M20 x 2—6H

When the pitch and crest diameters have different tolerance classes, the pitch diameter symbol is followed by the crest diameter symbol.

Example: M6 x 0.75—5g—6g

To indicate a specified thread fit between mating parts, the internal thread tolerance class symbol is followed by that of the external thread, separated by a slash.

Example: M20 x 2—6H/5g—6g

When rounded root external threads are to be specified, the minimum root radius value shall be added to the tolerance class designation.

Example: M6—5g—6g 0.100R





Limiting Dimensions of Standard Series Threads for Commercial Screws, Bolts and Nuts (Inches)

Nominal Size Diam	Pitch P	Basic Thread Designation	External Thread (Bolt)								Internal Thread (Nut)							
			Tol Cl.	Allowance	Major Diameter		Pitch Diameter			Minor Diameter		Tol Cl.	Minor Diameter		Pitch Diameter		Major Dia.	
					Max.	Min.	Max.	Min.	Tol.	Max.	Min.		Min.	Max.	Min.	Max.		Tol.
1.6	0.35	M1.6	6g	0.0008	0.0622	0.0589	0.0533	0.0509	0.0024	0.0453	0.0419	6H	0.0481	0.0520	0.0541	0.0574	0.0033	0.0630
1.8	0.35	M1.8	6g	0.0008	0.0701	0.0668	0.0611	0.0588	0.0023	0.0531	0.0498	6H	0.0560	0.0598	0.0620	0.0652	0.0032	0.0709
2	0.4	M2.0	6g	0.0009	0.0779	0.0743	0.0677	0.0652	0.0025	0.0586	0.0549	6H	0.0617	0.0661	0.0686	0.0720	0.0034	0.0788
2.2	0.45	M2.2	6g	0.0009	0.0858	0.0819	0.0743	0.0716	0.0027	0.0640	0.0601	6H	0.0675	0.0723	0.0752	0.0788	0.0036	0.0867
2.5	0.45	M2.5	6g	0.0009	0.0976	0.0938	0.0861	0.0834	0.0027	0.0759	0.0719	6H	0.0793	0.0841	0.0870	0.0906	0.0036	0.0985
3	0.5	M3.0	6g	0.0009	0.1173	0.1132	0.1045	0.1016	0.0029	0.0931	0.0889	6H	0.0969	0.1023	0.1054	0.1092	0.0038	0.1182
3.5	0.6	M3.5	6g	0.0009	0.1369	0.1321	0.1216	0.1183	0.0033	0.1079	0.1030	6H	0.1123	0.1185	0.1225	0.1268	0.0043	0.1378
4	0.7	M4.0	6g	0.0009	0.1566	0.1512	0.1387	0.1352	0.0034	0.1227	0.1173	6H	0.1277	0.1347	0.1396	0.1442	0.0046	0.1575
4.5	0.75	M4.5	6g	0.0010	0.1762	0.1708	0.1571	0.1536	0.0035	0.1400	0.1345	6H	0.1452	0.1526	0.1580	0.1626	0.0046	0.1772
5	0.8	M5.0	6g	0.0010	0.1959	0.1900	0.1754	0.1717	0.0037	0.1572	0.1513	6H	0.1628	0.1706	0.1764	0.1812	0.0048	0.1969
6	1.0	M6.0	6g	0.0012	0.2351	0.2282	0.2096	0.2052	0.0044	0.1868	0.1797	6H	0.1936	0.2028	0.2107	0.2165	0.0058	0.2363
7	1.0	M7.0	6g	0.0011	0.2745	0.2675	0.2489	0.2446	0.0043	0.2262	0.2191	6H	0.2330	0.2422	0.2501	0.2559	0.0058	0.2756
8	1.25	M8.0	6g	0.0012	0.3138	0.3056	0.2818	0.2773	0.0045	0.2535	0.2454	6H	0.2617	0.2721	0.2830	0.2892	0.0062	0.3150
8	1.0	M8 x 1.0	6g	0.0011	0.3139	0.3069	0.2883	0.2840	0.0043	0.2656	0.2584	6H	0.2724	0.2816	0.2894	0.2952	0.0058	0.3150
10	1.5	M10	6g	0.0013	0.3924	0.3832	0.3540	0.3489	0.0051	0.3199	0.3102	6H	0.3298	0.3415	0.3554	0.3624	0.0070	0.3937
10	1.25	M10 x 1.25	6g	0.0012	0.3925	0.3843	0.3606	0.3560	0.0046	0.3322	0.3241	6H	0.3404	0.3508	0.3618	0.3680	0.0062	0.3937
12	1.75	M12	6g	0.0014	0.4711	0.4607	0.4263	0.4205	0.0058	0.3865	0.3758	6H	0.3979	0.4110	0.4277	0.4355	0.0078	0.4725
12	1.25	M12 x 1.25	6g	0.0012	0.4713	0.4630	0.4393	0.4342	0.0051	0.4109	0.4023	6H	0.4192	0.4295	0.4405	0.4475	0.0070	0.4725
14	2.0	M14	6g	0.0016	0.5496	0.5387	0.4985	0.4923	0.0062	0.4530	0.4412	6H	0.4660	0.4807	0.5001	0.5083	0.0082	0.5512
14	1.5	M14 x 1.5	6g	0.0013	0.5499	0.5407	0.5115	0.5061	0.0054	0.4774	0.4677	6H	0.4873	0.4990	0.5129	0.5203	0.0074	0.5512
16	2.0	M16	6g	0.0016	0.6284	0.6175	0.5772	0.5710	0.0062	0.5318	0.5199	6H	0.5447	0.5594	0.5788	0.5871	0.0083	0.6300
16	1.5	M16 x 1.5	6g	0.0014	0.6286	0.6194	0.5903	0.5849	0.0054	0.5561	0.5465	6H	0.5660	0.5777	0.5916	0.5990	0.0074	0.6300
18	2.5	M18	6g	0.0017	0.7070	0.6939	0.6430	0.6364	0.0066	0.5862	0.5725	6H	0.6022	0.6198	0.6448	0.6535	0.0087	0.7087
18	1.5	M18 x 1.5	6g	0.0013	0.7074	0.6982	0.6690	0.6636	0.0054	0.6349	0.6252	6H	0.6448	0.6565	0.6704	0.6777	0.0073	0.7087
20	2.5	M20	6g	0.0018	0.7857	0.7726	0.7218	0.7152	0.0066	0.6649	0.6513	6H	0.6809	0.6985	0.7235	0.7322	0.0087	0.7875
20	1.5	M20 x 1.5	6g	0.0014	0.7861	0.7769	0.7477	0.7423	0.0054	0.7136	0.7039	6H	0.7235	0.7352	0.7491	0.7565	0.0074	0.7875
22	2.5	M22	6g	0.0018	0.8644	0.8513	0.8005	0.7939	0.0066	0.7437	0.7300	6H	0.7597	0.7773	0.8023	0.8110	0.0087	0.8662
22	1.5	M22 x 1.5	6g	0.0014	0.8648	0.8556	0.8265	0.8211	0.0054	0.7924	0.7827	6H	0.8023	0.8140	0.8278	0.8352	0.0074	0.8662
24	3.0	M24	6g	0.0020	0.9429	0.9283	0.8662	0.8584	0.0078	0.7980	0.7817	6H	0.8171	0.8366	0.8682	0.8785	0.0103	0.9449
24	2.0	M24 x 2.0	6g	0.0016	0.9433	0.9324	0.8922	0.8856	0.0066	0.8467	0.8345	6H	0.8597	0.8744	0.8938	0.9025	0.0087	0.9449
27	3.0	M27	6g	0.0019	1.0611	1.0464	0.9843	0.9765	0.0078	0.9161	0.8999	6H	0.9352	0.9548	0.9863	0.9966	0.0103	1.0630
27	2.0	M27 x 2.0	6g	0.0016	1.0614	1.0505	1.0103	1.0037	0.0066	0.9648	0.9526	6H	0.9778	0.9925	1.0119	1.0206	0.0087	1.0630
30	3.5	M30	6g	0.0022	1.1790	1.1623	1.0895	1.0812	0.0083	1.0099	0.9917	6H	1.0320	1.0539	1.0917	1.1026	0.0109	1.1812
30	2.0	M30 x 2.0	6g	0.0016	1.1796	1.1686	1.1284	1.1218	0.0066	1.0829	1.0707	6H	1.0959	1.1106	1.1300	1.1387	0.0087	1.1812
33	3.5	M33	6g	0.0022	1.2971	1.2804	1.2076	1.1993	0.0083	1.1280	1.1099	6H	1.1501	1.1720	1.2098	1.2207	0.0109	1.2993
33	2.0	M33 x 2.0	6g	0.0016	1.2977	1.2867	1.2465	1.2399	0.0066	1.2011	1.1888	6H	1.2140	1.2287	1.2481	1.2568	0.0087	1.2993
36	4.0	M36	6g	0.0025	1.4149	1.3963	1.3126	1.3039	0.0087	1.2217	1.2017	6H	1.2469	1.2704	1.3151	1.3268	0.0117	1.4174
36	3.0	M36 x 3.0	6g	0.0020	1.4154	1.4007	1.3386	1.3309	0.0077	1.2705	1.2542	6H	1.2895	1.3091	1.3406	1.3510	0.0104	1.4174
39	4.0	M39	6g	0.0025	1.5330	1.5144	1.4307	1.4220	0.0087	1.3398	1.3198	6H	1.3650	1.3885	1.4332	1.4449	0.0117	1.5355
39	3.0	M39 x 3.0	6g	0.0020	1.5335	1.5188	1.4568	1.4490	0.0078	1.3886	1.3723	6H	1.4076	1.4272	1.4587	1.4691	0.0104	1.5355

Excerpt from American National Standard B1. 16-1972, American Gaging Practices for Metric Screw Threads; "In all cases the inch conversion values have been rounded toward the interior of the tolerance zone, that is, maximum limits have been rounded downward and minimum limits have been rounded upward. Due to the fact that the majority of machinery and measuring equipment in the United States is based on the inch system, all gages should be made to the inch conversions."

TAP RECOMMENDATIONS: The pitch diameter high limits of the recommended tap for 6H tolerance class is 40% of the product tolerance rounded to the nearest .0005."

Example: M10 x 1.5; product tolerance = .00070" x .40 = .0028" rounded to .0030". This is the amount over basic pitch diameter. Based on .0005" increments over basic pitch diameter, the recommended tap has a D6 high limit (.0030 ÷ .0005").





Straight & Taper Pipe Taps

Standards & Dimensions

General Dimensions (USCTI Table 311)

Nominal Size (inch)	Dimensions (inch)				
	Overall Length A	Thread Length B	Length of Square C	Shank Diameter D	Size of Square E
1/16	2-1/8	11/16	3/8	0.3125	0.234
1/8	2-1/8	3/4	3/8	0.3125	0.234
1/8	2-1/8	3/4	3/8	0.4375	0.328
1/4	2-7/16	1-1/16	7/16	0.5625	0.421
3/8	2-9/16	1-1/16	1/2	0.7000	0.531
1/2	3-1/8	1-3/8	5/8	0.6875	0.515
3/4	3-1/4	1-3/8	11/16	0.9063	0.679
1	3-3/4	1-3/4	13/16	1.1250	0.843
1-1/4	4	1-3/4	15/16	1.3125	0.984
1-1/2	4-1/4	1-3/4	1	1.5000	1.125
2	4-1/2	1-3/4	1-1/8	1.8750	1.406

Tolerances

Element	Range (inch)	Direction	Tolerance (inch)	
			Cut Thread	Ground Thread
Overall Length-A	1/16 to 3/4 incl.	Plus or Minus	1/32	1/32
	1 to 4 incl.	Plus or Minus	1/16	1/16
Thread Length-B	1/16 to 3/4 incl.	Plus or Minus	1/16	1/16
	1 to 1-1/4 incl.	Plus or Minus	3/32	3/32
Length of Square-C	1-1/2 to 4 incl.	Plus or Minus	1/8	1/8
	1/16 to 3/4 incl.	Plus or Minus	1/32	1/32
Shank Diameter-D	1 to 4 incl.	Plus or Minus	1/16	1/16
	1/16 to 1/8 incl.	Minus	0.0070	0.0015
	1/4 to 1/2 incl.	Minus	0.0070	0.0020
Size of Square-E	3/4 to 1 incl.	Minus	0.0090	0.0020
	1-1/4 to 4 incl.	Minus	0.0090	0.0030
Size of Square-E	1/16 to 1/8 incl.	Minus	0.0040	0.0040
	1/4 to 3/4 incl.	Minus	0.0060	0.0060
	1 to 4 incl.	Minus	0.0080	0.0080

Thread Limits

Nominal Size (inch)	Threads per Inch NPT	*Gage Measurement (inch)			Taper per Foot (inch)			
		Projection	Tolerance (+/-)		Cut Thread		Ground Thread	
			Cut Thread	Ground Thread	Min.	Max.	Min.	Max.
1/16	27	.312	1/16	1/16	23/32	27/32	23/32	25/32
1/8	27	.312	1/16	1/16	23/32	27/32	23/32	25/32
1/4	18	.459	1/16	1/16	23/32	27/32	23/32	25/32
3/8	18	.454	1/16	1/16	23/32	27/32	23/32	25/32
1/2	14	.579	1/16	1/16	23/32	13/16	23/32	25/32
3/4	14	.565	1/16	1/16	23/32	13/16	23/32	25/32
1	11-1/2	.678	3/32	3/32	23/32	13/16	23/32	25/32
1-1/4	11-1/2	.686	3/32	3/32	23/32	13/16	23/32	25/32
1-1/2	11-1/2	.699	3/32	3/32	23/32	13/16	23/32	25/32
2	11-1/2	.667	3/32	3/32	23/32	13/16	23/32	25/32

*Distance small end of tap projects through American Standard Pipe Thread Ring Gage.



Taper Pipe Taps Ground Thread (USCTI Table 338)

American National Standard Taper Pipe Thread Form (NPT)
 Aeronautical National Taper Pipe Thread Form (ANPT)
 Dryseal American National Standard Taper Pipe Thread Form (NPTF)

Thread Limits

Nominal Size (inch)	Threads per Inch NPT	*Gage Measurement (inch)		Taper per Foot (inch)	
		Projection	Tolerance (+/-)	Min.	Max.
1/16	27	0.312	1/16	23/32	25/32
1/8	27	0.312	1/16	23/32	25/32
1/4	18	0.459	1/16	23/32	25/32
3/8	18	0.454	1/16	23/32	25/32
1/2	14	0.579	1/16	23/32	25/32
3/4	14	0.565	1/16	23/32	25/32
1	11-1/2	0.678	3/32	23/32	25/32
1 1/4	11-1/2	0.686	3/32	23/32	25/32
1 1/2	11-1/2	0.699	3/32	23/32	25/32
2	11-1/2	0.667	3/32	23/32	25/32
2 1/2	8	0.925	3/32	47/64	25/32
3	8	0.925	3/32	47/64	25/32
3 1/2	8	0.938	1/8	47/64	25/32
4	8	0.950	1/8	47/64	25/32

*Distance small end of tap projects through an L1 American Standard Taper Pipe Thread Ring Gage (See Table 357 page 668).

Angle Tolerance

Threads Per Inch	Tolerance Half Angle
8	±25'
11-1/2 to 27 inclusive	±30'

Formula Values

Threads Per Inch	A	B	C	D	E
27	0.0267	0.0296	0.0257	0.0234	0.0251
18	0.0408	0.0444	0.0401	0.0377	0.0395
14	0.0535	0.0571	0.0525	0.0515	0.0533
11 1/2	0.0658	0.0696	0.0647	0.0614	0.0649
8	0.0966	0.1000	0.0946		

For essential dimensions of American National Standard Pipe Threads (See Table 357 page 440).

Ground Thread American Standard Pipe Form Taps made to this table are to be marked NPT. Ground Thread Dryseal American National Standard Pipe Taps made to this table are to be marked NPTF. Ground Thread Taps, Aeronautical National Thread Form, made to this table are marked ANPT.

Width of Flats - Taps

Threads Per Inch	Element	Width of Flats at Tap Crest and Roots			
		NPT		NPTF	
		Min.	Max.	Min.	Max.
27	Major Dia.	0.0014	.0041	0.0040	.0055
	Minor Dia.				
18	Major Dia.	0.0021	.0057	0.0050	.0065
	Minor Dia.				
14	Major Dia.	0.0027	.0064	0.0050	.0065
	Minor Dia.				
11 1/2	Major Dia.	0.0033	.0073	0.0060	.0083
	Minor Dia.				
8	Major Dia.	0.0048	.0090	0.0080	.0103
	Minor Dia.				

Minimum minor diameter flats are not specified. May be as sharp as practicable. Ground Thread Taps marked NPT may be used for NPT and ANPT applications.

LEAD TOLERANCE

A maximum lead deviation of ±.0005" within any two threads not farther apart than one inch is permitted.

FORMULA FOR AMERICAN NATIONAL STANDARD PIPE FORM

Minimum major diameter = Measured pitch diameter +A.
 Maximum major diameter = Measured pitch diameter +B.
 Minimum minor diameter = Measured pitch diameter -B.
 Maximum minor diameter = Measured pitch diameter -C.

FORMULA FOR DRYSEAL AMERICAN NATIONAL STANDARD PIPE FORM


Minimum major diameter = Measured pitch diameter +D.
 Maximum major diameter = Measured pitch diameter +E.
 Minimum minor diameter = Maximum or smaller.
 Maximum minor diameter = Measured pitch diameter -E.




Measurement of Taper Pipe Taps, Reaming Data and Tap Drill Sizes (ref. USCTI Table 338)

Size	Projection				Ream Dia. Large End	Gage Width L1	Reamed Length L1 + L3	Tap Drill for Use w/ Reaming	Tap Drill for Use w/o Reaming
	NPT & NTF		SAE-SHORT						
	Min.	Max.	Min.	Max.					
1/16-27	0.250	0.375	0.222	0.259	0.2515	0.1600	0.2711	15/64	C
1/8-27	0.250	0.375	0.222	0.259	0.3340	0.1615	0.2726	21/64	Q
1/4-18	0.397	0.521	0.333	0.389	0.4472	0.2278	0.3945	27/64	7/16
3/8-18	0.392	0.516	0.333	0.389	0.5826	0.240	0.4067	9/16	9/16
1/2-14	0.517	0.641	0.429	0.500	0.7213	0.320	0.5343	11/16	45/64
3/4-14	0.503	0.627	0.429	0.500	0.9317	0.339	0.5533	57/64	29/32
1-11½	0.584	0.772	-	-	1.1691	0.400	0.6609	1-1/8	1-9/64
1¼-11½	0.592	0.780	-	-	1.1538	0.420	0.6809	1-15/32	1-31/64
1½-11½	0.606	0.792	-	-	1.7528	0.420	0.6809	1-45/64	1-23/32
2-11½	0.574	0.760	-	-	2.2267	0.436	0.6969	2-3/16	2-3/16

Projection Thru Ring Gage

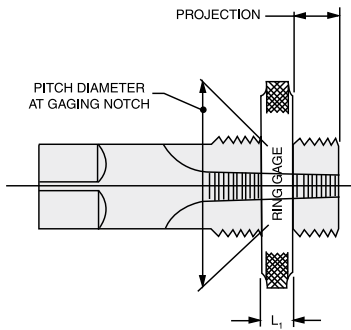

Reamed Hole Data





Straight Pipe Taps Ground Thread (USCTI Table 335)

Ground Threads

American National Standard Straight Pipe Thread Form (NPS) (NPSC) (NPSM)

Thread Limits

Nominal Sizes (inch)	Threads Per Inch	Major Diameter			Pitch Diameter		
		Plug at Gaging Notch	Min. G	Max. H	Plug at Gaging Notch E	Min. K	Max. L
1/8	27	0.3983	0.4022	0.4032	0.3736	0.3746	0.3751
1/4	18	0.5286	0.5347	0.5357	0.4916	0.4933	0.4938
3/8	18	0.6640	0.6701	0.6711	0.6270	0.6287	0.6292
1/2	14	0.8260	0.8347	0.8357	0.7784	0.7806	0.7811
3/4	14	1.0364	1.0447	1.0457	0.9889	0.9906	0.9916
1	11-1/2	1.2966	1.3062	1.3077	1.2386	1.2402	1.2412
1-1/4	11-1/2	1.6413	1.6507	1.6522	1.5834	1.5847	1.5862
1-1/2	11-1/2	1.8803	0.1890	1.8912	1.8223	1.8237	1.8252
2	11-1/2	2.3542	2.3639	2.3654	2.2963	2.2979	2.2994
2-1/2	8	2.8454	2.8604	2.8619	2.7622	2.7640	2.7660
3	8	3.4718	3.4868	3.4883	3.3885	3.3904	3.3924
3-1/2	8	3.9721	3.9872	3.9887	3.8888	3.8908	3.8928
4	8	4.4704	4.4855	4.4870	4.3871	4.3891	4.3911

LEAD TOLERANCE

A maximum lead deviation of plus or minus .0005" within any two threads not farther apart than one inch is permitted.

Note

Taps made to these specifications are marked NPS and used for NPS, NPSC, and NPSM.

Angle Tolerance

Threads Per Inch	Deviation in Half Angle
8	± 25'
11 1/2 to 27 Incl.	± 30'

Formula for American National Standard Dryseal Pipe Form (NPS)

The maximum Pitch Diameter of tap is based upon an allowance deducted from the maximum product pitch diameter of NPSC or NPSM, whichever is smaller. The minimum Pitch Diameter of tap is derived by subtracting the ground thread pitch diameter tolerance for actual equivalent size as shown in Table 331, page 433, Col. D.

Nominal Size (inch)	Major Diameter		Minor Diameter
	Min. G	Max. H	Max.
1/8	H - 0.0010	K + A - 0.0010	M - B
1/4 to 3/4 Incl.	H - 0.0010	K + A - 0.0020	M - B
1 to 4 Incl.	H - 0.0015	K + A - 0.0021	M - B

Formula Values

Threads Per Inch	A	B	M
27	0.0296	0.0257	Actual
18	0.0444	0.0401	Measured
14	0.0571	0.0525	Pitch
11-1/2	0.0696	0.0647	Diameter
8	0.1000	0.0946	

Straight Pipe Taps Ground Thread (USCTI Table 335-A)

Ground Thread

American National Standard Straight Dryseal Pipe Thread Form (NPSF)

Thread Limits

Nominal Size (inch)	Threads Per Inch	Major Diameter			Pitch Diameter		
		Min. G	Max. H	Plug at Gaging Notch E	Min. K	Max. L	Minor* Diam. Flat Max.
1/16	27	0.3008	0.3018	0.2812	0.2772	0.2777	0.004
1/8	27	0.3932	0.3942	0.3736	0.3696	0.3701	0.004
1/4	18	0.5239	0.5249	0.4916	0.4859	0.4864	0.005
3/8	18	0.6593	0.6603	0.6270	0.6213	0.6218	0.005
1/2	14	0.8230	0.8240	0.7784	0.7712	0.7717	0.005
3/4	14	1.0335	1.0345	0.9889	0.9817	0.9822	0.005
1	11-1/2	1.2933	1.2943	1.2386	1.2295	1.2305	0.006

*As specified or sharper.

The major diameter of standard taper pipe plug gages and the minor diameter of standard taper pipe ring gages used for gaging dryseal threads will be truncated .20p minimum to .25p maximum for all pitches.

Angle Tolerance

Threads Per Inch	Deviation in Half Angles
11-1/2 to 27 Incl.	± 30'

Formula for American National Standard Dryseal Pipe Form (NPSF)

Nominal Size (inch)	Major Diameter		Pitch Diameter		Max. Minor Diam.
	Min. G	Max. H	Min. K	Max. L	
1/6	H - 0.0010	K + Q - 0.0005	L - 0.0005	E - F	M - Q
1/8	H - 0.0010	K + Q - 0.0005	L - 0.0005	E - F	M - Q
1/4	H - 0.0010	K + Q - 0.0005	L - 0.0005	E - F	M - Q
3/8	H - 0.0010	K + Q - 0.0005	L - 0.0005	E - F	M - Q
1/2	H - 0.0010	K + Q - 0.0005	L - 0.0005	E - F	M - Q
3/4	H - 0.0010	K + Q - 0.0005	L - 0.0005	E - F	M - Q
1	H - 0.0010	K + Q - 0.0001	L - 0.0010	E - F	M - Q

Formula Values

Threads Per Inch	E	F	M	Q
27	Pitch Diameter	0.0035	Actual	0.0251
18	of plug	0.0052	Measured	0.0395
14	at gaging	0.0067	Pitch	0.0533
11-1/2	notch	0.0081	Diameter	0.0649


LEAD TOLERANCE

A maximum lead deviation of ±.0005" within any two threads not farther apart than one inch is permitted.





American National General Pipe Threads (USCTI Table 357)

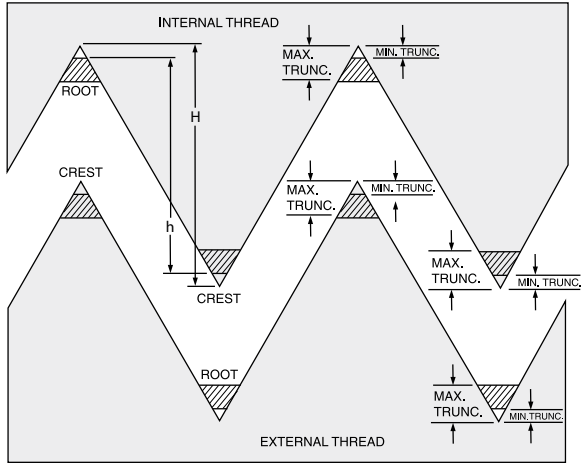


Crest and root limits for American National Standard External and Internal Taper Pipe Thread (NPT)

Threads Per Inch	Height Sharp V Thread (inch)	Height Pipe Thread Max (inch)	Truncation (inch)		Equivalent Width of Flat (inch)	
	H	h	Min	Max.	Min.	Max.
27	0.03208	0.02963	0.0012	0.0036	0.0014	0.0041
18	0.04811	0.04444	0.0018	0.0049	0.0021	0.0057
14	0.06186	0.05714	0.0024	0.0056	0.0027	0.0064
11 1/2	0.07531	0.06957	0.0029	0.0063	0.0033	0.0073
8	0.10825	0.10000	0.0041	0.0078	0.0048	0.0090

The limits specified above are intended to serve as a guide for establishing limits for the thread elements of taps, dies, and thread chasers. These limits may be required on the product. For complete specifications see latest edition of USE Standard B2.1. The Military Aeronautical Specification MIL-P-7105 agrees with all values given in this table.

Dryseal American National Standard Pipe Threads

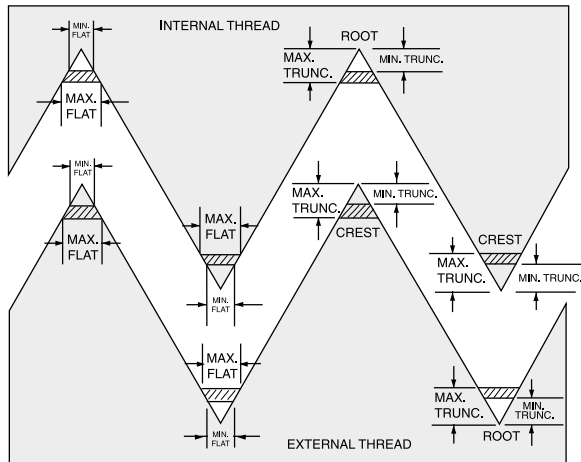

Crest and root limits for Dryseal American National Standard External and Internal Pipe Threads (NPTF)

Threads Per Inch		Height Sharp V Thread (inch)	Truncation (inch)		Equivalent Width of Flat (inch)	
		H	Min	Max.	Min.	Max.
27	Crest	0.03208	0.0017	0.0035	0.0020	0.0040
	Root		0.0035	0.0052	0.0040	0.0060
18	Crest	0.04811	0.0026	0.0043	0.0030	0.0050
	Root		0.0043	0.0061	0.0050	0.0070
14	Crest	0.06186	0.0026	0.0043	0.0030	0.0050
	Root		0.0043	0.0061	0.0050	0.0070
11 1/2	Crest	0.07531	0.0035	0.0052	0.0040	0.0060
	Root		0.0052	0.0078	0.0060	0.0090
8	Crest	0.10825	0.0052	0.0069	0.0060	0.0080
	Root		0.0069	0.0095	0.0080	0.0110

The major diameter of standard taper pipe plug gages and the minor diameter of standard taper pipe ring gages used for gaging dryseal threads will be truncated .20p minimum to .25p maximum for all pitches.



Tap Drill Sizes - Fractional Cut Taps

To minimize tapping problems and lengthen tool life, use the largest drill possible to produce a minor diameter that will result in the lowest percentage of full thread consistent with adequate strength. A minor diameter that provides a 55% to 65% thread is sufficient for most requirements, but in some cases a higher percentage of thread may be necessary to conform with the minor diameter limits of the thread class specified.

* Generally, deeper than 1-1/2 times the hole diameter.

Suggested Percentage of Full Thread in Tapped Holes

Material		*Deep Hole Tapping	Average Commercial Work	Thin Sheet Stock or Stamping
Free Cutting	Aluminum, Brass, Bronze, Cast Iron, Copper, Mild Steel, Tool Steel	60% - 70%	65% - 70%	75% - 85%
Hard or Tough Cutting	Cast Steel, Drop Forging, Monel Metal, Nickel Steel, Stainless Steel	55% - 65%	60% - 70%	

Tap Size	Threads Per Inch			Minor Diameter		Tap Drill Diameter - Cut Taps				
	UNC	UNF	8-Pitch	Min. 2B	Max. 2B	80% Thread	75% Thread	70% Thread	65% Thread	60% Thread
						(in)	(in)	(in)	(in)	(in)
0	-	80	-	0.0465	0.0514	0.0470	0.0478	0.0486	0.0494	0.0503
1	64	-	-	0.0561	0.0623	0.0568	0.0578	0.0588	0.0598	0.0608
	-	72	-	0.0580	0.0635	0.0586	0.0595	0.0604	0.0613	0.0622
2	56	-	-	0.0667	0.0737	0.0674	0.0686	0.0698	0.0709	0.0721
	-	64	-	0.0691	0.0752	0.0698	0.0708	0.0718	0.0728	0.0738
3	48	-	-	0.0764	0.0845	0.0774	0.0787	0.0801	0.0814	0.0828
	-	56	-	0.0797	0.0865	0.0804	0.0816	0.0828	0.0839	0.0851
4	40	-	-	0.0849	0.0939	0.0860	0.0876	0.0893	0.0909	0.0925
	-	48	-	0.0894	0.0968	0.0904	0.0917	0.0931	0.0944	0.0958
5	40	-	-	0.0979	0.1062	0.0990	0.1006	0.1023	0.1039	0.1055
	-	44	-	0.1004	0.1079	0.1014	0.1029	0.1043	0.1058	0.1073
6	32	-	-	0.1040	0.1140	0.1055	0.1076	0.1096	0.1116	0.1136
	-	40	-	0.1110	0.1190	0.1120	0.1136	0.1153	0.1169	0.1185
8	32	-	-	0.1300	0.1390	0.1315	0.1336	0.1356	0.1376	0.1396
	-	36	-	0.1340	0.1420	0.1351	0.1369	0.1387	0.1405	0.1424
10	24	-	-	0.1450	0.1560	0.1467	0.1494	0.1521	0.1548	0.1575
	-	32	-	0.1560	0.1640	0.1575	0.1596	0.1616	0.1636	0.1656
12	24	-	-	0.1710	0.1810	0.1727	0.1754	0.1781	0.1808	0.1835
	-	28	-	0.1770	0.1860	0.1789	0.1812	0.1835	0.1858	0.1882
1/4	20	-	-	0.1960	0.2070	0.1980	0.2013	0.2045	0.2078	0.2110
	-	28	-	0.2110	0.2200	0.2129	0.2152	0.2175	0.2198	0.2222
5/16	18	-	-	0.2520	0.2650	0.2548	0.2584	0.2620	0.2656	0.2692
	-	24	-	0.2670	0.2770	0.2692	0.2719	0.2746	0.2773	0.2800
3/8	16	-	-	0.3070	0.3210	0.3101	0.3141	0.3182	0.3222	0.3263
	-	24	-	0.3300	0.3400	0.3317	0.3344	0.3371	0.3398	0.3425
7/16	14	-	-	0.3600	0.3760	0.3633	0.3679	0.3726	0.3772	0.3818
	-	20	-	0.3830	0.3950	0.3855	0.3888	0.3920	0.3953	0.3985
1/2	13	-	-	0.4170	0.4340	0.4201	0.4251	0.4301	0.4351	0.4400
	-	20	-	0.4460	0.4570	0.4480	0.4513	0.4545	0.4578	0.4610
9/16	12	-	-	0.4720	0.4900	0.4759	0.4813	0.4867	0.4921	0.4976
	-	18	-	0.5020	0.5150	0.5048	0.5084	0.5120	0.5156	0.5192
5/8	11	-	-	0.5270	0.5460	0.5305	0.5364	0.5423	0.5482	0.5541
	-	18	-	0.5650	0.5780	0.5673	0.5709	0.5745	0.5781	0.5817
3/4	10	-	-	0.6420	0.6630	0.6461	0.6526	0.6591	0.6656	0.6721
	-	16	-	0.6820	0.6960	0.6851	0.6891	0.6932	0.6972	0.7013
7/8	9	-	-	0.7550	0.7780	0.7595	0.7668	0.7740	0.7812	0.7884
	-	14	-	0.7980	0.8140	0.8008	0.8054	0.8101	0.8147	0.8193
1	8	-	-	0.8650	0.8900	0.8701	0.8782	0.8863	0.8945	0.9026
	-	12	-	0.9100	0.9280	0.9134	0.9188	0.9242	0.9296	0.9351
1-1/8	7	-	-	0.9700	0.9980	0.9765	0.9858	0.9951	1.0044	1.0137
	-	12	-	1.0350	1.0530	1.0384	1.0438	1.0492	1.0546	1.0601
	-	-	8	0.9900	1.0150	0.9951	1.0032	1.0113	1.0195	1.0276
1-1/4	7	-	-	1.0950	1.1230	1.1015	1.1108	1.1201	1.1294	1.1387
	-	12	-	1.1600	1.1780	1.1634	1.1688	1.1742	1.1796	1.1851
	-	-	8	1.1150	1.1400	1.1201	1.1282	1.1363	1.1445	1.1526
1-3/8	6	-	-	1.1950	1.2250	1.2018	1.2126	1.2235	1.2343	1.2451
	-	12	-	1.2850	1.3030	1.2884	1.2938	1.2992	1.3046	1.3101
	-	-	8	1.2400	1.2650	1.2451	1.2532	1.2613	1.2695	1.2776
1-1/2	6	-	-	1.3200	1.3500	1.3268	1.3376	1.3485	1.3593	1.3701
	-	12	-	1.4100	1.4280	1.4134	1.4188	1.4242	1.4296	1.4351
	-	-	8	1.3650	1.3900	1.3701	1.3782	1.3863	1.3945	1.4026
1-5/8	5	-	-	1.4900	1.5150	1.4951	1.5032	1.5113	1.5195	1.5276
	-	-	8	1.5330	1.5670	1.5422	1.5551	1.5681	1.5811	1.5941
1-3/4	5	-	-	1.6150	1.6400	1.6201	1.6282	1.6363	1.6445	1.6526
	-	-	8	1.7400	1.7650	1.7451	1.7532	1.7613	1.7695	1.7776
1-7/8	5	-	-	1.7590	1.7950	1.7691	1.7835	1.7979	1.8124	1.8268
	-	-	8	1.8650	1.8900	1.8701	1.8782	1.8863	1.8945	1.9026
2	4-1/2	-	-	2.0090	2.0450	2.0191	2.0335	2.0479	2.0624	2.0768
	-	-	8	2.1150	2.1400	2.1201	2.1282	2.1363	2.1445	2.1526
2-1/4	4	-	-	2.2290	2.2670	2.2402	2.2564	2.2727	2.2889	2.3051
	-	-	8	2.3650	2.3900	2.3701	2.3782	2.3863	2.3945	2.4026

FORMULA: TAP DRILL SIZE

$$\text{Drill Size} = \text{Tap Major Dia} - \frac{0.01299 \times \% \text{ of Full Thread}}{\# \text{ of Threads Per Inch}}$$

Example: to determine drill size for 1/4"-20 UNC tap, 70% thread

Tap Major $\phi = 0.2500"$
 % of Full Thread = 70%
 # of Threads per Inch = 20

$$\text{Drill Size} = 0.2500" - \frac{(0.01299 \times 70\%)}{20}$$

$$\text{Drill Size} = 0.2500" - 0.0455" = \boxed{0.2045"}$$

FORMULA: PERCENTAGE OF FULL THREAD

$$\% \text{ of Full Thread} = \text{Threads Per Inch} \times \frac{\text{Tap Major Dia} - \text{Drill Dia}}{0.01299}$$

Example: to determine the % of thread for 1/4"-20 UNC using 0.2045" drill

Threads per Inch = 20
 Tap Major $\phi = 0.2500"$
 Drill $\phi = 0.2045"$

$$\% \text{ of Thread} = 20 \times \frac{(0.2500 - 0.2045)}{0.01299}$$

$$\% \text{ of Thread} = 20 \times 3.50 = \boxed{70\%}$$



Tap Drill Sizes - Fractional Form Taps

To minimize tapping problems and lengthen tool life, use the largest drill possible to produce a minor diameter that will result in the lowest percentage of full thread consistent with adequate strength. A minor diameter that provides a 55% to 65% thread is sufficient for most requirements, but in some cases a higher percentage of thread may be necessary to conform with the minor diameter limits of the thread class specified.

* Generally, deeper than 1 1/2 times the hole diameter.

Suggested Percentage of Full Thread in Tapped Holes

Material		*Deep Hole Tapping	Average Commercial Work	Thin Sheet Stock or Stamping
Free Cutting	Aluminum, Brass, Bronze, Cast Iron, Copper, Mild Steel, Tool Steel	60% - 70%	65% - 70%	75% - 85%
Hard or Tough Cutting	Cast Steel, Drop Forging, Monel Metal, Nickel Steel, Stainless Steel	55% - 65%	60% - 70%	

Tap Size	Threads Per Inch			Minor Diameter		Tap Drill Diameter - Form Taps				
	UNC	UNF	8-Pitch	Min. 2B	Max. 2B	75% Thread	70% Thread	65% Thread	60% Thread	55% Thread
						(in)	(in)	(in)	(in)	(in)
0	-	80	-	0.0465	0.0514	0.0536	0.0540	0.0545	0.0549	0.0554
1	64	-	-	0.0561	0.0623	0.0650	0.0655	0.0661	0.0666	0.0672
	-	72	-	0.0580	0.0635	0.0659	0.0663	0.0669	0.0673	0.0679
2	56	-	-	0.0667	0.0737	0.0769	0.0774	0.0781	0.0787	0.0794
	-	64	-	0.0691	0.0752	0.0780	0.0785	0.0791	0.0796	0.0802
3	48	-	-	0.0764	0.0845	0.0884	0.0890	0.0898	0.0905	0.0913
	-	56	-	0.0797	0.0865	0.0899	0.0904	0.0911	0.0917	0.0924
4	40	-	-	0.0849	0.0939	0.0993	0.1000	0.1010	0.1018	0.1028
	-	48	-	0.0894	0.0968	0.1014	0.1020	0.1028	0.1035	0.1043
5	40	-	-	0.0979	0.1062	0.1123	0.1130	0.1140	0.1148	0.1158
	-	44	-	0.1004	0.1079	0.1134	0.1141	0.1150	0.1157	0.1166
6	32	-	-	0.1040	0.1140	0.1221	0.1230	0.1243	0.1252	0.1264
	-	40	-	0.1110	0.1190	0.1253	0.1260	0.1270	0.1278	0.1288
8	32	-	-	0.1300	0.1390	0.1481	0.1490	0.1503	0.1512	0.1524
	-	36	-	0.1340	0.1420	0.1498	0.1507	0.1518	0.1526	0.1537
10	24	-	-	0.1450	0.1560	0.1688	0.1700	0.1716	0.1729	0.1746
	-	32	-	0.1560	0.1640	0.1741	0.1750	0.1762	0.1772	0.1784
12	24	-	-	0.1710	0.1810	0.1948	0.1960	0.1976	0.1989	0.2006
	-	28	-	0.1770	0.1860	0.1978	0.1990	0.2002	0.2014	0.2028
1/4	20	-	-	0.1960	0.2070	0.2245	0.2260	0.2279	0.2295	0.2315
	-	28	-	0.2110	0.2200	0.2318	0.2329	0.2342	0.2354	0.2389
5/16	18	-	-	0.2520	0.2650	0.2842	0.2861	0.2879	0.2898	0.2917
	-	24	-	0.2670	0.2770	0.2912	0.2927	0.2941	0.2955	0.2969
3/8	16	-	-	0.3070	0.3210	0.3431	0.3452	0.3474	0.3495	0.3516
	-	24	-	0.3300	0.3400	0.3537	0.3552	0.3566	0.3580	0.3594
7/16	14	-	-	0.3600	0.3760	0.4011	0.4035	0.4059	0.4084	0.4108
	-	20	-	0.3830	0.3950	0.4120	0.4137	0.4154	0.4171	0.4188
1/2	13	-	-	0.4170	0.4340	0.4608	0.4634	0.4660	0.4686	0.4712
	-	20	-	0.4460	0.4570	0.4745	0.4762	0.4779	0.4796	0.4813
9/16	12	-	-	0.4720	0.4900	0.5200	0.5229	0.5257	0.5285	0.5313
	-	18	-	0.5020	0.5150	0.5342	0.5361	0.5379	0.5398	0.5417
5/8	11	-	-	0.5270	0.5460	0.5787	0.5817	0.5848	0.5879	0.5910
	-	18	-	0.5650	0.5780	0.5967	0.5986	0.6004	0.6023	0.6042
3/4	10	-	-	0.6420	0.6630	0.6990	0.7024	0.7058	0.7092	0.7126
	-	16	-	0.6820	0.6960	0.7181	0.7202	0.7224	0.7245	0.7266
7/8	9	-	-	0.7550	0.7780	0.8183	0.8221	0.8259	0.8297	0.8334
	-	14	-	0.7980	0.8140	0.8386	0.8410	0.8434	0.8459	0.8483
1	8	-	-	0.8650	0.8900	0.9363	0.9405	0.9448	0.9490	0.9533
	-	12	-	0.9100	0.9280	0.9575	0.9603	0.9632	0.9660	0.9866

FORMULA: TAP DRILL SIZE

$$\text{Drill Size} = \text{Tap Major Dia} - \frac{0.0068 \times \% \text{ of Full Thread}}{\# \text{ of Threads Per Inch}}$$

Example: to determine drill size for 1/4"-20UNC tap, 70% thread

Tap Major $\varnothing = 0.2500"$
 % of Full Thread = 70%
 # of Threads per Inch = 20

$$\text{Drill Size} = 0.2500" - \frac{(0.0068 \times 70\%)}{20}$$

$$\text{Drill Size} = 0.2500" - 0.0238" = \boxed{0.2262"}$$

FORMULA: PERCENTAGE OF FULL THREAD

$$\% \text{ of Full Thread} = \text{Threads Per Inch} \times \frac{\text{Tap Major Dia} - \text{Drill Dia}}{0.0068}$$

Example: to determine the % of thread for 1/4"-20UNC Tap using 1.9603" drill

Threads per Inch = 20
 Tap Major $\varnothing = 0.2500"$
 Drill $\varnothing = 0.2045"$

$$\% \text{ of Thread} = 20 \times \frac{(0.2500 - 0.2262)}{0.0068}$$

$$\% \text{ of Thread} = 20 \times 3.5 = \boxed{70\%}$$

Suggested Pipe Tap Drill Sizes

Tap Size		1/16	1/8	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4
Drill Sizes	Taper Pipe Tap*	C	Q	7/16	9/16	45/64	29/32	1-9/64	1-31/64	1-23/32	2-3/16	2-5/8	3-1/4	3-3/4	4-1/4
	Straight Pipe Tap†	1/4	11/32	7/16	37/64	23/32	59/64	1-5/32	1-1/2	1-3/4	2-7/32	2-21/32			

*Sizes given permit direct tapping without reaming the hole, but only give a full thread for the first two or three threads.

†For Dryseal Straight Pipe Threads suggested drill sizes are as shown, except; 1/4" pipe, use .444 drill size.



Tap Drill Sizes - Metric Cut Taps

To minimize tapping problems and lengthen tool life, use the largest drill possible to produce a minor diameter that will result in the lowest percentage of full thread consistent with adequate strength. A minor diameter that provides a 55% to 65% thread is sufficient for most requirements, but in some cases a higher percentage of thread may be necessary to conform with the minor diameter limits of the thread class specified.

* Generally, deeper than 1 1/2 times the hole diameter.

Suggested Percentage of Full Thread in Tapped Holes

Material		*Deep Hole Tapping	Average Commercial Work	Thin Sheet Stock or Stamping
Free Cutting	Aluminum, Brass, Bronze, Cast Iron, Copper, Mild Steel, Tool Steel	60% - 70%	65% - 70%	75% - 85%
Hard or Tough Cutting	Cast Steel, Drop Forging, Monel Metal, Nickel Steel, Stainless Steel	55% - 65%	60% - 70%	

Tap Size	Pitch		Minor Dia. (mm)		Tap Drill Diameter - Cut Taps									
	M	MF	Min. 6H	Max. 6H	80% Thread		75% Thread		70% Thread		65% Thread		60% Thread	
					(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)
M1.6	0.35	-	1.221	1.321	1.24	0.0488	1.26	0.0496	1.28	0.0504	1.30	0.0512	1.33	0.0524
M1.7	0.35	-	1.321	1.421	1.33	0.0524	1.36	0.0535	1.38	0.0543	1.40	0.0551	1.42	0.0559
M1.8	0.35	-	1.422	1.519	1.44	0.0567	1.46	0.0575	1.48	0.0583	1.50	0.0591	1.53	0.0602
M2	0.4	-	1.567	1.679	1.58	0.0622	1.61	0.0634	1.64	0.0646	1.66	0.0654	1.69	0.0665
M2.2	0.45	-	1.715	1.836	1.73	0.0681	1.76	0.0693	1.79	0.0705	1.82	0.0717	1.85	0.0728
M2.5	0.45	-	2.013	2.138	2.03	0.0799	2.06	0.0811	2.09	0.0823	2.12	0.0835	2.15	0.0846
M2.6	0.45	-	2.113	2.238	2.13	0.0839	2.16	0.0850	2.19	0.0862	2.22	0.0874	2.25	0.0886
M3	0.5	-	2.459	2.599	2.48	0.0976	2.51	0.0988	2.55	0.1004	2.58	0.1016	2.61	0.1028
M3	-	0.35	2.621	2.721	2.63	0.1035	2.66	0.1047	2.68	0.1055	2.70	0.1063	2.72	0.1071
M3.5	0.6	-	2.850	3.010	2.88	0.1134	2.92	0.1150	2.95	0.1161	2.99	0.1177	3.03	0.1193
M4	0.7	-	3.242	3.422	3.27	0.1287	3.32	0.1307	3.36	0.1323	3.41	0.1343	3.45	0.1358
M4	-	0.5	3.459	3.599	3.48	0.1370	3.51	0.1382	3.54	0.1394	3.58	0.1409	3.61	0.1421
M4.5	0.75	-	3.688	3.876	3.72	0.1465	3.77	0.1484	3.82	0.1504	3.87	0.1524	3.92	0.1543
M5	0.8	-	4.134	4.334	4.17	0.1642	4.22	0.1661	4.27	0.1681	4.32	0.1701	4.38	0.1724
M5	-	0.5	4.458	4.600	4.48	0.1764	4.51	0.1776	4.54	0.1787	4.58	0.1803	4.61	0.1815
M6	1	-	4.917	5.153	4.96	0.1953	5.03	0.1980	5.09	0.2004	5.16	0.2031	5.22	0.2055
M6	-	0.75	5.187	5.377	5.22	0.2055	5.27	0.2075	5.32	0.2094	5.37	0.2114	5.41	0.2130
M7	1	-	5.918	6.152	5.96	0.2346	6.03	0.2374	6.09	0.2398	6.16	0.2425	6.22	0.2449
M8	1.25	-	6.647	6.912	6.70	0.2638	6.78	0.2669	6.86	0.2701	6.94	0.2732	7.03	0.2768
M8	-	1	6.917	7.153	6.96	0.2740	7.03	0.2768	7.09	0.2791	7.16	0.2819	7.22	0.2843
M8	-	0.75	7.187	7.377	7.22	0.2843	7.27	0.2862	7.32	0.2882	7.37	0.2902	7.41	0.2917
M10	1.5	-	8.376	8.676	8.44	0.3323	8.54	0.3362	8.64	0.3402	8.73	0.3437	8.83	0.3476
M10	-	1.25	8.647	8.912	8.70	0.3425	8.78	0.3457	8.86	0.3488	8.94	0.3520	9.03	0.3555
M10	-	1	8.917	9.153	8.96	0.3528	9.03	0.3555	9.09	0.3579	9.16	0.3606	9.22	0.3630
M10	-	0.75	9.188	9.378	9.22	0.3630	9.27	0.3650	9.32	0.3669	9.37	0.3689	9.41	0.3705
M12	1.75	-	10.106	10.441	10.18	0.4008	10.30	0.4055	10.41	0.4098	10.52	0.4142	10.64	0.4189
M12	-	1.5	10.376	10.676	10.44	0.4110	10.54	0.4150	10.64	0.4189	10.73	0.4224	10.83	0.4264
M12	-	1.25	10.647	10.912	10.70	0.4213	10.78	0.4244	10.86	0.4276	10.94	0.4307	11.03	0.4343
M12	-	1	10.917	11.153	10.96	0.4315	11.03	0.4343	11.09	0.4366	11.16	0.4394	11.22	0.4417
M14	2	-	11.835	12.210	11.92	0.4693	12.05	0.4744	12.18	0.4795	12.31	0.4846	12.44	0.4898
M14	-	1.5	12.376	12.676	12.44	0.4898	12.54	0.4937	12.64	0.4976	12.73	0.5012	12.83	0.5051
M16	2	-	13.835	14.210	13.92	0.5480	14.05	0.5531	14.18	0.5583	14.31	0.5634	14.44	0.5685
M16	-	1.5	14.376	14.676	14.44	0.5685	14.54	0.5724	14.64	0.5764	14.73	0.5799	14.83	0.5839
M18	2.5	-	15.296	15.743	15.40	0.6063	15.56	0.6126	15.73	0.6193	15.89	0.6256	16.05	0.6319
M18	-	1.5	16.376	16.676	16.44	0.6472	16.54	0.6512	16.64	0.6551	16.73	0.6587	16.83	0.6626
M20	2.5	-	17.294	17.744	17.40	0.6850	17.56	0.6913	17.73	0.6980	17.89	0.7043	18.05	0.7106
M20	-	1.5	18.376	18.676	18.44	0.7260	18.54	0.7299	18.64	0.7339	18.73	0.7374	18.83	0.7413
M20	-	1	18.917	19.153	18.96	0.7465	19.03	0.7492	19.09	0.7516	19.16	0.7543	19.22	0.7567
M22	2.5	-	19.294	19.744	19.40	0.7638	19.56	0.7701	19.73	0.7768	19.89	0.7831	20.05	0.7894
M22	-	2	19.835	20.210	19.92	0.7843	20.05	0.7894	20.18	0.7945	20.31	0.7996	20.44	0.8047
M22	-	1.5	20.376	20.676	20.44	0.8047	20.54	0.8087	20.64	0.8126	20.73	0.8161	20.83	0.8201
M24	3	-	20.752	21.252	20.88	0.8220	21.08	0.8299	21.27	0.8374	21.47	0.8453	21.66	0.8528
M24	-	2	21.835	22.210	21.92	0.8630	22.05	0.8681	22.18	0.8732	22.31	0.8783	22.44	0.8835
M24	-	1.5	22.376	22.676	22.44	0.8835	22.54	0.8874	22.64	0.8913	22.73	0.8949	22.83	0.8988
M27	3	-	23.752	24.252	23.88	0.9402	24.08	0.9480	24.27	0.9555	24.47	0.9634	24.66	0.9709
M27	-	2	24.835	25.210	24.92	0.9811	25.05	0.9862	25.18	0.9913	25.31	0.9965	25.44	1.0016
M27	-	1.5	25.376	25.676	25.44	1.0016	25.54	1.0055	25.64	1.0094	25.73	1.0130	25.83	1.0169
M30	3.5	-	26.211	26.771	26.36	1.0378	26.59	1.0469	26.82	1.0559	27.04	1.0646	27.27	1.0736
M30	-	2	27.835	28.210	27.92	1.0992	28.05	1.1043	28.18	1.1094	28.31	1.1146	28.44	1.1197
M30	-	1.5	28.376	28.676	28.44	1.1197	28.54	1.1236	28.64	1.1276	28.73	1.1311	28.83	1.1350
M33	3.5	-	29.211	29.771	29.36	1.1559	29.59	1.1650	29.82	1.1740	30.04	1.1827	30.27	1.1917
M33	-	2	30.835	31.210	30.92	1.2173	31.05	1.2224	31.18	1.2276	31.31	1.2327	31.44	1.2378
M36	4	-	31.670	32.270	31.84	1.2535	32.10	1.2638	32.36	1.2740	32.62	1.2843	32.88	1.2945
M36	-	3	32.752	33.252	32.88	1.2945	33.08	1.3024	33.27	1.3098	33.47	1.3177	33.66	1.3252
M36	-	2	33.835	34.210	33.92	1.3354	34.05	1.3406	34.18	1.3457	34.31	1.3508	34.44	1.3559
M39	4	-	34.670	35.270	34.84	1.3717	35.10	1.3819	35.36	1.3921	35.62	1.4024	35.88	1.4126
M39	-	2	36.835	37.210	36.92	1.4535	37.05	1.4587	37.18	1.4638	37.31	1.4689	37.44	1.4740
M42	4.5	-	37.129	37.799	37.32	1.4693	37.62	1.4811	37.91	1.4925	38.20	1.5039	38.49	1.5154
M42	-	3	38.752	39.252	38.88	1.5307	39.08	1.5386	39.27	1.5461	39.47	1.5539	39.66	1.5614
M42	-	2	39.835	40.210	39.92	1.5717	40.05	1.5768	40.18	1.5819	40.31	1.5870	40.44	1.5921

FORMULA: TAP DRILL SIZE

$$\text{Drill Size} = \text{Tap Major Dia} - \frac{\text{Pitch} \times \% \text{ of Full Thread}}{76.980}$$

Example: to determine drill size for M12 x 1.75 tap, 70% thread

$$\begin{aligned} \text{Tap Major } \varnothing &= 12\text{mm} \\ \% \text{ of Full Thread} &= 70\% \\ \text{Pitch} &= 1.75\text{mm} \\ \text{Drill Size} &= 12\text{mm} - \frac{(1.75 \times 70\%)}{76.980} \\ \text{Drill Size} &= 12\text{mm} - 1.591\text{mm} = \boxed{10.409\text{mm}} \end{aligned}$$

FORMULA: PERCENTAGE OF FULL THREAD

$$\% \text{ of Full Thread} = \text{Threads Per Inch} \times \frac{76.980}{\text{Pitch}}$$

Example: to determine the % of thread for M12 x 1.75 Tap using 10.41mm drill

$$\begin{aligned} \# \text{ Threads per Inch} &= 20 \\ \text{Tap Major } \varnothing &= 0.2500'' \\ \text{Drill } \varnothing &= 0.2045'' \\ \% \text{ of Thread} &= (12\text{mm} - 10.409\text{mm}) \times \frac{(0.2500 - 0.2262)}{0.0068} \\ \% \text{ of Thread} &= 1.591\text{mm} \times 43.989 = \boxed{70\%} \end{aligned}$$



Tap Drill Sizes - Metric Form Taps

To minimize tapping problems and lengthen tool life, use the largest drill possible to produce a minor diameter that will result in the lowest percentage of full thread consistent with adequate strength. A minor diameter that provides a 55% to 65% thread is sufficient for most requirements, but in some cases a higher percentage of thread may be necessary to conform with the minor diameter limits of the thread class specified.

* Generally, deeper than 1-1/2 times the hole diameter.

Suggested Percentage of Full Thread in Tapped Holes

Material		*Deep Hole Tapping	Average Commercial Work	Thin Sheet Stock or Stamping
Free Cutting	Aluminum, Brass, Bronze, Cast Iron, Copper, Mild Steel, Tool Steel	60% - 70%	65% - 70%	75% - 85%
Hard or Tough Cutting	Cast Steel, Drop Forging, Monel Metal, Nickel Steel, Stainless Steel	55% - 65%	60% - 70%	

Tap Size	Pitch		Minor Diameter (mm)		Tap Drill Diameter - Form Taps									
	M	MF	Min. 6H	Max. 6H	75% Thread		70% Thread		65% Thread		60% Thread		55% Thread	
					(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)
M1.6	0.35	-	1.221	1.321	1.42	0.0559	1.43	0.0563	1.45	0.0571	1.46	0.0575	1.47	0.0579
M1.7	0.35	-	1.321	1.421	1.56	0.0617	1.57	0.0620	1.58	0.0623	1.59	0.0627	1.60	0.0630
M1.8	0.35	-	1.422	1.519	1.62	0.0638	1.63	0.0642	1.65	0.0650	1.66	0.0654	1.67	0.0657
M2	0.4	-	1.567	1.679	1.80	0.0709	1.81	0.0713	1.82	0.0717	1.84	0.0724	1.85	0.0728
M2.2	0.45	-	1.715	1.836	1.97	0.0776	1.99	0.0783	2.00	0.0787	2.02	0.0795	2.03	0.0799
M2.5	0.45	-	2.013	2.138	2.27	0.0894	2.29	0.0902	2.30	0.0906	2.32	0.0913	2.33	0.0917
M2.6	0.45	-	2.113	2.238	2.41	0.0949	2.42	0.0953	2.43	0.0957	2.44	0.0962	2.45	0.0966
M3	0.5	-	2.459	2.599	2.75	0.1083	2.76	0.1087	2.78	0.1094	2.80	0.1102	2.81	0.1106
M3	-	0.35	2.621	2.721	2.86	0.1126	2.87	0.1130	2.88	0.1134	2.89	0.1138	2.90	0.1142
M3.5	0.6	-	2.850	3.010	3.19	0.1256	3.21	0.1264	3.23	0.1272	3.26	0.1283	3.28	0.1291
M4	0.7	-	3.242	3.422	3.64	0.1433	3.67	0.1445	3.69	0.1453	3.71	0.1461	3.74	0.1472
M4	-	0.5	3.459	3.599	3.75	0.1476	3.76	0.1480	3.78	0.1488	3.80	0.1496	3.81	0.1500
M4.5	0.75	-	3.688	3.876	4.12	0.1622	4.14	0.1630	4.17	0.1642	4.19	0.1650	4.22	0.1661
M5	0.8	-	4.134	4.334	4.59	0.1807	4.62	0.1819	4.65	0.1831	4.67	0.1839	4.70	0.1850
M5	-	0.5	4.458	4.600	4.75	0.1870	4.76	0.1874	4.78	0.1882	4.80	0.1890	4.81	0.1894
M6	1	-	4.917	5.153	5.49	0.2161	5.52	0.2173	5.56	0.2189	5.59	0.2201	5.63	0.2217
M6	-	0.75	5.187	5.377	5.62	0.2213	5.64	0.2220	5.67	0.2232	5.69	0.2240	5.72	0.2252
M7	1	-	5.918	6.152	6.49	0.2555	6.52	0.2567	6.56	0.2583	6.59	0.2594	6.63	0.2610
M8	1.25	-	6.647	6.912	7.36	0.2898	7.41	0.2917	7.45	0.2933	7.49	0.2949	7.53	0.2965
M8	-	1	6.917	7.153	7.49	0.2949	7.52	0.2961	7.56	0.2976	7.59	0.2988	7.63	0.3004
M8	-	0.75	7.187	7.377	7.62	0.3000	7.64	0.3008	7.67	0.3020	7.69	0.3028	7.72	0.3039
M10	1.5	-	8.376	8.676	9.24	0.3638	9.29	0.3657	9.34	0.3677	9.39	0.3697	9.44	0.3717
M10	-	1.25	8.647	8.912	9.36	0.3685	9.41	0.3705	9.45	0.3720	9.49	0.3736	9.53	0.3752
M10	-	1	8.917	9.153	9.49	0.3736	9.52	0.3748	9.56	0.3764	9.59	0.3776	9.63	0.3791
M10	-	0.75	9.188	9.378	9.62	0.3787	9.64	0.3795	9.67	0.3807	9.69	0.3815	9.72	0.3827
M12	1.75	-	10.106	10.441	11.11	0.4374	11.17	0.4398	11.23	0.4421	11.29	0.4445	11.35	0.4469
M12	-	1.5	10.376	10.676	11.24	0.4425	11.29	0.4448	11.34	0.4465	11.39	0.4484	11.44	0.4504
M12	-	1.25	10.647	10.912	11.36	0.4472	11.41	0.4492	11.45	0.4508	11.49	0.4524	11.53	0.4539
M12	-	1	10.917	11.153	11.49	0.4524	11.52	0.4535	11.56	0.4551	11.59	0.4563	11.63	0.4579
M14	2	-	11.835	12.210	12.98	0.5110	13.05	0.5138	13.12	0.5165	13.18	0.5189	13.25	0.5217
M14	-	1.5	12.376	12.676	13.24	0.5213	13.29	0.5232	13.34	0.5252	13.39	0.5272	13.44	0.5291
M16	2	-	13.835	14.210	14.98	0.5898	15.05	0.5925	15.12	0.5953	15.18	0.5976	15.25	0.6004
M16	-	1.5	14.376	14.676	15.24	0.6000	15.29	0.6020	15.34	0.6039	15.39	0.6059	15.44	0.6079
M18	2.5	-	15.296	15.743	16.73	0.6587	16.81	0.6618	16.90	0.6654	16.98	0.6685	17.07	0.6720
M18	-	1.5	16.376	16.676	17.24	0.6787	17.29	0.6807	17.34	0.6827	17.39	0.6846	17.44	0.6866
M20	2.5	-	17.294	17.744	18.73	0.7374	18.81	0.7406	18.90	0.7441	18.98	0.7472	19.07	0.7508
M20	-	1.5	18.376	18.676	19.24	0.7575	19.29	0.7594	19.34	0.7614	19.39	0.7634	19.44	0.7654
M20	-	1	18.917	19.153	19.49	0.7673	19.52	0.7685	19.56	0.7701	19.59	0.7713	19.63	0.7728
M22	2.5	-	19.294	19.744	20.73	0.8161	20.81	0.8193	20.90	0.8228	20.98	0.8260	21.07	0.8295
M22	-	2	19.835	20.210	20.98	0.8260	21.05	0.8287	21.12	0.8315	21.18	0.8339	21.25	0.8366
M22	-	1.5	20.376	20.676	21.24	0.8362	21.29	0.8382	21.34	0.8402	21.39	0.8421	21.44	0.8441
M24	3	-	20.752	21.252	22.47	0.8846	22.57	0.8886	22.67	0.8925	22.78	0.8969	22.88	0.9008
M24	-	2	21.835	22.210	22.98	0.9047	23.05	0.9075	23.12	0.9102	23.18	0.9126	23.25	0.9154
M24	-	1.5	22.376	22.676	23.24	0.9150	23.29	0.9169	23.34	0.9189	23.39	0.9209	23.44	0.9228

FORMULA: TAP DRILL SIZE		FORMULA: PERCENTAGE OF FULL THREAD	
Drill Size = Tap Major Dia - $\frac{\text{Pitch} \times \% \text{ of Full Thread}}{147.059}$		% of Full Thread = $\frac{(\text{Tap Major Dia} - \text{Drill Dia}) \times 147.059}{\text{Pitch}}$	
Example: to determine drill size for M12 x 1.75 tap, 70% thread		Example: to determine the % of thread for M12 x 1.75 Tap using 11.17mm drill	
Tap Major \varnothing = 12mm	Drill Size = 12mm - $\frac{(1.75 \times 70\%)}{147.059}$	# Threads per Inch = 20	% of Thread = $(12\text{mm} - 11.167\text{mm}) \times \frac{147.059}{1.75}$
% of Full Thread = 70%	Drill Size = 12mm - 0.833mm = 11.167mm	Tap Major \varnothing = 0.2500"	% of Thread = $(0.833\text{mm}) \times 84.03 = \b70\%$
Pitch = 1.75mm		Drill \varnothing = 0.2045"	



Tap Drill Sizes - STI Taps - Inch

Tap Size	Threads Per Inch		Minor Diameter (in) (After Tapping)		Tap Drill Diameter (in)	
	UNC	UNF	Min	Max	Aluminum	Steel, Magnesium, Plastic
2	56	–	0.0899	0.0961	0.0938	0.0960
3	48	–	0.1036	0.1104	0.1065	0.1094
	–	56	0.1029	0.1086	0.1040	0.1065
4	40	–	0.1175	0.1252	0.1200	0.1200
	–	48	0.1166	0.1229	0.1181	0.1200
5	40	–	0.1305	0.1373	0.1339	0.1360
6	32	–	0.1448	0.1527	0.1470	0.1495
	–	40	0.1435	0.1503	0.1470	0.1495
8	32	–	0.1708	0.1781	0.1730	0.1770
	–	36	0.1701	0.1771	0.1730	0.1770
10	24	–	0.1990	0.2000	0.2031	0.2055
	–	32	0.1968	0.2041	0.2010	0.2031
12	24	–	0.2250	0.2340	0.2280	0.2280
1/4	20	–	0.2608	0.2704	0.2660	0.2660
	–	28	0.2577	0.2646	0.2610	0.2638
5/16	18	–	0.3245	0.3342	0.3320	0.3320
	–	24	0.3215	0.3288	0.3281	0.3281
3/8	16	–	0.3885	0.3987	0.3970	0.3970
	–	24	0.3840	0.3910	0.3906	0.3906
7/16	14	–	0.4530	0.4639	0.4531	0.4531
	–	20	0.4483	0.4561	0.4531	0.4531
1/2	13	–	0.5166	0.5273	0.5156	0.5156
	–	20	0.5108	0.5186	0.5156	0.5156
9/16	12	–	0.5806	0.5918	0.5781	0.5938
	–	18	0.5745	0.5826	0.5781	0.5781
5/8	11	–	0.6447	0.6564	0.6562	0.6562
	–	18	0.6370	0.6451	0.6406	0.6406
3/4	10	–	0.7716	0.7838	0.7812	0.7812
	–	16	0.7635	0.7720	0.7656	0.7656
7/8	9	–	0.8990	0.9119	0.9062	0.9062
	–	14	0.8905	0.8994	0.8906	0.8906
1"	8	–	1.0271	1.0421	1.0312	1.0312
	–	12	1.0181	1.0281	1.0156	1.0312

The suggested drill sizes for aluminum listed in the table are within the minor diameter limits for STI tapped holes specified in MS 33537. Alternate drill sizes are suggested in many instances for magnesium, steel and plastics to provide for maximum tap wear life. In the case of magnesium, the larger size is recommended to allow for material close-in. There are suggested drill sizes and any special requirements or specifications will supersede these recommendations.



Tap Drill Sizes - STI Taps - Metric


Tap Size	Pitch	Minor Diameter (in) (After Tapping)		Tap Drill Diameter (Metric)	
		Min	Max	Aluminum	Steel, Magnesium, Plastic
M2	0.4	2.087	2.199	2.1	2.1
M2.5	0.45	2.597	2.722	2.3	2.35
M3	0.5	3.108	3.248	3.15	3.2
M4	0.7	4.152	4.332	4.2	4.25
M5	0.8	5.174	5.374	5.2	5.3
M6	1.0	6.217	6.407	6.25	6.3
M8	1.25	8.271	8.483	8.3	8.4
M10	1.5	10.324	10.560	10.5	10.5
M12	1.75	12.379	12.644	12.5	12.5
M14	2	14.433	14.733	14.5	14.5
M16	2	16.433	16.733	16.5	16.5
M18	2.5	18.541	18.896	18.75	18.75
M20	2.5	20.541	20.896	20.75	20.75
M22	2.5	22.541	22.896	22.75	22.75
M24	3	22.649	25.049	24.75	24.75

The suggested drill sizes for aluminum listed in the table are within the minor diameter limits for STI tapped holes specified in MS 33537. Alternate drill sizes are suggested in many instances for magnesium, steel and plastics to provide for maximum tap wear life. In the case of magnesium, the larger size is recommended to allow for material close-in. There are suggested drill sizes and any special requirements or specifications will supersede these recommendations.



Machining Technique


OSG's A Brand® & EXOCARB® Thread Mills have been developed for thread milling on a 3-Axis CNC controlled machine tool. Threads are produced by advancing one pitch feed per revolution in the axial direction, utilizing the planet-like rotation and revolution movements of the tool. Internal and right/left hand threads can all be produced with this one tool by simply changing the direction of feed.

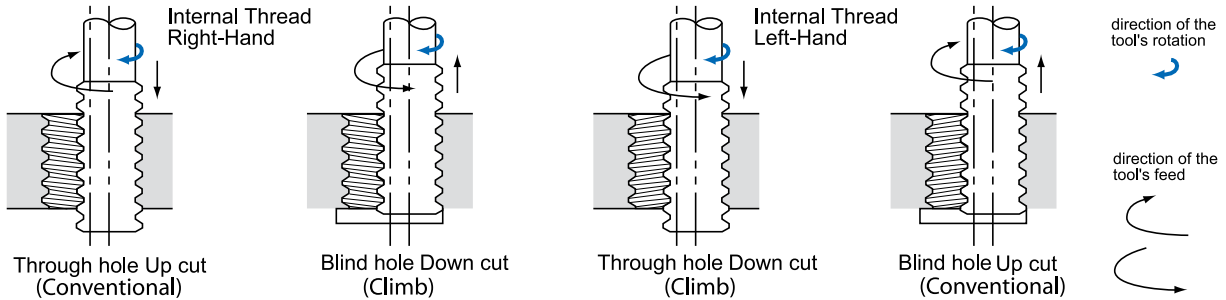

Threading Process

- 1-2 Move to edge (maintain clearance)
- 2-3 Cut with helical milling
- 3-4 Mill the circumference of the circle
- 4-5 Pull away from the edge
- 5-6 Remove tool

The transition between the start and finish of the milling operation must be smooth, and the appropriate amount of feed is essential for minimizing milling resistance. There are many different methods for using this tool, but our research has shown that this technique provides the most precise and efficient operation.

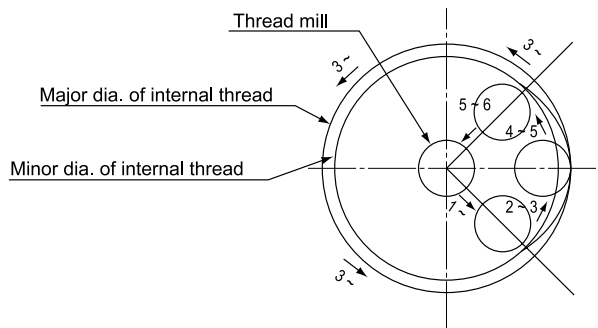


Thread Milling Process (view from above)



Radius Offset (RPRG)

RPRG is the reference value of tool radius offset.

Conventionally, the tool radius was entered during setup as a parameter of the NC system, which was corrected by checking the thread with a gauge. However, it has become possible to reduce the checking and correction simply by entering the RPRG value indicated on the tool shank.

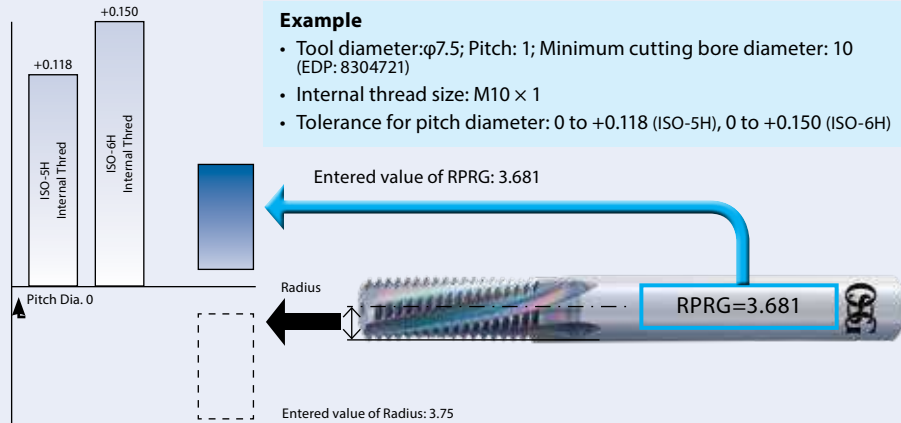

NOTES:

1. RPRG are reference values. Determine optimal values after trial cutting as values depend on machining environment.
2. RPRG values are optimally established to achieve ISO:5H (formerly Grade 1) internal thread limits for metric threads and ANSI:3B internal thread limits for unified threads. RPRG values established for taper pipes (R/Rc) are effective when using the thread milling NC code generator software ThreadPro available on our website.
3. For diameters of thread mills, RPRG values are calculated based on the minimum cutting bore diameter (the minimum cutting internal thread size of the tool diameter). To cut other diameters, it is necessary to use a smaller value than RPRG.

ThreadPro (Thread Milling NC Code Generator Software)

www.osgtool.com/threadpro



- Available in 12 different languages
- Supports 8 NC programming languages
- Incorporates RPRG* value to further simplify process

* RPRG = reference value of tool radius offset



ThreadPro

Powered by
 AUTODESK





List 16620/16625 - A Brand® AT-1 List 16630/16631 - A Brand® AT-1 NPT/NPTF

Work Material		Cutting Speed SFM	Feed Rate (in/t)
Low Carbon Steel	~C0.25%	260 - 790	0.0004 - 0.002
Medium Carbon Steel	C0.25%~0.45%	260 - 790	0.0004 - 0.002
High Carbon Steel	C0.45%~	260 - 790	0.0004 - 0.002
Alloy Steel	4140, 4340, 8620	200 - 650	0.0004 - 0.002
Hardened Steel	25-45 HRC	260 - 650	0.0004 - 0.002
	45-55 HRC	-	-
	50-60 HRC	-	-
Stainless Steel	300-series, 400-series	200 - 790	0.0004 - 0.002
Tool Steel	D2, H13, A6	-	-
Cast Steel	-	200 - 790	0.0004 - 0.002
Cast Iron	-	260 - 790	0.0004 - 0.002
Ductile Cast Iron	-	200 - 790	0.0004 - 0.002
Copper	-	260 - 790	0.001 - 0.004
Brass	B21, B36	260 - 790	0.001 - 0.004
Brass Casting	B62	260 - 790	0.001 - 0.004
Bronze	B124, B103, B159	260 - 790	0.001 - 0.004
Aluminum	6061, 7075, 2014	260 - 790	0.001 - 0.004
Aluminum Alloy Casting	-	330 - 1000	0.002 - 0.008
Magnesium Alloy Casting	-	330 - 1000	0.002 - 0.008
Zinc Alloy Casting	-	330 - 1000	0.002 - 0.008
Titanium Alloy	Ti-6Al-4V	-	-
Nickel Alloy	Inconel	-	-
Thermosetting Plastic	-	260 - 650	0.001 - 0.004
Thermo Plastic	-	260 - 650	0.001 - 0.004

1. The indicated speeds and feeds are for water-soluble coolant.
2. Water-soluble coolant is not suitable for threading magnesium alloy.
3. Please adjust the cutting conditions depending on the rigidity of the machine, tool holders, and workpiece clamping.
4. If the threading length is long, or when machining a large-pitch thread, reduce the feed rate and take multiple passes.
5. If a machined parallel internal thread is tapered and prevents the go-gauge from going through, add a zero cut/spring pass.





EXOCARB® Thread Mill

Cutting Conditions

- List 41000/41100 - EXOCARB® Thread Mill
- List 41050/41150 - EXOCARB® Thread Mill Oil
- List 42000/42001 - EXOCARB® Thread Mill NPT/NPTF

Work Material	SFM	Feed Rate (Inch/Tooth)	No. of Passes
Low Carbon Steel	300 - 420	0.0016 - 0.0050	1
Medium Carbon Steel	300 - 420	0.0016 - 0.0050	1
High Carbon Steel	250 - 420	0.0016 - 0.0050	1
Alloy Steel	180 - 350	0.0008 - 0.0040	1-2
Heat Treated Steel (28-34HRC)	160 - 300	0.0008 - 0.0040	1
Heat Treated Steel (34-40HRC)	130 - 260	0.0004 - 0.0040	1-2
Heat Treated Steel (40-50HRC)	65 - 250	0.0004 - 0.0040	2-4
Stainless Steel (300 - Series)	200 - 450	0.0016 - 0.0060	1-2
Stainless Steel (400 - Series)	165 - 400	0.0016 - 0.0060	1-2
Stainless Steel (15-5, 17-4PH)	130 - 350	0.0016 - 0.0060	2
Cast Iron	250 - 400	0.0008 - 0.0035	1
Ductile Cast Iron	210 - 280	0.0012 - 0.0040	1
Aluminum Alloy	300 - 500	0.0012 - 0.0040	1
Aluminum Alloy Casting Si [12]%	280 - 550	0.0012 - 0.0050	1
Aluminum Alloy Casting Si [12-16]%	250 - 460	0.0012 - 0.0040	1
Aluminum Alloy Casting with Si [16-20]%	210 - 400	0.0012 - 0.0040	1
Aluminum Alloy Casting with Si [20-25]%	200 - 350	0.0012 - 0.0040	1
Copper, Copper Casting	300 - 510	0.0012 - 0.0040	1
Brass, Brass Casting	300 - 510	0.0012 - 0.0040	1
Bronze, Bronze Casting (C6***, PB, PBC)	300 - 500	0.0012 - 0.0040	1
Magnesium Alloy Casting	210 - 410	0.0012 - 0.0050	1
Zinc Alloy Casting	180 - 380	0.0012 - 0.0050	1
Titanium Alloy (Ti-6Al-4V)	100 - 330	0.0012 - 0.0025	2
High Heat Resistance Alloy (Inconel)	65 - 260	0.0008 - 0.0020	2
High Heat Resistance Alloy (Inconel >40HRC)	65 - 200	0.0008 - 0.0020	4
Thermoplastic	220 - 510	0.0012 - 0.0050	1
Cobalt/Chrome Alloy (Stellite)	65 - 200	0.0016 - 0.0060	3

For chip loads, the smaller cutter diameters use a smaller chip load per tooth within a given range. Larger cutter diameters use the larger chip load per tooth within the given range. For programming help or other information, please contact our Engineering Department at 800-837-2223.












List 41200/41300 - EXOCARB® Thread Mill Mini

Work Material	Thread Sizes Under #2/M2			Thread Sizes #2/M2 & Larger		
	SFM	Feed Rate (Inch/Tooth)	No. of Passes	SFM	Feed Rate (Inch/Tooth)	No. of Passes
Low Carbon Steel	200 - 300	0.0008 - 0.0020	2	200 - 300	0.0008 - 0.0030	1
Medium Carbon Steel	200 - 300	0.0008 - 0.0020	2	200 - 300	0.0008 - 0.0030	1
High Carbon Steel	200 - 300	0.0008 - 0.0020	2	200 - 300	0.0008 - 0.0030	1
Alloy Steel	—	—	—	100 - 200	0.0004 - 0.0012	1-2
Heat Treated Steel (28-34HRC)	—	—	—	100 - 200	0.0004 - 0.0012	1
Heat Treated Steel (34-40HRC)	—	—	—	100 - 200	0.0004 - 0.0012	1-2
Heat Treated Steel (40-50HRC)	—	—	—	100 - 200	0.0004 - 0.0012	2-4
Stainless Steel (300 Series)	200 - 300	0.0008 - 0.0020	2-3	200 - 300	0.0008 - 0.0030	1-2
Stainless Steel (400 Series)	200 - 300	0.0008 - 0.0020	2-3	200 - 300	0.0008 - 0.0030	1-2
Stainless Steel (15-5, 17-4PH)	200 - 300	0.0008 - 0.0020	3	200 - 300	0.0008 - 0.0030	2
Cast Iron	130 - 200	0.0008 - 0.0020	2	165 - 330	0.0012 - 0.0040	1
Ductile Cast Iron	130 - 300	0.0008 - 0.0020	2	165 - 230	0.0012 - 0.0040	1
Aluminum Alloy	230 - 330	0.0015 - 0.0030	2	165 - 330	0.0008 - 0.0025	1
Aluminum Alloy Casting	230 - 330	0.0015 - 0.0030	2	165 - 330	0.0008 - 0.0025	1
Copper, Copper Casting	—	—	—	—	—	—
Brass, Brass Casting	200 - 330	0.0015 - 0.0030	2	165 - 330	0.0008 - 0.0025	1
Bronze, Bronze Casting	—	—	—	165 - 330	0.0008 - 0.0025	1
Magnesium Alloy Casting	230 - 330	0.0015 - 0.0030	2	165 - 330	0.0008 - 0.0025	1
Zinc Alloy Casting	230 - 330	0.0015 - 0.0030	2	165 - 330	0.0008 - 0.0025	1
Titanium Alloy (Ti-6Al-4V)	65 - 130	0.0004 - 0.0012	3	65 - 200	0.0004 - 0.0012	2
High Heat Resistance Alloy (Inconel)	—	—	—	65 - 200	0.0004 - 0.0012	2
High Heat Resistance Alloy (Inconel >40HRC)	—	—	—	65 - 200	0.0004 - 0.0012	4
Thermoplastic	165 - 330	0.0015 - 0.0030	2	165 - 330	0.0008 - 0.0025	1
Cobalt/Chrome Alloy (Stellite)	—	—	—	—	—	—

For chip loads, the smaller cutter diameters use a smaller chip load per tooth within a given range. Larger cutter diameters use the larger chip load per tooth within the given range. For programming help or other information, please contact our Engineering Department at 800-837-2223.













PROBLEM	CAUSE	SOLUTION
Chip Packing (Back Threaded Portion) 	Inappropriate spindle speed	Adjust RPM (lower or higher) for proper chip form
	Helix angle too large	Decrease helix angle or choose tap with low helix angle
	Chips not coiling / breaking properly	Use alternate coating
Chip Packing (Single Thread) 	*Occurs predominantly in horizontal applications*	
	Weak rake angle (positive)	Decrease rake angle
	Chips not evacuating properly	Use a POT style tap or a LHH / RHF
Chipping During Reversal 	Chips left behind in flute during tap reversal	Improve wear resistance of tap
		Improve / add surface treatment / coating
	Material shrinkage	Increase coolant volume / concentration to control heat
Chipping Due to Wear 	Tap substrate not suitable for work material	Improve wear resistance of tap
		Improve / add surface treatment / coating
	Cutting action work hardened material	Shorten chamfer length
Chipping of Land Edge 	Occurs when tap either hits bottom or entrance of hole	Avoid hitting the bottom of the hole, check stroke length, alignment and hole size
Chipping of Land Axially 	Occurs when tap either hits bottom or entrance of hole	Avoid hitting the bottom of the hole, check stroke length, alignment and hole size
Chipping of Chamfer 	Tap substrate not suitable for work material	Improve wear resistance of tap
	Inappropriate pre-drill size	Select suitable pre-drill size





PROBLEM	CAUSE	SOLUTION
Premature Tap Wear 	Inappropriate spindle speed	Reduce spindle speed
	Possible work hardening of pre-drilled hole	Prevent work hardening of pre-drilled hole
	Inappropriate thread relief	Use proper thread relief
	Inappropriate chamfer length	Adjust chamfer length
	Inappropriate lubrication	Change coolant method Increase volume / concentration Apply surface coating / treatment
Welding / Galling 	Inappropriate spindle speed	Reduce spindle speed
	Inappropriate lubrication	Change coolant method Increase volume / concentration Apply surface coating / treatment
Deformed Lobes 	Possible work hardening of pre-drilled hole	Prevent work hardening of pre-drilled hole
	Inappropriate spindle speed	Reduce spindle speed
	Inappropriate pre-drill size	Increase pre-drill hole size as much as possible
	Inappropriate lubrication	Change coolant method Increase volume / concentration Apply surface coating / treatment
		Tap substrate not suitable for material
Tap Breakage 	Possible chip packing	Avoid chip packing
	Inappropriate pre-drill size	Increase pre-drill hole size as much as possible
	Inappropriate spindle speed	Reduce spindle speed
	Possible runout or tapered hole	Reduce runout and assure hole is straight
	Too high of torque generated	Use tap holder with torque adjustment / limiting feature
	Possible tap collision with bottom of hole	Avoid hitting the bottom of the hole, check stroke length, alignment and hole size
Overcutting / Oversized Threads 	Inconsistent feed of spiral fluted style tap	Use compensating tension / compression tap holder Adjust feed rate appropriately Check CNC program
		Inconsistent feed of spiral pointed style tap
Tearing on Flanks 	Inappropriate thread relief / rake angle	Use sharper / freer cutting relief and angle
	Inappropriate lubrication	Change coolant method Increase volume / concentration Apply surface coating / treatment
Extremely Torn Threads 	Possible welding / galling	Select appropriate cutting conditions
	Possible chip packing	Select appropriate cutting conditions
	Inappropriate thread relief	Use sharper thread relief Change coolant method Increase volume / concentration Apply surface coating / treatment
		Inappropriate lubrication
Chips Remain at Bottom 	Inappropriate geometry of tap	Reduce chamfer relief angle
		Use thinner land width
		Reduce chamfer length
		Reduce cutting angle



MILLING



MILLING

The A Brand®

OSG's premium tooling brand. Features products that are designed to exceed the evolving manufacturing needs of our customers.

EXOPRO®

OSG's ultra-premium tooling series, featuring our latest innovative technologies when the absolute best performance is needed.

EXOCARB® WXL®

The new standard in high performance end mills for high speed machining, featuring our WXL™ nanocoating technology.

EXOCARB® WXS®

The new standard in high performance end mills for hard milling, featuring our WXS™ nanocoating technology.

EXOCARB® MAX

Maximum performance end mills designed exclusively for hard milling. Features technologies including WXS™ and CBN.

EXOCARB® DIAMOND

OSG's patented CVD diamond coated end mills for die/mold and aerospace applications in non-ferrous materials like graphite, aluminum and CFRP.

EXOCARB® AERO

High performance carbide end mills for aircraft materials.

HY-PRO® CARB


Performance sub-micrograin carbide end mills with OSG TiAlN coating. The perfect blend of performance and cost-efficiency.

CARBIDE

All-purpose micrograin carbide end mills for general machining applications.

SOMTA

























Value carbide and HSS-cobalt and mills for a wide range of applications.



Featured Milling Products




















































Inch/Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric
Size Range	5/64 - 1"	3 - 25mm	1/4 - 1"	-	-	0.06-20mm	1/2 - 1-1/4"	12 - 25mm
Number of Flutes	4		5		3, 4		5	
Square	✓	✓					✓	✓
Corner Radius/Chamfer	✓	✓	✓			✓	✓	✓
Ball Nose						✓		
Long Neck, Pencil Neck, Rib	✓	✓				✓	✓	✓
Coolant-Through								
Unequal Index, Variable Helix	✓	✓	✓				✓	✓
Substrate	Carbide		Carbide		Carbide		Carbide	
Coating	DUARISE		EXO®		WXS®/EXO®		EXO®	

P	Carbon Steels (1010, 1018)				
	Mild Steels, Alloy Steels (1050, 4140)				
	Die Steels (H13, D2)				
M	Stainless Steel (304SS, 420SS)				
K	Cast Iron				
	Ductile Cast Iron				
N	Aluminum Alloys (6061, 7075)				
S	Heat Resistant Alloys (Inconel 718)				
	Titanium Alloy (Ti-6Al-4V)				
H	Pre-Hardened Steel (P20)				
	Die Cast Steels (A2, S7)				
	Hardened Steels (D2)				




Featured Milling Products



EXOCARB® WXL® Series		EXOCARB® WXS® Series		EXOCARB® AERO DLC		EXOCARB® AERO UVX Silent Rougher		EXOCARB® AERO BLIZZARD®		HY-PRO® CARB VGX Series	
P853-883		P884-904		P932-941		P921-923		P942-950		P960-968	
											
Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric
1/64 - 3/4"	0.1 - 26mm	1/32 - 3/4"	0.1 - 13mm	1/2 - 1"	12 - 25mm	1/4 - 1"	6 - 25mm	1/8 - 1"	-	1/8 - 1 1/4"	-
2, 4		2, 3, 4, 6		2, 3		4		2, 3		4, 5	
✓	✓	✓	✓	✓	✓			✓		✓	
✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	
✓	✓	✓	✓					✓		✓	
✓	✓		✓			✓	✓	✓		✓	
				✓	✓						
						✓	✓			✓	
Carbide		Carbide		Carbide		Carbide		Carbide		Carbide	
WXL®		WXS®		DLC		WXL®		Bright/DLC		TiAlN	













For OSG's complete end mill offering please refer to the Illustrated Index starting on page 784.

 1st Choice  2nd Choice  Recommended






List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

A Brand®

8200		NEW SIZES	Inch	4	Variable	Carbide	Duarise	5/64" - 1"	AE-VMS	830	1112-1113
8205		NEW SIZES	Metric	4	Regular	Carbide	Duarise	3mm - 25mm	AE-VMS	831	1112-1113
8210			Inch	4	Variable	Carbide	Duarise	3/16" - 1"	AE-CR-VMS, Corner Radius	832	1114-1115
8215			Metric	4	Regular	Carbide	Duarise	3mm - 12mm	AE-CR-VMS, Corner Radius	833	1114-1115
8220			Inch	4	Variable	Carbide	Duarise	1/4" - 1"	AE-LN-CR-VMS, Long Neck, Corner Radius	834	1119
8206		NEW	Metric	4	Stub	Carbide	Duarise	3mm - 12mm	AE-VMSS	835	1116-1117
8230		NEW	Inch	4	Stub	Carbide	Duarise	1/4" - 1"	AE-LN-VMSS, Long Neck	836	1118
8235		NEW	Metric	4	Stub	Carbide	Duarise	6mm - 12mm	AE-LN-VMSS, Long Neck	837	1118
8201		NEW	Inch	4	Long	Carbide	Duarise	1/4" - 1/2"	AE-VML	838	1120-1123
8207		NEW	Metric	4	Long	Carbide	Duarise	6mm - 12mm	AE-VML	839	1120-1123
8202		NEW	Inch	4	Long	Carbide	Duarise	1/4" - 1/2"	AE-NIK-VML, Nicks	840	1120-1123
8208		NEW	Metric	4	Long	Carbide	Duarise	6mm - 12mm	AE-NIK-VML, Nicks	840	1120-1123

EXOPRO®

2055			Inch	5	Variable	Carbide	EXO®	1/4" - 1"	UVX-Ni, Corner Radius	841	1124
9510			Metric	3	Stub	Carbide	EXO®	1mm - 20mm	Phoenix® Deep Feed, Ball End	842	1125-1127
9590			Metric	3	Stub	Carbide	WXS®	0.6mm - 6mm	Phoenix® Long Neck, Ball End	843	1125-1127
9581			Metric	3	Stub	Carbide	WXS®	1mm - 12mm	Phoenix® Pencil-Neck, Deep Feed, Ball End	844-845	1125-1127
9592			Metric	4	Stub	Carbide	WXS®	0.8mm - 3mm	Phoenix® Pencil Neck, Deep Feed, Corner Radius	846	1131
9575			Metric	3	Stub	Carbide	WXS®	6mm - 20mm	Phoenix® Deep Feed, Corner Radius	847	1128-1130
9576			Metric	3	Stub	Carbide	WXS®	4mm - 16mm	Phoenix® Long Neck, Deep Feed, Corner Radius	848	1128-1130
9580			Metric	3	Stub	Carbide	WXS®	2mm - 12mm	Phoenix® Pencil Neck, Deep Feed, Corner Radius	849-851	1128-1130
9570			Metric	3	Stub	Carbide	EXO®	1mm - 20mm	Phoenix® High-Feed, Corner Radius	852	1128-1130



List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

A Brand®

8200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
8205	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
8210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8215	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8220	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8206	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
8230	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
8235	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
8201	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8202	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
8208	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

EXOPRO®






2055						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>				<input type="checkbox"/>	
9510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9590	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9581	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9592	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>									<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9575	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9576	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9580	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best



List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

EXOCARB® WXL®

3610	 NEW SIZES	Inch	2	Regular	Carbide	WXL®	1/32" - 1/2"	Ball End	853	1135
3710		Metric	2	Regular	Carbide	WXL®	0.1mm - 20mm	Ball End	854	1136
3670	 NEW SIZES	Inch	4	Regular	Carbide	WXL®	1/16" - 1"	Corner Radius	855	1137
3604	 NEW SIZES	Inch	4	Regular	Carbide	WXL®	1/16" - 1"		856	1138
3690		Inch	2	Regular	Carbide	WXL®	1/64" - 1/4"	Ball End, Long Neck, ±5µm Radius Tolerance	857	1139-1148
3790		Metric	2	Regular	Carbide	WXL®	0.1mm - 6mm	Ball End, Long Neck, ±5µm Radius Tolerance	858-860	1139-1148
3619	 NEW	Inch	2	Stub	Carbide	WXL®	1/16" - 1/2"		861	1149
3620		Inch	2	Stub	Carbide	WXL®	1/16" - 3/4"		862	1150
3621		Inch	2	Regular	Carbide	WXL®	1/16" - 3/4"		863	1150
3704		Metric	4	Regular	Carbide	WXL®	1mm - 12mm		864	1151
3742		Metric	4	Long	Carbide	WXL®	3mm - 26mm		865	1152
3791		Metric	2	Stub	Carbide	WXL®	0.2mm - 5mm	Long Neck	866-867	1154-1157
3711		Metric	2	Stub	Carbide	WXL®	1mm - 18mm	Ball End, Long Shank	868	1153
3720		Metric	2	Stub	Carbide	WXL®	0.1mm - 6mm		869	1158-1159
3721		Metric	2	Stub	Carbide	WXL®	0.1mm - 20mm		870	1160-1161
3712		Metric	2	Stub	Carbide	WXL®	0.2mm - 6mm	Pencil Neck, Ball End	871-876	1162-1169
3722		Metric	2	Regular	Carbide	WXL®	0.1mm - 20mm		877	1170-1171
3723		Metric	2	Long	Carbide	WXL®	0.2mm - 12mm		878	1172-1173
3770		Metric	2	Regular	Carbide	WXL®	0.6mm - 12mm	Corner Radius	879	1174
3771		Metric	4	Regular	Carbide	WXL®	3mm - 12mm	Corner Radius	880	1175
3794		Metric	4	Stub	Carbide	WXL®	1mm - 3mm	Long Neck	881-882	1176-1177
4445		Inch	4	Regular	Carbide	WXL®	1/8" - 1/2"	High Helix, Corner Radius	883	1178

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC



















EXOCARB® WXL®

3610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3710	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3670	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3604	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3690	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3790	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3619	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3620	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3621	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3704	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3742	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
3791	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3711	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3720	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3721	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3712	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3722	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3723	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3770	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3771	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3794	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
4445	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>






good best

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

EXOCARB® WXS®

4410		Inch	2	Stub	Carbide	WXS®	1/32" - 1/2"	Ball End	884	1179
4510		Metric	2	Stub	Carbide	WXS®	1mm - 12mm	Ball End	885	1180
4440		Inch	4, 6	Regular	Carbide	WXS®	1/16" - 3/4"		886	1181
4540	 NEW SIZES	Metric	4, 6	Regular	Carbide	WXS®	1mm - 25mm		887	1182
4471		Inch	4	Stub	Carbide	WXS®	1/16" - 1/2"	Corner Radius	888	1183
4571		Metric	4	Stub	Carbide	WXS®	3mm - 12mm	Corner Radius	889	1184
4470		Inch	3, 4	Stub	Carbide	WXS®	1/8" - 1/2"	Corner Radius, High Feed	890	1185
4570		Metric	3, 4	Stub	Carbide	WXS®	2mm - 13mm	Corner Radius, High Feed	890	1186
4472		Inch	5	Stub	Carbide	WXS®	1/8" - 1/2"	Corner Radius, High Feed	891	1187
4572		Metric	4, 5	Stub	Carbide	WXS®	2mm - 12mm	Corner Radius, High Feed	892	1188
4592		Metric	2	Stub	Carbide	WXS®	0.4mm - 3mm	Corner Radius, Long Neck, ±5µm Radius Tolerance	893-895	1189
4590		Metric	2	Stub	Carbide	WXS®	0.1mm - 6mm	Ball End, Long Neck, ±5µm Radius Tolerance	896-898	1190-1192
4430		Inch	4	Regular	Carbide	WXS®	1/4" - 1/2"	Ball End, True 4 Flute	899	1193
4530		Metric	4	Regular	Carbide	WXS®	6mm - 12mm	Ball End, True 4 Flute	900	1194
4413	 NEW	Inch	2	Regular	Carbide	WXS®	1/16" - 1/2"	Ball End, Sphere Type	901	1195
4513	 NEW SIZES	Metric	2	Regular	Carbide	WXS®	1mm - 12mm	Ball End, Sphere Type	902	1196
4581		Metric	4	Variable	Carbide	WXS®	1mm - 2.5mm	Ball End, Tapered	903	1197
4541		Metric	4, 6	Regular	Carbide	WXS®	3mm - 12mm	Corner Radius	904	1198

EXOCARB® MAX

9010		Inch	2	Stub	Carbide	WXS®	1/32" - 1/2"	Ball End	905	1199
9110		Metric	2	Stub	Carbide	WXS®	1mm - 10mm	Ball End	905	1199
9011		Inch	2	Stub	Carbide	WXS®	1/32" - 3/8"	Ball End, Long Shank	906	1199
9111		Metric	2	Stub	Carbide	WXS®	1mm - 10mm	Ball End, Long Shank	906	1199
9140		Metric	6	Regular	Carbide	WXS®	3mm - 12mm	Square End	907	1204-1205

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

EXOCARB® WXS®

4410	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4440	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4471	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4571	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4470	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4472	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4572	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4592	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4590	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4430	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4413	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4513	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4581	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4541	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>






EXOCARB® MAX

9010	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9110	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9011	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9111	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
9140	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best

















List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

EXOCARB® MAX

9144		Metric	6	Regular	Carbide	WXS®	6mm - 12mm	Corner Radius	907	1204-1205
9191		Metric	2	Stub	CBN	Bright	0.4mm - 3mm	CBN, Ball End	908	1202
9192		Metric	2	Stub	CBN	Bright	0.4mm - 3mm	CBN, Super Long Neck, Ball Nose	908	1203
9181		Metric	2	Stub	CBN	Bright	0.5mm - 3mm	CBN, Corner Radius	909	1200
9182		Metric	2	Stub	CBN	Bright	0.5mm - 3mm	Long Neck, CBN, Corner Radius	909	1201

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

EXOCARB® Diamond

7020		Inch	2	Stub	Carbide	Diamond	1/64" - 1/2"		910	1206-1207
7120		Metric	2	Regular	Carbide	Diamond	1mm - 12mm		911	1206-1207
7040		Inch	4	Stub	Carbide	Diamond	1/16" - 1/2"		911	1206-1207
7041		Inch	4	Long	Carbide	Diamond	1/8" - 1/2"		912	1206-1207
7042		Inch	4	Stub	Carbide	Diamond	1/16" - 1/2"	Long Shank	912	1206-1207
7072		Inch	4	Stub	Carbide	Diamond	1/8" - 1/2"	Long Shank, Corner Radius	913	1206-1207
7010		Inch	2	Regular	Carbide	Diamond	1/32" - 1/2"	Ball End	913	1206-1207
7110		Metric	2	Regular	Carbide	Diamond	1mm - 12mm	Ball End	914	1206-1207
7030		Inch	4	Regular	Carbide	Diamond	1/32" - 1/2"	Ball End	914	1206-1207
7031		Inch	4	Long	Carbide	Diamond	3/16" - 1/2"	Ball End	915	1206-1207
7032		Inch	4	Stub	Carbide	Diamond	1/16" - 1/2"	Ball End, Long Shank	915	1206-1207
7173		Metric	4	Stub	Carbide	Diamond	0.5mm - 12mm	Ball End, Long Shank	916	1206-1207
7132		Metric	4	Stub	Carbide	Diamond	3mm - 12mm	Long Shank, Corner Radius	917	1206-1207
7140		Metric	4	Regular	Carbide	Diamond	1mm - 12mm		917	1206-1207
7230		Inch	2, 4	Regular	Carbide	Diamond	1/64" - 1/4"	High Precision, Ball End	918	1208
7231		Inch	2, 4	Regular	Carbide	Diamond	1/64" - 1/4"	High Precision, Ball End, Long Reach	918	1208

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC

EXOCARB® MAX

9144	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9191														<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9192														<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9181														<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9182														<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum Alloys	Copper Alloys	Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH									

EXOCARB® Diamond

7020										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7120										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7040										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7041										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7042										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7072										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7010										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7110										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7030										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7031										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7032										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7173										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7132										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7140										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7230										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7231										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	

good best

List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------

EXOCARB® AERO

2050		Inch	4	Variable	Carbide	EXO®	1/8" - 1"	UVX, Square End, for Exotics	919	1209
2052		Inch	4	Variable	Carbide	EXO®	1/8" - 1"	UVX, Corner Radius, for Exotics	920	1209
3815		Inch	4	Regular	Carbide	WXL®	1/4" - 1"	UVX Silent Rougher, Low Helix, Corner Chamfer	921	1210-1211
3820		Inch	4	Regular	Carbide	WXL®	1/4" - 1"	UVX Silent Rougher, High Helix, Corner Chamfer	921	1210-1211
3915		Metric	4	Regular	Carbide	WXL®	6mm - 25mm	UVX Silent Rougher, Low Helix, Corner Chamfer	922	1210-1211
3920		Metric	4	Regular	Carbide	WXL®	6mm - 25mm	UVX Silent Rougher, High Helix, Corner Chamfer	922	1210-1211
3825		Inch	4	Regular	Carbide	WXL®	1/4" - 1"	UVX Silent Rougher, Low Helix, Long Neck, Corner Chamfer	923	1210-1211
3830		Inch	4	Regular	Carbide	WXL®	1/4" - 1"	UVX Silent Rougher, High Helix, Long Neck, Corner Chamfer	923	1210-1211
2015		Inch	4	Regular	Carbide	TiAlN	1/4" - 1"	Rougher, for Exotics	924	1212
2100		Inch	5	Multiple	Carbide	EXO®	1/2" - 1-1/4"	UVX-Ti	925	1213
2106		Inch	5	Multiple	Carbide	EXO®	1/2" - 1-1/4"	UVX-Ti, Corner Radius	926-927	1213
2104		Metric	5	Regular	Carbide	EXO®	12mm - 25mm	UVX-Ti, Reduced Neck	928	1214
2102		Inch	5	Regular	Carbide	EXO®	1/2" - 1-1/4"	UVX-Ti, Reduced Neck	928	1213
2108		Inch	5	Regular	Carbide	EXO®	1/2" - 1-1/4"	UVX-Ti, Reduced Neck, Corner Radius	929	1213
2110		Metric	5	Regular	Carbide	EXO®	12mm - 20mm	UVX-Ti, Reduced Neck, Corner Radius	930	1214
2080		Inch	6,8	Regular	Carbide	Bright	5/8" - 1"	HFC-Ti, High Feed Radius Cutter for Titanium	931	1215
2081		Metric	6,8	Regular	Carbide	Bright	16mm - 25mm	HFC-Ti, High Feed Radius Cutter for Titanium	931	1215
2863		Inch	2	Stub	Carbide	DLC	1/2" - 1"	AERO-DLC, Corner Radius	932	1216
2963		Metric	2	Stub	Carbide	DLC	12mm - 25mm	AERO-DLC, Corner Radius	933	1216
2873		Inch	3	Stub	Carbide	DLC	1/2" - 1"	AERO-DLC, Corner Radius/Square	934	1217
2973		Metric	3	Stub	Carbide	DLC	12mm - 25mm	AERO-DLC, Corner Radius/Square	935	1217
2874		Inch	3	Stub	Carbide	DLC	5/8" - 1"	AERO-DLC, Coolant-Through, Corner Radius/Square	936	1217
2974		Metric	3	Stub	Carbide	DLC	20mm - 25mm	AERO-DLC, Coolant-Through, Corner Radius/Square	937	1218

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC





EXOCARB® AERO

2050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
2052	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
3815	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
3820	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
3915	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
3920	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
3825	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
3830	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
2015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
2100						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
2106						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
2104						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
2102						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
2108						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
2110						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					
2080												<input checked="" type="checkbox"/>					
2081												<input checked="" type="checkbox"/>					
2863											<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
2963											<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
2873											<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
2973											<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
2874											<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
2974											<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					

good best











List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------

EXOCARB® AERO

2843		Inch	3	Long	Carbide	DLC	1/2" - 1"	AERO-DLC, Long Length, Corner Radius/Square	938	1218
2943		Metric	3	Long	Carbide	DLC	12mm - 20mm	AERO-DLC, Long Length, Corner Radius/Square	939	1218
2853		Inch	3	Extra Long	Carbide	DLC	3/4"	AERO-DLC, Extra Long Length, Corner Radius/Square	940	1219
2953		Metric	3	Extra Long	Carbide	DLC	20mm	AERO-DLC, Extra Long Length, Corner Radius/Square	941	1219

List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------

EXOCARB® AERO

2021		Inch	2	Stub	Carbide	Bright	1/8" - 1"	BLIZZARD® Square & Corner Radius	942	1220
2022		Inch	2	Regular	Carbide	Bright	1/8" - 1"	BLIZZARD® Square & Corner Radius	943	1220
2023		Inch	2	Regular	Carbide	Bright	1/4" - 1"	BLIZZARD®, Reduced Neck, Square & Corner Radius	944	1220
2024		Inch	2	Long	Carbide	Bright	1/4" - 1"	BLIZZARD®, Reduced Neck, Square & Corner Radius	945	1220
2041		Inch	3	Stub	Carbide	Bright	1/8" - 1"	BLIZZARD® Square & Corner Radius	946	1221
2042		Inch	3	Regular	Carbide	Bright	1/8" - 1"	BLIZZARD® Square & Corner Radius	947	1222
2043		Inch	3	Regular	Carbide	Bright	1/4" - 1"	BLIZZARD®, Reduced Neck, Square & Corner Radius	948	1222
2048		Inch	3	Long	Carbide	Bright	1/4" - 1"	BLIZZARD®, Reduced Neck, Square & Corner Radius	949	1222
2010		Inch	2	Regular	Carbide	Bright	1/8" - 1"	BLIZZARD®, Ball End	950	1223
8120		Metric	2	Regular	Carbide	Bright	1mm - 16mm		951	1224

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

EXOCARB® AERO

2843										<input type="checkbox"/>	<input type="checkbox"/>						
2943										<input type="checkbox"/>	<input type="checkbox"/>						
2853										<input type="checkbox"/>	<input type="checkbox"/>						
2953										<input type="checkbox"/>	<input type="checkbox"/>						

good best

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum Alloys	Copper Alloys	Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH									









EXOCARB® AERO

2021										<input type="checkbox"/>	<input type="checkbox"/>						
2022										<input type="checkbox"/>	<input type="checkbox"/>						
2023										<input type="checkbox"/>	<input type="checkbox"/>						
2024										<input type="checkbox"/>	<input type="checkbox"/>						
2041										<input type="checkbox"/>	<input type="checkbox"/>						
2042										<input type="checkbox"/>	<input type="checkbox"/>						
2043										<input type="checkbox"/>	<input type="checkbox"/>						
2048										<input type="checkbox"/>	<input type="checkbox"/>						
2010										<input type="checkbox"/>	<input type="checkbox"/>						
8120										<input type="checkbox"/>	<input type="checkbox"/>						

good best









List	Item	Brand/Series	Inch/Metric	Material	Coating	Size Range	Features	Page	Tech Page
------	------	--------------	-------------	----------	---------	------------	----------	------	-----------

Composite Routers

2061		EXOPRO® AERO-BNC	Inch	Carbide	Diamond	1/8" - 1/2"	Nick Router	952	1225
2066		EXOPRO® AERO-HBC	Inch	Carbide	Diamond	1/8" - 1/2"	Compression Router, 30° Helix	953	1225
2064		EXOPRO® AERO-HBC 45	Inch	Carbide	Diamond	1/4" - 1/2"	Compression Router, 45° Helix	954	1225
2068		EXOPRO® AERO-HBC 60	Inch	Carbide	Diamond	1/4" - 1/2"	Compression Router, 60° Helix	955	1226
2680		EXOPRO® AERO-REC	Inch	Carbide	Diamond	15/64" - 1/2"	Rougher Router	956	1227
2650		EXOPRO® AERO-MFR	Inch	Carbide	Diamond	1/4" - 1/2"	Finishing Router	957	1228
668		AERO-HBC 60	Inch	Carbide	Bright	1/4" - 1/2"	Compression Router, 60° Helix	958	1226
641R		AERO-HFR	Inch	Carbide	Bright	3/16" - 1/2"	Hand Router	959	1229

List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------

HY-PRO® CARB V_G_K (Variable Geometry)

VG441		Inch	4	Multiple	Carbide	TiAlN	1/8" - 1"	Square End	960	1230
VG434		Inch	4	Multiple	Carbide	TiAlN	1/8" - 1"	Corner Radius	961	1230
VG436		Inch	4	Multiple	Carbide	TiAlN	1/8" - 1"	Corner Chamfer	962	1230
VG446		Inch	4	Multiple	Carbide	TiAlN	1/4" - 1"	Red. Neck, Corner Radius/ Corner Chamfer	963	1231
VG464		Inch	4	Multiple	Carbide	TiAlN	1/4" - 1"	Extended Length, Square End/ Corner Chamfer	964	1231
VG441BN		Inch	4	Multiple	Carbide	TiAlN	1/8" - 1-1/4"	Ball Nose	965	1232
VG541		Inch	5	Multiple	Carbide	TiAlN	1/8" - 1"	Square End	966	1233
VG534		Inch	5	Multiple	Carbide	TiAlN	3/16" - 1"	Corner Radius	967-968	1233

List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				

Composite Routers

2061	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
2066	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
2064	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
2068	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
2680	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
2650	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
668			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
641R	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			

Good Best

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC












HY-PRO® CARB V_G_x (Variable Geometry)

VG441	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG434	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG436	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG446	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG464	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG441BN	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG541	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
VG534	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	








good best

List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------

HY-PRO® CARB Square End

HP421		Inch/Metric	2		Carbide	TiAIN	3/64" - 1", 3mm-25mm		969-970	1234-1238
HP441		Inch/Metric	4		Carbide	TiAIN	3/64" - 1", 3mm-25mm		969-970	1234-1238
HP460		Inch/Metric	3		Carbide	TiAIN	1/8" - 1", 3mm-25mm	High Helix	971	1239-1240
HP450		Inch/Metric	4, 6, 8		Carbide	TiAIN	1/8" - 1", 3mm-25mm		972	1241
HP453		Metric	4		Carbide	TiAIN	4mm - 20mm	Super Tough Mills	973	1243
HP456		Metric	4		Carbide	TiAIN	6mm - 12mm	Super Tough Mills, Corner Radius	973	1243
HP451		Inch/Metric	4		Carbide	TiAIN	1/8" - 1", 4mm-20mm	Super Tough Mills	974	1242-1243
HP400		Inch/Metric	4		Carbide	TiAIN	1/4" - 1", 3mm-25mm	Rougher	975	1244-1245
HP410		Inch/Metric	2		Carbide	TiAIN	1/32" - 3/16", 0.5mm-2.5mm	Short Length, Long Neck	976-977	1246
HP411		Inch/Metric	4		Carbide	TiAIN	1/8" - 1/4", 3mm - 6mm	Short Length, Long Neck	978	1247
HP455		Inch/Metric	5		Carbide	TiAIN	1/8" - 1", 3mm-25mm	Corner Protection	979	1248

HY-PRO® CARB Ball End

HP421BN		Inch/Metric	2		Carbide	TiAIN	3/64" - 1", 1mm-20mm	Ball End	980-981	1249-1250
HP441BN		Inch/Metric	4		Carbide	TiAIN	3/64" - 1", 1mm-20mm	Ball End	980-981	1249-1250
HP416		Inch/Metric	2		Carbide	TiAIN	1/32" - 1/2", 1mm-25mm	Ball End	982	1251-1252
HP418		Inch/Metric	2		Carbide	TiAIN	3/32" - 3/8", 1mm-12mm	Ball End, Pencil Neck	983	1253-1254
HP419		Inch/Metric	2		Carbide	TiAIN	1/32" - 3/16", 0.5mm-6mm	Ball End, Long Neck	984	1255-1256
HP419L		Metric	2		Carbide	TiAIN	0.6mm - 3mm	Ball End, Long Neck	985	1255-1256
HP413		Inch/Metric	2		Carbide	TiAIN	1/32" - 3/16", 1mm-6mm	Ball End	986	1255-1256

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													

HY-PRO® CARB Square End

HP421	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP441	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP460	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP453	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP456	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP451	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP400	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP410	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP411	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP455	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	





HY-PRO® CARB Ball End

HP421BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP441BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP416	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP418	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP419	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP419L	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP413	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	











good best

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

HY-PRO® CARB Corner Radius

HP432		Inch/ Metric	2		Carbide	TiAlN	1/8" - 1", 3mm-12mm	Corner Radius	987-988	1257-1260
HP434		Inch/ Metric	4		Carbide	TiAlN	1/8" - 1", 3mm-12mm	Corner Radius	987-988	1257-1260
HP433		Metric	2		Carbide	TiAlN	3mm - 12mm	Corner Radius	989	1257-1260
HP435		Metric	4		Carbide	TiAlN	3mm - 12mm	Corner Radius	990	1258-1260

Square & Corner Radius

400		Inch/ Metric	4		Carbide	Bright*	1/4" - 1", 6mm-25mm	Roughy Mills	991	1272-1273
415		Inch			Carbide	Bright*	1/8" - 1"	Toughy Mills, Standard Cut	992	-
415C		Inch			Carbide	Bright*	1/8" - 1"	Toughy Mills, Coarse Cut	992	-
402		Inch/ Metric	2		Carbide	TiAlN, TiCN, Bright*	1/32" - 1", 5mm-25mm	General Purpose	993-995	1261-1267
403		Inch/ Metric	3		Carbide	TiAlN, Bright*	1/32" - 1", 5mm-25mm	General Purpose	993-995	1261-1267
404		Inch/ Metric	4		Carbide	TiAlN, Bright*	1/32" - 1", 5mm-25mm	General Purpose	993-995	1261-1267
408		Inch	Multiple		Carbide	Bright*	1/8" - 1"	Slow Spiral	996	1265-1267
409		Inch	4		Carbide	Bright*	1/16" - 1"	Slow Spiral	996	1265-1267
452		Inch	2		Carbide	TiAlN, Bright*	1/16" - 1"	Plus Tolerance	997	1261-1267
454		Inch	4		Carbide	Bright*	1/16" - 1"	Plus Tolerance	997	1261-1267
412		Inch/ Metric	2		Carbide	Bright*	1/32" - 3/4", 1mm-12mm	Stub Length	998-999	1261-1267
414		Inch/ Metric	4		Carbide	TiAlN, Bright*	1/32" - 3/4", 1mm-12mm	Stub Length	998-999	1261-1267
462		Inch/ Metric	2		Carbide	TiCN, TiAlN, Bright*	1/8" - 1", 3mm-25mm	Long Length	1000-1001	1261-1267
464		Inch/ Metric	4		Carbide	TiCN, TiAlN, Bright*	1/8" - 1", 3mm-25mm	Long Length	1000-1001	1261-1267
482		Inch/ Metric	2		Carbide	TiCN, TiAlN, Bright*	1/8" - 1", 3mm-25mm	Extra-Long Length	1002-1003	1261-1267
484		Inch/ Metric	4		Carbide	TiCN, TiAlN, Bright*	1/8" - 1", 3mm-25mm	Extra-Long Length	1002-1003	1261-1267

* Other coatings are available on request.

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

HY-PRO® CARB Corner Radius

HP432	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP434	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP433	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
HP435	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Square & Corner Radius

400	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
415			<input type="checkbox"/>	<input type="checkbox"/>										<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
415C			<input type="checkbox"/>	<input type="checkbox"/>										<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
402	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
403	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
404	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
408	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
409	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
452	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
454	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
412	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
414	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
462	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
464	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
482	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>			
484	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		

good best



List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------

Square & Corner Radius

495		Inch	2		Carbide	Bright*	1/8" - 1"	Corner Radius	1004	1261-1267
496		Inch	4		Carbide	TiALN, Bright*	1/8" - 1"	Corner Radius	1004	1261-1267

Square End

455C		Inch	5		Carbide	TiCN, TiALN, Bright*	1/8" - 1"	Corner Protection	1005	1265-1267
460C		Inch/Metric	3		Carbide	Bright*	1/8" - 1", 6mm - 25mm	High Helix	1006	1261-1264
445		Inch/Metric	3		Carbide	Bright*	1/16" - 1", 1mm-20mm		1007	1261-1264
461		Inch/Metric	6		Carbide	TiALN, Bright*	1/8" - 1", 3mm-25mm		1008	1265-1267
447		Inch	4		Carbide	TiALN, Bright*	1/16" - 1"	RHC/LHS	1009	1265-1267
492		Inch	2		Carbide	Bright*	0.015" - 0.060"	Miniature	1010	1274
494		Inch	4		Carbide	Bright*	0.015" - 0.060"	Miniature	1010	1274

Ball End

402BN		Inch/Metric	2		Carbide	TiAIN, Bright*	1/32" - 1", 0.5mm-25mm	Ball End	1011-1013	1269-1271
403BN		Inch/Metric	3		Carbide	TiAIN, Bright*	1/32" - 1", 0.5mm-25mm	Ball End	1011-1013	1269-1271
404BN		Inch/Metric	4		Carbide	TiAIN, Bright*	1/32" - 1", 0.5mm-25mm	Ball End	1011-1013	1269-1271
452BN		Inch	2		Carbide	Bright*	1/16" - 1"	Ball End, Plus Tolerance	1014	1269
412BN		Inch/Metric	2		Carbide	TiALN, Bright*	1/32" - 3/4", 1mm - 12mm	Ball End, Stub Length	1015-1016	1269-1271
414BN		Inch/Metric	4		Carbide	TiCN, TiALN, Bright*	1/32" - 3/4", 1mm - 12mm	Ball End, Stub Length	1015-1016	1269-1271
462BN		Inch/Metric	2		Carbide	TiCN, Bright*	1/8" - 1", 3mm-25mm	Ball End, Long Length	1017	1269-1271
464BN		Inch/Metric	4		Carbide	TiCN, TiALN, Bright*	1/8" - 1", 3mm-25mm	Ball End, Long Length	1017	1269-1271
482BN		Inch/Metric	2		Carbide	TiALN, Bright*	1/8" - 1", 3mm-25mm	Ball End, Extra Long Length	1018-1019	1269-1271
484BN		Inch/Metric	4		Carbide	TiALN, Bright*	1/8" - 1", 3mm-25mm	Ball End, Extra Long Length	1018-1019	1269-1271
497		Inch/Metric	2		Carbide	Bright*	1/8" - 1", 3mm-20mm	Ball End, Long Shank	1020	1268

* Other coatings are available on request.



List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Square & Corner Radius

495	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
496	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Square End

455C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
460C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		
445	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
461	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
447	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
492	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
494	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		











Ball End

402BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
403BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
404BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
452BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
412BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
414BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
462BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
464BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
482BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>			
484BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		
497	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>		

good best

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------




Double End

442		Inch	2		Carbide	TiALN, Bright*	1/8" - 1/2"		1021	1261- 1267
444		Inch	4		Carbide	TiALN, Bright*	1/8" - 1/2"		1021	1261- 1267
422		Inch	2		Carbide	TiALN, Bright*	1/32" - 1/2"	Stub Length	1022	1261- 1267
423		Inch	3		Carbide	TiALN, Bright*	1/32" - 1/2"	Stub Length	1022	1261- 1267
424		Inch	4		Carbide	TiALN, Bright*	1/32" - 1/2"	Stub Length	1022	1261- 1267
442BN		Inch	2		Carbide	Bright*	1/8" - 1/2"	Ball End	1023	1269- 1271
444BN		Inch	4		Carbide	TiALN, Bright*	1/8" - 1/2"	Ball End	1023	1269- 1271
422BN		Inch	2		Carbide	TiALN, Bright*	1/32" - 1/2"	Ball End, Stub Length	1024	1269- 1271
423BN		Inch	3		Carbide	Bright*	1/32" - 1/2"	Ball End, Stub Length	1024	1269- 1271
424BN		Inch	4		Carbide	TiALN, Bright*	1/32" - 1/2"	Ball End, Stub Length	1024	1269- 1271

* Other coatings are available on request.

List	Item	Inch/ Metric	Length of Cut	Material	Coating	Size Range	Features	Product Page
------	------	-----------------	------------------	----------	---------	---------------	----------	-----------------

Carbide Routers

500		Inch		Carbide	Bright	3/32" - 1/2"	2 Flute, Straight	1025
502		Inch		Carbide	Bright	3/32" - 1/2"	3 Flute, Straight	1025
640		Inch		Carbide	Bright	1/16" - 1/2"	Fiberglass Routers, Diamond Cut	1026

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC












Double End

442	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
444	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
422	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
423	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
424	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
442BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
444BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
422BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
423BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
424BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>




good best

List	Item	Inch/Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-------------	---------------	---------------	----------	---------	------------	----------	--------------	-----------





SOMTA

04V-SO		NEW Inch/Metric	4	Stub	Carbide	TiALN	3/16" - 3/4", 5mm-20mm	Variable Index	1027	1275-1276
03V-SO		NEW Inch/Metric	4	Regular	Carbide	TiALN	1/4" - 1", 5mm-20mm	Variable Index	1028-1029	1275-1276
05V-SO		NEW Inch/Metric	5	Regular	Carbide	TiALN	3/16" - 3/4", 5mm-20mm	Variable Index	1030-1031	1277-1278
03A-SO		NEW Metric	2	Regular	Carbide	TiALN	1mm - 20mm	Square	1032	1279
03K-SO		NEW Metric	4	Regular	Carbide	TiALN	1mm - 20mm	Square	1033	1280
03M-SO		NEW Metric	2	Regular	Carbide	TiALN	1mm - 20mm	Ball Nose	1034	1279
03P-SO		NEW Metric	4	Regular	Carbide	TiALN	1mm - 20mm	Ball Nose	1035	1280
03E-SO		NEW Inch/Metric	4	Regular	Carbide	TiALN	1/4" - 1", 6mm-20mm	Fine Pitch, Rougher	1036	1281
03C-SO		NEW Inch	3	Regular	Carbide	Bright	1/4" - 1"	Coarse Pitch, Rougher	1037	1282
03F-SO		NEW Inch/Metric	4	Regular	Carbide	TiALN	1/4" - 1", 6mm-20mm	Fine Pitch, Flat Crest, Rougher	1038-1039	1283
03D-SO		NEW Inch	3	Regular	Carbide	TiALN	1/4" - 1"	Coarse Pitch, Flat Crest, Rougher	1040	1284

EXOMINI VC-10

673		Inch	2	Regular	VC-10	TiN	1/32" - 3/16"		1041	1297-1298
676		Inch	4	Stub	VC-10	TiN	1/16" - 3/16"		1042	1299-1300
677		Inch	4	Regular	VC-10	TiN	1/16" - 3/16"		1042	1299-1300

EXOMILL VC-10

620		Inch	2	Regular	VC-10	Bright*	1/8" - 1-1/2"		1043	1297-1298
621		Inch	2	Regular	VC-10	Bright*	1/8" - 1-1/2"	Ball End	1043	1301
641		Inch	4,6	Regular	VC-10	Bright*	1/8" - 2"		1044	1299-1300
644		Inch	4,6	Regular	VC-10	Bright*	3/8" - 1-1/2"	Ball End	1045	1301
646		Inch	4,6	Long	VC-10	Bright*	1/4" - 2"		1046	1299-1300
660		Inch	3,4	Regular	VC-10	Bright*	1/4" - 1"	High Helix	1046	1294

* Other coatings are available on request.

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

SOMTA

04V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
03V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
05V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			
03A-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
03K-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
03M-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
03P-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
03E-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input type="checkbox"/>			
03C-SO										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
03F-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
03D-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				

EXOMINI VC-10

673	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
676	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
677	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		



EXOMILL VC-10

620	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
621	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
641	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
644	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
646	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
660	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			











good best

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------









HY-PRO® V

573		Inch	2	Regular	HSSE	TiCN, Bright*	1/8" - 1"		1047	1295
574		Inch	4, 6	Regular	HSSE	TiCN, Bright*	1/8" - 1"		1048	1295- 1296

Roughing End Mills

690		Inch	Multiple	Regular	HSSE	TiN	1/4" - 2"	EXOTIN®, Non Center-Cutting	1049	1293
450		Inch	Multiple	Stub, Reg., Long	HSS-Co	TiCN, Bright*	3/16" - 2"	Fine Pitch, Non Center- Cutting	1050	1285
455		Inch	Multiple	Stub, Reg., Long	HSS-Co	TiCN, TiAlN	1/4" - 2"	Fine Pitch	1051	1286
420		Inch	3, 4, 6	Stub	HSS-Co	Bright*	1/4" - 1-1/2"	Fine Pitch, Center Cutting	1052	1285
460		Inch	4, 5, 6	Regular, Long	HSS-Co	Bright*	1/2" - 1-1/2"	Fine Pitch, Center Cutting	1052	1291- 1292
410		Inch	3	Stub	HSS-Co	Bright*	1/2" - 1"		1053	1289
430E		Inch	3	Reg., Med., Long	HSS-Co	Bright*	3/8" - 1-1/2"		1053	1288
490		Inch	Multiple	Stub, Reg., Med., Long	HSS-Co	Bright*	1/4" - 2"	General Purpose, Non Center-Cutting	1054	1289
440		Inch	4, 6, 8	Reg., Long	HSS-Co	Bright*	1/2" - 2"	Ball End, General Purpose	1055	1287
470		Inch	Multiple	Stub, Reg., Long	HSS-Co	Bright*	1/4" - 2"	Rough & Finish	1056	1290

Single End Mills

520		Inch	2	Regular	HSS-Co	TiN, Bright*	1/8" - 2"		1057	1297- 1298
580		Metric	2	Regular	HSS-Co	Bright*	3mm - 50mm		1058	1302
525		Inch	2	Long	HSS-Co	Bright*	3/8" - 2"		1059	1297- 1298
527		Inch	2	Regular	HSS-Co	Bright*	1/8" - 1-1/4"	Reduced Neck	1059	1297- 1298
530		Inch	2	Regular	HSS-Co	Bright*	1/4" - 2"	High Helix	1060	1297- 1298
535		Inch	2	Long	HSS-Co	Bright*	1/4" - 2"	High Helix	1060	1297- 1298
521		Inch	2	Regular	HSS-Co	Bright*	1/8" - 1-1/2"	Ball End	1061	1301
526		Inch	2	Regular	HSS-Co	Bright*	1/8" - 1"	Ball End, Reduced Neck	1061	1301

* Other coatings are available on request.

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC

HY-PRO® V

573	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
574	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

Roughing End Mills

690	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
455	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
420	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
460	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
410	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			
430E										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
490	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			
440	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			
470	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			













Single End Mills

520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
580	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
525	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
527	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
530	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
535	<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
521	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
526	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		







good best

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

Single End Multiple Flute

531		Inch	3	Regular	HSS-Co	Bright*	1/8" - 2"		1062	1304
581		Metric	4, 6	Regular	HSS-Co	Bright*	3mm - 45mm	Non Center-Cutting	1063	1303
536		Inch	3	Long	HSS-Co	Bright*	1/4" - 2"		1064	1304
541		Inch	4, 6	Regular	HSS-Co	TiCN, TiN, TiAlN, Bright*	1/8" - 2"		1065	1299- 1300
548		Inch	4	Medium	HSS-Co	TiCN, Bright*	5/8" - 1-1/2"		1066	1299- 1300
546		Inch	4, 6	Long	HSS-Co	TiCN, Bright*	1/4" - 2"		1066	1299- 1300
558		Inch	4, 6	Extra Long	HSS-Co	TiCN, Bright*	1/4" - 2"		1067	1299- 1300
544		Inch	4	Regular	HSS-Co	Bright*	3/8" - 1-1/2"	Ball End	1068	1301
540		Inch	4, 6, 8	Regular	HSS-Co	TiN, Bright*	1/8" - 2"	Non Center-Cutting	1069	1299- 1300
547		Inch	4, 6, 8	Medium	HSS-Co	Bright*	1" - 2"	Non Center-Cutting	1070	1299- 1300
545		Inch	4, 6, 8	Long	HSS-Co	Bright*	1/4" - 2"	Non Center-Cutting	1070	1299- 1300
557		Inch	4, 6	Extra Long	HSS-Co	Bright*	1/4" - 2"	Non Center-Cutting	1071	1299- 1300

Single End Tapered

591		Inch	3	Reg., Long, Extra Long	HSS-Co	Bright*	1/16" - 5/8"	1° Taper per Side	1072	1305
593		Inch	3	Reg., Long, Extra Long	HSS-Co	Bright*	1/16" - 5/8"	2° Taper per Side	1072	1306
594		Inch	3	Reg., Long, Extra Long	HSS-Co	Bright*	3/32" - 1/2"	3° Taper per Side	1073	1306
595		Inch	3	Reg., Long, Extra Long	HSS-Co	Bright*	3/32" - 1/2"	5° Taper per Side	1074	1307
596		Inch	3	Regular, Long	HSS-Co	Bright*	5/64" - 1/2"	7° Taper per Side	1075	1307
597		Inch	3	Regular, Long	HSS-Co	Bright*	3/32" - 1/4"	10° Taper per Side	1075	1308

* Other coatings are available on request.

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Single End Multiple Flute

531	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
581	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
536	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
541	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
548	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
546	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
558	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
544	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
547	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
545	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
557	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>




Single End Tapered

591	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
593	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
594	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
595	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
596	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
597	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>




good best

List	Item	Inch/ Metric	No. of Flutes	Length of Cut	Material	Coating	Size Range	Features	Product Page	Tech Page
------	------	-----------------	------------------	------------------	----------	---------	---------------	----------	-----------------	--------------

Double End Mills

522		Inch	2	Regular	HSS-Co	TiN, Bright*	1/8" - 1"		1076	1297- 1298
582		Metric	2	Regular	HSS-Co	Bright*	1mm - 25mm		1077	1302
532		Inch	3	Regular	HSS-Co	Bright*	1/8" - 1"		1078	1304
542		Inch	4	Regular	HSS-Co	TiN, Bright*	1/8" - 1"	Non Center-Cutting	1079	1299- 1300
543		Inch	4	Regular	HSS-Co	Bright*	1/8" - 1"		1080	1299- 1300
523		Inch	2	Regular	HSS-Co	Bright*	1/8" - 1"	Ball End	1080	1301
562		Inch	2	Stub	HSS-Co	Bright*	1/32" - 3/16"	Miniature	1081	-
563		Inch	2	Regular	HSS-Co	Bright*	1/32" - 3/16"	Miniature	1081	-
564		Inch	2	Long	HSS-Co	Bright*	1/16" - 3/16"	Miniature	1082	-
566		Inch	4	Stub	HSS-Co	Bright*	1/16" - 3/16"	Miniature	1082	-
567		Inch	4	Regular	HSS-Co	Bright*	1/16" - 3/16"	Miniature, Non Center-Cutting	1083	-
568		Inch	4	Long	HSS-Co	Bright*	1/16" - 3/16"	Miniature, Non Center-Cutting	1083	-
570		Inch	2	Stub	HSS-Co	Bright*	1/16" - 3/16"	Ball End, Miniature	1084	-
571		Inch	2	Regular	HSS-Co	Bright*	1/16" - 3/16"	Ball End, Miniature	1084	-

SOMTA

310-SO		NEW Metric	2	Regular	HSS-Co8	TiALN	2mm - 25mm	Square	1085	1309
314-SO		NEW Metric	4, 6	Regular	HSS-Co8	TiALN	3mm - 25mm	Square	1086	1310
312-SO		NEW Metric	2	Regular	HSS-Co8	TiALN	2mm - 25mm	Ball Nose	1087	1309

* Other coatings are available on request.

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC

Double End Mills

522	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
582	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
532	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
542	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
543	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
523	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
562	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
563	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
564	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
566	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
567	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
568	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
571	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

SOMTA

310-S0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
314-S0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
312-S0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List No.	Item	Inch/ Metric	Material	Coating	Feature	Product Page
----------	------	-----------------	----------	---------	---------	-----------------











Carbide Burs 1/4" Shank

801		Inch, Metric	Carbide	Bright	Cylindrical, Medium Tough Cut	1089
802		Inch, Metric	Carbide	Bright	Cylindrical Ball End, Medium Tough Cut	1089
803		Inch, Metric	Carbide	Bright	Round Nose Tree, Medium Tough Cut	1089
901		Inch, Metric	Carbide	Bright	Cylindrical, Medium Right Hand Spiral	1090
902		Inch, Metric	Carbide	Bright	Cylindrical Ball End, Medium Right Hand Spiral	1090
903		Inch, Metric	Carbide	Bright	Round Nose Tree, Medium Right Hand Spiral	1090
804		Inch, Metric	Carbide	Bright	Pointed Tree, Medium Tough Cut	1091
805		Inch, Metric	Carbide	Bright	Pointed Cone, Medium Tough Cut	1091
806		Inch, Metric	Carbide	Bright	Egg Shape, Medium Tough Cut	1091
904		Inch, Metric	Carbide	Bright	Pointed Tree, Medium Right Hand Spiral	1092
905		Inch, Metric	Carbide	Bright	Pointed Cone, Medium Right Hand Spiral	1092
906		Inch, Metric	Carbide	Bright	Egg Shape, Medium Right Hand Spiral	1092
807		Inch, Metric	Carbide	Bright	14° Included Angle, Medium Tough Cut	1093
808		Inch, Metric	Carbide	Bright	Ball Shape, Medium Tough Cut	1093
849		Inch, Metric	Carbide	Bright	90° Cone, Medium Tough Cut	1093
907		Inch, Metric	Carbide	Bright	14° Included Angle, Medium Right Hand Spiral	1094
908		Inch, Metric	Carbide	Bright	Ball Shape, Medium Right Hand Spiral	1094
949		Inch, Metric	Carbide	Bright	90° Cone, Medium Right Hand Spiral	1094
850		Inch, Metric	Carbide	Bright	60° Cone, Medium Tough Cut	1095
851		Inch, Metric	Carbide	Bright	Flame Shape, Medium Tough Cut	1095
852		Inch, Metric	Carbide	Bright	Inverted Taper, Medium Tough Cut	1095
950		Inch, Metric	Carbide	Bright	60° Cone, Medium Right Hand Spiral	1096
951		Inch, Metric	Carbide	Bright	Flame Shape, Medium Right Hand Spiral	1096
952		Inch, Metric	Carbide	Bright	Inverted Taper, Medium Right Hand Spiral	1096










List No.	Item	Inch/ Metric	Material	Coating	Feature	Product Page
----------	------	-----------------	----------	---------	---------	-----------------







Carbide Burs 6" Long Shank

861		Inch, Metric	Carbide	Bright	Cylindrical, Medium Tough Cut	1097
862		Inch, Metric	Carbide	Bright	Cylindrical Ball End, Medium Tough Cut	1097
863		Inch, Metric	Carbide	Bright	Round Nose Tree, Medium Tough Cut	1097
961		Inch, Metric	Carbide	Bright	Cylindrical, Medium Right Hand Spiral	1098
962		Inch, Metric	Carbide	Bright	Cylindrical Ball End, Medium Right Hand Spiral	1098
963		Inch, Metric	Carbide	Bright	Round Nose Tree, Medium Right Hand Spiral	1098
867		Inch, Metric	Carbide	Bright	14° Included Angle, Medium Tough Cut	1099
868		Inch, Metric	Carbide	Bright	Ball Shape, Medium Tough Cut	1099
967		Inch, Metric	Carbide	Bright	14° Included Angle, Medium Right Hand Spiral	1100
968		Inch, Metric	Carbide	Bright	Ball Shape, Medium Right Hand Spiral	1100

Carbide Burs for Aluminum

881		Inch, Metric	Carbide	Bright	Cylindrical, Aluminum Cut	1101
882		Inch, Metric	Carbide	Bright	Cylindrical Ball End, Aluminum Cut	1101
883		Inch, Metric	Carbide	Bright	Round Nose Tree, Aluminum Cut	1101
885		Inch, Metric	Carbide	Bright	Flame Shape, Aluminum Cut	1102
886		Inch, Metric	Carbide	Bright	Egg Shape, Aluminum Cut	1102
887		Inch, Metric	Carbide	Bright	14° Included Angle, Aluminum Cut	1102
888		Inch, Metric	Carbide	Bright	Ball Shape, Aluminum Cut	1102

Carbide Burs 1-1/2" OAL

800		Inch, Metric	Carbide	Bright	Tough Cut	1103-1104
900		Inch, Metric	Carbide	Bright	Medium Right Hand Spiral	1105-1106
815		Inch, Metric	Carbide	Bright	Tough Cut	1107
915		Inch, Metric	Carbide	Bright	Medium Right Hand Spiral	1108
820		Inch, Metric	Carbide	Bright	Tough Cut	1109
920		Inch, Metric	Carbide	Bright	Medium Right Hand Spiral	1110



A Brand® AE-VMS


Advanced Performance Anti-Vibration Carbide End Mills

List 8200

AE-VMS, 4 Flute, Multiple Lengths

NEW SIZES	SPEED FEED P1112-1113	CARBIDE	DUR	Var.°	SHRINK FIT
------------------	---------------------------------	----------------	------------	--------------	-------------------

Milling Diameter Tolerance	
D < 1/2	0/-0.008"
D ≥ 1/2	0/-0.0012"





Units: Inch

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D				
82004421	5/64	2	0.117	1/8	1
82004621	3/32	2	9/64	1/8	1
82004821	7/64	2	0.164	1/8	1
82005021	1/8	2	3/16	1/8	1
82005221	9/64	2	0.211	3/16	1
82005421	5/32	2	15/64	3/16	1
82000021	3/16	2	7/16	3/16	2
82000221	1/4	2-1/2	7/16	1/4	2
82000421	5/16	2-1/2	13/16	5/16	2
82000621	3/8	2-1/2	1/2	3/8	2
82000821	3/8	2-1/2	7/8	3/8	2
82001021	7/16	2-3/4	1	7/16	2

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D				
82001221	1/2	2-1/2	5/8	1/2	2
82001421	1/2	3	1	1/2	2
82001621	1/2	3-1/2	1-1/4	1/2	2
82001821	5/8	3	3/4	5/8	2
82002021	5/8	3-1/2	1-1/4	5/8	2
82002221	5/8	5	1-5/8	5/8	2
82002421	3/4	3-1/2	7/8	3/4	2
82002621	3/4	4	1-1/2	3/4	2
82002821	3/4	4	1-5/8	3/4	2
82003021	1	4	1-1/2	1	2
82003221	1	5	2	1	2
82003421	1	5	2-1/2	1	2

Packed: 1 pc.
Available Duarise coating only.

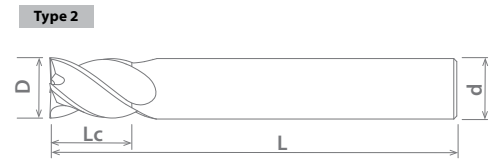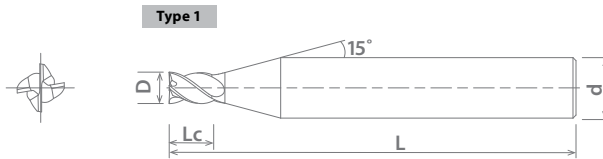

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 8205

AE-VMS, 4 Flute, Regular Length

NEW SIZES	SPEED FEED P1112-1113	CARBIDE	DUR		Var.	SHRINK FIT
------------------	---------------------------------	----------------	------------	--	-------------	-------------------

Milling Diameter Tolerance	
D ≤ 12mm	0/-0.020mm
D > 12mm	0/-0.030mm





Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D				
8555830	3	60	8	6	1
8555840	4	60	11	6	1
8555850	5	60	13	6	1
8555860	6	60	13	6	2
8555880	8	70	19	8	2

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D				
8555900	10	80	22	10	2
8555920	12	90	26	12	2
8555960	16	100	32	16	2
8556000	20	110	40	20	2
8556010	25	120	50	25	2

Packed: 1 pc.
Available Duarise coating only.

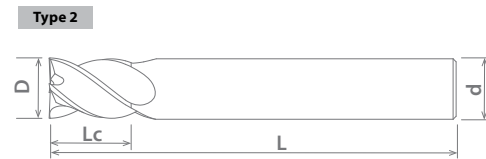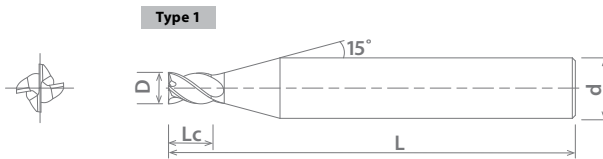

Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
8205	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand® AE-CR-VMS

Advanced Performance Anti-Vibration Carbide End Mills


List 8210

AE-CR-VMS, 4 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1114-1115	CARBIDE	DUR	Var.°	SHRINK FIT
---------------------------------	----------------	------------	--------------	-------------------

Milling Diameter Tolerance	
D < 1/2	0/-0.008"
D ≥ 1/2	0/-0.0012"

Radius Tolerance	
0.015 ≤ R ≤ 0.125	0/-0.0008"



Units: Inch

EDP Number	Mill Diameter D	Corner Radius R	OAL L	Length of Cut Lc	Shank Diameter d	EDP Number	Mill Diameter D	Corner Radius R	OAL L	Length of Cut Lc	Shank Diameter d
82100021	3/16	0.015	2	7/16	3/16	82105221	1/2	0.015	3-1/2	1-1/4	1/2
82100221	3/16	0.030	2	7/16	3/16	82105421	1/2	0.030	3-1/2	1-1/4	1/2
82100421	1/4	0.015	2-1/2	7/16	1/4	82105621	1/2	0.045	3-1/2	1-1/4	1/2
82100621	1/4	0.030	2-1/2	7/16	1/4	82105821	1/2	0.060	3-1/2	1-1/4	1/2
82100821	5/16	0.015	2-1/2	13/16	5/16	82106021	1/2	0.090	3-1/2	1-1/4	1/2
82101021	5/16	0.030	2-1/2	13/16	5/16	82106221	5/8	0.030	3	3/4	5/8
82101221	3/8	0.015	2-1/2	1/2	3/8	82106421	5/8	0.060	3	3/4	5/8
82101421	3/8	0.030	2-1/2	1/2	3/8	82106621	5/8	0.090	3	3/4	5/8
82101621	3/8	0.045	2-1/2	1/2	3/8	82106821	5/8	0.125	3	3/4	5/8
82101821	3/8	0.060	2-1/2	1/2	3/8	82107021	5/8	0.030	3-1/2	1-1/4	5/8
82102021	3/8	0.015	2-1/2	7/8	3/8	82107221	5/8	0.060	3-1/2	1-1/4	5/8
82102221	3/8	0.030	2-1/2	7/8	3/8	82107421	5/8	0.090	3-1/2	1-1/4	5/8
82102421	3/8	0.045	2-1/2	7/8	3/8	82107621	5/8	0.125	3-1/2	1-1/4	5/8
82102621	3/8	0.060	2-1/2	7/8	3/8	82107821	3/4	0.030	3-1/2	7/8	3/4
82102821	7/16	0.015	2-3/4	1	7/16	82108021	3/4	0.060	3-1/2	7/8	3/4
82103021	7/16	0.030	2-3/4	1	7/16	82108221	3/4	0.090	3-1/2	7/8	3/4
82103221	1/2	0.015	2-1/2	5/8	1/2	82108421	3/4	0.125	3-1/2	7/8	3/4
82103421	1/2	0.030	2-1/2	5/8	1/2	82108621	3/4	0.030	4	1-1/2	3/4
82103621	1/2	0.045	2-1/2	5/8	1/2	82108821	3/4	0.060	4	1-1/2	3/4
82103821	1/2	0.060	2-1/2	5/8	1/2	82109021	3/4	0.090	4	1-1/2	3/4
82104021	1/2	0.090	2-1/2	5/8	1/2	82109221	3/4	0.125	4	1-1/2	3/4
82104221	1/2	0.015	3	1	1/2	82109421	1	0.030	4	1-1/2	1
82104421	1/2	0.030	3	1	1/2	82109621	1	0.060	4	1-1/2	1
82104621	1/2	0.045	3	1	1/2	82109821	1	0.090	4	1-1/2	1
82104821	1/2	0.060	3	1	1/2	82109921	1	0.125	4	1-1/2	1
82105021	1/2	0.090	3	1	1/2						

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8210	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 8215

AE-CR-VMS, 4 Flute, Regular Length, Corner Radius

SPEED FEED P1114-1115	CARBIDE	DUR		Var.°	SHRINK FIT
---------------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D ≤ 12mm	0/-0.020mm
D > 12mm	0/-0.030mm

Radius Tolerance	
0.2 ≤ R ≤ 3	0/-0.02mm





Units: mm

EDP Number	Mill Diameter D	Corner Radius R	OAL L	Length of Cut Lc	Shank Diameter d	Type
8556050	3	0.2	60	8	6	1
8556060	3	0.5	60	8	6	1
8556070	4	0.2	60	11	6	1
8556080	4	0.5	60	11	6	1
8556090	4	1.0	60	11	6	1
8556100	5	0.2	60	13	6	1
8556110	5	0.5	60	13	6	1
8556120	5	1.0	60	13	6	1
8556130	6	0.3	60	13	6	2
8556140	6	0.5	60	13	6	2
8556150	6	1.0	60	13	6	2
8556160	8	0.3	70	19	8	2
8556170	8	0.5	70	19	8	2
8556180	8	1.0	70	19	8	2

EDP Number	Mill Diameter D	Corner Radius R	OAL L	Length of Cut Lc	Shank Diameter d	Type
8556190	8	1.5	70	19	8	2
8556200	8	2.0	70	19	8	2
8556210	10	0.3	80	22	10	2
8556220	10	0.5	80	22	10	2
8556230	10	1.0	80	22	10	2
8556240	10	1.5	80	22	10	2
8556250	10	2.0	80	22	10	2
8556260	10	3.0	80	22	10	2
8556270	12	0.5	90	26	12	2
8556280	12	1.0	90	26	12	2
8556290	12	1.5	90	26	12	2
8556300	12	2.0	90	26	12	2
8556310	12	3.0	90	26	12	2

Packed: 1 pc.
Available Duarise coating only.

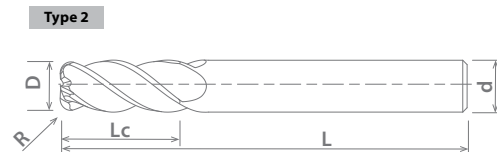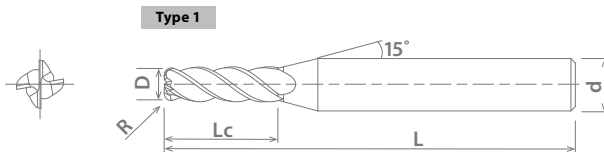

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8215	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






A Brand® AE-LN-CR-VMS

Advanced Performance Anti-Vibration Carbide End Mills

List 8220

AE-LN-CR-VMS, 4 Flute, Long Neck, Long Reach, Corner Radius



SPEED FEED P1119	CARBIDE	DUR		Var.°	SHRINK FIT
----------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D < 1/2	0/-0.0008"
D ≥ 1/2	0/-0.0012"

Radius Tolerance	
0.015 ≤ R ≤ 0.125	0/-0.0008"

Units: Inch

EDP Number	Mill Diameter	Corner Radius	OAL	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d1	d
82200021	1/4	0.015	4	0.375	1.250	0.235	1/4
82200221	1/4	0.030	4	0.375	1.250	0.235	1/4
82200421	1/4	0.060	4	0.375	1.250	0.235	1/4
82200621	5/16	0.015	4	0.438	1.562	0.295	5/16
82200821	5/16	0.030	4	0.438	1.562	0.295	5/16
82201021	3/8	0.015	4	0.500	1.875	0.353	3/8
82201221	3/8	0.030	4	0.500	1.875	0.353	3/8
82201421	3/8	0.045	4	0.500	1.875	0.353	3/8
82201621	3/8	0.060	4	0.500	1.875	0.353	3/8
82201821	7/16	0.015	4	0.547	1.968	0.400	7/16
82202021	7/16	0.030	4	0.547	1.968	0.400	7/16
82202221	1/2	0.015	4	0.625	2.250	0.470	1/2
82202421	1/2	0.030	4	0.625	2.250	0.470	1/2
82202621	1/2	0.045	4	0.625	2.250	0.470	1/2
82202821	1/2	0.060	4	0.625	2.250	0.470	1/2
82203021	1/2	0.090	4	0.625	2.250	0.470	1/2
82203221	5/8	0.030	4-1/8	0.780	2.250	0.588	5/8
82203421	5/8	0.060	4-1/8	0.780	2.250	0.588	5/8
82203621	5/8	0.090	4-1/8	0.780	2.250	0.588	5/8
82203821	5/8	0.125	4-1/8	0.780	2.250	0.588	5/8
82204021	3/4	0.030	5-1/4	1.000	3.250	0.705	3/4
82204221	3/4	0.060	5-1/4	1.000	3.250	0.705	3/4
82204421	3/4	0.090	5-1/4	1.000	3.250	0.705	3/4
82204621	3/4	0.125	5-1/4	1.000	3.250	0.705	3/4
82204821	1	0.030	5-1/2	1.125	3.250	0.940	1
82205021	1	0.060	5-1/2	1.125	3.250	0.940	1
82205221	1	0.090	5-1/2	1.125	3.250	0.940	1
82205421	1	0.125	5-1/2	1.125	3.250	0.940	1

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8220	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 8206

AE-VMSS, 4 Flute, Stub Length

NEW	SPEED FEED P1116-1117	CARBIDE	DUR		Var.°	SHRINK FIT
------------	---------------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D ≤ 12mm	0/-0.020mm
D > 12mm	0/-0.030mm




Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D	L	Lc	d	
8556430	3	45	4.5	6	1
8556440	4	45	6.0	6	1
8556450	5	45	7.5	6	1
8556460	6	45	9.0	6	2
8556480	8	60	12.0	8	2
8556500	10	70	15.0	10	2
8556520	12	75	18.0	12	2

Packed: 1 pc.
Available Duarise coating only.



Type 1



Type 2



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels ≤200HB				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8206	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand® AE-LN-VMSS


Advanced Performance Anti-Vibration Carbide End Mills

List 8230

AE-LN-VMSS, 4 Flute, Stub Length, Long Neck

NEW	SPEED FEED P1118	CARBIDE	DUR		Var.°	SHRINK FIT
------------	----------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D < 1/2	0/-0.0008"
D ≥ 1/2	0/-0.0012"

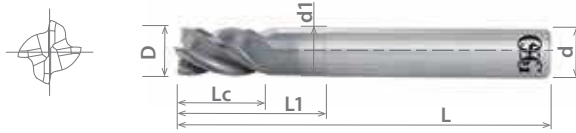

Units: Inch

EDP Number	Mill Diameter	OAL	Length of Cut	Neck Diameter	Neck Length	Shank Diameter
	D	L	Lc	L1	d1	d
82300021	1/4	3	3/8	0.235	3/4	1/4
82300121	1/4	4	3/8	0.243	1-1/4	1/4
82300221	5/16	4	7/16	0.303	1	5/16
82300321	5/16	4	7/16	0.303	1-9/16	5/16
82300421	3/8	4	1/2	0.364	1-3/16	3/8
82300521	3/8	4	1/2	0.364	1-7/8	3/8
82300621	7/16	4	35/64	0.400	1-5/16	7/16
82300721	7/16	4	35/64	0.400	1-7/8	7/16
82300821	1/2	4	5/8	0.485	1-1/2	1/2
82300921	1/2	4	5/8	0.485	2-1/4	1/2
82301021	5/8	4-1/8	0.78	0.588	2-1/4	5/8
82301121	5/8	5	0.78	0.588	3-1/8	5/8
82301221	3/4	5	1	0.705	2-1/4	3/4
82301321	3/4	5-1/4	1	0.705	3-1/4	3/4
82301421	1	5-1/2	1-1/8	0.940	3-1/4	1
82301521	1	7	1-1/8	0.940	5	1

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8230	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 8235

AE-LN-VMSS, 4 Flute, Stub Length, Long Neck

NEW	SPEED FEED P1118	CARBIDE	DUR		Var.°	SHRINK FIT
------------	----------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D ≤ 12mm	0/-0.020mm
D > 12mm	0/-0.030mm

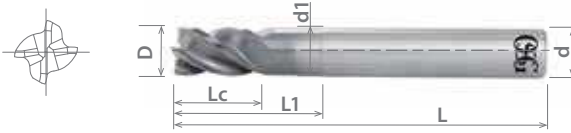

Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Neck Diameter	Neck Length	Shank Diameter
	D	L	Lc	L1	d1	d
8556618	6	60	9	5.8	18	6
8556630	6	70	9	5.8	30	6
8556724	8	70	12	7.7	24	8
8556740	8	80	12	7.7	40	8
8556830	10	80	15	9.7	30	10
8556850	10	100	15	9.7	50	10
8556936	12	90	18	11.7	36	12
8556960	12	110	18	11.7	60	12

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
8235	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand® AE-VML

Advanced Performance Anti-Vibration Carbide End Mills

List 8201

AE-VML, 4 Flute, Long Length

NEW	SPEED FEED P1120-1123	CARBIDE	DUR		Var.°	SHRINK FIT
------------	---------------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D < 1/2	0/-0.0008"
D ≥ 1/2	0/-0.0012"



Units: Inch

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter
	D	L	Lc	d
82010021	1/4	2-3/4	3/4	1/4
82010121	1/4	2-3/4	1	1/4
82010221	5/16	3-1/2	15/16	5/16
82010321	5/16	3-1/2	1-1/4	5/16
82010421	3/8	3-3/4	1-1/8	3/8
82010521	3/8	4	1-1/2	3/8
82010621	1/2	4	1-1/2	1/2
82010721	1/2	4-1/2	2	1/2

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
8201	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 8207

AE-VML, 4 Flute, Long Length

NEW	SPEED FEED P1120-1123	CARBIDE	DUR		Var.°	SHRINK FIT
------------	---------------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D ≤ 12mm	0/-0.020mm
D > 12mm	0/-0.030mm



Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter
	D	L	Lc	d
8556320	6	70	19	6
8556328	6	70	24	6
8556322	8	80	25	8
8556330	8	90	32	8
8556324	10	90	31	10
8556332	10	100	40	10
8556326	12	100	38	12
8556334	12	110	48	12

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
8207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





A Brand® AE-NIK-VML

Advanced Performance Anti-Vibration Carbide End Mills

List 8202

AE-NIK-VML, 4 Flute, Long Length, Nicked



NEW	SPEED FEED P1120-1123	CARBIDE	DUR		Var.°	SHRINK FIT
------------	---------------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D < 1/2	0/-0.008"
D ≥ 1/2	0/-0.0012"

Units: Inch

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter
	D	L	Lc	d
82020021	1/4	2-3/4	3/4	1/4
82020121	1/4	2-3/4	1	1/4
82020221	5/16	3-1/2	15/16	5/16
82020321	5/16	3-1/2	1-1/4	5/16
82020421	3/8	3-3/4	1-1/8	3/8
82020521	3/8	4	1-1/2	3/8
82020621	1/2	4	1-1/2	1/2
82020721	1/2	4-1/2	2	1/2

Packed: 1 pc.
Available Duarise coating only.



List 8208

AE-NIK-VML, 4 Flute, Long Length, Nicked



NEW	SPEED FEED P1120-1123	CARBIDE	DUR		Var.°	SHRINK FIT
------------	---------------------------------	----------------	------------	--	--------------	-------------------

Milling Diameter Tolerance	
D ≤ 12mm	0/-0.020mm
D > 12mm	0/-0.030mm

Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter
	D	L	Lc	d
8556321	6	70	19	6
8556329	6	70	24	6
8556323	8	80	25	8
8556331	8	90	32	8
8556325	10	90	31	10
8556333	10	100	40	10
8556327	12	100	38	12
8556335	12	110	48	12

Packed: 1 pc.
Available Duarise coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
8202	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8208	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 2055

UVX-Ni, 5 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1124	CARBIDE	EXO®		Var.°
Milling Diameter Tolerance				
1/4 ≤ D ≤ 1		+0/-0.0015"		



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Mill Diameter	Corner Radius	OAL	Length of Cut	Shank Diameter
		D	R	L	Lc	d
20552501	-	1/4	0.015	2-1/2	5/8	1/4
20552502	-	1/4	0.030	2-1/2	5/8	1/4
20552503	-	1/4	0.060	2-1/2	5/8	1/4
20553121	-	5/16	0.015	2-1/2	3/4	5/16
20553122	-	5/16	0.030	2-1/2	3/4	5/16
20553123	-	5/16	0.060	2-1/2	3/4	5/16
-	20553751	3/8	0.015	2-1/2	7/8	3/8
-	20553752	3/8	0.030	2-1/2	7/8	3/8
-	20553753	3/8	0.060	2-1/2	7/8	3/8
-	20555001	1/2	0.030	2-1/2	5/8	1/2
-	20555002	1/2	0.030	3	1	1/2
-	20555003	1/2	0.060	3	1	1/2
-	20555004	1/2	0.015	3-1/2	1-1/4	1/2
-	20555005	1/2	0.030	3-1/2	1-1/4	1/2
-	20555006	1/2	0.060	3-1/2	1-1/4	1/2
-	20555007	1/2	0.090	3-1/2	1-1/4	1/2
-	20555008	1/2	0.120	3-1/2	1-1/4	1/2
-	20556251	5/8	0.030	3-1/2	1-1/4	5/8
-	20556252	5/8	0.060	3-1/2	1-1/4	5/8
-	20556253	5/8	0.090	3-1/2	1-1/4	5/8
-	20556254	5/8	0.120	3-1/2	1-1/4	5/8
-	20557501	3/4	0.030	4	1-1/2	3/4
-	20557502	3/4	0.060	4	1-1/2	3/4
-	20557503	3/4	0.090	4	1-1/2	3/4
-	20557504	3/4	0.120	4	1-1/2	3/4
-	20551001	1	0.030	4	1-1/2	1
-	20551002	1	0.060	4	1-1/2	1
-	20551003	1	0.090	4	1-1/2	1
-	20551004	1	0.120	4	1-1/2	1

Packed: 1 pc.
Available EXO® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB VGX - List VG534 (p. 967-968)

Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
2055						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>				<input type="checkbox"/>		

good best





List 9510

PHX-DBT, 3 Flute, Deep Feed, Ball End

SPEED FEED P1125-1127	CARBIDE	EXO[®]		45°	SHANK h6
---------------------------------	----------------	------------------------	--	------------	--------------------




Milling Diameter Tolerance	
1 ≤ D ≤ 5	+0 / -0.015mm
6 < D ≤ 20	+0.01mm / -0.005mm
Radius Tolerance	
0.5 ≤ R ≤ 10	+0.01 / -0.01mm

Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D				
3090202	1	60	1.5	6	1
3090204	2	60	3.0	6	1
3090206	3	70	4.5	6	1
3090208	4	70	6.0	6	1
3090210	5	70	7.5	6	1
3090212	6	80	9.0	6	2
3090312	6	110	9.0	6	2
3090216	8	90	12.0	8	2

EDP Number	Mill Diameter	OAL	Length of Cut	Shank Diameter	Type
	D				
3090316	8	120	12.0	8	2
3090220	10	100	15.0	10	2
3090320	10	130	15.0	10	2
3090222	12	100	18.0	12	2
3090322	12	140	18.0	12	2
3090226	16	150	24.0	16	2
3090230	20	150	30.0	20	2
3090330	20	200	30.0	20	2

Packed: 1 pc.
Available EXO[®] coating only.

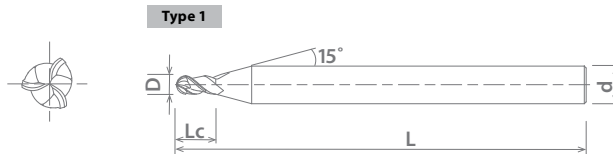

OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB[®] WXL[®] - List 3710 (p. 854)

Don't require ultra-high performance? Try EXOCARB[®] WXS[®] - List 4510 (p. 885)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





List 9590

PHX-LN-DBT, 3 Flute, Long Neck, Ball End

SPEED FEED P1125-1127	CARBIDE	WXS	45°	SHANK h6
---------------------------------	----------------	------------	------------	--------------------

Milling Diameter Tolerance	
0.6 ≤ D ≤ 6	+0.007mm / -0.007mm


Radius Tolerance	
0.3 ≤ R ≤ 3	+0.007mm / -0.007mm



Units: mm

EDP Number	Mill Diameter	OAL	Length of Cut	Neck Length	Neck Diameter	Effective Neck Length (Based on Inclined Angle)						Shank Diameter	Type
						α							
						0.5°	1°	1.5°	2°	2.5°	3°		
3194901	0.6	50	0.45	1	0.55	1.02	1.05	1.08	1.11	1.14	1.17	4	1
3194902	0.6	50	0.45	2	0.55	2.06	2.12	2.18	2.26	2.33	2.42	4	1
3194903	0.6	50	0.45	3	0.55	3.09	3.19	3.29	3.41	3.53	3.66	4	1
3194904	0.6	50	0.45	4	0.55	4.12	4.26	4.4	4.56	4.72	4.9	4	1
3194906	0.6	50	0.45	6	0.55	6.19	6.4	6.62	6.86	7.11	7.39	4	1
3195004	1.0	50	0.75	4	0.95	4.26	4.50	4.74	4.96	5.18	5.39	4	1
3195006	1.0	50	0.75	6	0.95	6.39	6.72	7.03	7.32	7.95	7.88	4	1
3195008	1.0	50	0.75	8	0.95	8.50	8.92	9.28	9.62	9.98	10.36	4	1
3195010	1.0	50	0.75	10	0.95	10.61	11.09	11.51	11.92	12.37	12.85	4	1
3195012	1.0	50	0.75	12	0.95	12.71	13.25	13.71	14.12	14.49	14.83	4	1
3195014	1.0	50	0.75	14	0.95	14.81	15.40	15.90	16.34	16.73	17.82	4	1
3195016	1.0	50	0.75	16	0.95	16.90	17.54	18.07	18.54	19.53	20.31	4	1
3195106	1.5	50	1.12	6	1.45	6.37	6.70	7.00	7.28	7.54	7.82	4	1
3195108	1.5	50	1.12	8	1.45	8.49	8.89	9.25	9.58	9.93	10.30	4	1
3195110	1.5	50	1.12	10	1.45	10.60	11.07	11.48	11.88	12.32	12.79	4	1
3195112	1.5	50	1.12	12	1.45	12.70	13.23	13.69	14.09	14.46	14.80	4	1
3195116	1.5	50	1.12	16	1.45	16.89	17.52	18.05	18.51	18.93	19.31	4	1
3195206	2.0	50	1.50	6	1.95	6.35	6.65	6.94	7.21	7.46	7.73	4	1
3195208	2.0	50	1.50	8	1.95	8.46	8.85	9.20	9.52	9.85	10.21	4	1
3195210	2.0	50	1.50	10	1.95	10.57	11.03	11.43	11.82	12.24	12.70	4	1
3195212	2.0	50	1.50	12	1.95	12.67	13.19	13.64	14.12	14.63	15.19	4	1
3195214	2.0	50	1.50	14	1.95	14.77	15.34	15.86	16.42	17.02	17.67	4	1
3195216	2.0	50	1.50	16	1.95	16.86	17.48	18.08	18.72	19.41	-	4	1
3195218	2.0	60	1.50	18	1.95	18.94	19.62	20.29	21.02	21.80	-	4	1
3195220	2.0	60	1.50	20	1.95	21.03	21.76	22.51	23.18	-	-	4	1
3195222	2.0	60	1.50	22	1.95	23.13	23.89	24.50	25.03	-	-	4	1
3195312	3.0	60	2.25	12	2.85	12.61	13.10	13.57	14.08	-	-	4	1
3195316	3.0	60	2.25	16	2.85	16.77	17.38	17.01	-	-	-	4	1
3195320	3.0	60	2.25	20	2.85	20.92	21.65	-	-	-	-	4	1
3195325	3.0	60	2.25	25	2.85	26.10	-	-	-	-	-	4	1
3195416	4.0	60	3.00	16	3.85	-	-	-	-	-	-	4	2
3195420	4.0	60	3.00	20	3.85	-	-	-	-	-	-	4	2
3195425	4.0	60	3.00	25	3.85	-	-	-	-	-	-	4	2
3195520	6.0	70	4.50	20	5.85	-	-	-	-	-	-	6	2
3195530	6.0	70	4.50	30	5.85	-	-	-	-	-	-	6	2

Packed: 1 pc. Available WXS[®] coating only.

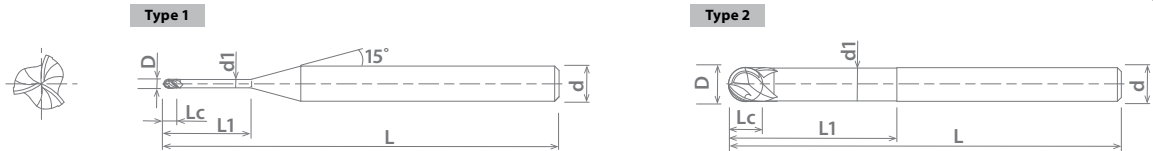

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9590	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 9581

PHX-PC-DBT, 3 Flute, Pencil-Neck, Deep Feed, Ball End

SPEED FEED P1125-1127	CARBIDE	WXS	45°	SHANK h6
--------------------------	---------	-----	-----	-------------



Milling Diameter Tolerance	
1 ≤ D ≤ 12	+ 0 / -0.015mm
Radius Tolerance	
0.5 ≤ R ≤ 6	+0.01mm / -0.01mm

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Min. Neck Diameter	Max. Neck Diameter	Neck Length	Effective Draft Angle	Neck Draft Angle	Shank Diameter	Type
	D	L	Lc	d1	d2	L1	α	β	d	
3095125	1.0	60	1.50	0.95	1.20	16.0	0.38°	0.5°	6	1
3095141	1.0	60	1.50	0.95	1.10	6.0	0.56°	1.0°	6	1
3095142	1.0	60	1.50	0.95	1.17	8.0	0.68°	1.0°	6	1
3095143	1.0	60	1.50	0.95	1.24	10.0	0.75°	1.0°	6	1
3095144	1.0	60	1.50	0.95	1.31	12.0	0.79°	1.0°	6	1
3095145	1.0	60	1.50	0.95	1.45	16.0	0.85°	1.0°	6	1
3095146	1.0	60	1.50	0.95	1.59	20.0	0.88°	1.0°	6	1
3095147	1.0	70	1.50	0.95	1.77	25.0	0.91°	1.0°	6	1
3095155	1.0	60	1.50	0.95	1.65	15.0	1.30°	1.5°	6	1
3095157	1.0	70	1.50	0.95	2.18	25.0	1.39°	1.5°	6	1
3095191	1.0	70	1.50	0.95	5.43	30.0	4.30°	4.5°	6	1
3095211	1.5	60	2.25	1.45	1.58	6.0	0.45°	1.0°	6	1
3095212	1.5	60	2.25	1.45	1.68	9.0	0.65°	1.0°	6	1
3095213	1.5	60	2.25	1.45	1.79	12.0	0.74°	1.0°	6	1
3095214	1.5	60	2.25	1.45	1.89	15.0	0.80°	1.0°	6	1
3095215	1.5	60	2.25	1.45	2.10	21.0	0.86°	1.0°	6	1
3095216	1.5	70	2.25	1.45	2.41	30.0	0.90°	1.0°	6	1
3095223	2.0	60	3.00	1.95	2.24	20.0	0.38°	0.5°	6	1
3095241	2.0	60	3.00	1.95	2.19	10.0	0.62°	1.0°	6	1
3095242	2.0	60	3.00	1.95	2.36	15.0	0.76°	1.0°	6	1
3095243	2.0	60	3.00	1.95	2.54	20.0	0.82°	1.0°	6	1
3095244	2.0	70	3.00	1.95	2.71	25.0	0.86°	1.0°	6	1
3095245	2.0	80	3.00	1.95	2.89	30.0	0.89°	1.0°	6	1
3095246	2.0	80	3.00	1.95	3.24	40.0	0.92°	1.0°	6	1
3095247	2.0	100	3.00	1.95	3.59	50.0	0.93°	1.0°	6	1
3095251	2.0	80	3.00	1.95	3.88	40.0	1.39°	1.5°	6	1
3095262	2.0	100	3.00	1.95	5.81	60.3	1.94°	2.0°	6	2
3095273	2.0	80	3.00	1.95	5.75	41.2	2.85°	3.0°	6	2
3095281	2.0	80	3.00	1.95	5.67	30.0	3.95°	3.8°	6	2
3095321	3.0	80	4.50	2.90	3.17	20.0	0.27°	0.5°	6	1
3095341	3.0	80	4.50	2.90	3.44	20.0	0.69°	1.0°	6	1
3095342	3.0	80	4.50	2.90	3.61	25.0	0.76°	1.0°	6	1
3095343	3.0	80	4.50	2.90	3.79	30.0	0.80°	1.0°	6	1
3095344	3.0	80	4.50	2.90	4.13	40.0	0.85°	1.0°	6	1
3095345	3.0	100	4.50	2.90	4.48	50.0	0.88°	1.0°	6	1
3095346	3.0	100	4.50	2.90	4.83	60.0	0.90°	1.0°	6	1
3095356	3.0	100	4.50	2.90	5.74	60.8	1.45°	1.5°	6	2
3095365	3.0	100	4.50	2.90	5.70	46.5	1.92°	2.0°	6	2
3095374	3.0	80	4.50	2.90	5.60	32.1	2.81°	3.0°	6	2
3095421	4.0	80	6.00	3.90	4.23	25.0	0.29°	0.5°	6	1
3095441	4.0	80	6.00	3.90	4.73	30.0	0.76°	1.0°	6	1
3095442	4.0	80	6.00	3.90	5.08	40.0	0.82°	1.0°	6	1
3095443	4.0	100	6.00	3.90	5.43	50.0	0.86°	1.0°	6	1
3095444	4.0	100	6.00	3.90	5.76	61.3	0.97°	1.0°	6	2
3095445	4.0	120	6.00	3.90	6.48	80.0	0.92°	1.0°	8	1
3095453	4.0	80	6.00	3.90	5.70	42.2	1.43°	1.5°	6	2
3095454	4.0	120	6.00	3.90	7.69	80.4	1.47°	1.5°	8	2
3095462	4.0	120	6.00	3.90	7.63	61.3	1.94°	2.0°	8	2
3095472	4.0	100	6.00	3.90	7.50	42.2	2.85°	3.0°	8	2
3095541	5.0	100	7.50	4.90	5.86	35.0	0.76°	1.0°	8	1
3095542	5.0	100	7.50	4.90	6.38	50.0	0.84°	1.0°	8	1
3095543	5.0	130	7.50	4.90	7.08	70.0	0.89°	1.0°	8	1

Packed: 1 pc. Available WXS[®] coating only.





List 9581 (Continued)


SPEED FEED P1125-1127 CARBIDE WXS 45° SHANK h6

PHX-PC-DBT, 3 Flute, Pencil-Neck, Deep Feed, Ball End

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Min. Neck Diameter	Max. Neck Diameter	Neck Length	Effective Draft Angle	Neck Draft Angle	Shank Diameter	Type
	D	L	Lc	d1	d2	L1	α	β	d	
3095544	5.0	130	7.50	4.90	7.72	90.4	0.98°	1.0°	8	2
3095553	5.0	130	7.50	4.90	7.64	61.8	1.45°	1.5°	8	2
3095562	5.0	130	7.50	4.90	7.56	47.5	1.91°	2.0°	8	2
3095641	6.0	100	9.00	5.90	6.98	40.0	0.77°	1.0°	8	1
3095642	6.0	100	9.00	5.90	7.33	50.0	0.82°	1.0°	8	1
3095643	6.0	130	9.00	5.90	7.69	62.3	0.97°	1.0°	8	2
3095644	6.0	130	9.00	5.90	8.72	90.0	0.90°	1.0°	10	1
3095651	6.0	100	9.00	5.90	7.60	43.2	1.43°	1.5°	8	2
3095653	6.0	130	9.00	5.90	9.59	81.4	1.47°	1.5°	10	2
3095661	6.0	100	9.00	5.90	7.50	33.6	1.87°	2.0°	8	2
3095662	6.0	130	9.00	5.90	9.49	62.3	1.94°	2.0°	10	2
3095841	8.0	120	12.00	7.90	9.22	50.0	0.77°	1.0°	10	1
3095842	8.0	120	12.00	7.90	9.62	63.3	0.97°	1.0°	10	2
3095843	8.0	150	12.00	7.90	10.62	90.0	0.88°	1.0°	12	1
3095844	8.0	180	12.00	7.90	11.62	120.6	0.99°	1.0°	12	2
3095851	8.0	120	12.00	7.90	9.50	44.2	1.43°	1.5°	10	2
3095853	8.0	150	12.00	7.90	11.49	82.4	1.47°	1.5°	12	2
3095862	8.0	120	12.00	7.90	11.35	63.3	1.94°	2.0°	12	2
3096041	10.0	120	15.00	9.90	11.56	64.3	0.97°	1.0°	12	2
3096042	10.0	160	15.00	9.90	12.16	80.0	0.83°	1.0°	16	1
3096043	10.0	160	15.00	9.90	12.86	100.0	0.87°	1.0°	16	1
3096044	10.0	180	15.00	9.90	13.56	120.0	0.89°	1.0°	16	1
3096045	10.0	200	15.00	9.90	14.26	140.0	0.91°	1.0°	16	1
3096046	10.0	220	15.00	9.90	14.96	160.0	0.92°	1.0°	16	1
3096051	10.0	120	15.00	9.90	11.40	45.2	1.43°	1.5°	12	2
3096053	10.0	180	15.00	9.90	15.38	121.6	1.48°	1.5°	16	2
3096061	10.0	120	15.00	9.90	11.24	35.6	1.87°	2.0°	12	2
3096064	10.0	160	15.00	9.90	15.21	92.9	1.96°	2.0°	16	2
3096241	12.0	120	18.00	11.90	13.36	60.0	0.73°	1.0°	16	1
3096242	12.0	180	18.00	11.90	14.76	100.0	0.85°	1.0°	16	1
3096243	12.0	180	18.00	11.90	15.48	122.6	0.99°	1.0°	16	2
3096244	12.0	220	18.00	11.90	16.85	160.0	0.91°	1.0°	20	1
3096254	12.0	220	18.00	11.90	19.27	160.8	1.48°	1.5°	20	2

Packed: 1 pc. Available WXS[®] coating only.

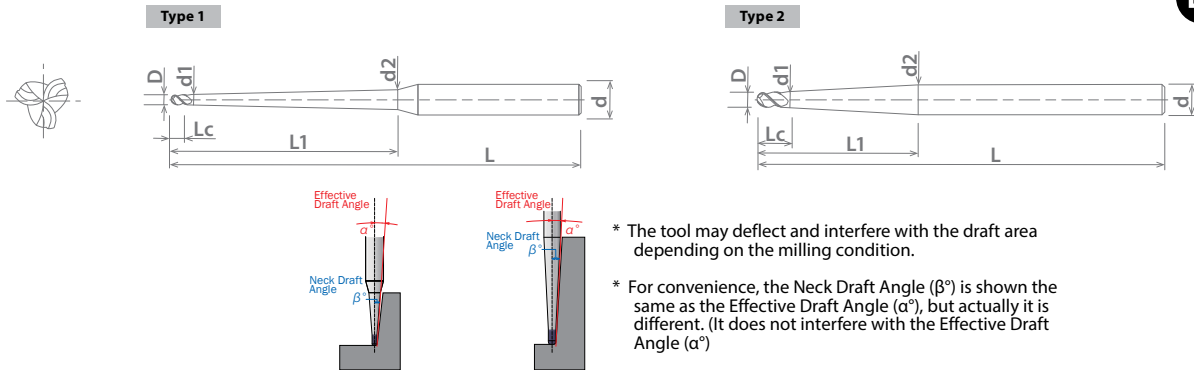

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9581	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best







List 9592

PHX-LN-CRE, 4 Flute, Pencil-Neck, Deep Feed, Corner Radius, Rib Processor

SPEED FEED P1131	CARBIDE	WXS			54° D=0.8	30° D≥1	SHANK h6
----------------------------	----------------	------------	--	--	---------------------	-------------------	--------------------

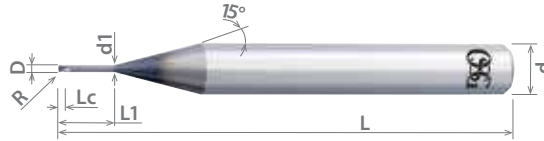

Milling Diameter Tolerance	
0.8≤D≤3	+0 / -0.01mm
Radius Tolerance	
0.1≤R≤0.3	+0.007mm / -0.007mm
Neck Length Tolerance	
0.8≤D≤3	+0 / -0.1mm

Units: mm

EDP Number	Mill Diameter D	Corner Radius R	Overall Length L	Length of Cut Lc	Neck Length L1	Neck Dia. d1	Effective Neck Length (le)			Shank Diameter d
							α			
							0°	0.5°	1°	
3190800	0.8	0.1	50	0.32	2	0.75	2.00	2.16	2.32	4
3190801	0.8	0.1	50	0.32	4	0.75	4.00	4.29	4.57	4
3190802	0.8	0.1	50	0.32	6	0.75	6.00	6.42	6.78	4
3190803	0.8	0.1	50	0.32	8	0.75	8.00	8.54	8.97	4
3191006	1.0	0.1	50	0.40	4	0.95	4.00	4.29	4.56	4
3191007	1.0	0.1	50	0.40	6	0.95	6.00	6.41	6.77	4
3191008	1.0	0.1	50	0.40	8	0.95	8.00	8.53	8.96	4
3191009	1.0	0.1	50	0.40	10	0.95	10.00	10.63	11.13	4
3191010	1.0	0.1	50	0.40	12	0.95	12.00	12.73	13.29	4
3191011	1.0	0.2	50	0.40	4	0.95	4.00	4.29	4.56	4
3191012	1.0	0.2	50	0.40	6	0.95	6.00	6.41	6.77	4
3191013	1.0	0.2	50	0.40	8	0.95	8.00	8.53	8.96	4
3191014	1.0	0.2	50	0.40	10	0.95	10.00	10.63	11.13	4
3191015	1.0	0.2	50	0.40	12	0.95	12.00	12.73	13.29	4
3191018	1.0	0.3	50	0.40	4	0.95	4.00	4.29	4.56	4
3191019	1.0	0.3	50	0.40	6	0.95	6.00	6.41	6.77	4
3191501	1.5	0.1	50	0.60	4	1.45	4.00	4.29	4.56	4
3191503	1.5	0.1	50	0.60	8	1.45	8.00	8.53	8.96	4
3191505	1.5	0.1	50	0.60	12	1.45	12.00	12.73	13.29	4
3191506	1.5	0.2	50	0.60	4	1.45	4.00	4.29	4.56	4
3191507	1.5	0.2	50	0.60	6	1.45	6.00	6.41	6.77	4
3191508	1.5	0.2	50	0.60	8	1.45	8.00	8.53	8.96	4
3192001	2.0	0.1	50	0.80	8	1.95	8.00	8.53	8.96	4
3192002	2.0	0.1	50	0.80	10	1.95	10.00	10.63	11.13	4
3192003	2.0	0.1	50	0.80	12	1.95	12.00	12.73	13.29	4
3192004	2.0	0.1	50	0.80	16	1.95	16.00	16.92	17.57	4
3192013	2.0	0.3	50	0.80	8	1.95	8.00	8.53	8.96	4
3192015	2.0	0.3	50	0.80	12	1.95	12.00	12.73	13.29	4
3192019	2.0	0.5	50	0.80	6	1.95	6.00	6.41	6.77	4
3192020	2.0	0.5	50	0.80	8	1.95	8.00	8.53	8.96	4
3192021	2.0	0.5	50	0.80	10	1.95	10.00	10.63	11.13	4
3192022	2.0	0.5	50	0.80	12	1.95	12.00	12.73	13.29	4
3193008	3.0	0.3	50	1.20	12	2.85	12.00	12.73	13.29	4

Packed: 1 pc.
Available WXS[®] coating only.
Center Cutting applies only to diameter sizes over 0.8mm.



OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB[®] WXS[®] - List 4592 (p. 893-895)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
9592	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best






List 9575

PHX-DFR, 3 Flute, Deep Feed, Corner Radius

SPEED FEED P1128-1130	CARBIDE	WXS	55°	SHANK h6
---------------------------------	----------------	------------	------------	--------------------

Milling Diameter Tolerance	
6 ≤ D ≤ 20	+0.01mm / -0.01mm
Radius Tolerance	
1.5 ≤ R ≤ 3	+0.03mm / -0.03mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
3090512	6	1.5	80	12	6
3090516	8	2.0	90	16	8
3090520	10	2.0	100	20	10
3090522	12	2.0	120	24	12
3090526	16	3.0	130	32	16
3090530	20	3.0	150	40	20

Packed: 1 pc.
Available WXS[®] coating only.



OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB[®] WXL[®] - List 3771 (p. 880)
Don't require ultra-high performance? Try EXOCARB[®] WXS[®] - List 4571 (p. 889)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9575	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 9576

PHX-LN-DFR, 3 Flute, Long Neck, Deep Feed, Corner Radius

SPEED FEED P1128-1130	CARBIDE	WXS		55°	SHANK h6
---------------------------------	----------------	------------	--	------------	--------------------



Milling Diameter Tolerance	
4 ≤ D ≤ 16	+0.01mm / -0.01mm
Radius Tolerance	
1 ≤ R ≤ 3	+0.03mm / -0.03mm

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d1	d
3092041	4	1.0	70	6	20	3.8	4
3092042	4	1.0	70	6	28	3.8	4
3092061	6	1.5	80	9	30	5.8	6
3092062	6	1.5	90	9	42	5.8	6
3092063	6	1.5	100	9	54	5.8	6
3092081	8	2.0	85	12	40	7.7	8
3092082	8	2.0	100	12	56	7.7	8
3092083	8	2.0	120	12	72	7.7	8
3092101	10	2.0	100	15	50	9.7	10
3092102	10	2.0	120	15	70	9.7	10
3092103	10	2.0	140	15	90	9.7	10
3092121	12	2.0	110	18	60	11.7	12
3092122	12	2.0	135	18	84	11.7	12
3092123	12	2.0	160	18	108	11.7	12
3092161	16	3.0	140	24	80	15.5	16
3092162	16	3.0	175	24	120	15.5	16

Packed: 1 pc.
Available WXS[®] coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9576	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





List 9580

PHX-PC-DFR, 3 Flute, Pencil Neck, Deep Feed, Corner Radius

SPEED FEED P1128-1130	CARBIDE	WXS	55°	SHANK h6
---------------------------------	----------------	------------	------------	--------------------

Milling Diameter Tolerance	
2 ≤ D ≤ 12	+0 / -0.015mm

Radius Tolerance	
0.5 ≤ R ≤ 2	+0.03mm / -0.03mm




Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Min. Neck Diameter	Maximum Neck Diameter	Neck Length	Effective Draft Angle	Neck Draft Angle	Shank Diameter	Type
	D	R	L	Lc	d1	d2	L1	α	β	d	
3097223	2	0.5	60	3.0	1.95	2.25	20.0	0.36°	0.5°	6	1
3097224	2	0.5	70	3.0	1.95	2.33	25.0	0.39°	0.5°	6	1
3097225	2	0.5	80	3.0	1.95	2.42	30.0	0.41°	0.5°	6	1
3097226	2	0.5	80	3.0	1.95	2.51	35.0	0.42°	0.5°	6	1
3097227	2	0.5	80	3.0	1.95	2.60	40.0	0.43°	0.5°	6	1
3097241	2	0.5	60	3.0	1.95	2.19	10.0	0.59°	1°	6	1
3097242	2	0.5	60	3.0	1.95	2.37	15.0	0.73°	1°	6	1
3097243	2	0.5	60	3.0	1.95	2.54	20.0	0.80°	1°	6	1
3097244	2	0.5	70	3.0	1.95	2.72	25.0	0.84°	1°	6	1
3097245	2	0.5	80	3.0	1.95	2.89	30.0	0.87°	1°	6	1
3097246	2	0.5	80	3.0	1.95	3.07	35.0	0.89°	1°	6	1
3097247	2	0.5	80	3.0	1.95	3.24	40.0	0.90°	1°	6	1
3097248	2	0.5	100	3.0	1.95	3.42	45.0	0.91°	1°	6	1
3097249	2	0.5	100	3.0	1.95	3.59	50.0	0.92°	1°	6	1
3097251	2	0.5	80	3.0	1.95	3.89	40.0	1.37°	1.5°	6	1
3097262	2	0.5	100	3.0	1.95	6.00	60.3	2.00°	2°	6	2
3097273	2	0.5	100	3.0	1.95	6.00	41.2	3.00°	3°	6	2
3097321	3	0.8	80	4.5	2.90	3.17	20.0	0.25°	0.5°	6	1
3097341	3	0.8	80	4.5	2.90	3.44	20.0	0.66°	1°	6	1
3097342	3	0.8	80	4.5	2.90	3.62	25.0	0.73°	1°	6	1
3097343	3	0.8	80	4.5	2.90	3.79	30.0	0.78°	1°	6	1

Packed: 1 pc.
Available WXS[®] coating only.

continued on next page **EP**

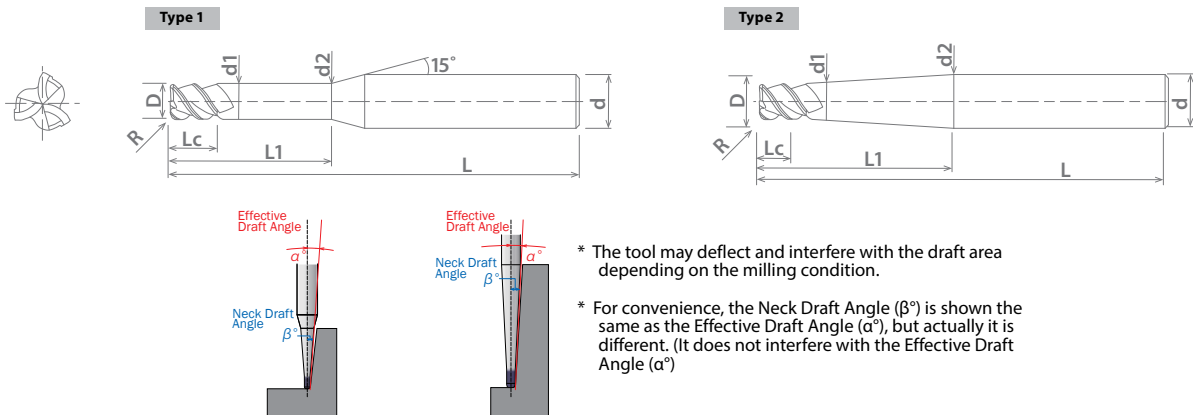

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels		Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels		
	Low	Med.	High	4140	4340		300	400	17-4 PH			6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
9580	☐	☐	☐	☐	☐	☐	☐	☐	☐					☐	☐	☐	☐

☐ good ☐ best





List 9580 (Continued)

PHX-PC-DFR, 3 Flute, Pencil Neck, Deep Feed, Corner Radius



SPEED FEED P1128-1130	CARBIDE	WXS		55°	SHANK h6
---------------------------------	----------------	------------	--	------------	--------------------

Milling Diameter Tolerance	
2 ≤ D ≤ 12	+0 / -0.015mm

Radius Tolerance	
0.5 ≤ R ≤ 2	+0.03mm / -0.03mm

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Min. Neck Diameter	Maximum Neck Diameter	Neck Length	Effective Draft Angle	Neck Draft Angle	Shank Diameter	Type
	D	R	L	Lc	d1	d2	L1	α	β	d	
3097344	3	0.8	80	4.5	2.90	4.14	40.0	0.83°	1°	6	1
3097345	3	0.8	100	4.5	2.90	4.49	50.0	0.87°	1°	6	1
3097346	3	0.8	100	4.5	2.90	4.84	60.0	0.89°	1°	6	1
3097356	3	0.8	100	4.5	2.90	6.00	60.8	1.50°	1.5°	6	2
3097365	3	0.8	100	4.5	2.90	6.00	46.5	2.00°	2°	6	2
3097374	3	0.8	100	4.5	2.90	6.00	32.1	3.00°	3°	6	2
3097421	4	1.0	80	6.0	3.90	4.23	25.0	0.28°	0.5°	6	1
3097422	4	1.0	80	6.0	3.90	4.32	30.0	0.31°	0.5°	6	1
3097423	4	1.0	80	6.0	3.90	4.41	35.0	0.34°	0.5°	6	1
3097424	4	1.0	80	6.0	3.90	4.49	40.0	0.36°	0.5°	6	1
3097425	4	1.0	80	6.0	3.90	4.58	45.0	0.38°	0.5°	6	1
3097426	4	1.0	100	6.0	3.90	4.67	50.0	0.39°	0.5°	6	1
3097441	4	1.0	80	6.0	3.90	4.74	30.0	0.73°	1°	6	1
3097442	4	1.0	80	6.0	3.90	5.09	40.0	0.80°	1°	6	1
3097443	4	1.0	100	6.0	3.90	5.44	50.0	0.84°	1°	6	1
3097444	4	1.0	100	6.0	3.90	6.00	61.3	1.00°	1°	6	2
3097453	4	1.0	80	6.0	3.90	6.00	42.2	1.50°	1.5°	6	2
3097454	4	1.0	120	6.0	3.90	8.00	80.4	1.50°	1.5°	8	2
3097461	4	1.0	80	6.0	3.90	6.00	32.6	2.00°	2°	6	2
3097462	4	1.0	120	6.0	3.90	8.00	61.3	2.00°	2°	8	2
3097472	4	1.0	100	6.0	3.90	8.00	42.2	3.00°	3°	8	2
3097627	6	1.5	130	9.0	5.90	6.79	60.0	0.39°	0.5°	8	1
3097641	6	1.5	100	9.0	5.90	6.98	40.0	0.73°	1°	8	1
3097642	6	1.5	100	9.0	5.90	7.33	50.0	0.79°	1°	8	1
3097643	6	1.5	130	9.0	5.90	8.00	62.3	1.00°	1°	8	2
3097651	6	1.5	100	9.0	5.90	8.00	43.2	1.50°	1.5°	8	2
3097653	6	1.5	130	9.0	5.90	10.00	81.4	1.50°	1.5°	10	2
3097661	6	1.5	100	9.0	5.90	8.00	33.6	2.00°	2°	8	2
3097662	6	1.5	130	9.0	5.90	10.00	62.3	2.00°	2°	10	2
3097826	8	2.0	150	12.0	7.90	9.09	80.0	0.40°	0.5°	10	1
3097841	8	2.0	120	12.0	7.90	9.23	50.0	0.73°	1°	10	1
3097842	8	2.0	150	12.0	7.90	10.00	63.3	1.00°	1°	10	2
3097844	8	2.0	180	12.0	7.90	12.00	120.6	1.00°	1°	12	2
3097851	8	2.0	120	12.0	7.90	10.00	44.2	1.50°	1.5°	10	2
3097853	8	2.0	150	12.0	7.90	12.00	82.4	1.50°	1.5°	12	2
3097861	8	2.0	120	12.0	7.90	10.00	34.6	2.00°	2°	10	2
3097862	8	2.0	120	12.0	7.90	12.00	63.3	2.00°	2°	12	2
3098026	10	2.0	150	15.0	9.90	11.38	100.0	0.40°	0.5°	12	1
3098041	10	2.0	120	15.0	9.90	12.00	64.3	1.00°	1°	12	2
3098042	10	2.0	160	15.0	9.90	12.17	80.0	0.80°	1°	16	1
3098043	10	2.0	160	15.0	9.90	12.87	100.0	0.84°	1°	16	1
3098044	10	2.0	180	15.0	9.90	13.57	120.0	0.87°	1°	16	1
3098045	10	2.0	200	15.0	9.90	14.26	140.0	0.88°	1°	16	1
3098046	10	2.0	220	15.0	9.90	14.96	160.0	0.90°	1°	16	1
3098051	10	2.0	120	15.0	9.90	12.00	45.2	1.50°	1.5°	12	2
3098053	10	2.0	180	15.0	9.90	16.00	121.6	1.50°	1.5°	16	2
3098061	10	2.0	120	15.0	9.90	12.00	35.6	2.00°	2°	12	2

Packed: 1 pc.
Available WXS[®] coating only.



List 9580 (Continued)




SPEED FEED P1128-1130	CARBIDE	WXS		55°	SHANK h6
---------------------------------	----------------	------------	--	------------	--------------------

PHX-PC-DFR, 3 Flute, Pencil Neck, Deep Feed, Corner Radius

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Min. Neck Diameter	Maximum Neck Diameter	Neck Length	Effective Draft Angle	Neck Draft Angle	Shank Diameter	Type
	D	R	L	Lc	d1	d2	L1	α	β	d	
3098064	10	2.0	220	15.0	9.90	16.00	92.9	2.00°	2°	16	2
3098224	12	2.0	180	18.0	11.90	13.68	120.0	0.41°	0.5°	16	1
3098241	12	2.0	120	18.0	11.90	13.37	60.0	0.67°	1°	16	1
3098242	12	2.0	180	18.0	11.90	14.76	100.0	0.81°	1°	16	1
3098243	12	2.0	180	18.0	11.90	16.00	122.6	1.00°	1°	16	2
3098244	12	2.0	220	18.0	11.90	16.86	160.0	0.88°	1°	20	1
3098254	12	2.0	220	18.0	11.90	20.00	160.8	1.50°	1.5°	20	2

Packed: 1 pc.
Available WXS[®] coating only.

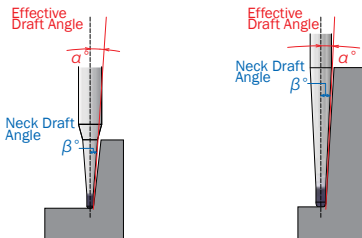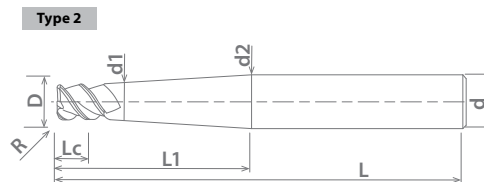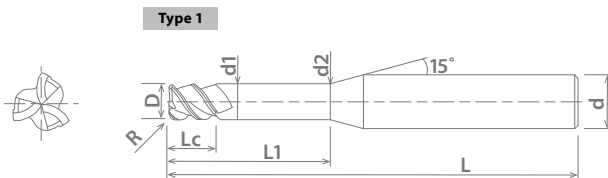

- * The tool may deflect and interfere with the draft area depending on the milling condition.
- * For convenience, the Neck Draft Angle (β°) is shown the same as the Effective Draft Angle (α°), but actually it is different. (It does not interfere with the Effective Draft Angle (α°))

Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9580	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





List 9570

PHX-CRT, 3 Flute, High Feed, Corner Radius

SPEED FEED P1128-1130	CARBIDE	EXO[®]		55°	SHANK h6
---------------------------------	----------------	------------------------	--	------------	--------------------




Milling Diameter Tolerance	
1 ≤ D ≤ 5	+0 / -0.015mm
6 ≤ D ≤ 20	+0.01mm / -0.005mm
Radius Tolerance	
0.3 ≤ R ≤ 3	+0.01mm / -0.01mm

Units: mm

EDP Number	Mill Diameter D	Corner Radius R	Overall Length L	Length of Cut Lc	Neck Length L1	Neck Diameter d1	Effective Neck Length (Le) (Based on Inclined Angle)				Shank Diameter d	Type
							α					
							0.5°	1°	2°	3°		
3090002	1.0	0.3	60	2	4.0	0.95	4.29	4.56	5.05	5.50	6	1
3090003	1.5	0.3	60	3	4.5	1.45	4.82	5.11	5.64	6.12	6	1
3090004	2.0	0.5	60	4	6.0	1.95	6.41	6.77	7.39	7.89	6	1
3090006	3.0	0.8	70	6	9.0	2.85	9.46	9.87	10.62	11.48	6	1
3090008	4.0	1.0	70	8	12.0	3.85	12.60	13.09	14.07	15.21	6	1
3090010	5.0	1.0	70	10	15.0	4.85	15.72	16.30	-	-	6	1
3090012	6.0	1.5	80	12	-	-	-	-	-	-	6	2
3090016	8.0	2.0	90	16	-	-	-	-	-	-	8	2
3090020	10.0	2.0	100	20	-	-	-	-	-	-	10	2
3090022	12.0	2.0	120	24	-	-	-	-	-	-	12	2
3090026	16.0	3.0	130	32	-	-	-	-	-	-	16	2
3090030	20.0	3.0	150	40	-	-	-	-	-	-	20	2

Packed: 1 pc.
Available EXO[®] coating only.

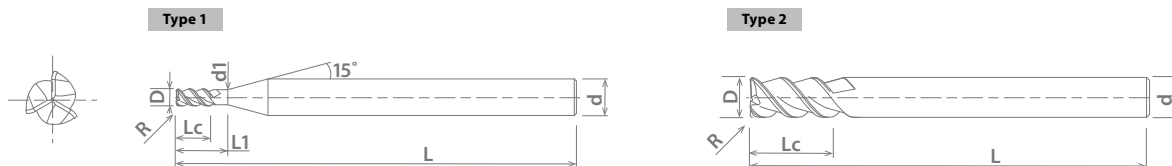

OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB[®] WXS[®] - List 4570 (p. 890)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best






List 3610

WXL-EBD, 2 Flute, Regular Length, Ball End

NEW SIZES	SPEED FEED P1135	CARBIDE	WXL	REG	30°	SHANK h6
------------------	----------------------------	----------------	------------	------------	------------	--------------------



Radius Tolerance	
1/32 ≤ D ≤ 3/16	+0.0002" / -0.0002"
1/4 ≤ D ≤ 1/2	+0.0001" / -0.0003"

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
36100111	1/32	2-1/2	1/32	1/4
36100211	1/16	2-1/2	1/16	1/4
36100311	3/32	2-1/2	3/32	1/4
36100411	1/8	3	1/8	1/4
36101011	5/32	2-1/2	5/32	1/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
36100511	3/16	3	3/16	1/4
36100611	1/4	3	1/4	1/4
36100711	5/16	4	5/16	5/16
36100811	3/8	4	3/8	3/8
36100911	1/2	4	1/2	1/2

Units: Inch

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421BN, HP416 or HP413 (p. 980-981, 982 or 986)

Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4410 (p. 884)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
3610	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® WXL®

Premium Performance Carbide End Mills with OSG's Proprietary WXL® Coating

List 3710

WXL-EBD, 2 Flute, Regular Length, Ball End

SPEED FEED P1136	CARBIDE	WXL	REG	30°	SHANK h6
---------------------	---------	-----	-----	-----	-------------



Radius Tolerance	
R < 3	+0.005mm / -0.005mm
3 ≤ R ≤ 6	+0.003mm / -0.007mm
6 > R	+0.01mm / -0.01mm

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3105010	0.1	40	0.2	4
3105020	0.2	40	0.4	4
3105030	0.3	40	0.6	4
3105040	0.4	40	0.8	4
3105050	0.5	40	1.1	4
3105060	0.6	40	1.1	4
3105080	0.8	40	2.0	4
3105100	1.0	50	1.5	4
3106100	1.0	60	2.5	6
3105120	1.2	50	3.0	4
3105140	1.4	50	3.5	4
3105150	1.5	50	2.0	4
3106150	1.5	50	4.0	6
3105160	1.6	50	4.0	4
3105200	2.0	50	3.0	4
3106200	2.0	50	5.0	6
3105250	2.5	50	3.0	4
3106250	2.5	60	6.0	6
3105300	3.0	60	4.5	4
3106301	3.0	60	8.0	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3106350	3.5	70	8.0	6
3105400	4.0	60	8.0	4
3106400	4.0	70	6.0	6
3106500	5.0	80	8.0	6
3106502	5.0	80	12.0	6
3106600	6.0	90	10.0	6
3106601	6.0	90	12.0	6
3106610	7.0	90	14.0	6
3106620	8.0	100	12.0	8
3106621	8.0	100	14.0	8
3106630	9.0	100	18.0	8
3106640	10.0	100	15.0	10
3106641	10.0	100	18.0	10
3106650	11.0	100	22.0	10
3106660	12.0	110	18.0	12
3106661	12.0	110	22.0	12
3106670	14.0	110	26.0	12
3106680	16.0	140	30.0	16
3106690	18.0	140	34.0	16
3106700	20.0	160	38.0	20

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421BN, HP416 or HP413 (p. 980-981, 982 or 986)

Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4510 (p. 885)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
3710	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3670

WXL-CR-EMS, 4 Flute, Regular Length, Corner Radius

NEW SIZES	SPEED FEED P1137	CARBIDE	WXL	REG	30°	SHANK h6
------------------	----------------------------	----------------	------------	------------	------------	--------------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
36700111	1/16	0.010	1-1/2	3/16	1/8
36700211	5/64	0.010	1-1/2	1/4	1/8
36700311	3/32	0.010	1-1/2	3/8	1/8
36700411	7/64	0.010	1-1/2	3/8	1/8
36700511	1/8	0.010	1-1/2	1/2	1/8
36700611	1/8	0.020	1-1/2	1/2	1/8
36700711	1/8	0.030	1-1/2	1/2	1/8
36700811	5/32	0.020	2	9/16	3/16
36700911	5/32	0.030	2	9/16	3/16
36701011	3/16	0.020	2	5/8	3/16
36701111	3/16	0.030	2	5/8	3/16
36701211	7/32	0.020	2-1/2	5/8	1/4
36701311	7/32	0.030	2-1/2	5/8	1/4
36701411	1/4	0.020	2-1/2	3/4	1/4
36701511	1/4	0.030	2-1/2	3/4	1/4
36701611	1/4	0.045	2-1/2	3/4	1/4
36701711	1/4	0.060	2-1/2	3/4	1/4
36701811	5/16	0.020	2-1/2	13/16	5/16
36701911	5/16	0.030	2-1/2	13/16	5/16
36703011	5/16	0.060	2-1/2	13/16	5/16
36702011	3/8	0.020	2-1/2	1	3/8
36702111	3/8	0.030	2-1/2	1	3/8
36702211	3/8	0.045	2-1/2	1	3/8

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
36702311	3/8	0.060	2-1/2	1	3/8
36703111	3/8	0.090	2-1/2	1	3/8
36702411	7/16	0.020	2-3/4	1	7/16
36702511	7/16	0.030	2-3/4	1	7/16
36703211	7/16	0.060	2-3/4	1	7/16
36702611	1/2	0.020	3	1	1/2
36702711	1/2	0.030	3	1	1/2
36702811	1/2	0.045	3	1	1/2
36702911	1/2	0.060	3	1	1/2
36703311	1/2	0.090	3	1	1/2
36703411	5/8	0.030	3-1/2	1-1/4	5/8
36703511	5/8	0.060	3-1/2	1-1/4	5/8
36703611	5/8	0.090	3-1/2	1-1/4	5/8
36703711	5/8	0.125	3-1/2	1-1/4	5/8
36703811	3/4	0.030	4	1-1/2	3/4
36703911	3/4	0.060	4	1-1/2	3/4
36704011	3/4	0.090	4	1-1/2	3/4
36704111	3/4	0.125	4	1-1/2	3/4
36704211	1	0.030	4	1-1/2	1
36704311	1	0.060	4	1-1/2	1
36704411	1	0.090	4	1-1/2	1
36704511	1	0.125	4	1-1/2	1

Packed: 1 pc.

Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 (p. 987-988)
Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4471 (p. 888)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3670	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® WXL®


Premium Performance Carbide End Mills with OSG's Proprietary WXL® Coating

List 3604

WXL-EMS, 4 Flute, Regular Length

NEW SIZES	SPEED FEED P1138	CARBIDE	WXL	REG	30°	SHANK h6
------------------	----------------------------	----------------	------------	------------	------------	--------------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
36040111	1/16	1-1/2	3/16	1/8
36040211	5/64	1-1/2	1/4	1/8
36040311	3/32	1-1/2	3/8	1/8
36040411	7/64	1-1/2	3/8	1/8
36040511	1/8	1-1/2	1/2	1/8
36040611	5/32	2	9/16	3/16
36040711	3/16	2	5/8	3/16
36040811	7/32	2-1/2	5/8	1/4
36040911	1/4	2-1/2	3/4	1/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
36041011	9/32	2-1/2	3/4	5/16
36041111	5/16	2-1/2	13/16	5/16
36041211	3/8	2-1/2	1	3/8
36041311	7/16	2-3/4	1	7/16
36041411	1/2	3	1	1/2
36041511	5/8	3-1/2	1-1/4	5/8
36041611	3/4	4	1-1/2	3/4
36041711	1	4	1-1/2	1

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441 (p. 969-970)
Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4440 (p. 886)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
3604	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 3690

WXL-LN-EBD, 2 Flute, Regular Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1139-1148	CARBIDE	WXL	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

±5µm (±0.0002") Radius Tolerance



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d1	d
36900111	1/64	2-1/2	1/64	3/64	0.013	1/8
36900211	1/64	2-1/2	1/64	3/32	0.013	1/8
36900311	1/32	2-1/2	1/32	5/32	0.029	1/4
36900411	1/32	2-1/2	1/32	5/16	0.029	1/4
36900511	1/32	2-1/2	1/32	13/32	0.029	1/4
36900611	1/16	2-1/2	1/16	5/16	0.061	1/4
36900711	1/16	2-1/2	1/16	5/8	0.061	1/4
36900811	1/16	3	1/16	13/16	0.061	1/4
36900911	3/32	2-1/2	3/32	15/32	0.092	1/4
36901011	3/32	2-7/8	3/32	15/16	0.092	1/4
36901111	3/32	3-1/8	3/32	1-13/32	0.092	1/4
36901211	1/8	3	1/8	5/8	0.123	1/4
36901311	1/8	3	1/8	1-1/4	0.123	1/4
36901411	1/8	3-3/4	1/8	1-7/8	0.123	1/4
36901511	3/16	3-1/2	3/16	15/16	0.185	1/4
36901611	3/16	4	3/16	1-7/8	0.185	1/4
36901711	1/4	4	1/4	1-1/4	0.248	1/4
36901811	1/4	4-1/2	1/4	2	0.248	1/4

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP419 (p. 984)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3690	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best






List 3790

WXL-LN-EBD, 2 Flute, Regular Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1139-1148	CARBIDE	WXL	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

±5µm Radius Tolerance



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Diameter
	D	L	Lc	L1	d2	d
3110103	0.1	45	0.1	0.3	0.085	4
3110105	0.1	45	0.1	0.5	0.085	4
3110203	0.2	45	0.2	0.3	0.18	4
3110205	0.2	45	0.2	0.5	0.18	4
3110207	0.2	45	0.16	0.75	0.18	4
3110210	0.2	45	0.2	1.0	0.18	4
3110212	0.2	45	0.16	1.25	0.18	4
3110215	0.2	45	0.2	1.5	0.18	4
3110217	0.2	45	0.16	1.75	0.18	4
3110220	0.2	45	0.16	2.0	0.18	4
3110225	0.2	45	0.16	2.5	0.18	4
3110230	0.2	45	0.16	3.0	0.18	4
3110305	0.3	45	0.24	0.5	0.28	4
3110306	0.3	45	0.24	0.6	0.28	4
3110307	0.3	45	0.24	0.75	0.28	4
3110310	0.3	45	0.2	1.0	0.28	4
3110312	0.3	45	0.24	1.25	0.28	4
3110315	0.3	45	0.2	1.5	0.28	4
3110317	0.3	45	0.24	1.75	0.28	4
3110320	0.3	45	0.2	2.0	0.28	4
3110322	0.3	45	0.24	2.25	0.28	4
3110325	0.3	45	0.24	2.5	0.28	4
3110327	0.3	45	0.24	2.75	0.28	4
3110330	0.3	45	0.24	3.0	0.28	4
3110335	0.3	45	0.24	3.5	0.28	4
3110340	0.3	45	0.24	4.0	0.28	4
3110345	0.3	45	0.24	4.5	0.28	4
3110350	0.3	45	0.24	5.0	0.28	4
3110405	0.4	45	0.3	0.5	0.37	4
3110407	0.4	45	0.3	0.75	0.37	4
3110410	0.4	45	0.3	1.0	0.37	4
3110415	0.4	45	0.3	1.5	0.37	4
3110420	0.4	45	0.3	2.0	0.37	4
3110425	0.4	45	0.3	2.5	0.37	4
3110430	0.4	45	0.3	3.0	0.37	4
3110435	0.4	45	0.3	3.5	0.37	4
3110440	0.4	45	0.3	4.0	0.37	4
3110445	0.4	45	0.3	4.5	0.37	4
3110450	0.4	45	0.3	5.0	0.37	4
3110455	0.4	45	0.3	5.5	0.37	4
3110460	0.4	45	0.3	6.0	0.37	4
3110510	0.5	45	0.4	1.0	0.45	4
3110515	0.5	45	0.4	1.5	0.45	4
3110520	0.5	45	0.4	2.0	0.45	4
3110525	0.5	45	0.4	2.5	0.45	4
3110530	0.5	45	0.4	3.0	0.45	4
3110535	0.5	45	0.4	3.5	0.45	4
3110540	0.5	45	0.4	4.0	0.45	4
3110545	0.5	45	0.4	4.5	0.45	4
3110550	0.5	45	0.4	5.0	0.45	4
3110555	0.5	45	0.4	5.5	0.45	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Diameter
	D	L	Lc	L1	d2	d
3110560	0.5	45	0.4	6.0	0.45	4
3110570	0.5	45	0.4	7.0	0.45	4
3110580	0.5	45	0.4	8.0	0.45	4
3110590	0.5	45	0.4	9.0	0.45	4
3110600	0.5	45	0.4	10	0.45	4
3110610	0.6	45	0.5	1.0	0.55	4
3110615	0.6	45	0.5	1.5	0.55	4
3110620	0.6	45	0.5	2.0	0.55	4
3110625	0.6	45	0.5	2.5	0.55	4
3110630	0.6	45	0.5	3.0	0.55	4
3110635	0.6	45	0.5	3.5	0.55	4
3110640	0.6	45	0.5	4.0	0.55	4
3110645	0.6	45	0.5	4.5	0.55	4
3110650	0.6	45	0.5	5.0	0.55	4
3110655	0.6	45	0.5	5.5	0.55	4
3110660	0.6	45	0.5	6.0	0.55	4
3110665	0.6	45	0.5	6.5	0.55	4
3110670	0.6	45	0.5	7.0	0.55	4
3110675	0.6	45	0.5	7.5	0.55	4
3110680	0.6	45	0.5	8.0	0.55	4
3110685	0.6	45	0.5	8.5	0.55	4
3110690	0.6	45	0.5	9.0	0.55	4
3110695	0.6	45	0.5	9.5	0.55	4
3110700	0.6	45	0.5	10	0.55	4
3110711	0.6	45	0.5	11	0.55	4
3110712	0.6	45	0.5	12	0.55	4
3110820	0.8	45	0.6	2.0	0.75	4
3110830	0.8	45	0.5	3.0	0.75	4
3110840	0.8	45	0.6	4.0	0.75	4
3110850	0.8	45	0.6	5.0	0.75	4
3110860	0.8	45	0.6	6.0	0.75	4
3110870	0.8	45	0.6	7.0	0.75	4
3110880	0.8	45	0.6	8.0	0.75	4
3110890	0.8	45	0.6	9.0	0.75	4
3110900	0.8	45	0.6	10	0.75	4
3110912	0.8	45	0.5	12	0.75	4
3111025	1.0	45	0.8	2.5	0.95	4
3111030	1.0	45	0.8	3.0	0.95	4
3111040	1.0	45	0.8	4.0	0.95	4
3111050	1.0	45	0.8	5.0	0.95	4
3111060	1.0	45	0.8	6.0	0.95	4
3111070	1.0	45	0.8	7.0	0.95	4
3111080	1.0	45	0.8	8.0	0.95	4
3111090	1.0	45	0.8	9.0	0.95	4
3111100	1.0	45	0.8	10	0.95	4
3111112	1.0	45	0.8	12	0.95	4
3111114	1.0	50	0.8	14	0.95	4
3111116	1.0	50	0.8	16	0.95	4
3111118	1.0	55	0.8	18	0.95	4
3111120	1.0	55	0.8	20	0.95	4
3111240	1.2	45	1.0	4.0	1.15	4

Packed: 1 pc.
Available WXL® coating only.





List 3790 (Continued)

WXL-LN-EBD, 2 Flute, Regular Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1139-1148	CARBIDE	WXL	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

±5µm Radius Tolerance

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Diameter
	D	L	Lc	L1	d2	d
3111260	1.2	45	1.0	6.0	1.15	4
3111280	1.2	45	1.0	8.0	1.15	4
3111300	1.2	45	1.0	10	1.15	4
3111312	1.2	45	1.0	12	1.15	4
3111314	1.2	50	1.0	14	1.15	4
3111316	1.2	50	1.0	16	1.15	4
3111318	1.2	55	1.0	18	1.15	4
3111320	1.2	60	1.0	20	1.15	4
3111324	1.2	60	1.0	24	1.15	4
3111480	1.4	45	1.1	8.0	1.35	4
3111512	1.4	45	1.1	12	1.35	4
3111516	1.4	50	1.1	16	1.35	4
3111530	1.5	45	1.2	3.0	1.45	4
3111540	1.5	45	1.2	4.0	1.45	4
3111560	1.5	45	1.2	6.0	1.45	4
3111580	1.5	45	1.2	8.0	1.45	4
3111600	1.5	45	1.2	10	1.45	4
3111612	1.5	45	1.2	12	1.45	4
3111614	1.5	50	1.2	14	1.45	4
3111616	1.5	55	1.2	16	1.45	4
3111618	1.5	55	1.2	18	1.45	4
3111620	1.5	55	1.2	20	1.45	4
3111622	1.5	55	1.2	22	1.45	4
3111630	1.5	65	1.2	30	1.45	4
3111640	1.6	45	1.3	4.0	1.55	4
3111680	1.6	45	1.3	8.0	1.55	4
3111712	1.6	45	1.3	12	1.55	4
3111716	1.6	50	1.3	16	1.55	4
3111720	1.6	55	1.3	20	1.55	4
3111880	1.8	45	1.4	8.0	1.75	4
3111912	1.8	45	1.4	12	1.75	4
3111916	1.8	50	1.4	16	1.75	4
3111920	1.8	55	1.4	20	1.75	4
3112030	2.0	45	1.6	3.0	1.95	4
3112040	2.0	45	1.6	4.0	1.95	4
3112060	2.0	45	1.6	6.0	1.95	4
3112080	2.0	45	1.6	8.0	1.95	4
3112100	2.0	45	1.6	10	1.95	4
3112112	2.0	45	1.6	12	1.95	4
3112114	2.0	50	1.6	14	1.95	4
3112116	2.0	50	1.6	16	1.95	4
3112118	2.0	55	1.6	18	1.95	4
3112120	2.0	55	1.6	20	1.95	4
3112122	2.0	60	1.6	22	1.95	4
3112125	2.0	65	1.6	25	1.95	4
3112130	2.0	70	1.6	30	1.95	4
3112135	2.0	75	1.6	35	1.95	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Diameter
	D	L	Lc	L1	d2	d
3112140	2.0	80	1.6	40	1.95	4
3112560	2.5	45	2.0	6.0	2.45	4
3112600	2.5	50	2.0	10	2.45	4
3112615	2.5	55	2.0	15	2.45	4
3112620	2.5	60	2.0	20	2.45	4
3112625	2.5	65	2.0	25	2.45	4
3112630	2.5	70	2.0	30	2.45	4
3112635	2.5	70	2.0	35	2.45	4
3123060	3.0	50	2.4	6.0	2.85	6
3123080	3.0	50	2.4	8.0	2.85	6
3123100	3.0	50	2.4	10	2.85	6
3123112	3.0	55	2.4	12	2.85	6
3123114	3.0	55	2.4	14	2.85	6
3123115	3.0	55	2.4	15	2.85	6
3123116	3.0	55	2.4	16	2.85	6
3123120	3.0	60	2.4	20	2.85	6
3123125	3.0	65	2.4	25	2.85	6
3123130	3.0	70	2.4	30	2.85	6
3123135	3.0	80	2.4	35	2.85	6
3123140	3.0	85	2.4	40	2.85	6
3123600	3.5	60	2.8	10	3.35	6
3123615	3.5	60	2.8	15	3.35	6
3123620	3.5	65	2.8	20	3.35	6
3123625	3.5	65	2.8	25	3.35	6
3123630	3.5	70	2.8	30	3.35	6
3123635	3.5	80	2.8	35	3.35	6
3123640	3.5	90	2.8	40	3.35	6
3123645	3.5	90	2.8	45	3.35	6
3124080	4.0	60	3.2	8.0	3.85	6
3124100	4.0	60	3.2	10	3.85	6
3124112	4.0	60	3.2	12	3.85	6
3124114	4.0	60	3.2	14	3.85	6
3124115	4.0	60	3.2	15	3.85	6
3124116	4.0	60	3.2	16	3.85	6
3124120	4.0	65	3.2	20	3.85	6
3124125	4.0	70	3.2	25	3.85	6
3124130	4.0	80	3.2	30	3.85	6
3124135	4.0	80	3.2	35	3.85	6
3124140	4.0	90	3.2	40	3.85	6
3124145	4.0	90	3.2	45	3.85	6
3124150	4.0	100	3.2	50	3.85	6
3125100	5.0	65	5.0	10	4.85	6
3125115	5.0	70	5.0	15	4.85	6
3125120	5.0	70	4.0	20	4.85	6
3125125	5.0	70	4.0	25	4.85	6
3125130	5.0	80	4.0	30	4.85	6
3125135	5.0	80	4.0	35	4.85	6

Packed: 1 pc.

Available WXL® coating only.

continued on next page

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
3790	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3790 (Continued)

WXL-LN-EBD, 2 Flute, Regular Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1139-1148	CARBIDE	WXL	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

±5µm Radius Tolerance



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Diameter
	D	L	Lc	L1	d2	d
3125140	5.0	90	5.0	40	4.85	6
3125145	5.0	100	5.0	45	4.85	6
3125150	5.0	100	5.0	50	4.85	6
3126100	6.0	60	6.0	10	5.85	6
3126120	6.0	70	6.0	20	5.85	6
3126125	6.0	70	6.0	25	5.85	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Diameter
	D	L	Lc	L1	d2	d
3126130	6.0	80	4.8	30	5.85	6
3126135	6.0	80	6.0	35	5.85	6
3126140	6.0	90	4.8	40	5.85	6
3126145	6.0	100	6.0	45	5.85	6
3126150	6.0	120	4.8	50	5.85	6

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP419 or HP419L (p. 984 or 985)
Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4590 (p. 896-898)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
3790	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best






List 3619

WXL-1.5D-DE, 2 Flute, Stub Length

NEW	SPEED FEED P1149	CARBIDE	WXL		STUB	30°	SHANK h6
------------	----------------------------	----------------	------------	--	-------------	------------	--------------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 7/16	+0 / -0.0008"
D = 1/2	+0 / -0.0012"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D			
36190001	1/16	2	3/32	1/8
36190002	5/64	2	1/8	1/8
36190003	3/32	2	9/64	1/8
36190004	7/64	2	11/64	1/8
36190005	1/8	2	3/16	1/8
36190006	5/32	2	15/64	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D			
36190007	3/16	2	9/32	3/16
36190008	1/4	2-1/2	3/8	1/4
36190009	5/16	2-1/2	15/32	5/16
36190010	3/8	2-3/4	9/16	3/8
36190011	7/16	3	21/32	7/16
36190012	1/2	3	3/4	1/2

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421 (p. 969-970)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3619	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® WXL®


Premium Performance Carbide End Mills with OSG's Proprietary WXL® Coating

List 3620

WXL-2D-DE, 2 Flute, Stub Length

SPEED FEED P1150	CARBIDE	WXL		STUB	30°	SHANK h6
---------------------	---------	-----	--	------	-----	-------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 7/16	+0 / -0.0008"
1/2 ≤ D ≤ 3/4	+0 / -0.0012"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D			
36200001	1/16	2	1/8	1/8
36200002	5/64	2	5/32	1/8
36200003	3/32	2	3/16	1/8
36200004	7/64	2	7/32	1/8
36200005	1/8	2	1/4	1/8
36200006	5/32	2	5/16	3/16
36200007	3/16	2	3/8	3/16
36200008	7/32	2	7/16	1/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D			
36200009	1/4	2-1/2	1/2	1/4
36200010	9/32	2-1/2	9/16	5/16
36200011	5/16	2-1/2	5/8	5/16
36200012	3/8	2-3/4	3/4	3/8
36200013	7/16	3	7/8	7/16
36200014	1/2	3	1	1/2
36200015	5/8	3-1/2	1-1/4	5/8
36200016	3/4	4	1-1/2	3/4

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421 (p. 969-970)

Work Material

List No.	P					Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels	Stainless Steels			Aluminum			Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High		300		400	17-4 PH	6061 7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
3620	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





List 3621

WXL-3D-DE, 2 Flute, Regular Length

SPEED FEED P1150	CARBIDE	WXL	REG	35°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 7/16	+0 / -0.0008"
1/2 ≤ D ≤ 3/4	+0 / -0.0012"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D			
36210001	1/16	2	3/16	1/8
36210002	5/64	2	15/64	1/8
36210003	3/32	2	9/32	1/8
36210004	7/64	2	21/64	1/8
36210005	1/8	2	3/8	1/8
36210006	5/32	2	15/32	3/16
36210007	3/16	2-1/4	9/16	3/16
36210008	7/32	2-1/2	21/32	1/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D			
36210009	1/4	2-1/2	3/4	1/4
36210010	9/32	2-3/4	27/32	5/16
36210011	5/16	2-3/4	15/16	5/16
36210012	3/8	3	1-1/8	3/8
36210013	7/16	3-1/4	1-5/16	7/16
36210014	1/2	3-1/2	1-1/2	1/2
36210015	5/8	4-1/4	1-7/8	5/8
36210016	3/4	5	2-1/4	3/4

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421 (p. 969-970)

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3621	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® WXL®

Premium Performance Carbide End Mills with OSG's Proprietary WXL® Coating

List 3704

WXL-EMS, 4 Flute, Regular Length

SPEED FEED P1151	CARBIDE	WXL	REG	30°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
1 ≤ D ≤ 12	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3130510	1.0	40	2.5	4
3130515	1.5	40	4	4
3130520	2.0	40	6	4
3130525	2.5	40	8	4
3130530	3.0	45	8	6
3130535	3.5	45	10	6
3130540	4.0	45	11	6
3130545	4.5	45	11	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3130550	5.0	50	13	6
3130560	6.0	50	13	6
3130570	7.0	60	16	8
3130580	8.0	60	19	8
3130590	9.0	70	19	10
3130600	10.0	70	22	10
3130620	12.0	75	26	12

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441 (p. 969-970)
Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4540 (p. 887)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3704	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 3742

WXL-EML, 4 Flute, Long Length

SPEED FEED P1152	CARBIDE	WXL	LONG	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 26	+0 / -0.03mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
37420000	3.0	50	12	6
37420001	3.5	50	14	6
37420002	4.0	50	17	6
37420003	4.5	50	17	6
37420004	5.0	60	20	6
37420005	5.5	60	20	6
37420006	6.0	60	20	6
37420007	6.5	70	24	8
37420008	7.0	70	24	8
37420009	7.5	70	24	8
37420010	8.0	70	28	8
37420011	8.5	80	28	10
37420012	9.0	80	28	10
37420013	9.5	80	28	10
37420014	10.0	80	34	10

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
37420015	10.5	90	34	12
37420016	11.0	90	34	12
37420017	11.5	90	34	12
37420018	12.0	90	40	12
37420019	13.0	100	40	12
37420020	14.0	100	40	12
37420021	15.0	105	40	16
37420022	16.0	115	48	16
37420023	18.0	115	48	16
37420024	20.0	125	56	20
37420025	23.0	140	67	25
37420026	24.0	140	67	25
37420027	25.0	140	67	25
37420028	26.0	140	67	25

Packed: 1 pc.

Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441 (p. 969-970)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3742	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 3791

WXL-LN-EDS, 2 Flute, Stub Length, Long Neck, Rib Processing

SPEED FEED P1154-1157	CARBIDE	WXL		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------

Milling Diameter Tolerance	
0.2 ≤ D ≤ 5	+0 / -0.015mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter	EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d		D	L	Lc	L1	d
3131201	0.2	45	0.30	0.5	4	3131706	0.7	45	1.00	6.0	4
3131202	0.2	45	0.30	1.0	4	3131708	0.7	45	1.00	8.0	4
3131203	0.2	45	0.30	1.5	4	3131710	0.7	45	1.00	10.0	4
3131204	0.2	45	0.30	2.0	4	3131804	0.8	45	1.20	4.0	4
3131205	0.2	45	0.30	2.5	4	3131806	0.8	45	1.20	6.0	4
3131206	0.2	45	0.30	3.0	4	3131808	0.8	45	1.20	8.0	4
3131207	0.2	45	0.30	3.5	4	3131810	0.8	45	1.20	10.0	4
3131208	0.2	45	0.30	4.0	4	3131812	0.8	45	1.20	12.0	4
3131302	0.3	45	0.45	1.0	4	3131814	0.8	50	1.20	14.0	4
3131303	0.3	45	0.45	1.5	4	3131816	0.8	50	1.20	16.0	4
3131304	0.3	45	0.45	2.0	4	3131820	0.8	55	1.20	20.0	4
3131305	0.3	45	0.45	2.5	4	3131824	0.8	60	1.20	24.0	4
3131306	0.3	45	0.45	3.0	4	3131904	0.9	45	1.35	4.0	4
3131308	0.3	45	0.45	4.0	4	3131906	0.9	45	1.35	6.0	4
3131310	0.3	45	0.45	5.0	4	3131908	0.9	45	1.35	8.0	4
3131312	0.3	45	0.45	6.0	4	3131910	0.9	45	1.35	10.0	4
3131318	0.3	45	0.45	9.0	4	3131915	0.9	50	1.35	15.0	4
3131403	0.4	45	0.60	1.5	4	3132003	1.0	45	1.50	3.0	4
3131404	0.4	45	0.60	2.0	4	3132004	1.0	45	1.50	4.0	4
3131406	0.4	45	0.60	3.0	4	3132005	1.0	45	1.50	5.0	4
3131408	0.4	45	0.60	4.0	4	3132006	1.0	45	1.50	6.0	4
3131410	0.4	45	0.60	5.0	4	3132007	1.0	45	1.50	7.0	4
3131412	0.4	45	0.60	6.0	4	3132008	1.0	45	1.50	8.0	4
3131414	0.4	45	0.60	7.0	4	3132009	1.0	45	1.50	9.0	4
3131416	0.4	45	0.60	8.0	4	3132010	1.0	45	1.50	10.0	4
3131418	0.4	45	0.60	9.0	4	3132012	1.0	45	1.50	12.0	4
3131420	0.4	45	0.60	10.0	4	3132014	1.0	50	1.50	14.0	4
3131424	0.4	45	0.60	12.0	4	3132016	1.0	50	1.50	16.0	4
3131501	0.5	45	0.70	1.5	4	3132018	1.0	55	1.50	18.0	4
3131502	0.5	45	0.70	2.0	4	3132020	1.0	55	1.50	20.0	4
3131503	0.5	45	0.70	3.0	4	3132022	1.0	60	1.50	22.0	4
3131504	0.5	45	0.70	4.0	4	3132025	1.0	60	1.50	25.0	4
3131505	0.5	45	0.70	5.0	4	3132030	1.0	70	1.50	30.0	4
3131506	0.5	45	0.70	6.0	4	3132204	1.2	45	1.80	4.0	4
3131507	0.5	45	0.70	7.0	4	3132206	1.2	45	1.80	6.0	4
3131508	0.5	45	0.70	8.0	4	3132208	1.2	45	1.80	8.0	4
3131509	0.5	45	0.70	9.0	4	3132210	1.2	45	1.80	10.0	4
3131510	0.5	45	0.70	10.0	4	3132212	1.2	45	1.80	12.0	4
3131512	0.5	45	0.70	12.0	4	3132214	1.2	50	1.80	14.0	4
3131515	0.5	50	0.70	15.0	4	3132216	1.2	50	1.80	16.0	4
3131602	0.6	45	0.90	2.0	4	3132220	1.2	55	1.80	20.0	4
3131603	0.6	45	0.90	3.0	4	3132406	1.4	45	2.10	6.0	4
3131604	0.6	45	0.90	4.0	4	3132408	1.4	45	2.10	8.0	4
3131605	0.6	45	0.90	5.0	4	3132410	1.4	45	2.10	10.0	4
3131606	0.6	45	0.90	6.0	4	3132412	1.4	45	2.10	12.0	4
3131607	0.6	45	0.90	7.0	4	3132414	1.4	50	2.10	14.0	4
3131608	0.6	45	0.90	8.0	4	3132416	1.4	50	2.10	16.0	4
3131610	0.6	45	0.90	10.0	4	3132422	1.4	60	2.10	22.0	4
3131612	0.6	45	0.90	12.0	4	3132504	1.5	45	2.30	4.0	4
3131615	0.6	50	0.90	15.0	4	3132506	1.5	45	2.30	6.0	4
3131618	0.6	50	0.90	18.0	4	3132508	1.5	45	2.30	8.0	4
3131702	0.7	45	1.00	2.0	4	3132510	1.5	45	2.30	10.0	4
3131704	0.7	45	1.00	4.0	4	3132512	1.5	45	2.30	12.0	4

Packed: 1 pc.
Available WXL® coating only.





List 3791 (Continued)

WXL-LN-EDS, 2 Flute, Stub Length, Long Neck, Rib Processing



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d
3132514	1.5	50	2.30	14.0	4
3132516	1.5	50	2.30	16.0	4
3132518	1.5	55	2.30	18.0	4
3132520	1.5	55	2.30	20.0	4
3132525	1.5	60	2.30	25.0	4
3132530	1.5	70	2.30	30.0	4
3132538	1.5	80	2.30	38.0	4
3132540	1.5	80	2.30	40.0	4
3132545	1.5	80	2.30	45.0	4
3132606	1.6	45	2.40	6.0	4
3132608	1.6	45	2.40	8.0	4
3132610	1.6	45	2.40	10.0	4
3132612	1.6	45	2.40	12.0	4
3132614	1.6	50	2.40	14.0	4
3132616	1.6	50	2.40	16.0	4
3132618	1.6	55	2.40	18.0	4
3132620	1.6	55	2.40	20.0	4
3132806	1.8	45	2.70	6.0	4
3132808	1.8	45	2.70	8.0	4
3132810	1.8	45	2.70	10.0	4
3132812	1.8	45	2.70	12.0	4
3132814	1.8	50	2.70	14.0	4
3132816	1.8	50	2.70	16.0	4
3132818	1.8	55	2.70	18.0	4
3132820	1.8	55	2.70	20.0	4
3132825	1.8	60	2.70	25.0	4
3133006	2.0	45	3.00	6.0	4
3133008	2.0	45	3.00	8.0	4
3133010	2.0	45	3.00	10.0	4
3133012	2.0	45	3.00	12.0	4
3133014	2.0	50	3.00	14.0	4
3133016	2.0	50	3.00	16.0	4
3133018	2.0	55	3.00	18.0	4
3133020	2.0	55	3.00	20.0	4
3133025	2.0	60	3.00	25.0	4
3133030	2.0	70	3.00	30.0	4
3133035	2.0	80	3.00	35.0	4
3133040	2.0	90	3.00	40.0	4
3133050	2.0	100	3.00	50.0	4
3133060	2.0	110	3.00	60.0	4
3133508	2.5	45	3.70	8.0	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d
3133510	2.5	45	3.70	10.0	4
3133512	2.5	45	3.70	12.0	4
3133514	2.5	50	3.70	14.0	4
3133516	2.5	55	3.70	16.0	4
3133518	2.5	55	3.70	18.0	4
3133520	2.5	60	3.70	20.0	4
3133525	2.5	70	3.70	25.0	4
3133530	2.5	80	3.70	30.0	4
3133540	2.5	90	3.70	40.0	4
3133550	2.5	100	3.70	50.0	4
3134008	3.0	45	4.50	8.0	6
3134010	3.0	45	4.50	10.0	6
3134012	3.0	45	4.50	12.0	6
3134014	3.0	50	4.50	14.0	6
3134016	3.0	55	4.50	16.0	6
3134018	3.0	55	4.50	18.0	6
3134020	3.0	60	4.50	20.0	6
3134025	3.0	65	4.50	25.0	6
3134030	3.0	80	4.50	30.0	6
3134035	3.0	90	4.50	35.0	6
3134040	3.0	90	4.50	40.0	6
3134050	3.0	100	4.50	50.0	6
3135012	4.0	50	6.00	12.0	6
3135016	4.0	60	6.00	16.0	6
3135020	4.0	60	6.00	20.0	6
3135025	4.0	70	6.00	25.0	6
3135030	4.0	80	6.00	30.0	6
3135035	4.0	90	6.00	35.0	6
3135040	4.0	90	6.00	40.0	6
3135045	4.0	100	6.00	45.0	6
3135050	4.0	100	6.00	50.0	6
3135060	4.0	110	6.00	60.0	6
3136016	5.0	60	7.50	16.0	6
3136020	5.0	70	7.50	20.0	6
3136025	5.0	70	7.50	25.0	6
3136030	5.0	90	7.50	30.0	6
3136035	5.0	90	7.50	35.0	6
3136040	5.0	100	7.50	40.0	6
3136050	5.0	110	7.50	50.0	6
3136060	5.0	120	7.50	60.0	6

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP410 (p. 976-977)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010	1035	1065	4140	4340												
3791	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





List 3711

WXL-LS-EBD, 2 Flute, Stub Length, Long Shank, Ball End

SPEED FEED P1153	CARBIDE	WXL		STUB	30°	SHANK h6
---------------------	---------	-----	--	------	-----	-------------

Radius Tolerance	
1 ≤ D < 4	+/-0.005mm
5 ≤ D ≤ 18	+/-0.01mm



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
37110000	1	70	2.5	3
37110001	2	70	5.0	3
37110002	3	80	8.0	3
37110003	4	100	8.0	4
37110004	5	100	10.0	4
37110005	6	140	12.0	6
37110006	7	140	14.0	6

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
37110007	8	160	14.0	8
37110008	10	180	18.0	10
37110009	12	200	22.0	12
37110010	14	200	26.0	12
37110011	16	220	30.0	16
37110012	18	220	34.0	16

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Machining steel over 54 HRC? Try EXOCARB® Max - List 9111 (p. 906)

Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3711	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3720

WXL-1.5D-DE, 2 Flute, Stub Length

SPEED FEED P1158-1159	CARBIDE	WXL	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
0.1 ≤ D ≤ 6	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3181801	0.1	45	0.15	4
3181802	0.2	45	0.30	4
3181803	0.3	45	0.45	4
3181804	0.4	45	0.60	4
3181805	0.5	45	0.75	4
3181806	0.6	45	0.90	4
3181807	0.7	45	1.10	4
3181808	0.8	45	1.20	4
3181809	0.9	45	1.40	4
3181810	1.0	45	1.50	4
3181811	1.1	45	1.70	4
3181812	1.2	45	1.80	4
3181813	1.3	45	2.00	4
3181814	1.4	45	2.10	4
3181815	1.5	45	2.30	4
3181816	1.6	45	2.40	4
3181817	1.7	45	2.60	4
3181818	1.8	45	2.70	4
3181819	1.9	45	2.90	4
3181820	2.0	45	3.00	4
3181821	2.1	45	3.20	4
3181822	2.2	45	3.30	4
3181823	2.3	45	3.50	4
3181824	2.4	45	3.60	4
3181825	2.5	45	3.80	4
3181826	2.6	45	3.90	4
3181827	2.7	45	4.10	4
3181828	2.8	45	4.20	4
3181829	2.9	45	4.40	4
3181830	3.0	45	4.50	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3181831	3.1	45	4.70	6
3181832	3.2	45	4.80	6
3181833	3.3	45	5.00	6
3181834	3.4	45	5.10	6
3181835	3.5	45	5.30	6
3181836	3.6	45	5.40	6
3181837	3.7	45	5.60	6
3181838	3.8	45	5.70	6
3181839	3.9	45	5.90	6
3181840	4.0	45	6.00	6
3181841	4.1	50	6.20	6
3181842	4.2	50	6.30	6
3181843	4.3	50	6.50	6
3181844	4.4	50	6.60	6
3181845	4.5	50	6.80	6
3181846	4.6	50	6.90	6
3181847	4.7	50	7.10	6
3181848	4.8	50	7.20	6
3181849	4.9	50	7.40	6
3181850	5.0	50	7.50	6
3181851	5.1	50	7.70	6
3181852	5.2	50	7.80	6
3181853	5.3	50	8.00	6
3181854	5.4	50	8.10	6
3181855	5.5	50	8.30	6
3181856	5.6	50	8.40	6
3181857	5.7	50	8.60	6
3181858	5.8	50	8.70	6
3181859	5.9	50	8.90	6
3181860	6.0	50	9.00	6

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421 (p. 969-970)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
3720	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best






List 3721

WXL-2D-DE, 2 Flute, Stub Length

SPEED FEED P1160-1161	CARBIDE	WXL	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
0.1 ≤ D ≤ 12	+0 / -0.02mm
12 < D ≤ 20	+0 / -0.03mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3182001	0.1	45	0.2	4
3182002	0.2	45	0.4	4
3182003	0.3	45	0.6	4
3182004	0.4	45	0.8	4
3182005	0.5	45	1.0	4
3182006	0.6	45	1.2	4
3182007	0.7	45	1.4	4
3182008	0.8	45	1.6	4
3182009	0.9	45	1.8	4
3182010	1.0	45	2.0	4
3182011	1.1	45	2.2	4
3182012	1.2	45	2.4	4
3182013	1.3	45	2.6	4
3182014	1.4	45	2.8	4
3182015	1.5	45	3.0	4
3182016	1.6	45	3.2	4
3182017	1.7	45	3.4	4
3182018	1.8	45	3.6	4
3182019	1.9	45	3.8	4
3182020	2.0	45	4.0	4
3182021	2.1	45	4.2	4
3182022	2.2	45	4.4	4
3182023	2.3	45	4.6	4
3182024	2.4	45	4.8	4
3182025	2.5	45	5.0	4
3182026	2.6	45	5.2	4
3182027	2.7	45	5.4	4
3182028	2.8	45	5.6	4
3182029	2.9	45	5.8	4
3182030	3.0	45	6.0	6
3182031	3.1	45	6.2	6
3182032	3.2	45	6.4	6
3182033	3.3	45	6.6	6
3182034	3.4	45	6.8	6
3182035	3.5	45	7.0	6
3182036	3.6	45	7.2	6
3182037	3.7	45	7.4	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3182038	3.8	45	7.6	6
3182039	3.9	45	7.8	6
3182040	4.0	45	8.0	6
3182041	4.1	50	8.2	6
3182042	4.2	50	8.4	6
3182043	4.3	50	8.6	6
3182044	4.4	50	8.8	6
3182045	4.5	50	9.0	6
3182046	4.6	50	9.2	6
3182047	4.7	50	9.4	6
3182048	4.8	50	9.6	6
3182049	4.9	50	9.8	6
3182050	5.0	50	10.0	6
3182051	5.1	50	10.2	6
3182052	5.2	50	10.4	6
3182053	5.3	50	10.6	6
3182054	5.4	50	10.8	6
3182055	5.5	50	11.0	6
3182056	5.6	50	11.2	6
3182057	5.7	50	11.4	6
3182058	5.8	50	11.6	6
3182059	5.9	50	11.8	6
3182060	6.0	50	12.0	6
3182065	6.5	60	13.0	8
3182070	7.0	60	14.0	8
3182075	7.5	60	15.0	8
3182080	8.0	60	16.0	8
3182085	8.5	70	17.0	10
3182090	9.0	70	18.0	10
3182095	9.5	70	19.0	10
3182100	10.0	70	20.0	10
3182110	11.0	75	22.0	12
3182120	12.0	75	24.0	12
3182160	16.0	90	32.0	16
3182180	18.0	90	36.0	16
3182200	20.0	100	40.0	20

Packed: 1 pc. Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421 (p. 969-970)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3721	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3712

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End

SPEED FEED P1162-1169	CARBIDE	WXL	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Radius Tolerance	
0.2 ≤ D ≤ 6	+/-0.005mm




Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170011	0.2	45	0.16	0.19	1.0	0.5°	4	1
3170012	0.2	45	0.16	0.19	1.5	0.5°	4	1
3170013	0.2	45	0.16	0.19	2.0	0.5°	4	1
3170014	0.2	45	0.16	0.19	2.5	0.5°	4	1
3170015	0.2	45	0.16	0.19	3.0	0.5°	4	1
3170021	0.2	45	0.16	0.19	2.0	1.0°	4	1
3170022	0.2	45	0.16	0.19	2.5	1.0°	4	1
3170023	0.2	45	0.16	0.19	3.0	1.0°	4	1
3170031	0.3	45	0.24	0.29	2.0	0.5°	4	1
3170032	0.3	45	0.24	0.29	3.0	0.5°	4	1
3170041	0.3	45	0.24	0.29	3.0	1.0°	4	1
3170042	0.3	45	0.24	0.29	4.0	1.0°	4	1
3170051	0.4	45	0.30	0.38	2.0	0.5°	4	1
3170052	0.4	45	0.30	0.38	3.0	0.5°	4	1
3170053	0.4	45	0.30	0.38	4.0	0.5°	4	1
3170054	0.4	45	0.30	0.38	5.0	0.5°	4	1
3170055	0.4	45	0.30	0.38	6.0	0.5°	4	1
3170061	0.4	45	0.30	0.38	4.0	1.0°	4	1
3170062	0.4	45	0.30	0.38	5.0	1.0°	4	1
3170063	0.4	45	0.30	0.38	6.0	1.0°	4	1
3170071	0.5	45	0.40	0.48	4.0	0.5°	4	1
3170072	0.5	45	0.40	0.48	6.0	0.5°	4	1

Packed: 1 pc.
Available WXL® coating only.

continued on next page

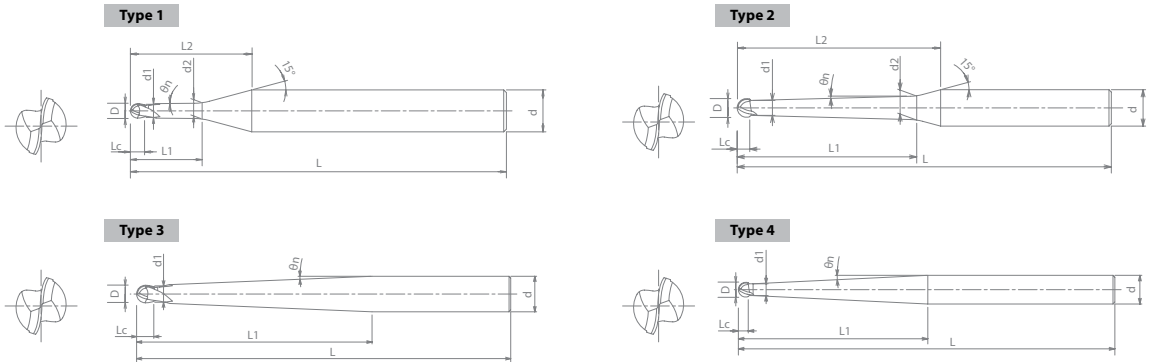

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3712	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3712 (Continued)

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End

SPEED FEED P1162-1169	CARBIDE	WXL	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Radius Tolerance	
0.2 ≤ D ≤ 6	+/-0.005mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170073	0.5	45	0.40	0.48	8.0	0.5°	4	1
3170074	0.5	45	0.40	0.48	10.0	0.5°	4	1
3170081	0.5	45	0.40	0.48	4.0	1.0°	4	1
3170082	0.5	45	0.40	0.48	6.0	1.0°	4	1
3170083	0.5	45	0.40	0.48	8.0	1.0°	4	1
3170084	0.5	45	0.40	0.48	10.0	1.0°	4	1
3170085	0.5	50	0.40	0.48	12.0	1.0°	4	1
3170091	0.6	45	0.50	0.58	2.0	0.5°	4	1
3170092	0.6	45	0.50	0.58	4.0	0.5°	4	1
3170093	0.6	45	0.50	0.58	6.0	0.5°	4	1
3170094	0.6	45	0.50	0.58	8.0	0.5°	4	1
3170095	0.6	45	0.50	0.58	10.0	0.5°	4	1
3170096	0.6	45	0.50	0.58	12.0	0.5°	4	1
3170097	0.6	50	0.50	0.58	16.0	0.5°	4	1
3170101	0.6	45	0.50	0.58	4.0	1.0°	4	1
3170102	0.6	45	0.50	0.58	6.0	1.0°	4	1
3170103	0.6	45	0.50	0.58	8.0	1.0°	4	1
3170104	0.6	45	0.50	0.58	10.0	1.0°	4	1
3170105	0.6	45	0.50	0.58	12.0	1.0°	4	1
3170106	0.6	50	0.50	0.58	16.0	1.0°	4	1
3170111	0.8	45	0.60	0.78	4.0	0.5°	4	1
3170112	0.8	45	0.60	0.78	6.0	0.5°	4	1
3170113	0.8	45	0.60	0.78	8.0	0.5°	4	1
3170114	0.8	45	0.60	0.78	12.0	0.5°	4	1
3170121	0.8	45	0.60	0.78	8.0	1.0°	4	1
3170122	0.8	45	0.60	0.78	12.0	1.0°	4	1
3170123	0.8	50	0.60	0.78	16.0	1.0°	4	1
3170131	1.0	45	0.63	0.95	6.0	0.5°	4	3
3170132	1.0	45	0.63	0.95	8.0	0.5°	4	3
3170133	1.0	45	0.63	0.95	10.0	0.5°	4	3
3170134	1.0	45	0.63	0.95	12.0	0.5°	4	3
3170135	1.0	50	0.63	0.95	16.0	0.5°	4	3
3170136	1.0	55	0.63	0.95	18.0	0.5°	4	3
3170137	1.0	55	0.63	0.95	20.0	0.5°	4	3
3170138	1.0	60	0.63	0.95	25.0	0.5°	4	3
3170139	1.0	65	0.63	0.95	30.0	0.5°	4	3
3170140	1.0	70	0.63	0.95	35.0	0.5°	4	3
3170141	1.0	45	0.63	0.95	10.0	1.0°	4	3
3170142	1.0	50	0.63	0.95	16.0	1.0°	4	3
3170143	1.0	55	0.63	0.95	20.0	1.0°	4	3
3170144	1.0	60	0.63	0.95	25.0	1.0°	4	3
3170145	1.0	65	0.63	0.95	30.0	1.0°	4	3
3170146	1.0	70	0.63	0.95	35.0	1.0°	4	3
3170147	1.0	80	0.63	0.95	40.0	1.0°	4	3
3170148	1.0	90	0.63	0.95	50.0	1.0°	4	3
3170149	1.0	100	0.63	0.95	60.0	1.0°	4	3
3170150	1.0	110	0.63	0.95	70.0	1.0°	4	3
3170151	1.0	45	0.63	0.95	8.0	1.5°	4	3
3170152	1.0	45	0.63	0.95	10.0	1.5°	4	3
3170153	1.0	45	0.63	0.95	12.0	1.5°	4	3

Packed: 1 pc.
Available WXL® coating only.





List 3712 (Continued)

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End


SPEED FEED P1162-1169	CARBIDE	WXL		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170154	1.0	50	0.63	0.95	16.0	1.5°	4	3
3170155	1.0	55	0.63	0.95	20.0	1.5°	4	3
3170156	1.0	60	0.63	0.95	25.0	1.5°	4	3
3170157	1.0	65	0.63	0.95	30.0	1.5°	4	3
3170158	1.0	70	0.63	0.95	35.0	1.5°	4	3
3170161	1.0	80	0.63	0.95	45.0	2.0°	4	4
3170171	1.2	45	0.76	1.15	12.0	0.5°	4	3
3170172	1.2	60	0.76	1.15	25.0	0.5°	4	3
3170181	1.2	45	0.76	1.15	12.0	1.0°	4	3
3170182	1.2	60	0.76	1.15	25.0	1.0°	4	3
3170191	1.2	45	0.76	1.15	12.0	1.5°	4	3
3170192	1.2	60	0.76	1.15	25.0	1.5°	4	3
3170211	1.5	45	0.95	1.42	8.0	0.5°	4	3
3170212	1.5	45	0.95	1.42	10.0	0.5°	4	3
3170213	1.5	45	0.95	1.42	12.0	0.5°	4	3
3170214	1.5	55	0.95	1.42	16.0	0.5°	4	3
3170215	1.5	55	0.95	1.42	20.0	0.5°	4	3
3170216	1.5	60	0.95	1.42	25.0	0.5°	4	3
3170217	1.5	65	0.95	1.42	30.0	0.5°	4	3
3170218	1.5	70	0.95	1.42	35.0	0.5°	4	3
3170221	1.5	45	0.95	1.42	10.0	1.0°	4	3
3170222	1.5	45	0.95	1.42	12.0	1.0°	4	3
3170223	1.5	55	0.95	1.42	16.0	1.0°	4	3
3170224	1.5	55	0.95	1.42	20.0	1.0°	4	3
3170225	1.5	60	0.95	1.42	25.0	1.0°	4	3

Packed: 1 pc.
Available WXL® coating only.

continued on next page

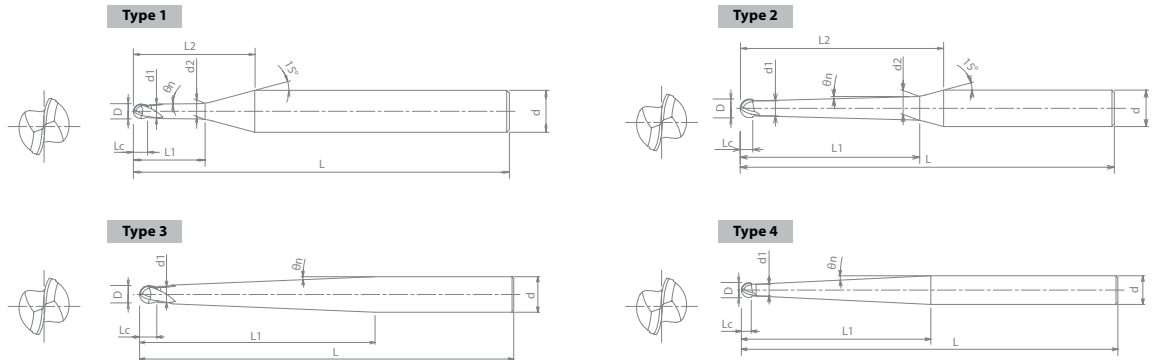

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
3712	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3712 (Continued)

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End

SPEED FEED P1162-1169	CARBIDE	WXL		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------

Radius Tolerance	
0.2≤D≤6	+/-0.005mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170226	1.5	65	0.95	1.42	30.0	1.0°	4	3
3170227	1.5	70	0.95	1.42	35.0	1.0°	4	3
3170230	1.5	45	0.95	1.42	10.0	1.5°	4	3
3170231	1.5	45	0.95	1.42	12.0	1.5°	4	3
3170232	1.5	55	0.95	1.42	16.0	1.5°	4	3
3170233	1.5	55	0.95	1.42	20.0	1.5°	4	3
3170234	1.5	60	0.95	1.42	25.0	1.5°	4	3
3170235	1.5	65	0.95	1.42	30.0	1.5°	4	3
3170236	1.5	70	0.95	1.42	35.0	1.5°	4	3
3170241	1.5	70	0.95	1.42	38.6	2.0°	4	4
3170271	2.0	45	1.26	1.93	8.0	0.5°	4	3
3170272	2.0	45	1.26	1.93	10.0	0.5°	4	3
3170273	2.0	45	1.26	1.93	12.0	0.5°	4	3
3170274	2.0	50	1.26	1.93	16.0	0.5°	4	3
3170275	2.0	55	1.26	1.93	20.0	0.5°	4	3
3170276	2.0	65	1.26	1.93	26.0	0.5°	4	3
3170277	2.0	70	1.26	1.93	30.0	0.5°	4	3
3170278	2.0	75	1.26	1.93	35.0	0.5°	4	3
3170279	2.0	80	1.26	1.93	40.0	0.5°	4	3
3170281	2.0	50	1.26	1.93	16.0	1.0°	4	3
3170282	2.0	55	1.26	1.93	20.0	1.0°	4	3
3170283	2.0	65	1.26	1.93	25.0	1.0°	4	3
3170284	2.0	70	1.26	1.93	30.0	1.0°	4	3
3170285	2.0	75	1.26	1.93	35.0	1.0°	4	3
3170286	2.0	80	1.26	1.93	40.0	1.0°	4	3
3170287	2.0	90	1.26	1.93	50.0	1.0°	6	3
3170288	2.0	100	1.26	1.93	60.0	1.0°	6	3
3170289	2.0	110	1.26	1.93	70.0	1.0°	6	3
3170291	2.0	50	1.26	1.93	16.0	1.5°	4	3
3170292	2.0	55	1.26	1.93	20.0	1.5°	4	3
3170293	2.0	65	1.26	1.93	25.0	1.5°	4	3
3170294	2.0	70	1.26	1.93	30.0	1.5°	4	3
3170295	2.0	75	1.26	1.93	35.0	1.5°	4	3
3170296	2.0	80	1.26	1.93	41.4	1.5°	4	4
3170301	2.0	70	1.26	1.93	31.5	2.0°	4	4
3170321	3.0	50	2.40	2.95	8.0	0.5°	6	1
3170322	3.0	50	2.40	2.95	10.0	0.5°	6	1
3170323	3.0	55	2.40	2.95	12.0	0.5°	6	1
3170324	3.0	55	2.40	2.95	16.0	0.5°	6	1
3170325	3.0	60	2.40	2.95	20.0	0.5°	6	1
3170326	3.0	65	2.40	2.95	25.0	0.5°	6	1
3170327	3.0	70	2.40	2.95	30.0	0.5°	6	1
3170328	3.0	80	2.40	2.95	35.0	0.5°	6	1
3170329	3.0	85	2.40	2.95	40.0	0.5°	6	1
3170330	3.0	90	2.40	2.95	50.0	0.5°	6	1
3170331	3.0	60	2.40	2.95	20.0	1.0°	6	1
3170332	3.0	65	2.40	2.95	25.0	1.0°	6	1
3170333	3.0	70	2.40	2.95	30.0	1.0°	6	1

Packed: 1 pc.
Available WXL® coating only.





List 3712 (Continued)

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End


SPEED FEED P1162-1169	CARBIDE	WXL	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170334	3.0	80	2.40	2.95	35.0	1.0°	6	1
3170335	3.0	85	2.40	2.95	40.0	1.0°	6	1
3170336	3.0	90	2.40	2.95	50.0	1.0°	6	1
3170337	3.0	100	2.40	2.95	60.0	1.0°	6	1
3170338	3.0	110	2.40	2.95	70.0	1.0°	6	1
3170341	3.0	60	2.40	2.95	20.0	1.5°	6	1
3170342	3.0	65	2.40	2.95	25.0	1.5°	6	1
3170343	3.0	70	2.40	2.95	30.0	1.5°	6	1
3170344	3.0	80	2.40	2.95	35.0	1.5°	6	1
3170345	3.0	85	2.40	2.95	40.0	1.5°	6	1
3170346	3.0	90	2.40	2.95	50.0	1.5°	6	1
3170347	3.0	100	2.40	2.95	62.5	1.5°	6	2
3170351	3.0	100	2.40	2.95	47.5	2.0°	6	2
3170371	4.0	65	3.20	3.93	20.0	1.0°	6	1
3170372	4.0	80	3.20	3.93	30.0	1.0°	6	1
3170373	4.0	90	3.20	3.93	40.0	1.0°	6	1
3170374	4.0	100	3.20	3.93	50.0	1.0°	8	1
3170375	4.0	110	3.20	3.93	60.0	1.0°	8	1
3170381	4.0	80	3.20	3.93	44.2	1.5°	6	2
3170391	4.0	80	3.20	3.93	34.0	2.0°	6	2
3170401	5.0	100	5.00	4.95	30.0	1.0°	8	1
3170402	5.0	100	5.00	4.95	40.0	1.0°	8	1
3170403	5.0	130	5.00	4.95	60.0	1.0°	8	1
3170411	5.0	100	5.00	4.95	26.9	1.5°	6	2
3170412	5.0	130	5.00	4.95	65.1	1.5°	8	2

Packed: 1 pc.
Available WXL® coating only.

continued on next page

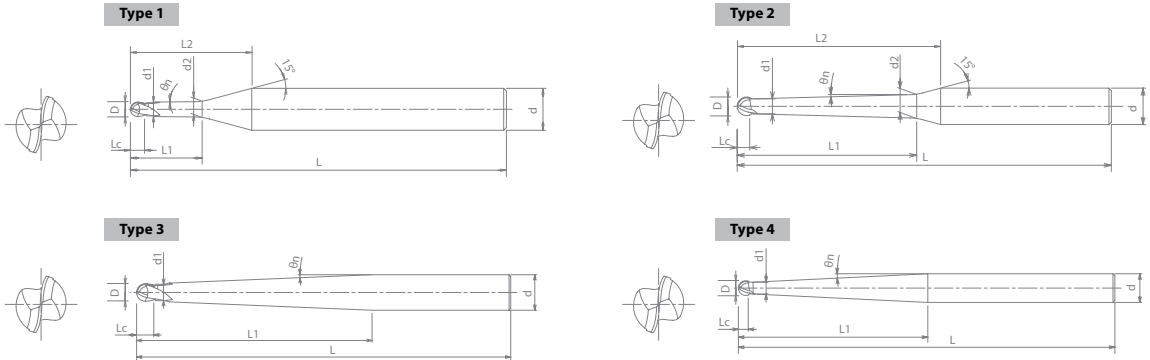

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3712	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3712 (Continued)

WXL-PC-EBD, 2 Flute, Stub Length, Pencil Neck, Ball End

SPEED FEED P1162-1169	CARBIDE	WXL		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------





Radius Tolerance	
0.2 ≤ D ≤ 6	+/-0.005mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Minimum Neck Diameter	Effective Neck Length	Neck Taper	Shank Diameter	Type
	D	L	Lc	d1	L1	θn	d	
3170421	5.0	130	5.00	4.95	50.1	2.0°	8	2
3170431	6.0	100	6.00	5.95	30.0	1.0°	8	1
3170432	6.0	100	6.00	5.95	40.0	1.0°	8	1
3170433	6.0	100	6.00	5.95	50.0	1.0°	8	1
3170434	6.0	110	6.00	5.95	60.0	1.0°	10	1
3170435	6.0	120	6.00	5.95	70.0	1.0°	10	1
3170436	6.0	130	6.00	5.95	80.0	1.0°	12	1
3170441	6.0	100	6.00	5.95	49.0	1.5°	8	2
3170451	6.0	100	6.00	5.95	36.0	2.0°	8	2

Packed: 1 pc.
Available WXL® coating only.

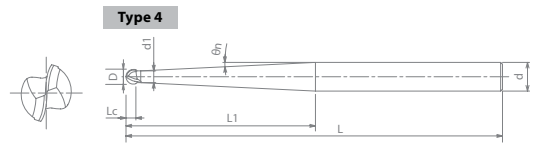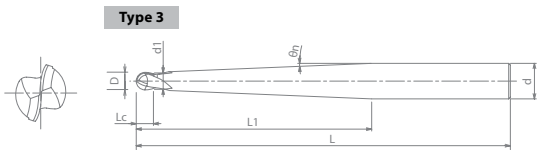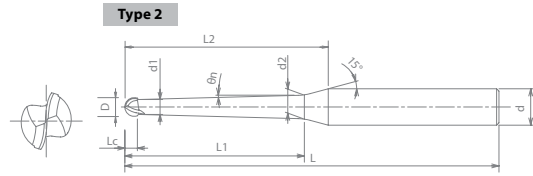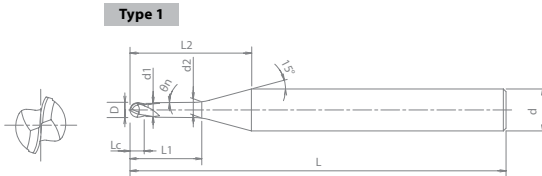

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3712	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3722

WXL-3D-DE, 2 Flute, Regular Length

SPEED FEED P1170-1171	CARBIDE	WXL	REG	35°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
0.1 ≤ D ≤ 12	+0 / -0.02mm
12 < D ≤ 20	+0 / -0.03mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3182401	0.1	45	0.3	4
3182402	0.2	45	0.6	4
3182403	0.3	45	0.9	4
3182404	0.4	45	1.2	4
3182405	0.5	45	1.5	4
3182406	0.6	45	1.8	4
3182407	0.7	45	2.1	4
3182408	0.8	45	2.4	4
3182409	0.9	45	2.7	4
3182410	1.0	45	3.0	4
3182411	1.1	45	3.3	4
3182412	1.2	45	3.6	4
3182413	1.3	45	3.9	4
3182414	1.4	45	4.2	4
3182415	1.5	45	4.5	4
3182416	1.6	45	4.8	4
3182417	1.7	45	5.1	4
3182418	1.8	45	5.4	4
3182419	1.9	45	5.7	4
3182420	2.0	45	6.0	4
3182421	2.1	45	6.3	4
3182422	2.2	45	6.6	4
3182423	2.3	45	6.9	4
3182424	2.4	45	7.2	4
3182425	2.5	45	7.5	4
3182426	2.6	45	7.8	4
3182427	2.7	45	8.1	4
3182428	2.8	45	8.4	4
3182429	2.9	45	8.7	4
3182430	3.0	45	9.0	6
3182431	3.1	45	9.3	6
3182432	3.2	45	9.6	6
3182433	3.3	45	9.9	6
3182434	3.4	45	10.2	6
3182435	3.5	45	10.5	6
3182436	3.6	45	10.8	6
3182437	3.7	45	11.1	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3182438	3.8	45	11.4	6
3182439	3.9	45	11.7	6
3182440	4.0	50	12.0	6
3182441	4.1	50	12.3	6
3182442	4.2	50	12.6	6
3182443	4.3	50	12.9	6
3182444	4.4	50	13.2	6
3182445	4.5	50	13.5	6
3182446	4.6	55	13.8	6
3182447	4.7	55	14.1	6
3182448	4.8	55	14.4	6
3182449	4.9	55	14.7	6
3182450	5.0	55	15.0	6
3182451	5.1	55	15.3	6
3182452	5.2	55	15.6	6
3182453	5.3	55	15.9	6
3182454	5.4	55	16.2	6
3182455	5.5	60	16.5	6
3182456	5.6	60	16.8	6
3182457	5.7	60	17.1	6
3182458	5.8	60	17.4	6
3182459	5.9	60	17.7	6
3182460	6.0	60	18.0	6
3182465	6.5	65	19.5	8
3182470	7.0	65	21.0	8
3182475	7.5	70	22.5	8
3182480	8.0	70	24.0	8
3182485	8.5	70	22.5	10
3182490	9.0	75	27.0	10
3182495	9.5	75	28.5	10
3182500	10.0	80	30.0	10
3182510	11.0	80	33.0	12
3182520	12.0	90	36.0	12
3182560	16.0	110	48.0	16
3182580	18.0	130	54.0	16
3182600	20.0	130	60.0	20

Packed: 1 pc.
Available WXL® coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
3722	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® WXL®

Premium Performance Carbide End Mills with OSG's Proprietary WXL® Coating

List 3723

WXL-4D-DE, 2 Flute, Long Length

SPEED FEED P1172-1173	CARBIDE	WXL	LONG	40°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
0.2 ≤ D ≤ 12	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3182602	0.2	45	0.8	4
3182603	0.3	45	1.2	4
3182604	0.4	45	1.6	4
3182605	0.5	45	2.0	4
3182606	0.6	45	2.4	4
3182607	0.7	45	2.8	4
3182608	0.8	45	3.2	4
3182609	0.9	45	3.6	4
3182610	1.0	45	4.0	4
3182611	1.1	45	4.4	4
3182612	1.2	45	4.8	4
3182613	1.3	45	5.2	4
3182614	1.4	45	5.6	4
3182615	1.5	45	6.0	4
3182616	1.6	45	6.4	4
3182617	1.7	45	6.8	4
3182618	1.8	45	7.2	4
3182619	1.9	45	7.6	4
3182620	2.0	45	8.0	4
3182621	2.1	45	8.4	4
3182622	2.2	45	8.8	4
3182623	2.3	45	9.2	4
3182624	2.4	45	9.6	4
3182625	2.5	45	10.0	4
3182626	2.6	50	10.4	4
3182627	2.7	50	10.8	4
3182628	2.8	50	11.2	4
3182629	2.9	50	11.6	4
3182630	3.0	50	12.0	6
3182631	3.1	50	12.4	6
3182632	3.2	50	12.8	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3182633	3.3	50	13.2	6
3182634	3.4	50	13.6	6
3182635	3.5	50	14.0	6
3182636	3.6	50	14.4	6
3182637	3.7	50	14.8	6
3182638	3.8	50	15.2	6
3182639	3.9	50	15.6	6
3182640	4.0	55	16.0	6
3182641	4.1	55	16.4	6
3182642	4.2	55	16.8	6
3182643	4.3	55	17.2	6
3182644	4.4	55	17.6	6
3182645	4.5	55	18.0	6
3182646	4.6	55	18.4	6
3182647	4.7	55	18.8	6
3182648	4.8	55	19.2	6
3182649	4.9	55	19.6	6
3182650	5.0	60	20.0	6
3182651	5.1	60	20.4	6
3182652	5.2	60	20.8	6
3182653	5.3	60	21.2	6
3182654	5.4	60	21.6	6
3182655	5.5	65	22.0	6
3182656	5.6	65	22.4	6
3182657	5.7	65	22.8	6
3182658	5.8	65	23.2	6
3182659	5.9	65	23.6	6
3182660	6.0	65	24.0	6
3182680	8.0	80	32.0	8
3182700	10.0	90	40.0	10
3182720	12.0	100	48.0	12

Packed: 1 pc.
Available WXL® coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3723	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3770

WXL-CR-EDS, 2 Flute, Regular Length, Corner Radius

SPEED FEED P1174	CARBIDE	WXL	REG	30°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
0.6 ≤ D ≤ 12	+0 / -0.02mm



Units: mm


EDP Number	Mill Dia.	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	R	L	Lc	L1	d2	d	
37700000	0.6	0.1	50	0.9	2.0	0.55	6	1
37700001	0.8	0.1	50	1.2	2.6	0.75	6	1
37700002	1.0	0.1	50	1.5	2.7	0.95	6	1
37700003	1.2	0.1	50	1.8	3.2	1.15	6	1
37700004	1.4	0.1	50	2.1	3.7	1.35	6	1
37700005	1.5	0.1	50	2.3	4.0	1.45	6	1
37700006	1.6	0.1	50	2.4	4.2	1.55	6	1
37700007	1.8	0.1	50	2.7	4.7	1.75	6	1
37700008	2.0	0.1	50	3.0	5.2	1.95	6	1
37700009	2.5	0.1	50	3.7	5.2	2.40	6	1
37700010	3.0	0.2	60	8.0	-	-	6	2
37700011	3.0	0.5	60	8.0	-	-	6	2
37700012	4.0	0.2	70	11.0	-	-	6	2
37700013	4.0	0.5	70	11.0	-	-	6	2
37700014	4.0	1.0	70	11.0	-	-	6	2
37700015	5.0	0.2	80	13.0	-	-	6	2
37700016	5.0	0.5	80	13.0	-	-	6	2
37700017	5.0	1.0	80	13.0	-	-	6	2
37700018	6.0	0.2	90	13.0	-	-	6	2

EDP Number	Mill Dia.	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	R	L	Lc	L1	d2	d	
37700019	6.0	0.5	90	13.0	-	-	6	2
37700020	6.0	1.0	90	13.0	-	-	6	2
37700021	6.0	1.5	90	13.0	-	-	6	2
37700022	6.0	2.0	90	13.0	-	-	6	2
37700023	8.0	0.5	100	19.0	-	-	8	2
37700024	8.0	1.0	100	19.0	-	-	8	2
37700025	8.0	1.5	100	19.0	-	-	8	2
37700026	8.0	2.0	100	19.0	-	-	8	2
37700027	10.0	0.5	100	22.0	-	-	10	2
37700028	10.0	1.0	100	22.0	-	-	10	2
37700029	10.0	1.5	100	22.0	-	-	10	2
37700030	10.0	2.0	100	22.0	-	-	10	2
37700031	10.0	3.0	100	22.0	-	-	10	2
37700032	12.0	0.5	110	26.0	-	-	12	2
37700033	12.0	1.0	110	26.0	-	-	12	2
37700034	12.0	1.5	110	26.0	-	-	12	2
37700035	12.0	2.0	110	26.0	-	-	12	2
37700036	12.0	3.0	110	26.0	-	-	12	2




Packed: 1 pc.
Available WXL® coating only.

Type 1

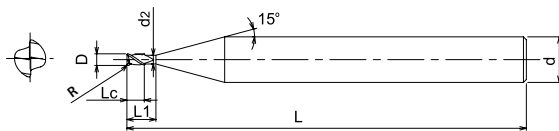

Type 2



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP432 or HP433 (p. 987-988 or 989)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3770	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3771

WXL-CR-PHS, 4 Flute, Regular Length, Corner Radius

SPEED FEED P1175	CARBIDE	WXL	REG	30°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
37710000	3	0.2	60	8	6
37710001	3	0.5	60	8	6
37710002	4	0.2	70	11	6
37710003	4	0.5	70	11	6
37710004	4	1.0	70	11	6
37710005	5	0.2	80	13	6
37710006	5	0.5	80	13	6
37710007	5	1.0	80	13	6
37710008	6	0.2	90	13	6
37710009	6	0.5	90	13	6
37710010	6	1.0	90	13	6
37710011	6	1.5	90	13	6
37710012	6	2.0	90	13	6
37710013	8	0.5	100	19	8

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
37710014	8	1.0	100	19	8
37710015	8	1.5	100	19	8
37710016	8	2.0	100	19	8
37710017	10	0.5	100	22	10
37710018	10	1.0	100	22	10
37710019	10	1.5	100	22	10
37710020	10	2.0	100	22	10
37710021	10	3.0	100	22	10
37710022	12	0.5	110	26	12
37710023	12	1.0	110	26	12
37710024	12	1.5	110	26	12
37710025	12	2.0	110	26	12
37710026	12	3.0	110	26	12

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 or HP435 (p. 987-988 or 990)

Machining steel over 54 HRC? Try EXOCARB® WXS® - List 4571 (p. 889)

Work Material

List No.	P					M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
3771	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 3794

WXL-LN-EMS, 4 Flute, Stub Length, Long Neck, Rib Processing

SPEED FEED P1176-1177	CARBIDE	WXL	STUB	35°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1 ≤ D ≤ 3	+0 / -0.015mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
3172004	1.0	45	1.5	4	0.95	4
3172006	1.0	45	1.5	6	0.95	4
3172008	1.0	45	1.5	8	0.95	4
3172010	1.0	45	1.5	10	0.95	4
3172012	1.0	45	1.5	12	0.95	4
3172016	1.0	50	1.5	16	0.95	4
3172206	1.2	45	1.8	6	1.15	4
3172208	1.2	45	1.8	8	1.15	4
3172210	1.2	45	1.8	10	1.15	4
3172212	1.2	45	1.8	12	1.15	4
3172216	1.2	50	1.8	16	1.15	4
3172406	1.4	45	2.1	6	1.35	4
3172408	1.4	45	2.1	8	1.35	4
3172410	1.4	45	2.1	10	1.35	4
3172412	1.4	45	2.1	12	1.35	4
3172414	1.4	50	2.1	14	1.35	4
3172416	1.4	50	2.1	16	1.35	4
3172422	1.4	60	2.1	22	1.35	4
3172506	1.5	45	2.3	6	1.45	4
3172508	1.5	45	2.3	8	1.45	4
3172510	1.5	45	2.3	10	1.45	4
3172512	1.5	45	2.3	12	1.45	4
3172514	1.5	50	2.3	14	1.45	4
3172516	1.5	50	2.3	16	1.45	4
3172518	1.5	55	2.3	18	1.45	4
3172520	1.5	55	2.3	20	1.45	4
3172606	1.6	45	2.4	6	1.55	4
3172608	1.6	45	2.4	8	1.55	4
3172610	1.6	45	2.4	10	1.55	4
3172612	1.6	45	2.4	12	1.55	4
3172614	1.6	50	2.4	14	1.55	4
3172616	1.6	50	2.4	16	1.55	4
3172618	1.6	55	2.4	18	1.55	4
3172620	1.6	55	2.4	20	1.55	4
3172625	1.6	60	2.4	25	1.55	4
3172806	1.8	45	2.7	6	1.75	4
3172808	1.8	45	2.7	8	1.75	4
3172810	1.8	45	2.7	10	1.75	4
3172812	1.8	45	2.7	12	1.75	4
3172814	1.8	50	2.7	14	1.75	4
3172816	1.8	50	2.7	16	1.75	4

Packed: 1 pc.
Available WXL® coating only.

continued on next page

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
3794	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 3794 (Continued)

WXL-LN-EMS, 4 Flute, Stub Length, Long Neck, Rib Processing

SPEED FEED P1176-1177	CARBIDE	WXL	STUB	35°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1 ≤ D ≤ 3	+0 / -0.015mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
3172818	1.8	55	2.7	18	1.75	4
3172820	1.8	55	2.7	20	1.75	4
3172825	1.8	60	2.7	25	1.75	4
3173006	2.0	45	3.0	6	1.95	4
3173008	2.0	45	3.0	8	1.95	4
3173010	2.0	45	3.0	10	1.95	4
3173012	2.0	45	3.0	12	1.95	4
3173014	2.0	50	3.0	14	1.95	4
3173016	2.0	50	3.0	16	1.95	4
3173018	2.0	55	3.0	18	1.95	4
3173020	2.0	55	3.0	20	1.95	4
3173025	2.0	60	3.0	25	1.95	4
3173030	2.0	70	3.0	30	1.95	4
3173508	2.5	45	3.7	8	2.40	4
3173512	2.5	45	3.7	12	2.40	4
3173516	2.5	55	3.7	16	2.40	4
3173520	2.5	60	3.7	20	2.40	4
3173525	2.5	70	3.7	25	2.40	4
3174008	3.0	45	4.5	8	2.85	6
3174012	3.0	45	4.5	12	2.85	6
3174016	3.0	55	4.5	16	2.85	6
3174020	3.0	60	4.5	20	2.85	6
3174025	3.0	65	4.5	25	2.85	6
3174030	3.0	80	4.5	30	2.85	6

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP411 (p. 978)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3794	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 4445

WXL-CR-EHS, 4 Flute, Regular Length, High Helix, Corner Radius

SPEED FEED P1178	CARBIDE	WXL	REG	50°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/2	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
44450001	1/8	0.01	2-1/2	3/8	1/4
44450002	3/16	0.01	2-1/2	1/2	1/4
44450003	1/4	0.01	2-1/2	5/8	1/4

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
44450004	5/16	0.02	2-3/4	3/4	5/16
44450005	3/8	0.02	3	1	3/8
44450006	1/2	0.02	4	1-1/8	1/2

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP460 (p. 971)

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4445	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® WXS®


Ultra Premium Performance Carbide End Mills with OSG's Proprietary WXS® Coating

List 4410

WXS-EBD, 2 Flute, Stub Length, Ball End

SPEED FEED P1179	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------


Radius Tolerance	
1/32 ≤ D ≤ 3/16	± 0.0002"
1/4 ≤ D ≤ 1/2	± 0.0003"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
44100111	1/32	1-1/2	1/32	0.094	0.029	1/4
44100211	1/16	1-1/2	1/16	0.157	0.060	1/4
44100511	3/32	1-1/2	3/32	0.189	0.092	1/4
44100711	1/8	2	1/8	0.252	0.123	1/4
44100911	3/16	2-1/2	3/16	0.283	0.185	1/4
44101111	1/4	3	1/4	0.504	0.246	1/4
44101311	5/16	3-1/2	5/16	0.630	0.308	5/16
44101411	3/8	3-1/2	3/8	0.756	0.371	3/8
44101611	1/2	4	1/2	1.000	0.496	1/2

Packed: 1 pc.
Available WXS® coating only.

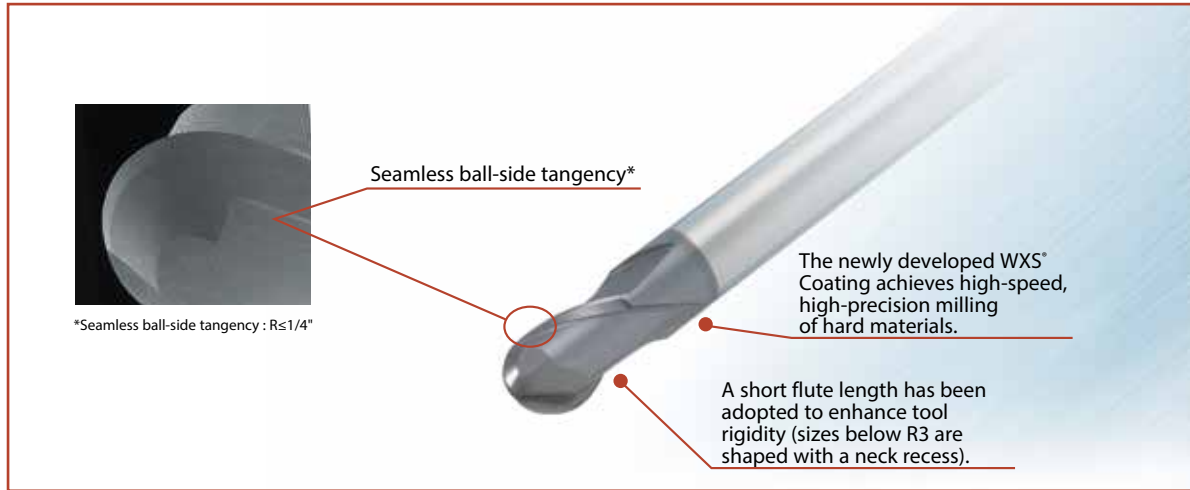

OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB® WXL® - List 3610 (p. 853)

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421BN, HP416 or HP413 (p. 981-982, 982 or 986)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4410	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





List 4510

WXS-EBD, 2 Flute, Stub Length, Ball End

SPEED FEED P1180	CARBIDE	WXS		STUB	30°	SHANK h6
---------------------	---------	-----	--	------	-----	-------------


Radius Tolerance	
1 ≤ D ≤ 2	+/- 0.005mm
2 < D ≤ 12	+/- 0.007mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
3041410	1.0	50	1	2	0.95	4
3041415	1.5	50	2	3	1.45	4
3041420	2.0	50	2	4	1.95	6
3041430	3.0	60	3	6	2.85	6
3041440	4.0	70	4	8	3.85	6
3041441	4.0	60	4	8	3.85	4
3041450	5.0	80	5	10	4.85	6
3041460	6.0	90	9	-	-	6
3041480	8.0	100	12	-	-	8
3041500	10.0	100	15	-	-	10
3041520	12.0	110	18	-	-	12

Packed: 1 pc.
Available WXS® coating only.

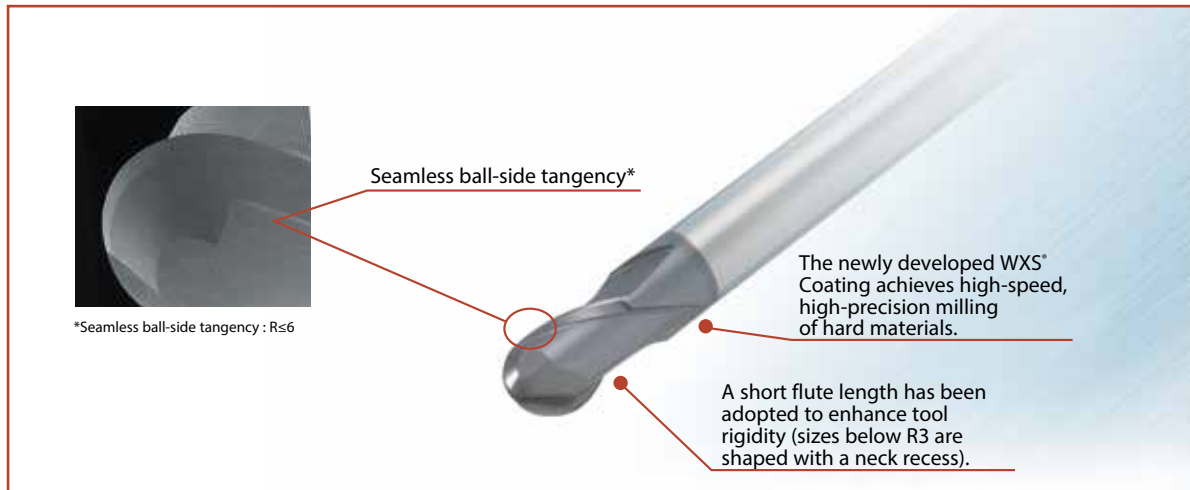

OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB® WXL® - List 3710 (p. 854)

Don't require ultra-high performance? Try HY-PRO® CARB - List HP421BN, HP416 or HP413 (p. 981-982, 982 or 986)

Want to turbo-charge performance? Try EXOPRO® PHX - List 9510 (p. 842)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4510	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4440

WXS-EMS, Multiple Flute, Regular Length

SPEED FEED P1181	CARBIDE	WXS	REG	45°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1/2	+0 / -0.0008"
5/8 ≤ D ≤ 3/4	+0 / -0.0012"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
44400311	1/16	2-1/2	3/16	1/4	4
44400511	3/32	2-1/2	5/16	1/4	4
44400711	1/8	2-1/2	3/8	1/4	4
44400911	3/16	2-1/2	1/2	1/4	4
44401111	1/4	2-1/2	5/8	1/4	6
44401311	5/16	2-3/4	3/4	5/16	6
44401411	3/8	3	1	3/8	6
44401611	1/2	3-1/2	1-1/8	1/2	6
44401811	5/8	4	1-1/2	5/8	6
44402011	3/4	4-1/4	1-3/4	3/4	6

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Not machining steel over 54HRC? Try EXOCARB® WXL® - List 3604 (p. 856)
 Don't require ultra-high performance? Try HY-PRO® CARB - List HP450 (p. 972)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4440	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4540

WXS-EMS, Multiple Flute, Regular Length

NEW SIZES	SPEED FEED P1182	CARBIDE	WXS	REG	45°	SHANK h6
------------------	----------------------------	----------------	------------	------------	------------	--------------------

Milling Diameter Tolerance	
1 ≤ D ≤ 12	+0 / -0.02mm
16 ≤ D ≤ 25	+0 / -0.03mm



4 Flutes 6 Flutes

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Dia.	Number of Flutes
	D	L	Lc	d	
3041010	1.0	60	2.5	6	4
3041015	1.5	60	4.0	6	4
3041020	2.0	60	6.0	6	4
3041025	2.5	60	8.0	6	4
3041030	3.0	60	8.0	6	4
3041035	3.5	60	10.0	6	4
3041040	4.0	60	11.0	6	4
3041045	4.5	60	11.0	6	4
3041050	5.0	60	13.0	6	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Dia.	Number of Flutes
	D	L	Lc	d	
3041055	5.5	60	13.0	6	4
3041060	6.0	60	13.0	6	6
3041080	8.0	70	19.0	8	6
3041100	10.0	80	22.0	10	6
3041120	12.0	90	26.0	12	6
3041160	16.0	105	32.0	16	6
3041200	20.0	110	38.0	20	6
3041250	25.0	125	45.0	25	8

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Not machining steel over 54HRC? Try EXOCARB® WXL® - List 3704 (p. 864)
Don't require ultra-high performance? Try HY-PRO® CARB - List HP450 (p. 972)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
4540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4471

WXS-PKE, 4 Flute, Stub Length, Reduced Neck, Corner Radius

SPEED FEED P1183	CARBIDE	WXS		STUB	45°	SHANK h6
---------------------	---------	-----	--	------	-----	-------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1/2	+0 / -0.0008"

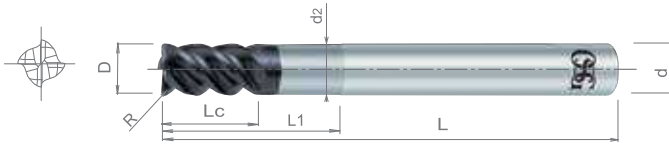

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
447100111	1/16	0.010	2.25	1/16	0.25	0.058	1/8
447100311	3/32	0.010	2.25	3/32	0.38	0.089	1/8
447100511	1/8	0.010	2.25	1/8	0.50	0.120	1/8
447100611	1/8	0.015	2.25	1/8	0.50	0.120	1/8
447100711	1/8	0.020	2.25	1/8	0.50	0.120	1/8
447101011	3/16	0.020	2.25	3/16	0.50	0.181	3/16
447101111	3/16	0.030	2.25	3/16	0.50	0.181	3/16
447101411	1/4	0.010	2.50	1/4	0.75	0.242	1/4
447101511	1/4	0.020	2.50	1/4	0.75	0.242	1/4
447101611	1/4	0.030	2.50	1/4	0.75	0.242	1/4
447102011	3/8	0.020	3.00	3/8	1.00	0.367	3/8
447102111	3/8	0.030	3.00	3/8	1.00	0.367	3/8
447102211	3/8	0.060	3.00	3/8	1.00	0.367	3/8
447102611	1/2	0.030	3.25	1/2	1.50	0.488	1/2
447102711	1/2	0.060	3.25	1/2	1.50	0.488	1/2

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Not machining steel over 54HRC? Try EXOCARB® WXL® - List 3670 (p. 855)
Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 (p. 987-988)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
4471	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4571

WXS-PKE, 4 Flute, Stub Length, Reduced Neck, Corner Radius

SPEED FEED P1184	CARBIDE	WXS	STUB	45°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.02mm

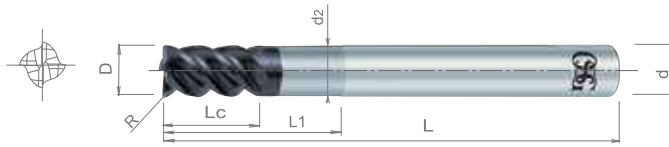

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
457103011	3	0.2	60	5	9	2.85	6
457103111	3	0.2	70	5	15	2.85	6
457103211	3	0.5	60	5	9	2.85	6
457103311	3	0.5	70	5	15	2.85	6
457104011	4	0.2	70	6	12	3.80	6
457104111	4	0.2	80	6	20	3.80	6
457104211	4	0.5	70	6	12	3.80	6
457104311	4	0.5	80	6	20	3.80	6
457105011	5	0.2	80	8	15	4.80	6
457105111	5	0.2	90	8	25	4.80	6
457105211	5	0.5	80	8	15	4.80	6
457105311	5	0.5	90	8	25	4.80	6
457106011	6	0.5	90	9	18	5.80	6
457106111	6	1.0	90	9	18	5.80	6
457106211	6	1.0	100	9	30	5.80	6
457106311	6	0.5	100	9	30	5.80	6
457108011	8	0.5	100	12	24	7.70	8
457108111	8	0.5	110	12	40	7.70	8
457108211	8	1.0	100	12	24	7.70	8
457108311	8	1.0	110	12	40	7.70	8
457110011	10	0.5	100	15	30	9.70	10
457110111	10	0.5	120	15	50	9.70	10
457110211	10	1.0	100	15	30	9.70	10
457110311	10	1.0	120	15	50	9.70	10
457110411	10	2.0	100	15	30	9.70	10
457110511	10	2.0	120	15	50	9.70	10
457112011	12	1.0	110	18	36	11.70	12
457112111	12	1.0	130	18	60	11.70	12
457112211	12	2.0	110	18	36	11.70	12
457112311	12	2.0	130	18	60	11.70	12

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB® WXL® - List 3771 (p. 880)

Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 or HP435 (p. 987-988 or 990)

Want to turbo-charge performance? Try EXOPRO® PHX - List 9575 (p. 847)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			4140 4340	300	400	17-4 PH	6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
4571	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4470

WXS-CRE, Stub Length, High Feed, Corner Radius, Multiple Flute

SPEED FEED P1185	CARBIDE	WXS	STUB	SHANK h6
---------------------	---------	-----	------	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 3/16	+0 / -0.0008"
1/4 ≤ D ≤ 1/2	+0 / -0.0012"

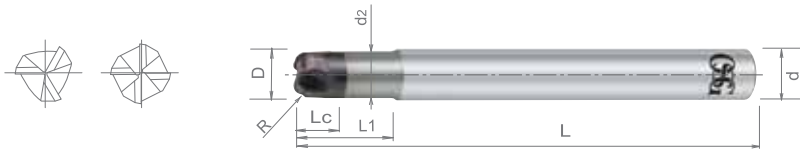

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	No. of Flutes
	D	R	L	Lc	L1	d2	d	
44700111	1/8	1/32	2-1/4	0.06	3/8	0.12	1/4	3
44700211	3/16	1/16	2-1/4	0.09	9/16	0.18	1/4	3
44700311	1/4	1/16	3	0.10	1	0.23	1/4	4
44700411	5/16	3/32	3	0.13	1-1/4	0.29	5/16	4
44700511	3/8	3/32	4	0.15	1-1/2	0.34	3/8	4
44700611	1/2	1/8	5	0.20	2	0.46	1/2	4

Packed: 1 pc.
Available WXS® coating only.




List 4570

WXS-CRE, Stub Length, High Feed, Corner Radius, Multiple Flute

SPEED FEED P1186	CARBIDE	WXS	STUB	SHANK h6
---------------------	---------	-----	------	-------------

Milling Diameter Tolerance	
2 ≤ D ≤ 5	+0 / -0.02mm
6 ≤ D ≤ 13	+0 / -0.03mm

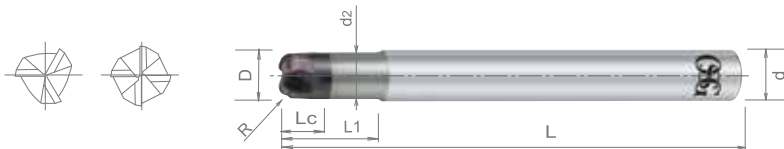

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	No. of Flutes
	D	R	L	Lc	L1	d2	d	
457002011	2	0.50	60	0.8	5.0	1.8	6	3
457003011	3	0.75	60	1.3	9.0	2.7	6	4
457004011	4	1.00	70	1.6	10.0	3.6	6	4
457005011	5	1.20	80	2.0	12.5	4.5	6	4
457006011	6	1.50	90	2.5	12.0	5.4	6	4
457007011	7	1.50	90	3.0	-	-	6	4
457008011	8	2.00	100	3.5	16.0	7.2	8	4
457009011	9	2.00	100	4.0	-	-	8	4
457010011	10	2.00	100	4.5	20.0	9.0	10	4
457011011	11	2.00	100	5.0	-	-	10	4
457012011	12	3.00	110	5.0	24.0	11.0	12	4
457013011	13	3.00	110	6.0	-	-	12	4

Packed: 1 pc.
Available WXS® coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4470	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
4570	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4472

WXS-CRE, 5 Flute, Stub Length, High Feed, Corner Radius

SPEED FEED P1187	CARBIDE	WXS		STUB	SHANK h6
----------------------------	----------------	------------	--	-------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 3/16	+0 / -0.0008"
1/4 ≤ D ≤ 1/2	+0 / -0.0012"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
447200013	1/8	1/32	2-1/4	0.062	0.375	0.113	1/4
447200113	3/16	1/16	2-1/4	0.094	0.562	0.168	1/4
447200213	1/4	1/16	3	0.098	1.000	0.226	1/4
447200313	5/16	3/32	3	0.129	1.250	0.280	5/16
447200413	3/8	3/32	4	0.149	1.500	0.336	3/8
447200513	1/2	1/8	5	0.200	2.000	0.460	1/2

Packed: 1 pc.

Available WXS® coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4472	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





EXOCARB® WXS®


Ultra Premium Performance Carbide End Mills with OSG's Proprietary WXS® Coating

List 4572

WXS-CRE, Multiple Flute, Stub Length, High Feed, Corner Radius

SPEED FEED P1188	CARBIDE	WXS		STUB	SHANK h6
---------------------	---------	-----	--	------	-------------

Milling Diameter Tolerance	
2 ≤ D ≤ 12	+0 / -0.03mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	Number of Flutes
	D	R	L	Lc	L1	d2	d	
48106421	2	0.50	50	0.8	8.0	2.0	6	4
48106433	3	0.75	55	1.2	12.0	2.7	6	5
48106445	4	1.00	55	1.6	12.0	3.6	6	5
48106467	6	1.50	90	2.5	12.0	5.4	6	5
48106489	8	2.00	100	3.5	16.0	7.2	8	5
48106509	10	2.00	100	4.0	20.0	9.0	10	5
48106533	12	3.00	110	5.0	24.0	11.0	12	5

Packed: 1 pc.
Available WXS® coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
4572	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4592

WXS-CPR, 2 Flute, Stub Length, Long Neck, Corner Radius, Rib Processing

SPEED FEED P1189	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------



±5µm Corner Radius Tolerance

Milling Diameter Tolerance	
0.4 ≤ D ≤ 0.5	+0 / -0.010mm
0.5 ≤ D ≤ 3	+0 / -0.015mm

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
3100403	0.4	0.05	50	0.30	2	0.37	4
3100404	0.4	0.05	50	0.30	3	0.37	4
3100405	0.4	0.05	50	0.30	4	0.37	4
3100406	0.4	0.10	50	0.30	2	0.37	4
3100407	0.4	0.10	50	0.30	3	0.37	4
3100408	0.4	0.10	50	0.30	4	0.37	4
3100501	0.5	0.05	50	0.40	1	0.46	4
3100502	0.5	0.05	50	0.40	2	0.46	4
3100503	0.5	0.05	50	0.40	3	0.46	4
3100504	0.5	0.05	50	0.40	4	0.46	4
3100505	0.5	0.05	50	0.40	5	0.46	4
3100506	0.5	0.05	50	0.40	6	0.46	4
3100508	0.5	0.10	50	0.40	2	0.46	4
3100509	0.5	0.10	50	0.40	3	0.46	4
3100510	0.5	0.10	50	0.40	4	0.46	4
3100511	0.5	0.10	50	0.40	5	0.46	4
3100512	0.5	0.10	50	0.40	6	0.46	4
3100601	0.6	0.10	50	0.48	2	0.56	4
3100602	0.6	0.10	50	0.48	4	0.56	4
3100603	0.6	0.10	50	0.48	6	0.56	4
3100803	0.8	0.20	50	0.65	4	0.76	4
3100804	0.8	0.20	50	0.65	6	0.76	4
3100805	0.8	0.20	50	0.65	8	0.76	4
3101001	1.0	0.05	50	0.80	4	0.95	4
3101002	1.0	0.05	50	0.80	6	0.95	4
3101003	1.0	0.05	50	0.80	8	0.95	4
3101004	1.0	0.05	50	0.80	10	0.95	4
3101005	1.0	0.05	50	0.80	12	0.95	4
3101006	1.0	0.10	50	0.80	4	0.95	4
3101007	1.0	0.10	50	0.80	6	0.95	4
3101008	1.0	0.10	50	0.80	8	0.95	4
3101009	1.0	0.10	50	0.80	10	0.95	4
3101010	1.0	0.10	50	0.80	12	0.95	4
3101011	1.0	0.20	50	0.80	4	0.95	4
3101012	1.0	0.20	50	0.80	6	0.95	4
3101013	1.0	0.20	50	0.80	8	0.95	4
3101014	1.0	0.20	50	0.80	10	0.95	4
3101015	1.0	0.20	50	0.80	12	0.95	4
3101016	1.0	0.20	50	0.80	16	0.95	4
3101017	1.0	0.20	50	0.80	20	0.95	4
3101018	1.0	0.30	50	0.80	4	0.95	4

Packed: 1 pc.
Available WXS® coating only.

continued on next page

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels		
	Low	Med.	High			300	400	17-4 PH	6061		Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC
4592	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





List 4592 (Continued)

WXS-CPR, 2 Flute, Stub Length, Long Neck, Corner Radius, Rib Processing

SPEED FEED P1189	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

±5µm Corner Radius Tolerance

Milling Diameter Tolerance	
0.4 ≤ D ≤ 0.5	+0 / -0.010mm
0.5 ≤ D ≤ 3	+0 / -0.015mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
3101019	1.0	0.30	50	0.80	6	0.95	4
3101020	1.0	0.30	50	0.80	8	0.95	4
3101021	1.0	0.30	50	0.80	10	0.95	4
3101022	1.0	0.30	50	0.80	12	0.95	4
3101201	1.2	0.20	50	1.00	6	1.15	4
3101202	1.2	0.20	50	1.00	8	1.15	4
3101203	1.2	0.20	50	1.00	10	1.15	4
3101501	1.5	0.20	50	1.20	6	1.45	4
3101502	1.5	0.20	50	1.20	8	1.45	4
3101503	1.5	0.20	50	1.20	10	1.45	4
3101504	1.5	0.20	50	1.20	12	1.45	4
3101505	1.5	0.20	50	1.20	16	1.45	4
3101506	1.5	0.30	50	1.20	6	1.45	4
3101507	1.5	0.30	50	1.20	8	1.45	4
3101508	1.5	0.30	50	1.20	10	1.45	4
3101509	1.5	0.30	50	1.20	12	1.45	4
3101510	1.5	0.30	50	1.20	16	1.45	4
3102001	2.0	0.10	50	1.60	8	1.95	4
3102002	2.0	0.10	50	1.60	10	1.95	4
3102003	2.0	0.10	50	1.60	12	1.95	4
3102004	2.0	0.10	60	1.60	16	1.95	4
3102005	2.0	0.10	60	1.60	20	1.95	4
3102006	2.0	0.10	70	1.60	25	1.95	4
3102007	2.0	0.20	50	1.60	8	1.95	4
3102008	2.0	0.20	50	1.60	10	1.95	4
3102009	2.0	0.20	50	1.60	12	1.95	4
3102010	2.0	0.20	60	1.60	16	1.95	4
3102011	2.0	0.20	60	1.60	20	1.95	4
3102012	2.0	0.20	70	1.60	25	1.95	4
3102013	2.0	0.30	50	1.60	8	1.95	4
3102014	2.0	0.30	50	1.60	10	1.95	4
3102015	2.0	0.30	50	1.60	12	1.95	4
3102016	2.0	0.30	60	1.60	16	1.95	4
3102017	2.0	0.30	60	1.60	20	1.95	4
3102018	2.0	0.30	70	1.60	25	1.95	4
3102019	2.0	0.50	50	1.60	8	1.95	4
3102020	2.0	0.50	50	1.60	10	1.95	4
3102021	2.0	0.50	50	1.60	12	1.95	4
3102022	2.0	0.50	60	1.60	16	1.95	4
3102023	2.0	0.50	60	1.60	20	1.95	4
3102024	2.0	0.50	70	1.60	25	1.95	4
3102501	2.5	0.20	50	2.20	10	2.40	4
3102502	2.5	0.20	60	2.20	20	2.40	4
3102503	2.5	0.20	70	2.20	30	2.40	4
3102504	2.5	0.50	50	2.20	10	2.40	4
3102505	2.5	0.50	60	2.20	20	2.40	4
3102506	2.5	0.50	70	2.20	30	2.40	4
3103001	3.0	0.20	60	2.50	8	2.85	6
3103002	3.0	0.20	60	2.50	12	2.85	6
3103003	3.0	0.20	60	2.50	16	2.85	6
3103004	3.0	0.20	70	2.50	20	2.85	6
3103005	3.0	0.20	70	2.50	25	2.85	6

Packed: 1 pc.
Available WXS® coating only.





List 4592 (Continued)

SPEED FEED P1189	CARBIDE	WXS		STUB	30°	SHANK h6
------------------------	---------	-----	--	------	-----	-------------

WXS-CPR, 2 Flute, Stub Length, Long Neck, Corner Radius, Rib Processing

±5µm Corner Radius Tolerance

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
3103006	3.0	0.20	70	2.50	30	2.85	6
3103007	3.0	0.20	80	2.50	35	2.85	6
3103008	3.0	0.30	60	2.50	12	2.85	6
3103009	3.0	0.30	60	2.50	16	2.85	6
3103010	3.0	0.30	70	2.50	20	2.85	6
3103011	3.0	0.30	70	2.50	25	2.85	6
3103012	3.0	0.30	70	2.50	30	2.85	6
3103013	3.0	0.30	80	2.50	35	2.85	6
3103014	3.0	0.50	60	2.50	12	2.85	6
3103015	3.0	0.50	60	2.50	16	2.85	6
3103016	3.0	0.50	70	2.50	20	2.85	6
3103017	3.0	0.50	70	2.50	25	2.85	6
3103018	3.0	0.50	70	2.50	30	2.85	6
3103019	3.0	0.50	80	2.50	35	2.85	6

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOPRO® PHX - List 9592 (p. 846)

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4592	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





List 4590

WXS-LN-EBD, 2 Flute, Stub Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1190- 1192	CARBIDE	WXS		STUB	30°	SHANK h6
---------------------------------	---------	-----	--	------	-----	-------------

Milling Diameter Tolerance	
0.1 ≤ D < 6	+0 / -0.005mm
D = 6	+0 / -0.007mm



Units: mm

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	L	Lc	L1	d2	d	
3050100	0.1	45	0.08	0.30	0.09	4	1
3050101	0.1	45	0.08	0.50	0.09	4	1
3050201	0.2	45	0.16	0.50	0.18	4	1
3049921	0.2	45	0.16	0.75	0.18	4	1
3050202	0.2	45	0.16	1.00	0.18	4	1
3049922	0.2	45	0.16	1.25	0.18	4	1
3050203	0.2	45	0.16	1.50	0.18	4	1
3049923	0.2	45	0.16	1.75	0.18	4	1
3050204	0.2	45	0.16	2.00	0.18	4	1
3050205	0.2	45	0.16	2.50	0.18	4	1
3050206	0.2	45	0.16	3.00	0.18	4	1
3050301	0.3	45	0.24	0.60	0.28	4	1
3050302	0.3	45	0.24	1.00	0.28	4	1
3049932	0.3	45	0.24	1.25	0.28	4	1
3050303	0.3	45	0.24	1.50	0.28	4	1
3049933	0.3	45	0.24	1.75	0.28	4	1
3050304	0.3	45	0.24	2.00	0.28	4	1
3049934	0.3	45	0.24	2.25	0.28	4	1
3050305	0.3	45	0.24	2.50	0.28	4	1
3050306	0.3	45	0.24	3.00	0.28	4	1
3050307	0.3	45	0.24	3.50	0.28	4	1
3050308	0.3	45	0.24	4.00	0.28	4	1
3050309	0.3	45	0.24	4.50	0.28	4	1
3050310	0.3	45	0.24	5.00	0.28	4	1
3050401	0.4	45	0.30	0.80	0.37	4	1
3050402	0.4	45	0.30	1.00	0.37	4	1
3050403	0.4	45	0.30	1.50	0.37	4	1
3050404	0.4	45	0.30	2.00	0.37	4	1
3050405	0.4	45	0.30	2.50	0.37	4	1
3050406	0.4	45	0.30	3.00	0.37	4	1
3050407	0.4	45	0.30	3.50	0.37	4	1
3050408	0.4	45	0.30	4.00	0.37	4	1
3050409	0.4	45	0.30	4.50	0.37	4	1
3050410	0.4	45	0.30	5.00	0.37	4	1
3050411	0.4	45	0.30	5.50	0.37	4	1
3050412	0.4	45	0.30	6.00	0.37	4	1
3050500	0.5	45	0.40	1.00	0.45	4	1
3050501	0.5	45	0.40	1.50	0.45	4	1
3050502	0.5	45	0.40	2.00	0.45	4	1
3049952	0.5	45	0.40	2.50	0.45	4	1
3050503	0.5	45	0.40	3.00	0.45	4	1
3049953	0.5	45	0.40	3.50	0.45	4	1
3050504	0.5	45	0.40	4.00	0.45	4	1
3049954	0.5	45	0.40	4.50	0.45	4	1
3050505	0.5	45	0.40	5.00	0.45	4	1
3049955	0.5	45	0.40	5.50	0.45	4	1
3050506	0.5	45	0.40	6.00	0.45	4	1
3050507	0.5	45	0.40	7.00	0.45	4	1
3050508	0.5	45	0.40	8.00	0.45	4	1
3050509	0.5	45	0.40	9.00	0.45	4	1

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	L	Lc	L1	d2	d	
3050510	0.5	45	0.40	10.00	0.45	4	1
3050601	0.6	45	0.50	1.20	0.55	4	1
3050602	0.6	45	0.50	2.00	0.55	4	1
3049962	0.6	45	0.50	2.50	0.55	4	1
3050603	0.6	45	0.50	3.00	0.55	4	1
3049963	0.6	45	0.50	3.50	0.55	4	1
3050604	0.6	45	0.50	4.00	0.55	4	1
3049964	0.6	45	0.50	4.50	0.55	4	1
3050605	0.6	45	0.50	5.00	0.55	4	1
3049965	0.6	45	0.50	5.50	0.55	4	1
3050606	0.6	45	0.50	6.00	0.55	4	1
3049966	0.6	45	0.50	6.50	0.55	4	1
3050607	0.6	45	0.50	7.00	0.55	4	1
3049967	0.6	45	0.50	7.50	0.55	4	1
3050608	0.6	45	0.50	8.00	0.55	4	1
3049968	0.6	45	0.50	8.50	0.55	4	1
3050609	0.6	45	0.50	9.00	0.55	4	1
3049969	0.6	45	0.50	9.50	0.55	4	1
3050610	0.6	45	0.50	10.00	0.55	4	1
3050611	0.6	50	0.50	11.00	0.55	4	1
3050612	0.6	50	0.50	12.00	0.55	4	1
3050802	0.8	45	0.60	2.00	0.75	4	1
3050803	0.8	45	0.60	3.00	0.75	4	1
3050804	0.8	45	0.60	4.00	0.75	4	1
3050805	0.8	45	0.60	5.00	0.75	4	1
3050806	0.8	45	0.60	6.00	0.75	4	1
3050807	0.8	45	0.60	7.00	0.75	4	1
3050808	0.8	45	0.60	8.00	0.75	4	1
3050810	0.8	45	0.60	10.00	0.75	4	1
3050812	0.8	50	0.60	12.00	0.75	4	1
3051002	1.0	45	0.80	2.00	0.95	4	1
3051003	1.0	45	0.80	3.00	0.95	4	1
3051004	1.0	45	0.80	4.00	0.95	4	1
3051005	1.0	45	0.80	5.00	0.95	4	1
3051006	1.0	45	0.80	6.00	0.95	4	1
3051007	1.0	45	0.80	7.00	0.95	4	1
3051008	1.0	45	0.80	8.00	0.95	4	1
3051009	1.0	45	0.80	9.00	0.95	4	1
3051010	1.0	45	0.80	10.00	0.95	4	1
3051012	1.0	45	0.80	12.00	0.95	4	1
3051014	1.0	50	0.80	14.00	0.95	4	1
3051016	1.0	50	0.80	16.00	0.95	4	1
3051018	1.0	55	0.80	18.00	0.95	4	1
3051020	1.0	55	0.80	20.00	0.95	4	1
3051022	1.0	60	0.80	22.00	0.95	4	1
3051202	1.2	45	1.00	2.40	1.15	4	1
3051204	1.2	45	1.00	4.00	1.15	4	1
3051206	1.2	45	1.00	6.00	1.15	4	1
3051208	1.2	45	1.00	8.00	1.15	4	1
3051210	1.2	45	1.00	10.00	1.15	4	1

Packed: 1 pc.
Available WXS® coating only.





List 4590 (Continued)

WXS-LN-EBD, 2 Flute, Stub Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1190-1192	CARBIDE	WXS		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------

Units: mm


EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	L	Lc	L1	d2	d	
3051212	1.2	45	1.00	12.00	1.15	4	1
3051214	1.2	50	1.00	14.00	1.15	4	1
3051216	1.2	50	1.00	16.00	1.15	4	1
3051218	1.2	55	1.00	18.00	1.15	4	1
3051220	1.2	55	1.00	20.00	1.15	4	1
3051503	1.5	45	1.20	3.00	1.45	4	1
3051504	1.5	45	1.20	4.00	1.45	4	1
3051506	1.5	45	1.20	6.00	1.45	4	1
3051508	1.5	45	1.20	8.00	1.45	4	1
3051510	1.5	45	1.20	10.00	1.45	4	1
3051512	1.5	45	1.20	12.00	1.45	4	1
3051514	1.5	50	1.20	14.00	1.45	4	1
3051516	1.5	50	1.20	16.00	1.45	4	1
3051518	1.5	55	1.20	18.00	1.45	4	1
3051520	1.5	55	1.20	20.00	1.45	4	1
3051522	1.5	60	1.20	22.00	1.45	4	1
3051530	1.5	70	1.20	30.00	1.45	4	1
3051608	1.6	45	1.30	8.00	1.55	4	1
3051612	1.6	45	1.30	12.00	1.55	4	1
3051616	1.6	50	1.30	16.00	1.55	4	1
3051620	1.6	55	1.30	20.00	1.55	4	1
3052004	2.0	45	1.60	4.00	1.95	4	1
3052006	2.0	45	1.60	6.00	1.95	4	1
3052008	2.0	45	1.60	8.00	1.95	4	1
3052010	2.0	45	1.60	10.00	1.95	4	1
3052012	2.0	45	1.60	12.00	1.95	4	1
3052014	2.0	50	1.60	14.00	1.95	4	1
3052016	2.0	50	1.60	16.00	1.95	4	1
3052018	2.0	55	1.60	18.00	1.95	4	1
3052020	2.0	55	1.60	20.00	1.95	4	1
3052022	2.0	60	1.60	22.00	1.95	4	1
3052025	2.0	65	1.60	25.00	1.95	4	1
3052030	2.0	70	1.60	30.00	1.95	4	1
3052035	2.0	70	1.60	35.00	1.95	4	1
3052040	2.0	80	1.60	40.00	1.95	4	1

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	L	Lc	L1	d2	d	
3052510	2.5	45	2.00	10.00	2.35	4	1
3052515	2.5	50	2.00	15.00	2.35	4	1
3052520	2.5	55	2.00	20.00	2.35	4	1
3052525	2.5	65	2.00	25.00	2.35	4	1
3052530	2.5	70	2.00	30.00	2.35	4	1
3052535	2.5	70	2.00	35.00	2.35	4	1
3053006	3.0	50	2.40	6.00	2.85	6	1
3053008	3.0	50	2.40	8.00	2.85	6	1
3053010	3.0	50	2.40	10.00	2.85	6	1
3053012	3.0	55	2.40	12.00	2.85	6	1
3053014	3.0	55	2.40	14.00	2.85	6	1
3053015	3.0	55	2.40	15.00	2.85	6	1
3053016	3.0	55	2.40	16.00	2.85	6	1
3053020	3.0	60	2.40	20.00	2.85	6	1
3053025	3.0	65	2.40	25.00	2.85	6	1
3053030	3.0	70	2.40	30.00	2.85	6	1
3053035	3.0	80	2.40	35.00	2.85	6	1
3053040	3.0	90	2.40	40.00	2.85	6	1
3053515	3.5	55	2.80	15.00	3.35	6	1
3053520	3.5	60	2.80	20.00	3.35	6	1
3053525	3.5	65	2.80	25.00	3.35	6	1
3053530	3.5	70	2.80	30.00	3.35	6	1
3053535	3.5	80	2.80	35.00	3.35	6	1
3053540	3.5	90	2.80	40.00	3.35	6	1
3053545	3.5	90	2.80	45.00	3.35	6	1
3054008	4.0	60	3.20	8.00	3.85	6	1
3054010	4.0	60	3.20	10.00	3.85	6	1
3054012	4.0	60	3.20	12.00	3.85	6	1
3054015	4.0	60	3.20	15.00	3.85	6	1
3054016	4.0	60	3.20	16.00	3.85	6	1
3054020	4.0	65	3.20	20.00	3.85	6	1
3054025	4.0	70	3.20	25.00	3.85	6	1
3054030	4.0	80	3.20	30.00	3.85	6	1
3054035	4.0	80	3.20	35.00	3.85	6	1
3054040	4.0	90	3.20	40.00	3.85	6	1


Packed: 1 pc.
Available WXS® coating only.

continued on next page

Type 1

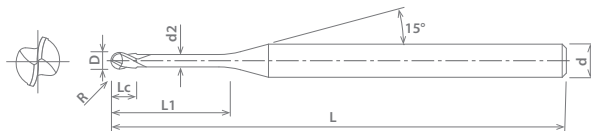

Type 2

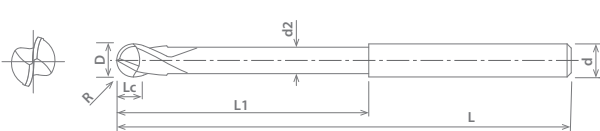

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4590	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 4590 (Continued)

WXS-LN-EBD, 2 Flute, Stub Length, Long Neck, Ball End, Rib Processing

SPEED FEED P1190-1192	CARBIDE	WXS		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------

Milling Diameter Tolerance	
0.1 ≤ D < 6	+0 / -0.005mm
D = 6	+0 / -0.007mm




EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	L	Lc	L1	d2	d	
3054045	4.0	90	3.20	45.00	3.85	6	1
3054050	4.0	100	3.20	50.00	3.85	6	1
3055010	5.0	60	4.00	10.00	4.85	6	1
3055015	5.0	60	4.00	15.00	4.85	6	1
3055020	5.0	70	4.00	20.00	4.85	6	1
3055025	5.0	70	4.00	25.00	4.85	6	1
3055030	5.0	80	4.00	30.00	4.85	6	1
3055035	5.0	80	4.00	35.00	4.85	6	1
3055040	5.0	90	4.00	40.00	4.85	6	1
3055045	5.0	100	4.00	45.00	4.85	6	1

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.	Type
	D	L	Lc	L1	d2	d	
3055050	5.0	100	4.00	50.00	4.85	6	1
3056012	6.0	60	4.80	12.00	5.85	6	2
3056020	6.0	70	4.80	20.00	5.85	6	2
3056025	6.0	70	4.80	25.00	5.85	6	2
3056030	6.0	80	4.80	30.00	5.85	6	2
3056035	6.0	80	4.80	35.00	5.85	6	2
3056040	6.0	90	4.80	40.00	5.85	6	2
3056045	6.0	100	4.80	45.00	5.85	6	2
3056050	6.0	120	4.80	50.00	5.85	6	2


Packed: 1 pc.
Available WXS® coating only.



Type 1

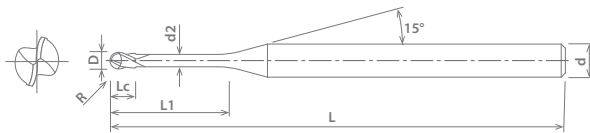

Type 2

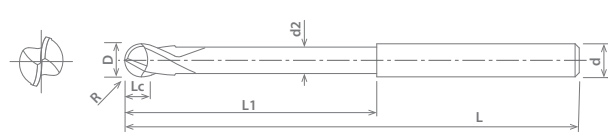

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
4590	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best





List 4430

WXS-EBM, True 4 Flute, Regular Length, Ball End

SPEED FEED P1193	CARBIDE	WXS	REG	30°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Radius Tolerance	
1/4 ≤ D ≤ 1/2	± 0.0006"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
44301111	1/4	3-1/2	1/2	1/4
44301311	5/16	4	5/8	5/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
44301411	3/8	4	3/4	3/8
44301611	1/2	4-3/8	7/8	1/2

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441BN (p. 980-981)

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4430	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





EXOCARB® WXS®

Ultra Premium Performance Carbide End Mills with OSG's Proprietary WXS® Coating

List 4530

WXS-EBM, True 4 Flute, Regular Length, Ball End

SPEED FEED P1194	CARBIDE	WXS	REG	30°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Radius Tolerance	
6 ≤ D ≤ 12	± 0.015mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
45300001	6	90	12	6
45300002	8	100	14	8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
45300003	10	100	18	10
45300004	12	110	22	12

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441BN (p. 980-981)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
4530	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





List 4413

WXS-EQD, Regular Length, 2 Flute, Ball End, Sphere Type

NEW	SPEED FEED P1195	CARBIDE	WXS	REG	30°	SHANK h6
------------	----------------------------	----------------	------------	------------	------------	--------------------

Radius Tolerance	
1/16 ≤ D ≤ 3/16	±0.0004"
1/4 ≤ D ≤ 1/2	±0.0006"




Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Min. Neck Diameter	Max Neck Diameter	Neck Incline	Shank Diameter	Type
	D	L	Lc	L1	d1	d2	θn	d	
44130113	1/16	2-1/2	0.0442	0.313	0.0555	0.0555	-	1/4	1
44130213	3/32	2-1/2	0.0663	0.469	0.0833	0.0833	-	1/4	1
44130313	1/8	2-3/4	0.0884	0.625	0.1110	0.1110	-	1/4	1
44130513	3/16	3-1/4	0.1326	0.938	0.1434	0.1856	-	1/4	1
44130613	1/4	3-1/2	0.1768	1.250	0.1912	0.2475	1.5°	1/4	2
44130713	5/16	4	0.2210	1.563	0.2391	0.3094	1.5°	5/16	2
44130813	3/8	4-1/4	0.2652	1.875	0.2868	0.3712	1.5°	3/8	2
44130913	1/2	4-1/2	0.3536	2.500	0.3825	0.4950	1.5°	1/2	2


Packed: 1 pc.
Available WXS® coating only.



Type 1

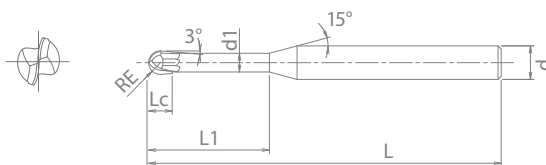

Type 2

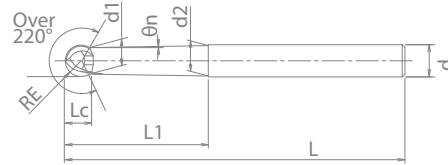

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4413	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





List 4513

WXS-EQD, 2 Flute, Regular Length, Ball End, Sphere Type

NEW SIZES	SPEED FEED P1196	CARBIDE	WXS	REG	30°	SHANK h6
------------------	----------------------------	----------------	------------	------------	------------	--------------------

Radius Tolerance	
1 ≤ D ≤ 5	±0.010mm
6 ≤ D ≤ 12	±0.015mm




Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Min. Neck Diameter	Max Neck Diameter	Neck Incline	Shank Diameter	Type
	D	L	Lc	L1	d1	d2	θn	d	
45130001	1	60	0.7	5	0.85	0.85	-	6	1
45130002	2	60	1.5	10	1.70	1.70	-	6	1
45130003	3	70	2.3	15	2.70	2.70	-	6	1
45130004	4	70	3.0	20	3.70	3.70	-	6	1
45130009	5	80	3.5	25	4.40	4.40	-	6	1
45130005	6	90	4.0	30	4.60	5.90	1.5°	6	2
45130006	8	100	5.4	40	6.20	7.90	1.5°	8	2
45130007	10	110	6.7	50	7.70	9.90	1.5°	10	2
45130008	12	110	8.1	60	9.20	11.90	1.5°	12	2


Packed: 1 pc.
Available WXS® coating only.



Type 1

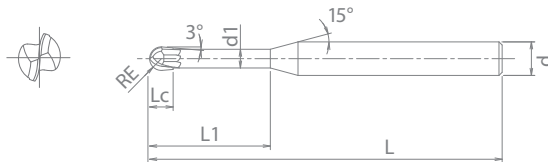

Type 2

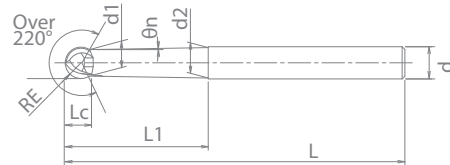

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4513	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best






List 4581

WXS-RB-TPB, 4 Flute, Tapered, Ball End, Rib Processing

SPEED FEED P1197	CARBIDE	WXS		25°	SHANK h6
----------------------------	----------------	------------	--	------------	--------------------

Side Cutting Edge Incline Tolerance ±0°5'



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Max Diameter	Cut Incline	Shank Diameter
	D	L	Lc	d2	α	d
45810026	1.0	45	8	1.13	0.50°	4
45810035	1.0	45	8	1.39	1.50°	4
45810040	1.0	45	12	1.80	2.00°	4
45810072	1.5	45	10	1.82	1.00°	4
45810073	1.5	45	12	1.90	1.00°	4
45810078	1.5	45	12	2.09	1.50°	4
45810083	1.5	45	12	2.29	2.00°	4
45810140	2.0	55	25	2.42	0.50°	4
45810144	2.0	55	20	2.50	0.75°	4
45810145	2.0	55	25	2.63	0.75°	4
45810150	2.0	55	25	2.84	1.00°	4
45810152	2.0	45	12	2.58	1.50°	4
45810154	2.0	55	20	3.00	1.50°	4
45810156	2.0	45	10	2.63	2.00°	4
45810175	2.5	55	25	3.33	1.00°	4
45810178	2.5	50	16	3.27	1.50°	4
45810180	2.5	55	25	3.74	1.50°	4

Packed: 1 pc.
Available WXS® coating only.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
4581	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





List 4541

WXS-CR-EMS, Regular Length, Corner Radius

SPEED FEED P1198	CARBIDE	WXS	REG	45°	SHANK h6
---------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.020mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	R	L	Lc	d	
45410000	3	0.2	60	8	6	4
45410001	3	0.5	60	8	6	4
45410002	4	0.2	70	11	6	4
45410003	4	0.5	70	11	6	4
45410004	4	1.0	70	11	6	4
45410005	5	0.2	80	13	6	4
45410006	5	0.5	80	13	6	4
45410007	5	1.0	80	13	6	4
45410008	6	0.2	90	13	6	6
45410009	6	0.5	90	13	6	6
45410010	6	1.0	90	13	6	6
45410011	6	1.5	90	13	6	6
45410012	6	2.0	90	13	6	6
45410013	8	0.5	100	19	8	6
45410014	8	1.0	100	19	8	6
45410015	8	1.5	100	19	8	6
45410016	8	2.0	100	19	8	6
45410017	10	0.5	100	22	10	6
45410018	10	1.0	100	22	10	6
45410019	10	1.5	100	22	10	6
45410020	10	2.0	100	22	10	6
45410021	10	3.0	100	22	10	6
45410022	12	0.5	110	26	12	6
45410023	12	1.0	110	26	12	6
45410024	12	1.5	110	26	12	6
45410025	12	2.0	110	26	12	6
45410026	12	3.0	110	26	12	6

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 or HP435 (p. 987-988 or 990)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
4541	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

good best





List 9010

MAX-BN-EBD, 2 Flute, Stub Length, Ball End



SPEED FEED P1199	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Radius Tolerance	
1/32 ≤ D < 1/4	±0.0002"
D ≥ 1/4	±0.0003"

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
90100111	1/32	2	3/64	1/4
90100311	1/16	2	3/32	1/4
90100711	1/8	2	3/16	1/4
90100911	3/16	2	9/32	1/4

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
90101111	1/4	2	3/8	1/4
90101311	5/16	2-3/16	15/32	5/16
90101411	3/8	2-3/16	9/16	3/8
90101611	1/2	2-1/2	11/16	1/2

Packed: 1 pc.
Available WXS® coating only.
Designed for faster speeds and feeds with larger depth of cut.



List 9110

MAX-BN-EBD, 2 Flute, Stub Length, Ball End



SPEED FEED P1199	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Radius Tolerance	
1 ≤ D < 6	±0.005mm
D ≥ 6	±0.007mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
91100111	1	50	1.5	6
91100211	2	50	3.0	6
91100311	3	50	4.5	6
91100411	4	50	6.0	6

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
91100611	6	50	9.0	6
91100811	8	55	12.0	8
91101011	10	55	15.0	10

Packed: 1 pc.
Available WXS® coating only.
Designed for faster speeds and feeds with larger depth of cut.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9010	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9110	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best





EXOCARB[®] MAX

Maximum Performance End Mills for Hardened Steels

List 9011

MAX-BN-LS-EBD, 2 Flute, Stub Length, Long Shank, Ball End

SPEED FEED P1199	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Radius Tolerance	
1/32 ≤ D ≤ 3/8	±0.0007"



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
90110111	1/32	3	3/64	1/4
90110211	1/16	3	3/32	1/4
90110311	1/8	3	3/16	1/4
90110411	3/16	3	9/32	1/4

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
90110511	1/4	3	3/8	1/4
90110611	5/16	3-3/16	15/32	5/16
90110711	3/8	3-3/16	9/16	3/8

Packed: 1 pc.
Available WXS[®] coating only.
Designed for faster speeds and feeds with larger depth of cut.



List 9111

MAX-BN-LS-EBD, 2 Flute, Stub Length, Long Shank, Ball End

SPEED FEED P1199	CARBIDE	WXS	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Radius Tolerance	
1 ≤ D ≤ 10	±0.020mm



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
91110111	1	75	1.5	6
91110211	2	75	3.0	6
91110311	3	75	4.5	6
91110411	4	75	6.0	6

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
91110511	6	75	9.0	6
91110611	8	80	12.0	8
91110711	10	80	15.0	10

Packed: 1 pc.
Available WXS[®] coating only.
Designed for faster speeds and feeds with larger depth of cut.



OSG's Performance & Savings

Not machining steel over 54 HRC? Try EXOCARB[®] WXL[®] - List 3711 (p. 868)

Work Material

List No.	P						M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
	1010 1018	1035 1045	1065	4140 4340														
9011	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		
9111	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

good best



List 9140

HARD-EMS, 6 Flute, Regular Length

SPEED FEED P1204-1205	CARBIDE	WXS	REG	45°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
3≤D≤12	+0 / -0.020mm



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
91400311	3	45	8	6
91400411	4	45	11	6
91400511	5	50	13	6
91400611	6	50	13	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
91400811	8	60	19	8
91401011	10	70	22	10
91401211	12	75	26	12

Packed: 1 pc.
Available WXS® coating only.
Center cutting applies only to diameter sizes over 5mm.



List 9144

HARD-EMS, 6 Flute, Regular Length, Corner Radius

SPEED FEED P1204-1205	CARBIDE	WXS	REG	45°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
6≤D≤12	+0 / -0.020mm



EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
91440611	6	0.5	50	13	6
91440811	8	0.5	60	19	8
91441011	10	0.5	70	22	10

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
91441111	10	1.0	70	22	10
91441211	12	0.5	75	26	12
91441311	12	1.0	75	26	12

Packed: 1 pc.
Available WXS® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® Carb - List HP450 (p. 972)

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9140	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
9144	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best





EXOCARB[®] MAX

Maximum Performance End Mills for Hardened Steels

List 9191

CBN-SXB, 2 Flute, Ball End, CBN

SPEED FEED P1202	CBN	BR		30°	SHANK h6
---------------------	-----	----	--	-----	-------------

Radius Tolerance	
0.4 ≤ D ≤ 3	±0.005mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d
8525304	0.4	45	0.3	1.2	4
8525305	0.5	45	0.3	1.5	4
8525306	0.6	45	0.4	1.8	4
8525307	0.7	45	0.5	2.1	4
8525308	0.8	45	0.5	2.4	4
8525309	0.9	45	0.6	2.7	4
8525310	1.0	45	0.6	2.5	4
8525210	1.0	50	0.6	2.5	6
8525211	1.1	50	0.7	2.8	6
8525212	1.2	50	0.7	3.0	6
8525213	1.3	50	0.8	3.3	6
8525214	1.4	50	0.8	3.5	6
8525215	1.5	50	0.9	3.8	6
8525216	1.6	50	1.0	4.0	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d
8525217	1.7	50	1.0	4.3	6
8525218	1.8	50	1.1	4.5	6
8525219	1.9	50	1.1	4.8	6
8525220	2.0	50	1.2	5.0	6
8525221	2.1	50	1.3	4.2	6
8525222	2.2	50	1.3	4.4	6
8525223	2.3	50	1.4	4.6	6
8525224	2.4	50	1.4	4.8	6
8525225	2.5	50	1.5	5.0	6
8525226	2.6	50	1.6	5.2	6
8525227	2.7	50	1.6	5.4	6
8525228	2.8	50	1.7	5.6	6
8525229	2.9	50	1.7	5.8	6
8525230	3.0	50	1.8	6.0	6

Packed: 1 pc.
Available Bright only.



List 9192

CBN-LN-SXB, 2 Flute, Long Neck, Ball End, CBN

SPEED FEED P1203	CBN	BR		30°	SHANK h6
---------------------	-----	----	--	-----	-------------

Radius Tolerance	
0.4 ≤ D ≤ 3	±0.050mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d
8525622	0.4	45	0.3	2.0	4
8525623	0.4	45	0.3	3.0	4
8525633	0.6	45	0.4	3.0	4
8525634	0.6	45	0.4	4.5	4
8525654	1.0	45	0.6	4.0	4
8525655	1.0	45	0.6	5.0	4
8525656	1.0	45	0.6	6.0	4
8525657	1.0	45	0.6	7.5	4
8525854	1.0	50	0.6	4.0	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	L	Lc	L1	d
8525855	1.0	50	0.6	5.0	6
8525856	1.0	50	0.6	6.0	6
8525857	1.0	50	0.6	7.5	6
8525877	1.5	50	0.9	7.5	6
8525903	2.0	50	1.2	6.0	6
8525904	2.0	50	1.2	8.0	6
8525905	2.0	50	1.2	10.0	6
8525956	3.0	50	1.8	12.0	6
8525957	3.0	50	1.8	15.0	6

Packed: 1 pc.
Available Bright only.



Work Material

List No.	P					M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum 6061 7075 Casting	Nickel Alloy Inconel		Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH					6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	9191																
9192												<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			

good best





List 9181

CBN-SXR, 2 Flute, Corner Radius, CBN



SPEED FEED P1200	CBN	BR	30°	SHANK h6
----------------------------	------------	-----------	------------	--------------------

Milling Diameter Tolerance	
D≤1	+0 / -0.010mm
D>1	+0 / -0.015mm

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	R	L	Lc	L1	d
8526210	0.5	0.05	45	0.3	1.5	4
8526211	0.5	0.10	45	0.3	1.5	4
8526220	1.0	0.05	45	0.6	2.5	4
8526221	1.0	0.10	45	0.6	2.5	4
8526222	1.0	0.20	45	0.6	2.5	4
8526223	1.0	0.30	45	0.6	2.5	4
8526231	1.5	0.10	50	0.9	3.8	6
8526232	1.5	0.20	50	0.9	3.8	6
8526233	1.5	0.30	50	0.9	3.8	6


EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	R	L	Lc	L1	d
8526241	2.0	0.10	50	1.2	5.0	6
8526242	2.0	0.20	50	1.2	5.0	6
8526243	2.0	0.30	50	1.2	5.0	6
8526245	2.0	0.50	50	1.2	5.0	6
8526261	3.0	0.10	50	1.8	6.0	6
8526262	3.0	0.20	50	1.8	6.0	6
8526263	3.0	0.30	50	1.8	6.0	6
8526265	3.0	0.50	50	1.8	6.0	6

Packed: 1 pc.
Available Bright only.



List 9182

CBN-LN-SXR, 2 Flute, Long Neck, Corner Radius, CBN



SPEED FEED P1201	CBN	BR	30°	SHANK h6
----------------------------	------------	-----------	------------	--------------------

Milling Diameter Tolerance	
D≤1	+0 / -0.010mm
D>1	+0 / -0.015mm

Radius Tolerance	
0.5≤D≤3	±0.005mm

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	R	L	Lc	L1	d
8526410	0.5	0.05	45	0.3	2.5	4
8526411	0.5	0.10	45	0.3	2.5	4
8526420	1.0	0.05	45	0.6	5.0	4
8526421	1.0	0.10	45	0.6	5.0	4
8526422	1.0	0.20	45	0.6	5.0	4
8526423	1.0	0.30	45	0.6	5.0	4
8526431	1.5	0.10	50	0.9	7.5	6
8526432	1.5	0.20	50	0.9	7.5	6
8526433	1.5	0.30	50	0.9	7.5	6

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Shank Diameter
	D	R	L	Lc	L1	d
8526441	2.0	0.10	50	1.2	10.0	6
8526442	2.0	0.20	50	1.2	10.0	6
8526443	2.0	0.30	50	1.2	10.0	6
8526445	2.0	0.50	50	1.2	10.0	6
8526461	3.0	0.10	50	1.8	12.0	6
8526462	3.0	0.20	50	1.8	12.0	6
8526463	3.0	0.30	50	1.8	12.0	6
8526465	3.0	0.50	50	1.8	12.0	6

Packed: 1 pc.
Available Bright only.



Work Material

List No.	P					M			K Cast Iron	N		S Titanium	H					
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum			Nickel Alloy Inconel	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Hardened Steels				
	1010 1018	1035 1045	1065											6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
9181																		
9182																		

good best






List 7020

2 Flute, Stub Length

SPEED FEED P1206-1207	CARBIDE	DIA	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1/64 ≤ D ≤ 1/2	+0 / -0.0020"

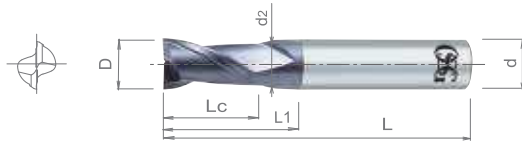

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	Coating Thickness	
	D	L	Lc	L1	d2	d	12µm	20µm
70200016	1/64	1-3/4	3/64	3/32	0.015	1/8	◆	
70200116	1/32	1-3/4	3/32	1/4	0.028	1/8	◆	
70200216	3/64	1-3/4	3/16	1/2	0.040	1/8	◆	
70200316	1/16	1-3/4	3/16	1/2	0.056	1/8	◆	
70200416	5/64	1-3/4	1/4	1/2	0.070	1/8	◆	
70200516	3/32	1-3/4	3/8	1/2	0.088	1/8	◆	
70200716	1/8	1-3/4	1/2	-	-	1/8	◆	
70205716	1/8	1 3/4	1/2	-	-	1/8		◆
70200816	5/32	2	9/16	-	-	5/32	◆	
70200916	3/16	2	3/4	-	-	3/16	◆	
70201116	1/4	2-1/2	3/4	-	-	1/4	◆	
70206116	1/4	2-1/2	3/4	-	-	1/4		◆
70201316	5/16	2-1/2	13/16	-	-	5/16	◆	
70201416	3/8	2-1/2	7/8	-	-	3/8	◆	
70206416	3/8	2-1/2	7/8	-	-	3/8		◆
70201616	1/2	3	1	-	-	1/2	◆	
70206616	1/2	3	1	-	-	1/2		◆

Packed: 1 pc.
Available Diamond coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		Other			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061	Casting						
7020	1010 1018	1035 1045	1065	4140 4340					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>	

good best






List 7120

D-RG-EDS, 2 Flute, Regular Length

SPEED FEED P1206-1207	CARBIDE	DIA	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
1 ≤ D ≤ 12	+0 / -0.050mm

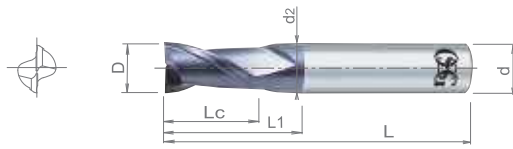

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
71200116	1	45	4	4.95	0.95	3
71200216	2	45	10	11.95	1.95	3
71200316	3	50	15	-	-	3
71200416	4	55	15	-	-	4
71200616	6	63	20	-	-	6
71200816	8	63	20	-	-	8
71201016	10	63	25	-	-	10
71201216	12	75	30	-	-	12

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.




List 7040

D-GF-EMS, 4 Flute, Regular Length

SPEED FEED P1206-1207	CARBIDE	DIA	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1/2	+0 / -0.0020"

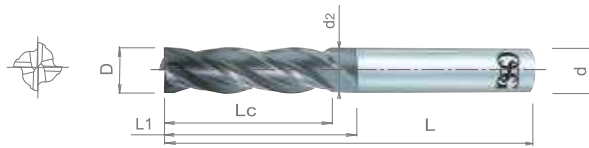

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
70400316	1/16	1-3/4	3/16	0.056	1/2	1/8
70400416	5/64	1-3/4	1/4	0.070	1/2	1/8
70400516	3/32	1-3/4	3/8	0.088	1/2	1/8
70400716	1/8	1-3/4	1/2	-	-	1/8
70400916	3/16	2	3/4	-	-	3/16
70401116	1/4	2-1/2	3/4	-	-	1/4
70401316	5/16	2-1/2	13/16	-	-	5/16
70401416	3/8	2-1/2	7/8	-	-	3/8
70401616	1/2	3	1	-	-	1/2

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



Work Material

List No.	P					Die Steels	M			K Cast Iron	N		S		Other			
	Carbon Steels			Alloy Steels	Titanium		Stainless Steels				Aluminum	Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome	
	Low	Med.	High				300	400	17-4 PH									6061 7075
7120	1010	1035	1065	4140	4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
7040	1018	1045									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best





List 7041

D-GF-EML, 4 Flute, Long Length

SPEED FEED P1206-1207	CARBIDE	DIA	LONG	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/2	+0 / -0.0020"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
70410716	1/8	3	1	1/8
70410916	3/16	4	1	3/16
70411116	1/4	4	1-1/2	1/4
70411416	3/8	4	1-1/2	3/8
70411616	1/2	5	2	1/2

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



List 7042

4 Flute, Stub Length, Long Shank

SPEED FEED P1206-1207	CARBIDE	DIA	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1/2	+0 / -0.0020"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
70420116	1/16	3	1/16	0.313	0.059	1/16
70420216	3/32	3	3/32	0.469	0.089	3/32
70420316	1/8	3	1/8	0.625	0.119	1/8
70420416	3/16	3	3/16	0.938	0.178	3/16
70420516	1/4	4	1/4	0.750	0.238	1/4
70420616	5/16	4	5/16	0.938	0.297	5/16
70420716	3/8	4	3/8	1.125	0.356	3/8
70420816	1/2	6	1/2	1.500	0.475	1/2

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



Work Material

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061	Casting						
7041	1010	1035	1065	4140	4340												<input checked="" type="checkbox"/>
7042	1018	1045															<input checked="" type="checkbox"/>

good best





List 7072

4 Flute, Stub Length, Long Shank, Corner Radius

SPEED FEED P1206-1207	CARBIDE	DIA	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/2	+0 / -0.0020"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
70720116	1/8	0.015	3	1/8	0.625	0.119	1/8
70720216	1/8	0.031	3	1/8	0.625	0.119	1/8
70720316	3/16	0.062	3	3/16	0.938	0.178	3/16
70720416	1/4	0.015	4	1/4	0.750	0.238	1/4
70720516	1/4	0.030	4	1/4	0.750	0.238	1/4
70720616	1/4	0.062	4	1/4	0.750	0.238	1/4
70720716	3/8	0.015	4	3/8	1.125	0.356	3/8
70720816	1/2	0.015	6	1/2	1.500	0.475	1/2

Packed: 1 pc. Available Diamond coating only.
12µm Coating Thickness.




List 7010

D-RG-EBDR, 2 Flute, Regular Length, Ball End

SPEED FEED P1206-1207	CARBIDE	DIA	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Radius Tolerance	
1/32 ≤ D ≤ 1/2	+0 / -0.0020"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	Coating Thickness	
	D	L	Lc	L1	d2	d	12µm	20µm
70100116	1/32	1-3/4	3/32	1/4	0.028	1/8	◆	
70100216	3/64	1-3/4	3/16	1/2	0.040	1/8	◆	
70100316	1/16	1-3/4	3/16	1/2	0.056	1/8	◆	
70100416	5/64	1-3/4	1/4	1/2	0.070	1/8	◆	
70100516	3/32	1-3/4	3/8	1/2	0.088	1/8	◆	
70100716	1/8	1-3/4	1/2	-	-	1/8	◆	
70105716	1/8	1-3/4	1/2	-	-	1/8		◆
70100816	5/32	2	9/16	-	-	5/32	◆	
70100916	3/16	2	3/4	-	-	3/16	◆	
70101116	1/4	2-1/2	3/4	-	-	1/4	◆	
70106116	1/4	2-1/2	3/4	-	-	1/4		◆
70101316	5/16	2-1/2	13/16	-	-	5/16	◆	
70101416	3/8	2-1/2	7/8	-	-	3/8	◆	
70106416	3/8	2-1/2	7/8	-	-	3/8		◆
70101616	1/2	3	1	-	-	1/2	◆	
70106616	1/2	3	1	-	-	1/2		◆

Packed: 1 pc.
Available Diamond coating only.



Work Material

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061	Casting						
7072	1010	1035	1065	4140	4340					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>
7010	1018	1045								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>

good best






List 7110

D-RG-EBD, 2 Flute, Regular Length, Ball End

SPEED FEED P1206-1207	CARBIDE	DIA	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Radius Tolerance	
1 ≤ D ≤ 12	+0 / -0.020mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
71100116	1	45	4	4.95	0.95	3
71100216	2	45	10	11.95	1.95	3
71100316	3	50	15	-	-	3
71100416	4	55	15	-	-	4
71100616	6	63	20	-	-	6
71100816	8	63	20	-	-	8
71101016	10	63	25	-	-	10
71101216	12	75	30	-	-	12

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.




List 7030

D-GF-EBMR, 4 Flute, Regular Length, Ball End

SPEED FEED P1206-1207	CARBIDE	DIA	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Radius Tolerance	
1/32 ≤ D ≤ 1/2	+0 / -0.0015"

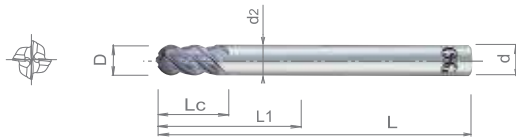

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
70300116	1/32	1-3/4	3/32	1/4	0.028	1/8
70300216	3/64	1-3/4	3/16	1/2	0.040	1/8
70300316	1/16	1-3/4	3/16	1/2	0.056	1/8
70300416	5/64	1-3/4	1/4	1/2	0.070	1/8
70300516	3/32	1-3/4	3/8	1/2	0.088	1/8
70300716	1/8	1-3/4	1/2	-	-	1/8
70300916	3/16	2	3/4	-	-	3/16
70301116	1/4	2-1/2	3/4	-	-	1/4
70301316	5/16	2-1/2	13/16	-	-	5/16
70301416	3/8	2-1/2	7/8	-	-	3/8
70301616	1/2	3	1	-	-	1/2

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		Other			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting						
7110	1010	1035	1065	4140	4340					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
7030	1018	1045								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best




List 7031

D-GF-EBML, 4 Flute, Long Length, Ball End

SPEED FEED P1206-1207	CARBIDE	DIA	LONG	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Radius Tolerance	
3/16 ≤ D ≤ 1/2	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
70310916	3/16	4	1	3/16
70311116	1/4	4	1-1/2	1/4
70311416	3/8	4	1-1/2	3/8
70311616	1/2	5	2	1/2

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.




List 7032

4 Flute, Stub Length, Long Shank, Ball End

SPEED FEED P1206-1207	CARBIDE	DIA	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Radius Tolerance	
1/16 ≤ D ≤ 1/2	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
70320116	1/16	3	1/16	0.313	0.059	1/16
70320216	3/32	3	3/32	0.469	0.089	3/32
70320316	1/8	3	1/8	0.625	0.119	1/8
70320416	3/16	3	3/16	0.938	0.178	3/16
70320516	1/4	4	1/4	0.750	0.238	1/4
70320616	5/16	4	5/16	0.938	0.297	5/16
70320716	3/8	4	3/8	1.125	0.356	3/8
70320816	1/2	6	1/2	1.500	0.475	1/2

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



Work Material

List No.	P					M			K	N		S		Other				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome	
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)					
7031	1010	1035	1045	1065	4140	4340				6061	7075		6Al4V (30 HRC)					
7032	1018	1045																

good best



List 7173

4 Flute*, Stub Length, Long Shank, Ball End

SPEED FEED P1206-1207	CARBIDE	DIA		STUB	30°	SHANK h6
--------------------------	---------	-----	--	------	-----	-------------

Radius Tolerance	
0.5 ≤ D ≤ 12	+0 / -0.015mm



2 Flutes 4 Flutes

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
71730116*	0.5	50	0.5	2.5	0.48	3
71730216	1.0	60	1.0	5.0	0.96	3
71730316	1.5	75	1.5	7.5	1.43	3
71730416	2.0	75	2.0	10.0	1.90	3
71730516	3.0	75	3.0	15.0	2.85	3
71730616	4.0	75	4.0	20.0	3.80	4
71730716	6.0	100	6.0	30.0	5.70	6
71730816	8.0	100	8.0	32.0	7.60	8
71730916	10.0	125	10.0	40.0	9.50	10
71731016	12.0	150	12.0	48.0	11.40	12

Packed: 1 pc.
 Available Diamond coating only.
 12µm Coating Thickness.
 *0.5mm is 2 flute.



Work Material

List No.	P				Die Steels	M			K	N		S		Other			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)				
7173	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	

good best



List 7132

4 Flute, Stub Length, Long Shank, Corner Radius

SPEED FEED P1206-1207	CARBIDE	DIA	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.020mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
71320116	3	0.5	75	3	15	2.85	3
71320216	4	0.5	75	4	20	3.80	4
71320316	6	0.5	100	6	30	5.70	6
71320416	6	1.0	100	6	30	5.70	6
71320516	8	0.5	100	8	30	7.60	8
71320616	8	1.0	100	8	32	7.60	8
71320716	10	0.5	125	10	40	9.50	10
71320816	10	1.0	125	10	40	9.50	10
71320916	12	0.5	150	12	48	11.40	12
71321016	12	1.0	150	12	48	11.40	12

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



List 7140

4 Flute*, Regular Length

SPEED FEED P1206-1207	CARBIDE	DIA	REG	30°	SHANK h6
--------------------------	---------	-----	-----	-----	-------------

Milling Diameter Tolerance	
0.5 ≤ D ≤ 12	+0 / -0.020mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
71400116	0.5	40	1.5	8	0.48	3
71400216	1.0	40	3	8	0.96	3
71400316	1.5	45	5	8	1.43	3
71400416	2.0	45	6	8	1.91	3
71400516	3.0	45	12	-	-	3
71400616	4.0	50	15	-	-	4
71400716	6.0	60	20	-	-	6
71400816	8.0	60	20	-	-	8
71400916	10.0	60	25	-	-	10
71401016	12.0	75	25	-	-	12

Packed: 1 pc. Available Diamond coating only.
12µm Coating Thickness.
*0.5mm is 2 flute.



Work Material

List No.	P					M			K	N		S		Other			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)				
7132	1010	1035	1065	4140	4340					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	
7140	1018	1045								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					<input checked="" type="checkbox"/>	

good best



List 7230

DIA-EBDSS, 2 or 4 Flute, Regular Length, Ball End, High Precision

SPEED FEED P1208	CARBIDE	DIA	REG	30°	SHANK h6
----------------------------	----------------	------------	------------	------------	--------------------

Milling Diameter Tolerance	
1/64 ≤ D ≤ 3/16	+0 / -0.0005"
D = 1/4	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
72300116	1/64	1-1/2	3/64	1/8	2
72300216	1/32	1-1/2	3/32	1/8	4
72300416	1/16	1-1/2	3/16	1/8	4
72300516	3/32	1-1/2	3/8	1/8	4
72300616	1/8	1-1/2	3/4	1/8	4
72300716	3/16	2	3/4	3/16	4
72300816	1/4	2-1/2	1	1/4	4

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.




List 7231

DIA-LN-EBM, 2 or 4 Flute, Regular Length, Long Reach, Ball End, High Precision

SPEED FEED P1208	CARBIDE	DIA	REG	30°	SHANK h6
----------------------------	----------------	------------	------------	------------	--------------------

Milling Diameter Tolerance	
1/64 ≤ D ≤ 1/8	+0 / -0.0004"
3/16 ≤ D ≤ 1/4	+0 / -0.0007"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	Number of Flutes
	D	L	Lc	L1	d2	d	
72310116	1/64	1-1/2	3/64	0.16	0.012	1/8	2
72310216	1/32	1-1/2	3/32	0.31	0.027	1/8	4
72310316	3/64	1-1/2	3/16	0.47	0.043	1/8	4
72310416	1/16	1-1/2	3/16	0.63	0.058	1/8	4
72310516	3/32	2	3/8	0.94	0.088	1/8	4
72310616	1/8	3	3/4	1.50	0.120	1/8	4
72310716	3/16	4	3/4	1.88	0.183	3/16	4
72310816	1/4	4	1	2.50	0.245	1/4	4

Packed: 1 pc.
Available Diamond coating only.
12µm Coating Thickness.



Work Material

List No.	P					M	K	N		S		Other						
	Carbon Steels			Alloy Steels	Die Steels			Stainless Steels			Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome
	Low	Med.	High					300	400	17-4 PH	Cast Iron	6061 7075	Casting	Inconel				
7230	1010	1035	1065	4140	4340													
7231	1018	1045																

good best





List 2050

4 Flute, Multiple Lengths, Square End

SPEED FEED P1209	CARBIDE	EXO®	Var.°	SHANK h6
---------------------	---------	------	-------	-------------



Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
		D	L	Lc	d
205000111	-	1/8	1-1/2	3/8	1/8
205001111	-	3/16	2	7/16	3/16
205002111	-	1/4	2-1/2	7/16	1/4
205002211	-	1/4	2-1/2	3/4	1/4
205003111	-	5/16	2-1/2	13/16	5/16
205004111	205094111	3/8	2-1/2	1/2	3/8
205004211	205094211	3/8	2-1/2	7/8	3/8
205005111	205095111	7/16	2-3/4	1	7/16
205006111	205096111	1/2	2-1/2	5/8	1/2
205006211	205096211	1/2	3	1	1/2
205006311	205096311	1/2	3	1-1/4	1/2
205007111	205097111	5/8	3-1/2	1-1/4	5/8
205008111	205098111	3/4	4	1-1/2	3/4
205009111	205099111	1	4	1-1/2	1

Packed: 1 pc.
Available EXO® coating only.



The variable-lead shape stabilizes cutting resistance to isolate vibration.

OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® Carb VGX - List VG441 (p. 960)
Want to turbo-charge performance? Try A Brand® AE-VMS - List 8200 (p. 830)

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
2050	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 2052

4 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1209	CARBIDE	EXO		Var.	SHANK h6
----------------------------	----------------	------------	--	-------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Edp Number w/ Weldon Flat	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
		D	R	L	Lc	d
205200111	-	1/8	0.010	1-1/2	3/8	1/8
205200211	-	1/8	0.015	1-1/2	3/8	1/8
205201111	-	3/16	0.015	2	7/16	3/16
205201211	-	3/16	0.030	2	7/16	3/16
205202111	-	1/4	0.015	2-1/2	3/8	1/4
205202211	-	1/4	0.030	2-1/2	3/8	1/4
205202311	-	1/4	0.015	2-1/2	3/4	1/4
205202411	-	1/4	0.030	2-1/2	3/4	1/4
205203111	-	5/16	0.015	2-1/2	5/8	5/16
205203211	-	5/16	0.030	2-1/2	5/8	5/16
205204111	205294111	3/8	0.030	2-1/2	1/2	3/8
205204211	205294211	3/8	0.030	2-1/2	7/8	3/8
205204311	205294311	3/8	0.045	2-1/2	7/8	3/8
205204411	205294411	3/8	0.060	2-1/2	7/8	3/8
205205111	205295111	7/16	0.015	2-3/4	1	7/16
205205211	205295211	7/16	0.030	2-3/4	1	7/16
205206111	205296111	1/2	0.030	2-1/2	5/8	1/2
205206211	205296211	1/2	0.030	3	1	1/2
205206311	205296311	1/2	0.060	3	1	1/2
205206411	205296411	1/2	0.015	3-1/4	1-1/4	1/2
205206511	205296511	1/2	0.030	3-1/4	1-1/4	1/2
205206611	205296611	1/2	0.045	3-1/4	1-1/4	1/2
205206711	205296711	1/2	0.060	3-1/4	1-1/4	1/2
205206811	205296811	1/2	0.090	3-1/4	1-1/4	1/2
205206911	205296911	1/2	0.125	3-1/4	1-1/4	1/2
205207111	205297111	5/8	0.030	3-1/2	1-1/4	5/8
205207211	205297211	5/8	0.060	3-1/2	1-1/4	5/8
205207311	205297311	5/8	0.090	3-1/2	1-1/4	5/8
205207411	205297411	5/8	0.125	3-1/2	1-1/4	5/8
205208111	205298111	3/4	0.030	3-1/2	1-1/2	3/4
205208211	205298211	3/4	0.060	3-1/2	1-1/2	3/4
205208311	205298311	3/4	0.090	4	1-1/2	3/4
205208411	205298411	3/4	0.125	4	1-1/2	3/4
205209111	205299111	1	0.030	4	1-1/2	1
205209211	205299211	1	0.060	4	1-1/2	1
205209311	205299311	1	0.090	4	1-1/2	1
205209411	205299411	1	0.125	4	1-1/2	1

Packed: 1 pc.
Available EXO® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® Carb VGX - List VG434 (p. 961)
Want to turbo-charge performance? Try A Brand® AE-CR-VMS - List 8210 (p. 832)

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
2052	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 3815

SI-WC-RESF, 4 Flute, Low Helix, Corner Chamfer

SPEED FEED P1210-1211 CARBIDE WXL Var.° SHANK h6

Milling Diameter Tolerance	
D ≤ 3/8	+0 / -0.0020"
D ≥ 1/2	+0 / -0.0025"



Units: Inch

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
	D	C	L	Lc	d
38150111	1/4	0.020	2-1/2	1/2	1/4
38150911	5/16	0.020	3	5/8	5/16
38151711	3/8	0.020	3	3/4	3/8
38152511	1/2	0.020	3-1/2	1	1/2
38153311	5/8	0.030	4	1-1/4	5/8
38154111	3/4	0.030	4-1/4	1-1/2	3/4
38154911	1	0.030	5	2	1

Packed: 1 pc.
Available WXL® coating only.



List 3820

SI-WC-RESF, 4 Flute, High Helix, Corner Chamfer

SPEED FEED P1210-1211 CARBIDE WXL Var.° SHANK h6

Milling Diameter Tolerance	
D ≤ 3/8	+0 / -0.0020"
D ≥ 1/2	+0 / -0.0025"



Units: Inch

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
	D	C	L	Lc	d
38200211	1/4	0.020	2-1/2	1/2	1/4
38201011	5/16	0.020	3	5/8	5/16
38201811	3/8	0.020	3	3/4	3/8
38202611	1/2	0.020	3-1/2	1	1/2
38203411	5/8	0.030	4	1-1/4	5/8
38204211	3/4	0.030	4-1/4	1-1/2	3/4
38205011	1	0.030	5	2	1

Packed: 1 pc.
Available WXL® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB® AERO - List 2015 (p. 924)

Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
3815	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3820	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 3915

SI-WC-RESF, 4 Flute, Low Helix, Corner Chamfer

SPEED FEED P1210-1211 CARBIDE WXL Var. SHANK h6

Milling Diameter Tolerance	
D≤12	+0 / -0.050mm
D>12	+0 / -0.060mm



Units: mm

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
	D	C	L	Lc	d
3017406	6	0.5	60	13	6
3017408	8	0.5	80	19	8
3017410	10	0.5	80	22	10
3017412	12	0.5	80	26	12
39150811	14	0.6	85	26	14
39151211	16	0.6	100	32	16
39151611	18	0.6	100	32	18
39152011	20	0.6	105	38	20
39152411	25	0.6	120	45	25

Packed: 1 pc.
 Available WXL® coating only.



List 3920

SI-WC-RESF, 4 Flute, High Helix, Corner Chamfer

SPEED FEED P1210-1211 CARBIDE WXL Var. SHANK h6

Milling Diameter Tolerance	
D≤12	+0 / -0.050mm
D>12	+0 / -0.060mm



Units: mm

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
	D	C	L	Lc	d
3017456	6	0.5	60	13	6
3017458	8	0.5	80	19	8
3017460	10	0.5	80	22	10
3017462	12	0.5	80	26	12
39200911	14	0.6	85	26	14
39201311	16	0.6	100	32	16
39201711	18	0.6	100	32	18
39202111	20	0.6	105	38	20
39202511	25	0.6	120	45	25

Packed: 1 pc.
 Available WXL® coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum	Nickel Alloy		Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH						6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC
3915	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3920	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 3825

SI-WC-LN-RESF, Long Neck, 4 Flute, Low Helix, Corner Chamfer

SPEED FEED P1210-1211 CARBIDE WXL Var.° SHANK h6

Milling Diameter Tolerance	
D ≤ 3/8	+0 / -0.0020"
D ≥ 1/2	+0 / -0.0025"



Units: Inch

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	C	L	Lc	L1	d2	d
38250511	1/4	0.020	2-1/2	1/2	1-1/4	0.2382	1/4
38251311	5/16	0.020	3	5/8	1-3/8	0.3007	5/16
38252111	3/8	0.020	3	3/4	1-1/2	0.3632	3/8
38252911	1/2	0.020	3-1/2	1	1-3/4	0.4882	1/2
38253711	5/8	0.030	4	1-1/4	2	0.6053	5/8
38254511	3/4	0.030	4-1/4	1-1/2	2-1/4	0.7264	3/4
38255311	1	0.030	5	2	2-3/4	0.9685	1

Packed: 1 pc.
Available WXL® coating only.



List 3830

SI-WC-LN-RESF, Long Neck, 4 Flute, High Helix, Corner Chamfer

SPEED FEED P1210-1211 CARBIDE WXL Var.° SHANK h6

Milling Diameter Tolerance	
D ≤ 3/8	+0 / -0.0020"
D ≥ 1/2	+0 / -0.0025"



Units: Inch

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	C	L	Lc	L1	d2	d
38300611	1/4	0.020	2-1/2	1/2	1-1/4	0.2382	1/4
38301411	5/16	0.020	3	5/8	1-3/8	0.3007	5/16
38302211	3/8	0.020	3	3/4	1-1/2	0.3632	3/8
38303011	1/2	0.020	3-1/2	1	1-3/4	0.4882	1/2
38303811	5/8	0.030	4	1-1/4	2	0.6053	5/8
38304611	3/4	0.030	4-1/4	1-1/2	2-1/4	0.7264	3/4
38305411	1	0.030	5	2	2-3/4	0.9685	1

Packed: 1 pc.
Available WXL® coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
3825	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3830	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





EXOCARB® AERO ROUGHER

Carbide Rougher for Heavy Milling in Exotic Materials

List 2015

4 Flute, Regular Length, Corner Radius, Rougher

SPEED FEED P1212	CARBIDE	TiAlN	REG	40°	SHANK h6
---------------------	---------	-------	-----	-----	-------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20150111	1/4	0.030	2	3/8	1/4
20150211	1/4	0.030	2-1/2	3/4	1/4
20150311	3/8	0.030	2	1/2	3/8
20150411	3/8	0.030	2-1/2	7/8	3/8
20150511	1/2	0.030	2-1/2	5/8	1/2
20150611	1/2	0.030	3	1-1/4	1/2
20150811	1/2	0.060	3	1-1/4	1/2
20151011	1/2	0.125	3	1-1/4	1/2
20151111	5/8	0.030	3	3/4	5/8
20151211	5/8	0.030	3-1/2	1-1/4	5/8
20151411	5/8	0.060	3-1/2	1-1/4	5/8
20151511	5/8	0.125	3-1/2	1-1/4	5/8
20151911	3/4	0.060	3-1/2	7/8	3/4
20152111	3/4	0.125	4	1-1/2	3/4
20152211	3/4	0.190	4	1-1/2	3/4
20152711	1	0.060	4	1-1/2	1
20152911	1	0.125	4	1-1/2	1
20153211	1	0.190	5	2-1/4	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® Carb - List HP400 (p. 975)
Want to turbo-charge performance? Try EXOCARB® AERO - List 3915 or 3920 (p. 922)

Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2015	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 2100

UVX-TI-5FL, 5 Flute, Multiple Lengths

SPEED FEED P1213	CARBIDE	EXO®		Var.°	SHANK h6
---------------------	---------	------	--	-------	-------------

Milling Diameter Tolerance	
1/2 ≤ D ≤ 1-1/4	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
21000711	1/2	2-1/2	5/8	1/2
21000811	1/2	3	1	1/2
21000911	1/2	3-1/2	1-1/4	1/2
21001011	1/2	3-1/2	1-5/8	1/2
21001111	5/8	3-1/2	1-1/4	5/8
21001211	5/8	4	1-7/8	5/8
21001311	3/4	4	1-1/2	3/4
21001411	3/4	5	2-1/4	3/4
21001511	1	4	1-1/2	1
21001611	1	6	3	1
21001711	1-1/4	4	1-1/2	1-1/4
21001811	1-1/4	6	3	1-1/4
21001911	1-1/4	7	4	1-1/4

Packed: 1 pc.
Available EXO® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® Carb VGx - List VG541 (p. 966)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2100	1010 1018	1035 1045	1065	4140 4340	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>					

good best





EXOCARB® AERO UVX-Ti


Variable Lead End Mill for Titanium Alloy

List 2106

UVX-TI-CR-5FL, 5 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1213	CARBIDE	EXO®		Var.°	SHANK h6
----------------------------	----------------	-------------	--	--------------	--------------------

Milling Diameter Tolerance	
1/2 ≤ D ≤ 1-1/4	+0/-0.002"

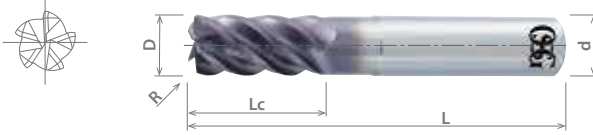

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
21062111	1/2	0.030	2-1/2	5/8	1/2
21062211	1/2	0.060	2-1/2	5/8	1/2
21062311	1/2	0.090	2-1/2	5/8	1/2
21062411	1/2	0.120	2-1/2	5/8	1/2
21062511	1/2	0.030	3	1	1/2
21062611	1/2	0.060	3	1	1/2
21062711	1/2	0.090	3	1	1/2
21062811	1/2	0.120	3	1	1/2
21062911	1/2	0.015	3-1/2	1-1/4	1/2
21063011	1/2	0.030	3-1/2	1-1/4	1/2
21063111	1/2	0.060	3-1/2	1-1/4	1/2
21063211	1/2	0.090	3-1/2	1-1/4	1/2
21063311	1/2	0.120	3-1/2	1-1/4	1/2
21063411	1/2	0.015	3-1/2	1-5/8	1/2
21063511	1/2	0.030	3-1/2	1-5/8	1/2
21063611	1/2	0.060	3-1/2	1-5/8	1/2
21063711	1/2	0.090	3-1/2	1-5/8	1/2
21063811	1/2	0.120	3-1/2	1-5/8	1/2
21063911	5/8	0.030	3-1/2	1-1/4	5/8
21064011	5/8	0.060	3-1/2	1-1/4	5/8
21064111	5/8	0.090	3-1/2	1-1/4	5/8
21064211	5/8	0.120	3-1/2	1-1/4	5/8
21064311	5/8	0.030	4	1-7/8	5/8
21064411	5/8	0.060	4	1-7/8	5/8
21064511	5/8	0.090	4	1-7/8	5/8
21064611	5/8	0.120	4	1-7/8	5/8
21064711	3/4	0.030	4	1-1/2	3/4
21064811	3/4	0.060	4	1-1/2	3/4
21064911	3/4	0.090	4	1-1/2	3/4
21065011	3/4	0.120	4	1-1/2	3/4
21065111	3/4	0.150	4	1-1/2	3/4
21065211	3/4	0.030	5	2-1/4	3/4
21065311	3/4	0.060	5	2-1/4	3/4
21065411	3/4	0.090	5	2-1/4	3/4
21065511	3/4	0.120	5	2-1/4	3/4
21065611	3/4	0.150	5	2-1/4	3/4
21065711	1	0.030	4	1-1/2	1
21065811	1	0.060	4	1-1/2	1
21065911	1	0.090	4	1-1/2	1
21066011	1	0.120	4	1-1/2	1
21066111	1	0.150	4	1-1/2	1
21066211	1	0.030	6	3	1
21066311	1	0.060	6	3	1
21066411	1	0.090	6	3	1
21066511	1	0.120	6	3	1
21066611	1	0.150	6	3	1
21066711	1 - 1/4	0.030	4	1-1/2	1 - 1/4
21066811	1 - 1/4	0.060	4	1-1/2	1 - 1/4
21066911	1 - 1/4	0.090	4	1-1/2	1 - 1/4
21067011	1 - 1/4	0.120	4	1-1/2	1 - 1/4
21067111	1 - 1/4	0.150	4	1-1/2	1 - 1/4
21067211	1 - 1/4	0.030	6	3	1 - 1/4
21067311	1 - 1/4	0.060	6	3	1 - 1/4
21067411	1 - 1/4	0.090	6	3	1 - 1/4
21067511	1 - 1/4	0.120	6	3	1 - 1/4

Packed: 1 pc.
Available EXO® coating only.





List 2106 (Continued)

UVX-TI-CR-5FL, 5 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1213	CARBIDE	EXO®		Var.°	SHANK h6
----------------------------	----------------	-------------	--	--------------	--------------------

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
21067611	1 - 1/4	0.150	6	3	1 - 1/4
21067711	1 - 1/4	0.030	7	4	1 - 1/4
21067811	1 - 1/4	0.060	7	4	1 - 1/4
21067911	1 - 1/4	0.090	7	4	1 - 1/4
21068011	1 - 1/4	0.120	7	4	1 - 1/4
21068111	1 - 1/4	0.150	7	4	1 - 1/4

Packed: 1 pc.
Available EXO® coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® Carb VGx - List VG534 (p. 967-968)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2106						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>					

good best





EXOCARB® AERO UVX-Ti


Variable Lead End Mill for Titanium Alloy

List 2104

UVX-TI-LN-5FL, 5 Flute, Regular Length, Reduced Neck, Square End

SPEED FEED P1214	CARBIDE	EXO®	REG	Var.°	SHANK h6
----------------------------	----------------	-------------	------------	--------------	--------------------

Milling Diameter Tolerance	
12 ≤ D ≤ 25	+0/-0.05mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
8555320	12	90	24	36	11.5	12
8555360	16	100	32	48	15.5	16
8555400	20	120	40	60	19.5	20
8555450	25	140	50	75	24.5	25

Packed: 1 pc.
Available EXO® coating only.




List 2102

UVX-TI-LN-5FL, 5 Flute, Regular Length, Reduced Neck, Square End

SPEED FEED P1213	CARBIDE	EXO®	REG	Var.°	SHANK h6
----------------------------	----------------	-------------	------------	--------------	--------------------

Milling Diameter Tolerance	
1/2 ≤ D ≤ 1-1/4	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	L	Lc	L1	d2	d
21020011	1/2	3-1/2	1	1-1/2	0.480	1/2
21020111	5/8	4	1-1/4	1-7/8	0.605	5/8
21020211	3/4	6-1/2	1-1/2	2-1/4	0.730	3/4
21020311	1	5-1/2	2	3	0.980	1
21020411	1-1/4	6	2-1/2	3-3/4	1.230	1-1/4

Packed: 1 pc.
Available EXO® coating only.



Work Material

List No.	P					Die Steels	M			K Cast Iron	N		S Titanium	H			
	Carbon Steels			Alloy Steels 4140 4340	Stainless Steels			Aluminum			Nickel Alloy Inconel	Hardened Steels					
	Low	Med.	High		300		400	17-4 PH	6061 7075			Casting					
	1010 1018	1035 1045	1065											~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2104					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>						
2102					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input checked="" type="checkbox"/>						

good best





List 2108

UVX-TI-LN-CR-5FL, 5 Flute, Regular Length, Reduced Neck, Corner Radius

SPEED FEED P1213	CARBIDE	EXO	REG	Var.	SHANK h6
---------------------	---------	-----	-----	------	-------------

Milling Diameter Tolerance	
$1/2 \leq D \leq 1-1/4$	+0/-0.002"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
21080011	1/2	0.03	3-1/2	1	1-1/2	0.480	1/2
21080111	1/2	0.06	3-1/2	1	1-1/2	0.480	1/2
21080211	1/2	0.09	3-1/2	1	1-1/2	0.480	1/2
21080311	1/2	0.12	3-1/2	1	1-1/2	0.480	1/2
21080411	5/8	0.03	4	1-1/4	1-7/8	0.605	5/8
21080511	5/8	0.06	4	1-1/4	1-7/8	0.605	5/8
21080611	5/8	0.09	4	1-1/4	1-7/8	0.605	5/8
21080711	5/8	0.12	4	1-1/4	1-7/8	0.605	5/8
21080811	3/4	0.03	4-3/4	1-1/2	2-1/4	0.730	3/4
21080911	3/4	0.06	4-3/4	1-1/2	2-1/4	0.730	3/4
21081011	3/4	0.09	4-3/4	1-1/2	2-1/4	0.730	3/4
21081111	3/4	0.12	4-3/4	1-1/2	2-1/4	0.730	3/4
21081211	3/4	0.15	4-3/4	1-1/2	2-1/4	0.730	3/4
21081311	1	0.03	5-1/2	2	3	0.980	1
21081411	1	0.06	5-1/2	2	3	0.980	1
21081511	1	0.09	5-1/2	2	3	0.980	1
21081611	1	0.12	5-1/2	2	3	0.980	1
21081711	1	0.15	5-1/2	2	3	0.980	1
21081811	1-1/4	0.03	6	2-1/2	3-3/4	1.230	1-1/4
21081911	1-1/4	0.06	6	2-1/2	3-3/4	1.230	1-1/4
21082011	1-1/4	0.09	6	2-1/2	3-3/4	1.230	1-1/4
21082111	1-1/4	0.12	6	2-1/2	3-3/4	1.230	1-1/4
21082211	1-1/4	0.15	6	2-1/2	3-3/4	1.230	1-1/4

Packed: 1 pc.
Available EXO® coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2108	1010 1018	1035 1045	1065	4140 4340	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					<input checked="" type="checkbox"/>					

good best





EXOCARB® AERO UVX-Ti

Variable Lead End Mill for Titanium Alloy

List 2110

UVX-TI-LN-CR-5FL, 5 Flute, Regular Length, Reduced Neck, Corner Radius

SPEED FEED P1214	CARBIDE	EXO	REG	Var.	SHANK h6
---------------------	---------	-----	-----	------	-------------

Milling Diameter Tolerance	
12 ≤ D ≤ 25	+0/-0.05mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
8555321	12	1.0	90	24	36	11.5	12
8555322	12	1.5	90	24	36	11.5	12
8555323	12	2.0	90	24	36	11.5	12
8555324	12	2.5	90	24	36	11.5	12
8555325	12	3.0	90	24	36	11.5	12
8555326	12	4.0	90	24	36	11.5	12
8555361	16	1.0	100	32	48	15.5	16
8555362	16	1.5	100	32	48	15.5	16
8555363	16	2.0	100	32	48	15.5	16
8555364	16	2.5	100	32	48	15.5	16
8555365	16	3.0	100	32	48	15.5	16
8555366	16	4.0	100	32	48	15.5	16
8555401	20	1.0	120	40	60	19.5	20
8555402	20	1.5	120	40	60	19.5	20
8555403	20	2.0	120	40	60	19.5	20
8555404	20	2.5	120	40	60	19.5	20
8555405	20	3.0	120	40	60	19.5	20
8555406	20	4.0	120	40	60	19.5	20
8555407	20	5.0	120	40	60	19.5	20

Packed: 1 pc.
Available EXO® coating only.



Work Material

List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
2110	1010	1035	1065	4140	4340	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		6061	7075		<input checked="" type="checkbox"/>						

good best






List 2080

HFC-Ti, 6 & 8 Flute

SPEED FEED P1215	CARBIDE	BR		SHANK h6
----------------------------	----------------	-----------	--	--------------------

Milling Diameter Tolerance	
5/8 ≤ D ≤ 1	+0 / -0.002"

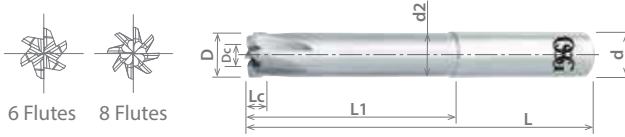

Units: Inch

EDP Number	Mill Diameter	Effective Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	No. of Flutes
	D	Dc	L	Lc	L1	d2	d	
20806250	5/8	0.304	4.72	0.197	2.76	0.586	5/8	6
20807500	3/4	0.365	4.72	0.197	2.76	0.711	3/4	8
20801000	1	0.486	4.72	0.197	2.76	0.961	1	8

Packed: 1 pc.
Available Bright only.




List 2081

HFC-Ti, 6 & 8 Flute

SPEED FEED P1215	CARBIDE	BR		SHANK h6
----------------------------	----------------	-----------	--	--------------------

Milling Diameter Tolerance	
16 ≤ D ≤ 25	+0 / -0.05mm

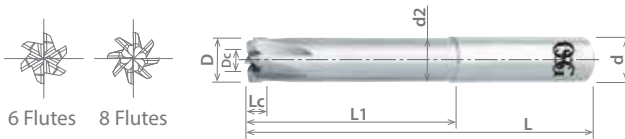

Units: mm

EDP Number	Mill Diameter	Effective Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	No. of Flutes
	D	Dc	L	Lc	L1	d2	d	
8555716	16	7.77	120	5	70	15	16	6
8555720	20	9.72	120	5	70	19	20	8
8555725	25	12.15	120	5	70	24	25	8

Packed: 1 pc.
Available Bright only.



Work Material

List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH			6061 7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
2080													<input type="checkbox"/>						
2081													<input type="checkbox"/>						

good best





EXOCARB® AERO DLC


High Speed Carbide End Mills for Aluminum Alloy

List 2863

AERO-EDS, 2 Flute, Stub Length, Corner Radius

SPEED FEED P1216	CARBIDE	DLC		STUB	25°	SHANK h6
---------------------	---------	-----	--	------	-----	-------------

Milling Diameter Tolerance	
1/2 ≤ D ≤ 1	+0 / -0.0012"

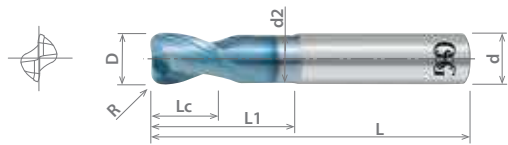

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
28630000	1/2	0.030	4	3/4	2.205	0.461	1/2
28630100	1/2	0.060	4	3/4	2.205	0.461	1/2
28630200	1/2	0.090	4	3/4	2.205	0.461	1/2
28630400	1/2	0.120	4	3/4	2.205	0.461	1/2
28630600	5/8	0.030	4	1	2.205	0.559	5/8
28630700	5/8	0.060	4	1	2.205	0.559	5/8
28630800	5/8	0.090	4	1	2.205	0.559	5/8
28630900	5/8	0.120	4	1	2.205	0.559	5/8
28631000	5/8	0.190	4	1	2.205	0.559	5/8
28631200	3/4	0.030	4	1-1/8	2.205	0.669	3/4
28631300	3/4	0.060	4	1-1/8	2.205	0.669	3/4
28631400	3/4	0.090	4	1-1/8	2.205	0.669	3/4
28631500	3/4	0.120	4	1-1/8	2.205	0.669	3/4
28631600	3/4	0.190	4	1-1/8	2.205	0.669	3/4
28631800	7/8	0.030	4	1-5/16	2.205	0.787	7/8
28631900	7/8	0.060	4	1-5/16	2.205	0.787	7/8
28632000	7/8	0.090	4	1-5/16	2.205	0.787	7/8
28632100	7/8	0.120	4	1-5/16	2.205	0.787	7/8
28632200	7/8	0.190	4	1-5/16	2.205	0.787	7/8
28632400	1	0.030	4	1-1/2	2.205	0.921	1
28632500	1	0.060	4	1-1/2	2.205	0.921	1
28632600	1	0.090	4	1-1/2	2.205	0.921	1
28632700	1	0.120	4	1-1/2	2.205	0.921	1
28632800	1	0.190	4	1-1/2	2.205	0.921	1

Packed: 1 pc.
Available DLC coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB® AERO - List 2021 (p. 942)

Work Material

List No.	P					M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum			Nickel Alloy Inconel	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2863									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 2963

AERO-EDS, 2 Flute, Stub Length, Corner Radius

SPEED FEED P1216	CARBIDE	DLC	STUB	25°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
12 ≤ D ≤ 25	+0 / -0.03mm

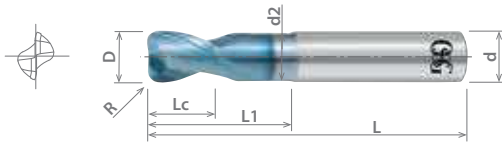

Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
8528822	12	1.0	90	14	40	11.0	12
8528823	12	1.6	90	14	40	11.0	12
8528826	12	3.0	90	14	40	11.0	12
8528862	16	1.0	100	18	45	14.4	16
8528863	16	1.6	100	18	45	14.4	16
8528866	16	3.0	100	18	45	14.4	16
8528902	20	1.0	110	22	56	18.0	20
8528903	20	1.6	110	22	56	18.0	20
8528906	20	3.0	110	22	56	18.0	20
8528952	25	1.0	110	27	56	23.0	25
8528953	25	1.6	110	27	56	23.0	25
8528956	25	3.0	110	27	56	23.0	25

Packed: 1 pc.
Available DLC coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2963										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best





EXOCARB® AERO DLC-CR


High Speed Carbide End Mills for Aluminum Alloy

List 2873

AERO-ETS, 3 Flute, Stub Length, Square & Corner Radius

SPEED FEED P1217	CARBIDE	DLC	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1/2 ≤ D ≤ 1	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
28730050	1/2	-	4	3/4	2.205	0.461	1/2
28730000	1/2	0.030	4	3/4	2.205	0.461	1/2
28730100	1/2	0.060	4	3/4	2.205	0.461	1/2
28730200	1/2	0.090	4	3/4	2.205	0.461	1/2
28730300	1/2	0.120	4	3/4	2.205	0.461	1/2
28731050	5/8	-	4	1	2.205	0.559	5/8
28731000	5/8	0.030	4	1	2.205	0.559	5/8
28731100	5/8	0.060	4	1	2.205	0.559	5/8
28731200	5/8	0.090	4	1	2.205	0.559	5/8
28731300	5/8	0.120	4	1	2.205	0.559	5/8
28731400	5/8	0.190	4	1	2.205	0.559	5/8
28732050	3/4	-	4	1-1/8	2.205	0.669	3/4
28732100	3/4	0.030	4	1-1/8	2.205	0.669	3/4
28732200	3/4	0.060	4	1-1/8	2.205	0.669	3/4
28732300	3/4	0.090	4	1-1/8	2.205	0.669	3/4
28732400	3/4	0.120	4	1-1/8	2.205	0.669	3/4
28732500	3/4	0.190	4	1-1/8	2.205	0.669	3/4
28734050	7/8	-	4	1-5/16	2.205	0.787	7/8
28734400	7/8	0.030	4	1-5/16	2.205	0.787	7/8
28734500	7/8	0.060	4	1-5/16	2.205	0.787	7/8
28734600	7/8	0.090	4	1-5/16	2.205	0.787	7/8
28734700	7/8	0.120	4	1-5/16	2.205	0.787	7/8
28734800	7/8	0.190	4	1-5/16	2.205	0.787	7/8
28735050	1	-	4	1-1/2	2.205	0.921	1
28735500	1	0.030	4	1-1/2	2.205	0.921	1
28735600	1	0.060	4	1-1/2	2.205	0.921	1
28735700	1	0.090	4	1-1/2	2.205	0.921	1
28735800	1	0.120	4	1-1/2	2.205	0.921	1
28735900	1	0.190	4	1-1/2	2.205	0.921	1

Packed: 1 pc.
Available DLC coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB® AERO - List 2041 (p. 946)

Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
2873	1010 1018	1035 1045	1065	4140 4340					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								

good best






List 2973

AERO-ETS, 3 Flute, Stub Length, Square & Corner Radius

SPEED FEED P1217	CARBIDE	DLC	STUB	30°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
12 ≤ D ≤ 25	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
8533249	12	-	100	18	55	11.0	12
8533250	12	1.0	100	18	55	11.0	12
8533251	12	1.6	100	18	55	11.0	12
8533252	12	3.0	100	18	55	11.0	12
8533253	16	-	100	24	55	14.4	16
8533254	16	1.0	100	24	55	14.4	16
8533255	16	1.6	100	24	55	14.4	16
8533256	16	3.0	100	24	55	14.4	16
8533257	16	4.0	100	24	55	14.4	16
8533258	16	5.0	100	24	55	14.4	16
8533259	20	-	100	30	55	18.0	20
8533260	20	1.0	100	30	55	18.0	20
8533261	20	1.6	100	30	55	18.0	20
8533262	20	3.0	100	30	55	18.0	20
8533263	20	4.0	100	30	55	18.0	20
8533264	20	5.0	100	30	55	18.0	20
8533265	25	-	100	37.5	55	23.0	25
8533266	25	1.0	100	37.5	55	23.0	25
8533267	25	1.6	100	37.5	55	23.0	25
8533268	25	3.0	100	37.5	55	23.0	25
8533269	25	4.0	100	37.5	55	23.0	25
8533270	25	5.0	100	37.5	55	23.0	25

Packed: 1 pc.
Available DLC coating only.



Work Material																
List No.	P					M			K	N		S	H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum			Nickel Alloy	Titanium	Hardened Steels	
		Low	Med.			High	4140	300	400	17-4 PH	Cast Iron	6061			Casting	Inconel
	1010	1035	1065	4340	7075											
2973	1018	1045							<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best





EXOCARB® AERO DLC-CR-OIL


High Speed Coolant-Through End Mills for Aluminum Alloy

List 2874

AERO-O-ETS, 3 Flute, Stub Length, Coolant-Through, Square & Corner Radius

SPEED FEED P1217	CARBIDE	DLC		STUB		30°	SHANK h6
---------------------	---------	-----	--	------	--	-----	-------------

Milling Diameter Tolerance	
5/8 ≤ D ≤ 1	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
28740050	5/8	-	4	1.016	2.205	0.559	5/8
28741550	3/4	-	4	1.142	2.205	0.669	3/4
28740000	3/4	0.030	4	1.142	2.205	0.669	3/4
28740500	3/4	0.060	4	1.142	2.205	0.669	3/4
28741000	3/4	0.090	4	1.142	2.205	0.669	3/4
28741500	3/4	0.120	4	1.142	2.205	0.669	3/4
28742000	3/4	0.190	4	1.142	2.205	0.669	3/4
28741050	7/8	-	4	1.327	2.205	0.787	7/8
28740550	1	-	4	1.523	2.205	0.921	1
28742500	1	0.030	4	1.523	2.205	0.921	1
28743000	1	0.060	4	1.523	2.205	0.921	1
28743500	1	0.090	4	1.523	2.205	0.921	1
28744000	1	0.120	4	1.523	2.205	0.921	1
28744500	1	0.190	4	1.523	2.205	0.921	1

Packed: 1 pc.
Available DLC coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB® AERO - List 2041 (p. 946)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2874	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2974

AERO-O-ETS, 3 Flute, Stub Length, Coolant-Through, Square & Corner Radius

SPEED FEED P1218	CARBIDE	DLC		STUB		30°	SHANK h6
----------------------------	----------------	------------	--	-------------	--	------------	--------------------

Milling Diameter Tolerance	
20 ≤ D ≤ 25	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
8533300	20	-	100	30.0	55	18	20
8533301	20	1.0	100	30.0	55	18	20
8533302	20	1.6	100	30.0	55	18	20
8533303	20	3.0	100	30.0	55	18	20
8533304	20	4.0	100	30.0	55	18	20
8533305	20	5.0	100	30.0	55	18	20
8533306	25	-	100	37.5	55	23	25
8533307	25	1.0	100	37.5	55	23	25
8533308	25	1.6	100	37.5	55	23	25
8533309	25	3.0	100	37.5	55	23	25
8533310	25	4.0	100	37.5	55	23	25
8533311	25	5.0	100	37.5	55	23	25

Packed: 1 pc.
Available DLC coating only.



Work Material

List No.	P				M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2974	1010 1018	1035 1045	1065	4140 4340					<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best





EXOCARB® AERO DLC

High Speed Carbide End Mills for Aluminum Alloy

List 2843

AERO-ETL, 3 Flute, Long Length, Square & Corner Radius

SPEED FEED P1218	CARBIDE	DLC	LONG	35°	SHANK h6
----------------------------	----------------	------------	-------------	------------	--------------------

Milling Diameter Tolerance	
1/2 ≤ D ≤ 1	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
28430000	1/2	-	4-1/2	2.024	1/2
28430400	1/2	0.030	4-1/2	2.024	1/2
28430550	1/2	0.060	4-1/2	2.024	1/2
28430600	1/2	0.090	4-1/2	2.024	1/2
28430700	1/2	0.120	4-1/2	2.024	1/2
28430800	1/2	0.150	4-1/2	2.024	1/2
28430900	1/2	0.190	4-1/2	2.024	1/2
28431000	5/8	-	4-1/2	2.024	5/8
28431550	5/8	0.030	4-1/2	2.024	5/8
28431600	5/8	0.060	4-1/2	2.024	5/8
28431700	5/8	0.090	4-1/2	2.024	5/8
28431800	5/8	0.120	4-1/2	2.024	5/8
28431900	5/8	0.150	4-1/2	2.024	5/8
28432050	5/8	0.190	4-1/2	2.024	5/8
28432000	3/4	-	4-1/2	2.024	3/4
28432600	3/4	0.030	4-1/2	2.024	3/4
28432700	3/4	0.060	4-1/2	2.024	3/4
28432800	3/4	0.090	4-1/2	2.024	3/4
28432900	3/4	0.120	4-1/2	2.024	3/4
28433050	3/4	0.150	4-1/2	2.024	3/4
28433100	3/4	0.190	4-1/2	2.024	3/4
28433500	7/8	-	4-1/2	2.024	7/8
28433800	7/8	0.030	4-1/2	2.024	7/8
28433900	7/8	0.060	4-1/2	2.024	7/8
28434050	7/8	0.090	4-1/2	2.024	7/8
28434100	7/8	0.120	4-1/2	2.024	7/8
28434200	7/8	0.150	4-1/2	2.024	7/8
28434300	7/8	0.190	4-1/2	2.024	7/8
28434500	1	-	4-1/2	2.024	1
28434900	1	0.030	4-1/2	2.024	1
28435050	1	0.030	4-1/2	2.024	1
28435100	1	0.090	4-1/2	2.024	1
28435200	1	0.120	4-1/2	2.024	1
28435300	1	0.150	4-1/2	2.024	1
28435400	1	0.190	4-1/2	2.024	1

Packed: 1 pc.
Available DLC coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try EXOCARB® AERO - List 2042 (p. 947)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2843	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best





List 2943

AERO-ETL, 3 Flute, Long Length, Square & Corner Radius

SPEED FEED P1218	CARBIDE	DLC	LONG	35°	SHANK h6
---------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
12 ≤ D ≤ 20	+0 / -0.02mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
8533350	12	-	110	50	12
8533351	12	1.0	110	50	12
8533352	12	1.6	110	50	12
8533353	12	3.0	110	50	12
8533354	12	4.0	110	50	12
8533355	16	-	110	50	16
8533356	16	1.0	110	50	16
8533357	16	1.6	110	50	16
8533358	16	3.0	110	50	16
8533359	16	4.0	110	50	16
8533360	16	5.0	110	50	16
8533361	20	-	110	50	20
8533362	20	1.0	110	50	20
8533363	20	1.6	110	50	20
8533364	20	3.0	110	50	20
8533365	20	4.0	110	50	20
8533366	20	5.0	110	50	20

Packed: 1 pc.
Available DLC coating only.



Work Material

List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
2943	1010	1035	1065	4140															
	1018	1045		4340															

good best





EXOCARB® AERO DLC

High Speed Carbide End Mills for Aluminum Alloy

List 2853

AERO-ETXL, 3 Flute, Extra Long Length, Square & Corner Radius

SPEED FEED P1219	CARBIDE	DLC	EXTRA LONG	35°	SHANK h6
---------------------	---------	-----	------------	-----	-------------

Milling Diameter Tolerance	
3/4 ≤ D ≤ 1	+0 / -0.0008"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
28530000	3/4	-	6-1/2	4	3/4
28530100	3/4	0.030	6-1/2	4	3/4
28530200	3/4	0.060	6-1/2	4	3/4
28530300	3/4	0.090	6-1/2	4	3/4
28530400	3/4	0.120	6-1/2	4	3/4
28530500	3/4	0.150	6-1/2	4	3/4
28530600	3/4	0.190	6-1/2	4	3/4

Packed: 1 pc.
Available DLC coating only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
2853	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2953

AERO-ETXL, 3 Flute, Extra Long Length, Square & Corner Radius

SPEED FEED P1219	CARBIDE	DLC		EXTRA LONG	35°	SHANK h6
----------------------------	----------------	------------	--	-------------------	------------	--------------------

Milling Diameter Tolerance	
3/4 ≤ D ≤ 1	+0 / -0.0008"



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
8533400	20	-	160	100	20
8533401	20	1.0	160	100	20
8533402	20	1.6	160	100	20
8533403	20	3.0	160	100	20
8533404	20	4.0	160	100	20
8533405	20	5.0	160	100	20

Packed: 1 pc.
Available DLC coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2953	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2021

2 Flute, Stub Length, Square & Corner Radius

SPEED FEED P1220	CARBIDE	BR		STUB	30°	SHANK h6
---------------------	---------	----	--	------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20210100	1/8	-	1-1/2	1/4	1/8
20210200	1/8	0.01	1-1/2	1/4	1/8
20210500	5/32	-	2	5/16	3/16
20210600	5/32	0.02	2	5/16	3/16
20210900	3/16	-	2	5/16	3/16
20211000	3/16	0.02	2	5/16	3/16
20211300	7/32	-	2-1/2	3/8	1/4
20211400	7/32	0.02	2-1/2	3/8	1/4
20211700	1/4	-	2-1/2	3/8	1/4
20211800	1/4	0.02	2-1/2	3/8	1/4
20211900	1/4	0.03	2-1/2	3/8	1/4
20212000	1/4	0.06	2-1/2	3/8	1/4
20212100	9/32	-	2-1/2	7/16	5/16
20212500	5/16	-	2-1/2	7/16	5/16
20212600	5/16	0.02	2-1/2	7/16	5/16
20212700	5/16	0.03	2-1/2	7/16	5/16
20212900	11/32	-	2-1/2	1/2	3/8
20213000	11/32	0.02	2-1/2	1/2	3/8
20213300	3/8	-	2-1/2	1/2	3/8
20213400	3/8	0.02	2-1/2	1/2	3/8
20213500	3/8	0.03	2-1/2	1/2	3/8

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20213600	3/8	0.06	2-1/2	1/2	3/8
20213700	13/32	-	2-3/4	9/16	7/16
20214100	7/16	-	2-3/4	9/16	7/16
20214200	7/16	0.02	2-3/4	9/16	7/16
20214500	15/32	-	3	5/8	1/2
20214900	1/2	-	3	5/8	1/2
20215000	1/2	0.02	3	5/8	1/2
20215100	1/2	0.03	3	5/8	1/2
20215200	1/2	0.06	3	5/8	1/2
20215300	5/8	-	3-1/2	3/4	5/8
20215400	5/8	0.03	3-1/2	3/4	5/8
20215500	5/8	0.06	3-1/2	3/4	5/8
20215600	5/8	0.09	3-1/2	3/4	5/8
20215700	3/4	-	4	1	3/4
20215800	3/4	0.06	4	1	3/4
20215900	3/4	0.09	4	1	3/4
20216000	3/4	0.12	4	1	3/4
20216100	1	-	4	1-1/4	1
20216200	1	0.06	4	1-1/4	1
20216300	1	0.09	4	1-1/4	1
20216400	1	0.12	4	1-1/4	1

Packed: 1 pc.
 EDPs above are stocked standard, DLC coating available upon request.
 Additional corner radii available upon request.



OSG's Performance & Savings

Don't require ultra-high performance? Try CARBIDE - List 412 or 495 (p. 998-999 or 1004)
 Want to turbo-charge performance? Try EXOCARB® DIAMOND - List 7020 (p. 910)

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
2021										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 2022

2 Flute, Regular Length, Square & Corner Radius

SPEED FEED P1220	CARBIDE	BR	REG	30°	SHANK h6
---------------------	---------	----	-----	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20220100	1/8	-	1-1/2	3/8	1/8
20220200	1/8	0.01	1-1/2	3/8	1/8
20220500	5/32	-	2	9/16	3/16
20220600	5/32	0.02	2	9/16	3/16
20220900	3/16	-	2	9/16	3/16
20221000	3/16	0.02	2	9/16	3/16
20221300	7/32	-	2-1/2	3/4	1/4
20221400	7/32	0.02	2-1/2	3/4	1/4
20221700	1/4	-	2-1/2	3/4	1/4
20221800	1/4	0.02	2-1/2	3/4	1/4
20221900	1/4	0.03	2-1/2	3/4	1/4
20222000	1/4	0.06	2-1/2	3/4	1/4
20222100	9/32	-	2-1/2	13/16	5/16
20222200	9/32	0.02	2-1/2	13/16	5/16
20222500	5/16	-	2-1/2	13/16	5/16
20222600	5/16	0.02	2-1/2	13/16	5/16
20222700	5/16	0.03	2-1/2	13/16	5/16
20222900	11/32	-	2-1/2	1	3/8
20223000	11/32	0.02	2-1/2	1	3/8
20223300	3/8	-	2-1/2	1	3/8
20223400	3/8	0.02	2-1/2	1	3/8
20223500	3/8	0.03	2-1/2	1	3/8
20223600	3/8	0.06	2-1/2	1	3/8

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20223700	13/32	-	2-3/4	1	7/16
20223800	13/32	0.02	2-3/4	1	7/16
20224100	7/16	-	2-3/4	1	7/16
20224200	7/16	0.02	2-3/4	1	7/16
20224500	15/32	-	3	1-1/4	1/2
20224600	15/32	0.02	3	1-1/4	1/2
20224900	1/2	-	3	1-1/4	1/2
20225000	1/2	0.02	3	1-1/4	1/2
20225100	1/2	0.03	3	1-1/4	1/2
20225200	1/2	0.06	3	1-1/4	1/2
20225300	5/8	-	3-1/2	1-5/8	5/8
20225400	5/8	0.03	3-1/2	1-5/8	5/8
20225500	5/8	0.06	3-1/2	1-5/8	5/8
20225600	5/8	0.09	3-1/2	1-5/8	5/8
20225700	3/4	-	4	1-5/8	3/4
20225800	3/4	0.06	4	1-5/8	3/4
20225900	3/4	0.09	4	1-5/8	3/4
20226000	3/4	0.12	4	1-5/8	3/4
20226100	1	-	5	2	1
20226200	1	0.06	5	2	1
20226300	1	0.09	5	2	1
20226400	1	0.12	5	2	1

Packed: 1 pc.

EDPs above are stocked standard, DLC coating available upon request. Additional corner radii available upon request.



OSG's Performance & Savings

Don't require ultra-high performance? Try CARBIDE - List 402 or 495 (p. 993-995 or 1004)

List No.	Work Material															
	P					M			K	N		S	H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels		
	Low 1010 1018	Med. 1035 1045	High 1065				300	400		17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC
2022									<input type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2023

SPEED FEED P1220	CARBIDE	BR	REG	30°	SHANK h6
----------------------------	----------------	-----------	------------	------------	--------------------

2 Flute, Regular Length, Reduced Neck, Square & Corner Radius

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
20230100	1/4	-	2-1/2	1/4	1-1/8	0.246	1/4
20230200	1/4	0.02	2-1/2	1/4	1-1/8	0.246	1/4
20230300	1/4	0.03	2-1/2	1/4	1-1/8	0.246	1/4
20230400	1/4	0.06	2-1/2	1/4	1-1/8	0.246	1/4
20230500	1/2	-	3	1/2	1-3/8	0.496	1/2
20230600	1/2	0.02	3	1/2	1-3/8	0.496	1/2
20230700	1/2	0.03	3	1/2	1-3/8	0.496	1/2
20230800	1/2	0.06	3	1/2	1-3/8	0.496	1/2
20230900	5/8	-	3-1/2	5/8	1-5/8	0.621	5/8
20231000	5/8	0.03	3-1/2	5/8	1-5/8	0.621	5/8
20231100	5/8	0.06	3-1/2	5/8	1-5/8	0.621	5/8
20231200	5/8	0.09	3-1/2	5/8	1-5/8	0.621	5/8
20231300	3/4	-	4	3/4	2	0.746	3/4
20231400	3/4	0.06	4	3/4	2	0.746	3/4
20231500	3/4	0.09	4	3/4	2	0.746	3/4
20231600	3/4	0.12	4	3/4	2	0.746	3/4
20231700	1	-	5	1	2-5/8	0.992	1
20231800	1	0.06	5	1	2-5/8	0.992	1
20231900	1	0.09	5	1	2-5/8	0.992	1
20232000	1	0.12	5	1	2-5/8	0.992	1

Packed: 1 pc.

EDPs above are stocked standard, DLC coating available upon request.



Work Material

List No.	P				Die Steels	M			Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
2023										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2024

2 Flute, Long Length, Reduced Neck, Square & Corner Radius

SPEED FEED P1220	CARBIDE	BR		LONG	30°	SHANK h6
----------------------------	----------------	-----------	--	-------------	------------	--------------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.002"

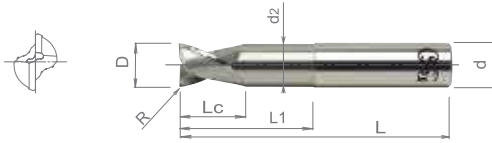

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
20240100	1/4	-	4	1/4	2-1/8	0.246	1/4
20240200	1/4	0.02	4	1/4	2-1/8	0.246	1/4
20240300	1/4	0.03	4	1/4	2-1/8	0.246	1/4
20240400	1/4	0.06	4	1/4	2-1/8	0.246	1/4
20240500	1/2	-	4	1/2	2-1/8	0.496	1/2
20240600	1/2	0.02	4	1/2	2-1/8	0.496	1/2
20240700	1/2	0.03	4	1/2	2-1/8	0.496	1/2
20240800	1/2	0.06	4	1/2	2-1/8	0.496	1/2
20240900	5/8	-	6	5/8	2-3/8	0.621	5/8
20241000	5/8	0.03	6	5/8	2-3/8	0.621	5/8
20241100	5/8	0.06	6	5/8	2-3/8	0.621	5/8
20241200	5/8	0.09	6	5/8	2-3/8	0.621	5/8
20241300	3/4	-	6	3/4	2-1/2	0.746	3/4
20241400	3/4	0.06	6	3/4	2-1/2	0.746	3/4
20241500	3/4	0.09	6	3/4	2-1/2	0.746	3/4
20241600	3/4	0.12	6	3/4	2-1/2	0.746	3/4
20241700	1	-	6	1	3-3/8	0.992	1
20241800	1	0.06	6	1	3-3/8	0.992	1
20241900	1	0.09	6	1	3-3/8	0.992	1
20242000	1	0.12	6	1	3-3/8	0.992	1

Packed: 1 pc.
EDPs above are stocked standard, DLC coating available upon request.



Work Material																	
List No.	P					M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2024									<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 2041

3 Flute, Stub Length, Square & Corner Radius

SPEED FEED P1221	CARBIDE	BR		STUB	45°	SHANK h6
---------------------	---------	----	--	------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20410100	1/8	-	1-1/2	1/4	1/8
20410200	1/8	0.01	1-1/2	1/4	1/8
20410900	3/16	-	2	5/16	3/16
20411000	3/16	0.02	2	5/16	3/16
20411700	1/4	-	2-1/2	3/8	1/4
20411800	1/4	0.02	2-1/2	3/8	1/4
20411900	1/4	0.03	2-1/2	3/8	1/4
20412000	1/4	0.06	2-1/2	3/8	1/4
20412500	5/16	-	2-1/2	7/16	5/16
20412600	5/16	0.02	2-1/2	7/16	5/16
20412700	5/16	0.03	2-1/2	7/16	5/16
20413300	3/8	-	2-1/2	1/2	3/8
20413400	3/8	0.02	2-1/2	1/2	3/8
20413500	3/8	0.03	2-1/2	1/2	3/8
20413600	3/8	0.06	2-1/2	1/2	3/8
20414100	7/16	-	2-3/4	9/16	7/16
20414200	7/16	0.02	2-3/4	9/16	7/16

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20414900	1/2	-	3	5/8	1/2
20415000	1/2	0.02	3	5/8	1/2
20415100	1/2	0.03	3	5/8	1/2
20415200	1/2	0.06	3	5/8	1/2
20415300	5/8	-	3-1/2	3/4	5/8
20415400	5/8	0.03	3-1/2	3/4	5/8
20415500	5/8	0.06	3-1/2	3/4	5/8
20415600	5/8	0.09	3-1/2	3/4	5/8
20415700	3/4	-	4	1	3/4
20415800	3/4	0.06	4	1	3/4
20415900	3/4	0.09	4	1	3/4
20416000	3/4	0.12	4	1	3/4
20416100	1	-	4	1-1/4	1
20416200	1	0.06	4	1-1/4	1
20416300	1	0.09	4	1-1/4	1
20416400	1	0.12	4	1-1/4	1

Packed: 1 pc.
EDPs above are stocked standard, DLC coating available upon request.



OSG's Performance & Savings

Don't require ultra-high performance? Try CARBIDE - List 403 (p. 993-995)

Want to turbo-charge performance? Try EXOCARB® AERO DLC - List 2873 or 2874 (p. 934 or 936)

Work Material

List No.	P					M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
2041										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							


good best





List 2042

3 Flute, Regular Length, Square & Corner Radius



SPEED FEED P1222	CARBIDE	BR	REG	45°	SHANK h6
---------------------	---------	----	-----	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20420100	1/8	-	1-1/2	3/8	1/8
20420200	1/8	0.01	1-1/2	3/8	1/8
20420900	3/16	-	2	9/16	3/16
20421000	3/16	0.02	2	9/16	3/16
20421700	1/4	-	2-1/2	5/8	1/4
20421800	1/4	0.02	2-1/2	5/8	1/4
20421900	1/4	0.03	2-1/2	5/8	1/4
20422000	1/4	0.06	2-1/2	5/8	1/4
20422500	5/16	-	2-1/2	13/16	5/16
20422600	5/16	0.02	2-1/2	13/16	5/16
20422700	5/16	0.03	2-1/2	13/16	5/16
20423300	3/8	-	2-1/2	1	3/8
20423400	3/8	0.02	2-1/2	1	3/8
20423500	3/8	0.03	2-1/2	1	3/8
20423600	3/8	0.06	2-1/2	1	3/8
20424100	7/16	-	2-3/4	1-1/4	7/16
20424200	7/16	0.02	2-3/4	1-1/4	7/16

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
	D	R	L	Lc	d
20424900	1/2	-	3	1-1/4	1/2
20425000	1/2	0.02	3	1-1/4	1/2
20425100	1/2	0.03	3	1-1/4	1/2
20425200	1/2	0.06	3	1-1/4	1/2
20425300	5/8	-	3-1/2	1-5/8	5/8
20425400	5/8	0.03	3-1/2	1-5/8	5/8
20425500	5/8	0.06	3-1/2	1-5/8	5/8
20425600	5/8	0.09	3-1/2	1-5/8	5/8
20425700	3/4	-	4	1-5/8	3/4
20425800	3/4	0.06	4	1-5/8	3/4
20425900	3/4	0.09	4	1-5/8	3/4
20426000	3/4	0.12	4	1-5/8	3/4
20426100	1	-	5	2	1
20426200	1	0.06	5	2	1
20426300	1	0.09	5	2	1
20426400	1	0.12	5	2	1



Packed: 1 pc.

EDPs above are stocked standard, DLC coating available upon request.

OSG's Performance & Savings

Don't require ultra-high performance? Try CARBIDE - List 403 (p. 993-995)

Want to turbo-charge performance? Try EXOCARB® AERO DLC - List 2843 (p. 938)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2042	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2043

3 Flute, Regular Length, Reduced Neck, Square & Corner Radius

SPEED FEED P1222	CARBIDE	BR	REG	45°	SHANK h6
---------------------	---------	----	-----	-----	-------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.002"

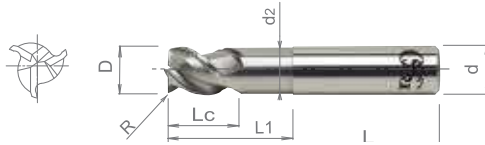

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
20430100	1/4	-	2-1/2	1/4	1-1/8	0.246	1/4
20430200	1/4	0.02	2-1/2	1/4	1-1/8	0.246	1/4
20430300	1/4	0.03	2-1/2	1/4	1-1/8	0.246	1/4
20430400	1/4	0.06	2-1/2	1/4	1-1/8	0.246	1/4
20430500	1/2	-	3	1/2	1-3/8	0.496	1/2
20430600	1/2	0.02	3	1/2	1-3/8	0.496	1/2
20430700	1/2	0.03	3	1/2	1-3/8	0.496	1/2
20430800	1/2	0.06	3	1/2	1-3/8	0.496	1/2
20430900	5/8	-	3-1/2	5/8	1-5/8	0.621	5/8
20431000	5/8	0.03	3-1/2	5/8	1-5/8	0.621	5/8
20431100	5/8	0.06	3-1/2	5/8	1-5/8	0.621	5/8
20431200	5/8	0.09	3-1/2	5/8	1-5/8	0.621	5/8
20431300	3/4	-	4	3/4	2	0.746	3/4
20431400	3/4	0.06	4	3/4	2	0.746	3/4
20431500	3/4	0.09	4	3/4	2	0.746	3/4
20431600	3/4	0.12	4	3/4	2	0.746	3/4
20431700	1	-	5	1	2-5/8	0.992	1
20431800	1	0.06	5	1	2-5/8	0.992	1
20431900	1	0.09	5	1	2-5/8	0.992	1
20432000	1	0.12	5	1	2-5/8	0.992	1

Packed: 1 pc.
EDPs above are stocked standard, DLC coating available upon request.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
2043										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						

good best






List 2048

3 Flute, Long Length, Reduced Neck, Square & Corner Radius

SPEED FEED P1222	CARBIDE	BR	LONG	45°	SHANK h6
---------------------	---------	----	------	-----	-------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.002"

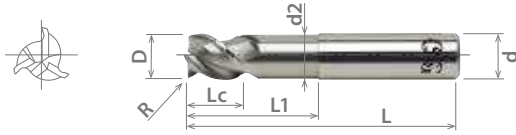

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
20480100	1/4	-	4	1/4	2-1/8	0.246	1/4
20480200	1/4	0.02	4	1/4	2-1/8	0.246	1/4
20480300	1/4	0.03	4	1/4	2-1/8	0.246	1/4
20480400	1/4	0.06	4	1/4	2-1/8	0.246	1/4
20480500	1/2	-	4	1/2	2-1/8	0.496	1/2
20480600	1/2	0.02	4	1/2	2-1/8	0.496	1/2
20480700	1/2	0.03	4	1/2	2-1/8	0.496	1/2
20480800	1/2	0.06	4	1/2	2-1/8	0.496	1/2
20480900	5/8	-	6	5/8	2-3/8	0.621	5/8
20481000	5/8	0.03	6	5/8	2-3/8	0.621	5/8
20481100	5/8	0.06	6	5/8	2-3/8	0.621	5/8
20481200	5/8	0.09	6	5/8	2-3/8	0.621	5/8
20481300	3/4	-	6	3/4	2-1/2	0.746	3/4
20481400	3/4	0.06	6	3/4	2-1/2	0.746	3/4
20481500	3/4	0.09	6	3/4	2-1/2	0.746	3/4
20481600	3/4	0.12	6	3/4	2-1/2	0.746	3/4
20481700	1	-	6	1	3-3/8	0.992	1
20481800	1	0.06	6	1	3-3/8	0.992	1
20481900	1	0.09	6	1	3-3/8	0.992	1
20482000	1	0.12	6	1	3-3/8	0.992	1

Packed: 1 pc.

EDPs above are stocked standard, DLC coating available upon request.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
2048										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 2010

2 Flute, Regular Length, Ball End

SPEED FEED P1223	CARBIDE	BR	REG	30°	SHANK h6
----------------------------	----------------	-----------	------------	------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
20100100	1/8	1-1/2	3/8	1/8
20100200	3/16	2	9/16	3/16
20100300	1/4	2-1/2	3/4	1/4
20100400	5/16	2-1/2	13/16	5/16
20100500	3/8	2-1/2	1	3/8
20100600	7/16	2-3/4	1	7/16
20100700	1/2	3	1-1/4	1/2
20100800	5/8	3-1/2	1-5/8	5/8
20100900	3/4	4	1-5/8	3/4
20101000	1	5	2	1

Packed: 1 pc.
Available Bright finish only.



OSG's Performance & Savings

Don't require ultra-high performance? Try CARBIDE - List 402BN (p. 1011-1013)
Want to turbo-charge performance? Try EXOCARB® DIAMOND - List 7010 (p. 913)

Work Material

List No.	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
2010	1010	1035	1065	4140	4340														
	1018	1045								<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								

good best






List 8120

CA-RG-EDS, 2 Flute, Regular Length

SPEED FEED P1224	CARBIDE	BR		REG	30°	SHANK h6
----------------------------	----------------	-----------	--	------------	------------	--------------------

Milling Diameter Tolerance	
D ≤ 12	+0 / -0.02mm
D > 12	+0 / -0.03mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
8502010	1.0	40	2.5	4
8502015	1.5	40	4.0	4
8502020	2.0	40	6.0	4
8502025	2.5	40	8.0	4
8502030	3.0	45	8.0	6
8502035	3.5	45	10.0	6
8502040	4.0	45	11.0	6
8502045	4.5	45	11.0	6
8502050	5.0	50	13.0	6
8502055	5.5	50	13.0	6
8502060	6.0	50	13.0	6
8502065	6.5	60	16.0	8
8502070	7.0	60	16.0	8
8502075	7.5	60	16.0	8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
8502080	8.0	60	19.0	8
8502085	8.5	70	19.0	10
8502090	9.0	70	19.0	10
8502095	9.5	70	19.0	10
8502100	10.0	70	22.0	10
8502105	10.5	75	22.0	12
8502110	11.0	75	22.0	12
8502115	11.5	75	22.0	12
8502120	12.0	75	26.0	12
8502130	13.0	85	26.0	12
8502140	14.0	85	26.0	12
8502150	15.0	90	26.0	16
8502160	16.0	100	32.0	16

Packed: 1 pc.
Available Bright finish only.



OSG's Performance & Savings

Don't require ultra-high performance? Try CARBIDE - List 402 (p. 993-995)
Want to turbo-charge performance? Try EXOCARB® DIAMOND - List 7120 (p. 911)

Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels				
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
8120										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best






List 2061

Multiple Flutes, Regular Length, Nicked Router

SPEED FEED P1225	CARBIDE	DIA		15°	SHANK h6
---------------------	---------	-----	--	-----	-------------

Tolerance +0/-0.002"

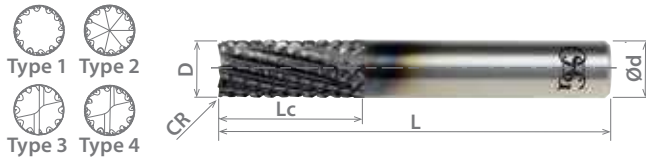

Units: Inch

EDP Number	Mill Diameter	Length of Cut	OAL	Shank Diameter	Number of Flutes	Type	Corner Radius
	D	Lc	L	d			
20610116	1/8	1/4	1-1/2	1/8	6	2	-
20611116	1/8	3/8	1-1/2	1/8	6	3	-
20612116	1/8	1/2	1-1/2	1/8	8	3	-
20610216	3/16	3/8	2	3/16	2	2	-
20611216	3/16	9/16	2	3/16	6	3	-
20612216	3/16	3/4	2	3/16	8	3	-
20610316	1/4	1/2	2-1/2	1/4	8	2	-
20613416	1/4	3/4	2-1/2	1/4	8	2	-
20612316	1/4	3/4	2-1/2	1/4	10	2	-
20612416	1/4	3/4	2-1/2	1/4	12	2	-
20611316	1/4	3/4	2-1/2	1/4	10	3	-
20613216	1/4	1	3	1/4	8	2	-
20614316	1/4	1	3	1/4	10	2	-
20614400	1/4	1	3	1/4	12	2	-
20614416	1/4	1	3	1/4	12	2	-
20617316	1/4	1	3	1/4	12	2	0.030
20613316	1/4	1	3	1/4	10	3	-
20616316	1/4	1	3	1/4	8	4	-
20616416	1/4	1	3	1/4	12	4	-
20615316	1/4	1-1/4	4	1/4	12	1	-
20615216	1/4	1-1/4	4	1/4	8	2	-
20610416	5/16	1	2-1/2	5/16	10	3	-
20610516	3/8	3/4	2-1/2	3/8	12	2	-
20612516	3/8	1-1/8	3	3/8	12	2	-
20616816	3/8	1-1/8	3	3/8	12	2	0.030
20611516	3/8	1-1/8	3	3/8	12	3	-
20616516	3/8	1-1/4	3	3/8	12	4	-
20614516	3/8	1-1/2	4	3/8	12	2	-
20613516	3/8	1-1/2	4	3/8	12	3	-
20615516	3/8	2	4	3/8	12	1	-
20616716	1/2	7/8	2-7/8	1/2	14	1	-
20611716	1/2	1	3	1/2	14	2	-
20613716	1/2	1	3	1/2	14	2	0.030
20610716	1/2	1	3	1/2	14	3	-
20615716	1/2	1	3	1/2	14	4	-
20612716	1/2	2	4	1/2	16	2	-

Packed: 1 pc.

Red EDP numbers indicate the item is uncoated. All others Diamond coating only.



- Type 1 - Non End Cutting
- Type 2 - Burr End
- Type 3 - End Mill Cut
- Type 4 - Drill Point

Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
2061	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Good Best





List 2066

4 Flute, Regular Length, 30° Compression Router

SPEED FEED P1225	CARBIDE	DIA		30°	SHANK h6
---------------------	---------	-----	--	-----	-------------

Tolerance
+0/-0.002"



Units: Inch

EDP Number	Mill Diameter	Compression Length	Length of Cut	OAL	Shank Diameter
	D	L2	Lc	L	d
20660116	1/8	1/8	0.560	1-1/2	1/8
20660316	1/4	1/4	0.750	2-1/2	1/4
20660516	3/8	3/8	0.875	3	3/8
20660716	1/2	1/2	1.500	3	1/2

Packed: 1 pc.
Available Diamond coating only.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
2066	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				

Good Best





EXOPRO[®] AERO-HBC 45

OSG Diamond Coated Routers for Milling CFRP and Other Composites



List 2064

4 Flute, Regular Length, 45° Compression Router

SPEED FEED P1225	CARBIDE	DIA		SHANK h6
---------------------	---------	-----	--	-------------

Tolerance +0/-0.002"



Units: Inch

EDP Number	Mill Diameter	Compression Length	Length of Cut	OAL	Shank Diameter
	D	L2	Lc	L	d
20642516	1/4	1/4	3/4	3	1/4
20643516	3/8	3/8	3/4	3	3/8
20643616	3/8	3/8	2	4	3/8
20645016	1/2	1/2	1	3	1/2
20645116	1/2	1/2	2	4	1/2

Packed: 1 pc.
Available Diamond coating only.



Work Material

List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
2064	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				

Good Best





List 2068

2 Flute, Regular Length, 60° Compression Router

SPEED FEED P1226	CARBIDE	DIA		SHANK h6
----------------------------	----------------	------------	--	--------------------

Tolerance +0/-0.002"



Units: Inch

EDP Number	Mill Diameter	Compression Length	Length of Cut	OAL	Shank Diameter
	D	L2	Lc	L	d
20682516	1/4	0.188	3/4	3	1/4
20683516	3/8	0.281	3/4	3	3/8
20683616	3/8	0.281	2	4	3/8
20685016	1/2	0.375	1	3	1/2
20685116	1/2	0.375	2	4	1/2

Packed: 1 pc.
Available Diamond coating only.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
2068	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				

Good Best





List 2680

Multiple Flute, Regular Length, Roughing Router

SPEED FEED P1227	CARBIDE	DIA		15°	SHANK h6
----------------------------	----------------	------------	--	------------	--------------------

Tolerance +0/-0.002"



Units: Inch

EDP Number	Mill Diameter	Length of Cut	OAL	Shank Diameter	Number of Flutes
	D	Lc	L	d	
26809316	15/64	3/4	2-1/2	1/4	4
26805316	1/4	1/2	2-1/2	1/4	4
26800316	1/4	3/4	2-1/2	1/4	4
26806316	1/4	1	3	1/4	4
26809416	5/16	15/16	3	3/8	6
26809516	23/64	1-1/8	3	3/8	6
26805516	3/8	3/4	3	3/8	6
26800516	3/8	1-1/8	3	3/8	6
26809616	7/16	1-5/16	3	1/2	8
26809716	31/64	1-1/2	3	1/2	8
26805716	1/2	1	3	1/2	8
26800716	1/2	1-1/2	3	1/2	8

Packed: 1 pc.
Available Diamond coating only.



Work Material

List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
2680	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			

Good Best





List 2650

Multiple Flute, Regular Length, Non End Cutting, Finishing Router

SPEED FEED P1228	CARBIDE	DIA	15°	SHANK h6
----------------------------	----------------	------------	------------	--------------------

Tolerance +0/-0.002"



Units: Inch

EDP Number	Mill Diameter	Length of Cut	OAL	Shank Diameter	Number of Flutes
	D	Lc	L	d	
26500316	1/4	3/4	2-1/2	1/4	8
26501316	1/4	1	3	1/4	8
26500616	3/8	1-1/8	3	3/8	12
26501516	3/8	1-1/2	3	3/8	12
26500716	1/2	1-1/2	4	1/2	14
26501716	1/2	2	4	1/2	14

Packed: 1 pc.
Available Diamond coating only.



Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
2650	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			

Good Best





CARBIDE AERO-HBC 60


Carbide Router for Honeycomb & Other Composites

List 668

2 Flute, Regular Length, 60° Compression Router

SPEED FEED P1226	CARBIDE	BR		SHANK h6
----------------------------	----------------	-----------	--	--------------------

Tolerance +0/-0.0015"



Units: Inch

EDP Number	Mill Diameter	Compression Length	Length of Cut	OAL	Shank Diameter
	D	L2	Lc	L	d
668-2501	1/4	0.188	3/4	2 1/2	1/4
668-3751	3/8	0.281	3/4	3	3/8
668-3752	3/8	0.281	2	4	3/8
668-5001	1/2	0.375	1	3	1/2
668-5002	1/2	0.375	2	4	1/2

Packed: 1 pc.
Available Bright finish only.



Work Material

List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/ Ti/ CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
668			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				

Good Best







List 641R

Regular Length, General Purpose Router

SPEED FEED P1229	CARBIDE	BR		30°	SHANK h6
----------------------------	----------------	-----------	--	------------	--------------------

Tolerance +0/-0.003"



Units: Inch

EDP Number	Mill Diameter	Length of Cut	OAL	Shank Diameter	Type
	D	Lc	L	d	
641-1871	3/16	1	3	1/4	1
641-1872	3/16	1	3	1/4	2
641-1873	3/16	1	3	1/4	3
641-1874	3/16	1	3	1/4	4
641-2501	1/4	1	3	1/4	1
641-2502	1/4	1	3	1/4	2
641-2503	1/4	1	3	1/4	3
641-2504	1/4	1	3	1/4	4
641-3751	3/8	1	3	3/8	1
641-3752	3/8	1	3	3/8	2
641-3753	3/8	1	3	3/8	3
641-3754	3/8	1	3	3/8	4
641-5001	1/2	1	3	1/2	1
641-5002	1/2	1	3	1/2	2
641-5003	1/2	1	3	1/2	3
641-5004	1/2	1	3	1/2	4

Packed: 1 pc.
Available Bright finish only.



Type #1 - Non End Cutting
Type #2 - Burr End
Type #3 - End Mill Cut
Type #4 - Drill Point

Work Material												
List No.	Carbon Fiber (CFRP)	Glass Fiber (GFRP)	Aramid Fiber (AFRP)	Honeycomb					Carbon/Carbon	Carbon Fiber/Aluminum Stack	Carbon Fiber/Titanium Stack	Carbon Fiber/Al/Ti/CRES Stack
				CFRP/Nomex	GFRP/Nomex	AFRP	CFRP/Al	Al/Al				
641R	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			

Good Best





HY-PRO® CARB VGX

High Performance Variable Geometry End Mills

List VG441

4 Flute, Multiple Lengths, Square End



SPEED FEED P1230	CARBIDE	TiAlN	35°	SHANK h6
----------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"

Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Overall Length	Length of Cut	Shank Diameter
		D	L	Lc	d
VG441-1250	-	1/8	1-1/2	3/8	1/8
VG441-1875	-	3/16	2	7/16	3/16
VG441-2500	-	1/4	2-1/2	7/16	1/4
VG441-2501	-	1/4	2-1/2	3/4	1/4
VG441-2502	-	1/4	3-1/4	1-1/4	1/4
VG441-3125	-	5/16	2-1/2	13/16	5/16
VG441-3126	-	5/16	3-1/4	1-1/4	5/16
VG441-3127	-	5/16	4	1-5/8	5/16
VG441-3750	VG441-3752	3/8	2-1/2	1/2	3/8
VG441-3751	VG441-3753	3/8	2-1/2	7/8	3/8
VG441-3754	VG441-3755	3/8	4	1-1/2	3/8
VG441-3756	VG441-3757	3/8	4	2-1/2	3/8
VG441-4375	VG441-4376	7/16	2-3/4	1	7/16
VG441-5007	VG441-5000	1/2	2-1/2	5/8	1/2
VG441-5008	VG441-5001	1/2	3	1	1/2
VG441-5009	VG441-5002	1/2	3-1/2	1-1/4	1/2
VG441-5010	VG441-5003	1/2	4	1-1/2	1/2
VG441-5011	VG441-5004	1/2	4	2	1/2
VG441-5012	VG441-5005	1/2	4	2-1/2	1/2
VG441-5013	VG441-5006	1/2	5	3	1/2
VG441-6255	VG441-6250	5/8	3	3/4	5/8
VG441-6256	VG441-6251	5/8	3-1/2	1-1/4	5/8
VG441-6257	VG441-6252	5/8	5	1-5/8	5/8
VG441-6258	VG441-6253	5/8	5	2-1/4	5/8
VG441-6259	VG441-6254	5/8	6	3	5/8
VG441-7506	VG441-7500	3/4	3-1/2	7/8	3/4
VG441-7507	VG441-7501	3/4	4	1-1/2	3/4
VG441-7508	VG441-7502	3/4	4	1-5/8	3/4
VG441-7509	VG441-7503	3/4	5	2-1/4	3/4
VG441-7510	VG441-7504	3/4	6	3	3/4
VG441-7511	VG441-7505	3/4	6-1/4	4	3/4
VG441-1005	VG441-1000	1	4	1-1/2	1
VG441-1006	VG441-1001	1	5	2	1
VG441-1007	VG441-1002	1	5	2-1/2	1
VG441-1008	VG441-1003	1	6	3	1
VG441-1009	VG441-1004	1	7	4	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441 (p. 969-970)
Want to turbo-charge performance? Try A Brand® AE-VMS - List 8200 (p. 830)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG441	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List VG434

4 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1230	CARBIDE	TiAlN	35°	SHANK h6
----------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
		D	R	L	Lc	d
VG434-1250	-	1/8	0.010	1-1/2	3/8	1/8
VG434-1251	-	1/8	0.015	1-1/2	3/8	1/8
VG434-1875	-	3/16	0.015	2	7/16	3/16
VG434-1876	-	3/16	0.030	2	7/16	3/16
VG434-2500	-	1/4	0.015	2-1/2	7/16	1/4
VG434-2501	-	1/4	0.030	2-1/2	7/16	1/4
VG434-2502	-	1/4	0.015	2-1/2	3/4	1/4
VG434-2503	-	1/4	0.030	2-1/2	3/4	1/4
VG434-2504	-	1/4	0.060	2-1/2	3/4	1/4
VG434-3125	-	5/16	0.015	2-1/2	13/16	5/16
VG434-3126	-	5/16	0.030	2-1/2	13/16	5/16
VG434-3750	VG434-3754	3/8	0.030	2-1/2	1/2	3/8
VG434-3751	VG434-3755	3/8	0.030	2-1/2	7/8	3/8
VG434-3752	VG434-3756	3/8	0.045	2-1/2	7/8	3/8
VG434-3753	VG434-3757	3/8	0.060	2-1/2	7/8	3/8
VG434-3759	VG434-3758	3/8	0.015	2-1/2	7/8	3/8
VG434-4375	VG434-4377	7/16	0.015	2-3/4	1	7/16
VG434-4376	VG434-4378	7/16	0.030	2-3/4	1	7/16
VG434-5021	VG434-5020	1/2	0.015	2-1/2	5/8	1/2
VG434-5009	VG434-5000	1/2	0.030	2-1/2	5/8	1/2
VG434-5010	VG434-5001	1/2	0.030	3	1	1/2
VG434-5011	VG434-5002	1/2	0.060	3	1	1/2
VG434-5012	VG434-5003	1/2	0.015	3-1/2	1-1/4	1/2
VG434-5013	VG434-5004	1/2	0.030	3-1/2	1-1/4	1/2
VG434-5014	VG434-5005	1/2	0.045	3-1/2	1-1/4	1/2
VG434-5015	VG434-5006	1/2	0.060	3-1/2	1-1/4	1/2
VG434-5016	VG434-5007	1/2	0.090	3-1/2	1-1/4	1/2
VG434-5017	VG434-5008	1/2	0.125	3-1/2	1-1/4	1/2
VG434-5019	VG434-5018	1/2	0.020	4	1-1/2	1/2
VG434-6254	VG434-6250	5/8	0.030	3-1/2	1-1/4	5/8
VG434-6255	VG434-6251	5/8	0.060	3-1/2	1-1/4	5/8
VG434-6256	VG434-6252	5/8	0.090	3-1/2	1-1/4	5/8
VG434-6257	VG434-6253	5/8	0.125	3-1/2	1-1/4	5/8
VG434-7504	VG434-7500	3/4	0.030	4	1-1/2	3/4
VG434-7505	VG434-7501	3/4	0.060	4	1-1/2	3/4
VG434-7506	VG434-7502	3/4	0.090	4	1-1/2	3/4
VG434-7507	VG434-7503	3/4	0.125	4	1-1/2	3/4
VG434-7510	VG434-7508	3/4	0.020	4	1-5/8	3/4
VG434-7511	VG434-7509	3/4	0.060	5	2-1/4	3/4
VG434-1004	VG434-1000	1	0.030	4	1-1/2	1
VG434-1005	VG434-1001	1	0.060	4	1-1/2	1
VG434-1006	VG434-1002	1	0.090	4	1-1/2	1
VG434-1007	VG434-1003	1	0.125	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG434	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best





HY-PRO® CARB VGX

High Performance Variable Geometry End Mills

List VG436

4 Flute, Multiple Lengths, Corner Chamfer

SPEED FEED P1230	CARBIDE	TiAlN	35°	SHANK h6
----------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Corner Chamfer	Overall Length	Length of Cut	Shank Diameter
		D	C	L	Lc	d
VG436-1252	-	1/8	0.010	1-1/2	1/8	1/8
VG436-1250	-	1/8	0.010	1-1/2	1/4	1/8
VG436-1251	-	1/8	0.010	1-1/2	1/2	1/8
VG436-1875	-	3/16	0.010	2	5/16	3/16
VG436-1876	-	3/16	0.010	2-1/4	5/8	3/16
VG436-2500	-	1/4	0.016	2	3/8	1/4
VG436-2501	-	1/4	0.016	2-1/2	3/4	1/4
VG436-3125	-	5/16	0.016	2	1/2	5/16
VG436-3126	-	5/16	0.016	2-1/2	3/4	5/16
-	VG436-3750	3/8	0.020	2	1/2	3/8
-	VG436-3751	3/8	0.020	2-1/2	7/8	3/8
-	VG436-4375	7/16	0.020	2-1/2	5/8	7/16
-	VG436-4376	7/16	0.020	2-3/4	7/8	7/16
-	VG436-5000	1/2	0.020	2-1/2	5/8	1/2
-	VG436-5001	1/2	0.020	3	1	1/2
-	VG436-5002	1/2	0.020	3-1/2	1-1/4	1/2
-	VG436-5003	1/2	0.020	4	1-1/2	1/2
-	VG436-6250	5/8	0.020	3	3/4	5/8
-	VG436-6251	5/8	0.020	3-1/2	1-1/4	5/8
-	VG436-6252	5/8	0.020	4-1/8	1-5/8	5/8
-	VG436-7500	3/4	0.020	3-1/2	7/8	3/4
-	VG436-7501	3/4	0.020	4	1-1/2	3/4
-	VG436-7502	3/4	0.020	4	1-5/8	3/4
-	VG436-1000	1	0.020	4	1-1/2	1
-	VG436-1001	1	0.020	5	2	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP434 (p. 987-988)

Want to turbo-charge performance? Try A Brand® AE-CR-VMS - List 8210 (p. 832)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG436	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List VG446

4 Flute, Multiple Lengths, Reduced Neck, Corner Radius/Corner Chamfer

SPEED FEED P1231	CARBIDE	TiAlN		SHANK h6
----------------------------	----------------	--------------	--	--------------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.0015"

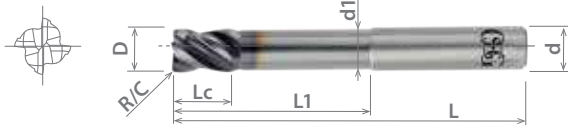

Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Corner Radius	Corner Chamfer	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
		D	R	C	L	Lc	L1	d1	d
VG446-2500	-	1/4	0.015	-	4	3/8	1-1/4	0.235	1/4
VG446-2501	-	1/4	0.030	-	4	3/8	1-1/4	0.235	1/4
VG446-2502	-	1/4	-	0.016	4	3/8	1-1/4	0.235	1/4
-	VG446-3750	3/8	0.030	-	4	1/2	1-7/8	0.353	3/8
-	VG446-3751	3/8	0.060	-	4	1/2	1-7/8	0.353	3/8
-	VG446-3752	3/8	-	0.020	4	1/2	1-7/8	0.353	3/8
-	VG446-5000	1/2	0.030	-	4	5/8	2-1/4	0.470	1/2
-	VG446-5001	1/2	0.060	-	4	5/8	2-1/4	0.470	1/2
-	VG446-5002	1/2	0.120	-	4	5/8	2-1/4	0.470	1/2
-	VG446-5003	1/2	-	0.020	4	5/8	2-1/4	0.470	1/2
-	VG446-6250	5/8	0.060	-	4-1/8	3/4	2-1/4	0.588	5/8
-	VG446-6251	5/8	0.120	-	4-1/8	3/4	2-1/4	0.588	5/8
-	VG446-6252	5/8	-	0.020	4-1/8	3/4	2-1/4	0.588	5/8
-	VG446-6253	5/8	-	0.020	5	3/4	3-1/8	0.588	5/8
-	VG446-7500	3/4	-	0.020	4-1/4	1	2-1/4	0.705	3/4
-	VG446-7501	3/4	0.030	-	5-1/4	1	3-1/4	0.705	3/4
-	VG446-7502	3/4	0.060	-	5-1/4	1	3-1/4	0.705	3/4
-	VG446-7503	3/4	0.120	-	5-1/4	1	3-1/4	0.705	3/4
-	VG446-7504	3/4	-	0.020	5-1/4	1	3-1/4	0.705	3/4
-	VG446-1000	1	-	0.020	4-1/2	1-1/8	2-1/4	0.940	1
-	VG446-1001	1	0.030	-	5-1/2	1-1/8	3-1/4	0.940	1
-	VG446-1002	1	0.060	-	5-1/2	1-1/8	3-1/4	0.940	1
-	VG446-1003	1	0.120	-	5-1/2	1-1/8	3-1/4	0.940	1
-	VG446-1004	1	-	0.020	5-1/2	1-1/8	3-1/4	0.940	1
-	VG446-1005	1	-	0.020	6-1/2	1-1/8	4-1/4	0.940	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try A Brand® AE-LN-CR-VMS - List 8220 (p. 834)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
VG446	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best





HY-PRO® CARB VGX

High Performance Variable Geometry End Mills

List VG464

4 Flute, Multiple Lengths, Extended Length, Square End/Corner Chamfer

SPEED FEED P1231	CARBIDE	TiAlN	35°	SHANK h6
---------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Corner Chamfer	Overall Length	Length of Cut	Shank Diameter
		D	C	L	Lc	d
VG464-2500	-	1/4	-	4	3/8	1/4
VG464-2501	-	1/4	0.016	4	3/8	1/4
-	VG464-3750	3/8	-	4	1/2	3/8
-	VG464-3751	3/8	0.020	4	1/2	3/8
-	VG464-5000	1/2	-	5	5/8	1/2
-	VG464-5001	1/2	0.020	5	5/8	1/2
-	VG464-5002	1/2	-	6	5/8	1/2
-	VG464-5003	1/2	0.020	6	5/8	1/2
-	VG464-6250	5/8	-	6	3/4	5/8
-	VG464-6251	5/8	0.020	6	3/4	5/8
-	VG464-6252	5/8	-	7	3/4	5/8
-	VG464-6253	5/8	0.020	7	3/4	5/8
-	VG464-7500	3/4	-	6	1	3/4
-	VG464-7501	3/4	0.020	6	1	3/4
-	VG464-7502	3/4	-	7	1	3/4
-	VG464-7503	3/4	0.020	7	1	3/4
-	VG464-1000	1	-	6	1-1/8	1
-	VG464-1001	1	0.020	6	1-1/8	1
-	VG464-1002	1	-	7	1-1/8	1
-	VG464-1003	1	0.020	7	1-1/8	1

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG464	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List VG441BN

4 Flute, Multiple Lengths, Ball Nose

SPEED FEED P1232	CARBIDE	TiAlN		35°	SHANK h6
Milling Diameter Tolerance					
1/8 ≤ D ≤ 1-1/4			+0 / -0.0015"		



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Overall Length	Length of Cut	Shank Diameter
		D	L	Lc	d
VG441-1250-BN	-	1/8	2	1/2	1/8
VG441-1875-BN	-	3/16	2-1/4	5/8	3/16
VG441-2500-BN	-	1/4	2-1/2	3/4	1/4
-	VG441-3125-BN	5/16	2-1/2	3/4	5/16
-	VG441-3750-BN	3/8	2-1/2	7/8	3/8
-	VG441-4375-BN	7/16	2-1/2	7/8	7/16
-	VG441-5000-BN	1/2	3	1	1/2
-	VG441-5010-BN	1/2	3	1-1/4	1/2
-	VG441-6250-BN	5/8	3-1/2	1-1/4	5/8
-	VG441-7500-BN	3/4	4	1-1/2	3/4
-	VG441-1000-BN	1	4	1-1/2	1
-	VG441-1010-BN	1-1/4	5	2-1/4	1-1/4

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP441BN (p. 980-981)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG441BN	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

good best





HY-PRO® CARB VGX

High Performance Variable Geometry End Mills

List VG541

5 Flute, Multiple Lengths, Square End

SPEED FEED P1233	CARBIDE	TiAlN	38°	SHANK h6
---------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Overall Length	Length of Cut	Shank Diameter
		D	L	Lc	d
VG541-1249	-	1/8	1-1/2	9/32	1/8
VG541-1250	-	1/8	1-1/2	3/8	1/8
VG541-1875	-	3/16	2	7/16	3/16
VG541-1874	-	3/16	2-1/4	5/8	3/16
VG541-2500	-	1/4	2	3/8	1/4
VG541-2501	-	1/4	2-1/2	3/4	1/4
VG541-3125	-	5/16	2	15/32	5/16
VG541-3124	-	5/16	2-1/2	3/4	5/16
VG541-3750	VG541-3752	3/8	2	1/2	3/8
VG541-3751	VG541-3753	3/8	2-1/2	7/8	3/8
VG541-5007	VG541-5000	1/2	2-1/2	5/8	1/2
VG541-5009	VG541-5002	1/2	3-1/2	1-1/4	1/2
VG541-6255	VG541-6250	5/8	3	3/4	5/8
VG541-6256	VG541-6251	5/8	3-1/2	1-1/4	5/8
VG541-7512	VG541-7513	3/4	4	1-1/8	3/4
VG541-7507	VG541-7501	3/4	4	1-1/2	3/4
VG541-1010	VG541-1011	1	4	1-1/4	1
VG541-1005	VG541-1000	1	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP455 (p. 979)
Want to turbo-charge performance? Try EXOCARB® AERO - List 2106 (p. 926-927)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG541	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List VG534

5 Flute, Multiple Lengths, Corner Radius

SPEED FEED P1233	CARBIDE	TiAlN	38°	SHANK h6
----------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
3/16 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
		D	R	L	Lc	d
VG534-1875	-	3/16	0.015	2	7/16	3/16
VG534-1876	-	3/16	0.030	2	7/16	3/16
VG534-1877	-	3/16	0.015	2-1/4	5/8	3/16
VG534-1878	-	3/16	0.030	2-1/4	5/8	3/16
VG534-2505	-	1/4	0.015	2	3/8	1/4
VG534-2506	-	1/4	0.030	2	3/8	1/4
VG534-2507	-	1/4	0.060	2	3/8	1/4
VG534-2502	-	1/4	0.015	2-1/2	3/4	1/4
VG534-2503	-	1/4	0.030	2-1/2	3/4	1/4
VG534-2504	-	1/4	0.060	2-1/2	3/4	1/4
VG534-3122	-	5/16	0.015	2-1/2	3/4	5/16
VG534-3123	-	5/16	0.030	2-1/2	3/4	5/16
VG534-3124	-	5/16	0.060	2-1/2	3/4	5/16
VG534-3764	VG534-3758	3/8	0.015	2	1/2	3/8
VG534-3765	VG534-3759	3/8	0.030	2	1/2	3/8
VG534-3766	VG534-3760	3/8	0.060	2	1/2	3/8
VG534-3751	VG534-3755	3/8	0.015	2-1/2	7/8	3/8
VG534-3752	VG534-3756	3/8	0.030	2-1/2	7/8	3/8
VG534-3753	VG534-3757	3/8	0.060	2-1/2	7/8	3/8
VG534-5024	VG534-5018	1/2	0.015	2-1/2	5/8	1/2
VG534-5009	VG534-5000	1/2	0.030	2-1/2	5/8	1/2
VG534-5025	VG534-5019	1/2	0.060	2-1/2	5/8	1/2
VG534-5026	VG534-5020	1/2	0.090	2-1/2	5/8	1/2
VG534-5027	VG534-5021	1/2	0.120	2-1/2	5/8	1/2
VG534-5010	VG534-5001	1/2	0.030	3	1	1/2
VG534-5011	VG534-5002	1/2	0.060	3	1	1/2
VG534-5012	VG534-5003	1/2	0.015	3-1/2	1-1/4	1/2
VG534-5013	VG534-5004	1/2	0.030	3-1/2	1-1/4	1/2
VG534-5015	VG534-5006	1/2	0.060	3-1/2	1-1/4	1/2
VG534-5016	VG534-5007	1/2	0.090	3-1/2	1-1/4	1/2
VG534-5017	VG534-5008	1/2	0.120	3-1/2	1-1/4	1/2
VG534-6265	VG534-6258	5/8	0.030	3	3/4	5/8
VG534-6266	VG534-6259	5/8	0.060	3	3/4	5/8
VG534-6267	VG534-6260	5/8	0.090	3	3/4	5/8
VG534-6254	VG534-6250	5/8	0.030	3-1/2	1-1/4	5/8
VG534-6255	VG534-6251	5/8	0.060	3-1/2	1-1/4	5/8
VG534-6256	VG534-6252	5/8	0.090	3-1/2	1-1/4	5/8
VG534-7515	VG534-7508	3/4	0.030	4	1-1/8	3/4
VG534-7516	VG534-7509	3/4	0.060	4	1-1/8	3/4
VG534-7517	VG534-7510	3/4	0.090	4	1-1/8	3/4
VG534-7518	VG534-7511	3/4	0.120	4	1-1/8	3/4
VG534-7504	VG534-7500	3/4	0.030	4	1-1/2	3/4

Packed: 1 pc.
Available TiAlN coating only.

continued on next page

List No.	Work Material																
	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140		300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG534	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best






HY-PRO® CARB VGX

High Performance Variable Geometry End Mills

List VG534 (Continued)

5 Flute, Multiple Lengths, Corner Radius



SPEED FEED P1233	CARBIDE	TiAlN	38°	SHANK h6
---------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
3/16 ≤ D ≤ 1	+0 / -0.0015"

Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Milling Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
		D	R	L	Lc	d
VG534-7505	VG534-7501	3/4	0.060	4	1-1/2	3/4
VG534-7506	VG534-7502	3/4	0.090	4	1-1/2	3/4
VG534-7507	VG534-7503	3/4	0.120	4	1-1/2	3/4
VG534-1017	VG534-1010	1	0.030	4	1-1/4	1
VG534-1018	VG534-1011	1	0.060	4	1-1/4	1
VG534-1019	VG534-1012	1	0.090	4	1-1/4	1
VG534-1020	VG534-1013	1	0.120	4	1-1/4	1
VG534-1004	VG534-1000	1	0.030	4	1-1/2	1
VG534-1005	VG534-1001	1	0.060	4	1-1/2	1
VG534-1006	VG534-1002	1	0.090	4	1-1/2	1
VG534-1007	VG534-1003	1	0.120	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Don't require ultra-high performance? Try HY-PRO® CARB - List HP455 (p. 979)

Want to turbo-charge performance? Try EXOPRO® - List 2055 (p. 841)

or EXOCARB® AERO - List 2106 (p. 926-927)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
VG534	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

good best







List HP421, HP441

SPEED FEED P1234-1238	CARBIDE	TiAIN	35°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Multiple Flutes



HP421



HP441

Milling Diameter Tolerance	
3/64 ≤ D ≤ 1	+0 / -0.0015"

Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List HP421 (2 Flute)	List HP441 (4 Flute)				
TiAIN	TiAIN	D	L	Lc	d
HP421-0469	HP441-0469	3/64	1-1/2	9/64	1/8
HP421-0625	HP441-0625	1/16	1-1/2	3/16	1/8
HP421-0781	HP441-0781	5/64	1-1/2	1/4	1/8
HP421-0938	HP441-0938	3/32	1-1/2	5/16	1/8
HP421-1094	HP441-1094	7/64	1-1/2	3/8	1/8
HP421-1250	HP441-1250	1/8	1-1/2	1/2	1/8
HP421-1406	HP441-1406	9/64	2	1/2	3/16
HP421-1562	HP441-1562	5/32	2	9/16	3/16
HP421-1719	HP441-1719	11/64	2	9/16	3/16
HP421-1875	HP441-1875	3/16	2	5/8	3/16
HP421-2031	HP441-2031	13/64	2-1/2	5/8	1/4
HP421-2188	HP441-2188	7/32	2-1/2	5/8	1/4
HP421-2500	HP441-2500	1/4	2-1/2	3/4	1/4
HP421-2812	HP441-2812	9/32	2-1/2	3/4	5/16
HP421-3125	HP441-3125	5/16	2-1/2	13/16	5/16
HP421-3438	HP441-3438	11/32	2-1/2	7/8	3/8
HP421-3750	HP441-3750	3/8	2-1/2	1	3/8
HP421-4062	HP441-4062	13/32	2-3/4	1	7/16
HP421-4375	HP441-4375	7/16	2-3/4	1	7/16
HP421-5000	HP441-5000	1/2	3	1	1/2
HP421-5625	HP441-5625	9/16	3-1/2	1-1/8	9/16
HP421-6250	HP441-6250	5/8	3-1/2	1-1/4	5/8
HP421-6875	HP441-6875	11/16	4	1-3/8	3/4
HP421-7500	HP441-7500	3/4	4	1-1/2	3/4
HP421-8750	HP441-8750	7/8	4	1-1/2	7/8
HP421-1000	HP441-1000	1	4	1-1/2	1

Packed: 1 pc.
Available TiAIN coating only.

continued on next page

OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3620, 3621, 3720 or 3721 (p. 862, 863, 869 or 870)

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List HP421, HP441 (Continued)


SPEED FEED P1234-1238	CARBIDE	TiAlN	35°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1 ≤ D ≤ 25	+0 / -0.038mm

Multiple Flutes



HP421



HP441

Units: mm

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List HP421 (2 Flute)	List HP441 (4 Flute)				
TiAlN	TiAlN	D	L	Lc	d
HP421-0394	HP441-0394	1.0	39	3	3
HP421-0591	HP441-0591	1.5	39	5	3
HP421-0787	HP441-0787	2.0	39	7	3
HP421-0984	HP441-0984	2.5	39	8	3
HP421-1181	HP441-1181	3.0	39	10	3
HP421-1378	HP441-1378	3.5	51	12	4
HP421-1575	HP441-1575	4.0	51	14	4
HP421-1772	HP441-1772	4.5	51	14	5
HP421-1968	HP441-1968	5.0	51	16	5
HP421-2362	HP441-2362	6.0	64	19	6
HP421-2756	HP441-2756	7.0	64	19	8
HP421-3150	HP441-3150	8.0	64	21	8
HP421-3543	HP441-3543	9.0	70	22	10
HP421-3937	HP441-3937	10.0	70	25	10
HP421-4331	HP441-4331	11.0	70	25	11
HP421-4724	HP441-4724	12.0	76	25	12
HP421-5512	HP441-5512	14.0	89	30	14
HP421-6299	HP441-6299	16.0	89	32	16
HP421-7087	HP441-7087	18.0	102	35	18
HP421-7874	HP441-7874	20.0	102	38	20
HP421-8661	HP441-8661	22.0	102	38	22
HP421-9843	HP441-9843	25.0	102	38	25

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3620, 3621, 3720 or 3721 (p. 862, 863, 869 or 870)

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List HP460

3 Flute, High Helix

SPEED FEED P1239-1240	CARBIDE	TiAlN	60°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP460-1250	1/8	1-1/2	1/2	1/8
HP460-1875	3/16	2	5/8	3/16
HP460-2500	1/4	2-1/2	3/4	1/4
HP460-3125	5/16	2-1/2	13/16	5/16
HP460-3750	3/8	2-1/2	1	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP460-4375	7/16	2-3/4	1	7/16
HP460-5000	1/2	3	1	1/2
HP460-6250	5/8	3-1/2	1-1/4	5/8
HP460-7500	3/4	4	1-1/2	3/4
HP460-1000	1	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.




List HP460

3 Flute, High Helix

SPEED FEED P1239-1240	CARBIDE	TiAlN	60°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP460-1181	3	64	12	6
HP460-1575	4	64	14	6
HP460-1968	5	64	16	6
HP460-2362	6	64	19	6
HP460-3150	8	64	21	8
HP460-3937	10	70	25	10

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP460-4724	12	76	25	12
HP460-5512	14	89	29	14
HP460-6299	16	89	32	16
HP460-7087	18	102	38	18
HP460-7874	20	102	38	20
HP460-9843	25	102	38	25

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 4445 (p. 883)

Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
HP460	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB


Performance Sub-Micrograin Carbide End Mills

List HP450

Multiple Flute

SPEED FEED P1241	CARBIDE	TiAlN	50°	SHANK h6
----------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
TiAlN	D	L	Lc	d	
HP450-1250	1/8	1-1/2	1/2	1/8	4
HP450-1875	3/16	2	5/8	3/16	4
HP450-2500	1/4	2-1/2	3/4	1/4	6
HP450-3125	5/16	2-1/2	13/16	5/16	6
HP450-3750	3/8	2-1/2	1	3/8	6
HP450-4375	7/16	2-3/4	1	7/16	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
TiAlN	D	L	Lc	d	
HP450-5000	1/2	3	1	1/2	6
HP450-5625	9/16	3-1/2	1-1/8	9/16	6
HP450-6250	5/8	3-1/2	1-1/4	5/8	6
HP450-7500	3/4	4	1-1/2	3/4	6
HP450-8750	7/8	4	1-1/2	7/8	6
HP450-1000	1	4	1-1/2	1	8

Packed: 1 pc.
Available TiAlN coating only.



List HP450

Multiple Flute

SPEED FEED P1241	CARBIDE	TiAlN	50°	SHANK h6
----------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
TiAlN	D	L	Lc	d	
HP450-1181	3	51	10	6	4
HP450-1575	4	51	14	6	4
HP450-1969	5	51	16	6	4
HP450-2362	6	64	19	6	6
HP450-3150	8	64	21	8	6
HP450-3937	10	64	25	10	6
HP450-4724	12	76	25	12	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
TiAlN	D	L	Lc	d	
HP450-5512	14	89	30	14	6
HP450-6299	16	89	35	16	6
HP450-7087	18	102	35	18	6
HP450-7874	20	102	38	20	6
HP450-8661	22	102	38	22	6
HP450-9843	25	102	38	25	8

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXS® - List 4440 or 4540 (p. 886 or 887)

Work Material

List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
HP450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List HP453

4 Flute, Super Tough Mills

SPEED FEED P1243	CARBIDE	TiAlN		50°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
4 ≤ D ≤ 20	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	L	Lc	L1	d2	d
HP453-1575	4	60	6	12	3.9	6
HP453-2362	6	60	9	18	5.9	6
HP453-3150	8	75	12	24	7.9	8
HP453-3937	10	80	15	30	9.9	10
HP453-4724	12	102	18	36	11.9	12
HP453-6299	16	110	24	48	15.9	16
HP453-7874	20	125	30	60	19.9	20

Packed: 1 pc.
Available TiAlN coating only.




List HP456

4 Flute, Super Tough Mills, Corner Radius

SPEED FEED P1243	CARBIDE	TiAlN		50°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
6 ≤ D ≤ 12	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	R	L	Lc	L1	d2	d
HP456-2363	6	0.5	60	9	18	5.9	6
HP456-2364	6	1.0	60	9	18	5.9	6
HP456-3151	8	0.5	75	12	24	7.9	8
HP456-3152	8	1.0	75	12	24	7.9	8
HP456-3938	10	0.5	80	15	30	9.9	10
HP456-3939	10	1.0	80	15	30	9.9	10
HP456-4725	12	0.5	102	18	36	11.9	12
HP456-4726	12	1.0	102	18	36	11.9	12
HP456-4727	12	1.5	102	18	36	11.9	12

Packed: 1 pc.
Available TiAlN coating only.



Work Material

Chart applies to all list numbers above	P						M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
	1010	1035	1045	1065	4140	4340												
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP451

4 Flute, Super Tough Mills

SPEED FEED P1242-1243	CARBIDE	TiAlN	50°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP451-1250	1/8	2-1/4	3/4	1/8
HP451-1875	3/16	2-1/4	3/4	3/16
HP451-2500	1/4	3	1-1/8	1/4
HP451-3125	5/16	3	1-1/8	5/16
HP451-3750	3/8	3	1-1/8	3/8
HP451-4375	7/16	4	2	7/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP451-5000	1/2	4	2	1/2
HP451-6250	5/8	5	2-1/4	5/8
HP451-7500	3/4	5	2-1/4	3/4
HP451-1000	1	5	2-1/4	1



Packed: 1 pc.
Available TiAlN coating only.

List HP451

4 Flute, Super Tough Mills

SPEED FEED P1242-1243	CARBIDE	TiAlN	50°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
4 ≤ D ≤ 20	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP451-1575	4	60	12	6
HP451-2362	6	60	15	6
HP451-3150	8	75	20	8
HP451-3937	10	80	25	10

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP451-4724	12	102	30	12
HP451-6299	16	110	40	16
HP451-7874	20	125	45	20



Packed: 1 pc.
Available TiAlN coating only.

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP451	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List HP400

4 Flute, Rougher

SPEED FEED P1244-1245	CARBIDE	TiAlN	30°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP400-2500	1/4	2-1/2	3/4	1/4
HP400-3125	5/16	2-1/2	3/4	5/16
HP400-3750	3/8	2-1/2	1	3/8
HP400-5000	1/2	3	1-1/4	1/2

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP400-6250	5/8	3-1/2	1-5/8	5/8
HP400-7500	3/4	4	1-5/8	3/4
HP400-1000	1	4	1-3/4	1

Packed: 1 pc.
Available TiAlN coating only.



List HP400

4 Flute, Rougher

SPEED FEED P1244-1245	CARBIDE	TiAlN	30°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP400-1181	3	64	10	6
HP400-1575	4	64	14	6
HP400-1968	5	64	15	6
HP400-2362	6	64	19	6
HP400-3150	8	64	21	8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP400-3937	10	70	25	10
HP400-4724	12	76	25	12
HP400-6299	16	89	32	16
HP400-7874	20	102	38	20
HP400-9843	25	102	38	25

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® AERO - List 2015 (p. 924)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
HP400	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP410

2 Flute, Short Length, Necked

SPEED FEED P1246	CARBIDE	TiAlN		30°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
1/32 ≤ D ≤ 3/16	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	L	Lc	L1	d2	d
HP410-0312	1/32	2-1/2	3/64	5/16	0.029	1/4
HP410-0625	1/16	2-1/2	3/32	5/8	0.060	1/4
HP410-0938	3/32	2-1/2	9/64	15/16	0.091	1/4
HP410-1250	1/8	3	3/16	1-1/4	0.123	1/4
HP410-1875	3/16	4	9/32	1-7/8	0.183	1/4

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3791 (p. 866-867)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
HP410	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best



List HP410

2 Flute, Short Length, Necked

SPEED FEED P1246	CARBIDE	TiAlN		30°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
0.5 ≤ D ≤ 2.5	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	L	Lc	L1	d2	d
HP410-0197	0.5	60	0.7	2.5	0.45	6
HP410-0236	0.6	60	0.9	3.0	0.55	6
HP410-0315	0.8	60	1.2	4.0	0.75	6
HP410-0394	1.0	60	1.5	5.0	0.95	6
HP410-0472	1.2	60	1.8	6.0	1.15	6
HP410-0551	1.4	60	2.1	7.0	1.35	6
HP410-0591	1.5	60	2.3	7.5	1.45	6
HP410-0630	1.6	60	2.4	8.0	1.55	6
HP410-0709	1.8	60	2.7	9.0	1.75	6
HP410-0787	2.0	60	3.0	10.0	1.95	6
HP410-0984	2.5	60	3.7	12.5	2.40	6

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3791 (p. 866-867)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP410	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>					<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP411

4 Flute, Short Length, Long Neck

SPEED FEED P1247	CARBIDE	TiAlN		30°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/4	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	L	Lc	L1	d2	d
HP411-1250	1/8	3	3/16	5/8	0.119	1/4
HP411-1875	3/16	3	9/32	15/16	0.182	1/4
HP411-2500	1/4	4	3/8	1-1/4	0.244	1/4

Packed: 1 pc.
Available TiAlN coating only.



List HP411

4 Flute, Short Length, Long Neck

SPEED FEED P1247	CARBIDE	TiAlN		30°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
3 ≤ D ≤ 6	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	L	Lc	L1	d2	d
HP411-1181	3.0	70	4.5	15.0	2.85	6
HP411-1378	3.5	70	5.3	17.5	3.35	6
HP411-1575	4.0	70	6.0	20.0	3.85	6
HP411-1969	5.0	80	7.5	25.0	4.85	6
HP411-2362	6.0	90	9.0	30.0	5.85	6

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3794 (p. 881-882)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP411	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best



List HP455

5 Flute, **Corner Protection**

SPEED FEED	CARBIDE	TiAlN	45°	SHANK h6
P1248				

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP455-1250	1/8	1-1/2	1/2	1/8
HP455-1562	5/32	2	9/16	3/16
HP455-1875	3/16	2	5/8	3/16
HP455-2188	7/32	2-1/2	5/8	1/4
HP455-2500	1/4	2-1/2	3/4	1/4
HP455-2812	9/32	2-1/2	3/4	5/16
HP455-3125	5/16	2-1/2	13/16	5/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP455-3750	3/8	2-1/2	1	3/8
HP455-4375	7/16	2-3/4	1	7/16
HP455-5000	1/2	3	1	1/2
HP455-5625	9/16	3-1/2	1-1/8	9/16
HP455-6250	5/8	3-1/2	1-1/4	5/8
HP455-7500	3/4	4	1-1/2	3/4
HP455-1000	1	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



List HP455

5 Flute, **Corner Protection**

SPEED FEED	CARBIDE	TiAlN	45°	SHANK h6
P1248				

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP455-1181	3	39	9	3
HP455-1575	4	51	14	4
HP455-1968	5	51	16	5
HP455-2362	6	64	19	6
HP455-2756	7	64	19	8
HP455-3150	8	64	21	8
HP455-3937	10	70	22	10

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP455-4331	11	70	25	11
HP455-4724	12	76	25	12
HP455-5512	14	89	30	14
HP455-6299	16	89	32	16
HP455-7874	20	102	38	20
HP455-9843	25	102	38	25

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try HY-PRO® CARB VGX - List VG534 (p. 967-968)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP455	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO[®] CARB


Performance Sub-Micrograin Carbide End Mills

List HP421BN, HP441BN

2 or 4 Flute, Ball End

SPEED FEED P1249-1250	CARBIDE	TiAlN	35°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
3/64 ≤ D ≤ 1	+0 / -0.0015"

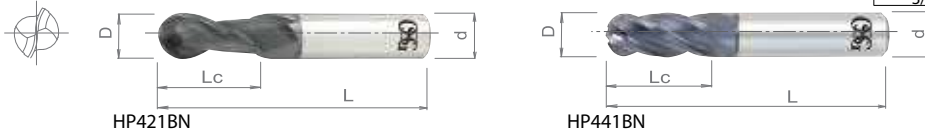

Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List HP421BN (2 Flute)	List HP441BN (4 Flute)				
TiAlN	TiAlN	D	L	Lc	d
HP421-0469-BN	HP441-0469-BN	3/64	1-1/2	9/64	1/8
HP421-0625-BN	HP441-0625-BN	1/16	1-1/2	3/16	1/8
HP421-0781-BN	HP441-0781-BN	5/64	1-1/2	1/4	1/8
HP421-0938-BN	HP441-0938-BN	3/32	1-1/2	5/16	1/8
HP421-1094-BN	HP441-1094-BN	7/64	1-1/2	3/8	1/8
HP421-1250-BN	HP441-1250-BN	1/8	1-1/2	1/2	1/8
HP421-1406-BN	HP441-1406-BN	9/64	2	1/2	3/16
HP421-1562-BN	HP441-1562-BN	5/32	2	9/16	3/16
HP421-1719-BN	HP441-1719-BN	11/64	2	9/16	3/16
HP421-1875-BN	HP441-1875-BN	3/16	2	5/8	3/16
HP421-2031-BN	HP441-2031-BN	13/64	2-1/2	5/8	1/4
HP421-2188-BN	HP441-2188-BN	7/32	2-1/2	5/8	1/4
HP421-2500-BN	HP441-2500-BN	1/4	2-1/2	3/4	1/4
HP421-2812-BN	HP441-2812-BN	9/32	2-1/2	3/4	5/16
HP421-3125-BN	HP441-3125-BN	5/16	2-1/2	13/16	5/16
HP421-3438-BN	HP441-3438-BN	11/32	2-1/2	7/8	3/8
HP421-3750-BN	HP441-3750-BN	3/8	2-1/2	1	3/8
HP421-4062-BN	HP441-4062-BN	13/32	2-3/4	1	7/16
HP421-4375-BN	HP441-4375-BN	7/16	2-3/4	1	7/16
HP421-5000-BN	HP441-5000-BN	1/2	3	1	1/2
HP421-5625-BN	HP441-5625-BN	9/16	3-1/2	1-1/8	9/16
HP421-6250-BN	HP441-6250-BN	5/8	3-1/2	1-1/4	5/8
HP421-6875-BN	HP441-6875-BN	11/16	4	1-3/8	3/4
HP421-7500-BN	HP441-7500-BN	3/4	4	1-1/2	3/4
HP421-8750-BN	HP441-8750-BN	7/8	4	1-1/2	7/8
HP421-1000-BN	HP441-1000-BN	1	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB[®] WXL[®] - List 3610 (p. 853)
or EXOCARB[®] WXS[®] - List 4430 (p. 899)

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List HP421BN, HP441BN

2 or 4 Flute, Ball End

SPEED FEED P1249-1250	CARBIDE	TiAlN	35°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1 ≤ D ≤ 25	+0 / -0.038mm

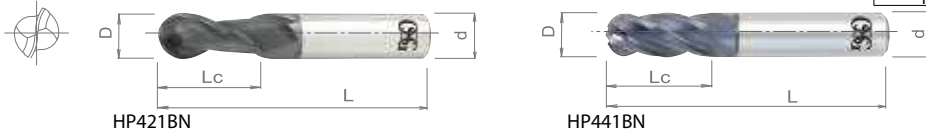

Units: mm

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List HP421BN (2 Flute)	List HP441BN (4 Flute)				
TiAlN	TiAlN	D	L	Lc	d
HP421-0394-BN	HP441-0394-BN	1.0	39	3	3
HP421-0591-BN	HP441-0591-BN	1.5	39	5	3
HP421-0787-BN	HP441-0787-BN	2.0	39	7	3
HP421-0984-BN	HP441-0984-BN	2.5	39	8	3
HP421-1181-BN	HP441-1181-BN	3.0	39	10	3
HP421-1378-BN	HP441-1378-BN	3.5	51	12	4
HP421-1575-BN	HP441-1575-BN	4.0	51	14	4
HP421-1772-BN	HP441-1772-BN	4.5	51	14	5
HP421-1968-BN	HP441-1968-BN	5.0	51	16	5
HP421-2362-BN	HP441-2362-BN	6.0	64	19	6
HP421-2756-BN	HP441-2756-BN	7.0	64	19	8
HP421-3150-BN	HP441-3150-BN	8.0	64	21	8
HP421-3543-BN	HP441-3543-BN	9.0	70	22	10
HP421-3937-BN	HP441-3937-BN	10.0	70	25	10
HP421-4331-BN	HP441-4331-BN	11.0	70	25	11
HP421-4724-BN	HP441-4724-BN	12.0	76	25	12
HP421-5512-BN	HP441-5512-BN	14.0	89	30	14
HP421-6299-BN	HP441-6299-BN	16.0	89	32	16
HP421-7087-BN	HP441-7087-BN	18.0	102	35	18
HP421-7874-BN	HP441-7874-BN	20.0	102	38	20
HP421-8661-BN	HP441-8661-BN	22.0	102	38	22
HP421-9843-BN	HP441-9843-BN	25.0	102	38	25

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3710 (p. 854)
or EXOCARB® WXS® - List 4530 (p. 900)

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP416

2 Flute, Ball End



SPEED FEED P1251-1252	CARBIDE	TiAlN		30°	SHANK h6
---------------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
1/32 ≤ D ≤ 1/2	+0 / -0.0015"

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP416-0312	1/32	2-1/2	1/16	1/4
HP416-0625	1/16	2-1/2	1/8	1/4
HP416-0938	3/32	2-1/2	3/16	1/4
HP416-1250	1/8	3	1/4	1/4
HP416-1875	3/16	3	3/8	1/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP416-2500	1/4	3	1/2	1/4
HP416-3125	5/16	4	5/8	5/16
HP416-3750	3/8	4	3/4	3/8
HP416-5000	1/2	4	1	1/2

Packed: 1 pc.
Available TiAlN coating only.



List HP416

2 Flute, Ball End



SPEED FEED P1251-1252	CARBIDE	TiAlN		30°	SHANK h6
---------------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
1 ≤ D ≤ 25	+0 / -0.038mm

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP416-0394	1.0	50	2.5	4
HP416-0472	1.2	50	3.0	4
HP416-0551	1.4	50	3.5	4
HP416-0591	1.5	50	4.0	4
HP416-0630	1.6	50	4.0	4
HP416-0709	1.8	50	4.5	4
HP416-0787	2.0	50	5.0	6
HP416-0984	2.5	60	6.0	6
HP416-1181	3.0	60	8.0	6
HP416-1378	3.5	70	8.0	6
HP416-1575	4.0	70	8.0	6
HP416-1576	4.0	60	8.0	4
HP416-1772	4.5	80	10.0	6
HP416-1969	5.0	80	10.0	6
HP416-2165	5.5	90	12.0	6
HP416-2362	6.0	90	12.0	6
HP416-2559	6.5	90	14.0	8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
TiAlN	D	L	Lc	d
HP416-2756	7.0	90	14.0	8
HP416-2953	7.5	90	14.0	8
HP416-3150	8.0	100	14.0	8
HP416-3346	8.5	100	18.0	10
HP416-3543	9.0	100	18.0	10
HP416-3740	9.5	100	18.0	10
HP416-3937	10.0	100	18.0	10
HP416-4331	11.0	100	22.0	12
HP416-4724	12.0	110	22.0	12
HP416-5118	13.0	110	26.0	16
HP416-5512	14.0	110	26.0	16
HP416-5906	15.0	110	30.0	16
HP416-6299	16.0	140	30.0	16
HP416-7087	18.0	140	34.0	20
HP416-7874	20.0	160	38.0	20
HP416-9843	25.0	180	50.0	25

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3610 or 3710 (p. 853 or 854)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High							6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP416	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List HP418

2 Flute, Pencil Neck, Ball End

SPEED FEED P1253-1254	CARBIDE	TiAlN	30°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
3/32 ≤ D ≤ 3/8	+0 / -0.0015"

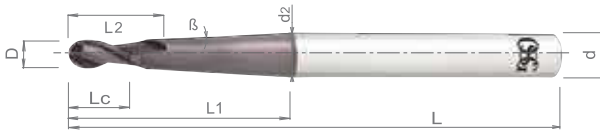

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Non-Taper Neck Length	Maximum Neck Diameter	Neck Incline	Shank Diameter
TiAlN	D	L	Lc	L1	L2	d2	β	d
HP418-0938	3/32	3	0.160	1.60	0.200	0.240	3°	1/4
HP418-1250	1/8	3	0.225	1.60	0.270	0.217	2°	1/4
HP418-1875	3/16	3-1/2	0.312	1.90	0.390	0.312	2°	5/16
HP418-2500	1/4	4	0.400	2.25	0.500	0.375	2°	3/8
HP418-3750	3/8	4	0.600	2.25	0.750	0.500	2°	1/2

Packed: 1 pc.
Available TiAlN coating only.




List HP418

2 Flute, Pencil Neck, Ball End

SPEED FEED P1253-1254	CARBIDE	TiAlN	30°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
1 ≤ D ≤ 12	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Non-Taper Neck Length	Maximum Neck Diameter	Neck Incline	Shank Diameter
TiAlN	D	L	Lc	L1	L2	d2	B	d
HP418-0390	1	60	2.5	20.0	4.0	3.8	5.0°	6
HP418-0391	1	80	2.5	40.0	4.0	4.8	3.0°	6
HP418-0392	1	70	2.5	20.0	4.0	1.8	1.5°	6
HP418-0780	2	60	5.0	20.0	7.0	4.3	5.0°	6
HP418-0781	2	80	5.0	40.0	7.0	5.5	3.0°	6
HP418-0782	2	70	5.0	20.0	7.0	2.7	1.5°	6
HP418-1180	3	70	8.0	30.0	10.5	5.0	3.0°	6
HP418-1181	3	90	8.0	50.0	10.5	5.1	1.5°	6
HP418-1570	4	70	8.0	28.0	10.5	6.0	3.0°	6
HP418-1571	4	90	8.0	48.0	10.5	6.0	1.5°	6
HP418-1960	5	90	10.0	40.0	12.5	8.0	3.0°	8
HP418-1961	5	110	10.0	60.0	12.5	7.5	1.5°	8
HP418-2360	6	90	12.0	33.5	14.5	8.0	3.0°	8
HP418-2361	6	110	12.0	52.0	14.5	8.0	1.5°	8
HP418-3150	8	100	14.0	35.5	16.5	10.0	3.0°	10
HP418-3151	8	120	14.0	54.5	16.5	10.0	1.5°	10
HP418-3930	10	110	18.0	39.5	20.5	12.0	3.0°	12
HP418-3931	10	130	18.0	58.5	20.5	12.0	1.5°	12
HP418-4720	12	140	22.0	60.0	25.0	16.0	3.0°	16
HP418-4721	12	160	22.0	80.0	25.0	14.9	1.5°	16

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP418	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP419

2 Flute, Necked, Ball End



SPEED FEED P1255-1256	CARBIDE	TiAlN	30°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/32 ≤ D ≤ 3/16	+0 / -0.0015"

Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP419-0312	1/32	2-1/2	1/32	5/16	0.029	1/4
HP419-0625	1/16	2-1/2	1/16	5/8	0.060	1/4
HP419-0938	3/32	2-1/2	3/32	15/16	0.091	1/4

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP419-1250	1/8	3	1/8	1-1/4	0.123	1/4
HP419-1875	3/16	4	3/16	1-7/8	0.183	1/4

Packed: 1 pc.
Available TiAlN coating only.



List HP419

2 Flute, Necked, Ball End



SPEED FEED P1255-1256	CARBIDE	TiAlN	30°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
0.5 ≤ D ≤ 6	+0 / -0.038mm

Units: mm

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP419-0197	0.5	60	0.5	2.5	0.45	6
HP419-0236	0.6	60	0.6	3.0	0.55	6
HP419-0315	0.8	60	0.8	4.0	0.75	6
HP419-0394	1.0	60	1.0	5.0	0.95	6
HP419-0472	1.2	60	1.2	6.0	1.15	6
HP419-0551	1.4	60	1.4	7.0	1.35	6
HP419-0591	1.5	60	1.5	7.5	1.45	6
HP419-0630	1.6	60	1.6	8.0	1.55	6

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP419-0709	1.8	60	1.8	9.0	1.75	6
HP419-0787	2.0	60	2.0	10.0	1.95	6
HP419-0984	2.5	60	2.5	12.5	2.40	6
HP419-1181	3.0	70	3.0	15.0	2.85	6
HP419-1378	3.5	70	3.5	17.5	3.35	6
HP419-1575	4.0	70	4.0	20.0	3.85	6
HP419-1969	5.0	80	5.0	25.0	4.85	6
HP419-2362	6.0	90	6.0	30.0	5.85	6

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3690 or 3790 (p. 857 or 858-860)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
HP419	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List HP419L

2 Flute, Long Neck, Ball End

SPEED FEED P1255-1256	CARBIDE	TiAlN	30°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
0.6 ≤ D ≤ 3	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Overall Diameter	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	L	Lc	L1	d2	d
HP419L-0236	0.6	60	0.6	6	0.55	6
HP419L-0315	0.8	60	0.8	8	0.75	6
HP419L-0394	1.0	60	1.0	10	0.95	6
HP419L-0472	1.2	60	1.2	12	1.15	6
HP419L-0551	1.4	60	1.4	12	1.35	6
HP419L-0591	1.5	60	1.5	12	1.45	6
HP419L-0630	1.6	60	1.6	16	1.55	6
HP419L-0709	1.8	60	1.8	16	1.75	6
HP419L-0787	2.0	60	2.0	16	1.95	6
HP419L-1181	3.0	70	3.0	30	2.85	6

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3790 (p. 858-860)

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
HP419L	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP413

2 Flute, Ball End



SPEED FEED PP1255-1256	CARBIDE	TiAlN	30°	SHANK h6
---------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1/32 ≤ D ≤ 3/16	+0 / -0.0015"

Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP413-0312	1/32	2-1/2	1/32	5/32	0.029	1/4
HP413-0625	1/16	2-1/2	1/16	5/16	0.060	1/4
HP413-0938	3/32	2-1/2	3/32	15/32	0.091	1/4

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP413-1250	1/8	3	1/8	5/8	0.123	1/4
HP413-1875	3/16	4	3/16	15/16	0.183	1/4

Packed: 1 pc.
Available TiAlN coating only.



List HP413

2 Flute, Ball End



SPEED FEED P1255-1256	CARBIDE	TiAlN	30°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
1 ≤ D ≤ 6	+0 / -0.038mm

Units: mm

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP413-0394	1.0	50	1.0	2.5	0.95	6
HP413-0472	1.2	50	1.2	3.0	1.15	6
HP413-0551	1.4	50	1.4	3.5	1.35	6
HP413-0591	1.5	50	1.5	3.8	1.45	6
HP413-0630	1.6	50	1.6	4.0	1.55	6
HP413-0709	1.8	50	1.8	4.5	1.75	6
HP413-0787	2.0	50	2.0	5.0	1.95	6

EDP Number	Mill Dia.	Overall Length	Length of Cut	Neck Length	Neck Dia.	Shank Dia.
TiAlN	D	L	Lc	L1	d2	d
HP413-0984	2.5	50	2.5	5.0	2.40	6
HP413-1181	3.0	50	3.0	6.0	2.85	6
HP413-1378	3.5	50	3.5	6.0	3.35	6
HP413-1575	4.0	50	4.0	6.0	3.85	6
HP413-1969	5.0	50	5.0	7.5	4.85	6
HP413-2362	6.0	50	6.0	9.0	5.85	6

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3610 or 3710 (p. 853 or 854)

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
HP413	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best



List HP432, HP434

2 or 4 Flute, Corner Radius

SPEED FEED P1257- 1260	CARBIDE TiAlN	35°	SHANK h6
---------------------------------	------------------	-----	-------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0015"



Units: Inch

EDP Number		Mill Dia.	Corner Radius	Overall Length	Length of Cut	Shank Dia.
List HP432 (2 Flute)	List HP434 (4 Flute)					
TiAlN	TiAlN	D	R	L	Lc	d
HP432-1251	HP434-1251	1/8	0.015	1-1/2	1/2	1/8
HP432-1872	HP434-1872	3/16	0.020	2	5/8	3/16
HP432-2502	HP434-2502	1/4	0.020	2-1/2	3/4	1/4
HP432-2503	HP434-2503	1/4	0.030	2-1/2	3/4	1/4
HP432-3122	HP434-3122	5/16	0.020	2-1/2	13/16	5/16
HP432-3123	HP434-3123	5/16	0.030	2-1/2	13/16	5/16
HP432-3752	HP434-3752	3/8	0.020	2-1/2	1	3/8
HP432-3753	HP434-3753	3/8	0.030	2-1/2	1	3/8
HP432-5002	HP434-5002	1/2	0.020	3	1	1/2
HP432-5003	HP434-5003	1/2	0.030	3	1	1/2
HP432-5006	HP434-5006	1/2	0.060	3	1	1/2
HP432-6253	HP434-6253	5/8	0.030	3-1/2	1-1/4	5/8
HP432-6256	HP434-6256	5/8	0.060	3-1/2	1-1/4	5/8
HP432-6259	HP434-6259	5/8	0.090	3-1/2	1-1/4	5/8
HP432-7506	HP434-7506	3/4	0.060	4	1-1/2	3/4
HP432-7509	HP434-7509	3/4	0.090	4	1-1/2	3/4
HP432-7512	HP434-7512	3/4	0.125	4	1-1/2	3/4
HP432-1006	HP434-1006	1	0.060	4	1-1/2	1
HP432-1009	HP434-1009	1	0.090	4	1-1/2	1
HP432-1012	HP434-1012	1	0.125	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.

continued on next page

Work Material																	
Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List HP432, HP434 (Continued)

SPEED FEED P1257-1260	CARBIDE	TiAlN	35°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.038mm

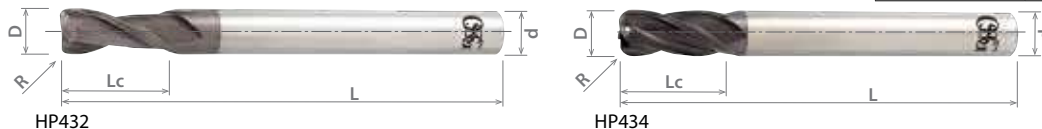

Units: mm

EDP Number		Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
List HP432 (2 Flute)	List HP434 (4 Flute)					
TiAlN	TiAlN	D	R	L	Lc	d
HP432-1181	HP434-1181	3	0.2	60	8	6
HP432-1182	HP434-1182	3	0.5	60	8	6
HP432-1575	HP434-1575	4	0.2	70	11	6
HP432-1576	HP434-1576	4	0.5	70	11	6
HP432-1577	HP434-1577	4	1.0	70	11	6
HP432-1960	HP434-1960	5	0.2	80	13	6
HP432-1961	HP434-1961	5	0.5	80	13	6
HP432-1962	HP434-1962	5	1.0	80	13	6
HP432-2360	HP434-2360	6	0.2	80	13	6
HP432-2361	HP434-2361	6	0.5	80	13	6
HP432-2362	HP434-2362	6	1.0	80	13	6
HP432-2363	HP434-2363	6	1.5	80	13	6
HP432-2364	HP434-2364	6	2.0	80	13	6
HP432-3150	HP434-3150	8	0.5	100	19	8
HP432-3151	HP434-3151	8	1.0	100	19	8
HP432-3152	HP434-3152	8	1.5	100	19	8
HP432-3153	HP434-3153	8	2.0	100	19	8
HP432-3930	HP434-3930	10	0.5	100	22	10
HP432-3931	HP434-3931	10	1.0	100	22	10
HP432-3932	HP434-3932	10	1.5	100	22	10
HP432-3933	HP434-3933	10	2.0	100	22	10
HP432-3934	HP434-3934	10	3.0	100	22	10
HP432-4720	HP434-4720	12	0.5	110	26	12
HP432-4721	HP434-4721	12	1.0	110	26	12
HP432-4722	HP434-4722	12	1.5	110	26	12
HP432-4723	HP434-4723	12	2.0	110	26	12
HP432-4724	HP434-4724	12	3.0	110	26	12

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3770 or 3771 (p. 879 or 880)

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List HP433

2 Flute, Corner Radius

SPEED FEED P1257-1260	CARBIDE	TiAlN	35°	SHANK h6
--------------------------	---------	-------	-----	-------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
Tialn	D	R	L	Lc	L1	d2	d
HP433-1181	3	0.2	60	4.5	14	2.8	6
HP433-1182	3	0.5	60	4.5	14	2.8	6
HP433-1575	4	0.2	70	6.0	25	3.7	6
HP433-1576	4	0.5	70	6.0	25	3.7	6
HP433-1577	4	1.0	70	6.0	25	3.7	6
HP433-1960	5	0.2	80	7.5	30	4.6	6
HP433-1961	5	0.5	80	7.5	30	4.6	6
HP433-1962	5	1.0	80	7.5	30	4.6	6
HP433-2360	6	0.2	80	9.0	35	5.5	6
HP433-2361	6	0.5	80	9.0	35	5.5	6
HP433-2362	6	1.0	80	9.0	35	5.5	6
HP433-2363	6	1.5	80	9.0	35	5.5	6
HP433-2364	6	2.0	80	9.0	35	5.5	6
HP433-3150	8	0.5	100	12.0	40	7.4	8
HP433-3151	8	1.0	100	12.0	40	7.4	8
HP433-3152	8	1.5	100	12.0	40	7.4	8
HP433-3153	8	2.0	100	12.0	40	7.4	8
HP433-3930	10	0.5	100	15.0	45	9.2	10
HP433-3931	10	1.0	100	15.0	45	9.2	10
HP433-3932	10	1.5	100	15.0	45	9.2	10
HP433-3933	10	2.0	100	15.0	45	9.2	10
HP433-3934	10	3.0	100	15.0	45	9.2	10
HP433-4720	12	0.5	110	18.0	50	11.0	12
HP433-4721	12	1.0	110	18.0	50	11.0	12
HP433-4722	12	1.5	110	18.0	50	11.0	12
HP433-4723	12	2.0	110	18.0	50	11.0	12
HP433-4724	12	3.0	110	18.0	50	11.0	12

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3770 (p. 879)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
HP433	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills

List HP435

4 Flute, Corner Radius

SPEED FEED P1258-1260	CARBIDE	TiAlN	35°	SHANK h6
---------------------------------	----------------	--------------	------------	--------------------

Milling Diameter Tolerance	
3 ≤ D ≤ 12	+0 / -0.038mm



Units: mm

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAlN	D	R	L	Lc	L1	d2	d
HP435-1181	3	0.2	60	4.5	14	2.8	6
HP435-1182	3	0.5	60	4.5	14	2.8	6
HP435-1575	4	0.2	70	6.0	25	3.7	6
HP435-1576	4	0.5	70	6.0	25	3.7	6
HP435-1577	4	1.0	70	6.0	25	3.7	6
HP435-1960	5	0.2	80	7.5	30	4.6	6
HP435-1961	5	0.5	80	7.5	30	4.6	6
HP435-1962	5	1.0	80	7.5	30	4.6	6
HP435-2360	6	0.2	80	9.0	35	5.5	6
HP435-2361	6	0.5	80	9.0	35	5.5	6
HP435-2362	6	1.0	80	9.0	35	5.5	6
HP435-2363	6	1.5	80	9.0	35	5.5	6
HP435-2364	6	2.0	80	9.0	35	5.5	6
HP435-3150	8	0.5	100	12.0	40	7.4	8
HP435-3151	8	1.0	100	12.0	40	7.4	8
HP435-3152	8	1.5	100	12.0	40	7.4	8
HP435-3153	8	2.0	100	12.0	40	7.4	8
HP435-3930	10	0.5	100	15.0	45	9.2	10
HP435-3931	10	1.0	100	15.0	45	9.2	10
HP435-3932	10	1.5	100	15.0	45	9.2	10
HP435-3933	10	2.0	100	15.0	45	9.2	10
HP435-3934	10	3.0	100	15.0	45	9.2	10
HP435-4720	12	0.5	110	18.0	50	11.0	12
HP435-4721	12	1.0	110	18.0	50	11.0	12
HP435-4722	12	1.5	110	18.0	50	11.0	12
HP435-4723	12	2.0	110	18.0	50	11.0	12
HP435-4724	12	3.0	110	18.0	50	11.0	12

Packed: 1 pc.
Available TiAlN coating only.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3771 (p. 880)

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
HP435	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 400

4 Flute, Roughy Mills

SPEED FEED P1272- 1273	CARBIDE	BR	ROUGH	30°
---------------------------------	---------	----	-------	-----

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
400-2500	1/4	2-1/2	3/4	1/4
400-3125	5/16	2-1/2	3/4	5/16
400-3750	3/8	2-1/2	1	3/8
400-5000	1/2	3	1-1/4	1/2

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
400-6250	5/8	3-1/2	1-5/8	5/8
400-7500	3/4	4	1-5/8	3/4
400-1000	1	4	1-3/4	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 400

4 Flute, Roughy Mills

SPEED FEED P1272- 1273	CARBIDE	BR	ROUGH	30°
---------------------------------	---------	----	-------	-----

Milling Diameter Tolerance	
6 ≤ D ≤ 25	+0 / -0.05mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
400-2362	6	64	19	6
400-3150	8	64	19	8
400-3937	10	70	25	10
400-4724	12	76	25	12

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
400-6299	16	89	32	16
400-7874	20	102	38	20
400-9843	25	102	38	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
1010	1035	1045	1065	4140	4340												
400	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 415

Standard Cut, Toughy Mills, (For use on lighter finishing cuts)

CARBIDE	BR	15°
---------	----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/4	+0 / -0.003"
5/16 ≤ D ≤ 1/2	+0 / -0.004"
9/16 ≤ D ≤ 1	+0 / -0.005"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
415-1250	1/8	1-1/2	1/2	1/8
415-1562	5/32	2	9/16	3/16
415-1875	3/16	2	5/8	3/16
415-2188	7/32	2-1/2	5/8	1/4
415-2500	1/4	2-1/2	3/4	1/4
415-3125	5/16	2-1/2	13/16	5/16
415-3750	3/8	2-1/2	1	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
415-4375	7/16	2-3/4	1	7/16
415-5000	1/2	3	1	1/2
415-5625	9/16	3-1/2	1-1/8	9/16
415-6250	5/8	3-1/2	1-1/4	5/8
415-7500	3/4	4	1-1/2	3/4
415-8750	7/8	4	1-1/2	7/8
415-1000	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 415C

Coarse Cut, Toughy Mills, (For use on heavy cuts)

CARBIDE	BR	15°
---------	----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/4	+0 / -0.003"
5/16 ≤ D ≤ 1/2	+0 / -0.004"
9/16 ≤ D ≤ 1	+0 / -0.005"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
415-1251	1/8	1-1/2	1/2	1/8
415-1561	5/32	2	9/16	3/16
415-1871	3/16	2	5/8	3/16
415-2181	7/32	2-1/2	5/8	1/4
415-2501	1/4	2-1/2	3/4	1/4
415-3121	5/16	2-1/2	13/16	5/16
415-3751	3/8	2-1/2	1	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
415-4371	7/16	2-3/4	1	7/16
415-5001	1/2	3	1	1/2
415-5621	9/16	3-1/2	1-1/8	9/16
415-6251	5/8	3-1/2	1-1/4	5/8
415-7501	3/4	4	1-1/2	3/4
415-8751	7/8	4	1-1/2	7/8
415-1001	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P				Die Steels	M			K	N		S		H				
	Carbon Steels			Alloy Steels		Stainless Steels				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
-			<input type="checkbox"/>	<input type="checkbox"/>									<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

good best




List 402, 403, 404

2, 3, or 4 Flute

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR		30°
--------------------------	---------	-------	------	----	---	-----

Milling Diameter Tolerance	
1/32 ≤ D ≤ 1	+0 / -0.002"

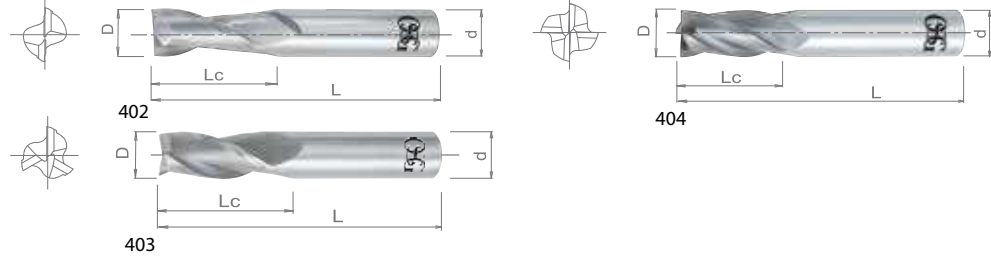

Units: Inch

EDP Number						Mill Diameter	Overall Length	Length of Cut	Shank Diameter	
List 402 (2 Flute)		List 403 (3 Flute)		List 404 (4 Flute)						
Bright	TiCN	TiAlN	Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
402-0312	-	402-031211	-	-	404-0312	404-031211	1/32	1-1/2	1/8	1/8
402-0469	-	402-046911	-	-	404-0469	404-046911	3/64	1-1/2	9/64	1/8
402-0625	-	402-062511	403-0625	403-062511	404-0625	404-062511	1/16	1-1/2	3/16	1/8
402-0781	-	402-078111	403-0781	403-078111	404-0781	404-078111	5/64	1-1/2	1/4	1/8
402-0938	-	402-093811	403-0938	403-093811	404-0938	404-093811	3/32	1-1/2	5/16	1/8
402-0939	-	-	403-0939	-	404-0939	404-093911	3/32	1-1/2	3/8	1/8
402-1094	-	402-109411	403-1094	403-109411	404-1094	404-109411	7/64	1-1/2	3/8	1/8
402-1250	-	402-125011	403-1250	403-125011	404-1250	404-125011	1/8	1-1/2	1/2	1/8
402-1406	-	402-140611	403-1406	403-140611	404-1406	404-140611	9/64	2	1/2	3/16
402-1562	-	402-156211	403-1562	403-156211	404-1562	404-156211	5/32	2	9/16	3/16
402-1719	-	402-171911	403-1719	403-171911	404-1719	404-171911	11/64	2	9/16	3/16
402-1875	-	402-187511	403-1875	403-187511	404-1875	404-187511	3/16	2	5/8	3/16
402-2031	-	402-203111	403-2031	403-203111	404-2031	404-203111	13/64	2-1/2	5/8	1/4
402-2188	-	402-218811	403-2188	403-218811	404-2188	404-218811	7/32	2-1/2	5/8	1/4
402-2344	-	402-234411	403-2344	403-234411	404-2344	404-234411	15/64	2-1/2	3/4	1/4
402-2500	-	402-250011	403-2500	403-250011	404-2500	404-250011	1/4	2-1/2	3/4	1/4
402-2656	-	402-265611	403-2656	403-265611	404-2656	404-265611	17/64	2-1/2	3/4	5/16
402-2812	-	402-281211	403-2812	403-281211	404-2812	404-281211	9/32	2-1/2	3/4	5/16
402-2969	-	402-296911	403-2969	403-296911	404-2969	404-296911	19/64	2-1/2	13/16	5/16
402-3125	-	402-312511	403-3125	403-312511	404-3125	404-312511	5/16	2-1/2	13/16	5/16
402-3281	-	402-328111	-	-	404-3281	404-328111	21/64	2-1/2	7/8	3/8
402-3438	-	402-343811	-	-	404-3438	404-343811	11/32	2-1/2	7/8	3/8
402-3594	-	402-359411	-	-	404-3594	404-359411	23/64	2-1/2	7/8	3/8
402-3750	402-375008	402-375011	403-3750	403-375011	404-3750	404-375011	3/8	2-1/2	1	3/8
402-3906	-	402-390611	-	-	404-3906	404-390611	25/64	2-3/4	1	7/16
402-4062	-	402-406211	-	-	404-4062	404-406211	13/32	2-3/4	1	7/16
402-4219	-	402-421911	-	-	404-4219	404-421911	27/64	2-3/4	1	7/16
402-4375	-	402-437511	403-4375	403-437511	404-4375	404-437511	7/16	2-3/4	1	7/16
402-4531	-	402-453111	-	-	404-4531	404-453111	29/64	3	1	1/2
402-4688	-	402-468811	-	-	404-4688	404-468811	15/32	3	1	1/2
402-4844	-	402-484411	-	-	404-4844	404-484411	31/64	3	1	1/2
402-5000	-	402-500011	403-5000	403-500011	404-5000	404-500011	1/2	3	1	1/2

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page 

List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High	300		400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC			
402	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
403	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
404	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 402, 403, 404 (Continued)

2, 3, or 4 Flute

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR		30°
--------------------------	---------	-------	------	----	--	-----

Milling Diameter Tolerance	
1/32 ≤ D ≤ 1	+0 / -0.002"

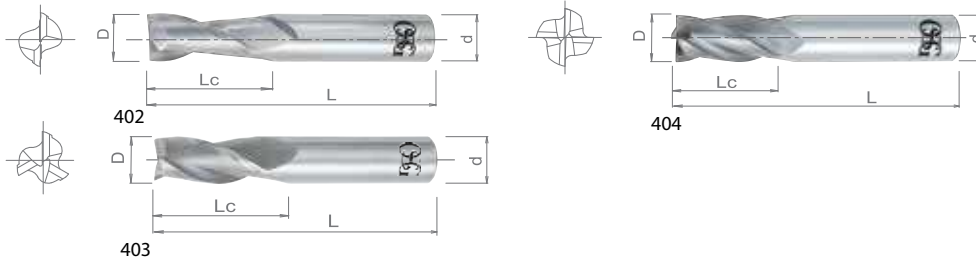

Units: Inch

EDP Number							Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 402 (2 Flute)		List 403 (3 Flute)		List 404 (4 Flute)						
Bright	TiCN	TiAlN	Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
402-5625	562508	402-562511	403-5625	403-562511	404-5625	404-562511	9/16	3-1/2	1-1/8	9/16
402-6250	-	402-625011	403-6250	403-625011	404-6250	404-625011	5/8	3-1/2	1-1/4	5/8
402-6875	-	402-687511	403-6875	403-687511	404-6875	404-687511	11/16	4	1-3/8	3/4
402-7500	-	402-750011	403-7500	403-750011	404-7500	404-750011	3/4	4	1-1/2	3/4
402-8750	-	402-875011	403-8750	403-875011	404-8750	404-875011	7/8	4	1-1/2	7/8
402-1000	-	402-100011	403-1000	403-100011	404-1000	404-100011	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
402	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
403	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
404	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 402, 403, 404

2, 3, or 4 Flute

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR		30°
--------------------------	---------	-------	------	----	--	-----

Milling Diameter Tolerance	
0.5≤D≤25	+0 / -0.05mm

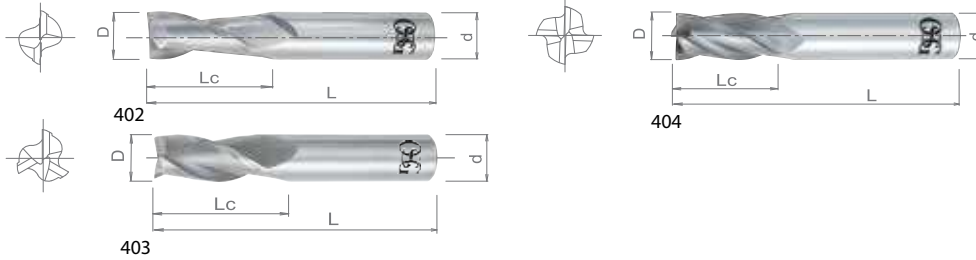

Units: mm

EDP Number						Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 402 (2 Flute)		List 403 (3 Flute)		List 404 (4 Flute)					
Bright	TiAlN	Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
402-0197	402-019711	-	-	-	-	0.5	39	1.5	3
402-0394	402-039411	403-0394	403-039411	404-0394	404-039411	1.0	39	3.0	3
402-0591	402-059111	403-0591	403-059111	404-0591	404-059111	1.5	39	5.0	3
402-0787	402-078711	403-0787	403-078711	404-0787	404-078711	2.0	39	7.0	3
402-0984	402-098411	403-0984	403-098411	404-0984	404-098411	2.5	39	8.0	3
402-1181	402-118111	403-1181	403-118111	404-1181	404-118111	3.0	39	10.0	3
402-1378	402-137811	403-1378	403-137811	404-1378	404-137811	3.5	51	12.0	4
402-1575	402-157511	403-1575	403-157511	404-1575	404-157511	4.0	51	14.0	4
402-1772	402-177211	403-1772	403-177211	404-1772	404-177211	4.5	51	14.0	5
402-1968	402-196811	403-1968	403-196811	404-1968	404-196811	5.0	51	16.0	5
402-2362	402-236211	403-2362	403-236211	404-2362	404-236211	6.0	64	19.0	6
402-2756	402-275611	403-2756	403-275611	404-2756	404-275611	7.0	64	19.0	8
402-3150	402-315011	403-3150	403-315011	404-3150	404-315011	8.0	64	21.0	8
402-3543	402-354311	403-3543	403-354311	404-3543	404-354311	9.0	70	22.0	10
402-3937	402-393711	403-3937	403-393711	404-3937	404-393711	10.0	70	25.0	10
402-4331	402-433111	403-4331	403-433111	404-4331	404-433111	11.0	70	25.0	11
402-4724	402-472411	403-4724	403-472411	404-4724	404-472411	12.0	76	25.0	12
402-5512	402-551211	403-5512	403-551211	404-5512	404-551211	14.0	89	30.0	14
402-6299	402-629911	403-6299	403-629911	404-6299	404-629911	16.0	89	32.0	16
402-7087	402-708711	403-7087	403-708711	404-7087	404-708711	18.0	102	35.0	18
402-7874	402-787411	403-7874	403-787411	404-7874	404-787411	20.0	102	38.0	20
402-8661	402-866111	403-8661	403-866111	404-8661	404-866111	22.0	102	38.0	22
402-9843	402-984311	403-9843	403-984311	404-9843	404-984311	25.0	102	38.0	25

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



List No.	Work Material																				
	P					M			K	N		S		H							
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels							
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
402	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
403	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
404	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 408

Multiple Flute, Slow Spiral

SPEED FEED P1265-1267	CARBIDE	BR		15°
---------------------------------	----------------	-----------	--	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
Bright	D	L	Lc	d	
408-1250	1/8	1-1/2	1/2	1/8	5
408-1562	5/32	2	9/16	3/16	6
408-1875	3/16	2	5/8	3/16	6
408-2500	1/4	2-1/2	3/4	1/4	6
408-2812	9/32	2-1/2	3/4	5/16	6
408-3125	5/16	2-1/2	13/16	5/16	6
408-3750	3/8	2-1/2	1	3/8	8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
Bright	D	L	Lc	d	
408-4375	7/16	2-3/4	1	7/16	8
408-5000	1/2	3	1	1/2	8
408-5625	9/16	3-1/2	1-1/8	9/16	8
408-6250	5/8	3-1/2	1-1/4	5/8	10
408-6875	11/16	4	1-3/8	3/4	10
408-7500	3/4	4	1-1/2	3/4	10
408-1000	1	4	1-1/2	1	14

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 409

4 Flute, Slow Spiral

SPEED FEED P1265-1267	CARBIDE	TiAlN	BR		15°
---------------------------------	----------------	--------------	-----------	--	------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	
Bright	TiAlN	D	L	Lc	d
409-0625	-	1/16	1-1/2	3/16	1/8
409-0781	-	5/64	1-1/2	1/4	1/8
409-0938	-	3/32	1-1/2	3/8	1/8
409-1094	-	7/64	1-1/2	7/16	1/8
409-1250	-	1/8	1-1/2	1/2	1/8
409-1562	-	5/32	2	9/16	3/16
409-1875	-	3/16	2	5/8	3/16
409-2188	-	7/32	2-1/2	5/8	1/4
409-2500	-	1/4	2-1/2	3/4	1/4
409-2812	-	9/32	2-1/2	3/4	5/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	
Bright	TiAlN	D	L	Lc	d
409-3125	-	5/16	2-1/2	13/16	5/16
409-3750	409-375011	3/8	2-1/2	1	3/8
409-4375	-	7/16	2-3/4	1	7/16
409-5000	-	1/2	3	1	1/2
409-5625	-	9/16	3-1/2	1-1/8	9/16
409-6250	-	5/8	3-1/2	1-1/4	5/8
409-6875	-	11/16	4	1-3/8	3/4
409-7500	-	3/4	4	1-1/2	3/4
409-8750	-	7/8	4	1-1/2	7/8
409-1000	-	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010	1035	1065	4140	4340				6061	7075							
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 452, 454

2, or 4 Flute, Plus Tolerance

SPEED FEED P1261- 1267	CARBIDE	TiAlN	BR		30°
	Milling Diameter Tolerance				

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0.001" / -0

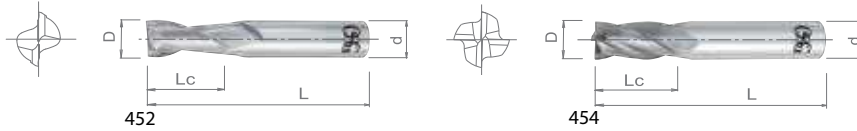

Units: Inch

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 452 (2 Flute)		List 454 (4 Flute)				
Bright	TiAlN	Bright	D	L	Lc	d
452-0625	-	454-0625	1/16	1-1/2	3/16	1/8
452-0938	-	454-0938	3/32	1-1/2	5/16	1/8
452-1250	-	454-1250	1/8	1-1/2	1/2	1/8
452-1562	-	454-1562	5/32	2	9/16	3/16
452-1875	-	454-1875	3/16	2	5/8	3/16
452-2188	-	454-2188	7/32	2-1/2	5/8	1/4
452-2500	452-250011	454-2500	1/4	2-1/2	3/4	1/4
452-2812	-	454-2812	9/32	2-1/2	3/4	5/16
452-3125	-	454-3125	5/16	2-1/2	13/16	5/16
452-3750	-	454-3750	3/8	2-1/2	1	3/8
452-4375	-	454-4375	7/16	2-3/4	1	7/16
452-5000	-	454-5000	1/2	3	1	1/2
452-5625	-	454-5625	9/16	3-1/2	1-1/8	9/16
452-6250	-	454-6250	5/8	3-1/2	1-1/4	5/8
452-6875	-	454-6875	11/16	4	1-3/8	3/4
452-7500	-	454-7500	3/4	4	1-1/2	3/4
452-1000	-	454-1000	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
Chart applies to all list numbers above	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best







List 412, 414

2 or 4 Flute, Stub Length

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR		30°
---------------------------------	----------------	--------------	-------------	-----------	--	------------

Milling Diameter Tolerance	
1/32 ≤ D ≤ 3/4	+0 / -0.002"



Units: Inch

EDP Number					Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 412 (2 Flute)		List 414 (4 Flute)						
Bright	TiCN	TiAlN	Bright	TiAlN	D	L	Lc	d
412-0312	412-031208	412-031211	414-0312	414-031211	1/32	1-1/2	5/64	1/8
412-0469	-	412-046911	414-0469	414-046911	3/64	1-1/2	3/32	1/8
412-0625	-	412-062511	414-0625	414-062511	1/16	1-1/2	1/8	1/8
412-0781	-	-	414-0781	414-078111	5/64	1-1/2	5/32	1/8
412-0938	412-093808	-	414-0938	414-093811	3/32	1-1/2	3/16	1/8
412-1094	-	-	414-1094	414-109411	7/64	1-1/2	7/32	1/8
412-1250	-	412-125011	414-1250	414-125011	1/8	1-1/2	1/4	1/8
412-1406	-	-	414-1406	414-140611	9/64	2	9/32	3/16
412-1562	412-156208	-	414-1562	414-156211	5/32	2	5/16	3/16
412-1875	412-187508	412-187511	414-1875	414-187511	3/16	2	3/8	3/16
412-2188	-	-	414-2188	414-218811	7/32	2	7/16	1/4
412-2500	-	412-250011	414-2500	414-250011	1/4	2	1/2	1/4
412-3125	-	412-312511	414-3125	414-312511	5/16	2	1/2	5/16
412-3750	-	412-375011	414-3750	414-375011	3/8	2	5/8	3/8
412-4375	-	-	414-4375	414-437511	7/16	2-1/2	5/8	7/16
412-5000	412-500008	412-500011	414-5000	414-500011	1/2	2-1/2	5/8	1/2
412-6250	-	-	414-6250	414-625011	5/8	3	3/4	5/8
412-7500	-	-	414-7500	414-750011	3/4	3	1	3/4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P						M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 412, 414

2 or 4 Flute, Stub Length

SPEED FEED P1261- 1267	CARBIDE	TiAlN	TiCN	BR	30°
---------------------------------	---------	-------	------	----	-----

Milling Diameter Tolerance	
1 ≤ D ≤ 12	+0 / -0.05mm

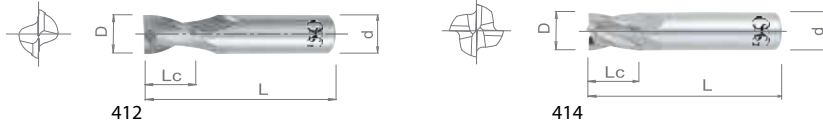

Units: mm

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 412 (2 Flute)	List 414 (4 Flute)					
Bright	Bright	TiAlN	D	L	Lc	d
412-0394	414-0394	414-039411	1.0	39	2	3
412-0591	414-0591	-	1.5	39	3	3
412-0787	414-0787	-	2.0	39	4	3
412-0984	414-0984	-	2.5	39	5	3
412-1181	414-1181	-	3.0	39	6	3
412-1378	414-1378	-	3.5	51	7	4
412-1575	414-1575	-	4.0	51	8	4
412-1772	414-1772	-	4.5	51	9	5
412-1968	414-1968	414-196811	5.0	51	10	5
412-2362	414-2362	-	6.0	51	12	6
412-2756	414-2756	-	7.0	51	12	8
412-3150	414-3150	-	8.0	51	12	8
412-3543	414-3543	-	9.0	51	14	10
412-3937	414-3937	-	10.0	51	14	10
412-4331	414-4331	-	11.0	64	16	11
412-4724	414-4724	-	12.0	64	16	12

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best







List 462, 464

2 or 4 Flute, Long Length

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR		30°
--------------------------	---------	-------	------	----	--	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number						Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 462 (2 Flute)			List 464 (4 Flute)						
Bright	TiCN	TiAlN	Bright	TiCN	TiAlN	D	L	Lc	d
462-1250	-	462-125011	464-1250	-	464-125011	1/8	2-1/4	3/4	1/8
462-1875	-	-	464-1875	-	464-187511	3/16	2-1/4	3/4	3/16
462-2500	-	462-250011	464-2500	-	464-250011	1/4	3	1-1/8	1/4
462-3125	-	462-312511	464-3125	-	464-312511	5/16	3	1-1/8	5/16
462-3750	462-375008	462-375011	464-3750	-	464-375011	3/8	3	1-1/8	3/8
462-4375	-	-	464-4375	464-437508	464-437511	7/16	4	2	7/16
462-5000	-	-	464-5000	-	464-500011	1/2	4	2	1/2
462-5001	462-500108	-	464-5001	464-500108	-	1/2	4	1	1/2
462-6250	462-625008	-	464-6250	-	464-625011	5/8	5	2-1/4	5/8
462-7500	-	-	464-7500	-	464-750011	3/4	5	2-1/4	3/4
462-1000	-	-	464-1000	464-100008	-	1	5	2-1/4	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
462	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
464	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 462, 464

2 or 4 Flute, Long Length

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR		30°
---------------------------------	----------------	--------------	-------------	-----------	---	------------

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.05mm

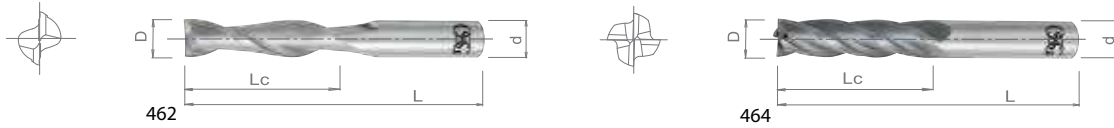

Units: mm

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 462 (2 Flute)	List 464 (4 Flute)					
Bright	Bright	TiAlN	D	L	Lc	d
462-1181	464-1181	-	3	57	19	3
462-1575	464-1575	-	4	57	19	4
462-1968	464-1968	464-196811	5	64	25	5
462-2362	464-2362	464-236211	6	76	28	6
462-3150	464-3150	464-315011	8	76	29	8
462-3937	464-3937	464-393711	10	76	32	10
462-4724	464-4724	464-472411	12	102	51	12
462-5512	464-5512	-	14	127	57	14
462-6299	464-6299	-	16	127	57	16
462-7087	464-7087	-	18	127	57	18
462-7874	464-7874	464-787411	20	127	57	20
462-9843	464-9843	-	25	127	57	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



OSG's Performance & Savings

Want to turbo-charge performance? Try EXOCARB® WXL® - List 3723 (p. 878) or EXOCARB® WXL® - List 3742 (p. 865)

List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
462	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
464	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 482, 484

2 or 4 Flute, Extra Long Length

SPEED FEED P1261-1267	CARBIDE	TiAlN	TiCN	BR	
---------------------------------	----------------	--------------	-------------	-----------	--

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"

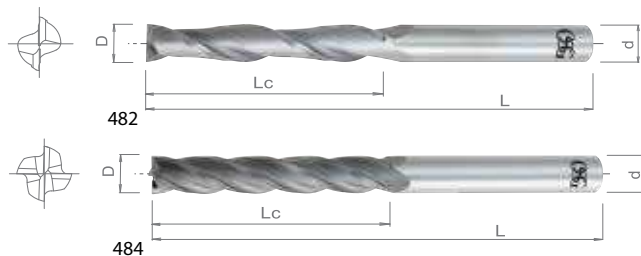

Units: Inch

EDP Number						Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 482 (2 Flute)			List 484 (4 Flute)						
Bright	TiCN	TiAlN	Bright	TiCN	TiAlN	D	L	Lc	d
482-1250	-	482-125011	484-1250	-	484-125011	1/8	3	1	1/8
482-1875	482-187508	-	484-1875	-	484-187511	3/16	3	1-1/8	3/16
482-1876	-	-	484-1876	484-187608	-	3/16	4	1	3/16
482-2500	-	482-250011	484-2500	-	484-250011	1/4	4	1-1/2	1/4
482-2501	482-250108	-	484-2501	484-250108	-	1/4	4	1	1/4
482-2502	482-250208	-	484-2502	484-250208	-	1/4	6	1-1/2	1/4
482-3125	-	-	484-3125	-	484-312511	5/16	4	1-5/8	5/16
-	-	-	484-3126	484-312608	-	5/16	4	1	5/16
-	-	-	484-3127	484-312708	-	5/16	6	1-1/2	5/16
482-3750	-	-	484-3750	-	484-375011	3/8	4	1-3/4	3/8
-	-	-	484-3751	484-375108	-	3/8	4	1	3/8
-	-	-	484-3752	484-375208	-	3/8	6	1-1/2	3/8
-	-	-	484-3753	-	-	3/8	6	3	3/8
482-4375	-	-	484-4375	-	-	7/16	6	3	7/16
482-5000	482-500008	482-500011	484-5000	484-500108	484-500011	1/2	6	3	1/2
-	-	-	484-5001	-	-	1/2	6	1-1/2	1/2
482-6250	-	-	484-6250	-	484-625011	5/8	6	3	5/8
-	-	-	484-6251	484-625108	-	5/8	6	2	5/8
482-7500	-	-	484-7500	-	484-750011	3/4	6	3	3/4
-	-	-	484-7501	-	-	3/4	6	2	3/4
482-1000	-	-	484-1000	484-100008	484-100011	1	6	3	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
482	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
484	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best




List 482, 484

2 or 4 Flute, Extra Long Length

SPEED FEED P1261-1267	CARBIDE	BR		30°
---------------------------------	----------------	-----------	---	------------

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.05mm

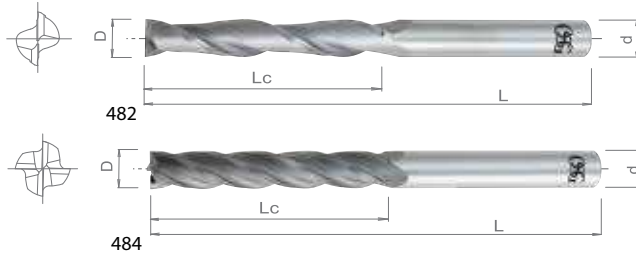

Units: mm

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 482 (2 Flute)	List 484 (4 Flute)				
Bright	Bright	D	L	Lc	d
482-1181	484-1181	3	76	25	3
482-1575	484-1575	4	76	28	4
482-1968	484-1968	5	76	32	5
482-2362	484-2362	6	102	38	6
482-3150	484-3150	8	102	42	8
482-3937	484-3937	10	102	45	10
482-4724	484-4724	12	153	76	12
482-5512	484-5512	14	153	76	14
482-6299	484-6299	16	153	76	16
482-7087	484-7087	18	153	76	18
482-7874	484-7874	20	153	76	20
482-9843	484-9843	25	153	76	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
List No.	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
482	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
484	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best







List 495, 496

2 or 4 Flute, Corner Radius

SPEED FEED P1261-1267	CARBIDE	TiAlN	BR		30°
---------------------------------	----------------	--------------	-----------	--	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number			Mill Diameter	Corner Radius	Overall Length	Length of Cut	Shank Diameter
List 495 (2 Flute)	List 496 (4 Flute)						
Bright	Bright	TiAlN	D	R	L	Lc	d
495-1251	496-1251	496-125111	1/8	0.015	1-1/2	1/2	1/8
495-1872	496-1872	496-187211	3/16	0.020	2	5/8	3/16
495-1873	496-1873	496-187311	3/16	0.030	2	5/8	3/16
495-2502	496-2502	496-250211	1/4	0.020	2-1/2	3/4	1/4
495-2503	496-2503	496-250311	1/4	0.030	2-1/2	3/4	1/4
495-2504	496-2504	-	1/4	0.045	2-1/2	3/4	1/4
495-3122	496-3122	496-312211	5/16	0.020	2-1/2	13/16	5/16
495-3123	496-3123	496-312311	5/16	0.030	2-1/2	13/16	5/16
495-3124	496-3124	-	5/16	0.045	2-1/2	13/16	5/16
495-3752	496-3752	-	3/8	0.020	2-1/2	1	3/8
495-3753	496-3753	496-375311	3/8	0.030	2-1/2	1	3/8
495-3754	496-3754	496-375411	3/8	0.045	2-1/2	1	3/8
495-5002	496-5002	496-500211	1/2	0.020	3	1	1/2
495-5003	496-5003	496-500311	1/2	0.030	3	1	1/2
495-5004	496-5004	-	1/2	0.045	3	1	1/2
495-5006	496-5006	496-500611	1/2	0.060	3	1	1/2
495-6252	496-6252	-	5/8	0.020	3-1/2	1-1/4	5/8
495-6253	496-6253	-	5/8	0.030	3-1/2	1-1/4	5/8
495-6254	496-6254	-	5/8	0.045	3-1/2	1-1/4	5/8
495-6256	496-6256	-	5/8	0.060	3-1/2	1-1/4	5/8
495-6259	496-6259	-	5/8	0.090	3-1/2	1-1/4	5/8
495-7500	496-7500	-	3/4	0.125	4	1-1/2	3/4
495-7502	496-7502	-	3/4	0.020	4	1-1/2	3/4
495-7503	496-7503	496-750311	3/4	0.030	4	1-1/2	3/4
495-7504	496-7504	-	3/4	0.045	4	1-1/2	3/4
495-7506	496-7506	-	3/4	0.060	4	1-1/2	3/4
495-7509	496-7509	-	3/4	0.090	4	1-1/2	3/4
495-1000	496-1000	-	1	0.125	4	1-1/2	1
495-1002	496-1002	-	1	0.020	4	1-1/2	1
495-1003	496-1003	-	1	0.030	4	1-1/2	1
495-1004	496-1004	-	1	0.045	4	1-1/2	1
495-1006	496-1006	-	1	0.060	4	1-1/2	1
495-1009	496-1009	-	1	0.090	4	1-1/2	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material																			
Chart applies to all list numbers above	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 455C

5 Flute, Corner Protection

SPEED FEED P1265-1267	CARBIDE	TiAlN	TiCN	BR	45°
--------------------------	---------	-------	------	----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiCN	TiAlN	D	L	Lc	d
455-1250	455-125008	-	1/8	1-1/2	1/2	1/8
455-1251	455-125108	455-125111	1/8	1-1/2	1/4	1/8
455-1562	455-156208	455-156211	5/32	2	9/16	3/16
455-1875	455-187508	-	3/16	2	5/8	3/16
455-1876	455-187608	455-187611	3/16	2	5/16	3/16
455-2188	-	-	7/32	2-1/2	5/8	1/4
455-2500	455-250008	-	1/4	2-1/2	3/4	1/4
455-2501	455-250108	455-250111	1/4	2	1/2	1/4
455-2502	455-250208	455-250211	1/4	4	1-1/4	1/4
455-2812	-	-	9/32	2-1/2	3/4	5/16
455-3125	-	-	5/16	2-1/2	13/16	5/16
455-3126	455-312608	455-312611	5/16	2	1/2	5/16
455-3127	455-312708	455-312711	5/16	4	1-1/4	5/16
455-3750	-	-	3/8	2-1/2	1	3/8
455-3751	455-375108	455-375111	3/8	2	5/8	3/8
455-3752	455-375208	455-375211	3/8	2-1/2	7/8	3/8
455-3753	455-375308	455-375311	3/8	4	1-1/2	3/8
455-4375	455-437508	-	7/16	2-3/4	1	7/16
455-4376	455-437608	-	7/16	2-1/2	5/8	7/16
455-4377	-	-	7/16	4	2	7/16
455-5000	-	-	1/2	3	1	1/2
455-5001	455-500108	455-500111	1/2	2-1/2	5/8	1/2
455-5002	455-500208	455-500211	1/2	3	1-1/4	1/2
455-5003	455-500308	455-500311	1/2	4-1/2	2	1/2
455-5625	-	-	9/16	3-1/2	1-1/8	9/16
455-6250	455-625008	-	5/8	3-1/2	1-1/4	5/8
455-6251	455-625108	455-625111	5/8	3	3/4	5/8
455-7500	455-750008	-	3/4	4	1-1/2	3/4
455-7501	455-750108	455-750111	3/4	3	1	3/4
455-7502	455-750208	455-750211	3/4	5	2-1/4	3/4
455-1000	-	-	1	4	1-1/2	1

Packed: 1 pc.
Corner Protection 0.005"~0.010"
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
455C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 460C

3 Flute, High Helix

SPEED FEED P1261-1264	CARBIDE	BR		60°
---------------------------------	----------------	-----------	--	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
460-1250	1/8	1-1/2	1/2	1/8
460-1875	3/16	2	5/8	3/16
460-2500	1/4	2-1/2	3/4	1/4
460-3125	5/16	2-1/2	13/16	5/16
460-3750	3/8	2-1/2	1	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
460-4375	7/16	2-3/4	1	7/16
460-5000	1/2	3	1	1/2
460-6250	5/8	3-1/2	1-1/4	5/8
460-7500	3/4	4	1-1/2	3/4
460-1000	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 460C

3 Flute, High Helix

SPEED FEED P1261-1264	CARBIDE	BR		60°
---------------------------------	----------------	-----------	--	------------

Milling Diameter Tolerance	
6 ≤ D ≤ 25	+0 / -0.05mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
460-2362	6	64	19	6
460-3150	8	64	21	8
460-3937	10	70	25	10
460-4724	12	76	25	12
460-5512	14	89	29	14

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
460-6299	16	89	32	16
460-7087	18	102	38	18
460-7874	20	102	38	20
460-9843	25	102	38	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH			6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
460C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best




List 445

3 Flute, RHS/RHC

SPEED FEED P1261- 1264	CARBIDE	BR		45°
---------------------------------	---------	----	---	-----

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
445-0625	1/16	1-1/2	3/16	1/8
445-0938	3/32	1-1/2	5/16	1/8
445-1250	1/8	1-1/2	1/2	1/8
445-1562	5/32	2	9/16	3/16
445-1875	3/16	2	5/8	3/16
445-2188	7/32	2-1/2	5/8	1/4
445-2500	1/4	2-1/2	3/4	1/4
445-2812	9/32	2-1/2	3/4	5/16
445-3125	5/16	2-1/2	13/16	5/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
445-3750	3/8	2-1/2	1	3/8
445-4375	7/16	2-3/4	1	7/16
445-5000	1/2	3	1	1/2
445-5625	9/16	3-1/2	1-1/8	9/16
445-6250	5/8	3-1/2	1-1/4	5/8
445-6875	11/16	4	1-3/8	3/4
445-7500	3/4	4	1-1/2	3/4
445-8750	7/8	4	1-1/2	7/8
445-1000	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 445

3 Flute, RHS/RHC

SPEED FEED P1261- 1264	CARBIDE	BR		45°
---------------------------------	---------	----	---	-----

Milling Diameter Tolerance	
1 ≤ D ≤ 20	+0 / -0.05mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
445-0394	1.0	39	3	3
445-0591	1.5	39	5	3
445-0787	2.0	39	7	3
445-0984	2.5	39	8	3
445-1181	3.0	39	10	3
445-1378	3.5	51	12	4
445-1575	4.0	51	14	4
445-1772	4.5	51	14	5
445-1968	5.0	51	16	5
445-2362	6.0	64	19	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
445-2756	7.0	64	19	8
445-3150	8.0	64	21	8
445-3543	9.0	70	22	10
445-3937	10.0	70	25	10
445-4331	11.0	70	25	11
445-4724	12.0	76	25	12
445-5512	14.0	89	30	14
445-6299	16.0	89	32	16
445-7087	18.0	102	35	18
445-7874	20.0	102	38	20

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
List No.	P					Die Steels	M			K Cast Iron	N		S		H				
	Carbon Steels			Alloy Steels	Stainless Steels			Aluminum			Nickel Alloy	Titanium	Hardened Steels						
	Low	Med.	High		300		400	17-4 PH	6061 7075				Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
445	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 461

6 Flute, RHS/RHC

SPEED FEED P1265-1267	CARBIDE	TiAlN	BR		30°
	Milling Diameter Tolerance				
1/8 ≤ D ≤ 1		+0 / -0.002"			



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiAlN	D	L	Lc	d
461-1250	-	1/8	1-1/2	1/2	1/8
461-1562	-	5/32	2	9/16	3/16
461-1875	461-187511	3/16	2	5/8	3/16
461-2500	461-250011	1/4	2-1/2	3/4	1/4
461-2812	-	9/32	2-1/2	3/4	5/16
461-3125	-	5/16	2-1/2	13/16	5/16
461-3750	461-375011	3/8	2-1/2	1	3/8

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiAlN	D	L	Lc	d
461-4375	-	7/16	2-3/4	1	7/16
461-5000	-	1/2	3	1	1/2
461-5625	-	9/16	3-1/2	1-1/8	9/16
461-6250	-	5/8	3-1/2	1-1/4	5/8
461-6875	-	11/16	4	1-3/8	3/4
461-7500	-	3/4	4	1-1/2	3/4
461-1000	-	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 461

6 Flute, RHS/RHC

SPEED FEED P1265-1267	CARBIDE	BR		30°
	Milling Diameter Tolerance			
3 ≤ D ≤ 25		+0 / -0.05mm		



Units: mm

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d	
461-1181	3	39	10	3	
461-1575	4	51	14	4	
461-1968	5	51	16	5	
461-2362	6	64	19	6	
461-2756	7	64	19	7	
461-3150	8	64	21	8	
461-3543	9	70	22	10	
461-3937	10	70	25	10	

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d	
461-4331	11	70	25	11	
461-4724	12	76	25	12	
461-5512	14	89	30	14	
461-6299	16	89	32	16	
461-7087	18	102	35	18	
461-7874	20	102	38	20	
461-8661	22	102	38	22	
461-9843	25	102	38	25	

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
461	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 447

4 Flute, LHS/RHC

SPEED FEED P1265-1267	CARBIDE	TiAlN	BR		LH	30°
--------------------------	---------	-------	----	---	----	-----

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiAlN	D	L	Lc	d
447-0625	-	1/16	1-1/2	3/16	1/8
447-1250	447-125011	1/8	1-1/2	1/2	1/8
447-1875	447-187511	3/16	2	5/8	3/16
447-2500	447-250011	1/4	2-1/2	3/4	1/4
447-3125	-	5/16	2-1/2	13/16	5/16

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiAlN	D	L	Lc	d
447-3750	-	3/8	2-1/2	1	3/8
447-5000	-	1/2	3	1	1/2
447-6250	-	5/8	3-1/2	1-1/4	5/8
447-7500	-	3/4	4	1-1/2	3/4
447-1000	-	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels		Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
447	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 492, 494

2 or 4 Flute, Miniature

SPEED FEED P1274	CARBIDE	TiAlN	BR		30°
----------------------------	----------------	--------------	-----------	--	------------

Milling Diameter Tolerance	
0.015 ≤ D ≤ 0.060	+0 / -0.002"

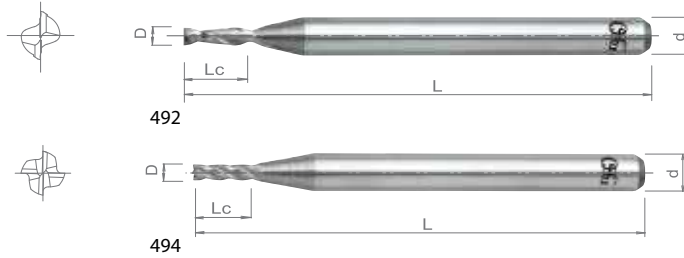

Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 492 (2 Flute)	List 494 (4 Flute)				
Bright	Bright	D	L	Lc	d
492-0150	-	0.015	1-1/2	0.047	1/8
492-0200	-	0.020	1-1/2	0.063	1/8
492-0250	-	0.025	1-1/2	0.078	1/8
492-0300	-	0.030	1-1/2	0.094	1/8
492-0350	494-0350	0.035	1-1/2	0.109	1/8
492-0400	494-0400	0.040	1-1/2	0.125	1/8
492-0450	494-0450	0.045	1-1/2	0.140	1/8
492-0500	494-0500	0.050	1-1/2	0.156	1/8
492-0550	494-0550	0.055	1-1/2	0.171	1/8
492-0600	494-0600	0.060	1-1/2	0.188	1/8

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010	1035	1065	4140	4340												
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 402BN, 403BN, 404BN


2, 3, or 4 Flute, Ball End

SPEED FEED P1269- 1271	CARBIDE	TiAIN	BR	30°


Milling Diameter Tolerance	
1/32 ≤ D ≤ 1	+0 / -0.002"



402BN



404BN



403BN

Units: Inch

EDP Number						Mill Dia.	Overall Length	Length of Cut	Shank Dia.
List 402BN (2 Flute)		List 403BN (3 Flute)		List 404BN (4 Flute)					
Bright	TiAIN	Bright	TiAIN	Bright	TiAIN	D	L	Lc	d
402-0312-BN	402-0312-BN11	-	-	404-0312-BN	404-0312-BN11	1/32	1-1/2	1/8	1/8
402-0469-BN	402-0469-BN11	-	-	404-0469-BN	404-0469-BN11	3/64	1-1/2	9/64	1/8
402-0625-BN	402-0625-BN11	403-0625-BN	403-0625-BN11	404-0625-BN	404-0625-BN11	1/16	1-1/2	3/16	1/8
402-0781-BN	402-0781-BN11	403-0781-BN	403-0781-BN11	404-0781-BN	404-0781-BN11	5/64	1-1/2	1/4	1/8
402-0938-BN	402-0938-BN11	403-0938-BN	403-0938-BN11	404-0938-BN	404-0938-BN11	3/32	1-1/2	5/16	1/8
402-1094-BN	402-1094-BN11	403-1094-BN	403-1094-BN11	404-1094-BN	404-1094-BN11	7/64	1-1/2	3/8	1/8
402-1250-BN	402-1250-BN11	403-1250-BN	403-1250-BN11	404-1250-BN	404-1250-BN11	1/8	1-1/2	1/2	1/8
402-1406-BN	402-1406-BN11	403-1406-BN	403-1406-BN11	404-1406-BN	404-1406-BN11	9/64	2	1/2	3/16
402-1562-BN	402-1562-BN11	403-1562-BN	403-1562-BN11	404-1562-BN	404-1562-BN11	5/32	2	9/16	3/16
402-1719-BN	402-1719-BN11	403-1719-BN	403-1719-BN11	404-1719-BN	404-1719-BN11	11/64	2	9/16	3/16
402-1875-BN	402-1875-BN11	403-1875-BN	403-1875-BN11	404-1875-BN	404-1875-BN11	3/16	2	5/8	3/16
402-2031-BN	402-2031-BN11	403-2031-BN	403-2031-BN11	404-2031-BN	404-2031-BN11	13/64	2-1/2	5/8	1/4
402-2188-BN	402-2188-BN11	403-2188-BN	403-2188-BN11	404-2188-BN	404-2188-BN11	7/32	2-1/2	5/8	1/4
402-2344-BN	402-2344-BN11	403-2344-BN	403-2344-BN11	404-2344-BN	404-2344-BN11	15/64	2-1/2	3/4	1/4
402-2500-BN	402-2500-BN11	403-2500-BN	403-2500-BN11	404-2500-BN	404-2500-BN11	1/4	2-1/2	3/4	1/4
402-2656-BN	402-2656-BN11	403-2656-BN	403-2656-BN11	404-2656-BN	404-2656-BN11	17/64	2-1/2	3/4	5/16
402-2812-BN	402-2812-BN11	403-2812-BN	-	404-2812-BN	404-2812-BN11	9/32	2-1/2	3/4	5/16
402-2969-BN	402-2969-BN11	403-2969-BN	403-2969-BN11	404-2969-BN	404-2969-BN11	19/64	2-1/2	13/16	5/16
402-3125-BN	402-3125-BN11	403-3125-BN	403-3125-BN11	404-3125-BN	404-3125-BN11	5/16	2-1/2	13/16	5/16
402-3281-BN	402-3281-BN11	-	-	404-3281-BN	404-3281-BN11	21/64	2-1/2	7/8	3/8
402-3438-BN	402-3438-BN11	-	-	404-3438-BN	404-3438-BN11	11/32	2-1/2	7/8	3/8
402-3594-BN	402-3594-BN11	-	-	404-3594-BN	404-3594-BN11	23/64	2-1/2	7/8	3/8
402-3750-BN	402-3750-BN11	403-3750-BN	403-3750-BN11	404-3750-BN	404-3750-BN11	3/8	2-1/2	1	3/8
402-3906-BN	402-3906-BN11	-	-	404-3906-BN	404-3906-BN11	25/64	2-3/4	1	7/16
402-4062-BN	402-4062-BN11	-	-	404-4062-BN	404-4062-BN11	13/32	2-3/4	1	7/16
402-4219-BN	402-4219-BN11	-	-	404-4219-BN	404-4219-BN11	27/64	2-3/4	1	7/16
402-4375-BN	402-4375-BN11	403-4375-BN	403-4375-BN11	404-4375-BN	404-4375-BN11	7/16	2-3/4	1	7/16
402-4531-BN	402-4531-BN11	-	-	404-4531-BN	404-4531-BN11	29/64	3	1	1/2
402-4688-BN	402-4688-BN11	-	-	404-4688-BN	404-4688-BN11	15/32	3	1	1/2
402-4844-BN	402-4844-BN11	-	-	404-4844-BN	404-4844-BN11	31/64	3	1	1/2
402-5000-BN	402-5000-BN11	403-5000-BN	403-5000-BN11	404-5000-BN	404-5000-BN11	1/2	3	1	1/2
402-5625-BN	402-5625-BN11	403-5625-BN	403-5625-BN11	404-5625-BN	404-5625-BN11	9/16	3-1/2	1-1/8	9/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

continued on next page

List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
1010	1035	1045	1065	4140	4340												
402BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
403BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
404BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





List 402BN, 403BN, 404BN (Cont.)


2, 3, or 4 Flute, Ball End

SPEED FEED P1269- 1271	CARBIDE	TiAlN	BR		30°
---------------------------------	---------	-------	----	--	-----


Milling Diameter Tolerance	
1/32 ≤ D ≤ 1	+0 / -0.002"



402BN



404BN



403BN

Units: Inch

EDP Number						Mill Dia.	Overall Length	Length of Cut	Shank Dia.
List 402BN (2 Flute)		List 403BN (3 Flute)		List 404BN (4 Flute)					
Bright	TiAlN	Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
402-6250-BN	402-6250-BN11	403-6250-BN	403-6250-BN11	404-6250-BN	404-6250-BN11	5/8	3-1/2	1-1/4	5/8
402-6875-BN	402-6875-BN11	403-6875-BN	403-6875-BN11	404-6875-BN	404-6875-BN11	11/16	4	1-3/8	3/4
402-7500-BN	402-7500-BN11	403-7500-BN	403-7500-BN11	404-7500-BN	404-7500-BN11	3/4	4	1-1/2	3/4
402-8750-BN	402-8750-BN11	403-8750-BN	403-8750-BN11	404-8750-BN	404-8750-BN11	7/8	4	1-1/2	7/8
402-1000-BN	402-1000-BN11	403-1000-BN	403-1000-BN11	404-1000-BN	404-1000-BN11	1	4	1-1/2	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
402BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
403BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
404BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 402BN, 403BN, 404BN

2, 3, or 4 Flute, Ball End

SPEED FEED P1269-1271	CARBIDE	TiAIN	BR		30°
---------------------------------	----------------	--------------	-----------	---	------------

Milling Diameter Tolerance	
0.5 ≤ D ≤ 25	+0 / -0.05mm

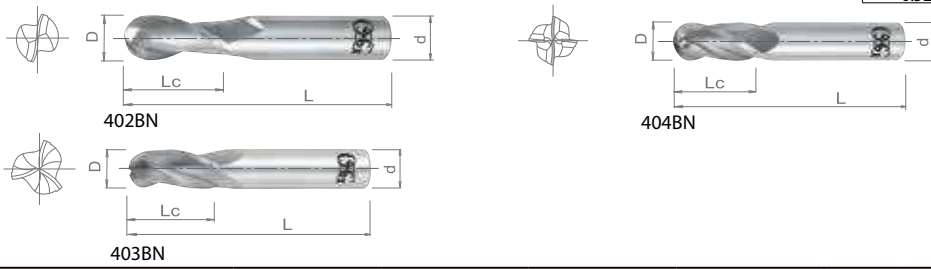

Units: mm

EDP Number						Mill Dia.	Overall Length	Length of Cut	Shank Dia.
List 402BN (2 Flute)		List 403BN (3 Flute)		List 404BN (4 Flute)					
Bright	TiAIN	Bright	TiAIN	Bright	TiAIN	D	L	Lc	d
402-0197-BN	402-0197-BN11	-	-	-	-	0.5	39	1.5	3
402-0394-BN	402-0394-BN11	403-0394-BN	403-0394-BN11	404-0394-BN	404-0394-BN11	1.0	39	3	3
402-0591-BN	402-0591-BN11	403-0591-BN	403-0591-BN11	404-0591-BN	404-0591-BN11	1.5	39	5	3
402-0787-BN	402-0787-BN11	403-0787-BN	403-0787-BN11	404-0787-BN	404-0787-BN11	2.0	39	7	3
402-0984-BN	402-0984-BN11	403-0984-BN	403-0984-BN11	404-0984-BN	404-0984-BN11	2.5	39	8	3
402-1181-BN	402-1181-BN11	403-1181-BN	403-1181-BN11	404-1181-BN	404-1181-BN11	3.0	39	10	3
402-1378-BN	402-1378-BN11	403-1378-BN	403-1378-BN11	404-1378-BN	404-1378-BN11	3.5	51	12	4
402-1575-BN	402-1575-BN11	403-1575-BN	403-1575-BN11	404-1575-BN	404-1575-BN11	4.0	51	14	4
402-1772-BN	402-1772-BN11	403-1772-BN	403-1772-BN11	404-1772-BN	404-1772-BN11	4.5	51	14	5
402-1968-BN	402-1968-BN11	403-1968-BN	403-1968-BN11	404-1968-BN	404-1968-BN11	5.0	51	16	5
402-2362-BN	402-2362-BN11	403-2362-BN	403-2362-BN11	404-2362-BN	404-2362-BN11	6.0	64	19	6
402-2756-BN	402-2756-BN11	403-2756-BN	403-2756-BN11	404-2756-BN	404-2756-BN11	7.0	64	19	8
402-3150-BN	402-3150-BN11	403-3150-BN	403-3150-BN11	404-3150-BN	404-3150-BN11	8.0	64	21	8
402-3543-BN	402-3543-BN11	403-3543-BN	403-3543-BN11	404-3543-BN	404-3543-BN11	9.0	70	22	10
402-3937-BN	402-3937-BN11	403-3937-BN	403-3937-BN11	404-3937-BN	404-3937-BN11	10.0	70	25	10
402-4331-BN	402-4331-BN11	403-4331-BN	403-4331-BN11	404-4331-BN	404-4331-BN11	11.0	70	25	11
402-4724-BN	402-4724-BN11	403-4724-BN	403-4724-BN11	404-4724-BN	404-4724-BN11	12.0	76	25	12
402-5512-BN	402-5512-BN11	403-5512-BN	403-5512-BN11	404-5512-BN	404-5512-BN11	14.0	89	30	14
402-6299-BN	402-6299-BN11	403-6299-BN	403-6299-BN11	404-6299-BN	404-6299-BN11	16.0	89	32	16
402-7087-BN	402-7087-BN11	403-7087-BN	403-7087-BN11	404-7087-BN	404-7087-BN11	18.0	102	35	18
402-7874-BN	402-7874-BN11	403-7874-BN	403-7874-BN11	404-7874-BN	404-7874-BN11	20.0	102	38	20
402-8661-BN	402-8661-BN11	403-8661-BN	403-8661-BN11	404-8661-BN	404-8661-BN11	22.0	102	38	22
402-9843-BN	402-9843-BN11	403-9843-BN	403-9843-BN11	404-9843-BN	404-9843-BN11	25.0	102	38	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140		300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010	1035	1045	1065	4340					7075							
402BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
403BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
404BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 452BN

2 Flute, Ball End, Plus Tolerance

SPEED FEED P1269	CARBIDE	BR		30°
----------------------------	----------------	-----------	--	------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0.001" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
452-0625-BN	1/16	1-1/2	3/16	1/8
452-0938-BN	3/32	1-1/2	5/16	1/8
452-1250-BN	1/8	1-1/2	1/2	1/8
452-1562-BN	5/32	2	9/16	3/16
452-1875-BN	3/16	2	5/8	3/16
452-2188-BN	7/32	2-1/2	5/8	1/4
452-2500-BN	1/4	2-1/2	3/4	1/4
452-2812-BN	9/32	2-1/2	3/4	5/16
452-3125-BN	5/16	2-1/2	13/16	5/16
452-3750-BN	3/8	2-1/2	1	3/8
452-5000-BN	1/2	3	1	1/2
452-5625-BN	9/16	3-1/2	1-1/8	9/16
452-6250-BN	5/8	3-1/2	1-1/4	5/8
452-6875-BN	11/16	4	1-3/8	3/4
452-7500-BN	3/4	4	1-1/2	3/4
452-1000-BN	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																		
	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
452BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 412BN, 414BN

2 or 4 Flute, Stub Length, Ball End

SPEED FEED P1269-1271	CARBIDE	TiAlN	TiCN	BR	STUB		30°
--------------------------	---------	-------	------	----	------	---	-----

Milling Diameter Tolerance	
1/32 ≤ D ≤ 3/4	+0 / -0.002"

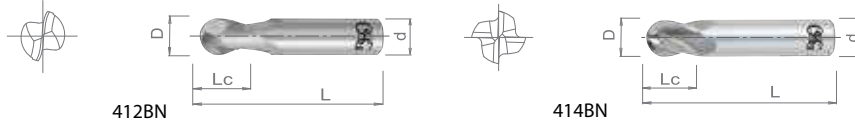

Units: Inch

EDP Number					Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 412BN (2 Flute)		List 414BN (4 Flute)						
Bright	TiAlN	Bright	TiCN	TiAlN	D	L	Lc	d
412-0312-BN	412-0312-BN11	414-0312-BN	-	414-0312-BN11	1/32	1-1/2	5/64	1/8
412-0469-BN	-	414-0469-BN	-	414-0469-BN11	3/64	1-1/2	3/32	1/8
412-0625-BN	412-0625-BN11	414-0625-BN	-	414-0625-BN11	1/16	1-1/2	1/8	1/8
412-0781-BN	-	414-0781-BN	-	414-0781-BN11	5/64	1-1/2	5/32	1/8
412-0938-BN	-	414-0938-BN	414-0938-BN08	414-0938-BN11	3/32	1-1/2	3/16	1/8
412-1094-BN	-	414-1094-BN	-	-	7/64	1-1/2	7/32	1/8
412-1250-BN	412-1250-BN11	414-1250-BN	414-1250-BN08	414-1250-BN11	1/8	1-1/2	1/4	1/8
412-1406-BN	-	414-1406-BN	-	-	9/64	2	9/32	3/16
412-1562-BN	412-1562-BN11	414-1562-BN	414-1562-BN08	-	5/32	2	5/16	3/16
412-1875-BN	412-1875-BN11	414-1875-BN	-	414-1875-BN11	3/16	2	3/8	3/16
412-2188-BN	-	414-2188-BN	-	-	7/32	2	7/16	1/4
412-2500-BN	412-2500-BN11	414-2500-BN	-	414-2500-BN11	1/4	2	1/2	1/4
412-3125-BN	-	414-3125-BN	414-3125-BN08	414-3125-BN11	5/16	2	1/2	5/16
412-3750-BN	412-3750-BN11	414-3750-BN	414-3750-BN08	414-3750-BN11	3/8	2	5/8	3/8
412-4375-BN	-	414-4375-BN	-	-	7/16	2-1/2	5/8	7/16
412-5000-BN	412-5000-BN11	414-5000-BN	414-5000-BN08	-	1/2	2-1/2	5/8	1/2
412-6250-BN	-	414-6250-BN	-	-	5/8	3	3/4	5/8
412-7500-BN	-	414-7500-BN	-	-	3/4	3	1	3/4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
Chart applies to all list numbers above	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 412BN, 414BN

2 or 4 Flute, Stub Length, Ball End

SPEED FEED P1269-1271	CARBIDE	TiAlN	TiCN	BR	STUB		30°
--------------------------	---------	-------	------	----	------	--	-----

Milling Diameter Tolerance	
1 ≤ D ≤ 12	+0 / -0.05mm

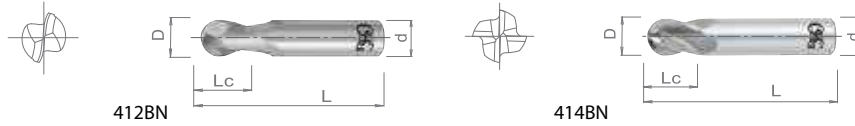

Units: mm

EDP Number				Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 412BN (2 Flute)		List 414BN (4 Flute)					
Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
412-0394-BN	412-0394-BN11	414-0394-BN	414-0394-BN11	1.0	39	2	3
412-0591-BN	-	414-0591-BN	-	1.5	39	3	3
412-0787-BN	-	414-0787-BN	-	2.0	39	4	3
412-0984-BN	-	414-0984-BN	-	2.5	39	5	3
412-1181-BN	-	414-1181-BN	-	3.0	39	6	3
412-1378-BN	-	414-1378-BN	-	3.5	51	7	4
412-1575-BN	412-1575-BN11	414-1575-BN	-	4.0	51	8	4
412-1772-BN	-	414-1772-BN	-	4.5	51	9	5
412-1968-BN	-	414-1968-BN	-	5.0	51	10	5
412-2362-BN	-	414-2362-BN	-	6.0	51	12	6
412-2756-BN	-	414-2756-BN	-	7.0	51	12	8
412-3150-BN	-	414-3150-BN	-	8.0	51	12	8
412-3543-BN	-	414-3543-BN	-	9.0	51	14	10
412-3937-BN	-	414-3937-BN	-	10.0	51	14	10
412-4331-BN	-	414-4331-BN	-	11.0	64	16	11
412-4724-BN	-	414-4724-BN	-	12.0	64	16	12

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.



Work Material																			
Chart applies to all list numbers above	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 462BN, 464BN

2 or 4 Flute, Long Length, Ball End

SPEED FEED P1269-1271	CARBIDE	TiAlN	TiCN	BR	LONG		
							30°

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch



EDP Number					Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 462BN (2 Flute)		List 464BN (4 Flute)						
Bright	TiCN	Bright	TiCN	TiAlN	D	L	Lc	d
462-1250-BN	-	464-1250-BN	-	464-1250-BN11	1/8	2-1/4	3/4	1/8
462-1875-BN	-	464-1875-BN	-	464-1875-BN11	3/16	2-1/4	3/4	3/16
462-2500-BN	462-2500-BN08	464-2500-BN	-	464-2500-BN11	1/4	3	1-1/8	1/4
462-3125-BN	-	464-3125-BN	-	-	5/16	3	1-1/8	5/16
462-3750-BN	-	464-3750-BN	-	464-3750-BN11	3/8	3	1-1/8	3/8
462-4375-BN	-	464-4375-BN	-	-	7/16	4	2	7/16
462-5000-BN	-	464-5000-BN	464-5000-BN08	464-5000-BN11	1/2	4	2	1/2
462-6250-BN	-	464-6250-BN	-	-	5/8	5	2-1/4	5/8
462-7500-BN	-	464-7500-BN	-	-	3/4	5	2-1/4	3/4
462-1000-BN	-	464-1000-BN	-	-	1	5	2-1/4	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.





List 462BN, 464BN

2 or 4 Flute, Long Length, Ball End

SPEED FEED P1269-1271	CARBIDE	BR	LONG		
					30°

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.05mm



Units: mm

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 462BN (2 Flute)	List 464BN (4 Flute)				
Bright	Bright	D	L	Lc	d
462-1181-BN	464-1181-BN	3	57	19	3
462-1575-BN	464-1575-BN	4	57	19	4
462-1968-BN	464-1968-BN	5	64	25	5
462-2362-BN	464-2362-BN	6	76	28	6
462-3150-BN	464-3150-BN	8	76	29	8
462-3937-BN	464-3937-BN	10	76	32	10
462-4724-BN	464-4724-BN	12	102	51	12
462-5512-BN	464-5512-BN	14	127	57	14
462-6299-BN	464-6299-BN	16	127	57	16
462-7087-BN	464-7087-BN	18	127	57	18
462-7874-BN	464-7874-BN	20	127	57	20
462-9843-BN	464-9843-BN	25	127	57	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140 4340		300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
462BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
464BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 482BN, 484BN

2 or 4 Flute, Extra Long Length, Ball End

SPEED FEED P1269-1271	CARBIDE	TiAlN	BR	EXTRA LONG		30°
--------------------------	---------	-------	----	------------	--	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"

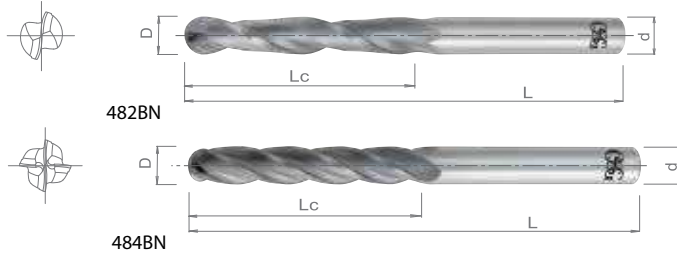

Units: Inch

EDP Number				Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 482BN (2 Flute)		List 484BN (4 Flute)					
Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
482-1250-BN	482-1250-BN11	484-1250-BN	484-1250-BN11	1/8	3	1	1/8
482-1875-BN	482-1875-BN11	484-1875-BN	484-1875-BN11	3/16	3	1-1/8	3/16
482-2500-BN	482-2500-BN11	484-2500-BN	484-2500-BN11	1/4	4	1-1/2	1/4
482-3125-BN	-	484-3125-BN	484-3125-BN11	5/16	4	1-5/8	5/16
482-3750-BN	-	484-3750-BN	484-3750-BN11	3/8	4	1-3/4	3/8
482-4375-BN	-	484-4375-BN	-	7/16	6	3	7/16
482-5000-BN	-	484-5000-BN	484-5000-BN11	1/2	6	3	1/2
482-6250-BN	-	484-6250-BN	-	5/8	6	3	5/8
482-7500-BN	-	484-7500-BN	-	3/4	6	3	3/4
482-1000-BN	-	484-1000-BN	-	1	6	3	1

Packed: 1 pc.
 EDP's listed above are stocked standard, other coatings available upon request.
 Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
482BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
484BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 482BN, 484BN

2 or 4 Flute, Extra Long Length, Ball End

SPEED FEED P1269-1271	CARBIDE	BR	EXTRA LONG		30°
--------------------------	---------	----	------------	---	-----

Milling Diameter Tolerance	
3 ≤ D ≤ 25	+0 / -0.05mm

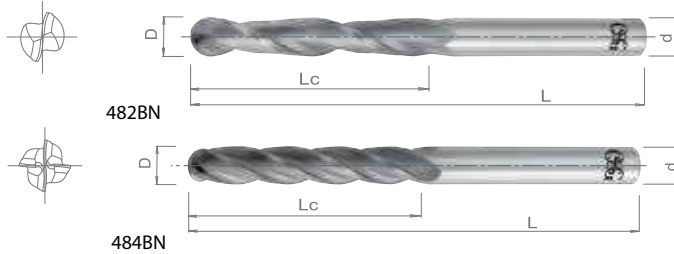

Units: mm

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 482BN (2 Flute)	List 484BN (4 Flute)				
Bright	Bright	D	L	Lc	d
482-1181-BN	484-1181-BN	3	76	25	3
482-1575-BN	484-1575-BN	4	76	28	4
482-1968-BN	484-1968-BN	5	76	32	5
482-2362-BN	484-2362-BN	6	102	38	6
482-3150-BN	484-3150-BN	8	102	42	8
482-3937-BN	484-3937-BN	10	102	45	10
482-4724-BN	484-4724-BN	12	153	76	12
482-5512-BN	484-5512-BN	14	153	76	14
482-6299-BN	484-6299-BN	16	153	76	16
482-7087-BN	484-7087-BN	18	153	76	18
482-7874-BN	484-7874-BN	20	153	76	20
482-9843-BN	484-9843-BN	25	153	76	25

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
482BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
484BN	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 497

2 Flute, Long Shank, Ball End

SPEED FEED P1268	CARBIDE	BR		15°
----------------------------	----------------	-----------	--	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.002"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
497-1250	1/8	2-1/2	3/16	1/8
497-1875	3/16	4	9/32	3/16
497-2500	1/4	4	3/8	1/4
497-3125	5/16	4	15/32	5/16
497-3750	3/8	4	9/16	3/8
497-4375	7/16	5	21/32	7/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
497-5000	1/2	5	3/4	1/2
497-5625	9/16	5	27/32	9/16
497-6250	5/8	6	15/16	5/8
497-7500	3/4	6	1-1/8	3/4
497-1000	1	6	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 497

2 Flute, Long Shank, Ball End

SPEED FEED P1268	CARBIDE	BR		15°
----------------------------	----------------	-----------	--	------------

Milling Diameter Tolerance	
3 ≤ D ≤ 20	+0 / -0.05mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
497-1181	3	63	4.5	3
497-1575	4	63	6.0	4
497-1968	5	63	7.5	5
497-2362	6	100	9.0	6
497-3150	8	100	12.0	8
497-3937	10	100	15.0	10

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
497-4331	11	127	16.5	11
497-4724	12	127	18.0	12
497-5512	14	127	21.0	14
497-6299	16	152	24.0	16
497-7087	18	152	27.0	18
497-7874	20	152	30.0	20

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P						M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
497	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best







List 442, 444

2 or 4 Flute

SPEED FEED P1261-1267	CARBIDE	TiAlN	BR		30°
--------------------------	---------	-------	----	--	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/2	+0 / -0.002"



Units: Inch

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 442 (2 Flute)	List 444 (4 Flute)					
Bright	Bright	TiAlN	D	L	Lc	d
442-1250	444-1250	444-125011	1/8	3-1/16	3/8	3/8
442-1562	444-1562	-	5/32	3-1/8	7/16	3/8
442-1875	444-1875	444-187511	3/16	3-1/4	1/2	3/8
442-2188	444-2188	-	7/32	3-3/8	9/16	3/8
442-2500	444-2500	444-250011	1/4	3-3/8	5/8	3/8
442-2812	444-2812	-	9/32	3-3/8	11/16	3/8
442-3125	444-3125	-	5/16	3-1/2	3/4	3/8
442-3438	444-3438	-	11/32	3-1/2	3/4	3/8
442-3750	444-3750	444-375011	3/8	3-1/2	3/4	3/8
442-4375	444-4375	-	7/16	4	7/8	1/2
442-5000	444-5000	-	1/2	4	1	1/2

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
	1010	1035	1065	4140	4340														
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 422, 423, 424

2, 3, or 4 Flute, Stub Length

SPEED FEED P1261- 1267	CARBIDE	TiAlN	BR	STUB		30°
---------------------------------	---------	-------	----	------	--	-----

Milling Diameter Tolerance	
1/32 ≤ D ≤ 1/2	+0 / -0.002"

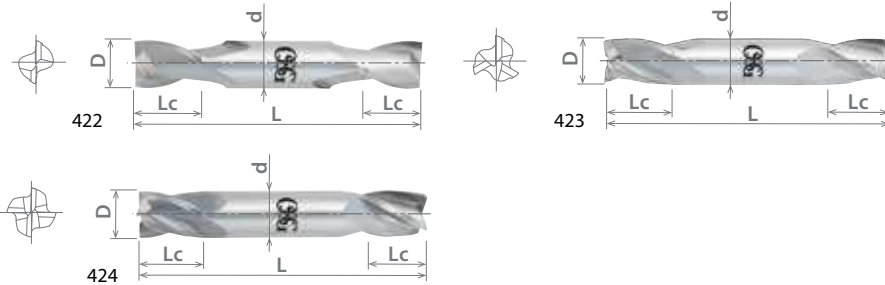

Units: Inch

EDP Number						Mill Dia.	Overall Length	Length of Cut	Shank Dia.
List 422 (2 Flute)		List 423 (3 Flute)		List 424 (4 Flute)					
Bright	TiAlN	Bright	TiAlN	Bright	TiAlN	D	L	Lc	d
422-0312	-	423-0312	-	424-0312	424-031211	1/32	1-1/2	5/64	1/8
422-0469	-	423-0469	-	424-0469	424-046911	3/64	1-1/2	3/32	1/8
422-0625	422-062511	423-0625	-	424-0625	424-062511	1/16	1-1/2	1/8	1/8
422-0781	-	-	-	424-0781	424-078111	5/64	1-1/2	5/32	1/8
422-0938	422-093811	423-0938	-	424-0938	424-093811	3/32	1-1/2	3/16	1/8
422-1094	-	-	-	424-1094	424-109411	7/64	1-1/2	7/32	1/8
422-1250	422-125011	423-1250	-	424-1250	424-125011	1/8	1-1/2	1/4	1/8
422-1406	-	-	-	424-1406	-	9/64	2	9/32	3/16
422-1562	-	423-1562	-	424-1562	424-156211	5/32	2	5/16	3/16
422-1875	422-187511	423-1875	-	424-1875	424-187511	3/16	2	3/8	3/16
422-2188	422-218811	423-2188	-	424-2188	-	7/32	2-1/2	1/2	1/4
422-2500	422-250011	423-2500	423-250011	424-2500	424-250011	1/4	2-1/2	1/2	1/4
422-3125	422-312511	423-3125	-	424-3125	424-312511	5/16	2-1/2	1/2	5/16
422-3750	422-375011	423-3750	423-375011	424-3750	424-375011	3/8	2-1/2	1/2	3/8
422-4375	-	423-4375	-	424-4375	-	7/16	2-3/4	9/16	7/16
422-5000	422-500011	423-5000	423-500011	424-5000	424-500011	1/2	3	5/8	1/2

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
Chart applies to all list numbers above	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best







List 442BN, 444BN

2 or 4 Flute, Ball End

SPEED FEED P1269-1271	CARBIDE	TiAlN	BR		30°
---------------------------------	----------------	--------------	-----------	--	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1/2	+0 / -0.002"



Units: Inch

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 442BN (2 Flute)	List 444BN (4 Flute)					
Bright	Bright	TiAlN	D	L	Lc	d
442-1250-BN	444-1250-BN	444-1250-BN11	1/8	3-1/16	3/8	3/8
442-1562-BN	444-1562-BN	-	5/32	3-1/8	7/16	3/8
442-1875-BN	444-1875-BN	-	3/16	3-1/4	1/2	3/8
442-2188-BN	444-2188-BN	-	7/32	3-3/8	9/16	3/8
442-2500-BN	444-2500-BN	-	1/4	3-3/8	5/8	3/8
442-2812-BN	444-2812-BN	-	9/32	3-3/8	11/16	3/8
442-3125-BN	444-3125-BN	-	5/16	3-1/2	3/4	3/8
442-3438-BN	444-3438-BN	-	11/32	3-1/2	3/4	3/8
442-3750-BN	444-3750-BN	-	3/8	3-1/2	3/4	3/8
442-4375-BN	444-4375-BN	-	7/16	4	7/8	1/2
442-5000-BN	444-5000-BN	-	1/2	4	1	1/2

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 422BN, 423BN, 424BN

2, 3, or 4 Flute, Stub Length, Ball End

SPEED FEED P1269-1271	CARBIDE	TIAlN	BR	STUB		30°
---------------------------------	----------------	--------------	-----------	-------------	--	------------

Milling Diameter Tolerance	
1/32 ≤ D ≤ 1/2	+0 / -0.002"

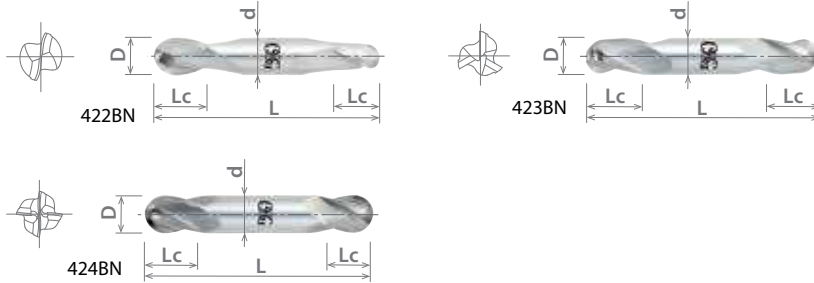

Units: Inch

EDP Number					Mill Dia.	Overall Length	Length of Cut	Shank Dia.
List 422BN (2 Flute)		List 423BN (3 Flute)	List 424BN (4 Flute)					
Bright	TiAlN	Bright	Bright	TiAlN	D	L	Lc	d
422-0312-BN	422-0312-BN11	423-0312-BN	424-0312-BN	424-0312-BN11	1/32	1-1/2	5/64	1/8
422-0469-BN	422-0469-BN11	423-0469-BN	424-0469-BN	424-0469-BN11	3/64	1-1/2	3/32	1/8
422-0625-BN	422-0625-BN11	423-0625-BN	424-0625-BN	424-0625-BN11	1/16	1-1/2	1/8	1/8
422-0781-BN	-	-	424-0781-BN	-	5/64	1-1/2	5/32	1/8
422-0938-BN	-	423-0938-BN	424-0938-BN	424-0938-BN11	3/32	1-1/2	3/16	1/8
422-1094-BN	-	-	424-1094-BN	-	7/64	1-1/2	7/32	1/8
422-1250-BN	422-1250-BN11	423-1250-BN	424-1250-BN	424-1250-BN11	1/8	1-1/2	1/4	1/8
422-1406-BN	-	-	424-1406-BN	-	9/64	2	9/32	3/16
422-1562-BN	-	423-1562-BN	424-1562-BN	-	5/32	2	5/16	3/16
422-1875-BN	-	423-1875-BN	424-1875-BN	424-1875-BN11	3/16	2	3/8	3/16
422-2188-BN	-	423-2188-BN	424-2188-BN	-	7/32	2-1/2	1/2	1/4
422-2500-BN	-	423-2500-BN	424-2500-BN	424-2500-BN11	1/4	2-1/2	1/2	1/4
422-3125-BN	-	423-3125-BN	424-3125-BN	-	5/16	2-1/2	1/2	5/16
422-3750-BN	-	423-3750-BN	424-3750-BN	424-3750-BN11	3/8	2-1/2	1/2	3/8
422-4375-BN	-	423-4375-BN	424-4375-BN	-	7/16	2-3/4	9/16	7/16
422-5000-BN	-	423-5000-BN	424-5000-BN	424-5000-BN11	1/2	3	5/8	1/2

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																			
Chart applies to all list numbers above	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 500, 502


2 or 3 Flute, Straight



Milling Diameter Tolerance	
$3/32 \leq D \leq 1/2$	$+0 / -0.003$ "



500



502

Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 500 (2 Flute)	List 502 (3 Flute)				
Bright	Bright	D	L	Lc	d
500-0938	502-0938	3/32	1-1/2	3/8	1/8
500-1250	502-1250	1/8	1-1/2	1/2	1/8
500-1875	502-1875	3/16	2	5/8	3/16
500-2500	502-2500	1/4	2-1/2	3/4	1/4
500-3125	502-3125	5/16	2-1/2	13/16	5/16
500-3750	502-3750	3/8	2-1/2	7/8	3/8
500-4375	502-4375	7/16	2-1/2	1	7/16
500-5000	502-5000	1/2	3	1	1/2

Packed: 1 pc.
Available Bright finish only.



List 640

CARBIDE	BR
---------	----

Fiberglass Routers, Diamond Cut

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1/2	+0 / -0.003"



Type 1 - No End Cut



Type 2 - Bur End



Type 3 - End Mill Cut




Type 4 - Drill Point

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Tool Type
Bright	D	L	Lc	d	
640-0621	1/16	1-1/2	3/16	1/8	1
640-0622	1/16	1-1/2	3/16	1/8	2
640-0623	1/16	1-1/2	3/16	1/8	3
640-0624	1/16	1-1/2	3/16	1/8	4
640-0931	3/32	1-1/2	5/16	1/8	1
640-0932	3/32	1-1/2	5/16	1/8	2
640-0933	3/32	1-1/2	5/16	1/8	3
640-0934	3/32	1-1/2	5/16	1/8	4
640-1251	1/8	1-1/2	7/16	1/8	1
640-1252	1/8	1-1/2	7/16	1/8	2
640-1253	1/8	1-1/2	7/16	1/8	3
640-1254	1/8	1-1/2	7/16	1/8	4
640-1871	3/16	2	5/8	3/16	1
640-1872	3/16	2	5/8	3/16	2
640-1873	3/16	2	5/8	3/16	3
640-1874	3/16	2	5/8	3/16	4
640-1881	3/16	2	5/8	1/4	1
640-1882	3/16	2	5/8	1/4	2
640-1883	3/16	2	5/8	1/4	3
640-1884	3/16	2	5/8	1/4	4
640-2501	1/4	2	3/4	1/4	1
640-2502	1/4	2	3/4	1/4	2
640-2503	1/4	2	3/4	1/4	3
640-2504	1/4	2	3/4	1/4	4
640-2511	1/4	2-1/2	3/4	1/4	1
640-2512	1/4	2-1/2	3/4	1/4	2
640-2513	1/4	2-1/2	3/4	1/4	3
640-2514	1/4	2-1/2	3/4	1/4	4
640-3121	5/16	2-1/2	1	5/16	1
640-3122	5/16	2-1/2	1	5/16	2
640-3123	5/16	2-1/2	1	5/16	3
640-3124	5/16	2-1/2	1	5/16	4
640-3751	3/8	2-1/2	1	3/8	1
640-3752	3/8	2-1/2	1	3/8	2
640-3753	3/8	2-1/2	1	3/8	3
640-3754	3/8	2-1/2	1	3/8	4
640-5001	1/2	3	1	1/2	1
640-5002	1/2	3	1	1/2	2
640-5003	1/2	3	1	1/2	3
640-5004	1/2	3	1	1/2	4

Packed: 1 pc.
Available Bright finish only.

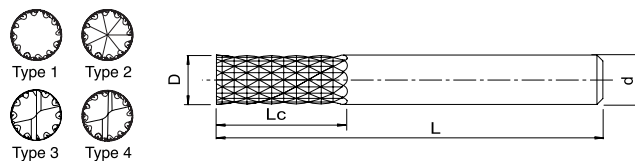



List 04V-SO

4 Flute, Variable Index, Stub Length, Corner Chamfer

NEW	SPEED FEED P1275-1276	CARBIDE	TiAIN	TYPE UNI		STUB		SHANK h6
------------	---------------------------------	----------------	--------------	-----------------	--	-------------	--	--------------------



Units: Inch

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
	D	C	L	Lc	d
04V0474X-SO	3/16	0.016x45°	2-1/8	3/8	1/4
04V0633X-SO	1/4	0.016x45°	2-1/8	3/8	1/4
04V0792X-SO	5/16	0.020x45°	2-1/4	1/2	5/16
04V0951X-SO	3/8	0.020x45°	2-1/2	9/16	3/8
04V1268X-SO	1/2	0.020x45°	2-7/8	5/8	1/2
04V1586X-SO	5/8	0.020x45°	3-1/4	7/8	5/8
04V1903X-SO	3/4	0.020x45°	3-1/2	1	3/4

Packed: 1 pc.
Available TiAIN coating only.



List 04V-SO

4 Flute, Variable Index, Stub Length, Corner Chamfer

NEW	SPEED FEED P1275-1276	CARBIDE	TiAIN	TYPE UNI		STUB		SHANK h6
------------	---------------------------------	----------------	--------------	-----------------	--	-------------	--	--------------------



Units: mm

EDP Number	Mill Diameter	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
	D	C	L	Lc	d
04V0500X-SO	5	0.4x45°	54	9	6
04V0600X-SO	6	0.4x45°	54	10	6
04V0800X-SO	8	0.5x45°	58	12	8
04V1000X-SO	10	0.5x45°	66	14	10
04V1200X-SO	12	0.5x45°	73	16	12
04V1600X-SO	16	0.5x45°	82	22	16
04V2000X-SO	20	0.5x45°	92	26	20

Packed: 1 pc.
Available TiAIN coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
04V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				


good best



List 03V-SO

NEW	SPEED FEED P1275-1276	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	---------------------------------	----------------	--------------	-----------------	---	------------	---	--------------------

4 Flute, Variable Index, Regular Length, Corner Radius/Corner Chamfer



Units: Inch

EDP Number	EDP Number w/ Weldon Flat	Mill Diameter	Corner Radius	Chamfer Width	Overall Length	Length of Cut	Shank Diameter
		D	R	C	L	Lc	d
03V0633X-SO	03V0635X-SO	1/4	-	0.016x45°	2-1/2	1/2	1/4
03V0634X-SO	03V0636X-SO	1/4	0.015	-	2-1/2	1/2	1/4
03V0951X-SO	03V0953X-SO	3/8	-	0.020x45°	2-1/2	7/8	3/8
03V0952X-SO	03V0954X-SO	3/8	0.015	-	2-1/2	7/8	3/8
03V1268X-SO	03V1270X-SO	1/2	-	0.020x45°	3	1	1/2
03V1269X-SO	03V1271X-SO	1/2	0.03	-	3	1	1/2
03V1586X-SO	03V1588X-SO	5/8	-	0.020x45°	3-1/2	1-1/4	5/8
03V1587X-SO	03V1589X-SO	5/8	0.03	-	3-1/2	1-1/4	5/8
03V1903X-SO	03V1905X-SO	3/4	-	0.020x45°	4	1-1/2	3/4
03V1904X-SO	03V1906X-SO	3/4	0.03	-	4	1-1/2	3/4
03V2502X-SO	03V2504X-SO	1	-	0.020x45°	4	1-1/2	1
03V2503X-SO	03V2505X-SO	1	0.03	-	4	1-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
03V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				

good best






List 03V-SO

NEW SPEED FEED P1275-1276 CARBIDE TiAlN TYPE UNI REG 40° SHANK h6

4 Flute, Variable Index, Regular Length, Reduced Neck, Corner Radius/Corner Chamfer



Units: mm

EDP Number	EDP Number w/ Weldon Flat	Mill Diameter	Corner Radius	Chamfer Width	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
		D	R	C	L	Lc	L1	d1	d
-	03V0500X-SO	5	-	0.2x45°	57	13	18	4.8	6
03V0545X-SO	-	5	-	0.4x45°	57	13	-	-	6
03V0505X-SO	-	5	0.5	-	57	13	25	4.8	6
03V0510X-SO	-	5	1.0	-	57	13	25	4.8	6
-	03V0600X-SO	6	-	0.2x45°	57	13	18	5.8	6
03V0645X-SO	-	6	-	0.4x45°	57	13	-	-	6
03V0605X-SO	-	6	0.5	-	57	13	25	5.8	6
03V0610X-SO	-	6	1.0	-	57	13	25	5.8	6
-	03V0800X-SO	8	-	0.25x45°	63	19	24	7.7	8
03V0845X-SO	-	8	-	0.5x45°	63	19	-	-	8
03V0805X-SO	-	8	0.5	-	63	19	31	7.8	8
03V0810X-SO	-	8	1.0	-	63	19	31	7.8	8
-	03V1000X-SO	10	-	0.25x45°	72	22	32	9.7	10
03V1045X-SO	-	10	-	0.5x45°	72	22	-	-	10
03V1005X-SO	-	10	0.5	-	72	22	34	9.8	10
03V1010X-SO	-	10	1.0	-	72	22	34	9.8	10
-	03V1200X-SO	12	-	0.3x45°	83	26	36	11.6	12
03V1245X-SO	-	12	-	0.75x45°	83	26	-	-	12
03V1205X-SO	-	12	0.5	-	83	26	38	11.8	12
03V1210X-SO	-	12	1.0	-	83	26	38	11.8	12
-	03V1600X-SO	16	-	0.4x45°	92	32	42	15.5	16
03V1645X-SO	-	16	-	0.75x45°	92	32	-	-	16
03V1610X-SO	-	16	1.0	-	92	32	44	15.8	16
03V1620X-SO	-	16	2.0	-	92	32	44	15.8	16
-	03V2000X-SO	20	-	0.4x45°	104	38	48	19.5	20
03V2045X-SO	-	20	-	0.75x45°	104	38	-	-	20
03V2010X-SO	-	20	1.0	-	104	38	50	19.8	20
03V2020X-SO	-	20	2.0	-	104	38	50	19.8	20

Packed: 1 pc.
Available TiAlN coating only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
03V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				


good best



List 05V-SO

5 Flute, Variable Index, Regular Length, Reduced Neck, Corner Radius

NEW	SPEED FEED P1277-1278	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	---------------------------------	----------------	--------------	-----------------	---	------------	---	--------------------



Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d1	d
05V0476X-SO	3/16	0.015	2-1/4	1/2	1	0.180	1/4
05V0477X-SO	3/16	0.030	2-1/4	1/2	1	0.180	1/4
05V0636X-SO	1/4	0.015	2-1/4	1/2	1	0.242	1/4
05V0634X-SO	1/4	0.030	2-1/4	1/2	1	0.242	1/4
05V0632X-SO	1/4	0.060	2-1/4	1/2	1	0.242	1/4
05V0795X-SO	5/16	0.015	2-1/2	3/4	1-1/4	0.305	5/16
05V0793X-SO	5/16	0.030	2-1/2	3/4	1-1/4	0.305	5/16
05V0791X-SO	5/16	0.060	2-1/2	3/4	1-1/4	0.305	5/16
05V0954X-SO	3/8	0.015	2-1/2	7/8	1-1/2	0.367	3/8
05V0952X-SO	3/8	0.030	2-7/8	7/8	1-1/2	0.367	3/8
05V0950X-SO	3/8	0.060	2-1/2	7/8	1-1/2	0.367	3/8
05V1271X-SO	1/2	0.015	3	1	1-1/2	0.484	1/2
05V1269X-SO	1/2	0.030	3-1/4	1	1-1/2	0.484	1/2
05V1267X-SO	1/2	0.060	3-1/4	1	1-1/2	0.484	1/2
05V1265X-SO	1/2	0.090	3-1/4	1	1-1/2	0.484	1/2
05V1263X-SO	1/2	0.120	3	1	1-1/2	0.484	1/2
05V1589X-SO	5/8	0.030	3-1/2	1-1/4	1-3/4	0.609	5/8
05V1587X-SO	5/8	0.060	3-1/2	1-1/4	1-3/4	0.609	5/8
05V1585X-SO	5/8	0.090	3-1/2	1-1/4	1-3/4	0.609	5/8
05V1906X-SO	3/4	0.030	4	1-1/2	2	0.734	3/4
05V1904X-SO	3/4	0.060	4	1-1/2	2	0.734	3/4
05V1902X-SO	3/4	0.090	4	1-1/2	2	0.734	3/4
05V1900X-SO	3/4	0.120	4	1-1/2	2	0.734	3/4

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB				Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH	6061 7075		Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
05V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				

good best






List 05V-SO

5 Flute, Variable Index, Regular Length, Reduced Neck, Corner Radius/Corner Chamfer

NEW	SPEED FEED P1277-1278	CARBIDE	TiAlN	TYPE UNI		REG	40°	SHANK h6
------------	---------------------------------	----------------	--------------	-----------------	--	------------	------------	--------------------



Units: mm

EDP Number	EDP Number w/ Weldon Flat	Mill Diameter	Corner Radius	Chamfer Width	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
		D	R	C	L	Lc	L1	d1	d
-	05V0500X-SO	5	-	0.2x45°	57	13	18	4.8	6
05V0545X-SO	-	5	-	0.4x45°	57	13	-	-	6
05V0505X-SO	-	5	0.5	-	57	13	25	4.8	6
05V0510X-SO	-	5	1.0	-	57	13	25	4.8	6
-	05V0600X-SO	6	-	0.2x45°	57	13	18	5.8	6
05V0645X-SO	-	6	-	0.4x45°	57	13	-	-	6
05V0605X-SO	-	6	0.5	-	57	13	25	5.8	6
05V0610X-SO	-	6	1.0	-	57	13	25	5.8	6
-	05V0800X-SO	8	-	0.25x45°	63	19	24	7.7	8
05V0845X-SO	-	8	-	0.5x45°	63	19	-	-	8
05V0805X-SO	-	8	0.5	-	63	19	31	7.8	8
05V0810X-SO	-	8	1.0	-	63	19	31	7.8	8
-	05V1000X-SO	10	-	0.25x45°	72	22	32	9.7	10
05V1045X-SO	-	10	-	0.5x45°	72	22	-	-	10
05V1005X-SO	-	10	0.5	-	72	22	34	9.8	10
05V1010X-SO	-	10	1.0	-	72	22	34	9.8	10
-	05V1200X-SO	12	-	0.3x45°	83	26	36	11.6	12
05V1245X-SO	-	12	-	0.75x45°	83	26	-	-	12
05V1205X-SO	-	12	0.5	-	83	26	38	11.8	12
05V1210X-SO	-	12	1.0	-	83	26	38	11.8	12
-	05V1600X-SO	16	-	0.4x45°	92	32	42	15.5	16
05V1645X-SO	-	16	-	0.75x45°	92	32	-	-	16
05V1610X-SO	-	16	1.0	-	92	32	44	15.8	16
05V1620X-SO	-	16	2.0	-	92	32	44	15.8	16
-	05V2000X-SO	20	-	0.4x45°	104	38	48	19.5	20
05V2045X-SO	-	20	-	0.75x45°	104	38	-	-	20
05V2010X-SO	-	20	1.0	-	104	38	50	19.8	20
05V2020X-SO	-	20	2.0	-	104	38	50	19.8	20

Packed: 1 pc.
Available TiAlN coating only.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC	
05V-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				

good best



List 03A-SO

2 Flute, Regular Length

NEW	SPEED FEED P1279	CARBIDE	TiAlN	TYPE N		REG		SHANK h6
------------	----------------------------	----------------	--------------	---------------	---	------------	---	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03A0100X-SO	1.0	39	3	3
03A0150X-SO	1.5	39	5	3
03A0200X-SO	2.0	39	7	3
03A0250X-SO	2.5	39	7	3
03A0300X-SO	3.0	39	8	3
03A0400X-SO	4.0	57	8	6
03A0500X-SO	5.0	57	10	6
03A0600X-SO	6.0	57	10	6
03A0800X-SO	8.0	63	16	8
03A1000X-SO	10.0	72	19	10
03A1200X-SO	12.0	83	22	12
03A1400X-SO	14.0	83	22	14
03A1600X-SO	16.0	92	26	16
03A1800X-SO	18.0	96	26	18
03A2000X-SO	20.0	104	32	20

 Packed: 1 pc.
 Available TiAlN coating only.


Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
03A-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

 good best



List 03K-SO

4 Flute, Regular Length

NEW	SPEED FEED P1280	CARBIDE	TiAlN	TYPE N		REG	30°	SHANK h6
------------	----------------------------	----------------	--------------	---------------	--	------------	------------	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03K0100X-SO	1.0	39	3	3
03K0150X-SO	1.5	39	5	3
03K0200X-SO	2.0	39	7	3
03K0250X-SO	2.5	39	7	3
03K0300X-SO	3.0	39	9	3
03K0400X-SO	4.0	57	11	6
03K0500X-SO	5.0	57	13	6
03K0600X-SO	6.0	57	13	6
03K0800X-SO	8.0	63	19	8
03K1000X-SO	10.0	72	22	10
03K1200X-SO	12.0	83	26	12
03K1400X-SO	14.0	83	26	14
03K1600X-SO	16.0	92	32	16
03K1800X-SO	18.0	96	32	18
03K2000X-SO	20.0	104	38	20

Packed: 1 pc.
Available TiAlN coating only.



Work Material																	
List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
03K-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best



List 03M-SO

2 Flute, Regular Length, Ball Nose

NEW	SPEED FEED P1279	CARBIDE	TiAlN	TYPE N		REG	 30°	SHANK h6
------------	----------------------------	----------------	--------------	---------------	---	------------	---	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03M0100X-SO	1.0	39	3	3
03M0150X-SO	1.5	39	5	3
03M0200X-SO	2.0	39	7	3
03M0250X-SO	2.5	39	7	3
03M0300X-SO	3.0	39	8	3
03M0400X-SO	4.0	57	8	6
03M0500X-SO	5.0	57	10	6
03M0600X-SO	6.0	57	10	6
03M0800X-SO	8.0	63	16	8
03M1000X-SO	10.0	72	19	10
03M1200X-SO	12.0	83	22	12
03M1400X-SO	14.0	83	22	14
03M1600X-SO	16.0	92	26	16
03M1800X-SO	18.0	96	26	18
03M2000X-SO	20.0	104	32	20

 Packed: 1 pc.
 Available TiAlN coating only.


Work Material


List No.	P					M			K	N		S	H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
03M-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

 good best

List 03P-SO

4 Flute, Regular Length, Ball Nose

NEW	SPEED FEED P1280	CARBIDE	TiAlN	TYPE N		REG	 30°	SHANK h6
------------	----------------------------	----------------	--------------	---------------	---	------------	--	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03P0100X-SO	1.0	39	3	3
03P0150X-SO	1.5	39	5	3
03P0200X-SO	2.0	39	7	3
03P0250X-SO	2.5	39	7	3
03P0300X-SO	3.0	39	9	3
03P0400X-SO	4.0	57	11	6
03P0500X-SO	5.0	57	13	6
03P0600X-SO	6.0	57	13	6
03P0800X-SO	8.0	63	19	8
03P1000X-SO	10.0	72	22	10
03P1200X-SO	12.0	83	26	12
03P1400X-SO	14.0	83	26	14
03P1600X-SO	16.0	92	32	16
03P1800X-SO	18.0	96	32	18
03P2000X-SO	20.0	104	38	20

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
03P-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 03E-SO

4 Flute, Regular Length, Fine Pitch, Rougher

NEW	SPEED FEED P1281	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	----------------------------	----------------	--------------	-----------------	--	------------	--	--------------------



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03E0635X-SO	1/4	2-1/2	3/4	1/4
03E0794X-SO	5/16	2-1/2	3/4	5/16
03E0953X-SO	3/8	2-1/2	7/8	3/8
03E1270X-SO	1/2	3	1	1/2
03E1588X-SO	5/8	3-1/2	1-1/4	5/8
03E1905X-SO	3/4	4	1-1/2	3/4
03E2540X-SO	1	4	2-1/2	1


Packed: 1 pc.
Available TiAlN coating only.



List 03E-SO

4 Flute, Regular Length, Fine Pitch, Rougher

NEW	SPEED FEED P1281	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	----------------------------	----------------	--------------	-----------------	--	------------	--	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03E0600X-SO	6	57	13	6
03E0800X-SO	8	63	16	8
03E1000X-SO	10	72	22	10
03E1200X-SO	12	83	26	12
03E1600X-SO	16	92	32	16
03E2000X-SO	20	104	38	20

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
03E-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>				

good best



List 03C-SO

3 Flute, Regular Length, Coarse Pitch, Rougher

NEW	SPEED FEED P1282	CARBIDE	BR	TYPE W		REG	30°	SHANK h6
------------	----------------------------	----------------	-----------	---------------	---	------------	------------	--------------------



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03C0635-SO	1/4	2-1/2	3/4	1/4
03C0794-SO	5/16	2-1/2	3/4	5/16
03C0953-SO	3/8	2-1/2	7/8	3/8
03C1270-SO	1/2	3	1	1/2
03C1588-SO	5/8	3-1/2	1-1/4	5/8
03C1905-SO	3/4	4	1-1/2	3/4
03C2540-SO	1	4	2-1/2	1

Packed: 1 pc.
Available Bright finish only.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S	H				
	Carbon Steels			Alloy Steels		Stainless Steels ≤200HB				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
03C-SO	1010 1018	1035 1045	1065	4140 4340						<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						


good best



List 03F-SO

4 Flute, Regular Length, Fine Pitch, Flat Crest, Rougher

NEW	SPEED FEED P1283	CARBIDE	TiAlN	TYPE UNI		REG	30°	SHANK h6
------------	----------------------------	----------------	--------------	-----------------	---	------------	------------	--------------------



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03F0635X-SO	1/4	2-1/2	3/4	1/4
03F0794X-SO	5/16	2-1/2	3/4	5/16
03F0953X-SO	3/8	2-1/2	7/8	3/8
03F1270X-SO	1/2	3	1	1/2
03F1588X-SO	5/8	3-1/2	1-1/4	5/8
03F1905X-SO	3/4	4	1-1/2	3/4
03F2540X-SO	1	4	2-1/2	1

 Packed: 1 pc.
 Available TiAlN coating only.


Work Material


List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
03F-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				

 good best


List 03F-SO

4 Flute, Regular Length, Fine Pitch, Flat Crest, Rougher

NEW	SPEED FEED P1283	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	----------------------------	----------------	--------------	-----------------	---	------------	---	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03F0600X-SO	6	57	13	6
03F0800X-SO	8	63	16	8
03F1000X-SO	10	72	22	10
03F1200X-SO	12	83	26	12
03F1600X-SO	16	92	32	16
03F2000X-SO	20	104	38	20

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
03F-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				


good best



List 03D-SO

3 Flute, Regular Length, Coarse Pitch, Flat Crest, Rougher

NEW	SPEED FEED P1284	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	----------------------------	----------------	--------------	-----------------	--	------------	--	--------------------



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03D0635X-SO	1/4	2-1/2	3/4	1/4
03D0794X-SO	5/16	2-1/2	3/4	5/16
03D0953X-SO	3/8	2-1/2	7/8	3/8
03D1270X-SO	1/2	3	1	1/2
03D1588X-SO	5/8	3-1/2	1-1/4	5/8
03D1905X-SO	3/4	4	1-1/2	3/4
03D2540X-SO	1	4	2-1/2	1

Packed: 1 pc.
Available TiAlN coating only.



List 03D-SO (SET)

INCH SET, 3 Flute, Regular Length, Coarse Pitch, Flat Crest, Rougher

NEW	SPEED FEED P1284	CARBIDE	TiAlN	TYPE UNI		REG		SHANK h6
------------	----------------------------	----------------	--------------	-----------------	--	------------	--	--------------------



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
03D0001X-SO	1/4	2-1/2	3/4	1/4
	5/16	2-1/2	3/4	5/16
	3/8	2-1/2	7/8	3/8
	1/2	3	1	1/2
	5/8	3-1/2	1-1/4	5/8

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
03D-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>					

good best






List 673

TIN-CPM-M-EDL, 2 Flute, Regular Length

SPEED FEED P1297-1298	VC10	TiN	REG	30°
--------------------------	------	-----	-----	-----

Milling Diameter Tolerance	
1/32 ≤ D ≤ 11/64	+0 / -0.0011"
D = 3/16	-0.0004" / -0.0015"



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6737005	1/32	1-7/8	3/32	3/16
6737105	3/64	1-7/8	9/64	3/16
6737205	1/16	1-7/8	3/16	3/16
6737305	5/64	1-7/8	15/64	3/16
6737405	3/32	1-7/8	9/32	3/16
6737505	7/64	1-7/8	21/64	3/16

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6737605	1/8	1-7/8	3/8	3/16
6737705	9/64	1-7/8	13/32	3/16
6737805	5/32	1-7/8	7/16	3/16
6737905	11/64	1-7/8	1/2	3/16
6738005	3/16	1-7/8	1/2	3/16

Packed: 1 pc.
Available TiN coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
673	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






EXOMINI VC-10

Powdered Metal High Speed Steel

List 676

TIN-CPM-M-EMS, 4 Flute, Stub Length, Non-Center Cutting (Smaller than 1/8)



SPEED FEED P1299-1300	VC10	TiN			STUB	
--------------------------	------	-----	--	--	------	--

Milling Diameter Tolerance	
1/16 ≤ D ≤ 5/32	+0.0011" / -0
D = 3/16	-0.0004" / -0.0015"

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6767205	1/16	1-3/4	3/32	3/16
6767405	3/32	1-3/4	9/64	3/16
6767605	1/8	1-3/4	3/16	3/16


EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6767805	5/32	1-3/4	15/64	3/16
6768005	3/16	1-3/4	9/32	3/16



Packed: 1 pc.
Available TiN coating only.

List 677

TIN-CPM-M-EML, 4 Flute, Regular Length, Non-Center Cutting (Smaller than 1/8)



SPEED FEED P1299-1300	VC10	TiN			STUB	
--------------------------	------	-----	--	--	------	--

Milling Diameter Tolerance	
1/16 ≤ D ≤ 5/32	+0.0011" / -0
D = 3/16	-0.0004" / -0.0015"

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6777205	1/16	1-7/8	3/16	3/16
6777405	3/32	1-7/8	9/32	3/16
6777605	1/8	1-7/8	3/8	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6777805	5/32	1-7/8	7/16	3/16
6778005	3/16	1-7/8	1/2	3/16



Packed: 1 pc.
Available TiN coating only.

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 620

CPM-EDS, 2 Flute, Regular Length

SPEED FEED P1297-1298	VC10	BR	REG	30°
--------------------------	------	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1, 1/2	+0.0011" / -0



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6200100	1/8	2-5/16	3/8	3/8
6200200	3/16	2-5/16	7/16	3/8
6200300	1/4	2-5/16	1/2	3/8
6200400	5/16	2-5/16	9/16	3/8
6200500	3/8	2-5/16	9/16	3/8
6201100	1/2	3	1	1/2

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6202100	5/8	3-7/16	1-5/16	5/8
6203100	3/4	3-9/16	1-5/16	3/4
6205100	1	4-1/8	1-5/8	1
6206100	1-1/4	4-1/8	1-5/8	1-1/4
6206200	1-1/2	4-1/8	1-5/8	1-1/4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 621

CPM-EBD, 2 Flute, Regular Length, Ball End

SPEED FEED P1301	VC10	BR	REG	30°
---------------------	------	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1, 1/2	+0.0011" / -0



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6210100	1/8	2-5/16	3/8	3/8
6210200	3/16	2-3/8	1/2	3/8
6210300	1/4	2-7/16	5/8	3/8
6210400	5/16	2-1/2	3/4	3/8
6210500	3/8	2-1/2	3/4	3/8
6211100	1/2	3	1	1/2

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
6212100	5/8	3-1/2	1-3/8	5/8
6213100	3/4	3-7/8	1-5/8	3/4
6215100	1	4-3/4	2-1/4	1
6216100	1-1/4	5	2-1/2	1-1/4
6216200	1-1/2	5	2-1/2	1-1/4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																	
Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010	1035	1065	4140	4340												
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





EXOMILL VC-10


Powdered Metal High Speed Steel

List 641

CPM-CC-EMS, Multiple Flute, Regular Length

SPEED FEED P1299-1300	VC10	BR	REG	30°
--------------------------	------	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6410100	1/8	2-5/16	3/8	3/8	4
6410200	3/16	2-3/8	1/2	3/8	4
6410300	1/4	2-7/16	5/8	3/8	4
6410400	5/16	2-1/2	3/4	3/8	4
6410500	3/8	2-1/2	3/4	3/8	4
6410600	7/16	2-11/16	1	3/8	4
6411100	1/2	3-1/4	1-1/4	1/2	4
6411500	1/2	3-1/4	1-1/4	1/2	6
6412100	5/8	3-3/4	1-5/8	5/8	4
6412500	5/8	3-3/4	1-5/8	5/8	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6413100	3/4	3-7/8	1-5/8	3/4	4
6413500	3/4	3-7/8	1-5/8	3/4	6
6414100	7/8	4-1/8	1-7/8	7/8	4
6414500	7/8	4-1/8	1-7/8	7/8	6
6415100	1	4-1/2	2	1	4
6415500	1	4-1/2	2	1	6
6416100	1-1/4	4-1/2	2	1-1/4	6
6416200	1-1/2	4-1/2	2	1-1/4	6
6416400	2	5-3/4	2	2	6



Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
641	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 644

CPM-EBM, Multiple Flute, Regular Length, Ball End

SPEED FEED P1301	VC10	BR	REG	30°
---------------------	------	----	-----	-----

Milling Diameter Tolerance	
3/8 ≤ D ≤ 1,1/2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6440500	3/8	2-1/2	3/4	3/8	4
6441100	1/2	3-1/4	1-1/4	1/2	4
6441500	1/2	3-1/4	1-1/4	1/2	6
6442100	5/8	3-3/4	1-5/8	5/8	4
6442500	5/8	3-3/4	1-5/8	5/8	6
6443100	3/4	3-7/8	1-5/8	3/4	4
6443500	3/4	3-7/8	1-5/8	3/4	6
6444100	7/8	4-1/8	1-7/8	7/8	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6444500	7/8	4-1/8	1-7/8	7/8	6
6445100	1	4-1/2	2	1	4
6445500	1	4-1/2	2	1	6
6446100	1-1/4	4-1/2	2	1-1/4	4
6446500	1-1/4	4-1/2	2	1-1/4	6
6446200	1-1/2	4-1/2	2	1-1/4	4
6446600	1-1/2	4-1/2	2	1-1/4	6

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
644	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





EXOMILL VC-10


Powdered Metal High Speed Steel

List 646

CPM-CC-EML, Multiple Flute, Long Length

SPEED FEED P1299-1300	VC10	BR		LONG	30°
--------------------------	------	----	--	------	-----

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6460300	1/4	3-1/16	1-1/4	3/8	4
6460500	3/8	3-1/4	1-1/2	3/8	4
6461100	1/2	4	2	1/2	4
6461500	1/2	4	2	1/2	6
6462100	5/8	4-5/8	2-1/2	5/8	4
6462500	5/8	4-5/8	2-1/2	5/8	6
6463100	3/4	5-1/4	3	3/4	4
6463500	3/4	5-1/4	3	3/4	6

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6464100	7/8	5-3/4	3-1/2	7/8	4
6464500	7/8	5-3/4	3-1/2	7/8	6
6465100	1	6-1/2	4	1	4
6465500	1	6-1/2	4	1	6
6466100	1-1/4	6-1/2	4	1-1/4	6
6466200	1-1/2	6-1/2	4	1-1/4	6
6466400	2	7-3/4	4	2	6



Packed: 1 pc.


EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

List 660

CPM-EHS, Multiple Flute, Regular Length, High Helix

SPEED FEED P1294	VC10	BR		REG	50°
---------------------	------	----	--	-----	-----

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6600300	1/4	2-7/16	5/8	3/8	3
6600400	5/16	2-1/2	3/4	3/8	3
6600500	3/8	2-1/2	3/4	3/8	3
6600600	7/16	2-11/16	1	3/8	3
6601100	1/2	3-1/4	1-1/4	1/2	3

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	No. of Flutes
	D	L	Lc	d	
6602100	5/8	3-3/4	1-5/8	5/8	3
6603100	3/4	3-7/8	1-5/8	3/4	3
6604100	7/8	4-1/8	1-7/8	7/8	4
6605100	1	4-1/2	2	1	4



Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

Work Material

List No.	P															M			K	N		S		H			
	Carbon Steels					Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels											
	Low	Med.	High	4140 4340	300			400	17-4 PH	6061 7075		Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC									
	1010 1018	1035 1045	1065																								
646	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>								
660	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>								

good best




List 573

EDS, 2 Flute, Regular Length

SPEED FEED P1295	HSSE	TiCN	BR		REG	
----------------------------	-------------	-------------	-----------	--	------------	--

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0.0011" / -0



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiCN	D	L	Lc	d
5730100	5730108	1/8	2-5/16	3/8	3/8
5730200	-	5/32	2-5/16	7/16	3/8
5730300	5730308	3/16	2-5/16	7/16	3/8
5730400	5730408	7/32	2-5/16	1/2	3/8
5730500	5730508	1/4	2-5/16	1/2	3/8
5730600	5730608	9/32	2-5/16	9/16	3/8
5730700	5730708	5/16	2-5/16	9/16	3/8
5730800	5730808	11/32	2-5/16	9/16	3/8
5730900	5730908	3/8	2-5/16	9/16	3/8
5731000	5731008	13/32	2-1/2	13/16	3/8
5731100	5731108	7/16	2-1/2	13/16	3/8
5731200	5731208	15/32	2-1/2	13/16	3/8
5731400	5731408	1/2	3	1	1/2
5731500	5731508	17/32	3-1/8	1-1/8	1/2
5731600	5731608	9/16	3-1/8	1-1/8	1/2

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiCN	D	L	Lc	d
5731700	5731708	19/32	3-1/8	1-1/8	1/2
5732300	5732308	5/8	3-7/16	1-5/16	5/8
5731900	5731908	21/32	3-5/16	1-5/16	1/2
5732000	5732008	11/16	3-5/16	1-5/16	1/2
5732400	5732408	11/16	3-7/16	1-5/16	5/8
5732100	5732108	23/32	3-5/16	1-5/16	1/2
5733200	5733208	3/4	3-9/16	1-5/16	3/4
5732600	5732608	25/32	3-5/8	1-1/2	5/8
5732700	5732708	13/16	3-5/8	1-1/2	5/8
5732800	5732808	27/32	3-5/8	1-1/2	5/8
5733700	5733708	7/8	3-3/4	1-1/2	7/8
5733400	5733408	29/32	3-3/4	1-1/2	3/4
5733000	5733008	15/16	3-5/8	1-1/2	5/8
5733500	5733508	31/32	3-3/4	1-1/2	3/4
5733900	5733908	1	4-1/8	1-5/8	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



HY-PRO® V ADVANTAGE

HY-PRO® V End Mills are made from premium HSSE-V3 (3% Vanadium) high speed steel for increased toughness and tool life. Available with TiCN coating for increased wear resistance when machining abrasive materials. With no cobalt content, HY-PRO® V End Mills are environmentally safe when reground.

Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
573	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 574

CC-EMS, Multiple Flute, Regular Length

SPEED FEED P1295-1296	HSSE	TiCN	BR	REG	30°
--------------------------	------	------	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0.0011" / -0



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	TiCN	D	L	Lc	d	
5740100	5740108	1/8	2-5/16	3/8	3/8	4
5740200	5740208	5/32	2-3/8	7/16	3/8	4
5740300	5740308	3/16	2-3/8	1/2	3/8	4
5740400	5740408	7/32	2-7/16	9/16	3/8	4
5740500	5740508	1/4	2-7/16	5/8	3/8	4
5740600	5740608	9/32	2-1/2	11/16	3/8	4
5740700	5740708	5/16	2-1/2	3/4	3/8	4
5740800	5740808	11/32	2-1/2	3/4	3/8	4
5740900	5740908	3/8	2-1/2	3/4	3/8	4
5741000	5741008	13/32	2-11/16	1	3/8	4
5741100	5741108	7/16	2-11/16	1	3/8	4
5741200	5741208	15/32	3-1/4	1-1/4	1/2	4
5741400	5741408	1/2	3-1/4	1-1/4	1/2	4
5741500	5741508	17/32	3-3/8	1-3/8	1/2	4
5741600	5741608	9/16	3-3/8	1-3/8	1/2	4
5741700	5741708	19/32	3-3/8	1-3/8	1/2	4
5742300	5742308	5/8	3-3/4	1-5/8	5/8	4
5741900	5741908	21/32	3-5/8	1-5/8	1/2	4
5742000	5742008	11/16	3-5/8	1-5/8	1/2	4
5742400	5742408	11/16	3-3/4	1-5/8	5/8	4
5742100	5742108	23/32	3-5/8	1-5/8	1/2	4
5743200	5743208	3/4	3-7/8	1-5/8	3/4	4
5742600	5742608	25/32	4	1-7/8	5/8	6
5742700	5742708	13/16	4	1-7/8	5/8	6
5742800	5742808	27/32	4	1-7/8	5/8	6
5743700	5743708	7/8	4-1/8	1-7/8	7/8	6
5743400	5743408	29/32	4-1/8	1-7/8	3/4	4
5743000	5743008	15/16	4	1-7/8	5/8	4
5743500	5743508	31/32	4-1/8	1-7/8	3/4	4
5743900	5743908	1	4-1/2	2	1	4

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



HY-PRO® V ADVANTAGE

HY-PRO® V End Mills are made from premium HSSE-V3 (3% Vanadium) high speed steel for increased toughness and tool life. Available with TiCN coating for increased wear resistance when machining abrasive materials. With no cobalt content, HY-PRO® V End Mills are environmentally safe when reground.

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
574	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 690

EXO-TIN-EX-REE, Multiple Flute, Regular Length, Non-Center Cutting

SPEED FEED P1293	HSSE	TiN	ROUGH	REG	30°
---------------------	------	-----	-------	-----	-----



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
6909105	1/4	2-1/2	3/4	3/8	4
6909405	5/16	2-1/2	3/4	3/8	4
6909705	3/8	2-5/8	7/8	3/8	4
6909805	3/8	3-1/4	1-1/2	3/8	4
6900105	1/2	3-1/4	1-1/4	1/2	4
6900305	1/2	4	2	1/2	4
6900505	5/8	3-3/4	1-5/8	5/8	4
6900705	5/8	4-5/8	2-1/2	5/8	4
6900905	3/4	3-7/8	1-5/8	5/8	4
6901305	3/4	3-7/8	1-5/8	3/4	4
6901505	3/4	5-1/4	3	3/4	4
6901705	7/8	4-1/8	1-7/8	3/4	5
6910105	1	4-1/4	2	3/4	5
6910505	1	4-1/2	2	1	5
6910905	1	6-1/2	4	1	5
6912105	1-1/4	4-1/2	2	1-1/4	6
6912305	1-1/4	5-1/2	3	1-1/4	6
6912505	1-1/4	6-1/2	4	1-1/4	6
6913305	1-1/2	4-1/2	2	1-1/4	6
6913505	1-1/2	5-1/2	3	1-1/4	6
6920105	2	4-1/2	2	1-1/4	8
6920505	2	6-1/2	4	1-1/4	8
6920705	2	6-3/4	3	2	8
6920905	2	7-3/4	4	2	8

Packed: 1pc.
Available TiN coating only.



Work Material																	
List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
690	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





Roughing Cut

Cobalt High Speed Steel

List 450

EX-REEF, Multiple Flute, Fine Pitch, Non-Center Cutting

SPEED FEED P1285	HSS-Co	TiCN	BR	FINE ROUGH		STUB	REG	LONG	
---------------------	--------	------	----	------------	--	------	-----	------	--



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	TiCN	D	L	Lc	d	
4509000	-	3/16	2-3/8	1/2	3/8	4
4509100	-	1/4	2-1/2	3/4	3/8	3
4509200	-	1/4	3-1/16	1-1/4	3/8	3
4509400	-	5/16	2-1/2	3/4	3/8	3
4509500	-	5/16	3-1/8	1-3/8	3/8	3
4509700	-	3/8	2-5/8	7/8	3/8	4
4509800	-	3/8	3-1/4	1-1/2	3/8	4
4509900	-	7/16	2-11/16	1	3/8	4
4500000	-	7/16	3-1/4	1-1/4	1/2	4
4500100	-	1/2	3-1/4	1-1/4	1/2	4
4500300	-	1/2	4	2	1/2	4
4500500	4500508	5/8	3-3/4	1-5/8	5/8	4
4500700	4500708	5/8	4-5/8	2-1/2	5/8	4
4500800	4500808	5/8	5-1/8	3	5/8	4
4500900	-	3/4	3-7/8	1-5/8	5/8	4
4501000	4501008	3/4	4-1/2	2-1/4	3/4	4
4501300	-	3/4	3-7/8	1-5/8	3/4	4
4501100	-	3/4	5-1/4	3	5/8	4
4501500	-	3/4	5-1/4	3	3/4	4
4501600	-	3/4	6-1/4	4	3/4	4
4501700	-	7/8	4-1/8	1-7/8	3/4	5
4502100	-	7/8	4-1/8	1-7/8	7/8	5
4501900	-	7/8	5-3/4	3-1/2	3/4	5
4502300	-	7/8	5-3/4	3-1/2	7/8	5
4510100	-	1	4-1/4	2	3/4	5
4510500	4510508	1	4-1/2	2	1	5
4510700	-	1	5-1/2	3	1	5
4510900	4510908	1	6-1/2	4	1	5
4511500	-	1-1/8	4-1/2	2	1	5
4512100	-	1-1/4	4-1/2	2	1-1/4	6
4512300	-	1-1/4	5-1/2	3	1-1/4	6
4511900	-	1-1/4	6-1/4	4	3/4	6
4512500	-	1-1/4	6-1/2	4	1-1/4	6
4513300	4513308	1-1/2	4-1/2	2	1-1/4	6
4513500	-	1-1/2	5-1/2	3	1-1/4	6
4513100	-	1-1/2	6-1/4	4	3/4	6
4513700	-	1-1/2	6-1/2	4	1-1/4	6
4513900	-	1-1/2	7-1/2	5	1-1/4	6
4514500	-	1-3/4	6-1/2	4	1-1/4	6
4520100	-	2	4-1/2	2	1-1/4	8
4520700	-	2	6-3/4	3	2	8
4520500	-	2	6-1/2	4	1-1/4	8
4520900	-	2	7-3/4	4	2	8
4521100	-	2	9-3/4	6	2	8
4521300	-	2	11-3/4	8	2	8

Packed: 1pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.

Note: 2" diameter shanks have combination drive.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High														
	1010	1035	1065	4140		300	400	17-4 PH		6061	Casting	Inconel	6Al4V	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1018	1045		4340						7075			(30 HRC)				
450	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 455

Multiple Flute, Roughing Cut, Fine Pitch

SPEED FEED P1286	HSS-Co	TiAlN	TiCN	FINE ROUGH			STUB	REG	LONG	30°
----------------------------	---------------	--------------	-------------	-------------------	--	--	-------------	------------	-------------	------------



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
TiCN	TiAlN	D	L	Lc	d	
4558908	-	1/4	2-1/16	1/4	3/8	4
4559008	4559011	1/4	2-1/16	1/4	3/8	4
4569108	-	1/4	2-7/16	5/8	3/8	3
4559108	4559111	1/4	2-1/2	3/4	3/8	4
4559208	4559211	1/4	3-1/16	1-1/4	3/8	4
4559308	4559311	5/16	2-1/16	5/16	3/8	3
4559408	4559411	5/16	2-1/2	3/4	3/8	4
4559508	4559511	5/16	3-1/8	1-3/8	3/8	4
4559608	4559611	3/8	2-5/32	3/8	3/8	3
4559708	4559711	3/8	2-5/8	7/8	3/8	4
4559808	4559811	3/8	3-1/4	1-1/2	3/8	4
4569808	-	7/16	2-1/2	1/2	1/2	4
4559908	-	7/16	3-1/4	1-1/4	1/2	4
4550008	4550011	1/2	2-1/2	1/2	1/2	3
4560008	-	1/2	2-1/2	1/2	1/2	4
4550108	4550111	1/2	3-1/4	1-1/4	1/2	4
4550308	4550311	1/2	4	2	1/2	4
4560308	-	1/2	5	3	1/2	4
4550408	4550411	5/8	2-3/4	5/8	5/8	3
4560408	-	5/8	2-3/4	5/8	5/8	4
4550508	4550511	5/8	3-3/4	1-5/8	5/8	4
4550608	-	5/8	4-1/8	2	5/8	4
4550708	4550711	5/8	4-5/8	2-1/2	5/8	4
4551208	4551211	3/4	2-7/8	3/4	3/4	3
4561208	-	3/4	2-7/8	3/4	3/4	4
4551308	4551311	3/4	3-7/8	1-5/8	3/4	4
4551408	-	3/4	4-1/2	2-1/2	3/4	4
4551508	4551511	3/4	5-1/4	3	3/4	4
4551608	-	3/4	6-1/4	4	3/4	4
4552108	-	3/4	4-1/2	2-1/4	3/4	4
4561008	-	1	3-1/2	1	1	5
4560108	4560111	1	4-1/2	2	3/4	5
4560508	4560511	1	4-1/2	2	1	5
4560708	4560711	1	5-1/2	3	1	5
4560908	4560911	1	6-1/2	4	1	5
4562108	4562111	1-1/4	4-1/2	2	1-1/4	6
4562308	4562311	1-1/4	5-1/2	3	1-1/4	6
4562508	4562511	1-1/4	6-1/2	4	1-1/4	6
4563308	4563311	1-1/2	4-1/2	2	1-1/4	6
4563508	4563511	1-1/2	5-1/2	3	1-1/4	6
4563708	4563711	1-1/2	6-1/2	4	1-1/4	6
4570708	-	2	6-3/4	3	2	8
4570908	-	2	7-3/4	4	2	8
4571108	4571111	2	9-3/4	6	2	8
4571308	-	2	11-3/4	8	2	8

Packed: 1pc.
Available in TiCN or TiAlN only.
Center cutting available in stub length only.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
455	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






Roughing Cut

Cobalt High Speed Steel

List 420

Stub Length, Center Cutting, Fine Pitch

SPEED FEED P1285	HSS-Co	BR	FINE ROUGH		STUB	25°
---------------------	--------	----	------------	--	------	-----



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
4205000	1/4	2-1/16	1/4	3/8	3
4205100	3/8	2-5/32	3/8	3/8	3
4205200	1/2	2-1/2	1/2	1/2	3
4205300	5/8	2-3/4	5/8	5/8	3
4205400	3/4	2-7/8	3/4	3/4	3

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
4205500	7/8	3-1/8	7/8	3/4	3
4205600	1	3-1/2	1	3/4	3
4205700	1	3-3/4	1	1	3
4205800	1-1/4	3-3/4	1-1/4	1-1/4	4
4205900	1-1/2	3-3/4	1-1/4	1-1/4	6


Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 460

Center Cutting, Fine Pitch

SPEED FEED P1291-1292	HSS-Co	BR	FINE ROUGH		REG	LONG	30°
--------------------------	--------	----	------------	--	-----	------	-----



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
4600100	1/2	3-1/4	1-1/4	1/2	4
4600300	1/2	4	2	1/2	4
4600500	5/8	3-3/4	1-5/8	5/8	4
4600600	7/16	2-1/2	1/2	1/2	4
4600700	5/8	4-5/8	2-1/2	5/8	4
4601200	3/4	2-7/8	3/4	3/4	4
4601300	3/4	3-7/8	1-5/8	3/4	4
4601500	3/4	5-1/4	3	3/4	4
4610400	1	3-1/2	1	1	5

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
4610500	1	4-1/2	2	1	5
4610700	1	5-1/4	3	1	5
4610900	1	6-1/2	4	1	5
4612100	1-1/4	4-1/2	2	1-1/4	6
4612300	1-1/4	5-1/2	3	1-1/4	6
4612500	1-1/4	6-1/2	4	1-1/4	6
4613300	1-1/2	4-1/2	2	1-1/4	6
4613700	1-1/2	6-1/2	4	1-1/4	6

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P						M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron		Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
	1010	1035	1065	4140	4340													
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best






List 410

3 Flute, Stub Length, Regular Pitch

SPEED FEED P1289	HSS-Co	BR	ROUGH		STUB	
---------------------	--------	----	-------	--	------	--



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
4105200	1/2	2-1/2	1/2	1/2
4105300	5/8	2-3/4	5/8	5/8

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
4105400	3/4	2-7/8	3/4	3/4
4105700	1	3-1/2	1	1


Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 430E

3 Flute, for Aluminum

SPEED FEED P1288	HSS-Co	BR	ROUGH		REG	MED	LONG	
---------------------	--------	----	-------	--	-----	-----	------	--



EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
4309700	3/8	2-5/8	7/8	3/8
4300100	1/2	3-1/4	1-1/4	1/2
4300300	1/2	4	2	1/2
4300500	5/8	3-3/4	1-5/8	5/8
4300700	5/8	4-5/8	2-1/2	5/8
4301200	3/4	3	3/4	3/4
4301300	3/4	3-7/8	1-5/8	3/4
4301500	3/4	5-1/4	3	3/4
4301700	7/8	4-1/8	1-7/8	3/4
4302100	7/8	4-1/8	1-7/8	7/8
4310300	1	3-1/2	1	1

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
4310100	1	4-1/4	2	3/4
4310500	1	4-1/2	2	1
4310700	1	5-1/2	3	1
4310900	1	6-1/2	4	1
4312100	1-1/4	4-1/2	2	1-1/4
4312300	1-1/4	5-1/2	3	1-1/4
4312500	1-1/4	6-1/2	4	1-1/4
4313300	1-1/2	4-1/2	2	1-1/4
4313500	1-1/2	5-1/2	3	1-1/4
4313700	1-1/2	6-1/2	4	1-1/4

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material																										
List No.	P					M			K	N		S	H													
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium													
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC									
410	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
430E										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>															

good best






Roughing Cut

Cobalt High Speed Steel

List 490

SPEED FEED P1289	HSS-Co	BR	ROUGH		STUB	REG	MED	LONG	
---------------------	--------	----	-------	--	------	-----	-----	------	--

Multiple Flute, Regular Pitch, General Purpose, Non-Center Cutting



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes	EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D						D				
4909000	1/4	2-7/16	5/8	5/8	4	4910700	1	5-1/2	3	1	5
4909100	1/4	2-1/2	3/4	3/8	4	4910900	1	6-1/2	4	1	5
4909200	1/4	3-1/16	1-1/4	3/8	4	4911500	1-1/8	4-1/2	2	1	5
4909400	5/16	2-1/2	3/4	3/8	4	4912100	1-1/4	4-1/2	2	1-1/4	6
4909500	5/16	3-1/8	1-3/8	3/8	4	4912300	1-1/4	5-1/2	3	1-1/4	6
4909700	3/8	2-5/8	7/8	3/8	4	4911900	1-1/4	6-1/4	4	3/4	6
4909800	3/8	3-1/4	1-1/2	3/8	4	4912500	1-1/4	6-1/2	4	1-1/4	6
4909900	7/16	2-11/16	1	3/8	4	4913300	1-1/2	4-1/2	2	1-1/4	6
4900100	1/2	3-1/4	1-1/4	1/2	4	4913500	1-1/2	5-1/2	3	1-1/4	6
4900300	1/2	4	2	1/2	4	4913100	1-1/2	6-1/4	4	3/4	6
4900500	5/8	3-3/4	1-5/8	5/8	4	4913700	1-1/2	6-1/2	4	1-1/4	6
4900600	5/8	4-1/8	2	5/8	4	4913900	1-1/2	7-1/2	5	1-1/4	6
4900700	5/8	4-5/8	2-1/2	5/8	4	4914500	1-3/4	6-1/2	4	1-1/4	6
4900800	5/8	5-1/8	3	5/8	4	4926100	2	4-1/2	2	1-1/4	6
4900900	3/4	3-7/8	1-5/8	5/8	4	4920100	2	4-1/2	2	1-1/4	8
4901300	3/4	3-7/8	1-5/8	3/4	4	4926700	2	6-3/4	3	2	6
4901100	3/4	5-1/4	3	5/8	4	4920700	2	6-3/4	3	2	8
4901400	3/4	4-1/2	2-1/4	3/4	4	4926500	2	6-1/2	4	1-1/4	6
4901500	3/4	5-1/4	3	3/4	4	4920500	2	6-1/2	4	1-1/4	8
4901700	7/8	4-1/8	1-7/8	3/4	5	4926900	2	7-3/4	4	2	6
4902100	7/8	4-1/8	1-7/8	7/8	5	4920900	2	7-3/4	4	2	8
4901900	7/8	5-3/4	3-1/2	3/4	5	4927100	2	9-3/4	6	2	6
4902300	7/8	5-3/4	3-1/2	7/8	5	4921100	2	9-3/4	6	2	8
4910100	1	4-1/4	2	3/4	5	4927300	2	11-3/4	8	2	6
4910500	1	4-1/2	2	1	5	4921300	2	11-3/4	8	2	8

Packed: 1pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.

2" diameter shanks have combination drive.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
490	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 440

EX-REB, Multiple Flute, Regular Pitch, Ball End, General Purpose

SPEED FEED P1287	HSS-Co	BR	ROUGH	REG	LONG	30°
---------------------	--------	----	-------	-----	------	-----



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
4400100	1/2	3-1/4	1-1/4	1/2	4
4400300	1/2	4	2	1/2	4
4400500	5/8	3-3/4	1-5/8	5/8	4
4400700	5/8	4-5/8	2-1/2	5/8	4
4401300	3/4	3-7/8	1-5/8	3/4	4
4401500	3/4	5-1/4	3	3/4	4
4410500	1	4-1/2	2	1	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
4410900	1	6-1/2	4	1	4
4412100	1-1/4	4-1/2	2	1-1/4	6
4412500	1-1/4	6-1/2	4	1-1/4	6
4413300	1-1/2	4-1/2	2	1-1/4	6
4413700	1-1/2	6-1/2	4	1-1/4	6
4420900	2	7-3/4	4	2	8
4421100	2	9-3/4	6	2	8

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
2" diameter shanks have combination drive.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
440	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 470

CC-RFE, Multiple Flute, Rough & Finish

SPEED FEED P1290	HSS-Co	BR	ROUGH FINISH		STUB	REG	LONG	
----------------------------	---------------	-----------	---------------------	---	-------------	------------	-------------	---



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	D	L	Lc	d	
4709100	1/4	2-1/2	3/4	3/8	4
4709400	5/16	2-1/2	3/4	3/8	4
4709500	3/8	2-5/32	3/8	3/8	4
4709600	3/8	2-1/2	3/4	3/8	4
4709700	3/8	2-5/8	7/8	3/8	4
4700200	3/8	3-1/4	1-1/2	3/8	4
4700000	1/2	2-1/2	1/2	1/2	4
4700100	1/2	3-1/4	1-1/4	1/2	4
4700300	1/2	4	2	1/2	4
4700500	5/8	3-3/4	1-5/8	5/8	4
4700600	5/8	4-1/8	2	5/8	4
4700700	5/8	4-5/8	2-1/2	5/8	4
4700900	3/4	3-7/8	1-5/8	5/8	4
4701300	3/4	3-7/8	1-5/8	3/4	4
4701400	3/4	4-1/2	2-1/4	3/4	4
4701500	3/4	5-1/4	3	3/4	4
4701700	7/8	4-1/8	1-7/8	3/4	4
4701900	7/8	5-3/4	3-1/2	3/4	5
4702100	7/8	4-1/8	1-7/8	7/8	4
4710000	1	3-1/2	1	1	5
4710100	1	4-1/4	2	3/4	4
4716100	1	4-1/4	2	3/4	6
4710500	1	4-1/2	2	1	4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	D	L	Lc	d	
4710600	1	4-1/2	2	1	5
4716500	1	4-1/2	2	1	6
4710900	1	6-1/2	4	1	4
4716900	1	6-1/2	4	1	6
4711500	1-1/8	4-1/2	2	1	5
4712100	1-1/4	4-1/2	2	1-1/4	6
4712300	1-1/4	5-1/2	3	1-1/4	6
4712500	1-1/4	6-1/2	4	1-1/4	6
4713300	1-1/2	4-1/2	2	1-1/4	6
4713500	1-1/2	5-1/2	3	1-1/4	6
4713700	1-1/2	6-1/2	4	1-1/4	6
4713900	1-1/2	7-1/2	5	1-1/4	6
4720100	2	4-1/2	2	1-1/4	8
4726700	2	6-3/4	3	2	6
4726500	2	6-1/2	4	1-1/4	6
4720500	2	6-1/2	4	1-1/4	8
4726900	2	7-3/4	4	2	6
4720900	2	7-3/4	4	2	8
4727100	2	9-3/4	6	2	6
4721100	2	9-3/4	6	2	8
4727300	2	11-3/4	8	2	6
4721300	2	11-3/4	8	2	8

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
2" diameter shanks have combination drive.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
470	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 520

2 Flute, Regular Length

SPEED FEED P1297-1298	HSS-Co	TiN	BR	REG	30°
--------------------------	--------	-----	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 2	+0.003" / -0



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiN	D	L	Lc	d
5200100	5200105	1/8	2-5/16	3/8	3/8
5209100	-	5/32	2-5/16	7/16	3/8
5200200	5200205	3/16	2-5/16	7/16	3/8
5209200	-	7/32	2-5/16	1/2	3/8
5200300	5200305	1/4	2-5/16	1/2	3/8
5209300	-	9/32	2-5/16	9/16	3/8
5200400	5200405	5/16	2-5/16	9/16	3/8
5209400	-	11/32	2-5/16	9/16	3/8
5200500	5200505	3/8	2-5/16	9/16	3/8
5209500	-	13/32	2-1/2	13/16	3/8
5200600	5200605	7/16	2-1/2	13/16	3/8
5209700	-	15/32	2-1/2	13/16	3/8
5200700	-	1/2	2-1/2	13/16	3/8
5201100	5201105	1/2	3	1	1/2
5201600	-	7/32	3-1/8	1-1/8	1/2
5201200	-	9/16	3-1/8	1-1/8	1/2
5201700	-	19/32	3-1/8	1-1/8	1/2
5201300	5201305	5/8	3-1/8	1-1/8	1/2
5202100	5202105	5/8	3-7/16	1-5/16	5/8
5201800	-	21/32	3-5/16	1-5/16	1/2
5201400	-	11/16	3-5/16	1-5/16	1/2
5202200	-	11/16	3-7/16	1-5/16	5/8
5201900	-	23/32	3-5/16	1-5/16	1/2
5201500	5201505	3/4	3-5/16	1-5/16	1/2
5202300	-	3/4	3-7/16	1-5/16	5/8

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiN	D	L	Lc	d
5203100	5203105	3/4	3-9/16	1-5/16	3/4
5202800	-	25/32	3-5/8	1-1/2	5/8
5202400	-	13/16	3-5/8	1-1/2	5/8
5202900	-	27/32	3-5/8	1-1/2	5/8
5202500	-	7/8	3-5/8	1-1/2	5/8
5203200	5203205	7/8	3-3/4	1-1/2	3/4
5204100	5204105	7/8	3-3/4	1-1/2	7/8
5203400	-	29/32	3-3/4	1-1/2	3/4
5202600	-	15/16	3-5/8	1-1/2	5/8
5203500	-	31/32	3-3/4	1-1/2	3/4
5202700	-	1	3-5/8	1-1/2	5/8
5203300	5203305	1	3-3/4	1-1/2	3/4
5204200	-	1	3-3/4	1-1/2	7/8
5205100	5205105	1	4-1/8	1-5/8	1
5204300	-	1-1/8	3-7/8	1-5/8	7/8
5205200	-	1-1/8	4-1/8	1-5/8	1
5204400	-	1-1/4	3-7/8	1-5/8	7/8
5205300	-	1-1/4	4-1/8	1-5/8	1
5206100	-	1-1/4	4-1/8	1-5/8	1-1/4
5205400	-	1-3/8	4-1/8	1-5/8	1
5205500	-	1-1/2	4-1/8	1-5/8	1
5206200	-	1-1/2	4-1/8	1-5/8	1-1/4
5206300	-	1-3/4	4-1/8	1-5/8	1-1/4
5206400	-	2	4-1/8	1-5/8	1-1/4
5207400	-	2	5-3/4	2	2

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
2" diameter shanks have combination drive.



List No.	Work Material																		
	P					M			K	N		S	H						
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
520	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 580

EDS, 2 Flute, Regular Length

SPEED FEED P1302	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
3 ≤ D ≤ 50	+0.028mm / -0



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5800100	3.0	58.7	9.52	9.52
5808100	3.5	58.7	11.11	9.52
5800200	4.0	58.7	11.11	9.52
5808200	4.5	58.7	11.11	9.52
5800300	5.0	58.7	12.70	9.52
5808300	5.5	58.7	12.70	9.52
5800400	6.0	58.7	12.70	9.52
5808400	6.5	58.7	12.70	9.52
5800500	7.0	58.7	14.28	9.52
5808500	7.5	58.7	14.28	9.52
5800600	8.0	58.7	14.28	9.52
5808600	8.5	58.7	14.28	9.52
5800700	9.0	58.7	14.28	9.52
5808700	9.5	58.7	14.28	9.52
5800800	10.0	63.5	20.63	9.52
5808800	10.5	63.5	20.63	9.52
5800900	11.0	63.5	20.63	9.52
5808900	11.5	63.5	20.63	9.52
5801100	12.0	76.2	25.40	12.70
5809100	12.5	79.3	28.57	12.70
5801200	13.0	79.3	28.57	12.70

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5809200	13.5	79.3	28.57	12.70
5801300	14.0	79.3	28.57	12.70
5809300	14.5	79.3	28.57	12.70
5801400	15.0	79.3	28.57	12.70
5802100	16.0	87.3	33.33	15.87
5802200	17.0	87.3	33.33	15.87
5802300	18.0	87.3	33.33	15.87
5803100	19.0	90.4	33.33	19.05
5803200	20.0	95.2	38.10	19.05
5803300	21.0	95.2	38.10	19.05
5804100	22.0	95.2	38.10	22.22
5804200	23.0	95.2	38.10	22.22
5805100	24.0	104.7	41.27	25.40
5805200	25.0	104.7	41.27	25.40
5805300	28.0	104.7	41.27	25.40
5806100	32.0	104.7	41.27	31.75
5806200	36.0	104.7	41.27	31.75
5806300	40.0	104.7	41.27	31.75
5806400	45.0	104.7	41.27	31.75
5806500	50.0	104.7	41.27	31.75

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
580	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 525

EDL, 2 Flute, Long Length

SPEED FEED P1297-1298	HSS-Co	BR		LONG	30°
---------------------------------	---------------	-----------	--	-------------	------------

Milling Diameter Tolerance	
3/8 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5250500	3/8	3-1/4	1-1/2	3/8
5251100	1/2	4	2	1/2
5252100	5/8	4-1/8	2	5/8
5253100	3/4	4-1/2	2-1/4	3/4
5254100	7/8	4-3/4	2-1/2	7/8
5255100	1	5-1/2	3	1
5255200	1-1/8	5-1/2	3	1

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5255300	1-1/4	5-1/2	3	1
5256100	1-1/4	5-1/2	3	1-1/4
5256200	1-1/2	5-1/2	3	1-1/4
5256300	1-3/4	5-1/2	3	1-1/4
5256400	2	5-1/2	3	1-1/4
5257400	2	6-3/4	3	2

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
Note: 2" diameter shanks have combination drive.




List 527

LS-EDS, 2 Flute, Regular Length, Reduced Neck

SPEED FEED P1297-1298	HSS-Co	BR		REG	30°
---------------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1, 1/4	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
Bright	D	L	Lc	L1	d
5270100	1/8	2-3/8	3/8	13/16	3/8
5270200	3/16	2-11/16	1/2	1-1/8	3/8
5270300	1/4	3-1/16	5/8	1-1/2	3/8
5270400	5/16	3-5/16	3/4	1-3/4	3/8
5270500	3/8	3-5/16	3/4	1-3/4	3/8
5271100	1/2	4	1	2-1/4	1/2

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
Bright	D	L	Lc	L1	d
5272100	5/8	4-5/8	1-3/8	2-3/4	5/8
5273100	3/4	5-3/8	1-5/8	3-3/8	3/4
5274100	7/8	6	2	4	7/8
5275100	1	7-1/4	2-1/2	5	1
5276100	1-1/4	7-1/4	3	5	1-1/4

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 530

AL-EDS, 2 Flute, Regular Length, for Aluminum, High Helix

SPEED FEED P1297-1298	HSS-Co	BR		REG	40°
---------------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5300300	1/4	2-7/16	5/8	3/8
5300400	5/16	2-1/2	3/4	3/8
5300500	3/8	2-1/2	3/4	3/8
5300600	7/16	2-11/16	1	3/8
5301100	1/2	3-1/4	1-1/4	1/2
5302100	5/8	3-3/4	1-5/8	5/8
5303100	3/4	3-7/8	1-5/8	3/4
5303200	7/8	4-1/8	1-7/8	3/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5303300	1	4-1/8	1-7/8	3/4
5304100	7/8	4-1/8	1-7/8	7/8
5305100	1	4-1/2	2	1
5306100	1-1/4	4-1/2	2	1-1/4
5306200	1-1/2	4-1/2	2	1-1/4
5306300	1-3/4	4-1/2	2	1-1/4
5306400	2	4-1/2	2	1-1/4




Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

List 535

AL-EDL, 2 Flute, Long Length, for Aluminum, High Helix

SPEED FEED P1297-1298	HSS-Co	BR		LONG	40°
---------------------------------	---------------	-----------	--	-------------	------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5350300	1/4	3-1/16	1-1/4	3/8
5350400	5/16	3-1/8	1-3/8	3/8
5350500	3/8	3-1/4	1-1/2	3/8
5351000	7/16	3-3/4	1-3/4	1/2
5351100	1/2	4	2	1/2
5352100	5/8	4-5/8	2-1/2	5/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5353100	3/4	5-1/4	3	3/4
5355100	1	6-1/2	4	1
5356100	1-1/4	6-1/2	4	1-1/4
5356200	1-1/2	6-1/2	4	1-1/4
5356400	2	6-1/2	4	1-1/4



Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
	1010	1035	1065	4140	4340												
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best




List 521

EBD, 2 Flute, Regular Length, Ball End

SPEED FEED P1301	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	---	------------	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1, 1/2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5210100	1/8	2-5/16	3/8	3/8
5210200	3/16	2-3/8	1/2	3/8
5210300	1/4	2-7/16	5/8	3/8
5210400	5/16	2-1/2	3/4	3/8
5210500	3/8	2-1/2	3/4	3/8
5210600	3/8	3-1/4	1-1/2	3/8
5219600	7/16	3	1	1/2
5211100	1/2	3	1	1/2
5217100	1/2	4	2	1/2
5211200	9/16	3-1/8	1-1/8	1/2
5211300	5/8	3-1/8	1-1/8	1/2

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5212100	5/8	3-1/2	1-3/8	5/8
5211500	3/4	3-5/16	1-5/16	1/2
5213100	3/4	3-7/8	1-5/8	3/4
5214300	3/4	5-1/4	3	3/4
5213200	7/8	4-1/8	1-7/8	3/4
5214100	7/8	4-1/4	2	7/8
5213300	1	4-1/2	2-1/4	3/4
5215100	1	4-3/4	2-1/4	1
5215200	1-1/8	4-3/4	2-1/4	1
5216100	1-1/4	5	2-1/2	1-1/4
5216200	1-1/2	5	2-1/2	1-1/4

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 526

LS-EBD, 2 Flute, Regular Length, Ball End, Reduced Neck

SPEED FEED P1301	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
Bright	D	L	Lc	L1	d
5260100	1/8	2-3/8	3/8	13/16	3/8
5260200	3/16	2-11/16	1/2	1-1/8	3/8
5260300	1/4	3-1/16	5/8	1-1/2	3/8
5260400	5/16	3-5/16	3/4	1-3/4	3/8
5260500	3/8	3-5/16	3/4	1-3/4	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Shank Diameter
Bright	D	L	Lc	L1	d
5269600	7/16	3-11/16	1	1-7/8	1/2
5261100	1/2	4	1	2-1/4	1/2
5262100	5/8	4-5/8	1-3/8	2-3/4	5/8
5263100	3/4	5-3/8	1-5/8	3-3/8	3/4
5265100	1	7-1/4	2-1/2	5	1

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010 1018	1035 1045	1065	4140 4340													
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 531

ETS, 3 Flute, Regular Length

SPEED FEED P1304	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
1/8 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5310100	1/8	2-5/16	3/8	3/8
5310200	3/16	2-3/8	1/2	3/8
5310300	1/4	2-7/16	5/8	3/8
5310400	5/16	2-1/2	3/4	3/8
5310500	3/8	2-1/2	3/4	3/8
5310600	7/16	2-11/16	1	3/8
5310700	1/2	2-11/16	1	3/8
5311100	1/2	3-1/4	1-1/4	1/2
5311200	9/16	3-3/8	1-3/8	1/2
5311300	5/8	3-3/8	1-3/8	1/2
5312100	5/8	3-3/4	1-5/8	5/8
5311500	3/4	3-5/8	1-5/8	1/2
5312300	3/4	3-3/4	1-5/8	5/8
5313100	3/4	3-7/8	1-5/8	3/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5312500	7/8	4	1-7/8	5/8
5313200	7/8	4-1/8	1-7/8	3/4
5314100	7/8	4-1/8	1-7/8	7/8
5312700	1	4	1-7/8	5/8
5313300	1	4-1/8	1-7/8	3/4
5314200	1	4-1/8	1-7/8	7/8
5315100	1	4-1/2	2	1
5315200	1-1/8	4-1/2	2	1
5315300	1-1/4	4-1/2	2	1
5316100	1-1/4	4-1/2	2	1-1/4
5315500	1-1/2	4-1/2	2	1
5316200	1-1/2	4-1/2	2	1-1/4
5316300	1-3/4	4-1/2	2	1-1/4
5316400	2	4-1/2	2	1-1/4

Packed: 1pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
531	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 581

CE-EMS, Multiple Flute, Regular Length, Non-Center Cutting

SPEED FEED P1303	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
3 ≤ D ≤ 45	+0.028mm / -0



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	D	L	Lc	d	
5810100	3.0	58.7	9.52	9.52	4
5818100	3.5	60.3	11.11	9.52	4
5810200	4.0	60.3	11.11	9.52	4
5818200	4.5	60.3	12.70	9.52	4
5810300	5.0	61.9	14.28	9.52	4
5818300	5.5	61.9	14.28	9.52	4
5810400	6.0	61.9	15.87	9.52	4
5818400	6.5	61.9	15.87	9.52	4
5810500	7.0	63.5	17.46	9.52	4
5818500	7.5	63.5	19.05	9.52	4
5810600	8.0	63.5	19.05	9.52	4
5818600	8.5	63.5	19.05	9.52	4
5810700	9.0	63.5	19.05	9.52	4
5818700	9.5	63.5	19.05	9.52	4
5810800	10.0	63.5	19.05	9.52	4
5818800	10.5	68.2	25.40	9.52	4
5810900	11.0	68.2	25.40	9.52	4
5818900	11.5	68.2	25.40	9.52	4
5811100	12.0	82.5	31.75	12.70	4
5819100	12.5	82.5	31.75	12.70	4
5811200	13.0	82.5	31.75	12.70	4
5819200	13.5	85.7	34.92	12.70	4
5811300	14.0	85.7	34.92	12.70	4
5819300	14.5	85.7	34.92	12.70	4
5811400	15.0	85.7	34.92	12.70	4
5812100	16.0	95.2	41.27	15.87	4
5812200	17.0	95.2	41.27	15.87	4
5812300	18.0	95.2	41.27	15.87	4
5813100	19.0	98.4	41.27	19.05	4
5813200	20.0	104.7	47.62	19.05	4
5813300	21.0	104.7	47.62	19.05	4
5814100	22.0	104.7	47.62	22.22	4
5814200	23.0	104.7	47.62	22.22	4
5815100	24.0	114.3	50.80	25.40	4
5815200	25.0	114.3	50.80	25.40	4
5815300	28.0	114.3	50.80	25.40	6
5816100	32.0	114.3	50.80	31.75	6
5816200	36.0	114.3	50.80	31.75	6
5816300	40.0	114.3	50.80	31.75	6
5816400	45.0	114.3	50.80	31.75	6

Packed: 1pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
581	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 536

ETL, 3 Flute, Long Length

SPEED FEED P1304	HSS-Co	BR		LONG	30°
----------------------------	---------------	-----------	--	-------------	------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
5360300	1/4	3-1/16	1-1/4	3/8
5360400	5/16	3-1/8	1-3/8	3/8
5360500	3/8	3-1/4	1-1/2	3/8
5361000	7/16	3-3/4	1-3/4	1/2
5361100	1/2	4	2	1/2
5362100	5/8	4-5/8	2-1/2	5/8
5363100	3/4	5-1/4	3	3/4

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
5364100	7/8	5-3/4	3-1/2	7/8
5365100	1	6-1/2	4	1
5366100	1-1/4	6-1/2	4	1-1/4
5366200	1-1/2	6-1/2	4	1-1/4
5366400	2	6-1/2	4	1-1/4



Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.

Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
536	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 541

Multiple Flute, Regular Length

SPEED FEED P1299-1300	HSS-Co	TiAlN	TiCN	TiN	BR	REG	30°
--------------------------	--------	-------	------	-----	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP				Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	TiN	TiCN	TiAlN	D	L	Lc	d	
5410100	5410105	5410108	-	1/8	2-5/16	3/8	3/8	4
5410200	5410205	5410208	-	3/16	2-3/8	1/2	3/8	4
5417000	-	-	-	1/4	2-1/16	1/4	3/8	4
5410300	5410305	5410308	-	1/4	2-7/16	5/8	3/8	4
5410400	5410405	5410408	-	5/16	2-1/2	3/4	3/8	4
5417100	-	5417108	-	3/8	2-1/8	3/8	3/8	4
5410500	5410505	5410508	-	3/8	2-1/2	3/4	3/8	4
5410900	-	-	-	7/16	3-1/4	1-1/4	1/2	4
5411000	-	5411008	-	1/2	2-1/2	1/2	1/2	4
5411100	5411105	-	-	1/2	3-1/4	1-1/4	1/2	4
5411500	-	-	-	1/2	3-1/4	1-1/4	1/2	6
5411700	-	-	-	9/16	3-3/8	1-3/8	1/2	4
5412000	-	5412008	-	5/8	2-3/4	5/8	5/8	4
5412100	5412105	5412108	5412111	5/8	3-3/4	1-5/8	5/8	4
5412500	-	5412508	-	5/8	3-3/4	1-5/8	5/8	6
5412200	-	-	-	11/16	3-3/4	1-5/8	5/8	4
5412600	-	-	-	11/16	3-3/4	1-5/8	5/8	6
5413000	-	-	-	3/4	3	3/4	3/4	4
5413100	5413105	5413108	-	3/4	3-7/8	1-5/8	3/4	4
5413500	-	-	-	3/4	3-7/8	1-5/8	3/4	6
5414100	5414105	5414108	-	7/8	4-1/8	1-7/8	7/8	4
5414500	-	-	-	7/8	4-1/8	1-7/8	7/8	6
5414900	-	-	-	1	4-1/8	1-7/8	3/4	4
5415000	-	-	-	1	4-1/8	1-7/8	3/4	6
5415100	5415105	5415108	5415111	1	4-1/2	2	1	4
5415500	-	-	5415511	1	4-1/2	2	1	6
5415200	-	-	-	1-1/8	4-1/2	2	1	4
5415600	-	-	-	1-1/8	4-1/2	2	1	6
5416100	-	5416108	-	1-1/4	4-1/2	2	1-1/4	4
5416500	-	-	-	1-1/4	4-1/2	2	1-1/4	6
5416200	-	5416208	-	1-1/2	4-1/2	2	1-1/4	4
5416600	-	-	-	1-1/2	4-1/2	2	1-1/4	6
5416400	-	-	-	2	4-1/2	2	1-1/4	6
5418400	-	-	-	2	5-3/4	2	2	6

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
541	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best






List 548

CC-EMN, 4 Flute, Medium Length

SPEED FEED P1299-1300	HSS-Co	TiCN	BR	MED	30°
--------------------------	--------	------	----	-----	-----

Milling Diameter Tolerance	
5/8 ≤ D ≤ 1,1/2	+0.0011" / -0



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	TiCN	D	L	Lc	d	
5483100	-	5/8	4-1/8	2	5/8	4
5484100	5484108	3/4	4-1/2	2-1/4	3/4	4
5485100	5485108	1	5-1/2	3	1	4
-	5485208	1	5-1/2	3	1	4
5486100	5486108	1-1/4	5-1/2	3	1-1/4	4
5486200	5486208	1-1/2	5-1/2	3	1-1/4	4

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



List 546

CC-EML, Multiple Flute, Long Length

SPEED FEED P1299-1300	HSS-Co	TiCN	BR	LONG	30°
--------------------------	--------	------	----	------	-----

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	TiCN	D	L	Lc	d	
5460300	5460308	1/4	3-1/16	1-1/4	3/8	4
5460400	5460408	5/16	3-1/8	1-3/8	3/8	4
5460500	5460508	3/8	3-1/4	1-1/2	3/8	4
5461100	5461108	1/2	4	2	1/2	4
5461500	-	1/2	4	2	1/2	6
5462100	5462108	5/8	4-5/8	2-1/2	5/8	4
5462500	-	5/8	4-5/8	2-1/2	5/8	6
5463100	5463108	3/4	5-1/4	3	3/4	4
5463500	-	3/4	5-1/4	3	3/4	6
5464100	5464108	7/8	5-3/4	3-1/2	7/8	4
5464500	-	7/8	5-3/4	3-1/2	7/8	6
5465100	5465108	1	6-1/2	4	1	4
5465500	-	1	6-1/2	4	1	6
5466100	-	1-1/4	6-1/2	4	1-1/4	4
5466500	-	1-1/4	6-1/2	4	1-1/4	6
5466600	-	1-1/2	6-1/2	4	1-1/4	6
5466400	-	2	6-1/2	4	1-1/4	6
5468400	-	2	7-3/4	4	2	6
5469400	-	2	9-3/4	6	2	6

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 558

CC-EXML, Multiple Flute, Extra Long Length

SPEED FEED P1299-1300	HSS-Co	TiCN	BR		EXTRA LONG	30°
--------------------------	--------	------	----	---	------------	-----

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	TiCN	D	L	Lc	d	
5580300	-	1/4	3-9/16	1-3/4	3/8	4
5580400	-	5/16	3-3/4	2	3/8	4
5580500	-	3/8	4-1/4	2-1/2	3/8	4
5581100	5581108	1/2	5	3	1/2	4
5581500	-	1/2	5	3	1/2	6
5582100	5582108	5/8	6-1/8	4	5/8	4
5582500	-	5/8	6-1/8	4	5/8	6
5583100	5583108	3/4	6-1/4	4	3/4	4
5583500	-	3/4	6-1/4	4	3/4	6
5584100	5584108	7/8	7-1/4	5	7/8	4
5584500	-	7/8	7-1/4	5	7/8	6
5585100	5585108	1	8-1/2	6	1	4
5585500	5585508	1	8-1/2	6	1	6
5586100	-	1-1/4	8-1/2	6	1-1/4	4
5586500	-	1-1/4	8-1/2	6	1-1/4	6
5586600	-	1-1/2	10-1/2	8	1-1/4	6
5588400	-	2	11-3/4	8	2	6

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC		
558	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 544

EBM, 4 Flute, Regular Length, Ball End

SPEED FEED P1301	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	--	------------	------------

Milling Diameter Tolerance	
3/8 ≤ D ≤ 1, 1/2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5440500	3/8	2-1/2	3/4	3/8
5449700	7/16	3-1/4	1-1/4	1/2
5441100	1/2	3-1/4	1-1/4	1/2
5442100	5/8	3-3/4	1-5/8	5/8
5442200	5/8	4-5/8	2-1/2	5/8
5443100	3/4	3-7/8	1-5/8	3/4
5444100	7/8	4-1/8	1-7/8	7/8
5445100	1	4-1/2	2	1
5446100	1-1/4	4-1/2	2	1-1/4
5446200	1-1/2	4-1/2	2	1-1/4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
544	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 540

Multiple Flute, Regular Length, Non-Center Cutting

SPEED FEED P1299-1300	HSS-Co	TiN	BR	REG	30°
--------------------------	--------	-----	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 2	+0.003" / -0



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.	No. of Flutes	Bright		TiN	
						D	L	Lc	d
5400100	5400105	1/8	2-5/16	3/8	3/8	4			
5409100	-	5/32	2-3/8	7/16	3/8	4			
5400200	5400205	3/16	2-3/8	1/2	3/8	4			
5409200	-	7/32	2-7/16	9/16	3/8	4			
5400300	5400305	1/4	2-7/16	5/8	3/8	4			
5409300	-	9/32	2-1/2	11/16	3/8	4			
5400400	5400405	5/16	2-1/2	3/4	3/8	4			
5409400	-	11/32	2-1/2	3/4	3/8	4			
5400500	5400505	3/8	2-1/2	3/4	3/8	4			
5409500	-	13/32	2-11/16	1	3/8	4			
5400600	5400605	7/16	2-11/16	1	3/8	4			
5409700	-	15/32	3-1/4	1-1/4	1/2	4			
5400700	-	1/2	2-11/16	1	3/8	4			
5401100	5401105	1/2	3-1/4	1-1/4	1/2	4			
5401600	-	17/32	3-3/8	1-3/8	1/2	4			
5401200	-	9/16	3-3/8	1-3/8	1/2	4			
5401700	-	19/32	3-3/8	1-3/8	1/2	4			
5401300	5401305	5/8	3-3/8	1-3/8	1/2	4			
5402100	-	5/8	3-3/4	1-5/8	5/8	4			
5401800	-	21/32	3-5/8	1-5/8	1/2	4			
5401400	-	11/16	3-5/8	1-5/8	1/2	4			
5402200	-	11/16	3-3/4	1-5/8	5/8	4			
5401900	-	23/32	3-5/8	1-5/8	1/2	4			
5401500	5401505	3/4	3-5/8	1-5/8	1/2	4			
5402300	-	3/4	3-3/4	1-5/8	5/8	4			
5403100	5403105	3/4	3-7/8	1-5/8	3/4	4			

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.	No. of Flutes	Bright		TiN	
						D	L	Lc	d
5402800	-	25/32	4	1-7/8	5/8	4			
5402400	-	13/16	4	1-7/8	5/8	6			
5402900	-	27/32	4	1-7/8	5/8	6			
5402500	-	7/8	4	1-7/8	5/8	6			
5403200	5403205	7/8	4-1/8	1-7/8	3/4	4			
5404100	-	7/8	4-1/8	1-7/8	7/8	4			
5403400	-	29/32	4-1/8	1-7/8	3/4	4			
5402600	-	15/16	4	1-7/8	5/8	6			
5403500	-	31/32	4-1/8	1-7/8	3/4	4			
5402700	-	1	4	1-7/8	5/8	6			
5403300	5403305	1	4-1/8	1-7/8	3/4	4			
5404200	-	1	4-1/8	1-7/8	7/8	4			
5405100	5405105	1	4-1/2	2	1	4			
5404300	-	1-1/8	4-1/4	2	7/8	6			
5405200	-	1-1/8	4-1/2	2	1	6			
5404400	-	1-1/4	4-1/4	2	7/8	6			
5405300	-	1-1/4	4-1/2	2	1	6			
5406100	-	1-1/4	4-1/2	2	1-1/4	6			
5405400	-	1-3/8	4-1/2	2	1	6			
5405500	-	1-1/2	4-1/2	2	1	6			
5406200	-	1-1/2	4-1/2	2	1-1/4	6			
5406300	-	1-3/4	4-1/2	2	1-1/4	6			
5406400	-	2	4-1/2	2	1-1/4	8			
5407400	-	2	5-3/4	2	2	4			
5408400	-	2	5-3/4	2	2	6			

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
Note: 2" diameter shanks have combination drive.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
540	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





Single End


Cobalt High Speed Steel

List 547

CE-EMS, Multiple Flute, Medium Length, Non-Center Cutting

SPEED FEED P1299-1300	HSS-Co	BR		MED	
--------------------------	--------	----	--	-----	--

Milling Diameter Tolerance	
1 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.	No. of Flutes
Bright	D	L	Lc	d	
5475100	1	5-1/2	3	1	4
5476100	1-1/4	5-1/2	3	1-1/4	6
5476200	1-1/2	5-1/2	3	1-1/4	6

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.	No. of Flutes
Bright	D	L	Lc	d	
5476300	1-3/4	5-1/2	3	1-1/4	6
5476400	2	5-1/2	3	1-1/4	8

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
Note: 2" diameter shanks have combination drive.



List 545

EML, Multiple Flute, Long Length, Non-Center Cutting

SPEED FEED P1299-1300	HSS-Co	BR		LONG	
--------------------------	--------	----	--	------	--

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.	No. of Flutes
Bright	D	L	Lc	d	
5450300	1/4	3-1/16	1-1/4	3/8	4
5450400	5/16	3-1/8	1-3/8	3/8	4
5450500	3/8	3-1/4	1-1/2	3/8	4
5451000	7/16	3-3/4	1-3/4	1/2	4
5451100	1/2	4	2	1/2	4
5452100	5/8	4-5/8	2-1/2	5/8	4
5453100	3/4	5-1/4	3	3/4	4
5454100	7/8	5-3/4	3-1/2	7/8	4
5455100	1	6-1/2	4	1	4

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.	No. of Flutes
Bright	D	L	Lc	d	
5455200	1-1/8	6-1/2	4	1	6
5455300	1-1/4	6-1/2	4	1	6
5456100	1-1/4	6-1/2	4	1-1/4	6
5455500	1-1/2	6-1/2	4	1	6
5456200	1-1/2	6-1/2	4	1-1/4	6
5456300	1-3/4	6-1/2	4	1-1/4	6
5456400	2	6-1/2	4	1-1/4	8
5457400	2	7-3/4	4	2	4
5458400	2	7-3/4	4	2	6

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
Note: 2" diameter shanks have combination drive.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 557

CE-EXML, Multiple Flute, Extra Long Length, Non-Center Cutting

SPEED FEED P1299-1300	HSS-Co	BR		EXTRA LONG	30°
---------------------------------	---------------	-----------	---	-------------------	------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 2	+0.0011" / -0



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
Bright	D	L	Lc	d	
5570300	1/4	3-9/16	1-3/4	3/8	4
5570400	5/16	3-3/4	2	3/8	4
5570500	3/8	4-1/4	2-1/2	3/8	4
5571100	1/2	5	3	1/2	4
5572100	5/8	6-1/8	4	5/8	4
5573100	3/4	6-1/4	4	3/4	4
5574100	7/8	7-1/4	5	7/8	4
5575100	1	8-1/2	6	1	4
5576100	1-1/4	8-1/2	6	1-1/4	6
5576200	1-1/2	10-1/2	8	1-1/4	6
5578400	2	11-3/4	8	2	6

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
557	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





List 591

TPET, 3 Flute, 1° Taper per Side

SPEED FEED P1305	HSS-Co	BR		REG	LONG	EXTRA LONG	25°
----------------------------	---------------	-----------	--	------------	-------------	-------------------	------------

Taper Angle Tolerance	
1/6 ≤ D ≤ 5/8	+0 / -10'



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5910100	1/16	1-3/4	1/2	3/16
5910200	1/16	2-1/4	1	3/16
5911100	5/64	1-3/4	1/2	3/16
5911200	5/64	2-1/4	1	3/16
5912100	3/32	2	3/4	3/16
5912400	3/32	2-11/16	1-1/2	3/16
5914100	1/8	1-5/8	3/8	3/16
5914200	1/8	2	3/4	3/16
5914300	1/8	2-1/4	1	3/16
5915100	3/16	2-5/8	3/4	3/8
5915200	3/16	3-1/8	1-1/4	3/8

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5916100	1/4	2-1/2	3/4	3/8
5916300	1/4	3	1-1/4	3/8
5916400	1/4	4	2-1/4	3/8
5916500	1/4	5	3-1/4	3/8
5917100	3/8	3-1/4	1-1/4	1/2
5917200	3/8	4-1/4	2-1/4	1/2
5917300	3/8	5-1/4	3-1/4	1/2
5918100	1/2	3-1/4	1-1/4	1/2
5918200	1/2	4-1/4	2-1/4	1/2
5918300	1/2	5-3/8	3-1/4	5/8
5919100	5/8	6-1/2	4-1/4	3/4

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



List 593

TPET, 3 Flute, 2° Taper per Side

SPEED FEED P1306	HSS-Co	BR		REG	LONG	EXTRA LONG	25°
----------------------------	---------------	-----------	--	------------	-------------	-------------------	------------

Taper Angle Tolerance	
1/6 ≤ D ≤ 5/8	+0 / -10'



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5930100	1/16	1-3/4	1/2	3/16
5930200	1/16	2-1/4	1	3/16
5931100	5/64	1-3/4	1/2	3/16
5931200	5/64	2-1/4	1	3/16
5931300	5/64	2-11/16	1-1/2	3/16
5932100	3/32	2	3/4	3/16
5932300	3/32	2-1/2	1-1/4	3/16
5934200	1/8	2	3/4	3/16
5934300	1/8	2-7/8	1	3/8
5935100	3/16	2-5/8	3/4	3/8
5935200	3/16	3-1/8	1-1/4	3/8

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5936100	1/4	2-1/2	3/4	3/8
5936300	1/4	3	1-1/4	3/8
5936400	1/4	4-3/8	2-1/4	1/2
5936500	1/4	5-1/4	3-1/4	1/2
5937100	3/8	3-1/4	1-1/4	1/2
5937200	3/8	4-1/4	2-1/4	1/2
5937300	3/8	5-3/8	3-1/4	5/8
5938100	1/2	3-1/4	1-1/4	1/2
5938200	1/2	4-3/8	2-1/4	5/8
5938300	1/2	5-3/8	3-1/4	5/8
5939100	5/8	6-1/2	4-1/4	3/4

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 594

TPET, 3 Flute, 3° Taper per Side

SPEED FEED P1306	HSS-Co	BR	REG	LONG	EXTRA LONG	25°
---------------------	--------	----	-----	------	------------	-----

Taper Angle Tolerance	
3/32 ≤ D ≤ 1/2	+0 / -10'



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5942200	3/32	2-7/8	1	3/8
5942300	3/32	3-1/8	1-1/4	3/8
5942400	3/32	3-3/8	1-1/2	3/8
5942500	3/32	3-3/4	2	3/8
5942600	3/32	4-1/4	2-1/2	3/8
5943100	7/64	2-7/8	1	3/8
5943200	7/64	3-3/8	1-1/2	3/8
5943300	7/64	3-3/4	2	3/8
5944200	1/8	2-5/8	3/4	3/8
5944300	1/8	2-7/8	1	3/8
5944400	1/8	3	1-1/8	3/8
5944700	1/8	3-3/8	1-1/2	3/8
5944800	1/8	3-3/4	2	3/8
5944900	1/8	4-1/2	2-1/2	1/2
5945000	1/8	5	3	1/2
5945100	3/16	2-5/8	3/4	3/8

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5945200	3/16	3-1/8	1-1/4	3/8
5945400	3/16	4-1/2	2-1/2	1/2
5945500	3/16	5	3	1/2
5945600	3/16	5-3/8	3-1/4	5/8
5945700	3/16	6-1/8	4	5/8
5946100	1/4	2-1/2	3/4	3/8
5946200	1/4	2-3/4	1	3/8
5946300	1/4	3-1/4	1-1/4	1/2
5946400	1/4	4-1/4	2-1/4	1/2
5946500	1/4	5-1/4	3-1/4	1/2
5946600	1/4	6-1/4	4	3/4
5947100	3/8	3-1/4	1-1/4	1/2
5947200	3/8	4-3/8	2-1/4	5/8
5947300	3/8	5-3/8	3-1/4	5/8
5948100	1/2	3-1/4	1-1/4	1/2
5948200	1/2	4-3/8	2-1/4	5/8

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List No.	Work Material																		
	P					M			K	N		S		H					
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels					
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
594	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





Single End


Cobalt High Speed Steel

List 595

TPET, 3 Flute, 5° Taper per Side

SPEED FEED P1307	HSS-Co	BR	REG	LONG	EXTRA LONG	25°
---------------------	--------	----	-----	------	------------	-----

Taper Angle Tolerance	
3/32 ≤ D ≤ 1/2	+0 / -10'



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5952100	3/32	2-5/8	3/4	3/8
5952200	3/32	2-7/8	1	3/8
5952300	3/32	3	1-1/4	3/8
5952400	3/32	3-5/16	1-1/2	3/8
5952500	3/32	4	2	1/2
5952600	3/32	4-5/8	2-1/2	5/8
5953100	7/64	2-7/8	1	3/8
5953200	7/64	3-5/16	1-1/2	3/8
5953300	7/64	4	2	1/2
5954200	1/8	2-5/8	3/4	3/8
5954300	1/8	2-7/8	1	3/8
5954400	1/8	2-7/8	1-1/8	3/8
5954700	1/8	3-1/4	1-1/2	3/8
5954800	1/8	3-3/4	2	3/8
5954900	1/8	4-1/2	2-1/2	1/2
5955000	1/8	5-1/4	3	3/4

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5955100	3/16	2-9/16	3/4	3/8
5955200	3/16	3-3/8	1-1/4	1/2
5955400	3/16	4-5/8	2-1/2	5/8
5955500	3/16	5-1/4	3	3/4
5955600	3/16	5-1/2	3-1/4	3/4
5955700	3/16	6-1/4	4	3/4
5956100	1/4	2-1/2	3/4	3/8
5956200	1/4	3	1	1/2
5956300	1/4	3-1/4	1-1/4	1/2
5956400	1/4	4-3/8	2-1/4	5/8
5956500	1/4	5-1/2	3-1/4	3/4
5956600	1/4	6-1/4	4	3/4
5957100	3/8	3-3/8	1-1/4	5/8
5957200	3/8	4-1/2	2-1/4	3/4
5957300	3/8	5-1/2	3-1/4	3/4
5958100	1/2	3-1/4	1-1/4	1/2

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request.

Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel		6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
595	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 596

TPET, 3 Flute, 7° Taper per Side

SPEED FEED P1307	HSS-Co	BR	REG	LONG	25°
---------------------	--------	----	-----	------	-----

Taper Angle Tolerance	
5/64 ≤ D ≤ 1/2	+0 / -10'



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5961200	5/64	2-3/4	1	3/8
5962200	3/32	2-3/4	1	3/8
5962300	3/32	3	1-1/4	3/8
5962400	3/32	3-1/2	1-1/2	1/2
5964200	1/8	2-9/16	3/4	3/8
5964300	1/8	2-3/4	1	3/8
5964700	1/8	3-1/2	1-1/2	1/2

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5965200	3/16	3-1/4	1-1/4	1/2
5966100	1/4	2-1/2	3/4	3/8
5966300	1/4	3-1/4	1-1/4	1/2
5966400	1/4	4-1/2	2-1/4	3/4
5967200	3/8	4-1/2	2-1/4	3/4
5968100	1/2	3-3/8	1-1/4	5/8

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 597

TPET, 3 Flute, 10° Taper per Side

SPEED FEED P1308	HSS-Co	BR	REG	LONG	25°
---------------------	--------	----	-----	------	-----

Taper Angle Tolerance	
3/32 ≤ D ≤ 1/4	+0 / -10'



Units: Inch

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5972400	3/32	3-5/8	1-1/2	5/8
5974200	1/8	2-3/4	3/4	1/2
5974500	1/8	3-3/8	1-1/4	5/8

EDP Number	Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	D	L	Lc	d
5976100	1/4	2-3/4	3/4	1/2
5976300	1/4	3-3/8	1-1/4	5/8
5976400	1/4	4-1/2	2-1/4	3/4

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P						M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
	1010	1035	1065	4140	4340													
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





Double End


Cobalt High Speed Steel

List 522

2 Flute, Regular Length

SPEED FEED P1297-1298	HSS-Co	TiN	BR	REG	30°
--------------------------	--------	-----	----	-----	-----

Milling Diameter Tolerance	
1/8 ≤ D ≤ 1	+0 / -0.0011"



Units: Inch

EDP Number		Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	TiN	D	L	Lc	d
5220100	5220105	1/8	3-1/16	3/8	3/8
5226000	-	9/64	3-1/8	7/16	3/8
5229100	-	5/32	3-1/8	7/16	3/8
5226100	-	11/64	3-1/8	7/16	3/8
5220200	5220205	3/16	3-1/8	7/16	3/8
5226200	-	13/64	3-1/8	1/2	3/8
5229200	-	7/32	3-1/8	1/2	3/8
5226300	-	15/64	3-1/8	1/2	3/8
5220300	5220305	1/4	3-1/8	1/2	3/8
5226400	-	17/64	3-1/8	9/16	3/8
5229300	-	9/32	3-1/8	9/16	3/8
5226500	-	19/64	3-1/8	9/16	3/8
5220400	5220405	5/16	3-1/8	9/16	3/8
5226600	-	21/64	3-1/8	9/16	3/8
5229400	-	11/32	3-1/8	9/16	3/8
5226700	-	23/64	3-1/8	9/16	3/8
5220500	5220505	3/8	3-1/8	9/16	3/8
5226800	-	25/64	3-3/4	13/16	1/2
5229500	-	13/32	3-3/4	13/16	1/2
5226900	-	27/64	3-3/4	13/16	1/2
5229600	5229605	7/16	3-3/4	13/16	1/2

EDP Number		Mill Dia.	Overall Length	Length of Cut	Shank Dia.
Bright	TiN	D	L	Lc	d
5227000	-	29/64	3-3/4	13/16	1/2
5229700	-	15/32	3-3/4	13/16	1/2
5227100	-	31/64	3-3/4	13/16	1/2
5221100	5221105	1/2	3-3/4	13/16	1/2
5227200	-	17/32	4-1/2	1-1/8	5/8
5229800	-	9/16	4-1/2	1-1/8	5/8
5227300	-	19/32	4-1/2	1-1/8	5/8
5222100	5222105	5/8	4-1/2	1-1/8	5/8
5227400	-	21/32	5	1-5/16	3/4
5229900	-	11/16	5	1-5/16	3/4
5227500	-	23/32	5	1-5/16	3/4
5223100	5223105	3/4	5	1-5/16	3/4
5227600	-	25/32	5-1/2	1-9/16	7/8
5227700	-	13/16	5-1/2	1-9/16	7/8
5227800	-	27/32	5-1/2	1-9/16	7/8
5224100	5224105	7/8	5-1/2	1-9/16	7/8
5228000	-	29/32	5-7/8	1-5/8	1
5228100	-	15/16	5-7/8	1-5/8	1
5228200	-	31/32	5-7/8	1-5/8	1
5225100	5225105	1	5-7/8	1-5/8	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Hardened Steels			
	1010 1018	1035 1045	1065											4140 4340	Inconel	6Al4V (30 HRC)	~35 HRC
522	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 582

DDE, 2 Flute, Regular Length

SPEED FEED P1302	HSS-Co	BR		REG	30°
----------------------------	---------------	-----------	---	------------	------------

Milling Diameter Tolerance	
1 ≤ D ≤ 25	+0 / - 0.028mm



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5827100	1.0	57.1	2.38	4.76
5827200	1.5	57.1	4.76	4.76
5827400	2.0	57.1	5.95	4.76
5827500	2.5	57.1	7.14	4.76
5820100	3.0	77.7	9.52	9.52
5828100	3.5	79.3	11.11	9.52
5820200	4.0	79.3	11.11	9.52
5828200	4.5	79.3	11.11	9.52
5820300	5.0	79.3	12.70	9.52
5828300	5.5	79.3	12.70	9.52
5820400	6.0	79.3	12.70	9.52
5828400	6.5	79.3	12.70	9.52
5820500	7.0	79.3	14.28	9.52
5828500	7.5	79.3	14.28	9.52
5820600	8.0	79.3	14.28	9.52
5828600	8.5	79.3	14.28	9.52
5820700	9.0	79.3	14.28	9.52
5828700	9.5	79.3	14.28	9.52
5820800	10.0	95.2	20.63	12.70
5828800	10.5	95.2	20.63	12.70

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5820900	11.0	95.2	20.63	12.70
5828900	11.5	95.2	20.63	12.70
5821100	12.0	95.2	20.63	12.70
5829100	12.5	95.2	20.63	12.70
5821200	13.0	114.3	28.57	15.87
5829200	13.5	114.3	28.57	15.87
5821300	14.0	114.3	28.57	15.87
5829300	14.5	114.3	28.57	15.87
5821400	15.0	114.3	28.57	15.87
5822100	16.0	127.0	33.33	19.05
5822200	17.0	127.0	33.33	19.05
5822300	18.0	127.0	33.33	19.05
5823100	19.0	127.0	33.33	19.05
5823200	20.0	139.7	39.68	22.22
5823300	21.0	139.7	39.68	22.22
5824100	22.0	139.7	39.68	22.22
5824200	23.0	149.2	41.27	25.40
5825100	24.0	149.2	41.27	25.40
5825200	25.0	149.2	41.27	25.40

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.
4.76mm diameter shanks have straight shanks.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
582	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





Double End


Cobalt High Speed Steel

List 532

TDE, 3 Flute, Regular Length

SPEED FEED P1304	HSS-Co	BR	REG	30°
----------------------------	---------------	-----------	------------	------------

Milling Diameter Tolerance	
D<Shk Dia	+0.0011" / -0
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5320100	1/8	3-1/16	3/8	3/8
5320200	3/16	3-1/4	1/2	3/8
5320300	1/4	3-3/8	5/8	3/8
5320400	5/16	3-1/2	3/4	3/8
5320500	3/8	3-1/2	3/4	3/8
5329600	7/16	4-1/8	1	1/2

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5321100	1/2	4-1/8	1	1/2
5329800	9/16	5	1-3/8	5/8
5322100	5/8	5	1-3/8	5/8
5323100	3/4	5-5/8	1-5/8	3/4
5324100	7/8	6-1/8	1-7/8	7/8
5325100	1	6-3/8	1-7/8	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material

List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
532	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best




List 542

4 Flute, Regular Length, Non-Center Cutting

SPEED FEED P1299-1300	HSS-Co	TiN	BR	REG	30°
--------------------------	--------	-----	----	-----	-----

Milling Diameter Tolerance	
D<Shk Dia	+0.0011" / -0
D=Shk Dia	-0.0004"/-0.0015"



Units: Inch

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiN	D	L	Lc	d
5420100	5420105	1/8	3-1/16	3/8	3/8
5426000	-	9/64	3-1/8	7/16	3/8
5429100	-	5/32	3-1/8	7/16	3/8
5426100	-	11/64	3-1/4	1/2	3/8
5420200	5420205	3/16	3-1/4	1/2	3/8
5426200	-	13/64	3-1/4	9/16	3/8
5429200	-	7/32	3-1/4	9/16	3/8
5426300	-	15/64	3-3/8	5/8	3/8
5420300	5420305	1/4	3-3/8	5/8	3/8
5426400	-	17/64	3-3/8	11/16	3/8
5429300	-	9/32	3-3/8	11/16	3/8
5426500	-	19/64	3-1/2	3/4	3/8
5420400	5420405	5/16	3-1/2	3/4	3/8
5426600	-	21/64	3-1/2	3/4	3/8
5429400	-	11/32	3-1/2	3/4	3/8
5426700	-	23/64	3-1/2	3/4	3/8
5420500	5420505	3/8	3-1/2	3/4	3/8
5426800	-	25/64	4-1/8	1	1/2
5429500	-	13/32	4-1/8	1	1/2
5426900	-	27/64	4-1/8	1	1/2

EDP Number		Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	TiN	D	L	Lc	d
5429600	5429605	7/16	4-1/8	1	1/2
5427000	-	29/64	4-1/8	1	1/2
5429700	-	15/32	4-1/8	1	1/2
5427100	-	31/64	4-1/8	1	1/2
5421100	5421105	1/2	4-1/8	1	1/2
5427200	-	17/32	5	1-3/8	5/8
5429800	-	9/16	5	1-3/8	5/8
5427300	-	19/32	5	1-3/8	5/8
5422100	5422105	5/8	5	1-3/8	5/8
5427400	-	21/32	5-5/8	1-5/8	3/4
5429900	-	11/16	5-5/8	1-5/8	3/4
5427500	-	23/32	5-5/8	1-5/8	3/4
5423100	5423105	3/4	5-5/8	1-5/8	3/4
5427600	-	25/32	6-1/8	1-7/8	7/8
5428100	-	13/16	6-1/8	1-7/8	7/8
5424100	5424105	7/8	6-1/8	1-7/8	7/8
5428000	-	29/32	6-3/8	1-7/8	1
5428200	-	15/16	6-3/8	1-7/8	1
5428300	-	31/32	6-3/8	1-7/8	1
5425100	5425105	1	6-3/8	1-7/8	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



List No.	Work Material																	
	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
542	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





Double End


Cobalt High Speed Steel

List 543

4 Flute, Regular Length

SPEED FEED P1299-1300	HSS-Co	BR	REG	30°
---------------------------------	---------------	-----------	------------	------------

Milling Diameter Tolerance	
D<Shk Dia	+0 / -0.0011"
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5430100	1/8	3-1/16	3/8	3/8
5430200	3/16	3-1/4	1/2	3/8
5430300	1/4	3-3/8	5/8	3/8
5430400	5/16	3-1/2	3/4	3/8
5430500	3/8	3-1/2	3/4	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5431100	1/2	4-1/8	1	1/2
5432100	5/8	5	1-3/8	5/8
5433100	3/4	5-5/8	1-5/8	3/4
5434100	7/8	6-1/8	1-7/8	7/8
5435100	1	6-3/8	1-7/8	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.




List 523

DDEB, 2 Flute, Regular Length, Ball End

SPEED FEED P1301	HSS-Co	BR	REG	30°
----------------------------	---------------	-----------	------------	------------

Milling Diameter Tolerance	
D<Shk Dia	+0 / -0.0011"
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5230100	1/8	3-1/16	3/8	3/8
5230200	3/16	3-1/8	7/16	3/8
5230300	1/4	3-1/8	1/2	3/8
5230400	5/16	3-1/8	9/16	3/8
5230500	3/8	3-1/8	9/16	3/8

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5239600	7/16	3-3/4	13/16	1/2
5231100	1/2	3-3/4	13/16	1/2
5232100	5/8	4-1/2	1-1/8	5/8
5233100	3/4	5	1-5/16	3/4
5235100	1	5-7/8	1-5/8	1

Packed: 1 pc.

EDP's listed above are stocked standard, other coatings available upon request. Specify treatment at time of order.



Work Material


List No.	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
543	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
523	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 562

M-DDE, 2 Flute, Stub Length, Miniature



HSS-Co	BR		STUB	
--------	----	--	------	--

Milling Diameter Tolerance	
D < Shk Dia	+0 / -0.0011"
D = Shk Dia	-0.0004" / -0.0015"

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5627000	1/32	2	3/64	3/16
5627100	3/64	2	1/16	3/16
5627200	1/16	2	3/32	3/16
5627300	5/64	2	1/8	3/16
5627400	3/32	2	9/64	3/16
5627500	7/64	2	5/32	3/16


EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5627600	1/8	2	3/16	3/16
5627700	9/64	2	7/32	3/16
5627800	5/32	2	15/64	3/16
5627900	11/64	2	1/4	3/16
5628000	3/16	2	9/32	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



List 563

M-DDE, 2 Flute, Regular Length, Miniature



HSS-Co	BR		REG	
--------	----	--	-----	--

Milling Diameter Tolerance	
D < Shk Dia	+0 / -0.0011"
D = Shk Dia	-0.0004" / -0.0015"

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5637000	1/32	2-1/4	3/32	3/16
5637100	3/64	2-1/4	9/64	3/16
5637200	1/16	2-1/4	3/16	3/16
5637300	5/64	2-1/4	15/64	3/16
5637400	3/32	2-1/4	9/32	3/16
5637500	7/64	2-1/4	21/64	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5637600	1/8	2-1/4	3/8	3/16
5637700	9/64	2-1/4	13/32	3/16
5637800	5/32	2-1/4	7/16	3/16
5637900	11/64	2-1/4	1/2	3/16
5638000	3/16	2-1/4	1/2	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best





Double End

Cobalt High Speed Steel

List 564

M-DDEL, 2 Flute, Long Length, Miniature

HSS-Co	BR		LONG	
--------	----	--	------	--

Milling Diameter Tolerance	
D<Shk Dia	+0.0011"/-0
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5647200	1/16	2-1/2	7/32	3/16
5647400	3/32	2-5/8	9/32	3/16
5647600	1/8	3-1/8	3/4	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5647800	5/32	3-1/4	7/8	3/16
5648000	3/16	3-3/8	1	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 566

M-FDE, 4 Flute, Stub Length, Miniature

HSS-Co	BR		STUB	
--------	----	--	------	--

Milling Diameter Tolerance	
D<Shk Dia	+0.0011"/-0
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5667200	1/16	2	3/32	3/16
5667400	3/32	2	9/64	3/16
5667600	1/8	2	3/16	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5667800	5/32	2	15/64	3/16
5668000	3/16	2	9/32	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

List No.	P					M			K Cast Iron	N		S Titanium	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels				Aluminum			Nickel Alloy	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
564	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
566	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best




List 567

M-FDE, 4 Flute, Regular Length, Miniature, Non-Center Cutting

HSS-Co	BR		REG	
--------	----	---	-----	---

Milling Diameter Tolerance	
D < Shk Dia	+0.0011" / -0
D = Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5677200	1/16	2-1/4	0.177	3/16
5677400	3/32	2-1/4	0.267	3/16
5677600	1/8	2-1/4	0.362	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5677800	5/32	2-1/4	0.417	3/16
5678000	3/16	2-1/4	0.480	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 568

M-FDEL, 4 Flute, Long Length, Miniature, Non-Center Cutting

HSS-Co	BR		LONG	
--------	----	---	------	---

Milling Diameter Tolerance	
D < Shk Dia	+0.0011" / -0
D = Shk Dia	-0.0004" / -0.0015"

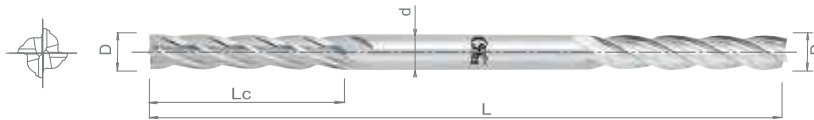

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5687200	1/16	2-1/2	0.220	3/16
5687400	3/32	2-5/8	0.279	3/16
5687600	1/8	3-1/8	0.732	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5687800	5/32	3-1/4	0.854	3/16
5688000	3/16	3-3/8	0.980	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
	1010	1035	1065	4140	4340												
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

good best





Double End

Cobalt High Speed Steel

List 570

M-DDEB, 2 Flute, Stub Length, Ball End, Miniature

HSS-Co	BR		STUB	
--------	----	--	------	--

Milling Diameter Tolerance	
D<Shk Dia	+0 / -0.0011"
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5707200	1/16	2	3/32	3/16
5707400	3/32	2	9/64	3/16
5707600	1/8	2	3/16	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5707800	5/32	2	15/64	3/16
5708000	3/16	2	9/32	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.




List 571

M-DDEB, 2 Flute, Regular Length, Ball End, Miniature

HSS-Co	BR		REG	
--------	----	--	-----	--

Milling Diameter Tolerance	
D<Shk Dia	+0 / -0.0011"
D=Shk Dia	-0.0004" / -0.0015"



Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5717200	1/16	2-1/4	3/16	3/16
5717400	3/32	2-1/4	9/32	3/16
5717600	1/8	2-1/4	3/8	3/16

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
Bright	D	L	Lc	d
5717800	5/32	2-1/4	7/16	3/16
5718000	3/16	2-1/4	1/2	3/16

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best



List 310-SO

2 Flute, Regular Length

NEW	SPEED FEED P1309	HSS-Co8	TiAlN	TYPE N		REG		SHANK h7
------------	----------------------------	----------------	--------------	---------------	---	------------	---	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3100200A-SO	2.0	48	4	6
3100250A-SO	2.5	49	5	6
3100300A-SO	3.0	49	5	6
3100350A-SO	3.5	50	6	6
3100400A-SO	4.0	51	7	6
3100450A-SO	4.5	51	7	6
3100500A-SO	5.0	52	8	6
3100550A-SO	5.5	52	8	6
3100600A-SO	6.0	52	8	6
3100650A-SO	6.5	60	10	10
3100700A-SO	7.0	60	10	10
3100750A-SO	7.5	60	10	10
3100800A-SO	8.0	61	11	10
3100850A-SO	8.5	61	11	10
3100900A-SO	9.0	61	11	10
3100950A-SO	9.5	61	11	10
3101000A-SO	10.0	63	13	10
3101100A-SO	11.0	70	13	12
3101200A-SO	12.0	73	16	12
3101300A-SO	13.0	73	16	12
3101400A-SO	14.0	73	16	12
3101500A-SO	15.0	73	16	12
3101600A-SO	16.0	79	19	16
3101700A-SO	17.0	79	19	16
3101800A-SO	18.0	79	19	16
3101900A-SO	19.0	79	19	16
3102000A-SO	20.0	88	22	20
3102200A-SO	22.0	88	22	20
3102400A-SO	24.0	102	26	25
3102500A-SO	25.0	102	26	25

Packed: 1 pc.
Available TiAlN coating only.



Work Material

List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High			300	400	17-4 PH		6061 7075	Casting			Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC
310-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					

good best



List 314-SO

4 & 6 Flute, Regular Length

NEW	SPEED FEED P1310	HSS-Co8	TiAlN	TYPE N		REG	30°	SHANK h7
------------	----------------------------	---------	-------	--------	--	-----	-----	-------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter	Number of Flutes
	D	L	Lc	d	
3140300A-SO	3	52	8	6	4
3140400A-SO	4	55	11	6	4
3140500A-SO	5	57	13	6	4
3140600A-SO	6	57	13	6	4
3140700A-SO	7	66	16	10	4
3140800A-SO	8	69	19	10	4
3140900A-SO	9	69	19	10	4
3141000A-SO	10	72	22	10	4
3141100A-SO	11	79	22	12	4
3141200A-SO	12	83	26	12	4
3141300A-SO	13	83	26	12	4
3141400A-SO	14	83	26	12	4
3141500A-SO	15	83	26	12	4
3141600A-SO	16	92	32	16	4
3141800A-SO	18	92	32	16	4
3141900A-SO	19	92	32	16	4
3142000A-SO	20	104	38	20	4
3142200A-SO	22	104	38	20	6
3142500A-SO	25	121	45	25	6

Packed: 1 pc.
 Available TiAlN coating only.
 Note: Center cutting in sizes 20mm and smaller.



Work Material

List No.	P				Die Steels	M			K Cast Iron	N		S		H			
	Carbon Steels			Alloy Steels 4140 4340		Stainless Steels ≤200HB				Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
314-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					

 good best


List 312-SO

2 Flute, Ball Nose, Regular Length

NEW	SPEED FEED P1309	HSS-Co8	TiAlN	TYPE N		REG		SHANK h7
------------	----------------------------	----------------	--------------	---------------	---	------------	---	--------------------



Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Shank Diameter
	D	L	Lc	d
3120200A-SO	2	48	4	6
3120300A-SO	3	49	5	6
3120400A-SO	4	51	7	6
3120500A-SO	5	52	8	6
3120600A-SO	6	52	8	6
3120700A-SO	7	60	10	10
3120800A-SO	8	61	11	10
3120900A-SO	9	61	11	10
3121000A-SO	10	63	13	10
3121100A-SO	11	70	13	12
3121200A-SO	12	73	16	12
3121300A-SO	13	73	16	12
3121400A-SO	14	73	16	12
3121500A-SO	15	73	16	12
3121600A-SO	16	79	19	16
3121800A-SO	18	79	19	16
3122000A-SO	20	88	22	20
3122200A-SO	22	88	22	20
3122400A-SO	24	102	26	25
3122500A-SO	25	102	26	25

Packed: 1 pc.
Available TiAlN coating only.



Work Material


List No.	P					M			K	N		S	H				
	Carbon Steels			Alloy Steels 4140 4340	Die Steels	Stainless Steels ≤200HB			Cast Iron	Aluminum		Nickel Alloy Inconel	Titanium 6Al4V (30 HRC)	Hardened Steels			
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting			~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
312-SO	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					

good best





Shapes & SCTI Identification



Series SA
Cylindrical



Series SC
Cylindrical Ball End




Series SF
Round Nose Tree



Series SG
Pointed Tree




Series SM
Pointed Cone




Series SE
Egg Shape




Series SL
14 Degree
Included Angle




Series SD
Ball Shape




Series SK
90 Degree
Included Angle



Series SJ
60 Degree
Included Angle



Series SN
Inverted Taper




Series SH
Flame Shape

Styles of Cut

Medium Tough Cut

Engineered specifically for tough applications. Tough cut insures faster, splinter-free cutting in weld and alloy castings with increased tool life.



Medium Right Hand Spiral

General purpose - Recommended for stock removal and a smooth finish.



Aluminum Cut

Designed for use on aluminum, non-ferrous metals, soft steel, reinforced plastics, and other soft materials.



Recommended Cutting Speeds for Carbide Burs

Diameter	RPM	Maximum RPM
1/16"	55,000 - 85,000	90,000
3/32"	50,000 - 60,000	85,000
1/8"	35,000 - 65,000	80,000
3/16"	30,000 - 55,000	75,000
1/4"	25,000 - 50,000	70,000
5/16"	18,000 - 38,000	65,000
3/8"	17,000 - 38,000	63,000
7/16"	13,000 - 37,000	55,000
1/2"	14,000 - 36,000	50,000
5/8"	11,000 - 23,000	40,000
3/4"	8,000 - 19,000	30,000
1"	7,000 - 18,000	25,000

NOTE: Use lower speeds when cutting harder ferrous materials and higher speeds for softer non-ferrous materials.

Coarse and Fine Cuts are available on request.




1/4" Shank


6mm Shank

List 801 — Cylindrical

Units: Inch


Medium Tough Cut	EDP Number	End Cut Suffix	Style	Dia.	Flute Length
	801-1250	-EC	SA-11*	1/8	1/2
	801-1875	-EC	SA-14*	3/16	5/8
	801-2500	-EC	SA-1*	1/4	5/8
	801-3125	-EC	SA-2	5/16	3/4
	801-3750	-EC	SA-3	3/8	3/4
	801-4375	-EC	SA-4	7/16	1
	801-5001	-EC	SA-5F	1/2	1/2
	801-5000	-EC	SA-5	1/2	1
	801-6250	-EC	SA-6	5/8	1
	801-7500	-EC	SA-16	3/4	3/4
	801-7501	-EC	SA-7	3/4	1
	801-1000	-EC	SA-9	1	1

Units: mm


Medium Tough Cut	EDP Number	End Cut Suffix	Style	Dia.	Flute Length
	801-1250-60	-EC	SA-11*	3	12
	801-1875-60	-EC	SA-14*	5	16
	801-2362	-EC	SA-1*	6	16
	801-3125-60	-EC	SA-2	8	19
	801-3750-60	-EC	SA-3	9	19
	801-4375-60	-EC	SA-4	11	25
	801-5001-60	-EC	SA-5F	12	12
	801-5000-60	-EC	SA-5	12	25
	801-6250-60	-EC	SA-6	16	25
	801-7500-60	-EC	SA-16	19	19
	801-7501-60	-EC	SA-7	19	25
	801-1000-60	-EC	SA-9	25	25

List 802 — Cylindrical Ball End

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	802-1250	SC-11*	1/8	1/2
	802-1875	SC-14*	3/16	5/8
	802-2500	SC-1*	1/4	5/8
	802-3125	SC-2	5/16	3/4
	802-3750	SC-3	3/8	3/4
	802-4375	SC-4	7/16	1
	802-5000	SC-5	1/2	1
	802-6250	SC-6	5/8	1
	802-7500	SC-7	3/4	1

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	802-1250-60	SC-11*	3	12
	802-1875-60	SC-14*	5	16
	802-2362	SC-1*	6	16
	802-3125-60	SC-2	8	19
	802-3750-60	SC-3	9	19
	802-4375-60	SC-4	11	25
	802-5000-60	SC-5	12	25
	802-6250-60	SC-6	16	25
	802-7500-60	SC-7	19	25

List 803 — Round Nose Tree

Units: Inch

Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	803-2500	SF-1*	1/4	5/8
	803-3750	SF-3	3/8	3/4
	803-5001	SF-13	1/2	3/4
	803-5000	SF-5	1/2	1
	803-6250	SF-6	5/8	1
	803-7500	SF-7	3/4	1
	803-7501	SF-14	3/4	1-1/4
	803-7502	SF-15	3/4	1-1/2

Units: mm

Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	803-2362	SF-1*	6	16
	803-3750-60	SF-3	9	19
	803-5001-60	SF-13	12	19
	803-5000-60	SF-5	12	25
	803-6250-60	SF-6	16	25
	803-7500-60	SF-7	19	25
	803-7501-60	SF-14	19	31
	803-7502-60	SF-15	19	38



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).




1/4" Shank


6mm Shank

List 901 — Cylindrical

Units: Inch


Medium Right Hand Spiral	EDP Number	End Cut Suffix	Style	Dia.	Flute Length
	901-1250	-EC	SA-11*	1/8	1/2
	901-1875	-EC	SA-14*	3/16	5/8
	901-2500	-EC	SA-1*	1/4	5/8
	901-3125	-EC	SA-2	5/16	3/4
	901-3750	-EC	SA-3	3/8	3/4
	901-4375	-EC	SA-4	7/16	1
	901-5001	-	SA-5F	1/2	1/2
	901-5000	-EC	SA-5	1/2	1
	901-6250	-EC	SA-6	5/8	1
	901-7500	-EC	SA-16	3/4	3/4
	901-7501	-EC	SA-7	3/4	1
	901-1000	-EC	SA-9	1	1

Units: mm


Medium Right Hand Spiral	EDP Number	End Cut Suffix	Style	Dia.	Flute Length
	901-1250-60	-EC	SA-11*	3	12
	901-1875-60	-EC	SA-14*	5	16
	901-2362	-EC	SA-1*	6	16
	901-3125-60	-EC	SA-2	8	19
	901-3750-60	-EC	SA-3	9	19
	901-4375-60	-EC	SA-4	11	25
	901-5001-60	-EC	SA-5F	12	12
	901-5000-60	-EC	SA-5	12	25
	901-6250-60	-EC	SA-6	16	25
	901-7500-60	-EC	SA-16	19	19
	901-7501-60	-EC	SA-7	19	25
	901-1000-60	-EC	SA-9	25	25

List 902 — Cylindrical Ball End

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	902-1250	SC-11*	1/8	1/2
	902-1875	SC-14*	3/16	5/8
	902-2500	SC-1*	1/4	5/8
	902-3125	SC-2	5/16	3/4
	902-3750	SC-3	3/8	3/4
	902-4375	SC-4	7/16	1
	902-5000	SC-5	1/2	1
	902-6250	SC-6	5/8	1
	902-7500	SC-7	3/4	1

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	902-1250-60	SC-11*	3	12
	902-1875-60	SC-14*	5	16
	902-2362	SC-1*	6	16
	902-3125-60	SC-2	8	19
	902-3750-60	SC-3	9	19
	902-4375-60	SC-4	11	25
	902-5000-60	SC-5	12	25
	902-6250-60	SC-6	16	25
	902-7500-60	SC-7	19	25

List 903 — Round Nose Tree

Units: Inch

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	903-2500	SF-1*	1/4	5/8
	903-3750	SF-3	3/8	3/4
	903-5001	SF-13	1/2	3/4
	903-5000	SF-5	1/2	1
	903-6250	SF-6	5/8	1
	903-7500	SF-7	3/4	1
	903-7501	SF-14	3/4	1-1/4
	903-7502	SF-15	3/4	1-1/2

Units: mm

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	903-2362	SF-1*	6	16
	903-3750-60	SF-3	9	19
	903-5001-60	SF-13	12	19
	903-5000-60	SF-5	12	25
	903-6250-60	SF-6	16	25
	903-7500-60	SF-7	19	25
	903-7501-60	SF-14	19	32
	903-7502-60	SF-15	19	38



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).




1/4" Shank


6mm Shank

List 804 — Pointed Tree

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	804-2500	SG-1*	1/4	5/8
	804-3125	SG-2	5/16	3/4
	804-3750	SG-3	3/8	3/4
	804-5001	SG-13	1/2	3/4
	804-5000	SG-5	1/2	1
	804-6250	SG-6	5/8	1
	804-7500	SG-7	3/4	1
	804-7501	SG-15	3/4	1-1/2

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	804-2362	SG-1*	6	16
	804-3125-60	SG-2	8	19
	804-3750-60	SG-3	9	19
	804-5001-60	SG-13	12	19
	804-5000-60	SG-5	12	25
	804-6250-60	SG-6	16	25
	804-7500-60	SG-7	19	25
	804-7501-60	SG-15	19	38

List 805 — Pointed Cone

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	805-2500	SM-1*	1/4	1/2	22
	805-2501	SM-2*	1/4	3/4	14
	805-2502	SM-3*	1/4	1	10
	805-3750	SM-4	3/8	5/8	28
	805-5000	SM-5	1/2	7/8	28
	805-6250	SM-6	5/8	1	31

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	805-2362	SM-1*	6	12	22
	805-2363	SM-2*	6	19	14
	805-2364	SM-3*	6	25	10
	805-3750-60	SM-4*	9	16	28
	805-5000-60	SM-5	12	22	28
	805-6250-60	SM-6	16	25	31

List 806 — Egg Shape

Units: Inch

Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	806-2500	SE-1*	1/4	3/8
	806-3750	SE-3	3/8	5/8
	806-5000	SE-5	1/2	7/8
	806-6250	SE-6	5/8	1
	806-7500	SE-7	3/4	1

Units: mm

Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	806-2362	SE-1*	6	9
	806-3750-60	SE-3	9	16
	806-5000-60	SE-5	12	22
	806-6250-60	SE-6	16	25
	806-7500-60	SE-7	19	25

*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).






1/4" Shank


6mm Shank

List 904 — Pointed Tree

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	904-2500	SG-1*	1/4	5/8
	904-3125	SG-2	5/16	3/4
	904-3750	SG-3	3/8	3/4
	904-5001	SG-13	1/2	3/4
	904-5000	SG-5	1/2	1
	904-6250	SG-6	5/8	1
	904-7500	SG-7	3/4	1
	904-7501	SG-15	3/4	1-1/2

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	904-2362	SG-1*	6	16
	904-3125-60	SG-2	8	19
	904-3750-60	SG-3	9	19
	904-5001-60	SG-13	12	19
	904-5000-60	SG-5	12	25
	904-6250-60	SG-6	16	25
	904-7500-60	SG-7	19	25
	904-7501-60	SG-15	19	38

List 905 — Pointed Cone

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	905-2500	SM-1*	1/4	1/2	22
	905-2501	SM-2*	1/4	3/4	14
	905-2502	SM-3*	1/4	1	10
	905-3750	SM-4	3/8	5/8	28
	905-5000	SM-5	1/2	7/8	28
	905-6250	SM-6	5/8	1	31

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	905-2362	SM-1*	6	12	22
	905-2363	SM-2*	6	19	14
	905-2364	SM-3*	6	25	10
	905-3750-60	SM-4	9	16	28
	905-5000-60	SM-5	12	22	28
	905-6250-60	SM-6	16	25	31

List 906 — Egg Shape

Units: Inch

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	906-2500	SE-1*	1/4	3/8
	906-3750	SE-3	3/8	5/8
	906-5000	SE-5	1/2	7/8
	906-6250	SE-6	5/8	1
	906-7500	SE-7	3/4	1

Units: mm

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	906-2362	SE-1*	6.0	9
	906-3750-60	SE-3	9.5	16
	906-5000-60	SE-5	12.7	22
	906-6250-60	SE-6	16.0	25
	906-7500-60	SE-7	19.0	25



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).




1/4" Shank


6mm Shank

List 807 — 14° Included Angle

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	807-2500	SL-1*	1/4	5/8	14
	807-3125	SL-2	5/16	7/8	14
	807-3750	SL-3	3/8	1-1/16	14
	807-5000	SL-4	1/2	1-1/8	14
	807-6250	SL-5	5/8	1-5/16	14
	807-7500	SL-7	3/4	1-1/2	14

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	807-2362	SL-1*	6	16	14
	807-3125-60	SL-2	8	22	14
	807-3750-60	SL-3	9	26	14
	807-5000-60	SL-4	12	28	14
	807-6250-60	SL-5	16	33	14
	807-7500-60	SL-7	19	38	14

List 808 — Ball Shape

Units: Inch


Medium Tough Cut	EDP Number	Style	Diameter
	808-1250	SD-11*	1/8
	808-1875	SD-14*	3/16
	808-2500	SD-1*	1/4
	808-3125	SD-2	5/16
	808-3750	SD-3	3/8
	808-5000	SD-5	1/2
	808-6250	SD-6	5/8
	808-7500	SD-7	3/4
	808-1000	SD-9	1

Units: mm


Medium Tough Cut	EDP Number	Style	Diameter
	808-1250-60	SD-11*	3
	808-1875-60	SD-14*	5
	808-2362	SD-1*	6
	808-3125-60	SD-2	8
	808-3750-60	SD-3	9
	808-5000-60	SD-5	12
	808-6250-60	SD-6	16
	808-7500-60	SD-7	19
	808-1000-60	SD-9	25

List 849 — 90° Cone

Units: Inch

Medium Tough Cut	EDP Number	Style	Dia.	Incl. Ang. Deg.
	849-2500	SK-1*	1/4	90
	849-3750	SK-3	3/8	90
	849-5000	SK-5	1/2	90
	849-6250	SK-6	5/8	90
	849-7500	SK-7	3/4	90
	849-1000	SK-9	1	90

Units: mm

Medium Tough Cut	EDP Number	Style	Dia.	Incl. Ang. Deg.
	849-2362	SK-1*	6	90
	849-3750-60	SK-3	9	90
	849-5000-60	SK-5	12	90
	849-6250-60	SK-6	16	90
	849-7500-60	SK-7	19	90
	849-1000-60	SK-9	25	90

*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).






1/4" Shank


6mm Shank

List 907 — 14° Included Angle

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	907-2500	SL-1*	1/4	5/8	14
	907-3125	SL-2	5/16	7/8	14
	907-3750	SL-3	3/8	1-1/16	14
	907-5000	SL-4	1/2	1-1/8	14
	907-6250	SL-5	5/8	1-5/16	14
	907-7500	SL-7	3/4	1-1/2	14

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	907-2362	SL-1*	6	16	14
	907-3125-60	SL-2	8	22	14
	907-3750-60	SL-3	9	26	14
	907-5000-60	SL-4	12	28	14
	907-6250-60	SL-5	16	33	14
	907-7500-60	SL-7	19	38	14

List 908 — Ball Shape

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Diameter
	908-1250	SD-11*	1/8
	908-1875	SD-14*	3/16
	908-2500	SD-1*	1/4
	908-3125	SD-2	5/16
	908-3750	SD-3	3/8
	908-5000	SD-5	1/2
	908-6250	SD-6	5/8
	908-7500	SD-7	3/4
	908-1000	SD-9	1

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Diameter
	908-1250-60	SD-11*	3
	908-1875-60	SD-14*	5
	908-2362	SD-1*	6
	908-3125-60	SD-2	8
	908-3750-60	SD-3	9
	908-5000-60	SD-5	12
	908-6250-60	SD-6	16
	908-7500-60	SD-7	19
	908-1000-60	SD-9	25

List 949 — 90° Cone

Units: Inch

Medium Right Hand Spiral	EDP Number	Style	Dia.	Incl. Ang. Deg.
	949-2500	SK-1*	1/4	90
	949-3750	SK-3	3/8	90
	949-5000	SK-5	1/2	90
	949-6250	SK-6	5/8	90
	949-7500	SK-7	3/4	90
	949-1000	SK-9	1	90

Units: mm

Medium Right Hand Spiral	EDP Number	Style	Dia.	Incl. Ang. Deg.
	949-2362	SK-1*	6	90
	949-3750-60	SK-3	9	90
	949-5000-60	SK-5	12	90
	949-6250-60	SK-6	16	90
	949-7500-60	SK-7	19	90
	949-1000-60	SK-9	25	90



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).




1/4" Shank


6mm Shank

List 850 — 60° Cone

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Incl. Ang. Deg.
	850-2500	SJ-1*	1/4	60
	850-3750	SJ-3	3/8	60
	850-5000	SJ-5	1/2	60
	850-6250	SJ-6	5/8	60
	850-7500	SJ-7	3/4	60
	850-1000	SJ-9	1	60

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Incl. Ang. Deg.
	850-2362	SJ-1*	6	60
	850-3750-60	SJ-3	9	60
	850-5000-60	SJ-5	12	60
	850-6250-60	SJ-6	16	60
	850-7500-60	SJ-7	19	60
	850-1000-60	SJ-9	25	60

List 851 — Flame Shape

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	851-3125	SH-2	5/16	3/4
	851-5000	SH-5	1/2	1-1/4
	851-6250	SH-6	5/8	1-7/16
	851-7500	SH-7	3/4	1-5/8

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	851-3125-60	SH-2	8	19
	851-5000-60	SH-5	12	31
	851-6250-60	SH-6	16	36
	851-7500-60	SH-7	19	41

List 852 — Inverted Taper

Units: Inch

Medium Tough Cut	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	852-2500	SN-1*	1/4	5/16	10
	852-3750	SN-2	3/8	3/8	13
	852-5000	SN-4	1/2	1/2	28
	852-6250	SN-6	5/8	3/4	18
	852-7500	SN-7	3/4	5/8	30

Units: mm

Medium Tough Cut	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	852-2362	SN-1*	6.0	8	10
	852-3750-60	SN-2	9.5	9	13
	852-5000-60	SN-4	12.0	12	28
	852-6250-60	SN-6	16.0	19	18
	852-7500-60	SN-7	19.0	16	30



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).






1/4" Shank


6mm Shank

List 950 — 60° Cone

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Incl. Ang. Deg.
	950-2500	SJ-1*	1/4	60
	950-3750	SJ-3	3/8	60
	950-5000	SJ-5	1/2	60
	950-6250	SJ-6	5/8	60
	950-7500	SJ-7	3/4	60
	950-1000	SJ-9	1	60

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Incl. Ang. Deg.
	950-2362	SJ-1*	6	60
	950-3750-60	SJ-3	9	60
	950-5000-60	SJ-5	12	60
	950-6250-60	SJ-6	16	60
	950-7500-60	SJ-7	19	60
	950-1000-60	SJ-9	25	60

List 951 — Flame Shape

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	951-3125	SH-2	5/16	3/4
	951-5000	SH-5	1/2	1-1/4
	951-6250	SH-6	5/8	1-7/16
	951-7500	SH-7	3/4	1-5/8

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	951-3125-60	SH-2	8	19
	951-5000-60	SH-5	12	31
	951-6250-60	SH-6	16	36
	951-7500-60	SH-7	19	41

List 952 — Inverted Taper

Units: Inch

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	952-2500	SN-1*	1/4	5/16	10
	952-3750	SN-2	3/8	3/8	13
	952-5000	SN-4	1/2	1/2	28
	952-6250	SN-6	5/8	3/4	18
	952-7500	SN-7	3/4	5/8	30

Units: mm

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length	Incl. Ang. Deg.
	952-2362	SN-1*	6	8	10
	952-3750-60	SN-2	9	9	13
	952-5000-60	SN-4	12	12	28
	952-6250-60	SN-6	16	19	18
	952-7500-60	SN-7	19	16	30



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).


*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).




1/4" Steel Shank (6" OAL)


6mm Steel Shank (152mm OAL)


List 861 — Cylindrical

Medium Tough Cut	EDP Number	Style	Dia.	Units: Inch
				Flute Length
	861-3750	SA-3L6	3/8	3/4
	861-5000	SA-5L6	1/2	1


Medium Tough Cut	EDP Number	Style	Dia.	Units: mm
				Flute Length
	861-3750-60	SA-3L6	9	19
	861-5000-60	SA-5L6	12	25


List 862 — Cylindrical Ball End

Medium Tough Cut	EDP Number	Style	Dia.	Units: Inch
				Flute Length
	862-3750	SC-3L6	3/8	3/4
	862-5000	SC-5L6	1/2	1

Medium Tough Cut	EDP Number	Style	Dia.	Units: mm
				Flute Length
	862-3750-60	SC-3L6	9	19
	862-5000-60	SC-5L6	12	25

List 863 — Round Nose Tree

Medium Tough Cut	EDP Number	Style	Dia.	Units: Inch
				Flute Length
	863-3750	SF-3L6	3/8	3/4
	863-5000	SF-5L6	1/2	1

Medium Tough Cut	EDP Number	Style	Dia.	Units: mm
				Flute Length
	863-3750-60	SF-3L6	9	19
	863-5000-60	SF-5L6	12	25




1/4" Steel Shank (6" OAL)


6mm Steel Shank (152mm OAL)

List 961 — Cylindrical

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	961-3750	SA-3L6	3/8	3/4
	961-5000	SA-5L6	1/2	1

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	961-3750-60	SA-3L6	9	19
	961-5000-60	SA-5L6	12	25

List 962 — Cylindrical Ball End

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	962-3750	SC-3L6	3/8	3/4
	962-5000	SC-5L6	1/2	1

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	962-3750-60	SC-3L6	9	19
	962-5000-60	SC-5L6	12	25

List 963 — Round Nose Tree

Units: Inch

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	963-3750	SF-3L6	3/8	3/4
	963-5000	SF-5L6	1/2	1

Units: mm

Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	963-3750-60	SF-3L6	9	19
	963-5000-60	SF-5L6	12	25




1/4" Steel Shank (6" OAL)


6mm Steel Shank (152mm OAL)

List 867 — 14° Included Angle

Units: Inch


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	867-3750	SL-3L6	3/8	1-1/16
	867-5000	SL-5L6	1/2	1-1/8

Units: mm


Medium Tough Cut	EDP Number	Style	Dia.	Flute Length
	867-3750-60	SL-3L6	9	26
	867-5000-60	SL-5L6	12	28

List 868 — Ball Shape

Units: Inch

Medium Tough Cut	EDP Number	Style	Dia.
	868-3750	SD-3L6	3/8
	868-5000	SD-5L6	1/2

Units: mm

Medium Tough Cut	EDP Number	Style	Dia.
	868-3750-60	SD-3L6	9
	868-5000-60	SD-5L6	12




1/4" Steel Shank (6" OAL)


6mm Steel Shank (152mm OAL)

List 967 — 14° Included Angle

Units: Inch


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	967-3750	SL-3L6	3/8	1-1/16
	967-5000	SL-5L6	1/2	1-1/8

Units: mm


Medium Right Hand Spiral	EDP Number	Style	Dia.	Flute Length
	967-3750-60	SL-3L6	9	26
	967-5000-60	SL-5L6	12	28

List 968 — Ball Shape

Units: Inch

Medium Right Hand Spiral	EDP Number	Style	Dia.
	968-3750	SD-3L6	3/8
	968-5000	SD-5L6	1/2

Units: mm

Medium Right Hand Spiral	EDP Number	Style	Dia.
	968-3750-60	SD-3L6	9
	968-5000-60	SD-5L6	12




1/4" Shank (For Aluminum)


6mm Shank (For Aluminum)

List 881 — Cylindrical

Units: Inch


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	881-2500	SA-1A*	1/4	5/8
	881-3750	SA-3A	3/8	3/4
	881-5000	SA-5A	1/2	1
	881-6250	SA-6A	5/8	1
	881-7500	SA-7A	3/4	1

Units: mm


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	881-2362	SA-1MA*	6	16
	881-3125-60	SA-2MA	8	19
	881-3750-60	SA-3MA	9	19
	881-5000-60	SA-5MA	12	25
	881-6250-60	SA-6MA	16	25
	881-7500-60	SA-7MA	19	25

List 882 — Cylindrical Ball End

Units: Inch


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	882-2500	SC-1A*	1/4	5/8
	882-3750	SC-3A	3/8	3/4
	882-5000	SC-5A	1/2	1
	882-6250	SC-6A	5/8	1
	882-7500	SC-7A	3/4	1

Units: mm


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	882-2362	SC-1MA	6	19
	882-3750-60	SC-3MA	9	19
	882-5000-60	SC-5MA	12	25
	882-6250-60	SC-6MA	16	25
	882-7500-60	SC-7MA	19	25

List 883 — Round Nose Tree

Units: Inch

Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	883-2500	SF-1A*	1/4	5/8
	883-3750	SF-3A	3/8	3/4
	883-5000	SF-5A	1/2	1
	883-6250	SF-6A	5/8	1
	883-7500	SF-14A	3/4	1-1/4

Units: mm

Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	883-2362	SF-1MA	6	16
	883-3750-60	SF-3MA	9	19
	883-5000-60	SF-5MA	12	25
	883-6250-60	SF-6MA	16	25
	883-7500-60	SF-14MA	19	32

Aluminum cut burs are designed for use on:

- Aluminum
- Non-ferrous metals
- Soft Steel
- Reinforced plastics
- Other soft materials

Also provide excellent work finish with minimum loading when cutting soft, sticky materials.



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).






1/4" Shank (For Aluminum)


6mm Shank (For Aluminum)

List 885 — Flame Shape

Units: Inch


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	885-5000	SH-5A	1/2	1-1/4
	885-6250	SH-6A	5/8	1-7/16
	885-7500	SH-7A	3/4	1-5/8

Units: mm


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	885-5000-60	SH-5MA	12	32
	885-6250-60	SH-6MA	16	37
	885-7500-60	SH-7MA	19	41

List 886 — Egg Shape

Units: Inch


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	886-3750	SE-3A	3/8	5/8
	886-5000	SE-5A	1/2	7/8
	886-6250	SE-6A	5/8	1
	886-7500	SE-7A	3/4	1

Units: mm


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	886-3750-60	SE-3MA	9	16
	886-5000-60	SE-5MA	12	22
	886-6250-60	SE-6MA	16	25
	886-7500-60	SE-7MA	19	25

List 887 — 14° Included Angle

Units: Inch


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	887-3750	SL-3A	3/8	1-1/16
	887-5000	SL-4A	1/2	1-1/8
	887-6250	SL-6A	5/8	1-5/16
	887-7500	SL-7A	3/4	1-1/2

Units: mm


Aluminium Cut	EDP Number	Style	Dia.	Flute Length
	887-3750-60	SL-3MA	9	27
	887-5000-60	SL-4MA	12	29
	887-6250-60	SL-5MA	16	33
	887-7500-60	SL-7MA	19	38

List 888 — Ball Shape

Units: Inch

Aluminium Cut	EDP Number	Style	Dia.
	888-2500	SD-1A*	1/4
	888-3750	SD-3A	3/8
	888-5000	SD-5A	1/2
	888-6250	SD-6A	5/8

Units: mm

Aluminium Cut	EDP Number	Style	Dia.
	888-2362	SD-1MA*	6
	888-3125-60	SD-2MA	8
	888-3750-60	SD-3MA	9
	888-5000-60	SD-5MA	12
	888-6250-60	SD-6MA	16



*Indicates 1/4" brazed carbide shank 2" OAL; all others have 1/4" diameter hardened steel shank (3/8" diameter shanks available).

*Indicates 6mm brazed carbide shank 50mm OAL; all others have 6mm diameter hardened steel shank (9mm diameter shanks available).



1/8" Shank Dia. (1-1/2" OAL)

List 800 — Inch Sizes, Tough Cut

Units: Inch



Style: SA-42
Size: 3/32 x 7/16
EDP Number: 800-8001



Style: SA-43
Size: 1/8 x 9/16
800-8002



Style: SB-43
Size: 1/8 x 9/16
800-8003



Style: SC-42
Size: 1/8 x 9/16
800-8004



Style: SG-44
Size: 1/8 x 1/2
800-8005



Style: SF-42
Size: 1/8 x 1/2
EDP Number: 800-8006



Style: SC-41
Size: 3/32 x 7/16
800-8007



Style: SA-41
Size: 1/16 x 1/4
800-8008



Style: SE-41
Size: 1/8 x 7/32
800-8010



Style: SM-41
Size: 1/8 x 11/32
Inc. Taper Deg.: 12
EDP Number: 800-8011



Style: SM-42
Size: 1/8 x 7/16
14
800-8012



Style: SM-43
Size: 1/8 x 5/8
7
800-8013



Style: SN-42
Size: 1/8 x 3/16
10 INVERTED
900-9014



Style: SJ-42
Size: 1/8 x 3/32
60
800-8015



Style: SK-42
Size: 1/8 x 1/16
Inc. Taper Deg.: 90
EDP Number: 800-8016



Style: SL-42
Size: 1/8 x 1/2
8
800-8017



Style: SD-41
Size: 3/32
800-8018



Style: SD-42
Size: 1/8
800-8019



Style: SH-41
Size: 1/8 x 1/4
800-8020





3mm Shank Dia. (38mm OAL)

List 800 — Metric Sizes, Tough Cut

Units: mm



Style: SA-42
Size: 2.38 x 11
EDP Number: 800-8001-30



Style: SA-43
Size: 3 x 14
EDP Number: 800-8002-30



Style: SB-43
Size: 3 x 14
EDP Number: 800-8003-30



Style: SC-42
Size: 3 x 14
EDP Number: 800-8004-30



Style: SG-44
Size: 3 x 12
EDP Number: 800-8005-30



Style: SF-42
Size: 3 x 12
EDP Number: 800-8006-30



Style: SC-41
Size: 2.38 x 14
EDP Number: 800-8007-30



Style: SA-41
Size: 1.59 x 6
EDP Number: 800-8008-30



Style: SB-ECO
Size: 3
EDP Number: 800-8009-30



Style: SE-41
Size: 3 x 5.5
EDP Number: 800-8010-30



Style: SM-41
Size: 3 x 8
Inc. Taper Deg.: 12
EDP Number: 800-8011-30



Style: SM-42
Size: 3 x 11
Inc. Taper Deg.: 14
EDP Number: 800-8012-30



Style: SM-43
Size: 3 x 16
Inc. Taper Deg.: 7
EDP Number: 800-8013-30



Style: SN-42
Size: 3 x 5
Inc. Taper Deg.: 10 INVERTED
EDP Number: 800-8014-30



Style: SJ-42
Size: 3 x 2.5
Inc. Taper Deg.: 60
EDP Number: 800-8015-30



Style: SK-42
Size: 3 x 1.5
Inc. Taper Deg.: 90
EDP Number: 800-8016-30



Style: SL-42
Size: 3 x 12
Inc. Taper Deg.: 8
EDP Number: 800-8017-30



Style: SD-41
Size: 2.38
EDP Number: 800-8018-30



Style: SD-42
Size: 3
EDP Number: 800-8019-30



Style: SH-41
Size: 3 x 6
EDP Number: 800-8020-30



1/8" Shank Dia. (1-1/2" OAL)

List 900 — Inch Sizes, Medium Right Hand Spiral

Units: Inch



Style: SA-42
Size: 3/32 x 7/16
EDP Number: 900-9001



Style: SA-43
Size: 1/8 x 9/16
EDP Number: 900-9002



Style: SB-43
Size: 1/8 x 9/16
EDP Number: 900-9003



Style: SC-42
Size: 1/8 x 9/16
EDP Number: 900-9004



Style: SG-44
Size: 1/8 x 1/2
EDP Number: 900-9005



Style: SF-42
Size: 1/8 x 1/2
EDP Number: 900-9006



Style: SC-41
Size: 3/32 x 7/16
EDP Number: 900-9007



Style: SA-41
Size: 1/16 x 1/4
EDP Number: 900-9008



Style: SB-ECO
Size: 1/8
EDP Number: 900-9009



Style: SE-41
Size: 1/8 x 7/32
EDP Number: 900-9010



Style: SM-41
Size: 1/8 x 11/32
Inc. Taper Deg.: 12
EDP Number: 900-9011



Style: SM-42
Size: 1/8 x 7/16
Inc. Taper Deg.: 14
EDP Number: 900-9012



Style: SM-43
Size: 1/8 x 5/8
Inc. Taper Deg.: 7
EDP Number: 900-9013



Style: SN-42
Size: 1/8 x 3/16
Inc. Taper Deg.: 10 INVERTED
EDP Number: 900-9014



Style: SJ-42
Size: 1/8 x 3/32
Inc. Taper Deg.: 60
EDP Number: 900-9015



Style: SK-42
Size: 1/8 x 1/16
Inc. Taper Deg.: 90
EDP Number: 900-9016



Style: SL-42
Size: 1/8 x 1/2
Inc. Taper Deg.: 8
EDP Number: 900-9017



Style: SD-41
Size: 3/32
EDP Number: 900-9018



Style: SD-42
Size: 1/8
EDP Number: 900-9019



Style: SH-41
Size: 1/8 x 1/4
EDP Number: 900-9020





3mm Shank Dia. (38mm OAL)

List 900 — Metric Sizes, Medium Right Hand Spiral

Units: mm



Style: SA-42
Size: 2.38 x 11
EDP Number: 900-9001-30



Style: SA-43
Size: 3 x 14
EDP Number: 900-9002-30



Style: SB-43
Size: 3 x 14
EDP Number: 900-9003-30



Style: SC-42
Size: 3 x 14
EDP Number: 900-9004-30



Style: SG-44
Size: 3 x 12
EDP Number: 900-9005-30



Style: SF-42
Size: 3 x 12
EDP Number: 900-9006-30



Style: SC-41
Size: 2.38 x 14
EDP Number: 900-9007-30



Style: SA-41
Size: 1.59 x 6
EDP Number: 900-9008-30



Style: SB-ECO
Size: 3
EDP Number: 900-9009-30



Style: SE-41
Size: 3 x 5.5
EDP Number: 900-9010-30



Style: SM-41
Size: 3 x 8
Inc. Taper Deg.: 12
EDP Number: 900-9011-30



Style: SM-42
Size: 3 x 11
Inc. Taper Deg.: 14
EDP Number: 900-9012-30



Style: SM-43
Size: 3 x 16
Inc. Taper Deg.: 7
EDP Number: 900-9013-30



Style: SN-42
Size: 3 x 5
Inc. Taper Deg.: 10 INVERTED
EDP Number: 900-9014-30



Style: SJ-42
Size: 3 x 2.5
Inc. Taper Deg.: 60
EDP Number: 900-9015-30



Style: SK-42
Size: 3 x 1.5
Inc. Taper Deg.: 90
EDP Number: 900-9016-30



Style: SL-42
Size: 3 x 12
Inc. Taper Deg.: 8
EDP Number: 900-9017-30



Style: SD-41
Size: 2.38
EDP Number: 900-9018-30



Style: SD-42
Size: 3
EDP Number: 900-9019-30












Style: SH-41
Size: 3 x 6
EDP Number: 900-9020-30



1/4" Diameter Carbide Burs (1/8" Hardened Steel Shank)

List 815 — Inch Sizes, Tough Cut










Units: Inch

	Cylindrical	Cylindrical Ball End	Round Nose Tree	Pointed Tree	Pointed Cone	End Cut	Ball Shape	Egg Shape	Inverted Taper
									
Style:	SA-51	SC-51	SF-51	SG-51	SM-51	SB-51	SD-51	SE-51	SN-51
Size:	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 3/16	1/4	1/4 x 3/8	1/4 x 1/4
Inc. Taper Deg.:					22				10 INVERTED
EDP Number:	815-0001	815-0002	815-0003	815-0004	815-0005	815-0006	815-0007	815-0008	815-0009

6mm Diameter Carbide Burs (3mm Hardened Steel Shank)

List 815 — Metric Sizes, Tough Cut

Units: mm

	Cylindrical	Cylindrical Ball End	Round Nose Tree	Pointed Tree	Pointed Cone	End Cut	Ball Shape	Egg Shape	Inverted Taper
									
Style:	SA-51	SC-51	SF-51	SG-51	SM-51	SB-51	SD-51	SE-51	SN-51
Size:	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 5	6.35	6.35 x 9	6.35 x 6.35
Inc. Taper Deg.:						22			10 INVERTED
EDP Number:	815-0001-30	815-0002-30	815-0003-30	815-0004-30	815-0005-30	815-0006-30	815-0007-30	815-0008-30	815-0009-30










1/4" Diameter Carbide Burs (1/8" Hardened Steel Shank)

List 915 — Inch Sizes, Medium Right Hand Spiral

Units: Inch

	Cylindrical	Cylindrical Ball End	Round Nose Tree	Pointed Tree	Pointed Cone	End Cut	Ball Shape	Egg Shape	Inverted Taper
									
Style:	SA-51	SC-51	SF-51	SG-51	SM-51	SB-51	SD-51	SE-51	SN-51
Size:	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 3/16	1/4	1/4 x 3/8	1/4 x 1/4
Inc. Taper Deg.:						22			10 INVERTED
EDP Number:	915-0001	915-0002	915-0003	915-0004	915-0005	915-0006	915-0007	915-0008	915-0009






Style:	SA-51	SC-51	SF-51	SG-51	SM-51	SB-51	SD-51	SE-51	SN-51
Size:	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 1/2	1/4 x 3/16	1/4	1/4 x 3/8	1/4 x 1/4
Inc. Taper Deg.:						22			10 INVERTED
EDP Number:	915-0001	915-0002	915-0003	915-0004	915-0005	915-0006	915-0007	915-0008	915-0009

6mm Diameter Carbide Burs (3mm Hardened Steel Shank)

List 915 — Metric Sizes, Medium Right Hand Spiral

Units: mm

	Cylindrical	Cylindrical Ball End	Round Nose Tree	Pointed Tree	Pointed Cone	End Cut	Ball Shape	Egg Shape	Inverted Taper
									
Style:	SA-51	SC-51	SF-51	SG-51	SM-51	SB-51	SD-51	SE-51	SN-51
Size:	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 5	6.35	6.35 x 9	6.35 x 6.35
Inc. Taper Deg.:						22			10 INVERTED
EDP Number:	915-0001-30	915-0002-30	915-0003-30	915-0004-30	915-0005-30	915-0006-30	915-0007-30	915-0008-30	915-0009-30





Style:	SA-51	SC-51	SF-51	SG-51	SM-51	SB-51	SD-51	SE-51	SN-51
Size:	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 12	6.35 x 5	6.35	6.35 x 9	6.35 x 6.35
Inc. Taper Deg.:						22			10 INVERTED
EDP Number:	915-0001-30	915-0002-30	915-0003-30	915-0004-30	915-0005-30	915-0006-30	915-0007-30	915-0008-30	915-0009-30



1/8" Brazed Carbide Shank (1-1/2" OAL)

List 820 — Inch Sizes, Tough Cut


Units: Inch

						
Style:	SA-52	SA-53	SC-52	SC-53	SF-53	SG-53
Size:	5/32 x 1/2	3/16 x 1/2	5/32 x 1/2	3/16 x 1/2	3/16 x 1/2	3/16 x 1/2
EDP Number:	820-0001	820-0011	820-0002	820-0012	820-0003	820-0004
						
Style:	SM-53	SE-53	SL-53	SD-53	SH-53	SN-53
Size:	3/16 x 1/2	3/16 x 9/32	3/16 x 1/2	3/16	3/16 x 3/8	3/16 x 1/4
Inc. Taper Deg.:	16		14			10 INVERTED
EDP Number:	820-0005	820-0006	820-0007	820-0008	820-0009	820-0010

3mm Brazed Carbide Shank (38mm OAL)

List 820 — Metric Sizes, Tough Cut

Units: mm

						
Style:	SA-52	SA-53	SC-52	SC-53	SF-53	SG-53
Size:	3.97 x 12	4.76 x 12	3.97 x 12	4.76 x 12	4.76 x 12	4.76 x 12
EDP Number:	820-0001-30	820-0011-30	820-0002-30	820-0012-30	820-0003-30	820-0004-30
						
Style:	SM-53	SE-53	SL-53	SD-53	SH-53	SN-53
Size:	3.97 x 12	4.76 x 12	3.97 x 12	4.76	4.76 x 9	4.76 x 6
Inc. Taper Deg.:	16		14			10 INVERTED
EDP Number:	820-0005-30	820-0006-30	820-0007-30	820-0008-30	820-0009-30	820-0010-30

















1/8" Brazed Carbide Shank (1-1/2" OAL)

List 920 — Inch Sizes, Medium Right Hand Spiral













Units: Inch

						
Style:	SA-52	SA-53	SC-52	SC-53	SF-53	SG-53
Size:	5/32 x 1/2	3/16 x 1/2	5/32 x 1/2	3/16 x 1/2	3/16 x 1/2	3/16 x 1/2
EDP Number:	920-0001	920-0011	920-0002	920-0012	920-0003	920-0004
						
Style:	SM-53	SE-53	SL-53	SD-53	SH-53	SN-53
Size:	3/16 x 1/2	3/16 x 9/32	3/16 x 1/2	3/16	3/16 x 3/8	3/16 x 1/4
Inc. Taper Deg.:	16		14			10 INVERTED
EDP Number:	920-0005	920-0006	920-0007	920-0008	920-0009	920-0010

3mm Brazed Carbide Shank (38mm OAL)

List 920 — Metric Sizes, Medium Right Hand Spiral


Units: mm

						
Style:	SA-52	SA-53	SC-52	SC-53	SF-53	SG-53
Size:	3.97 x 12	4.76 x 12	3.97 x 12	4.76 x 12	4.76 x 12	4.76 x 12
EDP Number:	920-0001-30	920-0011-30	920-0002-30	920-0012-30	920-0003-30	920-0004-30
						
Style:	SM-53	SE-53	SL-53	SD-53	SH-53	SN-53
Size:	3.97 x 12	4.76 x 12	3.97 x 12	4.76	4.76 x 9	4.76 x 6
Inc. Taper Deg.:	16		14			10 INVERTED
EDP Number:	920-0005-30	920-0006-30	920-0007-30	920-0008-30	920-0009-30	920-0010-30



MILLING

Technical

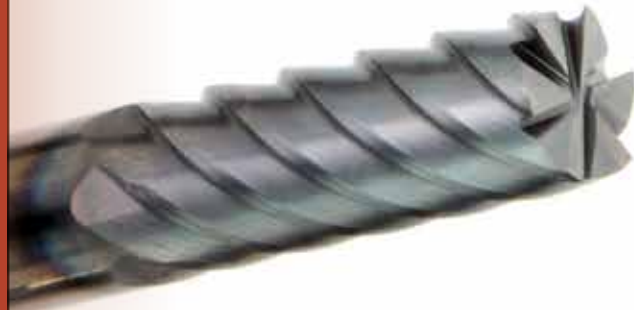




A Brand® AE-VMS

Advanced Performance Anti-Vibration Carbide End Mill

List 8200 - A Brand® AE-VMS : 4 Flute, Multiple Lengths

List 8205 - A Brand® AE-VMS : 4 Flute, Regular Length

Side Milling

Hardness	-		< 30 HRC		-		30-45 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Stainless Steels		Prehardened Steels Hardened Steels		
Cutting Speed	330-490 SFM		330-490 SFM		200-330 SFM		260-395 SFM		
Depth of Cut	$aa=1.5D$ $ar=0.2D$ 								
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
1/64	-	25,000	20.0	25,000	20.0	25,000	20.0	25,000	20.0
1/32	-	25,000	20.0	25,000	20.0	25,000	20.0	25,000	20.0
-	1	22,298	17.8	22,298	17.8	22,298	17.8	22,298	17.8
3/64	-	18,728	15.0	18,728	15.0	18,728	15.0	18,728	15.0
-	1.5	14,865	17.8	14,865	17.8	14,865	17.8	14,865	17.8
1/16	-	14,046	16.9	14,046	16.9	14,046	16.9	14,046	16.9
5/64	-	11,237	13.5	11,237	13.5	11,237	13.5	11,237	13.5
-	2	11,149	17.8	11,149	17.8	11,149	17.8	11,149	17.8
3/32	-	9,364	15.0	9,364	15.0	9,364	15.0	9,364	15.0
-	2.5	8,919	17.8	8,919	17.8	8,919	17.8	8,919	17.8
7/64	-	8,724	17.4	8,724	17.4	8,724	17.4	8,724	17.4
-	3	13,896	66.7	12,603	40.3	8,079	19.4	10,664	29.9
-	4	10,422	70.9	9,452	45.4	6,059	21.8	7,998	32.0
3/16	-	8,753	59.5	7,939	38.1	5,089	18.3	6,718	26.9
-	5	8,337	80.0	7,562	48.4	4,847	21.3	6,398	35.8
-	6	6,948	83.4	6,302	60.5	4,201	25.2	5,332	42.7
1/4	-	6,565	78.8	5,954	57.2	3,969	23.8	5,038	40.3
5/16	-	5,252	63.0	4,763	45.7	3,176	19.1	4,031	32.2
-	8	5,211	70.9	4,726	60.5	3,151	23.9	3,999	41.6
3/8	-	4,377	59.5	3,969	50.8	2,646	20.1	3,359	34.9
-	10	4,169	65.0	3,781	52.9	2,521	23.2	3,199	35.8
7/16	-	3,751	58.5	3,402	47.6	2,268	20.9	2,879	32.2
-	12	3,474	54.2	3,151	49.2	2,101	21.0	2,666	29.9
1/2	-	3,282	51.2	2,977	46.4	1,985	19.8	2,519	28.2
5/8	-	2,656	41.4	2,382	37.2	1,405	14.0	2,015	22.6
3/4	-	2,214	41.6	1,985	34.1	1,170	15.0	1,679	20.8
1	-	1,660	31.2	1,469	25.3	878	11.9	1,260	16.1


1. The above milling condition is a guideline for overhang length 3D.
2. Use a rigid and precise machine and holder.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.
7. Adjust the speed and feed accordingly when the overhang length is longer than specified.

continued on next page





Slotting

Hardness	-		<30 HRC		-		30-45 HRC								
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Stainless Steels		Prehardened Steels Hardened Steels								
Cutting Speed	260-395 SFM		230-360 SFM		155-260 SFM		195-330 SFM								
Depth of Cut	aa=1.0D					<table border="1"> <tr> <th>Dia</th> <th>aa</th> </tr> <tr> <td>D≤6</td> <td>0.5D</td> </tr> <tr> <td>D>6</td> <td>1.0D</td> </tr> </table> 		Dia	aa	D≤6	0.5D	D>6	1.0D	aa=1.0D	
Dia	aa														
D≤6	0.5D														
D>6	1.0D														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min							
1/64	-	25,000	10.0	25,000	10.0	25,000	10.0	25,000							
1/32	-	25,000	10.0	25,000	10.0	24,427	19.5	25,000							
-	1	25,000	20.0	25,000	20.0	19,389	15.5	22,298							
3/64	-	24,427	19.5	21,578	17.3	16,285	13.0	18,728							
-	1.5	19,389	23.3	17,127	20.6	12,926	15.5	14,865							
1/16	-	18,321	22.0	16,183	19.4	12,214	14.7	14,046							
5/64	-	14,656	17.6	12,947	15.5	9,771	15.6	11,237							
-	2	14,542	23.3	12,845	20.6	9,695	15.5	11,149							
3/32	-	12,214	19.5	10,789	17.3	8,142	19.5	9,364							
-	2.5	11,634	32.6	10,276	24.7	7,756	18.6	8,919							
7/64	-	10,469	29.3	9,248	22.2	8,201	19.7	8,026							
-	3	10,664	38.4	8,564	24.0	7,594	18.2	7,433							
-	4	7,998	38.4	7,150	28.6	5,696	20.5	5,574							
3/16	-	6,718	32.2	6,005	24.0	4,784	17.2	4,682							
-	5	6,398	41.0	5,720	32.0	4,556	21.9	4,460							
-	6	5,332	42.7	4,767	34.3	3,797	15.2	3,716							
1/4	-	5,038	40.3	4,504	32.4	3,588	14.4	3,511							
5/16	-	4,031	32.2	3,603	25.9	2,870	14.9	2,809							
-	8	3,999	35.2	3,575	28.6	2,848	14.8	2,787							
3/8	-	3,359	29.6	3,003	24.0	2,392	13.4	2,341							
-	10	3,199	33.3	2,860	27.5	2,278	14.6	2,230							
7/16	-	2,879	29.9	2,574	24.7	2,050	13.9	2,007							
-	12	2,666	32.0	2,383	25.7	1,899	12.9	2,101							
1/2	-	2,519	30.2	2,252	24.3	1,794	12.2	1,985							
5/8	-	2,015	24.2	1,802	19.5	1,221	12.2	1,588							
3/4	-	1,679	20.2	1,476	15.9	1,018	11.0	1,349							
1	-	1,260	15.1	1,088	12.2	592	6.6	992							

1. The above milling condition is a guideline for overhang length 3D.
2. Use a rigid and precise machine and holder.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.
7. Adjust the speed and feed accordingly when the overhang length is longer than specified (refer to Parameter Reduction Chart below).

Parameter Reduction Chart by Length to Diameter Ratio

Hardness	-		Up to 30 HRC		30-45 HRC		-	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Prehardened Steels Hardened Steels		Stainless Steels	
L/D	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
Slotting	4	80%	70%		70%		60%	
	5	70%	60%		60%		50%	
Side Milling	4	90%	90%		80%		70%	
	5	80%	80%		70%		70%	





List 8210 - A Brand® AE-CR-VMS : 4 Flute, Multiple Lengths, Corner Radius

List 8215 - A Brand® AE-CR-VMS : 4 Flute, Regular Length, Corner Radius

Side Milling

Hardness	-		<30 HRC		-		30-45 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Stainless Steels		Prehardened Steels Hardened Steels		
Cutting Speed	330-490 SFM		330-490 SFM		200-330 SFM		260-395 SFM		
Depth of Cut	$a_a=1.5D$ $a_r=0.2D$								
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	3	13,896	55.6	12,765	35.7	8,079	16.2	10,664	25.6
-	4	10,422	62.5	9,573	38.3	6,059	19.4	7,998	25.6
3/16	-	8,753	52.5	8,041	32.2	5,089	16.3	6,718	21.5
-	5	8,337	66.7	7,659	39.8	4,847	17.5	6,398	28.2
-	6	6,948	77.8	6,382	56.2	4,201	21.8	5,332	38.4
1/4	-	6,565	73.5	6,031	53.1	3,969	20.6	5,038	36.3
5/16	-	5,252	58.8	4,824	42.5	3,176	16.5	4,031	29.0
-	8	5,211	66.7	4,787	57.4	3,151	21.4	3,999	36.8
3/8	-	4,377	56.0	4,020	48.2	2,646	18.0	3,359	30.9
-	10	4,169	61.7	3,829	52.1	2,521	20.2	3,199	32.0
7/16	-	3,751	55.5	3,446	46.9	2,268	18.1	2,879	28.8
-	12	3,474	51.4	3,191	48.5	2,101	18.5	2,666	26.7
1/2	-	3,282	48.6	3,015	45.8	1,985	17.5	2,519	25.2
5/8	-	2,626	38.9	2,412	36.7	1,588	14.0	2,015	20.2
3/4	-	2,188	32.4	2,010	30.6	1,323	11.6	1,679	16.8
1	-	1,641	24.3	1,508	22.9	992	8.7	1,260	12.6

1. The above milling condition is a guideline for overhang length 3D.
2. Use a rigid and precise machine and holder.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.
7. Adjust the speed and feed accordingly when the overhang length is longer than specified (refer to Parameter Reduction Chart on next page).

continued on next page





Slotting

Hardness	-		<30 HRC		-		30-45 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Stainless Steels		Prehardened Steels Hardened Steels							
Cutting Speed	260-395 SFM		230-360 SFM		155-260 SFM		160-260 SFM							
Depth of Cut	$a_a=1.0D$				<table border="1"> <tr> <th>Dia</th> <th>a_a</th> </tr> <tr> <td>$D \leq 6$</td> <td>0.5D</td> </tr> <tr> <td>$D > 6$</td> <td>1.0D</td> </tr> </table>		Dia	a_a	$D \leq 6$	0.5D	$D > 6$	1.0D	$a_a=1.0D$	
Dia	a_a													
$D \leq 6$	0.5D													
$D > 6$	1.0D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
-	3	10,664	29.9	9,695	23.3	7,433	14.9	8,402	16.8					
-	4	7,998	32.0	7,271	23.3	5,574	15.6	6,302	15.1					
3/16	-	6,718	26.9	6,107	19.5	4,682	13.1	5,293	12.7					
-	5	6,398	33.3	5,817	27.9	4,460	17.8	5,041	18.1					
-	6	5,332	40.5	4,847	27.1	3,716	14.9	4,201	23.5					
1/4	-	5,038	38.3	4,580	25.6	3,511	14.0	3,969	22.2					
5/16	-	4,031	30.6	3,664	20.5	2,809	11.2	3,176	17.8					
-	8	3,999	33.6	3,635	27.6	2,787	13.4	3,151	22.7					
3/8	-	3,359	28.2	3,053	23.2	2,341	11.2	2,646	19.1					
-	10	3,199	32.0	2,908	25.6	2,230	12.5	2,521	20.2					
7/16	-	2,879	28.8	2,617	23.0	2,007	11.2	2,268	18.1					
-	12	2,666	29.9	2,424	25.2	1,858	11.9	2,101	19.3					
1/2	-	2,519	28.2	2,290	23.8	1,756	11.2	1,985	18.3					
5/8	-	2,015	22.6	1,832	19.1	1,405	9.0	1,588	14.6					
3/4	-	1,679	18.8	1,527	15.9	1,170	7.5	1,323	12.2					
1	-	1,260	14.1	1,145	11.9	878	5.6	992	9.1					

1. The above milling condition is a guideline for overhang length 3D.
2. Use a rigid and precise machine and holder.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.
7. Adjust the speed and feed accordingly when the overhang length is longer than specified (refer to Parameter Reduction Chart below).

Parameter Reduction Chart by Length to Diameter Ratio


Hardness	-		Up to 30 HRC		30-45 HRC		-	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Prehardened Steels Hardened Steels		Stainless Steels	
L/D	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
Slotting	4	80%	70%		70%		60%	
	5	70%	60%		60%		50%	
Side Milling	4	90%	90%		80%		70%	
	5	80%	80%		70%		70%	





List 8206 - A Brand® AE-VMSS : 4 Flute, Stub Length

Side Milling

Hardness	-		-		-		30-45 HRC	
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels	
Cutting Speed	330-495 SFM		330-495 SFM		195-330 SFM		260-395 SFM	
Depth of Cut	$aa=1.5D$ $ar=0.2D$ 							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1.0	25,000	21.7	25,000	23.7	22,300	17.7	25,000	20.1
1.5	25,000	35.5	21,200	29.9	14,900	18.1	17,000	21.3
2.0	19,900	56.3	17,500	33.1	11,100	18.5	14,300	24.8
2.5	15,900	62.6	14,000	35.4	8,900	18.9	11,500	27.2
3.0	13,800	65.4	12,700	42.1	8,000	18.9	10,600	29.9
4.0	10,400	72.0	9,600	45.3	6,000	20.9	8,000	31.5
5.0	8,300	78.3	7,600	48.0	4,800	22.0	6,400	35.4
6.0	6,900	81.5	6,400	60.6	4,200	25.2	5,300	41.7
8.0	5,200	69.7	4,800	60.6	3,200	24.0	4,000	40.9
10.0	4,100	64.6	3,800	53.9	2,500	22.8	3,200	35.4
12.0	3,500	55.1	3,200	50.4	2,100	20.9	2,700	29.9

1. The above milling condition is a guideline for overhang length 3D.
2. Use a rigid and precise machine and holder.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.
7. Adjust the speed and feed accordingly when the overhang length is longer than specified (refer to Parameter Reduction Chart on next page).

continued on next page





Slotting

Hardness	-		-		-		30-45 HRC							
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels							
Cutting Speed	260-395 SFM		330-360 SFM		160-260 SFM		195-330 SFM							
Depth of Cut	$a_r=1D$				<table border="1"> <tr> <th>Dia</th> <th>aa</th> </tr> <tr> <td>D≤6</td> <td>0.5D</td> </tr> <tr> <td>D>6</td> <td>1.0D</td> </tr> </table>		Dia	aa	D≤6	0.5D	D>6	1.0D		
Dia	aa													
D≤6	0.5D													
D>6	1.0D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1.0	25,000	19.5	25,000	18.1	19,100	13.4	22,300	14.2						
1.5	19,100	24.0	17,000	18.9	12,700	14.2	14,900	16.5						
2.0	14,300	24.8	12,700	20.1	9,600	15.0	11,100	17.3						
2.5	11,500	30.7	10,200	22.4	7,600	16.9	8,900	18.1						
3.0	10,600	36.6	9,600	27.2	7,400	18.5	8,500	20.1						
4.0	8,000	37.8	7,200	28.3	5,600	19.3	6,400	20.1						
5.0	6,400	40.2	5,700	31.5	4,500	22.0	5,100	24.0						
6.0	5,300	40.6	4,800	35.4	3,700	14.6	4,200	26.4						
8.0	4,000	35.8	3,600	28.3	2,800	14.6	3,200	25.2						
10.0	3,200	33.1	2,900	27.6	2,200	13.8	2,500	21.7						
12.0	2,700	31.9	2,400	26.4	1,900	13.0	2,100	21.7						

1. The above milling condition is a guideline for overhang length 3D.
2. Use a rigid and precise machine and holder.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.
7. Adjust the speed and feed accordingly when the overhang length is longer than specified (refer to Parameter Reduction Chart below).

Parameter Reduction Chart by Length to Diameter Ratio

Hardness	-		Up to 30 HRC		30-45 HRC		-	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Prehardened Steels Hardened Steels		Stainless Steels	
L/D	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
Slotting	4	80%	70%		70%		60%	
	5	70%	60%		60%		50%	
Side Milling	4	90%	90%		80%		70%	
	5	80%	80%		70%		70%	




A Brand® AE-LN-VMSS

Advanced Performance Anti-Vibration Carbide End Mill

List 8230 - A Brand® AE-LN-VMSS : 4 Flute, Stub Length, Long Neck

List 8235 - A Brand® AE-LN-VMSS : 4 Flute, Stub Length, Long Neck

Side Milling

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steel		
Cutting Speed	260-395 SFM		230-360 SFM		130-260 SFM		160-260 SFM		
Depth of Cut	$a_a=1.5D$ $a_r=0.2D$ 								
Mill Dia.		Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
-	6	5,520	65.4	5,120	48.4	2,940	17.7	3,710	29.1
1/4	-	5,221	62.7	4,840	46.5	2,779	16.7	3,511	28.1
5/16	-	4,177	50.1	3,872	37.2	2,223	13.3	2,809	22.5
-	8	4,160	55.9	3,840	48.4	2,240	16.9	2,800	28.7
3/8	-	3,491	47.5	3,226	41.3	1,883	14.3	2,351	24.5
-	10	3,280	51.6	3,040	43.3	1,750	16.1	2,240	24.8
7/16	-	2,949	46.0	2,739	39.4	1,579	14.5	2,015	22.6
-	12	2,800	44.1	2,560	40.2	1,470	14.6	1,890	20.9
1/2	-	2,649	41.3	2,420	37.7	1,389	13.9	1,786	20.0
5/8	-	2,107	32.9	1,936	30.2	1,099	11.0	1,405	15.7
3/4	-	1,756	27.4	1,613	25.2	916	9.2	1,170	13.1
1	-	1,317	21.1	1,210	19.4	687	6.9	878	9.8


1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.
5. Reduce speed and feed as well as depth of cut when high precision is required.





List 8220 - A Brand® AE-LN-CR-VMS : 4 Flute, Long Neck, Corner Radius

Side Milling

Hardness	-		<30 HRC		-		30-45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Alloy Steels		Stainless Steels		Prehardened Steels Hardened Steels	
Cutting Speed	260-395 SFM		230-360 SFM		130-260 SFM		130-260 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.02D$ 							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	5,191	62.3	4,809	46.2	2,748	16.5	3,511	28.1
5/16	4,153	49.8	3,847	36.9	2,198	13.2	2,809	22.5
3/8	3,461	47.1	3,206	41.0	1,832	13.9	2,341	24.3
7/16	2,966	46.3	2,748	39.6	1,570	14.4	2,007	22.5
1/2	2,595	40.5	2,405	37.5	1,374	13.7	1,756	19.7
5/8	2,076	32.4	1,924	30.0	1,099	11.0	1,405	15.7
3/4	1,730	27.0	1,603	25.0	916	9.2	1,170	13.1
1	1,298	20.2	1,202	18.8	687	6.9	878	10.5

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.
5. Reduce speed and feed as well as depth of cut when high precision is required.





A Brand® AE-VML & AE-NIK-VML

Advanced Performance Anti-Vibration Carbide End Mill


List 8201 - A Brand® AE-VML : 4 Flute, Long Length

List 8207 - A Brand® AE-VML : 4 Flute, Long Length

List 8202 - A Brand® AE-NIK-VML : 4 Flute, Long Length, Nicks


List 8208 - A Brand® AE-NIK-VML : 4 Flute, Long Length, Nicks

3D Side Milling ($a_r=0.05D$)

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	525 (450-590) SFM		490 (425-560) SFM		410 (330-460) SFM		460 (390-525) SFM		
Depth of Cut	$a_a=3D$ $a_r=0.05D$ 								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min	
mm									
-	6	8,500	97.6	8,000	85.8	6,600	65.4	7,400	79.1
1/4	-	8,031	93.2	7,557	81.6	6,229	62.3	6,992	75.5
5/16	-	6,424	74.5	6,046	65.3	4,983	49.8	5,594	60.4
-	8	6,400	73.6	6,000	64.2	5,000	49.6	5,600	59.8
3/8	-	5,374	62.3	5,038	54.4	4,204	42.0	4,702	50.8
-	10	5,100	68.1	4,800	56.7	4,000	44.1	4,500	53.1
-	12	4,200	56.3	4,000	47.2	3,300	36.2	3,700	43.7
1/2	-	3,969	54.0	3,779	45.3	3,115	33.6	3,496	42.0

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.

3D Side Milling ($a_r=0.1D$)

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	720 (655-790) SFM		560 (490-620) SFM		425 (360-490) SFM		440 (360-490) SFM		
Depth of Cut	$a_a=3D$ $a_r=0.1D$ 								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min	
mm									
-	6	11,700	125.2	9,000	89.4	6,900	63.0	7,200	71.3
1/4	-	11,053	119.4	8,504	85.0	6,519	60.0	6,809	68.1
5/16	-	8,843	95.5	6,803	68.0	5,215	48.0	5,447	54.5
-	8	8,800	94.1	6,800	67.3	5,200	47.6	5,400	53.5
3/8	-	7,389	79.8	5,710	57.1	4,366	40.2	4,539	45.4
-	10	7,000	88.2	5,400	59.4	4,100	42.1	4,300	47.2
-	12	5,800	73.2	4,500	49.6	3,500	35.8	3,600	39.8
1/2	-	5,481	70.2	4,252	47.6	3,305	34.4	3,405	38.1

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.

continued on next page





3D Side Milling ($a_r=0.15D$)

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	460 (395-525) SFM		330 (260-395) SFM		280 (195-330) SFM		295 (230-360) SFM		
Depth of Cut	$a_a=3D$ $a_r=0.15D$								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min	
mm									
-	6	7,400	73.2	5,600	51.2	4,500	37.4	4,800	43.7
1/4	-	6,992	69.9	5,298	48.7	4,260	35.8	4,534	41.7
5/16	-	5,594	55.9	4,238	39.0	3,408	28.6	3,627	33.4
-	8	5,600	55.5	4,200	38.2	3,400	28.3	3,600	33.1
3/8	-	4,702	47.0	3,532	32.5	2,860	24.0	3,023	27.8
-	10	4,500	53.1	3,300	33.9	2,700	25.6	2,900	29.5
-	12	3,700	43.7	2,800	28.7	2,300	21.7	2,400	24.4
1/2	-	3,496	42.0	2,649	27.5	2,176	20.9	2,267	22.7

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.

3D Side Milling ($a_r=0.2D$)

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	330 (260-395) SFM		260 (195-330) SFM		210 (130-260) SFM		230 (165-295) SFM		
Depth of Cut	$a_a=3D$ $a_r=0.2D$								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min	
mm									
-	6	5,300	48.4	4,200	35.0	3,500	26.4	3,700	30.7
1/4	-	5,008	46.1	3,969	33.3	3,313	25.2	3,496	29.4
5/16	-	4,006	36.9	3,176	26.7	2,650	20.1	2,797	23.5
-	8	4,000	36.6	3,200	26.8	2,600	19.7	2,800	23.2
3/8	-	3,359	30.9	2,687	22.6	2,188	16.6	2,351	19.7
-	10	3,200	35.4	2,500	23.6	2,100	18.1	2,200	20.9
-	12	2,700	29.9	2,100	19.7	1,700	14.6	1,900	18.1
1/2	-	2,550	28.6	1,985	18.3	1,603	13.5	1,794	17.2

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.

continued on next page





A Brand® AE-VML & AE-NIK-VML

Advanced Performance Anti-Vibration Carbide End Mill


List 8201 - A Brand® AE-VML : 4 Flute, Long Length (Continued)

List 8207 - A Brand® AE-VML : 4 Flute, Long Length (Continued)

List 8202 - A Brand® AE-NIK-VML : 4 Flute, Long Length, Nicks (Continued)


List 8208 - A Brand® AE-NIK-VML : 4 Flute, Long Length, Nicks (Continued)

4D Side Milling ($a_r=0.05D$)

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	460 (395-525) SFM		425 (360-490) SFM		375 (295-425) SFM		395 (330-460) SFM		
Depth of Cut	$a_a=4D$ $a_r=0.05D$ 								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min	
mm									
-	6	7,400	79.1	6,900	68.5	6,100	55.9	6,400	63.4
1/4	-	6,992	75.5	6,519	65.2	5,771	53.1	6,046	60.5
5/16	-	5,594	60.4	5,582	55.8	4,617	42.5	4,837	48.4
-	8	5,600	59.8	5,200	51.6	4,600	42.1	4,800	47.6
3/8	-	4,702	50.8	4,366	43.7	3,868	35.6	4,031	40.3
-	10	4,500	56.7	4,100	48.4	3,700	37.8	3,800	44.9
-	12	3,700	46.5	3,500	41.3	3,100	31.9	3,200	37.8
1/2	-	3,496	43.4	3,305	39.7	2,931	30.5	3,023	36.3

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.

4D Side Milling ($a_r=0.1D$)

Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	655 (590-720) SFM		525 (460-590) SFM		410 (360-460) SFM		425 (360-490) SFM		
Depth of Cut	$a_a=4D$ $a_r=0.1D$ 								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min	
mm									
-	6	10,600	105.1	8,500	77.6	6,600	55.1	6,900	63.0
1/4	-	10,015	100.2	8,031	73.9	6,229	52.3	6,519	60.0
5/16	-	8,012	80.1	6,424	59.1	4,983	41.9	5,215	48.0
-	8	8,000	79.5	6,400	58.3	5,000	41.7	5,200	47.6
3/8	-	6,718	67.2	5,374	49.4	4,204	35.3	4,366	40.2
-	10	6,400	75.6	5,100	52.4	4,000	37.8	4,100	42.1
-	12	5,300	62.6	4,200	42.9	3,300	31.1	3,500	35.8
1/2	-	5,008	60.1	3,969	41.3	3,115	29.9	3,305	34.4

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.

continued on next page





4D Side Milling ($a_r=0.15D$)


Hardness	-		-		-		30-45 HRC		
Work Material	Mild Steels		Alloy Steels Tool Steels		Stainless 300, 400		Hardened Steels		
Cutting Speed	440 (360-490) SFM		375 (330-460) SFM		245 (160-295) SFM		280 (195-330) SFM		
Depth of Cut	$a_a=4D$ $a_r=0.15D$								
Mill Dia.	Speed	Feed	Speed	Feed	Speed	Feed	Speed	Feed	
Inch	mm	RPM	in/min	RPM	in/min	RPM	in/min	RPM	in/min
-	6	7,200	65.7	6,100	50.8	4,000	30.3	4,500	37.4
1/4	-	6,809	62.6	5,771	48.5	3,786	28.8	4,260	35.8
5/16	-	5,447	50.1	4,617	38.8	3,029	23.0	3,408	28.6
-	8	5,400	49.2	4,600	38.6	3,000	22.8	3,400	28.3
3/8	-	4,539	41.8	3,868	32.5	2,524	19.2	2,860	24.0
-	10	4,300	47.2	3,700	35.0	2,400	20.9	2,700	25.6
-	12	3,600	39.8	3,100	29.1	2,000	17.3	2,300	21.7
1/2	-	3,405	38.1	2,931	27.0	1,893	16.7	2,176	20.9

1. Use a rigid and precise machine and holder.
2. Please use a suitable fluid with high smoke retardant properties.
3. During dry (no fluid) milling, please use air blow to remove chips from the milling area and to eliminate chip packing.
4. Please use water-soluble coolant when machining stainless steel.




List 2055 - EXOPRO® UVX-Ni : 5 Flute - Corner Radius

Side Milling

Hardness		
Work Material	High Temp. Alloys Inconel Hastelloy	
Cutting Speed	125-150 SFM	
Depth of Cut	$a_a = \leq 0.5D$ $a_r = \leq 0.3D$ 	
Mill Dia.	Speed RPM	Feed in/min
1/4	2,100	11.0
5/16	1,600	10.0
3/8	1,400	10.0
1/2	1,100	9.5
5/8	800	9.0
3/4	650	8.0
1	500	7.0

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed.
3. Use a suitable cutting fluid with high smoke retardant.

Slotting

Hardness		
Work Material	High Temp. Alloys Inconel Hastelloy	
Cutting Speed	75-100 SFM	
Depth of Cut	$a_a = \leq 0.5D$ 	
Mill Dia.	Speed RPM	Feed in/min
1/4	1,300	7.0
5/16	1,000	6.5
3/8	900	6.0
1/2	700	5.5
5/8	500	5.0
3/4	400	4.5
1	300	4.0

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed.
3. Use a suitable cutting fluid with high smoke retardant.



List 9510 - EXOPRO[®] PHX : Deep Feed, Ball Nose
List 9590 - EXOPRO[®] PHX : 3 Flute, Long Neck, Ball Nose
List 9581 - EXOPRO[®] PHX : Pencil-Neck, Deep-Feed, Ball Nose

Side Milling

Hardness			<38 HRC				38-53 HRC				<53 HRC				<55 HRC				
Work Material			Hardened and Pre-hardened Steels																
Cutting Speed			60-400 SFM				60-310 SFM				105-250 SFM				62-410 SFM				
R (mm)	L/D	Recom'd Cutting Angle	Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Clearance (in)
					DOC (in)				DOC (in)				DOC (in)				DOC (in)		
					Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar	
0.5	6	0.3°	18,000	39.4	0.0020	0.0063	18,000	35.4	0.0020	0.0063	18,000	11.0	0.0003	0.0012	18,000	47.2	0.0012	0.0012	0.0020
	10	0.3°	16,000	31.5	0.0016	0.0063	16,000	31.5	0.0016	0.0063	16,000	4.7	0.0001	0.0118	16,000	39.4	0.0012	0.0012	0.0012
	15	0.3°	8,000	16.5	0.0012	0.0063	8,000	16.5	0.0012	0.0063	-	-	-	-	8,000	19.7	0.0012	0.0012	0.0012
	20	0.3°	6,000	11.8	0.0008	0.0047	6,000	11.8	0.0008	0.0047	-	-	-	-	6,000	15.0	0.0012	0.0012	0.0012
	25	0.3°	6,000	5.1	0.0008	0.0031	6,000	5.1	0.0008	0.0031	-	-	-	-	6,000	13.8	0.0012	0.0012	0.0012
	30	0.3°	6,000	3.5	0.0004	0.0020	6,000	3.5	0.0004	0.0020	-	-	-	-	6,000	9.8	0.0012	0.0012	0.0012
0.75	6	0.3°	18,000	59.1	0.0039	0.0118	16,000	51.2	0.0039	0.0118	16,000	25.6	0.0028	0.0059	18,000	43.3	0.0016	0.0016	0.0020
	10	0.3°	15,000	43.3	0.0024	0.0098	15,000	37.4	0.0024	0.0098	15,000	12.6	0.0004	0.0039	15,000	35.4	0.0016	0.0016	0.0012
	16	0.3°	7,500	9.1	0.0008	0.0079	7,500	7.9	0.0008	0.0079	7,500	11.8	0.0003	0.0020	7,500	17.7	0.0016	0.0016	0.0012
1.0	6	0.3°	18,000	63.0	0.0079	0.0236	15,000	55.1	0.0079	0.0157	12,000	23.6	0.0059	0.0059	15,000	708.7	0.0024	0.0020	0.0039
	10	0.3°	12,000	49.2	0.0055	0.0157	12,000	43.3	0.0055	0.0157	12,000	23.6	0.0039	0.0020	12,000	59.1	0.0024	0.0020	0.0028
	15	0.3°	7,800	32.3	0.0055	0.0157	7,800	30.7	0.0055	0.0157	7,800	17.7	0.0028	0.0020	7,800	38.6	0.0024	0.0020	0.0028
	20	0.3°	6,200	25.6	0.0051	0.0157	6,200	23.6	0.0051	0.0118	6,200	13.4	0.0020	0.0020	6,200	23.6	0.0024	0.0020	0.0020
	25	0.3°	4,700	19.7	0.0047	0.0118	4,700	19.7	0.0047	0.0118	-	-	-	-	4,700	17.7	0.0024	0.0020	0.0020
	30	0.3°	3,500	15.7	0.0039	0.0118	3,500	15.7	0.0039	0.0118	-	-	-	-	3,500	17.7	0.0024	0.0020	0.0020
	35	0.3°	3,500	15.7	0.0028	0.0118	3,500	15.7	0.0028	0.0118	-	-	-	-	3,500	17.7	0.0024	0.0020	0.0012
	40	0.3°	3,500	11.8	0.0028	0.0098	3,500	11.8	0.0028	0.0098	-	-	-	-	3,500	17.7	0.0024	0.0020	0.0012
	45	0.3°	3,500	7.9	0.0028	0.0079	3,500	7.9	0.0028	0.0079	-	-	-	-	3,500	17.7	0.0024	0.0020	0.0012
	50	0.3°	3,500	5.9	0.0024	0.0039	3,500	5.9	0.0024	0.0039	-	-	-	-	3,500	17.7	0.0024	0.0020	0.0012
60	0.3°	3,500	5.9	0.0020	0.0039	3,500	5.9	0.0020	0.0039	-	-	-	-	3,500	17.7	0.0024	0.0020	0.0012	
1.5	10	0.3°	12,000	74.8	0.0083	0.0197	8,000	47.2	0.0083	0.0197	8,000	27.6	0.0051	0.0039	11,000	80.7	0.0035	0.0031	0.0039
	15	0.3°	10,000	61.0	0.0079	0.0197	8,000	47.2	0.0079	0.0197	8,000	21.7	0.0039	0.0039	10,000	74.8	0.0035	0.0031	0.0028
	20	0.3°	7,500	45.3	0.0075	0.0197	7,200	43.3	0.0075	0.0197	7,200	18.9	0.0024	0.0028	7,500	55.1	0.0035	0.0031	0.0028
	25	0.3°	4,800	29.5	0.0075	0.0197	4,600	27.6	0.0075	0.0197	4,600	12.6	0.0016	0.0020	4,800	35.4	0.0035	0.0031	0.0020
	30	0.3°	4,000	24.8	0.0063	0.0157	3,400	19.7	0.0063	0.0157	3,400	9.4	0.0008	0.0012	3,800	28.3	0.0035	0.0031	0.0012
	40	0.3°	2,800	17.3	0.0051	0.0157	2,600	15.7	0.0051	0.0157	-	-	-	-	2,600	19.7	0.0035	0.0031	0.0012
	50	0.3°	2,200	13.8	0.0039	0.0157	2,200	11.8	0.0039	0.0157	-	-	-	-	2,200	15.7	0.0035	0.0031	0.0012
	60	0.3°	2,200	13.8	0.0028	0.0157	2,200	11.8	0.0028	0.0157	-	-	-	-	2,200	15.7	0.0035	0.0031	0.0012
2.0	10	0.5°	9,600	78.7	0.0118	0.0236	6,000	49.2	0.0118	0.0236	6,000	31.5	0.0059	0.0039	9,500	94.5	0.0047	0.0039	0.0039
	15	0.5°	9,300	74.8	0.0106	0.0236	6,000	47.2	0.0106	0.0236	6,000	31.5	0.0047	0.0039	9,000	88.6	0.0047	0.0039	0.0039
	20	0.5°	7,600	61.0	0.0098	0.0236	6,000	45.3	0.0098	0.0236	6,000	27.6	0.0039	0.0028	8,200	80.7	0.0047	0.0039	0.0039
	25	0.5°	6,100	49.2	0.0091	0.0236	5,500	43.3	0.0091	0.0236	5,500	17.7	0.0020	0.0028	5,500	53.1	0.0047	0.0039	0.0028
	30	0.5°	5,000	41.3	0.0079	0.0236	4,500	31.5	0.0079	0.0236	4,500	13.8	0.0012	0.0020	4,500	43.3	0.0047	0.0039	0.0028
	35	0.5°	3,600	29.5	0.0063	0.0197	3,600	25.6	0.0063	0.0197	3,600	11.0	0.0004	0.0012	3,600	35.4	0.0047	0.0039	0.0020
	40	0.5°	3,000	24.8	0.0047	0.0197	3,000	21.7	0.0047	0.0197	3,000	5.9	0.0003	0.0004	3,000	29.5	0.0047	0.0039	0.0020
	45	0.5°	2,700	21.7	0.0039	0.0157	2,700	19.7	0.0039	0.0157	-	-	-	-	2,700	26.8	0.0047	0.0039	0.0012
	50	0.5°	2,500	20.5	0.0039	0.0157	2,500	17.7	0.0039	0.0157	-	-	-	-	2,500	24.8	0.0047	0.0039	0.0012
	60	0.5°	2,100	16.9	0.0031	0.0157	2,100	15.7	0.0031	0.0157	-	-	-	-	2,100	20.9	0.0047	0.0039	0.0012

- The above mentioned conditions according to projection lengths are intended as general guidelines for reference only. Adjustments should be made based on actual milling conditions.
- For 0.5R - 2.5R, the machining conditions are based on chucking the tool up to the base of the neck.
- Highly rigid machines and tool holders should be used.
- Tool vibrations should be kept at a minimum level for maximum accuracy.
- In the case of linear machining, do not use the Ar value, instead refer to the Aa value.
- More stable high-feed machining in the corners can be attained by setting an R insertion or deceleration on the CAM or machine side.
- When cutting load fluctuates (in the corners, etc.) or when high-precision is required, be sure to control the rotational speed.
- When cutting at greater than the recommended cutting angle, reduce the feed.

 continued on next page 





List 9510 - EXOPRO[®] PHX : Deep Feed, Ball Nose (Continued)

List 9590 - EXOPRO[®] PHX : 3 Flute, Long Neck, Ball Nose (Continued)





List 9581 - EXOPRO[®] PHX : Pencil-Neck, Deep-Feed, Ball Nose (Continued)

Side Milling

Hardness			<38 HRC			38-53 HRC			<53 HRC			>55 HRC							
Work Material			Hardened and Pre-hardened Steels																
Cutting Speed			60-400 SFM			60-310 SFM			105-250 SFM			62-410 SFM							
R (mm)	L/D	Recom'd Cutting Angle	Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Clearance (in)
					DOC (in)				DOC (in)				DOC (in)						
					Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar	
2.5	10	0.5°	7,700	74.8	0.0138	0.0315	4,800	43.3	0.0138	0.0315	4,800	35.4	0.0079	0.0039	7,700	94.5	0.0059	0.0472	0.0039
	15	0.5°	7,700	74.8	0.0118	0.0315	4,800	39.4	0.0118	0.0315	4,800	33.5	0.0063	0.0039	6,100	74.8	0.0059	0.0472	0.0039
	20	0.5°	7,700	70.9	0.0118	0.0315	4,800	37.4	0.0118	0.0315	4,800	27.6	0.0047	0.0028	6,100	74.8	0.0059	0.0472	0.0039
	25	0.5°	5,100	51.2	0.0098	0.0315	4,800	35.4	0.0098	0.0315	4,800	25.6	0.0024	0.0020	5,100	63.0	0.0059	0.0472	0.0028
	30	0.5°	5,100	47.2	0.0079	0.0236	4,800	33.5	0.0079	0.0236	4,800	19.7	0.0012	0.0020	5,100	63.0	0.0059	0.0472	0.0028
	35	0.5°	4,400	43.3	0.0055	0.0236	4,400	29.5	0.0055	0.0236	4,400	15.7	0.0006	0.0012	4,400	53.1	0.0059	0.0472	0.0020
3.0	40	0.5°	3,100	29.5	0.0039	0.0236	3,100	25.6	0.0039	0.0236	3,100	10.2	0.0003	0.0012	3,100	37.4	0.0059	0.0472	0.0020
	24	0.5°	6,400	74.8	0.0169	0.0472	4,000	47.2	0.0118	0.0394	4,000	35.4	0.0118	0.0039	6,500	57.1	0.0071	0.0063	0.0039
	30	0.5°	5,100	59.1	0.0134	0.0472	4,000	45.3	0.0118	0.0394	4,000	35.4	0.0098	0.0039	5,100	76.8	0.0071	0.0063	0.0039
	36	0.5°	4,200	49.2	0.0150	0.0472	4,000	43.3	0.0118	0.0394	4,000	29.5	0.0079	0.0028	4,200	62.2	0.0071	0.0063	0.0028
	42	0.5°	3,700	41.3	0.0079	0.0354	3,700	39.4	0.0079	0.0394	3,700	19.7	0.0059	0.0020	3,700	55.1	0.0071	0.0063	0.0028
	48	0.5°	3,600	29.5	0.0059	0.0354	2,600	27.6	0.0059	0.0315	2,600	15.7	0.0039	0.0012	2,600	38.6	0.0071	0.0063	0.0020
4.0	54	0.5°	2,100	24.8	0.0039	0.0315	2,100	23.6	0.0039	0.0315	2,100	9.4	0.0020	0.0012	2,100	31.5	0.0071	0.0063	0.0020
	66	0.5°	1,900	21.7	0.0031	0.0276	1,900	19.7	0.0031	0.0276	-	-	-	-	1,900	27.6	0.0071	0.0063	0.0012
	80	0.5°	1,700	17.7	0.0031	0.0236	1,700	15.7	0.0031	0.0236	-	-	-	-	1,700	25.6	0.0071	0.0063	0.0012
	30	0.5°	4,800	90.6	0.0177	0.0591	3,000	49.6	0.0118	0.0591	3,000	41.3	0.0118	0.0059	4,800	94.5	0.0094	0.0083	0.0039
	40	0.5°	3,800	70.9	0.0150	0.0512	3,000	47.2	0.0118	0.0512	3,000	41.3	0.0118	0.0039	3,800	74.8	0.0094	0.0083	0.0039
	48	0.5°	3,200	59.1	0.0110	0.0472	3,000	43.3	0.0098	0.0472	3,000	35.4	0.0098	0.0039	3,200	63.0	0.0094	0.0083	0.0028
5.0	56	0.5°	2,700	51.2	0.0079	0.0433	2,700	39.4	0.0079	0.0433	2,700	31.5	0.0079	0.0028	2,700	53.1	0.0094	0.0083	0.0028
	64	0.5°	1,900	35.4	0.0079	0.0394	1,900	27.6	0.0067	0.0394	1,900	19.7	0.0067	0.0028	1,900	37.4	0.0094	0.0083	0.0020
	80	0.5°	1,500	27.6	0.0059	0.0315	1,500	21.7	0.0055	0.0315	-	-	-	-	1,500	29.5	0.0094	0.0083	0.0012
	100	0.5°	1,200	23.6	0.0059	0.0315	1,200	15.7	0.0039	0.0315	-	-	-	-	1,200	23.6	0.0094	0.0083	0.0012
	120	0.5°	1,000	19.7	0.0039	0.0276	1,000	13.8	0.0028	0.0276	-	-	-	-	1,000	19.7	0.0094	0.0083	0.0012
	35	0.5°	3,800	90.6	0.0256	0.0709	2,400	39.4	0.0157	0.0630	2,400	33.5	0.0157	0.0059	3,800	94.5	0.0118	0.0106	0.0039
6.0	50	0.5°	3,100	74.8	0.0217	0.0709	2,400	39.4	0.0118	0.0630	2,400	33.5	0.0118	0.0059	3,100	76.8	0.0118	0.0106	0.0039
	60	0.5°	2,500	59.1	0.0181	0.0630	2,400	39.4	0.0118	0.0591	2,400	33.5	0.0118	0.0039	2,500	61.0	0.0118	0.0106	0.0039
	70	0.5°	2,200	51.2	0.0134	0.0630	2,200	35.4	0.0118	0.0591	2,200	31.5	0.0118	0.0039	2,200	53.1	0.0118	0.0106	0.0028
	80	0.5°	1,500	31.5	0.0094	0.0630	1,500	23.6	0.0079	0.0591	1,500	23.6	0.0079	0.0028	1,500	37.4	0.0118	0.0106	0.0028
	100	0.5°	1,200	23.6	0.0059	0.0591	1,200	19.7	0.0047	0.0591	1,200	19.7	0.0047	0.0028	1,200	29.5	0.0118	0.0106	0.0020
	120	0.5°	1,050	19.7	0.0039	0.0512	1,000	15.7	0.0039	0.0512	-	-	-	-	1,050	25.6	0.0118	0.0106	0.0020
8.0	140	0.5°	850	15.7	0.0028	0.0512	800	13.8	0.0028	0.0512	-	-	-	-	850	19.7	0.0118	0.0106	0.0012
	160	0.5°	700	12.6	0.0028	0.0394	700	11.8	0.0028	0.0394	-	-	-	-	700	17.7	0.0118	0.0106	0.0012
	45	0.5°	3,200	66.9	0.0315	0.0787	2,000	31.5	0.0315	0.0709	2,000	31.5	0.0236	0.0059	3,200	94.5	0.0142	0.0126	0.0059
	60	0.5°	2,500	51.2	0.0256	0.0787	2,000	31.5	0.0256	0.0709	2,000	31.5	0.0197	0.0059	2,500	74.8	0.0142	0.0126	0.0059
	70	0.5°	2,100	43.3	0.0224	0.0787	2,000	31.5	0.0224	0.0709	2,000	31.5	0.0197	0.0039	2,100	63.0	0.0142	0.0126	0.0039
	85	0.5°	1,800	37.4	0.0165	0.0709	1,500	23.6	0.0165	0.0669	1,500	23.6	0.0157	0.0039	1,800	53.1	0.0142	0.0126	0.0039
8.0	100	0.5°	1,300	27.2	0.0118	0.0709	1,200	19.7	0.0118	0.0669	1,200	19.7	0.0118	0.0039	1,300	38.6	0.0142	0.0126	0.0039
	120	0.5°	1,000	20.9	0.0098	0.0591	1,000	16.5	0.0098	0.0591	-	-	-	-	1,000	29.5	0.0142	0.0126	0.0020
	140	0.5°	900	18.5	0.0079	0.0591	900	15.0	0.0079	0.0591	-	-	-	-	900	26.8	0.0142	0.0126	0.0020
	160	0.5°	700	14.6	0.0059	0.0512	700	11.8	0.0059	0.0512	-	-	-	-	700	20.9	0.0142	0.0126	0.0020
	55	0.5°	2,400	63.0	0.0394	0.0866	1,500	23.6	0.0394	0.0709	1,500	23.6	0.0315	0.0059	2,400	94.5	0.0189	0.0157	0.0079
	80	0.5°	1,900	49.2	0.0354	0.0866	1,500	23.6	0.0354	0.0709	1,500	23.6	0.0315	0.0059	1,900	74.8	0.0189	0.0157	0.0059
8.0	90	0.5°	1,600	41.3	0.0295	0.0866	1,500	23.6	0.0295	0.0709	1,500	23.6	0.0276	0.0039	1,600	63.0	0.0189	0.0157	0.0039
	105	0.5°	1,400	35.4	0.0217	0.0787	1,400	22.4	0.0217	0.0669	1,400	22.4	0.0197	0.0028	1,400	55.1	0.0189	0.0157	0.0028
120	0.5°	1,000	25.6	0.0157	0.0787	1,000	16.5	0.0157	0.0669	1,000	16.5	0.0157	0.0020	1,000	39.4	0.0189	0.0157	0.0020	

continued on next page



Hardness			<38 HRC			38-53 HRC			<53 HRC			<55 HRC							
Work Material			Hardened and Pre-hardened Steels																
Cutting Speed			60-400 SFM			60-310 SFM			105-250 SFM			62-410 SFM							
R (mm)	L/D	Recom'd Cutting Angle	Speed (RPM)	Feed (in/min)	DOC (in)		Speed (RPM)	Feed (in/min)	DOC (in)		Speed (RPM)	Feed (in/min)	DOC (in)		Speed (RPM)	Feed (in/min)	DOC (in)		Clearance (in)
					Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar	
																			
10.0	70	0.5°	1,900	59.1	0.0472	0.1417	1,200	19.7	0.0472	0.0709	1,200	19.7	0.0315	0.0059	1,900	94.5	0.0236	0.0197	0.0079
	90	0.5°	1,500	47.2	0.0433	0.1417	1,200	19.7	0.0433	0.0709	1,200	19.7	0.0315	0.0059	1,500	74.8	0.0236	0.0197	0.0059
	110	0.5°	1,300	39.4	0.0354	0.1378	1,200	19.7	0.0354	0.0709	1,200	19.7	0.0315	0.0039	1,300	63.0	0.0236	0.0197	0.0039
	130	0.5°	1,100	33.5	0.0276	0.1339	1,100	17.7	0.0276	0.0709	1,100	17.7	0.0276	0.0039	1,100	55.1	0.0236	0.0197	0.0028
	150	0.5°	760	23.6	0.0197	0.1299	760	12.6	0.0197	0.0709	760	12.6	0.0197	0.0028	760	37.4	0.0236	0.0197	0.0020

- The above mentioned conditions according to projection lengths are intended as general guidelines for reference only. Adjustments should be made based on actual milling conditions.
- For 0.5R - 2.5R, the machining conditions are based on chucking the tool up to the base of the neck.
- Highly rigid machines and tool holders should be used.
- Tool vibrations should be kept at a minimum level for maximum accuracy.
- In the case of linear machining, do not use the Ar value, instead refer to the Aa value.
- More stable high-feed machining in the corners can be attained by setting an R insertion or deceleration on the CAM or machine side.
- When cutting load fluctuates (in the corners, etc.) or when high-precision is required, be sure to control the rotational speed.
- When cutting at greater than the recommended cutting angle, reduce the feed.



List 9570 - EXOPRO[®] PHX: High Feed, Corner Radius

List 9575 - EXOPRO[®] PHX: Deep Feed, Corner Radius

List 9576 - EXOPRO[®] PHX: Long Neck, Deep Feed, Corner Radius

List 9580 - EXOPRO[®] PHX: Pencil Neck, Deep Feed, Corner Radius

Side Milling

Hardness				<40 HRC				40-55 HRC				55-60 HRC							
Work Material				Mild Steels and Carbon Steels								Hardened Steels and Prehardened Steels							
				High Feed Roughing				Semi-Finishing				Finishing							
Cutting Speed				60-410 SFM				60-250 SFM				60-410 SFM							
D (mm)	r (mm)	L1	Rec'd Cutting Angle	Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Stock to Remove (in)			
						Depth of Cut (in)				Depth of Cut (in)				Depth of Cut (in)					
						Aa	Ar			Aa	Ar			Aa	Ar				
1.0	R0.3	10	0.3°	16,000	35.4	0.0012	0.0055	16,000	35.4	0.0012	0.0055	16,000	35.4	0.0016	0.0055	0.0020			
		15	0.3°	8,000	17.7	0.0012	0.0055	8,000	17.7	0.0012	0.0055	8,000	17.7	0.0016	0.0055	0.0020			
		20	0.3°	6,000	13.8	0.0008	0.0055	6,000	13.8	0.0008	0.0055	6,000	13.8	0.0016	0.0055	0.0012			
		25	0.3°	6,000	11.8	0.0004	0.0051	6,000	11.8	0.0004	0.0051	6,000	11.8	0.0016	0.0055	0.0012			
		30	0.3°	6,000	9.8	0.0004	0.0047	6,000	9.8	0.0004	0.0047	6,000	9.8	0.0016	0.0055	0.0012			
1.5	R0.3	10	0.3°	16,000	55.1	0.0020	0.0118	16,000	47.2	0.0020	0.0118	16,000	55.1	0.0016	0.0138	0.0028			
		15	0.3°	8,000	31.5	0.0020	0.0118	8,000	23.6	0.0020	0.0118	8,000	31.5	0.0016	0.0138	0.0020			
		20	0.3°	5,500	21.7	0.0016	0.0118	5,500	19.7	0.0016	0.0118	5,500	21.7	0.0016	0.0138	0.0020			
		25	0.3°	5,000	19.7	0.0016	0.0118	5,000	17.7	0.0016	0.0118	5,000	19.7	0.0016	0.0138	0.0012			
		30	0.3°	4,500	17.7	0.0016	0.0118	4,500	15.7	0.0016	0.0118	4,500	17.7	0.0016	0.0138	0.0012			
2.0	R0.5	10	0.3°	12,000	57.1	0.0059	0.0157	12,000	43.3	0.0059	0.0157	12,000	43.3	0.0024	0.0157	0.0028			
		15	0.3°	7,800	35.4	0.0047	0.0157	7,800	27.6	0.0039	0.0157	7,800	27.6	0.0024	0.0157	0.0028			
		20	0.3°	6,200	29.5	0.0039	0.0118	6,200	23.6	0.0028	0.0118	6,200	23.6	0.0024	0.0157	0.0020			
		25	0.3°	4,700	21.7	0.0028	0.0118	4,700	19.7	0.0024	0.0118	4,700	19.7	0.0024	0.0157	0.0020			
		30	0.3°	3,500	15.7	0.0028	0.0118	3,500	15.7	0.0020	0.0118	3,500	15.7	0.0024	0.0157	0.0020			
		35	0.3°	3,500	15.7	0.0028	0.0079	3,500	15.7	0.0016	0.0079	3,500	15.7	0.0024	0.0157	0.0012			
		40	0.3°	3,500	11.8	0.0028	0.0079	3,500	11.8	0.0016	0.0079	3,500	11.8	0.0024	0.0157	0.0012			
		45	0.3°	3,500	7.9	0.0028	0.0079	3,500	7.9	0.0012	0.0079	3,500	7.9	0.0024	0.0157	0.0012			
3.0	R0.8	10	0.3°	11,000	65.0	0.0051	0.0236	8,000	47.2	0.0051	0.0236	11,000	82.7	0.0039	0.0197	0.0039			
		15	0.3°	10,000	59.1	0.0051	0.0236	8,000	47.2	0.0051	0.0236	10,000	74.8	0.0039	0.0197	0.0028			
		20	0.3°	7,500	43.3	0.0005	0.0197	7,200	39.4	0.0005	0.0197	7,500	55.1	0.0039	0.0197	0.0028			
		25	0.3°	4,800	27.6	0.0047	0.0157	4,600	25.6	0.0047	0.0157	4,800	35.4	0.0039	0.0197	0.0020			
		30	0.3°	3,800	21.7	0.0039	0.0157	3,400	19.7	0.0039	0.0157	3,800	29.5	0.0039	0.0197	0.0012			
		40	0.3°	2,600	17.7	0.0031	0.0118	2,600	15.7	0.0031	0.0118	2,600	21.7	0.0039	0.0197	0.0012			
4.0	R1	10	0.5°	9,500	82.7	0.0079	0.0354	6,000	49.2	0.0079	0.0354	9,500	88.6	0.0047	0.0315	0.0039			
		15	0.5°	9,000	78.7	0.0079	0.0315	6,000	49.2	0.0079	0.0315	9,000	84.6	0.0047	0.0315	0.0039			
		20	0.5°	8,200	66.9	0.0079	0.0276	6,000	49.2	0.0055	0.0276	8,200	78.7	0.0047	0.0276	0.0039			
		25	0.5°	5,500	55.1	0.0059	0.0276	5,500	45.3	0.0043	0.0276	5,500	53.1	0.0047	0.0276	0.0028			
		30	0.5°	4,500	45.3	0.0059	0.0276	4,500	35.4	0.0035	0.0276	4,500	43.3	0.0047	0.0276	0.0028			
		35	0.5°	3,600	43.3	0.0047	0.0236	3,600	29.5	0.0035	0.0236	3,600	35.4	0.0047	0.0276	0.0020			
		40	0.5°	3,000	35.4	0.0047	0.0236	3,000	25.6	0.0035	0.0236	3,000	31.5	0.0047	0.0276	0.0020			
		45	0.5°	2,700	33.5	0.0039	0.0197	2,700	23.6	0.0031	0.0197	2,700	29.5	0.0047	0.0276	0.0012			
5.0	R1	50	0.5°	2,500	31.5	0.0039	0.0197	2,500	21.7	0.0031	0.0197	2,500	23.6	0.0047	0.0276	0.0012			
		60	0.5°	2,100	27.6	0.0031	0.0197	2,100	17.7	0.0024	0.0197	2,100	19.7	0.0047	0.0276	0.0012			
		10	0.5°	7,700	98.4	0.0079	0.0472	4,800	141.7	0.0079	0.0472	7,700	70.9	0.0047	0.0472	0.0039			
		15	0.5°	7,700	94.5	0.0079	0.0472	4,800	133.9	0.0063	0.0472	6,100	57.1	0.0047	0.0472	0.0039			
		20	0.5°	7,700	94.5	0.0079	0.0472	4,800	133.9	0.0063	0.0472	6,100	57.1	0.0047	0.0472	0.0039			
		25	0.5°	5,100	86.6	0.0067	0.0394	4,800	118.1	0.0051	0.0394	5,100	47.2	0.0047	0.0472	0.0028			
		30	0.5°	5,100	86.6	0.0067	0.0394	4,800	118.1	0.0051	0.0394	5,100	47.2	0.0047	0.0472	0.0028			
5.0	R1	35	0.5°	4,400	66.9	0.0059	0.0394	4,400	94.5	0.0035	0.0394	4,400	39.4	0.0047	0.0472	0.0020			
		40	0.5°	3,100	43.3	0.0059	0.0394	3,100	59.1	0.0031	0.0394	3,100	29.5	0.0047	0.0472	0.0020			

continued on next page



Side Milling

Hardness				<40 HRC				40-55 HRC				55-60 HRC							
Work Material				Mild Steels and Carbon Steels								Hardened Steels and Prehardened Steels							
				High Feed Roughing				Semi-Finishing				Finishing							
Cutting Speed				60-410 SFM				60-250 SFM				60-410 SFM							
D (mm)	r (mm)	L1	Rec'd Cutting Angle	Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Speed (RPM)	Feed (in/min)	aa		Stock to Remove (in)			
						Depth of Cut (in)				Depth of Cut (in)				Depth of Cut (in)					
						Aa	Ar			Aa	Ar			Aa	Ar				
6.0	R1.5	24	0.5°	6,500	255.9	0.0138	0.0512	4,000	66.9	0.0094	0.0512	6,500	74.8	0.0059	0.0472	0.0039			
		30	0.5°	5,100	200.8	0.0094	0.0472	4,000	66.9	0.0091	0.0472	5,100	59.1	0.0059	0.0472	0.0039			
		36	0.5°	4,200	165.4	0.0079	0.0394	4,000	66.9	0.0075	0.0394	4,200	49.2	0.0059	0.0472	0.0028			
		42	0.5°	3,700	145.7	0.0059	0.0394	3,700	55.1	0.0055	0.0394	3,700	43.3	0.0059	0.0472	0.0028			
		48	0.5°	2,600	102.4	0.0051	0.0354	2,600	35.4	0.0055	0.0354	2,600	31.5	0.0059	0.0472	0.0020			
		54	0.5°	2,100	82.7	0.0039	0.0354	2,100	31.5	0.0039	0.0354	2,100	25.6	0.0059	0.0472	0.0020			
		66	0.5°	1,900	74.8	0.0031	0.0354	1,900	27.6	0.0031	0.0354	1,900	21.7	0.0059	0.0472	0.0012			
		80	0.5°	1,700	66.9	0.0020	0.0354	1,700	23.6	0.0020	0.0354	1,700	17.7	0.0059	0.0472	0.0012			
8.0	R2	30	0.5°	4,800	78.7	0.0197	0.0669	3,000	49.2	0.0118	0.0630	4,800	70.9	0.0071	0.0630	0.0039			
		40	0.5°	3,800	74.8	0.0157	0.0630	3,000	49.2	0.0118	0.0630	3,800	55.1	0.0071	0.0630	0.0039			
		48	0.5°	3,200	66.9	0.0106	0.0551	3,000	49.2	0.0102	0.0551	2,300	45.3	0.0071	0.0630	0.0028			
		56	0.5°	2,700	51.2	0.0079	0.0551	2,700	43.3	0.0079	0.0551	2,700	39.4	0.0071	0.0630	0.0028			
		64	0.5°	1,900	34.6	0.0079	0.0512	1,900	31.5	0.0079	0.0512	1,900	27.6	0.0071	0.0630	0.0020			
		80	0.5°	1,500	27.6	0.0059	0.0512	1,500	27.6	0.0059	0.0512	1,500	21.7	0.0071	0.0630	0.0012			
		100	0.5°	1,200	25.6	0.0059	0.0512	1,200	25.6	0.0059	0.0512	1,200	19.7	0.0071	0.0630	0.0012			
		120	0.5°	1,000	21.7	0.0039	0.0512	1,000	21.7	0.0039	0.0512	1,000	17.7	0.0071	0.0630	0.0012			
10.0	R2	35	0.5°	3,800	82.7	0.0197	0.0984	2,400	94.5	0.0118	0.0630	3,800	149.6	0.0079	0.0945	0.0039			
		50	0.5°	3,100	76.8	0.0157	0.0945	2,400	94.5	0.0118	0.0630	3,100	122.0	0.0079	0.0945	0.0039			
		60	0.5°	2,500	68.9	0.0106	0.0787	2,400	94.5	0.0106	0.0630	2,500	98.4	0.0079	0.0945	0.0039			
		70	0.5°	2,200	53.1	0.0079	0.0787	2,200	86.6	0.0079	0.0630	2,200	86.6	0.0079	0.0945	0.0028			
		80	0.5°	1,500	35.4	0.0075	0.0787	1,500	59.1	0.0075	0.0630	1,500	59.1	0.0079	0.0945	0.0028			
		100	0.5°	1,200	28.3	0.0063	0.0787	1,200	47.2	0.0063	0.0630	1,200	47.2	0.0079	0.0945	0.0020			
		120	0.5°	1,050	25.6	0.0051	0.0787	1,000	39.4	0.0051	0.0630	1,050	41.3	0.0079	0.0945	0.0020			
		140	0.5°	850	21.7	0.0039	0.0591	800	31.5	0.0039	0.0551	850	33.5	0.0079	0.0945	0.0012			
12.0	R2	160	0.5°	700	19.7	0.0028	0.0591	700	27.6	0.0028	0.0551	700	27.6	0.0079	0.0945	0.0012			
		45	0.5°	3,200	86.6	0.0236	0.1339	2,000	78.7	0.0118	0.0630	3,200	126.0	0.0094	0.1260	0.0059			
		60	0.5°	2,500	82.7	0.0197	0.1260	2,000	78.7	0.0118	0.0630	2,500	98.4	0.0094	0.1260	0.0059			
		70	0.5°	2,100	74.8	0.0157	0.1102	2,000	78.7	0.0110	0.0630	2,100	82.7	0.0094	0.1260	0.0039			
		85	0.5°	1,800	59.1	0.0118	0.1063	1,500	59.1	0.0087	0.0630	1,800	70.9	0.0094	0.1260	0.0039			
		100	0.5°	1,300	39.4	0.0079	0.1024	1,200	47.2	0.0079	0.0630	1,300	51.2	0.0094	0.1260	0.0039			
		120	0.5°	1,000	27.6	0.0059	0.0984	1,000	39.4	0.0059	0.0630	1,000	39.4	0.0094	0.1260	0.0020			
		140	0.5°	900	23.6	0.0059	0.0787	900	35.4	0.0039	0.0630	900	35.4	0.0094	0.1260	0.0020			
160	0.5°	700	19.7	0.0039	0.0787	700	27.6	0.0039	0.0630	700	27.6	0.0094	0.1260	0.0020					

1. The above mentioned conditions according to projection lengths are intended as general guidelines for reference only. Adjustments should be made based on actual milling conditions.
2. Highly rigid machines and tool holders should be used.
3. Tool vibrations should be kept at a minimum level for maximum accuracy.
4. In the case of linear machining, do not use the Ar value, instead refer to the Aa value.
5. Under general machining conditions, air-blow cutting method is recommended.
6. More stable high-feed machining in the corners can be attained by setting an R insertion or deceleration on the CAM or machine side.
7. When cutting load fluctuates (in the corners, etc.) or when high-precision is required, be sure to control the rotational speed.
8. When cutting at greater than the recommended cutting angle, reduce the feed.
9. When the depth of cut is less than the specified amount as listed above, the feed rate can be increased up to 150%.
10. When the depth of cut is greater than the specified amount as listed above, the feed rate can be reduced by no more than 60% to ensure stable milling.

continued on next page





List 9570 - EXOPRO[®] PHX: High Feed, Corner Radius (Continued)

List 9575 - EXOPRO[®] PHX: Deep Feed, Corner Radius (Continued)

List 9576 - EXOPRO[®] PHX: Long Neck, Deep Feed, Corner Radius (Continued)

List 9580 - EXOPRO[®] PHX: Pencil Neck, Deep Feed, Corner Radius (Continued)

Side Milling

Hardness				<40 HRC				40-55 HRC				55-60 HRC				
Work Material				Mild Steels and Carbon Steels				Hardened Steels and Prehardened Steels								
				High Feed Roughing				Semi-Finishing				Finishing				
Cutting Speed				60-410 SFM				60-250 SFM				60-410 SFM				
D (mm)	r (mm)	L1	Rec'd Cutting Angle	Speed (RPM)	Feed (in/min)	 Depth of Cut (in)		Speed (RPM)	Feed (in/min)	 Depth of Cut (in)		Speed (RPM)	Feed (in/min)	 Depth of Cut (in)		Stock to Remove (in)
						Aa	Ar			Aa	Ar			Aa	Ar	
						16.0	R3			55	0.5°			2,400	78.7	
80	0.5°	1,900	74.8	0.0185	0.1575			1,500	59.1	0.0118	0.0630	1,900	74.8	0.0118	0.1575	0.0059
90	0.5°	1,600	66.9	0.0157	0.1339			1,500	59.1	0.0118	0.0630	1,600	63.0	0.0118	0.1575	0.0039
105	0.5°	1,400	51.2	0.0114	0.1299			1,400	55.1	0.0110	0.0630	1,400	55.1	0.0118	0.1575	0.0028
20.0	R3	120	0.5°	1,000	33.5	0.0079	0.1260	1,000	39.4	0.0079	0.0630	1,000	39.4	0.0118	0.1575	0.0020
		70	0.5°	1,900	78.7	0.0197	0.2165	1,200	47.2	0.0118	0.0630	1,900	74.8	0.0165	0.2165	0.0079
		90	0.5°	1,500	74.8	0.0185	0.2087	1,200	47.2	0.0118	0.0630	1,500	59.1	0.0165	0.2165	0.0059
		110	0.5°	1,300	66.9	0.0165	0.1654	1,200	47.2	0.0118	0.0630	1,300	51.2	0.0165	0.2165	0.0039
150	0.5°	130	0.5°	1,100	51.2	0.0122	0.1496	1,100	43.3	0.0118	0.0630	1,100	43.3	0.0165	0.2165	0.0028
		760	29.9	0.0098	0.1339	760	29.9	0.0091	0.0630	760	29.9	0.0165	0.2165	0.0020		

1. The above mentioned conditions according to projection lengths are intended as general guidelines for reference only. Adjustments should be made based on actual milling conditions.
2. Highly rigid machines and tool holders should be used.
3. Tool vibrations should be kept at a minimum level for maximum accuracy.
4. In the case of linear machining, do not use the Ar value, instead refer to the Aa value.
5. Under general machining conditions, air-blow cutting method is recommended.
6. More stable high-feed machining in the corners can be attained by setting an R insertion or deceleration on the CAM or machine side.
7. When cutting load fluctuates (in the corners, etc.) or when high-precision is required, be sure to control the rotational speed.
8. When cutting at greater than the recommended cutting angle, reduce the feed.
9. When the depth of cut is less than the specified amount as listed above, the feed rate can be increased up to 150%.
10. When the depth of cut is greater than the specified amount as listed above, the feed rate can be reduced by no more than 60% to ensure stable milling.



List 9592 - EXOPRO® PHX : Pencil-Neck, Deep Feed, Corner Radius

Side Milling

Hardness		<41 HRC				42-55 HRC				49-55 HRC									
Work Material		Hardened and Pre-hardened Steels																	
Cutting Speed		110-395 SFM				110-250 SFM				110-410 SFM									
D (mm)	r (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)		DOC (in)		Speed (RPM)	Feed (in/min)		DOC (in)		Speed (RPM)	Feed (in/min)	DOC (in)				
				Slotting	Contouring	Aa	Ar		Slotting	Contouring	Aa	Ar			Contour Finishing	Aa			
0.8		2	18,000	28.3	36.6	0.0008	0.0079	18,000	28.3	36.6	0.0008	0.0079	18,000	45.3	0.0006				
		4	18,000	28.3	36.6	0.0008	0.0079	18,000	28.3	36.6	0.0008	0.0079	18,000	45.3	0.0006				
		6	18,000	28.3	36.6	0.0008	0.0079	18,000	28.3	36.6	0.0008	0.0079	18,000	45.3	0.0006				
		8	15,000	21.3	26.8	0.0006	0.0079	15,000	21.3	24.8	0.0005	0.0079	16,000	27.6	0.0005				
1.0	0.1	4	18,000	32.7	43.3	0.0012	0.0091	18,000	32.7	34.6	0.0012	0.0091	18,000	56.7	0.0006				
		6	18,000	32.7	43.3	0.0009	0.0091	18,000	32.7	34.6	0.0009	0.0091	18,000	56.7	0.0006				
		8	15,000	29.5	39.4	0.0005	0.0091	15,000	29.5	31.5	0.0005	0.0091	15,000	47.2	0.0006				
		10	12,000	11.8	19.7	0.0003	0.0079	12,000	11.8	15.7	0.0003	0.0079	12,000	37.8	0.0006				
		12	10,500	8.7	14.2	0.0002	0.0071	10,500	8.7	11.3	0.0002	0.0071	10,500	33.1	0.0006				
		4	18,000	32.7	43.3	0.0012	0.0091	18,000	32.7	34.6	0.0012	0.0091	18,000	56.7	0.0007				
	0.2	6	18,000	32.7	43.3	0.0009	0.0091	18,000	32.7	34.6	0.0009	0.0091	18,000	56.7	0.0007				
		8	15,000	29.5	39.4	0.0005	0.0091	15,000	29.5	31.5	0.0005	0.0091	15,000	47.2	0.0007				
		10	12,000	11.8	19.7	0.0003	0.0079	12,000	11.8	15.7	0.0003	0.0079	12,000	37.8	0.0007				
		12	10,500	8.7	14.2	0.0002	0.0071	10,500	8.7	11.4	0.0002	0.0071	10,500	33.1	0.0007				
		4	18,000	32.7	49.6	0.0012	0.0091	18,000	32.7	39.4	0.0012	0.0091	18,000	56.7	0.0009				
		6	18,000	32.7	44.1	0.0009	0.0091	18,000	32.7	35.0	0.0009	0.0091	18,000	56.7	0.0009				
1.5	0.1	4	18,000	48.4	65.0	0.0012	0.0134	16,000	42.5	51.2	0.0012	0.0134	18,000	63.8	0.0006				
		8	18,000	48.4	65.0	0.0010	0.0134	16,000	42.5	51.2	0.0010	0.0134	18,000	63.8	0.0006				
		12	10,000	18.9	31.5	0.0005	0.0118	10,000	17.7	29.5	0.0005	0.0118	10,000	35.4	0.0006				
	0.2	4	18,000	48.4	65.0	0.0012	0.0134	16,000	42.5	51.2	0.0012	0.0134	18,000	63.8	0.0007				
		6	18,000	48.4	65.0	0.0011	0.0134	16,000	42.5	51.2	0.0011	0.0134	18,000	63.8	0.0007				
		8	18,000	48.4	65.0	0.0010	0.0134	16,000	42.5	51.2	0.0010	0.0134	18,000	63.8	0.0007				
2.0	0.1	8	18,000	69.3	87.0	0.0012	0.0181	12,000	39.4	51.2	0.0012	0.0181	18,000	63.8	0.0006				
		10	15,000	63.8	85.0	0.0012	0.0181	12,000	39.4	47.2	0.0012	0.0181	15,000	53.1	0.0006				
		12	13,000	52.0	69.3	0.0009	0.0181	12,000	37.4	45.3	0.0009	0.0181	13,000	46.1	0.0006				
		16	7,600	29.5	39.4	0.0005	0.0181	7,600	23.6	30.7	0.0005	0.0181	7,000	24.8	0.0006				
		0.3	8	18,000	63.8	87.0	0.0020	0.0181	12,000	39.4	51.2	0.0020	0.0181	18,000	63.8	0.0009			
		12	13,000	52.0	69.3	0.0016	0.0181	12,000	37.4	45.3	0.0016	0.0181	13,000	46.1	0.0009				
	0.5	6	18,000	69.3	87.0	0.0031	0.0177	12,000	33.5	51.2	0.0031	0.0177	18,000	63.8	0.0010				
		8	18,000	69.3	87.0	0.0030	0.0177	12,000	33.5	51.2	0.0030	0.0177	18,000	63.8	0.0010				
		10	15,000	63.8	85.0	0.0028	0.0177	12,000	31.5	47.2	0.0028	0.0177	15,000	53.1	0.0010				
		12	13,000	52.0	69.3	0.0024	0.0177	12,000	27.6	45.3	0.0024	0.0177	13,000	46.1	0.0010				
		3.0	0.3	12	12,700	55.1	91.3	0.0018	0.0276	8,000	33.1	47.2	0.0018	0.0276	13,000	46.1	0.0009		

1. Adjust the speed, feed, and plunge depth in accordance with operating conditions, including the machining shape, machine rigidity, holder rigidity, and work holding force.
2. If the speed and feed rates cannot increase due to equipment performance, operate by reducing the speed and feed rates at the same ratio.
3. High cutting speeds and feed rates can cause cutter wear or reduce machining precision. Therefore, operate by reducing the feed rate as needed.
4. Depending on the shape to be machined, if the end mill chatters during machining, it can bite into the shape. Therefore, operate by reducing the speed and feed rates at the same ratio.
5. For precise, detailed machining, use a dedicated machine that operates quietly.
6. Operate by keeping the runout at the tip of the end mill below 5 microns (.0002").
7. To perform finish machining with a high level of efficiency, keep the speed and feed rates below 2 times.
8. To finish a flat surface, operate at a speed range with a minimal amount of equipment vibration, making sure that the feed rate does not cause the equipment to wobble.
9. To finish machine a curved surface using the corner radius tool, operate by changing the machining pitch.
10. Set the inclined cut angle approximately between 0.3° and 0.5°.



For Standard LDR (Up to 6:1)

Speeds


Diameter	Roughing & Semi-finishing			Finishing		
	RPM			RPM		
	30 - 40 HRC	40 - 50 HRC	50 - 60 HRC	30 - 40 HRC	40 - 50 HRC	50 - 60 HRC
1/32	38,400 – 60,000	32,000 – 50,000	24,600 – 40,000	20,000 – 50,000	20,000 – 50,000	20,000 – 50,000
1/16	26,400 – 42,000	22,000 – 35,000	16,600 – 28,000	20,000 – 50,000	20,000 – 50,000	20,000 – 50,000
3/32	21,600 – 31,200	18,000 – 26,000	13,400 – 20,800	20,000 – 50,000	20,000 – 50,000	20,000 – 50,000
1/8	19,200 – 28,800	16,000 – 24,000	11,800 – 19,200	20,000 – 38,000	20,000 – 50,000	20,000 – 30,500
3/16	15,000 – 19,776	12,500 – 16,480	9,000 – 13,184	20,000 – 26,000	20,000 – 34,000	16,000 – 20,300
1/4	12,120 – 16,800	10,100 – 14,000	7,080 – 11,200	15,000 – 18,000	18,000 – 24,400	12,000 – 15,000
5/16	11,400 – 15,900	9,200 – 13,250	6,360 – 10,600	12,000 – 14,000	14,600 – 19,000	9,700 – 12,000
3/8	10,560 – 14,520	8,800 – 12,100	6,040 – 9,680	10,000 – 12,000	12,000 – 16,200	8,100 – 10,000
7/16	9,480 – 12,480	7,900 – 10,400	5,320 – 8,320	8,700 – 10,400	10,000 – 13,900	6,900 – 8,700
1/2	8,280 – 10,920	6,900 – 9,100	4,520 – 7,280	7,800 – 9,800	9,100 – 12,200	6,100 – 7,600

Chip Load per Tooth

Diameter	30 - 40 HRC		40 - 50 HRC		50 - 60 HRC	
	Rough & Semi	Finishing	Rough & Semi	Finishing	Rough & Semi	Finishing
1/32	0.0006 – 0.0010	0.0006 – 0.0009	0.0006 – 0.0008	0.0005 – 0.0007	0.0004 – 0.0007	0.0004 – 0.0006
1/16	0.0012 – 0.0016	0.0010 – 0.0015	0.0010 – 0.0015	0.0010 – 0.0014	0.0008 – 0.0012	0.0007 – 0.0010
3/32	0.0020 – 0.0025	0.0014 – 0.0024	0.0015 – 0.0022	0.0014 – 0.0020	0.0012 – 0.0020	0.0010 – 0.0014
1/8	0.0025 – 0.0030	0.0019 – 0.0028	0.0020 – 0.0027	0.0019 – 0.0026	0.0017 – 0.0022	0.0015 – 0.0020
3/16	0.0035 – 0.0043	0.0032 – 0.0042	0.0032 – 0.0041	0.0030 – 0.0040	0.0030 – 0.0039	0.0023 – 0.0031
1/4	0.0050 – 0.0060	0.0040 – 0.0053	0.0050 – 0.0057	0.0040 – 0.0051	0.0040 – 0.0050	0.0038 – 0.0048
5/16	0.0063 – 0.0070	0.0053 – 0.0068	0.0052 – 0.0066	0.0052 – 0.0063	0.0051 – 0.0062	0.0046 – 0.0054
3/8	0.0070 – 0.0080	0.0062 – 0.0079	0.0062 – 0.0077	0.0054 – 0.0065	0.0060 – 0.0072	0.0050 – 0.0061
7/16	0.0080 – 0.0087	0.0068 – 0.0086	0.0068 – 0.0084	0.0060 – 0.0078	0.0066 – 0.0080	0.0053 – 0.0070
1/2	0.0087 – 0.0100	0.0080 – 0.0094	0.0080 – 0.0092	0.0070 – 0.0090	0.0078 – 0.0090	0.0062 – 0.0081

Axial Depths of Cut (aa)

30 - 40 HRC 10% Diameter
 40 - 50 HRC 7% Diameter
 50 - 60 HRC 5% Diameter



Radial Depths of Cut (ar)

Up to 35% D for roughing and semi-finishing operations. However, radial depths of cut are normally determined by the surface finish requirements, specific to each application.

continued on next page





For Long LDR (6:1 to 8:1)

Speeds


Diameter	Roughing & Semi-finishing			Finishing		
	RPM			RPM		
	30 - 40 HRC	40 - 50 HRC	50 - 60 HRC	30 - 40 HRC	40 - 50 HRC	50 - 60 HRC
1/32	28,800 – 45,000	24,000 – 37,500	18,450 – 30,000	15,000 – 37,500	15,000 – 37,500	15,000 – 37,500
1/16	19,800 – 31,500	16,500 – 26,250	12,450 – 21,000	15,000 – 37,500	15,000 – 37,500	15,000 – 37,500
3/32	16,200 – 23,400	13,500 – 19,500	10,050 – 15,600	15,000 – 37,500	15,000 – 37,500	15,000 – 37,500
1/8	14,400 – 21,600	12,000 – 18,000	8,850 – 14,400	15,000 – 37,500	15,000 – 28,500	15,000 – 22,875
3/16	11,250 – 14,832	9,375 – 12,360	6,750 – 9,888	15,000 – 25,500	15,000 – 19,500	12,000 – 15,225
1/4	9,090 – 12,600	7,575 – 10,500	5,310 – 8,400	13,500 – 18,300	11,250 – 13,500	9,000 – 11,250
5/16	8,550 – 11,925	6,900 – 9,845	4,770 – 7,950	10,950 – 14,250	9,000 – 10,500	7,275 – 9,000
3/8	7,920 – 10,890	6,600 – 9,075	4,530 – 7,260	9,000 – 12,150	7,500 – 9,000	6,075 – 7,500
7/16	7,110 – 9,360	5,925 – 7,800	3,990 – 6,240	7,500 – 10,425	6,525 – 7,800	5,175 – 6,525
1/2	6,210 – 8,190	5,175 – 6,825	3,390 – 5,460	6,825 – 9,150	5,850 – 7,350	4,575 – 5,700

Chip Load per Tooth

Diameter	30 - 40 HRC		40 - 50 HRC		50 - 60 HRC	
	Rough & Semi	Finishing	Rough & Semi	Finishing	Rough & Semi	Finishing
1/32	0.0005 – 0.0008	0.0004 – 0.0007	0.0004 – 0.0005	0.0005 – 0.0006	0.0003 – 0.0005	0.0003 – 0.0005
1/16	0.0009 – 0.0012	0.0008 – 0.0011	0.0008 – 0.0011	0.0008 – 0.0011	0.0006 – 0.0009	0.0005 – 0.0008
3/32	0.0015 – 0.0019	0.0011 – 0.0018	0.0011 – 0.0017	0.0011 – 0.0015	0.0009 – 0.0015	0.0008 – 0.0011
1/8	0.0019 – 0.0023	0.0014 – 0.0021	0.0015 – 0.0020	0.0014 – 0.0020	0.0013 – 0.0017	0.0011 – 0.0015
3/16	0.0026 – 0.0032	0.0024 – 0.0032	0.0024 – 0.0031	0.0023 – 0.0030	0.0023 – 0.0029	0.0017 – 0.0023
1/4	0.0038 – 0.0045	0.0030 – 0.0040	0.0038 – 0.0043	0.0030 – 0.0038	0.0030 – 0.0038	0.0029 – 0.0036
5/16	0.0047 – 0.0053	0.0040 – 0.0051	0.0039 – 0.0050	0.0039 – 0.0047	0.0038 – 0.0047	0.0035 – 0.0041
3/8	0.0053 – 0.0060	0.0047 – 0.0059	0.0047 – 0.0058	0.0041 – 0.0049	0.0045 – 0.0054	0.0038 – 0.0046
7/16	0.0060 – 0.0065	0.0051 – 0.0065	0.0051 – 0.0063	0.0045 – 0.0059	0.0050 – 0.0060	0.0040 – 0.0053
1/2	0.0065 – 0.0075	0.0060 – 0.0071	0.0060 – 0.0069	0.0053 – 0.0068	0.0059 – 0.0068	0.0047 – 0.0061

Axial Depths of Cut (aa)

30 - 40 HRC 10% Diameter
 40 - 50 HRC 7% Diameter
 50 - 60 HRC 5% Diameter



Radial Depths of Cut (ar)

Up to 35% D for roughing and semi-finishing operations. However, radial depths of cut are normally determined by the surface finish requirements, specific to each application.

continued on next page





For Extra Long LDR (Beyond 8:1) (Continued)

Speeds


Diameter	Roughing & Semi-finishing			Finishing		
	RPM			RPM		
	30 - 40 HRC	40 - 50 HRC	50 - 60 HRC	30 - 40 HRC	40 - 50 HRC	50 - 60 HRC
1/32	19,200 – 30,000	16,000 – 25,000	12,300 – 20,000	10,000 – 25,000	10,000 – 25,000	10,000 – 25,000
1/16	13,200 – 21,000	11,000 – 17,500	8,300 – 14,000	10,000 – 25,000	10,000 – 25,000	10,000 – 25,000
3/32	10,800 – 15,600	9,000 – 13,000	6,700 – 10,400	10,000 – 25,000	10,000 – 25,000	10,000 – 25,000
1/8	9,600 – 14,400	8,000 – 12,000	5,900 – 9,600	10,000 – 25,000	10,000 – 19,000	10,000 – 15,250
3/16	7,500 – 9,888	6,250 – 8,240	4,500 – 6,592	10,000 – 17,000	10,000 – 13,000	8,000 – 10,150
1/4	6,060 – 8,400	5,050 – 7,000	3,540 – 5,600	9,000 – 12,200	7,500 – 9,000	6,000 – 7,500
5/16	5,700 – 7,950	4,600 – 6,625	3,180 – 5,300	7,300 – 9,500	6,000 – 7,000	4,850 – 6,000
3/8	5,280 – 7,260	4,400 – 6,050	3,020 – 4,840	6,000 – 8,100	5,000 – 6,000	4,050 – 5,000
7/16	4,740 – 6,240	3,950 – 5,200	2,660 – 4,160	5,000 – 6,950	4,350 – 5,200	3,450 – 4,350
1/2	4,140 – 5,460	3,450 – 4,550	2,260 – 3,640	4,550 – 6,100	3,900 – 4,900	3,050 – 3,800

Chip Load per Tooth

Diameter	30 - 40 HRC		40 - 50 HRC		50 - 60 HRC	
	Rough & Semi	Finishing	Rough & Semi	Finishing	Rough & Semi	Finishing
1/32	0.0003 – 0.0005	0.0003 – 0.0005	0.0003 – 0.0004	0.0003 – 0.0004	0.0002 – 0.0004	0.0002 – 0.0003
1/16	0.0006 – 0.0008	0.0005 – 0.0008	0.0005 – 0.0008	0.0005 – 0.0007	0.0004 – 0.0006	0.0004 – 0.0005
3/32	0.0010 – 0.0013	0.0007 – 0.0012	0.0008 – 0.0011	0.0007 – 0.0010	0.0006 – 0.0010	0.0005 – 0.0007
1/8	0.0013 – 0.0015	0.0010 – 0.0014	0.0010 – 0.0014	0.0010 – 0.0013	0.0009 – 0.0011	0.0008 – 0.0010
3/16	0.0018 – 0.0022	0.0016 – 0.0021	0.0016 – 0.0021	0.0015 – 0.0020	0.0015 – 0.0020	0.0012 – 0.0016
1/4	0.0025 – 0.0030	0.0020 – 0.0027	0.0025 – 0.0029	0.0020 – 0.0026	0.0020 – 0.0025	0.0019 – 0.0024
5/16	0.0032 – 0.0035	0.0027 – 0.0034	0.0026 – 0.0033	0.0026 – 0.0032	0.0026 – 0.0031	0.0023 – 0.0027
3/8	0.0035 – 0.0040	0.0031 – 0.0040	0.0031 – 0.0039	0.0027 – 0.0033	0.0030 – 0.0036	0.0025 – 0.0031
7/16	0.0040 – 0.0044	0.0034 – 0.0043	0.0034 – 0.0042	0.0030 – 0.0039	0.0033 – 0.0040	0.0027 – 0.0035
1/2	0.0044 – 0.0050	0.0040 – 0.0047	0.0040 – 0.0046	0.0035 – 0.0045	0.0039 – 0.0045	0.0031 – 0.0041

Axial Depths of Cut (aa)

30 - 40 HRC 10% Diameter
 40 - 50 HRC 7% Diameter
 50 - 60 HRC 5% Diameter



Radial Depths of Cut (ar)

Up to 35% D for roughing and semi-finishing operations. However, radial depths of cut are normally determined by the surface finish requirements, specific to each application.





List 3610 - EXOCARB® WXL®: Ball End, Regular Length, 2 Flute

Standard Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC										
Work Material	Aluminum Copper Alloy		Cast Iron, Carbon Steel, Alloy Steels, Stainless, Die Steels		Hardened Steels Pre-hardened Steels, P20, H13, S7, A2												
Cutting Speed	388 SFM		324 SFM		263 SFM		233 SFM										
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> <tr> <td>D<1/16</td> <td>0.05D</td> <td>0.2D</td> </tr> <tr> <td>1/16≤D≤1/2</td> <td>0.10D</td> <td>0.2D</td> </tr> </table>		Dia	aa	ar	D<1/16	0.05D	0.2D	1/16≤D≤1/2	0.10D	0.2D			aa=0.1D ar=0.2D		aa=0.05D ar=0.10D	
	Dia	aa	ar														
D<1/16	0.05D	0.2D															
1/16≤D≤1/2	0.10D	0.2D															
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1/32	25,000	35.0	25,000	35.0	32,149	35.0	28,482	30.0									
1/16	23,715	61.7	19,803	51.5	16,075	41.8	14,241	34.2									
3/32	15,810	60.1	13,202	50.2	10,716	40.7	9,494	34.2									
1/8	11,857	56.9	9,901	47.5	8,037	38.6	7,120	31.3									
5/32	9,486	57.7	7,921	48.2	6,430	39.1	5,696	32.3									
3/16	7,905	58.5	6,601	48.8	5,358	39.7	4,747	33.2									
1/4	5,929	54.5	4,951	45.5	4,019	37.0	3,560	32.0									
5/16	4,743	56.9	3,961	47.5	3,215	38.6	2,848	32.5									
3/8	3,952	55.3	3,300	46.2	2,679	37.5	2,373	28.5									
1/2	2,964	51.6	2,475	43.1	2,009	35.0	1,780	30.6									

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Light Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC													
Work Material	Copper Copper Alloy		Cast Iron, Carbon Steel, Alloy Steels, Stainless, Die Steels		Hardened Steels Pre-hardened Steels, P20, H13, S7, A2															
Cutting Speed	659 SFM		713 SFM		651 SFM		561 SFM													
Depth of Cut	aa=0.02D ar=0.05D		<table border="1"> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> <tr> <td>D≤3/16</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>1/4≤D≤3/8</td> <td>0.05D</td> <td>0.10D</td> </tr> <tr> <td>D=1/2</td> <td>0.40D</td> <td>0.20D</td> </tr> </table>		Dia	aa	ar	D≤3/16	0.02D	0.05D	1/4≤D≤3/8	0.05D	0.10D	D=1/2	0.40D	0.20D			aa=0.02D ar=0.05D	
	Dia	aa	ar																	
D≤3/16	0.02D	0.05D																		
1/4≤D≤3/8	0.05D	0.10D																		
D=1/2	0.40D	0.20D																		
Mill Diameter	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min												
1/32	25,000	35.0	25,000	35.0	25,000	35.0	25,000	30.0												
1/16	25,000	65.0	25,000	65.0	25,000	65.0	25,000	60.0												
3/32	25,000	95.0	25,000	95.0	25,000	95.0	22,859	82.3												
1/8	20,139	96.7	21,789	104.6	19,895	95.5	17,144	75.4												
5/32	16,111	98.0	17,431	106.0	15,916	96.8	13,715	77.7												
3/16	13,426	99.4	14,526	107.5	13,263	98.1	11,429	80.0												
1/4	10,070	92.6	10,895	100.2	9,947	91.5	8,572	77.1												
5/16	8,056	96.7	8,716	104.6	7,958	95.5	6,858	78.2												
3/8	6,713	94.0	7,263	101.7	6,632	92.8	5,715	68.6												
1/2	5,035	87.6	5,447	94.8	4,974	86.5	4,286	73.7												


1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.






List 3710 - EXOCARB® WXL®: Ball End, Regular Length, 2 Flute

Standard Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC	
Work Material	Copper Copper Alloy		Cast Iron, Carbon Steel, Alloy Steels, Stainless, Die Steels		Hardened Steels Pre-hardened Steels, P20, H13, S7, A2			
Cutting Speed	388 SFM		324 SFM		263 SFM		233 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.10D$				$a_a=0.03D$ $a_r=0.10D$		$a_a=0.02D$ $a_r=0.05D$	
Mill Diameter	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.1	25,000	5.0	25,000	5.0	25,000	5.0	25,000	5.0
0.2	25,000	10.0	25,000	10.0	25,000	10.0	25,000	10.0
0.4	25,000	20.0	25,000	20.0	25,000	20.0	25,000	15.0
0.6	25,000	30.0	25,000	30.0	25,000	30.0	25,000	21.0
0.8	25,000	40.0	25,000	40.0	25,000	40.0	25,000	27.5
1.0	25,000	45.0	25,000	45.0	25,000	45.0	22,610	31.7
2.0	18,830	60.3	15,720	50.3	12,760	40.8	11,310	29.4
3.0	12,550	67.8	10,480	56.6	8,510	46.0	7,540	33.2
4.0	9,410	73.4	7,860	61.3	6,380	49.8	5,650	40.7
6.0	6,280	67.8	5,240	56.6	4,250	45.9	3,770	33.2
8.0	4,710	63.1	3,930	52.7	3,190	42.7	2,830	31.7
10.0	3,770	57.3	3,140	47.7	2,550	38.8	2,260	28.0
12.0	3,140	56.5	2,620	47.2	2,130	38.3	1,880	29.3
16.0	2,350	42.3	1,970	35.5	1,600	28.8	1,410	22.0
20.0	1,880	33.8	1,570	28.3	1,280	23.0	1,130	17.6

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Light Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC	
Work Material	Copper Copper Alloy		Cast Iron, Carbon Steel, Alloy Steels, Stainless, Die Steels		Hardened Steels Pre-hardened Steels, P20, H13, S7, A2			
Cutting Speed	659 SFM		713 SFM		651 SFM		561 SFM	
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$				$a_a=0.02D$ $a_r=0.05D$		$a_a=0.01D$ $a_r=0.05D$	
Mill Diameter	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1.0	25,000	45.0	25,000	45.0	25,000	45.0	25,000	35.0
2.0	25,000	80.0	25,000	80.0	25,000	80.0	25,000	65.0
3.0	21,320	115.1	23,060	124.5	21,060	113.7	18,150	79.9
4.0	15,990	124.7	17,300	134.9	15,790	123.2	13,610	98.0
6.0	10,660	115.1	11,530	124.5	10,530	113.7	9,070	79.8
8.0	8,000	107.2	8,650	115.9	7,900	105.9	6,810	76.3
10.0	6,400	97.3	6,920	105.2	6,320	96.1	5,450	67.6
12.0	5,330	95.9	5,770	103.9	5,270	94.9	4,540	70.8
16.0	4,000	72.0	4,330	77.9	3,950	71.1	3,400	53.0
20.0	3,200	57.6	3,460	62.3	3,160	56.9	2,720	42.4


1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.






List 3670 - EXOCARB® WXL®: 4 Flute, Regular Length, Corner Radius

Side Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Stainless Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	396 SFM		294 SFM		258 SFM		192 SFM		156 SFM		96 SFM	
Depth of Cut	$a_a=1.2D$ $a_r=0.2D$ 						$a_a=1D$ $a_r=0.1D$		$a_a=1D$ $a_r=0.05D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/16	24,000	38.4	18,000	28.8	15,600	25.0	12,000	19.2	9,600	11.5	6,000	4.8
5/64	19,200	38.4	14,400	28.8	12,480	25.0	9,600	19.2	7,680	12.3	4,800	5.8
3/32	16,080	38.6	12,000	28.8	10,380	24.9	7,980	19.2	6,420	12.8	4,020	4.8
7/64	13,740	38.5	10,320	28.9	8,940	25.0	6,900	19.3	5,520	13.2	3,480	5.6
1/8	12,000	43.2	9,000	28.8	7,800	25.0	6,000	19.2	4,800	13.4	3,000	6.0
5/32	9,600	46.1	7,200	31.7	6,240	27.5	4,800	21.1	3,840	15.4	2,400	7.7
3/16	8,040	51.5	6,000	36.0	5,220	31.3	4,020	22.5	3,180	17.8	1,980	9.5
7/32	6,900	55.2	5,160	37.2	4,440	30.2	3,420	23.3	2,760	16.6	1,740	9.0
1/4	6,000	55.2	4,500	39.6	3,900	31.2	3,000	24.0	2,400	16.3	1,500	9.0
5/16	4,800	57.6	3,600	38.9	3,120	32.4	2,400	24.0	1,920	16.9	1,200	9.6
3/8	4,020	56.3	3,000	38.4	2,640	30.6	1,980	22.2	1,620	16.2	1,020	9.4
7/16	3,480	55.7	2,580	38.2	2,280	31.0	1,740	22.3	1,380	16.0	840	8.4
1/2	3,000	54.0	2,280	35.6	1,980	27.7	1,500	19.2	1,200	13.9	750	8.1
5/8	2,400	43.2	1,800	28.1	1,600	22.4	1,200	15.4	980	11.4	600	6.5
3/4	2,000	36.0	1,500	23.4	1,300	18.2	1,000	12.8	800	9.3	500	5.4
1	1,500	27.0	1,100	17.2	1,000	14.0	750	9.6	600	7.0	380	4.1

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Light Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC																							
Work Material	Carbon Steels 1045, 1055		Alloy Steels 4140, 4340		Hardened Steels Pre-hardened Steels D2, H13, 17-4PH		Tool Steels, Hardened Steels Pre-hardened Steels, D2, H13		Hardened Steels Heat Resistant Steels																							
Cutting Speed	1,560 SFM		1,380 SFM		960 SFM		600 SFM		310 SFM																							
Depth of Cut	a_a 						<table border="1"> <thead> <tr><th>Dia</th><th>a_a</th><th>a_r</th></tr> </thead> <tbody> <tr><td>D<1/8</td><td>1.5D</td><td>0.01D</td></tr> <tr><td>1/8≤D</td><td>1.5D</td><td>0.02D</td></tr> <tr><td>5/8<D</td><td>1.5D</td><td>0.05D</td></tr> </tbody> </table>			Dia	a_a	a_r	D<1/8	1.5D	0.01D	1/8≤D	1.5D	0.02D	5/8<D	1.5D	0.05D	<table border="1"> <thead> <tr><th>Dia</th><th>a_a</th><th>a_r</th></tr> </thead> <tbody> <tr><td>D≤5/16</td><td>1.0D</td><td>0.01D</td></tr> <tr><td>5/16<D</td><td>1.0D</td><td>0.02D</td></tr> </tbody> </table>		Dia	a_a	a_r	D≤5/16	1.0D	0.01D	5/16<D	1.0D	0.02D
Dia	a_a	a_r																														
D<1/8	1.5D	0.01D																														
1/8≤D	1.5D	0.02D																														
5/8<D	1.5D	0.05D																														
Dia	a_a	a_r																														
D≤5/16	1.0D	0.01D																														
5/16<D	1.0D	0.02D																														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																						
1/4	24,000	220.8	21,000	184.8	14,760	118.1	9,000	72.0	4,800	32.6																						
9/32	20,400	212.2	18,000	172.8	13,200	121.4	7,920	69.7	4,200	33.6																						
5/16	18,840	226.1	16,320	176.3	12,000	124.8	7,200	72.0	3,840	33.8																						
3/8	15,600	218.4	13,800	176.6	9,960	115.5	6,000	67.2	3,120	31.2																						
7/16	13,200	211.2	12,000	177.6	8,640	117.5	5,160	66.0	2,760	32.0																						
1/2	11,880	213.8	10,440	162.9	7,440	104.2	4,440	56.8	2,400	27.8																						
5/8	9,500	171.0	8,400	131.1	5,900	82.6	3,670	47.0	1,900	22.1																						
3/4	7,950	143.1	7,000	109.2	4,950	69.3	3,050	39.0	1,580	18.3																						
1	5,960	107.3	5,270	82.3	3,700	51.8	2,300	29.5	1,180	13.7																						

1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.





List 3604 - EXOCARB® WXL®: Regular Length, 4 Flute

Side Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Aluminum Copper Alloy		Cast Iron, Carbon Steel, Alloy Steels, Stainless, Die Steels		Hardened Steels Pre-hardened Steels, P20, H13, S7, A2													
Cutting Speed	974 SFM		250 SFM		172 SFM		153 SFM											
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D<7/64</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>7/64≤D</td> <td>1.5D</td> <td>0.10D</td> </tr> </tbody> </table>					Dia	a _a	a _r	D<7/64	1.5D	0.05D	7/64≤D	1.5D	0.10D			a _a =1.0D a _r =0.02D	
	Dia	a _a	a _r															
D<7/64	1.5D	0.05D																
7/64≤D	1.5D	0.10D																
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
1/16	25,000	40.0	14,000	22.4	8,200	13.1	7,400	11.8										
5/64	25,000	50.0	12,000	24.0	7,000	14.0	6,350	12.7										
3/32	25,000	60.0	10,800	25.9	6,600	15.8	5,950	14.3										
7/64	25,000	70.0	8,900	24.9	5,750	16.1	5,150	14.4										
1/8	25,000	90.0	7,000	25.2	4,800	15.4	4,200	13.4										
5/32	25,000	130.0	6,050	31.5	4,250	20.4	3,700	16.3										
3/16	21,500	137.6	5,500	35.2	3,900	23.4	3,425	19.2										
7/32	17,500	140.0	4,100	32.8	2,950	20.1	2,650	18.0										
1/4	14,000	128.8	3,800	35.0	2,600	20.8	2,300	18.4										
9/32	12,500	130.0	3,400	35.4	2,400	23.0	2,100	18.5										
5/16	12,000	144.0	3,050	36.6	2,200	25.5	1,950	19.5										
3/8	10,100	141.4	2,750	38.5	1,975	22.9	1,750	19.6										
7/16	8,700	139.2	2,250	36.0	1,600	21.8	1,425	18.2										
1/2	7,400	133.2	1,900	34.2	1,350	18.9	1,200	15.8										
5/8	6,000	110.4	1,500	27.6	1,100	16.3	995	13.9										
3/4	5,000	94.0	1,275	24.0	950	16.3	850	13.9										
1	3,750	69.4	950	17.6	690	11.8	630	10.3										

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Light Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC																				
Work Material	Aluminum Copper Alloy		Cast Iron, Carbon Steel, Alloy Steels, Stainless, Die Steels		Hardened Steels Pre-hardened Steels, P20, H13, S7, A2																						
Cutting Speed	1,627 SFM		1,231 SFM		803 SFM		482 SFM																				
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D<5/16</td> <td>1.5D</td> <td>0.01D</td> </tr> <tr> <td>5/16≤D</td> <td>1.5D</td> <td>0.02D</td> </tr> </tbody> </table>					Dia	a _a	a _r	D<5/16	1.5D	0.01D	5/16≤D	1.5D	0.02D			<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D<5/16</td> <td>1.0D</td> <td>0.01D</td> </tr> <tr> <td>5/16≤D</td> <td>1.0D</td> <td>0.02D</td> </tr> </tbody> </table>		Dia	a _a	a _r	D<5/16	1.0D	0.01D	5/16≤D	1.0D	0.02D
	Dia	a _a	a _r																								
D<5/16	1.5D	0.01D																									
5/16≤D	1.5D	0.02D																									
Dia	a _a	a _r																									
D<5/16	1.0D	0.01D																									
5/16≤D	1.0D	0.02D																									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																			
7/32	25,000	200.0	20,000	160.0	13,000	88.4	7,950	54.1																			
1/4	22,500	207.0	19,000	174.8	11,500	92.0	7,000	56.0																			
9/32	24,000	249.6	17,500	182.0	10,500	100.8	6,250	55.0																			
5/16	19,500	234.0	14,500	174.0	9,900	114.8	5,950	59.5																			
3/8	17,500	245.0	13,250	185.5	8,900	103.2	5,350	59.9																			
7/16	14,250	228.0	10,950	175.2	7,275	98.9	4,350	55.7																			
1/2	12,000	216.0	9,200	165.6	6,125	85.8	3,675	48.5																			
5/8	9,700	178.5	7,450	137.1	4,950	73.3	2,950	41.3																			
3/4	9,150	172.0	6,275	118.0	4,175	71.8	2,500	41.0																			
1	6,200	114.7	4,700	88.4	3,050	51.9	1,850	30.5																			

1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.





List 3690 : Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing

List 3790 : Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing

Standard Milling

Hardness		-		<32 HRC				33-41 HRC				42-50 HRC					
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.1	0.3	25,000	4.6	0.0002	0.0002	25,000	2.3	0.0002	0.0002	25,000	1.5	0.0002	0.0002	25,000	1.1	0.0002	0.0002
0.1	0.5	25,000	3.7	0.0002	0.0002	25,000	1.8	0.0002	0.0002	25,000	1.2	0.0002	0.0002	25,000	0.8	0.0002	0.0002
0.2	0.3	25,000	9.2	0.0008	0.0008	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0002	0.0002
0.2	0.5	25,000	9.2	0.0008	0.0008	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0002	0.0002
0.2	0.75	25,000	9.2	0.0008	0.0008	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	3.1	0.0002	0.0002
0.2	1	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
0.2	1.25	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
0.2	1.5	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
0.2	1.75	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
0.2	2	25,000	4.6	0.0004	0.0004	25,000	3.1	0.0002	0.0002	25,000	3.1	0.0002	0.0002	25,000	2.5	0.0002	0.0002
0.2	2.5	25,000	2.3	0.0004	0.0004	25,000	1.5	0.0002	0.0002	25,000	1.5	0.0002	0.0002	25,000	1.2	0.0001	0.0002
0.2	3	25,000	2.3	0.0004	0.0004	25,000	1.5	0.0002	0.0002	25,000	1.5	0.0002	0.0002	25,000	1.2	0.0001	0.0002
0.3	0.5	25,000	18.5	0.0008	0.0012	25,000	12.3	0.0004	0.0006	25,000	9.2	0.0004	0.0006	25,000	9.2	0.0002	0.0002
0.3	0.6	25,000	18.5	0.0008	0.0012	25,000	12.3	0.0004	0.0006	25,000	9.2	0.0004	0.0006	25,000	9.2	0.0002	0.0002
0.3	0.75	25,000	18.5	0.0008	0.0012	25,000	12.3	0.0004	0.0006	25,000	9.2	0.0004	0.0006	25,000	9.2	0.0002	0.0002
0.3	1	25,000	13.8	0.0008	0.0012	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
0.3	1.25	25,000	13.8	0.0008	0.0012	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
0.3	1.5	25,000	13.8	0.0008	0.0012	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
0.3	1.75	25,000	13.8	0.0008	0.0012	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
0.3	2	25,000	13.8	0.0008	0.0012	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
0.3	2.25	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004
0.3	2.5	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004
0.3	2.75	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004
0.3	3	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0002	0.0004
0.3	3.5	25,000	8.3	0.0008	0.0008	25,000	5.5	0.0004	0.0004	25,000	3.7	0.0004	0.0004	25,000	3.7	0.0002	0.0004
0.3	4	25,000	8.3	0.0008	0.0008	25,000	5.5	0.0004	0.0004	25,000	3.7	0.0004	0.0004	25,000	3.7	0.0002	0.0002
0.3	4.5	25,000	8.3	0.0008	0.0008	25,000	5.5	0.0004	0.0004	25,000	3.7	0.0004	0.0004	25,000	3.7	0.0001	0.0002
0.3	5	25,000	4.6	0.0004	0.0008	25,000	3.1	0.0002	0.0004	25,000	2.2	0.0002	0.0004	25,000	2.2	0.0001	0.0002
0.4	0.5	25,000	23.1	0.0010	0.0020	25,000	15.4	0.0006	0.0010	25,000	12.3	0.0006	0.0008	25,000	12.3	0.0004	0.0004
0.4	0.75	25,000	23.1	0.0010	0.0020	25,000	15.4	0.0006	0.0010	25,000	12.3	0.0006	0.0008	25,000	12.3	0.0004	0.0004
0.4	1	25,000	18.5	0.0010	0.0020	25,000	12.3	0.0006	0.0010	25,000	9.2	0.0006	0.0008	25,000	9.2	0.0004	0.0004
0.4	1.5	25,000	18.5	0.0010	0.0020	25,000	12.3	0.0006	0.0010	25,000	9.2	0.0006	0.0008	25,000	9.2	0.0004	0.0004
0.4	2	25,000	16.4	0.0010	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
0.4	2.5	25,000	16.4	0.0010	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
0.4	3	25,000	16.4	0.0010	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
0.4	3.5	25,000	16.4	0.0010	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
0.4	4	25,000	16.4	0.0004	0.0012	25,000	10.9	0.0002	0.0006	25,000	7.3	0.0002	0.0005	25,000	7.3	0.0002	0.0004
0.4	4.5	24,000	11.8	0.0004	0.0012	25,000	7.3	0.0002	0.0006	25,000	3.6	0.0002	0.0005	25,000	3.6	0.0002	0.0004
0.4	5	24,000	11.8	0.0004	0.0012	25,000	7.3	0.0002	0.0006	25,000	3.6	0.0002	0.0005	25,000	3.6	0.0002	0.0004
0.4	5.5	21,000	11.8	0.0004	0.0008	25,000	7.3	0.0002	0.0004	25,000	3.6	0.0002	0.0003	25,000	3.6	0.0002	0.0002
0.4	6	21,000	5.9	0.0004	0.0006	25,000	3.6	0.0002	0.0003	25,000	2.9	0.0002	0.0002	25,000	2.9	0.0001	0.0002
0.5	1	25,000	23.1	0.0016	0.0020	25,000	15.4	0.0008	0.0010	25,000	12.3	0.0008	0.0008	25,000	12.3	0.0004	0.0004
0.5	1.5	25,000	23.1	0.0016	0.0020	25,000	15.4	0.0008	0.0010	25,000	12.3	0.0008	0.0008	25,000	12.3	0.0004	0.0004
0.5	2	25,000	18.5	0.0016	0.0020	25,000	12.3	0.0008	0.0010	25,000	9.2	0.0008	0.0008	25,000	9.2	0.0004	0.0004
0.5	2.5	25,000	16.4	0.0016	0.0020	25,000	10.9	0.0008	0.0010	25,000	7.3	0.0008	0.0008	25,000	7.3	0.0004	0.0004
0.5	3	25,000	16.4	0.0016	0.0020	25,000	10.9	0.0008	0.0010	25,000	7.3	0.0008	0.0008	25,000	7.3	0.0004	0.0004

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page →





List 3690 : Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

List 3790 : Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

Standard Milling

Hardness		-		<32 HRC		33-41 HRC		42-50 HRC									
Work Material		Aluminum Copper Alloy		Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel		Prehardened & Hardened Steel											
Cutting Speed		90-460 SFM		80-340 SFM		80-280 SFM		80-280 SFM									
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.5	3.5	25,000	16.4	0.0016	0.0020	25,000	10.9	0.0008	0.0010	25,000	7.3	0.0008	0.0008	25,000	7.3	0.0004	0.0004
0.5	4	25,000	16.4	0.0016	0.0020	25,000	10.9	0.0008	0.0010	25,000	7.3	0.0008	0.0008	25,000	7.3	0.0004	0.0004
0.5	4.5	21,000	11.8	0.0016	0.0020	20,000	7.9	0.0008	0.0010	20,000	7.9	0.0008	0.0008	20,000	7.9	0.0004	0.0004
0.5	5	21,000	11.8	0.0016	0.0020	20,000	7.9	0.0008	0.0010	20,000	5.9	0.0008	0.0008	20,000	5.9	0.0004	0.0004
0.5	5.5	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0004	0.0006	20,000	5.9	0.0004	0.0004	20,000	5.9	0.0004	0.0004
0.5	6	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0004	0.0006	20,000	5.9	0.0004	0.0004	20,000	5.9	0.0004	0.0004
0.5	7	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0004	0.0006	20,000	5.9	0.0004	0.0004	20,000	5.9	0.0004	0.0004
0.5	8	21,000	11.8	0.0008	0.0012	15,000	7.9	0.0004	0.0006	15,000	5.9	0.0004	0.0004	15,000	5.9	0.0002	0.0004
0.5	9	18,000	5.9	0.0008	0.0008	15,000	3.9	0.0004	0.0004	15,000	3.1	0.0002	0.0004	15,000	3.1	0.0002	0.0002
0.5	10	18,000	5.9	0.0004	0.0004	15,000	3.9	0.0002	0.0002	15,000	3.1	0.0002	0.0002	15,000	3.1	0.0001	0.0002
0.6	1	25,000	27.7	0.0018	0.0047	25,000	18.5	0.0012	0.0024	25,000	15.4	0.0012	0.0020	25,000	15.4	0.0012	0.0012
0.6	1.5	25,000	27.7	0.0018	0.0047	25,000	18.5	0.0012	0.0024	25,000	15.4	0.0012	0.0020	25,000	15.4	0.0012	0.0012
0.6	2	25,000	20.8	0.0018	0.0047	25,000	13.8	0.0012	0.0024	25,000	9.2	0.0012	0.0020	25,000	9.2	0.0012	0.0012
0.6	2.5	25,000	22.1	0.0018	0.0047	25,000	13.8	0.0012	0.0024	25,000	9.2	0.0012	0.0020	25,000	9.2	0.0012	0.0012
0.6	3	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0020	24,000	7.9	0.0012	0.0012
0.6	3.5	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0012	0.0012
0.6	4	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0012	0.0012
0.6	4.5	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0012	0.0012
0.6	5	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0008	0.0008
0.6	5.5	25,000	11.8	0.0018	0.0047	20,000	7.9	0.0012	0.0024	20,000	7.9	0.0012	0.0016	20,000	7.9	0.0008	0.0008
0.6	6	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
0.6	6.5	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
0.6	7	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
0.6	7.5	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
0.6	8	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
0.6	8.5	22,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0008	0.0016	20,000	5.9	0.0004	0.0004
0.6	9	22,000	8.9	0.0012	0.0039	20,000	5.9	0.0008	0.0020	20,000	5.9	0.0008	0.0016	20,000	5.9	0.0004	0.0004
0.6	9.5	22,000	8.9	0.0012	0.0039	17,000	5.9	0.0008	0.0020	17,000	5.9	0.0008	0.0016	17,000	5.9	0.0004	0.0004
0.6	10	20,000	5.9	0.0010	0.0020	17,000	3.9	0.0006	0.0010	17,000	3.9	0.0006	0.0008	17,000	3.9	0.0002	0.0002
0.6	11	20,000	5.9	0.0010	0.0020	17,000	3.9	0.0006	0.0010	17,000	3.9	0.0004	0.0008	17,000	3.9	0.0002	0.0002
0.6	12	20,000	4.7	0.0010	0.0020	17,000	3.1	0.0006	0.0010	17,000	3.1	0.0004	0.0005	17,000	3.1	0.0002	0.0002
0.8	2	25,000	24.6	0.0024	0.0063	23,000	17.7	0.0016	0.0031	21,000	11.8	0.0016	0.0024	21,000	11.8	0.0016	0.0016
0.8	3	25,000	24.6	0.0024	0.0063	23,000	17.7	0.0016	0.0031	21,000	11.8	0.0016	0.0024	21,000	11.8	0.0016	0.0016
0.8	4	25,000	24.6	0.0024	0.0063	23,000	17.7	0.0016	0.0031	21,000	11.8	0.0016	0.0024	21,000	11.8	0.0016	0.0016
0.8	5	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0008	0.0010
0.8	6	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0008	0.0010
0.8	7	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0008	0.0010
0.8	8	22,000	8.9	0.0024	0.0047	19,000	5.9	0.0016	0.0024	17,000	5.9	0.0016	0.0020	17,000	5.9	0.0008	0.0010
0.8	9	22,000	8.9	0.0024	0.0047	19,000	5.9	0.0016	0.0024	17,000	5.9	0.0016	0.0020	17,000	5.9	0.0008	0.0010
0.8	10	22,000	8.9	0.0024	0.0047	19,000	5.9	0.0016	0.0024	17,000	5.9	0.0016	0.0020	17,000	5.9	0.0008	0.0010
0.8	12	20,000	8.9	0.0024	0.0047	19,000	5.9	0.0016	0.0024	17,000	5.9	0.0016	0.0020	17,000	5.9	0.0008	0.0010
1	2.5	25,000	31.6	0.0030	0.0079	25,000	23.6	0.0020	0.0039	21,000	15.7	0.0020	0.0031	21,000	15.7	0.0020	0.0020
1	3	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020
1	4	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020
1	5	21,000	17.7	0.0030	0.0079	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020
1	6	21,000	17.7	0.0030	0.0079	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





Standard Milling

Hardness		-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
1	7	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0030	16,000	7.9	0.0020	0.0024	16,000	7.9	0.0012	0.0012
1	8	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0030	16,000	7.9	0.0020	0.0024	16,000	7.9	0.0012	0.0012
1	9	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0030	16,000	7.9	0.0020	0.0024	16,000	7.9	0.0012	0.0012
1	10	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0006
1	12	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0006
1	14	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0006
1	16	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006
1	18	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006
1	20	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006
1	22	16,000	8.9	0.0020	0.0020	13,000	5.9	0.0008	0.0010	10,000	3.9	0.0008	0.0008	10,000	3.9	0.0002	0.0002
1.2	4	20,000	29.5	0.0035	0.0094	17,000	19.7	0.0024	0.0047	14,000	11.8	0.0024	0.0039	14,000	11.8	0.0024	0.0024
1.2	6	20,000	17.7	0.0035	0.0094	17,000	11.8	0.0024	0.0047	14,000	7.9	0.0024	0.0039	14,000	7.9	0.0024	0.0024
1.2	8	20,000	17.7	0.0035	0.0094	17,000	11.8	0.0024	0.0047	14,000	7.9	0.0024	0.0039	14,000	7.9	0.0024	0.0024
1.2	10	20,000	17.7	0.0035	0.0071	17,000	11.8	0.0024	0.0035	14,000	7.9	0.0024	0.0028	14,000	7.9	0.0012	0.0012
1.2	12	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0012	0.0012
1.2	14	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0004	0.0012
1.2	16	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0004	0.0012
1.2	18	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0004	0.0012
1.2	20	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0004	0.0012
1.2	24	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0004	0.0012
1.4	8	18,000	17.7	0.0039	0.0110	15,500	11.8	0.0028	0.0055	12,000	9.8	0.0028	0.0039	12,000	9.8	0.0028	0.0028
1.4	12	18,000	17.7	0.0039	0.0079	15,500	11.8	0.0028	0.0039	12,000	9.8	0.0028	0.0031	12,000	9.8	0.0028	0.0028
1.4	16	13,000	11.8	0.0035	0.0071	12,000	7.9	0.0024	0.0035	9,000	5.9	0.0016	0.0028	9,000	5.9	0.0004	0.0012
1.5	3	20,000	35.4	0.0047	0.0118	15,000	23.6	0.0031	0.0059	12,000	19.7	0.0031	0.0047	12,000	11.8	0.0031	0.0039
1.5	4	20,000	35.4	0.0047	0.0118	15,000	23.6	0.0031	0.0059	12,000	19.7	0.0031	0.0047	12,000	11.8	0.0031	0.0039
1.5	6	18,000	29.5	0.0047	0.0118	15,000	19.7	0.0031	0.0059	12,000	13.8	0.0031	0.0047	12,000	11.8	0.0031	0.0039
1.5	8	17,000	17.7	0.0047	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039
1.5	10	17,000	17.7	0.0047	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039
1.5	12	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0035	12,000	9.8	0.0020	0.0024
1.5	14	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0035	12,000	9.8	0.0020	0.0024
1.5	16	13,000	11.8	0.0035	0.0071	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0028	9,500	5.9	0.0004	0.0012
1.5	18	13,000	11.8	0.0035	0.0071	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0028	9,500	5.9	0.0004	0.0012
1.5	20	13,000	11.8	0.0035	0.0071	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0028	9,500	5.9	0.0004	0.0012
1.5	22	13,000	11.8	0.0035	0.0071	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0028	9,500	5.9	0.0004	0.0012
1.5	30	13,000	11.8	0.0035	0.0071	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0028	9,500	5.9	0.0004	0.0012
1.6	4	20,000	35.4	0.0047	0.0126	14,000	23.6	0.0031	0.0063	11,000	19.7	0.0031	0.0051	11,000	13.8	0.0031	0.0039
1.6	8	16,500	17.7	0.0047	0.0126	14,000	11.8	0.0031	0.0063	11,000	9.8	0.0031	0.0051	11,000	9.8	0.0031	0.0039
1.6	12	16,500	17.7	0.0047	0.0094	14,000	11.8	0.0031	0.0047	11,000	9.8	0.0031	0.0031	11,000	9.8	0.0020	0.0020
1.6	16	11,500	11.8	0.0047	0.0094	11,000	7.9	0.0031	0.0047	9,000	5.9	0.0031	0.0031	9,000	5.9	0.0020	0.0020
1.6	20	11,500	11.8	0.0035	0.0079	11,000	7.9	0.0024	0.0047	9,000	5.9	0.0024	0.0030	9,000	5.9	0.0006	0.0012
1.8	8	16,500	23.6	0.0051	0.0142	14,000	15.7	0.0035	0.0071	11,000	11.8	0.0035	0.0063	11,000	11.8	0.0035	0.0047
1.8	12	16,500	23.6	0.0051	0.0142	14,000	15.7	0.0035	0.0071	11,000	11.8	0.0035	0.0063	11,000	11.8	0.0035	0.0047
1.8	16	16,500	23.6	0.0051	0.0106	14,000	15.7	0.0035	0.0055	11,000	11.8	0.0035	0.0047	11,000	11.8	0.0020	0.0024
1.8	20	11,000	11.8	0.0039	0.0087	11,000	7.9	0.0024	0.0051	8,000	7.9	0.0024	0.0031	8,000	7.9	0.0008	0.0012
2	3	16,500	53.1	0.0059	0.0220	16,500	35.4	0.0039	0.0110	13,500	31.5	0.0039	0.0110	13,500	27.6	0.0039	0.0079
2	4	16,500	41.3	0.0059	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





List 3690: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

List 3790: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

Standard Milling

Hardness		-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
2	6	16,500	41.3	0.0059	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
2	8	16,500	41.3	0.0059	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
2	10	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
2	12	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
2	14	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
2	16	14,000	29.5	0.0059	0.0165	13,000	19.7	0.0039	0.0083	10,000	11.8	0.0039	0.0071	10,000	11.8	0.0024	0.0039
2	18	14,000	29.5	0.0059	0.0165	13,000	19.7	0.0039	0.0083	10,000	11.8	0.0039	0.0071	10,000	11.8	0.0024	0.0039
2	20	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
2	22	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
2	25	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
2	30	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
2	35	10,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
2	40	10,000	11.8	0.0059	0.0165	10,000	7.9	0.0039	0.0083	8,000	6.3	0.0039	0.0071	8,000	6.3	0.0024	0.0039
2.5	6	16,000	41.3	0.0071	0.0276	12,000	27.6	0.0047	0.0138	10,000	23.6	0.0047	0.0118	10,000	23.6	0.0039	0.0098
2.5	10	14,000	41.3	0.0071	0.0276	12,000	27.6	0.0047	0.0138	10,000	23.6	0.0047	0.0118	10,000	23.6	0.0039	0.0098
2.5	15	14,000	23.6	0.0071	0.0276	10,000	15.7	0.0047	0.0138	8,500	11.8	0.0047	0.0118	8,500	11.8	0.0039	0.0098
2.5	20	12,000	23.6	0.0071	0.0220	10,000	15.7	0.0047	0.0110	8,500	11.8	0.0047	0.0079	8,500	11.8	0.0031	0.0059
2.5	25	12,000	17.7	0.0071	0.0220	8,000	11.8	0.0047	0.0110	6,500	9.8	0.0047	0.0079	6,500	9.8	0.0031	0.0059
2.5	30	12,000	14.8	0.0071	0.0220	8,000	9.8	0.0047	0.0110	6,500	7.9	0.0047	0.0079	6,500	7.9	0.0031	0.0059
2.5	35	12,000	14.8	0.0071	0.0220	8,000	9.8	0.0047	0.0110	6,500	7.9	0.0047	0.0079	6,500	7.9	0.0031	0.0059
3	6	15,000	47.2	0.0079	0.0331	9,500	31.5	0.0059	0.0165	7,500	23.6	0.0059	0.0165	7,500	23.6	0.0059	0.0118
3	8	12,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
3	10	12,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
3	12	10,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
3	14	10,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
3	15	10,000	23.6	0.0079	0.0331	8,500	15.7	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
3	16	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
3	20	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
3	25	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059
3	30	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
3	35	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
3	40	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
3.5	10	10,000	41.3	0.0157	0.0386	8,500	27.6	0.0059	0.0193	6,500	19.7	0.0059	0.0165	6,500	19.7	0.0059	0.0138
3.5	15	10,000	35.4	0.0157	0.0386	8,500	23.6	0.0059	0.0193	6,500	15.7	0.0059	0.0165	6,500	15.7	0.0059	0.0138
3.5	20	8,000	29.5	0.0157	0.0386	7,500	19.7	0.0059	0.0193	5,500	11.8	0.0059	0.0165	5,500	11.8	0.0059	0.0138
3.5	25	8,000	23.6	0.0157	0.0386	7,500	15.7	0.0059	0.0193	5,500	10.8	0.0059	0.0165	5,500	10.8	0.0059	0.0138
3.5	30	8,000	17.7	0.0157	0.0386	7,500	11.8	0.0059	0.0193	5,500	9.8	0.0059	0.0138	5,500	9.8	0.0039	0.0079
3.5	35	8,000	14.8	0.0157	0.0386	6,000	9.8	0.0059	0.0193	5,000	7.9	0.0059	0.0138	5,000	7.9	0.0039	0.0079
3.5	40	6,000	14.8	0.0118	0.0386	6,000	9.8	0.0059	0.0193	5,000	7.9	0.0059	0.0138	5,000	7.9	0.0039	0.0079
3.5	45	6,000	14.8	0.0118	0.0386	6,000	9.8	0.0059	0.0193	5,000	7.9	0.0059	0.0138	5,000	7.9	0.0039	0.0079
4	8	11,000	47.2	0.0197	0.0504	7,500	31.5	0.0079	0.0252	6,000	27.6	0.0079	0.0236	6,000	27.6	0.0079	0.0157
4	10	9,000	35.4	0.0197	0.0504	7,500	23.6	0.0079	0.0252	6,000	15.7	0.0079	0.0236	6,000	15.7	0.0079	0.0157
4	12	9,000	35.4	0.0197	0.0504	7,500	23.6	0.0079	0.0252	6,000	15.7	0.0079	0.0236	6,000	15.7	0.0079	0.0157
4	14	9,000	35.4	0.0197	0.0504	7,500	23.6	0.0079	0.0252	6,000	15.7	0.0079	0.0236	6,000	15.7	0.0079	0.0157
4	15	9,000	35.4	0.0197	0.0504	7,500	23.6	0.0079	0.0252	6,000	15.7	0.0079	0.0236	6,000	15.7	0.0079	0.0157
4	16	9,000	35.4	0.0197	0.0504	7,500	23.6	0.0079	0.0252	6,000	15.7	0.0079	0.0236	6,000	15.7	0.0079	0.0157

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





Standard Milling

Hardness		-		<32 HRC		33-41 HRC		42-50 HRC									
Work Material		Aluminum Copper Alloy		Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel		Prehardened & Hardened Steel											
Cutting Speed		90-460 SFM		80-340 SFM		80-280 SFM		80-280 SFM									
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
4	20	7,000	23.6	0.0197	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0236	5,000	9.8	0.0079	0.0157
4	25	7,000	23.6	0.0197	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0236	5,000	9.8	0.0079	0.0157
4	30	7,000	23.6	0.0157	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0220	5,000	9.8	0.0047	0.0079
4	35	7,000	23.6	0.0157	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0220	5,000	9.8	0.0047	0.0079
4	40	5,000	14.8	0.0138	0.0504	5,000	9.8	0.0079	0.0252	4,000	7.9	0.0079	0.0220	4,000	7.9	0.0047	0.0079
4	45	5,000	14.8	0.0138	0.0504	5,000	9.8	0.0079	0.0252	4,000	7.9	0.0079	0.0220	4,000	7.9	0.0047	0.0079
4	50	5,000	14.8	0.0138	0.0504	5,000	9.8	0.0079	0.0252	4,000	7.9	0.0079	0.0220	4,000	7.9	0.0047	0.0079
5	10	9,000	53.1	0.0236	0.0709	6,500	35.4	0.0098	0.0354	5,000	29.5	0.0098	0.0276	5,000	29.5	0.0098	0.0197
5	15	9,000	53.1	0.0236	0.0709	6,500	35.4	0.0098	0.0354	5,000	29.5	0.0098	0.0276	5,000	29.5	0.0098	0.0197
5	20	7,000	29.5	0.0236	0.0709	6,500	19.7	0.0098	0.0354	5,000	15.7	0.0098	0.0276	5,000	15.7	0.0098	0.0197
5	25	6,000	29.5	0.0236	0.0709	5,000	19.7	0.0098	0.0354	4,000	9.8	0.0098	0.0276	4,000	9.8	0.0098	0.0197
5	30	6,000	29.5	0.0236	0.0709	5,000	19.7	0.0098	0.0354	4,000	9.8	0.0098	0.0276	4,000	9.8	0.0098	0.0197
5	35	6,000	29.5	0.0236	0.0709	5,000	19.7	0.0098	0.0354	4,000	9.8	0.0098	0.0276	4,000	9.8	0.0098	0.0197
5	40	5,000	23.6	0.0157	0.0709	4,000	15.7	0.0098	0.0354	4,000	7.9	0.0098	0.0236	4,000	7.9	0.0079	0.0098
5	45	5,000	23.6	0.0157	0.0709	4,000	15.7	0.0098	0.0354	4,000	7.9	0.0098	0.0236	4,000	7.9	0.0079	0.0098
5	50	5,000	17.7	0.0157	0.0709	4,000	11.8	0.0098	0.0354	4,000	7.9	0.0098	0.0236	4,000	7.9	0.0079	0.0098
6	10	7,000	59.1	0.0295	0.0945	5,500	39.4	0.0118	0.0472	4,500	31.5	0.0118	0.0378	4,500	31.5	0.0118	0.0236
6	20	7,000	47.2	0.0295	0.0945	5,500	31.5	0.0118	0.0472	4,500	23.6	0.0118	0.0378	4,500	23.6	0.0118	0.0236
6	25	6,000	35.4	0.0295	0.0945	5,500	23.6	0.0118	0.0472	4,500	15.7	0.0118	0.0378	4,500	15.7	0.0118	0.0236
6	30	5,000	23.6	0.0295	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
6	35	5,000	23.6	0.0295	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
6	40	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
6	45	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
6	50	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.81	0.0118	0.0118

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





List 3690: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

List 3790: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

High Speed Milling

Hardness		-		<32 HRC				33-41 HRC				42-50 HRC					
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.1	0.3	50,000	11.0	0.0002	0.0002	50,000	5.91	0.0002	0.0002	50,000	3.94	0.0002	0.0002	50,000	2.76	0.0002	0.0002
0.1	0.5	50,000	8.7	0.0002	0.0002	50,000	4.72	0.0002	0.0002	50,000	3.15	0.0002	0.0002	50,000	1.97	0.0002	0.0002
0.2	0.3	50,000	19.3	0.0008	0.0008	50,000	15.75	0.0004	0.0004	50,000	14.96	0.0004	0.0004	50,000	14.96	0.0002	0.0002
0.2	0.5	50,000	19.3	0.0008	0.0008	50,000	15.75	0.0004	0.0004	50,000	14.96	0.0004	0.0004	50,000	14.96	0.0002	0.0002
0.2	0.75	50,000	17.3	0.0008	0.0008	50,000	14.17	0.0004	0.0004	50,000	13.39	0.0004	0.0004	50,000	13.39	0.0002	0.0002
0.2	1	50,000	17.3	0.0008	0.0008	50,000	14.17	0.0004	0.0004	50,000	13.39	0.0004	0.0004	50,000	13.39	0.0002	0.0002
0.2	1.25	50,000	15.4	0.0008	0.0008	47,000	12.60	0.0004	0.0004	47,000	11.81	0.0004	0.0004	47,000	11.81	0.0002	0.0002
0.2	1.5	50,000	14.2	0.0008	0.0008	45,000	11.81	0.0004	0.0004	45,000	11.02	0.0004	0.0004	45,000	11.02	0.0002	0.0002
0.2	1.75	50,000	13.8	0.0008	0.0008	42,000	10.24	0.0004	0.0004	42,000	9.45	0.0004	0.0004	42,000	9.45	0.0002	0.0002
0.2	2	50,000	12.6	0.0004	0.0004	38,000	9.06	0.0002	0.0002	38,000	8.27	0.0002	0.0002	37,000	7.87	0.0002	0.0002
0.2	2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.2	3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.3	0.5	50,000	29.5	0.0008	0.0012	50,000	24.41	0.0004	0.0006	50,000	23.62	0.0004	0.0006	50,000	23.62	0.0002	0.0002
0.3	0.6	50,000	28.7	0.0008	0.0012	50,000	23.62	0.0004	0.0006	50,000	22.44	0.0004	0.0006	50,000	22.44	0.0002	0.0002
0.3	0.75	50,000	28.7	0.0008	0.0012	50,000	23.62	0.0004	0.0006	50,000	22.44	0.0004	0.0006	50,000	22.44	0.0002	0.0002
0.3	1	50,000	28.7	0.0008	0.0012	50,000	23.62	0.0004	0.0006	50,000	22.44	0.0004	0.0006	50,000	22.44	0.0002	0.0002
0.3	1.25	50,000	28.7	0.0008	0.0012	50,000	23.62	0.0004	0.0006	50,000	22.44	0.0004	0.0006	50,000	22.44	0.0002	0.0002
0.3	1.5	50,000	28.7	0.0008	0.0012	50,000	23.62	0.0004	0.0006	50,000	22.44	0.0004	0.0006	50,000	22.44	0.0002	0.0002
0.3	1.75	50,000	24.0	0.0008	0.0012	47,000	20.08	0.0004	0.0006	47,000	18.90	0.0004	0.0006	47,000	18.90	0.0002	0.0002
0.3	2	50,000	22.8	0.0008	0.0012	45,000	18.90	0.0004	0.0006	45,000	17.72	0.0004	0.0006	45,000	17.72	0.0002	0.0002
0.3	2.25	50,000	19.3	0.0008	0.0008	45,000	15.75	0.0004	0.0004	45,000	14.96	0.0004	0.0004	45,000	14.96	0.0004	0.0004
0.3	2.5	50,000	14.2	0.0008	0.0008	40,000	11.81	0.0004	0.0004	40,000	11.02	0.0004	0.0004	40,000	11.02	0.0004	0.0004
0.3	2.75	50,000	12.6	0.0008	0.0008	38,000	9.84	0.0004	0.0004	38,000	9.06	0.0004	0.0004	38,000	9.06	0.0004	0.0004
0.3	3	50,000	11.4	0.0008	0.0008	38,000	9.84	0.0004	0.0004	38,000	9.06	0.0004	0.0004	37,000	9.06	0.0002	0.0004
0.3	3.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.3	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.3	4.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.3	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.4	0.5	50,000	43.3	0.0010	0.0020	50,000	36.22	0.0006	0.0010	50,000	34.25	0.0006	0.0008	50,000	34.25	0.0004	0.0004
0.4	0.75	50,000	42.9	0.0010	0.0020	50,000	35.43	0.0006	0.0010	50,000	33.46	0.0006	0.0008	50,000	33.46	0.0004	0.0004
0.4	1	50,000	42.9	0.0010	0.0020	50,000	35.43	0.0006	0.0010	50,000	33.46	0.0006	0.0008	50,000	33.46	0.0004	0.0004
0.4	1.5	50,000	38.2	0.0010	0.0020	50,000	31.50	0.0006	0.0010	50,000	29.92	0.0006	0.0008	50,000	29.92	0.0004	0.0004
0.4	2	50,000	33.5	0.0010	0.0020	50,000	27.56	0.0006	0.0010	50,000	25.98	0.0006	0.0008	50,000	25.98	0.0004	0.0004
0.4	2.5	50,000	26.4	0.0010	0.0020	45,000	21.65	0.0006	0.0010	45,000	20.47	0.0006	0.0008	45,000	20.47	0.0004	0.0004
0.4	3	48,000	21.3	0.0010	0.0020	43,000	19.69	0.0006	0.0010	43,000	18.50	0.0006	0.0008	43,000	18.50	0.0004	0.0004
0.4	3.5	45,000	18.1	0.0010	0.0020	40,000	16.54	0.0006	0.0010	40,000	15.75	0.0006	0.0008	40,000	15.75	0.0004	0.0004
0.4	4	40,000	15.7	0.0004	0.0012	36,000	14.57	0.0002	0.0006	36,000	13.78	0.0002	0.0005	35,000	13.39	0.0002	0.0004
0.4	4.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.4	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.4	5.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.4	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.5	1	50,000	55.9	0.0016	0.0020	50,000	43.31	0.0008	0.0010	50,000	41.34	0.0008	0.0008	50,000	41.34	0.0004	0.0004
0.5	1.5	50,000	55.9	0.0016	0.0020	50,000	43.31	0.0008	0.0010	50,000	41.34	0.0008	0.0008	50,000	41.34	0.0004	0.0004
0.5	2	50,000	55.1	0.0016	0.0020	50,000	39.37	0.0008	0.0010	50,000	37.40	0.0008	0.0008	50,000	37.40	0.0004	0.0004
0.5	2.5	50,000	54.3	0.0016	0.0020	50,000	39.37	0.0008	0.0010	50,000	37.40	0.0008	0.0008	50,000	37.40	0.0004	0.0004
0.5	3	50,000	46.9	0.0016	0.0020	48,000	35.43	0.0008	0.0010	48,000	33.46	0.0008	0.0008	48,000	33.46	0.0004	0.0004

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





High Speed Milling

Hardness		-		<32 HRC		33-41 HRC		42-50 HRC									
Work Material		Aluminum Copper Alloy		Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel		Prehardened & Hardened Steel											
Cutting Speed		90-460 SFM		80-340 SFM		80-280 SFM		80-280 SFM									
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.5	3.5	50,000	44.9	0.0016	0.0020	45,000	27.56	0.0008	0.0010	45,000	25.59	0.0008	0.0008	45,000	25.59	0.0004	0.0004
0.5	4	45,000	39.4	0.0016	0.0020	43,000	23.62	0.0008	0.0010	43,000	22.44	0.0008	0.0008	43,000	22.44	0.0004	0.0004
0.5	4.5	38,000	37.0	0.0016	0.0020	38,000	19.69	0.0008	0.0010	38,000	18.50	0.0008	0.0008	38,000	18.50	0.0004	0.0004
0.5	5	30,000	29.9	0.0016	0.0020	30,000	15.75	0.0008	0.0010	30,000	14.96	0.0008	0.0008	29,000	14.17	0.0004	0.0004
0.5	5.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.5	7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.5	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.5	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.5	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	1	50,000	65.4	0.0018	0.0047	50,000	55.12	0.0012	0.0024	50,000	51.18	0.0012	0.0020	50,000	51.18	0.0012	0.0012
0.6	1.5	50,000	63.0	0.0018	0.0047	50,000	51.18	0.0012	0.0024	50,000	47.24	0.0012	0.0020	50,000	47.24	0.0012	0.0012
0.6	2	50,000	63.0	0.0018	0.0047	50,000	51.18	0.0012	0.0024	50,000	47.24	0.0012	0.0020	50,000	47.24	0.0012	0.0012
0.6	2.5	50,000	61.0	0.0018	0.0047	50,000	47.24	0.0012	0.0024	50,000	43.31	0.0012	0.0020	50,000	43.31	0.0012	0.0012
0.6	3	50,000	61.0	0.0018	0.0047	50,000	47.24	0.0012	0.0024	50,000	43.31	0.0012	0.0020	50,000	43.31	0.0012	0.0012
0.6	3.5	50,000	52.8	0.0018	0.0047	45,000	39.37	0.0012	0.0024	45,000	37.40	0.0012	0.0016	45,000	37.40	0.0012	0.0012
0.6	4	50,000	47.2	0.0018	0.0047	40,000	35.43	0.0012	0.0024	40,000	33.46	0.0012	0.0016	40,000	33.46	0.0012	0.0012
0.6	4.5	45,000	40.9	0.0018	0.0047	34,000	30.71	0.0012	0.0024	34,000	29.13	0.0012	0.0016	34,000	29.13	0.0012	0.0012
0.6	5	30,000	37.8	0.0018	0.0047	30,000	26.77	0.0012	0.0024	30,000	25.20	0.0012	0.0016	30,000	25.20	0.0008	0.0008
0.6	5.5	30,000	32.3	0.0018	0.0047	28,000	25.59	0.0012	0.0024	28,000	24.02	0.0012	0.0016	28,000	24.02	0.0008	0.0008
0.6	6	30,000	28.3	0.0018	0.0047	26,000	23.62	0.0012	0.0024	26,000	22.44	0.0012	0.0016	25,000	21.26	0.0008	0.0008
0.6	6.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	7.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	8.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	9.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	11	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.6	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.8	2	50,000	86.6	0.0024	0.0063	50,000	78.74	0.0016	0.0031	50,000	74.80	0.0016	0.0024	50,000	74.80	0.0016	0.0016
0.8	3	50,000	68.5	0.0024	0.0063	48,000	62.99	0.0016	0.0031	48,000	59.06	0.0016	0.0024	48,000	59.06	0.0016	0.0016
0.8	4	50,000	66.1	0.0024	0.0063	40,000	47.24	0.0016	0.0031	40,000	43.31	0.0016	0.0024	40,000	43.31	0.0016	0.0016
0.8	5	43,000	63.0	0.0024	0.0047	34,000	37.40	0.0016	0.0024	34,000	35.43	0.0016	0.0020	34,000	35.43	0.0008	0.0010
0.8	6	32,000	49.6	0.0024	0.0047	30,000	31.50	0.0016	0.0024	30,000	29.92	0.0016	0.0020	30,000	29.92	0.0008	0.0010
0.8	7	30,000	39.4	0.0024	0.0047	25,000	23.62	0.0016	0.0024	25,000	22.44	0.0016	0.0020	25,000	22.44	0.0008	0.0010
0.8	8	24,000	28.3	0.0024	0.0047	23,000	17.72	0.0016	0.0024	23,000	16.54	0.0016	0.0020	23,000	16.54	0.0008	0.0010
0.8	9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.8	10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.8	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	2.5	50,000	128.7	0.0030	0.0079	50,000	133.86	0.0020	0.0039	50,000	125.98	0.0020	0.0031	50,000	125.98	0.0020	0.0020
1	3	50,000	120.5	0.0030	0.0079	45,000	125.98	0.0020	0.0039	45,000	118.11	0.0020	0.0031	45,000	118.11	0.0020	0.0020
1	4	50,000	118.1	0.0030	0.0079	40,000	118.11	0.0020	0.0039	40,000	112.20	0.0020	0.0031	40,000	112.20	0.0020	0.0020
1	5	47,000	113.0	0.0030	0.0079	36,000	90.55	0.0020	0.0039	36,000	82.68	0.0020	0.0031	36,000	82.68	0.0020	0.0020
1	6	43,000	102.4	0.0030	0.0079	30,000	78.74	0.0020	0.0039	30,000	74.80	0.0020	0.0031	30,000	74.80	0.0020	0.0020

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





List 3690: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

List 3790: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

High Speed Milling

Hardness		-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
1	7	30,000	92.5	0.0030	0.0059	27,000	66.93	0.0020	0.0030	27,000	62.99	0.0020	0.0024	27,000	62.99	0.0012	0.0012
1	8	27,000	78.7	0.0030	0.0059	26,000	62.99	0.0020	0.0030	26,000	59.06	0.0020	0.0024	26,000	59.06	0.0012	0.0012
1	9	26,000	60.6	0.0030	0.0059	24,000	47.24	0.0020	0.0030	24,000	43.31	0.0020	0.0024	24,000	43.31	0.0012	0.0012
1	10	24,000	55.1	0.0024	0.0047	22,000	43.31	0.0012	0.0020	22,000	39.37	0.0012	0.0016	21,000	37.40	0.0004	0.0006
1	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	14	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.2	4	40,000	118.1	0.0035	0.0094	40,000	118.11	0.0024	0.0047	40,000	112.20	0.0024	0.0039	40,000	112.20	0.0024	0.0024
1.2	6	35,000	102.4	0.0035	0.0094	32,000	82.68	0.0024	0.0047	32,000	78.74	0.0024	0.0039	32,000	78.74	0.0024	0.0024
1.2	8	30,000	78.7	0.0035	0.0094	25,000	66.93	0.0024	0.0047	25,000	62.99	0.0024	0.0039	25,000	62.99	0.0024	0.0024
1.2	10	21,000	55.1	0.0035	0.0071	20,000	47.24	0.0024	0.0035	20,000	43.31	0.0024	0.0028	18,000	38.98	0.0012	0.0012
1.2	12	20,000	39.4	0.0035	0.0071	19,000	35.43	0.0024	0.0035	17,000	33.46	0.0024	0.0028	16,000	31.50	0.0012	0.0012
1.2	14	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.2	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.2	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.2	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.2	24	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.4	8	30,000	82.7	0.0039	0.0110	25,000	66.93	0.0028	0.0055	25,000	62.99	0.0028	0.0039	25,000	62.99	0.0028	0.0028
1.4	12	22,000	47.6	0.0039	0.0079	19,000	39.37	0.0028	0.0039	19,000	37.40	0.0028	0.0031	19,000	37.40	0.0028	0.0028
1.4	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	3	50,000	209.8	0.0047	0.0118	50,000	188.98	0.0031	0.0059	50,000	188.98	0.0031	0.0047	50,000	188.98	0.0031	0.0039
1.5	4	42,000	161.8	0.0047	0.0118	40,000	153.54	0.0031	0.0059	40,000	145.67	0.0031	0.0047	40,000	145.67	0.0031	0.0039
1.5	6	32,000	118.1	0.0047	0.0118	30,000	114.17	0.0031	0.0059	30,000	106.30	0.0031	0.0047	30,000	106.30	0.0031	0.0039
1.5	8	30,000	104.3	0.0047	0.0118	24,000	90.55	0.0031	0.0059	24,000	82.68	0.0031	0.0047	24,000	82.68	0.0031	0.0039
1.5	10	30,000	94.5	0.0047	0.0118	24,000	78.74	0.0031	0.0059	24,000	74.80	0.0031	0.0047	24,000	74.80	0.0031	0.0039
1.5	12	24,000	55.1	0.0047	0.0094	21,000	55.12	0.0031	0.0047	21,000	51.18	0.0031	0.0035	21,000	51.18	0.0020	0.0024
1.5	14	22,000	55.1	0.0047	0.0094	18,000	47.24	0.0031	0.0047	18,000	43.31	0.0031	0.0035	17,000	43.31	0.0020	0.0024
1.5	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	18	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.5	30	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.6	4	40,000	177.2	0.0047	0.0126	38,000	157.48	0.0031	0.0063	38,000	149.61	0.0031	0.0051	38,000	141.73	0.0031	0.0039
1.6	8	26,000	118.1	0.0047	0.0126	24,000	118.11	0.0031	0.0063	24,000	110.24	0.0031	0.0051	23,000	102.36	0.0031	0.0039
1.6	12	24,000	94.5	0.0047	0.0094	21,000	70.87	0.0031	0.0047	21,000	66.93	0.0031	0.0031	20,000	62.99	0.0020	0.0020
1.6	16	18,000	63.0	0.0047	0.0094	16,000	31.50	0.0031	0.0047	16,000	29.92	0.0031	0.0031	15,000	27.56	0.0020	0.0020
1.6	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.8	8	25,000	126.0	0.0051	0.0142	24,000	118.11	0.0035	0.0071	24,000	110.24	0.0035	0.0063	23,000	102.36	0.0035	0.0047
1.8	12	22,000	98.4	0.0051	0.0142	18,000	70.87	0.0035	0.0071	15,800	59.06	0.0035	0.0063	14,700	53.15	0.0035	0.0047
1.8	16	16,000	47.2	0.0051	0.0106	16,000	38.58	0.0035	0.0055	14,000	33.46	0.0035	0.0047	13,000	30.71	0.0020	0.0024
1.8	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	3	50,000	228.3	0.0059	0.0220	50,000	220.47	0.0039	0.0110	50,000	220.47	0.0039	0.0110	47,000	208.66	0.0039	0.0079
2	4	50,000	228.3	0.0059	0.0220	50,000	220.47	0.0039	0.0110	50,000	220.47	0.0039	0.0110	47,000	208.66	0.0039	0.0079

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





High Speed Milling

Hardness		-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
2	6	38,000	157.5	0.0059	0.0220	36,000	118.11	0.0039	0.0110	36,000	110.24	0.0039	0.0110	34,000	102.36	0.0039	0.0079
2	8	27,000	132.3	0.0059	0.0220	25,000	102.36	0.0039	0.0110	25,000	94.49	0.0039	0.0110	23,000	86.61	0.0039	0.0079
2	10	22,000	120.1	0.0059	0.0220	20,000	94.49	0.0039	0.0110	20,000	86.61	0.0039	0.0110	19,000	78.74	0.0039	0.0079
2	12	16,000	101.6	0.0059	0.0220	16,000	78.74	0.0039	0.0110	16,000	74.80	0.0039	0.0110	15,000	66.93	0.0039	0.0079
2	14	15,000	94.5	0.0059	0.0220	15,000	70.87	0.0039	0.0110	15,000	66.93	0.0039	0.0110	14,000	59.06	0.0039	0.0079
2	16	14,000	86.6	0.0059	0.0165	14,000	66.93	0.0039	0.0083	14,000	62.99	0.0039	0.0071	13,000	55.12	0.0024	0.0039
2	18	13,000	78.7	0.0059	0.0165	13,000	62.99	0.0039	0.0083	13,000	59.06	0.0039	0.0071	12,000	51.18	0.0024	0.0039
2	20	12,000	47.2	0.0059	0.0165	12,000	47.24	0.0039	0.0083	11,000	43.31	0.0039	0.0071	10,000	39.37	0.0024	0.0039
2	22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	30	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.5	6	32,000	218.5	0.0071	0.0276	28,000	181.10	0.0047	0.0138	28,000	169.29	0.0047	0.0118	25,000	145.67	0.0039	0.0098
2.5	10	21,000	157.5	0.0071	0.0276	20,000	129.92	0.0047	0.0138	20,000	122.05	0.0047	0.0118	18,000	106.30	0.0039	0.0098
2.5	15	17,000	118.1	0.0071	0.0276	17,000	110.24	0.0047	0.0138	17,000	102.36	0.0047	0.0118	16,000	94.49	0.0039	0.0098
2.5	20	15,000	70.9	0.0071	0.0220	15,000	70.87	0.0047	0.0110	15,000	66.93	0.0047	0.0079	14,000	59.06	0.0031	0.0059
2.5	25	12,000	39.8	0.0071	0.0220	12,000	39.37	0.0047	0.0110	12,000	37.40	0.0047	0.0079	10,000	33.86	0.0031	0.0059
2.5	30	10,000	31.5	0.0071	0.0220	-	-	-	-	-	-	-	-	-	-	-	-
2.5	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	6	42,000	267.7	0.0079	0.0331	41,500	244.09	0.0059	0.0165	41,500	244.09	0.0059	0.0165	32,000	188.98	0.0059	0.0118
3	8	32,000	181.1	0.0079	0.0331	30,000	177.17	0.0059	0.0165	30,000	165.35	0.0059	0.0142	25,000	137.80	0.0059	0.0118
3	10	28,000	157.5	0.0079	0.0331	25,000	149.61	0.0059	0.0165	25,000	141.73	0.0059	0.0142	20,000	110.24	0.0059	0.0118
3	12	24,000	120.1	0.0079	0.0331	20,000	118.11	0.0059	0.0165	20,000	110.24	0.0059	0.0142	18,000	98.43	0.0059	0.0118
3	14	22,000	114.2	0.0079	0.0331	18,000	106.30	0.0059	0.0165	18,000	98.43	0.0059	0.0142	15,000	78.74	0.0059	0.0118
3	15	20,000	110.2	0.0079	0.0331	16,000	94.49	0.0059	0.0165	16,000	86.61	0.0059	0.0142	13,000	66.93	0.0059	0.0118
3	16	20,000	102.4	0.0079	0.0331	16,000	78.74	0.0059	0.0165	16,000	74.80	0.0059	0.0142	13,000	59.06	0.0059	0.0118
3	20	16,000	86.6	0.0079	0.0331	14,000	70.87	0.0059	0.0165	14,000	66.93	0.0059	0.0142	11,000	51.18	0.0059	0.0118
3	25	16,000	70.9	0.0079	0.0331	12,000	47.24	0.0059	0.0165	12,000	43.31	0.0059	0.0118	9,000	32.28	0.0035	0.0059
3	30	12,000	39.4	0.0079	0.0331	10,000	31.50	0.0059	0.0165	9,000	29.92	0.0059	0.0118	7,800	23.23	0.0035	0.0059
3	35	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3.5	10	26,000	212.6	0.0157	0.0386	25,000	147.64	0.0059	0.0193	25,000	137.80	0.0059	0.0165	19,500	104.72	0.0059	0.0138
3.5	15	20,000	157.5	0.0157	0.0386	18,000	118.11	0.0059	0.0193	18,000	110.24	0.0059	0.0165	14,000	85.83	0.0059	0.0138
3.5	20	18,000	118.1	0.0157	0.0386	16,000	106.30	0.0059	0.0193	16,000	98.43	0.0059	0.0165	12,000	72.83	0.0059	0.0138
3.5	25	14,000	110.2	0.0157	0.0386	12,000	78.74	0.0059	0.0193	12,000	74.80	0.0059	0.0165	9,000	55.12	0.0059	0.0138
3.5	30	10,000	86.6	0.0157	0.0386	10,000	62.99	0.0059	0.0193	10,000	59.06	0.0059	0.0138	8,000	47.24	0.0039	0.0079
3.5	35	10,000	47.2	0.0157	0.0386	10,000	39.37	0.0059	0.0193	10,000	37.40	0.0059	0.0138	7,000	26.38	0.0039	0.0079
3.5	40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3.5	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	8	31,000	224.4	0.0197	0.0504	31,000	224.41	0.0079	0.0252	31,000	224.41	0.0079	0.0236	24,000	173.23	0.0079	0.0157
4	10	25,000	177.2	0.0197	0.0504	25,000	177.17	0.0079	0.0252	25,000	165.35	0.0079	0.0236	20,000	129.92	0.0079	0.0157
4	12	20,000	157.5	0.0197	0.0504	20,000	141.73	0.0079	0.0252	20,000	133.86	0.0079	0.0236	16,000	106.30	0.0079	0.0157
4	14	20,000	157.5	0.0197	0.0504	20,000	141.73	0.0079	0.0252	20,000	133.86	0.0079	0.0236	16,000	106.30	0.0079	0.0157
4	15	20,000	157.5	0.0197	0.0504	20,000	141.73	0.0079	0.0252	20,000	133.86	0.0079	0.0236	16,000	106.30	0.0079	0.0157
4	16	20,000	136.2	0.0197	0.0504	18,000	125.98	0.0079	0.0252	18,000	118.11	0.0079	0.0236	14,000	90.55	0.0079	0.0157

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





List 3690: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

List 3790: Ball End, Regular Length, 2 Flute, Long Neck, Rib Processing (Continued)

High Speed Milling

Hardness		-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material		Aluminum Copper Alloy				Cast Iron, Carbon Steel, Alloy Steel, Stainless Steel, Die Steel				Prehardened & Hardened Steel							
Cutting Speed		90-460 SFM				80-340 SFM				80-280 SFM				80-280 SFM			
Depth of Cut																	
Mill Dia.	L1 (mm)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
4	20	18,000	118.1	0.0197	0.0504	16,000	110.24	0.0079	0.0252	16,000	102.36	0.0079	0.0236	12,000	74.80	0.0079	0.0157
4	25	18,000	118.1	0.0197	0.0504	16,000	110.24	0.0079	0.0252	16,000	102.36	0.0079	0.0236	12,000	74.80	0.0079	0.0157
4	30	16,000	112.2	0.0157	0.0504	14,000	94.49	0.0079	0.0252	14,000	86.61	0.0079	0.0220	11,000	66.93	0.0047	0.0079
4	35	14,000	86.6	0.0157	0.0504	12,000	70.87	0.0079	0.0252	12,000	66.93	0.0079	0.0220	9,000	66.93	0.0047	0.0079
4	40	12,000	63.0	0.0138	0.0504	10,000	51.18	0.0079	0.0252	10,000	47.24	0.0079	0.0220	7,000	33.07	0.0047	0.0079
4	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5	10	25,000	220.5	0.0236	0.0709	25,000	212.60	0.0098	0.0354	25,000	212.60	0.0098	0.0276	19,000	157.48	0.0098	0.0197
5	15	20,000	173.2	0.0236	0.0709	20,000	165.35	0.0098	0.0354	20,000	153.54	0.0098	0.0276	16,000	122.05	0.0098	0.0197
5	20	18,000	149.6	0.0236	0.0709	16,000	137.80	0.0098	0.0354	16,000	129.92	0.0098	0.0276	12,000	94.49	0.0098	0.0197
5	25	20,000	133.9	0.0236	0.0709	15,000	125.98	0.0098	0.0354	15,000	118.11	0.0098	0.0276	12,000	94.49	0.0098	0.0197
5	30	16,000	114.2	0.0236	0.0709	14,000	98.43	0.0098	0.0354	14,000	90.55	0.0098	0.0276	11,000	70.87	0.0098	0.0197
5	35	14,000	86.6	0.0236	0.0709	12,000	62.99	0.0098	0.0354	12,000	59.06	0.0098	0.0276	9,000	43.31	0.0098	0.0197
5	40	12,000	70.9	0.0157	0.0709	10,000	47.24	0.0098	0.0354	10,000	43.31	0.0098	0.0236	8,000	34.65	0.0079	0.0098
5	45	9,000	47.2	0.0157	0.0709	9,000	35.43	0.0098	0.0354	9,000	33.46	0.0098	0.0236	7,000	25.98	0.0079	0.0098
5	50	8,000	43.3	0.0157	0.0709	8,000	31.50	0.0098	0.0354	8,000	29.92	0.0098	0.0236	6,000	22.44	0.0079	0.0098
6	10	22,000	232.3	0.0295	0.0945	20,000	212.60	0.0118	0.0472	20,000	196.85	0.0118	0.0378	15,000	147.64	0.0118	0.0236
6	20	18,000	173.2	0.0295	0.0945	16,000	165.35	0.0118	0.0472	16,000	153.54	0.0118	0.0378	12,000	114.17	0.0118	0.0236
6	25	14,000	157.5	0.0295	0.0945	12,000	125.98	0.0118	0.0472	12,000	118.11	0.0118	0.0378	9,000	88.58	0.0118	0.0236
6	30	10,000	126.0	0.0295	0.0945	10,000	102.36	0.0118	0.0472	10,000	94.49	0.0118	0.0378	8,000	74.80	0.0118	0.0236
6	35	9,000	118.1	0.0295	0.0945	9,000	90.55	0.0118	0.0472	9,000	82.68	0.0118	0.0378	7,000	62.99	0.0118	0.0236
6	40	9,000	110.2	0.0236	0.0945	9,000	78.74	0.0118	0.0472	9,000	74.80	0.0118	0.0378	7,000	55.12	0.0118	0.0236
6	45	8,000	98.4	0.0236	0.0945	8,000	70.87	0.0118	0.0472	8,000	66.93	0.0118	0.0378	6,500	51.18	0.0118	0.0236
6	50	7,000	90.6	0.0236	0.0945	7,000	62.99	0.0118	0.0472	7,000	59.06	0.0118	0.0378	5,500	43.31	0.0118	0.0118

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 3619 - EXOCARB® WXL®: 2 Flute, Square End, Stub Length

Slotting

Hardness	-	<32 HRC	33-41 HRC	42-50 HRC						
Work Material	Copper	Mild Steels	Hardened Steels Pre-hardened Steels							
Cutting Speed	495 SFM	245 SFM	175 SFM	150 SFM						
Depth of Cut	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D < 1/8</td> <td>0.3D</td> </tr> <tr> <td>1/8 ≤ D</td> <td>0.5D</td> </tr> </tbody> </table>				Dia	aa	D < 1/8	0.3D	1/8 ≤ D	0.5D
Dia	aa									
D < 1/8	0.3D									
1/8 ≤ D	0.5D									
Mill Diameter	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
1/16	25,000	10.7	15,000	6.2	10,700	4.6	9,200	3.2		
5/64	24,200	12.9	12,000	6.6	8,600	4.5	7,300	3.3		
3/32	20,200	14.3	10,000	7.2	7,100	4.1	6,100	3.1		
7/64	17,300	15.5	8,600	8.3	6,100	4.5	5,200	3.3		
1/8	15,100	17.5	7,500	8.6	5,300	4.7	4,600	3.5		
5/32	12,100	18.8	6,000	9.6	4,300	5.2	3,700	3.8		
3/16	10,100	21.1	5,000	11.0	3,600	5.1	3,000	3.7		
1/4	7,600	22.2	3,700	11.2	2,700	5.3	2,300	4.0		
5/16	6,000	21.9	3,000	10.7	2,100	4.8	1,800	3.8		
3/8	5,000	20.7	2,500	10.7	1,800	5.1	1,500	4.1		
7/16	4,300	20.2	2,100	9.9	1,500	4.8	1,300	4.5		
1/2	3,800	20.0	1,900	9.8	1,300	4.7	1,200	3.8		
5/8	3,000	16.5	1,500	8.3	1,000	4.2	900	3.6		
3/4	2,500	13.8	1,200	6.9	900	4.1	800	3.2		

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 3620 - EXOCARB® WXL®: Stub Length, 2 Flute

List 3621 - EXOCARB® WXL®: Regular Length, 2 Flute

Slotting

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC							
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels Pre-hardened Steels, Stainless Steels									
Cutting Speed	495 SFM		245 SFM		175 SFM		150 SFM							
Depth of Cut			<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<1/8</td> <td>0.3D</td> </tr> <tr> <td>1/8≤D</td> <td>0.5D</td> </tr> </tbody> </table>		Dia	aa	D<1/8	0.3D	1/8≤D	0.5D				
Dia	aa													
D<1/8	0.3D													
1/8≤D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/16	25,000	10.2	14,700	5.8	10,500	4.4	8,900	3.0						
5/64	24,000	12.2	11,800	6.2	8,300	4.2	7,200	3.1						
3/32	20,500	13.8	9,800	6.7	7,000	3.9	6,000	3.0						
7/64	17,500	15.0	8,400	7.7	6,000	4.3	5,100	3.2						
1/8	15,000	16.5	7,300	8.0	5,200	4.5	4,600	3.4						
5/32	12,000	17.7	5,900	9.0	4,200	4.9	3,700	3.7						
3/16	10,500	20.9	4,900	10.2	3,700	5.1	3,100	3.7						
7/32	8,700	21.3	4,300	10.6	3,100	5.1	2,600	3.9						
1/4	7,500	20.9	3,700	10.6	2,700	5.1	2,300	3.9						
9/32	6,900	20.9	3,400	10.6	2,500	5.1	2,100	3.9						
5/16	5,900	20.5	3,000	10.2	2,200	4.9	1,900	3.9						
3/8	5,100	20.1	2,500	10.2	1,800	4.9	1,500	4.0						
7/16	4,400	19.7	2,100	9.4	1,600	4.9	1,300	4.4						
1/2	4,000	20.1	1,900	9.4	1,400	4.9	1,200	3.7						
5/8	3,000	15.7	1,500	7.9	1,100	4.5	900	3.5						
3/4	2,600	13.6	1,200	6.5	900	3.9	800	3.1						

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 3704 - EXOCARB® WXL®: Regular Length, 4 Flute

Side Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels Prehardened Steels Stainless Steels													
Cutting Speed	516-990 SFM		248-254 SFM		143-184 SFM		129-164 SFM											
Depth of Cut			<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D<3</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>3≤D</td> <td>1.5D</td> <td>0.10D</td> </tr> </tbody> </table>			Dia	aa	ar	D<3	1.5D	0.05D	3≤D	1.5D	0.10D	aa = 1.0D ar = 0.02D			
Dia			aa	ar														
D<3	1.5D	0.05D																
3≤D	1.5D	0.10D																
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
1.0	25,000	8.7	24,000	8.3	14,000	3.1	12,500	2.8										
1.5	25,000	19.2	16,000	12.2	9,250	4.5	8,400	4.1										
2.0	25,000	22.8	12,000	11.6	7,000	4.3	6,350	3.9										
2.5	25,000	49.2	9,600	18.9	6,200	5.5	5,550	4.9										
3.0	25,000	49.2	8,150	16.9	5,300	4.9	4,750	4.3										
4.0	24,000	66.9	6,050	17.7	4,250	5.3	3,700	4.5										
5.0	19,000	78.7	4,900	20.5	3,550	5.5	3,150	4.9										
6.0	16,000	78.7	4,100	20.5	2,950	5.7	2,650	5.1										
8.0	12,000	74.8	3,050	19.9	2,200	5.7	1,950	5.1										
10.0	9,500	74.8	2,450	19.9	1,750	5.7	1,550	5.1										
12.0	7,900	74.8	2,050	19.9	1,450	5.7	1,300	5.1										
14.0	6,800	74.8	1,750	19.5	1,250	5.7	1,100	4.9										
15.0	6,300	74.8	1,600	19.3	1,150	5.3	1,050	4.7										
16.0	5,900	70.9	1,500	18.9	1,100	5.1	995	4.5										
18.0	5,300	70.9	1,350	18.5	990	4.5	880	4.1										
20.0	4,800	68.4	1,200	17.5	890	4.1	795	3.7										
25.0	3,800	55.1	970	14.2	710	3.3	635	3.0										
30.0	3,200	44.7	815	11.8	590	2.8	530	2.4										

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels Pre-hardened Steels													
Cutting Speed	1597-1625 SFM		1197-1238 SFM		805-820 SFM		480-492 SFM											
Depth of Cut			<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D<3</td> <td>1.5D</td> <td>0.01D</td> </tr> <tr> <td>3≤D</td> <td>1.5D</td> <td>0.02D</td> </tr> </tbody> </table>			Dia	aa	ar	D<3	1.5D	0.01D	3≤D	1.5D	0.02D	aa = 1.0D ar = 0.02D			
Dia			aa	ar														
D<3	1.5D	0.01D																
3≤D	1.5D	0.02D																
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
6	25,000	109.8	20,000	90.6	13,000	59.1	7,950	31.3										
8	19,500	118.1	14,500	90.6	9,900	57.1	5,950	31.3										
10	15,500	114.2	12,000	90.6	7,950	57.1	4,750	31.3										
12	13,000	118.1	9,900	90.6	6,600	57.1	3,950	31.1										
14	11,100	110.2	8,500	86.6	5,650	53.1	3,400	29.1										
15	10,500	110.2	7,950	84.6	5,250	53.1	3,150	28.7										
16	9,700	106.3	7,450	82.7	4,950	53.1	2,950	28.1										
18	8,600	106.3	6,600	82.7	4,400	51.2	2,650	27.8										
20	7,800	102.4	5,950	78.7	3,950	51.2	2,350	26.2										
25	6,200	78.7	4,750	63.0	3,150	41.3	1,900	22.0										
30	5,200	66.9	3,950	53.1	2,650	35.0	1,550	17.9										





List 3742 - EXOCARB® WXL®: 4 Flute, Long Length

Side Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC																			
Work Material	Mild Steel Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels																			
Cutting Speed	200 SFM		160 SFM		130 SFM		110 SFM		80 SFM																			
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤20</td> <td>2.5D</td> <td>0.05D</td> </tr> <tr> <td>20<D</td> <td>2.5D</td> <td>0.1D</td> </tr> </tbody> </table>				Dia	aa	ar	D≤20	2.5D	0.05D	20<D	2.5D	0.1D			<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤8</td> <td>1D</td> <td>0.01D</td> </tr> <tr> <td>8<D</td> <td>1D</td> <td>0.5D</td> </tr> </tbody> </table>		Dia	aa	ar	D≤8	1D	0.01D	8<D	1D	0.5D	aa = 2.5D ar = 0.02D	
	Dia	aa	ar																									
D≤20	2.5D	0.05D																										
20<D	2.5D	0.1D																										
Dia	aa	ar																										
D≤8	1D	0.01D																										
8<D	1D	0.5D																										
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																		
3	6,350	8.9	5,300	7.5	4,200	5.9	3,700	5.2	2,600	3.6																		
4	4,750	8.9	3,950	7.5	3,150	5.9	2,750	5.2	1,950	3.7																		
5	3,800	8.9	3,150	7.5	2,500	5.9	2,200	5.2	1,550	3.6																		
6	3,150	8.9	2,650	7.5	2,100	5.9	1,850	5.2	1,300	3.7																		
8	2,350	8.9	1,950	7.5	1,550	5.9	1,350	5.1	995	3.8																		
10	1,900	8.9	1,550	7.5	1,250	5.9	1,100	5.2	795	3.7																		
12	1,550	8.9	1,300	7.5	1,050	6.0	925	5.3	660	3.8																		
14	1,350	8.9	1,100	7.5	905	6.0	795	5.2	565	3.7																		
16	1,150	8.9	995	7.5	795	6.2	695	5.4	495	3.8																		
18	1,050	8.9	880	7.5	705	6.0	615	5.2	440	3.7																		
20	955	8.9	795	7.5	635	5.9	555	5.2	395	3.7																		
22	865	8.9	720	7.5	575	5.9	505	5.2	360	3.7																		
24	795	8.7	660	7.1	530	5.8	460	5.0	330	3.6																		
25	760	8.3	635	6.7	505	5.5	445	4.9	315	3.4																		

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously,
3. Use a suitable cutting fluid with high smoke retardant.





List 3711 - EXOCARB® WXL®: 2 Flute, Ball End, Stub Length, Long Shank

Side Milling

Hardness	-	<20 HRC	20-30 HRC	30-38 HRC	38-45 HRC	45-55 HRC	55-60 HRC							
Work Material	Cast Iron	Mild Steels Carbon Steels	Alloy Steels Tool Steels	Hardened Steels Pre-hardened Steels	Stainless Steel Hardened Steels	Hardened Steels	Hardened Steels							
Cutting Speed	330-490 SFM	330-390 SFM	300-330 SFM	230-260 SFM	200-230 SFM	170-200 SFM	120-150 SFM							
Depth of Cut						aa=0.05D ar=0.1D								
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	50.0	25,000	50.0	25,000	50.0	25,000	50.0	22,000	35.2	19,000	26.6	14,000	19.6
2	23,500	79.9	19,000	64.6	15,500	52.7	12,500	42.5	11,000	35.2	9,500	26.6	7,150	20.0
3	15,500	74.4	12,500	60.0	10,500	50.4	8,450	40.6	7,400	32.6	6,350	25.4	4,750	19.0
4	11,500	69.0	9,500	57.0	7,950	47.7	6,350	38.1	5,550	31.1	4,750	24.7	3,550	18.5
5	9,500	72.2	7,600	57.8	6,350	48.3	5,050	38.4	4,450	32.0	3,800	25.8	2,850	19.4
6	7,950	70.0	6,350	55.9	5,300	46.6	4,200	37.0	3,700	31.1	3,150	25.2	2,350	18.8
8	5,950	71.4	4,750	57.0	3,950	47.4	3,150	37.8	2,750	31.9	2,350	26.3	1,750	19.6
10	4,750	67.5	3,800	54.0	3,150	44.7	2,500	35.5	2,200	30.4	1,900	25.5	1,400	18.8
12	3,950	67.2	3,150	53.6	2,650	45.1	2,100	35.7	1,850	30.7	1,550	24.8	1,150	18.4
14	3,400	57.8	2,700	45.9	2,250	38.3	1,800	30.6	1,550	25.7	1,350	21.6	1,000	16.0
16	2,950	50.2	2,350	40.0	1,950	33.2	1,550	26.4	1,350	22.4	1,150	18.4	895	14.3
18	2,650	45.1	2,100	35.7	1,750	29.8	1,400	23.8	1,200	19.9	1,050	16.8	795	12.7
20	2,350	40.0	1,900	32.3	1,550	26.4	1,250	21.3	1,100	18.3	955	15.3	715	11.4
25	1,900	32.3	1,500	25.5	1,250	21.3	1,000	17.0	890	14.8	760	12.2	570	9.1
30	1,500	26.4	1,250	21.3	1,050	17.9	845	14.4	740	12.3	635	10.2	475	7.6

1. Use a rigid and precise machine and holder.
2. Use a suitable cutting fluid with high smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.





List 3791 - EXOCARB® WXL®: 2 Flute, Stub Length

Slotting

Hardness		-			<32 HRC			33-41 HRC			42-50 HRC			
Work Material		Copper Copper Alloy			Mild Steels Carbon Steels			Hardened Steels Pre-hardened Steels Stainless Steels						
Cutting Speed		45-376 SFM*			41-309 SFM*			41-309 SFM*			40-258 SFM*			
Depth of Cut														
D (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	
0.2	0.5	25,000	13.7	0.0009	25,000	13.8	0.0007	25,000	13.8	0.0006	25,000	8.5	0.0005	
	1	25,000	10.6	0.0006	25,000	10.8	0.0005	25,000	10.8	0.0004	25,000	6.8	0.0004	
	1.5	25,000	8.6	0.0004	25,000	8.8	0.0003	25,000	8.8	0.0003	25,000	5.9	0.0002	
	2	24,000	8.7	0.0002	22,000	7.9	0.0002	22,000	7.9	0.0002	20,000	4.7	0.0001	
	2.5	22,000	7.5	0.0002	20,000	7.1	0.0002	20,000	6.7	0.0002	20,000	3.9	0.0001	
	3	22,000	7.1	0.0002	20,000	6.7	0.0001	20,000	6.3	0.0001	20,000	3.5	0.0001	
0.3	3.5	22,000	5.9	0.0002	20,000	5.5	0.0001	20,000	5.1	0.0001	20,000	3.1	0.0001	
	4	22,000	1.6	0.0001	20,000	1.6	0.0001	20,000	1.4	0.0001	20,000	1.2	0.0001	
	1	25,000	12.3	0.0013	25,000	12.3	0.0011	25,000	10.8	0.0009	25,000	10.2	0.0007	
	1.5	25,000	11.0	0.0011	25,000	11.1	0.0009	25,000	9.2	0.0008	25,000	8.5	0.0006	
	2	25,000	10.6	0.0009	25,000	10.5	0.0008	25,000	8.8	0.0007	25,000	7.9	0.0005	
	2.5	25,000	9.7	0.0007	25,000	9.8	0.0006	25,000	8.1	0.0005	25,000	7.5	0.0003	
0.4	3	25,000	11.1	0.0004	22,000	9.8	0.0004	22,000	6.3	0.0003	20,000	5.9	0.0002	
	4	24,000	8.7	0.0003	20,000	7.5	0.0003	20,000	5.9	0.0002	20,000	5.1	0.0001	
	5	24,000	7.5	0.0002	20,000	6.3	0.0002	20,000	5.5	0.0001	18,000	4.7	0.0001	
	6	24,000	3.9	0.0001	20,000	3.5	0.0001	20,000	3.1	0.0001	16,000	2.4	0.0001	
	9	19,000	1.2	0.0001	16,000	1.2	0.0001	16,000	1.2	0.0001	13,000	0.8	0.0001	
	0.5	1.5	25,000	13.3	0.0013	25,000	13.5	0.0011	25,000	11.7	0.0009	25,000	11.2	0.0007
2		25,000	12.3	0.0012	25,000	12.3	0.0010	25,000	10.8	0.0009	25,000	10.2	0.0007	
3		25,000	10.6	0.0008	25,000	10.5	0.0007	25,000	8.8	0.0006	25,000	7.9	0.0004	
4		25,000	11.1	0.0006	22,000	9.8	0.0005	22,000	7.9	0.0004	20,000	5.9	0.0003	
5		24,000	9.4	0.0003	20,000	7.9	0.0002	20,000	6.3	0.0002	20,000	5.1	0.0001	
6		24,000	8.3	0.0002	20,000	7.1	0.0002	20,000	5.5	0.0002	20,000	4.7	0.0001	
7		24,000	6.3	0.0002	20,000	5.5	0.0002	20,000	4.7	0.0001	20,000	4.3	0.0001	
8		24,000	5.9	0.0001	20,000	5.1	0.0001	20,000	4.3	0.0001	20,000	3.9	0.0001	
9		24,000	5.5	0.0001	20,000	4.7	0.0001	20,000	3.9	0.0001	20,000	3.1	0.0001	
10		24,000	5.1	0.0001	20,000	4.3	0.0001	20,000	3.3	0.0001	18,000	2.8	0.0001	
12		24,000	3.9	0.0001	20,000	3.5	0.0001	20,000	3.1	0.0001	16,000	2.4	0.0001	
0.6		1.5	25,000	16.9	0.0021	25,000	16.9	0.0018	25,000	12.9	0.0015	25,000	11.2	0.0012
	2	25,000	15.3	0.0021	25,000	15.4	0.0018	25,000	12.3	0.0015	25,000	10.2	0.0012	
	3	25,000	14.8	0.0014	25,000	14.8	0.0012	25,000	11.8	0.0011	25,000	10.2	0.0009	
	4	25,000	14.1	0.0010	25,000	14.1	0.0008	25,000	11.2	0.0007	25,000	9.8	0.0006	
	5	25,000	13.2	0.0007	25,000	13.4	0.0006	25,000	11.8	0.0004	22,000	9.1	0.0003	
	6	25,000	15.6	0.0003	22,000	13.8	0.0002	22,000	8.7	0.0002	20,000	7.1	0.0002	
	7	24,000	15.0	0.0002	20,000	12.6	0.0002	20,000	7.9	0.0002	20,000	6.7	0.0001	
	8	24,000	12.6	0.0002	20,000	10.6	0.0002	20,000	7.1	0.0001	20,000	5.9	0.0001	
	9	24,000	11.8	0.0001	20,000	9.8	0.0001	18,000	6.3	0.0001	18,000	5.5	0.0001	
	10	24,000	9.4	0.0001	20,000	7.9	0.0001	18,000	5.9	0.0001	18,000	5.1	0.0001	
	12	24,000	7.5	0.0001	20,000	6.3	0.0001	18,000	4.7	0.0001	18,000	3.9	0.0001	
	15	21,500	3.9	0.0001	18,000	3.5	0.0001	16,000	3.1	0.0001	16,000	2.8	0.0001	
	0.6	2	25,000	18.4	0.0026	25,000	18.5	0.0021	25,000	12.3	0.0018	25,000	10.9	0.0014
		3	25,000	16.9	0.0024	25,000	16.9	0.0020	25,000	11.1	0.0016	25,000	10.2	0.0012
		4	25,000	15.9	0.0019	25,000	15.8	0.0016	25,000	10.5	0.0013	25,000	7.9	0.0010
5		25,000	14.1	0.0014	25,000	14.1	0.0012	25,000	8.7	0.0008	22,000	7.1	0.0008	
6		25,000	11.1	0.0009	22,000	9.8	0.0007	22,000	7.9	0.0006	20,000	5.9	0.0005	
7		25,000	11.1	0.0005	22,000	9.8	0.0004	22,000	7.9	0.0003	20,000	5.9	0.0003	
8		25,000	11.1	0.0003	22,000	9.8	0.0003	22,000	7.9	0.0002	20,000	5.9	0.0002	

1. Use a rigid and precise machine and holder.
 2. When chattering occurs, reduce the speed and feed simultaneously.
 3. Use a suitable cutting fluid with high smoke retardant.
- * Maximum speed will vary by diameter.

continued on next page





Slotting

Hardness		-			<32 HRC			33-41 HRC			42-50 HRC		
Work Material		Copper Copper Alloy			Mild Steels Carbon Steels			Hardened Steels Pre-hardened Steels Stainless Steels					
Cutting Speed		45-376 SFM*			41-309 SFM*			41-309 SFM*			40-258 SFM*		
Depth of Cut													
D (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)
0.6	10	24,000	9.4	0.0002	20,000	7.9	0.0002	18,000	5.9	0.0002	18,000	5.1	0.0001
	12	21,500	8.7	0.0001	18,000	7.5	0.0001	18,000	5.9	0.0001	18,000	4.7	0.0001
	15	21,500	5.9	0.0001	18,000	5.1	0.0001	16,000	4.3	0.0001	16,000	3.9	0.0001
	18	18,000	3.5	0.0001	15,000	3.1	0.0001	14,000	2.8	0.0001	14,000	2.4	0.0001
0.7	2	25,000	18.4	0.0030	25,000	18.5	0.0025	25,000	15.4	0.0021	25,000	15.1	0.0017
	4	25,000	15.9	0.0022	25,000	15.8	0.0018	25,000	10.5	0.0015	22,000	11.8	0.0012
	6	25,000	15.9	0.0014	25,000	15.8	0.0011	25,000	7.0	0.0010	22,000	7.9	0.0008
	8	25,000	11.1	0.0008	22,000	9.8	0.0007	22,000	7.9	0.0006	20,000	5.9	0.0004
10	25,000	11.1	0.0004	22,000	9.8	0.0003	22,000	7.9	0.0003	20,000	5.9	0.0002	
0.8	4	25,000	18.4	0.0025	25,000	18.5	0.0021	25,000	18.5	0.0017	25,000	15.7	0.0014
	6	25,000	17.1	0.0016	25,000	17.0	0.0013	25,000	15.1	0.0011	21,000	11.8	0.0009
	8	25,000	15.6	0.0011	22,000	13.8	0.0009	22,000	11.8	0.0008	18,000	9.8	0.0006
	10	25,000	15.6	0.0005	22,000	13.8	0.0004	22,000	11.8	0.0003	18,000	9.4	0.0002
	12	20,500	14.2	0.0003	17,000	11.8	0.0003	17,000	11.8	0.0002	15,000	7.9	0.0002
	14	20,500	12.6	0.0002	17,000	10.6	0.0001	17,000	9.8	0.0001	13,000	6.7	0.0001
	16	19,000	10.6	0.0001	16,000	9.1	0.0001	16,000	8.7	0.0001	12,000	5.9	0.0001
	20	17,000	7.9	0.0001	14,000	6.7	0.0001	14,000	6.3	0.0001	12,000	5.1	0.0001
24	14,500	3.9	0.0001	12,000	3.5	0.0001	12,000	3.1	0.0001	10,000	2.8	0.0001	
0.9	4	25,000	37.1	0.0028	25,000	36.9	0.0024	25,000	28.2	0.0024	23,000	25.6	0.0016
	6	25,000	32.8	0.0028	25,000	32.8	0.0023	25,000	27.4	0.0020	22,000	23.6	0.0016
	8	25,000	30.5	0.0018	25,000	30.3	0.0015	25,000	23.6	0.0013	19,000	15.7	0.0010
	10	24,000	28.3	0.0013	20,000	23.6	0.0011	20,000	19.7	0.0009	16,000	11.8	0.0007
	15	20,500	14.2	0.0004	17,000	11.8	0.0003	17,000	11.8	0.0002	16,000	11.8	0.0002
1.0	3	25,000	39.6	0.0043	25,000	39.4	0.0035	25,000	36.1	0.0031	22,000	31.5	0.0024
	4	25,000	38.3	0.0038	25,000	37.7	0.0031	25,000	36.1	0.0028	22,000	25.6	0.0020
	5	25,000	35.5	0.0038	25,000	36.1	0.0031	25,000	33.4	0.0028	20,000	23.6	0.0018
	6	25,000	36.3	0.0033	25,000	36.5	0.0028	25,000	34.1	0.0024	20,000	23.6	0.0016
	7	25,000	39.4	0.0024	25,000	39.4	0.0020	24,000	31.5	0.0020	20,000	19.7	0.0012
	8	25,000	34.4	0.0019	23,000	31.5	0.0016	22,000	27.6	0.0016	18,000	15.7	0.0012
	9	24,000	33.1	0.0014	20,000	27.6	0.0012	19,000	23.6	0.0012	18,000	15.7	0.0010
	10	23,000	28.3	0.0014	19,000	23.6	0.0012	18,000	19.7	0.0011	15,000	11.8	0.0008
	12	23,000	28.3	0.0009	19,000	23.6	0.0008	18,000	19.7	0.0007	15,000	11.8	0.0004
	14	18,000	18.9	0.0005	15,000	15.7	0.0004	15,000	15.7	0.0004	12,000	7.9	0.0003
	16	18,000	14.2	0.0004	15,000	11.8	0.0003	15,000	11.8	0.0003	12,000	7.9	0.0002
	18	15,500	10.6	0.0003	13,000	9.1	0.0002	13,000	8.7	0.0002	11,000	7.1	0.0002
	20	14,500	8.7	0.0002	12,000	7.5	0.0002	11,000	7.1	0.0002	10,000	5.1	0.0001
	22	13,000	7.5	0.0002	11,000	6.3	0.0001	10,000	5.9	0.0001	9,000	3.9	0.0001
25	11,000	3.9	0.0002	9,000	3.5	0.0001	9,000	3.3	0.0001	8,500	3.1	0.0001	
30	9,600	1.6	0.0001	8,000	1.6	0.0001	8,000	1.4	0.0001	8,000	1.2	0.0001	
1.2	4	25,000	44.1	0.0043	24,000	43.3	0.0035	23,000	39.4	0.0031	18,000	27.6	0.0024
	6	25,000	42.9	0.0038	23,000	39.4	0.0031	22,000	35.4	0.0028	17,000	23.6	0.0020
	8	24,000	33.1	0.0033	20,000	27.6	0.0028	19,000	27.6	0.0020	14,000	15.7	0.0016
	10	24,000	33.1	0.0024	20,000	27.6	0.0020	19,000	27.6	0.0016	14,000	15.7	0.0012
	12	20,500	28.3	0.0019	17,000	23.6	0.0016	16,000	19.7	0.0012	11,000	11.8	0.0008
	14	18,000	21.3	0.0007	15,000	17.7	0.0006	13,000	15.0	0.0005	11,000	9.8	0.0004
	16	14,500	14.2	0.0004	12,000	11.8	0.0003	11,000	9.8	0.0003	10,000	8.7	0.0002
	20	12,000	9.4	0.0002	10,000	7.9	0.0002	10,000	7.5	0.0002	9,000	7.1	0.0002

1. Use a rigid and precise machine and holder.
 2. When chattering occurs, reduce the speed and feed simultaneously.
 3. Use a suitable cutting fluid with high smoke retardant.
- * Maximum speed will vary by diameter.

continued on next page





List 3791 - EXOCARB® WXL®: 2 Flute, Stub Length (Continued)

Slotting

Hardness		-			<32 HRC			33-41 HRC			42-50 HRC		
Work Material		Copper Copper Alloy			Mild Steels Carbon Steels			Hardened Steels Pre-hardened Steels Stainless Steels					
Cutting Speed		45-376 SFM*			41-309 SFM*			41-309 SFM*			40-258 SFM*		
Depth of Cut													
D (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)
1.4	6	24,000	47.2	0.0061	20,000	39.4	0.0051	19,000	35.4	0.0043	15,000	23.6	0.0035
	8	21,500	37.8	0.0043	18,000	31.5	0.0035	17,000	27.6	0.0031	13,000	15.7	0.0024
	10	21,500	37.8	0.0028	18,000	31.5	0.0024	17,000	27.6	0.0020	13,000	15.7	0.0016
	12	21,500	37.8	0.0024	18,000	31.5	0.0020	17,000	27.6	0.0016	13,000	15.7	0.0012
	14	18,000	28.3	0.0019	15,000	23.6	0.0016	14,000	19.7	0.0014	11,000	11.8	0.0012
	16	18,000	28.3	0.0014	15,000	23.6	0.0012	14,000	19.7	0.0008	11,000	11.8	0.0008
	22	12,000	11.8	0.0002	10,000	9.8	0.0002	9,000	8.3	0.0002	8,000	7.1	0.0002
1.5	4	21,500	47.2	0.0066	18,000	39.4	0.0055	18,000	35.4	0.0043	14,000	23.6	0.0035
	6	21,500	47.2	0.0066	18,000	39.4	0.0055	18,000	35.4	0.0043	14,000	23.6	0.0035
	8	19,000	37.8	0.0047	16,000	31.5	0.0039	15,000	27.6	0.0031	12,000	15.7	0.0028
	10	19,000	37.8	0.0038	16,000	31.5	0.0031	15,000	27.6	0.0028	12,000	15.7	0.0020
	12	19,000	37.8	0.0028	16,000	31.5	0.0024	15,000	27.6	0.0020	12,000	15.7	0.0016
	14	19,000	37.8	0.0024	16,000	31.5	0.0020	15,000	27.6	0.0018	12,000	15.7	0.0014
	16	17,000	28.3	0.0024	14,000	23.6	0.0020	13,000	19.7	0.0016	10,000	11.8	0.0012
	18	17,000	28.3	0.0014	14,000	23.6	0.0012	13,000	19.7	0.0008	10,000	11.8	0.0008
	20	14,500	19.7	0.0009	12,000	16.5	0.0008	11,000	15.0	0.0006	10,000	11.8	0.0004
	25	12,000	13.4	0.0004	10,000	11.4	0.0003	9,000	9.1	0.0003	8,000	8.3	0.0002
	30	9,000	7.9	0.0002	7,500	6.7	0.0002	7,400	5.9	0.0002	7,000	5.1	0.0001
	38	8,150	3.9	0.0002	6,800	3.5	0.0002	6,700	3.3	0.0001	6,000	3.0	0.0001
	40	7,200	3.5	0.0002	6,000	3.0	0.0001	5,900	2.8	0.0001	5,600	2.4	0.0001
45	6,600	2.0	0.0002	5,500	1.8	0.0001	5,400	1.6	0.0001	5,400	1.6	0.0000	
1.6	6	20,500	47.2	0.0071	17,000	39.4	0.0059	17,000	35.4	0.0051	13,000	23.6	0.0039
	8	18,000	37.8	0.0066	15,000	31.5	0.0055	15,000	27.6	0.0047	11,000	15.7	0.0039
	10	18,000	37.8	0.0052	15,000	31.5	0.0043	15,000	27.6	0.0035	11,000	15.7	0.0028
	12	18,000	37.8	0.0033	15,000	31.5	0.0028	15,000	27.6	0.0024	11,000	15.7	0.0020
	14	18,000	37.8	0.0028	15,000	31.5	0.0024	15,000	27.6	0.0020	11,000	15.7	0.0016
	16	15,500	28.3	0.0024	13,000	23.6	0.0020	13,000	19.7	0.0016	9,000	11.8	0.0014
	18	15,500	28.3	0.0019	13,000	23.6	0.0016	13,000	19.7	0.0012	9,000	11.8	0.0012
	20	15,500	28.3	0.0009	13,000	23.6	0.0008	13,000	19.7	0.0008	9,000	11.8	0.0004
1.8	6	19,000	51.2	0.0104	16,000	43.3	0.0087	15,000	39.4	0.0071	12,000	27.6	0.0055
	8	19,000	51.2	0.0099	16,000	43.3	0.0083	15,000	39.4	0.0067	12,000	27.6	0.0051
	10	17,000	37.8	0.0057	14,000	31.5	0.0047	14,000	27.6	0.0039	10,000	19.7	0.0031
	12	17,000	37.8	0.0047	14,000	31.5	0.0039	14,000	27.6	0.0031	10,000	19.7	0.0028
	14	17,000	37.8	0.0038	14,000	31.5	0.0031	14,000	27.6	0.0024	10,000	19.7	0.0020
	16	17,000	37.8	0.0033	14,000	31.5	0.0028	14,000	27.6	0.0020	10,000	19.7	0.0016
	18	14,500	28.3	0.0024	12,000	23.6	0.0020	12,000	19.7	0.0018	8,000	15.7	0.0014
	20	14,500	28.3	0.0019	12,000	23.6	0.0016	12,000	19.7	0.0016	8,000	15.7	0.0012
25	9,600	14.2	0.0004	8,000	11.8	0.0004	7,000	9.8	0.0003	6,000	7.9	0.0003	
2.0	6	18,000	51.2	0.0146	15,000	43.3	0.0122	14,000	39.4	0.0102	11,000	27.6	0.0083
	8	18,000	51.2	0.0123	15,000	43.3	0.0102	14,000	39.4	0.0087	11,000	27.6	0.0071
	10	15,500	37.8	0.0113	13,000	31.5	0.0094	12,000	27.6	0.0079	9,000	19.7	0.0063
	12	15,500	37.8	0.0061	13,000	31.5	0.0051	12,000	27.6	0.0043	9,000	19.7	0.0035
	14	15,500	37.8	0.0052	13,000	31.5	0.0043	12,000	27.6	0.0035	9,000	19.7	0.0028
	16	15,500	37.8	0.0038	13,000	31.5	0.0031	12,000	27.6	0.0028	9,000	19.7	0.0024
	18	15,500	37.8	0.0033	13,000	31.5	0.0028	12,000	27.6	0.0024	9,000	19.7	0.0020
	20	13,000	28.3	0.0024	11,000	23.6	0.0020	10,000	19.7	0.0020	7,000	15.7	0.0016
25	13,000	28.3	0.0014	11,000	23.6	0.0012	10,000	19.7	0.0008	7,000	15.7	0.0008	

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

* Maximum speed will vary by diameter.

continued on next page





Slotting

Hardness		-			<32 HRC			33-41 HRC			42-50 HRC		
Work Material		Copper Copper Alloy			Mild Steels Carbon Steels			Hardened Steels Pre-hardened Steels Stainless Steels					
Cutting Speed		45-376 SFM*			41-309 SFM*			41-309 SFM*			40-258 SFM*		
Depth of Cut													
D (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)
2.0	30	13,000	28.3	0.0009	11,000	23.6	0.0008	10,000	19.7	0.0004	7,000	15.7	0.0004
	35	11,000	18.1	0.0004	9,000	15.4	0.0004	8,000	15.0	0.0003	6,000	10.6	0.0003
	40	7,800	9.4	0.0002	6,500	7.9	0.0002	6,000	7.1	0.0002	6,000	5.5	0.0001
	50	6,950	4.7	0.0001	5,800	3.9	0.0001	5,700	3.7	0.0001	5,000	3.1	0.0001
	60	6,000	2.4	0.0000	5,000	2.0	0.0000	5,000	1.8	0.0000	5,000	1.6	0.0000
2.5	8	14,500	51.2	0.0184	12,000	43.3	0.0154	11,000	39.4	0.0130	9,000	27.6	0.0102
	10	14,500	51.2	0.0156	12,000	43.3	0.0130	11,000	39.4	0.0110	9,000	27.6	0.0087
	12	14,500	51.2	0.0109	12,000	43.3	0.0091	11,000	39.4	0.0075	9,000	27.6	0.0059
	14	12,000	37.8	0.0080	10,000	31.5	0.0067	9,000	27.6	0.0055	7,000	19.7	0.0043
	16	12,000	37.8	0.0057	10,000	31.5	0.0047	9,000	27.6	0.0039	7,000	19.7	0.0031
	18	12,000	37.8	0.0052	10,000	31.5	0.0043	9,000	27.6	0.0035	7,000	19.7	0.0028
	20	12,000	37.8	0.0043	10,000	31.5	0.0035	9,000	27.6	0.0031	7,000	19.7	0.0024
	25	9,600	28.3	0.0038	8,000	23.6	0.0031	8,000	19.7	0.0024	6,000	15.7	0.0020
	30	9,600	28.3	0.0014	8,000	23.6	0.0012	8,000	19.7	0.0012	6,000	15.7	0.0008
	40	7,800	13.0	0.0003	6,500	11.0	0.0003	6,000	10.6	0.0002	6,000	9.4	0.0002
50	6,950	7.9	0.0001	5,800	6.7	0.0001	5,700	6.3	0.0001	5,000	5.1	0.0001	
3.0	8	12,000	51.2	0.0170	10,000	43.3	0.0142	10,000	39.4	0.0118	8,000	27.6	0.0094
	10	12,000	51.2	0.0137	10,000	43.3	0.0114	10,000	39.4	0.0094	8,000	27.6	0.0075
	12	12,000	51.2	0.0128	10,000	43.3	0.0106	10,000	39.4	0.0091	8,000	27.6	0.0071
	14	12,000	51.2	0.0118	10,000	43.3	0.0098	10,000	39.4	0.0083	8,000	27.6	0.0067
	16	12,000	37.8	0.0094	10,000	31.5	0.0079	9,000	27.6	0.0067	6,000	19.7	0.0051
	18	12,000	37.8	0.0066	10,000	31.5	0.0055	9,000	27.6	0.0047	6,000	19.7	0.0039
	20	12,000	37.8	0.0061	10,000	31.5	0.0051	9,000	27.6	0.0043	6,000	19.7	0.0031
	25	12,000	37.8	0.0052	10,000	31.5	0.0043	9,000	27.6	0.0035	6,000	19.7	0.0028
	30	9,600	28.3	0.0043	8,000	23.6	0.0035	7,000	19.7	0.0031	5,000	15.7	0.0024
	35	9,600	28.3	0.0033	8,000	23.6	0.0028	7,000	19.7	0.0024	5,000	15.7	0.0020
40	9,600	28.3	0.0019	8,000	23.6	0.0016	7,000	19.7	0.0012	5,000	15.7	0.0008	
50	6,950	12.6	0.0004	5,800	10.6	0.0004	5,700	9.4	0.0002	5,000	7.9	0.0002	
4.0	12	8,550	53.1	0.0180	7,000	43.3	0.0150	7,000	39.4	0.0126	6,000	27.6	0.0102
	16	8,550	53.1	0.0170	7,000	43.3	0.0142	7,000	39.4	0.0118	6,000	27.6	0.0094
	20	8,550	38.2	0.0161	7,000	31.5	0.0134	6,000	27.6	0.0110	5,000	19.7	0.0087
	25	8,550	38.2	0.0123	7,000	31.5	0.0102	6,000	27.6	0.0087	5,000	19.7	0.0071
	30	8,550	38.2	0.0090	7,000	31.5	0.0075	6,000	27.6	0.0063	5,000	19.7	0.0051
	35	8,550	38.2	0.0080	7,000	31.5	0.0067	6,000	27.6	0.0055	5,000	19.7	0.0043
	40	7,300	28.7	0.0066	6,000	23.6	0.0055	5,000	23.6	0.0047	4,000	15.7	0.0039
	45	7,300	28.7	0.0057	6,000	23.6	0.0047	5,000	23.6	0.0039	4,000	15.7	0.0031
	50	7,300	28.7	0.0024	6,000	23.6	0.0020	5,000	23.6	0.0016	4,000	15.7	0.0012
60	6,100	13.4	0.0009	5,000	11.0	0.0008	5,000	10.6	0.0008	4,000	9.8	0.0004	
5.0	16	7,300	53.1	0.0213	6,000	43.3	0.0177	5,000	35.4	0.0150	5,000	23.6	0.0118
	20	7,300	45.3	0.0203	6,000	37.4	0.0169	5,000	30.7	0.0142	5,000	23.6	0.0114
	25	6,100	38.2	0.0198	5,000	31.5	0.0165	5,000	27.6	0.0138	5,000	23.6	0.0110
	30	6,100	38.2	0.0180	5,000	31.5	0.0150	5,000	27.6	0.0118	5,000	23.6	0.0098
	35	6,100	38.2	0.0156	5,000	31.5	0.0130	5,000	27.6	0.0110	5,000	23.6	0.0087
	40	6,100	28.7	0.0134	5,000	23.6	0.0110	4,000	22.8	0.0079	4,000	19.7	0.0071
	50	4,900	24.0	0.0071	4,000	19.7	0.0059	3,000	15.7	0.0051	3,000	15.7	0.0039
60	4,900	16.5	0.0028	4,000	13.8	0.0024	3,000	13.0	0.0024	3,000	11.8	0.0016	

1. Use a rigid and precise machine and holder.
 2. When chattering occurs, reduce the speed and feed simultaneously.
 3. Use a suitable cutting fluid with high smoke retardant.
- * Maximum speed will vary by diameter.





List 3720 - EXOCARB® WXL®: 2 Flute, Stub Length

Slotting

Hardness	–		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Copper Copper Alloys		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels													
Cutting Speed	52-682 SFM*		41-323 SFM*		41-241 SFM*		41-208 SFM*											
Depth of Cut			<table border="1"> <tr><th>Dia</th><th>aa</th></tr> <tr><td>D<1</td><td>0.1D</td></tr> <tr><td>1≤D<3</td><td>0.3D</td></tr> <tr><td>3≤D</td><td>0.5D</td></tr> </table>		Dia	aa	D<1	0.1D	1≤D<3	0.3D	3≤D	0.5D						
	Dia	aa																
D<1	0.1D																	
1≤D<3	0.3D																	
3≤D	0.5D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
0.1	25,000	2.4	25,000	2.0	25,000	1.8	25,000	0.9										
0.2	25,000	3.3	25,000	2.7	25,000	2.2	25,000	1.1										
0.3	25,000	4.1	25,000	3.4	25,000	2.5	25,000	1.7										
0.4	25,000	4.5	25,000	3.7	25,000	2.7	25,000	2.1										
0.5	25,000	4.9	25,000	3.8	25,000	3.5	25,000	2.7										
0.6	25,000	5.5	25,000	4.4	24,500	4.3	21,000	3.0										
0.7	25,000	6.1	25,000	4.9	21,500	4.3	18,500	3.0										
0.8	25,000	7.1	25,000	5.5	19,500	4.3	17,000	3.1										
0.9	25,000	7.9	23,500	5.9	17,000	4.3	15,000	3.1										
1.0	25,000	8.5	22,000	5.9	15,500	4.3	13,500	3.1										
1.1	25,000	8.3	20,000	5.9	14,000	4.3	12,500	3.1										
1.2	25,000	8.3	18,500	5.9	13,500	4.3	11,500	3.1										
1.3	25,000	8.6	17,500	5.9	12,500	4.3	11,000	3.1										
1.4	25,000	9.2	16,000	5.9	11,500	4.3	10,000	3.1										
1.5	25,000	9.8	15,500	5.9	11,000	4.3	9,900	3.1										
1.6	25,000	10.1	15,000	5.9	10,500	4.3	9,400	3.1										
1.7	25,000	10.8	14,000	5.9	9,900	4.3	8,800	3.1										
1.8	25,000	11.4	13,500	6.3	9,400	4.3	8,500	3.1										
1.9	25,000	12.1	12,500	6.3	8,800	4.3	7,900	3.3										
2.0	25,000	12.5	12,000	6.3	8,700	4.3	7,900	3.5										
2.1	25,000	13.9	11,500	6.7	8,300	4.3	7,400	3.5										
2.2	25,000	14.4	11,000	6.7	8,200	4.3	7,200	3.5										
2.3	25,000	14.7	11,000	7.1	8,000	4.3	7,000	3.5										
2.4	25,000	16.3	10,500	7.1	7,900	4.3	6,900	3.5										
2.5	24,500	16.9	10,500	7.9	7,600	4.3	6,600	3.5										
2.6	23,500	18.5	9,800	7.9	7,400	4.9	6,300	3.5										
2.7	23,000	18.5	9,500	7.9	7,100	4.9	6,100	3.5										
2.8	22,000	18.5	9,100	8.3	6,900	4.9	5,800	3.7										
2.9	21,500	18.5	8,800	8.3	6,700	4.9	5,700	3.7										
3.0	21,000	21.3	8,900	9.1	6,800	5.1	5,700	3.9										
3.1	20,000	21.7	8,700	9.4	6,700	5.1	5,600	3.9										
3.2	19,500	22.0	8,400	9.4	6,500	5.7	5,400	4.1										
3.3	19,000	22.0	8,100	9.8	6,300	5.7	5,200	4.1										
3.4	18,000	22.0	7,900	9.8	6,100	5.7	5,100	4.1										
3.5	18,000	22.0	7,800	9.8	6,000	6.1	5,000	4.1										
3.6	17,500	22.8	7,600	10.6	5,900	6.1	4,900	4.3										
3.7	16,500	22.8	7,400	10.6	5,700	6.1	4,700	4.3										
3.8	16,000	23.2	7,300	11.0	5,700	6.1	4,600	4.3										
3.9	15,500	23.2	7,100	11.0	5,500	6.3	4,500	4.3										
4.0	15,500	23.6	7,000	11.0	5,500	6.3	4,500	4.5										
4.1	15,500	25.2	6,900	11.4	5,400	6.3	4,400	4.5										
4.2	15,000	25.2	6,800	11.4	5,300	6.3	4,400	4.5										
4.3	14,000	25.2	6,700	12.2	5,200	6.3	4,300	4.5										
4.4	14,000	26.4	6,600	12.6	5,100	6.7	4,200	4.9										
4.5	14,000	26.4	6,600	12.6	5,100	6.7	4,200	4.9										
4.6	13,500	27.6	6,500	13.0	4,900	6.7	4,100	4.9										
4.7	13,500	27.6	6,500	13.8	4,900	6.7	4,100	4.9										
4.8	13,500	28.0	6,400	13.8	4,800	6.7	4,100	4.9										
4.9	13,500	28.0	6,300	14.2	4,700	6.7	4,000	4.9										
5.0	12,500	28.3	6,200	14.6	4,600	6.7	3,900	5.1										

1. Use a rigid and precise machine and holder.
 2. When chattering occurs, reduce the speed and feed simultaneously.
 3. Use a suitable cutting fluid with high smoke retardant.
- *Maximum speed will vary by diameter.

continued on next page





Slotting

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC										
Work Material	Copper Copper Alloys		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels												
Cutting Speed	52-682 SFM*		41-323 SFM*		41-241 SFM*		41-208 SFM*										
Depth of Cut			<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<1</td> <td>0.1D</td> </tr> <tr> <td>1≤D<3</td> <td>0.3D</td> </tr> <tr> <td>3≤D</td> <td>0.5D</td> </tr> </tbody> </table>		Dia	aa	D<1	0.1D	1≤D<3	0.3D	3≤D	0.5D					
	Dia	aa															
D<1	0.1D																
1≤D<3	0.3D																
3≤D	0.5D																
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
5.1	12,500	28.3	6,100	14.6	4,500	6.7	3,900	5.1									
5.2	12,000	28.3	6,000	14.6	4,400	6.7	3,800	5.1									
5.3	12,000	28.3	5,900	14.6	4,400	6.7	3,800	5.1									
5.4	11,500	28.3	5,800	14.6	4,300	6.7	3,600	5.1									
5.5	11,500	28.3	5,700	14.6	4,200	6.7	3,500	5.1									
5.6	11,500	28.3	5,600	14.6	4,100	6.7	3,500	5.1									
5.7	11,000	28.3	5,500	14.6	4,000	6.7	3,400	5.1									
5.8	11,000	28.0	5,400	14.6	3,900	6.7	3,300	5.1									
5.9	10,500	28.0	5,300	14.6	3,800	6.7	3,300	5.1									
6.0	10,000	28.0	5,200	14.6	3,800	6.7	3,200	5.1									

1. Use a rigid and precise machine and holder.
 2. When chattering occurs, reduce the speed and feed simultaneously.
 3. Use a suitable cutting fluid with high smoke retardant.
- *Maximum speed will vary by diameter.





List 3721 - EXOCARB® WXL®: 2 Flute, Stub Length

Slotting

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels													
Depth of Cut			<table border="1"> <tr><th>Dia</th><th>aa</th></tr> <tr><td>D<1</td><td>0.1D</td></tr> <tr><td>1≤D<3</td><td>0.3D</td></tr> <tr><td>3≤D</td><td>0.5D</td></tr> </table>		Dia	aa	D<1	0.1D	1≤D<3	0.3D	3≤D	0.5D						
	Dia	aa																
D<1	0.1D																	
1≤D<3	0.3D																	
3≤D	0.5D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
0.1	25,000	2.0	25,000	2.2	25,000	1.8	25,000	0.9										
0.2	25,000	2.8	25,000	2.8	25,000	2.3	25,000	1.1										
0.3	25,000	3.3	25,000	3.4	25,000	2.5	25,000	1.7										
0.4	25,000	3.7	25,000	3.7	25,000	2.8	25,000	2.1										
0.5	25,000	3.9	25,000	3.8	25,000	3.5	22,000	2.4										
0.6	25,000	4.5	25,000	4.4	19,500	3.5	17,000	2.4										
0.7	25,000	4.9	24,000	4.7	17,000	3.5	15,000	2.4										
0.8	25,000	5.7	21,500	4.7	15,500	3.5	13,500	2.6										
0.9	25,000	6.4	19,000	4.7	13,500	3.5	12,000	2.6										
1.0	25,000	7.3	17,500	4.7	12,500	3.5	11,000	2.6										
1.1	25,000	7.8	16,000	4.7	11,500	3.5	9,900	2.6										
1.2	25,000	8.3	15,000	4.7	10,500	3.5	9,300	2.6										
1.3	25,000	8.5	14,000	4.7	9,900	3.5	8,700	2.6										
1.4	25,000	9.3	13,000	4.7	9,200	3.5	8,100	2.6										
1.5	25,000	9.8	12,500	4.7	8,900	3.5	7,900	2.6										
1.6	25,000	10.2	12,000	4.7	8,500	3.5	7,500	2.6										
1.7	25,000	10.9	11,000	4.7	7,900	3.5	7,000	2.6										
1.8	25,000	11.2	10,500	5.1	7,500	3.5	6,800	2.7										
1.9	25,000	12.1	10,000	5.1	7,100	3.5	6,300	2.7										
2.0	24,000	12.2	9,700	5.1	7,000	3.5	6,300	2.8										
2.1	23,000	13.0	9,300	5.5	6,600	3.5	5,900	2.8										
2.2	22,500	13.0	9,000	5.5	6,500	3.5	5,700	2.8										
2.3	22,000	13.0	8,800	5.9	6,400	3.5	5,600	2.8										
2.4	20,500	13.8	8,600	5.9	6,300	3.5	5,500	2.8										
2.5	20,000	13.8	8,200	6.3	6,100	3.5	5,300	2.8										
2.6	19,000	15.0	7,900	6.3	5,900	3.9	5,000	2.8										
2.7	18,000	15.0	7,600	6.3	5,700	3.9	4,900	2.8										
2.8	17,500	15.0	7,300	6.7	5,500	3.9	4,700	3.0										
2.9	17,000	15.0	7,100	6.7	5,300	3.9	4,500	3.0										
3.0	16,000	15.7	6,900	6.7	5,300	3.9	4,400	3.0										
3.1	15,500	16.1	6,700	7.1	5,100	3.9	4,300	3.0										
3.2	15,000	16.5	6,500	7.1	5,000	4.3	4,200	3.1										
3.3	14,500	16.5	6,300	7.5	4,800	4.3	4,000	3.1										
3.4	14,000	16.5	6,100	7.5	4,600	4.3	3,900	3.1										
3.5	14,000	16.5	6,000	7.5	4,600	4.7	3,800	3.1										
3.6	13,500	16.9	5,900	7.9	4,500	4.7	3,700	3.3										
3.7	12,500	16.9	5,700	7.9	4,400	4.7	3,600	3.3										
3.8	12,500	17.3	5,600	8.3	4,400	4.7	3,600	3.3										
3.9	12,000	17.3	5,500	8.3	4,200	4.9	3,500	3.3										
4.0	12,000	17.7	5,400	8.3	4,200	4.9	3,500	3.5										
4.1	11,500	18.9	5,300	8.7	4,100	4.9	3,400	3.5										
4.2	11,500	18.9	5,300	8.7	4,100	4.9	3,300	3.5										
4.3	11,000	18.9	5,200	9.1	4,000	4.9	3,300	3.5										
4.4	11,000	19.7	5,100	9.4	3,900	5.1	3,200	3.7										
4.5	10,500	19.7	5,100	9.4	3,900	5.1	3,200	3.7										
4.6	10,500	20.5	5,000	9.8	3,800	5.1	3,200	3.7										
4.7	10,500	20.5	5,000	10.2	3,800	5.1	3,100	3.7										
4.8	10,500	20.9	4,900	10.2	3,700	5.1	3,100	3.7										
4.9	10,000	20.9	4,900	10.6	3,600	5.1	3,100	3.7										
5.0	9,500	21.3	4,800	10.6	3,500	5.1	3,000	3.9										

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





Slotting

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels													
Depth of Cut			<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<1</td> <td>0.1D</td> </tr> <tr> <td>1≤D<3</td> <td>0.3D</td> </tr> <tr> <td>3≤D</td> <td>0.5D</td> </tr> </tbody> </table>		Dia	aa	D<1	0.1D	1≤D<3	0.3D	3≤D	0.5D						
	Dia	aa																
D<1	0.1D																	
1≤D<3	0.3D																	
3≤D	0.5D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
5.1	9,500	21.3	4,700	10.6	3,500	5.1	3,000	3.9										
5.2	9,300	21.3	4,600	10.6	3,400	5.1	2,900	3.9										
5.3	9,200	21.3	4,600	10.6	3,400	5.1	2,900	3.9										
5.4	9,000	21.3	4,500	10.6	3,300	5.1	2,800	3.9										
5.5	8,800	21.3	4,400	10.6	3,200	5.1	2,700	3.9										
5.6	8,700	21.3	4,300	10.6	3,100	5.1	2,600	3.9										
5.7	8,500	21.3	4,200	10.6	3,100	5.1	2,600	3.9										
5.8	8,400	20.9	4,200	10.6	3,000	5.1	2,600	3.9										
5.9	8,200	20.9	4,100	10.6	2,900	5.1	2,500	3.9										
6.0	7,900	20.9	4,000	10.6	2,900	5.1	2,500	3.9										
6.5	7,500	20.9	3,700	10.6	2,700	5.1	2,300	3.9										
7.0	6,900	20.9	3,400	10.6	2,500	5.1	2,100	3.9										
7.5	6,400	20.9	3,200	10.6	2,300	5.1	2,000	3.9										
8.0	5,900	20.5	3,000	10.2	2,200	4.9	1,900	3.9										
8.5	5,600	20.5	2,800	10.2	2,000	4.9	1,700	3.9										
9.0	5,300	20.1	2,600	10.2	1,900	4.9	1,500	3.9										
9.5	5,100	20.1	2,500	10.2	1,800	4.9	1,400	3.7										
10.0	4,700	19.7	2,400	9.8	1,700	4.9	1,500	3.7										
11.0	4,400	19.7	2,200	9.8	1,600	4.9	1,100	3.7										
12.0	4,000	20.1	2,000	9.8	1,400	4.9	1,200	3.7										
16.0	3,000	15.7	1,500	7.9	1,100	4.5	800	3.1										
18.0	2,700	14.2	1,300	7.1	900	3.9	700	2.8										
20.0	2,400	11.8	1,200	5.9	800	3.5	600	2.4										

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 3712: 2 Flute, Ball End, Stub Length, Pencil Neck

Standard Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels							
Cutting Speed				66-464 SFM				66-340 SFM				66-279 SFM							
Depth of Cut																			
R (mm)	θ _n	L2 (mm)	Recom'd Cutting Angle	Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)	
						Aa	Ar			Aa	Ar			Aa	Ar				
0.10	0.5°	1	0.3°	25,000	6.2	0.0008	0.0008	25,000	4.6	0.0004	0.0004	25,000	4.6	0.0004	0.0004	25,000	3.1	0.0002	0.0002
	0.5°	1.5	0.3°	25,000	6.2	0.0008	0.0008	25,000	4.6	0.0004	0.0004	25,000	4.6	0.0004	0.0004	25,000	3.1	0.0002	0.0002
	0.5°	2	0.3°	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
	0.5°	2.5	0.3°	25,000	4.6	0.0004	0.0004	25,000	3.1	0.0002	0.0002	25,000	3.1	0.0002	0.0002	25,000	2.5	0.0002	0.0002
	0.5°	3	0.3°	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002	25,000	2.5	0.0002	0.0002	25,000	1.8	0.0001	0.0002
	1°	2	0.3°	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
	1°	2.5	0.3°	25,000	4.6	0.0008	0.0008	25,000	3.1	0.0004	0.0004	25,000	3.1	0.0004	0.0004	25,000	2.5	0.0002	0.0002
1°	3	0.3°	25,000	4.6	0.0004	0.0004	25,000	3.1	0.0002	0.0002	25,000	3.1	0.0002	0.0002	25,000	2.5	0.0002	0.0002	
0.15	0.5°	2	0.3°	25,000	18.5	0.0008	0.0012	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
	0.5°	3	0.3°	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004
	1°	3	0.3°	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0006	25,000	6.2	0.0004	0.0006	25,000	6.2	0.0002	0.0002
	1°	4	0.3°	25,000	13.8	0.0008	0.0008	25,000	9.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004	25,000	6.2	0.0004	0.0004
0.20	0.5°	2	0.3°	25,000	16.4	0.0012	0.0020	25,000	12.3	0.0006	0.0010	25,000	9.2	0.0006	0.0008	25,000	9.2	0.0004	0.0004
	0.5°	3	0.3°	25,000	16.4	0.0010	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
	0.5°	4	0.3°	25,000	16.4	0.0008	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
	0.5°	5	0.3°	25,000	14.6	0.0006	0.0020	25,000	10.9	0.0002	0.0006	25,000	7.3	0.0002	0.0005	25,000	7.3	0.0002	0.0004
	0.5°	6	0.3°	25,000	10.9	0.0004	0.0012	25,000	10.9	0.0002	0.0006	25,000	7.3	0.0002	0.0005	25,000	7.3	0.0002	0.0004
	1°	4	0.3°	25,000	16.4	0.0010	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
	1°	5	0.3°	25,000	16.4	0.0008	0.0020	25,000	10.9	0.0006	0.0010	25,000	7.3	0.0006	0.0008	25,000	7.3	0.0004	0.0004
1°	6	0.3°	25,000	14.6	0.0006	0.0020	25,000	10.9	0.0002	0.0006	25,000	7.3	0.0002	0.0005	25,000	7.3	0.0002	0.0004	
0.25	0.5°	4	0.3°	25,000	18.5	0.0016	0.0020	25,000	12.3	0.0008	0.0010	25,000	9.2	0.0008	0.0008	25,000	9.2	0.0004	0.0006
	0.5°	6	0.3°	25,000	16.4	0.0016	0.0020	20,000	7.9	0.0008	0.0010	20,000	5.9	0.0008	0.0008	20,000	5.9	0.0004	0.0004
	0.5°	8	0.3°	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0004	0.0006	20,000	5.9	0.0004	0.0004	20,000	5.9	0.0004	0.0004
	0.5°	10	0.3°	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0004	0.0006	20,000	5.9	0.0004	0.0004	20,000	5.9	0.0002	0.0004
	1°	4	0.3°	25,000	18.5	0.0016	0.0020	25,000	12.3	0.0008	0.0010	25,000	9.2	0.0008	0.0008	25,000	9.2	0.0004	0.0004
	1°	6	0.3°	25,000	16.4	0.0016	0.0020	25,000	12.3	0.0008	0.0010	25,000	9.2	0.0008	0.0008	25,000	9.2	0.0004	0.0004
	1°	8	0.3°	25,000	16.4	0.0016	0.0020	20,000	7.9	0.0008	0.0010	20,000	5.9	0.0008	0.0008	20,000	5.9	0.0004	0.0004
	1°	10	0.3°	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0008	0.0010	20,000	5.9	0.0008	0.0008	20,000	5.9	0.0004	0.0004
1°	12	0.3°	21,000	11.8	0.0008	0.0012	20,000	7.9	0.0004	0.0006	20,000	5.9	0.0004	0.0004	20,000	5.9	0.0004	0.0004	
0.30	0.5°	2	0.3°	25,000	20.8	0.0018	0.0047	25,000	13.8	0.0012	0.0024	25,000	9.2	0.0012	0.0020	25,000	9.2	0.0012	0.0012
	0.5°	4	0.3°	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0020	24,000	7.9	0.0012	0.0012
	0.5°	6	0.3°	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0008	0.0008
	0.5°	8	0.3°	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
	0.5°	10	0.3°	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
	0.5°	12	0.3°	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0008	0.0016	20,000	5.9	0.0004	0.0004
	0.5°	16	0.3°	20,000	5.9	0.0010	0.0020	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0004	0.0016	20,000	5.9	0.0004	0.0004
	1°	4	0.3°	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0020	24,000	7.9	0.0012	0.0012
	1°	6	0.3°	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0008	0.0008
	1°	8	0.3°	25,000	12.3	0.0018	0.0047	25,000	9.8	0.0012	0.0024	24,000	7.9	0.0012	0.0016	24,000	7.9	0.0008	0.0008
	1°	10	0.3°	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
	1°	12	0.3°	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008
1°	16	0.3°	25,000	8.9	0.0018	0.0047	20,000	5.9	0.0012	0.0024	20,000	5.9	0.0012	0.0016	20,000	5.9	0.0008	0.0008	
0.40	0.5°	4	0.3°	25,000	24.6	0.0024	0.0063	23,000	17.7	0.0016	0.0031	21,000	11.8	0.0016	0.0024	21,000	11.8	0.0016	0.0031
	0.5°	6	0.3°	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0012	0.0020
	0.5°	8	0.3°	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0012	0.0020
	0.5°	12	0.3°	22,000	8.9	0.0024	0.0047	19,000	5.9	0.0016	0.0024	17,000	5.9	0.0016	0.0020	17,000	5.9	0.0008	0.0020

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





Standard Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels							
Cutting Speed				66-464 SFM				66-340 SFM				66-279 SFM							
Depth of Cut																			
R (mm)	θn	L2 (mm)	Recom'd Cutting Angle	Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)	
						Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar
0.40	1°	8	0.3°	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0012	0.0020
	1°	12	0.3°	24,000	14.8	0.0024	0.0047	21,000	9.8	0.0016	0.0024	19,000	7.9	0.0016	0.0020	19,000	7.9	0.0008	0.0020
	1°	16	0.3°	22,000	8.9	0.0024	0.0047	19,000	5.9	0.0016	0.0024	17,000	5.9	0.0016	0.0020	17,000	5.9	0.0008	0.0008
	0.5°	6	0.3°	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020
0.5°	8	0.3°	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020	
0.5°	10	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
0.5°	12	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
0.5°	16	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0010	
0.5°	18	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0010	
0.5°	20	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0010	
0.5°	25	0.3°	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006	
0.5°	30	0.3°	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006	
0.5°	35	0.3°	13,000	11.8	0.0016	0.0047	13,000	7.9	0.0004	0.0020	10,000	5.9	0.0004	0.0016	10,000	5.9	0.0002	0.0006	
1°	10	0.3°	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020	
1°	16	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
1°	20	0.3°	21,000	17.7	0.0030	0.0059	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0008	
1°	25	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0008	
1°	30	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0006	
1°	35	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0006	
1°	40	0.3°	18,000	11.8	0.0024	0.0047	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0006	
1°	50	0.3°	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006	
1°	60	0.3°	16,000	11.8	0.0024	0.0047	13,000	7.9	0.0012	0.0020	10,000	5.9	0.0012	0.0016	10,000	5.9	0.0004	0.0006	
1°	70	0.3°	12,000	11.8	0.0024	0.0047	13,000	7.9	0.0008	0.0020	10,000	5.9	0.0008	0.0016	10,000	5.9	0.0004	0.0006	
1.5°	8	0.3°	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020	
1.5°	10	0.3°	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020	
1.5°	12	0.3°	25,000	26.4	0.0030	0.0079	25,000	19.7	0.0020	0.0039	21,000	11.8	0.0020	0.0031	21,000	11.8	0.0020	0.0020	
1.5°	16	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
1.5°	20	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
1.5°	25	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
1.5°	30	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
1.5°	35	0.3°	21,000	17.7	0.0030	0.0059	17,000	7.9	0.0012	0.0020	14,000	5.9	0.0012	0.0016	14,000	5.9	0.0004	0.0008	
2°	45	0.3°	21,000	17.7	0.0030	0.0059	19,000	11.8	0.0020	0.0039	16,000	7.9	0.0020	0.0031	16,000	7.9	0.0020	0.0020	
0.60	0.5°	12	0.3°	20,000	17.7	0.0035	0.0094	17,000	11.8	0.0024	0.0047	14,000	7.9	0.0024	0.0039	14,000	7.9	0.0024	0.0024
	0.5°	25	0.3°	16,000	11.8	0.0035	0.0071	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0008	0.0012
	1°	12	0.3°	20,000	17.7	0.0035	0.0094	17,000	11.8	0.0024	0.0047	14,000	7.9	0.0024	0.0039	14,000	7.9	0.0024	0.0024
	1°	25	0.3°	16,000	11.8	0.0035	0.0094	14,000	7.9	0.0024	0.0035	11,000	5.9	0.0024	0.0028	11,000	5.9	0.0008	0.0012
	1.5°	12	0.3°	20,000	23.6	0.0035	0.0094	17,000	17.7	0.0024	0.0047	14,000	11.8	0.0024	0.0039	14,000	11.8	0.0024	0.0024
1.5°	25	0.3°	20,000	17.7	0.0035	0.0094	17,000	11.8	0.0024	0.0047	14,000	7.9	0.0024	0.0039	14,000	7.9	0.0024	0.0024	
0.75	0.5°	8	0.3°	18,000	29.5	0.0055	0.0118	15,000	19.7	0.0031	0.0059	12,000	13.8	0.0031	0.0059	12,000	11.8	0.0031	0.0059
	0.5°	10	0.3°	17,000	17.7	0.0055	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	0.5°	12	0.3°	17,000	17.7	0.0047	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	0.5°	16	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039	12,000	9.8	0.0030	0.0039
	0.5°	20	0.3°	13,000	11.8	0.0047	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0020	0.0039
	0.5°	25	0.3°	13,000	11.8	0.0047	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0020	0.0039
	0.5°	30	0.3°	13,000	11.8	0.0047	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0014	0.0039
	0.5°	35	0.3°	13,000	11.8	0.0035	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0012	0.0039

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





List 3712: 2 Flute, Ball End, Stub Length, Pencil Neck (Continued)

Standard Milling

Hardness				-		<32 HRC		33-41 HRC		42-50 HRC									
Work Material				Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels Pre-hardened Steels											
Cutting Speed				66-464 SFM		66-340 SFM		66-279 SFM											
Depth of Cut																			
R (mm)	theta_n	L2 (mm)	Recom'd Cutting Angle																
				Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar				
0.75	1°	10	0.3°	18,000	29.5	0.0055	0.0118	15,000	19.7	0.0031	0.0059	12,000	13.8	0.0031	0.0059	12,000	11.8	0.0031	0.0059
	1°	12	0.3°	17,000	17.7	0.0055	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	1°	16	0.3°	17,000	17.7	0.0047	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	1°	20	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039	12,000	9.8	0.0030	0.0039
	1°	25	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039	12,000	9.8	0.0020	0.0039
	1°	30	0.3°	13,000	11.8	0.0035	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0012	0.0039
	1°	35	0.3°	13,000	11.8	0.0035	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0008	0.0039
	1.5°	10	0.3°	18,000	29.5	0.0047	0.0118	15,000	19.7	0.0031	0.0059	12,000	13.8	0.0031	0.0059	12,000	11.8	0.0031	0.0059
	1.5°	12	0.3°	17,000	17.7	0.0047	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	1.5°	16	0.3°	17,000	17.7	0.0047	0.0118	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	1.5°	20	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059	12,000	9.8	0.0031	0.0059
	1.5°	25	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039	12,000	9.8	0.0030	0.0039
	1.5°	30	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039	12,000	9.8	0.0030	0.0039
	1.5°	35	0.3°	13,000	11.8	0.0030	0.0079	12,000	7.9	0.0024	0.0039	9,500	5.9	0.0024	0.0039	9,500	5.9	0.0020	0.0039
2°	38.6	0.3°	17,000	17.7	0.0047	0.0094	15,000	11.8	0.0031	0.0047	12,000	9.8	0.0031	0.0039	12,000	9.8	0.0030	0.0039	
1.00	0.5°	8	0.3°	16,500	41.3	0.0079	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
	0.5°	10	0.3°	16,500	41.3	0.0079	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
	0.5°	12	0.3°	16,500	41.3	0.0079	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
	0.5°	16	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
	0.5°	20	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
	0.5°	25	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	0.5°	30	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	0.5°	35	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	0.5°	40	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	1°	16	0.3°	16,500	41.3	0.0079	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
	1°	20	0.3°	14,000	29.5	0.0079	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
	1°	25	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079
	1°	30	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0031	0.0039
	1°	35	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0031	0.0039
	1°	40	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	1°	50	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	1°	60	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	1°	70	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039
	1.5°	16	0.3°	16,500	41.3	0.0079	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
	1.5°	20	0.3°	16,500	41.3	0.0079	0.0220	16,500	27.6	0.0039	0.0110	13,500	19.7	0.0039	0.0110	13,500	19.7	0.0039	0.0079
1.5°	25	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079	
1.5°	30	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079	
1.5°	35	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079	
1.5°	41.5	0.3°	11,000	14.8	0.0059	0.0165	10,000	9.8	0.0039	0.0083	8,000	7.9	0.0039	0.0071	8,000	7.9	0.0024	0.0039	
2°	31.5	0.3°	14,000	29.5	0.0059	0.0220	13,000	19.7	0.0039	0.0110	10,000	11.8	0.0039	0.0110	10,000	11.8	0.0039	0.0079	
1.50	0.5°	8	0.3°	15,000	47.2	0.0079	0.0331	9,500	31.5	0.0059	0.0165	7,500	23.6	0.0059	0.0165	7,500	23.6	0.0059	0.0118
	0.5°	10	0.3°	15,000	47.2	0.0079	0.0331	9,500	31.5	0.0059	0.0165	7,500	23.6	0.0059	0.0165	7,500	23.6	0.0059	0.0118
	0.5°	12	0.3°	12,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
	0.5°	16	0.3°	10,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
	0.5°	20	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	0.5°	25	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





Standard Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels							
Cutting Speed				66-464 SFM				66-340 SFM				66-279 SFM							
Depth of Cut																			
R (mm)	θn	L2 (mm)	Recom'd Cutting Angle	Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)		Speed (RPM)	Feed (in/min)	Depth of Cut (in)	
						Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar
1.50	0.5°	30	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059
	0.5°	35	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059
	0.5°	40	0.3°	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
	0.5°	50	0.3°	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
	1°	20	0.3°	10,000	35.4	0.0079	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
	1°	25	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	1°	30	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	1°	35	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059
	1°	40	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059
	1°	50	0.3°	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
	1°	60	0.3°	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
	1°	70	0.3°	9,000	14.8	0.0079	0.0331	7,500	9.8	0.0059	0.0165	6,000	7.9	0.0059	0.0118	6,000	7.9	0.0035	0.0059
	1.5°	20	0.3°	10,000	35.4	0.0118	0.0331	9,500	23.6	0.0059	0.0165	7,500	15.7	0.0059	0.0142	7,500	15.7	0.0059	0.0118
	1.5°	25	0.3°	10,000	17.7	0.0098	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	1.5°	30	0.3°	10,000	17.7	0.0098	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	1.5°	35	0.3°	10,000	17.7	0.0098	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	1.5°	40	0.3°	10,000	17.7	0.0098	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118
	1.5°	50	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059
1.5°	62.5	0.3°	10,000	17.7	0.0079	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0118	6,500	9.8	0.0035	0.0059	
1.5°	47.5	0.3°	10,000	17.7	0.0098	0.0331	8,500	11.8	0.0059	0.0165	6,500	9.8	0.0059	0.0142	6,500	9.8	0.0059	0.0118	
2.00	1°	20	0.5°	9,000	35.4	0.0197	0.0504	7,500	23.6	0.0079	0.0252	6,000	15.7	0.0079	0.0236	6,000	15.7	0.0079	0.0157
	1°	30	0.5°	7,000	23.6	0.0197	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0236	5,000	9.8	0.0079	0.0157
	1°	40	0.5°	7,000	23.6	0.0157	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0220	5,000	9.8	0.0047	0.0118
	1°	50	0.5°	7,000	23.6	0.0157	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0220	5,000	9.8	0.0047	0.0079
	1°	60	0.5°	5,000	14.8	0.0138	0.0504	5,000	9.8	0.0079	0.0252	4,000	7.9	0.0079	0.0220	4,000	7.9	0.0047	0.0079
	1.5°	44.2	0.5°	7,000	23.6	0.0197	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0236	5,000	9.8	0.0079	0.0157
2.50	2°	34	0.5°	7,000	23.6	0.0197	0.0504	6,000	15.7	0.0079	0.0252	5,000	9.8	0.0079	0.0236	5,000	9.8	0.0079	0.0197
	1°	30	0.5°	7,000	29.5	0.0236	0.0709	6,500	19.7	0.0098	0.0354	5,000	15.7	0.0098	0.0276	5,000	15.7	0.0098	0.0197
	1°	40	0.5°	6,000	29.5	0.0236	0.0709	5,000	19.7	0.0098	0.0354	4,000	9.8	0.0098	0.0276	4,000	9.8	0.0098	0.0197
	1°	60	0.5°	5,000	23.6	0.0157	0.0709	4,000	15.7	0.0098	0.0354	4,000	7.9	0.0098	0.0236	4,000	7.9	0.0079	0.0098
	1.5°	26.9	0.5°	9,000	53.1	0.0236	0.0709	6,500	35.4	0.0098	0.0354	5,000	29.5	0.0098	0.0276	5,000	29.5	0.0098	0.0197
3.00	1.5°	65.1	0.5°	6,000	29.5	0.0236	0.0709	5,000	19.7	0.0098	0.0354	4,000	9.8	0.0098	0.0276	4,000	9.8	0.0098	0.0197
	2°	50.1	0.5°	6,000	29.5	0.0236	0.0709	5,000	19.7	0.0098	0.0354	4,000	9.8	0.0098	0.0276	4,000	9.8	0.0098	0.0197
	1°	30	0.5°	7,000	47.2	0.0295	0.0945	5,500	31.5	0.0118	0.0472	4,500	23.6	0.0118	0.0378	4,500	23.6	0.0118	0.0236
	1°	40	0.5°	5,000	23.6	0.0295	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
	1°	50	0.5°	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
	1°	60	0.5°	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236
	1°	70	0.5°	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0118
	1°	80	0.5°	5,000	23.6	0.0177	0.0945	4,000	15.7	0.0079	0.0472	4,000	11.8	0.0079	0.0378	4,000	11.8	0.0079	0.0118
1.5°	49	0.5°	5,000	23.6	0.0236	0.0945	4,000	15.7	0.0118	0.0472	4,000	11.8	0.0118	0.0378	4,000	11.8	0.0118	0.0236	
2°	36	0.5°	7,000	47.2	0.0295	0.0945	5,500	31.5	0.0118	0.0472	4,500	23.6	0.0118	0.0378	4,500	23.6	0.0118	0.0236	

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





List 3712: 2 Flute, Ball End, Stub Length, Pencil Neck (Continued)

High Speed Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels							
Cutting Speed				103-1031 SFM				78-928 SFM				76-774 SFM							
Depth of Cut																			
R (mm)	θn	L2 (mm)	Recom'd Cutting Angle																
				Aa		Ar		Aa		Ar		Aa		Ar		Aa		Ar	
0.10	0.5°	1	0.3°	50,000	17.3	0.0003	0.0004	50,000	14.2	0.0002	0.0002	50,000	13.4	0.0002	0.0002	50,000	13.4	0.0002	0.0002
	0.5°	1.5	0.3°	50,000	17.3	0.0003	0.0004	50,000	14.2	0.0002	0.0002	50,000	13.4	0.0002	0.0002	50,000	13.4	0.0002	0.0002
	0.5°	2	0.3°	50,000	14.2	0.0003	0.0004	45,000	11.8	0.0002	0.0002	45,000	11.0	0.0002	0.0002	45,000	11.0	0.0002	0.0002
	0.5°	2.5	0.3°	50,000	12.6	0.0003	0.0004	38,000	9.1	0.0002	0.0002	38,000	8.3	0.0002	0.0002	37,000	7.9	0.0002	0.0002
	0.5°	3	0.3°	50,000	9.8	0.0003	0.0004	38,000	7.9	0.0002	0.0002	38,000	7.1	0.0002	0.0002	37,000	5.9	0.0001	0.0002
	1°	3.5	0.3°	50,000	17.3	0.0003	0.0004	50,000	14.2	0.0002	0.0002	50,000	13.4	0.0002	0.0002	50,000	13.4	0.0002	0.0002
	1°	4	0.3°	50,000	14.2	0.0003	0.0004	45,000	11.8	0.0002	0.0002	45,000	11.0	0.0002	0.0002	45,000	11.0	0.0002	0.0002
0.15	1°	4.5	0.3°	50,000	12.6	0.0003	0.0004	38,000	9.1	0.0002	0.0002	38,000	8.3	0.0002	0.0002	37,000	7.9	0.0002	0.0002
	0.5°	2	0.3°	50,000	28.7	0.0003	0.0008	50,000	23.6	0.0002	0.0004	50,000	22.4	0.0002	0.0004	50,000	22.4	0.0002	0.0002
	0.5°	3	0.3°	50,000	22.8	0.0003	0.0004	45,000	18.9	0.0002	0.0002	45,000	17.7	0.0002	0.0002	45,000	17.7	0.0002	0.0002
	1°	3	0.3°	50,000	24.0	0.0003	0.0008	47,000	20.1	0.0002	0.0004	47,000	18.9	0.0002	0.0004	47,000	18.9	0.0002	0.0002
0.20	1°	4	0.3°	50,000	22.8	0.0003	0.0004	45,000	18.9	0.0002	0.0002	45,000	17.7	0.0002	0.0002	45,000	17.7	0.0002	0.0002
	0.5°	2	0.3°	50,000	38.2	0.0006	0.0016	50,000	31.5	0.0004	0.0008	50,000	29.9	0.0004	0.0008	50,000	29.9	0.0004	0.0004
	0.5°	3	0.3°	50,000	26.4	0.0005	0.0012	45,000	21.7	0.0003	0.0006	45,000	20.5	0.0003	0.0006	45,000	20.5	0.0003	0.0004
	0.5°	4	0.3°	48,000	21.3	0.0003	0.0008	43,000	19.7	0.0002	0.0004	43,000	18.5	0.0002	0.0004	43,000	18.5	0.0002	0.0004
	0.5°	5	0.3°	45,000	18.9	0.0003	0.0008	40,000	16.5	0.0002	0.0004	40,000	15.7	0.0002	0.0004	40,000	15.7	0.0002	0.0004
	0.5°	6	0.3°	40,000	15.7	0.0003	0.0004	36,000	14.6	0.0002	0.0002	36,000	13.8	0.0002	0.0002	35,000	13.4	0.0002	0.0002
	1°	4	0.3°	50,000	26.4	0.0005	0.0012	45,000	21.7	0.0003	0.0006	45,000	20.5	0.0003	0.0006	45,000	20.5	0.0003	0.0004
0.25	1°	5	0.3°	48,000	21.3	0.0003	0.0008	43,000	19.7	0.0002	0.0004	43,000	18.5	0.0002	0.0004	43,000	18.5	0.0002	0.0004
	1°	6	0.3°	45,000	18.9	0.0003	0.0008	40,000	16.5	0.0002	0.0004	40,000	15.7	0.0002	0.0004	40,000	15.7	0.0002	0.0004
	0.5°	4	0.3°	50,000	47.2	0.0006	0.0016	48,000	35.4	0.0004	0.0008	48,000	33.5	0.0004	0.0008	48,000	33.5	0.0004	0.0006
	0.5°	6	0.3°	38,000	37.0	0.0006	0.0008	38,000	19.7	0.0004	0.0004	38,000	18.5	0.0004	0.0004	38,000	18.5	0.0004	0.0004
	0.5°	8	0.3°	30,000	29.9	0.0003	0.0008	30,000	15.7	0.0002	0.0004	30,000	15.0	0.0002	0.0004	29,000	14.2	0.0002	0.0004
	0.5°	10	0.3°	30,000	19.7	0.0002	0.0008	30,000	15.7	0.0002	0.0004	30,000	11.8	0.0002	0.0004	29,000	9.8	0.0002	0.0004
	1°	4	0.3°	50,000	47.2	0.0006	0.0016	48,000	35.4	0.0004	0.0008	48,000	33.5	0.0004	0.0008	48,000	33.5	0.0004	0.0004
0.30	1°	6	0.3°	50,000	47.2	0.0006	0.0016	48,000	35.4	0.0004	0.0008	48,000	33.5	0.0004	0.0008	48,000	33.5	0.0004	0.0004
	1°	8	0.3°	50,000	47.2	0.0006	0.0016	48,000	35.4	0.0004	0.0008	48,000	33.5	0.0004	0.0008	48,000	33.5	0.0004	0.0004
	1°	10	0.3°	30,000	29.9	0.0003	0.0008	30,000	15.7	0.0002	0.0004	30,000	15.0	0.0002	0.0004	29,000	14.2	0.0002	0.0004
	1°	12	0.3°	30,000	29.9	0.0003	0.0008	30,000	15.7	0.0002	0.0004	30,000	15.0	0.0002	0.0004	29,000	14.2	0.0002	0.0004
	0.5°	2	0.3°	50,000	61.0	0.0012	0.0024	50,000	47.2	0.0008	0.0012	50,000	43.3	0.0008	0.0012	50,000	43.3	0.0008	0.0012
	0.5°	4	0.3°	50,000	53.1	0.0012	0.0024	45,000	39.4	0.0008	0.0012	45,000	37.4	0.0008	0.0012	45,000	37.4	0.0008	0.0012
	0.5°	6	0.3°	35,000	37.8	0.0006	0.0016	30,000	26.8	0.0004	0.0008	30,000	25.2	0.0004	0.0008	30,000	25.2	0.0004	0.0008
	0.5°	8	0.3°	30,000	28.3	0.0006	0.0016	26,000	23.6	0.0004	0.0008	26,000	22.4	0.0004	0.0008	25,000	21.3	0.0004	0.0008
	0.5°	10	0.3°	30,000	19.7	0.0006	0.0016	26,000	18.9	0.0004	0.0008	26,000	17.7	0.0004	0.0008	25,000	15.0	0.0004	0.0008
	0.5°	12	0.3°	30,000	19.7	0.0004	0.0016	26,000	18.9	0.0003	0.0008	26,000	17.7	0.0003	0.0008	25,000	15.0	0.0003	0.0004
	1°	4	0.3°	50,000	53.1	0.0012	0.0024	45,000	39.4	0.0008	0.0012	45,000	37.4	0.0008	0.0012	45,000	37.4	0.0008	0.0012
0.40	1°	6	0.3°	35,000	37.8	0.0006	0.0016	30,000	26.8	0.0004	0.0008	30,000	25.2	0.0004	0.0008	30,000	25.2	0.0004	0.0008
	1°	8	0.3°	35,000	37.8	0.0006	0.0016	30,000	26.8	0.0004	0.0008	30,000	25.2	0.0004	0.0008	30,000	25.2	0.0004	0.0008
	1°	10	0.3°	30,000	28.3	0.0006	0.0016	26,000	23.6	0.0004	0.0008	26,000	22.4	0.0004	0.0008	25,000	21.3	0.0004	0.0008
	1°	12	0.3°	30,000	28.3	0.0006	0.0016	26,000	23.6	0.0004	0.0008	26,000	22.4	0.0004	0.0008	25,000	21.3	0.0004	0.0008
	1°	16	0.3°	30,000	19.7	0.0006	0.0016	26,000	18.9	0.0004	0.0008	26,000	17.7	0.0004	0.0008	25,000	15.0	0.0004	0.0008
	0.5°	4	0.3°	50,000	68.9	0.0024	0.0063	48,000	63.0	0.0016	0.0031	48,000	59.1	0.0016	0.0024	48,000	59.1	0.0016	0.0016
	0.5°	6	0.3°	43,000	63.0	0.0018	0.0039	34,000	37.4	0.0012	0.0020	34,000	35.4	0.0012	0.0020	34,000	35.4	0.0008	0.0010
	0.5°	8	0.3°	32,000	49.2	0.0018	0.0039	30,000	31.5	0.0012	0.0020	30,000	29.9	0.0012	0.0020	30,000	29.9	0.0008	0.0010
	0.5°	12	0.3°	24,000	28.3	0.0004	0.0016	23,000	17.7	0.0002	0.0004	23,000	16.5	0.0002	0.0004	23,000	16.5	0.0002	0.0010

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





High Speed Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC				
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels								
Cutting Speed				103-1031 SFM				78-928 SFM								76-774 SFM				
Depth of Cut																				
R (mm)	θ _n	L2 (mm)	Recom'd Cutting Angle																	Speed (min ⁻¹)
				Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	Aa	Ar	
0.40	1°	8	0.3°	43,000	63.0	0.0018	0.0039	34,000	37.4	0.0012	0.0020	34,000	35.4	0.0012	0.0020	34,000	35.4	0.0008	0.0010	
	1°	12	0.3°	32,000	49.2	0.0018	0.0039	30,000	31.5	0.0012	0.0020	30,000	29.9	0.0012	0.0020	30,000	29.9	0.0008	0.0010	
	1°	16	0.3°	24,000	28.3	0.0004	0.0016	23,000	17.7	0.0002	0.0004	23,000	16.5	0.0002	0.0004	23,000	16.5	0.0002	0.0006	
0.50	0.5°	6	0.3°	47,000	112.2	0.0030	0.0079	36,000	90.6	0.0020	0.0039	36,000	82.7	0.0020	0.0031	36,000	82.7	0.0020	0.0020	
	0.5°	8	0.3°	30,000	92.5	0.0030	0.0059	27,000	66.9	0.0020	0.0039	27,000	63.0	0.0020	0.0031	27,000	63.0	0.0020	0.0020	
	0.5°	10	0.3°	27,000	78.7	0.0030	0.0059	26,000	63.0	0.0020	0.0039	26,000	59.1	0.0020	0.0031	26,000	59.1	0.0020	0.0020	
	0.5°	12	0.3°	24,000	55.1	0.0006	0.0016	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0020	21,000	37.4	0.0004	0.0008	
	0.5°	16	0.3°	24,000	39.4	0.0006	0.0016	22,000	30.3	0.0004	0.0008	22,000	27.6	0.0004	0.0008	21,000	26.8	0.0004	0.0008	
	0.5°	18	0.3°	24,000	39.4	0.0004	0.0016	22,000	30.3	0.0003	0.0008	22,000	27.6	0.0003	0.0008	21,000	26.8	0.0003	0.0008	
	0.5°	20	0.3°	24,000	39.4	0.0004	0.0012	22,000	30.3	0.0003	0.0006	22,000	27.6	0.0003	0.0006	21,000	26.8	0.0003	0.0006	
	0.5°	25	0.3°	20,000	31.5	0.0004	0.0012	18,000	23.6	0.0003	0.0006	18,000	18.9	0.0003	0.0006	17,000	21.7	0.0003	0.0006	
	0.5°	30	0.3°	20,000	31.5	0.0003	0.0012	18,000	23.6	0.0002	0.0006	18,000	18.9	0.0002	0.0006	17,000	21.7	0.0002	0.0006	
	0.5°	35	0.3°	15,000	21.7	0.0002	0.0012	14,000	17.7	0.0002	0.0004	12,000	15.7	0.0002	0.0004	11,000	13.8	0.0002	0.0004	
	1°	10	0.3°	30,000	92.5	0.0030	0.0059	27,000	66.9	0.0020	0.0039	27,000	63.0	0.0020	0.0020	27,000	63.0	0.0020	0.0020	
	1°	16	0.3°	24,000	55.1	0.0006	0.0016	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0008	21,000	37.4	0.0004	0.0008	
	1°	20	0.3°	24,000	39.4	0.0006	0.0016	22,000	30.3	0.0004	0.0008	22,000	27.6	0.0004	0.0008	21,000	26.8	0.0004	0.0006	
	1°	25	0.3°	24,000	39.4	0.0006	0.0016	22,000	30.3	0.0004	0.0008	22,000	27.6	0.0004	0.0008	21,000	26.8	0.0004	0.0006	
	1°	30	0.3°	24,000	39.4	0.0004	0.0016	22,000	30.3	0.0003	0.0008	22,000	27.6	0.0003	0.0008	21,000	26.8	0.0003	0.0006	
	1°	35	0.3°	24,000	39.4	0.0004	0.0012	22,000	30.3	0.0003	0.0006	22,000	27.6	0.0003	0.0006	21,000	26.8	0.0003	0.0006	
	1°	40	0.3°	22,000	39.4	0.0004	0.0012	20,000	30.3	0.0003	0.0006	20,000	27.6	0.0003	0.0006	19,000	26.8	0.0003	0.0006	
	1°	50	0.3°	20,000	31.5	0.0004	0.0012	18,000	23.6	0.0003	0.0006	18,000	18.9	0.0003	0.0006	17,000	21.7	0.0003	0.0004	
	1°	60	0.3°	18,000	31.5	0.0003	0.0012	16,000	23.6	0.0002	0.0006	16,000	18.9	0.0002	0.0006	15,000	21.7	0.0002	0.0006	
	1°	70	0.3°	15,000	23.6	0.0002	0.0012	14,000	18.9	0.0002	0.0006	13,000	15.0	0.0002	0.0006	12,000	17.7	0.0002	0.0006	
	0.60	1.5°	8	0.3°	47,000	112.2	0.0030	0.0079	36,000	90.6	0.0020	0.0039	36,000	82.7	0.0020	0.0031	36,000	82.7	0.0020	0.0020
		1.5°	10	0.3°	30,000	92.5	0.0030	0.0059	27,000	66.9	0.0020	0.0039	27,000	63.0	0.0020	0.0031	27,000	63.0	0.0020	0.0020
		1.5°	12	0.3°	30,000	92.5	0.0030	0.0059	27,000	66.9	0.0020	0.0039	27,000	63.0	0.0020	0.0031	27,000	63.0	0.0020	0.0020
1.5°		16	0.3°	24,000	55.1	0.0006	0.0016	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0008	21,000	37.4	0.0004	0.0008	
1.5°		20	0.3°	24,000	55.1	0.0006	0.0016	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0008	21,000	37.4	0.0004	0.0008	
1.5°		25	0.3°	24,000	55.1	0.0006	0.0016	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0008	21,000	37.4	0.0004	0.0008	
1.5°		30	0.3°	24,000	39.4	0.0006	0.0016	22,000	30.3	0.0004	0.0008	22,000	27.6	0.0004	0.0008	21,000	26.8	0.0004	0.0008	
1.5°		35	0.3°	24,000	39.4	0.0006	0.0016	22,000	30.3	0.0004	0.0008	22,000	27.6	0.0004	0.0008	21,000	26.8	0.0004	0.0008	
2°		45	0.3°	24,000	55.1	0.0006	0.0016	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0008	21,000	37.4	0.0004	0.0008	
0.75		0.5°	8	0.3°	32,000	118.1	0.0047	0.0118	30,000	114.2	0.0030	0.0059	30,000	106.3	0.0030	0.0047	30,000	106.3	0.0030	0.0039
		0.5°	10	0.3°	30,000	104.3	0.0047	0.0118	24,000	90.6	0.0030	0.0059	24,000	82.7	0.0030	0.0047	24,000	82.7	0.0030	0.0039
		0.5°	12	0.3°	30,000	94.5	0.0047	0.0118	24,000	78.7	0.0030	0.0059	24,000	74.8	0.0030	0.0047	24,000	74.8	0.0030	0.0039
		0.5°	16	0.3°	24,000	55.1	0.0047	0.0079	21,000	55.1	0.0030	0.0039	21,000	51.2	0.0030	0.0035	21,000	51.2	0.0020	0.0024
		0.5°	20	0.3°	22,000	55.1	0.0039	0.0079	18,000	47.2	0.0020	0.0039	18,000	43.3	0.0020	0.0028	17,000	43.3	0.0012	0.0012
0.85		0.5°	25	0.3°	22,000	43.3	0.0039	0.0079	18,000	39.4	0.0020	0.0039	18,000	35.4	0.0020	0.0028	17,000	35.4	0.0008	0.0012
		0.5°	30	0.3°	22,000	43.3	0.0030	0.0079	18,000	39.4	0.0014	0.0039	18,000	35.4	0.0014	0.0028	17,000	35.4	0.0004	0.0012
		0.5°	35	0.3°	20,000	39.4	0.0020	0.0079	17,000	35.4	0.0012	0.0039	17,000	31.5	0.0012	0.0028	15,000	31.5	0.0004	0.0012

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.


continued on next page





List 3712: 2 Flute, Ball End, Stub Length, Pencil Neck (Continued)

High Speed Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels							
Cutting Speed				103-1031 SFM				78-928 SFM								76-774 SFM			
Depth of Cut																			
R (mm)	θn	L2 (mm)	Recom'd Cutting Angle	Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)		Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)		Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)		Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)	
						Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar
0.75	1°	10	0.3°	32,000	118.1	0.0047	0.0118	30,000	114.2	0.0030	0.0059	30,000	106.3	0.0030	0.0047	30,000	106.3	0.0030	0.0039
	1°	12	0.3°	30,000	104.3	0.0047	0.0118	24,000	90.6	0.0030	0.0059	24,000	82.7	0.0030	0.0047	24,000	82.7	0.0030	0.0039
	1°	16	0.3°	30,000	94.5	0.0047	0.0118	24,000	78.7	0.0030	0.0059	24,000	74.8	0.0030	0.0047	24,000	74.8	0.0030	0.0039
	1°	20	0.3°	24,000	55.1	0.0047	0.0079	21,000	55.1	0.0030	0.0039	21,000	51.2	0.0030	0.0035	21,000	51.2	0.0020	0.0024
	1°	25	0.3°	22,000	55.1	0.0039	0.0079	18,000	47.2	0.0020	0.0039	18,000	43.3	0.0020	0.0035	17,000	43.3	0.0020	0.0024
	1°	30	0.3°	22,000	55.1	0.0028	0.0079	18,000	47.2	0.0020	0.0039	18,000	43.3	0.0020	0.0028	17,000	43.3	0.0012	0.0012
	1°	35	0.3°	22,000	43.3	0.0028	0.0079	18,000	39.4	0.0020	0.0039	18,000	35.4	0.0020	0.0028	17,000	35.4	0.0008	0.0012
	1.5°	10	0.3°	32,000	118.1	0.0047	0.0118	30,000	114.2	0.0030	0.0059	30,000	106.3	0.0030	0.0047	30,000	106.3	0.0030	0.0039
	1.5°	12	0.3°	32,000	118.1	0.0047	0.0118	30,000	114.2	0.0030	0.0059	30,000	106.3	0.0030	0.0047	30,000	106.3	0.0030	0.0039
	1.5°	16	0.3°	30,000	94.5	0.0047	0.0118	24,000	78.7	0.0030	0.0059	24,000	74.8	0.0030	0.0047	24,000	74.8	0.0030	0.0039
	1.5°	20	0.3°	30,000	94.5	0.0047	0.0118	24,000	78.7	0.0030	0.0059	24,000	74.8	0.0030	0.0047	24,000	74.8	0.0031	0.0039
	1.5°	25	0.3°	24,000	55.1	0.0039	0.0079	21,000	55.1	0.0030	0.0039	21,000	51.2	0.0030	0.0035	21,000	51.2	0.0020	0.0024
	1.5°	30	0.3°	24,000	55.1	0.0039	0.0079	21,000	55.1	0.0030	0.0039	21,000	51.2	0.0030	0.0035	21,000	51.2	0.0020	0.0024
	1.5°	35	0.3°	22,000	55.1	0.0020	0.0079	18,000	47.2	0.0020	0.0039	18,000	43.3	0.0020	0.0028	17,000	43.3	0.0008	0.0012
	2°	38.6	0.3°	24,000	55.1	0.0039	0.0079	21,000	55.1	0.0030	0.0039	21,000	51.2	0.0030	0.0035	21,000	51.2	0.0020	0.0024
	1.00	0.5°	8	0.3°	27,000	131.9	0.0059	0.0157	25,000	102.4	0.0039	0.0079	25,000	94.5	0.0039	0.0079	23,000	86.6	0.0039
0.5°		10	0.3°	22,000	120.1	0.0059	0.0157	20,000	94.5	0.0039	0.0079	20,000	86.6	0.0039	0.0079	19,000	78.7	0.0039	0.0079
0.5°		12	0.3°	22,000	120.1	0.0059	0.0157	20,000	94.5	0.0039	0.0079	20,000	86.6	0.0039	0.0079	19,000	78.7	0.0039	0.0079
0.5°		16	0.3°	15,000	94.5	0.0059	0.0118	15,000	70.9	0.0039	0.0079	15,000	66.9	0.0039	0.0079	14,000	59.1	0.0039	0.0079
0.5°		20	0.3°	15,000	86.6	0.0059	0.0079	14,000	66.9	0.0039	0.0039	14,000	63.0	0.0039	0.0039	13,000	55.1	0.0039	0.0039
0.5°		25	0.3°	12,000	47.2	0.0039	0.0079	12,000	47.2	0.0020	0.0039	11,000	43.3	0.0020	0.0039	10,000	39.4	0.0020	0.0039
0.5°		30	0.3°	12,000	39.4	0.0039	0.0079	12,000	39.4	0.0020	0.0039	11,000	35.4	0.0020	0.0039	10,000	31.5	0.0020	0.0039
0.5°		35	0.3°	12,000	39.4	0.0030	0.0079	12,000	39.4	0.0012	0.0039	11,000	35.4	0.0012	0.0039	10,000	31.5	0.0012	0.0039
0.5°		40	0.3°	12,000	31.5	0.0020	0.0079	12,000	31.5	0.0008	0.0039	11,000	31.5	0.0008	0.0039	10,000	27.6	0.0008	0.0039
1°		16	0.3°	22,000	120.1	0.0059	0.0157	20,000	94.5	0.0039	0.0079	20,000	86.6	0.0039	0.0079	19,000	78.7	0.0039	0.0079
1°		20	0.3°	15,000	94.5	0.0059	0.0118	15,000	70.9	0.0039	0.0079	15,000	66.9	0.0039	0.0079	14,000	59.1	0.0039	0.0079
1°		25	0.3°	15,000	86.6	0.0059	0.0079	14,000	66.9	0.0039	0.0039	14,000	63.0	0.0039	0.0039	13,000	55.1	0.0039	0.0039
1°		30	0.3°	14,000	86.6	0.0059	0.0079	14,000	66.9	0.0039	0.0039	14,000	63.0	0.0039	0.0039	13,000	55.1	0.0028	0.0039
1°		35	0.3°	12,000	47.2	0.0039	0.0079	12,000	47.2	0.0020	0.0039	11,000	43.3	0.0020	0.0039	10,000	39.4	0.0020	0.0039
1°		40	0.3°	12,000	39.4	0.0039	0.0079	12,000	39.4	0.0020	0.0039	11,000	35.4	0.0020	0.0039	10,000	31.5	0.0020	0.0039
1°		50	0.3°	12,000	39.4	0.0030	0.0079	12,000	39.4	0.0012	0.0039	11,000	35.4	0.0012	0.0039	10,000	31.5	0.0012	0.0039
1°		60	0.3°	12,000	31.5	0.0020	0.0079	12,000	31.5	0.0008	0.0039	11,000	31.5	0.0008	0.0039	10,000	27.6	0.0008	0.0039
1°		70	0.3°	12,000	31.5	0.0012	0.0039	12,000	31.5	0.0004	0.0020	11,000	31.5	0.0004	0.0020	10,000	27.6	0.0004	0.0020
1.5°		16	0.3°	22,000	120.1	0.0079	0.0157	20,000	94.5	0.0039	0.0079	20,000	86.6	0.0039	0.0079	19,000	78.7	0.0039	0.0079
1.5°		20	0.3°	22,000	120.1	0.0079	0.0157	20,000	94.5	0.0039	0.0079	20,000	86.6	0.0039	0.0079	19,000	78.7	0.0039	0.0079
1.5°	25	0.3°	15,000	94.5	0.0059	0.0118	15,000	70.9	0.0039	0.0079	15,000	66.9	0.0039	0.0079	14,000	59.1	0.0039	0.0079	
1.5°	30	0.3°	15,000	86.6	0.0059	0.0079	14,000	66.9	0.0039	0.0039	14,000	63.0	0.0039	0.0039	13,000	55.1	0.0039	0.0039	
1.5°	35	0.3°	15,000	86.6	0.0059	0.0079	14,000	66.9	0.0039	0.0039	14,000	63.0	0.0039	0.0039	13,000	55.1	0.0039	0.0039	
1.5°	41.5	0.3°	12,000	47.2	0.0039	0.0079	12,000	47.2	0.0020	0.0039	11,000	43.3	0.0020	0.0039	10,000	39.4	0.0020	0.0039	
2°	31.5	0.3°	15,000	94.5	0.0059	0.0118	15,000	70.9	0.0039	0.0079	15,000	66.9	0.0039	0.0079	14,000	59.1	0.0039	0.0079	
1.50	0.5°	8	0.3°	32,000	181.1	0.0079	0.0236	30,000	177.2	0.0059	0.0118	30,000	165.4	0.0059	0.0118	25,000	137.8	0.0059	0.0118
	0.5°	10	0.3°	28,000	157.5	0.0079	0.0236	25,000	149.6	0.0059	0.0118	25,000	141.7	0.0059	0.0118	20,000	110.2	0.0059	0.0118
	0.5°	12	0.3°	28,000	157.5	0.0079	0.0236	25,000	149.6	0.0059	0.0118	25,000	141.7	0.0059	0.0118	20,000	110.2	0.0059	0.0118
	0.5°	16	0.3°	22,000	114.2	0.0079	0.0236	18,000	106.3	0.0059	0.0118	18,000	98.4	0.0059	0.0118	15,000	78.7	0.0059	0.0118
	0.5°	20	0.3°	20,000	102.4	0.0059	0.0157	16,000	78.7	0.0039	0.0079	16,000	74.8	0.0039	0.0079	13,000	59.1	0.0039	0.0079
	0.5°	25	0.3°	16,000	86.6	0.0059	0.0157	14,000	70.9	0.0039	0.0079	14,000	66.9	0.0039	0.0079	11,000	51.2	0.0039	0.0079
0.5°	30	0.3°	16,000	70.9	0.0049	0.0079	12,000	47.2	0.0020	0.0039	12,000	43.3	0.0020	0.0039	9,000	32.3	0.0020	0.0039	

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

continued on next page





High Speed Milling

Hardness				-				<32 HRC				33-41 HRC				42-50 HRC			
Work Material				Copper Copper Alloy				Mild Steels Carbon Steels				Hardened Steels Pre-hardened Steels							
Cutting Speed				103-1031 SFM				78-928 SFM								76-774 SFM			
Depth of Cut																			
R (mm)	θ _n	L2 (mm)	Recom'd Cutting Angle	Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)		Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)		Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)		Speed (min ⁻¹)	Feed (in/min)	Depth of Cut (in)	
						Aa	Ar			Aa	Ar			Aa	Ar			Aa	Ar
1.50	0.5°	35	0.3°	12,000	39.4	0.0030	0.0039	10,000	31.5	0.0012	0.0020	9,000	29.9	0.0012	0.0020	7,800	23.2	0.0012	0.0020
	0.5°	40	0.3°	12,000	31.5	0.0030	0.0039	10,000	23.6	0.0012	0.0020	9,000	23.6	0.0012	0.0020	7,800	18.9	0.0012	0.0020
	0.5°	50	0.3°	10,000	25.6	0.0020	0.0039	8,000	19.7	0.0008	0.0020	7,500	19.7	0.0008	0.0020	6,200	15.7	0.0008	0.0020
	1°	20	0.3°	22,000	114.2	0.0079	0.0236	18,000	106.3	0.0059	0.0118	18,000	98.4	0.0059	0.0118	15,000	78.7	0.0059	0.0118
	1°	25	0.3°	20,000	102.4	0.0079	0.0157	16,000	78.7	0.0039	0.0079	16,000	74.8	0.0039	0.0079	13,000	59.1	0.0039	0.0079
	1°	30	0.3°	16,000	86.6	0.0079	0.0157	14,000	70.9	0.0039	0.0079	14,000	66.9	0.0039	0.0079	11,000	51.2	0.0039	0.0079
	1°	35	0.3°	16,000	70.9	0.0049	0.0079	12,000	47.2	0.0020	0.0039	12,000	43.3	0.0020	0.0039	9,000	32.3	0.0020	0.0039
	1°	40	0.3°	16,000	70.9	0.0049	0.0079	12,000	47.2	0.0020	0.0039	12,000	43.3	0.0020	0.0039	9,000	32.3	0.0020	0.0039
	1°	50	0.3°	12,000	39.4	0.0030	0.0039	10,000	31.5	0.0012	0.0020	9,000	29.9	0.0012	0.0020	7,800	23.2	0.0012	0.0020
	1°	60	0.3°	12,000	31.5	0.0030	0.0039	10,000	23.6	0.0012	0.0020	9,000	23.6	0.0012	0.0020	7,800	18.9	0.0012	0.0020
	1°	70	0.3°	10,000	25.6	0.0020	0.0039	8,000	19.7	0.0008	0.0020	7,500	19.7	0.0008	0.0020	6,200	15.7	0.0008	0.0020
	1.5°	20	0.3°	22,000	114.2	0.0098	0.0236	18,000	106.3	0.0059	0.0118	18,000	98.4	0.0059	0.0118	15,000	78.7	0.0059	0.0118
	1.5°	25	0.3°	20,000	102.4	0.0079	0.0157	16,000	78.7	0.0039	0.0079	16,000	74.8	0.0039	0.0079	13,000	59.1	0.0039	0.0079
	1.5°	30	0.3°	20,000	102.4	0.0079	0.0157	16,000	78.7	0.0039	0.0079	16,000	74.8	0.0039	0.0079	13,000	59.1	0.0039	0.0079
	1.5°	35	0.3°	16,000	86.6	0.0079	0.0157	14,000	70.9	0.0039	0.0079	14,000	66.9	0.0039	0.0079	11,000	51.2	0.0039	0.0079
	1.5°	40	0.3°	16,000	86.6	0.0079	0.0157	14,000	70.9	0.0039	0.0079	14,000	66.9	0.0039	0.0079	11,000	51.2	0.0039	0.0079
1.5°	50	0.3°	16,000	70.9	0.0049	0.0079	12,000	47.2	0.0020	0.0039	12,000	43.3	0.0020	0.0039	9,000	32.3	0.0020	0.0039	
1.5°	62.5	0.3°	12,000	39.4	0.0030	0.0039	10,000	31.5	0.0012	0.0020	9,000	29.9	0.0012	0.0020	7,800	23.2	0.0012	0.0020	
1.5°	47.5	0.3°	16,000	86.6	0.0098	0.0157	14,000	70.9	0.0039	0.0079	14,000	66.9	0.0039	0.0079	11,000	51.2	0.0039	0.0079	
2.00	1°	20	0.5°	20,000	135.8	0.0157	0.0236	18,000	126.0	0.0079	0.0197	18,000	118.1	0.0079	0.0197	14,000	90.6	0.0079	0.0197
	1°	30	0.5°	18,000	118.1	0.0157	0.0197	16,000	110.2	0.0079	0.0157	16,000	102.4	0.0079	0.0157	12,000	74.8	0.0079	0.0157
	1°	40	0.5°	18,000	118.1	0.0098	0.0236	16,000	110.2	0.0039	0.0118	16,000	102.4	0.0039	0.0118	12,000	74.8	0.0039	0.0118
	1°	50	0.5°	14,000	86.6	0.0098	0.0157	12,000	70.9	0.0039	0.0079	12,000	66.9	0.0039	0.0079	9,000	66.9	0.0039	0.0079
	1°	60	0.5°	16,000	70.9	0.0049	0.0079	12,000	47.2	0.0020	0.0039	12,000	43.3	0.0020	0.0039	9,000	32.3	0.0020	0.0039
	1.5°	44.2	0.5°	18,000	118.1	0.0098	0.0236	16,000	110.2	0.0039	0.0118	16,000	102.4	0.0039	0.0118	12,000	74.8	0.0039	0.0118
2.50	2°	34	0.5°	20,000	135.8	0.0157	0.0236	18,000	126.0	0.0079	0.0197	18,000	118.1	0.0079	0.0197	14,000	90.6	0.0079	0.0197
	1°	30	0.5°	20,000	133.9	0.0157	0.0295	15,000	126.0	0.0079	0.0118	15,000	118.1	0.0079	0.0118	12,000	94.5	0.0079	0.0118
	1°	40	0.5°	16,000	114.2	0.0098	0.0295	14,000	98.4	0.0039	0.0118	14,000	90.6	0.0039	0.0118	11,000	70.9	0.0039	0.0118
	1°	60	0.5°	12,000	70.9	0.0098	0.0197	10,000	47.2	0.0039	0.0079	10,000	43.3	0.0039	0.0079	8,000	34.6	0.0039	0.0079
	1.5°	26.9	0.5°	18,000	149.6	0.0197	0.0492	16,000	137.8	0.0098	0.0197	16,000	129.9	0.0098	0.0197	12,000	94.5	0.0098	0.0197
	1.5°	65.1	0.5°	14,000	86.6	0.0098	0.0295	12,000	63.0	0.0039	0.0118	12,000	59.1	0.0039	0.0118	9,000	43.3	0.0039	0.0118
3.00	2°	50.1	0.5°	16,000	114.2	0.0098	0.0295	14,000	98.4	0.0039	0.0118	14,000	90.6	0.0039	0.0118	11,000	70.9	0.0039	0.0118
	1°	30	0.5°	14,000	157.5	0.0236	0.0492	12,000	126.0	0.0118	0.0197	12,000	118.1	0.0118	0.0197	9,000	88.6	0.0118	0.0197
	1°	40	0.5°	10,000	126.0	0.0236	0.0492	10,000	102.4	0.0118	0.0197	10,000	94.5	0.0118	0.0197	8,000	74.8	0.0118	0.0197
	1°	50	0.5°	9,000	118.1	0.0157	0.0394	9,000	90.6	0.0079	0.0157	9,000	82.7	0.0079	0.0157	7,000	63.0	0.0079	0.0157
	1°	60	0.5°	9,000	110.2	0.0157	0.0295	9,000	78.7	0.0079	0.0118	9,000	74.8	0.0079	0.0118	7,000	55.1	0.0079	0.0118
	1°	70	0.5°	7,000	90.6	0.0157	0.0295	7,000	63.0	0.0079	0.0118	7,000	59.1	0.0079	0.0118	5,500	43.3	0.0079	0.0118
	1°	80	0.5°	6,000	78.7	0.0118	0.0295	6,000	51.2	0.0059	0.0118	6,000	47.2	0.0059	0.0118	5,000	35.4	0.0059	0.0118
	1.5°	49	0.5°	10,000	126.0	0.0236	0.0492	10,000	102.4	0.0118	0.0197	10,000	94.5	0.0118	0.0197	8,000	74.8	0.0118	0.0197
2°	36	0.5°	14,000	157.5	0.0236	0.0492	12,000	126.0	0.0118	0.0197	12,000	118.1	0.0118	0.0197	9,000	88.6	0.0118	0.0197	

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 3722: 2 Flute, Regular Length

Slotting

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC											
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels													
Cutting Speed	52-522 SFM		33-251 SFM		33-186 SFM		33-159 SFM											
Depth of Cut			<table border="1"> <tr><th>Dia</th><th>aa</th></tr> <tr><td>D<1</td><td>0.1D</td></tr> <tr><td>1≤D<3</td><td>0.3D</td></tr> <tr><td>3≤D</td><td>0.5D</td></tr> </table>		Dia	aa	D<1	0.1D	1≤D<3	0.3D	3≤D	0.5D						
	Dia	aa																
D<1	0.1D																	
1≤D<3	0.3D																	
3≤D	0.5D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
0.1	25,000	2.0	25,000	2.2	25,000	1.8	25,000	0.9										
0.2	25,000	2.8	25,000	2.8	25,000	2.3	25,000	1.1										
0.3	25,000	3.3	25,000	3.4	25,000	2.5	25,000	1.7										
0.4	25,000	3.7	25,000	3.7	25,000	2.8	25,000	2.1										
0.5	25,000	3.9	25,000	3.8	25,000	3.5	22,000	2.4										
0.6	25,000	4.5	25,000	4.4	19,500	3.5	17,000	2.4										
0.7	25,000	4.9	24,000	4.7	17,000	3.5	15,000	2.4										
0.8	25,000	5.7	21,500	4.7	15,500	3.5	13,500	2.6										
0.9	25,000	6.4	19,000	4.7	13,500	3.5	12,000	2.6										
1.0	25,000	7.3	17,500	4.7	12,500	3.5	11,000	2.6										
1.1	25,000	7.8	16,000	4.7	11,500	3.5	9,900	2.6										
1.2	25,000	8.3	15,000	4.7	10,500	3.5	9,300	2.6										
1.3	25,000	8.5	14,000	4.7	9,900	3.5	8,700	2.6										
1.4	25,000	9.3	13,000	4.7	9,200	3.5	8,100	2.6										
1.5	25,000	9.8	12,500	4.7	8,900	3.5	7,900	2.6										
1.6	25,000	10.2	12,000	4.7	8,500	3.5	7,500	2.6										
1.7	25,000	10.9	11,000	4.7	7,900	3.5	7,000	2.6										
1.8	25,000	11.2	10,500	5.1	7,500	3.5	6,800	2.7										
1.9	25,000	12.1	10,000	5.1	7,100	3.5	6,300	2.7										
2.0	24,000	12.2	9,700	5.1	7,000	3.5	6,300	2.8										
2.1	23,000	13.0	9,300	5.5	6,600	3.5	5,900	2.8										
2.2	22,500	13.0	9,000	5.5	6,500	3.5	5,700	2.8										
2.3	22,000	13.0	8,800	5.9	6,400	3.5	5,600	2.8										
2.4	20,500	13.8	8,600	5.9	6,300	3.5	5,500	2.8										
2.5	20,000	13.8	8,200	6.3	6,100	3.5	5,300	2.8										
2.6	19,000	15.0	7,900	6.3	5,900	3.9	5,000	2.8										
2.7	18,000	15.0	7,600	6.3	5,700	3.9	4,900	2.8										
2.8	17,500	15.0	7,300	6.7	5,500	3.9	4,700	3.0										
2.9	17,000	15.0	7,100	6.7	5,300	3.9	4,500	3.0										
3.0	16,000	15.7	6,900	6.7	5,300	3.9	4,400	3.0										
3.1	15,500	16.1	6,700	7.1	5,100	3.9	4,300	3.0										
3.2	15,000	16.5	6,500	7.1	5,000	4.3	4,200	3.1										
3.3	14,500	16.5	6,300	7.5	4,800	4.3	4,000	3.1										
3.4	14,000	16.5	6,100	7.5	4,600	4.3	3,900	3.1										
3.5	14,000	16.5	6,000	7.5	4,600	4.7	3,800	3.1										
3.6	13,500	16.9	5,900	7.9	4,500	4.7	3,700	3.3										
3.7	12,500	16.9	5,700	7.9	4,400	4.7	3,600	3.3										
3.8	12,500	17.3	5,600	8.3	4,400	4.7	3,600	3.3										
3.9	12,000	17.3	5,500	8.3	4,200	4.9	3,500	3.3										
4.0	12,000	17.7	5,400	8.3	4,200	4.9	3,500	3.5										
4.1	11,500	18.9	5,300	8.7	4,100	4.9	3,400	3.5										
4.2	11,500	18.9	5,300	8.7	4,100	4.9	3,300	3.5										
4.3	11,000	18.9	5,200	9.1	4,000	4.9	3,300	3.5										
4.4	11,000	19.7	5,100	9.4	3,900	5.1	3,200	3.7										
4.5	10,500	19.7	5,100	9.4	3,900	5.1	3,200	3.7										
4.6	10,500	20.5	5,000	9.8	3,800	5.1	3,200	3.7										
4.7	10,500	20.5	5,000	10.2	3,800	5.1	3,100	3.7										
4.8	10,500	20.9	4,900	10.2	3,700	5.1	3,100	3.7										

1. Use a rigid and precise machine and holder.
2. Use a suitable cutting fluid with high smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.

continued on next page





Slotting

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC									
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels											
Cutting Speed	52-522 SFM		33-251 SFM		33-186 SFM		33-159 SFM									
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<1</td> <td>0.1D</td> </tr> <tr> <td>1≤D<3</td> <td>0.3D</td> </tr> <tr> <td>3≤D</td> <td>0.5D</td> </tr> </tbody> </table>				Dia	aa	D<1	0.1D	1≤D<3	0.3D	3≤D	0.5D				
Dia	aa															
D<1	0.1D															
1≤D<3	0.3D															
3≤D	0.5D															
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min								
4.9	10,000	20.9	4,900	10.6	3,600	5.1	3,100	3.7								
5.0	9,500	21.3	4,800	10.6	3,500	5.1	3,000	3.9								
5.1	9,500	21.3	4,700	10.6	3,500	5.1	3,000	3.9								
5.2	9,300	21.3	4,600	10.6	3,400	5.1	2,900	3.9								
5.3	9,200	21.3	4,600	10.6	3,400	5.1	2,900	3.9								
5.4	9,000	21.3	4,500	10.6	3,300	5.1	2,800	3.9								
5.5	8,800	21.3	4,400	10.6	3,200	5.1	2,700	3.9								
5.6	8,700	21.3	4,300	10.6	3,100	5.1	2,600	3.9								
5.7	8,500	21.3	4,200	10.6	3,100	5.1	2,600	3.9								
5.8	8,400	20.9	4,200	10.6	3,000	5.1	2,600	3.9								
5.9	8,200	20.9	4,100	10.6	2,900	5.1	2,500	3.9								
6.0	7,900	20.9	4,000	10.6	2,900	5.1	2,500	3.9								
6.5	7,500	20.9	3,700	10.6	2,700	5.1	2,300	3.9								
7.0	6,900	20.9	3,400	10.6	2,500	5.1	2,100	3.9								
7.5	6,400	20.9	3,200	10.6	2,300	5.1	2,000	3.9								
8.0	5,900	20.5	3,000	10.2	2,200	4.9	1,900	3.9								
8.5	5,600	20.5	2,800	10.2	2,000	4.9	1,700	3.9								
9.0	5,300	20.1	2,600	10.2	1,900	4.9	1,500	3.9								
9.5	5,100	20.1	2,500	10.2	1,800	4.9	1,400	3.7								
10.0	4,700	19.7	2,400	9.8	1,700	4.9	1,500	3.7								
11.0	4,400	19.7	2,200	9.8	1,600	4.9	1,100	3.7								
12.0	4,000	20.1	2,000	9.8	1,400	4.9	1,200	3.7								
16.0	3,000	15.7	1,500	7.9	1,100	4.5	800	3.1								
18.0	2,700	14.2	1,300	7.1	900	3.9	700	2.8								
20.0	2,400	11.8	1,200	5.9	800	3.5	600	2.4								

1. Use a rigid and precise machine and holder.
2. Use a suitable cutting fluid with high smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.





List 3723: 2 Flute, Long Length

Side Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC	
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels			
Cutting Speed	66-116 SFM		46-76 SFM		39-76 SFM		57-67 SFM	
Depth of Cut	Dia		Dia		Dia		Diagram	
	aa	ar	aa	ar	aa	ar	aa	ar
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.2	25,000	2.8	25,000	1.3	25,000	1.5	-	-
0.3	25,000	3.4	19,730	1.4	18,600	1.3	-	-
0.4	22,070	3.8	14,800	1.6	13,950	1.3	-	-
0.5	17,660	4.2	11,840	1.6	11,160	1.4	-	-
0.6	14,720	4.3	9,860	1.6	9,300	1.5	-	-
0.7	12,610	3.7	8,460	1.6	7,970	1.8	-	-
0.8	11,040	4.3	7,400	1.6	6,970	1.8	-	-
0.9	9,810	3.9	6,580	1.6	6,200	1.8	-	-
1.0	8,830	4.3	5,920	1.8	5,580	1.6	-	-
1.1	8,030	4.7	5,380	1.8	5,070	1.6	-	-
1.2	7,360	4.4	4,930	1.8	4,650	1.6	-	-
1.3	6,790	4.3	4,550	1.8	4,290	1.6	-	-
1.4	6,310	4.3	4,230	1.8	3,990	1.6	-	-
1.5	5,890	4.3	3,950	1.8	3,720	1.6	-	-
1.6	5,520	4.1	3,700	1.8	3,490	1.6	-	-
1.7	5,190	4.0	3,480	1.7	3,280	1.5	-	-
1.8	4,910	4.0	3,290	1.8	3,100	1.6	-	-
1.9	4,650	4.0	3,120	1.7	2,940	1.5	-	-
2.0	4,410	4.0	2,960	1.7	2,790	1.6	-	-
2.1	4,200	4.1	2,820	1.7	2,660	1.5	-	-
2.2	4,010	4.5	2,690	2.0	2,540	1.5	-	-
2.3	3,840	4.4	2,570	1.9	2,430	1.5	-	-
2.4	3,680	4.3	2,470	2.1	2,320	1.5	-	-
2.5	3,530	4.7	2,370	2.1	2,230	1.4	-	-
2.6	3,400	4.8	2,280	2.1	2,150	1.4	-	-
2.7	3,270	5.2	2,190	2.1	2,070	1.6	-	-
2.8	3,150	5.2	2,110	2.1	1,990	1.6	-	-
2.9	3,040	5.1	2,040	2.3	1,920	1.6	-	-
3.0	2,940	5.1	1,970	2.2	1,860	1.7	2,010	3.1
3.1	2,850	5.6	1,910	2.3	1,800	1.8	1,940	3.2
3.2	2,760	5.8	1,850	2.4	1,740	1.7	1,880	3.3
3.3	2,680	5.8	1,790	2.4	1,690	1.9	1,820	3.4
3.4	2,600	5.8	1,740	2.7	1,640	2.0	1,770	3.3
3.5	2,520	5.7	1,690	2.6	1,590	1.9	1,720	3.4
3.6	2,450	5.7	1,640	2.5	1,550	2.0	1,670	3.5
3.7	2,390	5.9	1,600	2.6	1,510	2.1	1,630	3.6
3.8	2,320	6.2	1,560	2.5	1,470	2.0	1,580	3.5
3.9	2,260	6.3	1,520	2.8	1,430	2.1	1,540	3.4
4.0	2,210	6.2	1,480	2.7	1,390	2.2	1,500	3.8
4.1	2,150	6.4	1,440	2.7	1,360	2.2	1,470	3.7
4.2	2,100	6.8	1,410	2.8	1,330	2.1	1,430	3.6
4.3	2,050	6.7	1,380	2.9	1,300	2.2	1,400	3.5
4.4	2,010	7.1	1,350	2.8	1,270	2.2	1,370	3.7
4.5	1,960	7.4	1,320	2.9	1,240	2.1	1,340	3.8
4.6	1,920	7.2	1,290	2.9	1,210	2.1	1,310	3.8
4.7	1,880	7.0	1,260	3.0	1,190	2.0	1,280	3.7



1. Use a rigid and precise machine and holder.
2. Use a suitable cutting fluid with high smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.

continued on next page





Side Milling

Hardness	-		<32 HRC		33-41 HRC		42-50 HRC																									
Work Material	Copper Copper Alloy		Mild Steels Carbon Steels		Hardened Steels, Pre-hardened Steels Stainless Steels																											
Cutting Speed	66-116 SFM		46-76 SFM		39-76 SFM		57-67 SFM																									
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D<1</td> <td>4D</td> <td>0.05D</td> </tr> <tr> <td>1≤D</td> <td>4D</td> <td>0.01D</td> </tr> </tbody> </table>		Dia	a _a	a _r	D<1	4D	0.05D	1≤D	4D	0.01D	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D<0.3</td> <td>4D</td> <td>0.015D</td> </tr> <tr> <td>0.3≤D<1</td> <td>4D</td> <td>0.03D</td> </tr> <tr> <td>1≤D<3</td> <td>4D</td> <td>0.05D</td> </tr> <tr> <td>3≤D</td> <td>4D</td> <td>0.1D</td> </tr> </tbody> </table>				Dia	a _a	a _r	D<0.3	4D	0.015D	0.3≤D<1	4D	0.03D	1≤D<3	4D	0.05D	3≤D	4D	0.1D		
	Dia	a _a	a _r																													
D<1	4D	0.05D																														
1≤D	4D	0.01D																														
Dia	a _a	a _r																														
D<0.3	4D	0.015D																														
0.3≤D<1	4D	0.03D																														
1≤D<3	4D	0.05D																														
3≤D	4D	0.1D																														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																								
4.8	1,840	6.9	1,230	2.9	1,160	2.0	1,250	3.6																								
4.9	1,800	7.4	1,210	3.1	1,140	2.1	1,230	3.5																								
5.0	1,770	7.3	1,180	3.2	1,120	2.0	1,200	3.6																								
5.1	1,730	7.5	1,160	3.1	1,090	2.0	1,180	3.9																								
5.2	1,700	7.4	1,140	3.0	1,070	2.0	1,160	3.8																								
5.3	1,670	7.7	1,120	3.2	1,050	2.1	1,140	3.7																								
5.4	1,640	7.5	1,100	3.2	1,030	2.0	1,110	3.7																								
5.5	1,610	7.4	1,080	3.1	1,010	2.0	1,090	3.9																								
5.6	1,580	7.7	1,060	3.0	1,000	2.0	1,070	3.8																								
5.7	1,550	7.5	1,040	3.0	980	1.9	1,060	3.8																								
5.8	1,520	7.4	1,020	3.2	960	2.1	1,040	3.7																								
5.9	1,500	7.7	1,000	3.1	950	2.0	1,020	4.0																								
6.0	1,470	7.6	990	3.1	930	2.0	1,000	3.9																								
8.0	1,100	7.9	740	3.1	700	2.0	750	3.7																								
10.0	880	7.7	590	3.0	560	2.0	600	3.6																								
12.0	740	7.2	490	2.9	460	2.0	500	3.6																								

1. Use a rigid and precise machine and holder.
2. Use a suitable cutting fluid with high smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.





List 3770: 2 Flute, Corner Radius, Regular Length

Slotting

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC																											
Work Material	Mild Steel Carbon Steels		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels																											
Cutting Speed	275 SFM		220 SFM		180 SFM		150 SFM		100 SFM		65 SFM																											
Depth of Cut	<table border="1"> <tr><th>Dia</th><th>aa</th></tr> <tr><td>D<1</td><td>0.1D</td></tr> <tr><td>1≤D<3</td><td>0.3D</td></tr> <tr><td>3<D</td><td>0.5D</td></tr> </table>				Dia	aa	D<1	0.1D	1≤D<3	0.3D	3<D	0.5D					<table border="1"> <tr><th>Dia</th><th>aa</th></tr> <tr><td>D<1</td><td>0.2D</td></tr> <tr><td>1≤D</td><td>0.5D</td></tr> </table>				Dia	aa	D<1	0.2D	1≤D	0.5D	<table border="1"> <tr><th>Dia</th><th>aa</th></tr> <tr><td>D<1</td><td>0.1D</td></tr> <tr><td>1≤D<3</td><td>0.2D</td></tr> <tr><td>3<D</td><td>0.5D</td></tr> </table>				Dia	aa	D<1	0.1D	1≤D<3	0.2D	3<D	0.5D
	Dia	aa																																				
D<1	0.1D																																					
1≤D<3	0.3D																																					
3<D	0.5D																																					
Dia	aa																																					
D<1	0.2D																																					
1≤D	0.5D																																					
Dia	aa																																					
D<1	0.1D																																					
1≤D<3	0.2D																																					
3<D	0.5D																																					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																										
0.2	25,000	2.7	25,000	2.7	25,000	2.3	25,000	1.1	25,000	1.0	25,000	1.0																										
0.3	25,000	3.5	25,000	3.5	25,000	2.4	25,000	1.7	32,340	1.3	21,020	1.3																										
0.4	25,000	3.8	25,000	3.8	25,000	2.7	25,000	2.2	24,260	1.7	15,770	1.3																										
0.5	25,000	3.8	25,000	4.1	25,000	3.5	25,000	2.7	19,410	1.7	12,610	1.3																										
0.6	25,000	3.4	25,000	5.0	25,000	4.2	24,260	3.1	16,170	1.7	10,510	1.2																										
0.8	25,000	5.0	25,000	6.6	21,830	4.9	18,190	3.5	12,130	1.7	7,880	1.2																										
1.0	25,000	6.5	21,350	7.2	17,470	4.9	14,550	3.4	9,700	1.7	6,310	1.2																										
1.5	17,790	6.5	14,230	6.6	11,640	4.6	9,700	3.2	6,470	2.0	4,200	1.2																										
2.0	13,340	6.4	10,670	6.2	8,730	4.4	7,280	3.2	4,850	2.0	3,150	1.1																										
3.0	8,890	9.5	7,120	6.6	5,820	4.3	4,850	3.3	3,230	2.1	2,100	1.3																										
4.0	6,670	10.4	5,340	8.0	4,370	5.0	3,640	3.6	2,430	2.2	1,580	1.2																										
5.0	5,340	12.5	4,270	9.2	3,490	5.0	2,910	3.7	1,940	2.2	1,260	1.2																										
6.0	4,450	12.2	3,560	9.2	2,910	5.0	2,430	3.8	1,620	2.3	1,050	1.0																										
8.0	3,340	11.7	2,670	9.2	2,180	4.9	1,820	3.7	1,210	2.1	790	1.0																										
10.0	2,670	11.1	2,130	9.0	1,750	4.9	1,460	3.6	970	2.0	630	1.0																										
12.0	2,220	11.1	1,780	9.0	1,460	4.9	1,210	3.6	810	1.8	530	0.8																										
14.0	1,910	11.0	1,520	8.6	1,250	4.3	1,040	3.7	690	1.6	450	0.7																										
16.0	1,670	10.3	1,330	7.8	1,090	3.9	910	3.1	610	1.4	390	0.6																										
18.0	1,480	9.3	1,190	7.0	970	3.4	810	2.9	540	1.2	350	0.6																										
20.0	1,330	8.3	1,070	6.2	870	3.0	730	2.5	490	1.2	320	0.5																										
22.0	1,210	7.6	970	5.6	790	2.7	660	2.3	440	1.0	290	0.4																										
24.0	1,110	7.0	890	5.2	730	2.6	610	2.1	400	1.0	260	0.4																										
25.0	1,070	6.6	850	5.0	700	2.6	580	2.1	390	0.8	250	0.4																										
30.0	890	5.5	710	4.1	580	2.0	490	1.7	320	0.8	210	0.4																										


1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.






List 3771: 4 Flute, Corner Radius, Regular Length

Side Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steel Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	396 SFM		294 SFM		258 SFM		192 SFM		156 SFM		96 SFM	
Depth of Cut	$a_a=1.2D$ $a_r=0.2D$ 						$a_a=1D$ $a_r=0.1D$		$a_a=1D$ $a_r=0.05D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	12,810	40.6	9,510	28.4	8,340	24.9	6,210	18.5	5,050	13.0	3,100	5.5
4	9,680	46.5	7,190	31.6	6,310	27.8	4,690	20.7	3,810	15.3	2,350	7.5
5	7,680	49.2	5,710	34.2	5,010	30.0	3,730	20.9	3,030	17.0	1,860	8.9
6	6,400	54.8	4,750	37.8	4,170	30.7	3,100	22.9	2,520	16.1	1,550	8.6
8	4,800	57.6	3,570	38.5	3,130	32.5	2,330	23.3	1,890	16.7	1,160	9.3
10	3,840	53.8	2,850	36.5	2,500	29.0	1,860	20.9	1,510	15.1	930	8.6
12	3,200	54.2	2,380	36.1	2,090	28.8	1,550	19.9	1,260	14.6	780	8.1

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Light Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC																			
Work Material	Carbon Steels 1045, 1055		Alloy Steels 4140, 4340		Hardened Steels Pre-hardened Steels D2, H13, 17-4PH		Tool Steels, Hardened Steels Pre-hardened Steels, D2, H13		Hardened Steels Heat Resistant Steels																			
Cutting Speed	1,560 SFM		1,380 SFM		960 SFM		600 SFM		130 SFM																			
Depth of Cut	<table border="1"> <thead> <tr><th>Dia</th><th>aa</th><th>ar</th></tr> </thead> <tbody> <tr><td>D<3</td><td>1.5D</td><td>0.01D</td></tr> <tr><td>3≤D</td><td>1.5D</td><td>0.02D</td></tr> </tbody> </table> 						Dia	aa	ar	D<3	1.5D	0.01D	3≤D	1.5D	0.02D	<table border="1"> <thead> <tr><th>Dia</th><th>aa</th><th>ar</th></tr> </thead> <tbody> <tr><td>D<8</td><td>1.0D</td><td>0.01D</td></tr> <tr><td>8≤D</td><td>1.0D</td><td>0.02D</td></tr> </tbody> </table>				Dia	aa	ar	D<8	1.0D	0.01D	8≤D	1.0D	0.02D
Dia	aa	ar																										
D<3	1.5D	0.01D																										
3≤D	1.5D	0.02D																										
Dia	aa	ar																										
D<8	1.0D	0.01D																										
8≤D	1.0D	0.02D																										
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																		
3	25,000.0	230.0	25,000	220.0	25,000	200.0	19,410	155.2	4,200	28.6																		
4	25,000.0	260.0	25,000	240.0	23,470	215.9	14,670	129.1	3,180	25.4																		
5	25,000.0	300.0	25,000	270.0	18,630	193.7	11,640	116.4	2,520	22.2																		
6	25,000.0	322.6	22,320	261.5	15,520	169.9	9,700	102.3	2,100	19.6																		
8	18,920.0	264.9	16,740	214.2	11,640	135.1	7,280	81.5	1,580	15.8																		
10	15,140.0	242.2	13,390	198.2	9,310	126.7	5,820	74.5	1,260	14.6																		
12	12,610.0	213.8	11,160	169.3	7,760	107.0	4,850	62.1	1,050	12.2																		

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 3794: 4 Flute, Long Neck, Stub Length

Slotting

Hardness		-			<32 HRC			33-41 HRC			42-50 HRC		
Work Material		Copper Copper Alloy			Mild Steels Carbon Steels			Hardened Steels Pre-hardened Steels Stainless Steels					
Cutting Speed		173-374 SFM			144-309 SFM			130-309 SFM			101-248 SFM		
Depth of Cut													
D (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)
1.0	4	25,000	62.8	0.0031	21,980	54.8	0.0028	21,300	46.1	0.0028	16,930	29.7	0.0020
	6	25,000	57.5	0.0031	21,980	51.3	0.0028	21,300	43.5	0.0024	16,930	30.0	0.0016
	8	25,000	51.9	0.0020	21,980	45.1	0.0016	21,300	40.0	0.0016	16,930	22.2	0.0012
	10	25,000	47.1	0.0016	21,980	42.8	0.0012	21,300	34.9	0.0011	16,930	20.0	0.0008
	12	25,000	47.1	0.0008	21,980	42.8	0.0008	21,300	34.9	0.0007	16,930	20.0	0.0004
	16	25,000	26.3	0.0004	21,980	23.1	0.0003	21,300	25.2	0.0003	16,930	16.7	0.0002
1.2	6	22,110	60.2	0.0039	18,310	50.2	0.0031	17,750	42.9	0.0028	14,110	29.4	0.0020
	8	22,110	52.6	0.0031	18,310	43.3	0.0028	17,750	38.6	0.0020	14,110	23.8	0.0016
	10	22,110	39.9	0.0024	18,310	33.9	0.0020	17,750	38.6	0.0016	14,110	23.8	0.0012
	12	22,110	46.7	0.0020	18,310	39.9	0.0016	17,750	32.8	0.0012	14,110	22.7	0.0008
	16	22,110	36.0	0.0004	18,310	30.0	0.0003	17,750	23.5	0.0003	14,110	18.3	0.0002
1.4	6	18,960	60.6	0.0055	15,700	49.4	0.0047	15,210	42.6	0.0043	12,090	28.6	0.0035
	8	18,960	50.3	0.0043	15,700	41.2	0.0035	15,210	37.0	0.0031	12,090	22.0	0.0024
	10	18,960	50.3	0.0028	15,700	41.2	0.0024	15,210	37.0	0.0020	12,090	22.0	0.0016
	12	18,960	50.3	0.0024	15,700	41.2	0.0020	15,210	37.0	0.0016	12,090	22.0	0.0012
	14	18,960	45.6	0.0020	15,700	38.7	0.0016	15,210	32.1	0.0014	12,090	19.5	0.0012
	16	18,960	45.6	0.0016	15,700	38.7	0.0012	15,210	32.1	0.0008	12,090	19.5	0.0008
	22	18,960	31.7	0.0004	15,700	26.6	0.0002	15,210	20.6	0.0002	12,090	16.1	0.0002
1.5	6	17,690	66.4	0.0055	14,650	54.5	0.0047	14,200	41.9	0.0043	11,290	28.6	0.0035
	8	17,690	53.2	0.0047	14,650	43.3	0.0039	14,200	39.1	0.0031	11,290	22.2	0.0028
	10	17,690	53.2	0.0039	14,650	43.3	0.0031	14,200	39.1	0.0028	11,290	22.2	0.0020
	12	17,690	53.2	0.0028	14,650	43.3	0.0024	14,200	39.1	0.0020	11,290	22.2	0.0016
	14	17,690	53.2	0.0024	14,650	43.3	0.0020	14,200	39.1	0.0018	11,290	22.2	0.0014
	16	17,690	45.1	0.0024	14,650	38.7	0.0020	14,200	32.2	0.0016	11,290	20.0	0.0012
	18	17,690	45.1	0.0016	14,650	38.7	0.0012	14,200	32.2	0.0008	11,290	20.0	0.0008
	20	17,690	38.4	0.0008	14,650	32.2	0.0008	14,200	29.0	0.0006	11,290	20.0	0.0004
1.6	6	16,590	65.3	0.0067	13,740	54.1	0.0055	13,310	41.6	0.0051	10,580	28.8	0.0039
	8	16,590	56.2	0.0063	13,740	46.9	0.0051	13,310	36.7	0.0047	10,580	22.7	0.0039
	10	16,590	52.6	0.0051	13,740	43.3	0.0043	13,310	36.7	0.0035	10,580	22.7	0.0028
	12	16,590	52.6	0.0031	13,740	43.3	0.0028	13,310	36.7	0.0024	10,580	22.7	0.0020
	14	16,590	52.6	0.0028	13,740	43.3	0.0024	13,310	36.7	0.0020	10,580	22.7	0.0016
	16	16,590	46.3	0.0024	13,740	39.1	0.0020	13,310	30.2	0.0016	10,580	20.8	0.0014
	18	16,590	46.3	0.0020	13,740	39.1	0.0016	13,310	30.2	0.0012	10,580	20.8	0.0012
	20	16,590	46.3	0.0008	13,740	39.1	0.0008	13,310	30.2	0.0008	10,580	20.8	0.0004
25	16,590	34.2	0.0004	13,740	27.9	0.0004	13,310	21.2	0.0004	10,580	15.0	0.0003	
1.8	6	14,740	68.7	0.0094	12,210	57.1	0.0079	11,830	46.6	0.0071	9,410	32.4	0.0055
	8	14,740	77.9	0.0091	12,210	57.1	0.0075	11,830	46.6	0.0067	9,410	32.4	0.0051
	10	14,740	49.5	0.0055	12,210	41.2	0.0047	11,830	34.9	0.0039	9,410	27.8	0.0031
	12	14,740	49.5	0.0047	12,210	41.2	0.0039	11,830	34.9	0.0031	9,410	27.8	0.0028
	14	14,740	49.5	0.0039	12,210	41.2	0.0031	11,830	34.9	0.0024	9,410	27.8	0.0020
	16	14,740	49.5	0.0031	12,210	41.2	0.0028	11,830	34.9	0.0020	9,410	27.8	0.0016
	18	14,740	44.0	0.0024	12,210	37.7	0.0020	11,830	29.1	0.0018	9,410	27.8	0.0014
	20	14,740	44.0	0.0020	12,210	37.7	0.0016	11,830	29.1	0.0016	9,410	27.8	0.0012
25	14,740	34.5	0.0004	12,210	28.8	0.0004	11,830	24.6	0.0003	9,410	18.5	0.0003	

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.
4. When length of the tool extension from the machine is long, reduce the speed and feed.

continued on next page





Slotting

Hardness		-			<32 HRC			33-41 HRC			42-50 HRC		
Work Material		Copper Copper Alloy			Mild Steels Carbon Steels			Hardened Steels Pre-hardened Steels Stainless Steels					
Cutting Speed		173-374 SFM			144-309 SFM			130-309 SFM			101-248 SFM		
Depth of Cut													
D (mm)	L2 (mm)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)	Speed (RPM)	Feed (in/min)	aa (in)
2.0	6	13,270	68.2	0.0134	10,990	54.8	0.0110	10,650	44.9	0.0102	8,470	31.8	0.0083
	8	13,270	68.2	0.0122	10,990	54.8	0.0102	10,650	44.9	0.0087	8,470	31.8	0.0071
	10	13,270	54.3	0.0114	10,990	43.3	0.0094	10,650	36.7	0.0079	8,470	27.8	0.0063
	12	13,270	50.6	0.0063	10,990	39.9	0.0051	10,650	36.7	0.0043	8,470	27.8	0.0035
	14	13,270	50.6	0.0051	10,990	39.9	0.0043	10,650	36.7	0.0035	8,470	27.8	0.0028
	16	13,270	50.6	0.0039	10,990	39.9	0.0031	10,650	36.7	0.0028	8,470	27.8	0.0024
	18	13,270	50.6	0.0031	10,990	39.9	0.0028	10,650	36.7	0.0024	8,470	27.8	0.0020
	20	13,270	46.2	0.0024	10,990	37.0	0.0020	10,650	31.4	0.0020	8,470	28.6	0.0016
2.5	25	13,270	46.2	0.0016	10,990	37.0	0.0012	10,650	31.4	0.0008	8,470	28.6	0.0008
	30	13,270	46.2	0.0008	10,990	37.0	0.0008	10,650	31.4	0.0004	8,470	28.6	0.0004
	8	10,610	67.7	0.0165	8,790	54.8	0.0138	8,520	45.7	0.0130	6,770	31.1	0.0102
	12	10,610	67.7	0.0110	8,790	54.8	0.0091	8,520	45.7	0.0075	6,770	31.1	0.0059
	16	10,610	52.2	0.0055	8,790	41.5	0.0047	8,520	39.1	0.0039	6,770	28.6	0.0031
3.0	20	10,610	52.2	0.0043	8,790	41.5	0.0035	8,520	39.1	0.0031	6,770	28.6	0.0024
	25	10,610	50.1	0.0039	8,790	40.7	0.0031	8,520	31.4	0.0024	6,770	26.7	0.0020
	8	8,850	68.2	0.0150	7,330	54.8	0.0126	7,100	41.9	0.0118	5,640	29.2	0.0094
	12	8,850	62.4	0.0126	7,330	50.5	0.0106	7,100	41.9	0.0091	5,640	29.2	0.0071
	16	8,850	43.5	0.0094	7,330	34.6	0.0079	7,100	32.6	0.0067	5,640	27.8	0.0051
	20	8,850	43.5	0.0063	7,330	34.6	0.0051	7,100	32.6	0.0043	5,640	27.8	0.0031
	25	8,850	43.5	0.0051	7,330	34.6	0.0043	7,100	32.6	0.0035	5,640	27.8	0.0028
30	8,850	41.7	0.0043	7,330	33.9	0.0035	7,100	29.9	0.0031	5,640	26.7	0.0024	



1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.
4. When length of the tool extension from the machine is long, reduce the speed and feed.







List 4445: 4 Flute, Corner Radius, High Helix, Regular Length

Side Milling

Hardness	<25 HRC		25-35 HRC		38-45 HRC		40-50 HRC		45-55 HRC		20-45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels 304 Stainless		Hardened Steels Pre-hardened Steels		Titanium Alloy Ti-6Al-4V		Heat Resistant Alloys Inconel	
Cutting Speed	220-328 SFM		130-220 SFM		115-210 SFM		98-150 SFM		65-195 SFM		65-130 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 						$a_a=1.5D$ $a_r=0.05D$ 					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	8,375	26.3	5,350	14.5	4,950	11.0	3,800	12.1	3,970	11.1	2,965	5.3
3/16	5,580	37.9	3,565	18.0	3,300	12.1	2,525	13.5	2,650	12.5	1,975	5.8
1/4	4,200	31.0	2,675	16.3	2,475	11.7	1,900	11.2	1,990	11.7	1,480	5.8
5/16	3,350	36.6	2,140	22.9	2,000	15.7	1,500	11.8	1,600	12.6	1,185	7.7
3/8	2,800	39.4	1,750	23.6	1,650	22.3	1,260	16.2	1,320	12.9	990	8.1
1/2	2,100	29.3	1,335	18.7	1,240	16.9	950	12.0	1,000	12.5	740	5.8

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

Slotting

Hardness	<25 HRC		25-35 HRC		38-45 HRC		40-50 HRC		45-55 HRC		20-45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels 304 Stainless		Hardened Steels Pre-hardened Steels		Titanium Alloy Ti-6Al-4V		Heat Resistant Alloys Inconel	
Cutting Speed	130-260 SFM		65-165 SFM		65-165 SFM		50-115 SFM		65-115 SFM		50-80 SFM	
Depth of Cut	$a_a=0.5D$ 						$a_a=0.2D$ 					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	5,960	11.7	3,970	7.8	3,970	6.7	2,500	4.1	2,750	4.3	2,000	2.9
3/16	3,970	12.3	2,650	8.8	2,650	7.1	1,650	4.7	1,800	4.7	1,300	3.1
1/4	2,980	10.9	1,990	7.8	1,990	6.1	1,250	4.9	1,375	5.0	1,000	2.6
5/16	2,400	13.8	1,600	9.8	1,600	6.7	1,000	5.9	1,100	6.7	800	3.1
3/8	2,000	14.5	1,320	10.3	1,320	7.0	835	6.5	900	6.8	640	3.1
1/2	1,500	11.8	1,000	6.7	1,000	7.0	625	5.9	690	5.6	500	2.8


1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.






List 4410: Ball End, Stub Length, 2 Flute

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels					
Cutting Speed	825 SFM		660 SFM		490 SFM		410 SFM		330 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.1D$ $a_a \text{ Max} = \text{less than } 0.024''$				$a_a=0.03D$ $a_r=0.1D$ $a_a \text{ Max} = \text{less than } 0.020''$		$a_a=0.02D$ $a_r=0.05D$ $a_a \text{ Max} = \text{less than } 0.012''$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/32	25,000	25.0	25,000	25.0	25,000	25.0	25,000	25.0	25,000	25.0
1/16	25,000	40.0	25,000	40.0	25,000	40.0	25,000	40.0	20,170	32.3
3/32	25,000	80.0	25,000	80.0	19,966	63.9	16,706	53.5	13,446	43.0
1/8	25,000	100.0	20,170	80.7	14,974	59.9	12,530	50.1	10,085	40.3
3/16	16,808	90.8	13,446	72.6	9,983	53.9	8,353	45.1	6,723	36.3
1/4	12,606	108.4	10,085	86.7	7,487	64.4	6,265	53.9	5,042	43.4
5/16	10,085	100.8	8,068	80.7	5,990	59.9	5,012	50.1	4,034	40.3
3/8	8,404	92.4	6,723	74.0	4,991	54.9	4,177	45.9	3,362	37.0
1/2	6,303	88.2	5,042	70.6	3,744	52.4	3,132	43.9	2,521	35.3

High Speed Light Milling


Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels					
Cutting Speed	1275 SFM		985 SFM		820 SFM		650 SFM		490 SFM	
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$ $a_a \text{ Max} = \text{less than } 0.012''$				$a_a=0.02D$ $a_r=0.05D$ $a_a \text{ Max} = \text{less than } 0.008''$		$a_a=0.01D$ $a_r=0.05D$ $a_a \text{ Max} = \text{less than } 0.004''$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/32	25,000	25.0	25,000	25.0	25,000	25.0	25,000	25.0	25,000	25.0
1/16	25,000	40.0	25,000	40.0	25,000	40.0	25,000	40.0	25,000	40.0
3/32	25,000	80.0	25,000	80.0	25,000	80.0	25,000	80.0	19,966	63.9
1/8	25,000	100.0	25,000	100.0	25,000	100.0	19,864	79.5	14,974	59.9
3/16	25,000	135.0	20,068	108.4	16,706	90.2	13,243	71.5	9,983	53.9
1/4	19,482	167.5	15,051	129.4	12,530	107.8	9,932	85.4	7,487	64.4
5/16	15,586	155.9	12,041	120.4	10,024	100.2	7,946	79.5	5,990	59.9
3/8	12,988	142.9	10,034	110.4	8,353	91.9	6,621	72.8	4,991	54.9
1/2	9,741	136.4	7,525	105.4	6,265	87.7	4,966	69.5	3,744	52.4






List 4510: Ball End, Stub Length, 2 Flute

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels					
Cutting Speed	825 SFM		660 SFM		490 SFM		410 SFM		330 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.1D$ a_a Max = less than 0.024"				$a_a=0.02D$ $a_r=0.1D$ a_a Max = less than 0.020"		$a_a=0.02D$ $a_r=0.05D$ a_a Max = less than 0.012"			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1.0	25,000	25.0	25,000	25.0	25,000	25.0	39,781	39.8	25,000	25.0
1.5	25,000	40.0	25,000	40.0	25,000	40.0	26,500	42.4	21,000	33.6
2.0	25,000	50.0	25,000	50.0	24,000	48.0	20,000	40.0	16,000	32.0
3.0	25,000	95.0	21,350	81.1	16,000	60.8	13,500	51.3	10,500	39.9
4.0	20,010	92.1	16,010	73.6	12,000	55.2	9,950	45.8	7,950	36.6
5.0	16,010	92.9	12,810	74.3	9,550	55.4	7,950	46.1	6,350	36.8
6.0	13,340	114.7	10,670	91.8	7,950	68.4	6,650	57.2	5,300	45.6
8.0	10,010	100.1	8,000	80.0	5,950	59.5	4,950	49.5	4,000	40.0
10.0	8,000	89.7	6,400	71.7	4,800	53.8	4,000	44.8	3,200	35.8
12.0	6,670	93.4	5,340	74.7	4,000	56.0	3,300	46.2	2,650	37.1
16.0	5,000	75.0	4,000	60.0	3,000	45.0	2,500	37.5	2,000	30.0
20.0	4,000	60.0	3,200	48.0	2,400	36.0	2,000	30.0	1,600	24.0
25.0	3,200	48.0	2,560	38.4	1,900	28.5	1,600	24.0	1,280	19.2

High Speed Light Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels					
Cutting Speed	1275 SFM		985 SFM		820 SFM		650 SFM		490 SFM	
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$ a_a Max = less than 0.012"				$a_a=0.02D$ $a_r=0.05D$ a_a Max = less than 0.008"		$a_a=0.01D$ $a_r=0.05D$ a_a Max = less than 0.004"			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1.0	25,000	25.0	25,000	25.0	25,000	25.0	25,000	25.0	25,000	25.0
1.5	25,000	40.0	25,000	40.0	25,000	40.0	25,000	40.0	25,000	40.0
2.0	25,000	50.0	25,000	50.0	25,000	50.0	25,000	50.0	24,000	48.0
3.0	25,000	95.0	25,000	95.0	25,000	95.0	21,000	79.8	16,000	60.8
4.0	25,000	115.0	24,000	110.4	20,000	92.0	16,000	73.6	12,000	55.2
5.0	25,000	145.0	19,000	110.2	16,000	92.8	12,600	73.0	9,550	55.4
6.0	20,500	176.3	16,000	137.6	13,500	116.1	10,500	90.3	7,950	68.4
8.0	15,500	155.0	12,000	120.0	9,950	99.5	7,950	79.5	5,950	59.5
10.0	12,500	140.0	9,550	107.0	7,950	89.0	6,350	71.1	4,800	53.8
12.0	10,500	147.0	7,950	111.3	6,650	93.1	5,300	74.2	4,000	56.0
16.0	7,750	116.3	5,950	89.3	4,950	74.3	4,000	60.0	3,000	45.0
20.0	6,200	93.0	4,800	72.0	4,000	60.0	3,200	48.0	2,400	36.0
25.0	4,950	74.3	3,800	57.0	3,200	48.0	2,550	38.3	1,900	28.5





List 4440: Regular Length, Multiple Flute

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels							
Depth of Cut	Dia		aa		ar	aa=1.5D ar=0.05D arMax=less than 0.040"		aa=1.5D ar=0.03D arMax=less than 0.020"		aa=1D ar=0.02D arMax=less than 0.020"		
	D≤1.5	1.5D	0.02D									
	1.5<D≤2.5	1.5D	0.05D									
2.5<D	1.5D	0.1D										
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/16	25,000	62.5	25,000	61.0	20,170	50.4	15,120	26.0	13,808	21.0	10,085	13.0
3/32	18,912	71.0	16,991	63.0	13,446	50.4	10,080	26.0	9,205	21.0	6,723	13.0
1/8	14,185	71.0	12,744	63.0	10,085	50.4	7,560	26.0	6,904	21.0	5,042	13.0
3/16	9,456	71.0	8,496	63.0	6,723	50.4	5,041	26.0	4,602	21.0	3,362	13.0
1/4	7,092	104.0	6,372	95.0	5,042	75.6	3,780	40.0	3,452	31.0	2,521	20.0
5/16	5,673	104.0	5,100	95.0	4,034	75.6	3,024	40.0	2,761	31.0	2,017	20.0
3/8	4,728	104.0	4,248	95.0	3,362	75.6	2,520	40.0	2,301	31.0	1,681	20.0
1/2	3,546	104.0	3,186	95.0	2,521	75.6	1,890	40.0	1,726	31.0	1,261	20.0
5/8	2,839	104.0	2,550	95.0	2,017	75.6	1,512	40.0	1,382	31.0	1,008	20.0
3/4	2,375	104.0	2,125	95.0	1,681	75.6	1,260	40.0	1,152	31.0	840	20.0

High Speed Light Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels							
Depth of Cut	aa=1D ar=0.05D arMax=less than 0.020"		aa	ar	aa=1D ar=0.03D arMax=less than 0.020"		aa=1D ar=0.02D arMax=less than 0.008"		aa=1D ar=0.01D arMax=less than 0.008"			
	Speed RPM	Feed in/min			Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/16	25,000	61.3	25,000	61.3	25,000	61.4	25,000	50.5	25,000	43.8	20,160	32.0
3/32	25,000	91.9	25,000	91.9	25,000	91.9	21,429	65.0	20,160	53.0	13,440	32.0
1/8	25,000	122.5	25,000	122.5	25,000	122.5	16,072	65.0	15,120	53.0	10,080	32.0
3/16	20,048	147.4	19,200	141.1	16,706	122.8	10,714	65.0	10,080	53.0	6,720	32.0
1/4	15,036	221.0	14,400	211.7	12,530	184.2	8,036	96.5	7,560	79.0	5,040	47.0
5/16	12,028	221.0	11,520	211.7	10,024	184.2	6,428	96.5	6,048	79.0	4,032	47.0
3/8	10,024	221.0	9,600	211.7	8,353	184.2	5,357	96.5	5,040	79.0	3,360	47.0
1/2	7,518	221.0	7,200	211.7	6,265	184.2	4,018	96.5	3,780	79.0	2,520	47.0
5/8	6,012	221.0	5,764	211.7	5,012	184.2	3,216	96.5	3,025	79.0	2,017	47.0
3/4	5,010	221.0	4,804	211.7	4,177	184.2	2,680	96.5	2,521	79.0	1,681	47.0





List 4540: Regular Length, Multiple Flute

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels							
Depth of Cut	Dia	aa	ar		aa=1.5D ar=0.05D arMax=less than 0.040"	aa=1.5D ar=0.03D arMax=less than 0.020"	aa=1D ar=0.02D arMax=less than 0.020"					
	D≤1.5	1.5D	0.02D	0.05D								
	1.5<D≤2.5	1.5D	0.05D	0.1D								
	2.5<D	1.5D	0.1D	0.1D								
	arMax=less than 0.040"											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	39.3	25,000	39.0	25,000	38.4	24,050	26.4	21,900	21.1	16,000	13.2
2	22,500	70.9	20,200	63.0	16,000	49.2	12,000	26.4	11,000	21.1	7,950	13.2
3	15,000	70.9	13,500	63.0	10,500	49.2	7,950	26.4	7,450	21.1	5,300	13.2
4	11,000	70.9	9,950	63.0	7,950	49.2	5,950	26.4	5,550	21.1	4,000	13.2
5	8,900	70.9	7,950	63.0	6,350	49.2	4,800	26.4	4,450	21.1	3,200	13.2
6	7,450	104.3	6,650	94.5	5,300	74.8	4,000	39.4	3,700	31.5	2,650	19.9
8	5,550	104.3	4,950	94.5	4,000	74.8	3,000	39.4	2,800	31.5	2,000	19.9
10	4,450	104.3	4,000	94.5	3,200	74.8	2,400	39.4	2,250	31.5	1,600	19.9
12	3,700	104.3	3,300	94.5	2,650	74.8	2,000	39.4	1,850	31.5	1,350	19.9
16	2,700	94.5	2,400	82.7	1,950	66.9	1,450	36.6	1,350	31.5	995	19.9
20	2,200	84.6	1,950	74.8	1,550	59.1	1,150	33.3	1,100	27.4	800	19.9
25	1,700	96.5	1,550	82.7	1,250	59.1	955	36.0	890	29.5	635	19.9

1. Use a rigid and precise machine and holder.
2. We suggest using an air blow. If using cutting fluids, use a high quality fluid with smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.

High Speed Light Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels							
Depth of Cut	aa=1D ar=0.05D arMax=less than 0.020"		aa=1D ar=0.03D arMax=less than 0.020"		aa=1D ar=0.02D arMax=less than 0.008"		aa=1D ar=0.01D arMax=less than 0.008"					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	31.5	25,000	39.4	25,000	39.4	25,000	31.5	25,000	27.9	25,000	21.9
2	25,000	67.4	25,000	78.7	25,000	78.8	25,000	63.7	24,000	53.1	16,000	31.5
3	25,000	106.0	25,000	116.9	25,000	118.9	17,000	65.0	16,000	53.1	10,500	31.5
4	24,000	153.5	24,000	149.6	20,000	126.0	12,500	65.0	12,000	53.1	7,950	31.5
5	19,000	161.4	19,000	149.6	16,000	126.0	10,000	65.0	9,550	53.1	6,350	31.5
6	16,000	226.4	16,000	226.4	13,500	189.0	8,500	96.5	7,950	78.7	5,300	47.2
8	12,000	226.4	12,000	226.4	9,950	189.0	6,350	96.5	5,950	78.7	4,000	47.2
10	9,550	226.4	9,550	226.4	7,950	189.0	5,100	96.5	4,800	78.7	3,200	47.2
12	7,950	226.4	7,950	226.4	6,650	189.0	4,250	96.5	4,000	78.7	2,650	47.2
16	5,950	202.76	5,950	202.8	4,950	167.3	3,150	88.6	2,950	72.8	1,950	47.2
20	4,750	181.10	4,750	181.1	3,950	143.7	2,500	80.7	2,350	61.0	1,550	43.3
25	3,800	210.63	3,800	198.8	3,150	149.6	2,000	78.7	1,900	49.2	1,250	41.3


1. Use a rigid and precise machine and holder.
2. We suggest using an air blow. If using cutting fluids, use a high quality fluid with smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.






List 4471: Stub Length, 4 Flute, Corner Radius

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC											
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels															
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> <tr> <td>D≤1/16</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>D>1/16</td> <td>1.5D</td> <td>0.10D</td> </tr> </table>			Dia	aa	ar	D≤1/16	1.5D	0.05D	D>1/16	1.5D	0.10D			$aa=1.5D$ $ar=0.05D$ ar Max=less than 0.04"		$aa=1.5D$ $ar=0.03D$ ar Max=less than 0.02"		$aa=1.0D$ $ar=0.02D$ ar Max=less than 0.02"	
	Dia	aa	ar																	
D≤1/16	1.5D	0.05D																		
D>1/16	1.5D	0.10D																		
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
1/16	25,000	70.0	25,000	70.0	20,170	56.5	15,158	36.4	14,180	22.7										
3/32	18,743	75.0	16,828	67.3	13,446	53.8	10,105	30.3	9,453	22.7										
1/8	14,058	73.1	12,621	65.6	10,085	52.4	7,579	27.3	7,090	25.5										
3/16	9,372	60.0	8,414	53.9	6,723	43.0	5,053	22.2	4,727	20.8										
1/4	7,029	101.2	6,311	90.9	5,042	72.6	3,789	37.9	3,545	31.2										
3/8	4,686	105.0	4,207	94.2	3,362	75.3	2,526	39.4	2,363	31.2										
1/2	3,514	99.8	3,155	89.6	2,521	71.6	1,895	38.7	1,772	31.2										

1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.

High Speed Light Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels						
Depth of Cut	$aa=1.0D$ $ar=0.05D$ ar Max = less than 0.02"					$aa=1.0D$ $ar=0.03D$ ar Max = less than 0.02"		$aa=1.0D$ $ar=0.02D$ ar Max = less than 0.008"		$aa=1.0D$ $ar=0.01D$ ar Max = less than 0.008"	
	Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/16	25,000	70.0	25,000	70.0	25,000	70.0	25,000	50.0	25,000	50.0	
3/32	25,000	100.0	25,000	100.0	25,000	100.0	21,433	68.6	20,170	56.5	
1/8	25,000	130.0	25,000	130.0	25,000	130.0	16,075	70.7	15,127	54.5	
3/16	20,068	128.4	20,068	128.4	16,706	106.9	10,716	72.9	10,085	52.4	
1/4	15,051	216.7	15,051	216.7	12,530	180.4	8,037	93.2	7,564	78.7	
3/8	10,034	224.8	10,034	224.8	8,353	187.1	5,358	96.4	5,042	78.7	
1/2	7,525	213.7	7,525	213.7	6,265	177.9	4,019	93.2	3,782	75.6	


1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.






List 4571: Stub Length, 4 Flute, Corner Radius

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC										
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels														
Depth of Cut	<table border="1"> <tr><th>Dia</th><th>aa</th><th>ar</th></tr> <tr><td>D=2</td><td>1.5D</td><td>0.05D</td></tr> <tr><td>2<D</td><td>1.5D</td><td>0.10D</td></tr> </table>		Dia	aa	ar	D=2	1.5D	0.05D	2<D	1.5D	0.10D			$a_a=1.5D$ $a_r=0.05D$ $arMax=less\ than\ 0.04"$		$a_a=1.5D$ $a_r=0.03D$ $arMax=less\ than\ 0.02"$		$a_a=1.0D$ $a_r=0.02D$ $arMax=less\ than\ 0.02"$	
	Dia	aa	ar																
D=2	1.5D	0.05D																	
2<D	1.5D	0.10D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
2	22,316	71.4	20,036	64.1	16,010	51.2	12,031	24.1	11,255	22.5									
3	14,878	71.4	13,358	64.1	10,673	51.2	8,021	25.7	7,503	21.0									
4	11,158	71.4	10,018	64.1	8,005	51.2	6,016	26.5	5,628	20.3									
5	8,927	85.7	8,015	76.9	6,404	61.5	4,813	25.0	4,502	21.6									
6	7,439	104.1	6,679	93.5	5,337	74.7	4,010	38.5	3,752	31.5									
8	5,579	104.9	5,009	94.2	4,002	75.2	3,008	39.7	2,814	31.5									
10	4,463	103.5	4,007	93.0	3,202	74.3	2,406	39.5	2,251	31.5									
12	3,719	104.1	3,339	93.5	2,668	74.7	2,005	39.3	1,876	32.3									

- The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
- Do not use flammable fluids because tools with considerable wear can cause sparks.
- We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.

High Speed Light Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels					
Depth of Cut	$a_a=1.0D$ $a_r=0.05D$ $arMax=less\ than\ 0.02"$				$a_a=1.0D$ $a_r=0.03D$ $arMax=less\ than\ 0.02"$		$a_a=1.0D$ $a_r=0.02D$ $arMax=less\ than\ 0.008"$		$a_a=1.0D$ $a_r=0.01D$ $arMax=less\ than\ 0.008"$	
	Mill Dia.	Speed RPM			Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM
2	25,000	80.0	25,000	80.0	25,000	80.0	25,000	60.0	24,014	48.0
3	25,000	120.0	25,000	120.0	25,000	120.0	17,012	68.0	16,010	51.2
4	23,893	152.9	23,893	152.9	19,891	127.3	12,759	66.3	12,007	52.8
5	19,115	183.5	19,115	183.5	15,913	152.8	10,207	65.3	9,606	53.8
6	15,929	223.0	15,929	223.0	13,260	185.6	8,506	95.3	8,005	80.0
8	11,947	224.6	11,947	224.6	9,945	187.0	6,380	97.0	6,004	79.2
10	9,557	221.7	9,557	221.7	7,956	184.6	5,104	95.9	4,803	76.8
12	7,964	223.0	7,964	223.0	6,630	185.6	4,253	97.0	4,002	78.4

- The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
- Do not use flammable fluids because tools with considerable wear can cause sparks.
- We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.





List 4470: Stub Length, Corner Radius, High Feed

Standard Milling

Hardness	<40 HRC		40 to 45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels						
Depth of Cut	CR	a _a	a _r		CR	a _a	a _r		CR	a _a	a _r
	CR≤1/16 1/16<CR	0.2CR 0.02"	0.5D 0.5D		CR≤1/16 1/16<CR	0.2CR 0.016"	0.5D 0.5D		CR≤1/16 1/16<CR	0.1CR 0.008"	0.5D 0.5D
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
1/8	12,224	252	8,404	158	6,112	103	3,667	41	3,056	34	
3/16	8,149	252	5,603	158	4,075	103	2,445	41	2,037	34	
1/4	6,112	336	4,202	210	3,056	138	1,834	55	1,528	46	
5/16	4,890	336	3,362	210	2,445	138	1,467	55	1,222	46	
3/8	4,075	336	2,801	210	2,037	138	1,222	55	1,019	46	
1/2	3,056	336	2,101	210	1,528	138	917	55	764	46	

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Feed Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels						
Depth of Cut	a _a =0.1CR a _r =0.3D			CR		a _a	a _r	CR		a _a	a _r
	CR=Corner Radius			CR≤1/16 1/16<CR	0.1CR 0.008"	0.3D 0.3D	CR≤1/16 1/16<CR	0.05CR 0.004"	0.3D 0.3D		
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
1/8	23,990	495	18,030	338	16,808	284	11,918	134	9,168	103	
3/16	15,993	495	12,020	338	11,205	284	7,946	134	6,112	103	
1/4	11,995	660	9,015	451	8,404	378	5,959	179	4,584	138	
5/16	9,596	660	7,212	451	6,723	378	4,767	179	3,667	138	
3/8	7,997	660	6,010	451	5,603	378	3,973	179	3,056	138	
1/2	5,997	660	4,508	451	4,202	378	2,980	179	2,292	138	

1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.





List 4570: Stub Length, Corner Radius, High Feed

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC																													
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels																																	
Depth of Cut	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.2CR</td><td>0.5D</td></tr> <tr><td>2<CR</td><td>0.02"</td><td>0.5D</td></tr> </table>		CR	aa	ar	CR≤2	0.2CR	0.5D	2<CR	0.02"	0.5D		<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.2CR</td><td>0.5D</td></tr> <tr><td>2<CR</td><td>0.016"</td><td>0.5D</td></tr> </table>		CR	aa	ar	CR≤2	0.2CR	0.5D	2<CR	0.016"	0.5D	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.1CR</td><td>0.5D</td></tr> <tr><td>2<CR</td><td>0.008"</td><td>0.5D</td></tr> </table>						CR	aa	ar	CR≤2	0.1CR	0.5D	2<CR	0.008"	0.5D
	CR	aa	ar																																			
CR≤2	0.2CR	0.5D																																				
2<CR	0.02"	0.5D																																				
CR	aa	ar																																				
CR≤2	0.2CR	0.5D																																				
2<CR	0.016"	0.5D																																				
CR	aa	ar																																				
CR≤2	0.1CR	0.5D																																				
2<CR	0.008"	0.5D																																				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																												
2	19,406	252	13,341	158	9,703	103	5,822	41	4,851	34																												
3	12,937	336	8,894	210	6,469	138	3,881	55	3,234	46																												
4	9,703	336	6,671	210	4,851	138	2,911	55	2,426	46																												
5	7,762	336	5,337	210	3,881	138	2,329	55	1,941	46																												
6	6,469	336	4,447	210	3,234	138	1,941	55	1,617	46																												
7	5,544	336	3,812	210	2,772	138	1,663	55	1,386	46																												
8	4,851	336	3,335	210	2,426	138	1,455	55	1,213	46																												
9	4,312	336	2,965	210	2,156	138	1,294	55	1,078	46																												
10	3,881	336	2,668	210	1,941	138	1,164	55	970	46																												
11	3,528	336	2,426	210	1,764	138	1,058	55	882	46																												
12	3,234	336	2,224	210	1,617	138	970	55	809	46																												
13	2,985	336	2,053	210	1,493	138	896	55	746	46																												

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Feed Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC																								
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels																												
Depth of Cut	<table border="1"> <tr><th>aa</th><th>ar</th></tr> <tr><td>aa=0.1CR</td><td>ar=0.3D</td></tr> </table>		aa	ar	aa=0.1CR	ar=0.3D		<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.1CR</td><td>0.3D</td></tr> <tr><td>2<CR</td><td>0.008"</td><td>0.3D</td></tr> </table>		CR	aa	ar	CR≤2	0.1CR	0.3D	2<CR	0.008"	0.3D	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.05CR</td><td>0.3D</td></tr> <tr><td>2<CR</td><td>0.004"</td><td>0.3D</td></tr> </table>						CR	aa	ar	CR≤2	0.05CR	0.3D	2<CR	0.004"	0.3D
	aa	ar																															
aa=0.1CR	ar=0.3D																																
CR	aa	ar																															
CR≤2	0.1CR	0.3D																															
2<CR	0.008"	0.3D																															
CR	aa	ar																															
CR≤2	0.05CR	0.3D																															
2<CR	0.004"	0.3D																															
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																							
2	25,000	325	25,000	295	25,000	266	18,920	134	14,554	103																							
3	25,000	650	19,082	451	17,788	378	12,614	179	9,703	138																							
4	19,042	660	14,312	451	13,341	378	9,460	179	7,277	138																							
5	15,233	660	11,449	451	10,673	378	7,568	179	5,822	138																							
6	12,694	660	9,541	451	8,894	378	6,307	179	4,851	138																							
7	10,881	660	8,178	451	7,624	378	5,406	179	4,158	138																							
8	9,521	660	7,156	451	6,671	378	4,730	179	3,639	138																							
9	8,463	660	6,361	451	5,929	378	4,205	179	3,234	138																							
10	7,617	660	5,725	451	5,337	378	3,784	179	2,911	138																							
11	6,924	660	5,204	451	4,851	378	3,440	179	2,646	138																							
12	6,347	660	4,771	451	4,447	378	3,153	179	2,426	138																							
13	5,859	660	4,404	451	4,105	378	2,911	179	2,239	138																							

1. The indicated speeds and feeds are for high speed light milling for use with high speed/high precision machining centers.
2. Do not use flammable fluids because tools with considerable wear can cause sparks.
3. We recommend using air blow. When using cutting fluids, use a high quality fluid with high smoke retardant.





List 4472: Regular Length, Corner Radius, High Feed

Standard Milling

Hardness	-		<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC																												
Work Material	Cast Iron		Mild Steels Carbon Steels		Tool Steels Stainless Steel Hardened Steels Prehardened Steels		Hardened Steels																																
Depth of Cut	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤1/16</td><td>0.2CR</td><td>0.5D</td></tr> <tr><td>1/16<CR</td><td>0.02"</td><td>0.5D</td></tr> </table>			CR	aa	ar	CR≤1/16	0.2CR	0.5D	1/16<CR	0.02"	0.5D				<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤1/16</td><td>0.1CR</td><td>0.5D</td></tr> <tr><td>1/16<CR</td><td>0.008"</td><td>0.5D</td></tr> </table>			CR	aa	ar	CR≤1/16	0.1CR	0.5D	1/16<CR	0.008"	0.5D	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤1/16</td><td>0.2CR</td><td>0.5D</td></tr> <tr><td>1/16<CR</td><td>0.016"</td><td>0.5D</td></tr> </table>			CR	aa	ar	CR≤1/16	0.2CR	0.5D	1/16<CR	0.016"	0.5D
	CR	aa	ar																																				
CR≤1/16	0.2CR	0.5D																																					
1/16<CR	0.02"	0.5D																																					
CR	aa	ar																																					
CR≤1/16	0.1CR	0.5D																																					
1/16<CR	0.008"	0.5D																																					
CR	aa	ar																																					
CR≤1/16	0.2CR	0.5D																																					
1/16<CR	0.016"	0.5D																																					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																											
1/8	10,080	255	7,950	175	7,030	150	5,040	100	3,060	40	2,690	28																											
3/16	6,720	265	5,300	190	4,690	165	3,360	110	2,040	42	1,790	30																											
1/4	5,040	275	3,970	200	3,510	175	2,520	115	1,530	45	1,340	32																											
5/16	4,030	275	3,180	200	2,810	175	2,020	115	1,220	45	1,080	32																											
3/8	3,360	275	2,650	200	2,340	175	1,680	115	1,020	45	900	32																											
1/2	2,520	275	1,990	200	1,760	175	1,260	115	760	45	670	32																											

1. Use a rigid and precise machine and holder.
2. These milling conditions are based on milling with circular interpolation at corners; for milling without circular interpolation (such as right angle cornering), reduce the speed to 50-70% and the cutting depth to 50-80% of the above conditions.
3. We recommend using air blow or MQL (mist).
4. Please adjust the speed, feed and cutting depth according to actual cutting conditions.
5. When entering into the part, reduce the feed to 30-60% of the above conditions, with a ramping angle < 2°.
6. These milling conditions are for a tool overhang less than 4xD; for longer overhangs, reduce the speed, feed and cutting depth to prevent chattering.

High Feed Milling

Hardness	-		<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC																												
Work Material	Cast Iron		Mild Steels Carbon Steels		Tool Steels Stainless Steel Hardened Steels Prehardened Steels		Hardened Steels																																
Depth of Cut	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤1/16</td><td>0.1CR</td><td>0.3D</td></tr> <tr><td>1/16<CR</td><td>0.008"</td><td>0.3D</td></tr> </table>			CR	aa	ar	CR≤1/16	0.1CR	0.3D	1/16<CR	0.008"	0.3D				<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤1/16</td><td>0.1CR</td><td>0.3D</td></tr> <tr><td>1/16<CR</td><td>0.008"</td><td>0.3D</td></tr> </table>			CR	aa	ar	CR≤1/16	0.1CR	0.3D	1/16<CR	0.008"	0.3D	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤1/16</td><td>0.05CR</td><td>0.3D</td></tr> <tr><td>1/16<CR</td><td>0.004"</td><td>0.3D</td></tr> </table>			CR	aa	ar	CR≤1/16	0.05CR	0.3D	1/16<CR	0.004"	0.3D
	CR	aa	ar																																				
CR≤1/16	0.1CR	0.3D																																					
1/16<CR	0.008"	0.3D																																					
CR	aa	ar																																					
CR≤1/16	0.1CR	0.3D																																					
1/16<CR	0.008"	0.3D																																					
CR	aa	ar																																					
CR≤1/16	0.05CR	0.3D																																					
1/16<CR	0.004"	0.3D																																					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																											
1/8	19,860	490	19,860	470	14,970	330	14,970	305	10,080	125	9,780	90																											
3/16	13,240	500	13,240	470	9,980	355	13,240	325	6,720	140	6,520	100																											
1/4	9,930	545	9,930	500	7,490	375	9,930	340	5,040	150	4,890	150																											
5/16	7,950	545	7,950	500	5,990	375	7,950	340	4,030	150	3,910	150																											
3/8	6,620	545	6,620	500	4,990	375	6,620	340	3,360	150	3,260	150																											
1/2	4,970	545	4,970	500	3,740	375	4,970	340	2,520	150	2,440	150																											

1. Use a rigid and precise machine and holder.
2. These milling conditions are based on milling with circular interpolation at corners; for milling without circular interpolation (such as right angle cornering), reduce the speed to 50-70% and the cutting depth to 50-80% of the above conditions.
3. We recommend using air blow or MQL (mist).
4. Please adjust the speed, feed and cutting depth according to actual cutting conditions.
5. When entering into the part, reduce the feed to 30-60% of the above conditions, with a ramping angle < 2°.
6. These milling conditions are for a tool overhang less than 4xD; for longer overhangs, reduce the speed, feed and cutting depth to prevent chattering.





List 4572: Regular Length, Corner Radius, High Feed

Standard Milling

Hardness	-		<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC																												
Work Material	Cast Iron		Mild Steels Carbon Steels		Tool Steels Stainless Steel Hardened Steels Prehardened Steels		Hardened Steels																																
Depth of Cut	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.2CR</td><td>0.5D</td></tr> <tr><td>2<CR</td><td>0.02"</td><td>0.5D</td></tr> </table>		CR	aa	ar	CR≤2	0.2CR	0.5D	2<CR	0.02"	0.5D			<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.1CR</td><td>0.5D</td></tr> <tr><td>2<CR</td><td>0.008"</td><td>0.5D</td></tr> </table>		CR	aa	ar	CR≤2	0.1CR	0.5D	2<CR	0.008"	0.5D	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.2CR</td><td>0.5D</td></tr> <tr><td>2<CR</td><td>0.016"</td><td>0.5D</td></tr> </table>						CR	aa	ar	CR≤2	0.2CR	0.5D	2<CR	0.016"	0.5D
	CR	aa	ar																																				
CR≤2	0.2CR	0.5D																																					
2<CR	0.02"	0.5D																																					
CR	aa	ar																																					
CR≤2	0.1CR	0.5D																																					
2<CR	0.008"	0.5D																																					
CR	aa	ar																																					
CR≤2	0.2CR	0.5D																																					
2<CR	0.016"	0.5D																																					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																											
2	16,000	207	12,500	150	11,000	132	7,950	85	4,750	34	4,270	24																											
3	10,500	246	8,500	177	7,450	154	5,300	102	3,200	39	2,850	28																											
4	7,950	260	6,350	189	5,550	165	4,000	108	2,400	41	2,150	30																											
6	5,300	276	4,250	201	3,700	175	2,650	112	1,600	45	1,400	32																											
8	4,000	276	3,200	201	2,800	175	2,000	112	1,200	45	1,050	32																											
10	3,200	276	2,550	201	2,250	175	1,600	112	955	45	860	32																											
12	2,650	276	2,100	201	1,850	175	1,350	112	795	45	715	32																											

1. Use a rigid and precise machine and holder.
2. These milling conditions are based on milling with circular interpolation at corners; for milling without circular interpolation (such as right angle cornering), reduce the speed to 50-70% and the cutting depth to 50-80% of the above conditions.
3. We recommend using air blow or MQL (mist).
4. Please adjust the speed, feed and cutting depth according to actual cutting conditions.
5. When entering into the part, reduce the feed to 30-60% of the above conditions, with a ramping angle < 2°.
6. These milling conditions are for a tool overhang less than 4xD; for longer overhangs, reduce the speed, feed and cutting depth to prevent chattering.

High Feed Milling

Hardness	-		<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC																												
Work Material	Cast Iron		Mild Steels Carbon Steels		Tool Steels Stainless Steel Hardened Steels Prehardened Steels		Hardened Steels																																
Depth of Cut	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.1CR</td><td>0.3D</td></tr> <tr><td>2<CR</td><td>0.008"</td><td>0.3D</td></tr> </table>		CR	aa	ar	CR≤2	0.1CR	0.3D	2<CR	0.008"	0.3D			<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.1CR</td><td>0.3D</td></tr> <tr><td>2<CR</td><td>0.008"</td><td>0.3D</td></tr> </table>		CR	aa	ar	CR≤2	0.1CR	0.3D	2<CR	0.008"	0.3D	<table border="1"> <tr><th>CR</th><th>aa</th><th>ar</th></tr> <tr><td>CR≤2</td><td>0.05CR</td><td>0.3D</td></tr> <tr><td>2<CR</td><td>0.004"</td><td>0.3D</td></tr> </table>						CR	aa	ar	CR≤2	0.05CR	0.3D	2<CR	0.004"	0.3D
	CR	aa	ar																																				
CR≤2	0.1CR	0.3D																																					
2<CR	0.008"	0.3D																																					
CR	aa	ar																																					
CR≤2	0.1CR	0.3D																																					
2<CR	0.008"	0.3D																																					
CR	aa	ar																																					
CR≤2	0.05CR	0.3D																																					
2<CR	0.004"	0.3D																																					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																											
2	25,000	324	25,000	294	24,000	281	24,000	254	16,000	112	14,400	81																											
3	21,000	492	21,000	472	16,000	331	16,000	309	10,500	130	9,450	93																											
4	16,000	512	16,000	472	12,000	354	12,000	323	7,950	140	7,150	100																											
6	10,600	551	10,600	500	7,950	376	7,950	339	5,300	150	5,300	150																											
8	7,950	551	7,950	500	5,950	376	5,950	339	4,000	150	4,000	150																											
10	6,350	551	6,350	500	4,750	376	4,750	339	3,200	150	3,200	150																											
12	5,300	551	5,300	500	4,000	376	4,000	339	2,650	150	2,650	150																											


1. Use a rigid and precise machine and holder.
2. These milling conditions are based on milling with circular interpolation at corners; for milling without circular interpolation (such as right angle cornering), reduce the speed to 50-70% and the cutting depth to 50-80% of the above conditions.
3. We recommend using air blow or MQL (mist).
4. Please adjust the speed, feed and cutting depth according to actual cutting conditions.
5. When entering into the part, reduce the feed to 30-60% of the above conditions, with a ramping angle < 2°.
6. These milling conditions are for a tool overhang less than 4xD; for longer overhangs, reduce the speed, feed and cutting depth to prevent chattering.





List 4592: Corner Radius, Stub Length, 2 Flute, Long Neck, Rib Processing

Standard Milling

Hardness									<45 HRC	45-55 HRC	55-65 HRC			
Work Material									Hardened Steels Pre-hardened Steels (SDK61, H13, NAK80, P21)	Hardened Steels Pre-hardened Steels (SDK61, H13, STAVAX, 420F)	Hardened Steels			
Depth of Cut									% of DOC's suggested on the left					
	aa (in)								aa=120% ar=120%	aa=100% ar=100%	aa=60% ar=80%			
	Dia.	L1	R0.05	R0.1	R0.2	R0.3	R0.5	R1	ar (in)	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM
0.4	1	0.00028	—	—	—	—	—	0.0047	25,000	14.0	25,000	14.0	19,800	11.1
	1.5	0.00028	—	—	—	—	—	0.0047	25,000	14.0	25,000	14.0	19,800	11.1
	2	0.00020	0.00031	—	—	—	—	0.0040	25,000	10.0	25,000	10.0	19,800	7.9
	3	0.00008	0.00012	—	—	—	—	0.0030	25,000	4.0	23,100	3.7	18,700	3.0
4	0.00004	0.00008	—	—	—	—	0.0014	22,000	1.8	22,000	1.8	18,700	1.5	
0.5	1	0.00028	0.00039	—	—	—	—	0.0059	25,000	14.0	25,000	14.0	18,700	10.5
	2	0.00028	0.00039	—	—	—	—	0.0059	25,000	14.0	25,000	14.0	18,700	10.5
	3	0.00012	0.00020	—	—	—	—	0.0041	25,000	6.0	24,200	5.8	17,600	4.2
	4	0.00008	0.00012	—	—	—	—	0.0004	25,000	4.0	23,100	3.7	17,050	2.7
	5	0.00004	0.00008	—	—	—	—	0.0018	24,200	1.9	22,550	1.8	16,500	1.3
	6	0.00004	0.00004	—	—	—	—	0.0012	22,000	1.8	22,000	1.8	16,500	1.3
0.6	2	—	0.00047	—	—	—	—	0.0071	25,000	23.5	25,000	23.5	17,600	16.5
	4	—	0.00020	—	—	—	—	0.0048	25,000	10.0	22,000	8.8	16,500	6.6
	6	—	0.00008	—	—	—	—	0.0021	22,000	3.5	20,900	3.3	15,400	2.5
0.8	4	—	0.00063	0.0013	—	—	—	0.0094	25,000	65.0	22,000	57.2	15,400	40.0
	6	—	0.00028	0.0006	—	—	—	0.0094	23,100	27.7	19,800	23.8	14,850	17.8
	8	—	—	0.0003	—	—	—	0.0085	19,800	11.9	18,700	11.2	14,300	8.6
1.0	4	0.00039	0.00079	0.0016	0.0020	—	—	0.0118	24,200	77.4	22,000	70.4	13,200	42.2
	6	0.00020	0.00039	0.0008	0.0010	—	—	0.0083	22,000	35.2	18,700	29.9	13,200	21.1
	8	0.00012	0.00024	0.0005	0.0006	—	—	0.0071	17,600	17.6	16,500	16.5	12,650	12.7
	10	0.00008	0.00016	0.0003	0.0004	—	—	0.0035	16,500	9.9	15,400	9.2	12,100	7.3
	12	0.00004	0.00012	0.0002	0.0003	—	—	0.0024	16,500	6.6	14,300	5.7	12,100	4.8
	16	—	—	0.0002	—	—	—	0.0012	13,200	5.3	13,200	5.3	11,550	4.6
	20	—	—	0.0001	—	—	—	0.0009	11,000	2.2	11,000	2.2	11,000	2.2
1.2	6	—	—	0.0013	0.0016	—	—	0.0142	18,700	48.6	15,400	40.0	11,000	28.6
	8	—	—	0.0007	0.0009	—	—	0.0099	15,400	21.6	13,200	18.5	11,000	15.4
	10	—	—	0.0004	0.0006	—	—	0.0085	15,400	12.3	13,200	10.6	9,900	7.9
1.5	6	—	—	0.0016	0.0024	—	—	0.0177	15,400	49.3	13,200	42.2	8,800	28.2
	8	—	—	0.0010	0.0015	—	—	0.0150	13,200	26.4	11,000	22.0	7,700	15.4
	10	—	—	0.0007	0.0011	—	—	0.0115	13,200	18.5	11,000	15.4	7,700	10.8
	12	—	—	0.0005	0.0007	—	—	0.0106	13,200	13.2	11,000	11.0	7,150	7.2
	16	—	—	0.0003	0.0004	—	—	0.0044	11,000	6.6	9,900	5.9	6,600	4.0
2.0	8	—	0.00079	0.0016	0.0024	0.0030	—	0.0236	12,100	38.7	9,900	31.7	6,600	21.1
	10	—	0.00063	0.0013	0.0019	0.0024	—	0.0201	9,900	25.7	7,700	20.0	6,600	17.2
	12	—	0.00039	0.0008	0.0012	0.0015	—	0.0165	9,900	15.8	7,700	12.3	6,600	10.6
	16	—	0.00024	0.0005	0.0007	0.0009	—	0.0142	9,900	9.9	7,700	7.7	6,050	6.1
	20	—	0.00016	0.0003	0.0005	0.0006	—	0.0071	7,700	4.6	7,150	4.3	5,500	3.3
	25	—	0.00008	0.0002	0.0003	0.0004	—	0.0047	7,700	3.1	6,600	2.6	4,950	2.0
2.5	10	—	—	0.0016	—	0.0030	—	0.0295	9,900	31.7	8,800	28.2	5,500	17.6
	20	—	—	0.0008	—	0.0015	—	0.0177	7,700	12.3	6,600	10.6	4,950	7.9
	30	—	—	0.0002	—	0.0004	—	0.0059	6,600	2.6	5,500	2.2	4,400	1.8
3.0	8	—	—	0.0016	—	—	—	0.0354	8,800	28.2	7,700	24.6	5,500	17.6
	12	—	—	0.0016	0.0024	0.0030	—	0.0354	8,800	28.2	7,700	24.6	5,500	17.6
	16	—	—	0.0011	0.0017	0.0020	—	0.0283	6,600	14.5	6,600	14.5	5,500	12.1
	20	—	—	0.0007	0.0011	0.0013	—	0.0241	6,600	9.2	6,600	9.2	5,500	7.7
	25	—	—	0.0005	0.0007	0.0009	—	0.0213	6,600	6.6	6,600	6.6	4,950	5.0
	30	—	—	0.0003	0.0005	0.0006	—	0.0106	5,500	3.3	5,500	3.3	4,400	2.6
	35	—	—	0.0002	0.0004	0.0004	—	0.0071	5,500	2.2	4,950	2.0	4,400	1.8
4.0	16	—	—	0.0016	0.0024	0.0030	0.0047	0.0472	6,600	21.1	4,950	15.8	4,400	14.1
	20	—	—	0.0013	0.0019	0.0024	0.0079	0.0402	5,500	14.3	4,400	11.4	4,400	11.4
	25	—	—	0.0008	0.0012	0.0015	0.0024	0.0321	5,500	8.8	4,400	7.0	4,400	7.0
	30	—	—	0.0006	0.0008	0.0010	0.0016	0.0293	5,500	6.6	4,400	5.3	4,400	5.3
	40	—	—	0.0003	0.0005	0.0006	0.0009	0.0142	4,400	2.6	4,400	2.6	4,400	2.6
	50	—	—	0.0002	0.0003	0.0004	0.0006	0.0085	4,400	1.8	4,400	1.8	3,850	1.5





List 4590: Ball End, Stub Length, 2 Flute, Long Neck, Rib Processing

Standard Milling (up to 38HRC)

Hardness		<20 HRC				20-30 HRC				30-38 HRC			
Work Material		Mild Steels, Carbon Steels, Cast Iron				Alloy Steels, Tool Steels				Hardened Steels, Pre-hardened Steels			
Depth of Cut													
Mill Dia.	L1	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.1	0.3	25,000	1.4	0.0001	0.0001	25,000	1.4	0.0001	0.0001	25,000	1.4	0.0001	0.0001
	0.5	25,000	1.0	0.0001	0.0001	25,000	1.0	0.0001	0.0001	25,000	1.0	0.0001	0.0001
0.2	0.5	25,000	7.8	0.0002	0.0002	25,000	7.8	0.0002	0.0002	25,000	7.6	0.0002	0.0002
	1	25,000	7.1	0.0002	0.0002	25,000	7.1	0.0002	0.0002	25,000	6.7	0.0002	0.0002
	1.5	25,000	6.5	0.0002	0.0002	25,000	6.5	0.0002	0.0002	25,000	6.1	0.0002	0.0002
	3	25,000	4.6	0.0002	0.0002	25,000	4.6	0.0002	0.0002	25,000	4.3	0.0002	0.0002
0.3	1	25,000	11.8	0.0002	0.0004	25,000	11.8	0.0002	0.0004	25,000	11.2	0.0002	0.0002
	3	25,000	6.4	0.0002	0.0002	25,000	6.4	0.0002	0.0002	25,000	6.0	0.0002	0.0002
	5	25,000	3.4	0.0002	0.0002	25,000	3.4	0.0002	0.0002	25,000	3.2	0.0002	0.0002
0.4	1	25,000	17.4	0.0004	0.0008	25,000	17.7	0.0004	0.0008	25,000	16.7	0.0004	0.0004
	3	25,000	11.4	0.0002	0.0004	25,000	11.4	0.0002	0.0004	25,000	10.7	0.0002	0.0002
	6	25,000	6.6	0.0002	0.0002	25,000	6.6	0.0002	0.0002	25,000	6.2	0.0002	0.0002
0.5	1	25,000	21.6	0.0006	0.0012	25,000	21.6	0.0006	0.0012	25,000	20.6	0.0006	0.0006
	5	25,000	13.1	0.0002	0.0004	25,000	13.1	0.0002	0.0004	25,000	12.5	0.0002	0.0002
	10	20,000	3.9	0.0002	0.0002	20,000	3.9	0.0002	0.0002	20,000	3.7	0.0002	0.0002
0.6	1	25,000	21.6	0.0012	0.0020	25,000	26.5	0.0012	0.0020	25,000	23.6	0.0012	0.0012
	5	25,000	22.3	0.0004	0.0008	25,000	22.3	0.0004	0.0008	25,000	21.0	0.0004	0.0004
	12	18,000	4.7	0.0002	0.0002	18,000	4.7	0.0002	0.0002	18,000	4.3	0.0002	0.0002
0.8	2	25,000	39.3	0.0016	0.0031	25,000	39.3	0.0016	0.0031	25,000	37.4	0.0016	0.0016
	6	25,000	26.3	0.0012	0.0020	25,000	26.3	0.0012	0.0020	25,000	24.9	0.0012	0.0012
	12	17,000	9.8	0.0002	0.0002	17,000	9.8	0.0002	0.0002	17,000	9.1	0.0002	0.0002
1.0	2	25,000	72.8	0.0020	0.0039	25,000	72.8	0.0020	0.0039	25,000	72.8	0.0020	0.0020
	5	25,000	62.9	0.0020	0.0039	25,000	62.9	0.0020	0.0039	25,000	57.4	0.0020	0.0020
	10	22,000	43.3	0.0004	0.0008	22,000	43.3	0.0004	0.0008	22,000	39.4	0.0004	0.0004
1.2	20	13,000	11.8	0.0002	0.0002	13,000	11.8	0.0002	0.0002	13,000	11.2	0.0002	0.0002
	2	25,000	74.8	0.0024	0.0047	25,000	74.8	0.0024	0.0047	25,000	70.8	0.0024	0.0024
	5	25,000	57.4	0.0024	0.0047	25,000	57.4	0.0024	0.0047	25,000	56.6	0.0024	0.0024
1.5	10	20,000	47.2	0.0020	0.0039	20,000	47.2	0.0020	0.0039	20,000	43.3	0.0020	0.0020
	20	14,000	12.6	0.0002	0.0002	14,000	12.6	0.0002	0.0002	14,000	11.8	0.0002	0.0002
	3	25,000	94.5	0.0030	0.0059	25,000	94.5	0.0030	0.0059	25,000	94.5	0.0030	0.0030
	6	25,000	95.2	0.0030	0.0059	25,000	95.2	0.0030	0.0059	25,000	88.6	0.0030	0.0030
1.5	10	24,000	78.7	0.0020	0.0059	24,000	78.7	0.0030	0.0059	24,000	74.8	0.0030	0.0030
	16	16,000	31.5	0.0020	0.0039	16,000	31.5	0.0020	0.0039	16,000	29.9	0.0020	0.0020
	20	13,000	14.2	0.0008	0.0020	13,000	14.2	0.0008	0.0020	13,000	13.4	0.0008	0.0008
	30	12,000	7.9	0.0002	0.0004	12,000	7.9	0.0002	0.0004	12,000	7.5	0.0002	0.0002
	4	25,000	110.2	0.0039	0.0079	25,000	110.2	0.0039	0.0079	25,000	110.2	0.0039	0.0039
2.0	8	25,000	102.4	0.0039	0.0079	25,000	102.4	0.0039	0.0079	25,000	94.5	0.0039	0.0039
	16	14,000	66.9	0.0039	0.0039	14,000	66.9	0.0039	0.0039	14,000	74.8	0.0039	0.0039
	20	12,000	47.2	0.0020	0.0039	12,000	47.2	0.0020	0.0039	12,000	43.3	0.0020	0.0020
	30	10,000	19.7	0.0008	0.0020	10,000	19.7	0.0008	0.0020	10,000	18.5	0.0008	0.0008
	40	7,000	5.9	0.0008	0.0012	7,000	5.9	0.0008	0.0012	7,000	5.5	0.0008	0.0008
3.0	6	25,000	147.0	0.0059	0.0118	25,000	147.0	0.0059	0.0118	25,000	147.0	0.0059	0.0059
	12	20,000	118.1	0.0059	0.0118	20,000	118.1	0.0059	0.0118	20,000	110.2	0.0059	0.0059
	16	16,000	78.7	0.0039	0.0079	16,000	78.7	0.0039	0.0079	16,000	74.8	0.0039	0.0039
	20	14,000	70.9	0.0039	0.0079	14,000	70.9	0.0039	0.0079	14,000	66.9	0.0039	0.0039
	30	10,000	31.5	0.0012	0.0020	10,000	31.5	0.0012	0.0020	10,000	29.9	0.0012	0.0012
3.5	40	7,000	19.7	0.0008	0.0012	7,000	19.7	0.0008	0.0012	7,000	18.5	0.0008	0.0008
	15	18,000	118.1	0.0039	0.0118	18,000	118.1	0.0039	0.0118	18,000	110.2	0.0039	0.0039
	25	12,000	78.7	0.0039	0.0039	12,000	78.7	0.0039	0.0039	12,000	74.8	0.0039	0.0039
	35	10,000	39.4	0.0020	0.0020	10,000	39.4	0.0020	0.0020	10,000	37.4	0.0020	0.0020
45	7,000	23.6	0.0012	0.0012	7,000	23.6	0.0012	0.0012	7,000	22.4	0.0012	0.0012	

continued on next page





Standard Milling (up to 38HRC)

Hardness		<20 HRC				20-30 HRC				30-38 HRC			
Work Material		Mild Steels, Carbon Steels, Cast Iron				Alloy Steels, Tool Steels				Hardened Steels, Pre-hardened Steels			
Depth of Cut													
Mill Dia.	L1	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
4.0	8	25,000	181.0	0.0079	0.0197	25,000	181.0	0.0079	0.0197	25,000	181.0	0.0079	0.0079
	16	18,000	126.0	0.0079	0.0197	18,000	126.0	0.0079	0.0197	18,000	118.1	0.0079	0.0079
	20	16,000	110.2	0.0079	0.0157	16,000	110.2	0.0079	0.0157	16,000	102.4	0.0079	0.0079
	30	14,000	94.5	0.0039	0.0079	14,000	94.5	0.0039	0.0079	14,000	86.6	0.0039	0.0039
	40	10,000	51.2	0.0020	0.0039	10,000	51.2	0.0020	0.0039	10,000	47.2	0.0020	0.0020
5.0	10	25,000	212.6	0.0098	0.0197	25,000	212.6	0.0098	0.0197	25,000	212.6	0.0098	0.0197
	20	16,000	137.8	0.0098	0.0197	16,000	137.8	0.0098	0.0197	16,000	129.9	0.0098	0.0197
	30	14,000	98.4	0.0039	0.0118	14,000	98.4	0.0039	0.0118	14,000	90.6	0.0039	0.0118
	40	10,000	47.2	0.0039	0.0079	10,000	47.2	0.0039	0.0079	10,000	43.3	0.0039	0.0079
	50	8,000	31.5	0.0039	0.0039	8,000	31.5	0.0039	0.0039	8,000	29.9	0.0039	0.0039
6.0	12	20,000	204.7	0.0118	0.0197	20,000	204.7	0.0118	0.0197	20,000	204.7	0.0118	0.0197
	20	16,000	165.4	0.0118	0.0197	16,000	165.4	0.0118	0.0197	16,000	153.5	0.0118	0.0197
	30	10,000	102.4	0.0118	0.0197	10,000	102.4	0.0118	0.0197	10,000	94.5	0.0118	0.0197
	40	9,000	78.7	0.0079	0.0118	9,000	78.7	0.0079	0.0118	9,000	74.8	0.0079	0.0118
	50	7,000	63.0	0.0079	0.0118	7,000	63.0	0.0079	0.0118	7,000	59.1	0.0079	0.0118

Standard Milling (38 to 60HRC)

Hardness		38-45 HRC				45-55 HRC				55-60 HRC			
Work Material		Stainless Steels, Hardened Steels, Pre-hardened Steels				Hardened Steels				Hardened Steels			
Depth of Cut													
Mill Dia.	L1	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.1	0.3	50,000	2.8	0.0001	0.0001	50,000	2.4	0.0001	0.0001	-	-	-	-
	0.5	50,000	2.0	0.0001	0.0001	50,000	1.6	0.0001	0.0001	-	-	-	-
0.2	0.5	50,000	15.0	0.0002	0.0002	50,000	10.2	0.0002	0.0002	50,000	7.9	0.0002	0.0002
	1	50,000	13.4	0.0002	0.0002	50,000	9.1	0.0002	0.0002	43,000	7.1	0.0002	0.0002
	1.5	45,000	11.0	0.0002	0.0002	45,000	7.5	0.0002	0.0002	41,000	5.1	0.0002	0.0002
	3	32,000	5.5	0.0002	0.0002	31,000	3.5	0.0002	0.0002	31,000	2.8	0.0002	0.0002
0.3	1	50,000	22.4	0.0002	0.0002	50,000	15.4	0.0002	0.0002	50,000	12.2	0.0002	0.0004
	3	38,000	9.1	0.0002	0.0002	37,000	5.9	0.0002	0.0002	33,000	3.9	0.0002	0.0002
	5	29,000	3.7	0.0002	0.0002	28,000	2.4	0.0002	0.0002	28,000	2.0	0.0002	0.0002
0.4	1	50,000	33.5	0.0004	0.0004	50,000	20.5	0.0004	0.0004	50,000	17.3	0.0003	0.0006
	3	43,000	18.5	0.0002	0.0002	43,000	11.0	0.0002	0.0002	38,000	8.7	0.0002	0.0004
	6	30,000	7.5	0.0002	0.0002	29,000	4.7	0.0002	0.0002	26,000	3.9	0.0002	0.0002
0.5	1	50,000	41.3	0.0006	0.0006	50,000	28.7	0.0006	0.0006	50,000	22.8	0.0004	0.0008
	5	30,000	15.0	0.0002	0.0002	29,000	9.8	0.0002	0.0002	26,000	6.7	0.0002	0.0004
	10	20,000	3.7	0.0002	0.0002	20,000	3.9	0.0002	0.0002	20,000	3.5	0.0002	0.0002
0.6	1	50,000	47.2	0.0012	0.0012	50,000	33.1	0.0012	0.0012	50,000	26.4	0.0004	0.0008
	5	30,000	25.2	0.0004	0.0004	30,000	17.3	0.0004	0.0004	27,000	12.2	0.0004	0.0008
	12	18,000	4.3	0.0002	0.0002	17,000	3.1	0.0002	0.0002	17,000	2.8	0.0002	0.0002

continued on next page





List 4590: Ball End, Stub Length, 2 Flute, Long Neck, Rib Processing (Continued)

Standard Milling (38 to 60HRC)


Hardness		38-45 HRC				45-55 HRC				55-60 HRC			
Work Material		Stainless Steels, Hardened Steels Pre-hardened Steels				Hardened Steels				Hardened Steels			
Depth of Cut													
Mill Dia.	L1	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)	Speed RPM	Feed in/min	aa (in)	ar (in)
0.8	2	50,000	74.8	0.0016	0.0016	50,000	63.0	0.0016	0.0016	50,000	47.2	0.0006	0.0012
	6	30,000	29.9	0.0012	0.0012	30,000	25.6	0.0012	0.0012	27,000	18.1	0.0006	0.0012
	12	17,000	9.1	0.0002	0.0002	16,000	6.3	0.0002	0.0002	16,000	4.3	0.0002	0.0002
1.0	2	50,000	145.7	0.0020	0.0020	50,000	145.7	0.0020	0.0020	50,000	118.1	0.0008	0.0020
	5	36,000	82.7	0.0020	0.0020	36,000	63.0	0.0020	0.0020	36,000	47.2	0.0008	0.0020
	10	22,000	39.4	0.0004	0.0004	21,000	29.9	0.0004	0.0004	18,000	20.5	0.0004	0.0008
	20	13,000	11.2	0.0002	0.0002	12,000	7.1	0.0002	0.0002	12,000	5.5	0.0002	0.0002
1.2	2	50,000	141.7	0.0024	0.0024	50,000	141.7	0.0024	0.0024	50,000	118.1	0.0008	0.0020
	5	36,000	78.7	0.0024	0.0024	32,000	63.0	0.0024	0.0024	30,000	47.2	0.0008	0.0020
	10	20,000	43.3	0.0020	0.0020	18,000	31.5	0.0020	0.0020	16,000	22.0	0.0008	0.0020
	20	13,000	11.8	0.0002	0.0002	12,000	7.1	0.0002	0.0002	10,000	4.7	0.0002	0.0002
1.5	3	50,000	189.0	0.0030	0.0030	50,000	189.0	0.0030	0.0030	50,000	153.5	0.0012	0.0024
	6	30,000	106.3	0.0030	0.0030	30,000	86.6	0.0030	0.0030	27,000	59.1	0.0012	0.0024
	10	24,000	74.8	0.0030	0.0030	24,000	59.1	0.0030	0.0030	21,000	39.4	0.0012	0.0024
	16	14,000	29.9	0.0020	0.0020	13,000	22.0	0.0020	0.0020	10,000	13.4	0.0012	0.0020
	20	12,000	13.4	0.0008	0.0008	11,000	9.4	0.0008	0.0008	9,000	5.9	0.0008	0.0020
	30	11,000	7.5	0.0002	0.0002	10,000	4.7	0.0002	0.0002	9,000	3.5	0.0002	0.0004
2.0	4	50,000	220.5	0.0039	0.0039	47,000	208.7	0.0039	0.0039	40,000	141.7	0.0020	0.0039
	8	25,000	94.5	0.0039	0.0039	24,000	90.6	0.0039	0.0039	20,000	59.1	0.0020	0.0039
	16	14,000	74.8	0.0039	0.0039	13,000	55.1	0.0039	0.0039	11,000	37.4	0.0020	0.0039
	20	11,000	43.3	0.0020	0.0020	10,000	35.0	0.0020	0.0020	9,000	25.2	0.0020	0.0039
	30	9,000	18.5	0.0008	0.0008	9,000	14.2	0.0008	0.0008	7,500	9.4	0.0008	0.0020
40	6,000	5.5	0.0002	0.0002	6,000	3.9	0.0002	0.0002	6,000	3.5	0.0002	0.0012	
3.0	6	41,500	244.1	0.0059	0.0059	32,000	189.0	0.0059	0.0059	26,500	129.9	0.0024	0.0059
	12	20,000	110.2	0.0059	0.0059	18,000	98.4	0.0059	0.0059	16,000	66.9	0.0024	0.0059
	16	16,000	74.8	0.0039	0.0039	13,000	59.1	0.0039	0.0039	11,000	43.3	0.0024	0.0059
	20	14,000	66.9	0.0039	0.0039	11,000	39.4	0.0039	0.0039	10,000	39.4	0.0024	0.0059
	30	9,000	29.9	0.0012	0.0012	7,000	23.2	0.0012	0.0012	6,000	15.7	0.0012	0.0020
	40	6,500	18.5	0.0008	0.0008	5,000	14.2	0.0008	0.0008	4,000	9.1	0.0008	0.0012
3.5	15	18,000	110.2	0.0039	0.0039	14,000	78.7	0.0039	0.0039	12,000	51.2	0.0028	0.0059
	25	12,000	74.8	0.0039	0.0039	9,000	51.2	0.0039	0.0039	8,000	36.2	0.0028	0.0059
	35	9,000	37.4	0.0020	0.0020	7,000	27.6	0.0020	0.0020	5,000	15.7	0.0020	0.0020
	45	6,500	22.4	0.0012	0.0012	5,000	16.5	0.0012	0.0012	4,000	10.2	0.0012	0.0012
4.0	8	31,000	224.4	0.0079	0.0079	24,000	173.2	0.0079	0.0079	20,000	126.0	0.0031	0.0079
	16	18,000	118.1	0.0079	0.0079	14,000	98.4	0.0079	0.0079	10,000	51.2	0.0031	0.0079
	20	16,000	102.4	0.0079	0.0079	14,000	90.6	0.0079	0.0079	8,000	39.4	0.0031	0.0079
	30	14,000	86.6	0.0039	0.0039	12,000	74.8	0.0039	0.0039	5,000	24.8	0.0031	0.0079
	40	9,000	47.2	0.0020	0.0020	8,000	39.4	0.0020	0.0020	4,000	15.7	0.0020	0.0039
	50	6,500	26.0	0.0008	0.0008	6,000	23.6	0.0008	0.0008	3,600	11.0	0.0008	0.0020
5.0	10	25,000	212.6	0.0098	0.0197	19,000	157.5	0.0098	0.0197	16,000	110.2	0.0039	0.0098
	20	16,000	129.9	0.0098	0.0197	13,000	106.3	0.0098	0.0197	8,000	51.2	0.0039	0.0098
	30	14,000	90.6	0.0039	0.0118	11,000	70.9	0.0039	0.0118	4,000	20.5	0.0039	0.0098
	40	10,000	43.3	0.0039	0.0079	9,000	39.0	0.0039	0.0079	3,000	10.2	0.0039	0.0079
	50	7,500	29.9	0.0039	0.0039	7,000	24.0	0.0039	0.0039	2,800	7.5	0.0039	0.0039
6.0	12	20,000	204.7	0.0118	0.0197	16,000	133.9	0.0118	0.0197	13,500	98.4	0.0039	0.0079
	20	16,000	153.5	0.0118	0.0197	12,000	118.1	0.0118	0.0197	8,000	63.0	0.0039	0.0079
	30	10,000	94.5	0.0118	0.0197	9,000	82.7	0.0118	0.0197	4,000	29.1	0.0039	0.0079
	40	9,000	74.8	0.0079	0.0118	9,000	70.9	0.0079	0.0118	3,000	18.9	0.0039	0.0079
	50	7,000	59.1	0.0079	0.0118	7,000	55.1	0.0079	0.0118	2,500	15.7	0.0039	0.0079






List 4430: True 4 Flute, Ball End, Regular Length

Standard Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	690 SFM		540 SFM		500 SFM		410 SFM		390 SFM		320 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.1D$				$a_a=0.03D$ $a_r=0.1D$				$a_a=0.02D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	10,500	182	8,190	140	7,699	126	6,313	93	5,871	80	4,873	67
5/16	8,400	165	6,500	127	6,110	108	5,010	77	4,659	66	4,100	55
3/8	7,000	160	5,460	123	5,132	105	4,209	74	3,914	64	3,444	51
1/2	5,200	130	4,050	100	3,807	85	3,122	60	2,903	52	2,555	52

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Feed Milling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	1080 SFM		870 SFM		820 SFM		670 SFM		625 SFM		550 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.05D$				$a_a=0.03D$ $a_r=0.05D$				$a_a=0.02D$ $a_r=0.05D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	17,000	295	13,260	227	12,464	205	10,221	151	9,505	130	7,889	108
5/16	13,590	276	10,600	212	9,964	180	8,171	128	7,599	110	6,687	91
3/8	11,300	256	8,814	197	8,285	167	6,794	119	6,318	102	5,560	82
1/2	8,520	215	6,646	165	6,247	140	5,122	100	4,764	86	4,192	86


1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.






List 4530: True 4 Flute, Ball End, Regular Length

Standard Milling

Hardness	<30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	740 SFM		570 SFM		540 SFM		440 SFM		410 SFM		340 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
6	11,900	207	9,280	154	8,750	139	7,160	103	6,630	85	5,480	70
8	8,950	180	6,960	141	6,570	119	5,370	87	4,970	75	4,380	62
10	7,160	163	5,570	126	5,250	106	4,300	76	3,980	65	3,500	53
12	5,970	150	4,640	117	4,380	99	3,580	70	3,320	60	2,920	44

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Feed Milling

Hardness	<30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Hardened Steels Pre-hardened Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	1,100 SFM		1,050 SFM		1,010 SFM		850 SFM		690 SFM		630 SFM	
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
6	18,000	314	17,000	283	16,400	261	13,800	198	11,100	143	10,100	122
8	13,500	273	12,700	257	12,300	224	10,300	167	8,360	126	7,560	107
10	10,800	245	10,200	231	9,870	199	8,280	146	6,680	109	6,050	91
12	9,020	227	8,490	214	8,220	187	6,900	135	5,570	101	5,040	76


1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 4413: Ball Nose, Regular Length, 2 Flute, Sphere Type

Profiling


Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Stainless Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	720 SFM		640 SFM		580 SFM		560 SFM		520 SFM		440 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.1D$								$a_a=0.02D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/16	25,000	48.9	25,000	43.0	25,000	43.0	25,000	43.0	25,000	43.0	25,000	39.9
3/32	25,000	83.7	25,000	65.9	23,650	62.3	22,800	60.1	21,200	55.8	17,950	45.9
1/8	22,000	98.2	19,550	71.0	17,700	61.2	17,100	57.0	15,900	53.6	13,450	44.0
3/16	14,650	91.2	13,050	72.0	11,800	63.9	11,400	59.8	10,600	56.1	8,950	48.1
1/4	11,000	85.6	9,800	71.9	8,850	66.0	8,550	63.0	7,950	58.8	6,700	49.1
5/16	8,800	70.7	7,800	53.6	7,100	48.5	6,850	47.2	6,350	43.0	5,400	37.8
3/8	7,350	59.1	6,500	42.2	5,900	38.8	5,700	38.5	5,300	35.6	4,500	30.3
1/2	5,500	47.2	4,900	31.0	4,450	29.5	4,300	30.0	3,950	28.0	3,350	22.7





List 4513: Ball Nose, Regular Length, 2 Flute, Sphere Type

Profiling

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Tool		Hardened Steels Pre-hardened Steels		Stainless Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Cutting Speed	720 SFM		640 SFM		580 SFM		470 SFM		520 SFM		440 SFM	
Depth of Cut	$a_a=0.05D$ $a_r=0.1D$								$a_a=0.02D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	26.5	25,000	26.5	25,000	26.5	25,000	26.5	25,000	26.5	25,000	23.3
2	25,000	70.3	24,000	53.1	24,000	53.1	23,500	51.2	24,000	53.1	22,000	47.2
4	17,500	98.4	15,500	70.9	14,000	61.0	11,500	49.2	12,500	53.1	11,000	45.3
5	14,000	91.5	12,400	71.9	11,250	64.0	10,900	60.0	10,100	56.1	8,550	48.3
6	11,500	84.6	10,500	72.8	9,500	66.9	7,950	55.1	8,450	59.1	7,400	51.2
8	8,750	70.9	7,950	55.1	7,150	49.2	5,950	41.3	6,350	43.3	5,550	39.2
10	7,000	59.1	6,350	43.3	5,700	39.4	4,750	33.7	5,050	35.6	4,450	31.5

1. Use a rigid and precise machine and holder.
2. Use a suitable cutting fluid with high smoke retardant.





List 4581: 4 Flute, Ball End, Tapered

Slotting

Hardness	<20 HRC			20-30 HRC			30-38 HRC			38-45 HRC			45-55 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron			Alloy Steels Tool Steels			Hardened Steels Pre-hardened Steels			Stainless Steels Hardened Steels			Hardened Steels		
Cutting Speed	400 SFM			330 SFM			300 SFM			240 SFM			160 SFM		
Depth of Cut															
Mill Dia.	Speed RPM	Feed in/min	aa	Speed RPM	Feed in/min	aa	Speed RPM	Feed in/min	aa	Speed RPM	Feed in/min	aa	Speed RPM	Feed in/min	aa
0.5	25,000	20.0	0.0004	25,000	20.0	0.0004	25,000	20.0	0.0004	25,000	20.0	0.0004	25,000	10.0	0.0002
0.6	25,000	42.5	0.0009	25,000	42.5	0.0009	25,000	42.5	0.0009	25,000	42.5	0.0009	25,000	22.5	0.0005
0.7	25,000	65.0	0.0013	25,000	65.0	0.0013	25,000	65.0	0.0013	25,000	65.0	0.0013	22,178	31.0	0.0007
0.8	25,000	87.5	0.0018	25,000	87.5	0.0018	25,000	87.5	0.0018	25,000	87.5	0.0018	19,406	36.9	0.0010
0.9	25,000	110.0	0.0022	25,000	110.0	0.0022	25,000	110.0	0.0022	25,000	110.0	0.0022	17,249	41.4	0.0012
1.0	25,000	132.5	0.0027	25,000	132.5	0.0027	25,000	132.5	0.0027	23,287	123.4	0.0027	15,524	45.0	0.0015
1.2	25,000	155.0	0.0031	25,000	155.0	0.0031	24,257	150.4	0.0031	19,406	120.3	0.0031	12,937	44.0	0.0017
1.5	25,000	177.5	0.0036	21,346	151.6	0.0036	19,406	137.8	0.0036	15,524	110.2	0.0036	10,350	40.4	0.0020
1.6	24,257	194.1	0.0040	20,012	160.1	0.0040	18,193	145.5	0.0040	14,554	116.4	0.0040	9,703	42.7	0.0022
1.8	21,562	191.9	0.0045	17,788	158.3	0.0045	16,171	143.9	0.0045	12,937	115.1	0.0045	8,625	42.3	0.0025
2.0	19,406	190.2	0.0049	16,010	156.9	0.0049	14,554	142.6	0.0049	11,643	114.1	0.0049	7,762	41.9	0.0027
2.5	15,524	166.1	0.0054	12,808	137.0	0.0054	11,643	124.6	0.0054	9,315	99.7	0.0054	6,210	36.6	0.0030
3.0	12,937	150.1	0.0058	10,673	123.8	0.0058	9,703	112.6	0.0058	7,762	90.0	0.0058	5,175	33.1	0.0032

1. To achieve flute depth, sequential use of each neck length is most effective.
2. When corner processing, reduce the feed rate by approximately half.
3. Use cutting fluid.





List 4541: 4 & 6 Flute, Corner Radius, Regular Length

Standard Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC																
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels																						
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> <tr> <td>D≤1.5</td> <td>1.5D</td> <td>0.02D</td> </tr> <tr> <td>1.5<D≤2.5</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>2.5<D</td> <td>1.5D</td> <td>0.1D</td> </tr> <tr> <td colspan="3">arMax=less than 0.040"</td> </tr> </table>			Dia	aa	ar	D≤1.5	1.5D	0.02D	1.5<D≤2.5	1.5D	0.05D	2.5<D	1.5D	0.1D	arMax=less than 0.040"				aa=1.5D ar=0.05D arMax=Less than 0.040"		aa=1.5D ar=0.03D arMax=Less than 0.020"		aa=1D ar=0.02D arMax=Less than 0.020"			
	Dia	aa	ar																								
D≤1.5	1.5D	0.02D																									
1.5<D≤2.5	1.5D	0.05D																									
2.5<D	1.5D	0.1D																									
arMax=less than 0.040"																											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min															
1	25,000	39.3	25,000	39.0	25,000	38.4	24,050	26.4	21,900	21.1	16,000	13.2															
2	22,500	70.9	20,200	63.0	16,000	49.2	12,000	26.4	11,000	21.1	7,950	13.2															
3	15,000	70.9	13,500	63.0	10,500	49.2	7,950	26.4	7,450	21.1	5,300	13.2															
4	11,000	70.9	9,950	63.0	7,950	49.2	5,950	26.4	5,550	21.1	4,000	13.2															
5	8,900	70.9	7,950	63.0	6,350	49.2	4,800	26.4	4,450	21.1	3,200	13.2															
6	7,450	104.3	6,650	94.5	5,300	74.8	4,000	39.4	3,700	31.5	2,650	19.9															
8	5,550	104.3	4,950	94.5	4,000	74.8	3,000	39.4	2,800	31.5	2,000	19.9															
10	4,450	104.3	4,000	94.5	3,200	74.8	2,400	39.4	2,250	31.5	1,600	19.9															
12	3,700	104.3	3,300	94.5	2,650	74.8	2,000	39.4	1,850	31.5	1,350	19.9															

1. Use a rigid and precise machine and holder.
2. We suggest using an air blow. If using cutting fluids, use a high quality fluid with smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.

High Feed Milling

Hardness	<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Tool Steels Hardened Steels Pre-hardened Steels		Hardened Steels							
Depth of Cut	aa=1D ar=0.05D arMax=Less than 0.020"				aa=1D ar=0.03D arMax=Less than 0.020"		aa=1D ar=0.02D arMax=Less than 0.008"		aa=1D ar=0.01D arMax=Less than 0.008"			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	31.5	25,000	39.4	25,000	39.4	25,000	31.5	25,000	27.9	25,000	21.9
2	25,000	67.4	25,000	78.7	25,000	78.8	25,000	63.7	24,000	53.1	16,000	31.5
3	25,000	106.0	25,000	116.9	25,000	118.9	17,000	65.0	16,000	53.1	10,500	31.5
4	24,000	153.5	24,000	149.6	20,000	126.0	12,500	65.0	12,000	53.1	7,950	31.5
5	19,000	161.4	19,000	149.6	16,000	126.0	10,000	65.0	9,550	53.1	6,350	31.5
6	16,000	226.4	16,000	226.4	13,500	189.0	8,500	96.5	7,950	78.7	5,300	47.2
8	12,000	226.4	12,000	226.4	9,950	189.0	6,350	96.5	5,950	78.7	4,000	47.2
10	9,550	226.4	9,550	226.4	7,950	189.0	5,100	96.5	4,800	78.7	3,200	47.2
12	7,950	226.4	7,950	226.4	6,650	189.0	4,250	96.5	4,000	78.7	2,650	47.2

1. Use a rigid and precise machine and holder.
2. We suggest using an air blow. If using cutting fluids, use a high quality fluid with smoke retardant.
3. When the length of tool extension from the machine is long, reduce the speed and feed.





List 9010: MAX Ball, Stub Length, 2 Flute

List 9110: MAX Ball, Stub Length, 2 Flute

List 9011: MAX Ball, Long Shank, 2 Flute

List 9111: MAX Ball, Long Shank, 2 Flute

High Speed Light Milling

Hardness	<45 HRC		<50 HRC		<55 HRC		<60 HRC		<65 HRC																							
Work Material	Hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels																							
Cutting Speed	1,650 SFM		1,250 SFM		900 SFM		740 SFM		410 SFM																							
Depth of Cut	<table border="1"> <tr><th>Dia</th><th>a_a</th><th>a_r</th></tr> <tr><td>D≤2</td><td>0.6D</td><td>0.1D</td></tr> <tr><td>D≤4</td><td>0.1D</td><td>0.15D</td></tr> <tr><td>D≤10</td><td>0.2D</td><td>0.2D</td></tr> </table>			Dia	a _a	a _r	D≤2	0.6D	0.1D	D≤4	0.1D	0.15D	D≤10	0.2D	0.2D				<table border="1"> <tr><th>Dia</th><th>a_a</th><th>a_r</th></tr> <tr><td>D≤4</td><td>0.05D</td><td>0.1D</td></tr> <tr><td>D≤10</td><td>0.10D</td><td>0.15D</td></tr> </table>			Dia	a _a	a _r	D≤4	0.05D	0.1D	D≤10	0.10D	0.15D	a _a =0.02D a _r =0.1D	
	Dia	a _a	a _r																													
D≤2	0.6D	0.1D																														
D≤4	0.1D	0.15D																														
D≤10	0.2D	0.2D																														
Dia	a _a	a _r																														
D≤4	0.05D	0.1D																														
D≤10	0.10D	0.15D																														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																						
1	25,000	100	25,000	85	25,000	76	25,000	60	25,000	19																						
2	25,000	175	25,000	150	25,000	130	25,000	87	20,000	63																						
3	25,000	175	25,000	150	25,000	130	25,000	105	15,000	57																						
4	25,000	159	25,000	135	22,000	130	18,000	105	10,000	53																						
6	25,000	157	20,000	133	15,000	118	12,000	94	6,600	47																						
8	20,000	138	15,000	117	11,000	104	9,000	83	5,000	41																						
10	15,000	125	12,000	106	8,750	94	7,200	75	4,000	38																						

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.

High Speed Light Milling

Hardness	<45 HRC		<50 HRC		<55 HRC		<60 HRC		<65 HRC																							
Work Material	Hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels		Hardened Steels																							
Cutting Speed	1,600 SFM		1,300 SFM		1,000 SFM		790 SFM		430 SFM																							
Depth of Cut	<table border="1"> <tr><th>Dia</th><th>a_a</th><th>a_r</th></tr> <tr><td>D≤1/16</td><td>0.6D</td><td>0.1D</td></tr> <tr><td>D≤1/8</td><td>0.1D</td><td>0.15D</td></tr> <tr><td>D≤3/8</td><td>0.2D</td><td>0.2D</td></tr> </table>			Dia	a _a	a _r	D≤1/16	0.6D	0.1D	D≤1/8	0.1D	0.15D	D≤3/8	0.2D	0.2D				<table border="1"> <tr><th>Dia</th><th>a_a</th><th>a_r</th></tr> <tr><td>D≤1/8</td><td>0.05D</td><td>0.1D</td></tr> <tr><td>D≤3/8</td><td>0.10D</td><td>0.15D</td></tr> </table>			Dia	a _a	a _r	D≤1/8	0.05D	0.1D	D≤3/8	0.10D	0.15D	a _a =0.02D a _r =0.1D	
	Dia	a _a	a _r																													
D≤1/16	0.6D	0.1D																														
D≤1/8	0.1D	0.15D																														
D≤3/8	0.2D	0.2D																														
Dia	a _a	a _r																														
D≤1/8	0.05D	0.1D																														
D≤3/8	0.10D	0.15D																														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																						
1/32	25,000	100	25,000	85	25,000	76	25,000	60	25,000	19																						
1/16	25,000	150	25,000	140	25,000	120	25,000	68	20,000	57																						
1/8	25,000	175	25,000	150	25,000	130	25,000	105	15,000	63																						
3/16	25,000	159	25,000	143	17,000	125	16,000	100	9,000	50																						
1/4	25,000	157	20,000	133	15,000	118	12,000	94	6,600	47																						
5/16	20,000	138	15,000	117	11,000	104	9,000	83	5,000	41																						
3/8	15,000	125	12,000	106	8,750	94	7,200	75	4,000	38																						

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.





List 9181: 2 Flute, Corner Radius, CBN, Stub Length

Standard Milling

Hardness			<50 HRC	50-60 HRC		60-68 HRC		
Work Material	Standard Depth of Cut		Hardened Steels					
Cutting Speed			258-598 SFM		258-495 SFM		196-397 SFM	
Depth of Cut (mm)			aa=1D	ar=1D	aa=0.8D	ar=0.8D	aa=0.5D	ar=0.5D
Mill Dia.	aa	ar	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.5	0.02	0.2	25,000	19.7	25,000	19.7	25,000	19.7
1.0	0.02	0.2	25,000	29.5	25,000	29.7	25,000	29.4
1.5	0.03	0.4	25,000	39.6	24,280	38.8	19,100	29.5
2.0	0.04	0.4	21,110	34.4	18,410	30.2	14,480	21.0
3.0	0.05	0.6	13,900	22.1	12,130	22.0	9,540	15.0

1. Use a rigid and precise machine and holder.
2. We suggest using air blow or MQL (mist).
3. When using low speed machines, use the maximum speed and adjust feed rate.
4. During heavy load operations such as corner processing, reduce the speed and feed.
5. The run out of the end mill should be within 10 microns (.0004") after chucking.



List 9182: 2 Flute, Corner Radius, Long Neck, CBN, Stub Length

Standard Milling


Hardness			<50 HRC		50-60 HRC		60-68 HRC	
Work Material	Standard Depth of Cut		Hardened Steels					
Cutting Speed			155-361 SFM		155-309 SFM		119-240 SFM	
Depth of Cut (mm)			aa=1D	ar=1D	aa=0.5D	ar=0.5D	aa=0.4D	ar=0.4D
Mill Dia.	aa	ar	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.5	0.02	0.1	25,000	19.5	25,000	19.7	25,000	20.1
1.0	0.02	0.1	25,000	29.5	22,310	25.5	17,460	20.7
1.5	0.03	0.2	16,830	26.8	14,890	24.1	11,650	17.7
2.0	0.03	0.2	12,760	20.6	11,290	18.4	8,840	12.7
3.0	0.05	0.3	8,400	13.2	7,430	11.6	5,820	9.0

1. Use a rigid and precise machine and holder.
2. We suggest using air blow or MQL (mist).
3. When using low speed machines, use the maximum speed and adjust feed rate.
4. During heavy load operations such as corner processing, reduce the speed and feed.
5. The run out of the end mill should be within 10 microns (.0004") after chucking.



List 9191: CBN, Ball End, Long Length, 2 Flute

Standard Milling

Hardness	30-45 HRC		45-55 HRC		55-60 HRC		60-68 HRC	
Work Material	Hardened Steels Pre-hardened Steels		Hardened Steels					
Depth of Cut	$a_a=0.015D$ $a_r=0.04D$						$a_a=0.01D$ $a_r=0.03D$	
Mill Dia. (mm)	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.4	25,000	39.3	25,000	39.3	25,000	39.3	25,000	39.3
0.6	25,000	39.3	25,000	39.3	25,000	39.3	25,000	39.3
1.0	25,000	59.0	25,000	59.0	25,000	59.0	25,000	59.0
2.0	25,000	78.7	25,000	78.7	25,000	78.7	25,000	78.7
3.0	25,000	78.7	25,000	78.7	25,000	78.7	21,500	66.9

1. Use a rigid and precise machine and holder.
2. We suggest using air blow or MQL (mist).
3. When using low speed machines, use the maximum speed and adjust feed rate.
4. During heavy load operations such as corner processing, reduce the speed and feed.
5. The run out of the end mill should be within 10 microns (.0004") after chucking.



List 9192: 2 Flute, Ball End, Super Long Neck, CBN, Stub Length

Standard Milling

Hardness	30-45 HRC		45-55 HRC		55-60 HRC		60-68 HRC	
Work Material	Hardened Steels Pre-hardened Steels		Hardened Steels					
Depth of Cut	$a_a=0.015D$ $a_r=0.04D$						$a_a=0.01D$ $a_r=0.03D$	
Mill Dia. (mm)	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.4	25,000	39.4	25,000	39.4	25,000	39.4	25,000	39.4
0.6	25,000	39.4	25,000	39.4	25,000	39.4	25,000	39.4
1.0	25,000	59.1	25,000	59.1	25,000	59.1	25,000	59.1
2.0	25,000	78.8	25,000	78.8	25,000	78.8	25,000	76.9
3.0	25,000	78.4	25,000	78.4	25,000	78.0	21,500	66.9

1. Use a rigid and precise machine and holder.
2. We suggest using air blow or MQL (mist).
3. When using low speed machines, use the maximum speed and adjust feed rate.
4. During heavy load operations such as corner processing, reduce the speed and feed.
5. The run out of the end mill should be within 10 microns (.0004") after chucking.



List 9140: MAX-HARD, Regular Length, 6 Flute

List 9144: MAX-HARD, Regular Length, 6 Flute, Corner Radius

Side Milling

Hardness	-		<40 HRC		40-45 HRC		45-55 HRC		55-60 HRC		60-65 HRC		65-70 HRC	
Work Material	Carbon Steels Cast Iron Mild Steels		Hardened Steels Pre-hardened Steels Alloy Steels		Tool Steels Hardened Steels		Hardened Steels Alloy Steels		Hardened Steels					
Cutting Speed	460 SFM		460 SFM		410 SFM		330 SFM		250 SFM		230 SFM		165 SFM	
Depth of Cut	Dia		aa		ar									
	D=1		1.5D		0.02D									
D=2		1.5D		0.05D										
D>2		1.5D		0.10D										
arMax=1.0mm														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	20,000	31.5	20,000	31.5	20,000	31.5	20,000	31.5	20,000	22.0	20,000	18.9	16,000	13.4
2	20,000	63.0	20,000	63.0	20,000	63.0	16,000	49.2	12,000	26.4	11,000	21.1	7,950	13.4
3	15,000	70.9	15,000	70.9	13,500	63.0	10,500	49.2	7,950	26.4	7,450	21.1	5,300	13.4
4	11,000	70.9	11,000	70.9	9,950	63.0	7,950	49.2	5,950	26.4	5,550	21.1	4,000	13.4
5	8,900	70.9	8,900	70.9	7,950	63.0	6,350	49.2	4,750	26.4	4,450	21.1	3,200	13.4
6	7,450	104.3	7,450	104.3	6,650	94.5	5,300	74.8	4,000	39.4	3,700	31.5	2,650	19.9
8	5,550	104.3	5,550	104.3	4,950	94.5	4,000	74.8	3,000	39.4	2,800	31.5	2,000	19.9
10	4,450	104.3	4,450	104.3	4,000	94.5	3,200	74.8	2,400	39.4	2,250	31.5	1,600	19.9
12	3,700	104.3	3,700	104.3	3,300	94.5	2,650	74.8	2,000	39.4	1,850	31.5	1,350	19.9

1. Use a rigid and precise machine and holder.
2. We suggest using an air blow or MQL (Mist).
3. When using low speed machines, use the maximum speed and adjust feedrate.
4. During heavy load operations such as corner processing, reduce the speed and feed.
5. The run out of the end mill should be within 10 microns (0.0004")

continued on next page





High Speed Light Milling

Hardness	-	<40 HRC	40-45 HRC	45-55 HRC	55-60 HRC	60-65 HRC	65-70 HRC							
Work Material	Carbon Steels Cast Iron Mild Steels	Hardened Steels Pre-hardened Steels Alloy Steels	Tool Steels Hardened Steels	Hardened Steels Alloy Steels	Hardened Steels									
Cutting Speed	1030 SFM	985 SFM	985 SFM	820 SFM	525 SFM	490 SFM	330 SFM							
Depth of Cut	$a_a=1.0D$ $a_r=0.05D$ arMax=0.8mm	$a_a=1.0D$ $a_r=0.05D$ arMax=0.5mm		$a_a=1.0D$ $a_r=0.03D$ arMax=0.5mm	$a_a=1.0D$ $a_r=0.02D$ arMax=0.2mm	$a_a=1.0D$ $a_r=0.01D$ arMax=0.2mm								
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25000	31.5	25000	31.5	25000	39.4	25000	39.4	25000	31.5	25000	28.0	25000	22.0
2	25000	66.9	25000	67.3	25000	78.7	25000	78.7	25000	63.7	24000	53.1	16000	31.5
3	25000	105.7	25000	106.1	25000	116.9	25000	118.9	17000	65.0	16000	53.1	10500	31.5
4	25000	162.1	24000	153.5	24000	149.6	20000	126.0	12500	65.0	12000	53.1	7950	31.5
5	20500	173.2	19000	161.4	19000	149.6	16000	126.0	10000	65.0	9550	53.1	6350	31.5
6	17000	240.2	16000	226.4	16000	226.4	13500	189.0	8500	96.5	7950	78.7	5300	47.2
8	12500	240.2	12000	226.4	12000	226.4	9950	189.0	6350	96.5	5950	78.7	4000	47.2
10	10000	240.2	9550	226.4	9550	226.4	7950	189.0	5100	96.5	4800	78.7	3200	47.2
12	8500	240.2	7950	226.4	7950	226.4	6650	189.0	4250	96.5	4000	78.7	2650	47.2

1. Use a rigid and precise machine and holder.
2. We suggest using an air blow or MQL (Mist).
3. When using low speed machines, use the maximum speed and adjust feedrate.
4. During heavy load operations such as corner processing, reduce the speed and feed.
5. The run out of the end mill should be within 10 microns (0.0004")





- List 7020:** Stub Length, 2 Flute
- List 7120:** Regular Length, 2 Flute
- List 7040:** Inch, Stub Length, 4 Flute
- List 7041:** Long Length, 4 Flute
- List 7042:** Stub Length, 4 Flute, Long Shank
- List 7072:** Inch, Stub Length, 4 Flute, Long Shank, Corner Radius
- List 7010:** Long Length, 2 Flute
- List 7110:** Ball End, Regular Length, 2 Flute
- List 7030:** Ball End, Regular Length, 4 Flute
- List 7031:** Ball End, Long Length, 4 Flute
- List 7032:** Inch, Ball End, Stub Length, 4 Flute, Long Shank
- List 7173:** Metric, Ball End, Stub Length, 4 Flute, Long Shank
- List 7132:** Metric, Stub Length, 4 Flute, Long Shank, Corner Radius
- List 7140:** Metric, Stub Length, 4 Flute

Standard



Work Material	Graphite		Green Ceramic Thermoset Plastic		Fiber Filler Plastics																			
Cutting Speed	160-300 SFM		80-140 SFM		130-800 SFM																			
Depth of Cut	<table border="1"> <tr><th>Dia</th><th>aa</th><th>ar</th></tr> <tr><td>D≤1/8</td><td>0.02D</td><td>0.05D</td></tr> <tr><td>D>1/8</td><td>0.10D</td><td>0.20D</td></tr> </table>		Dia	aa	ar	D≤1/8	0.02D	0.05D	D>1/8	0.10D	0.20D		<table border="1"> <tr><th>Dia</th><th>aa</th><th>ar</th></tr> <tr><td>D≤1/8</td><td>0.5D</td><td>0.05D</td></tr> <tr><td>D>1/8</td><td>1D</td><td>0.1D</td></tr> </table>		Dia	aa	ar	D≤1/8	0.5D	0.05D	D>1/8	1D	0.1D	
	Dia	aa	ar																					
D≤1/8	0.02D	0.05D																						
D>1/8	0.10D	0.20D																						
Dia	aa	ar																						
D≤1/8	0.5D	0.05D																						
D>1/8	1D	0.1D																						
Mill Dia.	Speed RPM	Feed in/tooth	Speed RPM	Feed in/tooth	Speed RPM	Feed in/tooth																		
1/32	25,000	0.0005-0.0010	13,450	0.0005-0.0010	25,000	0.0004-0.0008																		
1/16	14,060	0.0010-0.0020	6,720	0.0010-0.0020	25,000	0.0010-0.0020																		
3/32	9,370	0.0010-0.0020	4,480	0.0010-0.0020	19,560	0.0010-0.0020																		
1/8	7,030	0.0010-0.0020	3,360	0.0010-0.0020	14,670	0.0010-0.0020																		
3/16	4,690	0.0010-0.0020	2,240	0.0010-0.0020	9,780	0.0010-0.0020																		
1/4	3,510	0.0020-0.0040	1,680	0.0020-0.0040	7,330	0.0015-0.0030																		
5/16	2,810	0.0020-0.0040	1,350	0.0020-0.0040	5,870	0.0020-0.0040																		
3/8	2,340	0.0030-0.0050	1,120	0.0030-0.0050	4,890	0.0030-0.0050																		
1/2	1,760	0.0030-0.0050	840	0.0030-0.0050	3,670	0.0030-0.0050																		

1. Please reduce speed and feed by 20% when L/D>3D.
2. Please reduce speed and feed by 30% when slotting > 0.5D.
3. Please reduce depth of cut if running at elevated speed and feed.

continued on next page



Standard

Work Material	Aluminum Alloys		Metal Matrix Composite (MMC, AISiC)		Copper Alloys																			
Cutting Speed	160-800 SFM		100-750 SFM		328-649 SFM																			
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D ≤ 1/8</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>D > 1/8</td> <td>0.10D</td> <td>0.20D</td> </tr> </tbody> </table>		Dia	aa	ar	D ≤ 1/8	0.02D	0.05D	D > 1/8	0.10D	0.20D		<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D ≤ 1/8</td> <td>0.5D</td> <td>0.05D</td> </tr> <tr> <td>D > 1/8</td> <td>1D</td> <td>0.1D</td> </tr> </tbody> </table>		Dia	aa	ar	D ≤ 1/8	0.5D	0.05D	D > 1/8	1D	0.1D	
Dia	aa	ar																						
D ≤ 1/8	0.02D	0.05D																						
D > 1/8	0.10D	0.20D																						
Dia	aa	ar																						
D ≤ 1/8	0.5D	0.05D																						
D > 1/8	1D	0.1D																						
Mill Dia.	Speed RPM	Feed in/tooth	Speed RPM	Feed in/tooth	Speed RPM	Feed in/tooth																		
1/32	25,000	0.0004-0.0008	25,000	0.0004-0.0008	25,000	0.0004-0.0008																		
1/16	25,000	0.0010-0.0020	25,000	0.0010-0.0020	25,000	0.0010-0.0020																		
3/32	19,560	0.0010-0.0020	17,320	0.0010-0.0020	19,890	0.0010-0.0020																		
1/8	14,670	0.0010-0.0020	12,990	0.0010-0.0020	14,910	0.0010-0.0020																		
3/16	9,780	0.0010-0.0020	8,660	0.0010-0.0020	9,940	0.0010-0.0020																		
1/4	7,330	0.0015-0.0030	6,500	0.0015-0.0030	7,460	0.0015-0.0030																		
5/16	5,870	0.0020-0.0040	5,200	0.0020-0.0040	5,960	0.0020-0.0040																		
3/8	4,890	0.0030-0.0050	4,330	0.0030-0.0050	4,970	0.0030-0.0050																		
1/2	3,670	0.0030-0.0050	3,250	0.0030-0.0050	3,730	0.0030-0.0050																		



List 7230: Ball End, Long Reach, 2 & 4 Flute

List 7231: Ball End, Regular Length, 2 & 4 Flute, Long Reach

Side Milling

Work Material	Graphite											
Cutting Speed	160-300 SFM											
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> <tr> <td>D≤1/8</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>D>1/8</td> <td>0.10D</td> <td>0.20D</td> </tr> </table>		Dia	aa	ar	D≤1/8	0.02D	0.05D	D>1/8	0.10D	0.20D	
Dia	aa	ar										
D≤1/8	0.02D	0.05D										
D>1/8	0.10D	0.20D										
Mill Dia.	Style	Speed RPM	Feed in/tooth									
1/64	Regular	25,000	0.0002–0.0005									
1/64	Long	25,000	0.0001–0.0003									
1/32	Regular	25,000	0.0005–0.0010									
1/32	Long	25,000	0.0003–0.0007									
1/16	Regular	14,000	0.0010–0.0020									
1/16	Long	13,700	0.0006–0.0012									
3/32	Regular	9,500	0.0010–0.0020									
3/32	Long	9,300	0.0006–0.0012									
1/8	Regular	7,000	0.0010–0.0020									
1/8	Long	6,850	0.0006–0.0012									
3/16	Regular	4,700	0.0010–0.0020									
3/16	Long	4,600	0.0006–0.0012									
1/4	Regular	3,500	0.0020–0.0040									
1/4	Long	3,430	0.0012–0.0024									


1. Please reduce speed and feed by 20% when L/D>3D.
2. Please reduce speed and feed by 30% when slotting > 0.5D.
3. Please reduce depth of cut if running at elevated speed and feed.



List 2050: Regular Length, 4 Flute


List 2052: Regular Length, 4 Flute, Corner Radius

Side Milling

Hardness	-		<30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		-	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Pre-hardened Steels Tool Steels		Hardened Steels Pre-hardened Steels		Stainless Steels Hardened Steels		Stainless Steels Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Depth of Cut	$a_a=1.5D$ $a_r=0.2D$ 						$a_a=1.5D$ $a_r=0.1D$		$a_a=1.5D$ $a_r=0.05D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	11,900	41.2	9,075	30.0	7,640	23.2	7,275	23.0	7,030	20.4	3,600	8.2
3/16	8,395	54.0	6,500	43.7	5,540	30.0	5,215	32.1	5,075	27.9	2,590	10.1
1/4	6,420	60.0	4,965	44.6	4,220	33.2	3,970	31.0	3,850	26.0	1,985	9.3
5/16	5,135	62.0	4,000	43.8	3,385	32.3	3,180	32.2	3,080	26.9	1,590	8.8
3/8	4,280	59.5	3,330	43.0	2,820	29.8	2,650	29.2	2,570	26.2	1,325	9.0
7/16	3,670	59.4	2,855	42.4	2,420	29.5	2,270	28.8	2,200	25.5	1,135	9.0
1/2	3,200	51.8	2,500	37.2	2,115	26.6	1,985	25.1	1,925	22.3	995	7.9
5/8	2,565	47.5	2,000	37.0	1,695	24.9	1,590	21.8	1,540	19.8	795	8.6
3/4	2,140	40.5	1,665	30.9	1,410	24.2	1,325	21.5	1,285	18.6	660	8.2
1	1,605	33.7	1,250	26.6	1,060	20.2	995	18.9	965	15.2	495	7.0

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.


Slotting

Hardness	-		<30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		-	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Pre-hardened Steels Tool Steels		Hardened Steels Pre-hardened Steels		Stainless Steels Hardened Steels		Stainless Steels Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Depth of Cut	$a_a=1D$ 						$a_a=0.5D$		$a_a=0.2D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	9,932	26.8	8,098	25.1	7,487	20.2	7,029	17.6	6,876	17.2	2,414	5.1
3/16	6,621	31.1	5,399	31.3	4,991	22.5	4,686	22.0	4,584	21.5	1,609	6.0
1/4	4,966	28.3	4,049	23.9	3,744	21.7	3,514	21.8	3,438	21.0	1,207	5.7
5/16	3,973	24.2	3,239	22.0	2,995	21.9	2,812	20.8	2,750	20.4	966	6.3
3/8	3,311	24.5	2,699	22.9	2,496	19.7	2,343	19.2	2,292	18.6	805	5.9
7/16	2,838	22.7	2,314	24.3	2,139	18.2	2,008	17.7	1,965	17.5	690	5.8
1/2	2,483	21.1	2,025	17.8	1,872	17.6	1,757	16.7	1,719	16.5	604	5.6
5/8	1,986	22.2	1,620	17.2	1,497	14.7	1,406	14.6	1,375	14.6	483	4.4
3/4	1,655	19.9	1,350	15.4	1,248	14.4	1,171	13.7	1,146	13.4	402	4.5
1	1,242	17.8	1,012	14.7	936	12.4	879	11.2	860	9.3	302	4.2

1. Use a rigid and precise machine and holder.
2. When chattering occurs, reduce the speed and feed simultaneously.
3. Use a suitable cutting fluid with high smoke retardant.
4. When length of the tool extension from the machine is long, reduce the speed and feed.

List 3815 & 3915: 4 Flute, Low Helix, Corner Chamfer
List 3820 & 3920: 4 Flute, High Helix, Corner Chamfer
List 3825: Long Neck, 4 Flute, Low Helix, Corner Chamfer
List 3830: Long Neck, 4 Flute, High Helix, Corner Chamfer

Side Milling

Hardness		-		-		<30 HRC		<45 HRC		-		-	
Work Material		Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels		Hardened Steel Pre-hardened Steel		Stainless Steel 304		Titanium Alloy Ti-6AL-4V	
Depth of Cut		$a_a \leq 1.5D$ $a_r \leq 0.3D$ 											
Mill Dia.		Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
-	6	4,770	24.0	6,370	27.9	4,770	15.7	4,240	12.9	3,710	11.4	2,650	7.0
1/4	-	4,510	26.8	6,020	34.6	4,510	18.1	4,005	15.2	3,500	13.9	2,510	8.2
5/16	-	3,610	36.1	4,825	38.4	3,610	21.4	3,210	18.6	2,810	15.1	2,010	9.3
-	8	3,580	37.0	4,770	42.9	3,580	24.0	3,180	20.1	2,790	17.7	1,990	10.6
3/8	-	3,005	37.3	4,015	43.1	3,005	24.3	2,670	20.1	2,340	17.7	1,670	10.6
-	10	2,860	37.4	3,820	43.3	2,860	24.4	2,550	20.1	2,230	17.7	1,590	10.6
-	12	2,390	33.8	3,180	38.9	2,390	22.0	2,120	18.1	1,860	16.1	1,330	9.8
1/2	-	2,250	33.5	3,010	38.6	2,250	21.8	2,005	18.0	1,750	15.9	1,260	9.7
-	14	2,045	33.2	2,730	38.3	2,045	21.6	1,820	17.9	1,560	15.7	1,140	9.6
5/8	-	1,800	32.8	2,410	38.0	1,800	21.4	1,610	17.8	1,400	15.5	1,010	9.5
-	16	1,790	32.2	2,390	37.7	1,790	21.2	1,590	17.7	1,390	15.3	990	9.4
-	18	1,590	31.4	2,130	36.9	1,590	21.0	1,420	17.3	1,240	14.9	890	9.1
3/4	-	1,500	30.9	2,010	36.1	1,500	19.8	1,340	16.9	1,170	14.5	840	8.8
-	20	1,430	30.3	1,910	35.0	1,430	19.6	1,280	16.5	1,110	14.1	800	8.6
-	25	1,145	25.6	1,530	28.8	1,145	16.8	1,020	15.3	890	13.3	640	7.7
1	-	1,127	25.2	1,505	28.2	1,127	16.3	1,000	15.0	875	12.8	630	7.4

1. Use a rigid and precise machine and holder.
2. Please adjust the speed and feed when cutting depth is large or when machines with low rigidity are used.
3. Please use a suitable fluid with high smoke retardant properties.
4. During Dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.

continued on next page →





Slotting

Hardness	-		-		<30 HRC		<45 HRC		-		-		
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels		Hardened Steel Pre-hardened Steel		Stainless Steel 304		Titanium Alloy Ti-6AL-4V		
Depth of Cut	$a_a \leq 1D$ $a_r \text{ Max} = 0.472$												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	3,710	16.9	5,840	22.8	4,240	12.5	3,710	10.2	3,180	8.6	2,120	5.1
1/4	-	3,500	17.4	5,520	23.4	4,005	12.8	3,500	10.6	3,010	8.9	2,005	5.2
5/16	-	2,805	17.9	4,420	24.7	3,210	13.4	2,805	10.9	2,415	9.4	1,605	5.4
-	8	2,790	18.5	4,380	25.5	3,180	13.7	2,790	11.4	2,390	9.8	1,590	5.5
3/8	-	2,340	19.4	3,680	26.5	2,670	14.3	2,340	11.8	2,010	10.2	1,335	5.7
-	10	2,230	20.0	3,500	27.5	2,550	14.9	2,230	12.2	1,910	10.6	1,270	5.9
-	12	1,860	18.5	2,920	25.1	2,120	13.7	1,860	11.4	1,590	9.4	1,060	5.5
1/2	-	1,750	18.4	2,760	25.0	2,005	13.6	1,750	11.3	1,505	9.4	1,000	5.5
-	14	1,590	18.3	2,505	24.9	1,820	13.5	1,590	11.2	1,370	9.4	910	5.5
5/8	-	1,400	18.2	2,210	24.8	1,600	13.4	1,400	11.1	1,205	9.4	805	5.5
-	16	1,390	18.1	2,190	24.8	1,590	13.3	1,390	11.0	1,190	9.4	800	5.5
-	18	1,240	17.9	1,950	24.5	1,415	13.2	1,240	10.8	1,065	9.2	710	5.4
3/4	-	1,170	17.6	1,840	24.3	1,335	13.0	1,170	10.7	1,005	9.1	670	5.2
-	20	1,110	17.3	1,750	24.0	1,270	12.9	1,110	10.6	950	9.0	640	5.1
-	25	890	16.8	1,400	23.3	1,020	12.1	890	9.8	765	8.2	510	4.7
1	-	875	16.6	1,380	22.6	1,000	11.7	875	9.6	755	7.9	500	4.6

1. Use a rigid and precise machine and holder.
2. Please adjust the speed and feed when cutting depth is large or when machines with low rigidity are used.
3. Please use a suitable fluid with high smoke retardant properties.
4. During Dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.






EXOCARB® AERO ROUGHER


Carbide Rougher for Heavy Milling in Exotic Materials

List 2015: Regular Length, 4 Flute, Roughing

Side Milling

Hardness	35-45 HRC		45-55 HRC		<40 HRC		>40 HRC		-	
Work Material	Stainless Steel		Stainless Steel		Titanium		Titanium		Inconel, Waspaloy, Hastelloy	
Cutting Speed	450-490 SFM		310-350 SFM		210-240 SFM		150-165 SFM		80-90 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.4D$ 		$a_a=1.5D$ $a_r=0.33D$				$a_a=1.5D$ $a_r=0.25D$		$a_a=1.0D$ $a_r=0.20D$	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	7,181	28.7	5,040	16.1	3,440	22.0	2,408	12.5	1,300	3.1
3/8	4,788	30.6	3,360	17.5	2,294	19.3	1,605	11.6	867	3.5
1/2	3,590	30.2	2,520	16.1	1,720	17.8	1,204	11.1	650	3.1
5/8	2,873	29.9	2,016	16.9	1,376	19.8	963	11.9	520	3.3
3/4	2,394	32.6	1,680	17.5	1,147	18.4	802	12.5	433	3.5
1	1,795	25.8	1,260	14.6	860	14.8	602	9.6	325	2.9

Slotting

Hardness	35-45 HRC		45-55 HRC		<40 HRC		>40 HRC		-	
Work Material	Stainless Steel		Stainless Steel		Titanium		Titanium		Inconel, Waspaloy, Hastelloy	
Cutting Speed	450-490 SFM		310-350 SFM		210-240 SFM		150-165 SFM		80-90 SFM	
Depth of Cut	$a_a=0.5D$ 				$a_a=0.3D$		$a_a=0.25D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	7,181	23.0	5,040	12.9	3,440	17.6	2,408	10.0	1,300	2.5
3/8	4,788	24.5	3,360	14.0	2,294	15.4	1,605	9.3	867	2.8
1/2	3,590	24.2	2,520	12.9	1,720	14.3	1,204	8.9	650	2.5
5/8	2,873	23.9	2,016	13.5	1,376	15.9	963	9.5	520	2.7
3/4	2,394	26.0	1,680	14.0	1,147	14.7	802	10.0	433	2.8
1	1,795	20.7	1,260	11.7	860	11.8	602	7.7	325	2.5







List 2100: 5 Flute, Square End

List 2106: 5 Flute, Corner Radius

List 2102: 5 Flute, Regular Length, Reduced Neck, Square End

List 2108: 5 Flute, Regular Length, Reduced Neck, Corner Radius

	Side Milling		Slotting	
Cutting Speed	200-265 SFM		100-165 SFM	
Depth of Cut	$a_a \leq 1.8D$ $a_r = 0.2D$ 		$a_a \leq 1D$ 	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/2	1,800	31.9	1,030	10.2
5/8	1,435	25.5	825	8.2
3/4	1,200	25.7	700	8.3
1	900	19.7	515	6.0

1. Use a rigid and precise machine and holder.

2. The above cutting conditions are to be used as general guidelines. Please adjust the speed, feed and cutting depth according to actual cutting conditions.

3. Water soluble coolant is highly recommended.





EXOCARB® AERO UVX-Ti

Variable Lead End Mill for Titanium Alloy

List 2104: 5 Flute, Regular Length, Reduced Neck, Square End

List 2110: 5 Flute, Regular Length, Reduced Neck, Corner Radius

	Side Milling		Slotting	
Cutting Speed	200-265 SFM		100-165 SFM	
Depth of Cut	$a_a \leq 1.8D$ $a_r = 0.2D$ 		$a_a \leq 1D$ 	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
12	1,900	33.7	1,100	10.8
16	1,400	24.8	820	8.1
20	1,100	23.6	655	7.7
25	900	19.7	525	6.2

1. Use a rigid and precise machine and holder.
2. The above cutting conditions are to be used as general guidelines. Please adjust the speed, feed and cutting depth according to actual cutting conditions.
3. Water soluble coolant is highly recommended.







List 2080: 6 & 8 Flute, Inch

List 2081: 6 & 8 Flute, Metric

Contour Milling

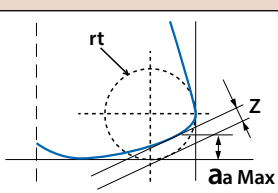Work Material		Titanium Alloy (Ti-6Al-4V)					
Cutting Speed		165 - 330 SFM					
Depth of Cut		$a_a \leq 0.035D$ $a_r \leq 0.39D$ 					
Mill Dia.		Speed RPM	Feed in/min	Ramping Angle	R (rt)	Z	
in	mm						
5/8	-	1,500	164	2°	0.031	0.016	
-	16	1,490	175		0.033	0.018	
3/4	-	1,250	132		0.037	0.021	
-	20	1,190	140		0.039	0.022	
-	25	850	189		0.047	0.029	
1	-	935	192		0.049	0.030	
							

1. During machining, please program the milling paths according to the recommended simulated R (rt) respective to the individual end mill diameter.
2. Using water soluble coolant is highly recommended.



List 2863: 2 Flute, Stub Length, Corner Radius


Work Material	Aluminum Alloy					
Cutting Speed	3,280 - 9,840 SFM					
Depth of Cut	<table border="1"> <tr> <td>aa</td> <td>ar</td> </tr> <tr> <td>0.6D</td> <td>1D</td> </tr> </table>	aa	ar	0.6D	1D	
aa	ar					
0.6D	1D					
Mill Dia.	Speed RPM	Feed in/min				
1/2	≤33000	≤360 IPM				
5/8	≤33000	≤470 IPM				
3/4	≤33000	≤590 IPM				
1	≤33000	≤590 IPM				

List 2963: 2 Flute, Stub Length, Corner Radius


Work Material	Aluminum Alloy					
Cutting Speed	3,280 - 9,840 SFM					
Depth of Cut	<table border="1"> <tr> <td>aa</td> <td>ar</td> </tr> <tr> <td>0.6D</td> <td>1D</td> </tr> </table>	aa	ar	0.6D	1D	
aa	ar					
0.6D	1D					
Mill Dia.	Speed RPM	Feed in/min				
12	≤33000	≤360 IPM				
16	≤33000	≤470 IPM				
20	≤33000	≤590 IPM				
25	≤33000	≤590 IPM				




List 2873: 3 Flute, Stub Length

Work Material	Aluminum Alloy					
Depth of Cut	<table border="1"> <tr> <td>aa</td> <td>ar</td> </tr> <tr> <td>0.4D</td> <td>1D</td> </tr> </table>	aa	ar	0.4D	1D	
aa	ar					
0.4D	1D					
Mill Dia.	Speed RPM	Feed in/min				
5/8	≤33000	≤790 IPM				
3/4	≤33000	≤1010 IPM				
1	≤33000	≤1280 IPM				

List 2973: 3 Flute, Stub Length

Work Material	Aluminum Alloy					
Depth of Cut	<table border="1"> <tr> <td>aa</td> <td>ar</td> </tr> <tr> <td>0.4D</td> <td>1D</td> </tr> </table>	aa	ar	0.4D	1D	
aa	ar					
0.4D	1D					
Mill Dia.	Speed RPM	Feed in/min				
20	≤33000	≤1010 IPM				
25	≤33000	≤1280 IPM				

List 2874: 3 Flute, Stub Length, Coolant-Through

Work Material	Aluminum Alloy					
Depth of Cut	<table border="1"> <tr> <td>aa</td> <td>ar</td> </tr> <tr> <td>0.4D</td> <td>1D</td> </tr> </table>	aa	ar	0.4D	1D	
aa	ar					
0.4D	1D					
Mill Dia.	Speed RPM	Feed in/min				
3/4	≤33000	≤1010 IPM				
1	≤33000	≤1280 IPM				



List 2974: 3 Flute, Stub Length, Coolant-Through

Work Material	Aluminum Alloy						
Depth of Cut	<table border="1"> <tr> <th>a_a</th> <th>a_r</th> </tr> <tr> <td>0.4D</td> <td>1D</td> </tr> </table>		a_a	a_r	0.4D	1D	
a_a	a_r						
0.4D	1D						
Mill Dia.	Speed RPM	Feed in/min					
20	≤33000	≤1010 IPM					
25	≤33000	≤1280 IPM					

List 2843: 3 Flute, Long Length

Work Material	Aluminum Alloy																	
Cutting Speed	3,280 SFM - 9,840 SFM																	
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> <tr> <td>1/2</td> <td>≤1.77</td> <td>≤0.006</td> </tr> <tr> <td>5/8</td> <td>≤1.77</td> <td>≤0.008</td> </tr> <tr> <td>3/4</td> <td>≤1.77</td> <td>≤0.012</td> </tr> <tr> <td>1</td> <td>≤1.77</td> <td>≤0.012</td> </tr> </table>		Dia	a_a	a_r	1/2	≤1.77	≤0.006	5/8	≤1.77	≤0.008	3/4	≤1.77	≤0.012	1	≤1.77	≤0.012	
Dia	a_a	a_r																
1/2	≤1.77	≤0.006																
5/8	≤1.77	≤0.008																
3/4	≤1.77	≤0.012																
1	≤1.77	≤0.012																
Mill Dia.	Speed RPM	Feed in/min																
1/2	≤14000	≤157 IPM																
5/8	≤14000	≤197 IPM																
3/4	≤14000	≤236 IPM																
1	≤14000	≤236 IPM																

List 2943: 3 Flute, Long Length

Work Material	Aluminum Alloy																	
Cutting Speed	3,280 SFM - 9,840 SFM																	
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> <tr> <td>12</td> <td>≤1.77</td> <td>≤0.006</td> </tr> <tr> <td>16</td> <td>≤1.77</td> <td>≤0.008</td> </tr> <tr> <td>20</td> <td>≤1.77</td> <td>≤0.012</td> </tr> <tr> <td>25</td> <td>≤1.77</td> <td>≤0.012</td> </tr> </table>		Dia	a_a	a_r	12	≤1.77	≤0.006	16	≤1.77	≤0.008	20	≤1.77	≤0.012	25	≤1.77	≤0.012	
Dia	a_a	a_r																
12	≤1.77	≤0.006																
16	≤1.77	≤0.008																
20	≤1.77	≤0.012																
25	≤1.77	≤0.012																
Mill Dia.	Speed RPM	Feed in/min																
12	≤14000	≤157 IPM																
16	≤14000	≤197 IPM																
20	≤14000	≤236 IPM																
25	≤14000	≤236 IPM																





List 2853: 3 Flute, Extra Long Length

Work Material	Aluminum Alloy					
Depth of Cut	<table border="1"> <tr> <td>\bar{a}_a</td> <td>\bar{a}_r</td> </tr> <tr> <td>≤ 3.74</td> <td>≤ 0.008</td> </tr> </table>	\bar{a}_a	\bar{a}_r	≤ 3.74	≤ 0.008	
\bar{a}_a	\bar{a}_r					
≤ 3.74	≤ 0.008					
Mill Dia.	Speed RPM	Feed in/min				
3/4	≤ 14000	≤ 236 IPM				

List 2953: 3 Flute, Extra Long Length

Work Material	Aluminum Alloy					
Depth of Cut	<table border="1"> <tr> <td>\bar{a}_a</td> <td>\bar{a}_r</td> </tr> <tr> <td>≤ 3.74</td> <td>≤ 0.008</td> </tr> </table>	\bar{a}_a	\bar{a}_r	≤ 3.74	≤ 0.008	
\bar{a}_a	\bar{a}_r					
≤ 3.74	≤ 0.008					
Mill Dia.	Speed RPM	Feed in/min				
20	≤ 14000	≤ 236 IPM				



List 2021: Stub Length - 2 Flute - Square & Corner Radius

Slotting

Work Material	Aluminum Alloys A6061, A7075		Aluminum Alloy Casting Si<13%	
Cutting Speed	1,190 SFM		1,080 SFM	
Depth of Cut	<1D Depth of Cut			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	25,000	100	25,000	100
3/16	24,400	195	22,000	175
1/4	18,300	200	16,500	180
3/8	12,200	195	11,000	175
7/16	10,400	210	9,350	190
1/2	9,100	225	8,200	200
5/8	7,300	205	6,600	185
3/4	6,100	195	5,500	175
1	4,500	180	4,050	160

1. Use a rigid and precise machine and holder.
2. Use a water soluble cutting fluid.
3. Please adjust the speed and feed when the cutting depth is large or when machines with low rigidity are used.

List 2022: Regular Length - 2 Flute - Square & Corner Radius

List 2023: Regular Length - 2 Flute - Reduced Neck

List 2024: Long Length - 2 Flute - Reduced Neck

Slotting

Work Material	Aluminum Alloys A6061, A7075		Aluminum Alloy Casting Si<13%	
Cutting Speed	990 SFM		890 SFM	
Depth of Cut	<0.6D Depth of Cut			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	25,000	100	25,000	100
3/16	20,300	160	18,300	145
1/4	15,200	170	13,700	150
3/8	10,100	160	9,100	145
7/16	8,700	175	7,800	160
1/2	7,600	190	6,800	170
5/8	6,100	170	5,500	150
3/4	5,100	160	4,600	145
1	3,800	150	3,400	135

1. Use a rigid and precise machine and holder.
2. Use a water soluble cutting fluid.
3. Please adjust the speed and feed when the cutting depth is large or when machines with low rigidity are used.





List 2041: Stub Length - 3 Flute - Square & Corner Radius

Slotting

Work Material	Aluminum Alloys A6061, A7075			
Depth of Cut	<0.5D Depth of Cut			
Mill Dia. (inch)	Speed RPM	IPT		Feed in/min
1/8	25,000	0.0014		105.0
3/16	24,400	0.0028		205.0
1/4	18,300	0.0039		211.4
3/8	12,200	0.0056		205.0
7/16	10,400	0.0070		218.4
1/2	9,100	0.0088		238.9
5/8	7,300	0.0098		214.6
3/4	6,100	0.0112		205.0
1	4,500	0.0140		189.0





List 2042: Regular Length - 3 Flute - Square & Corner Radius

List 2043: Regular Length - 3 Flute - Reduced Neck - Square & Corner Radius

List 2048: Regular Length - 3 Flute - Reduced Neck - Square & Corner Radius

Slotting

Work Material	Aluminum Alloys A6061, A7075			
Depth of Cut	<0.5D Depth of Cut			
Mill Dia.	Speed RPM	IPT	Feed in/min	
1/8	25,000	0.0014	105.0	
3/16	20,300	0.0028	170.5	
1/4	15,200	0.0039	175.6	
3/8	10,100	0.0056	169.7	
7/16	8,700	0.0070	182.7	
1/2	7,600	0.0088	199.5	
5/8	6,100	0.0098	179.3	
3/4	5,100	0.0112	171.4	
1	3,800	0.0140	159.6	





List 2010: Ball End, Regular Length, 2 Flute

Slotting

Work Material	Aluminum Alloy A6061, A7075		Aluminum Alloy Casting	
Cutting Speed	990 SFM		900 SFM	
Depth of Cut	<0.6D Depth of Cut			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	25,000	139.1	25,000	130.6
3/16	20,170	171.9	18,336	147.4
1/4	15,127	174.3	13,752	151.0
5/16	12,102	178.2	11,002	154.1
3/8	10,085	181.9	9,168	157.5
7/16	8,644	185.0	7,858	160.5
1/2	7,564	188.1	6,876	164.6
5/8	6,051	180.4	5,501	156.0
3/4	5,042	177.3	4,584	153.2
1	3,782	173.2	3,438	149.9

1. Use a rigid and precise machine and holder.
2. Use a water soluble cutting fluid.
3. Please adjust the speed and feed when the cutting depth is large or when machines with low rigidity are used.

Profiling

Work Material	Aluminum Alloy A6061, A7075		Aluminum Alloy Casting	
Cutting Speed	1190 SFM		1100 SFM	
Depth of Cut	Aa = 0.1D Ar = 0.2D			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	25,000	139.1	25,000	130.6
3/16	24,244	206.7	22,411	180.1
1/4	18,183	209.5	16,808	184.6
5/16	14,547	214.2	13,446	188.4
3/8	12,122	218.6	11,205	192.5
7/16	10,390	222.4	9,605	196.2
1/2	9,092	226.1	8,404	201.1
5/8	7,273	216.9	6,723	190.7
3/4	6,061	213.1	5,603	187.2
1	4,546	208.2	4,202	183.2


1. Use a rigid and precise machine and holder.
2. Use a water soluble cutting fluid.
3. Please adjust the speed and feed when the cutting depth is large or when machines with low rigidity are used.






List 8120: Regular Length - 2 Flute

Side Milling

Work Material	Aluminum Alloys		Copper Alloys	
Cutting Speed	650 SFM		245 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	6.8	23,500	8.7
2	25,000	12.9	11,500	8.5
3	21,000	27.6	7,950	9.8
4	15,500	28.5	5,950	11.0
5	12,500	29.9	4,750	11.6
6	10,500	32.7	3,950	12.2
8	7,950	35.0	2,950	13.8
10	6,350	39.2	2,350	14.4
12	5,300	41.3	1,950	15.4
14	4,500	41.3	1,700	15.6
16	3,950	41.3	1,450	15.4
18	3,500	41.3	1,300	15.4
20	3,150	41.3	1,150	15.2

1. Use a rigid and precise machine and holder.
2. Use a water soluble cutting fluid.
3. Please adjust the speed and feed when the cutting depth is large or when machines with low rigidity are used.

Slotting

Work Material	Aluminum Alloys		Copper Alloys	
Cutting Speed	490 SFM		245 SFM	
Depth of Cut	$a_a=1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	6.8	23,500	8.7
2	23,500	12.2	11,500	8.5
3	15,500	20.3	7,950	9.8
4	11,500	21.3	5,950	11.0
5	9,500	22.6	4,750	11.6
6	7,950	24.8	3,950	12.2
8	5,950	26.2	2,950	13.8
10	4,750	29.3	2,350	14.4
12	3,950	31.1	1,950	15.4
14	3,400	31.3	1,700	15.6
16	2,950	31.3	1,450	15.4
18	2,650	31.3	1,300	15.4
20	2,350	30.9	1,150	15.2

1. Use a rigid and precise machine and holder.
2. Use a water soluble cutting fluid.
3. Please adjust the speed and feed when the cutting depth is large or when machines with low rigidity are used.






List 2061: BNC, Nick Router


List 2066: HBC, Compression Router, 30° Helix

List 2064: HBC 45, Compression Router, 45° Helix

Side Milling

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	400-800 SFM	
Depth of Cut	$aa < 1.5D$ $ar < 1D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
1/8	12,200 - 24,400	0.0011 - 0.0022
3/16	8,100 - 16,300	0.0021 - 0.0042
1/4	6,100 - 12,200	0.0033 - 0.0067
5/16	5,000 - 9,800	0.0047 - 0.0093
3/8	4,100 - 8,100	0.0067 - 0.0133
1/2	3,000 - 6,100	0.0111 - 0.0222

Slotting

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	300-600 SFM	
Depth of Cut	$aa < 1D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
1/8	9,200 - 18,300	0.0016 - 0.0020
3/16	6,100 - 12,200	0.0020 - 0.0024
1/4	4,600 - 9,200	0.004 - 0.005
5/16	3,600 - 7,300	0.006 - 0.008
3/8	3,000 - 6,100	0.009 - 0.012
1/2	2,300 - 4,600	0.012 - 0.020

1. The conditions listed above are based on approximately 1xDc thickness of part with rigid work holding.
2. Conventional cut is recommended at part side for good surface finish.
3. Milling speed can be increased by 20-50% with the use of appropriate cutting oil.
4. Please provide appropriate measures against dust (Such as vacuum dust collection).
5. Depending on the workpiece thickness and form as well as work holding, vibration may occur. When it occurs, please adjust RPM and feed rate.

Feed Reduction


Material Thickness	Feed Reduction
$\leq 0.25D$	x80%
0.25D ~ 0.5D	x150%
0.5D ~ 1D	x120%
1D ~ 2D	x80%
2D ~ 3D	x50%




List 2068: HBC 60, Compression Router, 60° Helix

List 668: HBC 60, Compression Router, 60° Helix, Bright

Side Milling

Work Material	Carbon & Glass Fiber Reinforced Plastics		Honeycomb Structures & Aramid Fiber Reinforced Plastics	
Cutting Speed	400-800 SFM		1,000-2,600 SFM	
Depth of Cut	$a_a < 1.5D$ $a_r < 1D$			
Drill Diameter (Inch)	Speed RPM	Feed IPR	Speed RPM	Feed IPR
1/4	6,100 - 12,200	0.0033 - 0.0067	15,300 - 39,700	0.0003 - 0.0007
3/8	4,000 - 8,100	0.0067 - 0.0133	10,100 - 26,500	0.0006 - 0.0009
1/2	3,000 - 6,100	0.0111 - 0.0222	7,600 - 19,900	0.0011 - 0.0014

Slotting

Work Material	Carbon & Glass Fiber Reinforced Plastics		Honeycomb Structures & Aramid Fiber Reinforced Plastics	
Cutting Speed	300-600 SFM		750-1,900 SFM	
Depth of Cut	$a_a < 1D$			
Drill Diameter (Inch)	Speed RPM	Feed IPR	Speed RPM	Feed IPR
1/4	4,600 - 9,200	0.0021 - 0.0043	11,500 - 29,000	0.0002 - 0.0005
3/8	4,000 - 8,000	0.0044 - 0.0089	7,600 - 19,400	0.0007 - 0.0011
1/2	3,000 - 6,100	0.0071 - 0.0143	5,700 - 14,500	0.0013 - 0.0017

1. The conditions listed above are based on approximately 1xDc thickness of part with rigid work holding.
2. Conventional cut is recommended at part side for good surface finish.
3. Milling speed can be increased by 20-50% with the use of appropriate cutting oil.
4. Please provide appropriate measures against dust (Such as vacuum dust collection).
5. Depending on the workpiece thickness and form as well as work holding, vibration may occur. When it occurs, please adjust RPM and feed rate.
6. Kevlar laminate machinability can vary greatly by fiber and resin. If hole quality is not achieved with the feed rates provided above, reducing the feed rates may produce better quality surfaces.

Feed Reduction


Material Thickness	Feed Reduction
$\leq 0.25D$	x80%
0.25D ~ 0.5D	x150%
0.5D ~ 1D	x120%
1D ~ 2D	x80%
2D ~ 3D	x50%






List 2680: REC, Rougher Router

Side Milling

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	400-800 SFM	
Depth of Cut	$a_a < 1.5D$ $a_r < 1D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
1/4	6,100 - 12,200	0.0067 - 0.0200
3/8	4,100 - 8,100	0.0200 - 0.0400
1/2	3,000 - 6,100	0.0333 - 0.0667

Slotting

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	300-600 SFM	
Depth of Cut	$a_a < 1D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
1/4	4,600 - 9,200	0.0064 - 0.0129
3/8	3,000 - 6,100	0.0133 - 0.0267
1/2	2,300 - 4,600	0.0214 - 0.0429

1. The conditions listed above are based on approximately 1xDc thickness of part with rigid work holding.
2. Conventional cut is recommended at part side for good surface finish.
3. Milling speed can be increased by 20-50% with the use of appropriate cutting oil.
4. Please provide appropriate measures against dust (Such as vacuum dust collection).
5. Depending on the workpiece thickness and form as well as work holding, vibration may occur. When it occurs, please adjust RPM and feed rate.

Feed Reduction


Material Thickness	Feed Reduction
≤0.25D	x80%
0.25D ~ 0.5D	x150%
0.5D ~ 1D	x120%
1D ~ 2D	x80%
2D ~ 3D	x50%





List 2650: MFR, Finishing Router

Side Milling

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	325-600 SFM	
Depth of Cut	$a_a < 1.0D$ $a_r \leq 0.2D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
1/4	5,000 - 9,000	0.009 - 0.016
3/8	3,300 - 6,000	0.019 - 0.047
1/2	2,500 - 4,000	0.028 - 0.055

1. The conditions listed above are based on approximately 1xDc thickness of part with rigid work holding.
2. Conventional cut is recommended at part side for good surface finish.
3. Milling speed can be increased by 20-50% with the use of appropriate cutting oil.
4. Please provide appropriate measures against dust (Such as vacuum dust collection).
5. Depending on the workpiece thickness and form as well as work holding, vibration may occur. When it occurs, please adjust RPM and feed rate.


Feed Reduction

Material Thickness	Feed Reduction
$\leq 0.25D$	x80%
0.25D ~ 0.5D	x150%
0.5D ~ 1D	x120%
1D ~ 2D	x80%
2D ~ 3D	x50%




List 641R: HFR, Hand Router

Side Milling

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	400-800 SFM	
Depth of Cut	$a_a < 1.5D$ $a_r < 1D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
3/16	8,100 - 16,300	0.0015 - 0.0027
1/4	6,100 - 12,200	0.0033 - 0.0067
3/8	4,100 - 8,100	0.0067 - 0.0117
1/2	3,000 - 6,100	0.0111 - 0.0222

Slotting

Work Material	Carbon & Glass Fiber Reinforced Plastics	
Cutting Speed	300-600 SFM	
Depth of Cut	$a_a < 1D$ 	
Drill Diameter (Inch)	Speed RPM	Feed IPR
3/16	6,100 - 12,200	0.0010 - 0.0020
1/4	4,600 - 9,200	0.0021 - 0.0043
3/8	3,100 - 6,100	0.0044 - 0.0078
1/2	2,300 - 4,600	0.0071 - 0.0143



List VG441: 4 Flute

List VG434: 4 Flute - Corner Radius

List VG436: 4 Flute - Corner Chamfer

Side Milling

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		<40 HRC		<45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	400-500 SFM		300-400 SFM		200-350 SFM		200-250 SFM		175-225 SFM		150-250 SFM		100-135 SFM	
Depth of Cut	Aa=1.5D Ar=0.5D						Aa=1.5D Ar=0.5D		Aa=1.5D Ar=0.5D		Aa=1.5D Ar=0.5D		Aa=1.25D Ar=0.3D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	13,750	44.0	10,695	25.7	8,400	18.6	6,875	15.2	6,110	14.5	6,110	12.9	3,665	9.5
3/16	9,170	46.8	7,130	28.8	5,600	20.6	4,585	16.9	4,075	16.3	4,075	13.7	2,445	10.9
1/4	6,875	46.8	5,350	31.1	4,200	20.3	3,440	16.7	3,050	16.8	3,050	13.9	1,835	11.2
5/16	5,500	48.1	4,210	31.8	3,350	21.4	2,750	17.6	2,450	17.8	2,450	15.1	1,465	11.7
3/8	4,585	47.1	3,565	30.5	2,800	20.6	2,290	16.9	2,040	16.3	2,040	14.6	1,220	11.1
7/16	3,930	45.4	3,055	30.2	2,400	20.1	1,965	16.5	1,750	16.3	1,750	14.0	1,050	11.1
1/2	3,440	45.4	2,675	29.2	2,100	19.5	1,720	15.9	1,525	15.7	1,525	13.9	915	10.8
5/8	2,750	40.6	2,140	27.7	1,700	19.0	1,375	15.4	1,225	14.7	1,225	12.5	730	9.9
3/4	2,290	37.3	1,785	25.3	1,400	16.8	1,150	13.8	1,025	13.5	1,025	11.8	610	9.3
1	1,720	33.0	1,340	22.8	1,050	14.9	860	12.2	765	12.2	765	10.6	460	8.4

Slotting

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 40 HRC		< 45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	325-400 SFM		250-325 SFM		175-275 SFM		160-200 SFM		140-180 SFM		125-200 SFM		75-100 SFM	
Depth of Cut	Aa=1D						Aa=0.75D		Aa=0.75D		Aa=0.75D		Aa=0.25D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	11,240	35.8	8,860	21.3	6,900	15.4	5,500	10.7	4,890	11.6	5,050	10.6	2,750	7.3
3/16	7,495	38.5	5,910	23.9	4,600	17.5	3,670	11.5	3,260	12.8	3,350	11.5	1,835	8.1
1/4	5,620	37.9	4,430	25.5	3,450	17.2	2,750	12.2	2,445	14.0	2,550	11.8	1,375	8.1
5/16	4,500	39.4	3,545	26.8	2,750	18.3	2,200	12.9	1,955	14.2	2,000	11.8	1,100	9.0
3/8	3,750	38.2	2,955	25.5	2,300	17.5	1,835	12.2	1,630	12.8	1,700	11.6	915	8.3
7/16	3,210	37.1	2,530	24.7	1,950	16.7	1,575	11.8	1,395	12.8	1,450	11.8	785	8.3
1/2	2,810	37.2	2,215	24.2	1,700	16.1	1,375	11.5	1,225	12.8	1,300	12.1	690	8.1
5/8	2,250	33.1	1,775	22.5	1,400	15.9	1,100	11.0	975	11.6	1,000	10.0	550	7.6
3/4	1,875	31.1	1,480	20.9	1,150	14.4	920	10.0	815	10.5	850	9.4	460	6.9
1	1,405	26.7	1,110	18.7	875	12.6	685	8.6	610	9.8	650	9.0	345	6.5







List VG446: 4 Flute - Reduced Neck

List VG464: 4 Flute - Extended Length

Side Milling

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 40 HRC		< 45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	400-500 SFM		300-400 SFM		200-350 SFM		200-250 SFM		175-225 SFM		150-250 SFM		100-135 SFM	
Depth of Cut	$Aa=1D$ $Ar=0.4D$ 						$Aa=0.75D$ $Ar=0.35D$		$Aa=0.75D$ $Ar=0.15D$		$Aa=0.75D$ $Ar=0.35D$		$Aa=0.75D$ $Ar=0.15D$	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	6,875	46.8	5,350	31.1	4,200	20.3	3,440	16.7	3,050	16.8	3,050	13.9	1,835	11.2
3/8	4,585	47.1	3,565	30.5	2,800	20.6	2,290	16.9	2,040	16.3	2,040	14.6	1,220	11.1
1/2	3,440	45.4	2,675	29.2	2,100	19.5	1,720	15.9	1,525	15.7	1,525	13.9	915	10.8
5/8	2,750	40.6	2,140	27.7	1,700	19.0	1,375	15.4	1,225	14.7	1,225	12.5	730	9.9
3/4	2,290	37.3	1,785	25.3	1,400	16.8	1,150	13.8	1,025	13.5	1,025	11.8	610	9.3
1	1,720	33.0	1,340	22.8	1,050	14.9	860	12.2	765	12.2	765	10.6	460	8.4

Slotting


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		<40 HRC		<45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	325-400 SFM		250-325 SFM		175-275 SFM		160-200 SFM		140-180 SFM		125-200 SFM		75-100 SFM	
Depth of Cut	$Aa=0.6D$ 						$Aa=0.4D$		$Aa=0.25D$		$Aa=0.4D$		$Aa=0.15D$	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	5,620	37.9	4,430	25.5	3,450	17.2	2,750	12.2	2,445	14.0	2,550	11.8	1,375	8.1
3/8	3,750	38.2	2,955	25.5	2,300	17.5	1,835	12.2	1,630	12.8	1,700	11.6	915	8.3
1/2	2,810	37.2	2,215	24.2	1,700	16.1	1,375	11.5	1,225	12.8	1,300	12.1	690	8.1
5/8	2,250	33.1	1,775	22.5	1,400	15.9	1,100	11.0	975	11.6	1,000	10.0	550	7.6
3/4	1,875	31.1	1,480	20.9	1,150	14.4	920	10.0	815	10.5	850	9.4	460	6.9
1	1,405	26.7	1,110	18.7	875	12.6	685	8.6	610	9.8	650	9.0	345	6.5






List VG441BN: 4 Flute - Ball Nose

Side Milling

Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	<40 HRC	<45 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	400-500 SFM	300-400 SFM	200-350 SFM	200-250 SFM	175-225 SFM	150-250 SFM	100-135 SFM							
Depth of Cut	Aa=1.5D Ar=0.5D 			Aa=1.25D Ar=0.4D		Aa=1.25D Ar=0.4D		Aa=1D Ar=0.2D						
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	13,750	44.0	10,695	25.7	8,400	18.6	6,875	15.2	6,110	14.5	6,110	12.9	3,665	9.5
3/16	9,170	46.8	7,130	28.8	5,600	20.6	4,585	16.9	4,075	16.3	4,075	13.7	2,445	10.9
1/4	6,875	46.8	5,350	31.1	4,200	20.3	3,440	16.7	3,050	16.8	3,050	13.9	1,835	11.2
5/16	5,500	48.1	4,210	31.8	3,350	21.4	2,750	17.6	2,450	17.8	2,450	15.1	1,465	11.7
3/8	4,585	47.1	3,565	30.5	2,800	20.6	2,290	16.9	2,040	16.3	2,040	14.6	1,220	11.1
7/16	3,930	45.4	3,055	30.2	2,400	20.1	1,965	16.5	1,750	16.3	1,750	14.0	1,050	11.1
1/2	3,440	45.4	2,675	29.2	2,100	19.5	1,720	15.9	1,525	15.7	1,525	13.9	915	10.8
5/8	2,750	40.6	2,140	27.7	1,700	19.0	1,375	15.4	1,225	14.7	1,225	12.5	730	9.9
3/4	2,290	37.3	1,785	25.3	1,400	16.8	1,150	13.8	1,025	13.5	1,025	11.8	610	9.3
1	1,720	33.0	1,340	22.8	1,050	14.9	860	12.2	765	12.2	765	10.6	460	8.4
1 1/4	1,375	26.4	1,070	18.2	850	12.1	690	9.8	610	9.7	610	8.3	365	6.7

Slotting

Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	<40 HRC	<45 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	325-400 SFM	250-325 SFM	175-275 SFM	160-200 SFM	140-180 SFM	125-200 SFM	75-100 SFM							
Depth of Cut	Aa=1D 			Aa=0.75D		Aa=0.5D		Aa=0.2D						
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	11,240	35.8	8,860	21.3	6,900	15.4	5,500	10.7	4,890	11.6	5,050	10.6	2,750	7.3
3/16	7,495	38.5	5,910	23.9	4,600	17.5	3,670	11.5	3,260	12.8	3,350	11.5	1,835	8.1
1/4	5,620	37.9	4,430	25.5	3,450	17.2	2,750	12.2	2,445	14.0	2,550	11.8	1,375	8.1
5/16	4,500	39.4	3,545	26.8	2,750	18.3	2,200	12.9	1,955	14.2	2,000	11.8	1,100	9.0
3/8	3,750	38.2	2,955	25.5	2,300	17.5	1,835	12.2	1,630	12.8	1,700	11.6	915	8.3
7/16	3,210	37.1	2,530	24.7	1,950	16.7	1,575	11.8	1,395	12.8	1,450	11.8	785	8.3
1/2	2,810	37.2	2,215	24.2	1,700	16.1	1,375	11.5	1,225	12.8	1,300	12.1	690	8.1
5/8	2,250	33.1	1,775	22.5	1,400	15.9	1,100	11.0	975	11.6	1,000	10.0	550	7.6
3/4	1,875	31.1	1,480	20.9	1,150	14.4	920	10.0	815	10.5	850	9.4	460	6.9
1	1,405	26.7	1,110	18.7	875	12.6	685	8.6	610	9.8	650	9.0	345	6.5
1 1/4	1,115	21.2	885	14.9	700	10.1	550	6.9	490	7.8	500	6.9	275	5.1







List VG541: 5 Flute

List VG534: 5 Flute - Corner Radius

Side Milling

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		<40 HRC		<45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	400-500 SFM		300-400 SFM		200-350 SFM		200-250 SFM		175-225 SFM		150-250 SFM		100-135 SFM	
Depth of Cut	Aa=1.25D Ar=0.5D 						Aa=1.25D Ar=0.4D		Aa=1.25D Ar=0.2D		Aa=1.25D Ar=0.5D		Aa=1D Ar=0.2D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	13,750	55.0	10,695	32.2	8,400	23.2	6,875	19.0	6,110	18.2	6,110	16.1	3,665	11.8
3/16	9,170	58.5	7,130	36.1	5,600	25.8	4,585	21.1	4,075	20.4	4,075	17.2	2,445	13.6
1/4	6,875	58.4	5,350	38.9	4,200	25.4	3,440	20.8	3,050	21.1	3,050	17.4	1,835	14.1
5/16	5,500	60.2	4,210	39.7	3,350	26.8	2,750	22.0	2,450	22.2	2,450	18.9	1,465	14.7
3/8	4,585	58.8	3,565	38.1	2,800	25.8	2,290	21.1	2,040	20.4	2,040	18.3	1,220	13.9
7/16	3,930	56.8	3,055	37.8	2,400	25.1	1,965	20.6	1,750	20.4	1,750	17.5	1,050	13.8
1/2	3,440	56.8	2,675	36.5	2,100	24.3	1,720	19.9	1,525	19.6	1,525	17.4	915	13.4
5/8	2,750	50.7	2,140	34.6	1,700	23.8	1,375	19.3	1,225	18.4	1,225	15.6	730	12.4
3/4	2,290	46.7	1,785	31.6	1,400	21.0	1,150	17.3	1,025	16.8	1,025	14.8	610	11.6
1	1,720	41.3	1,340	28.5	1,050	18.7	860	15.3	765	15.3	765	13.2	460	10.5

Slotting

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		<40 HRC		<45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	325-400 SFM		250-325 SFM		175-275 SFM		160-200 SFM		140-180 SFM		125-200 SFM		75-100 SFM	
Depth of Cut	Aa=1D 						Aa=0.75D		Aa=0.5D		Aa=0.5D		Aa=0.2D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	11,240	44.8	8,860	26.6	6,900	19.3	5,500	13.4	4,890	14.6	5,050	13.3	2,750	9.1
3/16	7,495	48.2	5,910	29.9	4,600	21.9	3,670	14.3	3,260	16.0	3,350	14.3	1,835	10.2
1/4	5,620	47.5	4,430	31.9	3,450	21.6	2,750	15.3	2,445	17.5	2,550	14.8	1,375	10.2
5/16	4,500	49.2	3,545	33.4	2,750	22.9	2,200	16.1	1,955	17.8	2,000	14.8	1,100	11.2
3/8	3,750	47.8	2,955	31.9	2,300	21.9	1,835	15.3	1,630	16.0	1,700	14.5	915	10.4
7/16	3,210	46.4	2,530	30.8	1,950	20.9	1,575	14.8	1,395	16.0	1,450	14.7	785	10.3
1/2	2,810	46.5	2,215	30.2	1,700	20.1	1,375	14.3	1,225	16.0	1,300	15.1	690	10.2
5/8	2,250	41.4	1,775	28.2	1,400	19.8	1,100	13.8	975	14.5	1,000	12.5	550	9.6
3/4	1,875	38.8	1,480	26.1	1,150	18.0	920	12.5	815	13.1	850	11.8	460	8.7
1	1,405	33.4	1,110	23.4	875	15.8	685	10.7	610	12.2	650	11.3	345	8.0





List HP421

Slotting (Fractional)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC			
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels			
Cutting Speed	360 SFM		330 SFM		260 SFM		220 SFM		180 SFM		120 SFM		80 SFM			
Depth of Cut													Dia		aa	
													D<1/16		0.1D	
													1/16≤D≤1/8		0.3D	
		1/8≤D		0.5D		Dia		aa		Dia		aa				
		D<1/16		0.01D		1/16≤D≤1/8		0.02D		1/8≤D		0.05D				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
1/16	21,990	7.9	20,150	7.2	15,880	7.2	13,440	5.1	10,990	3.5	7,330	2.0	4,890	1.3		
3/32	14,660	9.6	13,440	8.8	10,590	7.3	8,960	5.1	7,330	3.7	4,890	2.3	3,260	1.3		
1/8	10,990	12.4	10,080	11.5	7,940	8.0	6,720	5.4	5,500	4.0	3,660	2.5	2,440	1.5		
5/32	8,790	13.6	8,060	12.4	6,350	9.2	5,370	6.1	4,230	4.2	2,930	2.6	1,870	1.4		
3/16	7,190	15.4	6,540	14.0	5,325	10.5	4,455	6.0	3,785	4.5	2,360	2.6	1,590	1.4		
1/4	5,600	16.0	5,090	14.5	4,125	11.1	3,375	6.0	2,870	4.7	1,775	2.6	1,205	1.2		
5/16	4,395	15.3	4,000	13.9	3,270	11.1	2,660	5.9	2,295	4.7	1,390	2.4	960	1.2		
3/8	3,695	14.7	3,360	13.3	2,735	11.0	2,225	5.9	1,910	4.5	1,200	2.4	800	1.2		
7/16	3,160	14.5	2,870	13.2	2,345	10.9	1,895	5.9	1,630	4.4	1,035	2.3	690	1.0		
1/2	2,760	14.5	2,510	13.2	2,030	10.6	1,655	5.6	1,415	4.4	900	2.1	600	0.9		
5/8	2,195	12.6	1,995	12.3	1,625	9.5	1,330	4.7	1,150	4.0	720	1.7	470	0.7		
3/4	1,760	11.1	1,605	10.0	1,305	7.6	1,095	3.8	935	3.2	580	1.4	410	0.6		
1	1,360	8.5	1,240	7.7	1,020	6.0	840	3.0	720	2.6	440	0.9	300	0.5		

For side milling, increase feeds 20% to 50%.

Slotting (Metric)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC			
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels			
Cutting Speed	360 SFM		330 SFM		260 SFM		220 SFM		180 SFM		120 SFM		80 SFM			
Depth of Cut													Dia		aa	
													D<1		0.1D	
													1≤D≤3		0.3D	
		3≤D		0.5D		Dia		aa		Dia		aa				
		D<1		0.01D		1≤D≤3		0.02D		3≤D		0.05D				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
1	25,000	6.5	25,000	6.6	25,000	8.4	21,330	6.0	17,450	4.1	11,634	2.0	7,756	1.5		
2	17,424	8.4	15,840	7.6	12,096	7.0	10,660	5.3	9,144	4.0	5,688	2.3	3,960	1.4		
3	11,750	12.5	10,656	11.4	8,400	7.8	7,110	5.2	5,817	3.9	3,960	2.6	2,585	1.5		
4	8,730	13.6	8,000	12.6	6,300	9.4	5,330	6.1	4,363	4.4	2,908	2.6	1,939	1.5		
5	6,980	16.4	6,400	15.0	5,040	10.9	4,270	6.1	3,490	4.5	2,327	2.7	1,551	1.4		
6	5,820	16.0	5,330	14.6	4,200	10.8	3,560	6.2	2,908	4.5	1,939	2.8	1,293	1.2		
8	4,360	15.3	4,000	14.1	3,150	10.8	2,670	5.9	2,181	4.5	1,454	2.5	969	1.2		
10	3,490	14.5	3,200	13.3	2,520	10.7	2,130	6.0	1,745	4.3	1,163	2.4	776	1.2		
12	2,910	14.5	2,670	13.3	2,100	10.6	1,780	6.0	1,454	4.3	969	2.2	646	1.0		
14	2,490	14.4	2,290	13.2	1,800	10.2	1,520	5.2	1,246	4.4	831	2.0	554	0.9		
16	2,180	12.5	2,000	12.4	1,580	9.2	1,330	4.7	1,091	3.8	727	1.7	485	0.7		
18	1,940	12.2	1,780	11.2	1,400	8.3	1,190	4.2	969	3.4	646	1.4	431	0.7		
20	1,750	10.9	1,600	10.0	1,260	7.3	1,070	3.7	873	3.0	582	1.4	388	0.6		
22	1,590	9.9	1,460	9.1	1,150	6.8	970	3.3	793	2.8	529	1.2	353	0.5		
25	1,400	8.7	1,280	7.9	1,010	6.0	850	3.1	698	2.5	465	1.0	310	0.5		

For side milling, increase feeds 20% to 50%.


For High Speed milling parameters, see pg 1211-1212.





List HP441

Side Milling (Fractional)

Hardness	–		<20 HRC		<30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC												
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels												
Cutting Speed	390 SFM		330 SFM		270 SFM		220 SFM		190 SFM		120 SFM		80 SFM												
Depth of Cut	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D ≤ 1/8</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>1/8 < D</td> <td>1.5D</td> <td>0.10D</td> </tr> </tbody> </table> 												Dia	aa	ar	D ≤ 1/8	1.5D	0.05D	1/8 < D	1.5D	0.10D	$a_a = 1D$ $a_r = 0.02D$			
	Dia	aa	ar																						
D ≤ 1/8	1.5D	0.05D																							
1/8 < D	1.5D	0.10D																							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min											
1/16	23,820	17.6	20,155	13.9	15,670	11.2	13,435	5.8	11,605	4.9	7,330	2.8	5,400	1.6											
3/32	16,305	21.5	13,720	18.1	11,550	14.5	13,435	9.0	13,435	9.6	4,885	3.4	3,260	2.2											
1/8	12,060	28.4	10,205	24.0	8,245	16.0	10,075	8.3	10,075	9.6	3,665	3.3	2,445	2.3											
5/32	9,630	29.9	8,060	25.0	8,060	17.9	5,170	6.3	4,475	5.3	2,930	3.6	1,955	2.4											
3/16	8,075	33.7	6,740	28.3	6,720	22.0	4,455	6.5	3,935	5.7	2,360	3.5	1,565	2.0											
1/4	5,955	29.0	5,090	28.9	4,235	20.0	3,375	6.9	3,030	6.1	1,775	3.3	1,205	1.9											
5/16	4,820	33.6	4,000	27.8	3,330	19.8	2,660	6.9	2,360	6.1	1,390	3.2	960	1.7											
3/8	4,005	33.6	3,360	27.8	2,795	19.8	2,225	6.9	1,970	6.1	1,200	3.8	800	1.7											
7/16	3,440	33.6	2,870	27.8	2,405	19.8	1,895	6.9	1,690	6.1	1,035	3.4	690	1.5											
1/2	3,010	32.7	2,510	27.5	2,090	19.7	1,655	6.9	1,475	6.0	900	2.7	600	1.3											
5/8	2,355	31.4	1,995	26.1	1,630	19.6	1,325	6.1	1,200	5.4	720	2.3	470	0.9											
3/4	1,920	29.7	1,605	24.9	1,350	15.7	1,095	5.0	975	4.5	580	1.7	405	1.0											
1	1,485	23.3	1,240	19.5	1,050	14.0	840	3.9	750	3.5	440	1.4	300	0.7											

continued on next page





List HP441 (Continued)

Side Milling (Metric)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC															
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels															
Cutting Speed	390 SFM		330 SFM		270 SFM		220 SFM		190 SFM		120 SFM		80 SFM															
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤3</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>3<D</td> <td>1.5D</td> <td>0.10D</td> </tr> </tbody> </table>											Dia	aa	ar	D≤3	1.5D	0.05D	3<D	1.5D	0.10D					$a_a=1D$ $a_r=0.02D$			
	Dia	aa	ar																									
	D≤3	1.5D	0.05D																									
3<D	1.5D	0.10D																										
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min														
1	25,000	13.6	25,000	13.7	25,000	14.4	21,330	7.6	18,420	6.6	11,635	3.9	7,755	2.4														
2	18,905	17.6	15,995	14.9	13,090	12.8	10,188	6.1	9,240	5.6	5,772	3.4	4,050	2.3														
3	12,605	29.7	10,665	25.1	8,725	17.0	7,110	5.9	6,140	5.8	3,816	3.5	2,585	2.4														
4	9,450	29.4	8,000	24.8	6,545	14.5	5,330	6.5	4,605	5.5	2,910	3.6	1,940	2.3														
5	7,560	34.7	6,400	30.2	5,235	20.2	4,265	6.8	3,685	5.9	2,325	3.7	1,550	2.1														
6	6,300	30.8	5,330	30.2	4,365	20.6	3,555	7.2	3,070	6.2	1,940	3.6	1,295	2.0														
8	4,725	32.9	4,000	27.8	3,270	19.4	2,665	6.9	2,300	6.0	1,455	3.4	970	1.7														
10	3,780	34.5	3,200	28.8	2,620	20.2	2,135	7.2	1,840	6.2	1,165	4.1	775	1.7														
12	3,150	34.3	2,665	29.3	2,180	20.5	1,775	7.4	1,535	6.2	970	2.9	645	1.4														
14	2,700	31.2	2,285	27.2	1,870	19.7	1,525	7.0	1,315	5.9	830	2.4	555	1.2														
16	2,365	31.5	2,000	26.1	1,635	19.6	1,335	6.2	1,150	5.2	725	2.3	485	1.0														
18	2,100	31.0	1,775	26.1	1,455	19.3	1,185	5.4	1,025	4.8	645	2.0	430	1.0														
20	1,890	29.3	1,600	24.8	1,310	15.3	1,065	4.9	920	4.3	580	1.7	390	0.9														
22	1,720	27.1	1,455	23.0	1,190	16.0	970	4.4	835	3.9	530	1.5	355	0.8														
25	1,510	23.7	1,280	20.2	1,045	13.9	855	3.9	735	3.4	465	1.5	310	0.7														


For High Speed see milling parameters, pg 1211-1212.

continued on next page



List HP421, HP441 (Continued)

High Speed Light Milling (Fractional)

Hardness	<20 HRC	20-30 HRC	30-38 HRC	38-45 HRC	45-55 HRC																							
Work Material	Mild Steels Carbon Steels	Alloy Steels Tool Steels Ti Alloys (Annealed)	Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)	Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	Hardened Steels																							
Cutting Speed	1,310 SFM	1,150 SFM	820 SFM	490 SFM	260 SFM																							
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D<5/16</td> <td>1.5D</td> <td>0.01D</td> </tr> <tr> <td>5/16≤D<5/8</td> <td>1.5D</td> <td>0.02D</td> </tr> <tr> <td>5/8≤D</td> <td>1.5D</td> <td>0.05D</td> </tr> </tbody> </table>			Dia	aa	ar	D<5/16	1.5D	0.01D	5/16≤D<5/8	1.5D	0.02D	5/8≤D	1.5D	0.05D		<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤5/16</td> <td>1D</td> <td>0.01D</td> </tr> <tr> <td>5/16<D</td> <td>1D</td> <td>0.02D</td> </tr> </tbody> </table>			Dia	aa	ar	D≤5/16	1D	0.01D	5/16<D	1D	0.02D
	Dia	aa	ar																									
D<5/16	1.5D	0.01D																										
5/16≤D<5/8	1.5D	0.02D																										
5/8≤D	1.5D	0.05D																										
Dia	aa	ar																										
D≤5/16	1D	0.01D																										
5/16<D	1D	0.02D																										
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																		
1/16	25,000	14.7	25,000	18.8	25,000	18.4	25,000	16.6	15,900	11.9																		
3/32	25,000	27.1	25,000	31.2	25,000	32.6	20,800	24.4	11,050	14.2																		
1/8	25,000	49.3	25,000	49.6	25,000	49	15,200	26	8,050	14.6																		
5/32	25,000	64.7	25,000	64.4	20,100	52.8	12,000	26.8	6,400	16.1																		
3/16	25,000	104.5	23,550	81.1	16,850	54.3	10,100	28.7	5,350	17.3																		
1/4	20,000	96.5	17,600	84.3	12,450	58.7	7,600	31.1	4,000	16.5																		
5/16	15,650	96.5	13,650	82.7	9,950	57.1	6,000	31.1	3,150	16.5																		
3/8	13,200	97.6	11,550	82.7	8,400	57.1	5,000	31.1	2,650	16.5																		
7/16	11,350	97.2	10,000	82.7	7,150	57.1	4,300	31.1	2,250	16.1																		
1/2	9,950	94.9	8,750	81.1	6,250	55.5	3,750	30.3	1,950	15.7																		
5/8	8,000	88.6	7,000	76.8	4,950	53.1	2,950	28	1,550	14.6																		
3/4	6,650	85.4	5,800	73.6	4,150	51.2	2,450	26.8	1,300	14.2																		
1	4,950	65.7	4,400	58.3	3,100	40.6	1,850	21.7	950	10.6																		

Reduce feeds 50% for Series HP421 High Speed Light Milling.

continued on next page →



List HP421, HP441 (Continued)

High Speed Light Milling (Metric)

Hardness	<20 HRC	20-30 HRC	30-38 HRC	38-45 HRC	45-55 HRC																							
Work Material	Mild Steels Carbon Steels	Alloy Steels Tool Steels Ti Alloys (Annealed)	Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)	Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	Hardened Steels																							
Cutting Speed	1,310 SFM	1,150 SFM	820 SFM	490 SFM	260 SFM																							
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D<8</td> <td>1.5D</td> <td>0.01D</td> </tr> <tr> <td>8≤D<16</td> <td>1.5D</td> <td>0.02D</td> </tr> <tr> <td>16≤D</td> <td>1.5D</td> <td>0.05D</td> </tr> </tbody> </table>			Dia	aa	ar	D<8	1.5D	0.01D	8≤D<16	1.5D	0.02D	16≤D	1.5D	0.05D		<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤8</td> <td>1D</td> <td>0.01D</td> </tr> <tr> <td>8<D</td> <td>1D</td> <td>0.02D</td> </tr> </tbody> </table>			Dia	aa	ar	D≤8	1D	0.01D	8<D	1D	0.02D
	Dia	aa	ar																									
D<8	1.5D	0.01D																										
8≤D<16	1.5D	0.02D																										
16≤D	1.5D	0.05D																										
Dia	aa	ar																										
D≤8	1D	0.01D																										
8<D	1D	0.02D																										
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																		
1	25,000	10.9	25,000	12.4	25,000	12.4	25,000	11.2	25,000	12.8																		
2	25,000	19.2	25,000	24.7	25,000	27.2	23,850	23.6	12,700	14.2																		
3	25,000	46.8	25,000	47.2	25,000	46.4	15,900	26.0	8,450	14.2																		
4	25,000	65.6	25,000	65.4	19,900	53.1	11,900	27.2	6,350	16.5																		
5	25,000	119.8	22,250	83.9	15,900	55.1	9,550	29.5	5,050	17.7																		
6	21,000	96.5	18,500	84.6	13,000	59.1	7,950	31.3	4,200	16.5																		
8	15,500	96.5	13,500	82.7	9,900	57.1	5,950	31.3	3,150	16.7																		
10	12,500	98.4	11,000	82.7	7,950	57.1	4,750	31.5	2,500	16.5																		
12	10,500	96.5	9,250	82.7	6,600	57.1	3,950	31.1	2,100	16.1																		
14	9,050	92.5	7,950	78.7	5,650	53.1	3,400	29.1	1,800	15.4																		
16	7,950	88.6	6,950	76.8	4,950	53.1	2,950	28.1	1,550	14.8																		
18	7,050	88.6	6,150	74.8	4,400	51.2	2,650	27.8	1,400	14.8																		
20	6,350	82.7	5,550	72.8	3,950	51.2	2,350	26.2	1,250	14.0																		
22	5,750	76.8	5,050	66.9	3,600	47.2	2,150	25.0	1,150	12.8																		
24	5,300	70.9	4,600	61.0	3,300	43.3	1,950	22.6	1,050	11.6																		
25	5,050	66.9	4,450	59.1	3,150	41.3	1,900	22.0	1,000	11.0																		


Reduce feeds 50% for Series HP421 High Speed Light Milling.






List HP460

Side Milling (Fractional)

Hardness	–		<20 HRC		20-35 HRC		35-45 HRC		45-55 HRC	
Work Material	Aluminum		Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	550 SFM		180 SFM		120 SFM		78 SFM		60 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 					$a_a=1.5D$ $a_r=0.1D$				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	8,280	26.0	2,880	12.7	1,920	8.0	1,191	3.4	960	1.4
5/16	6,718	28.0	2,160	12.7	1,440	8.0	960	3.6	720	1.4
3/8	5,598	31.4	1,832	17.6	1,221	8.6	768	3.6	611	1.5
1/2	4,200	28.3	1,440	17.0	960	8.5	595	3.4	480	1.4
5/8	3,359	30.5	1,080	18.8	720	8.5	480	3.6	360	1.4
3/4	2,799	31.4	916	20.5	611	10.1	384	3.6	305	1.5
1	2,040	28.3	696	16.6	456	8.5	300	3.6	228	1.4

Side Milling (Metric)

Hardness	–		<20 HRC		20-35 HRC		35-45 HRC		45-55 HRC	
Work Material	Aluminum		Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	550 SFM		180 SFM		120 SFM		78 SFM		60 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 					$a_a=1.5D$ $a_r=0.1D$				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	17,770	12.8	5,760	6.1	3,840	4.0	2,640	1.8	1,920	0.7
4	13,330	17.5	4,320	8.5	2,880	5.7	1,920	2.4	1,440	0.9
5	10,660	20.8	3,480	10.4	2,400	7.3	1,560	3.9	1,200	1.2
6	8,890	26.0	2,880	12.8	1,920	8.0	1,272	3.5	960	1.4
8	6,670	26.0	2,160	12.8	1,440	8.0	960	3.5	720	1.4
10	5,330	28.3	1,680	16.1	1,140	8.0	768	3.5	576	1.4
12	4,440	28.3	1,440	17.0	960	8.5	636	3.5	480	1.4
16	3,330	28.3	1,080	18.9	720	8.5	480	3.5	360	1.4
20	2,670	28.3	864	19.4	576	9.4	384	3.5	288	1.4
25	2,040	28.3	696	16.5	456	8.5	300	3.5	228	1.4

▶ continued on next page ▶





List HP460: (continued)

Slotting (Fractional)

Hardness	<20 HRC		20-35 HRC		35-45 HRC		45-55 HRC							
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels							
Cutting Speed	150 SFM		102 SFM		66 SFM		52 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> </tr> <tr> <td>D<1/2</td> <td>1.0D</td> </tr> <tr> <td>1/2≤D</td> <td>0.5D</td> </tr> </table>		Dia	aa	D<1/2	1.0D	1/2≤D	0.5D			aa=0.5D			
	Dia	aa												
D<1/2	1.0D													
1/2≤D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/4	2,290	8.9	1,632	5.6	1,008	2.2	816	1.0						
5/16	1,836	9.5	1,224	5.6	816	2.4	612	1.0						
3/8	1,527	11.7	1,038	6.0	648	2.4	529	1.1						
1/2	1,145	11.0	816	6.1	504	2.2	408	1.0						
5/8	912	12.7	612	6.1	408	2.4	312	1.0						
3/4	744	13.2	492	6.6	324	2.4	265	1.1						
1	600	11.3	384	6.1	252	2.4	192	1.0						

Slotting (Metric)


Hardness	<20 HRC		20-35 HRC		35-45 HRC		45-55 HRC							
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels							
Cutting Speed	150 SFM		102 SFM		66 SFM		52 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> </tr> <tr> <td>D<12</td> <td>1.0D</td> </tr> <tr> <td>12≤D</td> <td>0.5D</td> </tr> </table>		Dia	aa	D<12	1.0D	12≤D	0.5D			aa=0.5D			
	Dia	aa												
D<12	1.0D													
12≤D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
3	4,920	4.7	3,296	2.6	2,133	1.1	1,680	0.5						
4	3,720	6.1	2,472	3.4	1,680	1.7	1,320	0.6						
5	3,000	8.0	1,978	4.3	1,320	2.0	1,008	0.7						
6	2,448	9.4	1,632	5.7	1,080	2.4	816	0.9						
8	1,836	9.4	1,224	5.7	816	2.4	612	0.9						
10	1,428	10.9	972	5.7	648	2.4	492	0.9						
12	1,224	11.8	816	6.1	540	2.4	408	0.9						
16	912	12.8	612	6.1	408	2.4	312	0.9						
20	744	13.2	492	6.6	324	2.4	240	0.9						
25	600	11.3	384	6.1	252	2.4	192	0.9						






List HP450

Side Milling (Fractional)

Hardness	<25 HRC		25-45 HRC		45-55 HRC		55-65 HRC		30-40 HRC		25-45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Tool Steels		Hardened Steels Tool Steels		Titanium Alloy		Nickel Base High-Temp Alloy	
Cutting Speed	312-540 SFM		156-312 SFM		96-156 SFM		60-96 SFM		156-276 SFM		48-80 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 				$a_a=1.5D$ $a_r=0.05D$							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	13,008	80.8	7,145	21.6	3,847	8.5	2,280	4.8	6,595	44.0	1,954	2.8
5/32	10,406	85.3	5,716	22.9	3,078	11.2	1,905	5.1	5,276	49.5	1,563	3.0
3/16	8,672	77.6	4,763	23.8	2,565	12.8	1,588	4.9	4,397	52.8	1,303	4.8
1/4	6,360	122.4	3,480	39.6	1,920	14.4	1,191	6.5	3,298	55.0	977	5.6
5/16	5,203	122.3	2,858	42.9	1,539	15.4	996	7.2	2,638	57.7	782	6.0
3/8	4,336	112.5	2,382	43.7	1,282	14.7	804	7.2	2,198	52.4	651	6.5
1/2	3,252	93.1	1,786	33.5	960	13.2	595	5.3	1,649	47.1	489	4.3
5/8	2,640	75.6	1,440	27.6	769	11.5	476	4.3	1,319	46.2	391	4.5
3/4	2,160	61.2	1,140	21.6	641	8.0	397	3.4	1,099	40.6	326	4.9
1	1,626	61.1	900	22.8	481	9.0	300	3.6	824	27.5	244	2.7

Side Milling (Metric)


Hardness	<25 HRC		25-45 HRC		45-55 HRC		55-65 HRC		30-40 HRC		25-45 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Tool Steels		Hardened Steels Tool Steels		Titanium Alloy		Nickel Base High-Temp Alloy	
Cutting Speed	312-540 SFM		156-312 SFM		96-156 SFM		60-96 SFM		156-276 SFM		48-80 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 				$a_a=1.5D$ $a_r=0.05D$							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	13,766	85.6	7,562	22.5	4,072	9.5	2,521	5.2	6,980	45.8	2,068	2.6
4	10,325	84.7	5,671	22.3	3,054	10.9	1,800	4.7	5,235	48.3	1,551	3.2
5	8,260	74.2	4,537	22.3	2,443	11.8	1,560	4.7	4,188	49.5	1,241	4.2
6	6,883	132.9	3,781	43.6	2,036	15.0	1,320	7.6	3,490	58.9	1,034	5.2
8	5,162	121.9	2,836	43.1	1,527	15.0	996	7.1	2,618	58.0	776	5.3
10	4,130	106.7	2,160	40.2	1,222	14.0	756	6.7	2,094	50.7	620	5.5
12	3,480	99.2	1,920	36.4	1,018	14.0	630	5.8	1,745	49.1	517	4.8
16	2,640	75.6	1,440	27.4	763	11.0	473	4.2	1,309	45.1	388	4.1
20	2,160	61.4	1,140	21.7	611	8.0	378	3.6	1,047	38.0	310	4.3
25	1,652	62.4	900	22.4	489	9.2	300	3.8	838	27.5	248	3.3






List HP451

Side Milling (Fractional)

Hardness	-		-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Aluminum Alloy		Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	
Cutting Speed	361 SFM		279 SFM		328 SFM		262 SFM		197 SFM		131 SFM	
Depth of Cut	$d_a=1.5D$ $d_r=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	11,030	54.3	8,520	34.5	10,030	74.0	8,020	64.1	6,010	19.7	4,010	11.8
1/4	5,800	51.2	4,260	32.7	5,010	63.2	4,200	59.1	3,010	14.8	2,100	10.2
5/16	4,400	47.2	3,400	27.6	4,000	63.0	3,200	55.1	2,400	24.4	1,600	16.1
3/8	3,500	43.3	2,700	26.8	3,200	55.1	2,665	54.6	1,900	23.6	1,300	16.1
1/2	2,900	39.4	2,130	24.1	2,505	51.1	2,100	47.2	1,505	18.9	1,050	13.8
5/8	2,200	35.4	1,700	21.7	2,000	43.3	1,600	37.4	1,200	15.4	800	13.0
3/4	1,750	31.5	1,350	17.7	1,670	32.8	1,335	31.5	950	12.6	650	10.2

Slotting (Fractional)

Hardness	-		-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Aluminum Alloy		Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	
Cutting Speed	361 SFM		138 SFM		295 SFM		243 SFM		163 SFM		111 SFM	
Depth of Cut	$d_a=1.0D$ 						$d_a=0.5D$					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	11,030	45.0	4,260	16.7	9,020	31.1	7,450	22.0	4,920	14.0	3,390	9.5
1/4	5,800	39.4	2,105	13.7	4,505	27.1	3,900	24.8	2,620	13.4	1,695	9.8
5/16	4,400	37.4	1,700	13.0	3,600	26.0	2,970	22.8	1,960	13.4	1,355	10.3
3/8	3,500	35.4	1,350	11.8	2,880	23.6	2,475	19.7	1,660	13.1	1,130	9.7
1/2	2,900	31.5	1,055	10.4	2,250	21.1	1,950	17.7	1,310	11.4	845	8.6
5/8	2,200	27.6	850	18.9	1,800	18.9	1,480	26.8	980	8.7	680	8.0
3/4	1,750	23.6	675	16.5	1,500	15.3	1,235	13.4	830	7.7	565	6.5


▶ continued on next page ▶






List HP451, HP453, HP456 (Continued)

Side Milling (Metric)

Hardness	–		–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Aluminum Alloy		Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	
Cutting Speed	433 SFM		334 SFM		393 SFM		315 SFM		236 SFM		157 SFM	
Depth of Cut	$d_a=1.5D$ $a_r=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
4	10,560	52.0	8,160	33.1	9,600	70.9	7,680	61.4	5,760	18.9	3,840	11.3
6	6,960	61.4	5,400	37.8	6,360	80.3	5,040	70.9	3,840	18.9	2,520	12.3
8	5,280	56.7	4,080	33.1	4,800	75.6	3,840	66.1	2,880	29.3	1,920	19.4
10	4,200	52.0	3,240	32.1	3,840	66.1	3,000	61.4	2,280	28.3	1,560	19.4
12	3,480	47.2	2,760	31.2	3,240	66.1	2,520	56.7	1,920	24.1	1,260	16.5
16	2,640	42.5	2,040	26.0	2,400	52.0	1,920	44.9	1,440	18.4	960	15.6
20	2,100	37.8	1,620	21.3	2,160	42.5	1,500	35.4	1,140	15.1	780	12.3

Slotting (Metric)


Hardness	–		–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Aluminum Alloy		Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	
Cutting Speed	433 SFM		160 SFM		355 SFM		297 SFM		198 SFM		118 SFM	
Depth of Cut	$d_a=1.0D$ 						$d_a=0.5D$					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
4	10,490	54.7	3,840	15.1	8,640	29.8	7,200	21.3	4,800	13.7	2,880	8.0
6	6,960	47.2	2,520	17.5	5,760	34.5	4,800	29.8	3,240	16.1	1,920	10.9
8	5,280	44.9	1,920	15.6	4,320	31.2	3,600	27.4	2,400	16.1	1,440	10.9
10	4,200	42.5	1,560	14.2	3,480	28.3	2,880	22.2	1,920	14.6	1,140	9.9
12	3,480	37.8	1,272	13.7	2,880	27.4	2,400	21.3	1,560	13.7	960	9.4
16	2,640	33.1	960	22.7	2,160	22.7	1,800	32.1	1,200	10.4	720	8.5
20	2,100	28.3	780	19.8	1,680	19.8	1,440	15.1	960	8.5	576	6.6






List HP400

Side Milling (Fractional)

Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Cast Iron		Medium Steels Mild Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels		Stainless Steels Hardened Steels	
Cutting Speed	320-460 SFM		262-393 SFM		230-328 SFM		164-262 SFM		115-213 SFM	
Depth of Cut	$\bar{a}a=1.5D$ $\bar{a}r=0.4D$ 					$\bar{a}a=1.5D$ $\bar{a}r=0.3D$				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	6,350	29.9	5,300	25.2	4,500	14.2	3,450	11.0	2,650	8.3
5/16	4,750	29.9	4,000	25.2	3,400	16.1	2,600	12.2	2,000	9.4
3/8	3,800	29.9	3,200	25.2	2,700	16.9	2,050	13.0	1,600	10.2
1/2	3,200	30.3	2,650	25.2	2,250	17.7	1,700	13.4	1,350	10.6
5/8	2,400	30.3	2,000	25.2	1,700	18.9	1,300	14.2	1,000	11.0
3/4	1,900	29.9	1,600	24.0	1,350	18.5	1,050	13.8	800	10.2
1	1,500	29.9	1,150	24.0	1,000	18.5	800	13.8	600	10.2

Side Milling (Fractional)


Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Cast Iron		Medium Steels Mild Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels		Stainless Steels Hardened Steels	
Cutting Speed	320-460 SFM		262-393 SFM		230-328 SFM		164-262 SFM		115-213 SFM	
Depth of Cut	$\bar{a}a=1.5D$ $\bar{a}r=0.4D$ 					$\bar{a}a=1.5D$ $\bar{a}r=0.3D$				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	12,610	25.3	10,590	21.3	9,020	10.7	6,890	8.1	5,300	6.3
4	9,460	25.3	7,940	21.3	6,770	10.7	5,170	8.1	3,980	6.3
5	7,570	28.3	6,360	23.8	5,410	13.3	4,130	10.2	3,180	7.8
6	6,310	28.3	5,300	23.8	4,510	13.3	3,440	10.2	2,650	7.8
8	4,730	29.8	3,970	25.0	3,380	16.0	2,580	12.2	1,990	9.4
10	3,780	29.8	3,180	25.0	2,710	17.9	2,070	13.9	1,590	10.6
12	3,150	29.8	2,650	25.0	2,260	17.1	1,720	13.0	1,330	10.6
16	2,370	29.8	1,990	25.0	1,690	19.2	1,290	14.2	990	10.6
20	1,890	29.8	1,590	25.0	1,350	19.2	1,030	14.2	800	10.6
25	1,510	29.8	1,270	25.0	1,080	19.2	830	14.2	640	10.6

continued on next page






Slotting (Fractional)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Cast Iron		Medium Steels Mild Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels		Stainless Steels Hardened Steels	
Cutting Speed	262-393 SFM		230-328 SFM		180-279 SFM		130-230 SFM		95-195 SFM	
Depth of Cut	$da=0.75D$ 					$da=0.5D$				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	5,300	25.2	4,500	21.3	3,700	11.8	2,900	9.1	2,400	7.5
5/16	4,000	25.2	3,400	21.3	2,800	13.4	2,200	10.2	1,800	8.7
3/8	3,200	25.2	2,700	21.3	2,250	14.2	1,750	11	1,450	9.1
1/2	2,650	25.2	2,250	21.3	1,850	14.6	1,450	11.4	1,200	9.4
5/8	2,000	25.2	1,700	21.3	1,400	15.4	1,100	12.2	900	9.8
3/4	1,600	25.2	1,350	20.1	1,100	15.4	900	11.8	700	9.1
1	1,150	25.2	950	20.1	800	15.4	700	11.8	500	9.1

Slotting (Metric)


Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC	
Work Material	Cast Iron		Medium Steels Mild Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels		Stainless Steels Hardened Steels	
Cutting Speed	335 SFM		230 SFM		295 SFM		217 SFM		177 SFM	
Depth of Cut	$da=0.75D$ 					$da=0.5D$				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
6	5,400	25.5	3,700	17.5	4,800	15.3	3,480	10.9	2,880	9.0
8	4,100	25.5	2,800	17.5	3,600	17.2	2,640	12.3	2,160	10.4
10	3,300	25.5	2,200	17.5	2,900	18.3	2,100	13.2	1,740	10.9
12	2,700	25.5	1,900	17.5	2,400	18.9	1,740	13.7	1,440	11.3
16	2,000	25.5	1,400	17.5	1,800	20.0	1,320	14.6	1,080	11.8
20	1,600	25.5	1,100	16.4	1,450	20.0	1,080	14.2	840	10.9
25	1,300	25.5	900	23.5	1,150	18.1	840	13.0	680	9.8






List HP410

Slotting (Fractional)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC							
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels							
Cutting Speed	262 SFM		213 SFM		180 SFM		164 SFM		98 SFM		49 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> </tr> <tr> <td>D<1/16</td> <td>0.05D</td> </tr> <tr> <td>1/16≤D</td> <td>0.10D</td> </tr> </table>		Dia	a _a	D<1/16	0.05D	1/16≤D	0.10D					a _a =0.02D					
	Dia	a _a																
D<1/16	0.05D																	
1/16≤D	0.10D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/32	25,000	12.5	25,000	12.8	22,000	9.8	20,000	7.9	12,000	3.1	6,000	1.2						
1/16	16,000	23.6	13,000	19.7	11,500	15.7	10,000	9.8	6,000	3.1	3,000	1.2						
3/32	10,500	23.6	8,650	19.7	7,100	15.7	6,700	9.8	4,000	3.1	2,000	1.2						
1/8	8,020	18.0	6,510	14.8	5,510	12.2	5,010	8.0	3,000	2.4	1,500	0.9						
3/16	5,340	12.0	4,340	9.9	3,670	8.1	3,340	5.3	2,000	2.4	1,000	0.9						

For side milling, increase feeds 20% to 50%.

Slotting (Metric)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC							
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels							
Cutting Speed	262 SFM		213 SFM		180 SFM		164 SFM		98 SFM		49 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> </tr> <tr> <td>D<1.5</td> <td>0.05D</td> </tr> <tr> <td>1.5≤D</td> <td>0.10D</td> </tr> </table>		Dia	a _a	D<1.5	0.05D	1.5≤D	0.10D					a _a =0.02D					
	Dia	a _a																
D<1.5	0.05D																	
1.5≤D	0.10D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
0.5	25,000	7.7	25,000	6.2	25,000	6.2	25,000	4.8	19,000	3.2	9,500	1.1						
0.6	25,000	9.2	25,000	7.7	25,000	7.3	25,000	7.9	15,800	3.2	8,000	1.1						
0.8	25,000	12.3	25,000	12.8	22,000	9.8	20,000	8.3	12,000	3.2	6,000	1.1						
1	25,000	15.4	25,000	20.6	17,500	13.8	16,000	10.5	9,500	3.2	4,800	1.1						
1.5	17,000	22.4	13,800	19.3	11,700	15.6	10,600	10.4	6,300	3.2	3,200	1.1						
2	12,700	22.4	10,300	19.3	8,800	15.6	8,000	10.4	4,800	3.2	2,400	1.1						
2.5	10,200	22.4	8,300	19.3	7,000	15.6	6,400	10.4	3,800	3.2	1,900	1.1						


For side milling, increase feeds 20% to 50%.






List HP411

Slotting (Fractional)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	294 SFM		236 SFM		196 SFM		164 SFM		105 SFM		72 SFM	
Depth of Cut	$a_a=0.1D$ 						$a_a=0.02D$					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	8,900	39.4	7,200	27.6	5,900	19.7	5,100	15.7	3,200	5.9	2,100	2.0
3/16	6,000	39.4	4,800	27.6	4,000	19.7	3,400	15.7	2,200	5.9	1,500	2.0
1/4	4,500	39.4	3,600	27.6	3,000	19.7	2,500	15.7	1,600	5.9	1,100	2.0

Slotting (Metric)


Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	294 SFM		236 SFM		196 SFM		164 SFM		105 SFM		72 SFM	
Depth of Cut	$a_a=0.1D$ 						$a_a=0.02D$					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	9,500	42.1	7,600	29.3	6,300	20.9	5,300	16.4	3,400	6.3	2,350	2.1
4	7,100	42.1	5,700	29.3	4,750	20.9	4,000	16.4	2,550	7.1	1,750	2.1
5	5,700	42.1	4,600	29.3	3,800	20.9	3,200	16.4	2,050	7.1	1,400	2.1
6	4,800	42.1	3,800	29.3	3,150	20.9	2,650	16.4	1,700	7.1	1,150	2.1






List HP455

Side Milling (Fractional)

Hardness	<30 HRC		30-38 HRC		38-45 HRC	
Work Material	Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	
Cutting Speed	156 SFM		144 SFM		114 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	4,806	13.1	4,404	5.2	3,444	4.0
5/32	3,780	13.1	3,523	5.2	2,754	4.0
3/16	3,186	13.9	2,936	5.2	2,292	4.0
7/32	2,742	14.2	2,516	5.2	1,956	4.0
1/4	2,385	14.2	2,202	5.2	1,716	4.0
9/32	2,142	14.2	1,957	5.2	1,554	4.0
5/16	1,884	14.2	1,761	5.2	1,380	4.0
3/8	1,590	14.2	1,468	5.2	1,158	4.0
7/16	1,368	14.2	1,258	5.2	990	4.0
1/2	1,194	14.6	1,101	5.2	864	4.0
9/16	1,056	15.7	979	5.2	762	4.0
5/8	948	16.6	881	5.2	684	4.0
3/4	795	16.7	734	4.9	558	4.0
7/8	672	15.1	629	4.4	486	3.6
1	588	13.1	550	4.0	432	3.1


Side Milling (Metric)

Hardness	<30 HRC		30-38 HRC		38-45 HRC	
Work Material	Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys	
Cutting Speed	156 SFM		144 SFM		114 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 					
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	5,049	13.1	4,661	5.2	3,690	4.0
4	3,780	13.1	3,495	5.2	2,754	4.0
5	2,934	14.2	2,796	5.2	2,214	4.0
6	2,524	14.2	2,330	5.2	1,845	4.0
7	2,142	14.2	1,997	5.2	1,554	4.0
8	1,884	14.2	1,748	5.2	1,380	4.0
10	1,464	14.2	1,398	5.2	1,107	4.0
11	1,368	14.2	1,271	5.2	990	4.0
12	1,262	14.6	1,165	5.2	922	4.0
14	1,056	15.7	999	5.2	762	4.0
16	948	16.6	874	5.2	684	4.0
20	768	16.7	699	4.9	558	4.0
25	588	13.1	559	4.0	432	3.1




List HP421BN, HP441BN

Profiling Milling (Fractional)

Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	575 SFM		460 SFM		375 SFM		310 SFM		260 SFM		230 SFM		165 SFM	
Depth of Cut	$a_a=0.1D$ $a_r=0.2D$ 										$a_a=0.05D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/16	25,000	31.3	25,000	30.5	23,000	25.1	19,000	16.9	16,000	11.4	14,000	8.5	10,000	5.3
3/32	23,500	42.6	18,800	34.2	15,300	27.4	12,600	18.2	10,600	12.7	9,400	9.3	6,700	5.7
1/8	17,500	45.3	14,000	36.2	11,600	29.5	9,300	19.3	8,150	14.6	7,000	10.6	5,200	7.1
5/32	14,050	44.1	11,550	35.8	9,700	29.5	7,750	20.5	6,750	16.9	5,800	12.2	4,300	7.9
3/16	11,750	48.0	9,500	39.0	7,900	29.9	6,300	20.9	5,550	17.3	4,700	13.0	3,550	7.9
1/4	8,750	53.1	7,000	42.9	5,800	33.1	4,600	22.8	4,050	19.3	3,450	14.2	2,550	8.7
5/16	7,250	60.6	5,800	48.8	4,800	36.6	3,800	25.6	3,350	20.9	2,850	15.0	2,100	9.4
3/8	5,900	57.1	4,700	45.3	3,900	35.0	3,100	24.4	2,700	20.5	2,350	15.4	1,700	9.4
7/16	4,950	53.1	3,950	42.1	3,300	33.1	2,600	23.2	2,300	19.7	1,950	14.6	1,450	9.1
1/2	4,350	50.4	3,450	40.6	2,900	31.9	2,300	22.4	2,000	18.9	1,700	14.2	1,250	8.7
5/8	3,600	49.6	2,850	39.4	2,350	30.3	1,850	22.4	1,600	17.7	1,400	12.6	1,050	8.7
3/4	3,000	46.1	2,400	36.6	2,000	28.0	1,600	21.7	1,350	17.3	1,200	11.8	900	7.9
1	2,450	37.6	1,760	31.3	1,430	21.5	1,185	16.5	1,000	13.5	880	9.6	630	6.5

Increase feeds 40% to 50% for Series HP441BN.

Profiling Milling (Metric)

Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	575 SFM		460 SFM		375 SFM		310 SFM		260 SFM		230 SFM		165 SFM	
Depth of Cut	$a_a=0.1D$ $a_r=0.2D$ 										$a_a=0.05D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	23.5	25,000	23.5	25,000	19.3	25,000	15.7	25,000	12.7	25,000	10.8	16,000	6.2
2	25,000	38.9	22,350	34.9	18,200	28.1	15,050	18.7	12,600	12.8	11,150	9.5	8,000	6.0
3	18,600	46.4	14,900	37.4	12,150	29.9	10,050	20.0	8,400	14.0	7,450	10.5	5,350	6.8
4	14,000	44.5	11,150	34.9	9,100	28.1	7,550	20.5	6,300	16.2	5,600	12.2	4,000	7.5
5	11,200	50.1	8,950	40.7	7,300	29.7	6,000	21.5	5,050	17.0	4,450	13.4	3,200	8.0
6	9,300	52.6	7,450	42.9	6,050	32.4	5,000	23.5	4,200	18.7	3,700	14.5	2,650	8.7
8	7,000	59.2	5,600	47.8	4,550	35.2	3,750	25.5	3,150	20.1	2,800	14.9	2,000	9.3
10	5,600	56.5	4,450	44.7	3,650	34.4	3,000	25.1	2,500	19.8	2,250	15.9	1,600	9.5
12	4,650	52.6	3,700	41.9	3,050	32.9	2,500	23.9	2,100	19.6	1,850	15.0	1,350	9.3
14	4,000	48.6	3,200	40.2	2,600	30.7	2,150	22.3	1,800	17.7	1,600	14.0	1,150	8.5
16	3,500	48.6	2,800	39.0	2,300	29.8	1,900	22.7	1,600	17.6	1,400	12.9	1,000	8.0
18	3,100	46.1	2,500	37.1	2,050	28.1	1,650	22.0	1,400	17.4	1,250	12.1	900	7.8
20	2,800	43.3	2,250	35.0	1,800	25.7	1,500	20.8	1,250	16.2	1,100	11.1	800	7.3
22	2,550	42.1	2,050	32.4	1,650	22.5	1,350	18.9	1,150	15.3	1,000	10.4	750	7.5
25	2,250	36.8	1,800	31.7	1,450	21.3	1,200	17.0	1,000	12.9	900	9.6	650	6.5

Increase feeds 40% to 50% for Series HP441BN.

continued on next page





List HP421BN, HP441BN: (continued)

High Speed Light Milling (Fractional)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC										
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	985 SFM		855 SFM		740 SFM		590 SFM		590 SFM		400 SFM										
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$						<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>$D \leq 5/32$</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>$5/32 < D$</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>						Dia	a_a	a_r	$D \leq 5/32$	0.02D	0.05D	$5/32 < D$	0.13D	0.05D
							Dia	a_a	a_r												
$D \leq 5/32$	0.02D	0.05D																			
$5/32 < D$	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1/16	25,000	80.3	25,000	77.6	25,000	69.9	25,000	65.9	25,000	63.4	24,450	54.3									
3/32	25,000	125.5	25,000	127.6	25,000	115.4	24,050	104.4	24,050	99.4	16,300	58.4									
1/8	25,000	174.8	25,000	181.6	22,650	146.5	18,050	110.5	18,050	106.7	12,250	59.7									
5/32	24,100	192.4	20,900	177.8	18,100	129.3	14,450	101.7	14,450	96.7	9,800	52.9									
3/16	20,100	198.9	17,450	180.2	15,100	121.5	12,050	96.5	12,050	96.3	8,150	49.3									
1/4	15,050	189.5	13,100	164.9	11,300	106.1	9,000	83.8	9,000	83.8	6,100	42.0									
5/16	12,050	151.1	10,500	132.4	9,050	83.9	7,250	67.7	7,250	67.7	5,000	35.4									
3/8	10,050	125.1	8,700	108.4	7,400	69.3	5,900	55.1	5,900	55.1	4,100	28.7									
7/16	8,250	102.8	7,450	92.3	6,200	57.9	4,950	45.7	4,950	45.7	3,400	24.0									
1/2	7,250	90.2	6,550	81.3	5,450	50.4	4,300	40.2	4,300	40.2	3,000	20.9									
5/8	6,050	75.6	5,200	63.8	4,500	41.7	3,600	33.9	3,600	33.9	2,450	17.3									
3/4	5,050	62.6	4,350	54.7	3,750	35.4	3,000	28.3	3,000	28.3	2,100	14.6									
1	3,765	46.8	3,270	41.1	2,830	26.7	2,250	21.2	2,250	21.2	1,530	10.6									

Increase feeds 40% to 50% for Series HP441BN.

High Speed Light Milling (Metric)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC										
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	985 SFM		855 SFM		740 SFM		590 SFM		590 SFM		400 SFM										
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$						<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>$D \leq 4$</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>$4 < D$</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>						Dia	a_a	a_r	$D \leq 4$	0.02D	0.05D	$4 < D$	0.13D	0.05D
							Dia	a_a	a_r												
$D \leq 4$	0.02D	0.05D																			
$4 < D$	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1	25,000	55	25,000	55	25,000	49	25,000	47	25,000	47	25,000	39									
2	25,000	108	25,000	109	25,000	99	25,000	93	25,000	93	19,400	60									
3	25,000	170	25,000	175	23,950	151	19,100	113	19,100	113	12,950	62									
4	23,900	192	20,750	178	17,950	129	14,350	102	14,350	102	9,700	53									
5	19,150	202	16,600	181	14,350	119	11,450	96	11,450	96	7,750	49									
6	15,950	201	13,850	174	12,000	113	9,550	89	9,550	89	6,450	44									
8	12,000	150	10,400	131	9,000	83	7,150	67	7,150	67	4,850	34									
10	9,550	119	8,300	103	7,200	67	5,750	54	5,750	54	3,900	28									
12	7,950	99	6,900	85	6,000	56	4,750	44	4,750	44	3,250	23									
14	6,850	85	5,950	73	5,150	48	4,100	39	4,100	39	2,750	19									
16	6,000	75	5,200	64	4,500	42	3,600	34	3,600	34	2,450	17									
18	5,300	65	4,600	58	4,000	38	3,200	30	3,200	30	2,150	15									
20	4,800	60	4,150	52	3,600	34	2,850	27	2,850	27	1,950	14									
22	4,350	54	3,750	47	3,250	31	2,600	24	2,600	24	1,750	12									
25	3,850	48	3,300	41	2,850	27	2,300	22	2,300	22	1,550	11									


Increase feeds 40% to 50% for Series HP441BN.






List HP416

Profiling Milling (Fractional)

Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	575 SFM		460 SFM		375 SFM		310 SFM		260 SFM		230 SFM		165 SFM	
Depth of Cut	$\bar{a}_a=0.1D$ $\bar{a}_r=0.2D$ 										$\bar{a}_a=0.05D$ $\bar{a}_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/32	25,000	11.6	25,000	12.8	25,000	11.4	25,000	9.2	25,000	7.5	25,000	6.3	20,200	4.6
1/16	25,000	31.3	25,000	30.5	23,000	25.1	19,000	16.9	15,900	11.4	14,050	8.5	10,100	5.3
3/32	23,450	42.6	18,800	34.2	15,300	27.4	12,650	18.3	10,600	12.7	9,400	9.3	6,750	5.7
1/8	17,050	44.1	14,050	36.3	11,450	29.1	9,300	19.3	8,150	14.6	7,000	10.6	5,200	7.1
3/16	11,750	48.0	9,400	38.6	7,650	29.0	6,300	20.9	5,550	17.3	4,700	13.0	3,550	7.9
1/4	8,750	53.1	7,050	43.2	5,800	33.1	4,600	22.8	4,050	19.3	3,450	14.2	2,550	8.7
5/16	7,250	60.6	5,650	47.5	4,800	36.6	3,800	25.6	3,350	20.9	2,850	15.0	2,100	9.4
3/8	5,900	57.1	4,700	45.3	3,900	35.0	3,100	24.4	2,700	20.5	2,350	15.4	1,700	9.4
1/2	4,350	50.4	3,450	40.6	2,900	31.9	2,300	22.4	2,000	18.9	1,700	14.2	1,250	8.7

Profiling Milling (Metric)

Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	575 SFM		460 SFM		375 SFM		310 SFM		260 SFM		230 SFM		165 SFM	
Depth of Cut	$\bar{a}_a=0.1D$ $\bar{a}_r=0.2D$ 										$\bar{a}_a=0.05D$ $\bar{a}_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	23.5	25,000	23.5	25,000	19.3	25,000	15.7	25,000	12.7	25,000	10.8	16,000	6.2
2	25,000	38.9	22,350	34.9	18,200	28.1	15,050	18.7	12,600	12.8	11,150	9.5	8,000	6.0
3	18,600	46.4	14,900	37.4	12,150	29.9	10,050	20.0	8,400	14.0	7,450	10.5	5,350	6.8
4	13,950	44.3	11,150	34.9	9,100	28.1	7,550	20.5	6,300	16.2	5,600	12.2	4,000	7.5
5	11,150	49.8	8,950	40.7	7,300	29.7	6,000	21.5	5,050	17.0	4,450	13.4	3,200	8.0
6	9,300	52.6	7,450	42.9	6,050	32.4	5,000	23.5	4,200	18.7	3,700	14.5	2,650	8.7
8	7,000	59.2	5,600	47.8	4,550	35.2	3,750	25.5	3,150	20.1	2,800	14.9	2,000	9.3
10	5,600	56.5	4,450	44.7	3,650	34.4	3,000	25.1	2,500	19.8	2,250	15.9	1,600	9.5
12	4,650	52.6	3,700	41.9	3,050	32.9	2,500	23.9	2,100	19.6	1,850	15.0	1,350	9.3
14	4,000	48.6	3,200	40.2	2,600	30.7	2,150	22.3	1,800	17.7	1,600	14.0	1,150	8.5
16	3,500	48.6	2,800	39.0	2,300	29.8	1,900	22.7	1,600	17.6	1,400	12.9	1,000	8.0
18	3,100	46.1	2,500	37.1	2,000	27.4	1,650	22.0	1,400	17.4	1,250	12.1	900	7.8
20	2,800	43.3	2,250	35.0	1,800	25.7	1,500	20.8	1,250	16.2	1,100	11.1	800	7.3
22	2,550	42.1	2,050	32.4	1,650	22.5	1,350	18.9	1,150	15.3	1,000	10.4	750	7.5
25	2,250	36.8	1,800	31.7	1,450	21.3	1,200	17.0	1,000	12.9	900	9.6	650	6.5

continued on next page →





List HP416: (continued)

High Speed Light Milling (Fractional)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC										
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	985 SFM		855 SFM		740 SFM		590 SFM		590 SFM		400 SFM										
Depth of Cut	$\bar{a}_a=0.02D$ $\bar{a}_r=0.05D$								<table border="1"> <thead> <tr> <th>Dia</th> <th>\bar{a}_a</th> <th>\bar{a}_r</th> </tr> </thead> <tbody> <tr> <td>$D \leq 5/32$</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>$5/32 < D$</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>				Dia	\bar{a}_a	\bar{a}_r	$D \leq 5/32$	0.02D	0.05D	$5/32 < D$	0.13D	0.05D
									Dia	\bar{a}_a	\bar{a}_r										
$D \leq 5/32$	0.02D	0.05D																			
$5/32 < D$	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1/32	25,000	35.0	25,000	39.3	25,000	35.1	25,000	33.0	25,000	31.7	25,000	27.7									
1/16	25,000	80.3	25,000	77.6	25,000	69.9	25,000	65.9	25,000	63.4	24,450	54.3									
3/32	25,000	125.5	25,000	127.6	25,000	115.4	24,050	104.4	24,050	99.4	16,300	58.4									
1/8	25,000	174.8	25,000	181.6	22,650	146.5	18,050	110.5	18,050	106.7	12,250	59.7									
3/16	20,100	198.9	17,450	180.2	15,100	121.5	11,400	91.3	12,050	96.3	8,150	49.3									
1/4	15,050	189.5	13,050	164.3	11,300	106.1	8,750	81.5	8,750	81.5	6,050	41.7									
5/16	11,650	146.1	10,150	128.0	9,050	83.9	7,250	67.7	7,250	67.7	5,000	35.4									
3/8	9,800	122.0	8,500	105.9	7,400	69.3	5,900	55.1	5,900	55.1	4,100	28.7									
1/2	7,250	90.2	6,250	77.6	5,450	50.4	4,300	40.2	4,300	40.2	3,000	20.9									

High Speed Light Milling (Metric)


Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC										
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	985 SFM		855 SFM		740 SFM		590 SFM		590 SFM		400 SFM										
Depth of Cut	$\bar{a}_a=0.02D$ $\bar{a}_r=0.05D$								<table border="1"> <thead> <tr> <th>Dia</th> <th>\bar{a}_a</th> <th>\bar{a}_r</th> </tr> </thead> <tbody> <tr> <td>$D \leq 8$</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>$8 < D$</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>				Dia	\bar{a}_a	\bar{a}_r	$D \leq 8$	0.02D	0.05D	$8 < D$	0.13D	0.05D
									Dia	\bar{a}_a	\bar{a}_r										
$D \leq 8$	0.02D	0.05D																			
$8 < D$	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1	25,000	55.1	25,000	55.1	25,000	49.2	25,000	46.6	25,000	44.6	25,000	39.4									
2	25,000	107.8	25,000	108.6	25,000	98.9	25,000	92.8	25,000	88.0	19,400	60.2									
3	25,000	169.7	25,000	174.8	23,950	151.3	19,100	113.2	19,100	110.1	12,950	61.6									
4	23,900	192.0	20,750	177.9	18,000	129.2	14,300	101.3	14,300	96.2	9,700	52.3									
5	19,150	201.5	16,600	180.7	14,350	119.2	11,450	96.0	11,450	96.4	7,435	46.9									
6	15,950	200.4	13,850	173.6	12,000	112.4	9,550	89.0	9,550	89.0	6,305	43.3									
8	11,950	149.3	10,100	127.2	9,025	83.5	7,215	67.3	7,215	67.3	5,000	35.0									
10	9,550	118.7	8,025	99.2	6,950	65.0	5,540	51.6	5,540	51.6	3,840	27.2									
12	7,540	93.3	6,510	80.3	5,650	52.4	4,500	41.3	4,500	41.3	3,125	21.7									
14	6,800	84.6	5,900	72.8	5,100	47.2	4,050	38.2	4,050	38.2	2,800	19.7									
16	6,000	75.2	5,190	63.4	4,485	41.3	3,575	33.5	3,575	33.5	2,465	17.3									
18	5,300	65.0	4,550	57.1	3,950	37.0	3,150	29.5	3,150	29.5	2,200	15.4									
20	4,890	60.6	4,215	52.8	3,650	34.3	2,925	27.6	2,925	27.6	2,010	14.2									
22	4,255	53.1	3,710	46.1	3,190	29.9	2,550	24.0	2,550	24.0	1,755	12.2									
25	3,740	46.5	3,250	40.6	2,805	26.4	2,215	20.9	2,215	20.9	1,525	10.6									






List HP418

Profiling Milling (Fractional)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	497 SFM		397 SFM		330 SFM		262 SFM		230 SFM		196 SFM		146 SFM	
Depth of Cut	$a_a=0.1D$ $a_r=0.2D$ 										$a_a=0.05D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/32	20,450	37.0	16,520	30.1	13,590	24.5	10,955	15.8	9,625	11.4	8,295	8.3	6,235	5.5
1/8	14,800	37.0	11,975	30.1	10,050	24.8	8,080	16.2	7,075	12.0	6,070	8.7	4,540	5.7
3/16	9,975	40.3	8,050	32.8	6,730	24.9	5,355	17.5	4,710	14.6	4,025	11.1	3,015	6.9
1/4	7,600	43.0	6,070	35.0	5,060	27.2	4,015	18.9	3,530	15.8	3,010	11.8	2,245	7.4
3/8	5,035	48.1	4,025	38.6	3,340	29.7	2,650	20.9	2,330	17.1	2,005	13.1	1,480	8.3

Profiling Milling (Metric)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	497 SFM		397 SFM		330 SFM		262 SFM		230 SFM		196 SFM		146 SFM	
Depth of Cut	$a_a=0.1D$ $a_r=0.2D$ 										$a_a=0.05D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	23.5	25,000	23.5	25,000	19.3	2,500	1.6	25,000	12.7	19,050	8.2	14,200	5.5
2	25,000	38.9	19,250	30.1	16,000	24.7	12,700	15.8	11,150	11.3	9,500	8.1	7,100	5.3
3	16,100	40.2	12,850	32.2	10,700	26.4	8,500	16.9	7,450	12.4	6,350	8.9	4,750	6.0
4	12,050	38.3	9,650	30.2	8,000	24.7	6,350	17.2	5,600	14.4	4,750	10.4	3,550	6.7
5	9,650	43.1	7,700	35.0	6,400	26.0	5,100	18.2	4,450	15.0	3,800	11.5	2,850	7.1
6	8,050	45.5	6,400	36.8	5,350	28.6	4,250	20.0	3,700	16.5	3,150	12.4	2,350	7.7
8	6,050	51.2	4,800	41.0	4,000	30.9	3,200	21.8	2,800	17.9	2,400	12.8	1,750	8.1
10	4,850	49.0	3,850	38.7	3,200	30.1	2,550	21.3	2,250	17.8	1,900	13.4	1,400	8.3
12	4,000	45.3	3,200	36.2	2,650	28.6	2,100	20.1	1,850	17.3	1,600	13.0	1,200	8.3


continued on next page






List HP418: (continued)

High Speed Light Milling (Fractional)

Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC										
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	980 SFM		850 SFM		740 SFM		590 SFM		590 SFM		410 SFM										
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$								<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D ≤ 5/32</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>5/32 < D</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>				Dia	aa	ar	D ≤ 5/32	0.02D	0.05D	5/32 < D	0.13D	0.05D
Dia	aa	ar																			
D ≤ 5/32	0.02D	0.05D																			
5/32 < D	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
3/32	25,000	125.3	25,000	126.7	25,000	115.8	24,050	104.2	24,050	99.8	16,700	60.1									
1/8	25,000	170.0	25,000	175.2	22,650	143.3	18,050	107.2	18,050	104.0	12,550	60.1									
3/16	17,350	166.8	17,350	176.0	15,050	119.3	12,050	95.6	12,050	95.2	8,350	50.4									
1/4	13,000	163.6	12,880	161.7	11,050	103.8	9,080	84.8	9,080	84.8	6,305	43.5									
3/8	8,650	107.7	8,660	108.0	7,575	70.7	6,035	56.4	6,035	56.4	4,180	29.6									

High Speed Light Milling (Metric)


Hardness	-		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC										
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	980 SFM		850 SFM		740 SFM		590 SFM		590 SFM		410 SFM										
Depth of Cut	$a_a=0.02D$ $a_r=0.05D$								<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D ≤ 8</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>8 < D</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>				Dia	aa	ar	D ≤ 8	0.02D	0.05D	8 < D	0.13D	0.05D
Dia	aa	ar																			
D ≤ 8	0.02D	0.05D																			
8 < D	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1	25,000	55.1	25,000	55.1	25,000	49.2	25,000	44.6	25,000	44.6	25,000	39.4									
2	25,000	107.8	25,000	108.6	25,000	98.9	25,000	88.0	25,000	88.0	19,900	61.8									
3	25,000	169.7	25,000	174.9	24,000	151.7	19,100	110.1	19,100	110.1	13,250	63.0									
4	20,650	165.9	20,650	177.0	17,950	128.9	14,300	96.2	14,300	96.2	9,950	53.6									
5	16,500	173.6	16,500	179.6	14,350	119.2	11,450	96.4	11,450	96.4	7,950	50.1									
6	13,750	172.8	13,750	172.3	12,000	112.4	9,550	89.0	9,550	89.0	6,650	45.7									
8	10,300	128.6	10,300	129.7	9,000	83.2	7,150	66.7	7,150	66.7	5,000	35.0									
10	8,250	102.5	8,250	102.0	7,200	67.3	5,750	53.5	5,750	53.5	4,000	28.3									
12	6,900	85.4	6,900	85.1	6,000	55.6	4,750	43.6	4,750	43.6	3,300	22.9									





List HP419, HP413


Profiling Milling (Fractional)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	574 SFM		460 SFM		377 SFM		295 SFM		262 SFM		230 SFM		164 SFM	
Depth of Cut	$\bar{a}_a=0.1D$ $\bar{a}_r=0.2D$ 										$\bar{a}_a=0.05D$ $\bar{a}_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/32	25,000	23.4	25,000	23.4	25,000	18.8	25,000	12.1	25,000	8.6	25,000	8.7	20,050	6.3
1/16	25,000	31.6	25,000	30.9	23,050	25.5	18,050	16.1	16,000	11.7	14,050	8.6	10,050	5.5
3/32	23,400	42.3	18,750	34.2	15,350	27.7	12,050	17.3	10,700	12.7	9,400	9.4	6,700	5.9
1/8	17,760	44.4	14,370	36.1	12,060	29.8	9,690	19.5	8,490	14.4	7,280	10.4	5,440	6.9
3/16	11,970	48.3	9,660	39.4	8,070	29.9	6,420	21.0	5,650	17.5	4,830	13.3	3,610	8.3

Reduce speeds and feeds 10% to 25% for Series HP419.

List HP419, HP419L, HP413

Profiling Milling (Metric)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC	
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels	
Cutting Speed	574 SFM		460 SFM		377 SFM		295 SFM		262 SFM		230 SFM		164 SFM	
Depth of Cut	$\bar{a}_a=0.1D$ $\bar{a}_r=0.2D$ 										$\bar{a}_a=0.05D$ $\bar{a}_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.5	25,000	19.2	25,000	19.2	25,000	15.4	25,000	9.7	25,000	7.7	25,000	4.3	25,000	4.4
0.6	25,000	20.8	25,000	20.8	25,000	16.9	25,000	10.3	25,000	8.2	25,000	4.7	25,000	4.5
0.8	25,000	23.1	25,000	23.1	25,000	18.2	25,000	10.8	25,000	8.5	25,000	8.2	19,900	6.0
1.0	25,000	23.5	25,000	23.5	25,000	19.3	25,000	15.7	25,000	12.7	25,000	10.8	15,900	6.1
2.0	25,000	38.9	22,350	34.9	18,300	28.2	14,300	17.7	12,700	12.9	11,150	9.5	7,950	5.9
3.0	18,600	46.4	14,900	37.4	12,200	30.1	9,550	19.0	8,500	14.2	7,450	10.5	5,300	6.7
4.0	13,950	44.3	11,150	34.9	9,150	28.2	7,150	19.4	6,350	16.4	5,600	12.2	4,000	7.5
5.0	11,150	49.8	9,000	40.9	7,300	29.7	5,750	20.6	5,100	17.2	4,450	13.4	3,200	8.0
6.0	9,300	52.6	7,450	42.9	6,100	32.6	4,750	22.4	4,250	19.0	3,700	14.5	2,650	8.7
8.0	7,000	59.2	5,600	47.8	4,600	35.6	3,600	24.6	3,200	20.4	2,800	14.9	2,000	9.3
10.0	5,550	56.0	4,450	44.7	3,650	34.4	2,850	23.8	2,550	20.2	2,250	15.9	1,600	9.5
12.0	4,650	52.7	3,700	41.9	3,050	32.9	2,400	22.9	2,100	19.6	1,850	15.0	1,350	9.3

Reduce feeds 10% to 20% for Series HP419L.


continued on next page →





List HP419, HP413: (continued)


High Speed Light Milling (Fractional)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC										
Work Material	Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	951 SFM		820 SFM		722 SFM		574 SFM		574 SFM		394 SFM										
Depth of Cut	$a_a=0.1D$ $a_r=0.2D$ 						<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>$D \leq 5/32$</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>$5/32 < D$</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>						Dia	a_a	a_r	$D \leq 5/32$	0.02D	0.05D	$5/32 < D$	0.13D	0.05D
Dia	a_a	a_r																			
$D \leq 5/32$	0.02D	0.05D																			
$5/32 < D$	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1/32	25,000	43.3	25,000	43.3	25,000	39.4	25,000	37.4	25,000	35.3	25,000	30.8									
1/16	25,000	80.8	25,000	78.1	25,000	70.3	25,000	66.3	25,000	64.0	24,060	53.6									
3/32	25,000	125.3	25,000	126.7	25,000	115.8	23,370	101.2	23,370	96.9	16,040	57.6									
1/8	25,000	169.9	25,000	175.1	22,050	139.5	17,530	104.1	17,530	101.1	12,030	57.6									
3/16	19,360	186.1	16,700	169.4	14,700	116.4	11,680	92.7	11,680	92.2	8,020	48.4									

Reduce speeds and feeds 10% to 25% for Series HP419.

List HP419, HP419L, HP413: (continued)

High Speed Light Milling (Metric)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC										
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels										
Cutting Speed	951 SFM		820 SFM		722 SFM		574 SFM		574 SFM		394 SFM										
Depth of Cut	$a_a=0.1D$ $a_r=0.2D$ 						<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>$D \leq 8$</td> <td>0.02D</td> <td>0.05D</td> </tr> <tr> <td>$8 < D$</td> <td>0.13D</td> <td>0.05D</td> </tr> </tbody> </table>						Dia	a_a	a_r	$D \leq 8$	0.02D	0.05D	$8 < D$	0.13D	0.05D
Dia	a_a	a_r																			
$D \leq 8$	0.02D	0.05D																			
$8 < D$	0.13D	0.05D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
0.5	25,000	28.5	25,000	27.6	25,000	27.6	25,000	23.6	25,000	22.6	25,000	22.6									
0.6	25,000	32.5	25,000	32.5	25,000	32.5	25,000	27.6	25,000	27.1	25,000	27.1									
0.8	25,000	43.3	25,000	43.3	25,000	39.4	25,000	37.4	25,000	35.4	25,000	30.8									
1.0	25,000	55.1	25,000	55.1	25,000	49.2	25,000	46.6	25,000	44.6	25,000	39.4									
2.0	25,000	108.1	25,000	108.6	25,000	98.9	25,000	92.8	25,000	88.5	19,100	59.3									
3.0	25,000	169.9	25,000	175.1	23,330	147.6	18,550	110.1	18,550	107.0	12,730	61.0									
4.0	23,050	185.3	19,870	170.4	17,500	125.7	13,910	98.7	13,910	94.0	9,550	51.8									
5.0	18,440	194.4	15,900	173.5	14,000	116.6	11,130	93.4	11,130	93.8	7,640	48.2									
6.0	15,360	193.4	13,250	166.3	11,670	109.6	9,280	86.6	9,280	86.6	6,370	43.9									
8.0	11,530	144.2	9,940	125.3	8,750	80.9	6,960	65.2	6,960	65.2	4,780	33.8									
10.0	9,220	114.6	7,950	98.6	7,000	65.5	5,570	51.9	5,570	51.9	3,820	27.0									
12.0	7,680	95.3	6,630	82.0	5,830	54.0	4,640	42.8	4,640	42.8	3,180	22.4									


Reduce feeds 10% to 20% for Series HP419L.





List HP432


Slotting (Fractional)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC			
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels			
Cutting Speed	360 SFM		330 SFM		260 SFM		220 SFM		180 SFM		120 SFM		80 SFM			
Depth of Cut			Dia		aa						Dia		aa			
			D<1/16		0.1D				D<1/16		0.02D		D<1/16		0.01D	
			1/16≤D≤1/8		0.3D				1/16≤D		0.05D		1/16≤D≤1/8		0.02D	
		1/8≤D		0.5D						1/8≤D		0.05D				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
1/8	10,990	12.4	10,075	11.5	7,940	8.0	6,720	5.4	5,495	4.0	3,665	2.5	2,445	1.5		
3/16	7,330	15.7	6,720	14.4	5,295	10.4	4,480	6.0	3,665	4.4	2,445	2.7	1,630	1.4		
1/4	5,500	15.7	5,040	14.4	3,970	10.7	3,360	6.0	2,750	4.5	1,830	2.7	1,220	1.2		
5/16	4,395	15.3	4,030	14.0	3,175	10.8	2,685	6.0	2,200	4.5	1,465	2.5	975	1.2		
3/8	3,665	14.6	3,360	13.3	2,645	10.6	2,240	5.9	1,830	4.3	1,220	2.4	815	1.2		
1/2	2,750	14.4	2,520	13.3	1,985	10.4	1,680	5.7	1,375	4.3	915	2.1	610	0.9		
5/8	2,200	12.6	2,015	12.4	1,590	9.3	1,345	4.8	1,100	3.8	735	1.7	490	0.7		
3/4	1,830	11.5	1,680	10.5	1,325	7.7	1,120	3.9	915	3.1	610	1.5	410	0.6		
1	1,375	8.6	1,260	7.8	990	5.8	840	3.0	685	2.5	460	0.9	305	0.5		

For side milling, increase feeds 20% to 50%.

List HP432, HP433

Slotting (Metric)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC			
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels			
Cutting Speed	360 SFM		330 SFM		260 SFM		220 SFM		180 SFM		120 SFM		80 SFM			
Depth of Cut			Dia		aa						Dia		aa			
			D<1		0.1D				D<1		0.02D		D<1		0.01D	
			1≤D<3		0.3D				1≤D		0.05D		1≤D<3		0.02D	
		3≤D		0.5D						3≤D		0.05D				
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
3	11,635	12.4	10,665	11.4	8,400	7.8	7,110	5.2	5,815	3.9	3,880	2.5	2,585	1.5		
4	8,725	14.7	8,000	13.5	6,300	10.5	5,330	7.0	4,365	5.0	2,910	2.9	1,940	1.7		
5	6,980	19.7	6,400	17.9	5,040	13.4	4,265	7.4	3,490	5.6	2,325	3.2	1,550	1.7		
6	5,815	19.3	5,330	17.6	4,200	13.4	3,555	7.4	2,910	5.6	1,940	3.2	1,295	1.4		
8	4,365	18.4	4,000	16.7	3,150	13.4	2,665	7.0	2,180	5.6	1,455	2.9	970	1.4		
10	3,490	17.4	3,200	15.8	2,520	13.1	2,135	7.0	1,745	5.3	1,165	2.9	775	1.4		
12	2,910	17.4	2,665	15.8	2,100	13.1	1,775	7.0	1,454	5.3	970	2.6	645	1.1		

For side milling, increase feeds 20% to 50%.

▶ continued on next page ▶





List HP434

Side Milling (Fractional)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC												
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels												
Cutting Speed	390 SFM		330 SFM		270 SFM		220 SFM		190 SFM		120 SFM		80 SFM												
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D≤1/8</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>1/8<D</td> <td>1.5D</td> <td>0.10D</td> </tr> </tbody> </table>												Dia	a _a	a _r	D≤1/8	1.5D	0.05D	1/8<D	1.5D	0.10D			a _a =1D a _r =0.02D	
	Dia	a _a	a _r																						
D≤1/8	1.5D	0.05D																							
1/8<D	1.5D	0.10D																							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min											
1/8	11,910	28.0	10,075	23.7	8,245	16.0	6,720	5.6	5,800	5.5	3,665	3.3	2,445	2.3											
3/16	7,940	33.1	6,720	28.2	5,495	18.0	4,480	6.5	3,870	5.6	2,445	3.6	1,630	2.1											
1/4	5,955	29.0	5,040	28.6	4,120	19.5	3,360	6.9	2,900	5.8	1,830	3.4	1,220	1.9											
5/16	4,765	33.2	4,030	28.0	3,300	19.6	2,685	7.0	2,320	6.0	1,465	3.4	975	1.7											
3/8	3,970	33.3	3,360	27.8	2,750	19.5	2,240	6.9	1,935	6.0	1,220	3.9	815	1.7											
1/2	2,975	32.3	2,520	27.6	2,060	19.4	1,680	7.0	1,450	5.9	915	2.7	610	1.3											
5/8	2,380	31.7	2,015	26.4	1,650	19.8	1,345	6.2	1,160	5.2	735	2.3	490	0.9											
3/4	1,985	30.7	1,680	26.1	1,375	16.0	1,120	5.1	965	4.5	610	1.8	405	1.0											
1	1,490	23.4	1,260	19.8	1,030	13.7	840	3.9	725	3.4	460	1.5	305	0.7											

For Slotting, reduce feeds 20% to 50%.

List HP434, HP435

Side Milling (Metric)

Hardness	–		<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC		55-60 HRC												
Work Material	Cast Iron		Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels		Hardened Steels												
Cutting Speed	390 SFM		330 SFM		270 SFM		220 SFM		190 SFM		120 SFM		80 SFM												
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D≤3</td> <td>1.5D</td> <td>0.05D</td> </tr> <tr> <td>3<D</td> <td>1.5D</td> <td>0.10D</td> </tr> </tbody> </table>												Dia	a _a	a _r	D≤3	1.5D	0.05D	3<D	1.5D	0.10D			a _a =1D a _r =0.02D	
	Dia	a _a	a _r																						
D≤3	1.5D	0.05D																							
3<D	1.5D	0.10D																							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min											
3	12,605	29.7	10,665	25.1	8,725	17.0	7,110	5.9	6,140	5.8	3,880	3.6	2,585	2.4											
4	9,450	29.4	8,000	24.8	6,545	14.5	5,330	6.5	4,605	5.5	2,910	3.6	1,940	2.3											
5	7,560	34.7	6,400	30.2	5,235	20.2	4,265	6.8	3,685	5.9	2,325	3.7	1,550	2.1											
6	6,300	30.7	5,330	30.2	4,365	20.6	3,555	7.2	3,070	6.2	1,940	3.6	1,295	2.0											
8	4,725	32.9	4,000	27.8	3,270	19.4	2,665	6.9	2,300	6.0	1,455	3.4	970	1.7											
10	3,780	34.5	3,200	28.8	2,620	20.2	2,135	7.2	1,840	6.2	1,165	4.1	775	1.7											
12	3,150	34.3	2,665	29.3	2,180	20.5	1,775	7.4	1,535	6.2	970	2.9	645	1.4											

For Slotting, reduce feeds 20% to 50%.

continued on next page





List HP432, HP434 (Continued)

High Speed Light Milling (Fractional)

Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC																					
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels																					
Cutting Speed	1,310 SFM		1,150 SFM		820 SFM		490 SFM		260 SFM																					
Depth of Cut	<table border="1" style="display: inline-table;"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤5/16</td> <td>1.5D</td> <td>0.01D</td> </tr> <tr> <td>5/16<D≤5/8</td> <td>1.5D</td> <td>0.02D</td> </tr> <tr> <td>5/8<D</td> <td>1.5D</td> <td>0.05D</td> </tr> </tbody> </table>			Dia	aa	ar	D≤5/16	1.5D	0.01D	5/16<D≤5/8	1.5D	0.02D	5/8<D	1.5D	0.05D				<table border="1" style="display: inline-table;"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>D≤5/16</td> <td>1D</td> <td>0.01D</td> </tr> <tr> <td>5/16<D</td> <td>1D</td> <td>0.02D</td> </tr> </tbody> </table>			Dia	aa	ar	D≤5/16	1D	0.01D	5/16<D	1D	0.02D
	Dia	aa	ar																											
D≤5/16	1.5D	0.01D																												
5/16<D≤5/8	1.5D	0.02D																												
5/8<D	1.5D	0.05D																												
Dia	aa	ar																												
D≤5/16	1D	0.01D																												
5/16<D	1D	0.02D																												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																				
1/8	25,000	49.3	25,000	49.6	25,000	49.0	14,960	25.6	7,940	14.4																				
3/16	25,000	104.5	23,410	80.6	16,690	53.8	9,975	28.3	5,295	17.1																				
1/4	20,000	96.5	17,555	84.1	12,520	59.0	7,480	30.6	3,970	16.4																				
5/16	16,000	98.7	14,045	85.1	10,015	57.5	5,985	31.0	3,175	16.6																				
3/8	13,335	98.6	11,705	83.8	8,345	56.7	4,985	31.0	2,645	16.5																				
1/2	10,000	95.4	8,780	81.4	6,260	55.6	3,740	30.2	1,985	16.0																				
5/8	8,000	88.6	7,025	77.1	5,010	53.7	2,990	28.4	1,590	15.0																				
3/4	6,665	85.6	5,850	74.2	4,175	51.5	2,495	27.3	1,325	14.5																				
1	5,000	66.4	4,390	58.2	3,130	41.0	1,870	21.9	990	11.0																				

Reduce feeds 50% for Series HP432 High speed Light Milling.

continued on next page →





List HP432, HP434, HP433, HP435: (continued)

High Speed Light Milling (Metric)


Hardness	<20 HRC		20-30 HRC		30-38 HRC		38-45 HRC		45-55 HRC																					
Work Material	Mild Steels Carbon Steels		Alloy Steels Tool Steels Ti Alloys (Annealed)		Hardened Steels Pre-hardened Steels Ti Alloys (Solution Treated and Aged)		Hardened Steels Pre-hardened Steels Stainless Steels Inconel Ni Based Alloys		Hardened Steels																					
Cutting Speed	1,310 SFM		1,150 SFM		820 SFM		490 SFM		260 SFM																					
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D≤8</td> <td>1.5D</td> <td>0.01D</td> </tr> <tr> <td>8<D≤16</td> <td>1.5D</td> <td>0.02D</td> </tr> <tr> <td>16<D</td> <td>1.5D</td> <td>0.05D</td> </tr> </tbody> </table>			Dia	a _a	a _r	D≤8	1.5D	0.01D	8<D≤16	1.5D	0.02D	16<D	1.5D	0.05D				<table border="1"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>D≤8</td> <td>1D</td> <td>0.01D</td> </tr> <tr> <td>8<D</td> <td>1D</td> <td>0.02D</td> </tr> </tbody> </table>			Dia	a _a	a _r	D≤8	1D	0.01D	8<D	1D	0.02D
	Dia	a _a	a _r																											
D≤8	1.5D	0.01D																												
8<D≤16	1.5D	0.02D																												
16<D	1.5D	0.05D																												
Dia	a _a	a _r																												
D≤8	1D	0.01D																												
8<D	1D	0.02D																												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min																				
3	25,000	46.8	25,000	47.2	25,000	46.4	15,835	25.9	8,400	14.1																				
4	25,000	65.6	25,000	65.4	19,875	53.1	11,875	27.1	6,300	16.4																				
5	25,000	96.7	22,300	84.0	15,900	55.1	9,500	29.4	5,040	17.7																				
6	21,165	97.2	18,580	85.0	13,250	60.2	7,915	31.2	4,200	16.5																				
8	15,875	98.8	13,935	85.3	9,935	57.3	5,940	31.2	3,150	16.7																				
10	12,700	100.0	11,150	83.8	7,950	57.1	4,750	31.5	2,520	16.7																				
12	10,585	97.2	9,290	83.0	6,625	57.3	3,960	31.2	2,100	16.1																				

Reduce feeds 50% for Series HP432 High speed Light Milling.



Standard 2 Flute and 3 Flute Carbide

Side Milling (Fractional)

Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330-400 SFM		100-150 SFM		100-150 SFM		80-115 SFM		80-100 SFM		50 SFM	
Depth of Cut	$da=1.5D$ $dr=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.015	25,000	3.9	25,000	3.1	25,000	1.7	24,810	1.2	2,290	0.1	12,725	0.2
0.02	25,000	7.1	23,855	5.2	23,855	2.6	18,605	1.6	17,175	0.8	9,540	0.4
0.03	25,000	11.1	15,905	4.9	15,905	2.7	12,405	1.7	11,450	0.8	6,360	0.4
3/64	25,000	14.0	10,180	5.0	10,180	3.1	7,940	2.4	7,330	1.3	4,070	0.5
1/16	22,290	18.6	7,635	5.5	7,635	3.4	5,955	2.7	5,495	1.4	3,055	0.6
5/64	17,830	19.7	6,105	8.4	6,105	3.7	4,765	2.9	4,395	1.5	2,445	1.0
1/8	11,145	15.8	3,815	9.5	3,815	5.0	2,975	3.9	2,750	1.6	1,525	1.0
5/32	8,915	17.5	3,055	10.2	3,055	5.9	2,380	4.2	2,200	1.7	1,220	1.0
3/16	7,430	18.5	2,545	10.7	2,545	7.2	1,985	4.6	1,830	1.7	1,020	1.1
1/4	5,575	16.5	1,910	9.6	1,910	6.4	1,490	4.3	1,375	1.5	765	1.0
5/16	4,460	18.5	1,525	10.0	1,525	6.7	1,190	4.4	1,100	1.7	610	1.0
3/8	3,715	19.5	1,270	11.2	1,270	8.1	990	4.6	915	1.7	510	1.1
1/2	2,785	19.5	955	10.0	955	7.2	745	4.3	685	1.5	380	1.0
5/8	2,230	20.8	765	12.6	765	8.3	595	4.9	550	1.7	305	1.0
3/4	1,860	21.5	635	13.2	635	8.8	495	5.5	460	1.7	255	1.1
1	1,395	18.3	475	12.6	475	8.3	370	4.8	345	1.3	190	0.8

1. Increase speeds & feeds 5-10% for Series 412 and 422.
2. Reduce speeds & feeds 20-30% for Series 462.
3. Reduce speeds & feeds 40-50% for Series 482.
4. Increase speeds & feeds 20-30% for 402 TiN.
5. Column for Hardened Steels (40-50 HRC) is for Series 402 TiN and 403 TiN only.
6. Increase speeds & feeds 20-30% for Series 403 and 445.
7. Increase speeds & feeds 20-40% for Series 403 TiN.


▶ continued on next page ▶





Standard 2 Flute and 3 Flute Carbide: (continued)

Side Milling (Metric)

Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330-400 SFM		100-150 SFM		100-150 SFM		80-115 SFM		80-100 SFM		50 SFM	
Depth of Cut	$da=1.5D$ $dr=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.3	25,000	3.9	25,000	3.1	25,000	1.6	25,000	1.2	25,000	0.6	16,160	0.3
0.5	25,000	7.1	24,235	5.3	24,235	2.6	18,905	1.6	17,450	0.8	9,695	0.4
0.8	25,000	11.1	15,145	4.7	15,145	2.6	11,815	1.6	10,905	0.8	6,060	0.4
1.0	25,000	14.1	12,120	6.0	12,120	3.7	9,450	2.8	8,725	1.5	4,845	0.6
1.5	23,590	19.7	8,080	5.9	8,080	3.6	6,300	2.8	5,815	1.5	3,230	0.6
2.0	17,695	19.6	6,060	8.4	6,060	3.7	4,725	2.8	4,365	1.5	2,425	0.6
3.0	11,795	16.7	4,040	10.0	4,040	5.3	3,150	4.2	2,910	1.6	1,615	1.0
4.0	8,845	17.4	3,030	10.1	3,030	5.9	2,365	4.2	2,180	1.6	1,210	1.0
5.0	7,075	17.6	2,425	10.2	2,425	6.8	1,890	4.4	1,745	1.6	970	1.0
6.0	5,900	17.5	2,020	10.1	2,020	6.7	1,575	4.6	1,455	1.6	810	1.0
8.0	4,425	18.3	1,515	9.9	1,515	6.6	1,180	4.4	1,090	1.6	605	1.0
10.0	3,540	18.6	1,210	10.7	1,210	7.7	945	4.4	875	1.6	485	1.0
12.0	2,950	20.6	1,010	10.6	1,010	7.6	790	4.6	725	1.6	405	1.0
16.0	2,210	20.6	755	12.4	755	8.3	590	4.9	545	1.6	305	1.0
20.0	1,770	20.5	605	12.6	605	8.4	475	5.3	435	1.6	240	1.0
25.0	1,415	18.6	485	12.8	485	8.5	380	4.9	350	1.3	195	0.8


1. Increase speeds & feeds 5-10% for Series 412 and 422.
2. Reduce speeds & feeds 20-30% for Series 462.
3. Reduce speeds & feeds 40-50% for Series 482.
4. Increase speeds & feeds 20-30% for 402 TiN.
5. Column for Hardened Steels (40-50 HRC) is for Series 402 TiN and 403 TiN only.
6. Increase speeds & feeds 20-30% for Series 403 and 445.
7. Increase speeds & feeds 20-40% for Series 403 TiN.

continued on next page



Standard 2 Flute and 3 Flute Carbide: (continued)

Slotting (Fractional)

Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC									
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels									
Cutting Speed	330 SFM		100-150 SFM		100-130 SFM		65-100 SFM		65-82 SFM		43 SFM									
Depth of Cut	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D < 1/32</td> <td>0.25D</td> </tr> <tr> <td>1/32 < D < 5/64</td> <td>0.50D</td> </tr> <tr> <td>5/64 < D</td> <td>1.00D</td> </tr> </tbody> </table> 												Dia	aa	D < 1/32	0.25D	1/32 < D < 5/64	0.50D	5/64 < D	1.00D
													Dia	aa						
D < 1/32	0.25D																			
1/32 < D < 5/64	0.50D																			
5/64 < D	1.00D																			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min								
0.015	25,000	1.8	25,000	3.1	25,000	1.2	20,990	0.7	18,700	0.4	10,940	0.2								
0.020	25,000	3.2	23,855	5.2	21,945	1.8	15,745	1.0	14,025	0.7	8,205	0.3								
0.030	25,000	4.9	15,905	4.9	14,630	2.6	10,495	1.3	9,350	0.7	5,470	0.3								
3/64	25,000	6.3	10,180	4.0	9,365	2.2	6,720	1.1	5,985	0.5	3,500	0.2								
1/16	20,155	7.5	7,635	4.4	7,025	2.9	5,040	1.1	4,490	0.7	2,625	0.3								
5/64	16,120	11.9	6,105	5.1	5,620	3.5	4,030	1.9	3,590	1.1	2,100	0.5								
1/8	10,075	10.6	3,815	5.1	3,510	3.2	2,520	2.4	2,245	1.0	1,315	0.5								
5/32	8,060	11.9	3,055	5.4	2,810	3.5	2,015	2.6	1,795	1.1	1,050	0.5								
3/16	6,720	12.6	2,545	5.7	2,340	3.7	1,680	2.6	1,495	1.1	875	0.6								
1/4	5,040	11.2	1,910	6.4	1,755	3.2	1,260	2.4	1,120	1.0	655	0.5								
5/16	4,030	11.9	1,525	7.9	1,405	3.4	1,010	2.6	890	1.1	525	0.5								
3/8	3,360	12.6	1,270	8.4	1,170	3.7	840	2.6	750	1.1	440	0.6								
1/2	2,520	11.2	955	7.5	880	3.2	630	2.4	560	1.0	330	0.5								
5/8	2,015	11.9	765	7.9	700	3.4	505	2.6	450	1.4	265	0.4								
3/4	1,680	12.4	635	8.3	585	3.6	420	2.8	375	1.4	220	0.4								
1	1,260	11.9	475	7.9	440	3.4	315	2.6	280	1.3	165	0.3								

1. Increase speeds & feeds 5-10% for Series 412 and 422.
2. Reduce speeds & feeds 20-30% for Series 462.
3. Reduce speeds & feeds 40-50% for Series 482.
4. Increase speeds & feeds 20-30% for 402 TiN.
5. Column for Hardened Steels (40-50 HRC) is for Series 402 TiN and 403 TiN only.
6. Increase speeds & feeds 20-30% for Series 403 and 445.
7. Increase speeds & feeds 20-40% for Series 403 TiN.


▶ continued on next page ▶





Standard 2 Flute and 3 Flute Carbide: (continued)

Slotting (Metric)


Hardness	-	-	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC								
Work Material	Aluminum	Cast Iron	Mild Carbon Steels Mild Steels	Pre-hardened Steels Die & Alloy Steels	Pre-hardened Steels Die & Alloy Steels	Hardened Steels								
Cutting Speed	330 SFM	100-150 SFM	100-130 SFM	65-100 SFM	65-82 SFM	43 SFM								
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<0.8</td> <td>0.25D</td> </tr> <tr> <td>0.8<D<2</td> <td>0.50D</td> </tr> <tr> <td>2<D</td> <td>1.00D</td> </tr> </tbody> </table> 						Dia	aa	D<0.8	0.25D	0.8<D<2	0.50D	2<D	1.00D
							Dia	aa						
							D<0.8	0.25D						
							0.8<D<2	0.50D						
2<D	1.00D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
0.3	25,000	1.8	25,000	3.1	25,000	1.1	25,000	0.8	23,750	0.6	13,895	0.2		
0.5	25,000	3.2	24,235	5.3	22,300	1.8	15,995	1.0	14,250	0.7	8,335	0.3		
0.8	25,000	4.9	15,150	4.7	13,935	2.5	10,000	1.2	8,905	0.7	5,210	0.3		
1.0	25,000	6.2	12,120	4.8	11,150	2.6	8,000	1.3	7,125	0.6	4,170	0.3		
1.5	21,330	7.9	8,080	4.7	7,435	3.1	5,330	1.1	4,750	0.7	2,780	0.4		
2.0	15,995	11.8	6,060	5.0	5,575	3.5	4,000	1.9	3,565	1.1	2,085	0.5		
3.0	10,665	11.2	4,040	5.4	3,715	3.4	2,665	2.6	2,375	1.1	1,390	0.5		
4.0	8,000	11.8	3,030	5.4	2,785	3.5	2,000	2.6	1,780	1.1	1,040	0.5		
5.0	6,400	12.0	2,425	5.5	2,230	3.5	1,600	2.5	1,425	1.1	835	0.6		
6.0	5,330	11.9	2,020	6.7	1,860	3.5	1,335	2.6	1,190	1.1	695	0.5		
8.0	4,000	11.8	1,515	7.8	1,395	3.4	1,000	2.6	890	1.1	520	0.5		
10.0	3,200	12.0	1,210	8.0	1,115	3.5	800	2.5	715	1.1	415	0.5		
12.0	2,665	11.9	1,010	8.0	930	3.5	665	2.6	595	1.0	345	0.5		
16.0	2,000	11.8	755	7.8	695	3.4	500	2.6	445	1.3	260	0.4		
20.0	1,600	11.8	605	7.9	555	3.5	400	2.7	355	1.3	210	0.3		
25.0	1,280	12.1	485	8.0	445	3.5	320	2.7	285	1.3	165	0.3		

1. Increase speeds & feeds 5-10% for Series 412 and 422.
2. Reduce speeds & feeds 20-30% for Series 462.
3. Reduce speeds & feeds 40-50% for Series 482.
4. Increase speeds & feeds 20-30% for 402 TiN.
5. Column for Hardened Steels (40-50 HRC) is for Series 402 TiN and 403 TiN only.
6. Increase speeds & feeds 20-30% for Series 403 and 445.
7. Increase speeds & feeds 20-40% for Series 403 TiN.



Standard 4 Flute and Multiple Flute Carbide

Side Milling (Fractional)

Hardness	–		–		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330-400 SFM		100-150 SFM		100-150 SFM		80-115 SFM		80-100 SFM		50 SFM	
Depth of Cut	$da=1.5D$ $dr=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.030	25,000	15.5	15,905	6.9	15,905	3.7	12,405	2.5	11,450	1.1	6,360	0.6
3/64	25,000	19.7	10,180	7.0	10,180	4.3	7,940	3.3	7,330	1.8	4,070	0.7
1/16	22,290	26.1	7,635	7.7	7,635	4.8	5,955	3.7	5,495	2.0	3,055	0.8
5/64	17,830	27.6	6,105	11.9	6,105	5.2	4,765	3.9	4,395	2.2	2,445	0.8
1/8	11,145	22.1	3,815	13.3	3,815	7.0	2,975	5.6	2,750	2.2	1,525	1.3
5/32	8,915	24.6	3,055	14.2	3,055	8.3	2,380	6.0	2,200	2.3	1,220	1.4
3/16	7,430	26.0	2,545	15.0	2,545	10.0	1,985	6.3	1,830	2.4	1,020	1.5
1/4	5,575	23.2	1,910	13.4	1,910	8.9	1,490	5.9	1,375	2.1	765	1.3
5/16	4,460	25.9	1,525	14.0	1,525	9.3	1,190	6.0	1,100	2.3	610	1.4
3/8	3,715	27.3	1,270	15.7	1,270	11.1	990	6.3	915	2.4	510	1.5
1/2	2,785	27.1	955	14.0	955	9.9	745	5.9	685	2.1	380	1.3
5/8	2,230	29.0	765	17.6	765	11.7	595	7.0	550	2.3	305	1.4
3/4	1,860	30.1	635	18.5	635	12.3	495	7.8	460	2.4	255	1.5
1	1,395	25.7	475	17.6	475	11.7	375	7.0	345	1.8	190	1.1

1. Reduce speeds & feeds 20-30% for Series 464.
2. Reduce speeds & feeds 40-50% for Series 484.
3. Slotting is not recommended for Series 484.
4. Increase speeds & feeds 20-30 % for Series 404 TiN.
5. Column for Hardened Steels (40-50 HRC), is for Series 404 TiN only.


▶ continued on next page ▶





Standard 4 Flute and Multiple Flute Carbide: (continued)

Side Milling (Metric)

Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330-400 SFM		100-150 SFM		100-150 SFM		80-115 SFM		80-100 SFM		50 SFM	
Depth of Cut	$da=1.5D$ $dr=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
0.8	25,000	15.5	15,150	6.5	15,150	3.6	11,815	2.3	10,905	1.1	6,060	0.6
1.0	25,000	19.7	12,120	8.4	12,120	5.2	9,450	4.0	8,725	2.1	4,845	0.8
1.5	23,590	27.6	8,080	8.2	8,080	5.1	6,300	4.0	5,815	2.1	3,230	0.8
2.0	17,695	27.4	6,060	11.8	6,060	5.2	4,725	4.0	4,365	2.1	2,425	0.8
3.0	11,795	23.4	4,040	14.1	4,040	7.4	3,150	5.9	2,910	2.3	1,615	1.4
4.0	8,845	24.4	3,030	14.1	3,030	8.2	2,365	6.0	2,180	2.3	1,210	1.4
5.0	7,075	24.7	2,425	14.3	2,425	9.5	1,890	6.0	1,745	2.3	970	1.4
6.0	5,900	24.5	2,020	14.2	2,020	9.4	1,575	6.2	1,455	2.3	810	1.4
8.0	4,425	25.7	1,515	13.9	1,515	9.3	1,180	6.0	1,090	2.3	605	1.4
10.0	3,540	26.0	1,210	15.0	1,210	10.5	945	6.0	875	2.3	485	1.4
12.0	2,950	28.8	1,010	14.8	1,010	10.4	790	6.2	725	2.2	405	1.4
16.0	2,210	28.8	755	17.3	755	11.6	590	6.9	545	2.3	305	1.4
20.0	1,770	28.6	605	17.6	605	11.7	475	7.4	435	2.3	240	1.4
25.0	1,415	26.0	485	17.9	485	11.9	380	7.0	350	1.8	195	1.1


1. Reduce speeds & feeds 20-30% for Series 464.
2. Reduce speeds & feeds 40-50% for Series 484.
3. Slotting is not recommended for Series 484.
4. Increase speeds & feeds 20-30 % for Series 404 TiN.
5. Column for Hardened Steels (40-50 HRC), is for Series 404 TiN only.

continued on next page




Standard 4 Flute and Multiple Flute Carbide: (continued)

Slotting (Fractional)

Hardness	-	-	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC								
Work Material	Aluminum	Cast Iron	Mild Carbon Steels Mild Steels	Pre-hardened Steels Die & Alloy Steels	Pre-hardened Steels Die & Alloy Steels	Hardened Steels								
Cutting Speed	330 SFM	100-150 SFM	100-130 SFM	65-100 SFM	65-82 SFM	43 SFM								
Depth of Cut	<table border="1" style="display: inline-table; border-collapse: collapse;"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<1/32</td> <td>0.2D</td> </tr> <tr> <td>1/32<D<5/64</td> <td>0.3D</td> </tr> <tr> <td>5/64<D</td> <td>0.5D</td> </tr> </tbody> </table> 						Dia	aa	D<1/32	0.2D	1/32<D<5/64	0.3D	5/64<D	0.5D
	Dia	aa												
	D<1/32	0.2D												
	1/32<D<5/64	0.3D												
5/64<D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
0.030	25,000	6.9	15,905	6.9	14,630	3.7	10,495	1.8	9,350	0.9	5,470	0.4		
3/64	25,000	8.7	10,180	5.7	9,365	3.1	6,720	1.5	5,985	0.7	3,500	0.3		
1/16	20,155	10.5	7,635	6.3	7,025	4.0	5,040	1.6	4,490	1.0	2,625	0.5		
5/64	16,120	16.6	6,105	7.1	5,620	4.9	4,030	2.7	3,590	1.5	2,100	0.8		
1/8	10,075	14.8	3,815	7.1	3,510	4.5	2,520	3.4	2,245	1.5	1,315	0.7		
5/32	8,060	16.6	3,055	7.7	2,810	4.9	2,015	3.6	1,795	1.5	1,050	0.8		
3/16	6,720	17.6	2,545	8.1	2,340	5.1	1,680	3.6	1,495	1.6	875	0.8		
1/4	5,040	15.7	1,910	8.9	1,755	4.6	1,260	3.4	1,120	1.5	655	0.7		
5/16	4,030	16.6	1,525	11.0	1,405	4.8	1,010	3.6	900	1.5	525	0.8		
3/8	3,360	17.6	1,270	11.8	1,170	5.1	840	3.6	750	1.6	440	0.8		
1/2	2,520	15.7	955	10.5	880	4.6	630	3.3	560	1.4	330	0.7		
5/8	2,015	16.6	765	11.1	700	4.8	505	3.7	450	1.8	265	0.6		
3/4	1,680	17.3	635	11.6	585	5.1	420	3.9	375	1.9	220	0.6		
1	1,260	16.6	475	11.0	440	4.8	315	3.7	280	1.8	165	0.3		

Slotting (Metric)

Hardness	-	-	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC								
Work Material	Aluminum	Cast Iron	Mild Carbon Steels Mild Steels	Pre-hardened Steels Die & Alloy Steels	Pre-hardened Steels Die & Alloy Steels	Hardened Steels								
Cutting Speed	330 SFM	100-150 SFM	100-130 SFM	65-100 SFM	65-82 SFM	43 SFM								
Depth of Cut	<table border="1" style="display: inline-table; border-collapse: collapse;"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>D<0.8</td> <td>0.2D</td> </tr> <tr> <td>0.8<D<2</td> <td>0.3D</td> </tr> <tr> <td>2<D</td> <td>0.5D</td> </tr> </tbody> </table> 						Dia	aa	D<0.8	0.2D	0.8<D<2	0.3D	2<D	0.5D
	Dia	aa												
	D<0.8	0.2D												
	0.8<D<2	0.3D												
2<D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min		
0.8	25,000	6.9	15,150	6.5	13,935	3.4	10,000	1.7	8,905	0.9	5,210	0.3		
1.0	25,000	8.7	12,120	6.8	11,150	3.7	8,000	1.8	7,125	0.8	4,170	0.3		
1.5	21,330	11.1	8,080	6.7	7,435	4.3	5,330	1.6	4,750	1.0	2,780	0.5		
2.0	15,995	16.5	6,060	7.1	5,575	4.9	4,000	2.7	3,565	1.5	2,085	0.8		
3.0	10,665	15.7	4,040	7.5	3,715	4.8	2,665	3.6	2,375	1.5	1,390	0.8		
4.0	8,000	16.5	3,030	7.6	2,785	4.9	2,000	3.6	1,780	1.5	1,040	0.8		
5.0	6,400	16.8	2,425	7.7	2,230	4.9	1,600	3.5	1,425	1.5	835	0.8		
6.0	5,330	16.6	2,020	9.4	1,860	4.8	1,335	3.6	1,190	1.5	695	0.8		
8.0	4,000	16.5	1,515	10.9	1,395	4.8	1,000	3.6	890	1.5	520	0.8		
10.0	3,200	16.8	1,210	11.2	1,115	4.9	800	3.5	715	1.5	415	0.7		
12.0	2,665	16.6	1,010	11.1	930	4.8	665	3.5	595	1.4	345	0.7		
16.0	2,000	16.5	755	10.9	695	4.8	500	3.7	445	1.8	260	0.6		
20.0	1,600	16.5	605	11.1	555	4.9	400	3.8	355	1.7	210	0.5		
25.0	1,280	16.9	485	11.3	445	4.9	320	3.8	285	1.8	165	0.4		



List 497


Profiling (Fractional)

Hardness	-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC							
Work Material	Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steel Die & Alloy Steels		Pre-hardened Steels Stainless Steel Die & Alloy Steels		Hardened Steels							
Cutting Speed	390 SFM		390 SFM		330 SFM		260 SFM		200 SFM							
Depth of Cut			$a_r=0.3D$		<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>$D \leq 5/8$</td> <td>0.05D</td> </tr> <tr> <td>$5/8 < D$</td> <td>0.03D</td> </tr> </tbody> </table>		Dia	aa	$D \leq 5/8$	0.05D	$5/8 < D$	0.03D				
Dia	aa															
$D \leq 5/8$	0.05D															
$5/8 < D$	0.03D															
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/8	11,910	33.7	11,910	28.8	10,075	22.8	7,940	14.9	6,105	11.4						
3/16	7,940	29.8	7,940	24.0	6,720	20.2	5,295	14.9	4,080	11.9						
1/4	5,955	28.2	5,955	22.7	5,040	18.9	3,970	14.8	3,055	11.3						
5/16	4,765	26.8	4,765	22.3	4,030	18.2	3,175	15.1	2,445	11.5						
3/8	3,970	22.3	3,970	19.0	3,360	16.0	2,645	12.4	2,035	9.3						
7/16	3,400	18.8	3,400	16.1	2,880	13.5	2,270	10.9	1,745	8.3						
1/2	2,975	17.0	2,975	13.6	2,520	12.2	1,985	9.5	1,525	7.2						
9/16	2,645	14.9	2,645	12.4	2,240	11.2	1,765	8.4	1,355	6.8						
5/8	2,380	13.9	2,380	10.9	2,015	9.1	1,590	8.0	1,220	6.1						
3/4	1,985	11.5	1,985	9.4	1,680	8.4	1,325	6.1	1,020	5.4						
1	1,490	8.9	1,490	7.0	1,260	5.8	990	5.0	765	4.0						




Standard Ball Nose Carbide 2 Flute and 3 Flute

Profiling (Fractional)

Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330 SFM		115 SFM		115 SFM		80 SFM		65 SFM		82 SFM	
Depth of Cut	$da=0.3D$ $dr=0.7D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/64	25,000	5.9	9,365	3.0	9,365	2.6	6,515	1.5	5,295	0.7	6,675	1.5
5/64	16,120	7.6	5,620	3.5	5,620	3.1	3,910	1.8	3,175	0.9	4,005	1.8
1/8	10,075	7.6	3,510	3.7	3,510	3.3	2,445	1.9	1,985	1.1	2,505	2.1
5/32	8,060	7.6	2,810	3.9	2,810	3.5	1,954	2.0	1,590	1.2	2,005	2.2
3/16	6,720	7.9	2,340	4.1	2,340	3.7	1,630	2.0	1,325	1.2	1,670	2.3
1/4	5,040	7.1	1,760	3.6	1,760	3.2	1,220	1.8	990	1.2	1,250	2.1
5/16	4,030	8.8	1,405	3.9	1,405	3.5	975	2.0	795	1.2	1,000	2.2
13/32	3,100	8.4	1,080	3.8	1,080	3.4	750	1.9	610	1.1	770	2.1
15/32	2,685	9.0	935	3.9	935	3.5	650	2.0	530	1.2	670	2.2
5/8	2,015	8.8	700	3.9	700	3.5	490	2.0	395	1.2	500	2.2
25/32	1,610	8.8	560	3.9	560	3.5	390	2.0	320	1.2	400	2.2
1	1,260	9.1	440	3.8	440	3.4	305	1.9	250	1.2	315	2.2

1. Increase speeds & feeds 5-10% for Series 412BN, 414BN, 442BN and 444BN.
2. Reduce speeds & feeds 20-30% for Series 462BN and 464BN.
3. Reduce speeds & feeds 40-50% for Series 482BN and 484BN.
4. Increase speeds & feeds 20-30% for Series 402BN TiN and 404BN TiN.
5. Column for Hardened Steels (40-50 HRC) is for 402BN TiN and 404BN TiN only.

Profiling (Metric)


Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330 SFM		115 SFM		115 SFM		80 SFM		65 SFM		82 SFM	
Depth of Cut	$da=0.3D$ $dr=0.7D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	5.8	11,130	3.6	11,130	3.2	7,950	1.8	6,360	0.9	7,950	1.8
2	15,905	7.4	5,565	3.5	5,565	3.1	3,975	1.8	3,180	0.9	3,975	1.8
3	10,600	7.9	3,710	3.9	3,710	3.6	2,650	2.0	2,120	1.2	2,650	2.2
4	7,950	7.4	2,785	3.9	2,785	3.5	1,990	2.0	1,590	1.2	1,990	2.2
5	6,360	7.4	2,225	4.0	2,225	3.6	1,590	2.0	1,270	1.2	1,590	2.2
6	5,300	7.5	1,855	3.8	1,855	3.5	1,325	2.0	1,060	1.3	1,325	2.2
8	3,975	8.6	1,390	3.9	1,390	3.5	995	2.0	795	1.2	995	2.2
10	3,180	8.6	1,115	4.0	1,115	3.6	795	2.0	635	1.2	795	2.2
12	2,650	8.8	930	3.9	930	3.5	665	2.0	530	1.2	665	2.2
16	1,990	8.6	695	3.9	695	3.5	495	1.9	400	1.2	495	2.1
20	1,590	8.6	555	3.9	555	3.5	400	2.0	320	1.2	400	2.2
25	1,270	9.2	445	3.9	445	3.5	320	2.0	255	1.2	320	2.2

1. Increase speeds & feeds 5-10% for Series 412BN, 414BN, 442BN and 444BN.
2. Reduce speeds & feeds 20-30% for Series 462BN and 464BN.
3. Reduce speeds & feeds 40-50% for Series 482BN and 484BN.
4. Increase speeds & feeds 20-30% for Series 402BN TiN and 404BN TiN.
5. Column for Hardened Steels (40-50 HRC) is for 402BN TiN and 404BN TiN only.



Standard Ball Nose Carbide 4 Flute and Multiple Flute

Profiling (Fractional)


Hardness	-	-	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC						
Work Material	Aluminum	Cast Iron	Mild Carbon Steels Mild Steels	Pre-hardened Steels Die & Alloy Steels	Pre-hardened Steels Die & Alloy Steels	Hardened Steels						
Cutting Speed	330 SFM	100-115 SFM	100-130 SFM	65-100 SFM	65-82 SFM	43 SFM						
Depth of Cut	$a_a=0.3D$ $a_r=0.7D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/64	25,000	8.2	8,755	4.0	9,365	3.7	6,720	2.1	5,985	1.2	3,500	1.1
5/64	16,120	10.6	5,250	4.7	5,620	4.4	4,030	2.5	3,590	1.5	2,100	1.3
1/8	10,075	10.6	3,280	4.9	3,510	4.7	2,520	2.7	2,245	1.8	1,315	1.5
5/32	8,060	10.6	2,625	5.2	2,810	5.0	2,015	2.8	1,795	1.9	1,050	1.6
3/16	6,720	11.0	2,190	5.5	2,340	5.3	1,680	2.9	1,495	2.0	875	1.6
1/4	5,040	10.0	1,640	4.7	1,755	4.6	1,260	2.7	1,120	1.9	655	1.5
5/16	4,030	12.2	1,315	5.2	1,405	5.0	1,010	2.8	900	1.9	525	1.6
13/32	3,100	11.7	1,010	5.1	1,080	4.9	775	2.7	690	1.8	405	1.5
15/32	2,685	12.5	875	5.2	935	5.0	670	2.8	600	1.9	350	1.6
5/8	2,015	12.2	655	5.1	700	5.0	505	2.8	450	1.9	265	1.6
25/32	1,610	12.2	525	5.2	560	5.0	405	2.8	360	1.9	210	1.6
1	1,260	12.7	410	5.0	440	4.9	315	2.8	280	1.9	165	1.5

1. Increase speeds & feeds 5-10% for Series 412BN, 414BN, 442BN and 444BN.
2. Reduce speeds & feeds 20-30% for Series 462BN and 464BN.
3. Reduce speeds & feeds 40-50% for Series 482BN and 484BN.
4. Increase speeds & feeds 20-30% for Series 402BN TiN and 404BN TiN.
5. Column for Hardened Steels (40-50 HRC) is for 402BN TiN and 404BN TiN only.

continued on next page



Profiling (Metric)



Hardness	-		-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Cast Iron		Mild Carbon Steels Mild Steels		Pre-hardened Steels Die & Alloy Steels		Pre-hardened Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	330 SFM		100-115 SFM		100-130 SFM		65-100 SFM		65-82 SFM		43 SFM	
Depth of Cut	$a_a=0.3D$ $a_r=0.7D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	25,000	7.0	10,420	4.7	11,150	4.5	8,000	2.5	7,125	1.5	4,170	1.3
2	15,995	8.9	5,210	4.6	5,575	4.4	4,000	2.5	3,565	1.5	2,085	1.3
3	10,665	9.5	3,475	5.2	3,715	5.0	2,665	2.8	2,375	1.9	1,390	1.6
4	8,000	8.9	2,605	5.1	2,785	4.9	2,000	2.8	1,780	1.8	1,040	1.6
5	6,400	8.9	2,085	5.2	2,230	5.0	1,600	2.8	1,425	1.8	835	1.6
6	5,330	8.9	1,735	5.0	1,860	4.9	1,335	2.8	1,190	2.0	695	1.6
8	4,000	12.1	1,305	5.1	1,395	4.9	1,000	2.8	890	1.8	520	1.6
10	3,200	12.1	1,040	5.2	1,115	5.0	800	2.8	715	1.8	415	1.6
12	2,665	12.4	870	5.2	930	5.0	665	2.8	595	1.9	345	1.6
16	2,000	12.1	650	5.1	695	4.9	500	2.8	445	1.8	260	1.6
20	1,600	12.1	520	5.1	555	4.9	400	2.8	355	1.8	210	1.6
25	1,280	12.9	415	5.1	445	4.9	320	2.8	285	1.9	165	1.6

1. Increase speeds & feeds 5-10% for Series 412BN, 414BN, 442BN and 444BN.
2. Reduce speeds & feeds 20-30% for Series 462BN and 464BN.
3. Reduce speeds & feeds 40-50% for Series 482BN and 484BN.
4. Increase speeds & feeds 20-30% for Series 402BN TiN and 404BN TiN.
5. Column for Hardened Steels (40-50 HRC) is for 402BN TiN and 404BN TiN only.






List 400: 4 flute

Side Milling

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	130 SFM		100 SFM		66 SFM		50 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$				$a_a=1.5D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
6	2,100	15.7	1,615	12.7	1,065	8.3	810	6.4
8	1,575	15.5	1,210	11.9	800	7.9	605	6.0
10	1,260	15.1	970	11.7	640	7.7	485	6.0
12	1,050	15.0	810	11.6	535	7.7	405	6.0
16	790	15.6	605	11.9	400	7.9	305	6.0
20	630	12.8	485	9.9	320	6.6	240	4.9
25	505	11.7	390	9.3	255	6.0	195	4.4



Slotting

Hardness	<20 HRC		20-30 HRC		35-45 HRC		45-55 HRC							
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels							
Cutting Speed	110 SFM		85 SFM		56 SFM		43 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> </tr> <tr> <td>$D \leq 12$</td> <td>1.0D</td> </tr> <tr> <td>$D > 12$</td> <td>0.5D</td> </tr> </table>		Dia	a_a	$D \leq 12$	1.0D	$D > 12$	0.5D			$a_a=0.5D$ 		$a_a=0.5D$ 	
Dia	a_a													
$D \leq 12$	1.0D													
$D > 12$	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
6	1,775	5.3	1,375	4.1	905	2.7	695	2.1						
8	1,335	5.3	1,030	4.1	680	2.7	520	2.0						
10	1,065	5.2	825	4.1	545	2.7	415	2.0						
12	890	5.3	685	4.0	450	2.7	345	2.0						
16	665	5.2	515	4.1	340	2.7	260	2.0						
20	535	4.3	410	3.4	270	2.3	210	1.7						
25	425	3.6	330	2.9	215	1.9	165	1.4						




continued on next page 



Side Milling

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	130 SFM		100 SFM		66 SFM		50 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$				$a_a=1.5D$ $a_r=0.1D$			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	2,100	16	1,600	13	1,000	8	800	6
5/16	1,600	16	1,200	12	800	8	600	6
3/8	1,300	15	950	11	650	8	480	6
1/2	1,060	15	800	11	500	7	400	6
5/8	800	16	600	12	400	8	300	6
3/4	640	13	480	10	330	7	240	5
1	510	12	380	9	250	5	190	4

Slotting

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC							
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels							
Cutting Speed	110 SFM		85 SFM		56 SFM		43 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> </tr> <tr> <td>$D \leq 1/2$</td> <td>1.0D</td> </tr> <tr> <td>$D > 1/2$</td> <td>0.5D</td> </tr> </table>		Dia	a_a	$D \leq 1/2$	1.0D	$D > 1/2$	0.5D			$a_a=0.5D$ 		$a_a=0.5D$ 	
Dia	a_a													
$D \leq 1/2$	1.0D													
$D > 1/2$	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/4	1,700	5	1,300	4	850	3	700	2						
5/16	1,350	5	1,000	4	700	3	520	2						
3/8	1,120	5	850	4	570	3	480	2						
1/2	840	5	650	4	450	3	330	2						
5/8	650	5	520	4	340	3	260	2						
3/4	560	4	430	4	290	2	220	2						
1	420	3	350	3	220	2	170	2						



List 492, 494: Miniature

Side Milling


Hardness	-		<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC	
Work Material	Aluminum Aluminum Alloys Plastics Wood		Mild Steels Cast Iron Brass Bronze		Mild Steel Forging Hard Brass and Bronze Copper		Medium Tensile Steels Unalloyed Titanium Tool Steels Heat Resistant Ferritic Low Alloys		High Tensile Steel Medium Strength Stainless Steels and Titanium Alloys	
Cutting Speed	200-400 SFM		100-120 SFM		70-90 SFM		50-60 SFM		30-40 SFM	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/64	25,000	1.8	24,427 - 25,000	1.5	17,099 - 21,985	1.0	12,214 - 14,656	0.5	7,334 - 9,779	0.4
1/32	24,427 - 25,000	3.0	12,214 - 14,656	2.0	8,556 - 11,001	2.0	6,112 - 7,334	0.6	3,667 - 4,889	0.5
3/64	16,285 - 25000	3.1	8,150 - 9,780	2.5	5,704 - 7,334	3.0	4,075 - 4,889	0.8	2,445 - 3,260	0.6
1/16	12,214 - 24,427	5.1	6,112 - 7,333	3.1	4,280 - 5,502	4.0	3,057 - 3,668	1.3	1,834 - 2,445	0.8
5/64	9,771 - 19,542	5.1	4,889 - 5,867	3.1	3,423 - 4,400	4.0	2,445 - 2,934	1.3	1,467 - 1,956	0.8
3/32	8,142 - 16,285	5.1	4,075 - 4,890	3.1	2,853 - 3,667	4.0	2,038 - 2,446	1.3	1,222 - 1,426	0.8
7/64	6,979 - 13,959	5.3	3,492 - 4,191	3.1	2,445 - 3,143	4.0	1,746 - 2,095	1.3	1,048 - 1,397	0.8
1/8	6,107 - 12,214	5.5	3,056 - 3,667	3.5	2,139 - 2,750	4.0	1,528 - 1,834	1.3	917 - 1,222	0.8
9/64	5,433 - 10,865	5.6	2,716 - 4,191	3.5	1,901 - 2,445	4.2	1,358 - 1,630	1.3	815 - 1,087	0.9
5/32	4,889 - 9,779	5.6	2,448 - 2,934	3.6	1,711 - 2,200	4.4	1,222 - 1,467	1.4	733 - 978	1.0
11/64	4,445 - 8,890	5.8	2,222 - 2,667	3.8	1,556 - 2,000	4.6	1,111 - 1,333	1.5	667 - 889	1.1
3/16	4,074 - 8,148	5.9	2,037 - 2,445	4.0	1,426 - 1,834	4.8	1,019 - 1,222	1.6	611 - 815	1.3




List 04V-SO

List 03V-SO

Side Milling

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		< 35 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	295-655 SFM		165-330 SFM		195-375 SFM		145-280 SFM		260-460 SFM		165-195 SFM		80-165 SFM	
Depth of Cut	Aa=1.5D Ar=0.5D 												Aa=1.5D Ar=0.3D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/16	9,677	50.3	5,042	16.7	5,806	27.4	4,329	14.3	7,334	31.2	3,667	12.1	2,496	6.7
1/4	7,258	45.7	3,782	14.9	4,355	24.7	3,247	12.8	5,501	28.6	2,750	10.8	1,872	5.9
5/16	5,806	50.3	3,025	16.2	3,484	26.9	2,598	13.9	4,401	31.2	2,200	11.8	1,497	6.6
3/8	4,839	49.5	2,521	16.3	2,903	27.0	2,165	14.0	3,667	31.2	1,834	11.8	1,248	6.5
1/2	3,629	42.3	1,891	14.0	2,177	23.0	1,624	12.0	2,750	26.9	1,375	10.2	936	5.6
5/8	2,903	42.1	1,513	13.8	1,742	22.8	1,299	11.9	2,200	26.3	1,100	10.0	749	5.5
3/4	2,419	39.6	1,261	12.9	1,452	21.5	1,082	11.1	1,834	24.8	917	9.4	624	5.2
1	1,815	32.3	945	10.6	1,089	17.5	812	9.1	1,375	20.1	688	7.7	468	4.3

Slotting

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		< 35 HRC											
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy											
Cutting Speed	295-655 SFM		165-330 SFM		195-375 SFM		145-280 SFM		260-460 SFM		165-195 SFM		80-165 SFM											
Depth of Cut	Aa=1.5D 												Aa=0.75D-1D		Aa=1.25D		Aa=1D		Aa=0.75D		Aa=1D		Aa=0.3D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min										
3/16	9,677	45.3	5,042	15.0	5,806	24.7	4,329	12.9	7,334	28.1	3,667	10.9	2,496	6.0										
1/4	7,258	41.1	3,782	13.4	4,355	22.2	3,247	11.5	5,501	25.7	2,750	9.7	1,872	5.3										
5/16	5,806	45.3	3,025	14.6	3,484	24.2	2,598	12.5	4,401	28.1	2,200	10.6	1,497	5.9										
3/8	4,839	44.6	2,521	14.7	2,903	24.3	2,165	12.6	3,667	28.1	1,834	10.7	1,248	5.8										
1/2	3,629	38.1	1,891	12.6	2,177	20.7	1,624	10.8	2,750	24.2	1,375	9.2	936	5.0										
5/8	2,903	37.9	1,513	12.4	1,742	20.5	1,299	10.7	2,200	23.7	1,100	9.0	749	5.0										
3/4	2,419	35.7	1,261	11.6	1,452	19.3	1,082	10.0	1,834	22.3	917	8.4	624	4.7										
1	1,815	29.1	945	9.5	1,089	15.7	812	8.2	1,375	18.1	688	6.9	468	3.8										


continued on next page 




List 04V-SO (Continued)

List 03V-SO (Continued)

Side Milling


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		<35 HRC		<35 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	295-655 SFM		165-330 SFM		195-375 SFM		145-280 SFM		260-460 SFM		165-195 SFM		80-165 SFM	
Depth of Cut	Aa=1.5D Ar=0.5D 												Aa=1.5D Ar=0.3D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5	9,218	47.9	4,803	15.9	5,531	26.1	4,124	13.6	6,986	29.7	3,493	11.6	2,377	6.4
6	7,681	48.4	4,002	15.8	4,609	26.1	3,436	13.5	5,822	30.3	2,911	11.5	1,981	6.2
8	5,761	49.9	3,002	16.1	3,457	26.7	2,577	13.8	4,366	30.9	2,183	11.7	1,486	6.6
10	4,609	47.2	2,401	15.5	2,765	25.7	2,062	13.3	3,493	29.7	1,747	11.3	1,189	6.2
12	3,841	44.8	2,001	14.8	2,304	24.3	1,718	12.7	2,911	28.4	1,455	10.8	990	5.9
16	2,881	41.7	1,501	13.7	1,728	22.6	1,289	11.8	2,183	26.1	1,092	10.0	743	5.5
20	2,304	37.7	1,201	12.3	1,383	20.5	1,031	10.6	1,747	23.7	873	8.9	594	5.0

Slotting


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		<35 HRC		<35 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	295-655 SFM		165-330 SFM		195-375 SFM		145-280 SFM		260-460 SFM		165-195 SFM		80-165 SFM	
Depth of Cut	Aa=1.5D 		Aa=0.75D-1D		Aa=1.25D		Aa=1D		Aa=0.75D		Aa=1D		Aa=0.3D	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5	9,218	43.1	4,803	14.3	5,531	23.5	4,124	12.3	6,986	26.7	3,493	10.4	2,377	5.7
6	7,681	43.5	4,002	14.2	4,609	23.5	3,436	12.2	5,822	27.2	2,911	10.3	1,981	5.6
8	5,761	44.9	3,002	14.5	3,457	24.0	2,577	12.4	4,366	27.8	2,183	10.5	1,486	5.9
10	4,609	42.5	2,401	14.0	2,765	23.1	2,062	12.0	3,493	26.7	1,747	10.1	1,189	5.6
12	3,841	40.3	2,001	13.3	2,304	21.9	1,718	11.4	2,911	25.6	1,455	9.7	990	5.3
16	2,881	37.6	1,501	12.3	1,728	20.3	1,289	10.6	2,183	23.5	1,092	9.0	743	4.9
20	2,304	34.0	1,201	11.1	1,383	18.4	1,031	9.5	1,747	21.3	873	8.0	594	4.5

05V-SO

Side Milling

Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC	< 35 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	295-655 SFM	165-330 SFM	195-375 SFM	145-280 SFM	260-460 SFM	165-195 SFM	80-165 SFM							
Depth of Cut	 Aa=1.5D Ar=0.5D						Aa=1.5D Ar=0.3D							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/16	9,677	62.9	5,042	20.8	5,806	34.3	4,329	17.9	7,334	39.0	3,667	15.2	2,496	8.4
1/4	7,258	57.1	3,782	18.6	4,355	30.9	3,247	16.0	5,501	35.7	2,750	13.5	1,872	7.4
5/16	5,806	62.9	3,025	20.2	3,484	33.6	2,598	17.4	4,401	39.0	2,200	14.7	1,497	8.3
3/8	4,839	61.9	2,521	20.3	2,903	33.7	2,165	17.5	3,667	39.0	1,834	14.8	1,248	8.1
1/2	3,629	52.9	1,891	17.5	2,177	28.7	1,624	15.0	2,750	33.6	1,375	12.7	936	7.0
5/8	2,903	52.6	1,513	17.3	1,742	28.5	1,299	14.8	2,200	32.9	1,100	12.6	749	6.9
3/4	2,419	49.5	1,261	16.1	1,452	26.9	1,082	13.8	1,834	31.0	917	11.7	624	6.5
1	1,815	40.4	945	13.2	1,089	21.9	812	11.3	1,375	25.2	688	9.6	468	5.3

Slotting


Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC	< 35 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	295-655 SFM	165-330 SFM	195-375 SFM	145-280 SFM	260-460 SFM	165-195 SFM	80-165 SFM							
Depth of Cut	 Aa=1.5D	Aa=0.75D-1D	Aa=1.25D	Aa=1D	Aa=0.75D	Aa=1D	Aa=0.3D							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/16	9,677	56.6	5,042	18.8	5,806	30.9	4,329	16.1	7,334	35.1	3,667	13.6	2,496	7.5
1/4	7,258	51.4	3,782	16.8	4,355	27.8	3,247	14.4	5,501	32.2	2,750	12.2	1,872	6.6
5/16	5,806	56.6	3,025	18.2	3,484	30.2	2,598	15.6	4,401	35.1	2,200	13.3	1,497	7.4
3/8	4,839	55.7	2,521	18.3	2,903	30.3	2,165	15.7	3,667	35.1	1,834	13.3	1,248	7.3
1/2	3,629	47.6	1,891	15.7	2,177	25.8	1,624	13.5	2,750	30.2	1,375	11.5	936	6.3
5/8	2,903	47.3	1,513	15.5	1,742	25.6	1,299	13.3	2,200	29.6	1,100	11.3	749	6.2
3/4	2,419	44.6	1,261	14.5	1,452	24.2	1,082	12.5	1,834	27.9	917	10.6	624	5.9
1	1,815	36.3	945	11.9	1,089	19.7	812	10.2	1,375	22.7	688	8.6	468	4.8

continued on next page 




05V-SO (Continued)

Side Milling

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		< 35 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	295-655 SFM		165-330 SFM		195-375 SFM		145-280 SFM		260-460 SFM		165-195 SFM		80-165 SFM	
Depth of Cut	 $Aa=1.5D$ $Ar=0.5D$												$Aa=1.5D$ $Ar=0.3D$	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5	9,218	59.9	4,803	19.9	5,531	32.7	4,124	17.0	6,986	37.1	3,493	14.4	2,377	8.0
6	7,681	60.5	4,002	19.7	4,609	32.7	3,436	16.9	5,822	37.8	2,911	14.3	1,981	7.8
8	5,761	62.4	3,002	20.1	3,457	33.3	2,577	17.2	4,366	38.7	2,183	14.6	1,486	8.2
10	4,609	59.0	2,401	19.4	2,765	32.1	2,062	16.6	3,493	37.1	1,747	14.1	1,189	7.7
12	3,841	55.9	2,001	18.5	2,304	30.4	1,718	15.9	2,911	35.5	1,455	13.5	990	7.4
16	2,881	52.2	1,501	17.1	1,728	28.2	1,289	14.7	2,183	32.7	1,092	12.5	743	6.9
20	2,304	47.2	1,201	15.4	1,383	25.6	1,031	13.2	1,747	29.6	873	11.2	594	6.2


Slotting

Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		< 35 HRC	
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy	
Cutting Speed	295-655 SFM		165-330 SFM		195-375 SFM		145-280 SFM		260-460 SFM		165-195 SFM		80-165 SFM	
Depth of Cut	 $Aa=1.5D$		$Aa=0.75D-1D$		$Aa=1.25D$		$Aa=1D$		$Aa=0.75D$		$Aa=1D$		$Aa=0.3D$	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5	9,218	53.9	4,803	17.9	5,531	29.4	4,124	15.3	6,986	33.4	3,493	13.0	2,377	7.2
6	7,681	54.4	4,002	17.7	4,609	29.4	3,436	15.2	5,822	34.0	2,911	12.9	1,981	7.0
8	5,761	56.1	3,002	18.1	3,457	30.0	2,577	15.5	4,366	34.8	2,183	13.2	1,486	7.4
10	4,609	53.1	2,401	17.4	2,765	28.9	2,062	15.0	3,493	33.4	1,747	12.7	1,189	6.9
12	3,841	50.4	2,001	16.7	2,304	27.4	1,718	14.3	2,911	32.0	1,455	12.1	990	6.7
16	2,881	47.0	1,501	15.4	1,728	25.4	1,289	13.2	2,183	29.4	1,092	11.2	743	6.2
20	2,304	42.5	1,201	13.8	1,383	23.0	1,031	11.9	1,747	26.6	873	10.1	594	5.6


List 03A-SO

List 03M-SO

Side Milling

Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC	< 35 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	260-655 SFM	115-195 SFM	130-230 SFM	95-170 SFM	95-165 SFM	80-130 SFM	50-65 SFM							
Depth of Cut	$Aa=0.5D$ $Ar=1D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	44,390	104.9	15,039	4.7	17,465	82.5	12,856	4.0	12,614	39.7	10,188	32.1	5,579	6.6
2	22,195	87.4	7,520	3.6	8,733	55.0	6,428	3.0	6,307	24.8	5,094	20.1	2,790	4.4
4	11,098	43.7	3,760	2.1	4,366	3.4	3,214	1.8	3,153	12.4	2,547	10.0	1,395	2.2
6	7,398	35.0	2,507	2.0	2,911	3.4	2,143	1.7	2,102	8.3	1,698	6.7	930	2.2
8	5,549	35.0	1,880	2.2	2,183	3.4	1,607	1.9	1,577	6.2	1,273	5.0	697	1.6
10	4,439	28.0	1,504	2.4	1,747	4.1	1,286	2.0	1,261	6.0	1,019	4.8	558	1.8
12	3,699	29.1	1,253	3.0	1,455	4.6	1,071	2.5	1,051	5.0	849	4.0	465	1.8
16	2,774	21.8	940	3.0	1,092	4.3	804	2.5	788	4.3	637	3.5	349	1.4
18	2,466	19.4	836	3.0	970	4.6	714	2.5	701	4.4	566	3.6	310	1.5
20	2,220	17.5	752	3.0	873	4.8	643	2.5	631	4.0	509	3.2	279	1.3


Slotting

Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC	< 35 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	260-655 SFM	115-195 SFM	130-230 SFM	95-170 SFM	95-165 SFM	80-130 SFM	50-65 SFM							
Depth of Cut	$Aa=1.25D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	44,390	94.4	15,039	4.3	17,465	74.3	12,856	3.6	12,614	35.8	10,188	28.9	5,579	5.9
2	22,195	78.6	7,520	3.2	8,733	49.5	6,428	2.7	6,307	22.3	5,094	18.0	2,790	4.0
4	11,098	39.3	3,760	1.9	4,366	3.1	3,214	1.6	3,153	11.2	2,547	9.0	1,395	2.0
6	7,398	31.5	2,507	1.8	2,911	3.1	2,143	1.5	2,102	7.4	1,698	6.0	930	2.0
8	5,549	31.5	1,880	2.0	2,183	3.1	1,607	1.7	1,577	5.6	1,273	4.5	697	1.5
10	4,439	25.2	1,504	2.1	1,747	3.7	1,286	1.8	1,261	5.4	1,019	4.3	558	1.6
12	3,699	26.2	1,253	2.7	1,455	4.1	1,071	2.3	1,051	4.5	849	3.6	465	1.6
16	2,774	19.7	940	2.7	1,092	3.9	804	2.3	788	3.9	637	3.2	349	1.2
18	2,466	17.5	836	2.7	970	4.1	714	2.3	701	4.0	566	3.2	310	1.3
20	2,220	15.7	752	2.7	873	4.3	643	2.3	631	3.6	509	2.9	279	1.2


List 03K-SO

List 03P-SO

Side Milling


Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC	< 35 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	260-655 SFM	115-195 SFM	130-230 SFM	95-170 SFM	95-165 SFM	80-130 SFM	50-65 SFM							
Depth of Cut	$Aa=0.5D$ $Ar=1D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	44,390	209.7	15,039	9.5	17,465	165.0	12,856	8.1	12,614	79.5	10,188	64.2	5,579	13.2
2	22,195	174.8	7,520	7.1	8,733	110.0	6,428	6.1	6,307	49.7	5,094	40.1	2,790	8.8
4	11,098	87.4	3,760	4.1	4,366	6.9	3,214	3.5	3,153	24.8	2,547	20.1	1,395	4.4
6	7,398	69.9	2,507	3.9	2,911	6.9	2,143	3.4	2,102	16.6	1,698	13.4	930	4.4
8	5,549	69.9	1,880	4.4	2,183	6.9	1,607	3.8	1,577	12.4	1,273	10.0	697	3.3
10	4,439	55.9	1,504	4.7	1,747	8.3	1,286	4.0	1,261	11.9	1,019	9.6	558	3.5
12	3,699	58.3	1,253	5.9	1,455	9.2	1,071	5.1	1,051	9.9	849	8.0	465	3.7
16	2,774	43.7	940	5.9	1,092	8.6	804	5.1	788	8.7	637	7.0	349	2.7
18	2,466	38.8	836	5.9	970	9.2	714	5.1	701	8.8	566	7.1	310	2.9
20	2,220	35.0	752	5.9	873	9.6	643	5.1	631	7.9	509	6.4	279	2.6

Slotting


Hardness	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC	< 35 HRC							
Work Material	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys	High Temp. Alloys Inconel Hastelloy							
Cutting Speed	260-655 SFM	115-195 SFM	130-230 SFM	95-170 SFM	95-165 SFM	80-130 SFM	50-65 SFM							
Depth of Cut	$Aa=0.5D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1	44,390	188.7	15,039	8.5	17,465	148.5	12,856	7.3	12,614	71.5	10,188	57.8	5,579	11.9
2	22,195	157.3	7,520	6.4	8,733	99.0	6,428	5.5	6,307	44.7	5,094	36.1	2,790	7.9
4	11,098	78.6	3,760	3.7	4,366	6.2	3,214	3.2	3,153	22.3	2,547	18.0	1,395	4.0
6	7,398	62.9	2,507	3.6	2,911	6.2	2,143	3.0	2,102	14.9	1,698	12.0	930	4.0
8	5,549	62.9	1,880	4.0	2,183	6.2	1,607	3.4	1,577	11.2	1,273	9.0	697	3.0
10	4,439	50.3	1,504	4.3	1,747	7.4	1,286	3.6	1,261	10.7	1,019	8.7	558	3.2
12	3,699	52.4	1,253	5.3	1,455	8.3	1,071	4.6	1,051	8.9	849	7.2	465	3.3
16	2,774	39.3	940	5.3	1,092	7.7	804	4.6	788	7.8	637	6.3	349	2.5
18	2,466	35.0	836	5.3	970	8.3	714	4.6	701	7.9	566	6.4	310	2.6
20	2,220	31.5	752	5.3	873	8.7	643	4.6	631	7.2	509	5.8	279	2.4

List 03E-SO

Side Milling


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		
Cutting Speed	390-655 SFM		195-330 SFM		260-330 SFM		195-250 SFM		260-460 SFM		145-215 SFM		
Depth of Cut	$Aa=1D$ $Ar=0.5D$ 												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	8,450	43.9	4,245	16.0	4,771	22.5	3,598	13.6	5,822	24.8	2,911	11.0
1/4	-	7,991	41.5	4,019	15.1	4,508	21.2	3,407	12.9	5,501	23.4	2,750	10.4
5/16	-	6,393	45.3	3,215	16.7	3,606	23.3	2,726	14.1	4,401	25.6	2,200	11.4
-	8	6,337	44.9	3,184	16.5	3,578	23.1	2,699	14.0	4,366	25.4	2,183	11.3
3/8	-	5,328	45.3	2,679	16.4	3,005	27.8	2,272	13.9	3,667	25.4	1,834	11.2
-	10	5,070	43.1	2,547	15.6	2,862	22.1	2,159	13.3	3,493	24.2	1,747	10.7
-	12	4,225	43.9	2,122	16.4	2,385	22.9	1,799	13.9	2,911	24.8	1,455	11.2
1/2	-	3,996	41.5	2,009	15.5	2,254	21.6	1,704	13.2	2,750	23.4	1,375	10.6
-	16	3,169	40.4	1,592	15.0	1,789	21.1	1,349	12.7	2,183	22.7	1,092	10.3
5/8	-	3,197	40.7	1,607	15.1	1,803	21.3	1,363	12.8	2,200	22.9	1,100	10.4
3/4	-	2,664	38.6	1,340	14.7	1,503	20.6	1,136	12.5	1,834	21.9	917	10.1
-	20	2,535	36.7	1,273	14.0	1,431	19.6	1,079	11.9	1,747	20.9	873	9.6
1	-	1,998	28.9	1,005	11.1	1,127	15.4	852	9.4	1,375	16.4	688	7.6

Slotting


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		
Cutting Speed	390-655 SFM		195-330 SFM		260-330 SFM		195-250 SFM		260-460 SFM		145-215 SFM		
Depth of Cut	$Aa=0.75D$ 												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	8,450	39.5	4,245	14.4	4,771	20.3	3,598	12.2	5,822	22.3	2,911	9.9
1/4	-	7,991	37.3	4,019	13.6	4,508	19.1	3,407	11.5	5,501	21.1	2,750	9.3
5/16	-	6,393	40.7	3,215	15.1	3,606	20.9	2,726	12.7	4,401	23.1	2,200	10.3
-	8	6,337	40.4	3,184	14.9	3,578	20.8	2,699	12.6	4,366	22.9	2,183	10.2
3/8	-	5,328	40.8	2,679	14.8	3,005	20.9	2,272	12.5	3,667	22.9	1,834	10.2
-	10	5,070	38.8	2,547	14.1	2,862	19.9	2,159	11.9	3,493	21.8	1,747	9.7
-	12	4,225	39.5	2,122	14.7	2,385	20.6	1,799	12.5	2,911	22.3	1,455	10.1
1/2	-	3,996	37.3	2,009	13.9	2,254	19.5	1,704	11.8	2,750	21.1	1,375	9.5
-	16	3,169	36.4	1,592	13.5	1,789	19.0	1,349	11.5	2,183	20.4	1,092	9.3
5/8	-	3,197	36.7	1,607	13.6	1,803	19.1	1,363	11.6	2,200	20.6	1,100	9.4
3/4	-	2,664	34.8	1,340	13.3	1,503	18.5	1,136	11.3	1,834	19.7	917	9.1
-	20	2,535	33.1	1,273	12.6	1,431	17.6	1,079	10.7	1,747	18.8	873	8.7
1	-	1,998	26.1	1,005	9.9	1,127	13.9	852	8.4	1,375	14.8	688	6.8

List 03C-SO

Side Milling


Work Material	Aluminum Alloys		Aluminum Alloy Casting	
Cutting Speed	1640 - 6560 SFM		1640 - 4920 SFM	
Depth of Cut	Aa=1D Ar=0.5D			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	62,650	488.4	50,100	349.1
5/16	50,100	520.7	40,100	379.1
3/8	41,700	541.8	33,400	390.5
1/2	31,300	487.9	25,000	351.4
5/8	25,000	519.7	20,000	373.2
3/4	20,900	543.0	16,700	390.5
1	15,600	405.3	12,500	292.3

Slotting


Work Material	Aluminum Alloys		Aluminum Alloy Casting	
Cutting Speed	1640 - 6560 SFM		1640 - 4920 SFM	
Depth of Cut	Aa=1D			
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	62,650	341.8	50,100	244.4
5/16	50,100	364.5	40,100	261.9
3/8	41,700	379.2	33,400	273.4
1/2	31,300	341.6	25,000	245.9
5/8	25,000	363.8	20,000	261.2
3/4	20,900	380.1	16,700	273.4
1	15,600	283.7	12,500	204.6

List 03F-SO

Side Milling


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		< 35 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy		
Cutting Speed	390-655 SFM		195-330 SFM		260-330 SFM		195-250 SFM		330-460 SFM		145-215 SFM		65-130 SFM		
Depth of Cut	$Aa=1D$ $Ar=0.5D$ 														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	8,450	53.2	4,245	19.4	4,771	27.0	3,598	16.4	6,388	33.2	2,911	11.9	1,577	4.7
1/4	-	7,991	50.3	4,019	18.4	4,508	25.5	3,407	15.5	6,035	31.3	2,750	11.2	1,482	4.4
5/16	-	6,393	55.4	3,215	20.3	3,606	28.4	2,726	17.2	4,828	34.3	2,200	12.8	1,185	4.8
-	8	6,337	54.9	3,184	20.1	3,578	28.2	2,699	17.0	4,791	34.0	2,183	12.7	1,183	4.8
3/8	-	5,328	55.4	2,679	20.3	3,005	28.9	2,272	17.1	4,023	34.2	1,834	13.1	988	5.1
-	10	5,070	52.7	2,547	19.3	2,862	27.5	2,159	16.3	3,833	32.6	1,747	12.4	946	4.8
-	12	4,225	51.2	2,122	18.7	2,385	26.3	1,799	15.9	3,194	31.2	1,455	11.9	788	4.6
1/2	-	3,996	48.4	2,009	17.7	2,254	24.8	1,704	15.1	3,017	29.5	1,375	11.2	741	4.3
-	16	3,169	46.9	1,592	17.5	1,789	24.5	1,349	14.9	2,395	29.0	1,092	11.0	591	4.3
5/8	-	3,197	47.3	1,607	17.7	1,803	24.7	1,363	15.1	2,414	29.2	1,100	11.1	592	4.3
3/4	-	2,664	45.3	1,340	17.1	1,503	23.9	1,136	14.5	2,011	27.9	917	10.7	494	4.2
-	20	2,535	43.1	1,273	16.2	1,431	22.8	1,079	13.8	1,916	26.6	873	10.2	473	4.0
1	-	1,998	33.9	1,005	12.8	1,127	17.9	852	10.9	1,508	20.9	688	8.1	370	3.1

Slotting


Hardness	<25 HRC		25-30 HRC		30-35 HRC		35-45 HRC		45-50 HRC		< 35 HRC		< 35 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy		
Cutting Speed	390-655 SFM		195-330 SFM		260-330 SFM		195-250 SFM		330-460 SFM		145-215 SFM		65-130 SFM		
Depth of Cut	$Aa=0.75D$ 														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	8,450	47.9	4,245	17.4	4,771	24.3	3,598	14.8	6,388	29.9	2,911	10.7	1,577	4.2
1/4	-	7,991	45.3	4,019	16.5	4,508	22.9	3,407	14.1	6,035	28.2	2,750	10.1	1,482	3.9
5/16	-	6,393	49.8	3,215	18.2	3,606	25.6	2,726	15.4	4,828	30.8	2,200	11.5	1,185	4.4
-	8	6,337	49.4	3,184	18.0	3,578	25.4	2,699	15.3	4,791	30.6	2,183	11.4	1,183	4.4
3/8	-	5,328	49.8	2,679	18.2	3,005	25.9	2,272	15.5	4,023	30.7	1,834	11.6	988	4.5
-	10	5,070	47.4	2,547	17.3	2,862	24.7	2,159	14.7	3,833	29.3	1,747	11.1	946	4.3
-	12	4,225	46.1	2,122	16.8	2,385	23.7	1,799	14.3	3,194	28.1	1,455	10.7	788	4.1
1/2	-	3,996	43.6	2,009	15.9	2,254	22.4	1,704	13.5	3,017	26.5	1,375	10.1	741	3.8
-	16	3,169	42.2	1,592	15.8	1,789	22.1	1,349	13.4	2,395	26.1	1,092	9.9	591	3.9
5/8	-	3,197	42.6	1,607	15.9	1,803	22.3	1,363	13.5	2,414	26.3	1,100	9.9	592	3.9
3/4	-	2,664	40.8	1,340	15.4	1,503	21.5	1,136	13.1	2,011	25.1	917	9.7	494	3.7
-	20	2,535	38.8	1,273	14.6	1,431	20.5	1,079	12.4	1,916	23.9	873	9.2	473	3.6
1	-	1,998	30.6	1,005	11.5	1,127	16.1	852	9.8	1,508	18.8	688	7.2	370	2.8

List 03D-SO

Side Milling

Hardness	<25 HRC		25-35 HRC		30-35 HRC		35-45 SFM		45 to 50 HRC		<35 HRC		<35 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy		
Cutting Speed	390-655 SFM		195-330 SFM		260-330 SFM		195-250 SFM		330-460 SFM		145-215 SFM		65-130 SFM		
Depth of Cut	$Aa=1D$ $Ar=0.5D$ 														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	8,450	53.2	4,245	19.4	4,771	27.0	3,598	16.4	6,388	33.2	2,911	11.9	1,577	4.7
1/4	-	7,991	50.3	4,019	18.4	4,508	25.5	3,407	15.5	6,035	31.3	2,750	11.2	1,482	4.4
5/16	-	6,393	55.4	3,215	20.3	3,606	28.4	2,726	17.2	4,828	34.3	2,200	12.8	1,185	4.8
-	8	6,337	54.9	3,184	20.1	3,578	28.2	2,699	17.0	4,791	34.0	2,183	12.7	1,183	4.8
3/8	-	5,328	55.4	2,679	20.3	3,005	28.9	2,272	17.1	4,023	34.2	1,834	13.1	988	5.1
-	10	5,070	52.7	2,547	19.3	2,862	27.5	2,159	16.3	3,833	32.6	1,747	12.4	946	4.8
-	12	4,225	51.2	2,122	18.7	2,385	26.3	1,799	15.9	3,194	31.2	1,455	11.9	788	4.6
1/2	-	3,996	48.4	2,009	17.7	2,254	24.8	1,704	15.1	3,017	29.5	1,375	11.2	741	4.3
-	16	3,169	46.9	1,592	17.5	1,789	24.5	1,349	14.9	2,395	29.0	1,092	11.0	591	4.3
5/8	-	3,197	47.3	1,607	17.7	1,803	24.7	1,363	15.1	2,414	29.2	1,100	11.1	592	4.3
3/4	-	2,664	45.3	1,340	17.1	1,503	23.9	1,136	14.5	2,011	27.9	917	10.7	494	4.2
-	20	2,535	43.1	1,273	16.2	1,431	22.8	1,079	13.8	1,916	26.6	873	10.2	473	4.0
1	-	1,998	33.9	1,005	12.8	1,127	17.9	852	10.9	1,508	20.9	688	8.1	370	3.1


Side Milling

Hardness	<25 HRC		25-35 HRC		30-35 HRC		35-45 SFM		45 to 50 HRC		<35 HRC		<35 HRC		
Work Material	Mild Steels Carbon Steels Cast Iron		400 Stainless Steels Alloy Steels Tool Steels		300 Stainless Steels Hardened Steels Pre-hardened Steels		PH Stainless Steels Hardened Steels		Hardened Steels		Titanium Alloys		High Temp. Alloys Inconel Hastelloy		
Cutting Speed	390-655 SFM		195-330 SFM		260-330 SFM		195-250 SFM		330-460 SFM		145-215 SFM		65-130 SFM		
Depth of Cut	$Aa=0.75D$ 														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	
-	6	8,450	53.2	4,245	19.4	4,771	27.0	3,598	16.4	6,388	33.2	2,911	11.9	1,577	4.7
1/4	-	7,991	50.3	4,019	18.4	4,508	25.5	3,407	15.5	6,035	31.3	2,750	11.2	1,482	4.4
5/16	-	6,393	55.4	3,215	20.3	3,606	28.4	2,726	17.2	4,828	34.3	2,200	12.8	1,185	4.8
-	8	6,337	54.9	3,184	20.1	3,578	28.2	2,699	17.0	4,791	34.0	2,183	12.7	1,183	4.8
3/8	-	5,328	55.4	2,679	20.3	3,005	28.9	2,272	17.1	4,023	34.2	1,834	13.1	988	5.1
-	10	5,070	52.7	2,547	19.3	2,862	27.5	2,159	16.3	3,833	32.6	1,747	12.4	946	4.8
-	12	4,225	51.2	2,122	18.7	2,385	26.3	1,799	15.9	3,194	31.2	1,455	11.9	788	4.6
1/2	-	3,996	48.4	2,009	17.7	2,254	24.8	1,704	15.1	3,017	29.5	1,375	11.2	741	4.3
-	16	3,169	46.9	1,592	17.5	1,789	24.5	1,349	14.9	2,395	29.0	1,092	11.0	591	4.3
5/8	-	3,197	47.3	1,607	17.7	1,803	24.7	1,363	15.1	2,414	29.2	1,100	11.1	592	4.3
3/4	-	2,664	45.3	1,340	17.1	1,503	23.9	1,136	14.5	2,011	27.9	917	10.7	494	4.2
-	20	2,535	43.1	1,273	16.2	1,431	22.8	1,079	13.8	1,916	26.6	873	10.2	473	4.0
1	-	1,998	33.9	1,005	12.8	1,127	17.9	852	10.9	1,508	20.9	688	8.1	370	3.1


List 420: Stub Length - Multiple Flute - Fine Pitch

List 450: Multiple Flute - Fine Pitch - Center Hole

Side Milling

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Medium Tensile Steels Mild Steels		High Tensile Steels Unalloyed Titanium Heat Resistant Ferritic Low Alloys		High Tensile Steels Tool Steels Medium Strength Stainless Steels and Titanium Alloys		Heat Resistant High Alloys High Strength and Titanium Alloys Stainless Steels	
Cutting Speed	90-110 SFM		60-75 SFM		45-60 SFM		30-45 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.5D$ 							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	1,500	4.0	1,000	2.6	800	1.9	530	1.1
5/16	1,180	4.5	800	3.3	630	2.3	425	1.3
3/8	1,000	4.8	670	3.3	530	2.5	355	1.4
1/2	750	5.8	500	3.9	400	2.9	265	1.6
5/8	600	6.6	400	4.4	315	3.3	224	2.0
3/4	500	7.5	325	4.8	265	3.5	180	2.0
7/8	425	7.9	280	5.3	224	3.5	150	1.9
1	375	7.4	250	4.9	200	3.5	132	1.9
1-1/8	335	7.0	224	4.6	180	3.5	118	1.8
1-1/4	300	6.4	200	4.3	160	3.1	106	1.8
1-1/2	250	5.9	160	3.6	132	2.8	90	1.6
1-3/4	312	5.0	140	3.3	112	2.4	75	1.4
2	190	4.5	125	2.9	100	2.3	67	1.4


Slotting

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Medium Tensile Steels Mild Steels		High Tensile Steels Unalloyed Titanium Heat Resistant Ferritic Low Alloys		High Tensile Steels Tool Steels Medium Strength Stainless Steels and Titanium Alloys		Heat Resistant High Alloys High Strength and Titanium Alloys Stainless Steels	
Cutting Speed	90-110 SFM		60-75 SFM		45-60 SFM		30-45 SFM	
Depth of Cut	$a_a = 0.8D$ 							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	1,500	4.1	1,000	2.5	800	1.5	530	0.9
3/8	1,000	4.6	670	3.0	530	1.9	355	1.0
1/2	750	5.0	500	3.0	400	2.0	265	1.3
5/8	600	5.1	400	3.8	315	2.3	224	1.4
3/4	500	6.1	325	4.0	265	2.9	180	1.5
7/8	425	6.1	280	4.0	224	2.9	150	1.6
1	375	5.8	250	3.9	200	2.8	132	1.6
1-1/4	300	5.4	200	3.6	160	2.5	106	1.5
1-1/2	200	5.0	160	3.3	132	2.4	90	1.4




List 455: Multiple Flute - Fine Pitch - Center Hole

Side Milling

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		<45 HRC							
Work Material	Cast Iron Mild Steel Forgings Brass		Medium Carbon Steels Mild Steel Forgings		High Tensile Steels 4140, 4340 304 Stainless Steels Ti-Alloy		D2 H13 17-4PH		Heat Resistant Alloys Inconel 718 Heat Treated Materials							
Cutting Speed	150 SFM		120 SFM		90 SFM		65 SFM		50 SFM							
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>$1/4 \leq D \leq 2$</td> <td>1.5D</td> <td>0.5D</td> </tr> </tbody> </table> 										Dia	aa	ar	$1/4 \leq D \leq 2$	1.5D	0.5D
											Dia	aa	ar			
$1/4 \leq D \leq 2$	1.5D	0.5D														
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/4	2,300	4.6	1,800	3.4	1,400	2.6	1,000	1.7	750	1.5						
5/16	1,800	5.7	1,500	4.7	1,100	3.4	800	2.5	600	1.6						
3/8	1,500	6.6	1,200	5.4	900	4.0	650	2.8	500	1.7						
1/2	1,150	6.3	950	5.1	700	3.6	500	2.6	400	1.5						
5/8	900	7.9	750	5.9	550	4.3	400	3.1	300	1.7						
3/4	750	8.7	600	6.6	450	5.0	350	3.9	250	1.9						
7/8	650	8.4	525	6.5	400	4.9	300	3.5	210	1.8						
1	575	8.4	450	5.6	350	4.3	250	3.1	190	1.7						
1-1/8	500	8.3	400	6.0	300	4.4	220	3.2	160	1.7						
1-1/4	450	8.3	375	7.1	250	4.6	200	3.5	150	1.9						
1-1/2	375	7.1	300	5.5	200	3.7	160	2.5	120	1.5						
2	285	7.2	230	5.6	170	4.2	125	2.6	95	1.6						

Slotting

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		<45 HRC					
Work Material	Cast Iron Mild Steel Forgings Brass		Medium Carbon Steels Mild Steel Forgings		High Tensile Steels 4140, 4340 304 Stainless Steels Ti-Alloy		D2 H13 17-4PH		Heat Resistant Alloys Inconel 718 Heat Treated Materials					
Cutting Speed	150 SFM		120 SFM		90 SFM		65 SFM		50 SFM					
Depth of Cut	<table border="1"> <thead> <tr> <th>Dia</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>$1/4 \leq D \leq 2$</td> <td>0.8D</td> </tr> </tbody> </table> 										Dia	aa	$1/4 \leq D \leq 2$	0.8D
											Dia	aa		
$1/4 \leq D \leq 2$	0.8D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min				
1/4	2,300	6.1	1,800	4.6	1,400	3.3	1,000	2.4	750	1.6				
5/16	1,800	8.4	1,500	5.9	1,100	3.9	800	2.8	600	1.7				
3/8	1,500	10.5	1,200	5.9	900	4.4	650	3.2	500	1.8				
1/2	1,150	9.6	950	5.5	700	4.1	500	2.9	400	1.7				
5/8	900	12.5	750	7.5	550	4.8	400	3.1	300	2.4				
3/4	750	13.9	600	7.2	450	4.4	350	3.6	250	2.7				
7/8	650	12.8	525	6.9	400	4.7	300	3.5	210	2.5				
1	575	12.0	450	6.6	350	4.4	250	3.3	190	2.1				
1-1/4	450	12.5	375	8.7	250	4.6	200	3.6	150	2.4				
1-1/2	400	10.7	300	7.8	225	4.2	160	3.1	120	1.9				
2	300	8.2	250	7.0	180	3.2	100	1.6	90	1.4				



List 440: Ball End - Multiple Flute - General Purpose - Regular Pitch

Side Milling

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		-										
Work Material	Mild Steels Carbon Steels Cast Iron		Medium Carbon Steels Hard Brass and Bronze Cast Iron		High Carbon Steel Titanium Alloys Medium Strength Stainless Effects		Heat Resistant High Alloys Austenitic Alloys Tool Steels		Aluminum Aluminum Alloys										
Cutting Speed	100-130 SFM		60-75 SFM		40-55 SFM		26-40 SFM		190-330 SFM										
Depth of Cut	<table border="1" style="display: inline-table; border-collapse: collapse;"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>1/2 ≤ D ≤ 1</td> <td>1.5D</td> <td>0.5D</td> </tr> <tr> <td>1 - 1/4 ≤ D ≤ 2</td> <td>1.0D</td> <td>0.5D</td> </tr> </tbody> </table>										Dia	aa	ar	1/2 ≤ D ≤ 1	1.5D	0.5D	1 - 1/4 ≤ D ≤ 2	1.0D	0.5D
Dia	aa	ar																	
1/2 ≤ D ≤ 1	1.5D	0.5D																	
1 - 1/4 ≤ D ≤ 2	1.0D	0.5D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1/2	875	3.9	500	2.7	365	1.7	250	1.1	2,000	12.6									
5/8	700	4.4	420	3.1	300	1.9	200	1.3	1,600	14.1									
3/4	590	4.1	350	3.1	250	2.0	170	1.2	1,350	13.9									
1	500	5.0	250	2.9	180	1.8	125	1.3	1,000	14.2									
1-1/4	350	5.0	200	3.3	150	2.3	100	1.4	800	15.9									
1-1/2	300	5.0	175	3.3	120	1.9	80	1.3	650	14.3									
2	250	4.3	130	2.7	90	1.6	65	1.2	500	11.7									

Slotting

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		-									
Work Material	Mild Steels Carbon Steels Cast Iron		Medium Carbon Steels Hard Brass and Bronze Cast Iron		High Carbon Steel Titanium Alloys Medium Strength Stainless Effects		Heat Resistant High Alloys Austenitic Alloys Tool Steels		Aluminum Aluminum Alloys									
Cutting Speed	80-150 SFM		50-65 SFM		30-50 SFM		16-32 SFM		80-390 SFM									
Depth of Cut	<table border="1" style="display: inline-table; border-collapse: collapse;"> <thead> <tr> <th># of Flutes</th> <th>aa</th> </tr> </thead> <tbody> <tr> <td>4FL</td> <td>1/4D</td> </tr> <tr> <td>6FL</td> <td>1/6D</td> </tr> <tr> <td>8FL</td> <td>1/8D</td> </tr> </tbody> </table>										# of Flutes	aa	4FL	1/4D	6FL	1/6D	8FL	1/8D
# of Flutes	aa																	
4FL	1/4D																	
6FL	1/6D																	
8FL	1/8D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min								
1/2	1,000	10.5	450	3.3	315	2.1	200	1.1	2,500	21.0								
5/8	800	8.5	355	3.0	250	2.0	160	0.9	2,000	16.7								
3/4	710	8.5	315	2.8	225	2.0	140	0.9	1,800	16.9								
1	500	7.0	224	2.2	160	1.6	100	0.9	1,250	14.1								
1-1/4	400	5.3	180	1.7	125	1.1	80	0.7	1,000	10.5								
1-1/2	315	4.0	140	1.1	100	0.8	63	0.5	800	8.0								
2	250	3.9	112	1.1	80	0.8	50	0.5	630	7.8								

In case of deeper operation, slow down feed by 20-50%.



List 430E: For Aluminum - 3 Flute

Side Milling

Work Material	Aluminum Aluminum Alloys								
Cutting Speed	195-330 SFM								
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> <tr> <td>$3/8 \leq D \leq 2$</td> <td>1.5D</td> <td>0.15D</td> </tr> </table>	Dia	aa	ar	$3/8 \leq D \leq 2$	1.5D	0.15D		
Dia	aa	ar							
$3/8 \leq D \leq 2$	1.5D	0.15D							
Mill Dia.	Speed RPM	Feed in/min							
3/8	2,700	11.4							
1/2	2,000	12.0							
5/8	1,600	10.7							
3/4	1,350	10.1							
7/8	1,200	10.2							
1	1000	9.0							
1-1/4	800	7.6							
1-1/2	670	6.7							
2	500	5.0							

Slotting

Work Material	Aluminum Aluminum Alloys						
Cutting Speed	195-330 SFM						
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>aa</th> </tr> <tr> <td>$3/8 \leq D \leq 2$</td> <td>1/3D</td> </tr> </table>	Dia	aa	$3/8 \leq D \leq 2$	1/3D		
Dia	aa						
$3/8 \leq D \leq 2$	1/3D						
Mill Dia.	Speed RPM	Feed in/min					
3/8	2,700	22.9					
1/2	2,000	24.0					
5/8	1,600	21.5					
3/4	1,350	20.3					
7/8	1,200	20.4					
1	1,000	18.0					
1-1/4	800	15.2					
1-1/2	670	13.4					
2	500	15.0					



List 410: Stub Length - 3 Flute - Regular Pitch

List 490: Multiple Flute - Regular Pitch - General Purpose - Center Hole


Side Milling

Hardness	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-									
Work Material	Medium Tensile Steels (up to 115x103 Lb/in ²) Mild Steel Forgings Cast Iron Brass and Bronze Copper	High Tensile Steels (115x103~145x103 Lb/in ²) Unalloyed Titanium Heat Resistant Ferritic Low Alloys	High Tensile Steels (145x103~200x103 Lb/in ²) Tool Steels Medium Strength Stainless Steels Titanium Alloys	Heat Resistant High Alloys High Strength Stainless Steels Titanium Alloys	Aluminum Alloyed Aluminum Plastics Woods									
Cutting Speed	80-100 SFM	60-75 SFM	40-55 SFM	26-40 SFM	195-330 SFM									
Depth of Cut	<table border="1" style="display: inline-table; border-collapse: collapse;"> <thead> <tr> <th style="padding: 2px;">Dia</th> <th style="padding: 2px;">a_a</th> <th style="padding: 2px;">a_r</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">$1/2 \leq D \leq 1-1/8$</td> <td style="padding: 2px;">1.5D</td> <td style="padding: 2px;">0.5D</td> </tr> <tr> <td style="padding: 2px;">$1-1/4 \leq D \leq 2$</td> <td style="padding: 2px;">1D</td> <td style="padding: 2px;">0.5D</td> </tr> </tbody> </table>					Dia	a_a	a_r	$1/2 \leq D \leq 1-1/8$	1.5D	0.5D	$1-1/4 \leq D \leq 2$	1D	0.5D
Dia	a_a	a_r												
$1/2 \leq D \leq 1-1/8$	1.5D	0.5D												
$1-1/4 \leq D \leq 2$	1D	0.5D												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min				
1/4	1,320	2.6	1,000	1.6	750	1.0	500	0.6	4,000	11.1				
5/16	1,060	3.0	800	1.9	600	1.1	400	0.8	3,150	12.4				
3/8	950	3.1	710	2.0	530	1.0	355	0.8	2,800	13.0				
1/2	670	3.8	500	2.4	375	1.5	250	0.9	2,000	15.8				
5/8	600	4.8	400	2.6	300	1.6	200	1.0	1,600	17.6				
3/4	475	4.5	355	2.8	265	1.8	180	1.0	1,400	18.5				
7/8	375	4.5	280	2.8	212	1.8	140	1.0	1,120	18.8				
1	335	4.1	250	2.6	190	1.6	125	1.0	1,000	17.8				
1-1/8	300	4.0	224	2.5	170	1.6	112	0.9	900	16.9				
1-1/4	265	4.6	200	3.0	150	1.9	100	1.0	800	19.9				
1-1/2	212	4.1	160	2.6	118	1.6	80	1.0	630	17.6				
1-3/4	190	4.0	140	2.5	106	1.5	71	1.0	560	16.5				
2	170	3.5	125	2.3	95	1.4	63	0.9	500	14.8				



List 470: Regular Length - Multiple Flute - Center Hole


Side Milling

Hardness	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-									
Work Material	Medium Tensile Steels (up to 115 x 103 Lb/in ²) Mild Steel Forgings Cast Iron Brass and Bronze Copper	High Tensile Steels (115 x 103~145 x 103 Lb/in ²) Unalloyed Titanium Heat Resistant Ferritic Low Alloys	High Tensile Steels (145 x 103 ~200 x 103 Lb/in ²) Tool Steels Medium Strength Stainless Steels and Titanium Alloys	Heat Resistant High Alloys High Strength Stainless Steels and Titanium Alloys	Aluminum Alloyed Aluminum Plastics Woods									
Cutting Speed	80-100 SFM	60-75 SFM	40-55 SFM	26-40 SFM	195-330 SFM									
Depth of Cut	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>Dia</th> <th>aa</th> <th>ar</th> </tr> </thead> <tbody> <tr> <td>1/2 ≤ D ≤ 1-1/8</td> <td>1.5D</td> <td>0.3D</td> </tr> <tr> <td>1-1/4 ≤ D ≤ 2</td> <td>1D</td> <td>0.3D</td> </tr> </tbody> </table> 					Dia	aa	ar	1/2 ≤ D ≤ 1-1/8	1.5D	0.3D	1-1/4 ≤ D ≤ 2	1D	0.3D
Dia	aa	ar												
1/2 ≤ D ≤ 1-1/8	1.5D	0.3D												
1-1/4 ≤ D ≤ 2	1D	0.3D												
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min				
1/4	1,320	2.1	1,000	1.3	750	0.9	500	0.5	4,000	8.9				
5/16	1,060	2.4	800	1.5	600	1.0	400	0.5	3,150	9.9				
3/8	950	2.3	710	1.5	530	1.0	355	0.6	2,800	10.5				
1/2	670	3.0	500	1.9	375	1.1	250	0.8	2,000	12.4				
5/8	600	3.4	400	2.1	300	1.4	200	0.8	1,600	14.0				
3/4	475	3.5	355	2.3	265	1.4	180	0.9	1,400	14.8				
7/8	375	3.5	280	2.3	212	1.4	140	0.9	1,120	14.8				
1	335	3.4	250	2.1	190	1.4	125	0.8	1,000	14.0				
1-1/8	300	3.1	224	2.0	170	1.3	112	0.8	900	13.3				
1-1/4	265	3.8	200	2.4	150	1.5	100	1.0	800	15.8				
1-1/2	212	3.4	160	2.1	118	1.4	80	0.9	630	14.0				
1-3/4	190	3.1	140	2.0	106	1.3	71	0.8	560	13.3				
2	170	2.9	125	1.8	95	1.1	63	0.8	500	11.8				





List 460: Multiple Flute - Fine Pitch

Side Milling

Hardness	-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	400-460 SFM		130-160 SFM		100 SFM		65 SFM		50 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.1D$ 									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
6	6,900	21.7	2,400	10.6	1,600	6.7	1,060	3.0	800	1.2
8	5,200	21.7	1,800	10.6	1,200	6.7	800	3.0	600	1.2
10	4,200	23.6	1,400	13.4	950	6.7	640	3.0	480	1.2
12	3,500	23.6	1,200	14.2	800	7.1	530	3.0	400	1.2
16	2,600	23.6	900	15.7	600	7.1	400	3.0	300	1.2
20	2,100	23.6	720	16.1	480	7.9	320	3.0	240	1.2
25	1,700	23.6	580	13.8	380	7.1	250	3.0	190	1.2

Slotting


Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC							
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels							
Cutting Speed	125 SFM		85 SFM		55 SFM		40 SFM							
Depth of Cut	<table border="1" style="display: inline-table;"> <tr><th>Dia</th><th>a_a</th></tr> <tr><td>D ≤ 12</td><td>1.0D</td></tr> <tr><td>12 < D</td><td>0.5D</td></tr> </table> 				Dia	a _a	D ≤ 12	1.0D	12 < D	0.5D	$a_a = 0.5D$ 			
Dia	a _a													
D ≤ 12	1.0D													
12 < D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
6	2,040	7.9	1,360	4.7	900	2.0	680	0.8						
8	1,530	8.3	1,020	4.7	680	2.0	510	0.8						
10	1,190	9.1	810	4.7	540	2.0	410	0.8						
12	1,020	9.8	680	5.1	450	2.0	340	0.8						
16	760	10.6	510	5.1	340	2.0	260	0.8						
20	620	11.0	410	5.5	270	2.0	200	0.8						
25	500	9.4	320	5.1	210	2.0	160	0.8						

For 460 TiN Series, multiply cutting condition by 1.2 to 1.5



continued on next page

List 460: Multiple Flute - Fine Pitch (Continued)

Side Milling


Hardness	-		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	Aluminum		Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels	
Cutting Speed	390-460 SFM		130-164 SFM		100 SFM		66 SFM		50 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.1D$ 									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	6,900	21.7	2,400	10.6	1,600	6.7	1,060	3.0	800	1.2
5/16	5,200	21.7	1,800	10.6	1,200	6.7	800	3.0	600	1.2
3/8	4,200	23.6	1,400	13.4	950	6.7	640	3.0	480	1.2
1/2	3,500	23.6	1,200	14.2	800	7.1	530	3.0	400	1.2
5/8	2,600	23.6	900	15.7	600	7.1	400	3.0	300	1.2
3/4	2,100	23.6	720	16.1	480	7.9	320	3.0	240	1.2
1	1,700	23.6	580	13.8	380	7.1	250	3.0	190	1.2

Slotting

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC							
Work Material	Medium Carbon Steels Mild Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Pre-hardened Steels Stainless Steels Die & Alloy Steels		Hardened Steels							
Cutting Speed	110-140 SFM		85 SFM		56 SFM		43 SFM							
Depth of Cut	<table border="1"> <tr> <th>Dia</th> <th>a_a</th> </tr> <tr> <td>D ≤ 1/2</td> <td>1.0D</td> </tr> <tr> <td>1/2 < D</td> <td>0.5D</td> </tr> </table> 				Dia	a _a	D ≤ 1/2	1.0D	1/2 < D	0.5D	$a_a = 0.5D$ 			
Dia	a _a													
D ≤ 1/2	1.0D													
1/2 < D	0.5D													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min						
1/4	2,040	7.9	1,360	4.7	900	2.0	680	0.8						
5/16	1,530	7.9	1,020	4.7	680	2.0	510	0.8						
3/8	1,190	9.1	810	4.7	540	2.0	410	0.8						
1/2	1,020	9.8	680	5.1	450	2.0	340	0.8						
5/8	760	10.6	510	5.1	340	2.0	260	0.8						
3/4	620	11.0	410	5.5	270	2.0	200	0.8						
1	500	9.4	320	5.1	210	2.0	160	0.8						

List 690: Regular Length - Multiple Flute - Center Hole


Side Milling

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-45 HRC		>50 HRC										
Work Material	Mild Steels (up to 70x103 lb/in.2)		Medium Tensile Steels (70x103 to 115x103 lb/in.2) Mild Steel Forgings Cast Iron		High Tensile Steels (115x103 to 142x103 lb/in.2) Heat Resistant Ferritic Low Alloys		High Tensile Steels (142x103 to 200x103 lb/in.2) Tool Steels Medium Strength Stainless Steel		High Strength Stainless Steels										
Cutting Speed	130-148 SFM		115-131 SFM		79-83 SFM		55-66 SFM		45-47 SFM										
Depth of Cut	<table border="1" style="display: inline-table; margin-right: 20px;"> <thead> <tr> <th>Dia</th> <th>a_a</th> <th>a_r</th> </tr> </thead> <tbody> <tr> <td>1/2 ≤ D < 1-1/8</td> <td>1.5D</td> <td>0.5D</td> </tr> <tr> <td>1-1/4 ≤ D ≤ 2</td> <td>1D</td> <td>0.5D</td> </tr> </tbody> </table> 										Dia	a _a	a _r	1/2 ≤ D < 1-1/8	1.5D	0.5D	1-1/4 ≤ D ≤ 2	1D	0.5D
Dia	a _a	a _r																	
1/2 ≤ D < 1-1/8	1.5D	0.5D																	
1-1/4 ≤ D ≤ 2	1D	0.5D																	
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min									
1/4	2,230	6.0	1,770	4.5	1,250	3.0	940	2.3	700	1.5									
5/16	1,700	7.9	1,600	6.3	1,000	3.5	800	2.8	560	1.5									
3/8	1,470	10.3	1,180	7.0	835	4.0	660	3.3	470	1.9									
1/2	1,100	9.3	900	6.4	630	4.1	425	3.1	355	1.9									
5/8	850	12.5	715	8.4	500	6.3	400	4.0	280	2.4									
3/4	725	14.8	590	8.4	420	6.0	325	4.3	235	2.4									
7/8	630	14.0	500	8.4	350	6.0	280	4.5	200	2.4									
1	560	14.0	450	7.9	310	6.0	250	4.5	175	2.3									
1-1/8	490	12.1	400	7.0	270	6.0	220	4.3	160	2.4									
1-1/4	450	11.8	355	7.0	250	5.5	200	4.0	140	2.3									
1-1/2	370	10.1	300	6.6	210	4.5	165	3.3	115	1.9									
1-3/4	315	8.8	250	6.0	180	4.0	140	2.8	100	1.5									
2	275	7.8	220	5.0	155	3.5	120	2.3	90	1.4									




List 660: Super High-Helix - Regular Length - Multiple Flute

Semi-Roughing Cut

Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	1045 1055 Cast Steel Cast Iron		15-5 PH 4140, 4340, 304, 316, 410, 420, 430 A1		6AL-4V 17-4 PH H13 (HRC38) P20, D2 Beryllium Copper		H13 (HRC45) Inconel 718 Hastelloy Waspaloy	
Cutting Speed	80-100 SFM		50-65 SFM		35-45 SFM		20-30 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.3D$ 							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	1,400	3.0	900	1.9	600	1.2	400	0.7
5/16	1,100	2.8	700	1.8	500	1.3	300	0.7
3/8	900	3.2	600	2.1	400	1.4	250	0.7
7/16	780	3.3	500	2.1	355	1.5	224	0.8
1/2	710	3.8	450	2.4	315	1.7	200	0.8
5/8	560	3.8	350	2.3	250	1.7	160	0.9
3/4	450	3.8	300	2.6	200	1.7	140	0.8
7/8	400	4.0	250	2.5	180	1.8	110	0.8
1	315	3.5	200	2.2	160	1.8	100	0.8

Finish Cut


Hardness	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC	
Work Material	1045 1055 Cast Steel Cast Iron		15-5 PH 4140, 4340, 304, 316, 410, 420, 430 A1		6AL-4V 17-4 PH H13 (HRC38) P20, D2 Beryllium Copper		H13 (HRC45) Inconel 718 Hastelloy Waspaloy	
Cutting Speed	80-100 SFM		50-65 SFM		35-45 SFM		20-30 SFM	
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 							
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/4	1,400	5.9	900	3.1	600	2.0	400	1.1
5/16	1,100	6.6	700	3.3	500	2.4	315	1.2
3/8	900	6.3	600	3.5	400	2.3	250	1.2
7/16	780	7.0	500	3.7	355	2.7	224	1.4
1/2	710	6.7	450	3.6	315	2.5	200	1.4
5/8	560	6.3	350	3.5	250	2.5	160	1.5
3/4	450	5.1	300	3.2	200	2.1	140	1.5
7/8	400	6.0	250	3.7	180	2.7	110	1.6
1	350	5.3	200	3.0	160	2.4	100	1.4



List 573: Regular Length, 2 Flute

List 574: Regular Length, Multiple Flute

Slotting

Hardness	–		<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC	
Work Material	Aluminum Alloyed Aluminum Plastics Woods		Mild Steels Brass Bronze		Medium Tensile Steels Mild Steel Forgings Cast Iron Hard Brass and Bronze Copper		High Tensile Steels Unalloyed Titanium Heat Resistant Ferritic Low Alloys		High Tensile Steels Tool Steels Medium Strength Stainless Steels and Titanium Alloys	
Cutting Speed	250-350 SFM		80-100 SFM		50-65 SFM		35-45 SFM		20-30 SFM	
Depth of Cut	<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <p>2 Flute: $aa=0.5D$ 4 Flute: $aa=0.25D$</p> </div> <div style="text-align: center;">  </div> </div>									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	9,170	9.2	2,750	3.1	1,760	4.2	1,220	1.0	765	0.6
5/32	7,335	10.4	2,200	3.5	1,400	4.8	980	1.1	610	0.6
3/16	6,110	11.6	1,830	4.0	1,170	5.5	815	1.3	510	0.7
1/4	4,585	12.1	1,375	4.4	880	5.9	610	1.4	380	0.8
5/16	3,670	14.0	1,100	4.9	700	6.7	490	1.5	300	0.8
3/8	3,055	12.9	915	4.8	585	6.5	410	1.5	255	0.8
7/16	2,620	13.9	785	5.3	500	7.1	350	1.7	220	0.9
1/2	2,290	13.8	690	5.2	440	6.7	305	1.6	190	0.9
9/16	2,040	12.8	610	4.9	390	6.6	270	1.6	170	1.0
5/8	1,835	12.3	550	4.6	350	6.2	245	1.6	150	1.0
11/16	1,670	12.5	500	4.8	320	5.7	220	1.6	140	1.0
3/4	1,530	11.5	460	4.4	295	5.2	200	1.5	130	0.9
13/16	1,410	11.2	425	4.2	270	4.8	190	1.5	120	1.0
7/8	1,310	11.1	395	4.1	250	4.4	175	1.4	110	0.9
15/16	1,220	11.0	365	4.1	235	4.2	165	1.3	100	0.8
1	1,150	10.3	345	3.9	220	4.0	155	1.2	95	0.7

1) Based on regular 4FL end mills cutting depth (1.5D) x cutting width (0.1D).
 2) For 2FL end mill, decrease feed 50%.
 3) For finish, increase RPM 1.3 to 1.5 times.


continued on next page →





List 574: Regular Length, Multiple Flute (Continued)

Side Milling

Hardness	-		<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC	
Work Material	Aluminum Alloyed Aluminum Plastics Woods		Mild Steels Brass Bronze		Medium Tensile Steels Mild Steel Forgings Cast Iron Hard Brass and Bronze Copper		High Tensile Steels Unalloyed Titanium Heat Resistant Ferritic Low Alloys		High Tensile Steels Tool Steels Medium Strength Stainless Steels and Titanium Alloys	
Cutting Speed	325-590 SFM		130-165 SFM		105-125 SFM		65-80 SFM		30-50 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.1D$ 									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	13,980	28.0	4,500	10.1	3,550	7.1	2,240	3.6	1,250	1.6
5/32	11,185	31.8	3,550	11.4	2,800	8.0	1,800	4.0	1,000	1.9
3/16	9,320	35.4	2,800	12.4	2,240	9.0	1,400	4.5	800	2.1
1/4	6,990	36.9	2,240	14.4	1,800	10.1	1,120	5.0	630	2.4
5/16	5,590	42.5	1,800	16.1	1,400	11.3	900	5.8	500	2.6
3/8	4,660	39.5	1,600	17.0	1,250	11.8	800	6.1	450	2.9
7/16	3,995	42.4	1,250	16.8	1,000	12.0	630	6.3	355	3.0
1/2	3,495	41.9	1,120	16.8	900	11.4	560	5.9	315	3.0
9/16	3,100	39.2	1,000	16.0	800	11.4	500	6.0	280	3.1
5/8	2,795	37.5	900	15.3	710	10.6	450	6.0	250	3.1
11/16	2,540	38.1	800	15.3	630	9.5	400	5.6	224	3.1
3/4	2,330	35.0	800	15.3	630	9.5	400	5.6	224	3.1
13/16	2,150	34.4	710	14.3	560	8.4	355	5.6	200	3.3
7/8	2,000	34.0	630	13.4	500	7.5	315	5.0	180	2.9
15/16	1,865	33.6	560	12.5	450	6.8	280	4.5	160	2.5
1	1,750	31.5	560	12.5	450	6.8	280	4.5	160	2.5

1) Based on regular 4FL end mills cutting depth (1.5D) x cutting width (0.1D).


2) For 2FL end mill, decrease feed 50%.

3) For finish, increase RPM 1.3 to 1.5 times.



Standard 2 Flute HSS-Co

Slotting

Hardness	<145 Brinell			<20 HRC			20-30 HRC		
Work Material	Mild Steels Brass Bronze			Medium Tensile Steels Mild Steel Forgings Cast Iron Hard Brass and Bronze Copper			High Tensile Steels Unalloyed Titanium Heat Resistant Ferritic Low Alloys		
Cutting Speed	80-150 SFM			80-110 SFM			50-65 SFM		
Depth of Cut	$aa=0.5D$ 								
Mill Dia.	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min
1/64	25,000	0.00002	1.0	23,225	0.00002	0.9	14,000	0.00001	0.3
1/32	14,060	0.00007	2.0	11,610	0.00006	1.4	7,100	0.00005	0.7
3/64	9,370	0.00014	2.6	7,740	0.00012	1.9	4,500	0.00010	0.9
1/16	7,030	0.00020	2.8	5,800	0.00018	2.1	3,550	0.00014	1.0
5/64	5,625	0.00028	3.1	4,645	0.00025	2.3	2,800	0.00020	1.1
3/32	4,685	0.00040	3.7	3,870	0.00035	2.7	2,240	0.00028	1.3
7/64	4,015	0.00047	3.8	3,320	0.00042	2.8	2,000	0.00033	1.3
1/8	3,515	0.00056	3.9	2,900	0.00050	2.9	1,800	0.00040	1.4
9/64	3,125	0.00067	4.2	2,580	0.00060	3.1	1,600	0.00047	1.5
5/32	2,810	0.00080	4.5	2,320	0.00071	3.3	1,400	0.00056	1.6
11/64	2,555	0.00095	4.9	2,110	0.00085	3.6	1,250	0.00067	1.7
3/16	2,340	0.00110	5.2	1,935	0.00100	3.9	1,120	0.00080	1.8
1/4	1,760	0.00160	5.6	1,450	0.00140	4.1	900	0.00112	2.0
5/16	1,400	0.00224	6.3	1,160	0.00200	4.6	710	0.00160	2.3
3/8	1,170	0.00265	6.2	970	0.00236	4.6	630	0.00190	2.4
7/16	1,000	0.00335	6.7	830	0.00300	5.0	500	0.00250	2.5
1/2	880	0.00375	6.6	725	0.00315	4.6	450	0.00265	2.4
9/16	780	0.00400	6.2	645	0.00355	4.6	400	0.00300	2.4
5/8	700	0.00425	6.0	580	0.00375	4.4	355	0.00335	2.4
11/16	640	0.00475	6.1	530	0.00400	4.2	315	0.00355	2.2
3/4	585	0.00475	5.6	485	0.00400	3.9	315	0.00355	2.2
13/16	540	0.00500	5.4	445	0.00400	3.6	280	0.00400	2.2
7/8	500	0.00530	5.3	415	0.00400	3.3	250	0.00400	2.0
15/16	470	0.00560	5.2	390	0.00400	3.1	224	0.00400	1.8
1	440	0.00560	4.9	360	0.00400	2.9	224	0.00400	1.8
1-1/8	390	0.00560	4.4	320	0.00400	2.6	200	0.00400	1.6
1-1/4	350	0.00600	4.2	290	0.00400	2.3	180	0.00400	1.4
1-3/8	320	0.00600	3.8	265	0.00400	2.1	160	0.00400	1.3
1-1/2	295	0.00630	3.7	240	0.00400	1.9	140	0.00400	1.1
1-5/8	270	0.00630	3.4	225	0.00400	1.8	140	0.00400	1.1
1-3/4	250	0.00630	3.2	210	0.00400	1.7	125	0.00400	1.0
1-7/8	235	0.00630	3.0	195	0.00400	1.5	112	0.00400	0.9
2	220	0.00630	2.8	180	0.00400	1.5	112	0.00400	0.9

- 1) Speeds and Feeds for Lists 520, 522, 540, 541, 542, 543, 548, 620 and 641
- 2) Reduce Speeds and Feeds 5-10% for Lists 525, 527, 547
- 3) Reduce Speeds and Feeds 10-20% for Lists 545 and 557
- 4) Increase Speeds and Feeds 5-15% for Lists 530 and 535 (Aluminum only)
- 5) Increase Speeds and Feeds 10-20% for List 529
- 6) Speeds can be increased up to 20% for 520TiN, 522TiN, 540TiN, and 542TiN
- 7) Speeds can be increased up to 15% for Lists 541TiN/TiCN and 548 TiCN

▶ continued on next page ▶





Standard 2 Flute HSS-Co: (Continued)

Slotting


Hardness	30-40 HRC			40-50 HRC			-		
Work Material	High Tensile Steels Tool Steels Medium Strength Stainless Steels and Titanium Alloys			Heat Resistant High Strength Stainless Steels and Titanium Alloys			Aluminum Alloy Aluminum Plastics Woods		
Cutting Speed	80-150 SFM			16-32 SFM			150-165 SFM		
Depth of Cut	$a_a=0.5D$								
Mill Dia.	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min
1/64	25,000	0.00002	0.8	6,300	0.00001	0.1	25,000	0.00003	1.5
1/32	14,060	0.00004	1.2	3,150	0.00003	0.2	19,250	0.00008	2.9
3/64	9,370	0.00009	1.6	2,000	0.00006	0.2	12,835	0.00014	3.6
1/16	7,030	0.00012	1.7	1,600	0.00008	0.3	9,625	0.00020	3.9
5/64	5,625	0.00017	1.9	1,250	0.00011	0.3	7,700	0.00028	4.3
3/32	4,685	0.00024	2.2	1,000	0.00016	0.3	6,420	0.00038	4.8
7/64	4,015	0.00028	2.2	900	0.00020	0.4	5,500	0.00043	4.7
1/8	3,515	0.00034	2.4	800	0.00024	0.4	4,815	0.00050	4.8
9/64	3,125	0.00040	2.5	710	0.00028	0.4	4,280	0.00060	5.1
5/32	2,810	0.00048	2.7	630	0.00034	0.4	3,850	0.00071	5.5
11/64	2,555	0.00056	2.9	560	0.00040	0.4	3,500	0.00080	5.6
3/16	2,345	0.00067	3.1	500	0.00048	0.5	3,210	0.00095	6.1
1/4	1,760	0.00095	3.3	400	0.00071	0.6	2,400	0.00132	6.4
5/16	1,400	0.00132	3.7	315	0.00100	0.6	1,925	0.00190	7.3
3/8	1,170	0.00160	3.7	280	0.00118	0.7	1,600	0.00212	6.8
7/16	1,000	0.00212	4.3	224	0.00140	0.6	1,375	0.00265	7.3
1/2	880	0.00236	4.1	200	0.00180	0.7	1,200	0.00300	7.2
9/16	780	0.00280	4.4	180	0.00200	0.7	1,070	0.00315	6.7
5/8	700	0.00315	4.4	160	0.00224	0.7	965	0.00335	6.4
11/16	640	0.00355	4.5	140	0.00250	0.7	875	0.00375	6.6
3/4	585	0.00355	4.2	140	0.00250	0.7	800	0.00375	6.0
13/16	540	0.00400	4.3	125	0.00280	0.7	740	0.00400	5.9
7/8	500	0.00400	4.0	112	0.00315	0.7	690	0.00425	5.8
15/16	470	0.00400	3.7	100	0.00355	0.7	640	0.00450	5.8
1	440	0.00400	3.5	100	0.00355	0.7	600	0.00450	5.4
1-1/8	390	0.00400	3.1	90	0.00400	0.7	535	0.00475	5.1
1-1/4	350	0.00400	2.8	80	0.00400	0.6	480	0.00475	4.6
1-3/8	320	0.00400	2.6	71	0.00400	0.6	440	0.00500	4.4
1-1/2	295	0.00400	2.3	63	0.00400	0.5	400	0.00500	4.0
1-5/8	270	0.00400	2.2	63	0.00400	0.5	370	0.00500	3.7
1-3/4	250	0.00400	2.0	56	0.00400	0.4	345	0.00500	3.4
1-7/8	235	0.00400	1.9	50	0.00400	0.4	320	0.00500	3.2
2	220	0.00400	1.8	50	0.00400	0.4	300	0.00500	3.0

1) Based on regular 2FL cutting depth (1/2D) 4FL depth (1/4D).
 2) In case of deeper operation, slow down feed by 20-50%.



Standard 4 Flute and 6 Flute HSS-Co

Side Milling

Hardness	<145 Brinell			<20 HRC			20-30 HRC		
Work Material	Mild Steels Brass Bronze			Medium Tensile Steels Mild Steel Forgings Cast Iron Hard Brass and Bronze Copper			High Tensile Steels Unalloyed Titanium Heat Resistant Ferritic Low Alloys		
Cutting Speed	80-150 SFM			80-110 SFM			16-32 SFM		
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 								
Mill Dia.	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min
1/16	7,030	0.00020	5.6	5,800	0.00018	4.2	1,465	0.00014	0.8
5/64	5,625	0.00028	6.3	4,645	0.00025	4.6	1,175	0.00020	0.9
3/32	4,685	0.00040	7.5	3,870	0.00036	5.5	980	0.00028	1.1
7/64	4,015	0.00048	7.6	3,320	0.00043	5.6	840	0.00034	1.1
1/8	3,515	0.00056	7.9	2,900	0.00050	5.8	735	0.00040	1.2
9/64	3,125	0.00067	8.4	2,580	0.00060	6.2	650	0.00048	1.2
5/32	2,810	0.00080	9.0	2,320	0.00071	6.6	585	0.00056	1.3
11/64	2,555	0.00095	9.7	2,110	0.00085	7.2	530	0.00067	1.4
3/16	2,340	0.00110	10.3	1,935	0.00100	7.7	490	0.00080	1.6
1/4	1,760	0.00160	11.2	1,450	0.00140	8.1	365	0.00112	1.6
5/16	1,400	0.00224	12.6	1,160	0.00200	9.3	295	0.00160	1.9
3/8	1,170	0.00265	12.4	970	0.00236	9.1	245	0.00190	1.9
7/16	1,000	0.00335	13.5	830	0.00300	10.0	210	0.00250	2.1
1/2	880	0.00375	13.2	725	0.00315	9.1	185	0.00265	1.9
9/16	780	0.00400	12.5	645	0.00355	9.2	160	0.00300	2.0
5/8	700	0.00425	11.9	580	0.00375	8.7	145	0.00335	2.0
11/16	640	0.00475	12.1	530	0.00375	7.9	135	0.00355	1.9
3/4	585	0.00475	11.1	485	0.00375	7.3	120	0.00355	1.7
13/16	540	0.00500	10.8	445	0.00375	6.7	110	0.00400	1.8
7/8	500	0.00530	10.6	415	0.00375	6.2	105	0.00400	1.7
15/16	470	0.00560	10.5	390	0.00375	5.8	100	0.00400	1.6
1	440	0.00560	9.8	365	0.00375	5.4	90	0.00400	1.5
1-1/8	390	0.00560	8.7	320	0.00375	4.8	80	0.00400	1.3
1-1/4	350	0.00600	8.4	290	0.00375	4.4	75	0.00400	1.2
1-3/8	320	0.00600	7.7	265	0.00375	4.0	65	0.00400	1.1
1-1/2	295	0.00630	7.4	240	0.00375	3.6	60	0.00400	1.0
1-3/4	250	0.00630	9.5	210	0.00375	4.7	50	0.00400	1.3
2	220	0.00630	8.3	180	0.00375	4.1	45	0.00400	1.1

- 1) Speeds and Feeds for Lists 540, 541, 542, 543, 547, 548, 575, and 641
- 2) Reduce Speeds and Feeds 15-20% for Lists 557
- 3) Reduce Speeds and Feeds 10-15% for Lists 545, 546, 558 and 646
- 4) Increase Speeds and Feeds 5-15% for Lists 549

▶ continued on next page ▶





Standard 4 Flute and 6 Flute HSS-Co: (Continued)

Side Milling

Hardness	30-40 HRC			40-50 HRC			-		
Work Material	High Tensile Steels Tool Steels Medium Strength Stainless Steels and Titanium Alloys			Heat Resistant High Strength Stainless Steels and Titanium Alloys			Aluminum Alloyed Aluminum Plastics Woods		
Cutting Speed	30-50 SFM			16-32 SFM			150-390 SFM		
Depth of Cut	$a_a = 1.5D$ $a_r = 0.1D$								
Mill Dia.	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min	Speed RPM	IPT	Feed in/min
1/16	2,500	0.00012	1.2	1,600	0.00008	0.5	16,500	0.00020	13.2
5/64	2,000	0.00017	1.4	1,250	0.00011	0.6	13,200	0.00028	14.8
3/32	1,600	0.00024	1.5	1,000	0.00016	0.6	11,000	0.00038	16.5
7/64	1,400	0.00028	1.6	900	0.00020	0.7	9,430	0.00043	16.0
1/8	1,250	0.00034	1.7	800	0.00024	0.8	8,250	0.00050	16.5
9/64	1,120	0.00040	1.8	710	0.00028	0.8	7,335	0.00060	17.6
5/32	1,000	0.00048	1.9	630	0.00034	0.8	6,600	0.00071	18.7
11/64	900	0.00056	2.0	560	0.00040	0.9	6,000	0.00080	19.2
3/16	800	0.00067	2.1	500	0.00048	1.0	5,500	0.00095	20.9
1/4	630	0.00095	2.4	400	0.00071	1.1	4,125	0.00132	21.8
5/16	500	0.00132	2.6	315	0.00100	1.3	3,300	0.00190	25.1
3/8	450	0.00160	2.9	280	0.00118	1.3	2,750	0.00212	23.3
7/16	355	0.00212	3.0	224	0.00140	1.3	2,360	0.00265	25.0
1/2	315	0.00236	3.0	200	0.00180	1.4	2,060	0.00300	24.8
9/16	280	0.00280	3.1	180	0.00200	1.4	1,835	0.00315	23.1
5/8	250	0.00315	3.2	160	0.00224	1.4	1,650	0.00335	22.1
11/16	224	0.00355	3.2	140	0.00250	1.4	1,500	0.00375	22.5
3/4	224	0.00355	3.2	140	0.00250	1.4	1,375	0.00375	20.6
13/16	200	0.00400	3.2	125	0.00280	1.4	1,270	0.00400	20.3
7/8	180	0.00400	2.9	112	0.00315	1.4	1,180	0.00425	20.0
15/16	160	0.00400	2.6	100	0.00355	1.4	1,100	0.00450	19.8
1	160	0.00400	2.6	100	0.00355	1.4	1,030	0.00450	18.6
1-1/8	140	0.00400	2.2	90	0.00400	1.4	915	0.00475	17.4
1-1/4	125	0.00400	2.0	80	0.00400	1.3	825	0.00475	15.7
1-3/8	112	0.00400	1.8	71	0.00400	1.1	750	0.00500	15.0
1-1/2	100	0.00400	1.6	63	0.00400	1.0	690	0.00500	13.8
1-3/4	90	0.00400	2.2	56	0.00400	1.3	590	0.00500	17.7
2	80	0.00400	1.9	50	0.00400	1.2	515	0.00500	15.5


1) Based on regular 4FL end mills, cutting depth (1.5D) x cutting width (0.1D)

2) For finish cut, increase RPM 30-50%.



- List 521: Single End, Regular Length, 2 Flute**
- List 523: Double End, Regular Length, 2 Flute**
- List 526: Single End, Regular Length, 2 Flute, Extension Type**
- List 544: Single End, Regular Length, 4 Flute**
- List 621: Ball End, Regular Length, 2 Flute**
- List 644: Ball End, Regular Length, Multiple Flute**

Profiling

Hardness	<145 Brinell	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC		-		
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Medium Carbon Steels Medium Strength Titanium Alloys Medium Strength Stainless Steels		High Carbon Steel Titanium Alloys High Strength Stainless Steels		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Heat Resistant High Alloys High Strength Stainless Steels Titanium Alloys		Aluminum Aluminum Alloys		
Cutting Speed	80-150 SFM	80-110 SFM		50-65 SFM		30-50 SFM		16-32 SFM		80-390 SFM		
Depth of Cut	a_a $2FL = 1/2D$ $4FL = 1/4D$ $a_r = 0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	3,515	4.0	2,900	2.9	1,800	1.5	1,250	0.9	800	0.4	7,180	7.2
3/16	2,340	5.2	1,935	3.9	1,120	1.8	800	1.1	500	0.5	4,790	9.1
1/4	1,760	5.6	1,450	4.2	900	2.0	630	1.3	400	0.6	3,590	9.6
5/16	1,400	6.2	1,160	4.7	710	2.3	500	1.4	315	0.6	2,875	11.0
3/8	1,170	6.2	970	4.6	630	2.4	450	1.5	280	0.6	2,390	10.1
7/16	1,000	6.7	830	5.0	500	2.5	355	1.5	224	0.6	2,050	10.9
1/2	880	6.6	725	4.6	450	2.4	315	1.5	200	0.8	1,795	10.8
9/16	780	6.3	645	4.6	400	2.4	280	1.6	180	0.8	1,595	10.0
5/8	700	6.0	580	4.4	355	2.4	250	1.6	160	0.8	1,435	9.6
3/4	585	5.6	485	3.9	315	2.3	225	1.6	140	0.8	1,195	9.0
7/8	500	5.3	415	3.3	250	2.0	180	1.5	110	0.8	1,025	8.7
1	440	4.9	360	2.9	224	1.8	160	1.3	100	0.8	900	8.1
1-1/8	390	4.3	320	2.5	200	1.6	140	1.1	90	0.8	800	7.6
1-1/4	350	4.2	290	2.3	180	1.5	125	1.0	80	0.6	720	6.8
1-1/2	295	3.7	240	2.0	140	1.1	100	0.8	63	0.5	600	6.0

Reduce Speeds and Feeds by 10% for List 526
In case of deeper operation, slow down feed by 20-50%






Single/Double End

Cobalt High Speed Steel

List 580: Single End, Regular Length, 2 Flute

List 582: Double End, Regular Length, 2 Flute

Side Milling


Hardness	<145 Brinell	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-						
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys	Heat Resistant High Alloys High Strength Stainless Steels Titanium Alloys	Aluminum Aluminum Alloys						
Cutting Speed	125-145 SFM	95-110 SFM	50-65 SFM	30-50 SFM	16-32 SFM	160-390 SFM						
Depth of Cut	$aa=1.5D$ $ar=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	4,365	4.1	3,315	3.0	1,860	1.3	1,400	0.8	800	0.4	8,895	7.8
4	3,275	5.1	2,485	3.5	1,395	1.6	1,000	1.0	630	0.4	6,670	9.5
5	2,620	5.8	1,990	3.9	1,115	1.8	800	1.0	500	0.5	5,335	10.5
6	2,185	5.8	1,660	3.8	930	1.8	710	1.1	400	0.6	4,450	9.8
8	1,640	7.3	1,245	4.8	700	2.2	500	1.1	315	0.6	3,335	12.7
10	1,310	8.3	995	5.4	560	2.5	400	1.3	280	0.6	2,670	13.3
12	1,090	8.2	830	5.1	465	2.5	315	1.5	200	0.8	2,220	13.2
14	935	7.4	710	4.9	400	2.4	280	1.6	180	0.8	1,900	11.8
16	820	6.9	620	4.6	350	2.4	250	1.6	160	0.8	1,670	11.3
18	730	6.7	550	4.4	310	2.2	225	1.6	140	0.8	1,480	11.2
20	655	6.5	500	3.9	280	2.2	200	1.6	140	0.8	1,335	10.3
22	595	6.3	450	3.5	255	2.0	180	1.4	112	0.8	1,210	10.2
24	545	6.0	415	3.3	235	1.9	160	1.3	100	0.8	1,110	9.8
25	525	5.8	400	3.2	225	1.8	160	1.3	100	0.6	1,070	9.4
26	500	5.5	385	3.1	215	1.7	160	1.3	90	0.6	1,025	9.0
28	465	5.1	355	2.8	200	1.6	140	1.1	80	0.6	950	8.8
30	435	4.8	330	2.6	185	1.5	140	1.1	70	0.6	890	8.3
32	410	4.8	310	2.5	175	1.4	125	1.0	63	0.5	835	7.8
35	375	4.3	285	2.3	160	1.3	110	0.9	63	0.5	760	7.5
36	365	4.2	275	2.2	155	1.3	110	0.8	63	0.5	740	7.2
40	330	4.1	250	2.0	140	1.1	100	0.8	56	0.4	670	6.6
45	290	3.6	220	1.8	125	1.0	90	0.7	50	0.4	595	5.9
50	260	3.2	200	1.6	110	0.9	80	0.7	50	0.4	535	5.3

In case of deeper operation, slow down feed by 20-50%



List 581: Regular Length - Multiple Flute - Center Hole

Side Milling

Hardness	<145 Brinell	<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC		-		
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels		High Carbon Steel Titanium Alloys High Strength Stainless Steels		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Heat Resistant High Alloys High Strength Stainless Steels Titanium Alloys		Aluminum Aluminum Alloys		
Cutting Speed	130-165 SFM	105-125 SFM		65-85 SFM		30-50 SFM		16-32 SFM		450-590 SFM		
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3	4,770	8.8	4,000	7.5	2,425	3.4	1,295	1.5	800	0.8	16,820	29.4
4	3,580	11.3	2,800	8.8	1,820	4.0	970	1.8	630	0.9	12,615	35.7
5	2,860	12.6	2,240	9.8	1,455	4.5	775	2.1	500	1.0	10,090	39.8
6	2,385	12.6	2,000	10.4	1,210	4.5	650	2.0	400	1.1	8,410	36.8
8	1,790	15.7	1,400	12.4	910	5.6	485	2.6	315	1.3	6,300	46.6
10	1,430	17.8	1,120	14.0	730	6.5	390	2.8	280	1.4	5,045	49.6
12	1,190	17.9	900	13.2	600	6.4	325	3.0	200	1.5	4,200	48.9
14	1,020	16.1	800	12.4	520	6.2	280	3.1	180	1.5	3,600	44.8
16	895	14.8	710	11.8	455	6.0	240	3.0	160	1.4	3,150	41.7
18	795	14.7	630	11.0	400	5.6	215	3.0	140	1.4	2,800	41.7
20	715	14.1	560	9.8	365	5.7	195	3.0	140	1.4	2,520	39.8
22	650	13.6	500	8.8	330	5.1	175	2.7	112	1.4	2,295	38.4
24	600	13.1	450	7.9	300	4.6	160	2.5	100	1.4	2,100	36.8
25	575	12.6	450	7.9	290	4.5	155	2.4	100	1.4	2,020	35.3
26	550	12.1	450	7.9	280	4.3	150	2.3	90	1.5	1,940	34.0
28	510	11.4	400	7.1	260	4.1	140	2.2	80	1.3	180	33.2
30	480	10.6	400	7.1	240	3.8	130	2.0	71	1.1	1,680	31.0
32	450	9.6	355	6.3	230	3.6	120	1.9	71	1.1	1,575	29.7
35	410	9.4	315	5.5	210	3.2	110	1.8	63	1.0	1,440	28.6
36	400	9.2	315	5.5	200	3.1	105	1.7	63	1.0	1,400	27.8
40	360	8.9	280	4.9	180	2.9	100	1.6	56	1.4	1,260	24.8
45	320	9.3	250	5.5	160	3.1	85	1.7	56	1.4	1,120	27.8
50	285	8.4	224	4.9	145	2.9	80	1.6	50	1.3	1,010	24.7




List 531: Single End - Regular Length - 3 Flute

List 532: Double End - Regular Length - 3 Flute


List 536: Single End - Long Length - 3 Flute

Side Milling

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		-	
Work Material	Mild Steels Hard Brass Bronze Cast Iron		Med. Carbon Steels Hard Brass and Bronze Mild Steel Forgings		High Carbon Steel Unalloyed Titanium Ferritic Low Alloys		High Alloys Titanium Alloys High Strength Stainless Steels		Aluminum Aluminum Alloys	
Cutting Speed	155 SFM		115 SFM		70 SFM		40 SFM		395 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.2D$ 									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	4,700	5.7	3,516	4.1	2,140	2.0	1,223	0.9	12,076	13.4
3/16	3,200	9.1	2,344	6.0	1,427	3.1	815	1.4	8,051	20.1
1/4	2,350	8.3	1,758	5.4	1,070	2.7	611	1.2	6,038	16.9
5/16	1,896	11.0	1,406	7.0	856	3.6	489	1.8	4,831	25.2
3/8	1,580	12.9	1,172	8.3	713	3.9	408	2.0	4,025	25.2
1/2	1,185	11.6	879	6.9	535	3.7	306	1.9	3,019	21.4
5/8	948	10.4	703	6.9	428	3.7	245	2.1	2,415	21.4
3/4	790	10.4	586	6.0	357	3.6	204	2.1	2,013	19.8
1	592	8.4	439	4.6	268	2.9	153	1.6	1,510	17.9
1-1/4	474	6.6	352	3.7	214	2.2	122	1.3	1,208	15.1
1-1/2	395	6.1	293	3.1	178	1.9	102	1.1	1,006	13.2

When using List Number 536, reduce speeds and feeds by 10%.

Slotting


Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		-	
Work Material	Mild Steels Brass Bronze Cast Iron		Med. Carbon Steels Hard Brass and Bronze Mild Steel Forgings		High Carbon Steel Unalloyed Titanium Ferritic Low Alloys		High Alloys Titanium Alloys High Strength Stainless Steels		Aluminum Aluminum Alloys	
Cutting Speed	115-150 SFM		90-110 SFM		50-65 SFM		15-35 SFM		325-375 SFM	
Depth of Cut	$a_a = 1/3D$ 									
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
1/8	4,050	4.9	3,055	3.6	1,760	1.7	765	0.5	10,700	11.8
3/16	2,700	7.7	2,040	5.3	1,170	2.5	500	0.9	7,130	17.8
1/4	2,025	7.1	1,530	4.7	880	2.2	385	0.8	5,350	15.0
5/16	1,620	9.4	1,220	6.1	700	3.0	300	1.1	4,280	22.4
3/8	1,350	11.0	1,020	7.2	585	3.2	255	1.3	3,565	22.3
1/2	1,010	9.9	765	6.0	440	3.0	190	1.2	2,675	18.9
5/8	810	8.9	610	6.0	350	3.1	150	1.3	2,140	18.9
3/4	675	8.9	510	5.3	295	2.9	130	1.3	1,780	17.5
1	500	7.2	385	4.0	220	2.4	95	1.0	1,340	15.8
1-1/4	400	5.7	300	3.2	175	1.8	75	0.8	1,070	13.4
1-1/2	340	5.2	255	2.7	145	1.6	65	0.7	890	11.7

When using List Number 536, reduce speeds and feeds by 10%.




List 591: 1° Taper on Side - 3 Flute

Side Milling

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC		-	
Work Material	Mild Steels Brass Bronze Cast Iron		Med. Carbon Steels Hard Brass and Bronze Mild Steel Forgings		High Carbon Steel Unalloyed Titanium Ferritic Low Alloys		High Carbon Steel Unalloyed Titanium Ferritic Low Alloys		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Aluminum Aluminum Alloys	
Cutting Speed	80-120 SFM		60-80 SFM		45-60 SFM		25-45 SFM		16-32 SFM		150-400 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5/64	4,890	6.9	3,425	4.8	2,570	3.6	1,710	2.4	1,175	1.6	13,445	19.0
3/32	4,075	5.7	2,850	4.0	2,140	3.0	1,425	1.9	980	1.2	11,200	15.8
1/8	3,055	7.2	2,140	5.1	1,600	3.8	1,070	2.6	735	1.6	8,400	19.9
3/16	2,040	6.7	1,425	4.7	1,070	3.4	715	2.3	490	1.5	5,600	18.5
1/4	1,530	5.5	1,070	3.8	800	2.7	535	2.0	365	1.2	4,200	14.9
3/8	1,020	9.6	715	6.4	535	4.9	355	3.4	245	2.2	2,800	26.4
1/2	765	8.2	535	5.9	400	4.3	270	3.0	185	1.9	2,100	23.6
5/8	610	7.3	430	5.1	320	3.9	215	2.6	145	1.6	1,680	20.8

Slotting

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC		-	
Work Material	Mild Steels Brass Bronze Cast Iron		Med. Carbon Steels Hard Brass and Bronze Mild Steel Forgings		High Carbon Steel Unalloyed Titanium Ferritic Low Alloys		High Carbon Steel Unalloyed Titanium Ferritic Low Alloys		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Aluminum Aluminum Alloys	
Cutting Speed	80-120 SFM		60-80 SFM		45-60 SFM		10 - 20 SFM		8-15 SFM		150-350 SFM	
Depth of Cut	$a_a = 1/3D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5/64	4,890	3.5	3,420	2.2	2,570	1.4	776	0.5	504	0.3	12,225	6.9
3/32	4,075	3.6	2,850	2.5	2,140	1.5	640	0.4	416	0.2	10,185	5.7
1/8	3,055	3.8	2,140	2.6	1,600	1.8	480	0.6	312	0.3	7,640	7.2
3/16	2,040	3.4	1,425	2.4	1,070	1.6	320	0.5	208	0.3	5,095	6.7
1/4	1,530	3.5	1,070	2.5	800	1.8	240	0.4	156	0.2	3,820	7.5
3/8	1,020	4.8	715	3.2	535	2.2	160	0.7	104	0.4	2,545	9.6
1/2	765	4.3	535	3.0	400	2.2	120	0.6	78	0.4	1,910	8.6
5/8	610	3.7	430	2.6	320	1.9	96	0.6	62	0.3	1,530	7.6



List 593: 2° Taper on Side - 3 Flute

List 594: 3° Taper on Side - 3 Flute

Side Milling

Hardness	<145 Brinell	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-						
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	Aluminum Aluminum Alloys						
Cutting Speed	130-150 SFM	105-120 SFM	65-80 SFM	20-50 SFM	15-20 SFM	400-590 SFM						
Depth of Cut	$aa=1.5D$ $ar=0.1D$											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5/64	6,845	9.7	5,500	7.8	3,545	5.0	1,710	2.4	855	1.1	24,200	33.3
3/32	5,700	8.1	4,585	6.4	2,955	4.1	1,425	2.1	715	0.9	20,170	28.5
1/8	4,280	10.1	3,440	8.0	2,215	5.2	1,070	2.4	535	1.1	15,130	35.6
3/16	2,850	9.4	2,295	7.5	1,480	4.8	715	2.3	355	1.1	10,085	33.3
1/4	2,140	7.5	1,720	6.0	1,110	3.9	525	1.8	270	0.8	7,560	26.7
3/8	1,425	13.5	1,145	10.7	740	6.9	355	3.3	180	1.5	5,040	47.6
1/2	1,070	12.0	860	9.6	550	6.2	270	3.0	135	1.4	3,780	42.3
5/8	855	10.6	690	8.5	440	5.5	215	2.6	105	1.2	3,025	37.5

Slotting


Hardness	<145 Brinell	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-						
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	Aluminum Aluminum Alloys						
Cutting Speed	80-120 SFM	60-80 SFM	45-60 SFM	25-45 SFM	8-20 SFM	150-350 SFM						
Depth of Cut	$aa=1/3D$											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5/64	4,890	3.2	3,420	2.4	2,670	1.5	1,710	1.2	685	0.3	12,225	7.0
3/32	4,075	3.1	2,850	2.4	2,140	1.5	1,425	0.9	570	0.3	10,190	7.2
1/8	3,055	3.2	2,140	2.5	1,600	1.9	1,070	1.2	430	0.3	7,640	7.3
3/16	2,040	3.1	1,425	2.7	1,070	1.8	715	1.2	285	0.3	5,095	7.5
1/4	1,530	3.6	1,070	3.2	800	2.2	535	0.9	215	0.3	3,820	7.9
3/8	1,020	4.4	715	3.3	535	2.6	355	1.5	140	0.5	2,545	9.7
1/2	765	4.1	535	2.8	400	2.2	270	1.5	105	0.5	1,910	8.7
5/8	610	3.4	430	2.6	320	2.0	215	1.2	85	0.3	1,530	7.9




List 595: 5° Taper on Side - 3 Flute

List 596: 7° Taper on Side - 3 Flute

Side Milling

Hardness	<145 Brinell	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-						
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys	Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys	Aluminum Aluminum Alloys						
Cutting Speed	130-165 SFM	105-125 SFM	65-80 SFM	20-50 SFM	15-20 SFM	400-590 SFM						
Depth of Cut	$a_a=1.5D$ $a_r=0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5/64	7,210	10.9	5,625	8.0	3,545	5.0	1,710	2.4	855	1.1	24,200	36.4
3/32	6,010	8.4	4,685	6.5	2,955	4.2	1,425	2.1	715	0.9	20,170	28.4
1/8	4,510	10.6	3,515	8.3	2,215	5.2	1,070	2.5	535	1.1	15,130	35.5
3/16	3,000	9.9	2,345	7.5	1,470	4.8	715	2.3	355	1.1	10,085	33.1
1/4	2,250	8.5	1,760	5.8	1,110	3.9	535	2.0	270	0.9	7,565	28.5
3/8	1,500	14.1	1,170	10.8	740	6.9	355	3.2	180	1.5	5,040	47.5
1/2	1,125	13.2	880	9.4	555	6.2	270	2.9	135	1.3	3,780	44.3


Slotting

Hardness	<145 Brinell	<20 HRC	20-30 HRC	30-40 HRC	40-50 HRC	-						
Work Material	Mild Steels Hard Brass Bronze Cast Iron	Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels	High Carbon Steel Titanium Alloys High Strength Stainless Steels	Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys	Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys	Aluminum Aluminum Alloys						
Cutting Speed	80-120 SFM	60-80 SFM	45-60 SFM	8 - 15 SFM	5 - 10 SFM	150-350 SFM						
Depth of Cut	$a_a=1/3D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
5/64	4,890	3.3	3,420	2.4	2,570	1.6	565	0.4	365	0.2	12,225	7.4
3/32	4,075	3.2	2,855	2.3	2,140	1.5	470	0.3	300	0.2	10,190	7.6
1/8	3,055	3.1	2,140	2.5	1,600	2.0	350	0.4	230	0.2	7,640	8.2
3/16	2,040	3.9	1,425	3.2	1,070	2.4	235	0.4	150	0.2	5,095	9.9
1/4	1,530	5.1	1,070	4.6	800	3.0	175	0.3	115	0.1	3,820	10.0
3/8	1,020	4.7	715	3.6	535	2.5	120	0.6	75	0.3	2,545	10.7
1/2	765	4.1	535	2.8	400	2.4	90	0.5	60	0.2	1,910	9.5




List 597: 10° Taper on Side - 3 Flute

Side Milling

Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC		-	
Work Material	Mild Steels Hard Brass Bronze Cast Iron		Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels		High Carbon Steel Titanium Alloys High Strength Stainless Steels		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Aluminum Aluminum Alloys	
Cutting Speed	80-120 SFM		60-80 SFM		45-60 SFM		25-45 SFM		15-20 SFM		150-350 SFM	
Depth of Cut	$a_a = 1.5D$ $a_r = 0.1D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/32	4,075	5.7	2,850	4.0	2,140	3.1	1,425	2.1	715	0.9	10,185	14.4
1/8	3,055	7.2	2,140	5.0	1,600	3.7	1,070	2.5	535	1.1	7,640	18.1
1/4	1,530	5.8	1,070	3.6	800	2.8	535	2.0	270	0.9	3,820	13.5

Slotting


Hardness	<145 Brinell		<20 HRC		20-30 HRC		30-40 HRC		40-50 HRC		-	
Work Material	Mild Steels Hard Brass Bronze Cast Iron		Med. Carbon Steels Med. Strength Titanium Alloys Med. Strength Stainless Steels		High Carbon Steel Titanium Alloys High Strength Stainless Steels		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Heat Resistant High Alloys Austenitic Alloys Nickel Base Alloys		Aluminum Aluminum Alloys	
Cutting Speed	80-120 SFM		60-80 SFM		45-60 SFM		25-45 SFM		5 - 12 SFM		150-350 SFM	
Depth of Cut	$a_a = 1/3D$ 											
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
3/32	4,075	2.5	2,850	2.0	2,140	1.5	1,425	1.0	345	0.2	10,185	7.2
1/8	3,055	3.2	2,140	2.5	1,600	1.8	1,070	1.3	260	0.2	7,640	8.0
1/4	1,530	4.7	1,070	4.1	800	3.0	535	1.0	130	0.2	3,820	10.0




List 310-SO

List 312-SO

Side Milling


Hardness	-	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC							
Work Material	Aluminum	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys							
Cutting Speed	325-820 SFM	50-130 SFM	15-30 SFM	15-30 SFM	10-23 SFM	50-80 SFM	20-40 SFM							
Depth of Cut	$Aa=1D$ $Ar=0.5D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
2	27,774	28.4	4,366	3.4	1,092	0.9	1,092	0.9	800	0.6	3,153	2.5	1,455	1.1
4	13,887	20.8	2,183	2.6	546	0.6	546	0.6	400	0.5	1,577	1.9	728	0.8
6	9,258	20.4	1,455	2.5	364	0.6	364	0.6	267	0.5	1,051	1.8	485	0.8
8	6,944	21.3	1,092	2.6	273	0.6	273	0.6	200	0.5	788	1.9	364	0.8
10	5,555	20.1	873	2.5	218	0.6	218	0.6	160	0.5	631	1.8	291	0.7
12	4,629	20.8	728	2.5	182	0.6	182	0.6	133	0.5	526	1.8	243	0.8
14	3,968	20.6	624	2.5	156	0.6	156	0.6	114	0.5	450	1.8	208	0.8
16	3,472	20.5	546	2.5	136	0.6	136	0.6	100	0.5	394	1.8	182	0.7
18	3,086	20.7	485	2.5	121	0.6	121	0.6	89	0.5	350	1.8	162	0.7
20	2,777	20.1	437	2.5	109	0.6	109	0.6	80	0.5	315	1.8	146	0.8
22	2,525	20.7	397	2.5	99	0.6	99	0.6	73	0.5	287	1.8	132	0.8
24	2,315	20.0	364	2.4	91	0.6	91	0.6	67	0.4	263	1.8	121	0.7
25	2,222	20.5	349	2.5	87	0.6	87	0.6	64	0.5	252	1.8	116	0.7

Slotting


Hardness	-	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC							
Work Material	Aluminum	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys							
Cutting Speed	325-820 SFM	390-655 SFM	195-330 SFM	260-330 SFM	195-250 SFM	260-460 SFM	145-215 SFM							
Depth of Cut	$Aa=0.5D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
2	27,774	25.6	4,366	3.1	1,092	0.8	1,092	0.8	800	0.6	3,153	2.2	1,455	1.0
4	13,887	18.7	2,183	2.3	546	0.6	546	0.6	400	0.4	1,577	1.7	728	0.7
6	9,258	18.4	1,455	2.3	364	0.6	364	0.6	267	0.4	1,051	1.6	485	0.7
8	6,944	19.2	1,092	2.3	273	0.6	273	0.6	200	0.4	788	1.7	364	0.7
10	5,555	18.1	873	2.2	218	0.6	218	0.6	160	0.4	631	1.6	291	0.7
12	4,629	18.7	728	2.3	182	0.6	182	0.6	133	0.4	526	1.6	243	0.7
14	3,968	18.6	624	2.3	156	0.6	156	0.6	114	0.4	450	1.6	208	0.7
16	3,472	18.5	546	2.2	136	0.6	136	0.6	100	0.4	394	1.6	182	0.7
18	3,086	18.6	485	2.2	121	0.6	121	0.6	89	0.4	350	1.6	162	0.7
20	2,777	18.1	437	2.3	109	0.6	109	0.6	80	0.4	315	1.6	146	0.7
22	2,525	18.6	397	2.3	99	0.6	99	0.6	73	0.4	287	1.6	132	0.7
24	2,315	18.0	364	2.2	91	0.5	91	0.5	67	0.4	263	1.6	121	0.6
25	2,222	18.4	349	2.2	87	0.6	87	0.6	64	0.4	252	1.6	116	0.7

List 314-SO

Side Milling

Hardness	-	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC							
Work Material	Aluminum	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys							
Cutting Speed	325-820 SFM	50-130 SFM	15-30 SFM	15-30 SFM	10-23 SFM	50-80 SFM	20-40 SFM							
Depth of Cut	$Aa=1D$ $Ar=0.5D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
2	27,774	56.9	4,366	6.9	1,092	1.7	1,092	1.7	800	1.3	3,153	5.0	1,455	2.3
4	13,887	41.6	2,183	5.2	546	1.3	546	1.3	400	0.9	1,577	3.7	728	1.5
6	9,258	40.8	1,455	5.0	364	1.3	364	1.3	267	0.9	1,051	3.6	485	1.5
8	6,944	42.6	1,092	5.2	273	1.3	273	1.3	200	0.9	788	3.7	364	1.5
10	5,555	40.2	873	5.0	218	1.2	218	1.2	160	0.9	631	3.6	291	1.5
12	4,629	41.6	728	5.0	182	1.3	182	1.3	133	0.9	526	3.6	243	1.5
14	3,968	41.2	624	5.0	156	1.3	156	1.3	114	0.9	450	3.6	208	1.5
16	3,472	41.0	546	5.0	136	1.2	136	1.2	100	0.9	394	3.6	182	1.5
18	3,086	41.3	485	5.0	121	1.2	121	1.2	89	0.9	350	3.6	162	1.5
20	2,777	40.2	437	5.0	109	1.3	109	1.3	80	0.9	315	3.6	146	1.5
22	2,525	62.0	397	7.5	99	1.9	99	1.9	73	1.4	287	5.4	132	2.3
24	2,315	60.1	364	7.3	91	1.8	91	1.8	67	1.3	263	5.3	121	2.2
25	2,222	61.4	349	7.4	87	1.9	87	1.9	64	1.4	252	5.4	116	2.2

Slotting

Hardness	-	<25 HRC	25-30 HRC	30-35 HRC	35-45 HRC	45-50 HRC	< 35 HRC							
Work Material	Aluminum	Mild Steels Carbon Steels Cast Iron	400 Stainless Steels Alloy Steels Tool Steels	300 Stainless Steels Hardened Steels Pre-hardened Steels	PH Stainless Steels Hardened Steels	Hardened Steels	Titanium Alloys							
Cutting Speed	325-820 SFM	390-655 SFM	195-330 SFM	260-330 SFM	195-250 SFM	260-460 SFM	145-215 SFM							
Depth of Cut	$Aa=0.5D$ 													
Mill Dia.	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min	Speed RPM	Feed in/min
2	27,774	51.2	4,366	6.2	1,092	1.5	1,092	1.5	800	1.1	3,153	4.5	1,455	2.0
4	13,887	37.4	2,183	4.6	546	1.2	546	1.2	400	0.9	1,577	3.4	728	1.4
6	9,258	36.7	1,455	4.5	364	1.1	364	1.1	267	0.8	1,051	3.3	485	1.3
8	6,944	38.4	1,092	4.6	273	1.2	273	1.2	200	0.9	788	3.4	364	1.4
10	5,555	36.2	873	4.5	218	1.1	218	1.1	160	0.8	631	3.2	291	1.3
12	4,629	37.4	728	4.5	182	1.1	182	1.1	133	0.8	526	3.3	243	1.3
14	3,968	37.1	624	4.5	156	1.1	156	1.1	114	0.8	450	3.3	208	1.3
16	3,472	36.9	546	4.5	136	1.1	136	1.1	100	0.8	394	3.2	182	1.3
18	3,086	37.2	485	4.5	121	1.1	121	1.1	89	0.8	350	3.2	162	1.3
20	2,777	36.2	437	4.5	109	1.1	109	1.1	80	0.8	315	3.3	146	1.3
22	2,525	55.8	397	6.8	99	1.7	99	1.7	73	1.2	287	4.9	132	2.0
24	2,315	54.1	364	6.6	91	1.6	91	1.6	67	1.2	263	4.7	121	1.9
25	2,222	55.3	349	6.7	87	1.7	87	1.7	64	1.2	252	4.8	116	2.0

End Mill


Reconditioning





OSG Tool Reconditioning

OSG's Bensenville facility is the special cutting tool and regrinding authority based in the Chicago area. Through accurate and expedient regrinds of high-end cutting tools, OSG helps customers extend tool life and save money by restoring their used cutting tools to their original condition. In addition to regrinding, the Bensenville facility also manufactures custom drills, reamers, and other special cutting tools, performs product modifications and provides premium coating services.

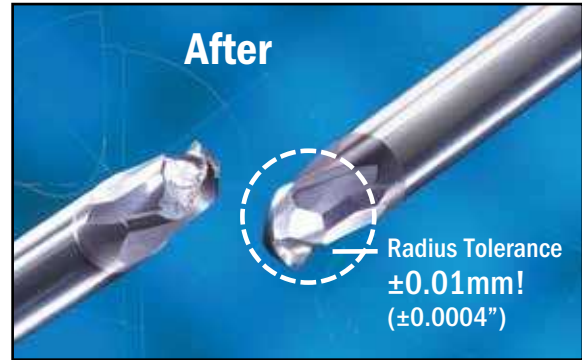

Before:

After:



As part of the OSG Corporation (headquartered in Japan), the regrind facility is the only OSG authorized regrinding source in America. The regrinding program uses the same OSG manufacturing drawings, adheres to OSG's strict quality control standards and uses the same equipment for OSG manufacturing and inspection procedures. As one of the world's leading cutting tool manufacturers, OSG offers a global network of support to our customers.

Tool Reconditioning Lowers Costs

The primary benefit of tool reconditioning is clear: the reduction in overall tooling costs. As part of normal production, tool wear, chipping and breakage occurs often affecting tool performance and increasing manufacturing costs. By reconditioning high performance drills, end mills and taps, OSG helps manufacturers realize substantial cost savings through extended tool life without jeopardizing production quality or performance. Because OSG's reconditioned tools are manufactured to the same high level of quality and held to the same exacting standards that new tools are, customers of OSG's tool reconditioning services can expect the same high performance and quality they are accustomed with OSG's new tools even after regrinding multiple times.

Engineering & Sales Support

OSG reconditions OSG tools using the same prints as the original tools made in our plants around the world. By using original part drawings, tools are accurately reconditioned to the original specifications, so customers are assured that reconditioned tools realize the same high level of performance. Manufacturers can also work directly with OSG design engineers to customize tools for enhanced performance or to meet specific requirements.

OSG's national sales team provides tooling expertise in the field for onsite evaluations and recommendations for manufacturers to implement a customized reconditioning program. The goal is to help manufacturers reduce tool costs and inventory, optimize performance and enhance overall profits.



Contact your OSG representative or distributor to review your tool reconditioning program.





CNC Training

OSG CNC technicians are extensively trained on proper setup methodologies and reconditioning processes by an on-staff CNC trainer. Through their development, the CNC technician training program moves operators through three levels where they are diligently monitored and certified/reevaluated annually to maintain consistency and quality in our tools. Technicians are also trained and certified/reevaluated annually by Quality Assurance to perform inspections to print on first piece and in process tools.

Inspector Training

In order to guarantee that our tools are reconditioned to the highest standards, inspectors also undergo annual training and certifications which involve standardized procedures. These are the same methods that are used in the OSG manufacturing facilities in Japan and around the world. Inspectors are trained to inspect and measure tools completely to the original tool prints.

Throughout the reconditioning process, the tools are also continuously inspected until 100% visual inspection ensures that no chipped or defective tools are received by the customer. The high tech inspection equipment used at the reconditioning facility is the same equipment used at all OSG locations. This includes in-house developed tool analyzers and state-of-the-art equipment with up to 300x magnification capabilities. The key to inspecting high performance, accurate reconditioned tools is assuring that they are held to the same inspection standards through the use of the same inspection methods as new OSG tools.

The Bensenville plant is subject to OSG's stringent JQA regrinding standards and is certified regularly by OSG Japan.

Equipment and Facility

In 2015, OSG opened a reconditioning facility which is equipped with state-of-the-art production and inspection equipment. The facility uses high precision 5-Axis CNC grinders throughout the reconditioning process for improved repeatability and precision.

OSG's weekly equipment Preventive Maintenance (PM) program ensures consistency and accuracy throughout the reconditioning process. Through this PM program, OSG's tool reconditioning performance will be consistent year after year.



INDEXABLE

OSG **PHOENIX**[®]

OSG's high performance indexable tooling for rough and finish milling and drilling in a variety of applications.

EXOCARB[®] ***DISC CUTTER S***



OSG's patented face mill for high feed, roughing applications on low horsepower machine spindles.

EXOCARB[®] ***DISC CUTTER PRO***

OSG's patented face mill for high feed, finishing applications on low horsepower machine spindles.





List	Product	Brand/Name	Inch/ Metric	Size Range	Features	Page
OSG PHOENIX®						
52400		OSG PHOENIX® PXD	Inch	0.551-1.023"	Exchangeable Head Drill, 3D & 5D	1328
78310			Metric	14.00-25.99mm	Exchangeable Head Drill, 3D & 5D	1329
78PXD			-	-	PXD Exchangeable Heads	1330-1334
7808H			-	-	PXD Accessories	1335
52502		OSG PHOENIX® PD	Inch	0.484-2.500"	Indexable Drill, 2D	1337-1338
78031			Metric	12.00-63.00mm	Indexable Drill, 2D	1339-1340
52503			Inch	0.484-2.500"	Indexable Drill, 3D	1341-1342
78032			Metric	12.00-63.00mm	Indexable Drill, 3D	1343-1344
52504			Inch	0.484-2.500"	Indexable Drill, 4D	1345-1346
78033			Metric	12.00-63.00mm	Indexable Drill, 4D	1347-1348
52505			Inch	0.484-2.500"	Indexable Drill, 5D	1349-1350
78027			Metric	12.00-63.00mm	Indexable Drill, 5D	1351-1352
78P5D			-	-	PD Inserts	1353
7808H			-	-	PD Accessories	1354
78001		OSG PHOENIX® PHP	Metric	14.00-40.00mm	High Performance Drill, 3D	1361
78PHP			-	-	PHP Inserts	1362
7808H			-	-	PHP Accessories	1362
52510		OSG PHOENIX® PZAG	Inch	0.531-1.813"	Counterbore Cutter, SA	1364
78321			Metric	14-48mm	Counterbore Cutter, SS	1365
52511			Inch	2.000-3.125"	Counterbore Cutter, Bore	1366
78421			Metric	54-82mm	Counterbore Cutter, Bore	1367
78PZAG			-	-	PZAG Inserts	1368
7808H			-	-	PZAG Accessories	1368

HOLEMAKING

NEW SIZES

NEW

List	Product	Brand/Name	Inch/ Metric	Size Range	Features	Page
------	---------	------------	-----------------	------------	----------	------

OSG PHOENIX® (Continued)

MILLING	52700		OSG PHOENIX® PAS	Inch	2.000-6.000"	45° Face Mill, 2-Sided Square Insert, Bore	1370
	78020			Metric	50-125mm	45° Face Mill, 2-Sided Square Insert, Bore	1370
	78PAS			-	-	PAS Inserts	1371
	7808H			-	-	PAS Accessories	1371
	52800		OSG PHOENIX® PAO	Inch	2.000-8.000"	45° Face Mill, 2-Sided Octagon Insert, Bore	1373
	78120			Metric	50-200mm	45° Face Mill, 2-Sided Octagon Insert, Bore	1374
	78PAO			-	-	PAO Inserts	1375
	7808H			-	-	PAO Accessories	1376
	78013		OSG PHOENIX® PSE	Inch	0.625-1.500"	90° Shoulder Cutter, SA/FA	1378
	78011			Metric	16-36mm	90° Shoulder Cutter, SS	1379-1380
	78012			Inch	2.000-6.000"	90° Shoulder Cutter, Bore	1381
	78010			Metric	40-125mm	90° Shoulder Cutter, Bore	1382
	52601			Inch	0.625-1.500"	90° Shoulder Cutter, ASF	1383
	78016			Metric	16-40mm	90° Shoulder Cutter, SF	1384
	78PSE			-	-	PSE/PSEL Inserts	1385
	7808H			-	-	PSE Accessories	1386
	53000		OSG PHOENIX® PSEL	Inch	1.000-1.500"	90° Roughing Cutter, SA/FA	1389
	78029			Metric	25-50mm	90° Roughing Cutter, SS	1390
	53001			Inch	2.000-3.000"	90° Roughing Cutter, Bore	1391
	78028			Metric	50-80mm	90° Roughing Cutter, Bore	1391
78PSE	-			-	PSE/PSEL Inserts	1392	
7808H	-			-	PSEL Accessories	1393	
52900		OSG PHOENIX® PSF	Inch	1.000-1.500"	90° Shoulder Cutter, Square Insert, SA/FA	1396	
78030			Metric	25-40mm	90° Shoulder Cutter, Square Insert, SS	1396	
52901			Inch	2.000-3.000"	90° Shoulder Cutter, Square Insert, Bore	1397	
78130			Metric	50-80mm	90° Shoulder Cutter, Square Insert, Bore	1397	
78PSF			-	-	PSF/PSFL Inserts	1398	
7808H			-	-	PSF Accessories	1398	

 continued on next page

List	Product	Brand/Name	Inch/ Metric	Size Range	Features	Page
OSG PHOENIX® (Continued)						
53200		OSG PHOENIX® PSFL	Inch	1.250-1.500"	90° Roughing Cutter, Square Insert, SA/FA	1400
78037			Metric	32-40mm	90° Roughing Cutter, Square Insert, SS	1400
53201			Inch	2.000-4.000"	90° Roughing Cutter, Square Insert, Bore	1401
78137			Metric	50-80mm	90° Roughing Cutter, Square Insert, Bore	1401
78PSF			-	-	PSF/PSFL Inserts	1402
7808H			-	-	PSFL Accessories	1402
53100		OSG PHOENIX® PSTW	Inch	2.000-6.000"	90° Shoulder Cutter, 2-Sided Triangle Insert, Bore	1404
78131			Metric	50-125mm	90° Shoulder Cutter, 2-Sided Triangle Insert, Bore	1405
78PSTW			-	-	PSTW Inserts	1406
7808H			-	-	PSTW Accessories	1406
78005		OSG PHOENIX® PRC	Inch	1.000-1.500"	Radius Cutter, SA	1408
78003			Metric	20-63mm	Radius Cutter, SS	1409
78004			Inch	2.000-6.000"	Radius Cutter, Bore	1410
78002			Metric	50-100mm	Radius Cutter, Bore	1411
52602			Inch	1.000-1.500"	Radius Cutter, ASF	1412
78017			Metric	20-40mm	Radius Cutter, SF	1412
78PRC			-	-	PRC Inserts	1413
7808H			-	-	PRC Accessories	1413
78009		OSG PHOENIX® PHC	Inch	0.625-1.500"	High Feed Radius Cutter, SA/FA	1416-1417
78007			Metric	16-63mm	High Feed Radius Cutter, SS	1418-1419
78008			Inch	2.000-6.000"	High Feed Radius Cutter, Bore	1420
78006			Metric	40-100mm	High Feed Radius Cutter, Bore	1421
52603			Inch	0.625-1.500"	High Feed Radius Cutter, ASF	1422
78015			Metric	16-40mm	High Feed Radius Cutter, SF	1423
78PHC			-	-	PHC Inserts	1424
7808H			-	-	PHC Accessories	1424


MILLING

List	Product	Brand/Name	Inch/ Metric	Size Range	Features	Page
------	---------	------------	-----------------	------------	----------	------

OSG PHOENIX® (Continued)


MILLING	6420		OSG PHOENIX® PDR	Metric	40-50mm	Deep Feed Radius Cutter, SS	1427
	6450			Metric	63-125mm	Deep Feed Radius Cutter, Bore	1427
	78PDR			-	-	PDR Inserts	1428
	7808H			-	-	PDR Accessories	1428
	78036		OSG PHOENIX® PFAL	Metric	50-160mm	Finishing Cutter for Aluminum, Bore	1430
	78PFAL			-	-	PFAL Inserts	1431
	7808H			-	-	PFAL Accessories	1431
	52100		OSG PHOENIX® PFB	Inch	0.250-1.250"	Finishing Ball End Mill, SA	1433-1434
	78014			Metric	6-32mm	Finishing Ball End Mill, SS	1435
	52604			Inch	0.375-1.000"	Finishing Ball End Mill, ASF	1436
78114	Metric			10-32mm	Finishing Ball End Mill, SF	1436	
78PFB	-			-	PFB Inserts	1437-1438	
7808H	-			-	PFB Accessories	1439	
				NEW INSERT			
52200		OSG PHOENIX® PFR	Inch	0.250-1.250"	Finishing Radius End Mill, SA	1442	
78320			Metric	6-32mm	Finishing Radius End Mill, SS	1443	
52605			Inch	0.375-1.000"	Finishing Radius End Mill, ASF	1444	
78220			Metric	10-32mm	Finishing Radius End Mill, SF	1444	
78PFR			-	-	PFR Inserts	1445-1449	
7808H			-	-	PFR Accessories	1450	

continued on next page 


List	Product	Brand/Name	Inch/ Metric	Size Range	Features	Page
OSG PHOENIX® (Continued)						
MILLING		OSG PHOENIX® SF	Inch	0.625-1.500"	Screw Fit Cutter, PSE ASF	1453
			Metric	16-40mm	Screw Fit Cutter, PSE SF	1454
			Inch	1.000-1.500"	Screw Fit Cutter, PRC ASF	1455
			Metric	20-40mm	Screw Fit Cutter, PRC SF	1455
			Inch	0.625-1.500"	Screw Fit Cutter, PHC ASF	1456
			Metric	16-40mm	Screw Fit Cutter, PHC SF	1457
			Inch	0.375-1.000"	Screw Fit Cutter, PFB ASF	1458
			Metric	10-30mm	Screw Fit Cutter, PFB SF	1459
			Inch	0.375-1.000"	Screw Fit Cutter, PFR ASF	1460
			Metric	10-32mm	Screw Fit Cutter, PFR SF	1460
			Inch	-	Screw Fit Cutter, SF Arbor SA	1461
			Metric	-	Screw Fit Cutter, SF Arbor SS	1462
			-	-	Screw Fit Cutter, SF Arbor BT	1463
			-	-	Screw Fit Cutter, SF Arbor HSK	1464

List	Product	Brand/Name	Inch/ Metric	Size Range	Features	Page
------	---------	------------	-----------------	------------	----------	------


OSG PHOENIX® (Continued)

MILLING		OSG PHOENIX® PXM	Inch/ Metric	0.375-1.000" 10-25mm	PXSE, 4 Flute, Square & Corner Radius	1465	
			78PXSE	Inch/ Metric	0.500-1.000" 12-25mm	PXSE, 4 Flute, Square & Corner Radius, Coolant-Through	1466
			78PXSE-O	Inch/ Metric	0.375-1.250" 10-32mm	PXVC, 4 Flute, Square & Corner Radius	1467-1468
			78PXVC	Inch/ Metric	0.375-1.000" 10-25mm	PXSM, Multiple Flute, Square & Corner Radius	1469-1470
			78PXSM	Inch/ Metric	0.375-1.000" 10-25mm	PXNL, 4 Flute, Roughing, Low Helix	1471
			78PXNL	Inch/ Metric	0.500-1.000" 12-25mm	PXNL, 4 Flute, Roughing, Low Helix, Coolant-Through	1471
			78PXNL-O	Inch/ Metric	0.375-1.000" 10-25mm	PXNH, 4 Flute, Roughing, High Helix	1472
			78PXNH	Inch/ Metric	0.500-1.000" 12-25mm	PXNH, 4 Flute, Roughing, High Helix, Coolant-Through	1472
			78PXNH-O	Inch/ Metric	0.375-1.000" 10-25mm	PXRE, Multiple Flute, Straight Flute, Corner Radius	1473
			78PXRE	Inch/ Metric	0.375-1.000" 10-25mm	PXDR, 3 Flute, Helical Flute, Corner Radius	1473-1474
			78PXDR	Inch/ Metric	0.375-1.000" 10-25mm	PXBE, 3 Flute, Ball End	1475-1476
			78PXBE	Inch/ Metric	0.500-0.750" 12-20mm	PXBE, 3 Flute, Ball End, Coolant-Through	1476-1477
			78PXBE-O	Inch/ Metric	0.375-1.000" 10-25mm	PXBM, Multiple Flute, Ball End	1477
			78PXBM	Inch	-	PXM SA/TPA	1478-1479
			52300	Inch	-	PXM SA/TPA, Coolant-Through	1480-1481
			52319	Metric	-	PXM SS/TP	1482-1483
			78018	Metric	-	PXM SS/TP, Coolant-Through	1484-1485
			78035	Metric	-	PXMC	1486
			78340	Inch/ Metric	-	Base Holders for general purpose & coolant-Through operations - BT, CT and HSK.	1487
			-	-	-	PXM Accessories	1488
7808H	NEW SIZES						

EXOCARB® DISC CUTTER®

MILLING		EXOCARB® DISC CUTTER® S	Metric	80-125mm	Face Milling Cutter for Small Machines, Roughing	1500	
						6440	1501
		6442	EXOCARB® DISC CUTTER® PRO	Metric	80-125mm	Face Milling Cutter for Small Machines, Finishing	1502
		6441					1503
6541							

EXOCARB® Arbor

ARBORS		EXOCARB® Arbor	Metric	-	Face Mill Arbor for Small Machines, BT30, CAT40 & HSK40A	1504
6640						



Material Class	Grade	Coating Method	Hardness (HRA)	Surface Treatment		Features
				Main Component	Coating Thickness	
P	XC3020	CVD	90.5	TiCN + Al ₂ O ₃	10 µm	For Machining Steel and Cast Iron Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistance coating.
	XP3025	PVD	90.5	TiAlN	5 µm	For Machining Steel and Cast Iron Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistance coating.
	XC3025	CVD	90.8	TiCN + TiN + Al ₂ O ₃	4 µm	For Machining Steel, Stainless Steel and Cast Iron Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistant coating.
	XC3030	CVD	89.5	TiCN + Al ₂ O ₃	10 µm	For Machining Steel and Cast Iron Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistant coating.
	XP3035	PVD	89.5	TiAlN	5 µm	For Machining Steel, Stainless Steel and Cast Iron A grade for general purpose milling. Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistant coating.
	XP3930	PVD	90.8	TiAlN	3 µm	For Machining Steel, Stainless Steel and Cast Iron Excellent balance; can accommodate a wide range of workpiece materials.
	XP8030	PVD	91.9	TiAlN	3 µm	For Machining Steel & Stainless Steel Excellent balance of wear-resistance and chipping-resistance; can accommodate a wide range of workpiece materials.
	XC8035	CVD	89.6	TiCN + Al ₂ O ₃	7 µm	For Machining Steel and Cast Iron Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistant coating.
	XP3225	PVD	91.5	Cr	3 µm	For Machining Steel, Stainless Steel and Cast Iron Composed of a tough carbide material with an excellent general purpose coating.
	XP3310	PVD	92.5	SiC Silicon-based heat-resistant coating	3 µm	For Machining Steel and Cast Iron Composed of a tough, high-strength carbide material with a chipping-resistant and wear-resistant coating.
	XP3320	PVD	91.5	SiC Silicon-based heat-resistant coating	3 µm	For Machining Steel, Stainless Steel and Cast Iron Composed of a tough carbide material with a heat-resistant and wear-resistant coating.
	XP3425	PVD	91.8	Cr Composite multilayer	7 µm	For Drilling Steel Composed of a tough, high strength carbide material with a wear-resistant thick film coating.
	XC9015	CVD	91.9	TiCN + Al ₂ O ₃	7 µm	For Drilling Steel Composed of a tough carbide material with an anti-chipping and wear-resistant coating.
	XP9020	PVD	91.9	TiAlN	3 µm	For Drilling Steel, Stainless Steel, Cast Iron and Non-Ferrous Materials Composed of a tough carbide material with an anti-chipping and wear-resistant coating.
	XP9040	PVD	91.9	TiAlN	3 µm	For Drilling Steel and Stainless Steel Composed of a high-strength carbide material with an anti-chipping and wear-resistant coating.















Material Class	Grade	Coating Method	Hardness (HRA)	Surface Treatment		Features
				Main Component	Coating Thickness	
M	XP2025	PVD	91.0	TiAlN	5 µm	For Machining Stainless Steel and Steel Composed of a tough, high-strength carbide material with an anti-chipping and wear resistant coating.
	XP2040	PVD	89.6	TiAlN	5 µm	For Machining Stainless Steel and Steel Ideal for general-purpose milling. Composed of a tough, high-strength carbide with an anti-chipping and wear-resistant coating.
	XP2225	PVD	91.5	Cr	3 µm	For Machining Stainless Steel Composed of a heat-resistant carbide material with a heat-resistant and wear-resistant coating.
K	XC1015	CVD	91.5	TiCN + Al ₂ O ₃	10 µm	For Machining Cast Iron Composed of a tough, high-strength carbide material with an anti-chipping and wear-resistant coating.
	XP1020	PVD	91.5	TiAlN	5 µm	For Machining Cast Iron Composed of a tough, high-strength carbide material with an anti-chipping and wear-resistant coating.
	XP1010	PVD	91.4	TiAlN	6 µm	For Drilling Cast Iron Composed of a tough, high-strength carbide material with highly rigid cutting edge and wear resistant coating.
	XP1425	PVD	91.8	Cr Composite multilayer	7 µm	For Drilling Cast Iron Composed of a tough, high strength carbide material with a wear-resistant thick film coating.
	XC9025	CVD	90.8	TiCN + Al ₂ O ₃	6 µm	For Drilling Cast Iron Composed of a tough, high-strength carbide with an anti-chipping and wear-resistant coating.
N	CK010	-	92.0	-	-	For Machining Non-Ferrous Materials Composed of a non-coated carbide material with an anti-chipping and wear-resistant properties.
	XC4505	CVD	93.0	DIA	12 µm	For Machining Non-Ferrous Materials Micro crystal diamond provides a coating layer with excellent strength.
	CK110	-	92.2	-	-	For Drilling Aluminum Alloy and Non-Ferrous Materials Composed of a non-coated carbide material with a sharp cutting edge and polished surface.
	CF225	-	91.8	-	-	For Drilling Non-Ferrous Materials Composed of a non-coated carbide material with an anti-chipping and wear-resistant properties.
S	XC5035	CVD	89.3	TiN + Ti(CN) + Al ₂ O ₃ + Ti(BN)	6 µm	For Machining Heat-Resistant Alloy and Stainless Steel Composed of a tough carbide material with an oxidation-resistant and high-lubricity coating.
	XC5040	CVD	89.3	TiN + TiB ₂	4 µm	For Machining Heat-Resistant Alloy and Stainless Steel Can be used for wet machining. Composed of a tough carbide material with an oxidation-resistant and high-lubricity coating.
H	XP6015	PVD	92.2	TiAlN	4 µm	For Machining High Hardness Steel Composed of a tough, high-strength carbide material with a wear-resistant coating.
	XP6305	PVD	93.0	SiC Silicon-based heat-resistant coating	3 µm	For Machining High Hardness Steel Composed of a tough, high-strength carbide material with excellent thermal conductivity.





Machining Method	Chip Breaker	Cutting Edge Cross-Section (Approximate)	Application
Milling	GL		For milling stainless steel: a breaker with a large rake angle and a small flat land to reduce cutting force.
	GM		For milling various materials from steel to cast iron: a breaker with a superior balance of rake angle and flat land.
	GR		For milling various materials from steel to cast iron: a highly rigid breaker with large rake angle and flat and to provide a sharp cutting edge and enable efficient milling.
	HR		For milling high hardened steel: a breaker with sharpness and excellent rigidity.
	SM		For milling difficult materials: a breaker with a sharp cutting edge to reduce cutting force and provide smooth chip evacuation.
	NM		For milling non-ferrous materials: a breaker with a sharp cutting edge and a large rake angle to suppress welding, improve the milling surface and prevent burrs.
Holemaking	DM		For drilling various materials from steel to cast iron: a general purpose breaker with an ideal rake angle.
	DR		For drilling cast iron: a highly rigid breaker with an optimal land width and rake angle.
	DN		For drilling non-ferrous materials: a breaker with a sharp cutting edge and polish treatment for excellent chip evacuation.



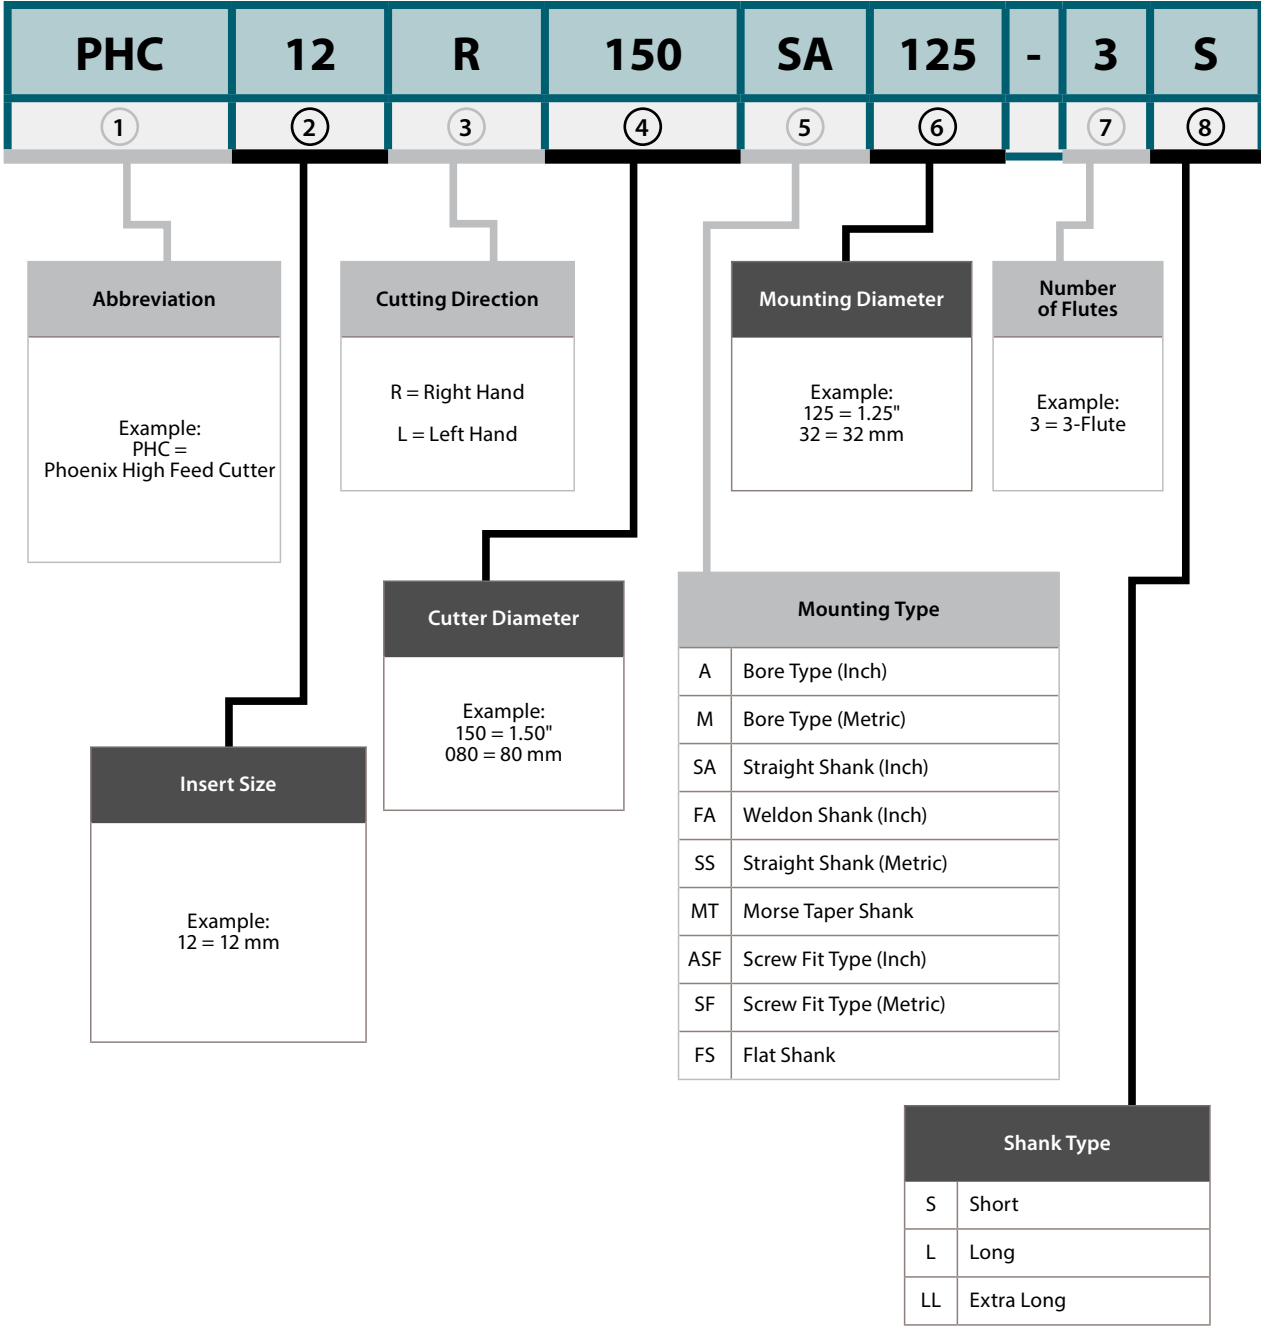



Z	D	K	T
①	②	③	④

Shape of Insert		
C	Diamond Apex 80°	
D	Diamond Apex 55°	
O	Octagon	
R	Round	
S	Square	
T	Triangle	
V	Diamond Apex 35°	
W	Axonometric Hexagon	
Z	Other Shapes	-

Tolerance			
Symbol	Inscribed Circle Tolerance (mm)	Corner Height Tolerance (mm)	Thickness Tolerance (mm)
A	±0.025	±0.005	±0.025
C	±0.025	±0.013	±0.025
E	±0.025	±0.025	±0.025
H	±0.013	±0.013	±0.025
K*	±0.05~±0.15	±0.013	±0.025
M*	±0.05~±0.15	±0.08~±0.18	±0.13
N*	±0.05~±0.15	±0.08~±0.18	±0.025

*Sintered insert shown on the side

Clearance Angle		
A	3°	
C	7°	
D	15°	
E	20°	
N	0°	
P	11°	
X	Special Dimension	

Special Cutting and Fastening Feature			
Symbol	Shape of Hole	With or Without Breaker	Insert Cross Section
W	(40°~60°) Partial cylindrical hole	No Breaker	
T		One Side	
B	(70°~90°) Partial cylindrical hole	No Breaker	
U	(40°~60°) Partial cylindrical hole	Both Sides	
N	-	No Breaker	
R	-	One Side	





15	05	08	S	R	-	GM
⑤	⑥	⑦	⑧	⑨	-	⑩

Length of the Cutting Edge	
O	
R	
S	
T	
Z	

Corner Radius Symbol	
Symbol	Corner Radius (mm)
02	R0.2
04	R0.4
08	R0.8
12	R1.2
16	R1.6
24	R2.4

Cutting Direction	
Symbol	Cutting Direction
R	Right Hand
L	Left Hand
N	Neutral

Thickness of Insert	
Symbol	Thickness (mm)
02	2.38
03	3.18
T3	3.97
04	4.76
05	5.56
06	6.35

Type of Cutting Edge	
Symbol	Appearance
F	 Sharp Edge
E	 Round Honing
T	 Chamfer Honing
S	 Combination Honing

Type of Chip Breaker	
Symbol	Name
GL	GL Breaker
GM	GM Breaker
GR	GR Breaker
HR	HR Breaker
NM	NM Breaker
SM	SM Breaker
DM	DM Breaker
DR	DR Breaker
DN	DN Breaker






List 52400

PXD 3D (Inch)

SPEED FEED
P1336

Recommended Materials: p1336
Accessories & Inserts: p1330-1335

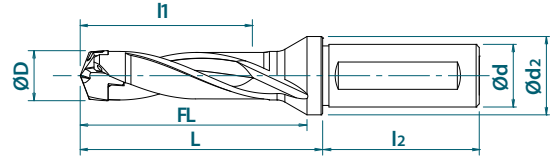

EDP No.	Body Type	Designation	Drill Dia. (inch)		Drilling Depth (inch)	Flute Length (inch)	Gage Length (inch)	Shank Length (inch)	Shank Dia. (inch)	Flange Dia. (inch)	Appl. Head
			D Min	D Max	l1	FL	L	l2	d	d2	
52400000	Cylindrical Shank	PXDZ0551-3D-113.5-0625	0.551	0.570	1.693	2.496	2.752	1.890	0.625	0.787	1
52400001		PXDZ0571-3D-115.5-0625	0.571	0.590	1.752	2.579	2.835	1.890	0.625	0.787	2
52400002		PXDZ0591-3D-119.5-0750	0.591	0.629	1.831	2.642	2.898	1.969	0.750	0.984	3
52400003		PXDZ0630-3D-123.5-0750	0.630	0.668	1.949	2.823	3.079	1.969	0.750	0.984	4
52400004		PXDZ0669-3D-128.5-0750	0.669	0.708	2.067	3.024	3.280	1.969	0.750	0.984	5
52400005		PXDZ0709-3D-138.5-1000	0.709	0.747	2.185	3.205	3.461	2.205	1.000	1.260	6
52400006		PXDZ0748-3D-142.5-1000	0.748	0.786	2.303	3.362	3.618	2.205	1.000	1.260	7
52400007		PXDZ0787-3D-146.5-1000	0.787	0.826	2.421	3.547	3.803	2.205	1.000	1.260	8
52400008		PXDZ0827-3D-154.5-1250	0.827	0.865	2.539	3.728	3.984	2.362	1.250	1.654	9
52400009		PXDZ0866-3D-158.5-1250	0.866	0.905	2.657	3.890	4.146	2.362	1.250	1.654	10
52400010		PXDZ0906-3D-162.5-1250	0.906	0.944	2.775	4.071	4.327	2.362	1.250	1.654	11
52400011		PXDZ0945-3D-167.5-1250	0.945	0.983	2.894	4.268	4.524	2.362	1.250	1.654	12
52400012		PXDZ0984-3D-170.5-1250	0.984	1.023	3.012	4.409	4.665	2.362	1.250	1.654	13

Packed: 1 pc.
Note: Driver included with body.




List 52400

PXD 5D (Inch)

SPEED FEED
P1336

Recommended Materials: p1336
Accessories & Inserts: p1330-1335

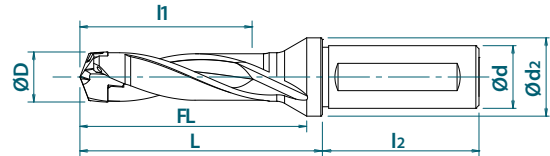


EDP No.	Body Type	Designation	Drill Dia. (inch)		Drilling Depth (inch)	Flute Length (inch)	Gage Length (inch)	Shank Length (inch)	Shank Dia. (inch)	Flange Dia. (inch)	Appl. Head
			D Min	D Max	l1	FL	L	l2	d	d2	
52400100	Cylindrical Shank	PXDZ0551-5D-141.5-0625	0.551	0.570	2.805	3.657	3.854	1.890	0.625	0.787	1
52400101		PXDZ0571-5D-144.5-0625	0.571	0.590	2.903	3.780	3.976	1.890	0.625	0.787	2
52400102		PXDZ0591-5D-149.5-0750	0.591	0.629	3.051	3.823	4.079	1.969	0.750	0.984	3
52400103		PXDZ0630-5D-155.5-0750	0.630	0.668	3.248	4.083	4.339	1.969	0.750	0.984	4
52400104		PXDZ0669-5D-162.5-0750	0.669	0.708	3.445	4.362	4.618	1.969	0.750	0.984	5
52400105		PXDZ0709-5D-174.5-1000	0.709	0.747	3.642	4.622	4.878	2.205	1.000	1.260	6
52400106		PXDZ0748-5D-180.5-1000	0.748	0.786	3.838	4.858	5.114	2.205	1.000	1.260	7
52400107		PXDZ0787-5D-186.5-1000	0.787	0.826	4.035	5.122	5.378	2.205	1.000	1.260	8
52400108		PXDZ0827-5D-196.5-1250	0.827	0.865	4.232	5.382	5.638	2.362	1.250	1.654	9
52400109		PXDZ0866-5D-202.5-1250	0.866	0.905	4.429	5.622	5.878	2.362	1.250	1.654	10
52400110		PXDZ0906-5D-208.5-1250	0.906	0.944	4.626	5.882	6.138	2.362	1.250	1.654	11
52400111		PXDZ0945-5D-215.5-1250	0.945	0.983	4.823	6.157	6.413	2.362	1.250	1.654	12
52400112		PXDZ0984-5D-220.5-1250	0.984	1.023	5.020	6.378	6.634	2.362	1.250	1.654	13

Packed: 1 pc.
Note: Driver included with body.




List 78310

PXD 3D (Metric)



Recommended Materials: p1336
Accessories & Inserts: p1330-1335

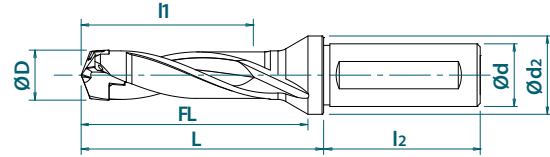


EDP No.	Body Type	Designation	Drill Dia. (mm)		Drilling Depth (mm)	Flute Length (mm)	Gage Length (mm)	Shank Length (mm)	Shank Dia. (mm)	Flange Dia. (mm)	Appl. Head
			D Min	D Max							
48173001	Cylindrical Shank	PXDZ140-3D-113.5-16	14.00	14.49	43.0	63.4	69.9	48	16	20	1
48173002		PXDZ145-3D-115.5-16	14.50	14.99	44.5	65.5	72.0	48	16	20	2
48173003		PXDZ150-3D-119.5-20	15.00	15.99	46.5	67.1	73.6	50	20	25	3
48173004		PXDZ160-3D-123.5-20	16.00	16.99	49.5	71.7	78.2	50	20	25	4
48173005		PXDZ170-3D-128.5-20	17.00	17.99	52.5	76.8	83.3	50	20	25	5
48173006		PXDZ180-3D-138.5-25	18.00	18.99	55.5	81.4	87.9	56	25	32	6
48173007		PXDZ190-3D-142.5-25	19.00	19.99	58.5	85.4	91.9	56	25	32	7
48173008		PXDZ200-3D-146.5-25	20.00	20.99	61.5	90.1	96.6	56	25	32	8
48173009		PXDZ210-3D-154.5-32	21.00	21.99	64.5	94.7	101.2	60	32	42	9
48173010		PXDZ220-3D-158.5-32	22.00	22.99	67.5	98.8	105.3	60	32	42	10
48173011		PXDZ230-3D-162.5-32	23.00	23.99	70.5	103.4	109.9	60	32	42	11
48173012		PXDZ240-3D-167.5-32	24.00	24.99	73.5	108.4	114.9	60	32	42	12
48173013		PXDZ250-3D-170.5-32	25.00	25.99	76.5	112.0	118.5	60	32	42	13

Packed: 1 pc.
Note: Driver included with body.




List 78310

PXD 5D (Metric)



Recommended Materials: p1336
Accessories & Inserts: p1330-1335

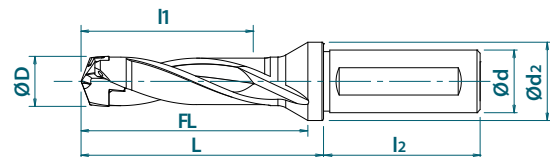

EDP No.	Body Type	Designation	Drill Dia. (mm)		Drilling Depth (mm)	Flute Length (mm)	Gage Length (mm)	Shank Length (mm)	Shank Dia. (mm)	Flange Dia. (mm)	Appl. Head
			D Min	D Max							
48173014	Cylindrical Shank	PXDZ140-5D-141.5-16	14.00	14.49	71.2	92.9	97.9	48	16	20	1
48173015		PXDZ145-5D-144.5-16	14.50	14.99	73.7	96.0	101.0	48	16	20	2
48173016		PXDZ150-5D-149.5-20	15.00	15.99	77.5	97.1	103.6	50	20	25	3
48173017		PXDZ160-5D-155.5-20	16.00	16.99	82.5	103.7	110.2	50	20	25	4
48173018		PXDZ170-5D-162.5-20	17.00	17.99	87.5	110.8	117.3	50	20	25	5
48173019		PXDZ180-5D-174.5-25	18.00	18.99	92.5	117.4	123.9	56	25	32	6
48173020		PXDZ190-5D-180.5-25	19.00	19.99	97.5	123.4	129.9	56	25	32	7
48173021		PXDZ200-5D-186.5-25	20.00	20.99	102.5	130.1	136.6	56	25	32	8
48173022		PXDZ210-5D-196.5-32	21.00	21.99	107.5	136.7	143.2	60	32	42	9
48173023		PXDZ220-5D-202.5-32	22.00	22.99	112.5	142.8	149.3	60	32	42	10
48173024		PXDZ230-5D-208.5-32	23.00	23.99	117.5	149.4	155.9	60	32	42	11
48173025		PXDZ240-5D-215.5-32	24.00	24.99	122.5	156.4	162.9	60	32	42	12
48173026		PXDZ250-5D-220.5-32	25.00	25.99	127.5	162.0	168.5	60	32	42	13


Packed: 1 pc.
Note: Driver included with body.





List 78PXD

PXD Exchangeable Heads (Inch & Metric)



EDP No.	Type	Designation	Head Diameter (D)			Size	Grade
			Fractional	mm	inch		
7831140	PC	PXDH1400-PC	-	14.00	0.5512	1	XP3425
52401000		PXDH5625-PC	9/16	14.29	0.5625		XP3425
7831145		PXDH1450-PC	-	14.50	0.5709	2	XP3425
52401014		PXDH5781-PC	37/64	14.68	0.5781		XP3425
7831351		PXDH1495-PC	-	14.95	0.5886	3	XP3425
7831150		PXDH1500-PC	-	15.00	0.5906		XP3425
52401001		PXDH5938-PC	19/32	15.08	0.5938	4	XP3425
7831352		PXDH1525-PC	-	15.25	0.6004		XP3425
52401015		PXDH6094-PC	39/64	15.48	0.6094	5	XP3425
7831155		PXDH1550-PC	-	15.50	0.6102		XP3425
52401002		PXDH6250-PC	5/8	15.88	0.6250	6	XP3425
7831160		PXDH1600-PC	-	16.00	0.6299		XP3425
52401016		PXDH6406-PC	41/64	16.27	0.6406	7	XP3425
7831165		PXDH1650-PC	-	16.50	0.6496		XP3425
52401003		PXDH6563-PC	21/32	16.67	0.6563	8	XP3425
7831167		PXDH1670-PC	-	16.70	0.6575		XP3425
7831170		PXDH1700-PC	-	17.00	0.6693	9	XP3425
52401017		PXDH6719-PC	43/64	17.07	0.6719		XP3425
7831353		PXDH1725-PC	-	17.25	0.6791	10	XP3425
52401004		PXDH6875-PC	11/16	17.46	0.6875		XP3425
7831175		PXDH1750-PC	-	17.50	0.6890	11	XP3425
52401018		PXDH7031-PC	45/64	17.86	0.7031		XP3425
7831180		PXDH1800-PC	-	18.00	0.7087	12	XP3425
52401005		PXDH7188-PC	23/32	18.26	0.7188		XP3425
7831185		PXDH1850-PC	-	18.50	0.7283	13	XP3425
52401019		PXDH7344-PC	47/64	18.65	0.7344		XP3425
7831187		PXDH1870-PC	-	18.70	0.7362	14	XP3425
7831190		PXDH1900-PC	-	19.00	0.7480		XP3425
52401006		PXDH7500-PC	3/4	19.05	0.7500	15	XP3425
7831354		PXDH1925-PC	-	19.25	0.7579		XP3425
52401020		PXDH7656-PC	49/64	19.45	0.7656	16	XP3425
7831195		PXDH1950-PC	-	19.50	0.7677		XP3425
52401007		PXDH7813-PC	25/32	19.85	0.7813	17	XP3425
7831200		PXDH2000-PC	-	20.00	0.7874		XP3425
52401021		PXDH7969-PC	51/64	20.24	0.7969	18	XP3425
7831205		PXDH2050-PC	-	20.50	0.8071		XP3425
52401008		PXDH8125-PC	13/16	20.64	0.8125	19	XP3425
7831207		PXDH2070-PC	-	20.70	0.8150		XP3425
7831210		PXDH2100-PC	-	21.00	0.8268	20	XP3425
52401022		PXDH8281-PC	53/64	21.03	0.8281		XP3425
7831355		PXDH2125-PC	-	21.25	0.8366	21	XP3425
52401009		PXDH8438-PC	27/32	21.43	0.8438		XP3425
7831215	PXDH2150-PC	-	21.50	0.8465	22	XP3425	
52401023	PXDH8594-PC	55/64	21.83	0.8594		XP3425	
7831220	PXDH2200-PC	-	22.00	0.8661	23	XP3425	
52401010	PXDH8750-PC	7/8	22.23	0.8750		XP3425	
7831224	PXDH2240-PC	-	22.40	0.8819	24	XP3425	
7831225	PXDH2250-PC	-	22.50	0.8858		XP3425	
52401024	PXDH8906-PC	57/64	22.62	0.8906	25	XP3425	

Packed: 1 pc.



List 78PXD (Continued)

PXD Exchangeable Heads (Inch & Metric)

EDP No.	Type	Designation	Head Diameter (D)			Size	Grade
			Fractional	mm	inch		
7831230	PC	PXDH2300-PC	-	23.00	0.9055	11	XP3425
52401011		PXDH9063-PC	29/32	23.02	0.9063		XP3425
7831356		PXDH2325-PC	-	23.25	0.9154		XP3425
52401025		PXDH9219-PC	59/64	23.42	0.9219		XP3425
7831235		PXDH2350-PC	-	23.50	0.9252		XP3425
52401012		PXDH9375-PC	15/16	23.81	0.9375		XP3425
7831240		PXDH2400-PC	-	24.00	0.9449	12	XP3425
52401026		PXDH9531-PC	61/64	24.21	0.9531		XP3425
7831245		PXDH2450-PC	-	24.50	0.9646		XP3425
52401013		PXDH9688-PC	31/32	24.61	0.9688		XP3425
7831250		PXDH2500-PC	-	25.00	0.9843	13	XP3425
52401027		PXDH9844-PC	63/64	25.00	0.9844		XP3425
7831254		PXDH2540-PC	1	25.40	1.0000		XP3425

Packed: 1 pc.




 continued on next page 





List 78PXD (Continued)

PXD Exchangeable Heads (Inch & Metric)



EDP No.	Type	Designation	Head Diameter (D)			Size	Grade
			Fractional	mm	inch		
7831440	KC	PXDH1400-KC	-	14.00	0.5512	1	XP1425
52402000		PXDH5625-KC	9/16	14.29	0.5625		XP1425
7831445		PXDH1450-KC	-	14.50	0.5709	2	XP1425
52402014		PXDH5781-KC	37/64	14.68	0.5781		XP1425
7831450		PXDH1500-KC	-	15.00	0.5906	3	XP1425
52402001		PXDH5938-KC	19/32	15.08	0.5938		XP1425
52402015		PXDH6094-KC	39/64	15.48	0.6094		XP1425
7831455		PXDH1550-KC	-	15.50	0.6102	4	XP1425
52402002		PXDH6250-KC	5/8	15.88	0.6250		XP1425
7831460		PXDH1600-KC	-	16.00	0.6299	4	XP1425
52402016		PXDH6406-KC	41/64	16.27	0.6406		XP1425
7831465		PXDH1650-KC	-	16.50	0.6496		XP1425
52402003		PXDH6563-KC	21/32	16.67	0.6563	5	XP1425
7831467		PXDH1670-KC	-	16.70	0.6575		XP1425
7831470		PXDH1700-KC	-	17.00	0.6693	5	XP1425
52402017		PXDH6719-KC	43/64	17.07	0.6719		XP1425
52402004		PXDH6875-KC	11/16	17.46	0.6875		XP1425
7831475		PXDH1750-KC	-	17.50	0.6890	6	XP1425
52402018		PXDH7031-KC	45/64	17.86	0.7031		XP1425
7831480		PXDH1800-KC	-	18.00	0.7087	6	XP1425
52402005		PXDH7188-KC	23/32	18.26	0.7188		XP1425
7831485		PXDH1850-KC	-	18.50	0.7283		XP1425
52402019		PXDH7344-KC	47/64	18.65	0.7344	7	XP1425
7831487		PXDH1870-KC	-	18.70	0.7362		XP1425
7831490		PXDH1900-KC	-	19.00	0.7480	7	XP1425
52402006		PXDH7500-KC	3/4	19.05	0.7500		XP1425
52402020		PXDH7656-KC	49/64	19.45	0.7656		XP1425
7831495		PXDH1950-KC	-	19.50	0.7677	8	XP1425
52402007		PXDH7813-KC	25/32	19.85	0.7813		XP1425
7831500		PXDH2000-KC	-	20.00	0.7874	8	XP1425
52402021		PXDH7969-KC	51/64	20.24	0.7969		XP1425
7831505		PXDH2050-KC	-	20.50	0.8071		XP1425
52402008		PXDH8125-KC	13/16	20.64	0.8125	9	XP1425
7831507		PXDH2070-KC	-	20.70	0.8150		XP1425
7831510		PXDH2100-KC	-	21.00	0.8268	9	XP1425
52402022		PXDH8281-KC	53/64	21.03	0.8281		XP1425
52402009		PXDH8438-KC	27/32	21.43	0.8438		XP1425
7831515		PXDH2150-KC	-	21.50	0.8465	10	XP1425
52402023		PXDH8594-KC	55/64	21.83	0.8594		XP1425
7831520		PXDH2200-KC	-	22.00	0.8661	10	XP1425
52402010	PXDH8750-KC	7/8	22.23	0.8750	XP1425		
7831524	PXDH2240-KC	-	22.40	0.8819	XP1425		
7831525	PXDH2250-KC	-	22.50	0.8858	11	XP1425	
52402024	PXDH8906-KC	57/64	22.62	0.8906		XP1425	
7831530	PXDH2300-KC	-	23.00	0.9055	11	XP1425	
52402011	PXDH9063-KC	29/32	23.02	0.9063		XP1425	
52402025	PXDH9219-KC	59/64	23.42	0.9219		XP1425	
7831535	PXDH2350-KC	-	23.50	0.9252	11	XP1425	
52402012	PXDH9375-KC	15/16	23.81	0.9375		XP1425	

Packed: 1 pc.





List 78PXD (Continued)

PXD Exchangeable Heads (Inch & Metric)

EDP No.	Type	Designation	Head Diameter (D)			Size	Grade
			Fractional	mm	inch		
7831540	KC	PXDH2400-KC	-	24.00	0.9449	12	XP1425
52402026		PXDH9531-KC	61/64	24.21	0.9531		XP1425
7831545		PXDH2450-KC	-	24.50	0.9646		XP1425
52402013		PXDH9688-KC	31/32	24.61	0.9688	13	XP1425
7831550		PXDH2500-KC	-	25.00	0.9843		XP1425
52402027		PXDH9844-KC	63/64	25.00	0.9844		XP1425
7831554		PXDH2540-KC	1	25.40	1.0000		XP1425

Packed: 1 pc.




continued on next page →





List 78PXD (Continued)

PXD Exchangeable Heads (Inch & Metric)



EDP No.	Type	Designation	Head Diameter (D)			Size	Grade
			Fractional	mm	inch		
7831740	NC	PXDH1400-NC	-	14.00	0.5512	1	CF225
52403000		PXDH5625-NC	9/16	14.29	0.5625		CF225
7831745		PXDH1450-NC	-	14.50	0.5709	2	CF225
52403014		PXDH5781-NC	37/64	14.68	0.5781		CF225
7831750		PXDH1500-NC	-	15.00	0.5906	3	CF225
52403001		PXDH5938-NC	19/32	15.08	0.5938		CF225
52403015		PXDH6094-NC	39/64	15.48	0.6094		CF225
7831755		PXDH1550-NC	-	15.50	0.6102	4	CF225
52403002		PXDH6250-NC	5/8	15.88	0.6250		CF225
7831760		PXDH1600-NC	-	16.00	0.6299	5	CF225
52403016		PXDH6406-NC	41/64	16.27	0.6409		CF225
7831765		PXDH1650-NC	-	16.50	0.6496		CF225
52403003		PXDH6563-NC	21/32	16.67	0.6563	6	CF225
7831767		PXDH1670-NC	-	16.70	0.6575		CF225
7831770		PXDH1700-NC	-	17.00	0.6693	7	CF225
52403017		PXDH6719-NC	43/64	17.07	0.6719		CF225
52403004		PXDH6875-NC	11/16	17.46	0.6875		CF225
7831775		PXDH1750-NC	-	17.50	0.6890	8	CF225
52403018		PXDH7031-NC	45/64	17.86	0.7031		CF225
7831780		PXDH1800-NC	-	18.00	0.7087	9	CF225
52403005		PXDH7188-NC	23/32	18.26	0.7188		CF225
7831785		PXDH1850-NC	-	18.50	0.7283		CF225
52403019		PXDH7344-NC	47/64	18.65	0.7344	10	CF225
7831787		PXDH1870-NC	-	18.70	0.7362		CF225
7831790		PXDH1900-NC	-	19.00	0.7480	11	CF225
52403006		PXDH7500-NC	3/4	19.05	0.7500		CF225
52403020		PXDH7656-NC	49/64	19.45	0.7656		CF225
7831795		PXDH1950-NC	-	19.50	0.7677	12	CF225
52403007		PXDH7813-NC	25/32	19.85	0.7813		CF225
7831800		PXDH2000-NC	-	20.00	0.7874	13	CF225
52403021		PXDH7969-NC	51/64	20.24	0.7969		CF225
7831805		PXDH2050-NC	-	20.50	0.8071		CF225
52403008		PXDH8125-NC	13/16	20.64	0.8125	14	CF225
7831807		PXDH2070-NC	-	20.70	0.8150		CF225
7831810		PXDH2100-NC	-	21.00	0.8268	15	CF225
52403022		PXDH8281-NC	53/64	21.03	0.8281		CF225
52403009		PXDH8438-NC	27/32	21.43	0.8438		CF225
7831815		PXDH2150-NC	-	21.50	0.8465	16	CF225
52403023		PXDH8594-NC	55/64	21.83	0.8594		CF225
7831820		PXDH2200-NC	-	22.00	0.8661	17	CF225
52403010	PXDH8750-NC	7/8	22.23	0.8750	CF225		
7831824	PXDH2240-NC	-	22.40	0.8819	CF225		
7831825	PXDH2250-NC	-	22.50	0.8858	18	CF225	
52403024	PXDH8906-NC	57/64	22.62	0.8906		CF225	
7831830	PXDH2300-NC	-	23.00	0.9055	19	CF225	
52403011	PXDH9063-NC	29/32	23.02	0.9063		CF225	
52403025	PXDH9219-NC	59/64	23.42	0.9219		CF225	
7831835	PXDH2350-NC	-	23.50	0.9252	20	CF225	
52403012	PXDH9375-NC	15/16	23.81	0.9375		CF225	
7831840	PXDH2400-NC	-	24.00	0.9449	21	CF225	
52403026	PXDH9531-NC	61/64	24.21	0.9531		CF225	
7831845	PXDH2450-NC	-	24.50	0.9646		CF225	
52403013	PXDH9688-NC	31/32	24.61	0.9688	22	CF225	
7831850	PXDH2500-NC	-	25.00	0.9843		CF225	
52403027	PXDH9844-NC	63/64	25.00	0.9844	23	CF225	
7831854	PXDH2540-NC	1	25.40	1.0000		CF225	


Packed: 1 pc.





List 7808H





PXD Accessories

Appearance	EDP No.	Designation	Sheet Thickness (mm)	Applicable Head		
				Size	(inch)	(mm)
 Driver	7808282	PXDP1400-1890	1.5	1-6	Ø0.551-0.744	Ø14.0-18.9
	7808283	PXDP1900-2299	1.8	7-10	Ø0.748-0.901	Ø19.0-22.9
	7808284	PXDP2300-2699	2	11-13	Ø0.905-1.059	Ø23.0-26.9

Packed: 1 pc.

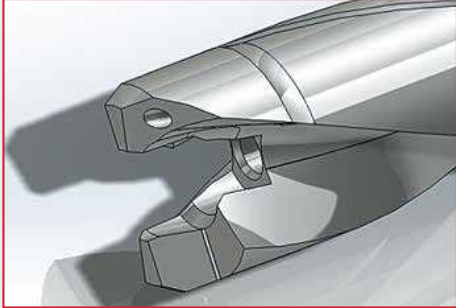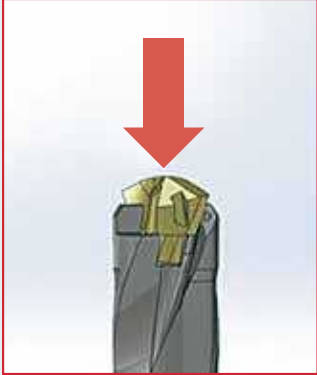

» Mounting Procedure

Step 1	Step 2
 <p>Clean attachment area with an air nozzle. Any leftover cutting chips may prevent the head from being mounted properly and may cause damage to the tool.</p>	 <p>Manually attach the head.</p>
Step 3	Step 4
 <p>Insert the flat metal portion of the designated driver into the groove of the head. Insert the driver firmly into the groove. If the insertion of the designated driver is too shallow, it could damage the flutes.</p>	 <p>Turn the driver clockwise and mount the head onto the body. Mount it firmly and make sure that there is no gap in the area between the head and the body.</p>





Cutting Conditions

Work Material	Mild Steel Low Carbon Steel		Carbon Steel		Alloy Steel		Cast Iron		Ductile Cast Iron		Aluminum Alloy Casting	
Speed	265 - 395 SFM		265 - 395 SFM		195 - 395 SFM		265 - 395 SFM		195 - 325 SFM		265 - 590 SFM	
Drill Dia. (mm)	Speed (RPM)	Feed (in/rev)	Speed (RPM)	Feed (in/rev)	Speed (RPM)	Feed (in/rev)	Speed (RPM)	Feed (in/rev)	Speed (RPM)	Feed (in/rev)	Speed (RPM)	Feed (in/rev)
14	2300	0.008 - 0.014	2300	0.008 - 0.014	2000	0.008 - 0.014	2300	0.008 - 0.014	1800	0.008 - 0.014	3000	0.011 - 0.016
15	2100	0.009 - 0.015	2100	0.009 - 0.015	1900	0.009 - 0.015	2100	0.009 - 0.015	1700	0.009 - 0.015	2800	0.012 - 0.018
16	2000	0.009 - 0.016	2000	0.009 - 0.016	1800	0.009 - 0.016	2000	0.009 - 0.016	1600	0.009 - 0.016	2600	0.012 - 0.019
17	1900	0.010 - 0.017	1900	0.010 - 0.017	1700	0.010 - 0.017	1900	0.010 - 0.017	1500	0.010 - 0.017	2400	0.013 - 0.020
18	1800	0.010 - 0.018	1800	0.010 - 0.018	1600	0.010 - 0.018	1800	0.010 - 0.018	1400	0.010 - 0.018	2300	0.014 - 0.021
19	1700	0.011 - 0.019	1700	0.011 - 0.019	1500	0.011 - 0.019	1700	0.011 - 0.019	1300	0.011 - 0.019	2200	0.015 - 0.022
20	1600	0.012 - 0.020	1600	0.012 - 0.020	1400	0.012 - 0.020	1600	0.012 - 0.020	1300	0.012 - 0.020	2100	0.016 - 0.024
21	1500	0.012 - 0.021	1500	0.012 - 0.021	1400	0.012 - 0.021	1500	0.012 - 0.021	1200	0.012 - 0.021	2000	0.016 - 0.025
22	1400	0.013 - 0.022	1400	0.013 - 0.022	1300	0.013 - 0.022	1400	0.013 - 0.022	1200	0.013 - 0.022	1900	0.017 - 0.026
23	1400	0.014 - 0.023	1400	0.014 - 0.023	1200	0.014 - 0.023	1400	0.014 - 0.023	1100	0.014 - 0.023	1800	0.018 - 0.027
24	1300	0.014 - 0.024	1300	0.014 - 0.024	1200	0.014 - 0.024	1300	0.014 - 0.024	1100	0.014 - 0.024	1700	0.019 - 0.028
25	1300	0.015 - 0.025	1300	0.015 - 0.025	1100	0.015 - 0.025	1300	0.015 - 0.025	1000	0.015 - 0.025	1700	0.020 - 0.029

Recommended Materials by Application

Insert Grade	Type	Coolant	Carbon Steel	Alloy Steel	Hardened Steel (Up to 35 HRC)	Cast Iron Ductile Cast Iron	Aluminum Alloy Casting	Copper Alloy
XP3425	PC	Yes	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
XP1425	KC	Yes	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
CF225	NC	Yes					<input checked="" type="checkbox"/>	<input type="checkbox"/>

good best





List 52502

P2D (Inch)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

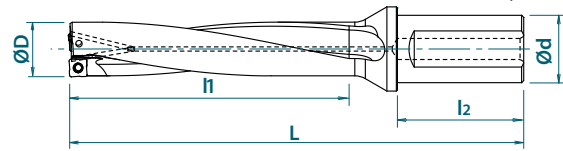

EDP No.	Body Type	Designation	Drill Dia. (inch)	Drilling Depth (inch)	Overall Length (inch)	Shank Dia. (inch)	Shank Length (inch)	Applicable Insert
			D	l1	L	d	l2	
52502063	Flat Shank	P2D0484FS075A03	0.4844	0.969	3.844	0.750	1.969	XCMT03...
52502064		P2D0500FS075A03	0.5000	1.000	3.875	0.750	1.969	
52502065		P2D0516FS075A03	0.5156	1.031	3.906	0.750	1.969	
52502066		P2D0531FS075A03	0.5313	1.063	3.938	0.750	1.969	
52502067		P2D0547FS075A03	0.5469	1.094	3.969	0.750	1.969	
52502068		P2D0563FS075A03	0.5625	1.125	4.000	0.750	1.969	
52502069		P2D0578FS075A03	0.5781	1.156	4.031	0.750	1.969	XCMT04...
52502026		P2D0594FS075A04	0.5938	1.188	4.063	0.750	1.969	
52502027		P2D0609FS075A04	0.6094	1.219	4.094	0.750	1.969	
52502008		P2D0625FS075A04	0.6250	1.250	4.125	0.750	1.969	
52502028		P2D0641FS075A04	0.6406	1.281	4.156	0.750	1.969	
52502009		P2D0656FS075A04	0.6563	1.313	4.187	0.750	1.969	
52502029		P2D0672FS075A05	0.6719	1.344	4.219	0.750	1.969	XCMT05...
52502010		P2D0688FS075A05	0.6875	1.375	4.250	0.750	1.969	
52502030		P2D0703FS075A05	0.7031	1.406	4.281	0.750	1.969	
52502031		P2D0719FS100A05	0.7188	1.438	4.549	1.000	2.205	
52502032		P2D0734FS100A05	0.7344	1.469	4.580	1.000	2.205	
52502011		P2D0750FS100A06	0.7500	1.500	4.611	1.000	2.205	
52502033		P2D0766FS100A06	0.7656	1.531	4.642	1.000	2.205	
52502034		P2D0781FS100A06	0.7813	1.563	4.674	1.000	2.205	
52502035		P2D0797FS100A06	0.7969	1.594	4.705	1.000	2.205	
52502012		P2D0812FS100A06	0.8125	1.625	4.736	1.000	2.205	
52502036		P2D0828FS100A07	0.8281	1.656	4.767	1.000	2.205	XCMT07...
52502037		P2D0844FS100A07	0.8439	1.688	4.799	1.000	2.205	
52502038		P2D0859FS100A07	0.8594	1.719	4.830	1.000	2.205	
52502000		P2D0875FS100A07	0.8750	1.750	4.861	1.000	2.205	
52502039		P2D0891FS100A07	0.8906	1.781	4.892	1.000	2.205	
52502040		P2D0906FS100A07	0.9063	1.813	4.924	1.000	2.205	
52502041		P2D0922FS100A07	0.9219	1.844	4.955	1.000	2.205	
52502001		P2D0937FS125A07	0.9375	1.875	5.143	1.250	2.362	
52502042		P2D0953FS125A07	0.9531	1.906	5.174	1.250	2.362	
52502043		P2D0969FS125A07	0.9688	1.938	5.206	1.250	2.362	
52502044		P2D0984FS125A08	0.9844	1.969	5.237	1.250	2.362	XCMT09...
52502002		P2D1000FS125A08	1.0000	2.000	5.268	1.250	2.362	
52502045		P2D1031FS125A08	1.0313	2.063	5.331	1.250	2.362	
52502003		P2D1062FS125A08	1.0625	2.125	5.393	1.250	2.362	
52502046		P2D1094FS125A08	1.0938	2.188	5.456	1.250	2.362	
52502004		P2D1125FS125A08	1.1250	2.250	5.518	1.250	2.362	
52502047		P2D1156FS125A09	1.1563	2.313	5.581	1.250	2.362	
52502005		P2D1187FS125A09	1.1875	2.375	5.643	1.250	2.362	
52502048		P2D1219FS125A09	1.2188	2.438	5.706	1.250	2.362	
52502006		P2D1250FS125A09	1.2500	2.500	5.768	1.250	2.362	
52502049	P2D1281FS150A09	1.2813	2.563	6.225	1.500	2.756		
52502007	P2D1312FS150A09	1.3125	2.625	6.287	1.500	2.756		

Packed: 1 pc.

continued on next page





List 52502 (Continued)

P2D (Inch)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

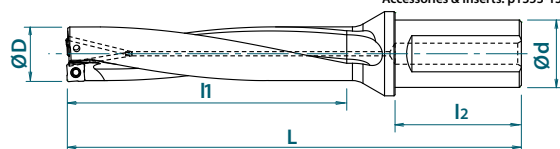

EDP No.	Body Type	Designation	Drill Dia. (inch)	Drilling Depth (inch)	Overall Length (inch)	Shank Dia. (inch)	Shank Length (Inch)	Applicable Insert
			D	l1	L	d	l2	
52502050	Flat Shank	P2D1344FS150A10	1.3438	2.688	6.350	1.500	2.756	XCMT10...
52502013		P2D1375FS150A10	1.3750	2.750	6.412	1.500	2.756	
52502051		P2D1406FS150A10	1.4063	2.813	6.475	1.500	2.756	
52502014		P2D1437FS150A10	1.4375	2.875	6.537	1.500	2.756	
52502052		P2D1469FS150A10	1.4688	2.938	6.600	1.500	2.756	
52502015		P2D1500FS150A10	1.5000	3.000	6.662	1.500	2.756	
52502053		P2D1531FS150A10	1.5313	3.063	6.725	1.500	2.756	
52502016		P2D1563FS150A12	1.5625	3.125	6.787	1.500	2.756	
52502054		P2D1594FS150A12	1.5938	3.188	6.850	1.500	2.756	
52502017		P2D1625FS150A12	1.6250	3.250	6.912	1.500	2.756	
52502055		P2D1656FS150A12	1.6563	3.313	6.975	1.500	2.756	
52502018		P2D1688FS150A12	1.6875	3.375	7.037	1.500	2.756	
52502056		P2D1719FS150A12	1.7188	3.438	7.100	1.500	2.756	
52502019		P2D1750FS150A12	1.7500	3.500	7.162	1.500	2.756	
52502057		P2D1781FS150A13	1.7813	3.563	7.225	1.500	2.756	
52502058		P2D1813FS150A13	1.8125	3.625	7.287	1.500	2.756	
52502059		P2D1844FS150A13	1.8438	3.688	7.350	1.500	2.756	
52502020		P2D1875FS150A13	1.8750	3.750	7.412	1.500	2.756	
52502060		P2D1906FS150A13	1.9063	3.813	7.475	1.500	2.756	
52502061		P2D1938FS150A13	1.9375	3.875	7.537	1.500	2.756	
52502062		P2D1969FS150A14	1.9688	3.938	7.600	1.500	2.756	
52502021		P2D2000FS150A14	2.0000	4.000	7.664	1.500	2.756	
52502022		P2D2125FS150A14	2.1250	4.250	7.912	1.500	2.756	
52502023		P2D2250FS150A16	2.2500	4.500	8.162	1.500	2.756	
52502024		P2D2375FS150A16	2.3750	4.750	8.412	1.500	2.756	
52502025		P2D2500FS150A16	2.5000	5.000	8.662	1.500	2.756	

Packed: 1 pc.



List 78031

P2D (Metric)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354



EDP No.	Body Type	Designation	Drill Dia.	Drilling Depth	Overall Length	Shank Dia.	Shank Length	Applicable Insert
			(mm)	(mm)	(mm)	(mm)	(mm)	
			D	l1	L	d	l2	
7803180	Flat Shank	P2D1200FS20M03	12.0	24	89	20	50	XCMT03...
7803181		P2D1250FS20M03	12.5	25	90	20	50	
7803182		P2D1300FS20M03	13.0	26	91	20	50	
7803183		P2D1350FS20M03	13.5	27	92	20	50	
7803184		P2D1400FS20M03	14.0	28	93	20	50	
7803185		P2D1450FS20M03	14.5	29	94	20	50	
7803117		P2D1500FS20M04	15.0	30	95	20	50	XCMT04...
7803118		P2D1550FS20M04	15.5	31	96	20	50	
7803119		P2D1600FS20M04	16.0	32	97	20	50	
7803120		P2D1650FS20M04	16.5	33	98	20	50	
7803121		P2D1700FS20M05	17.0	34	102	20	50	XCMT05...
7803122		P2D1750FS20M05	17.5	35	103	20	50	
7803190		P2D1750FS25M05	17.5	35	109	25	56	
7803123		P2D1800FS25M05	18.0	36	110	25	56	
7803124		P2D1850FS25M05	18.5	37	111	25	56	XCMT06...
7803125		P2D1900FS25M06	19.0	38	112	25	56	
7803126		P2D1950FS25M06	19.5	39	113	25	56	
7803127		P2D2000FS25M06	20.0	40	114	25	56	
7803128		P2D2050FS25M06	20.5	41	115	25	56	XCMT07...
7803129		P2D2100FS25M07	21.0	42	121	25	56	
7803130		P2D2150FS25M07	21.5	43	122	25	56	
7803131		P2D2200FS25M07	22.0	44	123	25	56	
7803132		P2D2250FS25M07	22.5	45	124	25	56	
7803133		P2D2300FS25M07	23.0	46	125	25	56	
7803191		P2D2350FS25M07	23.5	47	126	25	56	XCMT08...
7803134		P2D2350FS32M07	23.5	47	130	32	60	
7803192		P2D2400FS25M07	24.0	48	127	25	56	
7803135		P2D2400FS32M07	24.0	48	131	32	60	
7803193		P2D2450FS25M07	24.5	49	128	25	56	XCMT09...
7803136		P2D2450FS32M07	24.5	49	132	32	60	
7803194		P2D2500FS25M08	25.0	50	129	25	56	
7803137		P2D2500FS32M08	25.0	50	133	32	60	
7803195		P2D2550FS25M08	25.5	51	130	25	56	
7803138		P2D2550FS32M08	25.5	51	134	32	60	
7803139		P2D2600FS32M08	26.0	52	135	32	60	XCMT09...
7803140		P2D2650FS32M08	26.5	53	136	32	60	
7803141		P2D2700FS32M08	27.0	54	137	32	60	
7803142		P2D2800FS32M08	28.0	56	139	32	60	
7803143		P2D2850FS32M08	28.5	57	140	32	60	XCMT09...
7803144		P2D2900FS32M09	29.0	58	141	32	60	
7803145		P2D3000FS32M09	30.0	60	143	32	60	
7803146		P2D3100FS32M09	31.0	62	145	32	60	
7803196	P2D3100FS40M09	31.0	62	155	40	70		
7803147	P2D3200FS32M09	32.0	64	147	32	60		
7803197	P2D3200FS40M09	32.0	64	157	40	70	XCMT09...	
7803148	P2D3300FS40M09	33.0	66	159	40	70		
7803149	P2D3350FS40M09	33.5	67	160	40	70		

Packed: 1 pc.

continued on next page





List 78031 (Continued)

P2D (Metric)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

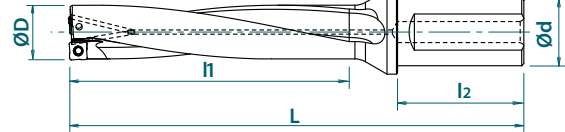

EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7803150	Flat Shank	P2D3400FS40M10	34.0	68	161	40	70	XCMT10...
7803151		P2D3500FS40M10	35.0	70	163	40	70	
7803152		P2D3600FS40M10	36.0	72	165	40	70	
7803153		P2D3700FS40M10	37.0	74	167	40	70	
7803154		P2D3800FS40M10	38.0	76	169	40	70	XCMT12...
7803155		P2D3900FS40M12	39.0	78	178	40	70	
7803156		P2D4000FS40M12	40.0	80	180	40	70	
7803157		P2D4100FS40M12	41.0	82	182	40	70	
7803158		P2D4200FS40M12	42.0	84	184	40	70	XCMT13...
7803159		P2D4300FS40M12	43.0	86	186	40	70	
7803160		P2D4400FS40M12	44.0	88	188	40	70	
7803161		P2D4500FS40M13	45.0	90	190	40	70	
7803162		P2D4600FS40M13	46.0	92	192	40	70	XCMT14...
7803163		P2D4700FS40M13	47.0	94	194	40	70	
7803164		P2D4800FS40M13	48.0	96	196	40	70	
7803165		P2D4900FS40M13	49.0	98	198	40	70	
7803166		P2D5000FS40M14	50.0	100	200	40	70	XCMT16...
7803167		P2D5100FS40M14	51.0	102	202	40	70	
7803168		P2D5200FS40M14	52.0	104	204	40	70	
7803169		P2D5300FS40M14	53.0	106	206	40	70	
7803170		P2D5400FS40M14	54.0	108	208	40	70	XCMT16...
7803171		P2D5500FS40M14	55.0	110	210	40	70	
7803172		P2D5600FS40M14	56.0	112	212	40	70	
7803173		P2D5700FS40M16	57.0	114	214	40	70	
7803174		P2D5800FS40M16	58.0	116	216	40	70	XCMT16...
7803175		P2D5900FS40M16	59.0	118	218	40	70	
7803176		P2D6000FS40M16	60.0	120	220	40	70	
7803177		P2D6100FS40M16	61.0	122	222	40	70	
7803178		P2D6200FS40M16	62.0	124	224	40	70	XCMT16...
7803179		P2D6300FS40M16	63.0	126	226	40	70	

Packed: 1 pc.





List 52503

P3D (Inch)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

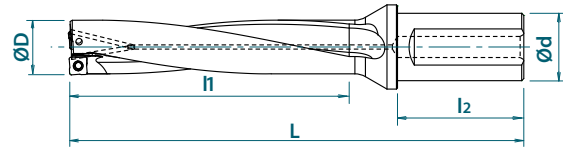

EDP No.	Body Type	Designation	Drill Dia. (inch)	Drilling Depth (inch)	Overall Length (inch)	Shank Dia. (inch)	Shank Length (inch)	Applicable Insert
			D	l1	L	d	l2	
52503063	Flat Shank	P3D0484FS075A03	0.4844	1.453	4.328	0.750	1.969	XCMT03...
52503064		P3D0500FS075A03	0.5000	1.500	4.375	0.750	1.969	
52503065		P3D0516FS075A03	0.5156	1.547	4.422	0.750	1.969	
52503066		P3D0531FS075A03	0.5313	1.594	4.469	0.750	1.969	
52503067		P3D0547FS075A03	0.5469	1.641	4.516	0.750	1.969	
52503068		P3D0563FS075A03	0.5625	1.688	4.563	0.750	1.969	
52503069		P3D0578FS075A03	0.5781	1.734	4.609	0.750	1.969	XCMT04...
52503026		P3D0594FS075A04	0.5938	1.781	4.656	0.750	1.969	
52503027		P3D0609FS075A04	0.6094	1.828	4.703	0.750	1.969	
52503008		P3D0625FS075A04	0.6250	1.875	4.750	0.750	1.969	
52503028		P3D0641FS075A04	0.6406	1.922	4.797	0.750	1.969	
52503009		P3D0656FS075A04	0.6563	1.969	4.843	0.750	1.969	
52503029		P3D0672FS075A05	0.6719	2.016	4.891	0.750	1.969	XCMT05...
52503010		P3D0688FS075A05	0.6875	2.063	4.937	0.750	1.969	
52503030		P3D0703FS075A05	0.7031	2.109	4.984	0.750	1.969	
52503031		P3D0719FS100A05	0.7188	2.156	5.267	1.000	2.205	
52503032		P3D0734FS100A05	0.7344	2.203	5.314	1.000	2.205	
52503011		P3D0750FS100A06	0.7500	2.250	5.361	1.000	2.205	
52503033		P3D0766FS100A06	0.7656	2.297	5.408	1.000	2.205	XCMT06...
52503034		P3D0781FS100A06	0.7813	2.344	5.455	1.000	2.205	
52503035		P3D0797FS100A06	0.7969	2.391	5.502	1.000	2.205	
52503012		P3D0812FS100A06	0.8125	2.438	5.548	1.000	2.205	
52503036		P3D0828FS100A07	0.8281	2.484	5.595	1.000	2.205	
52503037		P3D0844FS100A07	0.8438	2.531	5.642	1.000	2.205	
52503038		P3D0859FS100A07	0.8594	2.578	5.689	1.000	2.205	XCMT07...
52503000		P3D0875FS100A07	0.8750	2.625	5.736	1.000	2.205	
52503039		P3D0891FS100A07	0.8906	2.672	5.783	1.000	2.205	
52503040		P3D0906FS100A07	0.9063	2.719	5.830	1.000	2.205	
52503041		P3D0922FS100A07	0.9219	2.766	5.877	1.000	2.205	
52503001		P3D0937FS125A07	0.9375	2.813	6.080	1.250	2.362	
52503042		P3D0953FS125A07	0.9531	2.859	6.127	1.250	2.362	XCMT08...
52503043		P3D0969FS125A07	0.9688	2.906	6.174	1.250	2.362	
52503044		P3D0984FS125A08	0.9844	2.953	6.221	1.250	2.362	
52503002		P3D1000FS125A08	1.0000	3.000	6.268	1.250	2.362	
52503045		P3D1031FS125A08	1.0313	3.094	6.362	1.250	2.362	
52503003		P3D1062FS125A08	1.0625	3.188	6.455	1.250	2.362	
52503046		P3D1094FS125A08	1.0938	3.281	6.549	1.250	2.362	XCMT09...
52503004		P3D1125FS125A08	1.1250	3.375	6.643	1.250	2.362	
52503047		P3D1156FS125A09	1.1563	3.469	6.737	1.250	2.362	
52503005		P3D1187FS125A09	1.1875	3.563	6.830	1.250	2.362	
52503048	P3D1219FS125A09	1.2188	3.656	6.924	1.250	2.362		
52503006	P3D1250FS125A09	1.2500	3.750	7.018	1.250	2.362		
52503049	P3D1281FS150A09	1.2813	3.844	7.506	1.500	2.756	XCMT09...	
52503007	P3D1312FS150A09	1.3125	3.938	7.599	1.500	2.756		

Packed: 1 pc.

continued on next page



List 52503 (Continued)

P3D (Inch)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354



EDP No.	Body Type	Designation	Drill Dia. (inch)	Drilling Depth (inch)	Overall Length (inch)	Shank Dia. (inch)	Shank Length (inch)	Applicable Insert
			D	l1	L	d	l2	
52503050	Flat Shank	P3D1344FS150A10	1.3438	4.031	7.693	1.500	2.756	XCMT10...
52503013		P3D1375FS150A10	1.3750	4.125	7.787	1.500	2.756	
52503051		P3D1406FS150A10	1.4063	4.219	7.881	1.500	2.756	
52503014		P3D1437FS150A10	1.4375	4.313	7.974	1.500	2.756	
52503052		P3D1469FS150A10	1.4688	4.406	8.068	1.500	2.756	
52503015		P3D1500FS150A10	1.5000	4.500	8.162	1.500	2.756	XCMT12...
52503053		P3D1531FS150A10	1.5313	4.594	8.256	1.500	2.756	
52503016		P3D1563FS150A12	1.5625	4.688	8.349	1.500	2.756	
52503054		P3D1594FS150A12	1.5938	4.781	8.443	1.500	2.756	
52503017		P3D1625FS150A12	1.6250	4.875	8.537	1.500	2.756	
52503055		P3D1656FS150A12	1.6563	4.969	8.631	1.500	2.756	XCMT13...
52503018		P3D1688FS150A12	1.6875	5.063	8.724	1.500	2.756	
52503056		P3D1719FS150A12	1.7188	5.156	8.818	1.500	2.756	
52503019		P3D1750FS150A12	1.7500	5.250	8.912	1.500	2.756	
52503057		P3D1781FS150A13	1.7813	5.344	9.006	1.500	2.756	
52503058		P3D1813FS150A13	1.8125	5.438	9.100	1.500	2.756	XCMT14...
52503059		P3D1844FS150A13	1.8438	5.531	9.193	1.500	2.756	
52503020		P3D1875FS150A13	1.8750	5.625	9.287	1.500	2.756	
52503060		P3D1906FS150A13	1.9063	5.719	9.381	1.500	2.756	
52503061		P3D1938FS150A13	1.9375	5.813	9.475	1.500	2.756	
52503062		P3D1969FS150A14	1.9688	5.906	9.568	1.500	2.756	XCMT16...
52503021		P3D2000FS150A14	2.0000	6.000	9.662	1.500	2.756	
52503022		P3D2125FS150A14	2.1250	6.375	10.037	1.500	2.756	
52503023		P3D2250FS150A16	2.2500	6.750	10.412	1.500	2.756	
52503024		P3D2375FS150A16	2.3750	7.125	10.787	1.500	2.756	
52503025	P3D2500FS150A16	2.5000	7.500	11.162	1.500	2.756		

Packed: 1 pc.





List 78032

P3D (Metric)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

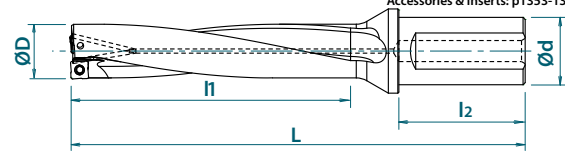

EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7803210	Flat Shank	P3D1200FS20M03	12.0	36	101	20	50	XCMT03...
7803211		P3D1250FS20M03	12.5	37.5	102.5	20	50	
7803212		P3D1270FS20M03	12.7	38.1	103.1	20	50	
7803213		P3D1300FS20M03	13.0	39	104	20	50	
7803214		P3D1350FS20M03	13.5	40.5	105.5	20	50	
7803215		P3D1400FS20M03	14.0	42	107	20	50	
7803216		P3D1450FS20M03	14.5	43.5	108.5	20	50	XCMT04...
7803217		P3D1500FS20M04	15.0	45	110	20	50	
7803218		P3D1550FS20M04	15.5	47	112	20	50	
7803219		P3D1600FS20M04	16.0	48	113	20	50	
7803220		P3D1650FS20M04	16.5	50	115	20	50	XCMT05...
7803221		P3D1700FS20M05	17.0	51	119	20	50	
7803222		P3D1750FS20M05	17.5	53	121	20	50	
7803290		P3D1750FS25M05	17.5	53	127	25	56	
7803223		P3D1800FS25M05	18.0	54	128	25	56	XCMT06...
7803224		P3D1850FS25M05	18.5	56	130	25	56	
7803225		P3D1900FS25M06	19.0	57	131	25	56	
7803226		P3D1950FS25M06	19.5	59	133	25	56	
7803227		P3D2000FS25M06	20.0	60	134	25	56	XCMT07...
7803228		P3D2050FS25M06	20.5	62	136	25	56	
7803229		P3D2100FS25M07	21.0	63	142	25	56	
7803230		P3D2150FS25M07	21.5	65	144	25	56	
7803231		P3D2200FS25M07	22.0	66	145	25	56	
7803232		P3D2250FS25M07	22.5	68	147	25	56	
7803233		P3D2300FS25M07	23.0	69	148	25	56	XCMT08...
7803291		P3D2350FS25M07	23.5	71	150	25	56	
7803234		P3D2350FS32M07	23.5	71	154	32	60	
7803292		P3D2400FS25M07	24.0	72	151	25	56	
7803235		P3D2400FS32M07	24.0	72	155	32	60	XCMT08...
7803293		P3D2450FS25M07	24.5	74	153	25	56	
7803236		P3D2450FS32M07	24.5	74	157	32	60	
7803294		P3D2500FS25M08	25.0	75	154	25	56	
7803237		P3D2500FS32M08	25.0	75	158	32	60	
7803295		P3D2550FS25M08	25.5	77	156	25	56	
7803238		P3D2550FS32M08	25.5	77	160	32	60	
7803239		P3D2600FS32M08	26.0	78	161	32	60	
7803240		P3D2650FS32M08	26.5	80	163	32	60	
7803241		P3D2700FS32M08	27.0	81	164	32	60	
7803300		P3D2750FS32M08	27.5	83	166	32	60	
7803242		P3D2800FS32M08	28.0	84	167	32	60	
7803243	P3D2850FS32M08	28.5	86	169	32	60		

Packed: 1 pc.

continued on next page





List 78032 (Continued)

P3D (Metric)


NEW SIZES



SPEED FEED
P1355



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

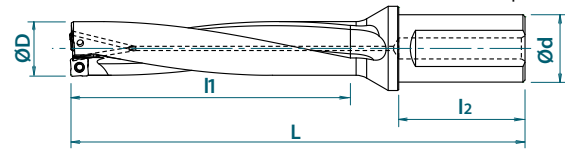

EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7803244	Flat Shank	P3D2900FS32M09	29.0	87	170	32	60	XCMT09...
7803301		P3D2950FS32M09	29.5	89	172	32	60	
7803245		P3D3000FS32M09	30.0	90	173	32	60	
7803302		P3D3050FS32M09	30.5	92	175	32	60	
7803246		P3D3100FS32M09	31.0	93	176	32	60	
7803296		P3D3100FS40M09	31.0	93	186	40	70	
7803303		P3D3150FS32M09	31.5	95	178	32	60	
7803247		P3D3200FS32M09	32.0	96	179	32	60	
7803297		P3D3200FS40M09	32.0	96	189	40	70	
7803304		P3D3250FS40M09	32.5	98	191	40	70	
7803248		P3D3300FS40M09	33.0	99	192	40	70	
7803249		P3D3350FS40M09	33.5	101	194	40	70	
7803250		P3D3400FS40M10	34.0	102	195	40	70	
7803305		P3D3450FS40M10	34.5	104	197	40	70	
7803251		P3D3500FS40M10	35.0	105	198	40	70	
7803306		P3D3550FS40M10	35.5	107	200	40	70	
7803252		P3D3600FS40M10	36.0	108	201	40	70	
7803253		P3D3700FS40M10	37.0	111	204	40	70	
7803307		P3D3750FS40M10	37.5	113	206	40	70	
7803254		P3D3800FS40M10	38.0	114	207	40	70	
7803255		P3D3900FS40M12	39.0	117	217	40	70	
7803256		P3D4000FS40M12	40.0	120	220	40	70	
7803308		P3D4050FS40M12	40.5	122	222	40	70	
7803257		P3D4100FS40M12	41.0	123	223	40	70	
7803258		P3D4200FS40M12	42.0	126	226	40	70	
7803259		P3D4300FS40M12	43.0	129	229	40	70	
7803260		P3D4400FS40M12	44.0	132	232	40	70	
7803261		P3D4500FS40M13	45.0	135	235	40	70	
7803262		P3D4600FS40M13	46.0	138	238	40	70	
7803263		P3D4700FS40M13	47.0	141	241	40	70	
7803264		P3D4800FS40M13	48.0	144	244	40	70	
7803265		P3D4900FS40M13	49.0	147	247	40	70	
7803266		P3D5000FS40M14	50.0	150	250	40	70	
7803309		P3D5050FS40M14	50.5	152	252	40	70	
7803267		P3D5100FS40M14	51.0	153	253	40	70	
7803268		P3D5200FS40M14	52.0	156	256	40	70	
7803269		P3D5300FS40M14	53.0	159	259	40	70	
7803270		P3D5400FS40M14	54.0	162	262	40	70	
7803271		P3D5500FS40M14	55.0	165	265	40	70	
7803272		P3D5600FS40M14	56.0	168	268	40	70	
7803273	P3D5700FS40M16	57.0	171	271	40	70		
7803274	P3D5800FS40M16	58.0	174	274	40	70		
7803275	P3D5900FS40M16	59.0	177	277	40	70		
7803276	P3D6000FS40M16	60.0	180	280	40	70		
7803277	P3D6100FS40M16	61.0	183	283	40	70		
7803278	P3D6200FS40M16	62.0	186	286	40	70		
7803279	P3D6300FS40M16	63.0	189	289	40	70		

Packed: 1 pc.





List 52504

P4D (Inch)


NEW SIZES



SPEED FEED
P1356



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

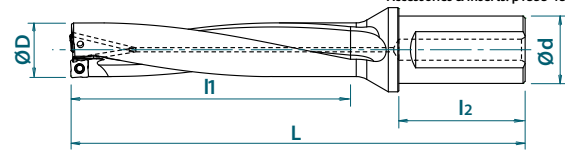

EDP No.	Body Type	Designation	Drill Dia. (inch)	Drilling Depth (inch)	Overall Length (inch)	Shank Dia. (inch)	Shank Length (inch)	Applicable Insert
			D	l1	L	d	l2	
52504063	Flat Shank	P4D0484FS075A03	0.4844	1.938	4.813	0.750	1.969	XCMT03...
52504064		P4D0500FS075A03	0.5000	2.000	4.875	0.750	1.969	
52504065		P4D0516FS075A03	0.5156	2.063	4.938	0.750	1.969	
52504066		P4D0531FS075A03	0.5313	2.125	5.000	0.750	1.969	
52504067		P4D0547FS075A03	0.5469	2.188	5.063	0.750	1.969	
52504068		P4D0563FS075A03	0.5625	2.250	5.125	0.750	1.969	
52504069		P4D0578FS075A03	0.5781	2.313	5.188	0.750	1.969	XCMT04...
52504026		P4D0594FS075A04	0.5938	2.375	5.250	0.750	1.969	
52504027		P4D0609FS075A04	0.6094	2.438	5.313	0.750	1.969	
52504008		P4D0625FS075A04	0.6250	2.500	5.375	0.750	1.969	
52504028		P4D0641FS075A04	0.6406	2.563	5.438	0.750	1.969	
52504009		P4D0656FS075A04	0.6563	2.625	5.500	0.750	1.969	
52504029		P4D0672FS075A05	0.6719	2.688	5.563	0.750	1.969	XCMT05...
52504010		P4D0688FS075A05	0.6875	2.750	5.625	0.750	1.969	
52504030		P4D0703FS075A05	0.7031	2.813	5.688	0.750	1.969	
52504031		P4D0719FS100A05	0.7188	2.875	5.986	1.000	2.205	
52504032		P4D0734FS100A05	0.7344	2.938	6.049	1.000	2.205	
52504011		P4D0750FS100A06	0.7500	3.000	6.111	1.000	2.205	
52504033		P4D0766FS100A06	0.7656	3.063	6.174	1.000	2.205	XCMT06...
52504034		P4D0781FS100A06	0.7813	3.125	6.236	1.000	2.205	
52504035		P4D0797FS100A06	0.7969	3.188	6.299	1.000	2.205	
52504012		P4D0812FS100A06	0.8125	3.250	6.361	1.000	2.205	
52504036		P4D0828FS100A07	0.8281	3.313	6.424	1.000	2.205	
52504037		P4D0844FS100A07	0.8438	3.375	6.486	1.000	2.205	
52504038		P4D0859FS100A07	0.8594	3.438	6.549	1.000	2.205	XCMT07...
52504000		P4D0875FS100A07	0.8750	3.500	6.611	1.000	2.205	
52504039		P4D0891FS100A07	0.8906	3.563	6.674	1.000	2.205	
52504040		P4D0906FS100A07	0.9063	3.625	6.736	1.000	2.205	
52504041		P4D0922FS100A07	0.9219	3.688	6.799	1.000	2.205	
52504001		P4D0937FS125A07	0.9375	3.750	7.018	1.250	2.362	
52504042		P4D0953FS125A07	0.9531	3.813	7.081	1.250	2.362	XCMT08...
52504043		P4D0969FS125A07	0.9688	3.875	7.143	1.250	2.362	
52504044		P4D0984FS125A08	0.9844	3.938	7.206	1.250	2.362	
52504002		P4D1000FS125A08	1.0000	4.000	7.268	1.250	2.362	
52504045		P4D1031FS125A08	1.0313	4.125	7.393	1.250	2.362	
52504003		P4D1062FS125A08	1.0625	4.250	7.518	1.250	2.362	
52504046		P4D1094FS125A08	1.0938	4.375	7.643	1.250	2.362	XCMT09...
52504004		P4D1125FS125A08	1.1250	4.500	7.768	1.250	2.362	
52504047		P4D1156FS125A09	1.1563	4.625	7.893	1.250	2.362	
52504005		P4D1187FS125A09	1.1875	4.750	8.018	1.250	2.362	
52504048	P4D1219FS125A09	1.2188	4.875	8.143	1.250	2.362		
52504006	P4D1250FS125A09	1.2500	5.000	8.268	1.250	2.362		
52504049	P4D1281FS150A09	1.2813	5.125	8.787	1.500	2.756	XCMT09...	
52504007	P4D1312FS150A09	1.3125	5.250	8.912	1.500	2.756		

Packed: 1 pc.

continued on next page





List 52504 (Continued)

P4D (Inch)


NEW SIZES



SPEED FEED
P1356



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

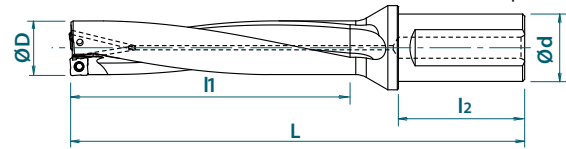

EDP No.	Body Type	Designation	Drill Dia. (inch)	Drilling Depth (inch)	Overall Length (inch)	Shank Dia. (inch)	Shank Length (inch)	Applicable Insert
			D	l1	L	d	l2	
52504050	Flat Shank	P4D1344FS150A10	1.3438	5.375	9.037	1.500	2.756	XCMT10...
52504013		P4D1375FS150A10	1.3750	5.500	9.162	1.500	2.756	
52504051		P4D1406FS150A10	1.4063	5.625	9.287	1.500	2.756	
52504014		P4D1437FS150A10	1.4375	5.750	9.412	1.500	2.756	
52504052		P4D1469FS150A10	1.4688	5.875	9.537	1.500	2.756	
52504015		P4D1500FS150A10	1.5000	6.000	9.662	1.500	2.756	
52504053		P4D1531FS150A10	1.5313	6.125	9.787	1.500	2.756	
52504016		P4D1563FS150A12	1.5625	6.250	9.912	1.500	2.756	XCMT12...
52504054		P4D1594FS150A12	1.5938	6.375	10.037	1.500	2.756	
52504017		P4D1625FS150A12	1.6250	6.500	10.162	1.500	2.756	
52504055		P4D1656FS150A12	1.6563	6.625	10.287	1.500	2.756	
52504018		P4D1688FS150A12	1.6875	6.750	10.412	1.500	2.756	
52504056		P4D1719FS150A12	1.7188	6.875	10.537	1.500	2.756	
52504019		P4D1750FS150A12	1.7500	7.000	10.662	1.500	2.756	
52504057		P4D1781FS150A13	1.7813	7.125	10.787	1.500	2.756	XCMT13...
52504058		P4D1813FS150A13	1.8125	7.250	10.912	1.500	2.756	
52504059		P4D1844FS150A13	1.8438	7.375	11.037	1.500	2.756	
52504020		P4D1875FS150A13	1.8750	7.500	11.162	1.500	2.756	
52504060		P4D1906FS150A13	1.9063	7.625	11.287	1.500	2.756	
52504061		P4D1938FS150A13	1.9375	7.750	11.412	1.500	2.756	
52504062		P4D1969FS150A14	1.9688	7.875	11.537	1.500	2.756	
52504021		P4D2000FS150A14	2.0000	8.000	11.662	1.500	2.756	
52504022		P4D2125FS150A14	2.1250	8.500	12.162	1.500	2.756	
52504023		P4D2250FS150A16	2.2500	9.000	12.662	1.500	2.756	XCMT16...
52504024		P4D2375FS150A16	2.3750	9.500	13.162	1.500	2.756	
52504025		P4D2500FS150A16	2.5000	10.000	13.662	1.500	2.756	

Packed: 1 pc.





List 78033

P4D (Metric)


NEW SIZES



SPEED FEED
P1356



Recommended Materials: p1357
Accessories & Inserts: p1353-1354



EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7803311	Flat Shank	P4D1200FS20M03	12.0	48	113	20	50	XCMT03...
7803312		P4D1250FS20M03	12.5	50	115	20	50	
7803313		P4D1300FS20M03	13.0	52	117	20	50	
7803314		P4D1350FS20M03	13.5	54	119	20	50	
7803315		P4D1400FS20M03	14.0	56	121	20	50	
7803316		P4D1450FS20M03	14.5	58	123	20	50	
7803317		P4D1500FS20M04	15.0	60	135	20	50	XCMT04...
7803318		P4D1550FS20M04	15.5	62	127	20	50	
7803319		P4D1600FS20M04	16.0	64	129	20	50	
7803320		P4D1650FS20M04	16.5	66	131	20	50	
7803321		P4D1700FS20M05	17.0	68	136	20	50	
7803322		P4D1750FS20M05	17.5	70	138	20	50	
7803390		P4D1750FS25M05	17.5	70	144	25	56	XCMT05...
7803323		P4D1800FS25M05	18.0	72	146	25	56	
7803324		P4D1850FS25M05	18.5	74	148	25	56	
7803325		P4D1900FS25M06	19.0	76	150	25	56	XCMT06...
7803326		P4D1950FS25M06	19.5	78	152	25	56	
7803327		P4D2000FS25M06	20.0	80	154	25	56	
7803328		P4D2050FS25M06	20.5	82	156	25	56	XCMT07...
7803329		P4D2100FS25M07	21.0	84	163	25	56	
7803330		P4D2150FS25M07	21.5	86	165	25	56	
7803331		P4D2200FS25M07	22.0	88	167	25	56	
7803332		P4D2250FS25M07	22.5	90	169	25	56	
7803333		P4D2300FS25M07	23.0	92	171	25	56	
7803391		P4D2350FS25M07	23.5	94	173	25	56	
7803334		P4D2350FS32M07	23.5	94	177	32	60	
7803392		P4D2400FS25M07	24.0	96	175	25	56	
7803335		P4D2400FS32M07	24.0	96	179	32	60	
7803393		P4D2450FS25M07	24.5	98	177	25	56	
7803336		P4D2450FS32M07	24.5	98	181	32	60	
7803394		P4D2500FS25M08	25.0	100	179	25	56	XCMT08...
7803337		P4D2500FS32M08	25.0	100	183	32	60	
7803395		P4D2550FS25M08	25.5	102	181	25	56	
7803338		P4D2550FS32M08	25.5	102	185	32	60	
7803339		P4D2600FS32M08	26.0	104	187	32	60	
7803340		P4D2650FS32M08	26.5	106	189	32	60	
7803341		P4D2700FS32M08	27.0	108	191	32	60	
7803342		P4D2800FS32M08	28.0	112	195	32	60	
7803343		P4D2850FS32M08	28.5	114	197	32	60	
7803344		P4D2900FS32M09	29.0	116	199	32	60	
7803345		P4D3000FS32M09	30.0	120	203	32	60	
7803346		P4D3100FS32M09	31.0	124	207	32	60	
7803396	P4D3100FS40M09	31.0	124	217	40	70		
7803347	P4D3200FS32M09	32.0	128	211	32	60		
7803397	P4D3200FS40M09	32.0	128	221	40	70		
7803348	P4D3300FS40M09	33.0	132	225	40	70		
7803349	P4D3350FS40M09	33.5	134	227	40	70		

Packed: 1 pc.

continued on next page





List 78033 (Continued)

P4D (Metric)


NEW SIZES



SPEED FEED
P1356



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

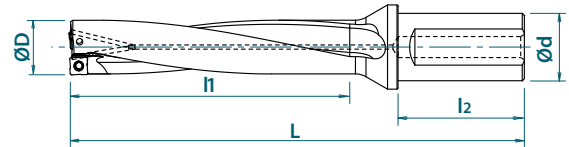

EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7803350	Flat Shank	P4D3400FS40M10	34.0	136	229	40	70	XCMT10...
7803351		P4D3500FS40M10	35.0	140	233	40	70	
7803352		P4D3600FS40M10	36.0	144	237	40	70	
7803353		P4D3700FS40M10	37.0	148	241	40	70	XCMT12...
7803354		P4D3800FS40M10	38.0	152	245	40	70	
7803355		P4D3900FS40M12	39.0	156	256	40	70	
7803356		P4D4000FS40M12	40.0	160	260	40	70	XCMT13...
7803357		P4D4100FS40M12	41.0	164	264	40	70	
7803358		P4D4200FS40M12	42.0	168	268	40	70	
7803359		P4D4300FS40M12	43.0	172	272	40	70	XCMT14...
7803360		P4D4400FS40M12	44.0	176	276	40	70	
7803361		P4D4500FS40M13	45.0	180	280	40	70	
7803362		P4D4600FS40M13	46.0	184	284	40	70	XCMT16...
7803363		P4D4700FS40M13	47.0	188	288	40	70	
7803364		P4D4800FS40M13	48.0	192	292	40	70	
7803365		P4D4900FS40M13	49.0	196	296	40	70	XCMT16...
7803366		P4D5000FS40M14	50.0	200	300	40	70	
7803367		P4D5100FS40M14	51.0	204	304	40	70	
7803368		P4D5200FS40M14	52.0	208	308	40	70	XCMT16...
7803369		P4D5300FS40M14	53.0	212	312	40	70	
7803370		P4D5400FS40M14	54.0	216	316	40	70	
7803371		P4D5500FS40M14	55.0	220	320	40	70	XCMT16...
7803372		P4D5600FS40M14	56.0	224	324	40	70	
7803373		P4D5700FS40M16	57.0	228	328	40	70	
7803374		P4D5800FS40M16	58.0	232	332	40	70	XCMT16...
7803375		P4D5900FS40M16	59.0	236	336	40	70	
7803376		P4D6000FS40M16	60.0	240	340	40	70	
7803377		P4D6100FS40M16	61.0	244	344	40	70	XCMT16...
7803378		P4D6200FS40M16	62.0	248	348	40	70	
7803379		P4D6300FS40M16	63.0	252	352	40	70	

Packed: 1 pc.





List 52505

P5D (Inch)


NEW SIZES



SPEED FEED
P1357



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

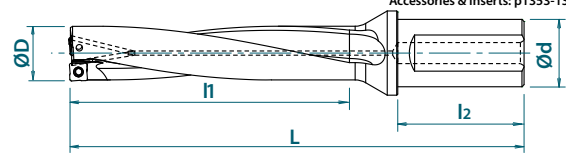

EDP No.	Body Type	Designation	Drill Dia.	Drilling Depth	Overall Length	Shank Dia.	Shank Length	Applicable Insert	
			(inch)	(inch)	(inch)	(inch)	(inch)		
			D	l1	L	d	l2		
52505063	Flat Shank	P5D0484FS075A03	0.4844	2.422	5.297	0.750	1.969	XCMT03...	
52505064		P5D0500FS075A03	0.5000	2.500	5.375	0.750	1.969		
52505065		P5D0516FS075A03	0.5156	2.578	5.453	0.750	1.969		
52505066		P5D0531FS075A03	0.5313	2.656	5.531	0.750	1.969		
52505067		P5D0547FS075A03	0.5469	2.734	5.609	0.750	1.969		
52505068		P5D0563FS075A03	0.5625	2.813	5.688	0.750	1.969		
52505069		P5D0578FS075A03	0.5781	2.891	5.766	0.750	1.969		
52505026		P5D0594FS075A04	0.5938	2.969	5.844	0.750	1.969		XCMT04...
52505027		P5D0609FS075A04	0.6094	3.047	5.922	0.750	1.969		
52505008		P5D0625FS075A04	0.6250	3.125	6.000	0.750	1.969		
52505028		P5D0641FS075A04	0.6406	3.203	6.078	0.750	1.969		
52505009		P5D0656FS075A04	0.6563	3.281	6.156	0.750	1.969		
52505029		P5D0672FS075A05	0.6719	3.359	6.234	0.750	1.969	XCMT05...	
52505010		P5D0688FS075A05	0.6875	3.438	6.312	0.750	1.969		
52505030		P5D0703FS075A05	0.7031	3.516	6.391	0.750	1.969		
52505031		P5D0719FS100A05	0.7188	3.594	6.705	1.000	2.205		
52505032		P5D0734FS100A05	0.7344	3.672	6.783	1.000	2.205		
52505011		P5D0750FS100A06	0.7500	3.750	6.861	1.000	2.205	XCMT06...	
52505033		P5D0766FS100A06	0.7656	3.828	6.939	1.000	2.205		
52505034		P5D0781FS100A06	0.7813	3.906	7.017	1.000	2.205		
52505035		P5D0797FS100A06	0.7969	3.984	7.095	1.000	2.205		
52505012		P5D0812FS100A06	0.8125	4.063	7.173	1.000	2.205		
52505036		P5D0828FS100A07	0.8281	4.141	7.252	1.000	2.205	XCMT07...	
52505037		P5D0844FS100A07	0.8438	4.219	7.330	1.000	2.205		
52505038		P5D0859FS100A07	0.8594	4.297	7.408	1.000	2.205		
52505000		P5D0875FS100A07	0.8750	4.375	7.485	1.000	2.205		
52505039		P5D0891FS100A07	0.8906	4.453	7.564	1.000	2.205		
52505040		P5D0906FS100A07	0.9063	4.531	7.642	1.000	2.205	XCMT08...	
52505041		P5D0922FS100A07	0.9219	4.609	7.720	1.000	2.205		
52505001		P5D0937FS125A07	0.9375	4.688	7.955	1.250	2.362		
52505042		P5D0953FS125A07	0.9531	4.766	8.034	1.250	2.362		
52505043		P5D0969FS125A07	0.9688	4.844	8.112	1.250	2.362		
52505044		P5D0984FS125A08	0.9844	4.922	8.190	1.250	2.362	XCMT09...	
52505002		P5D1000FS125A08	1.0000	5.000	8.268	1.250	2.362		
52505045		P5D1031FS125A08	1.0313	5.156	8.424	1.250	2.362		
52505003		P5D1062FS125A08	1.0625	5.313	8.580	1.250	2.362		
52505046		P5D1094FS125A08	1.0938	5.469	8.737	1.250	2.362		
52505004		P5D1125FS125A08	1.1250	5.625	8.893	1.250	2.362	XCMT09...	
52505047		P5D1156FS125A09	1.1563	5.781	9.049	1.250	2.362		
52505005		P5D1187FS125A09	1.1875	5.938	9.205	1.250	2.362		
52505048	P5D1219FS125A09	1.2188	6.094	9.362	1.250	2.362			
52505006	P5D1250FS125A09	1.2500	6.250	9.518	1.250	2.362			
52505049	P5D1281FS150A09	1.2813	6.406	10.068	1.500	2.756	XCMT09...		
52505007	P5D1312FS150A09	1.3125	6.563	10.224	1.500	2.756			

Packed: 1 pc.

continued on next page




List 52505 (Continued)

P5D (Inch)

NEW SIZES

SPEED FEED
P1357

Recommended Materials: p1357
Accessories & Inserts: p1353-1354



EDP No.	Body Type	Designation	Drill Dia.	Drilling Depth	Overall Length	Shank Dia.	Shank Length	Applicable Insert
			(inch)	(inch)	(inch)	(inch)	(inch)	
			D	l1	L	d	l2	
52505050	Flat Shank	P5D1344FS150A10	1.3438	6.719	10.381	1.500	2.756	XCMT10...
52505013		P5D1375FS150A10	1.3750	6.875	10.537	1.500	2.756	
52505051		P5D1406FS150A10	1.4063	7.031	10.693	1.500	2.756	
52505014		P5D1437FS150A10	1.4375	7.188	10.849	1.500	2.756	
52505052		P5D1469FS150A10	1.4688	7.344	11.006	1.500	2.756	
52505015		P5D1500FS150A10	1.5000	7.500	11.162	1.500	2.756	
52505053		P5D1531FS150A10	1.5313	7.656	11.318	1.500	2.756	
52505016		P5D1563FS150A12	1.5625	7.813	11.474	1.500	2.756	
52505054		P5D1594FS150A12	1.5938	7.969	11.631	1.500	2.756	
52505017		P5D1625FS150A12	1.6250	8.125	11.787	1.500	2.756	
52505055		P5D1656FS150A12	1.6563	8.281	11.943	1.500	2.756	
52505018		P5D1688FS150A12	1.6875	8.438	12.099	1.500	2.756	
52505056		P5D1719FS150A12	1.7188	8.594	12.256	1.500	2.756	
52505019		P5D1750FS150A12	1.7500	8.750	12.412	1.500	2.756	
52505057		P5D1781FS150A13	1.7813	8.906	12.568	1.500	2.756	
52505058		P5D1813FS150A13	1.8125	9.063	12.725	1.500	2.756	
52505059		P5D1844FS150A13	1.8438	9.219	12.881	1.500	2.756	
52505020		P5D1875FS150A13	1.8750	9.375	13.037	1.500	2.756	
52505060		P5D1906FS150A13	1.9063	9.531	13.193	1.500	2.756	
52505061		P5D1938FS150A13	1.9375	9.688	13.350	1.500	2.756	
52505062		P5D1969FS150A14	1.9688	9.844	13.506	1.500	2.756	
52505021		P5D2000FS150A14	2.0000	10.000	13.662	1.500	2.756	
52505022		P5D2125FS150A14	2.1250	10.625	14.287	1.500	2.756	
52505023		P5D2250FS150A16	2.2500	11.250	14.912	1.500	2.756	
52505024		P5D2375FS150A16	2.3750	11.875	15.537	1.500	2.756	
52505025	P5D2500FS150A16	2.5000	12.500	16.162	1.500	2.756		

Packed: 1 pc.





List 78027

P5D (Metric)


NEW SIZES



SPEED FEED
P1357



Recommended Materials: p1357
Accessories & Inserts: p1353-1354



EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7802780	Flat Shank	P5D1200FS20M03	12.0	60	125	20	50	XCMT03...
7802781		P5D1250FS20M03	12.5	62.5	127.5	20	50	
7802782		P5D1300FS20M03	13.0	65	130	20	50	
7802783		P5D1350FS20M03	13.5	67.5	132.5	20	50	
7802784		P5D1400FS20M03	14.0	70	135	20	50	
7802785		P5D1450FS20M03	14.5	72.5	137.5	20	50	
7802717		P5D1500FS20M04	15.0	75	140	20	50	XCMT04...
7802718		P5D1550FS20M04	15.5	78	143	20	50	
7802719		P5D1600FS20M04	16.0	80	145	20	50	
7802720		P5D1650FS20M04	16.5	83	148	20	50	
7802721		P5D1700FS20M05	17.0	85	153	20	50	XCMT05...
7802722		P5D1750FS20M05	17.5	88	156	20	50	
7802790		P5D1750FS25M05	17.5	88	162	25	56	
7802723		P5D1800FS25M05	18.0	90	164	25	56	
7802724		P5D1850FS25M05	18.5	93	167	25	56	XCMT06...
7802725		P5D1900FS25M06	19.0	95	169	25	56	
7802726		P5D1950FS25M06	19.5	98	172	25	56	
7802727		P5D2000FS25M06	20.0	100	174	25	56	
7802728		P5D2050FS25M06	20.5	103	177	25	56	XCMT07...
7802729		P5D2100FS25M07	21.0	105	184	25	56	
7802730		P5D2150FS25M07	21.5	108	187	25	56	
7802731		P5D2200FS25M07	22.0	110	189	25	56	
7802732		P5D2250FS25M07	22.5	113	192	25	56	
7802733		P5D2300FS25M07	23.0	115	194	25	56	
7802791		P5D2350FS25M07	23.5	118	197	25	56	
7802734		P5D2350FS32M07	23.5	118	201	32	60	
7802792		P5D2400FS25M07	24.0	120	199	25	56	
7802735		P5D2400FS32M07	24.0	120	203	32	60	
7802793		P5D2450FS25M07	24.5	123	202	25	56	XCMT08...
7802736		P5D2450FS32M07	24.5	123	206	32	60	
7802794		P5D2500FS25M08	25.0	125	204	25	56	
7802737		P5D2500FS32M08	25.0	125	208	32	60	
7802795		P5D2550FS25M08	25.5	128	207	25	56	
7802738		P5D2550FS32M08	25.5	128	211	32	60	
7802739		P5D2600FS32M08	26.0	130	213	32	60	
7802740		P5D2650FS32M08	26.5	133	216	32	60	
7802741		P5D2700FS32M08	27.0	135	218	32	60	
7802742		P5D2800FS32M08	28.0	140	223	32	60	
7802743		P5D2850FS32M08	28.5	143	226	32	60	XCMT09...
7802744		P5D2900FS32M09	29.0	145	228	32	60	
7802745		P5D3000FS32M09	30.0	150	233	32	60	
7802746		P5D3100FS32M09	31.0	155	238	32	60	
7802796	P5D3100FS40M09	31.0	155	248	40	70		
7802747	P5D3200FS32M09	32.0	160	243	32	60		
7802797	P5D3200FS40M09	32.0	160	253	40	70		
7802748	P5D3300FS40M09	33.0	165	258	40	70		
7802749	P5D3350FS40M09	33.5	168	261	40	70		

Packed: 1 pc.

continued on next page PXT



List 78027 (Continued)

P5D (Metric)


NEW SIZES



SPEED FEED
P1357



Recommended Materials: p1357
Accessories & Inserts: p1353-1354

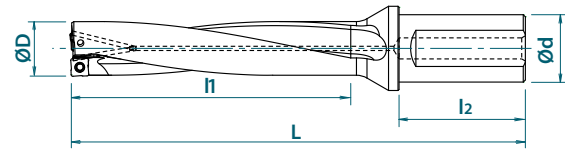

EDP No.	Body Type	Designation	Drill Dia. (mm)	Drilling Depth (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	l1	L	d	l2	
7802750	Flat Shank	P5D3400FS40M10	34.0	170	263	40	70	XCMT10...
7802751		P5D3500FS40M10	35.0	175	268	40	70	
7802752		P5D3600FS40M10	36.0	180	273	40	70	
7802753		P5D3700FS40M10	37.0	185	278	40	70	
7802754		P5D3800FS40M10	38.0	190	283	40	70	
7802755		P5D3900FS40M12	39.0	195	295	40	70	XCMT12...
7802756		P5D4000FS40M12	40.0	200	300	40	70	
7802757		P5D4100FS40M12	41.0	205	305	40	70	
7802758		P5D4200FS40M12	42.0	210	310	40	70	
7802759		P5D4300FS40M12	43.0	215	315	40	70	
7802760		P5D4400FS40M12	44.0	220	320	40	70	XCMT13...
7802761		P5D4500FS40M13	45.0	225	325	40	70	
7802762		P5D4600FS40M13	46.0	230	330	40	70	
7802763		P5D4700FS40M13	47.0	235	335	40	70	
7802764		P5D4800FS40M13	48.0	240	340	40	70	
7802765		P5D4900FS40M13	49.0	245	345	40	70	XCMT14...
7802766		P5D5000FS40M14	50.0	250	350	40	70	
7802767		P5D5100FS40M14	51.0	255	355	40	70	
7802768		P5D5200FS40M14	52.0	260	360	40	70	
7802769		P5D5300FS40M14	53.0	265	365	40	70	
7802770		P5D5400FS40M14	54.0	270	370	40	70	XCMT16...
7802771		P5D5500FS40M14	55.0	275	375	40	70	
7802772		P5D5600FS40M14	56.0	280	380	40	70	
7802773		P5D5700FS40M16	57.0	285	385	40	70	
7802774		P5D5800FS40M16	58.0	290	390	40	70	
7802775		P5D5900FS40M16	59.0	295	395	40	70	
7802776		P5D6000FS40M16	60.0	300	400	40	70	
7802777		P5D6100FS40M16	61.0	305	405	40	70	
7802778		P5D6200FS40M16	62.0	310	410	40	70	
7802779	P5D6300FS40M16	63.0	315	415	40	70		

Packed: 1 pc.






List 78P5D

NEW SIZES

PD Inserts

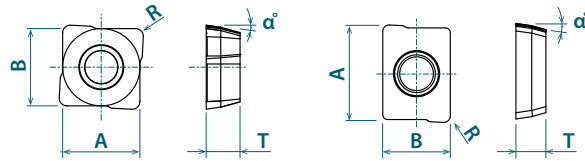

Designation	No. of Cutting Edges	Insert Size				EDP Number								
		A x B (mm)	T (mm)	α	R (mm)	XP9020	XC9015	XP1010	CK110					
XCMT031904ER-DM	2	6.1 x 4.5	1.9	8°	0.4	7823098	7829098	-	-					
XCMT031904ER-DR						-	-	7823163	-					
XCMT031904ER-DN						-	-	-	7823263	-				
XCMT042204ER-DM	4	5 x 5	2.2			7823064	7829064	-	-	-				
XCMT042204ER-DR						-	-	7823164	-	-				
XCMT042204ER-DN						-	-	-	7823264	-				
XCMT052404ER-DM						5.83 x 5.83	2.4	7823065	7829065	-	-	-		
XCMT052404ER-DR								-	-	7823165	-	-		
XCMT052404ER-DN								-	-	-	7823265	-		
XCMT062706ER-DM								6.46 x 6.46	2.7	7823066	7829066	-	-	-
XCMT062706ER-DR										-	-	7823166	-	-
XCMT062706ER-DN										-	-	-	7823266	-
XCMT073106ER-DM					7.42 x 7.42	3.1	7823067			7829067	-	-	-	
XCMT073106ER-DR							-			-	7823167	-	-	
XCMT073106ER-DN							-			-	-	7823267	-	
XCMT083508ER-DM	8.71 x 8.71	3.5	7823068				7829068	-	-	-				
XCMT083508ER-DR			-				-	7823168	-	-				
XCMT083508ER-DN			-				-	-	7823268	-				
XCMT094008ER-DM			10.04 x 10.04		4.0	7823069	7829069	-	-	-				
XCMT094008ER-DR						-	-	7823169	-	-				
XCMT094008ER-DN						-	-	-	7823269	-				
XCMT104608ER-DM	10.89 x 10.89	4.6				7823097	7829097	-	-	-				
XCMT104608ER-DR						-	-	7823197	-	-				
XCMT104608ER-DN						-	-	-	7823297	-				
XCMT125010ER-DM			12.57 x 12.57		5.0	7823071	7829071	-	-	-				
XCMT125010ER-DR						-	-	7823171	-	-				
XCMT125010ER-DN						-	-	-	7823271	-				
XCMT135212ER-DM	14.05 x 14.05	5.2				7823072	7829072	-	-	-				
XCMT135212ER-DR						-	-	7823172	-	-				
XCMT135212ER-DN						-	-	-	7823272	-				
XCMT145612ER-DM			15.58 x 15.58		5.6	7823073	7829073	-	-	-				
XCMT145612ER-DR						-	-	7823173	-	-				
XCMT145612ER-DN				-		-	-	7823273	-					
XCMT165912ER-DM	17.28 x 17.28	5.8		7823075		7829075	-	-	-					
XCMT165912ER-DR				-		-	7823175	-	-					
XCMT165912ER-DN				-		-	-	7823275	-					
XCMT165912ER-DN			-	-	-	-	-							



Packed: 10 pcs.

Note: Grade XC9015 recommended for peripheral cutting edge only.



List 7808H

PD Accessories

Appearance	EDP Number	Designation	Applicable Insert	Recommended Tightening Torque
 Clamping Screw	7808096	FS18536P (M1.8 x 3.6, Torx 6IP)	XCMT03...	0.7 Nm
	7808139	FS20543P (M2 x 4.3, Torx 6IP)	XCMT04...	0.7 Nm
			XCMT05...	
	7808138	FS22550P (M2.2 x 5, Torx 7IP)	XCMT06...	1.0 Nm
	7808136	FS25560P (M2.5 x 6, Torx 8IP)	XCMT07...	1.6 Nm
	7808135	FS30570P (M3 x 7, Torx 9IP)	XCMT08...	2.2 Nm
			XCMT09...	
	7808137	FS35586P (M3.5 x 8.6, Torx 15IP)	XCMT10...	3.2 Nm
			XCMT12...	
	7808114	FS45510P (M4.5 x 10.5, Torx 20IP)	XCMT13...	5.0 Nm
XCMT14...				
XCMT16...				
 Wrench	7808223	6IP-D (Torx 6IP)	XCMT03...	
			XCMT05...	
	7808224	7IP-D (Torx 7IP)	XCMT06...	
	7808225	8IP-D (Torx 8IP)	XCMT07...	
	7808226	9IP-D (Torx 9IP)	XCMT08...	
			XCMT09...	
	7808228	15IP-D (Torx 15IP)	XCMT10...	
			XCMT12...	
	7808229	20IP-D (Torx 20IP)	XCMT13...	
XCMT14...				
XCMT16...				

Packed: Clamping Screws = 10 pcs.; Wrench = 1 pc.
Note: Wrench sold separately.





Cutting Conditions (2D & 3D)

Work Material	Tensile Strength – Hardness	Drilling Speed Vc (SFM)	Feed Rate, f (in/rev)								
			Drilling Depth 2D, 3D								
			Ø0.472-0.571 (12-14.5mm)	Ø0.591-0.650 (15-16.5mm)	Ø0.669-0.728 (17-18.5mm)	Ø0.748-0.807 (19-20.5mm)	Ø0.827-0.965 (21-24.5mm)	Ø0.984-1.122 (25-28.5mm)	Ø1.142-1.319 (29-33.5mm)	Ø1.339-2.500 (34-63mm)	
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	650 (500 - 800)	.0024 (.0015 - .003)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0027 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.002 - .006)	.004 (.002 - .007)
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	500 (330 - 720)	.003 (.0015 - .0047)	.003 (.0015 - .0055)	.0035 (.0015 - .0063)	.004 (.0015 - .007)	.0055 (.0015 - .008)	.007 (.0024 - .010)	.008 (.003 - .012)	.008 (.003 - .014)
	Die Steels (H13, D2)	~280 HB	330 (260 - 500)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0027 (.0015 - .004)	.003 (.0015 - .0047)	.0047 (.0015 - .006)	.0055 (.0024 - .008)	.007 (.003 - .010)	.007 (.003 - .010)
M	Stainless Steels (304, 420)	~250 HB	430 (260 - 600)	.0027 (.0015 - .004)	.0027 (.0015 - .004)	.003 (.0015 - .004)	.0035 (.0015 - .0047)	.004 (.0015 - .006)	.005 (.0024 - .008)	.006 (.003 - .010)	.006 (.003 - .010)
K	Cast Iron (No. 35 B)	~350 N/mm ²	650 (500 - 920)	.003 (.0015 - .0055)	.003 (.0015 - .0055)	.004 (.0015 - .0063)	.0047 (.0015 - .008)	.0063 (.003 - .010)	.008 (.0024 - .012)	.008 (.003 - .012)	.008 (.003 - .014)
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	530 (330 - 720)	.003 (.0015 - .004)	.003 (.0015 - .0047)	.0035 (.0015 - .0055)	.004 (.0015 - .007)	.0055 (.0015 - .008)	.007 (.0024 - .010)	.007 (.003 - .010)	.007 (.003 - .010)
N	Aluminum Alloys (6061, 7075)	~13% Si	650 (330 - 2600)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.0015 - .0063)	.0047 (.0015 - .008)	.0063 (.0015 - .010)	.008 (.0024 - .012)	.008 (.003 - .012)	.008 (.003 - .012)
S	Heat Resistant Alloys (Inconel 718)	-	100 (50 - 160)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.002 (.0012 - .0024)	.002 (.0012 - .0024)	.0024 (.0015 - .003)	.003 (.0024 - .004)	.004 (.0024 - .0047)	.004 (.0024 - .0047)
	Titanium Alloy (Ti-6Al-4V)	-	200 (100 - 330)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .006)	.004 (.0024 - .008)	.0055 (.003 - .008)	.0055 (.003 - .008)
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HrC	330 (200 - 400)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0024 (.0015 - .0047)	.0027 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.0024 - .006)	.004 (.0024 - .006)	.004 (.0024 - .006)
	Die Cast Steels (A2, S7)	43 - 48 HrC	260 (165 - 330)	.002 (.0015 - .003)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)
	Hardened Steels (D2)	50 - 55 HrC	200 (130 - 260)	.002 (.0015 - .003)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)





Cutting Conditions (4D)

Work Material	Tensile Strength - Hardness	Drilling Speed Vc (SFM)	Feed Rate, f (in/rev)								
			Drilling Depth 4D								
			Ø0.472-0.571 (12-14.5mm)	Ø0.591-0.650 (15-16.5mm)	Ø0.669-0.728 (17-18.5mm)	Ø0.748-0.807 (19-20.5mm)	Ø0.827-0.965 (21-24.5mm)	Ø0.984-1.122 (25-28.5mm)	Ø1.142-1.319 (29-33.5mm)	Ø1.339-2.500 (34-63mm)	
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	650 (500 - 800)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.002 - .006)	.004 (.002 - .007)
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	500 (330 - 720)	.0027 (.0015 - .004)	.003 (.0015 - .0055)	.003 (.0015 - .0063)	.0035 (.0015 - .007)	.0047 (.0015 - .006)	0.007 (.0024 - .010)	.008 (.003 - .010)	.008 (.003 - .012)
	Die Steels (H13, D2)	~280 HB	330 (260 - 500)	.0024 (.0015 - .003)	.0024 (.0015 - .004)	.0027 (.0015 - .004)	.003 (.0015 - .0047)	.004 (.0015 - .0051)	.0055 (.0024 - .008)	.007 (.003 - .010)	.007 (.003 - .010)
M	Stainless Steels (304, 420)	~250 HB	430 (260 - 600)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)	.0051 (.0024 - .008)	.0063 (.003 - .008)	.0063 (.003 - .008)
K	Cast Iron (No. 35 B)	~350 N/mm ²	650 (500 - 920)	.003 (.0015 - .0047)	.003 (.0015 - .0055)	.0035 (.0015 - .0063)	.004 (.0015 - .008)	.0047 (.0015 - .006)	.008 (.0024 - .012)	.008 (.003 - .012)	.008 (.003 - .012)
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	530 (330 - 720)	.003 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0015 - .0047)	.0035 (.0015 - .006)	.0047 (.0015 - .006)	.006 (.0024 - .010)	.007 (.003 - .010)	.007 (.003 - .010)
N	Aluminum Alloys (6061, 7075)	~13% Si	650 (330 - 2600)	.0027 (.0015 - .0047)	.0027 (.0015 - .0047)	.0035 (.0015 - .0047)	.0047 (.0015 - .008)	.0055 (.0015 - .008)	.008 (.0024 - .012)	.008 (.003 - .012)	.008 (.003 - .012)
S	Heat Resistant Alloys (Inconel 718)	-	100 (50 - 160)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.002 (.0015 - .003)	.0027 (.0024 - .004)	.003 (.0024 - .0047)	.003 (.0024 - .0047)
	Titanium Alloy (Ti-6Al-4V)	-	200 (100 - 330)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.004 (.0024 - .008)	.0055 (.003 - .008)	.0055 (.003 - .008)
H	Pre-hardened Steel (P20, Stavax)	40 - 43 Hrc	330 (200 - 400)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0024 - .0047)	.004 (.0024 - .0051)	.004 (.0024 - .0051)
	Die Cast Steels (A2, S7)	43 - 48 Hrc	260 (165 - 330)	.002 (.0015 - .003)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)
	Hardened Steels (D2)	50 - 55 Hrc	200 (130 - 260)	.002 (.0015 - .003)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)





Cutting Conditions (5D)

Work Material	Tensile Strength – Hardness	Drilling Speed Vc (SFM)	Feed Rate, f (in/rev)								
			Drilling Depth 5D								
			Ø0.472-0.571 (12-14.5mm)	Ø0.591-0.650 (15-16.5mm)	Ø0.669-0.728 (17-18.5mm)	Ø0.748-0.807 (19-20.5mm)	Ø0.827-0.965 (21-24.5mm)	Ø0.984-1.122 (25-28.5mm)	Ø1.142-1.319 (29-33.5mm)	Ø1.339-2.500 (34-63mm)	
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	650 (500 - 800)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.002 - .006)	.004 (.002 - .007)
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	500 (330 - 720)	.0024 (.0015 - .0035)	.0024 (.0015 - .0035)	.003 (.0015 - .0047)	.003 (.0015 - .0055)	.0047 (.0015 - .006)	.006 (.0024 - .008)	.007 (.003 - .008)	.007 (.003 - .010)
	Die Steels (H13, D2)	~280 HB	330 (260 - 500)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.004 (.0015 - .0051)	.0047 (.0024 - .006)	.006 (.003 - .007)	.0063 (.003 - .0087)
M	Stainless Steels (304, 420)	~250 HB	430 (260 - 600)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0027 (.0015 - .0035)	.003 (.0015 - .004)	.004 (.0024 - .006)	.0047 (.0024 - .007)	.0047 (.0024 - .008)
K	Cast Iron (No. 35 B)	~350 N/mm ²	650 (500 - 920)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.003 (.0015 - .0047)	.003 (.0015 - .0051)	.0047 (.0015 - .006)	.006 (.0024 - .008)	.007 (.003 - .008)	.007 (.003 - .010)
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	530 (330 - 720)	.0024 (.0015 - .0035)	.0024 (.0015 - .0035)	.003 (.0015 - .0047)	.003 (.0015 - .0047)	.004 (.0015 - .0051)	.0047 (.0024 - .006)	.006 (.003 - .007)	.007 (.003 - .010)
N	Aluminum Alloys (6061, 7075)	~13% Si	650 (330 - 2600)	.0024 (.0015 - .004)	.0024 (.0015 - .004)	.0035 (.0015 - .0047)	.004 (.0015 - .006)	.0047 (.0015 - .006)	.006 (.0024 - .010)	.008 (.003 - .012)	.008 (.003 - .012)
S	Heat Resistant Alloys (Inconel 718)	-	100 (50 - 160)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0015 (.0008 - .0024)	.0027 (.0024 - .003)	.0027 (.0024 - .003)	.0027 (.0024 - .003)
	Titanium Alloy (Ti-6Al-4V)	-	200 (100 - 330)	.002 (.0015 - .003)	.002 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .004)	.004 (.0024 - .006)	.004 (.003 - .006)	.004 (.003 - .006)
H	Pre-hardened Steel (P20, Stavax)	40 - 43 Hrc	330 (200 - 400)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.0024 (.0015 - .003)	.003 (.0015 - .004)	.003 (.0024 - .0047)	.004 (.0024 - .0047)	.004 (.0024 - .0047)
	Die Cast Steels (A2, S7)	43 - 48 Hrc	260 (165 - 330)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.0024 (.0015 - .0027)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)
	Hardened Steels (D2)	50 - 55 Hrc	200 (130 - 260)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.002 (.0015 - .0027)	.0024 (.0015 - .0027)	.0024 (.0015 - .003)	.0027 (.0015 - .004)	.003 (.0015 - .004)	.003 (.0015 - .004)

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XP9020	DM	Yes	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
XC9015	DM	Yes	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
XP1010	DR	Yes	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
CK110	DN	Yes	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

DM: Steel & Stainless Steel DR: Cast Iron DN: Non-Ferrous

good best






Maximum Offset for Drilling on Lathe

Drill Diameter (Inch)	Maximum Offset (Inch)	Max Diameter (Inch)
0.4844	0.0157	0.5158
0.5000	0.0118	0.5236
0.5156	0.0078	0.5312
0.5313	0.0078	0.5469
0.5469	0.0078	0.5625
0.5625	0.0039	0.5703
0.5781	0.0039	0.5859
0.5938	0.0157	0.6252
0.6094	0.0118	0.6330
0.6250	0.0078	0.6406
0.6406	0.0078	0.6562
0.6563	0.0078	0.6719
0.6719	0.0196	0.7111
0.6875	0.0157	0.7189
0.7031	0.0157	0.7345
0.7188	0.0157	0.7502
0.7344	0.0118	0.7580
0.7500	0.0196	0.7892
0.7656	0.0157	0.7970
0.7813	0.0157	0.8127
0.7969	0.0118	0.8205
0.8125	0.0118	0.8361
0.8281	0.0269	0.8819
0.8438	0.0230	0.8898
0.8594	0.0210	0.9014
0.8750	0.0200	0.9150
0.8906	0.0190	0.9286
0.9063	0.0173	0.9409
0.9219	0.0133	0.9485
0.9375	0.0124	0.9623
0.9531	0.0078	0.9687
0.9688	0.0039	0.9766
0.9844	0.0287	1.0418
1.0000	0.0248	1.0496
1.0313	0.0220	1.0753
1.0625	0.0173	1.0971
1.0938	0.0141	1.1220
1.1250	0.0039	1.1328
1.1563	0.0295	1.2153
1.1875	0.0277	1.2429
1.2188	0.0218	1.2624
1.2500	0.0188	1.2876
1.2813	0.0169	1.3151
1.3125	0.0078	1.3281
1.3438	0.0393	1.4224
1.3750	0.0315	1.4380
1.4063	0.0236	1.4535
1.4375	0.0275	1.4925
1.4688	0.0196	1.5080
1.5000	0.0118	1.5236
1.5313	0.0039	1.5391
1.5625	0.0315	1.6255
1.5938	0.0275	1.6488
1.6250	0.0275	1.6800
1.6563	0.0236	1.7035
1.6875	0.0157	1.7189
1.7188	0.0118	1.7424
1.7500	0.0078	1.7656
1.7813	0.0314	1.8441
1.8125	0.0275	1.8675
1.8438	0.0196	1.8830
1.8750	0.0196	1.9142
1.9063	0.0157	1.9377
1.9375	0.0078	1.9531
1.9688	0.0433	2.0554
2.0000	0.0354	2.0708
2.1250	0.0157	2.1564
2.2500	0.0433	2.3366
2.3750	0.0275	2.4300
2.5000	0	2.5000

Drill Diameter (mm)	Maximum Offset (mm)	Max Diameter (mm)
12.0	0.4	12.8
12.5	0.4	13.3
12.7	0.3	13.3
13.0	0.3	13.6
13.5	0.2	13.9
14.0	0.2	14.4
14.5	0.1	14.7
15.0	0.4	15.8
15.5	0.3	16.1
16.0	0.3	16.6
16.5	0.3	17.1
17.0	0.6	18.2
17.5	0.5	18.5
18.0	0.5	19.0
18.5	0.4	19.3
19.0	0.6	20.2
19.5	0.5	20.5
20.0	0.4	20.8
20.5	0.4	21.3
21.0	0.6	22.2
21.5	0.6	22.7
22.0	0.5	23.0
22.5	0.5	23.5
23.0	0.4	23.8
23.5	0.3	24.1
24.0	0.3	24.6
24.5	0.2	24.9
25.0	0.7	26.4
25.5	0.6	26.7
26.0	0.5	27.0
26.5	0.5	27.5
27.0	0.4	27.8
27.5	0.4	28.3
28.0	0.3	28.6
28.5	0.2	28.9
29.0	0.8	30.6
29.5	0.8	31.1
30.0	0.7	31.4
30.5	0.7	31.9
31.0	0.6	32.2
31.5	0.5	32.5
32.0	0.5	33.0
32.5	0.4	33.3
33.0	0.4	33.8
33.5	0.2	33.9
34.0	1.1	36.2
34.5	0.9	36.3
35.0	0.8	36.6
35.5	0.7	36.9
36.0	0.8	37.6
37.0	0.6	38.2
37.5	0.4	38.3
38.0	0.3	38.6
39.0	1.0	41.0
40.0	0.9	41.8
40.5	0.8	42.1
41.0	0.8	42.6
42.0	0.6	43.2
43.0	0.5	44.0
44.0	0.3	44.6
45.0	0.9	46.8
46.0	0.8	47.6
47.0	0.7	48.4
48.0	0.5	49.0
49.0	0.3	49.6
50.0	1.1	52.2
50.5	1.0	52.5
51.0	1.0	53.0
52.0	0.8	53.6
53.0	0.7	54.4
54.0	0.6	55.2
55.0	0.4	55.8
56.0	0.1	56.2
57.0	1.1	59.2
58.0	1.0	60.0
59.0	0.9	60.8
60.0	0.8	61.6
61.0	0.6	62.2
62.0	0.4	62.8
63.0	0.2	63.4




Maximum Offset Amount, A, for Drilling on a lathe.





Reference Value of PD Hmax

Drill Diameter (Inch)	Hmax (Inch)	Drill Diameter (mm)	Hmax (mm)
0.472 - 0.571	0.024	12 - 14.5	0.6
0.591 - 0.650	0.031	15 - 16.5	0.8
0.669 - 0.728	0.035	17 - 18.5	0.9
0.748 - 0.807	0.043	19 - 20.5	1.1
0.827 - 0.965	0.047	21 - 24.5	1.2
0.984 - 1.122	0.059	22 - 28.5	1.5
1.142 - 1.319	0.063	29 - 33.5	1.6
1.339 - 2.500	0.067	34 - 38	1.7
1.535 - 1.732	0.079	39 - 44	2
1.772 - 1.929	0.091	45 - 49	2.3
1.968 - 2.205	0.098	50 - 56	2.5
2.244 - 2.500	0.102	57 - 63	2.6

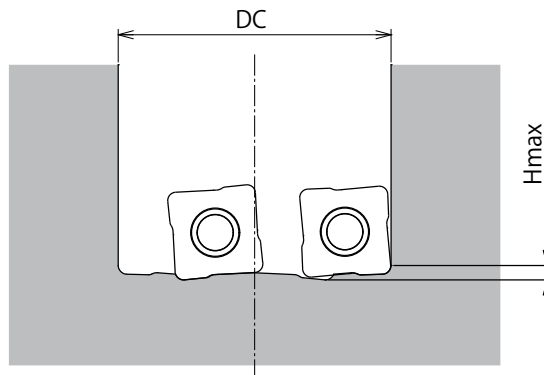



PD Hole Diameter Tolerance

Diameter (Inch)	P2D (Inch)	P3D (Inch)	P4D (Inch)	P5D (Inch)
0.4724 - 0.8071	+0.0098 / -0	+0.0098 / -0	+0.0118 / -0	+0.0118 / -0
0.8268 - 1.9291	+0.0118 / -0	+0.0118 / -0	+0.0157 / -0	+0.0157 / -0
1.9685 - 2.5000	+0.0138 / -0	+0.0138 / -0	+0.0197 / -0	+0.0197 / -0

The above values are general values and may differ based on actual machining conditons.

Diameter (mm)	P2D (mm)	P3D (mm)	P4D (mm)	P5D (mm)
12 - 20.5	+0.25 / -0	+0.25 / -0	+0.30 / -0	+0.30 / -0
21 - 49	+0.30 / -0	+0.30 / -0	+0.40 / -0	+0.40 / -0
50 - 63	+0.35 / -0	+0.35 / -0	+0.50 / -0	+0.50 / -0


The above values are general values and may differ based on actual machining conditons.






List 78001

PHP (Metric)



Recommended Materials: p1363
Accessories & Inserts: p1362

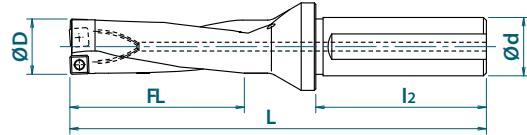

EDP No.	Body Type	Designation	Drill Dia. (mm)	Flute Length (mm)	Overall Length (mm)	Shank Dia. (mm)	Shank Length (mm)	Applicable Insert
			D	FL	L	d	l2	
7800100	Flat Shank	PHP140FS20M04-3D	14.0	42	116	20	50	SCMT04...
7800101		PHP145FS20M04-3D	14.5	45	119	20	50	
7800102		PHP150FS20M04-3D	15.0	45	119	20	50	
7800103		PHP155FS20M04-3D	15.5	48	122	20	50	
7800104		PHP160FS20M04-3D	16.0	48	122	20	50	
7800105		PHP165FS20M05-3D	16.5	51	125	20	50	SCMT05...
7800106		PHP170FS20M05-3D	17.0	51	125	20	50	
7800107		PHP175FS25M05-3D	17.5	54	134	25	56	
7800108		PHP180FS25M05-3D	18.0	54	134	25	56	
7800109		PHP185FS25M06-3D	18.5	57	137	25	56	SCMT06...
7800110		PHP190FS25M06-3D	19.0	57	137	25	56	
7800111		PHP195FS25M06-3D	19.5	60	140	25	56	
7800112		PHP200FS25M06-3D	20.0	60	140	25	56	
7800113		PHP205FS25M06-3D	20.5	63	143	25	56	SCMT07...
7800114		PHP210FS25M06-3D	21.0	63	143	25	56	
7800115		PHP215FS25M07-3D	21.5	66	146	25	56	
7800116		PHP220FS25M07-3D	22.0	66	146	25	56	
7800117		PHP225FS25M07-3D	22.5	69	149	25	56	SCMT08...
7800118		PHP230FS25M07-3D	23.0	69	149	25	56	
7800119		PHP235FS32M07-3D	23.5	72	156	32	60	
7800120		PHP240FS32M07-3D	24.0	72	156	32	60	
7800121		PHP245FS32M08-3D	24.5	75	159	32	60	SCMT10...
7800122		PHP250FS32M08-3D	25.0	75	159	32	60	
7800123		PHP255FS32M08-3D	25.5	78	162	32	60	
7800124		PHP260FS32M08-3D	26.0	78	162	32	60	
7800125		PHP265FS32M08-3D	26.5	81	165	32	60	SCMT12...
7800126		PHP270FS32M08-3D	27.0	81	165	32	60	
7800127		PHP280FS32M08-3D	28.0	84	168	32	60	
7800128		PHP290FS32M10-3D	29.0	87	171	32	60	
7800130		PHP300FS32M10-3D	30.0	90	179	32	60	SCMT12...
7800131		PHP310FS32M10-3D	31.0	93	182	32	60	
7800132		PHP320FS32M10-3D	32.0	96	185	32	60	
7800133		PHP330FS40M10-3D	33.0	99	196	40	68	
7800134		PHP340FS40M12-3D	34.0	102	199	40	68	SCMT12...
7800135		PHP350FS40M12-3D	35.0	105	202	40	68	
7800136		PHP360FS40M12-3D	36.0	108	205	40	68	
7800137		PHP370FS40M12-3D	37.0	111	218	40	68	
7800138		PHP380FS40M12-3D	38.0	114	221	40	68	
7800139		PHP390FS40M12-3D	39.0	117	224	40	68	
7800140		PHP400FS40M12-3D	40.0	120	227	40	68	

Packed: 1 pc.



Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**





List 78PHP

PHP Inserts



Designation	No. of Cutting Edges	Insert Size				EDP Number	
		A x B (mm)	T (mm)	α	R (mm)	XP9040	XC9025
SCMT042204-DM	4	4.8 x 4.8	2.2	7°	0.4	7818001	7817001
SCMT052404-DM		5.4 x 5.4	2.4			7818002	7817002
SCMT062806-DM		6.2 x 6.2	2.8		0.6	7818003	7817003
SCMT073206-DM		7.2 x 7.2	3.2			7818004	7817004
SCMT083608-DM		8.6 x 8.6	3.6		0.8	7818005	7817005
SCMT104208-DM		10.0 x 10.0	4.2			7818006	7817006
SCMT125008-DM		12.3 x 12.3	5.0			7818007	7817007

Packed: 10 pcs.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**



List 7808H

PHP Accessories

Appearance	EDP No.	Designation	Applicable Insert	Recommended Tightening Torque
	7808100	FS18538 (M1.8 x 3.8, Torx 6)	SCMT04...	0.7 Nm
	7808102	FS20540 (M2 x 4, Torx 6)	SCMT05...	0.7 Nm
	7808104	FS22550 (M2.2 x 5, Torx 7)	SCMT06...	1.0 Nm
	7808108	FS25560 (M2.5 x 6, Torx 8)	SCMT07...	1.6 Nm
	7808110	FS30573 (M3 x 7.3, Torx 8)	SCMT08...	1.6 Nm
	7808111	FS35572 (M3.5 x 7.2, Torx 15)	SCMT10...	3.2 Nm
	7808113	FS45510 (M4.5 x 10.5, Torx 20)	SCMT12...	5.0 Nm
	7808203	T6-D (Torx 6)	SCMT04...	
			SCMT05...	
	7808204	T7-D (Torx 7)	SCMT06...	
	7808205	T8-D (Torx 8)	SCMT07...	
			SCMT08...	
	7808208	T15-D (Torx 15)	SCMT10...	
7808209	T20-D (Torx 20)	SCMT12...		

Packed: Clamping Screws = 10 pcs; Wrench = 1 pc.

Note: Wrench sold separately.

This item is stocked overseas. Please contact OSG for availability and delivery.





Cutting Conditions

Work Material	Tensile Strength - Hardness	Drilling Speed Vc (SFM)	Feed Rate f (in/rev)			
			Ø14-20.5mm	Ø21-28mm	Ø29-34mm	Ø35-40mm
P Mild Steels, Carbon Steels (1010, 1018) Carbon Steels, Alloy Steels (1050, 4140) Die Steels (H13, D2)	~180 HB	655 (495 - 820)	0.004 (0.002 - 0.005)	0.005 (0.004 - 0.007)	0.007 (0.005 - 0.008)	0.010 (0.008 - 0.011)
	~280 HB	525 (330 - 720)	0.004 (0.002 - 0.005)	0.005 (0.004 - 0.007)	0.007 (0.005 - 0.008)	0.010 (0.008 - 0.011)
	~280 HB	460 (265 - 590)	0.003 (0.002 - 0.005)	0.005 (0.002 - 0.006)	0.006 (0.004 - 0.007)	0.006 (0.004 - 0.008)
M Stainless Steels (304, 420)	~250 HB	495 (330 - 590)	0.003 (0.002 - 0.005)	0.004 (0.002 - 0.005)	0.006 (0.004 - 0.007)	0.007 (0.006 - 0.008)
K Cast Iron (No. 35 B) Ductile Cast Iron (60-40-18)	~350 N/mm ²	495 (330 - 590)	0.004 (0.002 - 0.005)	0.005 (0.004 - 0.007)	0.007 (0.005 - 0.008)	0.010 (0.008 - 0.011)
	~800 N/mm ²	425 (265 - 495)	0.004 (0.002 - 0.005)	0.005 (0.003 - 0.006)	0.006 (0.004 - 0.008)	0.008 (0.006 - 0.010)
N Aluminum Alloys (6061, 7075)	~13% Si	720 (330 - 2625)	0.004 (0.002 - 0.008)	0.005 (0.004 - 0.010)	0.007 (0.005 - 0.012)	0.010 (0.008 - 0.014)
S Heat Resistant Alloys (Inconel 718) Titanium Alloy (Ti-6Al-4V)	-	100 (50 - 165)	0.002 (0.001 - 0.003)	0.002 (0.001 - 0.004)	0.003 (0.002 - 0.005)	0.004 (0.002 - 0.006)
	-	195 (100 - 330)	0.002 (0.002 - 0.003)	0.003 (0.002 - 0.005)	0.004 (0.003 - 0.006)	0.005 (0.004 - 0.006)

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XP9040	DM	Yes	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	
XC9025	DM	Yes	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

DM: Center Cutting Drill

good best





List 52510

PZAG SA (Inch)

NEW



SPEED
FEED
P1369





Recommended Materials: p1369
Accessories & Inserts: p1368



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Shank Dia. (inch)	Overall Length (inch)	Neck Length (inch)	Min. Pre-Drilled Hole Dia.	Ar Max for Plunging	Applicable Insert
					D		d	L	l2			
52510000	Cylindrical Shank	Normal	PZAG04R053SA075-2	1	0.5313	2	0.750	3.813	1.063	0.216	0.157	ZPNT04
52510001			PZAG04R063SA075-2	1	0.6250	2	0.750	4.000	1.250	0.310	0.157	
52510002			PZAG06R072SA075-2	1	0.7188	2	0.750	4.188	1.438	0.246	0.236	ZPNT06
52510003			PZAG06R075SA075-2	1	0.7500	2	0.750	4.250	1.500	0.278	0.236	
52510004			PZAG06R081SA100-2	1	0.8125	2	1.000	4.625	1.625	0.340	0.236	
52510005			PZAG06R091SA100-2	1	0.9063	2	1.000	4.813	1.813	0.434	0.236	
52510006			PZAG09R100SA100-2	1	1.0000	2	1.000	5.000	2.000	0.291	0.354	ZPNT09
52510007			PZAG09R119SA125-2	1	1.1875	2	1.250	5.525	2.375	0.479	0.354	
52510008			PZAG09R125SA125-2	1	1.2500	2	1.250	5.650	2.500	0.541	0.354	
52510009			PZAG09R138SA125-2	2	1.3750	2	1.250	5.900	2.750	0.666	0.354	
52510010			PZAG09R150SA125-2	2	1.5000	2	1.250	6.150	3.000	0.791	0.354	
52510011			PZAG09R163SA125-2	2	1.6250	2	1.250	6.400	3.250	0.916	0.354	
52510012	PZAG09R181SA125-2	2	1.8125	2	1.250	6.775	3.625	1.104	0.354			

Packed: 1 pc.

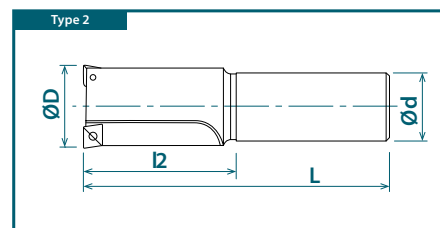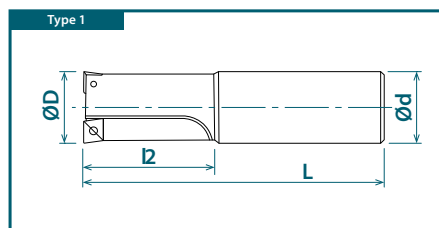



List 78321

PZAG SS (Metric)

NEW



SPEED FEED
P1369





Recommended Materials: p1369
Accessories & Inserts: p1368



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Min. Pre-Drilled Hole Dia.	Ar Max for Plunging	Applicable Insert
					D		d	L	l2			
7832100	Cylindrical Shank	Normal	PZAG04R014SS20-2	1	14	2	20	100	30	6	4	ZPNT04
7832101			PZAG06R0175SS20-2	1	17.5	2	20	105	35	5.5	6	ZPNT06
7832102			PZAG06R020SS20-2	1	20	2	20	110	40	8	6	
7832103			PZAG06R023SS25-2	1	23	2	25	125	50	11	6	
7832104			PZAG09R026SS25-2	2	26	2	25	130	55	8	9	
7832105			PZAG09R029SS32-2	1	29	2	32	140	60	11	9	
7832106			PZAG09R032SS32-2	1	32	2	32	145	65	14	9	
7832107			PZAG09R035SS32-2	2	35	2	32	150	70	17	9	
7832108			PZAG09R039SS32-2	2	39	2	32	160	80	21	9	
7832109			PZAG09R043SS32-2	2	43	2	32	170	90	25	9	
7832110	PZAG09R048SS32-2	2	48	2	32	180	100	30	9	ZPNT09		

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

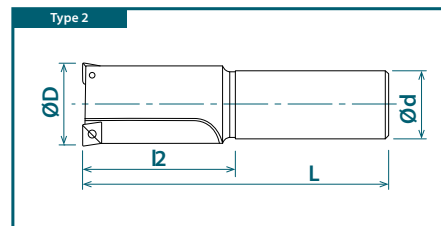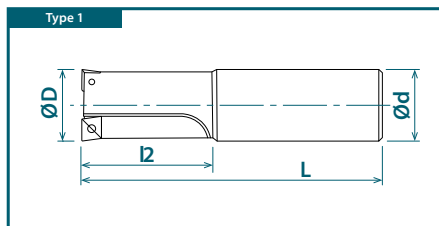



List 52511

PZAG Bore (Inch)

NEW



SPEED FEED
P1369




Recommended Materials: p1369
Accessories & Inserts: p1368



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Tool Height (inch)	Flange Dia. (inch)	Bore Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Min. Pre-Drilled Hole Dia.	Ar Max for Plunging	Applicable Insert
					D		H	D2	d3	a	b			
52511000	Bore	Normal	PZAG13R200A075-4	1	2.000	4	2.480	1.772	0.750	0.315	0.197	1.016	0.492	ZPNT13
52511001			PZAG13R238A075-4	1	2.375	4	2.480	1.772	0.750	0.315	0.197	1.391	0.492	
52511002			PZAG13R250A075-4	1	2.500	4	2.480	1.772	0.750	0.315	0.197	1.516	0.492	
52511003			PZAG13R275A100-4	1	2.750	4	2.480	2.362	1.000	0.375	0.236	1.766	0.492	ZPNT17
52511004			PZAG17R300A100-4	1	3.000	4	2.480	2.362	1.000	0.375	0.236	1.740	0.630	
52511005	PZAG17R313A100-4	1	3.125	4	2.480	2.362	1.000	0.375	0.236	1.866	0.630			

Packed: 1 pc.





List 78421

PZAG Bore (Metric)

NEW



SPEED FEED
P1369




Recommended Materials: p1369
Accessories & Inserts: p1368



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Min. Pre-Drilled Hole Dia.	Ar Max for Plunging	Applicable Insert
					D		H	D2	d3	a	b			
7832111	Bore	Normal	PZAG13R054M22-4	1	54	4	63	45	22	10.4	6.3	29	12.5	ZPNT13
7832112			PZAG13R058M22-4	1	58	4	63	45	22	10.4	6.3	33	12.5	
7832113			PZAG13R062M22-4	1	62	4	63	45	22	10.4	6.3	37	12.5	
7832114			PZAG13R067M22-4	1	67	4	63	45	22	10.4	6.3	42	12.5	
7832115			PZAG13R072M22-4	1	72	4	63	45	22	10.4	6.3	47	12.5	
7832116			PZAG17R076M22-4	1	76	4	63	45	22	10.4	6.3	44	16	
7832117			PZAG17R082M22-4	1	82	4	63	45	22	10.4	6.3	50	16	ZPNT17

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**







List 78PZAG

NEW

PZAG Inserts



Designation	No. of Cutting Edges	Insert Size					EDP Number	
		A x B (mm)	S (mm)	α	R (mm)	Type	XP8030	XC8035
ZPNT040204ER	2	6.35 x 4.45	1.76	11°	0.4	1	7814101	7815101
ZPNT060204EN		6.95 x 6.95	2.93		0.4	2	7814103	7815103
ZPNT090404EN		9.94 x 9.94	4.65		0.4	2	7814106	7815106
ZPNT130504EN		13.92 x 13.92	5.46		0.4	2	7814109	7815109
ZPNT170608EN		17.85 x 17.85	6.31		0.8	2	7814111	7815111

Packed: 10 pcs.

PXI

List 7808H

PZAG Accessories

Appearance	EDP No.	Designation	Applicable Insert	Recommended Tightening Torque
	7808096	FS18536P (M1.8 x 3.6, Torx 6IP)	ZPNT04...	0.7 Nm
	7808138	FS22550P (M2.2 x 5, Torx 7IP)	ZPNT06...	1.0 Nm
	7808135	FS30570P (M3 x 7, Torx 9IP)	ZPNT09...	2.2 Nm
	7808137	FS35586P (Torx 15IP) Screw	ZPNT10...	3.2 Nm
	7808114	FS45510P (M4.5 x 10, Torx 20IP)	ZPNT13... ZPNT17...	5.0 Nm
	7808223	6IP-D (Torx 6IP) Wrench	ZPNT04...	
	7808224	7IP-D (Torx 7IP) Wrench	ZPNT06...	
	7808226	9IP-D (Torx 9IP) Wrench	ZPNT09...	
	7808229	20IP-D (Torx 20IP) Wrench	ZPNT13... ZPNT17...	

Packed: Clamping Screws = 10 pcs.; Wrench = 1 pc.
Note: Wrench sold separately.

PXT





Cutting Conditions

Work Material	Tensile Strength - Hardness	Drilling Speed Vc (SFM)	Feed Rate f (in/rev)				
			Ø0.531-0.625 (14-17.5mm)	Ø0.719-0.906 (20-23mm)	Ø1.000-1.813 (26-48mm)	Ø2.000-2.750 (54-72mm)	Ø3.000-0.313 (76-82mm)
P Mild Steels, Carbon Steels (1010, 1018) Carbon Steels, Alloy Steels (1050, 4140) Die Steels (H13, D2)	~180 HB	525 (330 - 655)	0.0055 (0.003-0.008)	0.007 (0.004-0.010)	0.008 (0.005-0.012)	0.016 (0.008-0.024)	0.016 (0.008-0.024)
	~280 HB	495 (330 - 655)	0.0055 (0.003-0.008)	0.007 (0.004-0.010)	0.008 (0.005-0.012)	0.016 (0.008-0.024)	0.016 (0.008-0.024)
	~280 HB	395 (265 - 590)	0.005 (0.003-0.006)	0.0055 (0.004-0.008)	0.007 (0.005-0.010)	0.016 (0.008-0.020)	0.016 (0.008-0.020)
M Stainless Steels (304, 420)	~250 HB	425 (265 - 590)	0.004 (0.003-0.006)	0.005 (0.004-0.008)	0.006 (0.005-0.010)	0.014 (0.008-0.020)	0.014 (0.008-0.020)
K Cast Iron (No. 35 B) Ductile Cast Iron (60-40-18)	~350 N/mm ²	655 (495 - 915)	0.006 (0.003-0.010)	0.008 (0.004-0.012)	0.012 (0.006-0.016)	0.024 (0.012-0.032)	0.024 (0.012-0.032)
	~800 N/mm ²	525 (330 - 720)	0.0055 (0.003-0.008)	0.007 (0.004-0.010)	0.008 (0.006-0.012)	0.016 (0.012-0.032)	0.016 (0.012-0.032)
N Aluminum Alloys (6061, 7075)	~13% Si	650 (330 - 2625)	0.006 (0.003-0.010)	0.008 (0.004-0.012)	0.012 (0.006-0.016)	0.024 (0.012-0.031)	0.024 (0.012-0.031)
S Heat Resistant Alloys (Inconel 718) Titanium Alloy (Ti-6Al-4V)	-	165 (100 - 200)	0.003 (0.002-0.0055)	0.003 (0.0024-0.0055)	0.005 (0.003-0.008)	0.010 (0.006-0.016)	0.010 (0.006-0.016)
	-	200 (100 - 330)	0.003 (0.002-0.0055)	0.004 (0.0024-0.006)	0.0055 (0.003-0.008)	0.012 (0.006-0.020)	0.012 (0.006-0.020)
H Pre-hardened Steel (P20, Stavax) Die Cast Steels (A2, S7) Hardened Steels (D2)	40 - 43 Hrc	330 (200 - 400)	0.003 (0.002-0.0055)	0.004 (0.0024-0.006)	0.0055 (0.003-0.008)	0.012 (0.006-0.020)	0.012 (0.006-0.020)
	43 - 48 Hrc	260 (165 - 330)	0.003 (0.002-0.0055)	0.003 (0.0024-0.0055)	0.005 (0.003-0.008)	0.010 (0.006-0.016)	0.010 (0.006-0.016)
	50 - 55 Hrc	200 (130 - 260)	0.003 (0.002-0.0055)	0.003 (0.002-0.0055)	0.005 (0.003-0.008)	0.010 (0.006-0.016)	0.010 (0.006-0.016)

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XP8030	-	Yes	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
XC8035	-	No	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
		Yes	<input type="checkbox"/>	<input type="checkbox"/>				


good best





List 52700

PAS Bore (Inch)



Recommended Materials: p1372
Accessories & Inserts: p1371



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia.	Effective Dia.	No. of Teeth	Tool Height	Flange Dia.	Bore Dia.	Keyway Width	Keyway Depth	Applicable Insert
					D	D1		H	D2	d3	a	b	
52700000	Bore	Normal	PAS15R200A075-4	1	2.590	2.000	4	1.772	1.772	0.750	0.315	0.197	SNKU15...
52700001			PAS15R250A075-5	1	3.090	2.500	5	1.772	1.968	0.750	0.315	0.197	
52700002			PAS15R300A100-6	1	3.590	3.000	6	1.968	2.362	1.000	0.375	0.236	
52700003			PAS15R400A125-7	2	4.590	4.000	7	1.968	2.756	1.250	0.500	0.315	
52700004			PAS15R500A150-8	2	5.590	5.000	8	2.480	3.543	1.500	0.625	0.394	
52700005			PAS15R600A150-9	2	6.590	6.000	9	2.480	3.740	1.500	0.625	0.394	

Packed: 1 pc.



List 78020

PAS Bore (Metric)





Recommended Materials: p1372
Accessories & Inserts: p1371



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia.	Effective Dia.	No. of Teeth	Tool Height	Flange Dia.	Bore Dia.	Keyway Width	Keyway Depth	Applicable Insert
					D	D1		H	D2	d3	a	b	
7802000	Bore	Normal	PAS15R050M22-4	1	65	50	4	45	45	22	10.4	6.3	SNKU15...
7802001			PAS15R063M22-5	1	78	63	5	45	50	22	10.4	6.3	
7802002			PAS15R080M25.4-6	1	95	80	6	50	60	25.4	9.5	6	
7802003			PAS15R100M31.7-7	2	115	100	7	50	70	31.75	12.7	8	
7802004			PAS15R125M38.1-8	2	140	125	8	63	90	38.1	15.9	10	

Packed: 1 pc.



Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**





List 78PAS

PAS Inserts





Designation	No. of Cutting Edges	Insert Size					EDP Number				
		AxB (mm)	T (mm)	R (mm)	b (mm)	Aa Max (mm)	XC3025	XP3035	XP2040	XC1015	XC5040
SNKU1505AZER-GM	8	15.88 x 15.88	7.18	1.0	3.65	6.5	7819061	7814061	7813061	-	-
SNKU1505AZER-GR							-	-	-	7812060	-
SNKU1505AZER-SM							-	-	-	-	52700006

Packed: 10 pcs.



List 7808H

PAS Accessories

Appearance	EDP No.	Designation	Applicable Cutter		Recommended Tightening Torque
			(mm)	(inch)	
 Clamping Screw	7808131	FS45513P (M4.5 x 13, Torx 20IP)	PAS BORE Ø50-125	PAS BORE Ø2-6"	5.0 Nm
 Wrench	7808000	20IP-T (Torx 20IP)	PAS BORE Ø50-125	PAS BORE Ø2-6"	

Packed: Clamping Screws = 10 pcs.; Wrench = 1 pc.
Note: Wrench sold separately.





Cutting Conditions

Work Material		Tensile Strength - Hardness	Insert Size		
			SNKU15...		
			Face Milling		
			Milling Speed V _c (SFM)	Feed Per Tooth f _z (in/t)	Depth of Cut A _a (in)
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	590 (330 - 820)	0.007 (0.006 - 0.014)	0.120
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (330 - 820)	0.007 (0.006 - 0.014)	0.120
	Die Steels (H13, D2)	~280 HB	495 (260 - 655)	0.006 (0.004 - 0.012)	0.120
M	Stainless Steels (304, 420)	~250 HB	395 (260 - 590)	0.005 (0.003 - 0.010)	0.120
K	Cast Iron (No. 35 B)	~300 N/mm ²	590 (330 - 1150)	0.008 (0.006 - 0.014)	0.160
	Ductile Cast Iron (60-40-18)	~600 N/mm ²	590 (330 - 885)	0.008 (0.004 - 0.012)	0.120
S	Heat Resistant Alloys (Inconel 718)	-	115 (85 - 200)	0.004 (0.002 - 0.006)	0.040
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 400)	0.005 (0.003 - 0.008)	0.060
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	330 (195 - 495)	0.005 (0.003 - 0.008)	0.060
	Die Cast Steels (A2, S7)	43 - 48 HRC	260 (130 - 395)	0.004 (0.002 - 0.006)	0.020
	Hardened Steels (D2)	50 - 55 HRC	195 (130 - 295)	0.003 (0.002 - 0.006)	0.020

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XC3025	GM	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3035	GM	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2040	GM	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XC1015	GR	-			<input checked="" type="checkbox"/>			
XC5040	SM	Yes		<input type="checkbox"/>			<input checked="" type="checkbox"/>	

GM: Medium Cutting GR: Rough Cutting SM: Heat Resistant Alloy

good best





List 52800

PAO Bore (Inch)



SPEED
FEED
P1377








Recommended Materials: p1377
Accessories & Inserts: p1375-1376



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	Effective Dia. (inch)	No. of Teeth	Tool Height (inch)	Flange Dia. (inch)	Bore Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Applicable Insert
					D	D1		H	D2	d3	a	b	
52800000	Bore	Normal	PAO06R200A075-5	1	2.401	2.000	5	1.575	1.772	0.750	0.315	0.197	OZKU06... / XAHT06...
52800001			PAO06R250A075-7	2	2.901	2.500	7	1.575	1.968	0.750	0.315	0.197	
52800002			PAO06R300A100-8	2	3.401	3.000	8	1.968	2.362	1.000	0.375	0.236	
52800003			PAO06R400A125-10	3	4.401	4.000	10	1.968	2.756	1.250	0.500	0.315	
52800004			PAO06R500A150-12	3	5.401	5.000	12	2.480	3.543	1.500	0.625	0.394	
52800005		PAO06R600A150-13	3	6.401	6.000	13	2.480	3.740	1.500	0.625	0.394		
52800006		PAO06R400A125W-14	Close	4	4.401	4.000	14	1.968	2.756	1.250	0.500	0.315	
52800007		PAO06R500A150W-17		4	5.401	5.000	17	2.480	3.543	1.500	0.625	0.394	
52800008		PAO06R600A150W-20		4	6.401	6.000	20	2.480	3.740	1.500	0.625	0.394	
52800009	PAO06R800A250W-25	5		8.401	8.000	25	2.480	5.118	2.500	1.000	0.551		


Packed: 1pc.





List 78120

PAO Bore (Metric)




Recommended Materials: p1377
Accessories & Inserts: p1375-1376



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D	D1		H	D2	d3	a	b	
7802020	Bore	Normal	PAO06R050M22-5	1	60.2	50	5	40	45	22	10.4	6.3	OZKU06... / XAHT06...
7802021			PAO06R063M22-7	2	73.2	63	7	40	50	22	10.4	6.3	
7802022			PAO06R080M25.4-8	2	90.2	80	8	50	60	25.4	9.5	6	
7802023			PAO06R100M31.7-10	3	110.2	100	10	50	70	31.75	12.7	8	
7802024			PAO06R125M38.1-12	3	135.2	125	12	63	90	38.1	15.9	10	
7802089		PAO06R100M31.7W-14	4	110.2	100	14	50	70	31.75	12.7	8		
7802091		PAO06R125M38.1W-17	4	135.2	125	17	63	90	38.1	15.9	10		
7802093		PAO06R160M50.8W-20	4	170.2	160	20	63	100	50.8	19.0	11		
7802095		PAO06R200M47.6W-25	5	210.2	200	25	63	150	47.625	25.4	14		

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

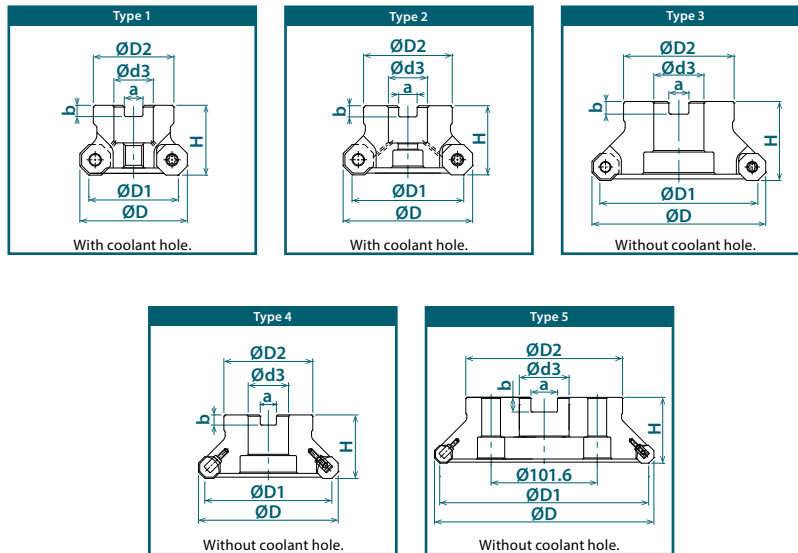



List 78PAO


PAO Inserts



Designation	No. of Cutting Edges	Insert Size							Aa Max (mm)	EDP Number								
		B (mm)	T (mm)	I (mm)	α	R (mm)	b (mm)	XC3020		XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XP1020	XC5040	
OZKU060508SR-GL	16	17.1	5.66	6	3°	0.8	2	3.5	7827063	7828063	7825063	7814063	7826063	7813063	-	-	-	
OZKU060508SR-GM									7827062	7828062	7825062	7814062	7826062	7813062	7812062	7821062	-	-
OZKU060508SR-GR									-	-	-	-	-	-	7812086	7821086	-	-
OZKU060508ER-SM									-	-	-	-	-	-	-	-	-	7816085
XAHT060525SR-GM	2	5.56	10	-	-	2.5	-	-	-	-	7814064	-	-	7812064	-	-		

Packed: 10 pcs.






Correct orientation of wiper insert:





List 7808H

PAO Accessories

Appearance	EDP No.	Designation	Applicable Cutter		Recommended Tightening Torque
			(mm)	(inch)	
 Clamping Screw	7808130	FS50614 (M5 x 14, Torx 20)	PAO BORE Ø50-125	PAO BORE Ø2-6"	5.0 Nm
 Power Screw	7808151	PS1031 (M10x31)	PAO BORE Ø50	PAO BORE Ø2"	20.0 Nm
 Wedge	7808141	W12F-06N (M6)	PAO BORE(W) Ø100-200	PAO BORE(W) Ø4-8"	
 Wedge Clamping Screw	7808140	WS0621T (M6x21)	PAO BORE(W) Ø100-200	PAO BORE(W) Ø4-8"	4.0 Nm
 Wrench	7808208	T15-D (Torx 15)	PAO BORE(W) Ø100-200	PAO BORE(W) Ø4-8"	
	7808209	T20-D (Torx 20)	PAO BORE Ø50-125	PAO BORE Ø2-6"	

Packed: Clamping Screws = 10 pcs.; Power Screw = 1 pc.; Wedge = 10 pcs.;
Wedge Clamping Screw = 10 pcs.; Wrench = 1 pc.
Note: Wrench sold separately.



Cutting Conditions

Work Material	Tensile Strength - Hardness	Insert Size			
		OZKU06... / XAHT06...			
		Face Milling			Depth of Cut Aa (in)
Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)				
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	590 (330 - 820)	0.010 (0.008 - 0.020)	0.080
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (330 - 820)	0.010 (0.008 - 0.020)	0.080
	Die Steels (H13, D2)	~280 HB	495 (260 - 655)	0.010 (0.006 - 0.016)	0.080
M	Stainless Steels (304, 420)	~250 HB	395 (260 - 590)	0.008 (0.006 - 0.016)	0.080
K	Cast Iron (No. 35 B)	~300 N/mm ²	655 (330 - 1150)	0.012 (0.008 - 0.020)	0.080
	Ductile Cast Iron (60-40-18)	~600 N/mm ²	590 (330 - 885)	0.011 (0.006 - 0.016)	0.080
S	Heat Resistant Alloys (718 Inconel)	-	115 (85 - 200)	0.005 (0.002 - 0.008)	0.040
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 400)	0.006 (0.004 - 0.010)	0.060
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	330 (195 - 495)	0.006 (0.004 - 0.010)	0.060
	Die Cast Steels (A2, S7)	43 - 48 HRC	260 (130 - 395)	0.005 (0.002 - 0.008)	0.020
	Hardened Steels (D2)	50 - 55 HRC	195 (130 - 295)	0.004 (0.002 - 0.008)	0.020

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XC3020	GL / GM	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3025	GL / GM	Yes	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XC3030	GL / GM	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3035	GL / GM	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2025	GL / GM	Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XP2040	GL / GM	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XC1015	GM / GR	-			<input checked="" type="checkbox"/> *			
XP1020	GM / GR	-			<input checked="" type="checkbox"/> **			
XC5040	SM	Yes		<input type="checkbox"/>			<input checked="" type="checkbox"/>	

GM: Medium Cutting GR: Rough Cutting SM: Heat Resistant Alloy

*: XC1015 best recommended for grey cast iron

** : XP1020 best recommended for ductile cast iron

good best



List 78013

PSE SA/FA (Inch)





Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Shank Dia. (inch)	Overall Length (inch)	Neck Length (inch)	Applicable Insert
					D		d	L	L1	
7801300	Cylindrical Shank Short	Normal	PSE11R063SA063-2S	1	0.625	2	0.625	3.543	0.984	ZD_T11...
7801301			PSE11R075SA075-3S	1	0.750	3	0.750	3.937	1.181	
7801302			PSE11R100SA100-3S	1	1.000	3	1.000	4.724	1.378	
7801303			PSE11R125SA125-3S	1	1.250	3	1.250	5.118	1.772	
7801304			PSE11R100SA100-4S	1	1.000	4	1.000	4.724	1.378	
7801305		Close	PSE11R125SA125-5S	1	1.250	5	1.250	5.118	1.772	
7801306			PSE15R100SA100-2S	1	1.000	2	1.000	4.724	1.378	
7801307			Normal	PSE15R125SA125-2S	1	1.250	2	1.250	5.118	1.772
7801308				PSE15R150SA125-3S	2	1.500	3	1.250	5.512	1.969
7801309				PSE15R125SA125-3S	1	1.250	3	1.250	5.118	1.772
7801310	Close	PSE15R150SA125-4S	2	1.500	4	1.250	5.512	1.969		
7801336		Cylindrical Shank Long	Normal	PSE11R063SA063-2L	1	0.625	2	0.625	5.906	1.969
7801337	PSE11R075SA075-3L			1	0.750	3	0.750	6.299	2.362	
7801338	PSE11R100SA100-3L			1	1.000	3	1.000	6.693	2.756	
7801339	Close		PSE11R125SA125-3L	1	1.250	3	1.250	7.480	3.543	ZD_T11...
7801340			PSE11R100SA100-4L	1	1.000	4	1.000	6.693	2.756	
7801341			PSE11R125SA125-5L	1	1.250	5	1.250	7.480	3.543	
7801342	Normal		PSE15R100SA100-2L	1	1.000	2	1.000	6.693	2.756	ZDKT15...
7801343			PSE15R125SA125-2L	1	1.250	2	1.250	7.480	3.543	
7801344			PSE15R150SA125-3L	2	1.500	3	1.250	7.480	1.969	
7801345	Close	PSE15R125SA125-3L	1	1.250	3	1.250	7.480	3.543	ZDKT15...	
7801346		PSE15R150SA125-4L	2	1.500	4	1.250	7.480	1.969		
7801320		Weldon Shank Short	Normal	PSE11R063FA063-2S	1	0.625	2	0.625		3.205
7801321	PSE11R075FA075-3S			1	0.750	3	0.750	3.583	1.551	
7801323	PSE11R100FA100-3S			1	1.000	3	1.000	3.831	1.551	
7801324	Close		PSE11R100FA100-4S	1	1.000	4	1.000	3.831	1.551	
7801325			PSE11R125FA125-5S	1	1.250	5	1.250	4.378	2.098	
7801330	Normal		PSE15R100FA100-2S	1	1.000	2	1.000	3.830	1.550	ZDKT15...
7801332			PSE15R125FA125-2S	1	1.250	2	1.250	4.380	2.100	
7801333	Close		PSE15R125FA125-3S	1	1.250	3	1.250	4.380	2.100	
7801334			PSE15R150FA125-3S	2	1.500	3	1.250	4.380	2.100	
7801335	Close		PSE15R150FA125-4S	2	1.500	4	1.250	4.380	2.100	
7801347		Weldon Shank Long	Normal	PSE11R063FA063-2L	1	0.625	2	0.625	3.874	1.969
7801348	PSE11R075FA075-3L			1	0.750	3	0.750	4.394	2.362	
7801349	PSE11R100FA100-3L			1	1.000	3	1.000	5.035	2.756	
7801350	Close		PSE11R100FA100-4L	1	1.000	4	1.000	5.035	2.756	ZD_T11...
7801351			PSE11R125FA125-5L	1	1.250	5	1.250	5.823	3.543	
7801352	Normal		PSE15R100FA100-2L	1	1.000	2	1.000	5.035	2.756	ZDKT15...
7801353			PSE15R125FA125-2L	1	1.250	2	1.250	5.823	3.543	
7801354			PSE15R125FA125-3L	1	1.250	3	1.250	5.823	3.543	
7801355	Close		PSE15R150FA125-3L	2	1.500	3	1.250	5.823	2.100	
7801356		PSE15R150FA125-4L	2	1.500	4	1.250	5.823	2.100		

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

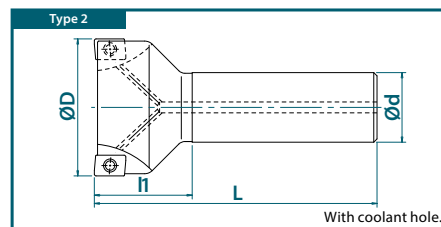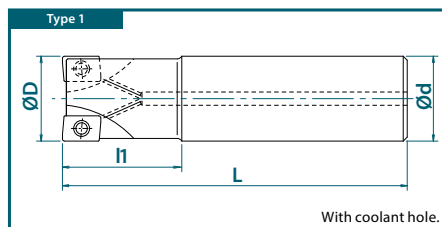



List 78011

PSE SS (Metric)



SPEED FEED
P1387

Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388





EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D		d	L	L1	
7801101	Cylindrical Shank Short	Normal	PSE11R020SS20-2S	1	20	2	20	100	30	ZD_T11...
7801102			PSE11R025SS25-3S	1	25	3	25	120	35	
7801103			PSE11R032SS32-3S	1	32	3	32	130	45	
7801100			PSE11R016SS16-2S	1	16	2	16	90	25	
7801116			PSE11R018SS16-2S	2	18	2	16	90	25	
7801115			PSE11R020SS20-3S	1	20	3	20	100	30	
7801117		PSE11R022SS20-3S	2	22	3	20	110	30		
7801104		PSE11R025SS25-4S	1	25	4	25	120	35		
7801118		PSE11R028SS25-4S	2	28	4	25	120	35		
7801119		PSE11R030SS32-4S	1	30	4	32	130	45		
7801105		PSE11R032SS32-5S	1	32	5	32	125	40		
7801120		PSE11R035SS32-5S	2	35	5	32	130	35		
7801121	Cylindrical Shank Long	Close	PSE11R016SS16-2L	1	16	2	16	150	50	
7801139			PSE11R017SS16-2L	2	17	2	16	150	25	
7801122			PSE11R018SS16-2L	2	18	2	16	150	25	
7801123			PSE11R020SS20-3L	1	20	3	20	160	60	
7801140			PSE11R021SS20-3L	2	21	3	20	160	30	
7801124			PSE11R022SS20-3L	2	22	3	20	160	30	
7801125		PSE11R025SS25-3L	1	25	3	25	170	70		
7801141		PSE11R026SS25-3L	2	26	3	25	170	35		
7801126		PSE11R028SS25-3L	2	28	3	25	170	35		
7801127		PSE11R030SS32-3L	1	30	3	32	190	90		
7801128		PSE11R032SS32-3L	1	32	3	32	190	90		
7801142		PSE11R033SS32-3L	2	33	3	32	190	35		
7801129	PSE11R035SS32-3L	2	35	3	32	190	35			
7801107	Cylindrical Shank Short	Normal	PSE15R032SS32-2S	1	32	2	32	130	45	
7801108			PSE15R040SS32-3S	2	40	3	32	140	50	
7801109			PSE15R050SS32-3S	2	50	3	32	130	45	
7801110			PSE15R063SS32-4S	2	63	4	32	130	45	
7801106			PSE15R025SS25-2S	1	25	2	25	120	35	
7801130			PSE15R028SS25-2S	2	28	2	25	120	35	
7801131		PSE15R030SS32-3S	1	30	3	32	130	45		
7801111		PSE15R032SS32-3S	1	32	3	32	130	45		
7801132		PSE15R035SS32-3S	2	35	3	32	130	35		
7801112		PSE15R040SS32-4S	2	40	4	32	140	50		
7801113		PSE15R050SS32-5S	2	50	5	32	130	45		
7801114		PSE15R063SS32-6S	2	63	6	32	130	45		

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

continued on next page

This item is stocked overseas. Please contact OSG for availability and delivery.

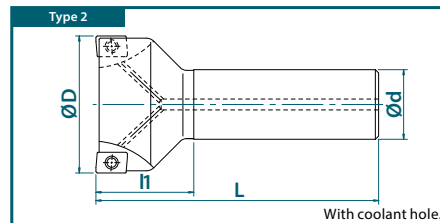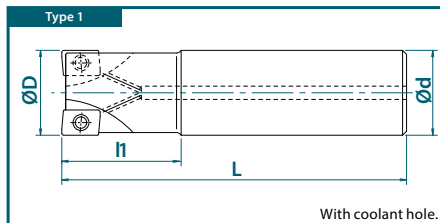

List 78011 (Continued)

PSE SS (Metric)



SPEED FEED
P1387

Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388





EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D		d	L	L1	
7801133	Cylindrical Shank Long	Close	PSE15R025SS25-2L	1	25	2	25	170	70	ZDKT15...
7801143			PSE15R026SS25-2L	2	26	2	25	170	35	
7801134			PSE15R028SS25-2L	2	28	2	25	170	35	
7801135			PSE15R030SS32-3L	1	30	3	32	190	90	
7801136			PSE15R032SS32-3L	1	32	3	32	190	90	
7801144			PSE15R033SS32-3L	2	33	3	32	190	45	
7801137			PSE15R035SS32-3L	2	35	3	32	190	45	
7801138		Normal	PSE15R040SS32-3L	2	40	3	32	190	45	

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

This item is stocked overseas. Please contact OSG for availability and delivery.

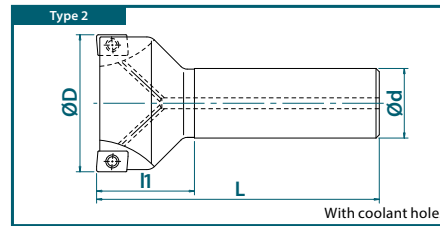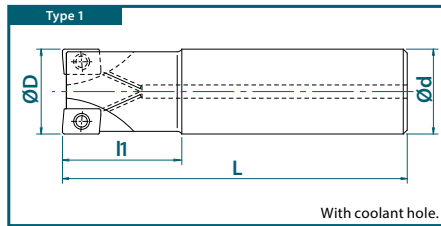



List 78012

PSE Bore (Inch)





Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Tool Height (inch)	Flange Dia. (inch)	Bore Hole Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Applicable Insert	
					D		H	D2	d3	a	b		
7801200	Bore	Normal	PSE11R200A075-5	2	2.000	5	1.575	1.772	0.750	0.315	0.197	ZD_T11...	
7801201			PSE11R250A075-6	2	2.500	6	1.575	1.968	0.750	0.315	0.197		
7801202			PSE11R300A100-7	2	3.000	7	1.968	2.362	1.000	0.375	0.236		
7801203			PSE11R200A075-7	2	2.000	7	1.575	1.772	0.750	0.315	0.197		
7801204			Close	PSE11R250A075-8	2	2.500	8	1.575	1.968	0.750	0.315		0.197
7801205				PSE11R300A100-10	2	3.000	10	1.968	2.362	1.000	0.375		0.236
7801206		Normal	PSE15R200A075-3	2	2.000	3	1.575	1.772	0.750	0.315	0.197	ZDKT15...	
7801207			PSE15R250A075-4	2	2.500	4	1.575	1.968	0.750	0.315	0.197		
7801208			PSE15R300A100-5	2	3.000	5	1.968	2.362	1.000	0.375	0.236		
7801209			PSE15R400A150-7	3	4.000	7	1.968	2.756	1.500	0.625	0.394		
7801210			PSE15R500A150-8	3	5.000	8	2.480	3.543	1.500	0.625	0.394		
7801216			PSE15R600A150-10	3	6.000	10	2.480	3.740	1.500	0.625	0.394		
7801211	Close	PSE15R200A075-5	2	2.000	5	1.575	1.772	0.750	0.315	0.197	ZDKT15...		
7801212		PSE15R250A075-6	2	2.500	6	1.575	1.968	0.750	0.315	0.197			
7801213		PSE15R300A100-8	2	3.000	8	1.968	2.362	1.000	0.375	0.236			
7801214		PSE15R400A150-10	3	4.000	10	1.968	2.756	1.500	0.625	0.394			
7801215		PSE15R500A150-11	3	5.000	11	2.480	3.543	1.500	0.625	0.394			
7801217		PSE15R600A150-12	3	6.000	12	2.480	3.740	1.500	0.625	0.394			

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).





List 78010

PSE Bore (Metric)



SPEED FEED
P1387



Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388






EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Hole Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert		
					D		H	D2	d3	a	b			
7801000	Bore	Normal	PSE11R040M16-4	1	40	4	40	38	16	8.4	5.6	ZD_T11...		
7801001			PSE11R050M22-5	1	50	5	40	45	22	10.4	6.3			
7801002			PSE11R063M22-6	2	63	6	40	50	22	10.4	6.3			
7801003			PSE11R080M27-7	2	80	7	50	60	27	12.4	7			
7801020			PSE11R080M25.4-7	2	80	7	50	60	25.4	9.5	6			
7801004			PSE11R040M16-6	1	40	6	40	38	16	8.4	5.6			
7801005			PSE11R050M22-7	1	50	7	40	45	22	10.4	6.3			
7801006			PSE11R063M22-8	2	63	8	40	50	22	10.4	6.3			
7801007			PSE11R080M27-10	2	80	10	50	60	27	12.4	7			
7801021			PSE11R080M25.4-10	2	80	10	50	60	25.4	9.5	6			
7801008		Close	PSE15R040M16-3	1	40	3	40	38	16	8.4	5.6	ZDKT15...		
7801009			PSE15R050M22-3	1	50	3	40	45	22	10.4	6.3			
7801010			PSE15R063M22-4	2	63	4	40	50	22	10.4	6.3			
7801011			PSE15R080M27-5	2	80	5	50	60	27	12.4	7			
7801022			PSE15R080M25.4-5	2	80	5	50	60	25.4	9.5	6			
7801012			PSE15R100M32-7	2	100	7	50	70	32	14.4	8			
7801023			PSE15R100M31.7-7	3	100	7	50	70	31.75	12.7	8			
7801024			PSE15R125M38.1-8	3	125	8	63	90	38.1	15.9	10			
7801014			Normal	PSE15R040M16-4	1	40	4	40	38	16	8.4		5.6	ZDKT15...
7801015				PSE15R050M22-5	1	50	5	40	45	22	10.4		6.3	
7801016		PSE15R063M22-6		2	63	6	40	50	22	10.4	6.3			
7801017		PSE15R080M27-8		2	80	8	50	60	27	12.4	7			
7801025		PSE15R080M25.4-8		2	80	8	50	60	25.4	9.5	6			
7801018		PSE15R100M32-10		2	100	10	50	70	32	14.4	8			
7801026		PSE15R100M31.7-10		3	100	10	50	70	31.75	12.7	8			
7801027		PSE15R125M38.1-11		3	125	11	63	90	38.1	15.9	10			
7801015		Close	PSE15R040M16-4	1	40	4	40	38	16	8.4	5.6	ZDKT15...		
7801016			PSE15R050M22-5	1	50	5	40	45	22	10.4	6.3			
7801017	PSE15R063M22-6		2	63	6	40	50	22	10.4	6.3				
7801018	PSE15R080M27-8		2	80	8	50	60	27	12.4	7				
7801025	PSE15R080M25.4-8		2	80	8	50	60	25.4	9.5	6				
7801019	PSE15R100M32-10		2	100	10	50	70	32	14.4	8				
7801020	PSE15R100M31.7-10		3	100	10	50	70	31.75	12.7	8				
7801021	PSE15R125M38.1-11		3	125	11	63	90	38.1	15.9	10				

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

This item is stocked overseas. Please contact OSG for availability and delivery.






List 52601

PSE ASF (Inch)



Recommended Materials: p1387
 Accessories & Inserts: p1385-1386
 Maximum Ramping Angle: p1388
 SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D		Da	Dg	L	D2		
52601000	Screw Fit Head	PSE11R063ASF8-2	0.625	2	0.335	M8	1.063	0.571	10	ZD_T11...
52601001		PSE11R075ASF10-3	0.750	3	0.413	M10	1.299	0.709	14	
52601002		PSE11R100ASF12-3	1.000	3	0.492	M12	1.378	0.905	17	
52601003		PSE11R125ASF16-3	1.250	3	0.669	M16	1.575	1.102	22	ZDKT15...
52601004		PSE15R100ASF12-2	1.000	2	0.492	M12	1.378	0.905	17	
52601005		PSE15R125ASF16-3	1.250	3	0.669	M16	1.575	1.102	22	
52601006	PSE15R150ASF16-4	1.500	4	0.669	M16	1.575	1.102	22		

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).






List 78016

PSE SF (Metric)



Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D		Da	Dg	L	D2		
7801600	Screw Fit Head	PSE11R016SF8-2	16	2	8.5	M8	27	14.5	10	ZD_T11...
7801612		PSE11R017SF8-2	17	2	8.5	M8	27	14.5	10	
7801613		PSE11R018SF8-2	18	2	8.5	M8	27	14.5	10	
7801601		PSE11R020SF10-3	20	3	10.5	M10	33	18	14	
7801614		PSE11R021SF10-3	21	3	10.5	M10	33	18	14	
7801615		PSE11R022SF10-3	22	3	10.5	M10	33	18	14	
7801602		PSE11R025SF12-4	25	4	12.5	M12	35	23	17	
7801616		PSE11R026SF12-3	26	3	12.5	M12	35	23	17	
7801603		PSE11R028SF12-4	28	4	12.5	M12	35	23	17	
7801604		PSE11R032SF16-5	32	5	17	M16	40	28	22	
7801617		PSE11R033SF16-3	33	3	17	M16	40	28	22	
7801605		PSE11R035SF16-5	35	5	17	M16	40	28	22	
7801606		PSE11R040SF16-6	40	6	17	M16	40	28	22	
7801607		PSE15R025SF12-2	25	2	12.5	M12	35	23	17	
7801618		PSE15R026SF12-2	26	2	12.5	M12	35	23	17	
7801608		PSE15R028SF12-2	28	2	12.5	M12	35	23	17	
7801609		PSE15R032SF16-3	32	3	17	M16	40	28	22	
7801619		PSE15R033SF16-3	33	3	17	M16	40	28	22	
7801610	PSE15R035SF16-3	35	3	17	M16	40	28	22		
7801611	PSE15R040SF16-4	40	4	17	M16	40	28	22		
										ZDKT15...

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected.

The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).


This item is stocked overseas. Please contact OSG for availability and delivery.





List 78PSE

PSE/PSEL Inserts



Designation	No. of Cutting Edges	Insert Size						EDP Number															
		AxB (mm)	T (mm)	α	R (mm)	b (mm)	Aa Max (mm)	CK010	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040	XP6015					
ZDKT11T302FR-NM	2	11x6.8	3.8	15°	0.2	2.0	10	7811048	-	-	-	-	-	-	-	-	-	-	-				
ZDKT11T304FR-NM					0.4	1.8		7811049	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDKT11T308FR-NM					0.8	1.4		7811023	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T302FR-NM					0.2	2.0		7811010	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T304FR-NM					0.4	1.8		7811024	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T308FR-NM					0.8	1.4		7811014	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T312FR-NM					1.2	1.4		7811015	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T316FR-NM					1.6	1.4		7811017	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T320FR-NM					2.0	1.4		7811018	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T325FR-NM					2.5	1.4		7811019	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T332FR-NM					3.2	0.8		7811020	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T340FR-NM					4.0	-		7811021	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T350FR-NM			5.0	-	7811022	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
ZDKT11T304SR-GL			0.4	1.8	-	-	-	7825024	7814024	-	-	-	-	-	-	-	-	-	-	-			
ZDKT11T308SR-GL			0.8	1.4	-	-	-	-	-	7827026	7828026	7825026	7814026	7826026	7813026	-	-	-	-	-			
ZDKT11T312SR-GL			1.2	1.0	-	-	-	-	-	-	-	-	-	-	7813034	-	-	-	-	-			
ZDKT11T320SR-GL			2.0	2.1	-	-	-	7825035	7814035	-	-	-	-	-	7813035	-	-	-	-	-			
ZDKT11T332SR-GL			3.2	1.5	-	-	-	-	-	-	-	-	-	-	7813036	-	-	-	-	-			
ZDKT11T304SR-GM			0.4	1.8	-	-	-	-	-	7827025	7828025	7825025	7814025	7826025	7813025	7812025	-	-	-	-			
ZDKT11T308SR-GM			0.8	1.4	-	-	-	-	-	7827032	7828032	7825032	7814032	7826032	7813032	-	-	-	-	-			
ZDKT11T312SR-GM			1.2	1.0	-	-	-	-	-	-	-	-	7814053	-	7813053	-	-	-	-	-			
ZDKT11T320SR-GM			2.0	2.1	-	-	-	-	-	-	-	-	7814038	-	7813038	-	-	-	-	-			
ZDKT11T325SR-GM			2.5	1.6	-	-	-	7825039	7814039	-	-	-	-	-	-	-	-	-	-	-			
ZDKT11T330SR-GM			3.0	1.5	-	-	-	-	-	-	-	-	7814054	-	7813054	-	-	-	-	-			
ZDKT11T340SR-GM			4.0	-	-	-	-	-	-	-	-	-	7814055	-	7813055	-	-	-	-	-			
ZDKT11T308SR-GR			0.8	1.4	-	-	-	-	-	7827033	7828033	7825033	7814033	-	7813033	7812033	-	-	-	-			
ZDKT11T308SR-HR			0.8	1.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7824035			
ZDKT11T304ER-SM			0.4	1.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816034	-			
ZDKT11T308ER-SM			0.8	1.4	-	-	-	-	-	-	-	-	-	-	-	7815031	7816031	-	-	-			
ZDKT11T312ER-SM			1.2	1.1	-	-	-	-	-	-	-	-	-	-	-	-	7816040	-	-	-			
ZDKT11T316ER-SM			1.6	0.8	-	-	-	-	-	-	-	-	-	-	-	7815027	7816027	-	-	-			
ZDKT11T320ER-SM			2.0	0.3	-	-	-	-	-	-	-	-	-	-	-	-	-	7816041	-	-			
ZDKT11T325ER-SM			2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816042	-	-			
ZDKT11T332ER-SM			3.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816043	-	-			
ZDKT11T340ER-SM			4.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816044	-	-			
ZDKT150508FR-NM			2	15x9.3	5.56	14	0.8	1.6	14	7811046	-	-	-	-	-	-	-	-	-	-	-		
ZDKT150508SR-GL	0.8	1.6					-	7827057		7828057	7825057	7814057	7826057	7813057	-	-	-	-	-	-	-	-	
ZDKT150508SR-GM	0.8	1.6					-	7827028		7828028	7825029	7814029	7826029	7813028	7812029	-	-	-	-	-	-	-	
ZDKT150512SR-GM	1.2	1.2					-	-		-	-	7814077	-	7813077	-	-	-	-	-	-	-	-	-
ZDKT150516SR-GM	1.6	0.8					-	-		-	-	7814078	-	7813078	-	-	-	-	-	-	-	-	-
ZDKT150520SR-GM	2.0	2.1					-	-		-	-	7814079	-	7813079	-	-	-	-	-	-	-	-	-
ZDKT150530SR-GM	3.0	1.9					-	-		-	-	7814080	-	7813080	-	-	-	-	-	-	-	-	-
ZDKT150540SR-GM	4.0	1.1					-	-		-	-	7814081	-	7813081	-	-	-	-	-	-	-	-	-
ZDKT150550SR-GM	5.0	0.7					-	-		-	-	7814082	-	7813082	-	-	-	-	-	-	-	-	-
ZDKT150508SR-GR	0.8	1.6					-	-		-	-	-	7827058	7828058	7825058	7814058	-	7813058	7812058	-	-	-	-
ZDKT150508SR-HR	0.8	1.6					-	-		-	-	-	-	-	-	-	-	-	-	-	-	-	7824036
ZDKT150508ER-SM	0.8	1.6					-	-		-	-	-	-	-	-	-	-	-	7815056	7816056	-	-	-




Packed: 10 pcs.





List 7808H

PSE Accessories

Appearance	EDP No.	Designation	Applicable Insert	Applicable Cutter		Recommended Tightening Torque
				(mm)	(inch)	
	7808107	FS25656P (M2.5 x 5.6, Torx 8IP)	ZD_T11...	PSE SS/SF Ø16-35	PSE11 SA/FA/ASF Ø.625-1.25"	1.6 Nm
	7808109	FS25673P (M2.5 x 7.3, Torx 8IP)		PSE BORE Ø40-80	PSE11 BORE Ø2-3"	1.6 Nm
	7808115	FS35686P (M3.5 x 8.6, Torx 15IP)	ZDKT15...	PSE SS/SF Ø25-63 PSE BORE Ø40-125	PSE SA/FA/ASF Ø1-1.5" PSE15 BORE Ø2-6"	3.2 Nm
	7808150	PS0830 (M8x30)	ZD_T11... ZDKT15...	PSE BORE Ø40	n/a	15.0 Nm
	7808151	PS1031 (M10x31)	ZD_T11... ZDKT15...	PSE BORE Ø50	n/a	20.0 Nm
	7808225	8IP-D (Torx 8IP)	ZD_T11...	PSE SS/SF Ø16-35 PSE BORE Ø40-80	PSE11 SA/FA/ASF Ø.625-1.25" PSE11 BORE Ø2-3"	
	7808228	15IP-D (Torx 15IP)	ZDKT15...	PSE SS/SF Ø25-63 PSE BORE Ø40-125	PSE15 SA/FA/ASF Ø1-1.5" PSE15 BORE Ø2-6"	

Packed: Clamping Screws = 10 pcs.; Power Screw = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.



Cutting Conditions

Work Material		Tensile Strength - Hardness	Insert Size							
			ZD T11...				ZDKT15...			
			Side Milling Aa: 0.394" • Ar: 0.2D		Face Milling Aa: 0.118" • Ar: 1.0D		Side Milling Aa: 0.551" • Ar: 0.2D		Face Milling Aa: 0.197" • Ar: 1.0D	
			Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)	Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)	Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)	Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	590 (330 - 820)	0.010 (0.008 - 0.020)	590 (330 - 820)	0.005 (0.002 - 0.008)	590 (330 - 820)	0.012 (0.008 - 0.024)	590 (330 - 820)	0.006 (0.002 - 0.010)
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (330 - 820)	0.008 (0.006 - 0.016)	590 (330 - 820)	0.004 (0.002 - 0.008)	590 (330 - 820)	0.010 (0.006 - 0.020)	590 (330 - 820)	0.005 (0.002 - 0.008)
	Die Steels (H13, D2)	~280 HB	495 (260 - 655)	0.008 (0.006 - 0.016)	495 (260 - 655)	0.004 (0.002 - 0.007)	495 (260 - 655)	0.010 (0.006 - 0.020)	495 (260 - 655)	0.005 (0.002 - 0.008)
M	Stainless Steels(Dry) (304SS, 420SS)	~250 HB	495 (260 - 655)	0.007 (0.006 - 0.016)	495 (260 - 655)	0.004 (0.004 - 0.007)	495 (260 - 655)	0.008 (0.006 - 0.018)	495 (260 - 655)	0.005 (0.004 - 0.008)
	Stainless Steels(Wet) (304SS, 420SS)	~250 HB	260 (195 - 395)	0.007 (0.006 - 0.016)	260 (195 - 395)	0.004 (0.004 - 0.007)	260 (195 - 395)	0.008 (0.006 - 0.018)	260 (195 - 395)	0.005 (0.004 - 0.008)
K	Cast Iron (FC250)	~350 N/mm ²	590 (330 - 985)	0.010 (0.006 - 0.020)	590 (330 - 985)	0.005 (0.002 - 0.008)	590 (330 - 985)	0.012 (0.008 - 0.024)	590 (330 - 985)	0.006 (0.002 - 0.010)
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	590 (330 - 820)	0.006 (0.004 - 0.016)	590 (330 - 820)	0.005 (0.002 - 0.008)	590 (330 - 820)	0.008 (0.006 - 0.020)	590 (330 - 820)	0.006 (0.002 - 0.010)
N	Aluminum Alloys (6061, 7075)	~13% Si	985 (655 - 4920)	0.012 (0.008 - 0.020)	985 (655 - 4920)	0.006 (0.004 - 0.010)	985 (655 - 4920)	0.014 (0.008 - 0.024)	985 (655 - 4920)	0.007 (0.004 - 0.012)
S	Heat Resistant Alloys (Inconel 718)	-	115 (85 - 195)	0.006 (0.004 - 0.012)	115 (85 - 195)	0.004 (0.002 - 0.006)	115 (85 - 195)	0.008 (0.004 - 0.012)	115 (85 - 195)	0.004 (0.002 - 0.006)
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 395)	0.007 (0.004 - 0.014)	130 (100 - 395)	0.004 (0.004 - 0.010)	130 (100 - 395)	0.009 (0.004 - 0.014)	130 (100 - 395)	0.004 (0.004 - 0.010)
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	330 (130 - 495)	0.007 (0.004 - 0.012)	330 (130 - 495)	0.004 (0.003 - 0.008)	330 (130 - 495)	0.008 (0.004 - 0.014)	330 (130 - 495)	0.005 (0.003 - 0.010)
	Die Cast Steels (A2, S7)	43 - 48 HRC	260 (130 - 395)	0.005 (0.003 - 0.008)	260 (130 - 395)	0.003 (0.002 - 0.006)	260 (130 - 395)	0.006 (0.003 - 0.010)	260 (130 - 395)	0.004 (0.002 - 0.008)
	Hardened Steels (D2)	50 - 55 HRC	195 (130 - 295)	0.004 (0.002 - 0.008)	195 (130 - 295)	0.002 (0.002 - 0.004)	195 (130 - 295)	0.005 (0.002 - 0.008)	195 (130 - 295)	0.003 (0.002 - 0.005)

Recommended Materials by Application


Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
CK010	NM	Yes				<input checked="" type="checkbox"/>		
XC3020	GL / GM / GR	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3025	GL / GM / GR	Yes	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XC3030	GL / GM / GR	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3035	GL / GM / GR	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2025	GL / GM	Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XP2040	GL / GM / GR	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XC1015	GM / GR	-			<input checked="" type="checkbox"/>			
XC5035	SM	-		<input checked="" type="checkbox"/>				
		Yes		<input type="checkbox"/>			<input type="checkbox"/>	
XC5040	SM	Yes		<input type="checkbox"/>			<input checked="" type="checkbox"/>	
XP6015	HR	-	<input type="checkbox"/>		<input type="checkbox"/>			<input checked="" type="checkbox"/>

GL:Light Cutting GM:Medium Cutting GR:Rough Cutting NM:Aluminum SM:Heat Resistant Alloy HR: Hardened Steel

good best



Maximum Ramping Angle (E) & Helical Angle (P)

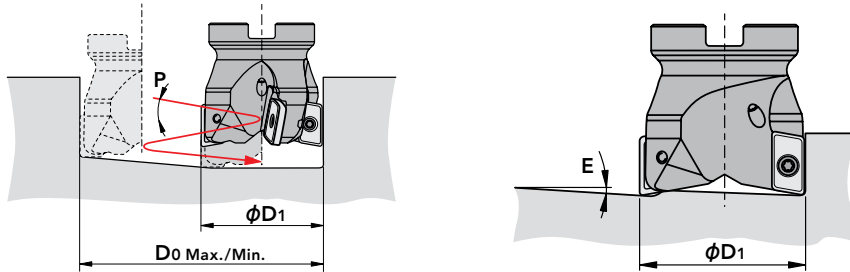

Insert Size	ZD_T11...				ZDKT15...			
Diameter (inch)	Ramping Angle	Helical Milling (inch)		Helical Angle	Ramping Angle	Helical Milling (inch)		Helical Angle
D1	E	D ₀ Min.	D ₀ Max.	P	E	D ₀ Min.	D ₀ Max.	P
0.625	10.8°	0.935	1.187	9.5°	-	-	-	-
0.750	9.8°	1.185	1.437	7.0°	-	-	-	-
1.000	7.4°	1.685	1.927	4.4°	9.5°	1.488	1.921	7.4°
1.250	4.8°	2.158	2.437	3.2°	6.8°	1.988	2.421	5.0°
1.500	2.9°	2.685	2.937	2.2°	5.1°	2.488	2.921	3.2°
2.000	2.1°	3.685	3.937	1.6°	2.4°	3.488	3.921	2.4°
2.500	1.8°	4.685	4.937	1.4°	2.3°	4.488	4.921	1.4°
3.000	1.4°	5.685	5.937	1.0°	2.0°	5.488	5.921	1.3°
4.000	-	-	-	-	1.4°	7.488	7.921	1.0°
5.000	-	-	-	-	0.8°	9.488	9.921	0.8°
6.000	-	-	-	-	0.7°	11.488	11.921	0.6°





List 53000

PSEL SA/FA (Inch)



Recommended Materials: p1395
Accessories & Inserts: p1392-1393





EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	No. of Inserts per Tooth	Total No. of Inserts	Length of Cut (inch)	Shank Dia. (inch)	Overall Length (inch)	Neck Length (inch)	Applicable Insert
					D				Lc	d	L	L1	
53000000	Cylindrical Shank Short	Normal	PSEL11R100SA100-2-27	1	1.000	2	3	6	1.063	1.000	4.921	1.968	ZD_T11...
53000001			PSEL11R125SA125-2-37	1	1.250	2	4	8	1.457	1.250	5.512	2.362	
53000002			PSEL11R125SA125-3-45	1	1.250	3	5	15	1.791	1.250	5.512	2.362	
53000003			PSEL11R150SA125-3-37	2	1.500	3	4	12	1.457	1.250	5.512	2.362	
53000004			PSEL11R150SA125-4-45	2	1.500	4	5	20	1.791	1.250	5.512	2.362	
53000005			PSEL15R150SA125-2-38	2	1.500	2	3	6	1.496	1.250	5.512	2.362	
53000006	Weldon Shank Short	Normal	PSEL11R100FA100-2-27	1	1.000	2	3	6	1.063	1.000	4.248	1.968	ZD_T11...
53000007			PSEL11R125FA125-2-37	1	1.250	2	4	8	1.457	1.250	4.642	2.362	
53000008			PSEL11R125FA125-3-45	1	1.250	3	5	15	1.791	1.250	4.642	2.362	
53000009			PSEL11R150FA125-3-37	2	1.500	3	4	12	1.457	1.250	4.642	2.362	
53000010			PSEL11R150FA125-4-45	2	1.500	4	5	20	1.791	1.250	4.642	2.362	
53000011			PSEL15R150FA125-2-38	2	1.500	2	3	6	1.496	1.250	4.642	2.362	

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected.

The body corner should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

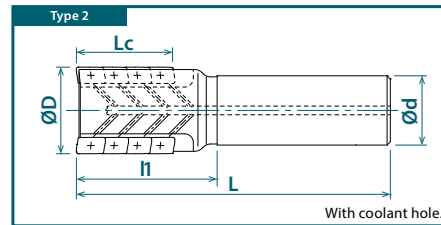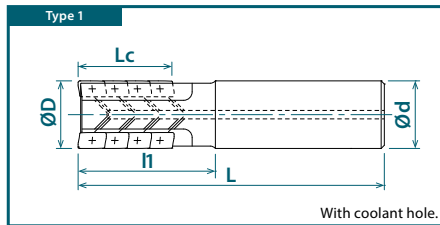



List 78029

PSEL SS (Metric)



Recommended Materials: p1395
Accessories & Inserts: p1392-1393





EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	No. of Inserts per Tooth	Total No. of Inserts	Length of Cut (mm)	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D				Lc	d	L	L1	
7802900	Cylindrical Shank	Normal	PSEL11R025SS25-2-27	1	25	2	3	6	27.0	25	125	50	ZD_T11...
7802901			PSEL11R032SS32-2-37	1	32	2	4	8	37.0	32	140	60	
7802902			PSEL11R032SS32-3-45	1	32	3	5	15	45.5	32	140	60	
7802903			PSEL11R040SS42-3-37	1	40	3	4	12	37.0	42	140	60	
7802904			PSEL11R040SS42-4-45	1	40	4	5	20	45.5	42	140	60	ZDKT15...
7802905			PSEL15R040SS42-2-38	1	40	2	3	6	38.0	42	140	60	
7802906			PSEL15R050SS42-3-50	2	50	3	4	12	50.5	42	144	64	

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

This item is stocked overseas. Please contact OSG for availability and delivery.

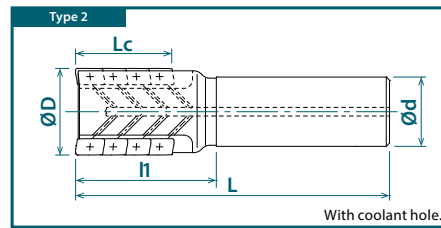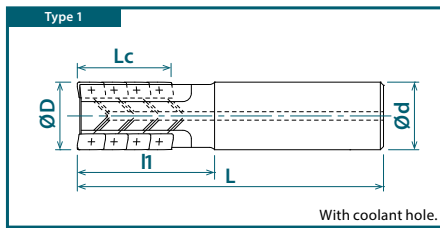



List 53001

PSEL Bore (Inch)



Recommended Materials: p1395
Accessories & Inserts: p1392-1393



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	No. of Inserts per Tooth	Total No. of Inserts	Length of Cut (inch)	Tool Height (inch)	Flange Dia. (inch)	Bore Hole Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Applicable Insert
					D				Lc	H	D2	d3	a	b	
53001000	Bore	Normal	PSEL15R200A075-3-50	1	2.000	3	4	12	1.988	2.913	1.772	0.750	0.315	0.197	ZDKT15...
53001001			PSEL15R250A100-4-50	1	2.500	4	4	16	1.988	2.913	2.362	1.000	0.375	0.236	
53001002			PSEL15R300A100-4-63	1	3.000	4	5	20	2.480	3.464	2.362	1.000	0.375	0.236	

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).



List 78028

PSEL Bore (Metric)



Recommended Materials: p1395
Accessories & Inserts: p1392-1393




EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	No. of Inserts per Tooth	Total No. of Inserts	Length of Cut (mm)	Tool Height (mm)	Flange Dia. (mm)	Bore Hole Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D				Lc	H	D2	d3	a	b	
7802850	Bore	Normal	PSEL15R050M22-3-50	1	50	3	4	12	50.5	74	45	22	10.4	6.3	ZDKT15...
7802851			PSEL15R063M27-3-50	1	63	3	4	12	50.5	74	60	27	12.4	7	
7802852			PSEL15R080M32-4-63	1	80	4	5	20	63	88	76	32	14.4	8	

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).


This item is stocked overseas. Please contact OSG for availability and delivery.





List 78PSE

PSE/PSEL Inserts



Designation	No. of Cutting Edges	Insert Size					EDP Number															
		AxB (mm)	T (mm)	α	R (mm)	b (mm)	Aa Max (mm)	CK010	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040	XP6015				
ZDKT11T302FR-NM	2	11x6.8	3.8	15°	0.2	2.0	7811048	-	-	-	-	-	-	-	-	-	-	-	-			
ZDKT11T304FR-NM					0.4	1.8	7811049	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDKT11T308FR-NM					0.8	1.4	7811023	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T302FR-NM					0.2	2.0	7811010	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T304FR-NM					0.4	1.8	7811024	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T308FR-NM					0.8	1.4	7811014	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T312FR-NM					1.2	1.4	7811015	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ZDHT11T316FR-NM			1.6		1.4	7811017	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDHT11T320FR-NM			2.0		1.4	7811018	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDHT11T325FR-NM			2.5		1.4	7811019	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDHT11T332FR-NM			3.2		0.8	7811020	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDHT11T340FR-NM			4.0		-	7811021	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDHT11T350FR-NM			5.0		-	7811022	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
ZDKT11T304SR-GL			0.4		1.8	-	-	-	7825024	7814024	-	-	-	-	-	-	-	-	-	-	-	
ZDKT11T308SR-GL		0.8	1.4	-	-	-	7827026	7828026	7825026	7814026	7826026	7813026	-	-	-	-	-	-	-			
ZDKT11T312SR-GL		1.2	1.0	-	-	-	-	-	-	-	-	7813034	-	-	-	-	-	-	-			
ZDKT11T320SR-GL		2.0	2.1	-	-	-	7825035	7814035	-	-	-	7813035	-	-	-	-	-	-	-			
ZDKT11T332SR-GL		3.2	1.5	-	-	-	-	-	-	-	-	7813036	-	-	-	-	-	-	-			
ZDKT11T304SR-GM		0.4	1.8	-	-	-	7827025	7828025	7825025	7814025	7826025	7813025	7812025	-	-	-	-	-	-			
ZDKT11T308SR-GM		0.8	1.4	-	-	-	7827032	7828032	7825032	7814032	7826032	7813032	-	-	-	-	-	-	-			
ZDKT11T312SR-GM		1.2	1.0	-	-	-	-	-	-	7814053	-	7813053	-	-	-	-	-	-	-			
ZDKT11T320SR-GM		2.0	2.1	-	-	-	-	-	-	7814038	-	7813038	-	-	-	-	-	-	-			
ZDKT11T325SR-GM		2.5	1.6	-	-	-	7825039	7814039	-	-	-	-	-	-	-	-	-	-	-			
ZDKT11T330SR-GM		3.0	1.5	-	-	-	-	-	-	7814054	-	7813054	-	-	-	-	-	-	-			
ZDKT11T340SR-GM		4.0	-	-	-	-	-	-	-	7814055	-	7813055	-	-	-	-	-	-	-			
ZDKT11T308SR-GR		0.8	1.4	-	-	-	7827033	7828033	7825033	7814033	-	7813033	7812033	-	-	-	-	-	-			
ZDKT11T308SR-HR		0.8	1.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7824035			
ZDKT11T304ER-SM		0.4	1.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816034	-			
ZDKT11T308ER-SM	0.8	1.4	-	-	-	-	-	-	-	-	-	-	7815031	7816031	-	-	-	-				
ZDKT11T312ER-SM	1.2	1.1	-	-	-	-	-	-	-	-	-	-	-	-	-	7816040	-	-				
ZDKT11T316ER-SM	1.6	0.8	-	-	-	-	-	-	-	-	-	-	7815027	7816027	-	-	-	-				
ZDKT11T320ER-SM	2.0	0.3	-	-	-	-	-	-	-	-	-	-	-	-	-	7816041	-	-				
ZDKT11T325ER-SM	2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816042	-	-				
ZDKT11T332ER-SM	3.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816043	-	-				
ZDKT11T340ER-SM	4.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7816044	-	-				
ZDKT150508FR-NM	0.8	1.6	-	-	-	7811046	-	-	-	-	-	-	-	-	-	-	-	-				
ZDKT150508SR-GL	0.8	1.6	-	-	-	7827057	7828057	7825057	7814057	7826057	7813057	-	-	-	-	-	-	-				
ZDKT150508SR-GM	0.8	1.6	-	-	-	7827028	7828028	7825029	7814029	7826029	7813028	7812029	-	-	-	-	-	-				
ZDKT150512SR-GM	1.2	1.2	-	-	-	-	-	-	7814077	-	7813077	-	-	-	-	-	-	-				
ZDKT150516SR-GM	1.6	0.8	-	-	-	-	-	-	7814078	-	7813078	-	-	-	-	-	-	-				
ZDKT150520SR-GM	2.0	2.1	-	-	-	-	-	-	7814079	-	7813079	-	-	-	-	-	-	-				
ZDKT150530SR-GM	3.0	1.9	-	-	-	-	-	-	7814080	-	7813080	-	-	-	-	-	-	-				
ZDKT150540SR-GM	4.0	1.1	-	-	-	-	-	-	7814081	-	7813081	-	-	-	-	-	-	-				
ZDKT150550SR-GM	5.0	0.7	-	-	-	-	-	-	7814082	-	7813082	-	-	-	-	-	-	-				
ZDKT150508SR-GR	0.8	1.6	-	-	-	7827058	7828058	7825058	7814058	-	7813058	7812058	-	-	-	-	-	-				
ZDKT150508SR-HR	0.8	1.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7824036				
ZDKT150508ER-SM	0.8	1.6	-	-	-	-	-	-	-	-	-	-	7815056	7816056	-	-	-	-				

Packed: 10 pcs.




Note: For the 2nd and subsequent steps, use an insert with R0.8 or smaller.





List 7808H

PSEL Accessories

Appearance	EDP No.	Designation	Applicable Insert	Applicable Cutter		Recommended Tightening Torque
				(mm)	(inch)	
 Clamping Screw	7808107	FS25656P (M2.5 x 5.6, Torx 8IP)	ZD_T11...	PSEL SS Ø25	PSEL11 SA/FA Ø1"	1.6 Nm
	7808109	FS25673P (M2.5 x 7.3, Torx 8IP)		PSEL SS Ø32-40	PSEL11 SA/FA Ø1.25-1.5"	1.6 Nm
	7808115	FS35686P (M3.5 x 8.6, Torx 15IP)	ZDKT15...	PSEL SS Ø40-50 PSEL BORE Ø50-80	PSEL15 SA/FA Ø1.5" PSEL BORE Ø2-3"	3.2 Nm
 Coolant Cap Bolt	7808132	OCB-M20-08		PSEL BORE Ø50	PSEL BORE Ø2"	
	7808133	OCB-M24-10		PSEL BORE Ø63	PSEL BORE Ø2.5"	
	7808134	OCB-M30-14		PSEL BORE Ø80	PSEL BORE Ø3"	
 Wrench	7808225	8IP-D (Torx 8IP)	ZD_T11...	PSEL SS Ø25-40	PSEL11 SA/FA Ø1-1.5"	
	7808228	15IP-D (Torx 15IP)	ZDKT15...	PSEL SS Ø40-50 PSEL BORE Ø50-80	PSEL15 SA/FA Ø1.5" PSEL BORE Ø2-3"	

Packed: Clamping Screws = 10 pcs.; Coolant Cap Bolt = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.





Cutting Conditions

Work Material		Tensile Strength - Hardness	Insert Size			
			ZD T11...		ZDKT15...	
			Side Milling Aa: 1.1-1.5D • Ar: 0.1D Max		Side Milling Aa: 1.1-1.5D • Ar: 0.1D Max	
			Milling Speed V _c (SFM)	Feed Per Tooth f _z (in/t)	Milling Speed V _c (SFM)	Feed Per Tooth f _z (in/t)
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	525 (330 - 655)	0.010 (0.008 - 0.016)	525 (330 - 655)	0.012 (0.008 - 0.016)
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	495 (330 - 655)	0.008 (0.006 - 0.012)	495 (330 - 655)	0.010 (0.006 - 0.012)
	Die Steels (H13, D2)	~280 HB	425 (260 - 590)	0.008 (0.006 - 0.012)	425 (260 - 590)	0.010 (0.006 - 0.012)
M	Stainless Steels(Dry) (304SS, 420SS)	~250 HB	495 (330 - 655)	0.005 (0.004 - 0.012)	495 (330 - 655)	0.006 (0.004 - 0.012)
	Stainless Steels(Wet) (304SS, 420SS)	~250 HB	260 (195 - 395)	0.005 (0.004 - 0.012)	260 (195 - 395)	0.006 (0.004 - 0.012)
K	Cast Iron (FC250)	~350 N/mm ²	525 (330 - 985)	0.008 (0.008 - 0.014)	525 (330 - 985)	0.010 (0.008 - 0.014)
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	525 (330 - 820)	0.006 (0.008 - 0.012)	525 (330 - 820)	0.008 (0.008 - 0.012)
N	Aluminum Alloys (6061, 7075)	~13% Si	985 (655 - 3280)	0.010 (0.004 - 0.016)	985 (655 - 3280)	0.012 (0.004 - 0.016)
S	Heat Resistant Alloys (Inconel 718)	-	115 (85 - 195)	0.006 (0.004 - 0.012)	115 (85 - 195)	0.007 (0.004 - 0.012)
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 395)	0.006 (0.004 - 0.012)	130 (100 - 395)	0.007 (0.004 - 0.012)
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	330 (130 - 495)	0.006 (0.004 - 0.012)	330 (130 - 495)	0.007 (0.004 - 0.012)
	Die Cast Steels (A2, S7)	43 - 48 HRC	195 (130 - 395)	0.005 (0.002 - 0.008)	195 (130 - 395)	0.006 (0.002 - 0.008)



Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
CK010	NM	Yes				<input type="checkbox"/>		
XC3020	GL / GM / GR	-	<input type="checkbox"/>		<input type="checkbox"/>			
XP3025	GL / GM / GR	Yes	<input type="checkbox"/>		<input type="checkbox"/>			
XC3030	GL / GM / GR	-	<input type="checkbox"/>		<input type="checkbox"/>			
XP3035	GL / GM / GR	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2025	GL / GM	Yes	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	
XP2040	GL / GM / GR	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	
XC1015	GM / GR	-			<input type="checkbox"/>			
XC5035	SM	-		<input type="checkbox"/>				
		Yes		<input type="checkbox"/>			<input type="checkbox"/>	
XC5040	SM	Yes		<input type="checkbox"/>			<input type="checkbox"/>	
XP6015	HR	-	<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>

GL:Light Cutting GM:Medium Cutting
GR: Rough Cutting NM:Aluminum
SM: Heat Resistant Alloy HR: Hardened Steel

good best

Cutting Conditions Adjustment Ratio

Depth of Cut Aa	Width of Cut Ar Max	Milling Speed Ratio	Feed Rate Ratio
< 0.2D	1D	0.8	0.5
0.25-0.3D	0.7D	0.8	0.6
0.4-0.5D	0.5D	0.9	0.7
0.6-0.7D	0.3D	0.9	0.8
0.8-1.0D	0.2D	1.0	0.9
1.1-1.5D	0.1D	1.0	1.0

Ex: For Ø1.250" PSEL with ZDKT11 inserts, Aa = 1.150",
side milling in 1050 carbon steel:
Vc = 492 SFM x 1.0 = 492 SFM
fz = 0.008 in/t x 0.9 = 0.007 in/t
Ar = 0.2 x 1.250" = 0.250" Max



List 52900

PSF SA/FA (Inch)



Recommended Materials: p1399
Accessories & Inserts: p1398




EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Shank Dia. (inch)	Overall Length (inch)	Neck Length (inch)	Applicable Insert
					D		d	L	L1	
52900000	Cylindrical Shank Short	Normal	PSF09R100SA100-3S	1	1.000	3	1.000	4.724	1.378	SD_T09...
52900001			PSF09R125SA125-4S	1	1.250	4	1.250	5.118	1.772	
52900002			PSF09R150SA125-5S	2	1.500	5	1.250	5.512	1.969	
52900004	Weldon Shank Short	Normal	PSF09R100FA100-3S	1	1.000	3	1.000	3.831	1.551	
52900005			PSF09R125FA125-4S	1	1.250	4	1.250	4.378	2.098	
52900006			PSF09R150FA125-5S	2	1.500	5	1.250	4.378	2.098	

Packed: 1 pc.



List 78030

PSF SS (Metric)





Recommended Materials: p1399
Accessories & Inserts: p1398



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D		d	L	L1	
7803001	Cylindrical Shank Short	Normal	PSF09R025SS25-3S	1	25	3	25	120	35	SD_T09...
7803002			PSF09R032SS32-4S	1	32	4	32	130	45	
7803003			PSF09R040SS32-5S	2	40	5	32	140	50	

Packed: 1 pc.


Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

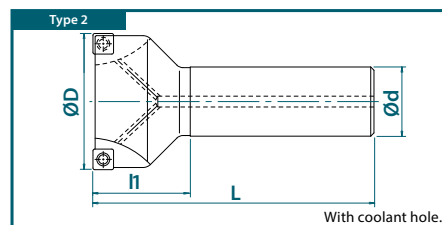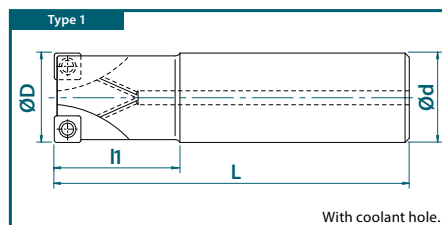



List 52901

PSF Bore (Inch)



Recommended Materials: p1399
Accessories & Inserts: p1398



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Tool Height (inch)	Flange Dia. (inch)	Bore Hole Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Applicable Insert
					D		H	D2	d3	a	b	
52901000	Bore	Normal	PSF09R200A075-6	1	2.000	6	1.575	1.772	0.750	0.315	0.197	SD_T09...
52901001			PSF09R250A075-7	1	2.500	7	1.575	1.968	0.750	0.315	0.197	
52901002			PSF09R300A100-9	1	3.000	9	1.968	2.362	1.000	0.375	0.236	

Packed: 1 pc.



List 78130

PSF Bore (Metric)




Recommended Materials: p1399
Accessories & Inserts: p1398



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Hole Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D		H	D2	d3	a	b	
7803011	Bore	Normal	PSF09R050M22-6	1	50	6	40	45	22	10.4	6.3	SD_T09...
7803012			PSF09R063M22-7	1	63	7	40	50	22	10.4	6.3	
7803013			PSF09R080M25.4-9	1	80	9	50	60	25.4	9.5	6	

Packed: 1 pc.


Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**





List 78PSF

PSF/PSFL Inserts



Designation	No. of Cutting Edges	Insert Size					EDP Number					
		AxB (mm)	T (mm)	α	R (mm)	b (mm)	CK010	XC3030	XP3035	XP2040	XC1015	XC5040
SDHT09T308FR-NM	4	9.07 x 9.07	3.97	15°	0.8	2.5	7811076	-	-	-	-	-
SDKT09T308SR-GL							7825073	7814073	7813073	-	7816073	
SDKT09T308SR-GM							7825074	7814074	7813074	-	-	
SDKT09T308SR-GR							-	-	-	7812075	-	
SDHT120508FR-NM							-	-	-	-	-	
SDKT120508SR-GL		12.38 x 12.38	5	1.2	7811625	-	-	7813623	-	7816620		
SDKT120508SR-GM					-	7825622	7814621	-	-			
SDKT120508SR-GR					-	-	-	-	7812624	-		
-					-	-	-	-	-	-		
-					-	-	-	-	-	-		

Packed: 10 pcs.



List 7808H

PSF Accessories

Appearance	EDP No.	Designation	Applicable Cutter		Recommended Tightening Torque
			(mm)	(inch)	
Clamping Screw	7808110	FS30573 (M3 x 7.3, Torx 8)	PSF SS Ø25-40 PSF BORE Ø50-80	PSF SA/FA Ø1-1.5" PSF BORE Ø2-3"	1.6 Nm
Wrench	7808205	T8-D (Torx 8)	PSF SS Ø25-40 PSF BORE Ø50-80	PSF SA/FA Ø1-1.5" PSF BORE Ø2-3"	

Packed: Clamping Screws = 10 pcs.; Wrench = 1 pc.
Note: Wrench sold separately.



Cutting Conditions

Work Material		Tensile Strength – Hardness	Insert Size		
			SD T09...		
			Face Milling • Side Milling		
			Milling Speed Vc (SFM)	Feed Per Tooth fz(in/t)	Depth of Cut Aa (in)
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	590 (330 - 820)	0.005 (0.002 - 0.008)	0.120
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (330 - 820)	0.005 (0.002 - 0.008)	0.120
	Die Steels (H13, D2)	~280 HB	495 (260 - 655)	0.004 (0.002 - 0.007)	0.120
M	Stainless Steels(Dry) (304SS, 420SS)	~250 HB	495 (260 - 655)	0.004 (0.002 - 0.007)	0.080
	Stainless Steels(Wet) (304SS, 420SS)	~250 HB	260 (195 - 395)	0.004 (0.002 - 0.007)	0.080
K	Cast Iron (FC250)	~350 N/mm ²	590 (330 - 1150)	0.005 (0.002 - 0.008)	0.120
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	590 (330 - 885)	0.005 (0.002 - 0.008)	0.120
N	Aluminum Alloys (6061, 7075)	~13% Si	985 (655 - 4920)	0.006 (0.004 - 0.010)	0.120
S	Heat Resistant Alloys (Inconel 718)	-	115 (85 - 195)	0.004 (0.002 - 0.006)	0.060
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 395)	0.004 (0.002 - 0.007)	0.060
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	295 (130 - 495)	0.004 (0.003 - 0.008)	0.060
	Die Cast Steels (A2, S7)	43 - 48 HRC	230 (130 - 395)	0.003 (0.002 - 0.006)	0.020
	Hardened Steels (D2)	50 - 55 HRC	165 (130 - 295)	0.002 (0.002 - 0.004)	0.020

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
CK010	NM	Yes				<input type="checkbox"/>		
XC3030	GL/GM	-	<input type="checkbox"/>		<input type="checkbox"/>			
XP3035	GL/GM	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2040	GL/GM	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		
XC1015	GR	-			<input type="checkbox"/>			
XC5040	GL	Yes		<input type="checkbox"/>			<input type="checkbox"/>	

GL:Light Cutting GM:Medium Cutting GR: Rough Cutting NM:Aluminum

good best



List 53200

PSFL SA/FA (Inch)



Recommended Materials: p1403
Accessories & Inserts: p1402



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	No. of Inserts Per Tooth	Total No. of Inserts	Length of Cut (inch)	Shank Dia. (inch)	Overall Length (inch)	Neck Length (inch)	Applicable Insert
					D				Lc	d	L	L1	
53200000	Cylindrical Shank	Normal	PSFL09R125SA125-2-36	1	1.250	2	5	10	1.417	1.250	5.512	2.362	SD_T09...
53200001			PSFL09R150SA125-3-43	2	1.500	3	6	18	1.693	1.250	5.512	2.362	
53200002	Weldon Shank	Normal	PSFL09R125FA125-2-36	1	1.250	2	5	10	1.417	1.250	4.642	2.362	
53200003			PSFL09R150FA125-3-43	2	1.500	3	6	18	1.693	1.250	4.642	2.362	

Packed: 1 pc.



List 78037

PSFL SS (Metric)





Recommended Materials: p1403
Accessories & Inserts: p1402



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	No. of Inserts Per Tooth	Total No. of Inserts	Length of Cut (mm)	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D				Lc	d	L	L1	
7803700	Cylindrical Shank	Normal	PSFL09R032SS32-2-36	1	32	2	5	10	36	32	140	60	SD_T09...
7803701			PSFL09R040SS42-3-43	1	40	3	6	18	43	42	140	60	

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

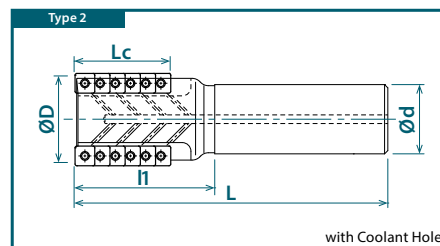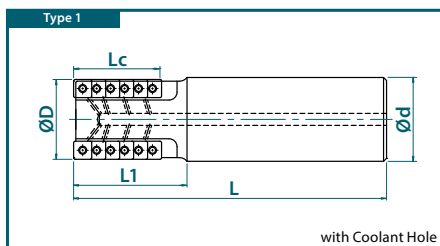



List 53201

PSFL Bore (Inch)



Recommended Materials: p1403
Accessories & Inserts: p1402



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	No. of Inserts Per Tooth	Total No. of Inserts	Length of Cut (inch)	Tool Height (inch)	Flange Dia. (Inch)	Bore Dia. (Inch)	Keyway Width (Inch)	Keyway Depth (Inch)	Applicable Insert
					D				Lc	H	D2	d3	a	b	
53201000	Bore	Normal	PSFL09R200A075-4-57	1	2.000	4	8	32	2.244	3.000	1.941	0.750	0.315	0.197	SD_T09...
53201001			PSFL09R200A075-4-78	1	2.000	4	11	44	3.071	4.000	1.941	0.750	0.315	0.197	
53201002			PSFL12R250A100-4-70	1	2.500	4	7	28	2.756	3.500	2.402	1.000	0.375	0.236	SD_T12...
53201003			PSFL12R250A100-4-110	1	2.500	4	11	44	4.331	5.000	2.402	1.000	0.375	0.236	
53201004			PSFL12R300A125-5-80	1	3.000	5	8	40	3.150	4.000	2.890	1.250	0.500	0.315	
53201005			PSFL12R300A125-5-120	1	3.000	5	12	60	4.724	5.500	2.890	1.250	0.500	0.315	
53201006			PSFL12R400A125-6-130	1	4.000	6	13	78	5.118	6.000	3.882	1.250	0.500	0.315	

Packed: 1 pc.



List 78137

PSFL Bore (Metric)




Recommended Materials: p1403
Accessories & Inserts: p1402



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	No. of Inserts Per Tooth	Total No. of Inserts	Length of Cut (mm)	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D				Lc	H	D2	d3	a	b	
7803702	Bore	Normal	PSFL09R050M22-4-50	1	50	4	7	28	50	75	48.5	22	10.4	6.3	SD_T09...
7803703			PSFL09R050M22-4-78	1	50	4	11	44	78	100	48.5	22	10.4	6.3	
7803706			PSFL12R063M27-4-60	1	63	4	6	24	60	85	60.5	27	12.4	7	SD_T12...
7803707			PSFL12R063M27-4-100	1	63	4	10	40	100	125	60.5	27	12.4	7	
7803708			PSFL12R080M32-5-70	1	80	5	7	35	70	95	77.3	32	14.4	8	
7803709			PSFL12R080M32-5-110	1	80	5	11	55	110	143	77.3	32	14.4	8	

Packed: 1 pc.


Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

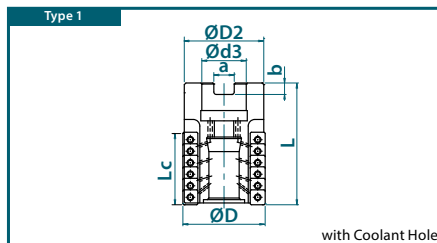



List 78PSF

PSF/PSFL Inserts



Designation	No. of Cutting Edges	Insert Size					EDP Number						
		AxB (mm)	T (mm)	α	R (mm)	b (mm)	CK010	XC3030	XP3035	XP2040	XC1015	XC5040	
SDHT09T308FR-NM	4	9.07 x 9.07	3.97	15°	0.8	2.5	7811076	-	-	-	-	-	
SDKT09T308SR-GL							-	7825073	7814073	7813073	-	7816073	
SDKT09T308SR-GM							-	7825074	7814074	7813074	-	-	
SDKT09T308SR-GR							-	-	-	-	7812075	-	
SDHT120508FR-NM		12.38 x 12.38	5			1.2	7811625	-	-	-	-	-	-
SDKT120508SR-GL							-	-	7813623	-	7816620		
SDKT120508SR-GM							-	7825622	7814621	-	-		
SDKT120508SR-GR							-	-	-	-	7812624	-	

Packed: 10 pcs.



List 7808H

PSFL Accessories

Appearance	EDP No.	Designation	Applicable Insert	Applicable Cutter		Recommended Tightening Torque
				(mm)	(inch)	
	7808110	FS30573 (M3 x 7.3, Torx 8)	SD_T09...	PSFL SS Ø32-40 PSFL BORE Ø50	PSFL SA/FA Ø1.25-1.5" PSFL BORE Ø2"	1.6 Nm
	7808129	FS40511 (M4 x 11, Torx 15)	SD_T12...	PSFL BORE Ø63-80	PSFL BORE Ø2.5-4"	5.0 Nm
	7808132	OCB-M20-08		PSFL BORE Ø50	PSFL BORE Ø2"	
	7808133	OCB-M24-10		PSFL BORE Ø63	PSFL BORE Ø2.5"	
	7808134	OCB-M30-14		PSFL BORE Ø80	PSFL BORE Ø3-4"	
	7808205	T8-D (Torx 8)	SD_T09...	PSFL SS Ø32-40 PSFL BORE Ø50	PSFL SA/FA Ø1.25-1.5" PSFL BORE Ø2"	
	7808208	T15-D (Torx 15)	SD_T12...	PSFL BORE Ø63-80	PSFL BORE Ø2.5-4"	

Packed: Clamping Screws = 10 pcs.; Coolant Cap Bolt = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.



Cutting Conditions

Work Material		Tensile Strength – Hardness	Insert Size		Insert Size	
			SD_T09...		SD_T12...	
			Face Milling • Side Milling		Face Milling • Side Milling	
			Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)	Milling Speed Vc (SFM)	Feed Per Tooth fz (in/t)
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	525 (330 - 655)	0.010 (0.008 - 0.016)	525 (330 - 655)	0.012 (0.008 - 0.016)
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	495 (330 - 655)	0.008 (0.006 - 0.012)	495 (330 - 655)	0.010 (0.006 - 0.012)
	Die Steels (H13, D2)	~280 HB	425 (265 - 590)	0.008 (0.006 - 0.012)	425 (265 - 590)	0.010 (0.006 - 0.012)
M	Stainless Steels(Dry) (304SS, 420SS)	~250 HB	495 (330 - 655)	0.005 (0.004 - 0.012)	495 (330 - 655)	0.006 (0.004 - 0.012)
	Stainless Steels(Wet) (304SS, 420SS)	~250 HB	265 (200 - 395)	0.005 (0.004 - 0.012)	265 (200 - 395)	0.006 (0.004 - 0.012)
K	Cast Iron (FC250)	~350 N/mm ²	525 (330 - 985)	0.008 (0.006 - 0.014)	525 (330 - 985)	0.010 (0.008 - 0.016)
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	525 (330 - 820)	0.008 (0.006 - 0.012)	525 (330 - 820)	0.008 (0.006 - 0.014)
N	Aluminum Alloys (6061, 7075)	~13% Si	985 (655 - 3280)	0.010 (0.004 - 0.016)	985 (655 - 3280)	0.012 (0.004 - 0.016)
S	Heat Resistant Alloys (Inconel 718)	-	115 (85 - 195)	0.006 (0.003 - 0.012)	115 (85 - 195)	0.007 (0.004 - 0.012)
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 395)	0.006 (0.003 - 0.012)	130 (100 - 395)	0.007 (0.004 - 0.012)
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	330 (130 - 490)	0.006 (0.003 - 0.012)	330 (130 - 490)	0.007 (0.004 - 0.012)
	Die Cast Steels (A2, S7)	43 - 48 HRC	200 (130 - 395)	0.005 (0.002 - 0.008)	200 (130 - 395)	0.006 (0.002 - 0.012)
	Hardened Steels (D2)	50 - 55 HRC	165 (130 - 295)	0.004 (0.002 - 0.006)	165 (130 - 295)	0.004 (0.002 - 0.006)

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
CK010	NM	Yes				<input checked="" type="checkbox"/>		
XC3030	GL/GM	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3035	GL/GM	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2040	GL/GM	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XC1015	GR	-			<input checked="" type="checkbox"/>			
XC5040	GL	Yes		<input type="checkbox"/>			<input checked="" type="checkbox"/>	

GL:Light Cutting GM:Medium Cutting GR: Rough Cutting NM:Aluminum

good best

Cutting Conditions Adjustment Ratio

Depth of Cut	Width of Cut	Milling Speed Ratio	Feed Rate Ratio
Aa	Ar Max		
< 0.2D	1D	0.8	0.5
0.25-0.3D	0.7D	0.8	0.6
0.4-0.5D	0.5D	0.9	0.7
0.6-0.7D	0.3D	0.9	0.8
0.8-1.0D	0.2D	1.0	0.9
1.1-1.5D	0.1D	1.0	1.0

Ex: For Ø1.250" PSFL with SDMT09 inserts, Aa = 1.150", side milling in 1050 carbon steel:
Vc = 495 SFM x 1.0 = 495 SFM
fz = 0.008 in/t x 0.9 = 0.007 in/t
Ar = 0.2 x 1.250" = 0.250" Max



List 53100

PSTW Bore (Inch)




Recommended Materials: p1407
Accessories & Inserts: p1406



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	No. of Teeth	Tool Height (inch)	Flange Dia. (inch)	Bore Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Applicable Insert
					D		H	D2	d3	a	b	
53100000	Bore	Normal	PSTW12R200A075-3	1	2.000	3	1.575	1.772	0.750	0.315	0.197	TNKU12...
53100001			PSTW12R250A075-3	2	2.500	3	1.575	1.968	0.750	0.315	0.197	
53100002			PSTW12R300A100-5	2	3.000	5	1.968	2.362	1.000	0.375	0.236	
53100003			PSTW12R400A125-5	3	4.000	5	1.968	2.756	1.250	0.500	0.315	
53100004			PSTW12R500A150-7	3	5.000	7	2.480	3.543	1.500	0.625	0.394	
53100010			PSTW12R600A150-8	3	6.000	8	2.480	3.740	1.500	0.625	0.394	
53100005		Close	PSTW12R200A075-4	1	2.000	4	1.575	1.772	0.750	0.315	0.197	
53100006			PSTW12R250A075-5	2	2.500	5	1.575	1.968	0.750	0.315	0.197	
53100007			PSTW12R300A100-6	2	3.000	6	1.968	2.362	1.000	0.375	0.236	
53100008			PSTW12R400A125-7	3	4.000	7	1.968	2.756	1.250	0.500	0.315	
53100009			PSTW12R500A150-9	3	5.000	9	2.480	3.543	1.500	0.625	0.394	
53100011			PSTW12R600A150-10	3	6.000	10	2.480	3.740	1.500	0.625	0.394	

Packed: 1 pc.

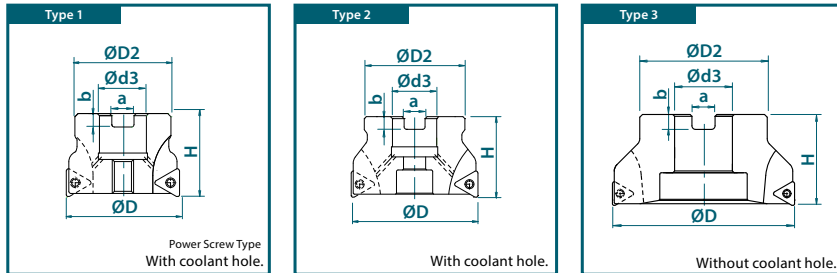



List 78131

PSTW Bore (Metric)



SPEED
FEED
P1407






Recommended Materials: p1407
Accessories & Inserts: p1406



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D		H	D2	d3	a	b	
7803100	Bore	Normal	PSTW12R050M22-3	1	50	3	40	45	22	10.4	6.3	TNKU12...
7803102			PSTW12R063M22-3	2	63	3	40	50	22	10.4	6.3	
7803110			PSTW12R080M27-5	2	80	5	50	60	27	12.4	7	
7803104			PSTW12R080M25.4-5	2	80	5	50	60	25.4	9.5	6	
7803112			PSTW12R100M32-5	2	100	5	50	70	32	14.4	8	
7803106			PSTW12R100M31.7-5	3	100	5	50	70	32	12.7	8	
7803114			PSTW12R125M40-7	2	125	7	63	90	40	16.4	9	
7803108			PSTW12R125M38.1-7	3	125	7	63	90	38.1	15.9	10	
7803101			PSTW12R050M22-4	1	50	4	40	45	22	10.4	6.3	
7803103		PSTW12R063M22-5	2	63	5	40	50	22	10.4	6.3		
7803111		PSTW12R080M27-6	2	80	6	50	60	27	12.4	7		
7803105		PSTW12R080M25.4-6	2	80	6	50	60	25.4	9.5	6		
7803113		PSTW12R100M32-7	2	100	7	50	70	32	14.4	8		
7803107		PSTW12R100M31.7-7	3	100	7	50	70	31.8	12.7	8		
7803115		PSTW12R125M40-9	2	125	9	63	90	40	16.4	9		
7803109		PSTW12R125M38.1-9	3	125	9	63	90	38.1	15.9	10		



Packed: 1 pc.





List 78PSTW

PSTW Inserts






Designation	No. of Cutting Edges	Insert Size					EDP Number									
		B (mm)	T (mm)	R (mm)	b (mm)	Aa Max (mm)	CK010	XC3020	XP3025	XC3030	XP3035	XP2040	XC1015	XP1020	XC5040	
TN KU120608ER-NM	6	10.8	6.55	0.8	1.25	12	7811087	-	-	-	-	-	-	-	-	
TN KU120608ER-GL				0.8	1.5		-	-	-	7825089	7814089	7813089	-	-	-	
TN KU120608ER-GM				0.8	1.5		-	7827088	7828088	7825088	7814088	7813088	7812088	7821088	-	
TN KU120612ER-GM				1.2	1.0		-	-	-	-	7814094	7813094	-	-	-	
TN KU120616ER-GM				1.6	0.75		-	-	-	-	7814095	7813095	-	-	-	
TN KU120620ER-GM				2.0	0.6		-	-	-	-	7814096	7813096	-	-	-	
TN KU120608ER-GR				0.8	1.5		-	-	-	-	-	-	-	7812090	7821090	-
TN KU120608ER-SM				0.8	1.5		-	-	-	-	-	-	-	-	-	7816091

Packed: 10 pcs.



List 7808H

PSTW Accessories

Appearance	EDP No.	Designation	Applicable Cutter		Recommended Tightening Torque
			(mm)	(inch)	
 Clamping Screw	7808129	FS40511 (M4 x 11, Torx 15)	PSTW BORE Ø50-125	PSTW BORE Ø2-5"	3.2 Nm
 Power Screw	7808151	PS1031 (M10x31)	PSTW BORE Ø50	PSTW BORE Ø2"	20.0 Nm
 Wrench	7808208	T15-D (Torx 15)	PSTW BORE Ø50-125	PSTW BORE Ø2-5"	

Packed: Clamping Screws = 10 pcs.; Power Screw = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.





Cutting Conditions

Work Material		Tensile Strength – Hardness	Insert Size		
			TNKU12...		
			Face Milling		
			Milling Speed V _c (SFM)	Feed Per Tooth f _z (in/t)	Depth of Cut A _a (in)
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	590 (330 - 820)	0.006 (.002 - .010)	0.120
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (330 - 820)	0.006 (.002 - .010)	0.120
	Die Steels (H13, D2)	~280 HB	495 (260 - 655)	0.005 (.002 - .008)	0.120
M	Stainless Steels(Dry) (304SS, 420SS)	~250 HB	495 (260 - 655)	0.004 (.002 - .007)	0.080
	Stainless Steels(Wet) (304SS, 420SS)	~250 HB	260 (195 - 395)	0.004 (.002 - .007)	0.080
K	Cast Iron (FC250)	~350 N/mm ²	650 (330 - 1150)	0.008 (.004 - .012)	0.120
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	590 (330 - 885)	0.006 (.002 - .010)	0.120
N	Aluminum Alloys (6061, 7075)	~13% Si	985 (655 - 4920)	0.006 (.004 - .012)	0.120
S	Heat Resistant Alloys (Inconel 718)	-	115 (85 - 195)	0.003 (.002 - .006)	0.040
	Titanium Alloy (Ti-6Al-4V)	-	130 (100 - 395)	0.003 (.002 - .006)	0.060
H	Pre-hardened Steel (P20, Stavax)	40 - 43 Hrc	330 (165 - 495)	0.004 (.003 - .008)	0.060
	Die Cast Steels (A2, S7)	43 - 48 Hrc	265 (130 - 395)	0.003 (.002 - .006)	0.040
	Hardened Steels (D2)	50 - 55 Hrc	195 (130 - 295)	0.002 (.002 - .004)	0.020

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
CK010	NM	Yes				☐		
XC3020	GM	-	☐		☐			
XP3025	GM	Yes	☐		☐			
XC3030	GL / GM	-	☐		☐			
XP3035	GL / GM	-	☐	☐	☐			
XP2040	GL/GM	-	☐	☐				☐
		Yes	☐	☐			☐	
XC1015	GM/GR	-			☐*			
XP1020	GM/GR	-			☐**			
XC5040	SM	Yes		☐			☐	

GL: Light Cutting GM: Medium Cutting GR: Rough Cutting SM: Heat Resistant Alloy

*: XC1015 best recommended for grey cast iron

** : XP1020 best recommended for ductile cast iron

☐ good ☐ best





List 78005

PRC SA (Inch)



SPEED
FEED
P1414





Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia.	Effective Dia.	No. of Teeth	Shank Dia.	Overall Length	Neck Length	Applicable Insert
					(inch)	(inch)		(inch)	(inch)	(inch)	
					D	D1					
								d	L	L1	
7800500	Cylindrical Shank Short	Normal	PRC10R100SA100-3S	1	1.000	0.606	3	1.000	5.512	2.362	RPH_10...
7800501			PRC10R125SA125-4S	1	1.250	0.856	4	1.250	5.905	2.756	
7800502			PRC12R125SA125-2S	1	1.250	0.778	2	1.250	5.905	2.756	RPH_12...
7800503			PRC12R150SA125-3S	2	1.500	1.028	3	1.250	5.905	1.968	
7800504			PRC16R150SA125-2S	2	1.500	0.870	2	1.250	5.905	1.968	RPH_16...
7800505	Cylindrical Shank Long		PRC10R100SA100-3L	1	1.000	0.606	3	1.000	7.874	4.724	RPH_10...
7800506			PRC10R125SA125-4L	1	1.250	0.856	4	1.250	7.874	4.724	
7800507			PRC12R125SA125-2L	1	1.250	0.778	2	1.250	7.874	4.724	RPH_12...
7800508			PRC12R150SA125-3L	2	1.500	1.028	3	1.250	9.842	1.968	
7800509			PRC16R150SA125-2L	2	1.500	0.870	2	1.250	9.842	1.968	RPH_16...

Packed: 1 pc.

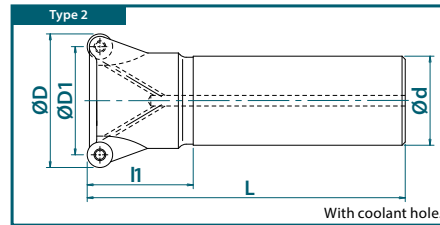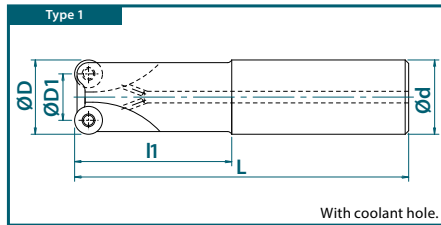



List 78003

PRC SS (Metric)



SPEED FEED
P1414



Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D	D1		d	L	L1	
7800300	Cylindrical Shank Short	Normal	PRC10R020SS20-2S	1	20	10	2	20	130	50	RPH_10...
7800301			PRC10R025SS25-3S	1	25	15	3	25	140	60	
7800302			PRC10R032SS32-4S	1	32	22	4	32	150	70	
7800303	Cylindrical Shank Long		PRC10R020SS20-2L	1	20	10	2	20	180	80	
7800304			PRC10R025SS25-3L	1	25	15	3	25	200	120	
7800305			PRC10R032SS32-4L	1	32	22	4	32	200	120	
7800322	Cylindrical Shank Short		PRC12R024SS25-2S	1	24	12	2	25	140	60	RPH_12...
7800318			PRC12R030SS32-2S	1	30	18	2	32	150	70	
7800306			PRC12R032S032-2S	1	32	20	2	32	150	70	
7800320			PRC12R032SS32-3S	1	32	20	3	32	150	70	
7800307			PRC12R040SS32-3S	2	40	28	3	32	150	50	
7800308			PRC12R050SS42-4S	2	50	38	4	42	150	50	
7800323	Cylindrical Shank Long		PRC12R024SS25-2L	1	24	12	2	25	180	100	RPH_16...
7800319			PRC12R030SS32-2L	1	30	18	2	32	200	120	
7800309			Cylindrical Shank Long	PRC12R032SS32-2L	1	32	20	2	32	200	
7800321	PRC12R032SS32-3L			1	32	20	3	32	200	120	
7800310	PRC12R040SS32-3L			2	40	28	3	32	250	50	
7800311	Cylindrical Shank Short		PRC12R050SS42-4L	2	50	38	4	42	250	50	RPH_16...
7800324		PRC16R033SS32-2S	1	32	16	2	32	150	70		
7800312		PRC16R040SS32-2S	2	40	24	2	32	150	50		
7800313	Cylindrical Shank Short	PRC16R050SS42-3S	2	50	34	3	42	150	50	RPH_16...	
7800314		PRC16R063SS042-4S	2	63	47	4	42	150	50		
7800325	Cylindrical Shank Long	PRC16R033SS32-2L	1	32	16	2	32	200	120	RPH_16...	
7800315		PRC16R040SS32-2L	2	40	24	2	32	250	50		
7800316		PRC16R050SS42-3L	2	50	34	3	42	250	50		
7800317			PRC16R063SS42-4L	2	63	47	4	42	250	50	

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

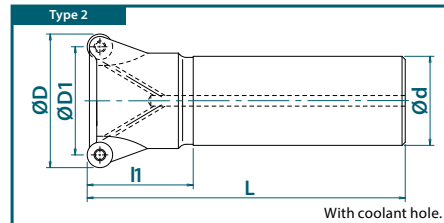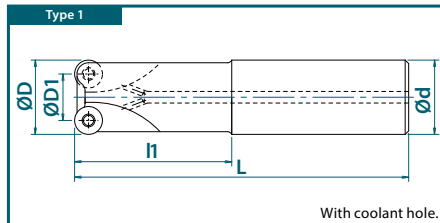



List 78004

PRC Bore (Inch)



SPEED FEED
P1414





Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia.	Effective Dia.	No. of Teeth	Tool Height	Flange Dia.	Bore Dia.	Keyway Width	Keyway Depth	Applicable Insert
					D	D1		H	D2	d3	a	b	
7800412	Bore	Normal	PRC10R200A075-5	2	2.000	1.606	5	1.575	1.772	0.750	0.315	0.197	RPH_10...
7800413			PRC10R250A075-6	2	2.500	2.106	6	1.575	1.968	0.750	0.315	0.197	
7800400			PRC12R200A075-4	2	2.000	1.528	4	1.575	1.772	0.750	0.315	0.197	
7800401			PRC12R250A075-4	2	2.500	2.028	4	1.575	1.968	0.750	0.315	0.197	
7800402			PRC12R300A100-5	2	3.000	2.528	5	1.968	2.362	1.000	0.375	0.236	
7800403			PRC12R400A150-6	3	4.000	3.528	6	1.968	2.756	1.500	0.625	0.394	
7800404		Close	PRC12R200A075-5	2	2.000	1.528	5	1.575	1.772	0.750	0.315	0.197	RPH_12...
7800405			PRC12R250A075-6	2	2.500	2.028	6	1.575	1.968	0.750	0.315	0.197	
7800406			PRC12R300A100-8	2	3.000	2.528	8	1.968	2.362	1.000	0.375	0.236	
7800407			PRC12R400A150-10	3	4.000	3.528	10	1.968	2.756	1.500	0.625	0.394	
7800414			PRC12R500A150-12	3	5.000	4.528	12	2.480	3.543	1.500	0.625	0.394	
7800408			Normal	PRC16R200A075-3	2	2.000	1.370	3	1.575	1.772	0.750	0.315	
7800409		PRC16R250A075-5		2	2.500	1.870	5	1.575	1.968	0.750	0.315	0.197	
7800410		PRC16R300A100-6		2	3.000	2.370	6	1.968	2.362	1.000	0.375	0.236	
7800411		PRC16R400A150-7		3	4.000	3.370	7	1.968	2.756	1.500	0.625	0.394	
7800415		PRC16R500A150-8		3	5.000	4.370	8	2.480	3.543	1.500	0.625	0.394	
7800416		PRC16R600A150-10		3	6.000	5.370	10	2.480	3.740	1.500	0.625	0.394	

Packed: 1 pc.





List 78002

PRC Bore (Metric)



SPEED
FEED
P1414






Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia.	Effective Dia.	No. of Teeth	Tool Height	Flange Dia.	Bore Dia.	Keyway Width	Keyway Depth	Applicable Insert	
					D	D1		H	D2	d3	a	b		
7800200	Bore	Normal	PRC12R050M22-4	2	50	38	4	40	45	22	10.4	6.3	RPH_12...	
7800201			PRC12R063M22-4	2	63	51	4	40	50	22	10.4	6.3		
7800202			PRC12R080M27-5	2	80	68	5	50	60	27	12.4	7		
7800209			PRC12R080M25.4-5	2	80	68	5	50	60	25.4	9.5	6		
7800203			PRC12R100M32-6	2	100	88	6	50	70	32	14.4	8		
7800210			PRC12R100M31.7-6	3	100	88	6	50	70	31.75	12.7	8		
7800204		Close	PRC12R050M22-5	2	50	38	5	40	45	22	10.4	6.3		
7800206			PRC12R063M22-6	2	63	51	6	40	50	22	10.4	6.3		
7800207			PRC12R080M27-8	2	80	38	8	50	60	27	12.4	7		
7800211			PRC12R080M25.4-8	2	80	38	8	50	60	25.4	9.5	6		
7800208			PRC12R100M32-10	2	100	88	10	50	70	32	14.4	8		
7800212			PRC12R100M31.7-10	3	100	88	10	50	70	31.75	12.7	8		
7800213		Normal	PRC16R050M22-3	1	50	34	3	40	45	22	10.4	6.3		RPH_16...
7800214			PRC16R063M22-5	2	63	47	5	40	50	22	10.4	6.3		
7800216			PRC16R080M27-6	2	80	64	6	50	60	27	12.4	7		
7800218			PRC16R080M25.4-6	2	80	64	6	50	60	25.4	9.5	6		
7800217			PRC16R100M32-7	2	100	84	7	50	70	32	14.4	8		
7800219			PRC16R100M31.7-7	3	100	84	7	50	70	31.75	12.7	8		

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**






List 52602

PRC ASF (Inch)



Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	Effective Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
52602000	Screw Fit Head	PRC10R100ASF12-3	1.000	0.606	3	0.492	M12	1.378	0.905	17	RPH_10...
52602001		PRC10R125ASF16-4	1.250	0.856	4	0.669	M16	1.575	1.102	22	RPH_12...
52602002		PRC12R125ASF16-2	1.250	0.778	2	0.669	M16	1.575	1.102	22	
52602003		PRC12R150ASF16-3	1.500	1.028	3	0.669	M16	1.575	1.102	22	
52602004		PRC16R150ASF16-2	1.500	0.870	2	0.669	M16	1.575	1.102	22	RPH_16...

Packed: 1 pc.




List 78017

PRC SF (Metric)



Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
7801700	Screw Fit Head	PRC10R020SF10-2	20	10	2	10.5	M10	33	18	14	RPH_10...
7801701		PRC10R025SF12-3	25	15	3	12.5	M12	35	23	17	
7801702		PRC10R030SF16-3	30	20	3	17	M16	40	28	22	
7801703		PRC10R032SF16-4	32	22	4	17	M16	40	28	22	RPH_12...
7801704		PRC10R040SF16-4	40	30	4	17	M16	40	28	22	
7801705		PRC12R030SF16-2	30	18	2	17	M16	40	28	22	
7801706		PRC12R032SF16-3	32	20	3	17	M16	40	28	22	
7801707		PRC12R040SF16-3	40	28	3	17	M16	40	28	22	

Packed: 1 pc.


Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**





List 78PRC

PRC Inserts



Designation	No. of Cutting Edges	Insert Size			EDP Number										
		B (mm)	T (mm)	α	CK010	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040	XP6015		
RPHT10T3MOFN-NM	8	10	3.97	11°	7811009	-	-	-	-	-	-	-	-	-	
RPHW10T3MOSN	8				-	7825017	7814030	-	-	-	-	-	-	-	-
RPHW10T3MOEN	8				-	-	-	-	-	-	-	7812017	-	-	-
RPHT10T3MOEN-GL	8				-	7825008	7814008	7826008	7813008	-	-	-	-	-	-
RPHT10T3MOEN-GM	8				-	7825009	7814009	-	-	-	-	-	-	-	-
RPHT10T3MOEN-SM	4				-	-	-	-	-	-	-	-	7815010	-	-
RPHT10T3M8EN-SM	8				-	-	-	-	-	-	-	-	7815050	7816050	-
RPMT10T3M8EN-HR	8				-	-	-	-	-	-	-	-	-	-	7824083
RPHT1204MOFN-NM	8	12	4.76		7811013	-	-	-	-	-	-	-	-	-	
RPHW1204MOSN	8				-	7825018	7814018	-	-	-	7812018	-	-	-	-
RPHT1204MOEN-GL	8				-	-	-	7826011	7813011	-	-	-	-	-	-
RPHT1204MOEN-GM	8				-	7825011	7814011	-	-	-	-	-	-	-	-
RPHT1204MOEN-SM	4				-	-	-	-	-	-	-	-	7815012	-	-
RPHT1204M8EN-SM	8				-	-	-	-	-	-	-	-	7815051	7816051	-
RPMT1204M8EN-HR	8				-	-	-	-	-	-	-	-	-	-	7824084
RPHT1605MOFN-NM	8				16	5.56	7811016	-	-	-	-	-	-	-	-
RPHW1605MOSN	8	-	7825019	7814019			-	-	-	7812019	-	-	-	-	
RPHT1605MOEN-GL	8	-	-	-			7826014	7813014	-	-	-	-	-	-	
RPHT1605MOEN-SM	4	-	-	-			-	-	-	-	-	7815015	-	-	
RPHT1605M8EN-SM	8	-	-	-			-	-	-	-	-	7815052	7816052	-	

Packed: 10 pcs.



List 7808H

PRC Accessories

Appearance	EDP No.	Designation	Applicable Insert	Applicable Cutter		Recommended Tightening Torque
				(mm)	(inch)	
<p>Clamping Screw</p>	7808116	FS30573A (M3 x 7.3, Torx 10)	RPH_10...	PRC SS/SF Ø20-32	PRC10 SA/ASF Ø1-1.25" PRC10 BORE Ø2-2.5"	2.0 Nm
	7808112	FS35586 (M3.5 x 8.6, Torx 15)	RPH_12...	PRC SS/SF Ø32-50 PRC BORE Ø32-63	PRC12 SA/ASF Ø1.25-1.5" PRC12 BORE Ø2-4"	3.2 Nm
	7808113	FS45510 (M4.5 x 10.5, Torx 20)	RPH_16...	PRC SS/SF Ø40-63 PRC BORE Ø50-100	PRC16 SA/ASF Ø1.5" PRC16 BORE Ø2-6"	5.0 Nm
<p>Power Screw</p>	7808151	PS1031 (M10x31)	RPH_16...	PRC BORE Ø50	n/a	20.0 Nm
<p>Wrench</p>	7808207	T10-D (Torx 10)	RPH_10...	PRC SS/SF Ø20-32	PRC10 SA/ASF Ø1-1.25" PRC10 BORE Ø2-2.5"	
	7808208	T15-D (Torx 15)	RPH_12...	PRC SS/SF Ø32-50 PRC BORE Ø32-63	PRC12 SA/ASF Ø1.25-1.5" PRC12 BORE Ø2-4"	
	7808209	T20-D (Torx 20)	RPH_16...	PRC SS/SF Ø40-63 PRC BORE Ø50-100	PRC16 SA/ASF Ø1.5" PRC16 BORE Ø2-6"	

Packed: Clamping Screws = 10 pcs.; Power Screw = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.





Cutting Conditions

Work Material		Tensile Strength - Hardness	Milling Speed Vc (SFM)	Insert Size					
				RPH_10...		RPH_12...		RPH_16...	
				Face Milling		Face Milling		Face Milling	
				Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)	Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)	Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)
P	Mild Steels, Carbon Steels (1010, 1018)	~180HB	655 (330-985)	0.010 (0.004 - 0.014)	0.078	0.012 (0.004 - 0.016)	0.093	0.014 (0.004 - 0.020)	0.125
	Carbon Steels, Alloy Steels (1050, 4140)	~280HB	590 (330-820)	0.008 (0.004 - 0.012)	0.078	0.010 (0.004 - 0.014)	0.093	0.012 (0.004 - 0.018)	0.125
	Die Steels (H13, D2)	~280HB	495 (260-655)	0.008 (0.004 - 0.012)	0.078	0.010 (0.004 - 0.014)	0.093	0.012 (0.004 - 0.018)	0.125
M	Stainless Steels (Dry) (304SS, 420SS)	~250HB	525 (265 - 655)	0.010 (0.004 - 0.014)	0.078	0.012 (0.004 - 0.016)	0.093	0.014 (0.004 - 0.020)	0.125
	Stainless Steels (Wet) (304SS, 420SS)	~250HB	395 (200 - 590)	0.010 (0.004 - 0.014)	0.078	0.012 (0.004 - 0.016)	0.093	0.014 (0.004 - 0.020)	0.125
K	Cast Iron (FC250)	~350N/mm ²	720 (330-1150)	0.010 (0.002 - 0.016)	0.078	0.012 (0.004 - 0.020)	0.093	0.014 (0.004 - 0.023)	0.125
	Ductile Cast Iron (60-40-18)	~800N/mm ²	495 (330-720)	0.008 (0.004 - 0.012)	0.078	0.010 (0.004 - 0.014)	0.093	0.012 (0.004 - 0.018)	0.125
N	Aluminum Alloys (6061, 7075)	~13%Si	1970 (985-4920)	0.016 (0.008 - 0.031)	0.078	0.023 (0.008 - 0.039)	0.093	0.031 (0.012 - 0.059)	0.125
S	Heat Resistant Alloys (Inconel 718)	-	130 (85-195)	0.006 (0.002 - 0.010)	0.078	0.010 (0.002 - 0.012)	0.093	0.010 (0.002 - 0.016)	0.125
	Titanium Alloy (Ti-6Al-4V)	-	260 (165-395)	0.008 (0.004 - 0.012)	0.078	0.010 (0.004 - 0.014)	0.093	0.012 (0.004 - 0.018)	0.125
H	Pre-hardened Steel (P20, Stavax)	40-43 HRC	395 (130-495)	0.006 (0.002 - 0.010)	0.059	0.010 (0.002 - 0.012)	0.059	0.010 (0.002 - 0.016)	0.059
	Die Cast Steels (A2, S7)	43-48HRC	260 (130-395)	0.006 (0.002 - 0.010)	0.039	0.010 (0.002 - 0.012)	0.039	0.010 (0.002 - 0.016)	0.039
	Hardened Steels (D2)	50-55HRC	195 (100-295)	0.006 (0.002 - 0.010)	0.020	0.010 (0.002 - 0.012)	0.020	0.010 (0.002 - 0.016)	0.020

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
CK010	NM	Yes				☐		
XC3030	- / GL / GM	-	☐		☐			
XP3035	- / GL / GM	-	☐	☐	☐			
XP2025	GL	Yes	☐	☐			☐	
XP2040	GL	-	☐	☐				☐
		Yes	☐	☐			☐	
XC1015	-	-			☐			
XC5035	SM	-		☐				
		Yes		☐			☐	
XC5040	SM	Yes		☐			☐	
XP6015	HR	-	☐		☐			☐

GL:Light Cutting NM:Aluminum SM: Heat Resistant Alloy HR: Hardened Steel



☐ good ☐ best







Maximum Ramping Angle (E) & Helical Angle (P)

Insert Size	RPH_10...				RPH_12...				RPH_16...			
	Diameter (inch)	Ramping Angle	Helical Milling (inch)		Helical Angle	Ramping Angle	Helical Milling (inch)		Helical Angle	Ramping Angle	Helical Milling (inch)	
D1	E	D0 Min	D0 Max	P	E	D0 Min	D0 Max	P	E	D0 Min	D0 Max	P
1.000	2.0°	1.488	1.606	1.8°	-	-	-	-	-	-	-	-
1.250	3.0°	1.988	2.106	1.5°	4.0°	1.752	2.028	1.7°	-	-	-	-
1.500	3.3°	2.488	2.606	1.1°	2.8°	2.252	2.528	1.4°	3.0°	2.016	2.370	2.0°
2.000	2.3°	3.488	3.606	0.9°	2.5°	3.252	3.528	1.1°	4.0°	3.016	3.370	1.5°
2.500	2.2°	4.488	4.606	0.7°	1.8°	4.252	4.528	0.9°	2.8°	4.016	4.370	1.1°
3.000	-	-	-	-	1.3°	5.252	5.528	0.7°	2.0°	5.016	5.370	0.9°
4.000	-	-	-	-	0.9°	7.252	7.528	0.5°	1.5°	7.016	7.370	0.7°
5.000	-	-	-	-	1.0°	9.252	9.528	0.4°	1.1°	9.016	9.370	0.45°
6.000	-	-	-	-	-	-	-	-	1.0°	11.016	11.370	0.4°

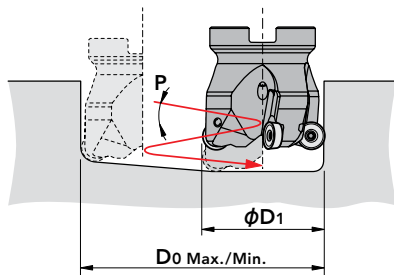

Maximum Depth of Cut (Aa)

Insert Size	Maximum Depth of Cut (Aa)	
	4 Indexes Per Insert	8 Indexes Per Insert
	(in)	(in)
RPH_10...	0.177	0.055
RPH_12...	0.217	0.067
RPH_16...	0.295	0.091





List 78009

PHC SA/FA (Inch)



SPEED FEED
P1425





Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)	Effective Dia. (inch)	No. of Teeth	Shank Dia. (inch)	Overall Length (inch)	Neck Length (inch)	Applicable Insert
					D	D1		d	L	L1	
7800905	Cylindrical Shank Short	Normal	PHC07R063SA063-2S	1	0.625	0.286	2	0.625	3.937	1.181	SPMT07...
7800906			PHC07R075SA075-3S	1	0.750	0.411	3	0.750	5.118	1.968	
7800907			PHC07R100SA100-4S	1	1.000	0.661	4	1.000	5.512	2.362	
7800908			PHC07R125SA125-5S	1	1.250	0.911	5	1.250	5.905	2.756	
7800909			PHC09R100SA100-2S	1	1.000	0.535	2	1.000	5.512	2.362	
7800901		Close	PHC09R100SA100-3S	1	1.000	0.535	3	1.000	5.512	2.362	SDMT09...
7800902			PHC09R125SA125-3S	1	1.250	0.785	3	1.250	5.906	2.756	
7800903		Normal	PHC12R125SA125-2S	1	1.250	0.596	2	1.250	5.906	2.756	SXMT12...
7800904			PHC12R150SA125-3S	2	1.500	0.846	3	1.250	5.906	1.969	
7800909		Cylindrical Shank Long	Normal	PHC07R063SA063-2L	1	0.625	0.286	2	0.625	5.905	1.968
7800913	PHC07R075SA075-3L			1	0.750	0.411	3	0.750	6.299	3.150	
7800914	PHC07R100SA100-4L			1	1.000	0.661	4	1.000	7.874	3.937	
7800915	PHC07R125SA125-5L			1	1.250	0.911	5	1.250	7.874	4.724	
7800922	PHC09R100SA100-2L			1	1.000	0.535	2	1.000	7.874	4.724	
7800923	Close		PHC09R100SA100-3L	1	1.000	0.535	3	1.000	7.874	4.724	SDMT09...
7800924			PHC09R125SA125-3L	1	1.250	0.785	3	1.250	7.874	4.724	
7800925	Normal		PHC12R125SA125-2L	1	1.250	0.596	2	1.250	7.874	4.724	SXMT12...
7800926			PHC12R150SA125-3L	2	1.500	0.846	3	1.250	9.843	2.756	
7800927	Cylindrical Shank Extra-Long		Normal	PHC09R100SA100-2LL	1	1.000	0.535	2	1.000	11.811	7.087
7800928		Close	PHC09R100SA100-3LL	1	1.000	0.535	3	1.000	11.811	7.087	
7800929		Normal	PHC09R125SA125-3LL	1	1.250	0.785	3	1.250	11.811	7.087	
7800930			PHC12R125SA125-2LL	1	1.250	0.596	2	1.250	11.811	7.087	
7800931			PHC12R150SA125-3LL	2	1.500	0.846	3	1.250	11.811	2.756	
7800916	Weldon Shank Short	Normal	PHC07R063FA063-2S	1	0.625	0.286	2	0.625	3.937	1.181	SPMT07...
7800917			PHC07R075FA075-3S	1	0.750	0.411	3	0.750	5.118	1.968	
7800918			PHC07R100FA100-4S	1	1.000	0.661	4	1.000	5.512	2.362	
7800919			PHC07R125FA125-5S	1	1.250	0.911	5	1.250	5.905	2.756	
7800910			Close	PHC09R100FA100-2S	1	1.000	0.535	2	1.000	3.831	
7800911		PHC09R100FA100-3S		1	1.000	0.535	3	1.000	3.831	1.551	
7800912		Normal	PHC09R125FA125-3S	1	1.250	0.785	3	1.250	4.378	2.098	SXMT12...
7800920			PHC12R125FA125-2S	1	1.250	0.596	2	1.250	4.378	2.098	
7800921			PHC12R150FA125-3S	2	1.500	0.846	3	1.250	4.378	2.098	

Packed: 1 pc.

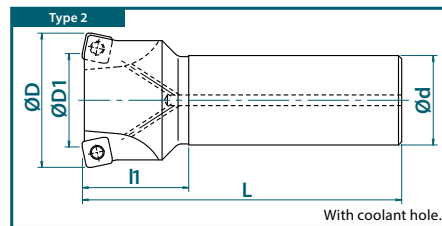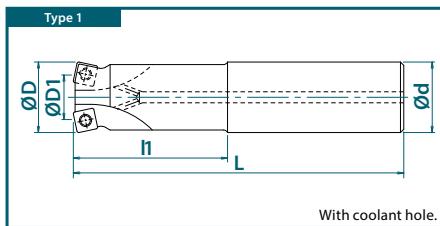



List 78009 (Continued)



PHC SA/FA (Inch)



Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426

EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia.	Effective Dia.	No. of Teeth	Shank Dia.	Overall Length	Neck Length	Applicable Insert	
					(inch)	(inch)		(inch)	(inch)	(inch)		
					D	D1						
					d	L						
7800942	Weldon Shank Long	Normal	PHC07R063FA063-2L	1	0.625	0.286	2	0.625	5.905	1.968	SPMT07...	
7800943			PHC07R075FA075-3L	1	0.750	0.411	3	0.750	6.299	3.150		
7800944			PHC07R100FA100-4L	1	1.000	0.661	4	1.000	7.874	3.937		
7800945			PHC07R125FA125-5L	1	1.250	0.911	5	1.250	7.874	4.724		
7800932		Weldon Shank Long	Normal	PHC09R100FA100-2L	1	1.000	0.535	2	1.000	7.004	4.724	SDMT09...
7800933				PHC09R100FA100-3L	1	1.000	0.535	3	1.000	7.004	4.724	
7800934			Close	PHC09R125FA125-3L	1	1.250	0.785	3	1.250	7.004	4.724	
7800935				PHC12R125FA125-2L	1	1.250	0.596	2	1.250	7.004	4.724	
7800936	Normal			PHC12R150FA125-3L	2	1.500	0.846	3	1.250	7.004	4.724	
7800937				PHC09R100FA100-2LL	1	1.000	0.535	2	1.000	9.366	7.087	
7800938	Weldon Shank Extra-Long	Close	PHC09R100FA100-3LL	1	1.000	0.535	3	1.000	9.366	7.087	SDMT09...	
7800939			PHC09R125FA125-3LL	1	1.250	0.785	3	1.250	9.366	7.087		
7800940		Normal	PHC12R125FA125-2LL	1	1.250	0.596	2	1.250	9.366	7.087		
7800941			PHC12R150FA125-3LL	2	1.500	0.846	3	1.250	9.366	7.087		

Packed: 1 pc.

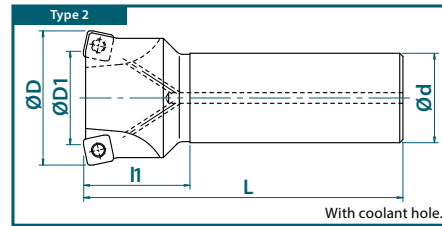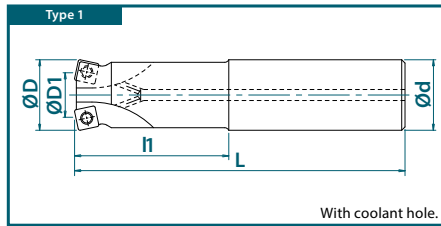

List 78007

PHC SS (Metric)





Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)		No. of Teeth	Shank Dia. (mm)		Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D	D1		d	L			
7800750	Cylindrical Shank Short	Normal	PHC07R016SS16-2S	1	16	7.4	2	16	100	30	SPMT07...	
7800751			PHC07R020SS20-3S	1	20	11.4	3	20	130	50		
7800752			PHC07R025SS25-4S	1	25	16.4	4	25	140	60		
7800753			PHC07R030SS32-4S	1	30	21.4	4	32	150	70		
7800754			PHC07R032SS32-5S	1	32	23.4	5	32	150	70		
7800755	Cylindrical Shank Long	Normal	PHC07R016SS16-2L	1	16	7.4	2	16	150	50	SPMT07...	
7800756			PHC07R017SS16-2L	2	17	8.4	2	16	150	25		
7800757			PHC07R018SS16-2L	2	18	9.4	2	16	150	25		
7800758			PHC07R020SS20-3L	1	20	11.4	3	20	160	80		
7800759			PHC07R021SS20-3L	2	21	12.4	3	20	160	30		
7800760			PHC07R022SS20-3L	2	22	13.4	3	20	160	30		
7800761			PHC07R025SS25-4L	1	25	16.4	4	25	200	100		
7800762			PHC07R026SS25-4L	2	26	17.4	4	25	200	40		
7800763			PHC07R028SS25-4L	2	28	19.4	4	25	200	40		
7800764			PHC07R030SS32-4L	1	30	21.4	4	32	200	120		
7800765			PHC07R032SS32-5L	1	32	23.4	5	32	200	120		
7800766			PHC07R033SS32-5L	2	33	24.4	5	32	200	50		
7800767			PHC07R035SS32-5L	2	35	26.0	5	32	200	50		
7800700	Cylindrical Shank Short	Normal	PHC09R025SS25-2S	1	25	13.2	2	25	140	60	SDMT09...	
7800701		Close	PHC09R025SS25-3S	1	25	13.2	3	25	140	60		
7800716		Normal	PHC09R028SS25-3S	2	28	16.2	3	25	140	40		
7800717			PHC09R030SS32-3S	1	30	18.2	3	32	150	70		
7800702			PHC09R032SS32-3S	1	32	20.2	3	32	150	70		
7800718		Normal	PHC09R035SS32-3S	2	35	23.2	3	32	150	50		
7800703			PHC09R040SS32-4S	2	40	28.2	4	32	150	50		
7800719			PHC09R040SS42-4S	1	40	28.2	4	42	150	50		
7800704		Cylindrical Shank Long	Normal	PHC09R025SS25-2L	1	25	13.2	2	25	200		120
7800705	Close		PHC09R025SS25-3L	1	25	13.2	3	25	200	120		
7800740	Normal		PHC09R026SS25-3L	2	26	14.2	3	25	200	40		
7800720			PHC09R028SS25-3L	2	28	16.2	3	25	200	40		
7800721			PHC09R030SS32-3L	1	30	18.2	3	32	200	120		
7800706	Normal		PHC09R032SS32-3L	1	32	20.2	3	32	200	120		
7800741			PHC09R033SS32-3L	2	33	21.2	3	32	200	50		
7800722			PHC09R035SS32-3L	2	35	23.2	3	32	200	50		
7800707	Close		PHC09R040SS32-4L	2	40	28.2	4	32	250	50		
7800723	Normal		PHC09R040SS42-3L	1	40	28.2	3	42	250	70		

Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.

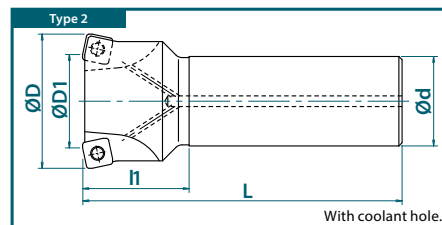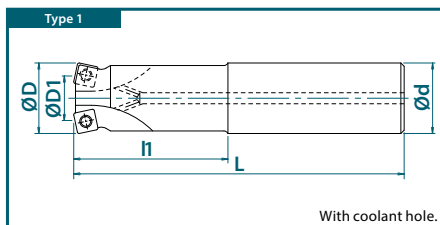



List 78007 (Continued)

PHC SS (Metric)





Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426

EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Applicable Insert
					D	D1		d	L	L1	
7800724	Cylindrical Shank Extra-Long	Normal	PHC09R025SS25-2LL	1	25	13.2	2	25	300	180	SDMT09...
7800742			PHC09R026SS25-2LL	2	26	14.2	2	25	300	40	
7800725			PHC09R028SS25-2LL	2	28	16.2	2	25	300	40	
7800726			PHC09R030SS32-2LL	1	30	18.2	2	32	300	180	
7800727			PHC09R032SS32-2LL	1	32	20.2	2	32	300	180	
7800743			PHC09R033SS32-2LL	2	33	21.2	2	32	300	50	
7800728			PHC09R035SS32-2LL	2	35	23.2	2	32	300	50	
7800729			PHC09R040SS42-2LL	1	40	28.2	2	42	300	70	
7800730	Cylindrical Shank Short	Normal	PHC12R030SS32-2S	1	30	13.4	2	32	150	70	SXMT12...
7800708			PHC12R032SS32-2S	1	32	15.4	2	32	150	70	
7800731			PHC12R035SS32-3S	2	35	18.4	3	32	150	50	
7800709			PHC12R040SS32-3S	2	40	23.4	3	32	150	50	
7800732			PHC12R040SS42-3S	1	40	23.4	3	42	150	50	
7800710			PHC12R050SS42-4S	2	50	33.4	4	42	150	50	
7800711			PHC12R063SS42-5S	2	63	46.4	5	42	150	50	
7800733			Cylindrical Shank Long	Normal	PHC12R030SS32-2L	1	30	13.4	2	32	
7800712	PHC12R032SS32-2L	1			32	15.4	2	32	200	120	
7800744	PHC12R033SS32-2L	2			33	16.4	2	32	200	50	
7800734	PHC12R035SS32-3L	2			35	18.4	3	32	200	50	
7800713	PHC12R040SS32-3L	2			40	23.4	3	32	250	50	
7800735	PHC12R040SS42-3L	1			40	23.4	3	42	250	70	
7800714	PHC12R050SS42-4L	2			50	33.4	4	42	250	50	
7800715	PHC12R063SS42-5L	2			63	46.4	5	42	250	50	
7800736	Cylindrical Shank Extra-Long	Normal	PHC12R030SS32-2LL	1	30	13.4	2	32	300	180	SXMT12...
7800737			PHC12R032SS32-2LL	1	32	15.4	2	32	300	180	
7800745			PHC12R033SS32-2LL	2	33	16.4	2	32	300	50	
7800738			PHC12R035SS32-2LL	2	35	18.4	2	32	300	50	
7800739			PHC12R040SS42-2LL	1	40	23.4	2	42	300	70	

Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.

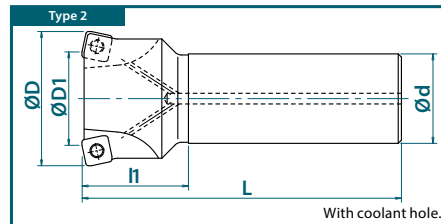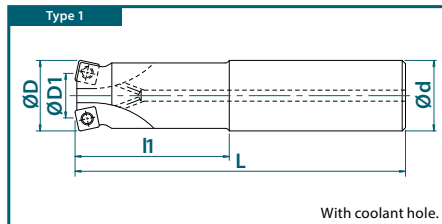



List 78008

PHC Bore (Inch)





Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (inch)		No. of Teeth	Tool Height (inch)		Bore Dia. (inch)	Keyway Width (inch)	Keyway Depth (inch)	Applicable Insert
					D	D1		H	D2				
7800800	Bore	Close	PHC09R200A075-5	2	2.000	1.535	5	1.968	1.850	0.750	0.315	0.197	SDMT09...
7800801			PHC09R250A075-6	2	2.500	2.035	6	1.968	2.362	0.750	0.315	0.197	
7800806		Normal	PHC09R300A100-8	2	3.000	2.535	8	2.480	2.835	1.000	0.375	0.236	SXMT12...
7800807			PHC12R250A075-4	2	2.500	1.846	4	1.968	2.362	0.750	0.315	0.197	
7800808		Normal	PHC12R300A100-5	2	3.000	2.346	5	2.480	2.835	1.000	0.375	0.236	SXMT12...
7800809			PHC12R400A150-6	3	4.000	3.346	6	2.480	3.779	1.500	0.625	0.394	
7800802		Close	PHC12R200A075-4	2	2.000	1.346	4	1.968	1.850	0.750	0.315	0.197	SXMT12...
7800803			PHC12R250A075-5	2	2.500	1.846	5	1.968	2.362	0.750	0.315	0.197	
7800804			PHC12R300A100-7	2	3.000	2.346	7	2.480	2.835	1.000	0.375	0.236	
7800805			PHC12R400A150-8	3	4.000	3.346	8	2.480	3.779	1.500	0.625	0.394	
7800810			PHC12R500A150-10	3	5.000	4.346	10	2.480	3.779	1.500	0.625	0.394	
7800811			PHC12R600A150-12	3	6.000	5.346	12	2.480	3.779	1.500	0.625	0.394	

Packed: 1 pc.





List 78006

PHC Bore (Metric)





Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)		No. of Teeth	Tool Height (mm)		Flange Dia. (mm)		Bore Dia. (mm)		Keyway Width (mm)		Keyway Depth (mm)		Applicable Insert
					D	D1		H	D2	d3	a	b						
7800600	Bore	Close	PHC09R040M16-4	1	40	28.2	4	40	38	16	8.4	5.6	SDMT09...					
7800601			PHC09R050M22-5	2	50	38.2	5	50	47	22	10.4	6.3						
7800605			PHC09R050M22.2-5	2	50	38.2	5	50	47	22.225	8.4	5						
7800603			PHC09R063M22-6	2	63	51.2	6	50	60	22	10.4	6.3						
7800606			PHC09R063M22.2-6	2	63	51.2	6	50	60	22.225	8.4	5						
7800607			PHC12R040M16-3	1	40	23.4	3	40	38	16	8.4	5.6						
7800608			PHC12R050M22-4	2	50	33.4	4	50	47	22	10.4	6.3						
7800614			PHC12R050M22.2-4	2	50	33.4	4	50	47	22.225	8.4	5						
7800610			PHC12R063M22-5	2	63	46.4	5	50	60	22	10.4	6.3						
7800615			PHC12R063M22.2-5	2	63	46.4	5	50	60	22.225	8.4	5						
7800612			PHC12R080M27-7	2	80	63.4	7	50	76	27	12.4	7	SXMT12...					
7800618			PHC12R080M31.7-5	2	80	63.4	5	63	76	31.75	12.7	8						
7800616			PHC12R080M31.7-7	2	80	63.4	7	63	76	31.75	12.7	8						
7800613			PHC12R100M32-8	2	100	83.4	8	63	96	32	14.4	8						
7800617			PHC12R100M31.7-8	2	100	83.4	8	63	96	31.75	12.7	8						

Packed: 1 pc.


Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**






List 52603

PHC ASF (Inch)



Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	Effective Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
52603004	Screw Fit Head	PHC07R063ASF8-2	0.625	0.286	2	0.334	M8	1.063	0.571	10	SPMT07...
52603005		PHC07R075ASF10-3	0.750	0.411	3	0.413	M10	1.300	0.709	14	
52603006		PHC07R100ASF12-4	1.000	0.661	4	0.492	M12	1.378	0.905	17	
52603007		PHC07R125ASF16-5	1.250	0.911	5	0.669	M16	1.575	1.102	22	SDMT09...
52603000		PHC09R100ASF12-2	1.000	0.535	2	0.492	M12	1.378	0.905	17	
52603001		PHC09R125ASF16-3	1.250	0.785	3	0.669	M16	1.575	1.102	22	
52603002		PHC12R125ASF16-2	1.250	0.596	2	0.669	M16	1.575	1.102	22	SXMT12...
52603003		PHC12R150ASF16-3	1.500	0.846	3	0.669	M16	1.575	1.102	22	

Packed: 1 pc.






List 78015

PHC SF (Metric)



Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert		
			D	D1		Da	Dg	L	D2				
7801520	Screw Fit Head	PHC07R016SF8-2	16	7.4	2	8.5	M8	27	14.5	10	SPMT07...		
7801521		PHC07R017SF8-2	17	8.4	2	8.5	M8	27	14.5	10			
7801522		PHC07R018SF8-2	18	9.4	2	8.5	M8	27	14.5	10			
7801523		PHC07R020SF10-3	20	11.4	3	10.5	M10	33	18	14			
7801524		PHC07R021SF10-3	21	12.4	3	10.5	M10	33	18	14			
7801525		PHC07R022SF10-3	22	13.4	3	10.5	M10	33	18	14			
7801526		PHC07R025SF12-4	25	16.4	4	12.5	M12	35	23	17			
7801527		PHC07R026SF12-4	26	17.4	4	12.5	M12	35	23	17			
7801528		PHC07R028SF12-4	28	19.4	4	12.5	M12	35	23	17			
7801529		PHC07R030SF16-4	30	21.4	4	17	M16	40	28	22			
7801530		PHC07R032SF16-5	32	23.4	5	17	M16	40	28	22			
7801531		PHC07R033SF16-5	33	24.4	5	17	M16	40	28	22			
7801532		PHC07R035SF16-5	35	26.4	5	17	M16	40	28	22			
7801500		Screw Fit Head	PHC09R025SF12-3	25	13.2	3	12.5	M12	35	23	17	SDMT09...	
7801510			PHC09R026SF12-3	26	14.2	3	12.5	M12	35	23	17		
7801501			PHC09R028SF12-3	28	16.2	3	12.5	M12	35	23	17		
7801502			PHC09R030SF16-3	30	18.2	3	17	M16	40	28	22		
7801503			PHC09R032SF16-3	32	20.2	3	17	M16	40	28	22		
7801511			PHC09R033SF16-3	33	21.2	3	17	M16	40	28	22		
7801504			PHC09R035SF16-3	35	23.2	3	17	M16	40	28	22		
7801505			PHC09R040SF16-4	40	28.2	4	17	M16	40	28	22		
7801506			PHC12R030SF16-2	30	13.4	2	17	M16	40	28	22		SXMT12...
7801507			PHC12R032SF16-2	32	15.4	2	17	M16	40	28	22		
7801512		PCH12R033SF16-2	33	16.4	2	17	M16	40	28	22			
7801508		PHC12R035SF16-3	35	18.4	3	17	M16	40	28	22			
7801509		PHC12R040SF16-3	40	23.4	3	17	M16	40	28	22			


Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.



List 78PHC

PHC Inserts



Designation	No. of Cutting Edges	Insert Size					EDP Number								
		A x B (mm)	T (mm)	α	R (mm)	Aa Max (mm)	XC3020	XP3025	XC3030	XP3035	XP2025	XP2040	XC1015	XC5035	XC5040
SPMT070305SR-GM	4	7.0 x 7.0	2.75	11°	0.5	0.8	7827092	7828092	7825092	7814092	7826092	7813092	7812092	-	-
SPMT070305ER-SM							-	-	-	-	-	-	-	-	-
SDMT09T308SR-GM		9.52 x 9.52	3.97	15°	0.8	1.0	7827020	7828020	7825020	7814020	7826020	7813020	7812020	-	-
SDMT09T308ER-SM							-	-	-	-	-	-	-	-	-
SXMT120410SR-GM		12.7 x 12.7	4.76	9°	1.0	2.0	7827022	7828022	7825022	7814022	7826022	7813022	7812022	-	-
SXMT120410ER-SM	-						-	-	-	-	-	-	-	-	-

Packed: 10 pcs.



List 7808H

PHC Accessories

Appearance	EDP No.	Designation	Applicable Insert	Applicable Cutter		Recommended Tightening Torque
				(mm)	(inch)	
 Clamping Screw	7808105	FS25550 (M2.5 x 5, Torx 8)	SPMT07...	PHC SS/SF Ø16-35	PHC07 SA/FA/ASF Ø0.625-1.25"	1.6 Nm
	7808111	FS35572 (M3.5 x 7.2, Torx 15)	SDMT09...	PHC SS/SF Ø25-35	PHC09 SA/FA/ASF Ø1-1.25"	3.2 Nm
	7808112	FS35586 (M3.5 x 8.6, Torx 15)		PHC SS/SF Ø40 PHC BORE Ø40-63	PHC09 SA/FA/ASF Ø1.5" PHC09 BORE Ø2-3"	3.2 Nm
	7808113	FS45510 (M4.5 x 10.5, Torx 20)	SXMT12...	PHC SS/SF Ø32-63 PHC BORE Ø40-100	PHC12 SA/FA/ASF Ø1.25-1.5" PHC12 BORE Ø2-6"	5.0 Nm
 Power Screw	7808150	PS0830 (M8x30)	SDMT09... SXMT12...	PHC BORE Ø40	n/a	20.0 Nm
 Wrench	7808205	T8-D (Torx 8)	SPMT07...	PHC SS/SF Ø16-35	PHC07 SA/FA/ASF Ø0.625-1.25"	
	7808208	T15-D (Torx 15)	SDMT09...	PHC SS/SF Ø25-40 PHC BORE Ø40-63	PHC09 SA/FA/ASF Ø1-1.5" PHC09 BORE Ø2-3"	
	7808209	T20-D (Torx 20)	SXMT12...	PHC SS/SF Ø32-63 PHC BORE Ø40-100	PHC12 SA/FA/ASF Ø1.25-1.5" PHC12 BORE Ø2-6"	

Packed: Clamping Screws = 10 pcs.; Power Screw = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.





Cutting Conditions

Work Material	Tensile Strength - Hardness	Milling Speed Vc (SFM)	Insert Size											
			SPMT07...			SDMT09...			SXMT12...					
			Face Milling			Face Milling			Face Milling					
			Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)			Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)			Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)		
L/D=2	L/D=3	L/D=4		L/D=2	L/D=3	L/D=4		L/D=2	L/D=3	L/D=4				
P Mild Steels, Carbon Steels (1010, 1018) Carbon Steels, Alloy Steels (1050, 4140) Die Steels (H13, D2)	~180 HB	590 (195 - 820)	0.028 (0.012 - 0.060)	0.032	0.024	0.016	0.032 (0.012 - 0.071)	0.040	0.032	0.020	0.050 (0.020 - 0.126)	0.047	0.047	0.040
	~280 HB	590 (195 - 820)	0.028 (0.012 - 0.051)	0.032	0.024	0.016	0.032 (0.012 - 0.060)	0.040	0.032	0.020	0.050 (0.020 - 0.118)	0.047	0.047	0.040
	~280 HB	590 (195 - 820)	0.028 (0.012 - 0.051)	0.024	0.020	0.012	0.032 (0.012 - 0.060)	0.032	0.024	0.016	0.050 (0.020 - 0.118)	0.047	0.047	0.040
M Stainless Steels (Dry) (304, 420) Stainless Steels (Wet) (304, 420)	~250 HB	525 (265 - 655)	0.016 (0.012 - 0.047)	0.024	0.020	0.012	0.020 (0.012 - 0.060)	0.032	0.024	0.016	0.040 (0.020 - 0.098)	0.047	0.040	0.040
	~250 HB	395 (200 - 590)	0.016 (0.012 - 0.047)	0.024	0.020	0.012	0.020 (0.012 - 0.060)	0.032	0.024	0.016	0.040 (0.020 - 0.098)	0.047	0.040	0.040
K Cast Iron (FC250) Ductile Cast Iron (60-40-18)	~350 N/mm ²	655 (330 - 985)	0.032 (0.016 - 0.060)	0.032	0.024	0.016	0.040 (0.020 - 0.071)	0.040	0.032	0.020	0.060 (0.020 - 0.138)	0.060	0.060	0.040
	~800 N/mm ²	590 (330 - 820)	0.028 (0.012 - 0.051)	0.032	0.024	0.016	0.035 (0.020 - 0.060)	0.040	0.032	0.020	0.053 (0.020 - 0.118)	0.047	0.047	0.035
S Heat Resistant Alloys (Inconel 718) Titanium Alloy (Ti-6Al-4V)	-	100 (85 - 195)	0.012 (0.008 - 0.028)	0.016	0.016	0.012	0.016 (0.008 - 0.032)	0.020	0.020	0.016	0.020 (0.008 - 0.040)	0.040	0.040	0.032
	-	260 (165 - 395)	0.016 (0.012 - 0.032)	0.016	0.016	0.012	0.020 (0.012 - 0.040)	0.020	0.020	0.012	0.028 (0.012 - 0.047)	0.032	0.032	0.016
H Pre-hardened Steel (P20, Stavax) Die Cast Steels (A2, S7) Hardened Steels (D2)	40 - 43 HRC	395 (130 - 495)	0.016 (0.008 - 0.032)	0.016	0.016	0.012	0.020 (0.008 - 0.040)	0.020	0.020	0.012	0.032 (0.012 - 0.060)	0.040	0.040	0.020
	43 - 48 HRC	295 (130 - 395)	0.012 (0.008 - 0.024)	0.016	0.016	0.012	0.016 (0.008 - 0.032)	0.020	0.020	0.016	0.028 (0.012 - 0.047)	0.028	0.028	0.024
	50 - 55 HRC	195 (130 - 295)	0.008 (0.008 - 0.020)	0.012	0.012	0.008	0.012 (0.008 - 0.028)	0.012	0.012	0.008	0.020 (0.012 - 0.032)	0.020	0.020	0.016

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XC3020	GM	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3025	GM	Yes	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XC3030	GM	-	<input checked="" type="checkbox"/>		<input type="checkbox"/>			
XP3035	GM	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
XP2025	GM	Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XP2040	GM	-	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
		Yes	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input type="checkbox"/>	
XC1015	GM	-			<input checked="" type="checkbox"/>			
XC5035	SM	-		<input checked="" type="checkbox"/>				
		Yes		<input type="checkbox"/>			<input type="checkbox"/>	
XC5040	SM	Yes		<input type="checkbox"/>			<input checked="" type="checkbox"/>	



GM: Medium Cutting SM: Heat Resistant Alloy

good best



Maximum Ramping Angle (E) & Helical Angle (P)


Insert Size	SPMT07...				SDMT09...				SXMT12...			
	Diameter (inch)	Ramping Angle	Helical Milling (inch)		Helical Angle	Ramping Angle	Helical Milling (inch)		Helical Angle	Ramping Angle	Helical Milling (inch)	
D1	E	D0 Min	D0 Max	P	E	D0 Min	D0 Max	P	E	D0 Min	D0 Max	P
0.625	5.9°	0.857	1.211	4.5°	-	-	-	-	-	-	-	-
0.750	3.2°	1.107	1.461	2.3°	-	-	-	-	-	-	-	-
1.000	2.0°	1.607	1.961	1.2°	3.5°	1.409	1.921	3.0°	-	-	-	-
1.250	1.3°	2.107	2.461	0.9°	1.9°	1.909	2.421	1.7°	7.2°	1.713	2.421	6.1°
1.500	-	-	-	-	1.2°	2.409	2.921	1.0°	2.9°	2.213	2.921	2.5°
2.000	-	-	-	-	0.8°	3.409	3.921	0.7°	1.4°	3.213	3.921	1.2°
2.500	-	-	-	-	0.7°	4.409	4.921	0.7°	1.1°	4.213	4.921	0.9°
3.000	-	-	-	-	0.45°	5.409	5.921	0.4°	1.0°	5.213	5.921	0.8°
4.000	-	-	-	-	-	-	-	-	0.7°	7.213	7.921	0.6°
5.000	-	-	-	-	-	-	-	-	0.5°	9.213	9.921	0.35°
6.000	-	-	-	-	-	-	-	-	0.4°	11.213	11.921	0.3°

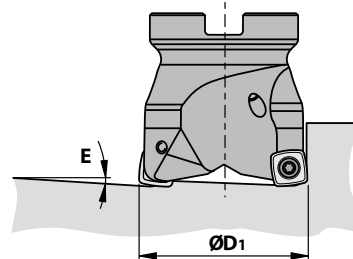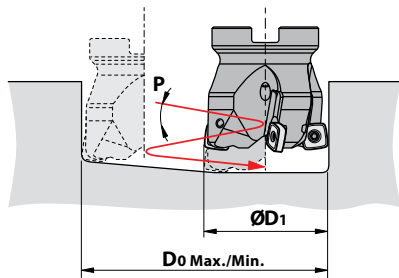

Flute shape definitions for the purpose of creating a program

Insert Size	R (mm)	Aa Max (mm)	rt (mm)	z (mm)
SPMT07...	0.5	0.8	1.2	0.35
SDMT09...	0.8	1	2	0.7
SXMT12...	1	2	3	1.15

For machining purposes, create machining programs for the respective simulated R radius cutters.

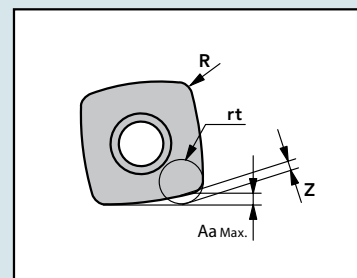



List 6420

PDR SS (Metric)



SPEED FEED
P1429

Recommended Materials: p1429
Accessories & Inserts: p1428
Maximum Ramping Angle: p1429



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Shank Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Neck Dia. (mm)	Applicable Insert
					D	D1		d	L	L1	d1	
7800000	Cylindrical Shank Short	Normal	PDR20R040SS42-2S	1	40	20	2	42	150	50	38.9	ADMT20...
7800004			PDR20R050SS42-3S	1	50	30	3	42	150	50	48.5	
7800009			PDR20R040SS42-2L	1	40	20	2	42	250	150	38.9	
7800013			PDR20R050SS42-3L	1	50	30	3	42	250	150	48.5	

Packed: 1 pc.



List 6450

PDR Bore (Metric)





SPEED FEED
P1429

Recommended Materials: p1429
Accessories & Inserts: p1428
Maximum Ramping Angle: p1429



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D	D1		H	D2	d3	a	b	
6450001	Bore	Normal	PDR20R063M25.4-3	2	63	43	3	70	60	25.4	8	5	ADMT20...
6450002			PDR20R063M25.4-4	2	63	43	4	70	60	25.4	8	5	
7800052			PDR20R080M31.7-4	2	80	60	4	63	76	31.75	12.7	8	
7800053			PDR20R080M31.7-5	2	80	60	5	63	76	31.75	12.7	8	
7800054			PDR20R100M31.7-5	2	100	80	5	63	90	31.75	12.7	8	
7800055			PDR20R100M31.7-6	2	100	80	6	63	90	31.75	12.7	8	
7800056			PDR20R125M31.7-6	2	125	105	6	63	100	31.75	12.7	8	
7800057			PDR20R063M22-3	2	63	43	3	63	60	22	10.4	6.3	
7800058			PDR20R063M22-4	2	63	43	4	63	60	22	10.4	6.3	
7800059			PDR20R080M27-4	2	80	60	4	63	76	27	12.4	7	
7800060			PDR20R080M27-5	2	80	60	5	63	76	27	12.4	7	
7800061			PDR20R100M32-5	2	100	80	5	63	96	32	14.4	8	
7800062			PDR20R100M32-6	2	100	80	6	63	96	32	14.4	8	
7800063			PDR20R125M40-6	2	125	105	6	63	100	40	16.4	9	


Packed: 1 pc.

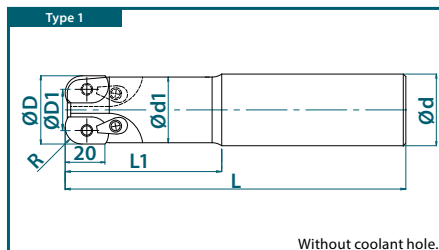



List 78PDR

PDR Inserts





Designation	No. of Cutting Edges	Insert Size					EDP Number
		A x B (mm)	T (mm)	α	R (mm)	b (mm)	
ADMT2006100PDR-GM	2	24.18 x 16	6.35	15°	10	1	7810000

Packed: 10 pcs.



List 7808H

PDR Accessories

Appearance	EDP No.	Designation	Recommended Tightening Torque
 Clamping Screw	7808001	CSPB-5 (Torx 20IP)	5.0 Nm
 Wrench	7808000	20IP-T (Torx 20IP)	
Metal Weight Set Washer	7808002	CSY-20	

Packed: Clamping Screws = 10 pcs.; Wrench = 1 pc.; Weight Set = 1 pc.
Note: Wrench sold separately.



Cutting Conditions

Work Material		Tensile Strength - Hardness	Milling Speed Vc (SFM)	Insert Size							
				PDR SS				PDR BORE			
				Face Milling				Face Milling			
				Feed Per Tooth fz (in/t)	Depth of Cut aa (in)		Feed Per Tooth fz (in/t)	Depth of Cut aa (in)			
OAL=120	OAL=170	OAL=100	OAL=200		OAL=300	OAL=400					
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	590 (295 - 720)	0.027 (0.012 - 0.040)	0.118	0.079	0.024 (0.012 - 0.040)	0.118	0.118	0.079	0.079
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (295 - 720)	0.027 (0.012 - 0.040)	0.118	0.079	0.024 (0.012 - 0.040)	0.118	0.118	0.079	0.079
	Die Steels (H13, D2)	~280 HB	495 (295 - 590)	0.024 (0.012 - 0.040)	0.118	0.079	0.020 (0.012 - 0.040)	0.118	0.079	0.079	0.079
K	Cast Iron (FC250)	~350 N/mm ²	590 (330 - 820)	0.031 (0.012 - 0.059)	0.118	0.118	0.027 (0.012 - 0.059)	0.118	0.118	0.079	0.079
	Ductile Cast Iron (60-40-18)	~800 N/mm ²	495 (330 - 820)	0.027 (0.012 - 0.047)	0.118	0.118	0.024 (0.012 - 0.047)	0.118	0.118	0.079	0.079



Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
XP3930	GM	-	☐		☐			

GM: Medium Cutting

Maximum Ramping Angle (E)

Insert Size	ADMT20...			
Diameter (mm)	Ramping Angle	Helical Milling (mm)		Plunging (mm)
D1	E	D0 Min	D0 Max	Z
40	5°	50	78	3
50	3°	70	98	3
63	2°	96	124	3
80	1°	130	158	3
100	0.5°	170	198	3
125	0.5°	220	248	3





List 78036

PFAL Bore (Metric)

SPEED FEED
P1432

Recommended Materials: p1432
Accessories & Inserts: p1431





EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D		H	D2	d3	a	b	
7803600	Bore	Normal	PFAL04R050M16-5	1	50	5	55	40	16	8.4	5.6	FR1204 / FR1206
7803601			PFAL04R063M22-6	1	63	6	55	45	22	10.4	6.3	
7803602		Close	PFAL04R063M22-8	1	63	8	55	45	22	10.4	6.3	
7803603			PFAL04R080M25.4-8	2	80	8	50	70	25.4	9.5	6	
7803604		Normal	PFAL04R080M27-8	2	80	8	50	70	27	12.4	7	
7803605			PFAL04R080M25.4-10	2	80	10	50	70	25.4	9.5	6	
7803606		Close	PFAL04R080M27-10	2	80	10	50	70	27	12.4	7	
7803607			PFAL04R100M25.4-8	2	100	8	50	80	25.4	9.5	6	
7803608		Normal	PFAL04R100M27-8	2	100	8	50	80	27	12.4	7	
7803609			PFAL04R100M31.7-8	2	100	8	50	72	31.75	12.7	8	
7803610		Close	PFAL04R100M32-8	2	100	8	50	80	32	14.4	8.2	
7803611			PFAL04R100M25.4-12	2	100	12	50	80	25.4	9.5	6	
7803612		Normal	PFAL04R100M27-12	2	100	12	50	80	27	12.4	7	
7803613			PFAL04R100M31.7-12	2	100	12	50	80	31.75	12.7	8	
7803614		Close	PFAL04R100M32-12	2	100	12	50	80	32	14.4	8.2	
7803615			PFAL04R125M25.4-10	2	125	10	50	80	25.4	9.5	6	
7803616		Normal	PFAL04R125M27-10	2	125	10	50	80	27	12.4	7	
7803617			PFAL04R125M38.1-10	2	125	10	63	80	38.1	15.9	10	
7803618		Close	PFAL04R125M40-10	2	125	10	63	85	40	16.4	9.2	
7803619			PFAL04R125M25.4-16	2	125	16	50	80	25.4	9.5	6	
7803620		Normal	PFAL04R125M27-16	2	125	16	50	80	27	12.4	7	
7803621			PFAL04R125M38.1-16	2	125	16	63	80	38.1	15.9	10	
7803622		Close	PFAL04R125M40-16	2	125	16	63	85	40	16.4	9.2	
7803623			PFAL04R160M25.4-12	2	160	12	50	80	25.4	9.5	6	
7803624		Normal	PFAL04R160M27-12	2	160	12	50	80	27	12.4	7	
7803625			PFAL04R160M40-12	2	160	12	63	85	40	16.4	9.2	
7803626		Close	PFAL04R160M50.8-12	2	160	12	63	100	50.8	19.1	11	
7803629			PFAL04R160M25.4-20	2	160	20	50	80	40	16.4	9.2	
7803630		Normal	PFAL04R160M27-20	2	160	20	50	80	50.8	19.1	11	
7803627			PFAL04R160M40-20	2	160	20	63	85	25.4	9.5	6	
7803628		Close	PFAL04R160M50.8-20	2	160	20	63	100	27	12.4	7	

Packed: 1 pc.

Note: All accessories included with body.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**




For the use of internal coolant, please use a clamping bolt with coolant holes sold in the market.





List 78PFAL

PFAL Inserts



Designation	No. of Cutting Edges	Insert Size		EDP Number
		c (mm)	Aa max (mm)	DP010
FR1204	1	0.4 x 45°	4	7820500
FR1206	1	0.4 x 45°	6	7820502
FR1204-W	1	0.4 x 45°	-	7820501

Packed: 1 pc.

Note: One wiper blade is required per cutter body and should be mounted in the designated position.

Note: The FR1204-W wiper blade can be used with both FR1204 & FR1206 normal blades.



List 7808H

PFAL Accessories

Appearance	EDP No.	Designation	Applicable Cutter		Recommended Tightening Torque
			(mm)	(inch)	
 Blade Clamping Screw	7808125	FS60620 (M6 x 17, Torx 25)	PFAL Ø50-160	-	10.0 Nm
 Wedge	7808143	W12-06	PFAL Ø50-160	-	
 Wedge Clamping Screw	7808142	WS0617	PFAL Ø50-160	-	
 Wrench for Blade	7808211	T25-T (Torx 25)	PFAL Ø50-160	-	
 Wrench for Wedge	7808231	3MM-L	PFAL Ø50-160	-	

Packed: Clamping Screws = 10 pcs.; Wedge = 10 pcs.; Wedge Clamping Screw = 10 pcs.; Wrench for Blade = 1 pc.; Wrench for Wedge = 1 pc.





Cutting Conditions (Semi-Finishing)

Work Material		Tensile Strength – Hardness	Insert Size			
			FR12...			
			Face Milling			
			Milling Speed Vc (SFM)		Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)
CAT30	CAT40, CAT50 HSK-63					
N	Aluminum Alloys (7075, 5052, 2017, ADC12)	~12% Si	3300 (2600-6500)	6500 (3300-16400)	0.003 (0.002-0.004)	0.060 (0.040-0.080)
	Aluminum Alloys (AC9A, AC9B)	~13% Si	2000 (1300-2600)	2000 (1300-2600)	0.0025 (0.002-0.003)	0.060 (0.040-0.080)

Cutting Conditions (Finishing)

Work Material		Tensile Strength – Hardness	Insert Size			
			FR12...			
			Face Milling			
			Milling Speed Vc (SFM)		Feed Per Tooth fz (in/t)	Depth of Cut Aa (in)
CAT30	CAT40, CAT50 HSK-63					
N	Aluminum Alloys (7075, 5052, 2017, ADC12)	~12% Si	3300 (2600-6500)	6500 (3300-16400)	0.003 (0.002-0.004)	0.020 (0.012-0.040)
	Aluminum Alloys (AC9A, AC9B)	~13% Si	2000 (1300-2600)	2000 (1300-2600)	0.0025 (0.002-0.003)	0.020 (0.012-0.040)

Recommended Materials by Application

Insert Grade	Chip Breaker	Coolant	P	M	K	N	S	H
DP010	–	Yes				<input checked="" type="checkbox"/>		

good best





List 52100

PFB SA (Inch)



SPEED FEED
P1441

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440



Steel Shank





Carbide Shank

EDP No.	Body Type	Designation	Type	Tool Dia. (inch)		Overall Length (inch)	Neck Length (inch)		Taper	L/D Ratio	No. of Teeth	Shank Dia. (inch)		Neck Dia. (inch)	
				D	R		l1	l2				d	l2		d2
52100000	Cylindrical Shank Steel	PFB-R0250SA0250-S325	1	0.250	0.1250	3.250	0.625	0	2.5	2	2	0.250	2.625	0.226	
52100026		PFB-R0250SA0250-S375	1	0.250	0.1250	3.750	1.125	0	4.5	2	2	0.250	2.625	0.226	
52100027		PFB-R0250TPA0375-S375	2	0.250	0.1250	3.750	1.125	2	4.5	2	2	0.375	2.581	0.226	
52100028		PFB-R0250TPA0375-S425	2	0.250	0.1250	4.250	1.500	1	6	2	2	0.375	2.697	0.226	
52100029		PFB-R0375SA0375-S400	1	0.375	0.1875	4.000	0.937	0	2.5	2	2	0.375	3.063	0.336	
52100001		PFB-R0375SA0375-S550	1	0.375	0.1875	5.500	1.687	0	4.5	2	2	0.375	3.813	0.336	
52100030		PFB-R0375TPA0500-S500	2	0.375	0.1875	5.000	1.687	2	4.5	2	2	0.500	3.276	0.336	
52100031		PFB-R0375TPA0500-S550	2	0.375	0.1875	5.500	2.250	1	6	2	2	0.500	3.200	0.336	
52100032		PFB-R0500SA0500-S450	1	0.500	0.2500	4.500	1.250	0	2.5	2	2	0.500	3.250	0.461	
52100002		PFB-R0500SA0500-S550	1	0.500	0.2500	5.500	2.250	0	4.5	2	2	0.500	3.250	0.461	
52100033		PFB-R0500TPA0625-S550	2	0.500	0.2500	5.500	2.250	2	4.5	2	2	0.625	3.229	0.461	
52100034		PFB-R0500TPA0625-S650	2	0.500	0.2500	6.500	3.000	1	6	2	2	0.625	3.461	0.461	
52100035		PFB-R0625SA0625-S500	1	0.625	0.3125	5.000	1.562	0	2.5	2	2	0.625	3.438	0.546	
52100003		PFB-R0625SA0625-S550	1	0.625	0.3125	5.500	2.500	0	4	2	2	0.625	3.000	0.546	
52100036		PFB-R0625TPA0750-S600	2	0.625	0.3125	6.000	2.812	2	4.5	2	2	0.750	3.181	0.546	
52100037		PFB-R0625TPA0750-S700	2	0.625	0.3125	7.000	3.750	1	6	2	2	0.750	3.222	0.546	
52100038		PFB-R0750SA0750-S550	1	0.750	0.3750	5.500	1.875	0	2.5	2	2	0.750	3.625	0.671	
52100004		PFB-R0750SA0750-S600	1	0.750	0.3750	6.000	3.000	0	4	2	2	0.750	3.000	0.671	
52100039		PFB-R0750TPA1000-S650	2	0.750	0.3750	6.500	3.375	2	4.5	2	2	1.000	3.072	0.671	
52100040		PFB-R0750TPA1000-S800	2	0.750	0.3750	8.000	4.500	1	6	2	2	1.000	3.420	0.671	
52100005		PFB-R1000SA1000-S650	1	1.000	0.5000	6.500	3.000	0	3	2	2	1.000	3.500	0.882	
52100041		PFB-R1000SA1000-S750	1	1.000	0.5000	7.500	4.000	0	4	2	2	1.000	3.500	0.882	
52100042		PFB-R1000TPA1250-S800	2	1.000	0.5000	8.000	4.500	2	4.5	2	2	1.250	3.477	0.882	
52100043		PFB-R1000TPA1250-S950	2	1.000	0.5000	9.500	6.000	1	6	2	2	1.250	3.442	0.882	
52100016		PFB-R1250SA1250-S700	1	1.250	0.6250	7.000	3.750	0	3	2	2	1.250	3.250	1.132	
52100044		PFB-R1250SA1250-S850	1	1.250	0.6250	8.500	5.000	0	4	2	2	1.250	3.500	1.132	
52100045		PFB-R1250TPA1500-S900	2	1.250	0.6250	9.000	5.625	2	4.5	2	2	1.500	3.344	1.132	
52100046		PFB-R1250TPA1500-S1100	2	1.250	0.6250	11.000	7.500	1	6	2	2	1.500	3.425	1.132	
52100020		Cylindrical Shank Short Carbide	PFB-R0250SA0250-S325CS	1	0.250	0.1250	3.250	0.625	0	2.5	2	2	0.250	2.625	0.226
52100021			PFB-R0375SA0375-S400CS	1	0.375	0.1875	4.000	0.937	0	2.5	2	2	0.375	3.063	0.336
52100022			PFB-R0500SA0500-S450CS	1	0.500	0.2500	4.500	1.250	0	2.5	2	2	0.500	3.250	0.461
52100023			PFB-R0625SA0625-S550CS	1	0.625	0.3125	5.500	1.562	0	2.5	2	2	0.625	3.938	0.546
52100024	PFB-R0750SA0750-S600CS		1	0.750	0.3750	6.000	1.875	0	2.5	2	2	0.750	4.125	0.671	
52100025	PFB-R1000SA1000-S650CS		1	1.000	0.5000	6.500	2.500	0	2.5	2	2	1.000	4.000	0.882	
52100017	PFB-R1250SA1250-S700CS		1	1.250	0.6250	7.000	3.125	0	2.5	2	2	1.250	3.875	1.132	

Packed: 1 pc.

continued on next page

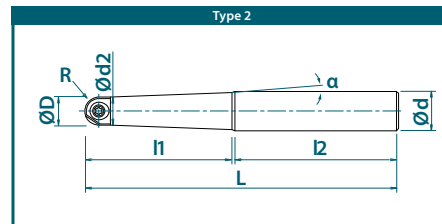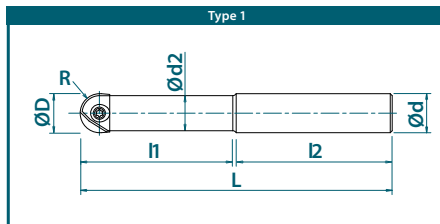



List 52100 (Continued)

PFB SA (Inch)

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440





Steel Shank



Carbide Shank

EDP No.	Body Type	Designation	Type	Tool Dia.	Tool Radius	Overall Length	Neck Length	Taper	L/D Ratio	No. of Teeth	Shank Dia.	Shank Length	Neck Dia.
				(inch)	(inch)	(inch)	(inch)	α°	(inch)		(inch)	(inch)	
				D	R	L	l1						
				d									
52100047	Cylindrical Shank Long Carbide	PFB-R0250SA0250-L400CS	1	0.250	0.1250	4.000	1.250	0	5	2	0.250	2.750	0.226
52100048		PFB-R0250TPA0375-L425CS	2	0.250	0.1250	4.250	1.500	1	6	2	0.375	2.697	0.226
52100006		PFB-R0375SA0375-L550CS	1	0.375	0.1875	5.500	1.875	0	5	2	0.375	3.625	0.336
52100049		PFB-R0375TPA0500-L550CS	2	0.375	0.1875	5.500	2.250	1	6	2	0.500	3.200	0.336
52100007		PFB-R0500SA0500-L550CS	1	0.500	0.2500	5.500	2.500	0	5	2	0.500	3.000	0.461
52100050		PFB-R0500TPA0625-L650CS	2	0.500	0.2500	6.500	3.000	1	6	2	0.625	3.461	0.461
52100008		PFB-R0625SA0625-L650CS	1	0.625	0.3125	6.500	3.125	0	5	2	0.625	3.375	0.546
52100051		PFB-R0625TPA0750-L700CS	2	0.625	0.3125	7.000	3.750	1	6	2	0.750	3.222	0.546
52100009		PFB-R0750SA0750-L700CS	1	0.750	0.3750	7.000	3.750	0	5	2	0.750	3.250	0.671
52100052		PFB-R0750TPA1000-L800CS	2	0.750	0.3750	8.000	4.500	1	6	2	1.000	3.420	0.671
52100010		PFB-R1000SA1000-L800CS	1	1.000	0.5000	8.000	4.500	0	4.5	2	1.000	3.500	0.882
52100053		PFB-R1000TPA1250-L950CS	2	1.000	0.5000	9.500	6.000	1	6	2	1.250	3.442	0.882
52100018		PFB-R1250SA1250-L900CS	1	1.250	0.6250	9.000	5.625	0	4.5	2	1.250	3.375	1.132
52100054		PFB-R1250TPA1500-L1100CS	2	1.250	0.6250	11.000	7.500	1	6	2	1.500	3.425	1.132
52100055		PFB-R0250SA0250-LL450CS	1	0.250	0.1250	4.500	1.750	0	7	2	0.250	2.750	0.226
52100056		PFB-R0250TPA0375-LL475CS	2	0.250	0.1250	4.750	2.000	0.5	8	2	0.375	2.690	0.226
52100011	PFB-R0375SA0375-LL650CS	1	0.375	0.1875	6.500	2.625	0	7	2	0.375	3.875	0.336	
52100057	PFB-R0375TPA0500-LL650CS	2	0.375	0.1875	6.500	3.000	0.5	8	2	0.500	3.440	0.336	
52100012	PFB-R0500SA0500-LL700CS	1	0.500	0.2500	7.000	3.500	0	7	2	0.500	3.500	0.461	
52100058	PFB-R0500TPA0625-LL750CS	2	0.500	0.2500	7.500	4.000	0.5	8	2	0.625	3.448	0.461	
52100013	PFB-R0625SA0625-LL750CS	1	0.625	0.3125	7.500	3.750	0	6	2	0.625	3.750	0.546	
52100059	PFB-R0625TPA0750-LL825CS	2	0.625	0.3125	8.250	5.000	0.5	8	2	0.750	3.206	0.546	
52100014	PFB-R0750SA0750-LL900CS	1	0.750	0.3750	9.000	4.500	0	6	2	0.750	4.500	0.671	
52100060	PFB-R0750TPA1000-LL950CS	2	0.750	0.3750	9.500	6.000	0.5	8	2	1.000	3.401	0.671	
52100015	PFB-R1000SA1000-LL1050CS	1	1.000	0.5000	10.500	5.500	0	5.5	2	1.000	5.000	0.882	
52100061	PFB-R1000TPA1250-LL1150CS	2	1.000	0.5000	11.500	8.000	0.5	8	2	1.250	3.416	0.882	
52100019	PFB-R1250SA1250-LL1200CS	1	1.250	0.6250	12.000	6.875	0	5.5	2	1.250	5.125	1.132	
52100062	PFB-R1250TPA1500-LL1350CS	2	1.250	0.6250	13.500	10.000	0.5	8	2	1.500	3.392	1.132	

Packed: 1 pc.

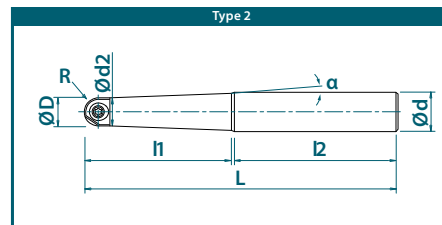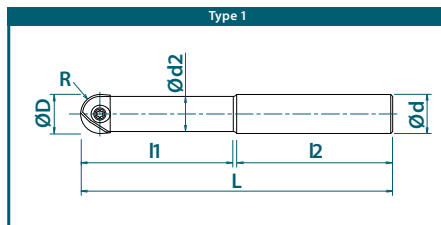



List 78014

PFB SS (Metric)



SPEED FEED
P1441

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440




Steel Shank



Carbide Shank

EDP No.	Body Type	Designation	Tool Dia. (mm)	Tool Radius (mm)	Overall Length (mm)	Neck Length (mm)	L/D Ratio	No. of Teeth	Shank Dia. (mm)	Shank Length (mm)	Neck Dia. (mm)
			D	R	L	l1			d	l2	d2
7801400	Cylindrical Shank Steel	PFB-R080SS08-S120	8	4	120	36	4.5	2	8	84	7
7801401		PFB-R100SS10-S130	10	5	130	45	4.5	2	10	85	9
7801402		PFB-R120SS12-S130	12	6	130	54	4.5	2	12	76	11
7801403		PFB-R160SS16-S140	16	8	140	65	4	2	16	76	14
7801404		PFB-R200SS20-S160	20	10	160	80	4	2	20	80	18
7801405		PFB-R250SS25-S160	25	12.5	160	75	3	2	25	85	22
7801406		PFB-R300SS32-S170	30	15	170	90	3	2	32	80	27
7801407		PFB-R320SS32-S180	32	16	180	96	3	2	32	84	29
7801429	Cylindrical Shank Short Carbide	PFB-R060SS06-S80CS	6	3	80	15	2.5	2	6	65	5.4
7801430		PFB-R080SS08-S100CS	8	4	100	20	2.5	2	8	80	7
7801431		PFB-R100SS10-S100CS	10	5	100	25	2.5	2	10	75	9
7801432		PFB-R120SS12-S110CS	12	6	110	30	2.5	2	12	80	11
7801433		PFB-R160SS16-S140CS	16	8	140	40	2.5	2	16	100	14
7801434		PFB-R200SS20-S160CS	20	10	160	50	2.5	2	20	110	18
7801435		PFB-R250SS25-S160CS	25	12.5	160	62.5	2.5	2	25	97.5	22
7801436		PFB-R300SS32-S170CS	30	15	170	75	2.5	2	32	95	27
7801437	PFB-R320SS32-S180CS	32	16	180	80	2.5	2	32	100	29	
7801439	Cylindrical Shank Long Carbide	PFB-R060SS06-L100CS	6	3	100	30	5.0	2	6	70	5.4
7801440		PFB-R080SS08-L120CS	8	4	120	40	5.0	2	8	80	7
7801441		PFB-R100SS10-L130CS	10	5	130	50	5.0	2	10	80	9
7801442		PFB-R120SS12-L140CS	12	6	140	60	5.0	2	12	80	11
7801443		PFB-R160SS16-L160CS	16	8	160	72	4.5	2	16	88	14
7801444		PFB-R200SS20-L180CS	20	10	180	90	4.5	2	20	90	18
7801445		PFB-R250SS25-L200CS	25	12.5	200	100	4	2	25	100	22
7801446		PFB-R300SS32-L220CS	30	15	220	120	4	2	32	100	27
7801447	PFB-R320SS32-L230CS	32	16	230	128	4	2	32	102	29	
7801419	Cylindrical Shank Extra-Long Carbide	PFB-R060SS06-LL120CS	6	3	120	42	7	2	6	78	5.4
7801420		PFB-R080SS08-LL140CS	8	4	140	56	7	2	8	84	7
7801421		PFB-R100SS10-LL150CS	10	5	150	70	7	2	10	80	9
7801422		PFB-R120SS12-LL160CS	12	6	160	84	7	2	12	76	11
7801423		PFB-R160SS16-LL200CS	16	8	200	96	6	2	16	104	14
7801424		PFB-R200SS20-LL240CS	20	10	240	120	6	2	20	120	18
7801425		PFB-R250SS25-LL260CS	25	12.5	260	137.5	5.5	2	25	122.5	22
7801426		PFB-R300SS32-LL290CS	30	15	290	165	5.5	2	32	125	27
7801427	PFB-R320SS32-LL300CS	32	16	300	176	5.5	2	32	124	29	

Packed: 1 pc.

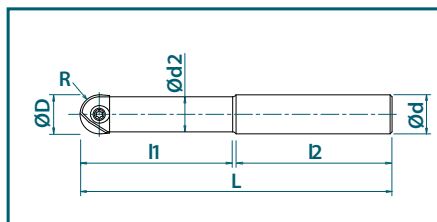




List 52604

PFB ASF (Inch)



SPEED
FEED
P1441

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Head Dia. (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
52604000	Screw Fit Head	PFB-R0375ASF6	0.375	2	0.256	M6	1.024	0.354	0.354	7	PFB...
52604001		PFB-R0500ASF6	0.500	2	0.256	M6	1.024	0.433	0.433	7	
52604002		PFB-R0625ASF8	0.625	2	0.335	M8	1.260	0.551	0.571	10	
52604003		PFB-R0750ASF10	0.750	2	0.413	M10	1.496	0.709	0.709	14	
52604004		PFB-R1000ASF12	1.000	2	0.492	M12	1.496	0.866	0.906	17	

Packed: 1 pc.




List 78114

PFB SF (Metric)



SPEED
FEED
P1441

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Head Dia. (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
7801490	Screw Fit Head	PFB-R100SF6	10	2	6.5	M6	26	9	9	7	PFB...
7801491		PFB-R120SF6	12	2	6.5	M6	26	11	11	7	
7801492		PFB-R160SF8	16	2	8.5	M8	32	14	14.5	10	
7801493		PFB-R200SF10	20	2	10.5	M10	38	18	18	14	
7801494		PFB-R250SF12	25	2	12.5	M12	38	22	23	17	
7801495		PFB-R300SF16	30	2	17	M16	43	27	28	22	

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**





NEW SIZES

List 78PFB




PFB Inserts (Inch)



Designation	Type	Specification	No. of Cutting Edges	Range	Insert Size				EDP Number				
					D (inch)	R (inch)	T (mm)	H (mm)	XP3225	XP3310	XP3320	XP2225	XC4505
PFB0250A-SP	1	Spiral	2	180°	0.250	0.1250	2	5.175	52101020	-	52101010	-	-
PFB0375A-SP					0.375	0.1875	2.6	8.5	52101021	-	52101011	-	-
PFB0500A-SP					0.500	0.2500	3	10	52101022	-	52101012	-	-
PFB0625A-SP					0.625	0.3125	4	12	52101023	-	52101013	-	-
PFB0750A-SP					0.750	0.3750	5	15	52101024	-	52101014	-	-
PFB1000A-SP					1.000	0.5000	6	18.5	52101025	-	52101015	-	-
PFB1250A-SP					1.250	0.6250	7	23.5	52101026	-	52101016	-	-
PFB0250A-Q	2	Spiral (Full Radius)	2	220°	0.250	0.1250	2	5.175	52101040	-	-	-	-
PFB0375A-Q					0.375	0.1875	2.6	8.5	52101041	-	-	-	-
PFB0500A-Q					0.500	0.2500	3	10	52101042	-	-	-	-
PFB0625A-Q					0.625	0.3125	4	12	52101043	-	-	-	-
PFB0750A-Q					0.750	0.3750	5	15	52101044	-	-	-	-
PFB1000A-Q					1.000	0.5000	6	18.5	52101045	-	-	-	-
PFB1250A-Q					1.250	0.6250	7	23.5	52101046	-	-	-	
PFB0375A-Q-ST	3	Straight (Full Radius)	2	200°	0.375	0.1875	2.6	8.5	-	-	-	52101051	-
PFB0500A-Q-ST				0.500	0.2500	3	10	-	-	-	52101052	-	
PFB0625A-Q-ST				0.625	0.3125	4	12	-	-	-	52101053	-	
PFB0750A-Q-ST				0.750	0.3750	5	15	-	-	-	52101054	-	
PFB1000A-Q-ST				1.000	0.5000	6	18.5	-	-	-	52101055	-	
PFB1250A-Q-ST				1.250	0.6250	7	23.5	-	-	-	52101056	-	
PFB0250A-SH	2	Spiral (Strengthened Edge)	2	180°	0.250	0.1250	2	5.175	-	52101030	-	-	-
PFB0375A-SH	0.375				0.1875	2.6	8.5	-	52101031	-	-	-	
PFB0500A-SH	0.500				0.2500	3	10	-	52101032	-	-	-	
PFB0625A-SH	0.625				0.3125	4	12	-	52101033	-	-	-	
PFB0750A-SH	0.750				0.3750	5	15	-	52101034	-	-	-	
PFB1000A-SH	1.000				0.5000	6	18.5	-	52101035	-	-	-	
PFB1250A-SH					1.250	0.6250	7	23.5	-	52101036	-	-	
PFB0250A-D	1	Spiral (Diamond Coated)	2	180°	0.250	0.1250	2	5.175	-	-	-	-	52101000
PFB0375A-D					0.375	0.1875	2.6	8.5	-	-	-	-	52101001
PFB0500A-D					0.500	0.2500	3	10	-	-	-	-	52101002
PFB0625A-D					0.625	0.3125	4	12	-	-	-	-	52101003
PFB0750A-D					0.750	0.3750	5	15	-	-	-	-	52101004
PFB1000A-D					1.000	0.5000	6	18.5	-	-	-	-	52101005
PFB1250A-D					1.250	0.6250	7	23.5	-	-	-	52101006	

Packed: 1 pc.

continued on next page **PXI**

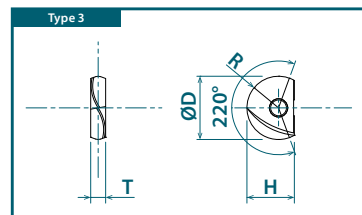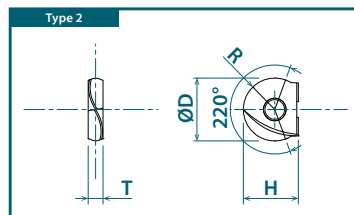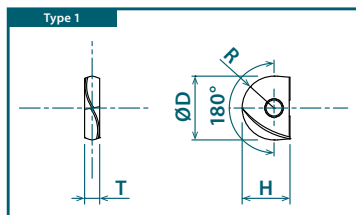




NEW SIZES

List 78PFB (Continued)

PFB Inserts (Metric)




Spiral



Spiral (Full Radius)



Straight (Full Radius)






Spiral (Strengthened Edge)



Spiral (Diamond Coated)

Designation	Type	Specification	No. of Cutting Edges	Range	Insert Size				EDP Number								
					D (mm)	R (mm)	T (mm)	H (mm)	XP3225	XP3310	XP3320	XP2225	XC4505				
PFB080-SP	1	Spiral	2	180°	8	4	2.4	7	7820030	-	7820010	-	-				
PFB100-SP					10	5	2.6	8.5	7820031	-	7820011	-	-				
PFB120-SP					12	6	3	10	7820032	-	7820012	-	-				
PFB160-SP					16	8	4	12	7820033	-	7820013	-	-				
PFB200-SP					20	10	5	15	7820034	-	7820014	-	-				
PFB250-SP					25	12.5	6	18.5	7820035	-	7820015	-	-				
PFB300-SP					30	15	7	22.5	7820036	-	7820016	-	-				
PFB060-Q					2	Spiral (Full Radius)	2	220°	6	3	2	5	7820048	-	-	-	-
PFB070-Q									7	3.5	2	5.5	7820049	-	-	-	-
PFB080-Q									8	4	2.4	7	7820050	-	-	-	-
PFB100-Q	10	5	2.6	8.5					7820051	-	-	-	-				
PFB120-Q	12	6	3	10					7820052	-	-	-	-				
PFB160-Q	16	8	4	12					7820053	-	-	-	-				
PFB200-Q	20	10	5	15					7820054	-	-	-	-				
PFB250-Q	25	12.5	6	18.5					7820055	-	-	-	-				
PFB300-Q	30	15	7	22.5					7820056	-	-	-	-				
PFB080-Q-ST	2	Straight (Full Radius)	2	200°					8	4	2.4	7	-	-	-	7820060	-
PFB100-Q-ST					10	5	2.6	8.5	-	-	-	7820061	-				
PFB120-Q-ST					12	6	3	10	-	-	-	7820062	-				
PFB160-Q-ST				3	220°	16	8	4	12	-	-	-	7820063	-			
PFB200-Q-ST						20	10	5	15	-	-	-	7820064	-			
PFB250-Q-ST						25	12.5	6	18.5	-	-	-	7820065	-			
PFB300-Q-ST	30	15	7	22.5	-	-	-	7820066	-								
PFB060-SH	2	Spiral (Strengthened Edge)	2	180°	6	3	2	5	-	7820039	-	-	-				
PFB080-SH	8				4	2.4	7	-	7820040	-	-	-	-				
PFB100-SH	10				5	2.6	8.5	-	7820041	-	-	-	-				
PFB120-SH	12				6	3	10	-	7820042	-	-	-	-				
PFB160-SH	16				8	4	12	-	7820043	-	-	-	-				
PFB200-SH	20				10	5	15	-	7820044	-	-	-	-				
PFB250-SH	25				12.5	6	18.5	-	7820045	-	-	-	-				
PFB300-SH	30				15	7	22.5	-	7820046	-	-	-	-				
PFB320-SH	32				16	7	23.5	-	7820047	-	-	-	-				
PFB060-D	1				Spiral (Diamond Coated)	2	220°	6	3	2	5	-	-	-	-	7820018	
PFB070-D		7	3.5	2				5.5	-	-	-	-	7820019				
PFB080-D		8	4	2.4				7	-	-	-	-	7820020				
PFB100-D		10	5	2.6				8.5	-	-	-	-	7820021				
PFB120-D		12	6	3				10	-	-	-	-	7820022				
PFB160-D		1	180°	16			8	4	12	-	-	-	7820023				
PFB200-D				20			10	5	15	-	-	-	-	7820024			
PFB250-D				25			12.5	6	18.5	-	-	-	-	7820025			
PFB300-D				30			15	7	22.5	-	-	-	-	7820026			

Packed: 1 pc.

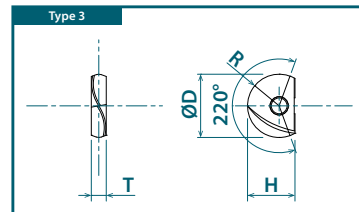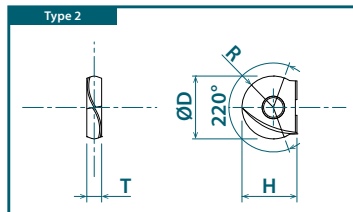
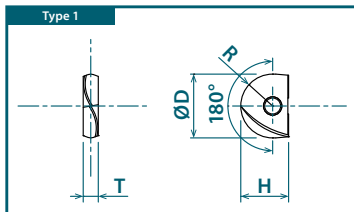


PXI



List 7808H

PFB Accessories

Appearance	EDP No.	Designation	Applicable Insert		Recommended Tightening Torque
			(inch)	(mm)	
 Clamping Screw	7808124	FS20652RB (Torx 6)	0.250	6-7	0.8 Nm
	7808123	FS25669RB (Torx 7)	-	8	1.0 Nm
	7808117	FS30686RB (Torx 8)	0.375	10	1.2 Nm
	7808118	FS35610RB (Torx 10)	0.500	12	2.0 Nm
	7808119	FS40613RB (Torx 15)	0.625	16	3.0 Nm
	7808120	FS50615RB (Torx 20)	0.750	20	5.0 Nm
	7808121	FS60620RB (Torx 20)	1.000	25	5.0 Nm
	7808122	FS80624RB (Torx 30)	1.250	30-32	6.0 Nm
 Wrench	7808203	T6-D (Torx 6)	0.250	6-7	
	7808204	T7-D (Torx 7)	-	8	
	7808205	T8-D (Torx 8)	0.375	10	
	7808207	T10-D (Torx 10)	0.500	12	
	7808208	T15-D (Torx 15)	0.625	16	
	7808209	T20-D (Torx 20)	0.750-1.000	20-25	
	7808212	T30-T (Torx 30)	1.250	30-32	

Packed: Clamping Screw = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.






Effective Cutting Diameter

Depth of Cut Aa		Effective Cutting Diameter (ØDe)																			
		ØDc		ØDc		ØDc		ØDc		ØDc		ØDc		ØDc		ØDc		ØDc			
(inch)	(mm)	0.250"	6mm	0.275"	7mm	0.315"	8 mm	0.375"	10 mm	0.500"	12 mm	0.625"	16 mm	0.750"	20 mm	1.000"	25 mm	1.181"	30 mm	1.250"	32mm
0.004	0.1	0.063	1.5	0.063	1.6	0.071	1.8	0.077	2.0	0.089	2.2	0.100	2.5	0.109	2.8	0.126	3.2	0.137	3.5	0.142	3.6
0.008	0.2	0.088	2.2	0.091	2.3	0.099	2.5	0.108	2.8	0.125	3.1	0.141	3.6	0.154	4.0	0.178	4.5	0.194	4.9	0.197	5.0
0.012	0.3	0.107	2.6	0.110	2.8	0.121	3.0	0.132	3.4	0.153	3.7	0.172	4.3	0.188	4.9	0.218	5.4	0.237	6.0	0.244	6.2
0.016	0.4	0.122	3.0	0.130	3.3	0.138	3.5	0.152	3.9	0.176	4.3	0.197	5.0	0.217	5.6	0.251	6.3	0.273	6.9	0.280	7.1
0.020	0.5	0.136	3.3	0.142	3.6	0.154	3.9	0.169	4.4	0.196	4.8	0.220	5.6	0.242	6.2	0.280	7.0	0.305	7.7	0.311	7.9
0.031	0.8	0.165	4.1	0.177	4.5	0.188	4.8	0.207	5.4	0.241	6.0	0.271	7.0	0.299	7.8	0.347	8.8	0.378	9.7	0.394	10.0
0.039	1.0	-	-	-	-	-	-	0.229	6.0	0.268	6.6	0.302	7.7	0.333	8.7	0.387	9.8	0.422	10.8	0.437	11.1
0.059	1.5	-	-	-	-	-	-	0.273	7.1	0.323	7.9	0.365	9.3	0.404	10.5	0.471	11.9	0.515	13.1	0.531	13.5
0.079	2.0	-	-	-	-	-	-	-	0.365	8.9	0.415	10.6	0.460	12.0	0.539	13.6	0.590	15.0	0.610	15.5	
0.098	2.5	-	-	-	-	-	-	-	-	-	-	0.455	11.6	0.506	13.2	0.595	15.0	0.652	16.6	0.677	17.2
0.118	3.0	-	-	-	-	-	-	-	-	-	-	-	0.546	14.3	0.645	16.2	0.708	18.0	0.736	18.7	
0.138	3.5	-	-	-	-	-	-	-	-	-	-	-	0.581	15.2	0.690	17.3	0.759	19.3	0.787	20.0	
0.157	4.0	-	-	-	-	-	-	-	-	-	-	-	-	-	0.728	18.3	0.802	20.4	0.835	21.2	
0.117	4.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.706	21.4	0.874	22.2
0.197	5.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.881	22.3	0.913	23.2

Note: Effective cutting diameter is based on cutting depth (Aa)

How to determine effective cutting diameter:


Ex: Dc = 0.500"
Aa = 0.020"
De = 2√(0.020(0.500-0.020))
De = 0.196"



$$De = 2 \sqrt{a_a(D_c - a_a)}$$


Recommended Width of Cut & Surface Roughness

Tool Dia ØDc		Width of Cut Ar		Surface Finish h	
(inch)	(mm)	(inch)	(mm)	(inch)	(mm)
0.250	6	0.0157	0.4	0.00027	0.007
0.275	7	0.0177	0.45	0.00027	0.007
0.315	8	0.0197	0.5	0.00031	0.008
0.375	10	0.0236	0.6	0.00037	0.009
0.500	12	0.0275	0.7	0.00038	0.010
0.625	16	0.0315	0.8	0.00040	0.010
0.750	20	0.0394	1.0	0.00052	0.012
1.000	25	0.0472	1.2	0.00055	0.014
1.181	30	0.0512	1.3	0.00055	0.014
1.250	32	0.0551	1.4	0.00059	0.015



$$h = 0.5 (D_c - \sqrt{D_c^2 - Ar^2})$$

Dc=20mm
Ar=1mm
->h=0.0125mm

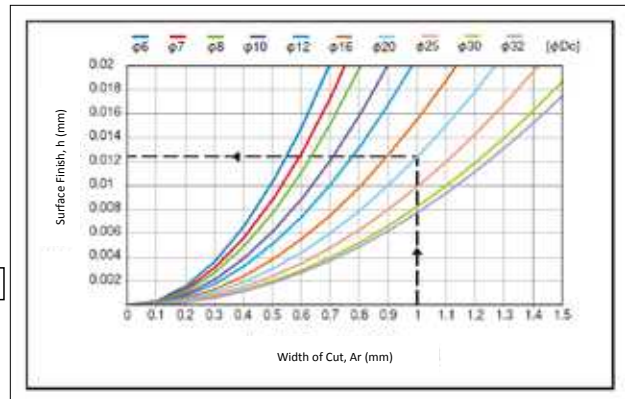

Cutting Conditions

Work Material	Tensile Strength – Hardness	Milling Speed Vc (SFM)	Depth of Cut Aa (in)	Feed Per Tooth fz (in/t)			
				Ø0.236-0.312 (6-8mm)	Ø0.375-0.500 (10-12mm)	Ø0.625-0.750 (16-20mm)	Ø1.000-1.250 (25-32mm)
P Mild Steels, Carbon Steels (1010, 1018) Carbon Steels, Alloy Steels (1050, 4140) Die Steels (H13, D2)	~180 HB	985 (655-1310)	0.02Dc	0.0040	0.0047	0.0055	0.0071
	~280 HB	985 (655-1310)	0.02Dc	0.0028	0.0040	0.0047	0.0055
	~280 HB	820 (495-1150)	0.02Dc	0.0028	0.0040	0.0047	0.0055
M Stainless Steels (304SS, 420SS)	~250 HB	820 (495-1150)	0.02Dc	0.0028	0.0047	0.0055	0.0067
K Cast Iron (FC250) Ductile Cast Iron (60-40-18)	~350 N/mm ²	1310 (985-1640)	0.02Dc	0.0047	0.0055	0.0071	0.0086
	~600 N/mm ²	985 (655-1310)	0.02Dc	0.0040	0.0047	0.0055	0.0071
N Aluminum Alloys (6061, 7075) Copper Alloys (C1100) Graphite CFRP	~13% Si	1640 (1310-1970)	0.03Dc	0.0047	0.0055	0.0071	0.0086
	-	985 (655-1310)	0.03Dc	0.0043	0.0051	0.0067	0.0079
	-	1640 (1310-1970)	0.03Dc	0.0055	0.0067	0.0083	0.0098
	-	1310 (985-1640)	0.03Dc	0.0043	0.0051	0.0067	0.0079
S Heat Resistant Alloys (Inconel 718) Titanium Alloy (Ti-6Al-4V)	-	165 (65-260)	0.015Dc	0.0016	0.0020	0.0024	0.0024
	-	295 (130-395)	0.02Dc	0.0024	0.0031	0.0043	0.0051
H Pre-hardened Steel (P20, Stavax) Die Cast Steels (A2, S7) Hardened Steels (D2)	40 - 43 HRC	655 (330-985)	0.015Dc	0.0024	0.0028	0.0031	0.0040
	43 - 48 HRC	590 (295-655)	0.015Dc	0.0020	0.0024	0.0028	0.0028
	50 - 55 HRC	490 (330-820)	0.01Dc	0.0020	0.0024	0.0028	0.0028

Recommended Materials by Application

Insert Grade	P	M	K	N	S	H
XP3225	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="checkbox"/>	
XP3310			<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
XP3320	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
XP2225	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>	<input type="checkbox"/>
XC4505				<input checked="" type="checkbox"/>		

*: Best recommended for aluminum & copper alloy applications.
 **: Best recommended for graphite & CFRP applications.

good best



List 52200



SPEED FEED
P1451-1452


Recommended Materials: p1451-1452
Accessories & Inserts: p1445-1450

PFR SA (Inch)



EDP No.	Body Type	Designation	Tool Dia.	Overall Length	Neck Length	L/D Ratio	No. of Teeth	Shank Dia.	Shank Length	Neck Dia.	
			(inch)	(inch)	(inch)			(inch)	(inch)	(inch)	(inch)
			D	L	l1				d	l2	d2
52200024	Cylindrical Shank Steel	PFR-R0250SA0250-S325	0.250	3.250	0.625	2.5	2	0.250	2.625	0.225	
52200025		PFR-R0250SA0250-S375	0.250	3.750	1.125	4.5	2	0.250	2.625	0.225	
52200026		PFR-R0375SA0375-S400	0.375	4.000	0.937	2.5	2	0.375	3.063	0.335	
52200000		PFR-R0375SA0375-S550	0.375	5.500	1.687	4.5	2	0.375	3.813	0.355	
52200027		PFR-R0500SA0500-S450	0.500	4.500	1.250	2.5	2	0.500	3.250	0.480	
52200001		PFR-R0500SA0500-S550	0.500	5.500	2.250	4.5	2	0.500	3.250	0.480	
52200028		PFR-R0625SA0625-S500	0.625	5.000	1.562	2.5	2	0.625	3.438	0.605	
52200002		PFR-R0625SA0625-S550	0.625	5.500	2.500	4	2	0.625	3.000	0.605	
52200029		PFR-R0750SA0750-S550	0.750	5.500	1.875	2.5	2	0.750	3.625	0.730	
52200003		PFR-R0750SA0750-S600	0.750	6.000	3.000	4	2	0.750	3.000	0.730	
52200004		PFR-R1000SA1000-S650	1.000	6.500	3.000	3	2	1.000	3.500	0.980	
52200030		PFR-R1000SA1000-S750	1.000	7.500	4.000	4	2	1.000	3.500	0.980	
52200015		PFR-R1250SA1250-S700	1.250	7.000	3.750	3	2	1.250	3.250	1.230	
52200031		PFR-R1250SA1250-S850	1.250	8.500	5.000	4	2	1.250	3.500	1.230	
52200032		PFR-R0250SA0250-S325CS	0.250	3.250	0.625	2.5	2	0.250	2.625	0.225	
52200005	PFR-R0375SA0375-S400CS	0.375	4.000	0.937	2.5	2	0.375	3.063	0.355		
52200006	PFR-R0500SA0500-S450CS	0.500	4.500	1.250	2.5	2	0.500	3.250	0.480		
52200007	PFR-R0625SA0625-S550CS	0.625	5.500	1.562	2.5	2	0.625	3.938	0.605		
52200008	PFR-R0750SA0750-S600CS	0.750	6.000	1.875	2.5	2	0.750	4.125	0.730		
52200009	PFR-R1000SA1000-S650CS	1.000	6.500	2.500	2.5	2	1.000	4.000	0.980		
52200016	PFR-R1250SA1250-S700CS	1.250	7.000	3.125	2.5	2	1.250	3.875	1.230		
52200033	PFR-R0250SA0250-L400CS	0.250	4.000	1.250	5	2	0.250	2.750	0.225		
52200018	PFR-R0375SA0375-L550CS	0.375	5.500	1.875	5	2	0.375	3.625	0.355		
52200019	PFR-R0500SA0500-L550CS	0.500	5.500	2.500	5	2	0.500	3.000	0.480		
52200020	PFR-R0625SA0625-L650CS	0.625	6.500	3.125	5	2	0.625	3.375	0.605		
52200021	PFR-R0750SA0750-L700CS	0.750	7.000	3.750	5	2	0.750	3.250	0.730		
52200022	PFR-R1000SA1000-L800CS	1.000	8.000	4.500	4.5	2	1.000	3.500	0.980		
52200023	PFR-R1250SA1250-L900CS	1.250	9.000	5.625	4.5	2	1.250	3.375	1.230		
52200034	PFR-R0250SA0250-LL450CS	0.250	4.500	1.750	7	2	0.250	2.750	0.225		
52200010	PFR-R0375SA0375-LL650CS	0.375	6.500	2.625	7	2	0.375	3.875	0.355		
52200011	PFR-R0500SA0500-LL700CS	0.500	7.000	3.500	7	2	0.500	3.500	0.480		
52200012	PFR-R0625SA0625-LL750CS	0.625	7.500	3.750	6	2	0.625	3.750	0.605		
52200013	PFR-R0750SA0750-LL900CS	0.750	9.000	4.500	6	2	0.750	4.500	0.730		
52200014	PFR-R1000SA1000-LL1050CS	1.000	10.500	5.500	5.5	2	1.000	5.000	0.980		
52200017	PFR-R1250SA1250-LL1200CS	1.250	12.000	6.875	5.5	2	1.250	5.125	1.230		

Packed: 1 pc.

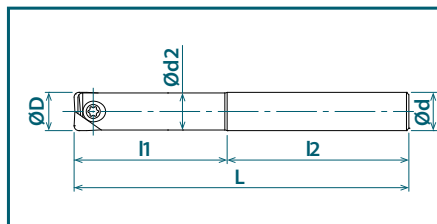




List 78320

PFR SS (Metric)




SPEED FEED
P1451-1452

Recommended Materials: p1451-1452
Accessories & Inserts: p1445-1450

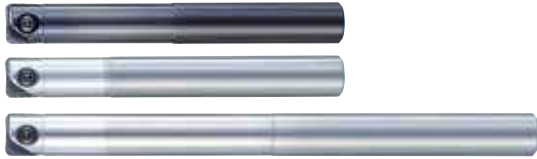

EDP No.	Body Type	Designation	Tool Dia.	Overall Length	Neck Length	L/D Ratio	No. of Teeth	Shank Dia.	Shank Length	Neck Dia.	
			(mm)	(mm)	(mm)			(mm)	(mm)	(mm)	
			D	L	l1				d	l2	d2
7832000	Cylindrical Shank Steel	PFR-R080SS08-S120	8	120	36	4.5	2	8	84	7.5	
7832001		PFR-R100SS10-S130	10	130	45	4.5	2	10	85	9.5	
7832002		PFR-R120SS12-S130	12	130	54	4.5	2	12	76	11.5	
7832003		PFR-R160SS16-S140	16	140	64	4	2	16	76	15.5	
7832004		PFR-R200SS20-S160	20	160	80	4	2	20	80	19.5	
7832005		PFR-R250SS25-S160	25	160	75	3	2	25	85	24.5	
7832006		PFR-R300SS32-S170	30	170	90	3	2	32	80	29.5	
7832007	PFR-R320SS32-S180	32	180	96	3	2	32	84	31.5		
7832029	Cylindrical Shank Short Carbide	PFR-R060SS06-S80CS	6	80	15	2.5	2	6	65	5.5	
7832030		PFR-R080SS08-S100CS	8	100	20	2.5	2	8	80	7.5	
7832031		PFR-R100SS10-S100CS	10	100	25	2.5	2	10	75	9.5	
7832032		PFR-R120SS12-S110CS	12	110	30	2.5	2	12	80	11.5	
7832033		PFR-R160SS16-S140CS	16	140	40	2.5	2	16	100	15.5	
7832034		PFR-R200SS20-S160CS	20	160	50	2.5	2	20	110	19.5	
7832035		PFR-R250SS25-S160CS	25	160	62.5	2.5	2	25	97.5	24.5	
7832036	PFR-R300SS32-S170CS	30	170	75	2.5	2	32	95	29.5		
7832037	PFR-R320SS32-S180CS	32	180	80	2.5	2	32	100	31.5		
7832039	Cylindrical Shank Long Carbide	PFR-R060SS06-L100CS	6	100	30	5	2	6	70	5.5	
7832040		PFR-R080SS08-L120CS	8	120	40	5	2	8	80	7.5	
7832041		PFR-R100SS10-L130CS	10	130	50	5	2	10	80	9.5	
7832042		PFR-R120SS12-L140CS	12	140	60	5	2	12	80	11.5	
7832043		PFR-R160SS16-L160CS	16	160	72	4.5	2	16	88	15.5	
7832044		PFR-R200SS20-L180CS	20	180	90	4.5	2	20	90	19.5	
7832045		PFR-R250SS25-L200CS	25	200	100	4	2	25	100	24.5	
7832046	PFR-R300SS32-L220CS	30	220	120	4	2	32	100	29.5		
7832047	PFR-R320SS32-L230CS	32	230	128	4	2	32	102	31.5		
7832019	Cylindrical Shank Extra-Long Carbide	PFR-R060SS06-LL120CS	6	120	42	7	2	6	78	5.5	
7832020		PFR-R080SS08-LL140CS	8	140	56	7	2	8	84	7.5	
7832021		PFR-R100SS10-LL150CS	10	150	70	7	2	10	80	9.5	
7832022		PFR-R120SS12-LL160CS	12	160	84	7	2	12	76	11.5	
7832023		PFR-R160SS16-LL200CS	16	200	96	6	2	16	104	15.5	
7832024		PFR-R200SS20-LL240CS	20	240	120	6	2	20	120	19.5	
7832025		PFR-R250SS25-LL260CS	25	260	137.5	5.5	2	25	122.5	24.5	
7832026	PFR-R300SS32-LL290CS	30	290	165	5.5	2	32	125	29.5		
7832027	PFR-R320SS32-LL300CS	32	300	176	5.5	2	32	124	31.5		

Packed: 1 pc.

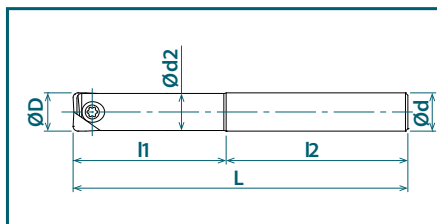


List 52605

PFR ASF (Inch)



SPEED FEED
P1451-1452

Recommended Materials: p1451-1452
Accessories & Inserts: p1445-1450
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Head Dia. (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
52605000	Screw Fit Head	PFR-R0375ASF6	0.375	2	0.256	M6	1.024	0.374	0.354	7	PFR...
52605001		PFR-R0500ASF6	0.500	2	0.256	M6	1.024	0.453	0.433	7	
52605002		PFR-R0625ASF8	0.625	2	0.335	M8	1.260	0.610	0.571	10	
52605003		PFR-R0750ASF10	0.750	2	0.413	M10	1.496	0.768	0.709	14	
52605004		PFR-R1000ASF12	1.000	2	0.492	M12	1.496	0.965	0.906	17	

Packed: 1 pc.




List 78220

PFR SF (Metric)



SPEED FEED
P1451-1452

Recommended Materials: p1451-1452
Accessories & Inserts: p1445-1450
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Head Dia. (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
7832090	Screw Fit Head	PFR-R100SF6	10	2	6.5	M6	26	9.5	9	7	PFR...
7832091		PFR-R120SF6	12	2	6.5	M6	26	11.5	11	7	
7832092		PFR-R160SF8	16	2	8.5	M8	32	15.5	14.5	10	
7832093		PFR-R200SF10	20	2	10.5	M10	38	19.5	18	14	
7832094		PFR-R250SF12	25	2	12.5	M12	38	24.5	23	17	
7832095		PFR-R300SF16	30	2	17	M16	43	29.5	28	22	
7832096		PFR-R320SF16	32	2	17	M16	43	31.5	28	22	


Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**




List 78PFR


PFR Inserts (Inch)




Multi-Purpose



Strengthened Edge



Diamond Coated




Designation	Specification	No. of Cutting Edges	Insert Size					EDP Number		
			D	R	Aa	T	H	XP3225	XP3310	XC4505
			(inch)	(inch)	(inch)	(mm)	(mm)			
PFR0250R015A-ST	Multi-Purpose	2	0.250	0.015	0.078	2	5	52201029	-	-
PFR0250R030A-ST				0.030				52201030	-	-
PFR0250R060A-ST				0.060				52201031	-	-
PFR0375R015A-ST				0.015				52201000	-	-
PFR0375R030A-ST			0.375	0.030	0.130	2.6	8.5	52201001	-	-
PFR0375R060A-ST				0.060				52201002	-	-
PFR0375R090A-ST				0.090				52201003	-	-
PFR0500R015A-ST				0.015				52201004	-	-
PFR0500R030A-ST			0.500	0.030	0.157	3	10	52201005	-	-
PFR0500R060A-ST				0.060				52201006	-	-
PFR0500R090A-ST				0.090				52201007	-	-
PFR0500R120A-ST				0.120				52201008	-	-
PFR0625R015A-ST			0.625	0.015	0.208	4	12	52201009	-	-
PFR0625R030A-ST				0.030				52201010	-	-
PFR0625R060A-ST				0.060				52201011	-	-
PFR0625R090A-ST				0.090				52201012	-	-
PFR0625R120A-ST			0.750	0.120	0.264	5	15	52201013	-	-
PFR0750R015A-ST				0.015				52201014	-	-
PFR0750R030A-ST				0.030				52201015	-	-
PFR0750R060A-ST				0.060				52201016	-	-
PFR0750R090A-ST			1.000	0.090	0.327	6	18.5	52201017	-	-
PFR0750R120A-ST				0.120				52201018	-	-
PFR1000R015A-ST				0.015				52201019	-	-
PFR1000R030A-ST				0.030				52201020	-	-
PFR1000R060A-ST			1.250	0.060	0.405	7	23.5	52201021	-	-
PFR1000R090A-ST				0.090				52201022	-	-
PFR1000R120A-ST				0.120				52201023	-	-
PFR1250R015A-ST				0.015				52201024	-	-
PFR1250R030A-ST	Strengthened Edge	2	0.250	0.030	0.078	2	5	52201025	-	-
PFR1250R060A-ST				0.060				52201026	-	-
PFR1250R090A-ST				0.090				52201027	-	-
PFR1250R120A-ST				0.120				52201028	-	-
PFR0250R015A-SH			0.375	0.015	0.130	2.6	8.5	-	52201079	-
PFR0250R030A-SH				0.030				-	52201080	-
PFR0250R060A-SH				0.060				-	52201081	-
PFR0375R015A-SH				0.015				-	52201050	-
PFR0375R030A-SH	0.500	0.030	0.157	3	10	-	52201051	-		
PFR0375R060A-SH		0.060				-	52201052	-		
PFR0375R090A-SH		0.090				-	52201053	-		
PFR0500R015A-SH		0.015				-	52201054	-		
PFR0500R030A-SH	0.625	0.030	0.208	4	12	-	52201055	-		
PFR0500R060A-SH		0.060				-	52201056	-		
PFR0500R090A-SH		0.090				-	52201057	-		
PFR0500R120A-SH		0.120				-	52201058	-		

Packed: 1 pc.


continued on next page  **PXI**

List 78PFR (Continued)


PFR Inserts (Inch)




Multi-Purpose



Strengthened Edge



Diamond Coated




Designation	Specification	No. of Cutting Edges	Insert Size					EDP Number				
			D	R	Aa	T	H	XP3225	XP3310	XC4505		
			(inch)	(inch)	(inch)	(mm)	(mm)					
PFR0625R015A-SH	Strengthened Edge	2	0.625	0.015	0.208	4	12	-	52201059	-		
PFR0625R030A-SH				0.030				-	52201060	-		
PFR0625R060A-SH				0.060				-	52201061	-		
PFR0625R090A-SH				0.090				-	52201062	-		
PFR0625R120A-SH				0.120				-	52201063	-		
PFR0750R015A-SH				0.015				0.264	5	15	-	52201064
PFR0750R030A-SH			0.030	-	52201065	-						
PFR0750R060A-SH			0.060	-	52201066	-						
PFR0750R090A-SH			0.090	-	52201067	-						
PFR0750R120A-SH			0.120	-	52201068	-						
PFR1000R015A-SH			0.015	0.327	6	18.5	-				52201069	-
PFR1000R030A-SH			0.030				-	52201070	-			
PFR1000R060A-SH			0.060				-	52201071	-			
PFR1000R090A-SH			0.090				-	52201072	-			
PFR1000R120A-SH			0.120				-	52201073	-			
PFR1250R015A-SH			0.015				0.405	7	23.5	-	52201074	-
PFR1250R030A-SH			0.030	-	52201075	-						
PFR1250R060A-SH			0.060	-	52201076	-						
PFR1250R090A-SH			0.090	-	52201077	-						
PFR1250R120A-SH			0.120	-	52201078	-						
PFR0250R015A-D			Diamond Coated	2	0.250	0.015				0.078	2	5
PFR0250R030A-D						0.030	-	52201115	-			
PFR0250R060A-D						0.060	-	52201116	-			
PFR0375R015A-D					0.375	0.015	0.130	2.6	8.5	-	-	52201100
PFR0375R030A-D	0.030	-				52201101				-		
PFR0375R060A-D	0.060	-				52201102				-		
PFR0500R015A-D	0.500	0.015			0.157	3	10	-	-	52201103	-	
PFR0500R030A-D		0.030						-	52201104	-		
PFR0500R060A-D		0.060						-	52201105	-		
PFR0625R015A-D	0.625	0.015			0.208	4	12	-	-	52201106	-	
PFR0625R030A-D		0.030						-	52201107	-		
PFR0625R060A-D		0.060						-	52201108	-		
PFR0750R015A-D	0.750	0.015			0.264	5	15	-	-	52201109	-	
PFR0750R030A-D		0.030						-	52201110	-		
PFR0750R060A-D		0.060						-	52201111	-		
PFR1000R060A-D	1.000	0.060			0.327	6	18.5	-	-	52201112	-	
PFR1250R060A-D	1.250	0.060			0.405	7	23.5	-	-	52201113	-	

Packed: 1 pc.




List 78PFR (Continued)


PFR Inserts (Metric)




Multi-Purpose



Strengthened Edge



Diamond Coated



Designation	Specification	No. of Cutting Edges	Insert Size					EDP Number						
			D	R	Aa	T	H	XP3225	XP3310	XC4505				
			(mm)	(mm)	(mm)	(mm)	(mm)							
PFR060R03-ST	Multi-Purpose	2	6	0.3	2	2	5	7820350	-	-				
PFR060R05-ST				0.5				7820351	-	-				
PFR060R10-ST				1				7820352	-	-				
PFR070R03-ST				0.3				7820353	-	-				
PFR070R05-ST				0.5				7820354	-	-				
PFR070R10-ST				1				7820355	-	-				
PFR080R03-ST			0.3	8	2.7	2.4	7	7820200	-	-				
PFR080R05-ST			0.5					7820201	-	-				
PFR080R10-ST			1					7820202	-	-				
PFR080R20-ST			2	7820203	-	-								
PFR100R03-ST			0.3	10	3.3	2.6	8.5	7820204	-	-				
PFR100R05-ST			0.5					7820205	-	-				
PFR100R10-ST			1					7820206	-	-				
PFR100R20-ST			2					7820207	-	-				
PFR110R03-ST			0.3					11	3.3	2.6	8.5	7820356	-	-
PFR110R05-ST			0.5									7820357	-	-
PFR110R10-ST			1	7820358	-	-								
PFR110R20-ST			2	7820359	-	-								
PFR120R03-ST			0.3	12	4	3	10	7820208	-	-				
PFR120R05-ST			0.5					7820209	-	-				
PFR120R10-ST			1					7820210	-	-				
PFR120R20-ST			2					7820211	-	-				
PFR120R30-ST			3					7820212	-	-				
PFR130R03-ST			0.3					13	4	3	10	7820360	-	-
PFR130R05-ST			0.5	7820361	-	-								
PFR130R10-ST			1	7820362	-	-								
PFR130R20-ST			2	7820363	-	-								
PFR160R03-ST			0.3	16	5.3	4	12					7820213	-	-
PFR160R05-ST			0.5									7820214	-	-
PFR160R10-ST			1					7820215	-	-				
PFR160R20-ST			2					7820216	-	-				
PFR160R30-ST			3					7820217	-	-				
PFR170R03-ST			0.3					17	5.3	4	12	7820364	-	-
PFR170R05-ST			0.5	7820365	-	-								
PFR170R10-ST			1	7820366	-	-								
PFR170R20-ST			2	7820367	-	-								
PFR200R03-ST			0.3	20	6.7	5	15					7820218	-	-
PFR200R05-ST			0.5									7820219	-	-
PFR200R10-ST			1					7820220	-	-				
PFR200R20-ST			2					7820221	-	-				
PFR200R30-ST			3					7820222	-	-				
PFR210R03-ST			0.3					21	6.7	5	15	7820368	-	-
PFR210R05-ST			0.5	7820369	-	-								
PFR210R10-ST			1	7820370	-	-								
PFR210R20-ST			2	7820371	-	-								


Packed: 1 pc.

continued on next page  




List 78PFR (Continued)


PFR Inserts (Metric)




Multi-Purpose



Strengthened Edge



Diamond Coated



Designation	Specification	No. of Cutting Edges	Insert Size					EDP Number		
			D (mm)	R (mm)	Aa (mm)	T (mm)	H (mm)	XP3225	XP3310	XC4505
PFR250R03-ST	Multi-Purpose	2	25	0.3	8.3	6	18.5	7820223	-	-
PFR250R05-ST				0.5				7820224	-	-
PFR250R10-ST				1				7820225	-	-
PFR250R20-ST				2				7820226	-	-
PFR250R30-ST				3				7820227	-	-
PFR260R03-ST			26	0.3	8.3	6	18.5	7820372	-	-
PFR260R05-ST				0.5				7820373	-	-
PFR260R10-ST				1				7820374	-	-
PFR260R20-ST				2				7820375	-	-
PFR300R03-ST				0.3				10	7	22.5
PFR300R05-ST			0.5	7820229	-	-				
PFR300R10-ST			1	7820230	-	-				
PFR300R20-ST			2	7820231	-	-				
PFR300R30-ST			3	7820232	-	-				
PFR320R03-ST			32	0.3	10.3	7	23.5	7820233	-	-
PFR320R05-ST				0.5				7820234	-	-
PFR320R10-ST				1				7820235	-	-
PFR320R20-ST				2				7820236	-	-
PFR320R30-ST				3				7820237	-	-
PFR060R03-SH			Strengthened Edge	2	6	0.3	2	2	5	-
PFR060R05-SH	0.5	-				7820401				-
PFR060R10-SH	1	-				7820402				-
PFR070R03-SH	7	0.3			2.7	2.4	7	-	7820403	-
PFR070R05-SH		0.5						-	7820404	-
PFR070R10-SH		1						-	7820405	-
PFR080R03-SH	8	0.3			3.3	2.6	8.5	-	7820250	-
PFR080R05-SH		0.5						-	7820251	-
PFR080R10-SH		1						-	7820252	-
PFR080R20-SH	2	-			7820253	-				
PFR100R03-SH	10	0.3			4	3	10	-	7820254	-
PFR100R05-SH		0.5						-	7820255	-
PFR100R10-SH		1						-	7820256	-
PFR100R20-SH	2	-			7820257	-				
PFR110R03-SH	11	0.3			4	3	10	-	7820406	-
PFR110R05-SH		0.5						-	7820407	-
PFR110R10-SH		1						-	7820408	-
PFR110R20-SH	2	-			7820409	-				
PFR120R03-SH	12	0.3			4	3	10	-	7820258	-
PFR120R05-SH		0.5						-	7820259	-
PFR120R10-SH		1						-	7820260	-
PFR120R20-SH	2	-			7820261	-				
PFR120R30-SH	3	-			7820262	-				
PFR130R03-SH	13	0.3			4	3	10	-	7820410	-
PFR130R05-SH		0.5						-	7820411	-
PFR130R10-SH		1						-	7820412	-
PFR130R20-SH	2	-			7820413	-				

Packed: 1 pc.



List 78PFR (Continued)

PFR Inserts (Metric)

Designation	Specification	No. of Cutting Edges	Insert Size					EDP Number		
			D (mm)	R (mm)	Aa (mm)	T (mm)	H (mm)	XP3225	XP3310	XC4505
PFR160R03-SH	Strengthened Edge	2	16	0.3	5.3	4	12	-	7820263	-
PFR160R05-SH				0.5				-	7820264	-
PFR160R10-SH				1				-	7820265	-
PFR160R20-SH				2				-	7820266	-
PFR160R30-SH				3				-	7820267	-
PFR170R03-SH				17				0.3	-	7820414
PFR170R05-SH			0.5		-	7820415	-			
PFR170R10-SH			1		-	7820416	-			
PFR170R20-SH			2		-	7820417	-			
PFR200R03-SH			20		0.3	-	7820268	-		
PFR200R05-SH					0.5	-	7820269	-		
PFR200R10-SH				1	-	7820270	-			
PFR200R20-SH				2	-	7820271	-			
PFR200R30-SH				3	-	7820272	-			
PFR210R03-SH				21	0.3	-	7820418	-		
PFR210R05-SH			0.5		-	7820419	-			
PFR210R10-SH			1		-	7820420	-			
PFR210R20-SH			2		-	7820421	-			
PFR250R03-SH			25		0.3	-	7820273	-		
PFR250R05-SH					0.5	-	7820274	-		
PFR250R10-SH				1	-	7820275	-			
PFR250R20-SH				2	-	7820276	-			
PFR250R30-SH				3	-	7820277	-			
PFR260R03-SH				26	0.3	-	7820422	-		
PFR260R05-SH			0.5		-	7820423	-			
PFR260R10-SH			1		-	7820424	-			
PFR260R20-SH			2		-	7820425	-			
PFR300R03-SH			30		0.3	-	7820278	-		
PFR300R05-SH					0.5	-	7820279	-		
PFR300R10-SH				1	10	7	22.5	-	7820280	-
PFR300R20-SH				2	-	-	-	-	7820281	-
PFR300R30-SH				3	-	-	-	-	7820282	-
PFR320R03-SH				32	0.3	-	7820283	-		
PFR320R05-SH			0.5		-	7820284	-			
PFR320R10-SH			1		10.3	7	23.5	-	7820285	-
PFR320R20-SH			2		-	-	-	-	7820286	-
PFR320R30-SH	3	-	-		-	-	7820287	-		
PFR060R03-D	Diamond Coated	2	6		0.3	2	2	5	-	-
PFR060R05-D				0.5	-				-	7820451
PFR060R10-D				1	-				-	7820452
PFR080R03-D				0.3	-				-	7820300
PFR080R05-D			0.5	2.7	2.4	7	-	-	7820301	
PFR080R10-D			1	-	-	-	-	-	7820302	
PFR100R03-D			10	0.3	-	-	-	-	7820303	
PFR100R05-D				0.5	3.3	2.6	8.5	-	-	7820304
PFR100R10-D				1	-	-	-	-	-	7820305
PFR120R03-D				0.3	-	-	-	-	-	7820306
PFR120R05-D			0.5	4	3	10	-	-	7820307	
PFR120R10-D			1	-	-	-	-	-	7820308	
PFR160R03-D			16	0.3	-	-	-	-	7820309	
PFR160R05-D				0.5	5.3	4	12	-	-	7820310
PFR160R10-D				1	-	-	-	-	-	7820311
PFR200R03-D				0.3	-	-	-	-	-	7820312
PFR200R05-D			20	0.5	6.7	5	15	-	-	7820313
PFR200R10-D				1	-	-	-	-	-	7820314



Packed: 1 pc.





List 7808H

PFR Accessories

Appearance	EDP No.	Designation	Applicable Insert		Recommended Tightening Torque
			(inch)	(mm)	
 Clamping Screw	7808124	FS20652RB (Torx 6)	0.250	6-7	0.8 Nm
	7808123	FS25669RB (Torx 7)	-	8	1.0 Nm
	7808117	FS30686RB (Torx 8)	0.375	10	1.2 Nm
	7808118	FS35610RB (Torx 10)	0.500	12	2.0 Nm
	7808119	FS40613RB (Torx 15)	0.625	16	3.0 Nm
	7808120	FS50615RB (Torx 20)	0.750	20	5.0 Nm
	7808121	FS60620RB (Torx 20)	1.000	25	5.0 Nm
	7808122	FS80624RB (Torx 30)	1.250	30-32	6.0 Nm
 Wrench	7808203	T6-D (Torx 6)	0.250	6-7	
	7808204	T7-D (Torx 7)	-	8	
	7808205	T8-D (Torx 8)	0.375	10	
	7808207	T10-D (Torx 10)	0.500	12	
	7808208	T15-D (Torx 15)	0.625	16	
	7808209	T20-D (Torx 20)	0.750-1.000	20-25	
	7808212	T30-T (Torx 30)	1.250	30-32	

Packed: Clamping Screw = 1 pc.; Wrench = 1 pc.
Note: Wrench sold separately.



Cutting Conditions (Standard Milling)

Work Material	Tensile Strength - Hardness	Milling Speed Vc (SFM)			Depth of Cut Aa (in)	Feed Per Tooth fz (in/t)				
		L/D = 2.5	L/D = 5	L/D = 8		Ø0.236-0.275 [6-7mm]	Ø0.312-0.375 [8-10mm]	Ø0.500-0.625 [12-16mm]	Ø0.750-1.250 [20-32mm]	
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	655 (490-820)	80%	60%	0.05Dc	0.0047	0.0079	0.0087	0.0098
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	590 (495-820)			0.05Dc	0.0059	0.0071	0.0087	0.0098
	Die Steels (H13, D2)	~280 HB	495 (395-655)			0.05Dc	0.0040	0.0059	0.0071	0.0079
M	Stainless Steels (304SS, 420SS)	~250 HB	495 (330-655)			0.03Dc	0.0031	0.0047	0.0059	0.0071
K	Cast Iron (FC250)	~350 N/mm ²	655 (495-820)			0.05Dc	0.0059	0.0079	0.0098	0.0118
	Ductile Cast Iron (60-40-18)	~600 N/mm ²	495 (330-655)			0.05Dc	0.0047	0.0059	0.0079	0.0098
N	Aluminum Alloys (6061, 7075)	~13% Si	985 (655-1310)			0.05Dc	0.0079	0.0098	0.0118	0.0138
	Graphite	-	825 (500-1150)			0.10Dc	0.0098	0.0157	0.0197	0.0197
	CFRP	-	650 (500-825)			0.50Dc	0.0020	0.0040	0.0059	0.0079
S	Heat Resistant Alloys (Inconel 718)	-	100 (65-130)			0.02Dc	0.0016	0.0020	0.0031	0.0047
	Titanium Alloy (Ti-6Al-4V)	-	165 (130-195)			0.02Dc	0.0020	0.0031	0.0040	0.0059
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	395 (330-495)			0.03Dc	0.0031	0.0040	0.0047	0.0071
	Die Cast Steels (A2, S7)	43 - 48 HRC	260 (165-330)	0.025Dc	0.0020	0.0031	0.0040	0.0059		
	Hardened Steels (D2)	50 - 55 HRC	195 (130-260)	0.02Dc	0.0016	0.0020	0.0031	0.0040		

Recommended Materials by Application

Insert Grade	P	M	K	N	S	H
XP3225	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> *	<input checked="" type="checkbox"/>	<input type="checkbox"/>
XP3310	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
XP4505				<input checked="" type="checkbox"/> **		

XP3225: recommended when L/D ≥ 5.

XP3310: recommended for interrupted cutting.

*: Best recommended for aluminum applications.

** : Best recommended for graphite & CFRP applications.

good best



Cutting Conditions (High Speed Light Milling)

Work Material	Tensile Strength - Hardness	Milling Speed Vc (SFM)			Depth of Cut Aa (in)	Feed Per Tooth fz (in/t)				
		Steel Shank	Carbide Shank Short	Carbide Shank Long		Ø0.236-0.312 [6-8mm]	Ø0.375-0.500 [10-12mm]	Ø0.625-0.750 [16-20mm]	Ø1.000-1.250 [25-32mm]	
P	Mild Steels, Carbon Steels (1010, 1018)	~180 HB	1475	1575	1180	0.02Dc	0.0040	0.0047	0.0055	0.0071
	Carbon Steels, Alloy Steels (1050, 4140)	~280 HB	1475	1575	1180	0.02Dc	0.0027	0.0040	0.0047	0.0055
	Die Steels (H13, D2)	~280 HB	1230	1310	985	0.02Dc	0.0027	0.0040	0.0047	0.0055
M	Stainless Steels (304SS, 420SS)	~250 HB	1230	1310	985	0.02Dc	0.0027	0.0047	0.0055	0.0067
K	Cast Iron (FC250)	~350 N/mm ²	1970	2100	1575	0.02Dc	0.0047	0.0055	0.0071	0.0087
	Ductile Cast Iron (60-40-18)	~600 N/mm ²	1475	1575	1180	0.02Dc	0.0040	0.0047	0.0055	0.0071
N	Aluminum Alloys (6061, 7075)	~13% Si	2460	2625	1970	0.03Dc	0.0047	0.0055	0.0071	0.0087
S	Heat Resistant Alloys (Inconel 718)	-	230	260	195	0.015Dc	0.0016	0.0020	0.0024	0.0051
	Titanium Alloy (Ti-6Al-4V)	-	395	470	360	0.02Dc	0.0024	0.0031	0.0043	0.0040
H	Pre-hardened Steel (P20, Stavax)	40 - 43 HRC	985	1050	790	0.015Dc	0.0024	0.0027	0.0031	0.0040
	Die Cast Steels (A2, S7)	43 - 48 HRC	885	940	720	0.015Dc	0.0020	0.0024	0.0027	0.0027
	Hardened Steels (D2)	50 - 55 HRC	720	790	590	0.01Dc	0.0020	0.0024	0.0027	0.0027

Recommended Materials by Application

Insert Grade	P	M	K	N	S	H
XP3225	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
XP3310	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
XP4505				<input checked="" type="checkbox"/>		

XP3225: recommended when L/D ≥ 5.

XP3310: recommended for interrupted cutting.

*: Best recommended for aluminum applications.

** : Best recommended for graphite & CFRP applications.

good best






List 52601

PSE ASF (Inch)



Recommended Materials: p1387
 Accessories & Inserts: p1385-1386
 Maximum Ramping Angle: p1388
 SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D		Da	Dg	L	D2		
52601000	Screw Fit Head	PSE11R063ASF8-2	0.625	2	0.335	M8	1.063	0.571	10	ZD_T11...
52601001		PSE11R075ASF10-3	0.750	3	0.413	M10	1.299	0.709	14	
52601002		PSE11R100ASF12-3	1.000	3	0.492	M12	1.378	0.905	17	
52601003		PSE11R125ASF16-3	1.250	3	0.669	M16	1.575	1.102	22	ZDKT15...
52601004		PSE15R100ASF12-2	1.000	2	0.492	M12	1.378	0.905	17	
52601005		PSE15R125ASF16-3	1.250	3	0.669	M16	1.575	1.102	22	
52601006	PSE15R150ASF16-4	1.500	4	0.669	M16	1.575	1.102	22		

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).






List 78016

PSE SF (Metric)



Recommended Materials: p1387
Accessories & Inserts: p1385-1386
Maximum Ramping Angle: p1388
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D		Da	Dg	L	D2		
7801600	Screw Fit Head	PSE11R016SF8-2	16	2	8.5	M8	27	14.5	10	ZD_T11...
7801612		PSE11R017SF8-2	17	2	8.5	M8	27	14.5	10	
7801613		PSE11R018SF8-2	18	2	8.5	M8	27	14.5	10	
7801601		PSE11R020SF10-3	20	3	10.5	M10	33	18	14	
7801614		PSE11R021SF10-3	21	3	10.5	M10	33	18	14	
7801615		PSE11R022SF10-3	22	3	10.5	M10	33	18	14	
7801602		PSE11R025SF12-4	25	4	12.5	M12	35	23	17	
7801616		PSE11R026SF12-3	26	3	12.5	M12	35	23	17	
7801603		PSE11R028SF12-4	28	4	12.5	M12	35	23	17	
7801604		PSE11R032SF16-5	32	5	17.0	M16	40	28	22	
7801617		PSE11R033SF16-3	33	3	17.0	M16	40	28	22	
7801605		PSE11R035SF16-5	35	5	17.0	M16	40	28	22	
7801606		PSE11R040SF16-6	40	6	17.0	M16	40	28	22	
7801607		PSE15R025SF12-2	25	2	12.5	M12	35	23	17	
7801618		PSE15R026SF12-2	26	2	12.5	M12	35	23	17	
7801608		PSE15R028SF12-2	28	2	12.5	M12	35	23	17	
7801609		PSE15R032SF16-3	32	3	17	M16	40	28	22	
7801619		PSE15R033SF16-3	33	3	17	M16	40	28	22	
7801610	PSE15R035SF16-3	35	3	17	M16	40	28	22		
7801611	PSE15R040SF16-4	40	4	17	M16	40	28	22		
										ZDKT15...

Packed: 1 pc.

Note: When using an insert with a corner radius of R2 or greater, the corner of the cutter body must be corrected. The body corner radius should equal insert radius minus one (example: if insert radius is R3, body radius should be R2).

This item is stocked overseas. Please contact OSG for availability and delivery.






List 52602

PRC ASF (Inch)



Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	Effective Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
52602000	Screw Fit Head	PRC10R100ASF12-3	1.000	0.606	3	0.492	M12	1.378	0.905	17	RPH_10...
52602001		PRC10R125ASF16-4	1.250	0.856	4	0.669	M16	1.575	1.102	22	RPH_12...
52602002		PRC12R125ASF16-2	1.250	0.778	2	0.669	M16	1.575	1.102	22	
52602003		PRC12R150ASF16-3	1.500	1.028	3	0.669	M16	1.575	1.102	22	
52602004		PRC16R150ASF16-2	1.500	0.870	2	0.669	M16	1.575	1.102	22	RPH_16...

Packed: 1 pc.




List 78017

PRC SF (Metric)



Recommended Materials: p1414
Accessories & Inserts: p1413
Maximum Ramping Angle: p1415
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
7801700	Screw Fit Head	PRC10R020SF10-2	20	10	2	10.5	M10	33	18	14	RPH_10...
7801701		PRC10R025SF12-3	25	15	3	12.5	M12	35	23	17	
7801702		PRC10R030SF16-3	30	20	3	17	M16	40	28	22	
7801703		PRC10R032SF16-4	32	22	4	17	M16	40	28	22	
7801704		PRC10R040SF16-4	40	30	4	17	M16	40	28	22	RPH_12...
7801705		PRC12R030SF16-2	30	18	2	17	M16	40	28	22	
7801706		PRC12R032SF16-3	32	20	3	17	M16	40	28	22	
7801707		PRC12R040SF16-3	40	28	3	17	M16	40	28	22	

Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.






List 52603

PHC ASF (Inch)



SPEED FEED
P1425

Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	Effective Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
52603004	Screw Fit Head	PHC07R063ASF8-2	0.625	0.286	2	0.334	M8	1.063	0.571	10	SPMT07...
52603005		PHC07R075ASF10-3	0.750	0.411	3	0.413	M10	1.300	0.709	14	
52603006		PHC07R100ASF12-4	1.000	0.661	4	0.492	M12	1.378	0.905	17	
52603007		PHC07R125ASF16-5	1.250	0.911	5	0.669	M16	1.575	1.102	22	SDMT09...
52603000		PHC09R100ASF12-2	1.000	0.535	2	0.492	M12	1.378	0.905	17	
52603001		PHC09R125ASF16-3	1.250	0.785	3	0.669	M16	1.575	1.102	22	
52603002		PHC12R125ASF16-2	1.250	0.596	2	0.669	M16	1.575	1.102	22	SXMT12...
52603003		PHC12R150ASF16-3	1.500	0.846	3	0.669	M16	1.575	1.102	22	

Packed: 1 pc.






List 78015

PHC SF (Metric)



SPEED FEED
P1425

Recommended Materials: p1425
Accessories & Inserts: p1424
Maximum Ramping Angle: p1426
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	Effective Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D	D1		Da	Dg	L	D2		
7801520	Screw Fit Head	PHC07R016SF8-2	16	7.4	2	8.5	M8	27	14.5	10	SPMT07...
7801521		PHC07R017SF8-2	17	8.4	2	8.5	M8	27	14.5	10	
7801522		PHC07R018SF8-2	18	9.4	2	8.5	M8	27	14.5	10	
7801523		PHC07R020SF10-3	20	11.4	3	10.5	M10	33	18	14	
7801524		PHC07R021SF10-3	21	12.4	3	10.5	M10	33	18	14	
7801525		PHC07R022SF10-3	22	13.4	3	10.5	M10	33	18	14	
7801526		PHC07R025SF12-4	25	16.4	4	12.5	M12	35	23	17	
7801527		PHC07R026SF12-4	26	17.4	4	12.5	M12	35	23	17	
7801528		PHC07R028SF12-4	28	19.4	4	12.5	M12	35	23	17	
7801529		PHC07R030SF16-4	30	21.4	4	17	M16	40	28	22	
7801530		PHC07R032SF16-5	32	23.4	5	17	M16	40	28	22	
7801531		PHC07R033SF16-5	33	24.4	5	17	M16	40	28	22	
7801532		PHC07R035SF16-5	35	26.4	5	17	M16	40	28	22	
7801500		SDMT09...	PHC09R025SF12-3	25	13.2	3	12.5	M12	35	23	17
7801510			PHC09R026SF12-3	26	14.2	3	12.5	M12	35	23	17
7801501			PHC09R028SF12-3	28	16.2	3	12.5	M12	35	23	17
7801502			PHC09R030SF16-3	30	18.2	3	17	M16	40	28	22
7801503			PHC09R032SF16-3	32	20.2	3	17	M16	40	28	22
7801511			PHC09R033SF16-3	33	21.2	3	17	M16	40	28	22
7801504			PHC09R035SF16-3	35	23.2	3	17	M16	40	28	22
7801505	PHC09R040SF16-4		40	28.2	4	17	M16	40	28	22	
7801506	PHC12R030SF16-2		30	13.4	2	17	M16	40	28	22	
7801507	PHC12R032SF16-2		32	15.4	2	17	M16	40	28	22	
7801512	SDXMT12...	PCH12R033SF16-2	33	16.4	2	17	M16	40	28	22	
7801508		PHC12R035SF16-3	35	18.4	3	17	M16	40	28	22	
7801509		PHC12R040SF16-3	40	23.4	3	17	M16	40	28	22	

Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.






List 52604

PFB ASF (Inch)



**SPEED
FEED**
P1441

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440
SF Arbors: p1461

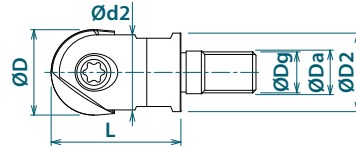

EDP No.	Body Type	Designation	Tool Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Head Dia. (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
52604000	Screw Fit Head	PFB-R0375ASF6	0.375	2	0.256	M6	1.024	0.354	0.354	7	PFB...
52604001		PFB-R0500ASF6	0.500	2	0.256	M6	1.024	0.433	0.433	7	
52604002		PFB-R0625ASF8	0.625	2	0.335	M8	1.260	0.551	0.571	10	
52604003		PFB-R0750ASF10	0.750	2	0.413	M10	1.496	0.709	0.709	14	
52604004		PFB-R1000ASF12	1.000	2	0.492	M12	1.496	0.866	0.906	17	

Packed: 1 pc.






List 78114

PFB SF (Metric)



SPEED
FEED
P1441

Recommended Materials: p1441
Accessories & Inserts: p1437-1439
Effective Cutting Diameter & Recommended Width of Cut: p1440
SF Arbors: p1462-1464

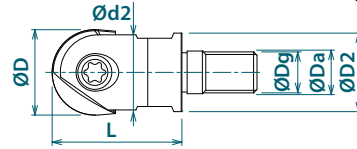

EDP No.	Body Type	Designation	Tool Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Head Dia. (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
7801490	Screw Fit Head	PFB-R100SF6	10	2	6.5	M6	26	9	9	7	PFB...
7801491		PFB-R120SF6	12	2	6.5	M6	26	11	11	7	
7801492		PFB-R160SF8	16	2	8.5	M8	32	14	14.5	10	
7801493		PFB-R200SF10	20	2	10.5	M10	38	18	18	14	
7801494		PFB-R250SF12	25	2	12.5	M12	38	22	23	17	
7801495		PFB-R300SF16	30	2	17	M16	43	27	28	22	

Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.






List 52605

PFR ASF (Inch)



SPEED FEED
P1451-1452

Recommended Materials: p1451-1452
Accessories & Inserts: p1445-1450
SF Arbors: p1461



EDP No.	Body Type	Designation	Tool Dia. (inch)	No. of Teeth	Pilot Dia. (inch)	Thread Dia. (mm)	Overall Length (inch)	Head Dia. (inch)	Flange Dia. (inch)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
52605000	Screw Fit Head	PFR-R0375ASF6	0.375	2	0.256	M6	1.024	0.374	0.354	7	PFR...
52605001		PFR-R0500ASF6	0.500	2	0.256	M6	1.024	0.453	0.433	7	
52605002		PFR-R0625ASF8	0.625	2	0.335	M8	1.260	0.610	0.571	10	
52605003		PFR-R0750ASF10	0.750	2	0.413	M10	1.496	0.768	0.709	14	
52605004		PFR-R1000ASF12	1.000	2	0.492	M12	1.496	0.965	0.906	17	

Packed: 1 pc.




List 78220

PFR SF (Metric)



SPEED FEED
P1451-1452

Recommended Materials: p1451-1452
Accessories & Inserts: p1445-1450
SF Arbors: p1462-1464



EDP No.	Body Type	Designation	Tool Dia. (mm)	No. of Teeth	Pilot Dia. (mm)	Thread Dia. (mm)	Overall Length (mm)	Head Dia. (mm)	Flange Dia. (mm)	Wrench Size	Applicable Insert
			D		Da	Dg	L	d2	D2		
7832090	Screw Fit Head	PFR-R100SF6	10	2	6.5	M6	26	9.5	9	7	PFR...
7832091		PFR-R120SF6	12	2	6.5	M6	26	11.5	11	7	
7832092		PFR-R160SF8	16	2	8.5	M8	32	15.5	14.5	10	
7832093		PFR-R200SF10	20	2	10.5	M10	38	19.5	18	14	
7832094		PFR-R250SF12	25	2	12.5	M12	38	24.5	23	17	
7832095		PFR-R300SF16	30	2	17	M16	43	29.5	28	22	
7832096		PFR-R320SF16	32	2	17	M16	43	31.5	28	22	

Packed: 1 pc.

This item is stocked overseas. Please contact OSG for availability and delivery.





List 52600


SF Arbor SA (Inch)



Carbide



Steel



EDP No.	Body Type	Designation	Shank Dia. (inch)	Neck Dia. (inch)	Thread Dia. (mm)	Pilot Dia. (inch)	Overall Length (inch)	Neck Length (inch)
			d	d2	Dg	Da	L	l1
52600000	Cylindrical Shank Steel	SF-M06SA0375-0250	0.375	0.354	M6	0.256	4.000	0.250
52600001		SF-M06SA0500-0500	0.500	0.433	M6	0.256	4.000	0.500
52600002		SF-M08SA0625-0500	0.625	0.571	M8	0.335	4.000	0.500
52600003		SF-M10SA0750-1000	0.750	0.709	M10	0.413	5.000	1.000
52600004		SF-M12SA1000-1250	1.000	0.905	M12	0.492	5.500	1.250
52600005	SF-M16SA1250-1500	1.250	1.102	M16	0.669	6.000	1.500	
52600010	Cylindrical Shank Carbide	SF-M06SA0375-1500CS	0.375	0.354	M6	0.256	5.000	1.500
52600011		SF-M06SA0500-2500CS	0.500	0.433	M6	0.256	5.500	2.500
52600012		SF-M08SA0625-2000CS	0.625	0.571	M8	0.335	5.000	2.000
52600013		SF-M08SA0625-3000CS	0.625	0.571	M8	0.335	6.000	3.000
52600014		SF-M10SA0750-3000CS	0.750	0.709	M10	0.413	6.000	3.000
52600015		SF-M10SA0750-4000CS	0.750	0.709	M10	0.413	7.000	4.000
52600016		SF-M12SA1000-4000CS	1.000	0.905	M12	0.492	7.000	4.000
52600017		SF-M12SA1000-5500CS	1.000	0.905	M12	0.492	9.000	5.500
52600018		SF-M16SA1250-5500CS	1.250	1.102	M16	0.669	9.000	5.500
52600019		SF-M16SA1250-8500CS	1.250	1.102	M16	0.669	12.000	8.500

Packed: 1 pc.





List 78019




SF Arbor SS (Metric)



Carbide



Steel



EDP No.	Body Type	Designation	Shank Dia. (mm)	Neck Dia. (mm)	Thread Dia. (mm)	Pilot Dia. (mm)	Overall Length (mm)	Neck Length (mm)
			d	d2	Dg	Da	L	l1
7801904	Cylindrical Shank Steel	SF-M06SS10-4	10	9	M6	6.5	104	4
7801905		SF-M06SS12-10	12	11	M6	6.5	104	10
7801900		SF-M08SS16-15	16	14.5	M8	8.5	95	15
7801901		SF-M10SS20-20	20	18	M10	10.5	120	20
7801902		SF-M12SS25-35	25	23	M12	12.5	135	35
7801903		SF-M16SS32-35	32	28	M16	17	155	35
7801918	Cylindrical Shank Carbide	SF-M06SS10-24CS	10	9	M6	6.5	124	24
7801919		SF-M06SS12-34CS	12	11	M6	6.5	134	34
7801910		SF-M08SS16-55CS	16	14.5	M8	8.5	115	55
7801911		SF-M08SS16-85CS	16	14.5	M8	8.5	145	85
7801912		SF-M10SS20-70CS	20	18	M10	10.5	140	70
7801913		SF-M10SS20-110CS	20	18	M10	10.5	180	110
7801914		SF-M12SS25-90CS	25	23	M12	12.5	170	90
7801915		SF-M12SS25-140CS	25	23	M12	12.5	220	140
7801916		SF-M16SS32-120CS	32	28	M16	17	220	120
7801917		SF-M16SS32-190CS	32	28	M16	17	290	190


Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**



List 78025

SF Arbor BT

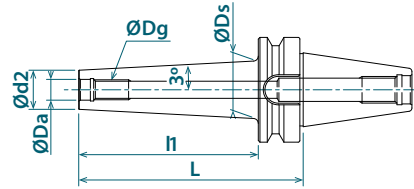

EDP No.	Body Type	Designation	Neck Dia. (mm)	Thread Dia. (mm)	Bore Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Taper Dia. (mm)
			d2	Dg	Da	L	l1	Ds
7802500	BT30 Taper	BT30-SFA8-45	14.5	M8	8.5	45	23	16.0
7802501		BT30-SFA8-85	14.5	M8	8.5	85	63	21.1
7802502		BT30-SFA10-45	18.5	M10	10.5	45	23	20.0
7802503		BT30-SFA10-85	18.5	M10	10.5	85	63	25.1
7802504		BT30-SFA12-45	23.5	M12	12.5	45	23	25.0
7802505		BT30-SFA12-85	23.5	M12	12.5	85	63	30.1
7802506		BT30-SFA16-45	29	M16	17	45	23	32.0
7802507		BT30-SFA16-85	29	M16	17	85	63	32.0
7802508	BT40 Taper	BT40-SFA8-45	14.5	M8	8.5	45	18	16.0
7802509		BT40-SFA8-85	14.5	M8	8.5	85	58	20.5
7802510		BT40-SFA10-45	18.5	M10	10.5	45	18	20.0
7802511		BT40-SFA10-85	18.5	M10	10.5	85	58	24.5
7802512		BT40-SFA12-45	23.5	M12	12.5	45	18	25.0
7802513		BT40-SFA12-85	23.5	M12	12.5	85	58	29.5
7802514		BT40-SFA12-135	23.5	M12	12.5	135	108	34.8
7802515		BT40-SFA16-45	29	M16	17	45	18	32.0
7802516	BT40-SFA16-85	29	M16	17	85	58	35.0	
7802517	BT40-SFA16-135	29	M16	17	135	108	40.3	
7802518	BT50 Taper	BT50-SFA8-85	14.5	M8	8.5	85	47	19.4
7802519		BT50-SFA8-135	14.5	M8	8.5	135	97	23.6
7802520		BT50-SFA10-85	18.5	M10	10.5	85	47	20.0
7802521		BT50-SFA10-135	18.5	M10	10.5	135	97	28.6
7802522		BT50-SFA12-85	23.5	M12	12.5	85	47	25.0
7802523		BT50-SFA12-135	23.5	M12	12.5	135	97	33.6
7802524		BT50-SFA12-185	23.5	M12	12.5	185	147	38.9
7802525		BT50-SFA12-250	23.5	M12	12.5	250	212	45.7
7802526		BT50-SFA12-300	23.5	M12	12.5	300	262	50.9
7802527		BT50-SFA16-800	29	M16	17	85	47	32.0
7802528		BT50-SFA16-135	29	M16	17	135	97	39.1
7802529		BT50-SFA16-185	29	M16	17	185	147	44.4
7802530		BT50-SFA16-250	29	M16	17	250	212	51.2
7802531	BT50-SFA16-300	29	M16	17	300	262	56.4	


Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**



List 78125

SF Arbor HSK

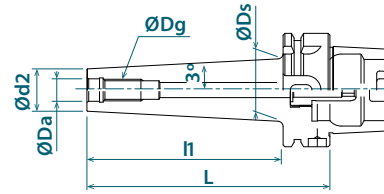

EDP No.	Body Type	Designation	Neck Dia. (mm)	Thread Dia. (mm)	Bore Dia. (mm)	Overall Length (mm)	Neck Length (mm)	Taper Dia. (mm)
			d2	Dg	Da	L	l1	Ds
7802550	HSK-A63	A63-SFA8-45	14.5	M8	8.5	45	19	16.0
7802551		A63-SFA8-85	14.5	M8	8.5	85	59	20.6
7802552		A63-SFA10-60	18.5	M10	10.5	60	34	20.0
7802553		A63-SFA10-85	18.5	M10	10.5	85	59	24.6
7802554		A63-SFA12-60	23.5	M12	12.5	60	34	25.0
7802555		A63-SFA12-85	23.5	M12	12.5	85	59	39.6
7802556		A63-SFA12-135	23.5	M12	12.5	135	109	34.9
7802557		A63-SFA16-60	29	M16	17	60	34	32.0
7802558		A63-SFA16-85	29	M16	17	85	59	32.0
7802559		A63-SFA16-135	29	M16	17	135	109	40.4
7802560	HSK-A100	A100-SFA8-85	14.5	M8	8.5	85	50	19.7
7802561		A100-SFA8-135	14.5	M8	8.5	135	100	23.9
7802562		A100-SFA10-85	18.5	M10	10.5	85	50	23.7
7802563		A100-SFA10-135	18.5	M10	10.5	135	100	28.9
7802564		A100-SFA12-85	23.5	M12	12.5	85	50	28.7
7802565		A100-SFA12-135	23.5	M12	12.5	135	100	33.9
7802566		A100-SFA12-185	23.5	M12	12.5	185	150	39.2
7802567		A100-SFA12-250	23.5	M12	12.5	250	221	46.6
7802568		A100-SFA12-300	23.5	M12	12.5	300	271	51.9
7802569		A100-SFA16-85	29	M16	17	85	50	34.2
7802570		A100-SFA16-135	29	M16	17	135	106	40.1
7802571		A100-SFA16-185	29	M16	17	185	156	45.3
7802572		A100-SFA16-250	29	M16	17	250	221	52.1
7802573		A100-SFA16-300	29	M16	17	300	271	57.4

Packed: 1 pc.

Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**





List 78PXSE


PXSE Exchangeable Heads (Inch & Metric) - 4 Flute, Square & Corner Radius

NEW SIZES



SPEED FEED
P1489

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		r		Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52301020	PXSE	PXSE0375AC10-04R000	-	0.375	-	0.000	-	0.263	-	0.488	-	0.366	38°	XP3225
52301021		PXSE0375AC10-04R015	-	0.375	-	0.015	-	0.263	-	0.488	-	0.366	38°	XP3225
52301022		PXSE0375AC10-04R030	-	0.375	-	0.030	-	0.263	-	0.488	-	0.366	38°	XP3225
52301023		PXSE0375AC10-04R060	-	0.375	-	0.060	-	0.263	-	0.488	-	0.366	38°	XP3225
52301024		PXSE0375AC10-04R090	-	0.375	-	0.090	-	0.263	-	0.488	-	0.366	38°	XP3225
52301000		PXSE0500AC12-04R000	-	0.500	-	0.000	-	0.350	-	0.598	-	0.488	38°	XP3225
52301001		PXSE0500AC12-04R015	-	0.500	-	0.015	-	0.350	-	0.598	-	0.488	38°	XP3225
52301002		PXSE0500AC12-04R030	-	0.500	-	0.030	-	0.350	-	0.598	-	0.488	38°	XP3225
52301003		PXSE0500AC12-04R060	-	0.500	-	0.060	-	0.350	-	0.598	-	0.488	38°	XP3225
52301004		PXSE0500AC12-04R090	-	0.500	-	0.090	-	0.350	-	0.598	-	0.488	38°	XP3225
52301005		PXSE0625AC16-04R000	-	0.625	-	0.000	-	0.438	-	0.732	-	0.613	38°	XP3225
52301006		PXSE0625AC16-04R030	-	0.625	-	0.030	-	0.438	-	0.732	-	0.613	38°	XP3225
52301007		PXSE0625AC16-04R060	-	0.625	-	0.060	-	0.438	-	0.732	-	0.613	38°	XP3225
52301008		PXSE0625AC16-04R090	-	0.625	-	0.090	-	0.438	-	0.732	-	0.613	38°	XP3225
52301009		PXSE0625AC16-04R120	-	0.625	-	0.120	-	0.438	-	0.732	-	0.613	38°	XP3225
52301010		PXSE0750AC20-04R000	-	0.750	-	0.000	-	0.525	-	0.807	-	0.736	38°	XP3225
52301011		PXSE0750AC20-04R030	-	0.750	-	0.030	-	0.525	-	0.807	-	0.736	38°	XP3225
52301012		PXSE0750AC20-04R060	-	0.750	-	0.060	-	0.525	-	0.807	-	0.736	38°	XP3225
52301013		PXSE0750AC20-04R090	-	0.750	-	0.090	-	0.525	-	0.807	-	0.736	38°	XP3225
52301014		PXSE0750AC20-04R120	-	0.750	-	0.120	-	0.525	-	0.807	-	0.736	38°	XP3225
52301015		PXSE1000AC25-04R000	-	1.000	-	0.000	-	0.700	-	1.098	-	0.960	38°	XP3225
52301016		PXSE1000AC25-04R030	-	1.000	-	0.030	-	0.700	-	1.098	-	0.960	38°	XP3225
52301017		PXSE1000AC25-04R060	-	1.000	-	0.060	-	0.700	-	1.098	-	0.960	38°	XP3225
52301018		PXSE1000AC25-04R090	-	1.000	-	0.090	-	0.700	-	1.098	-	0.960	38°	XP3225
52301019		PXSE1000AC25-04R120	-	1.000	-	0.120	-	0.700	-	1.098	-	0.960	38°	XP3225
7829994		PXSE100C10-04R000	10	-	0	-	7	-	13	-	9.7	-	38°	XP3225
7829995		PXSE100C10-04R005	10	-	0.5	-	7	-	13	-	9.7	-	38°	XP3225
7829996		PXSE100C10-04R010	10	-	1	-	7	-	13	-	9.7	-	38°	XP3225
7829997		PXSE100C10-04R020	10	-	2	-	7	-	13	-	9.7	-	38°	XP3225
7829998		PXSE100C10-04R030	10	-	3	-	7	-	13	-	9.7	-	38°	XP3225
7830004		PXSE120C12-04R000	12	-	0	-	8.4	-	14.4	-	11.7	-	38°	XP3225
7830005		PXSE120C12-04R005	12	-	0.5	-	8.4	-	14.4	-	11.7	-	38°	XP3225
7830006		PXSE120C12-04R010	12	-	1	-	8.4	-	14.4	-	11.7	-	38°	XP3225
7830007		PXSE120C12-04R020	12	-	2	-	8.4	-	14.4	-	11.7	-	38°	XP3225
7830008		PXSE120C12-04R030	12	-	3	-	8.4	-	14.4	-	11.7	-	38°	XP3225
7830009		PXSE160C16-04R000	16	-	0	-	11.2	-	18.7	-	15.7	-	38°	XP3225
7830010		PXSE160C16-04R005	16	-	0.5	-	11.2	-	18.7	-	15.7	-	38°	XP3225
7830011		PXSE160C16-04R010	16	-	1	-	11.2	-	18.7	-	15.7	-	38°	XP3225
7830012		PXSE160C16-04R015	16	-	1.5	-	11.2	-	18.7	-	15.7	-	38°	XP3225
7830013		PXSE160C16-04R020	16	-	2	-	11.2	-	18.7	-	15.7	-	38°	XP3225
7830014		PXSE160C16-04R030	16	-	3	-	11.2	-	18.7	-	15.7	-	38°	XP3225
7830015		PXSE200C20-04R000	20	-	0	-	14	-	21.5	-	19.6	-	38°	XP3225
7830016		PXSE200C20-04R005	20	-	0.5	-	14	-	21.5	-	19.6	-	38°	XP3225
7830017		PXSE200C20-04R010	20	-	1	-	14	-	21.5	-	19.6	-	38°	XP3225
7830018		PXSE200C20-04R020	20	-	2	-	14	-	21.5	-	19.6	-	38°	XP3225
7830019		PXSE200C20-04R030	20	-	3	-	14	-	21.5	-	19.6	-	38°	XP3225
7830020		PXSE250C25-04R000	25	-	0	-	17.5	-	27.5	-	24	-	38°	XP3225
7830021		PXSE250C25-04R010	25	-	1	-	17.5	-	27.5	-	24	-	38°	XP3225
7830022		PXSE250C25-04R020	25	-	2	-	17.5	-	27.5	-	24	-	38°	XP3225
7830023		PXSE250C25-04R030	25	-	3	-	17.5	-	27.5	-	24	-	38°	XP3225

Packed: 1 pc.



List 78PXSE-O



SPEED FEED
P1489
Accessories: p1488
PXM Arbors: p1478-1487

PXSE Exchangeable Heads (Inch & Metric) - 4 Flute, Square & Corner Radius, Coolant-Through



EDP No.	Type	Designation	Head Dia.		Corner Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		r		Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52314000	PXSE	PXSE0500AC12-04R000-O	-	0.500	-	0.000	-	0.350	-	0.598	-	0.488	38°	XP3225	
52314001		PXSE0500AC12-04R030-O	-	0.500	-	0.030	-	0.350	-	0.598	-	0.488	38°	XP3225	
52314002		PXSE0500AC12-04R120-O	-	0.500	-	0.120	-	0.350	-	0.598	-	0.488	38°	XP3225	
52314005		PXSE0625AC16-04R000-O	-	0.625	-	0.000	-	0.438	-	0.732	-	0.613	38°	XP3225	
52314006		PXSE0625AC16-04R030-O	-	0.625	-	0.030	-	0.438	-	0.732	-	0.613	38°	XP3225	
52314007		PXSE0625AC16-04R120-O	-	0.625	-	0.120	-	0.438	-	0.732	-	0.613	38°	XP3225	
52314010		PXSE0750AC20-04R000-O	-	0.750	-	0.000	-	0.525	-	0.807	-	0.736	38°	XP3225	
52314011		PXSE0750AC20-04R030-O	-	0.750	-	0.030	-	0.525	-	0.807	-	0.736	38°	XP3225	
52314012		PXSE0750AC20-04R120-O	-	0.750	-	0.120	-	0.525	-	0.807	-	0.736	38°	XP3225	
52314015		PXSE1000AC25-04R000-O	-	1.000	-	0.000	-	0.700	-	1.098	-	0.960	38°	XP3225	
52314016		PXSE1000AC25-04R030-O	-	1.000	-	0.030	-	0.700	-	1.098	-	0.960	38°	XP3225	
52314017		PXSE1000AC25-04R120-O	-	1.000	-	0.120	-	0.700	-	1.098	-	0.960	38°	XP3225	
7830054		PXSE120C12-04R000-O	12	-	0	-	8.4	-	14.4	-	11.7	-	11.7	38°	XP3225
7830056		PXSE120C12-04R010-O	12	-	1	-	8.4	-	14.4	-	11.7	-	11.7	38°	XP3225
7830058		PXSE120C12-04R030-O	12	-	3	-	8.4	-	14.4	-	11.7	-	11.7	38°	XP3225
7830059		PXSE160C16-04R000-O	16	-	0	-	11.2	-	18.7	-	15.7	-	15.7	38°	XP3225
7830061		PXSE160C16-04R010-O	16	-	1	-	11.2	-	18.7	-	15.7	-	15.7	38°	XP3225
7830064		PXSE160C16-04R030-O	16	-	3	-	11.2	-	18.7	-	15.7	-	15.7	38°	XP3225
7830065		PXSE200C20-04R000-O	20	-	0	-	14	-	21.5	-	19.6	-	19.6	38°	XP3225
7830067		PXSE200C20-04R010-O	20	-	1	-	14	-	21.5	-	19.6	-	19.6	38°	XP3225
7830069		PXSE200C20-04R030-O	20	-	3	-	14	-	21.5	-	19.6	-	19.6	38°	XP3225
7830070		PXSE250C25-04R000-O	25	-	0	-	17.5	-	27.5	-	24	-	24	38°	XP3225
7830071		PXSE250C25-04R010-O	25	-	1	-	17.5	-	27.5	-	24	-	24	38°	XP3225
7830074		PXSE250C25-04R030-O	25	-	3	-	17.5	-	27.5	-	24	-	24	38°	XP3225

Packed: 1 pc.





List 78PXVC


PXVC Exchangeable Heads (inch & metric) - 4, 5 or 8 Flutes, Square & Corner Radius

NEW SIZES



SPEED FEED
P1490

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		No. of Flutes	Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		r			Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52308020	PXVC	PXVC0375AC10-04R000	-	0.375	-	0.000	4	-	0.375	-	0.598	-	0.366	45° / 48°	XP3225	
52308021		PXVC0375AC10-04R015	-	0.375	-	0.015	4	-	0.375	-	0.598	-	0.366	45° / 48°	XP3225	
52308022		PXVC0375AC10-04R030	-	0.375	-	0.030	4	-	0.375	-	0.598	-	0.366	45° / 48°	XP3225	
52308023		PXVC0375AC10-04R060	-	0.375	-	0.060	4	-	0.375	-	0.598	-	0.366	45° / 48°	XP3225	
52308024		PXVC0375AC10-04R090	-	0.375	-	0.090	4	-	0.375	-	0.598	-	0.366	45° / 48°	XP3225	
52308000		PXVC0500AC12-04R000	-	0.500	-	0.000	4	-	0.500	-	0.748	-	0.488	45° / 48°	XP3225	
52308001		PXVC0500AC12-04R015	-	0.500	-	0.015	4	-	0.500	-	0.748	-	0.488	45° / 48°	XP3225	
52308002		PXVC0500AC12-04R030	-	0.500	-	0.030	4	-	0.500	-	0.748	-	0.488	45° / 48°	XP3225	
52308003		PXVC0500AC12-04R060	-	0.500	-	0.060	4	-	0.500	-	0.748	-	0.488	45° / 48°	XP3225	
52308004		PXVC0500AC12-04R090	-	0.500	-	0.090	4	-	0.500	-	0.748	-	0.488	45° / 48°	XP3225	
52308005		PXVC0625AC16-04R000	-	0.625	-	0.000	4	-	0.625	-	0.921	-	0.614	45° / 48°	XP3225	
52308006		PXVC0625AC16-04R030	-	0.625	-	0.030	4	-	0.625	-	0.921	-	0.614	45° / 48°	XP3225	
52308007		PXVC0625AC16-04R060	-	0.625	-	0.060	4	-	0.625	-	0.921	-	0.614	45° / 48°	XP3225	
52308008		PXVC0625AC16-04R090	-	0.625	-	0.090	4	-	0.625	-	0.921	-	0.614	45° / 48°	XP3225	
52308009		PXVC0625AC16-04R120	-	0.625	-	0.120	4	-	0.625	-	0.921	-	0.614	45° / 48°	XP3225	
52308010		PXVC0750AC20-04R000	-	0.750	-	0.000	4	-	0.750	-	1.035	-	0.736	45° / 48°	XP3225	
52308011		PXVC0750AC20-04R030	-	0.750	-	0.030	4	-	0.750	-	1.035	-	0.736	45° / 48°	XP3225	
52308012		PXVC0750AC20-04R060	-	0.750	-	0.060	4	-	0.750	-	1.035	-	0.736	45° / 48°	XP3225	
52308013		PXVC0750AC20-04R090	-	0.750	-	0.090	4	-	0.750	-	1.035	-	0.736	45° / 48°	XP3225	
52308014		PXVC0750AC20-04R120	-	0.750	-	0.120	4	-	0.750	-	1.035	-	0.736	45° / 48°	XP3225	
52308015		PXVC1000AC25-04R000	-	1.000	-	0.000	4	-	1.000	-	1.398	-	0.961	45° / 48°	XP3225	
52308016		PXVC1000AC25-04R030	-	1.000	-	0.030	4	-	1.000	-	1.398	-	0.961	45° / 48°	XP3225	
52308017		PXVC1000AC25-04R060	-	1.000	-	0.060	4	-	1.000	-	1.398	-	0.961	45° / 48°	XP3225	
52308018		PXVC1000AC25-04R090	-	1.000	-	0.090	4	-	1.000	-	1.398	-	0.961	45° / 48°	XP3225	
52308019		PXVC1000AC25-04R120	-	1.000	-	0.120	4	-	1.000	-	1.398	-	0.961	45° / 48°	XP3225	
52308025		PXVC1250AC32-05R030	-	1.250	-	0.030	5	-	1.250	-	1.748	-	1.094	45°	XP3225	
52308026		PXVC1250AC32-08R030	-	1.250	-	0.030	8	-	1.250	-	1.748	-	1.094	38°	XP3225	
7834994		PXVC100C10-04R000	10	-	0	-	4	10	10	-	16	-	9.8	-	45° / 48°	XP3225
7834995		PXVC100C10-04R005	10	-	0.5	-	4	10	10	-	16	-	9.8	-	45° / 48°	XP3225
7834996		PXVC100C10-04R010	10	-	1	-	4	10	10	-	16	-	9.8	-	45° / 48°	XP3225
7834997		PXVC100C10-04R020	10	-	2	-	4	10	10	-	16	-	9.8	-	45° / 48°	XP3225
7834998		PXVC100C10-04R030	10	-	3	-	4	10	10	-	16	-	9.8	-	45° / 48°	XP3225
7834999		PXVC120C10-04R000	12	-	0	-	4	12	12	-	18	-	9.8	-	45° / 48°	XP3225
7835000		PXVC120C10-04R005	12	-	0.5	-	4	12	12	-	18	-	9.8	-	45° / 48°	XP3225
7835001		PXVC120C10-04R010	12	-	1	-	4	12	12	-	18	-	9.8	-	45° / 48°	XP3225
7835002		PXVC120C10-04R020	12	-	2	-	4	12	12	-	18	-	9.8	-	45° / 48°	XP3225
7835003		PXVC120C10-04R030	12	-	3	-	4	12	12	-	18	-	9.8	-	45° / 48°	XP3225
7835004		PXVC120C12-04R000	12	-	0	-	4	12	12	-	18	-	11.7	-	45° / 48°	XP3225
7835005		PXVC120C12-04R005	12	-	0.5	-	4	12	12	-	18	-	11.7	-	45° / 48°	XP3225
7835006		PXVC120C12-04R010	12	-	1	-	4	12	12	-	18	-	11.7	-	45° / 48°	XP3225
7835007		PXVC120C12-04R020	12	-	2	-	4	12	12	-	18	-	11.7	-	45° / 48°	XP3225
7835008		PXVC120C12-04R030	12	-	3	-	4	12	12	-	18	-	11.7	-	45° / 48°	XP3225
7835009		PXVC140C12-04R000	14	-	0	-	4	14	14	-	20	-	11.7	-	45° / 48°	XP3225
7835010		PXVC140C12-04R005	14	-	0.5	-	4	14	14	-	20	-	11.7	-	45° / 48°	XP3225
7835011		PXVC140C12-04R010	14	-	1	-	4	14	14	-	20	-	11.7	-	45° / 48°	XP3225
7835012	PXVC140C12-04R020	14	-	2	-	4	14	14	-	20	-	11.7	-	45° / 48°	XP3225	
7835013	PXVC140C12-04R030	14	-	3	-	4	14	14	-	20	-	11.7	-	45° / 48°	XP3225	

Packed: 1 pc.

continued on next page





List 78PXVC (Continued)


PXVC Exchangeable Heads (inch & metric) - 4, 5 or 8 Flutes, Square & Corner Radius

NEW SIZES



SPEED FEED
P1490

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		No. of Flutes	Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		r			Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
7835014	PXVC	PXVC160C16-04R000	16	-	0	-	4	16	-	23.5	-	15.7	-	45° / 48°	XP3225
7835015		PXVC160C16-04R005	16	-	0.5	-	4	16	-	23.5	-	15.7	-	45° / 48°	XP3225
7835016		PXVC160C16-04R010	16	-	1	-	4	16	-	23.5	-	15.7	-	45° / 48°	XP3225
7835017		PXVC160C16-04R015	16	-	1.5	-	4	16	-	23.5	-	15.7	-	45° / 48°	XP3225
7835018		PXVC160C16-04R020	16	-	2	-	4	16	-	23.5	-	15.7	-	45° / 48°	XP3225
7835019		PXVC160C16-04R030	16	-	3	-	4	16	-	23.5	-	15.7	-	45° / 48°	XP3225
7835020		PXVC180C16-04R000	18	-	0	-	4	18	-	25.5	-	15.7	-	45° / 48°	XP3225
7835021		PXVC180C16-04R005	18	-	0.5	-	4	18	-	25.5	-	15.7	-	45° / 48°	XP3225
7835022		PXVC180C16-04R010	18	-	1	-	4	18	-	25.5	-	15.7	-	45° / 48°	XP3225
7835023		PXVC180C16-04R020	18	-	2	-	4	18	-	25.5	-	15.7	-	45° / 48°	XP3225
7835024		PXVC180C16-04R030	18	-	3	-	4	18	-	25.5	-	15.7	-	45° / 48°	XP3225
7835025		PXVC200C20-04R000	20	-	0	-	4	20	-	27.5	-	19.6	-	45° / 48°	XP3225
7835026		PXVC200C20-04R005	20	-	0.5	-	4	20	-	27.5	-	19.6	-	45° / 48°	XP3225
7835027		PXVC200C20-04R010	20	-	1	-	4	20	-	27.5	-	19.6	-	45° / 48°	XP3225
7835028		PXVC200C20-04R020	20	-	2	-	4	20	-	27.5	-	19.6	-	45° / 48°	XP3225
7835029		PXVC200C20-04R030	20	-	3	-	4	20	-	27.5	-	19.6	-	45° / 48°	XP3225
7835030		PXVC220C20-04R000	22	-	0	-	4	22	-	29.5	-	19.6	-	45° / 48°	XP3225
7835038		PXVC220C20-04R005	22	-	0.5	-	4	22	-	29.5	-	19.6	-	45° / 48°	XP3225
7835031		PXVC220C20-04R010	22	-	1	-	4	22	-	29.5	-	19.6	-	45° / 48°	XP3225
7835032		PXVC220C20-04R020	22	-	2	-	4	22	-	29.5	-	19.6	-	45° / 48°	XP3225
7835033		PXVC220C20-04R030	22	-	3	-	4	22	-	29.5	-	19.6	-	45° / 48°	XP3225
7835034		PXVC250C25-04R000	25	-	0	-	4	25	-	35	-	24	-	45° / 48°	XP3225
7835035		PXVC250C25-04R010	25	-	1	-	4	25	-	35	-	24	-	45° / 48°	XP3225
7835036		PXVC250C25-04R020	25	-	2	-	4	25	-	35	-	24	-	45° / 48°	XP3225
7835037		PXVC250C25-04R030	25	-	3	-	4	25	-	35	-	24	-	45° / 48°	XP3225
7835039		PXVC320C32-05R010	32	-	1	-	5	32	-	44.7	-	28	-	45°	XP3225
7835040		PXVC320C32-08R010	32	-	1	-	8	32	-	44.7	-	28	-	38°	XP3225

Packed: 1 pc.





List 78PXSM


PXSM Exchangeable Heads (Inch & Metric) - Multiple Flute, Square & Corner Radius

NEW SIZES



SPEED FEED
P1491

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		No. of Flutes	Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		r			Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52302025	PXSM	PXSM0375AC10-06R000	-	0.375	-	0.000	6	-	0.263	-	0.488	-	0.366	38°	XP3225
52302026		PXSM0375AC10-06R015	-	0.375	-	0.015	6	-	0.263	-	0.488	-	0.366	38°	XP3225
52302027		PXSM0375AC10-06R030	-	0.375	-	0.030	6	-	0.263	-	0.488	-	0.366	38°	XP3225
52302028		PXSM0375AC10-06R060	-	0.375	-	0.060	6	-	0.263	-	0.488	-	0.366	38°	XP3225
52302000		PXSM0500AC12-06R000	-	0.500	-	0.000	6	-	0.350	-	0.598	-	0.488	38°	XP3225
52302001		PXSM0500AC12-06R015	-	0.500	-	0.015	6	-	0.350	-	0.598	-	0.488	38°	XP3225
52302002		PXSM0500AC12-06R030	-	0.500	-	0.030	6	-	0.350	-	0.598	-	0.488	38°	XP3225
52302003		PXSM0500AC12-06R060	-	0.500	-	0.060	6	-	0.350	-	0.598	-	0.488	38°	XP3225
52302004		PXSM0500AC12-06R090	-	0.500	-	0.090	6	-	0.350	-	0.598	-	0.488	38°	XP3225
52302005		PXSM0625AC16-06R000	-	0.625	-	0.000	6	-	0.438	-	0.732	-	0.613	38°	XP3225
52302006		PXSM0625AC16-06R030	-	0.625	-	0.030	6	-	0.438	-	0.732	-	0.613	38°	XP3225
52302007		PXSM0625AC16-06R060	-	0.625	-	0.060	6	-	0.438	-	0.732	-	0.613	38°	XP3225
52302008		PXSM0625AC16-06R090	-	0.625	-	0.090	6	-	0.438	-	0.732	-	0.613	38°	XP3225
52302009		PXSM0625AC16-06R120	-	0.625	-	0.120	6	-	0.438	-	0.732	-	0.613	38°	XP3225
52302010		PXSM0625AC16-08R000	-	0.625	-	0.000	8	-	0.438	-	0.732	-	0.613	42°	XP3225
52302011		PXSM0625AC16-08R030	-	0.625	-	0.030	8	-	0.438	-	0.732	-	0.613	42°	XP3225
52302012		PXSM0625AC16-08R060	-	0.625	-	0.060	8	-	0.438	-	0.732	-	0.613	42°	XP3225
52302013		PXSM0625AC16-08R090	-	0.625	-	0.090	8	-	0.438	-	0.732	-	0.613	42°	XP3225
52302014		PXSM0625AC16-08R120	-	0.625	-	0.120	8	-	0.438	-	0.732	-	0.613	42°	XP3225
52302015		PXSM0750AC20-10R000	-	0.750	-	0.000	10	-	0.525	-	0.807	-	0.736	42°	XP3225
52302016		PXSM0750AC20-10R030	-	0.750	-	0.030	10	-	0.525	-	0.807	-	0.736	42°	XP3225
52302017		PXSM0750AC20-10R060	-	0.750	-	0.060	10	-	0.525	-	0.807	-	0.736	42°	XP3225
52302018		PXSM0750AC20-10R090	-	0.750	-	0.090	10	-	0.525	-	0.807	-	0.736	42°	XP3225
52302019		PXSM0750AC20-10R120	-	0.750	-	0.120	10	-	0.525	-	0.807	-	0.736	42°	XP3225
52302020		PXSM1000AC25-10R000	-	1.000	-	0.000	10	-	0.700	-	1.098	-	0.960	42°	XP3225
52302021		PXSM1000AC25-10R030	-	1.000	-	0.030	10	-	0.700	-	1.098	-	0.960	42°	XP3225
52302022		PXSM1000AC25-10R060	-	1.000	-	0.060	10	-	0.700	-	1.098	-	0.960	42°	XP3225
52302023		PXSM1000AC25-10R090	-	1.000	-	0.090	10	-	0.700	-	1.098	-	0.960	42°	XP3225
52302024		PXSM1000AC25-10R120	-	1.000	-	0.120	10	-	0.700	-	1.098	-	0.960	42°	XP3225
7830094		PXSM100C10-06R000	10	-	0	-	6	7	-	13	-	9.7	-	38°	XP3225
7830095		PXSM100C10-06R005	10	-	0.5	-	6	7	-	13	-	9.7	-	38°	XP3225
7830096		PXSM100C10-06R010	10	-	1	-	6	7	-	13	-	9.7	-	38°	XP3225
7830097		PXSM100C10-06R020	10	-	2	-	6	7	-	13	-	9.7	-	38°	XP3225
7830104		PXSM120C12-06R000	12	-	0	-	6	8.4	-	14.4	-	11.7	-	38°	XP3225
7830105		PXSM120C12-06R005	12	-	0.5	-	6	8.4	-	14.4	-	11.7	-	38°	XP3225
7830106		PXSM120C12-06R010	12	-	1	-	6	8.4	-	14.4	-	11.7	-	38°	XP3225
7830107		PXSM120C12-06R020	12	-	2	-	6	8.4	-	14.4	-	11.7	-	38°	XP3225
7830108		PXSM120C12-06R030	12	-	3	-	6	8.4	-	14.4	-	11.7	-	38°	XP3225
7830109		PXSM160C16-06R000	16	-	0	-	6	11.2	-	18.7	-	15.7	-	38°	XP3225
7830110		PXSM160C16-06R005	16	-	0.5	-	6	11.2	-	18.7	-	15.7	-	38°	XP3225
7830111	PXSM160C16-06R010	16	-	1	-	6	11.2	-	18.7	-	15.7	-	38°	XP3225	
7830112	PXSM160C16-06R015	16	-	1.5	-	6	11.2	-	18.7	-	15.7	-	38°	XP3225	
7830113	PXSM160C16-06R020	16	-	2	-	6	11.2	-	18.7	-	15.7	-	38°	XP3225	
7830114	PXSM160C16-06R030	16	-	3	-	6	11.2	-	18.7	-	15.7	-	38°	XP3225	
7830115	PXSM160C16-08R000	16	-	0	-	8	11.2	-	18.7	-	15.7	-	42°	XP3225	
7830116	PXSM160C16-08R005	16	-	0.5	-	8	11.2	-	18.7	-	15.7	-	42°	XP3225	
7830117	PXSM160C16-08R010	16	-	1	-	8	11.2	-	18.7	-	15.7	-	42°	XP3225	
7830118	PXSM160C16-08R015	16	-	1.5	-	8	11.2	-	18.7	-	15.7	-	42°	XP3225	
7830119	PXSM160C16-08R020	16	-	2	-	8	11.2	-	18.7	-	15.7	-	42°	XP3225	
7830120	PXSM160C16-08R030	16	-	3	-	8	11.2	-	18.7	-	15.7	-	42°	XP3225	

Packed: 1 pc.

continued on next page





List 78PXSM (Continued)


PXSM Exchangeable Heads (Inch & Metric) - Multiple Flute, Square & Corner Radius

NEW SIZES



SPEED FEED
P1491

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		No. of Flutes	Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		r			Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
7830121	PXSM	PXSM200C20-10R000	20	-	0	-	10	14	-	21.5	-	19.6	-	42°	XP3225
7830122		PXSM200C20-10R005	20	-	0.5	-	10	14	-	21.5	-	19.6	-	42°	XP3225
7830123		PXSM200C20-10R010	20	-	1	-	10	14	-	21.5	-	19.6	-	42°	XP3225
7830124		PXSM200C20-10R020	20	-	2	-	10	14	-	21.5	-	19.6	-	42°	XP3225
7830125		PXSM200C20-10R030	20	-	3	-	10	14	-	21.5	-	19.6	-	42°	XP3225
7830126		PXSM250C25-10R000	25	-	0	-	10	17.5	-	27.5	-	24	-	42°	XP3225
7830127		PXSM250C25-10R010	25	-	1	-	10	17.5	-	27.5	-	24	-	42°	XP3225
7830128		PXSM250C25-10R020	25	-	2	-	10	17.5	-	27.5	-	24	-	42°	XP3225
7830129		PXSM250C25-10R030	25	-	3	-	10	17.5	-	27.5	-	24	-	42°	XP3225

Packed: 1 pc.





List 78PXNL


PXNL Exchangeable Heads (inch & metric) - 4 Flute, Roughing, Low Helix

NEW SIZES



SPEED FEED
P1492

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Chamfer		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		C		Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52303004	PXNL	PXNL0375AC10-04C020	-	0.375	-	0.020	-	0.263	-	0.488	-	0.366	19° / 21°	XP3225
52303000		PXNL0500AC12-04C020	-	0.500	-	0.020	-	0.350	-	0.598	-	0.488	19° / 21°	XP3225
52303001		PXNL0625AC16-04C025	-	0.625	-	0.025	-	0.438	-	0.732	-	0.613	19° / 21°	XP3225
52303002		PXNL0750AC20-04C025	-	0.750	-	0.025	-	0.525	-	0.807	-	0.736	19° / 21°	XP3225
52303003		PXNL1000AC25-04C025	-	1.000	-	0.025	-	0.700	-	1.098	-	0.960	19° / 21°	XP3225
7830400		PXNL100C10-04C005	10	-	0.5	-	7	-	13	-	9.7	-	19° / 21°	XP3225
7830401		PXNL120C12-04C005	12	-	0.5	-	8.4	-	14.4	-	11.7	-	19° / 21°	XP3225
7830402		PXNL160C16-04C006	16	-	0.6	-	11.2	-	18.7	-	15.7	-	19° / 21°	XP3225
7830403		PXNL200C20-04C006	20	-	0.6	-	14	-	21.5	-	19.6	-	19° / 21°	XP3225
7830404		PXNL250C25-04C006	25	-	0.6	-	17.5	-	27.5	-	24	-	19° / 21°	XP3225

Packed: 1 pc.



List 78PXNL-O


PXNL Exchangeable Heads (inch & metric) - 4 Flute, Roughing, Low Helix, Coolant-Through

NEW



SPEED FEED
P1492

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Chamfer		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		C		Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52315000	PXNL	PXNL0500AC12-04C020-O	-	0.500	-	0.020	-	0.350	-	0.598	-	0.488	19° / 21°	XP3225
52315001		PXNL0625AC16-04C025-O	-	0.625	-	0.025	-	0.438	-	0.732	-	0.613	19° / 21°	XP3225
52315002		PXNL0750AC20-04C025-O	-	0.750	-	0.025	-	0.525	-	0.807	-	0.736	19° / 21°	XP3225
52315003		PXNL1000AC25-04C025-O	-	1.000	-	0.025	-	0.700	-	1.098	-	0.960	19° / 21°	XP3225
7830411		PXNL120C12-04C005-O	12	-	0.5	-	8.4	-	14.4	-	11.7	-	19° / 21°	XP3225
7830412		PXNL160C16-04C006-O	16	-	0.6	-	11.2	-	18.7	-	15.7	-	19° / 21°	XP3225
7830413		PXNL200C20-04C006-O	20	-	0.6	-	14	-	21.5	-	19.6	-	19° / 21°	XP3225
7830414		PXNL250C25-04C006-O	25	-	0.6	-	17.5	-	27.5	-	24	-	19° / 21°	XP3225

Packed: 1 pc.





List 78PXNH


PXNH Exchangeable Heads (inch & metric) - 4 Flute, Roughing, High Helix

NEW SIZES



SPEED FEED
P1492

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Chamfer		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		C		Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52304004	PXNH	PXNH0375AC10-04C020	-	0.375	-	0.020	-	0.263	-	0.488	-	0.366	40° / 42°	XP3225	
52304000		PXNH0500AC12-04C020	-	0.500	-	0.020	-	0.350	-	0.598	-	0.488	40° / 42°	XP3225	
52304001		PXNH0625AC16-04C025	-	0.625	-	0.025	-	0.438	-	0.732	-	0.613	40° / 42°	XP3225	
52304002		PXNH0750AC20-04C025	-	0.750	-	0.025	-	0.525	-	0.807	-	0.736	40° / 42°	XP3225	
52304003		PXNH1000AC25-04C025	-	1.000	-	0.025	-	0.700	-	1.098	-	0.960	40° / 42°	XP3225	
7830450		PXNH100C10-04C005	10	-	0.5	-	7	-	13	-	9.7	-	-	40° / 42°	XP3225
7830451		PXNH120C12-04C005	12	-	0.5	-	8.4	-	14.4	-	11.7	-	-	40° / 42°	XP3225
7830452		PXNH160C16-04C006	16	-	0.6	-	11.2	-	18.7	-	15.7	-	-	40° / 42°	XP3225
7830453		PXNH200C20-04C006	20	-	0.6	-	14	-	21.5	-	19.6	-	-	40° / 42°	XP3225
7830454		PXNH250C25-04C006	25	-	0.6	-	17.5	-	27.5	-	24	-	-	40° / 42°	XP3225

Packed: 1 pc.



List 78PXNH-O


PXNH Exchangeable Heads (inch & metric) - 4 Flute, Roughing, High Helix, Coolant-Through

NEW



SPEED FEED
P1492

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Chamfer		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		C		Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52316000	PXNH	PXNH0500AC12-04C020-O	-	0.500	-	0.020	-	0.350	-	0.598	-	0.488	40° / 42°	XP3225	
52316001		PXNH0625AC16-04C025-O	-	0.625	-	0.025	-	0.438	-	0.732	-	0.613	40° / 42°	XP3225	
52316002		PXNH0750AC20-04C025-O	-	0.750	-	0.025	-	0.525	-	0.807	-	0.736	40° / 42°	XP3225	
52316003		PXNH1000AC25-04C025-O	-	1.000	-	0.025	-	0.700	-	1.098	-	0.960	40° / 42°	XP3225	
7830461		PXNH120C12-04C005-O	12	-	0.5	-	8.4	-	14.4	-	11.7	-	-	40° / 42°	XP3225
7830462		PXNH160C16-04C006-O	16	-	0.6	-	11.2	-	18.7	-	15.7	-	-	40° / 42°	XP3225
7830463		PXNH200C20-04C006-O	20	-	0.6	-	14	-	21.5	-	19.6	-	-	40° / 42°	XP3225
7830464		PXNH250C25-04C006-O	25	-	0.6	-	17.5	-	27.5	-	24	-	-	40° / 42°	XP3225

Packed: 1 pc.






List 78PXRE


PXRE Exchangeable Heads (inch & metric) - Multiple Flute, Straight Flute, Corner Radius

NEW SIZES



SPEED FEED
P1493

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		No. of Flutes	Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		r			Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52305004	PXRE	PXRE0375AC10-04R090	-	0.375	-	0.090	4	-	0.169	-	0.488	-	0.366	-	XP6305
52305000		PXRE0500AC12-04R090	-	0.500	-	0.090	4	-	0.197	-	0.598	-	0.488	-	XP6305
52305001		PXRE0625AC16-06R120	-	0.625	-	0.120	6	-	0.276	-	0.732	-	0.613	-	XP6305
52305002		PXRE0750AC20-06R120	-	0.750	-	0.120	6	-	0.394	-	0.807	-	0.736	-	XP6305
52305003		PXRE1000AC25-06R120	-	1.000	-	0.120	6	-	0.500	-	1.098	-	0.960	-	XP6305
7830200		PXRE100C10-04R020	10	-	2	-	4	4.5	-	13	-	9.7	-	-	XP6305
7830201		PXRE120C12-04R020	12	-	2	-	4	5	-	14.4	-	11.7	-	-	XP6305
7830202		PXRE160C16-06R030	16	-	3	-	6	7	-	18.7	-	15.7	-	-	XP6305
7830203		PXRE200C20-06R030	20	-	3	-	6	10	-	21.5	-	19.6	-	-	XP6305


Packed: 1 pc.



List 78PXDR


PXDR-P Exchangeable Heads (inch & metric) - 3 Flute, Helical Flute, Corner Radius

NEW SIZES



SPEED FEED
P1493

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		r		Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52309008	PXDR-P	PXDR0375AC10-03R060-P	-	0.375	-	0.060	-	0.264	-	0.488	-	0.366	45°	XP3225
52309009		PXDR0375AC10-03R090-P	-	0.375	-	0.090	-	0.264	-	0.488	-	0.366	45°	XP3225
52309000		PXDR0500AC12-03R060-P	-	0.500	-	0.060	-	0.350	-	0.598	-	0.488	45°	XP3225
52309001		PXDR0500AC12-03R090-P	-	0.500	-	0.090	-	0.350	-	0.598	-	0.488	45°	XP3225
52309002		PXDR0625AC16-03R090-P	-	0.625	-	0.090	-	0.438	-	0.732	-	0.614	45°	XP3225
52309003		PXDR0625AC16-03R120-P	-	0.625	-	0.120	-	0.438	-	0.732	-	0.614	45°	XP3225
52309004		PXDR0750AC20-03R090-P	-	0.750	-	0.090	-	0.525	-	0.807	-	0.736	45°	XP3225
52309005		PXDR0750AC20-03R120-P	-	0.750	-	0.120	-	0.525	-	0.807	-	0.736	45°	XP3225
52309006		PXDR1000AC25-03R090-P	-	1.000	-	0.090	-	0.700	-	1.098	-	0.960	45°	XP3225
52309007		PXDR1000AC25-03R120-P	-	1.000	-	0.120	-	0.700	-	1.098	-	0.960	45°	XP3225
7830349		PXDR100C10-03R015-P	10	-	1.5	-	7	-	13	-	9.7	-	45°	XP3225
7830350		PXDR100C10-03R020-P	10	-	2	-	7	-	13	-	9.7	-	45°	XP3225
7830351		PXDR120C12-03R015-P	12	-	1.5	-	8.4	-	14.4	-	11.7	-	45°	XP3225
7830352		PXDR120C12-03R020-P	12	-	2	-	8.4	-	14.4	-	11.7	-	45°	XP3225
7830353		PXDR160C16-03R020-P	16	-	2	-	11.2	-	18.7	-	15.7	-	45°	XP3225
7830354		PXDR160C16-03R030-P	16	-	3	-	11.2	-	18.7	-	15.7	-	45°	XP3225
7830355		PXDR200C20-03R020-P	20	-	2	-	14	-	21.5	-	19.6	-	45°	XP3225
7830356		PXDR200C20-03R030-P	20	-	3	-	14	-	21.5	-	19.6	-	45°	XP3225

Packed: 1 pc.


continued on next page



List 78PXDR (Continued)


PXDR-N Exchangeable Heads (inch & metric) - 3 Flute, Helical Flute, Corner Radius

NEW SIZES



SPEED FEED
P1494

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Corner Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		r		Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52310008	PXDR-N	PXDR0375AC10-03R060-N	-	0.375	-	0.060	-	0.264	-	0.488	-	0.366	45°	XP6305	
52310009		PXDR0375AC10-03R090-N	-	0.375	-	0.090	-	0.264	-	0.488	-	0.366	45°	XP6305	
52310000		PXDR0500AC12-03R060-N	-	0.500	-	0.060	-	0.350	-	0.598	-	0.488	45°	XP6305	
52310001		PXDR0500AC12-03R090-N	-	0.500	-	0.090	-	0.350	-	0.598	-	0.488	45°	XP6305	
52310002		PXDR0625AC16-03R090-N	-	0.625	-	0.090	-	0.438	-	0.732	-	0.614	45°	XP6305	
52310003		PXDR0625AC16-03R120-N	-	0.625	-	0.120	-	0.438	-	0.732	-	0.614	45°	XP6305	
52310004		PXDR0750AC20-03R090-N	-	0.750	-	0.090	-	0.525	-	0.807	-	0.736	45°	XP6305	
52310005		PXDR0750AC20-03R120-N	-	0.750	-	0.120	-	0.525	-	0.807	-	0.736	45°	XP6305	
52310006		PXDR1000AC25-03R090-N	-	1.000	-	0.090	-	0.700	-	1.098	-	0.960	45°	XP6305	
52310007		PXDR1000AC25-03R120-N	-	1.000	-	0.120	-	0.700	-	1.098	-	0.960	45°	XP6305	
7830369		PXDR100C10-03R015-N	10	-	1.5	-	7	-	13	-	9.7	-	9.7	45°	XP6305
7830370		PXDR100C10-03R020-N	10	-	2	-	7	-	13	-	9.7	-	9.7	45°	XP6305
7830371		PXDR120C12-03R015-N	12	-	1.5	-	8.4	-	14.4	-	11.7	-	11.7	45°	XP6305
7830372		PXDR120C12-03R020-N	12	-	2	-	8.4	-	14.4	-	11.7	-	11.7	45°	XP6305
7830373		PXDR160C16-03R020-N	16	-	2	-	11.2	-	18.7	-	15.7	-	15.7	45°	XP6305
7830374		PXDR160C16-03R030-N	16	-	3	-	11.2	-	18.7	-	15.7	-	15.7	45°	XP6305
7830375		PXDR200C20-03R020-N	20	-	2	-	14	-	21.5	-	19.6	-	19.6	45°	XP6305
7830376		PXDR200C20-03R030-N	20	-	3	-	14	-	21.5	-	19.6	-	19.6	45°	XP6305

Packed: 1 pc.






List 78PXBE


PXBE-P Exchangeable Heads (inch & metric) - 3 Flute, Ball End

NEW SIZES



SPEED FEED
P1494

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Head Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		r		Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52311004	PXBE-P	PXBE0375AC10-03R187-P	-	0.375	-	0.1875	-	0.264	-	0.488	-	0.366	45°	XP3320	
52311000		PXBE0500AC12-03R250-P	-	0.500	-	0.250	-	0.350	-	0.598	-	0.488	45°	XP3320	
52311001		PXBE0625AC16-03R313-P	-	0.625	-	0.3125	-	0.438	-	0.732	-	0.614	45°	XP3320	
52311002		PXBE0750AC20-03R375-P	-	0.750	-	0.375	-	0.525	-	0.807	-	0.736	45°	XP3320	
52311003		PXBE1000AC25-03R500-P	-	1.000	-	0.500	-	0.700	-	1.098	-	0.960	45°	XP3320	
7830270		PXBE100C10-03R050-P	10	-	5	-	7	-	13	-	9.7	-	-	45°	XP3320
7830271		PXBE120C12-03R060-P	12	-	6	-	8.4	-	14.4	-	11.7	-	-	45°	XP3320
7830272		PXBE160C16-03R080-P	16	-	8	-	11.2	-	18.7	-	15.7	-	-	45°	XP3320
7830273	PXBE200C20-03R100-P	20	-	10	-	14	-	21.5	-	19.6	-	-	45°	XP3320	

Packed: 1 pc.

continued on next page






List 78PXBE (Continued)


PXBE-N Exchangeable Heads (inch & metric) - 3 Flute, Ball End

NEW SIZES



SPEED FEED
P1495

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Head Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		R		Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52306004	PXBE-N	PXBE0375AC10-03R187-N	-	0.375	-	0.1875	-	0.264	-	0.488	-	0.366	45°	XP3320
52306000		PXBE0500AC12-03R250-N	-	0.500	-	0.500	-	0.350	-	0.598	-	0.488	45°	XP3320
52306001		PXBE0625AC16-03R313-N	-	0.625	-	0.3125	-	0.438	-	0.732	-	0.613	45°	XP3320
52306002		PXBE0750AC20-03R375-N	-	0.750	-	0.375	-	0.525	-	0.807	-	0.736	45°	XP3320
52306003		PXBE1000AC25-03R500-N	-	1.000	-	0.500	-	0.700	-	1.098	-	0.960	45°	XP3320
7830250		PXBE100C10-03R050-N	10	-	5	-	7	-	13	-	9.7	-	45°	XP3320
7830251		PXBE120C12-03R060-N	12	-	6	-	8.4	-	14.4	-	11.7	-	45°	XP3320
7830252		PXBE160C16-03R080-N	16	-	8	-	11.2	-	18.7	-	15.7	-	45°	XP3320
7830253		PXBE200C20-03R100-N	20	-	10	-	14	-	21.5	-	19.6	-	45°	XP3320


Packed: 1 pc.



List 78PXBE-O


PXBE-P Exchangeable Heads (inch & metric) - 3 Flute, Ball End, Coolant-Through

NEW



SPEED FEED
P1494

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Head Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		R		Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52317000	PXBE-P	PXBE0500AC12-03R250-P-O	-	0.500	-	0.250	-	0.350	-	0.598	-	0.488	45°	XP3320
52317001		PXBE0625AC16-03R313-P-O	-	0.625	-	0.3125	-	0.438	-	0.732	-	0.614	45°	XP3320
52317002		PXBE0750AC20-03R375-P-O	-	0.750	-	0.375	-	0.525	-	0.807	-	0.736	45°	XP3320
7830281		PXBE120C12-03R060-P-O	12	-	6	-	8.4	-	14.4	-	11.7	-	45°	XP3320
7830282		PXBE160C16-03R080-P-O	16	-	8	-	11.2	-	18.7	-	15.7	-	45°	XP3320
7830283		PXBE200C20-03R100-P-O	20	-	10	-	14	-	21.5	-	19.6	-	45°	XP3320

Packed: 1 pc.






List 78PXBE-O (Continued)


PXBE-N Exchangeable Heads (inch & metric) - 3 Flute, Ball End, Coolant-Through

NEW



SPEED FEED
P1495

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Head Radius		Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade	
			D		R		Lc		L		D2				
			(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
52318000	PXBE-N	PXBE0500AC12-03R250-N-O	-	0.500	-	0.500	-	0.350	-	0.598	-	0.488	45°	XP3320	
52318001		PXBE0625AC16-03R313-N-O	-	0.625	-	0.3125	-	0.438	-	0.732	-	0.613	45°	XP3320	
52318002		PXBE0750AC20-03R375-N-O	-	0.750	-	0.375	-	0.525	-	0.807	-	0.736	45°	XP3320	
7830261		PXBE120C12-03R060-N-O	12	-	6	-	8.4	-	14.4	-	11.7	-	-	45°	XP3320
7830262		PXBE160C16-03R080-N-O	16	-	8	-	11.2	-	18.7	-	15.7	-	-	45°	XP3320
7830263		PXBE200C20-03R100-N-O	20	-	10	-	14	-	21.5	-	19.6	-	-	45°	XP3320

Packed: 1 pc.



List 78PXBM


PXBM Exchangeable Heads (inch & metric) - Multiple Flute, Ball End

NEW SIZES



SPEED FEED
P1495

Accessories: p1488
PXM Arbors: p1478-1487



EDP No.	Type	Designation	Head Dia.		Head Radius		No. of Flutes	Length of Cut		Overall Length		Flange Dia.		Helix Angle	Grade
			D		R			Lc		L		D2			
			(mm)	(inch)	(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		
52307004	PXBM	PXBM0375AC10-04R187	-	0.375	-	0.1875	4	-	0.264	-	0.488	-	0.366	45°	XP3320
52307000		PXBM0500AC12-04R250	-	0.500	-	0.250	4	-	0.350	-	0.598	-	0.488	45°	XP3320
52307001		PXBM0625AC16-06R313	-	0.625	-	0.3125	6	-	0.438	-	0.732	-	0.613	45°	XP3320
52307002		PXBM0750AC20-06R375	-	0.750	-	0.375	6	-	0.525	-	0.807	-	0.736	45°	XP3320
52307003		PXBM1000AC25-06R500	-	1.000	-	0.500	6	-	0.700	-	1.098	-	0.960	45°	XP3320
7830300		PXBM100C10-04R050	10	-	5	-	4	7	-	13	-	9.7	-	45°	XP3320
7830301		PXBM120C12-04R060	12	-	6	-	4	8.4	-	14.4	-	11.7	-	45°	XP3320
7830302		PXBM160C16-06R080	16	-	8	-	6	11.2	-	18.7	-	15.7	-	45°	XP3320
7830303		PXBM200C20-06R100	20	-	10	-	6	14	-	21.5	-	19.6	-	45°	XP3320

Packed: 1 pc.



NEW SIZES

List 52300

PXM SA/TPA (inch)





Straight Shank



Tapered Shank

EDP No.	Body Type	Designation	Type	Neck Dia. (inch)	Shank Dia. (inch)	Taper	Overall Length (inch)	Neck Length (inch)	Applicable Head (Inch)
				d2	d	α°	L	l1	
52300024	Cylindrical Shank Steel	PXMZ-C10SA0375-S300	1	0.366	0.375	-	3.000	1.000	0.375
52300000		PXMZ-C12SA0500-S400	1	0.488	0.500	-	4.000	0.750	0.500
52300001		PXMZ-C12TPA0750-S600	2	0.488	0.750	5°	6.000	2.000	0.625
52300002		PXMZ-C16SA0625-S400	1	0.613	0.625	-	4.000	1.000	0.750
52300003		PXMZ-C16TPA1000-S650	2	0.613	1.000	5°	6.500	2.000	1.000
52300004		PXMZ-C20SA0750-S500	1	0.736	0.750	-	5.000	1.250	1.250
52300005		PXMZ-C20TPA1250-S700	2	0.736	1.250	5°	7.000	2.750	1.000
52300006		PXMZ-C25SA1000-S550	1	0.960	1.000	-	5.500	1.500	1.250
52300025		PXMZ-C32SA1250-S600	1	1.094	1.250	-	6.000	2.500	0.375
52300026		Cylindrical Shank Carbide	PXMZ-C10SA0375-S300CS	1	0.366	0.375	-	3.000	1.000
52300027	PXMZ-C10SA0375-L400CS		1	0.366	0.375	-	4.000	1.750	0.500
52300028	PXMZ-C10TPA0500-LL500CS		2	0.366	0.375	1.4°	5.000	2.750	0.625
52300007	PXMZ-C12SA0500-S300CS		1	0.488	0.500	-	3.000	1.000	0.750
52300008	PXMZ-C12SA0500-L400CS		1	0.488	0.500	-	4.000	1.750	0.625
52300009	PXMZ-C12SA0500-L450CS		1	0.488	0.500	-	4.500	2.500	0.750
52300010	PXMZ-C12TPA0625-LL550CS		2	0.488	0.625	1.5°	5.500	3.250	0.750
52300011	PXMZ-C16SA0625-S350CS		1	0.613	0.625	-	3.500	1.500	0.750
52300012	PXMZ-C16SA0625-L550CS		1	0.613	0.625	-	5.500	2.500	1.000
52300013	PXMZ-C16SA0625-L600CS		1	0.613	0.625	-	6.000	3.250	0.750
52300014	PXMZ-C16TPA0750-LL650CS		2	0.613	0.750	1.5°	6.500	4.500	1.000
52300015	PXMZ-C20SA0750-S350CS		1	0.736	0.750	-	3.500	1.500	1.250
52300016	PXMZ-C20SA0750-L600CS		1	0.736	0.750	-	6.000	3.000	1.000
52300017	PXMZ-C20SA0750-L700CS		1	0.736	0.750	-	7.000	4.250	0.750
52300018	PXMZ-C20TPA1000-LL800CS		2	0.736	1.000	1.5°	8.000	5.500	1.000
52300019	PXMZ-C25SA1000-L800CS		1	0.960	1.000	-	8.000	3.750	1.250
52300029	PXMZ-C32SA1250-L1000CS		1	1.094	1.250	-	10.000	6.500	


Packed: 1 pc.
Note: Wrench included with body.

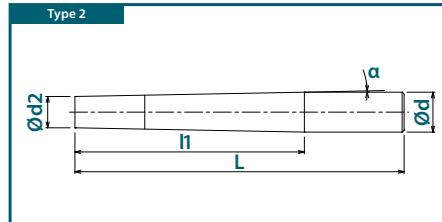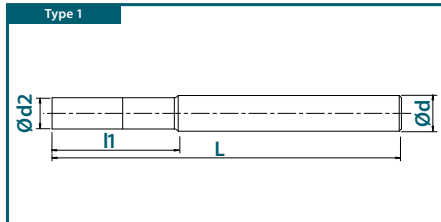



List 52300 (Continued)

PXM SF Joint (Inch)

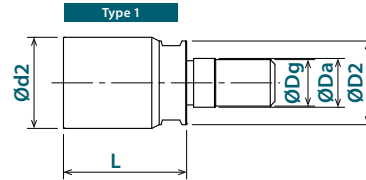


EDP No.	Body Type	Designation	Type	Neck Dia. (Inch)	Pilot Dia. (Inch)	Thread Dia. (mm)	Flange Dia. (Inch)	Overall Length (Inch)	Spanner Wrench	Applicable Head (inch)
				d2	Da	Dg	D2	L		
52300020	PXMJ (Joint)	PXMJ-AC12SF06	1	0.488	0.256	M6	0.433	0.709	PXMP8-10	0.500
52300021		PXMJ-AC16SF08		0.613	0.335	M8	0.571	0.858	PXMP13-16	0.625
52300022		PXMJ-AC20SF10		0.736	0.413	M10	0.707	1.043	PXMP13-16	0.750
52300023		PXMJ-AC25SF12		0.960	0.492	M12	0.905	1.338	PXMP21	1.000

Packed: 1 pc.

Note: Wrench included with body.

Note: PXM heads can be mounted to PHOENIX® SF Arbors by attaching the PXM SF Joint.



List 52319



PXM SA/TPA (inch) - Coolant-Through





Straight Shank



Tapered Shank

EDP No.	Body Type	Designation	Type	Neck Dia. (inch)	Shank Dia. (inch)	Taper	Overall Length (inch)	Neck Length (inch)	Applicable Head (Inch)
				d2	d	α°	L	l1	
52319000	Cylindrical Shank Steel	PXMZ-C12SA0500-S400-O	3	0.488	0.500	-	4.000	0.750	0.500
52319001		PXMZ-C16SA0625-S400-O	3	0.613	0.625	-	4.000	1.000	0.625
52319002		PXMZ-C20SA0750-S500-O	3	0.736	0.750	-	5.000	1.250	0.750
52319003		PXMZ-C25SA1000-S550-O	3	0.960	1.000	-	5.500	1.500	1.000
52319004	Cylindrical Shank Carbide	PXMZ-C12SA0500-S300CS-O	3	0.488	0.500	-	3.000	1.000	0.500
52319005		PXMZ-C12SA0500-L400CS-O	3	0.488	0.500	-	4.000	1.750	0.500
52319006		PXMZ-C12SA0500-L450CS-O	3	0.488	0.500	-	4.500	2.500	0.500
52319007		PXMZ-C12TPA0625-LL550CS-O	4	0.488	0.625	1.2°	5.500	3.250	0.500
52319008		PXMZ-C12TPA0625-LL600CS-O	4	0.488	0.625	1°	6.000	3.750	0.500
52319009		PXMZ-C16SA0625-S350CS-O	3	0.613	0.625	-	3.500	1.500	0.625
52319010		PXMZ-C16SA0625-L550CS-O	3	0.613	0.625	-	5.500	2.500	0.625
52319011		PXMZ-C16SA0625-L600CS-O	3	0.613	0.625	-	6.000	3.250	0.625
52319012		PXMZ-C16TPA0750-LL650CS-O	4	0.613	0.750	1°	6.500	4.500	0.625
52319013		PXMZ-C16TPA0750-LL700CS-O	4	0.613	0.750	1°	7.000	5.000	0.625
52319014		PXMZ-C20SA0750-S350CS-O	3	0.736	0.750	-	3.500	1.500	0.750
52319015		PXMZ-C20SA0750-L600CS-O	3	0.736	0.750	-	6.000	3.000	0.750
52319016		PXMZ-C20SA0750-L700CS-O	3	0.736	0.750	-	7.000	4.250	0.750
52319017		PXMZ-C20TPA1000-LL800CS-O	4	0.736	1.000	1.5°	8.000	5.500	0.750
52319018		PXMZ-C20TPA1000-LL850CS-O	4	0.736	1.000	1.2°	8.500	6.000	0.750
52319019	PXMZ-C25SA1000-L800CS-O	3	0.960	1.000	-	8.000	3.750	1.000	

Packed: 1 pc.
Note: Wrench included with body.

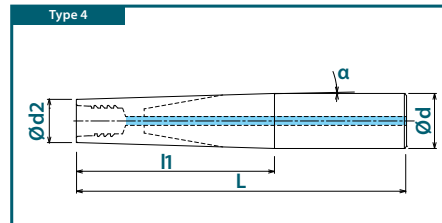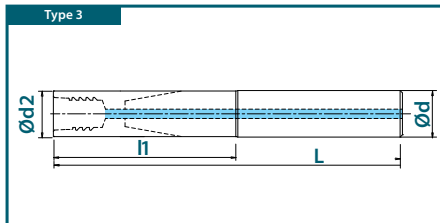




List 52319 (Continued)


NEW

PXM SF Joint (Inch) - Coolant-Through

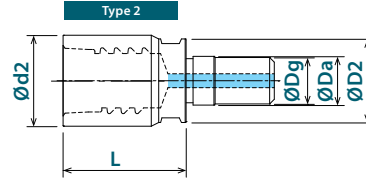

EDP No.	Body Type	Designation	Type	Neck Dia. (Inch)	Pilot Dia. (Inch)	Thread Dia. (mm)	Flange Dia. (Inch)	Overall Length (Inch)	Spanner Wrench	Applicable Head (inch)
				d2	Da	Dg	D2	L		
52319020	PXMJ Joint	PXMJ-AC12SF06-O	2	0.488	0.256	M6	0.433	0.709	PXMP8-10	0.500
52319021		PXMJ-AC16SF08-O		0.613	0.335	M8	0.571	0.858	PXMP13-16	0.625
52319022		PXMJ-AC20SF10-O		0.736	0.413	M10	0.707	1.043	PXMP13-16	0.750
52319023		PXMJ-AC25SF12-O		0.960	0.492	M12	0.905	1.338	PXMP21	1.000

Packed: 1 pc.
Note: Wrench included with body.
Note: PXM heads can be mounted to PHOENIX® SF Arbors by attaching the PXM SF Joint.



List 78018

PXM SS/TP (Metric)



Straight Shank





Tapered Shank

EDP No.	Body Type	Designation	Type	Neck Dia. (mm)	Shank Dia. (mm)	Taper	Overall Length (mm)	Neck Length (mm)	Applicable Head (mm)
				d2	d	α°	L	l1	
48174021	Cylindrical Shank Steel	PXMZ-C10SS10-S075	1	9.8	10	-	75	12	10
48174001		PXMZ-C12SS12-S100	1	11.7	12	-	100	19	12
48174002		PXMZ-C12TP20-S145	2	11.7	20	5°	145	47.4	16
48174003		PXMZ-C16SS16-S100	1	15.7	16	-	100	23.4	
48174004		PXMZ-C16TP25-S155	2	15.7	25	5°	155	53.1	20
48174005		PXMZ-C20SS20-S120	1	19.6	20	-	120	28.8	
48174006		PXMZ-C20TP32-S170	2	19.6	32	5°	170	70.8	25
48174007		PXMZ-C25SS25-S140	1	24	25	-	140	36	
48174022		PXMZ-C32SS32-S160	1	28	32	-	160	33	32
48174025		Cylindrical Shank Carbide	PXMZ-C10SS10-S075CS	1	9.8	10	-	75	17.3
48174023	PXMZ-C10SS10-L100CS		1	9.8	10	-	100	37.3	
48174026	PXMZ-C10TP12-LL130CS		2	9.8	10	0.9°	130	67	
48174008	PXMZ-C12SS12-S075CS		1	11.7	12	-	75	25	12
48174009	PXMZ-C12SS12-L100CS		1	11.7	12	-	100	46.3	
48174010	PXMZ-C12SS12-L115CS		1	11.7	12	-	115	65	
48174011	PXMZ-C12TP16-LL135CS		2	11.7	16	1.5°	135	85	16
48174012	PXMZ-C16SS16-S090CS		1	15.7	16	-	90	40	
48174013	PXMZ-C16SS16-L130CS		1	15.7	16	-	130	62	
48174014	PXMZ-C16SS16-L135CS		1	15.7	16	-	135	85	20
48174015	PXMZ-C16TP20-LL165CS		2	15.7	20	1.5°	165	115	
48174016	PXMZ-C20SS20-S090CS		1	19.6	20	-	90	40	
48174017	PXMZ-C20SS20-L150CS		1	19.6	20	-	150	79.3	25
48174018	PXMZ-C20SS20-L180CS		1	19.6	20	-	180	110	
48174019	PXMZ-C20TP25-LL200CS		2	19.6	25	1.5°	200	140	
48174020	PXMZ-C25SS25-L200CS		1	24	25	-	200	98	25
48174024	PXMZ-C32SS32-L250CS		1	28	32	-	250	115.2	32

Packed: 1 pc.


Note: Wrench included with body.

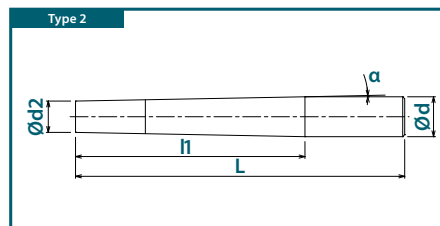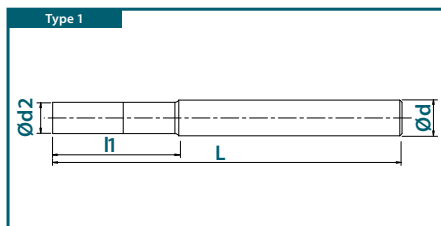



List 78018 (Continued)

PXM SF Joint (Metric)

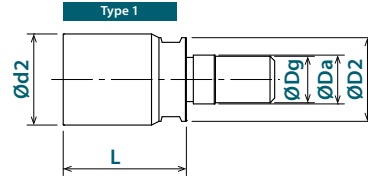


EDP No.	Body Type	Designation	Type	Neck Dia. (mm)	Pilot Dia. (mm)	Thread Dia. (mm)	Flange Dia. (mm)	Overall Length (mm)	Spanner Wrench	Applicable Head (mm)
				d2	Da	Dg	D2	L		
7801893	PXMJ (Joint)	PXMJ-C12SF06	1	11.7	6.5	M6	11.0	18	PXMP8-10	12
7801894		PXMJ-C16SF08		15.7	8.5	M8	14.5	21.8	PXMP13-16	16
7801895		PXMJ-C20SF10		19.6	10.5	M10	18	26.5	PXMP13-16	20
7801896		PXMJ-C25SF12		24	12.5	M12	23	34	PXMP21	25

Packed: 1 pc.

Note: Wrench included with body.

Note: PXM heads can be mounted to PHOENIX[®] SF Arbors by attaching the PXM SF Joint.





List 78035

PXM SS/TP (metric) - Coolant-Through





Straight Shank



Tapered Shank

EDP No.	Body Type	Designation	Type	Neck Dia. (mm)	Shank Dia. (mm)	Taper	Overall Length (mm)	Neck Length (mm)	Applicable Head (mm)
				d2	d	α°	L	l1	
48309001	Cylindrical Shank Steel	PXMZ-C12SS12-S100-O	3	11.7	12	-	100	18	12
48309002		PXMZ-C16SS16-S100-O	3	15.7	16	-	100	23	16
48309003		PXMZ-C20SS20-S120-O	3	19.6	20	-	120	28	20
48309004		PXMZ-C25SS25-S140-O	3	24	25	-	140	34.5	25
48309005	Cylindrical Shank Carbide	PXMZ-C12SS12-S075CS-O	3	11.7	12	-	75	25	12
48309006		PXMZ-C12SS12-L100CS-O	3	11.7	12	-	100	46.3	12
48309007		PXMZ-C12SS12-L115CS-O	3	11.7	12	-	115	65	12
48309008		PXMZ-C12TP16-LL135CS-O	4	11.7	16	1.3°	135	85	12
48309009		PXMZ-C12TP16-LL150CS-O	4	11.7	16	1°	150	85.6	12
48309010		PXMZ-C16SS16-S090CS-O	3	15.7	16	-	90	40	16
48309011		PXMZ-C16SS16-L130CS-O	3	15.7	16	-	130	62	16
48309012		PXMZ-C16SS16-L135CS-O	3	15.7	16	-	135	85	16
48309013		PXMZ-C16TP20-LL165CS-O	4	15.7	20	1°	165	115	16
48309014		PXMZ-C16TP20-LL180CS-O	4	15.7	20	1°	180	116.6	16
48309015		PXMZ-C20SS20-S090CS-O	3	19.6	20	-	90	40	20
48309016		PXMZ-C20SS20-L150CS-O	3	19.6	20	-	150	79.3	20
48309017		PXMZ-C20SS20-L180CS-O	3	19.6	20	-	180	110	20
48309018		PXMZ-C20TP25-LL200CS-O	4	19.6	25	1°	200	140	20
48309019		PXMZ-C20TP25-LL210CS-O	4	19.6	25	1°	210	145	20
48309020		PXMZ-C25SS25-L200CS-O	3	24	25	-	200	98	25

Packed: 1 pc.
Note: Wrench included with body.

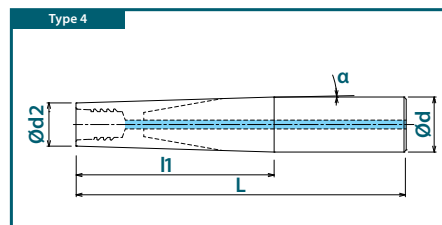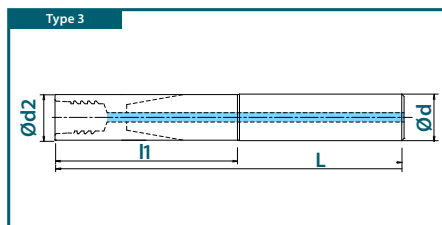




List 78035 (Continued)

NEW

PXM SF Joint (metric) - Coolant-Through

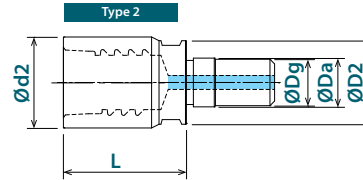


EDP No.	Body Type	Designation	Type	Neck Dia. (mm)	Pilot Dia. (mm)	Thread Dia. (mm)	Flange Dia. (mm)	Overall Length (mm)	Spanner Wrench	Applicable Head (mm)
				d2	Da	Dg	D2	L		
7803551	PXMJ Joint	PXMJ-C12SF06-O	2	11.7	6.5	M6	11	18	PXMP8-10	12
7803552		PXMJ-C16SF08-O		15.7	8.5	M8	14.5	21.8	PXMP13-16	16
7803553		PXMJ-C20SF10-O		19.6	10.5	M10	18	26.5	PXMP13-16	20
7803554		PXMJ-C25SF12-O		24	12.5	M12	23	34	PXMP21	25

Packed: 1 pc.

Note: Wrench included with body.


Note: PXM heads can be mounted to PHOENIX[®] SF Arbors by attaching the PXM SF Joint.



List 78340



PXMC (Metric)

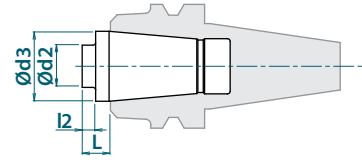

EDP No.	Body Type	Designation	Neck Dia. (mm)	Body Dia. (mm)	Projection Length (mm)	Neck Length (mm)	Applicable Head (mm)
			d2	d3	L	l2	
7834001	Extra-Short	PXMC-C1205	11.7	26	10.5	5	12
7834002		PXMC-C1605	15.7	26	10.5	5	16
7834003		PXMC-C2005	19.6	26	10.5	5	20
7834004		PXMC-C2505	24	26	10.5	5	25
7834011	Short	PXMC-C1230	11.7	26	35.5	30	12
7834012		PXMC-C1630	15.7	26	35.5	30	16
7834013		PXMC-C2030	19.6	26	35.5	30	20
7834014		PXMC-C2530	24	26	35.5	30	25

Packed: 1 pc.

Note: The PXMC collet is compatible with the HYPRO Shrink Collet System.


Note: Wrench sold separately.





HY-PRO[®] Shrink

2 Piece Base Holders



EDP No.	Body Type	Designation	Nose Diameter (mm)	Gage Length (mm)	
			C	L2	
				Extra-Short	Short
9910002	CAT40	CT40-SLK12-45	40.9	45.5	70.5
8910000	BT30	BT30-SLK12-35 - 45 Deg.	38	45.5	70.5
8910001		BT30-SLK12-35 - 60 Deg.	38	45.5	70.5
8910002	BT40	BT40-SLK12-45	38	55.5	80.5
8910003		BT40-SLK12-75	38	85.5	110.5
9910005	HSK-E50	HSK-E50-SLK12-75	38	85.5	110.5
8910005	HSK-A63	HSK-A63-SLK12-75	38	85.5	110.5
8910006		HSK-A63-SLK12-135	38	145.5	170.5


Packed: 1 pc.

Note: For more information, see p1523.



List 7808H

PXM Accessories

Appearance	EDP No.	Designation	Applicable Head		Recommended Tightening
			(inch)	(mm)	
 Spanner Wrench	7801890	PXMP8-10	0.375	10-12	10.0 Nm
			0.500	12-14	12.0 Nm
	7801891	PXMP13-16	0.625	16-18	30.0 Nm
			0.750	20-22	50.0 Nm
	7801892	PXMP21	1.000	25	60.0 Nm
7801897	PXMP24	1.250	32	60.0 Nm	

Packed: Wrench = 1 pc.





Cutting Conditions (PXSE & PXSE-O)

Side milling

Hardness		Up to 30 HRC				30-45 HRC		45-55 HRC			
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels Titanium Alloys		Heat Resistant Alloys Inconel	
Depth of Cut		Aa=0.5Dc • Ar=0.15Dc				Aa=0.5Dc • Ar=0.1Dc		Aa=0.5Dc • Ar=0.05Dc			
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	4000	38.00	3350	31.83	2175	20.70	2175	17.38	840	5.38
-	10	3810	36.22	3190	30.31	2070	19.70	2070	16.54	800	5.12
-	12	3180	29.92	2650	25.20	1700	15.75	1700	13.78	650	3.94
1/2	-	3010	28.29	2450	23.28	1590	14.95	1590	12.72	620	3.78
5/8	-	2410	22.65	1955	18.57	1270	11.94	1270	10.16	495	3.07
-	16	2390	22.44	1950	18.50	1250	11.81	1250	9.84	500	3.15
3/4	-	2000	18.80	1630	15.49	1060	10.39	1060	8.48	410	2.62
-	20	1910	18.11	1550	14.57	1000	9.84	1000	7.87	400	2.56
-	25	1530	14.57	1240	11.81	800	7.87	800	6.30	320	1.97
1	-	1500	14.10	1225	11.64	790	7.74	790	6.25	310	1.89

1. Cutting conditions shown above are for side milling with L/D ≤ 3.5xD.
2. Adjust/reduce the cutting conditions when the overhang length is longer than 3.5xD.

Slotting

Hardness		Up to 30 HRC				30-45 HRC		45-55 HRC			
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels Titanium Alloys		Heat Resistant Alloys Inconel	
Depth of Cut		Aa≤0.35Dc				Aa≤0.3Dc		Aa≤0.2Dc		Aa≤0.1Dc	
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	3185	25.23	3185	25.23	1680	13.23	1680	10.75	840	5.38
-	10	3030	24.00	3030	24.00	1600	12.60	1600	10.24	800	5.12
-	12	2500	19.69	1550	11.81	1300	9.84	1300	9.84	650	3.94
1/2	-	2350	18.49	1450	11.02	1240	9.42	1240	9.42	620	3.78
5/8	-	1875	14.76	1160	9.98	1010	7.88	1010	7.88	495	3.07
-	16	1850	13.78	1150	9.84	1000	7.87	1000	7.87	500	3.15
3/4	-	1565	12.32	990	8.22	790	6.64	790	6.64	410	2.62
-	20	1500	11.81	950	7.87	750	6.30	750	6.30	400	2.56
-	25	1200	9.45	760	6.30	600	5.12	600	5.12	320	1.97
1	-	1170	9.21	745	6.18	590	5.02	590	5.02	310	1.89

1. Cutting conditions shown above are for slotting with L/D ≤ 3.5xD.
2. Adjust/reduce the cutting conditions when the overhang length is longer than 3.5xD.





Cutting Conditions (PXVC)

Side milling

Hardness		Up to 30 HRC				30-45 HRC		45-55 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels Titanium Alloys	
Depth of Cut		Aa=0.5Dc • Ar=0.2Dc				Aa=0.5Dc • Ar=0.1Dc		Aa=0.5Dc • Ar=0.05Dc	
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)								
3/8	-	5020	47.50	4010	38.00	3350	31.80	2680	25.65
-	10	4780	45.28	3820	36.22	3190	30.31	2550	24.41
-	12	3980	37.80	3190	30.31	2660	25.20	2130	20.47
1/2	-	3780	35.83	3020	28.63	2520	23.90	2010	19.30
-	14	3420	32.68	2730	25.98	2280	21.65	1820	17.32
5/8	-	3025	28.67	2410	22.85	2015	19.10	1610	15.46
-	16	2990	28.35	2390	22.83	1990	18.90	1600	15.35
-	18	2660	25.20	2130	20.47	1770	16.93	1420	13.78
3/4	-	2520	23.90	2010	19.05	1680	15.93	1340	12.86
-	20	2390	22.83	1910	18.11	1600	15.35	1280	12.20
-	22	2180	20.87	1740	16.54	1450	13.78	1160	11.00
-	25	1910	18.11	1530	14.57	1280	12.20	1020	9.84
1	-	1890	17.92	1510	14.31	1260	11.95	1000	9.60
1 1/4 (5F)	-	1515	15.10	1210	9.53	1010	9.94	805	6.34
1 1/4 (8F)	-	1515	19.09	1210	15.48	1010	12.73	805	10.30
-	32 (5F)	1500	14.96	1200	9.45	1000	9.84	800	6.30
-	32 (8F)	1500	18.90	1200	15.35	1000	12.60	800	10.24

1. Cutting conditions shown above are for side milling with $L/D \leq 5xD$
2. For side milling with $5xD < L/D \leq 6xD$, reduce Speed and Feed by 10%
3. For side milling with $6xD < L/D \leq 7xD$, reduce Speed & Feed by 20%
4. For side milling with PXM Extra-Short Collet, increase Speed by 30-40% and Feed by 40-80%
5. For side milling with PXM Short Collet, increase Speed by 10-20% and Feed by 20-30%

Slotting

Hardness		Up to 30 HRC				30-45 HRC		45-55 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels Titanium Alloys	
Depth of Cut		Aa≤0.5Dc		Aa≤0.4Dc		Aa≤0.3Dc			
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)								
3/8	-	5020	39.70	4010	31.82	3340	26.47	2510	19.85
-	10	4780	37.80	3820	30.31	3180	25.20	2390	18.90
-	12	3980	31.50	3180	25.20	2650	20.87	1990	15.75
1/2	-	3760	29.61	3010	23.70	2505	19.72	1870	14.72
-	14	3410	26.77	2730	21.65	2270	17.72	1710	13.38
5/8	-	3010	23.70	2410	18.98	2005	15.79	1500	11.81
-	16	2980	23.62	2390	18.90	1990	15.75	1490	11.81
-	18	2650	20.87	2120	16.53	1770	13.78	1330	10.63
3/4	-	2505	19.72	2010	15.83	1670	13.15	1250	9.84
-	20	2390	18.90	1910	14.96	1590	12.60	1190	9.45
-	22	2170	16.93	1740	13.78	1450	11.42	1090	8.66
-	25	1910	14.96	1530	12.20	1270	9.84	950	7.48
1	-	1880	14.80	1505	11.85	1250	9.70	935	7.36

1. Cutting conditions shown above are for slotting with $L/D \leq 5xD$.
2. For slotting with $5xD < L/D \leq 6xD$, reduce Speed and Feed by 20%.
3. For slotting with $6xD < L/D \leq 7xD$, reduce Speed & Feed by 35%.
4. For slotting with PXM Extra-Short Collet, increase Speed by 10-20% and Feed by 10-50%.
5. For slotting with PXM Short Collet, increase Feed by 15-30%.
6. Slotting with $\varnothing 1\ 1/4"$ or $\varnothing 32\text{mm}$ PXVC is not recommended due to the large number of flutes.





Cutting Conditions (PXSM)

Side milling

Hardness		Up to 30 HRC				30-45 HRC		45-55 HRC			
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels Titanium Alloys		Heat Resistant Alloys Inconel	
Depth of Cut		Aa≤0.5Dc • Ar≤0.05Dc				Aa≤0.5Dc • Ar≤0.02Dc		Aa≤0.3Dc • Ar≤0.02Dc			
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	6020	91.36	5020	59.55	4010	47.53	3350	39.70	2000	17.32
-	10	5730	81.50	4780	56.70	3820	45.28	3190	37.80	1910	16.54
-	12	4750	68.90	3950	45.28	3150	37.40	2650	31.50	1550	13.78
1/2	-	4485	65.03	3725	42.84	2980	35.16	2500	29.75	1450	12.91
5/8 (6F)	-	3590	52.06	2970	34.16	2385	28.38	1955	23.66	1160	10.32
5/8 (8F)	-	3590	69.65	2970	45.44	2385	37.92	1955	31.67	1160	13.92
-	16 (6F)	3550	51.57	2950	33.86	2350	27.95	1950	23.62	1150	10.24
-	16 (8F)	3550	68.90	2950	45.28	2350	37.40	1950	31.50	1150	13.78
3/4	-	2990	71.76	2475	47.52	1985	39.10	1630	33.09	995	14.43
-	20	2850	68.90	2350	45.28	1900	37.40	1550	31.50	950	13.78
-	25	2280	55.12	1880	36.22	1520	29.92	1240	25.20	760	11.02
1	-	2240	54.21	1855	35.80	1490	29.35	1220	24.77	745	10.80

1. Cutting conditions shown above are for side milling with L/D ≤ 3.5xD.
2. Adjust/reduce the cutting conditions when the overhang length is longer than 3.5xD.





Cutting Conditions (PXNL, PXNL-O, PXNH & PXNH-O)

Side milling

Work Material		Cast Iron		Carbon Steels		Alloy Steels		Hardened Steels Pre-hardened Steels		Stainless Steels	
Depth of Cut		Aa=0.5Dc • Ar=0.3Dc				Aa=0.5Dc • Ar=0.2Dc					
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	3000	29.74	4010	34.71	3340	21.50	3000	14.45	2680	11.56
-	10	2860	28.35	3820	33.07	3180	20.47	2860	13.78	2550	11.00
-	12	2390	23.62	3180	27.56	2650	17.32	2390	11.42	2120	9.06
1/2	-	2255	22.32	3000	26.10	2500	16.25	2255	10.82	2000	8.60
5/8	-	1800	24.48	2400	28.56	2000	17.80	1800	11.88	1600	9.44
-	16	1790	24.41	2390	28.35	1990	17.72	1790	11.81	1590	9.45
3/4	-	1500	27.30	2000	31.40	1670	19.87	1500	12.75	1335	10.28
-	20	1430	25.98	1910	29.92	1590	18.90	1430	12.20	1270	9.84
-	25	890	17.72	1270	22.05	1020	13.38	890	8.66	760	6.69
1	-	875	17.41	1250	21.75	1000	13.10	875	8.49	745	6.56

1. Cutting conditions shown above are for side milling with $L/D \leq 3.5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $3.5xD$.
3. For side milling with PXM Extra-Short Collet, increase Speed by 20-80% and Feed by 20-100%.
4. For side milling with PXM Short Collet, increase Speed by 30-50% and Feed by 10-80%.

Slotting

Work Material		Cast Iron		Carbon Steels		Alloy Steels		Hardened Steels Pre-hardened Steels		Stainless Steels	
Depth of Cut		Aa=0.5Dc									
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	2345	14.90	3340	18.61	2680	11.17	2345	7.05	2000	5.36
-	10	2230	14.17	3180	17.72	2550	10.63	2230	6.70	1910	5.12
-	12	1860	11.81	2650	14.57	2120	8.66	1860	5.51	1590	4.33
1/2	-	1750	11.03	2505	13.78	2000	8.20	1750	5.08	1500	4.05
5/8	-	1400	12.74	2005	15.84	1600	9.44	1400	5.88	1200	4.80
-	16	1390	12.60	1990	15.75	1590	9.45	1390	5.91	1190	4.72
3/4	-	1165	14.91	1670	18.54	1335	11.21	1165	6.99	1000	5.40
-	20	1110	14.17	1590	17.72	1270	10.63	1110	6.69	950	5.12
-	25	760	11.02	1150	14.57	890	8.27	760	5.12	640	3.94
1	-	745	10.80	1130	14.35	875	8.14	745	4.99	630	3.84

1. Cutting conditions shown above are for slotting with $L/D \leq 3.5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $3.5xD$.
4. For slotting with PXM Extra-Short Collet, increase Speed by 20-80% and Feed by 50-250%.
5. For slotting with PXM Short Collet, increase Speed by 20-50% and Feed by 30-200%.





Cutting Conditions (PXRE)

Contouring

Hardness		-		Up to 30 HRC		30-45 HRC		45-55 HRC		55-60 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Depth of Cut		Aa=0.1r • Ar=0.3Dc									
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	6695	529.65	5045	322.77	4100	248.33	3465	169.49	2940	111.61
-	10	6370	503.94	4800	307.10	3900	236.22	3300	161.42	2800	106.30
-	12	5800	417.32	4000	255.91	3200	192.91	2700	129.92	2300	86.61
1/2	-	5475	393.65	3780	241.92	3020	182.11	2535	121.93	2170	81.59
5/8	-	4035	472.50	3025	305.53	2415	233.77	2030	155.90	1735	108.44
-	16	4000	468.50	3000	303.15	2400	232.28	2000	153.54	1700	106.30
3/4	-	3360	394.80	2520	268.63	2010	204.02	1690	137.23	1445	89.45
-	20	3200	375.98	2400	255.91	1900	192.91	1600	129.92	1400	86.61
-	25	2560	294.40	1920	192.00	1535	145.80	1280	102.40	1100	68.75
1	-	2520	289.80	1890	189.00	1510	143.45	1260	100.80	1090	67.50

1. Cutting conditions shown above are for contouring with $L/D \leq 3.5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $3.5xD$.

Cutting Conditions (PXDR-P)

Contouring

Hardness		-		Up to 30 HRC		30-45 HRC		45-55 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels	
Depth of Cut		Aa=0.05r • Ar=0.25Dc						Aa=0.03r • Ar=0.25Dc	
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)								
3/8	-	5010	148.00	5010	118.26	5010	88.90	5010	59.13
-	10	4770	140.95	4770	112.60	4770	84.65	4770	56.30
-	12	3980	117.32	3980	94.10	3980	70.47	3980	46.85
1/2	-	3780	111.60	3780	89.30	3780	66.97	3780	44.65
5/8	-	3025	89.32	3025	74.45	3025	53.59	3025	35.73
-	16	2980	88.19	2980	70.47	2980	52.75	2980	35.43
3/4	-	2520	74.40	2520	59.53	2520	44.65	2520	29.76
-	20	2390	70.47	2390	56.30	2390	42.12	2390	28.35
-	25	1920	56.64	1920	45.12	1920	33.98	1920	22.46
1	-	1890	55.75	1890	44.41	1890	33.45	1890	22.11

1. Cutting conditions shown above are for contouring with $L/D \leq 5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $5xD$.





Cutting Conditions (PXDR-N)

Contouring

Hardness		Up to 30 HRC		30-45 HRC		45-55 HRC		55-60 HRC	
Work Material		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels		Hardened Steels	
Depth of Cut		Aa=0.03r • Ar=0.25Dc						Aa=0.02r • Ar=0.2Dc	
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)								
3/8	-	5010	148.00	4010	94.64	3340	47.56	3340	39.28
-	10	4770	140.95	3820	90.16	3180	45.28	3180	37.40
-	12	3980	117.32	3180	75.20	2650	37.40	2650	31.50
1/2	-	3780	111.60	3020	71.34	2520	34.72	2520	29.76
5/8	-	3025	89.32	2415	57.05	2015	28.56	2015	23.80
-	16	2980	88.19	2390	56.30	1990	28.35	1990	23.62
3/4	-	2520	74.40	2010	47.48	1680	23.15	1680	19.84
-	20	2390	70.47	1910	45.27	1590	22.44	1590	18.90
-	25	1920	56.64	1535	36.07	1275	17.85	1275	15.05
1	-	1890	55.75	1500	35.25	1250	17.50	1250	14.75

1. Cutting conditions shown above are for contouring with $L/D \leq 5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $5xD$.

Cutting Conditions (PXBE-P & PXBE-P-O)

Contouring

Hardness				Up to 30 HRC		30-45 HRC		45-55 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Stainless Steels Hardened Steels		Hardened Steels Titanium Alloys	
Depth of Cut		$\leq \varnothing 0.500$: Aa=0.07Dc • Ar=0.15Dc $\geq \varnothing 0.625$: Aa=0.10Dc • Ar=0.15Dc						$\leq \varnothing 0.500$: Aa=0.05Dc • Ar=0.1Dc $\geq \varnothing 0.625$: Aa=0.03Dc • Ar=0.1Dc	
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)								
3/8	-	5010	88.90	4010	71.10	3340	59.13	3340	39.28
-	10	4770	84.65	3820	67.72	3180	56.30	3180	37.40
-	12	3980	70.47	3180	56.30	2650	46.85	2650	31.50
1/2	-	3780	66.97	3020	53.50	2520	44.65	2520	29.76
5/8	-	3025	53.60	2415	42.78	2015	35.70	2015	23.80
-	16	2980	52.75	2390	42.12	1990	35.43	1990	23.62
3/4	-	2520	44.65	2010	35.61	1680	29.76	1680	19.84
-	20	2390	42.12	1910	33.86	1590	28.35	1590	18.90
-	25	1920	33.98	1535	27.17	1275	22.57	1275	15.05
1	-	1890	33.45	1500	26.55	1250	22.12	1250	14.75

1. Cutting conditions shown above are for contouring with $L/D \leq 5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $5xD$.





Cutting Conditions (PXBE-N & PXBE-N-0)

Contouring

Hardness				Up to 30 HRC		30-45 HRC		45-55 HRC		55-60 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Depth of Cut		$\leq \text{Ø}0.500: \text{Aa}=0.07\text{Dc} \cdot \text{Ar}=0.15\text{Dc}$ $\geq \text{Ø}0.625: \text{Aa}=0.05\text{Dc} \cdot \text{Ar}=0.15\text{Dc}$						$\leq \text{Ø}0.500: \text{Aa}=0.05\text{Dc} \cdot \text{Ar}=0.1\text{Dc}$ $\geq \text{Ø}0.625: \text{Aa}=0.03\text{Dc} \cdot \text{Ar}=0.1\text{Dc}$		$\text{Aa}=0.03\text{Dc} \cdot \text{Ar}=0.05\text{Dc}$	
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	8360	148.00	8360	148.00	6695	94.76	5010	59.13	3340	19.85
-	10	7960	140.95	7960	140.95	6370	90.16	4770	56.30	3180	18.90
-	12	6600	116.14	6600	116.14	5300	74.80	3950	45.27	2600	15.75
1/2	-	6235	109.74	6235	109.74	4970	70.08	3715	42.72	2230	13.38
5/8	-	4990	89.32	4990	89.32	3975	57.24	2970	35.64	1925	11.94
-	16	4950	88.58	4950	88.58	3950	57.09	2950	35.43	1900	11.81
3/4	-	4155	72.30	4155	72.30	3310	47.66	2475	31.19	1680	10.25
-	20	3950	68.90	3950	68.90	3150	45.27	2350	29.53	1600	9.84
-	25	3160	55.30	3160	55.30	2520	36.29	1880	23.50	1280	7.68
1	-	3110	54.42	3110	54.42	2485	35.78	1850	23.12	1260	7.56

1. Cutting conditions shown above are for contouring with $L/D \leq 3.5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $3.5xD$.

Cutting Conditions (PXBM)

Contouring

Hardness				Up to 30 HRC		30-45 HRC		45-55 HRC		55-60 HRC	
Work Material		Mild Steels Carbon Steels Cast Iron		Alloy Steels Tool Steels		Hardened Steels Pre-hardened Steels		Hardened Steels		Hardened Steels	
Depth of Cut		$\text{Aa}=0.02\text{Dc} \cdot \text{Ar}=0.05\text{Dc}$									
Mill Dia.		Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)	Speed (RPM)	Feed (in/min)
(in)	(mm)										
3/8	-	8360	197.24	8360	197.24	6695	126.40	5010	78.98	3340	26.47
-	10	7960	187.80	7960	187.80	6360	120.08	4770	75.20	3180	25.20
-	12	6600	153.54	6600	153.54	5300	98.42	3950	59.05	2600	21.65
1/2	-	6235	145.28	6235	145.28	4970	92.44	3715	55.35	2230	18.51
5/8	-	4990	178.64	4990	178.64	3975	114.88	2970	71.28	1925	23.87
-	16	4950	177.16	4950	177.16	3950	114.17	2950	70.87	1900	23.62
3/4	-	4155	145.01	4155	145.01	3310	95.00	2475	62.12	1680	20.66
-	20	3950	137.79	3950	137.79	3150	90.55	2350	59.05	1600	19.68
-	25	3160	110.60	3160	110.60	2520	71.82	1880	47.00	1280	15.75
1	-	3110	108.85	3110	108.85	2485	70.82	1850	46.25	1260	15.50


1. Cutting conditions shown above are for contouring with $L/D \leq 3.5xD$.
2. Adjust/reduce the cutting conditions when the overhang length is longer than $3.5xD$.



PXM Head Selector

» Roughing Operations

A guide for selecting head type based on application.

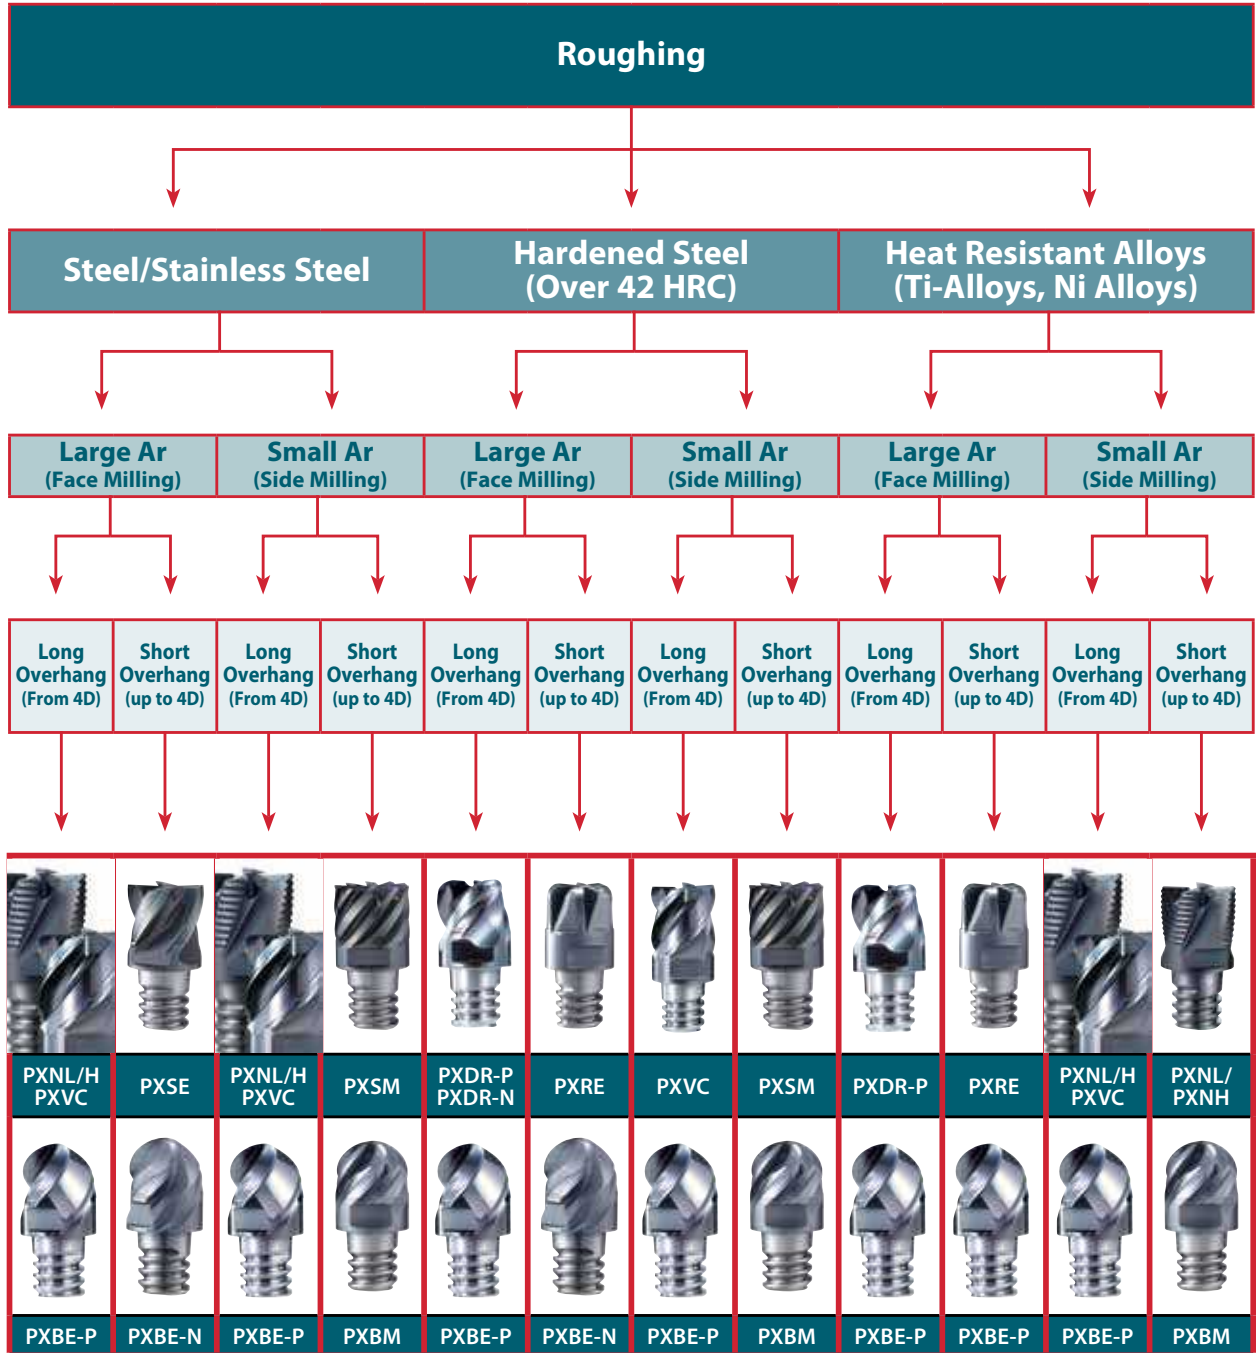




PXM Head Selector

» Semi-Finishing/Finishing Operations

A guide for selecting head type based on application.

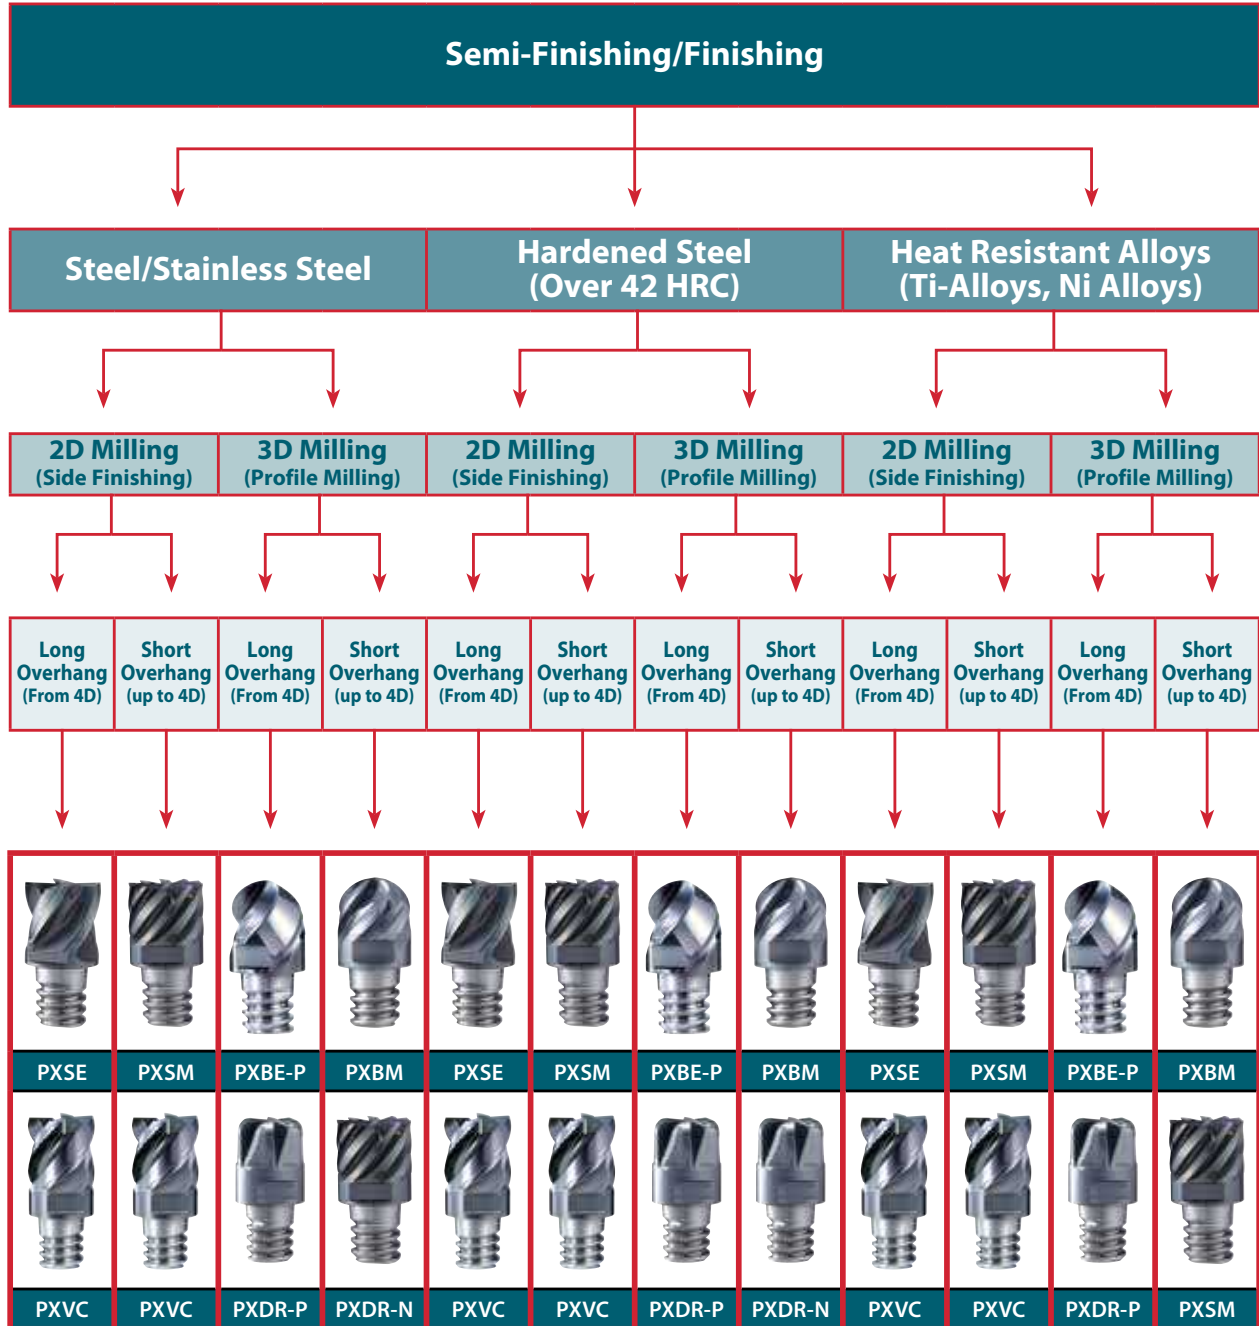



EXOCARB[®] DISC CUTTER[®]

Face Mill Cutter for Small Machines

DISC CUTTER[®] PRO


DISC CUTTER[®] S




Revolutionary Face Milling Cutter for Small Machines

Roughing	DISC CUTTER [®] S
Finishing	DISC CUTTER [®] Pro


Why do we need the DISC CUTTER[®]?




Multiple passes on large, wide work pieces are required for small diameter cutter bodies which result in blend lines on the finished part.



Larger cutter bodies remove material in fewer passes, but are typically heavier, requiring more weight and protrusion from the arbor.



On smaller machines, the total tool weight allowance including the arbor is 3kg (6.6lbs). A conventional 125mm cutter is too heavy for these machines.



OSG's Solution

EXOCARB[®] DISC CUTTER[®] solves these issues by designing a lighter, large diameter cutter without sacrificing rigidity.

Thin, Light and Steel Body

DISC CUTTER[®] S, $\phi 125\text{mm}$ = 1.0kg (2.2lbs)
DISC CUTTER[®] PRO, $\phi 125\text{mm}$ = 1.3kg (2.86lbs)

Arbor = 0.6kg (1.32lbs)



Less than 1/2 of the weight compared to competitors.

Short reach results in high rigidity.

High rigidity allows High - Speed & Feed milling.





DISC CUTTER® S


- Roughing
- Carbide Insert
- No Height Adjustment



DISC CUTTER® PRO

- Finishing
- PCD Brazed Insert
- Height Adjustment

Arbors

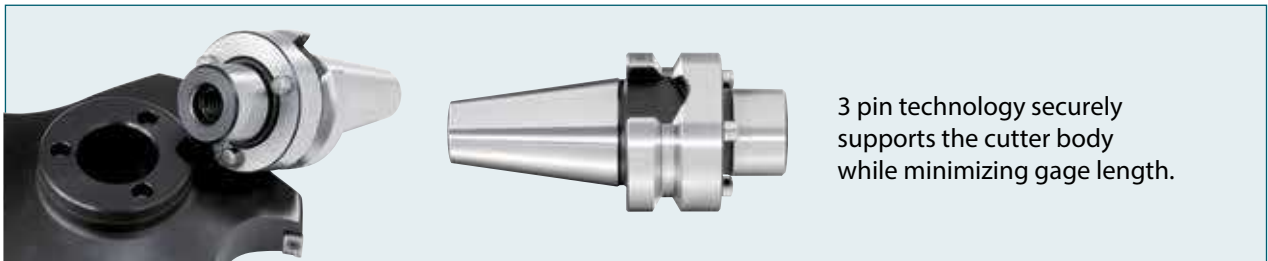

3 pin technology securely supports the cutter body while minimizing gage length.



Optional Internal Coolant Supply Clamping Bolt

The internal coolant supply improves surface finish and tool life by cooling the cutting edge & evacuating the chips.

Performance

DISC CUTTER® S	
Tool	DC-S 125 x SL x 5J (125mm)
Insert	Carbide
Work Material	A7075
Speed	8,000 RPM
Feed	158 IPM (0.004 inch/t)
Depth of Cut	3mm (0.120 in)
Width of Cut	100mm (4.000 in)
Machine	Vertical Machining Center BT30 5.5kw

MRR : 1,200cm³/Min

DISC CUTTER® PRO	
Tool	DC-P 125 x SL x 5J (125mm)
Insert	PCD
Work Material	A7075
Speed	5,000 RPM
Feed	100 IPM (0.004 inch/t)
Depth of Cut	0.5mm (0.02 in)
Width of Cut	100mm (4.000 in)
Machine	Vertical Machining Center BT30 5.5kw

Surface Roughness : Ra 0.171um






List 6440

DISC CUTTER® S for Roughing



SPEED FEED
P1505

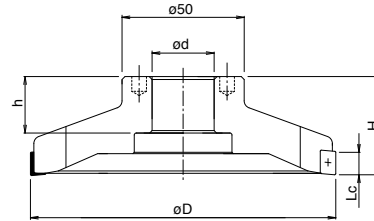

EDP No.	Designation	Cutter Diameter		No. of Teeth	Height		Length of Cut		Bore Diameter		Weight		Max. RPM
		D			H		Lc		d				
		(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(kg)	(lb)	
8070255	80xSLx4J	80	3.150	4	40	1.575	9	0.354	25.4	1.000	0.44	0.97	15,000
8070256	100xSLx4J	100	3.937	4	40	1.575	9	0.354	25.4	1.000	0.60	1.32	13,400
8070257	125xSLx5J	125	4.921	5	40	1.575	9	0.354	25.4	1.000	1.00	2.20	12,000



Accessories are included.
Packed: 1 pc.





List 6442

DISC CUTTER® S Inserts



EDP No.	Description	No. of Cutting Edges	Insert Size					Grade
			AxB (mm)	T (mm)	α	R (mm)	b (mm)	
8033300	APHT0903PPR-73	2	9.52 x 6.75	3.18	11°	0.4	1.5	K10T
8059301	APKT0903PPR-52	2	9.52 x 6.75	3.18	11°	0.4	1.2	K15CA
8091278	APMT0903PPR-F56	2	9.52 x 6.75	3.18	11°	0.4	1.2	WQM25


Packed: 10 pcs.




Accessories

DISC CUTTER® S Accessories



	EDP No.	Description
	8009023	FS923
Clamping Screw		

Packed: 10 pcs.

	EDP No.	Description
	7808205	FS230
Screwdriver		

Packed: 1 pc.



Recommended Materials by Application

Insert Grade	Chip Breaker	P	M	K	N	S
K10T	25°				<input checked="" type="checkbox"/>	
K15CA	16°			<input checked="" type="checkbox"/>		
WQM25	16°	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>

good best






List 6441

DISC CUTTER® PRO for Finishing

DISC CUTTER PRO

SPEED FEED
P1506

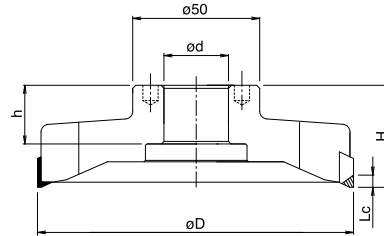

EDP No.	Designation	Cutter Diameter		No. of Teeth	Height		Length of Cut		Bore Diameter		Weight		Max. RPM
		D			H		Lc		d		(kg)	(lb)	
		(mm)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)			
8070265	80xSLx3J	80	3.150	3	40	1.575	4	0.157	25.4	1.000	0.48	1.06	15,500
8070266	100xSLx4J	100	3.937	4	40	1.575	4	0.157	25.4	1.000	0.70	1.54	13,800
8070267	125xSLx5J	125	4.921	5	40	1.575	4	0.157	25.4	1.000	1.30	2.87	12,400


Accessories are included.
Packed: 1 pc.





List 6541

DISC CUTTER® PRO Inserts

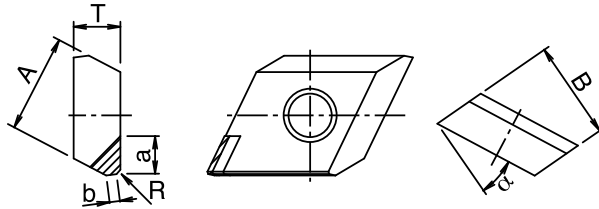

EDP No.	Description	No. of Cutting Edges	Insert Size						Grade
			AxB (mm)	T (mm)	α	R (mm)	b (mm)	a (mm)	
8080801	XOHW1104PDR	1	9.52x9.52	4.76	30°	0.4x45°	4	1.1	PCD






Packed: 1 pc.



Accessories

DISC CUTTER® PRO Accessories



EDP No.	Description	EDP No.	Description
 8008626	Clamping Screw	 8008748	Pad
 8008747	Adjusting Bolt	 7808208	Wrench
 8009063	Set Screw		

Packed: Clamping Screws = 10 pcs.; Adjusting Bolts = 10 pcs.; Set Screws = 10 pcs.; Pads = 10 pcs.; Screwdriver = 1 pc.



Recommended Materials by Application

Insert Grade	Chip Breaker	P	M	K	N	S
PCD	-				<input checked="" type="checkbox"/>	


good best





List 6640


DISC CUTTER® Arbor

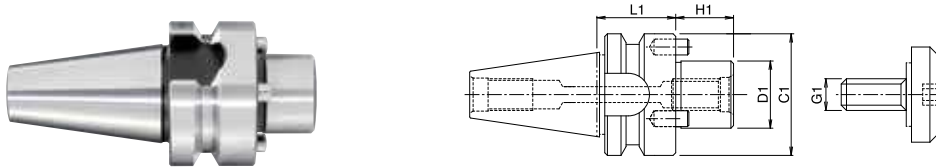

BT30

EDP No.	Description	D1		L1		C1		H1		G1	Weight	
		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		(kg)	(lb)
99640	BT30-FMOA25.4-29	25.4	1.000	29	1.142	46	1.811	19	0.748	M12	0.60	1.32


Packed: 1 pc.

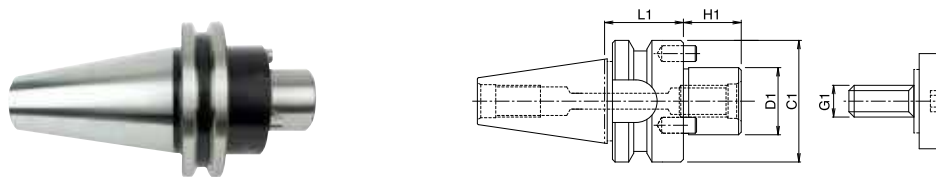

CAT 40

EDP No.	Description	D1		L1		C1		H1		G1	Weight	
		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		(kg)	(lb)
664001	CAT40-FMOA25.4-49	25.4	1.000	35	1.378	44.45	1.750	19	0.748	M12	1.10	2.43

Packed: 1 pc.

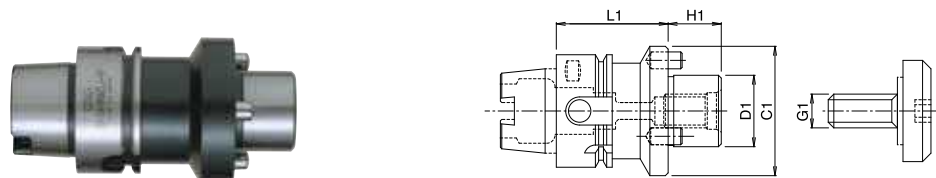

HSK40A

EDP No.	Description	D1		L1		C1		H1		G1	Weight	
		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)		(kg)	(lb)
99634	HSK40A-FMOA25.4-49	25.4	1.000	49	1.929	46	1.811	19	0.748	M12	0.60	1.32

Packed: 1 pc.



Accessories

Clamping Bolt for Coolant-Through Spindles (Optional)



EDP No.	Description	G1
99632	Coolant-Through Clamping Bolt (MBAH-M12)	M12

Packed: 1 pc.





Cutting Conditions (Roughing)

DISC CUTTER® S

DISC CUTTER® S

Roughing

Work Material	Cutting Speed (RPM)	Feed Rate (Inch/Tooth)
Carbon Steel 1018, 1050	325 - 1,050	0.0021 - 0.0060
Stainless Steel 300, 400	300 - 865	0.0018 - 0.0042
Cast Iron	450 - 5,100	0.0027 - 0.0098
Ductile Cast Iron	375 - 4,100	0.0027 - 0.0098
Aluminum A5052, A7075	3,280 - 10,000	0.0027 - 0.0098
Aluminum Alloy Casting ~ 13% Si	3,280 - 10,000	0.0027 - 0.0098
Aluminum Alloy Casting 13% Si ~	300 - 2,500	0.0027 - 0.0098
Copper	800 - 6,800	0.0027 - 0.0098

**DISC
CUTTER S**





Cutting Conditions (Finishing)

DISC CUTTER[®] PRO

DISC CUTTER[®] PRO

Finishing

Work Material	Cutting Speed (RPM)	Feed Rate (Inch/Tooth)
Aluminum A5052, A7075	3,280 - 13,120	0.0027 - 0.0059
Aluminum Alloy Casting ~ 13% Si	3,280 - 13,120	0.0027 - 0.0059
Aluminum Alloy Casting 13% Si ~	300 - 2,500	0.0027 - 0.0059
Copper	800 - 6,800	0.0027 - 0.0059

**DISC
CUTTER[®] PRO**





OSG  **PHOENIX**®








HOLDERS
















List	Product	Page	Inch/Metric	Tool Features
------	---------	------	-------------	---------------

SynchroMaster

9950	SynchroMaster Tap Holders	 NEW	1511	Inch/Metric	BT30, BT40, HSK40A, HSK63A, ST20D*, ST25D*, and CAT40 Micro Float Tap Holders for rigid tapping (*Straight Shank)
9953	SynchroMaster Collet	 NEW	1511	Inch/Metric	ER16 Sealed Collets for coolant-through without sealing disc
9955	SynchroMaster Accessories	 NEW	1512	-	

HY-PRO® SHRINK

-	HR-B Handy Unit		1513-1515	-	General Purpose Shrink Device - By Hot Air & Accessories
-	HSK Mono Series Holders		1521-1522	Metric	HSK-E25, HSK-E32, and HSK-E40 Holders for standard coolant-through the tool operations.
-	Base Holders: 2pc Series		1523	Inch/Metric	Base Holders for general purpose & coolant-through the tool operations - BT, CT, and HSK.
-	Nozzle Holders		1524	Inch/Metric	Nozzle Type Holders for coolant-through the holder operations - BT, CT, and HSK.
-	Regular Extensions		1525	Inch/Metric	Regular Type Shrink Extensions for general purpose & coolant-through the tool operations.
-	Flush Type Extensions		1526	Inch/Metric	Flush Type Shrink Extensions for coolant-through the collet operations.
-	Slim Type Extensions		1527-1528	Inch/Metric	Slim Type Shrink Extensions for long reach & coolant-through the tool operations.
-	Straight Regular Extensions		1529	Inch/Metric	Straight Regular Type Shrink Extensions for standard milling / end mill chucks.
-	Straight Slim Extensions		1530-1531	Inch/Metric	Straight Slim Type Shrink Extensions for standard milling / end mill chucks.
-	Carbide Straight Extensions		1532	Metric	Straight Type Shrink Extensions for increased rigidity and reach.
-	Carbide Straight Slim Extensions		1532	Metric	Taper Type Shrink Extensions for increased rigidity and reach.







List 9950

NEW


SynchroMaster Tap Holders




BT Shank Holder



HSK Shank Holder



ST Shank Holder



CAT40 Shank Holder

EDP Number	Designation	L (mm)	ANSI Tap Size	JIS Tap Size
79910	BT30-SMH16-90	90	M4~M8 No.8~5/16	M3~M12 No.5~7/16
79911	BT40-SMH16-90	90		
79912*	HSK40A-SMH16-85	85		
79913	HSK63A-SMH16-90	90		
79924	ST20D-SMH16-68	68		
79925	ST25D-SMH16-68	68		
79926	CAT40-SMH16-90	90		

Packed: 1 pc.

1. The collet and spanner are sold separately.
2. Please use a machine with synchronous feed capability.


* The HSK40A is without manual clamping hole.




List 9953

NEW

SynchroMaster Collet, Internal and External Coolant



Square Hole Design
Prevents Tap Slippage



EDP Number	Designation	d	B	I	ANSI	Old JIS	End Mill Shank	Standard Tightening Torque
79960	ER16GH-0.255	0.255"	0.191"	18mm	1/4, M6	-	-	30~35Nm
79961	ER16GH-0.318	0.318"	0.238"	22mm	5/16, M7, M8	-	-	45~50Nm
79917	ER16GH-6-4.5	6mm	4.5mm	18mm	-	M6	M4, M5, M6	30~35Nm
79918	ER16GH-6.2-5	6.2mm	5mm	18mm	-	M8	-	
79919	ER16GH-7-5.5	7mm	5.5mm	18mm	-	M10	-	
79920	ER16GH-8-6	8mm	6mm	22mm	-	-	M8, M10	
79921	ER16GH-8.5-6.5	8.5mm	6.5mm	22mm	-	M12	-	45~50Nm

Packed: 1 pc.

1. For center-through coolant system, please insert tool all the way to the back of the collet.

Coolant leakage may occur if the tool insertion length is too short.

2. Select the appropriate collet after confirming the dimensions of the tap to be used.
3. Confirm the tightening torque with a torque spanner wrench or similar tool.






List 9955


NEW

SynchroMaster Accessories

Appearance	EDP Number	Designation
 Spanner Wrench	79923	FKT-32L

Packed: 1 pc.



Appearance	EDP Number	Designation
 Nut	79922	ERP-16T

Packed: 1 pc.



HR-B Handy Unit



Features

- Small Foot Print
- Light Weight
- 120 V AC Current
- Easy-adjust slide

Benefits

- Fits on a table top
- Portable
- Works with any standard wall outlet
- Fast and simple height adjustments
- Cost effective!

Machine Specifications












EDP Number	68802B
Name	HRB-025-120NA SHRINK UNIT
Voltage required	120V
Power rating	1200W
Dimensions	362mm x 105mm x 570mm
Shrink fit capabilities	All OSG HY-PRO® Shrink holders
Heating cycle time	120 seconds
Included Accessories	Heat resistant gloves, timer, tool tweezer
Weight	16.5 lbs.

Safe Use of Shrink Devices

- 1** DO NOT allow contact between hot air from the system and the body as there is a possibility of burns.
- 2** DO NOT use this system near flammable gases and substances.
- 3** DO NOT apply water to the system.
- 4** Recommended cool-down time is five minutes.



HR-B Handy Unit Accessories

	Item Name	EDP No.	Size	Specification
 	Base	9910232	BAA-01	To hold the appropriate adapter for positioning a shrink fit holder or extension during assembly and disassembly.
 	Adjustable Base Adapter	9910222	BAS-02	To position 10-40mm straight type shrink extensions during assembly and disassembly. Can be used in conjunction with the BAA-01 base.
 	Adapter	9910224	ADH-HSK25	Used with HSK25 series tool holders. It fits into the top of the BAA-01 Base and accepts the tool holder.
	Adapter	9910225	ADH-HSK32	Used with HSK32 series tool holders. It fits into the top of the BAA-01 Base and accepts the tool holder.
	Adapter	9910226	ADH-HSK40	Used with HSK40 series tool holders. It fits into the top of the BAA-01 Base and accepts the tool holder.
	Adapter	9910227	ADH-HSK50	Used with HSK50 series tool holders. It fits into the top of the BAA-01 Base and accepts the tool holder.
 	Adapter	9910228	ADH-BT30	Used with BT30 series tool holders. It fits into the top of the BAA-01 Base and accepts the tool holder.
 	Adapter	9910229	ADH-40	Used with BT40 and CT40 series tool holders. It fits into the top of the BA-01 Base and accepts the tool holder.
	Adapter	9910230	ADH-50	Used with BT50 and CT50 series tool holders. It fits into the top of the BA-01 Base and accepts the tool holder.
 	Base Adapter	9910220	ADH-SLK	Used with regular, flush and slim type shrink extensions. It fits into the top of the BAA-01 Base.
	Heat Resistant Gloves	8910171	HBT-01	
	F Type Nozzle	9910205	NOZ-M4-12	Optional nozzles for BT and HSK Flush Type Holders






HR-B Handy Unit Accessories


	Item Name	EDP No.	Size	Specification
<p>Insertion</p> <p>Set either the overhang length or insertion length of the cutting tool.</p> <p>Removing</p> <p>Leave some clearance, and attach the stopper</p>	Coil spring (type depth stops)	8910172	HSA-3	3mm shanks, 10 pcs.
		8910174	HSA-4	4mm shanks, 10 pcs.
		9910213	HSA-5	5mm shanks, 10 pcs.
		8910176	HSA-6	6mm shanks, 10 pcs.
		9910215	HSA-7	7mm shanks, 10 pcs.
		8910178	HSA-8	8mm shanks, 10 pcs.
		9910217	HSA-9	9mm shanks, 10 pcs.
		8910180	HSA-10	10mm shanks, 10 pcs.
		9910219	HSA-11	11mm shanks, 10 pcs.
		8910182	HSA-12	12mm shanks, 10 pcs.
		8910183	HST-F	Set 3-12mm, 10 pcs.
		9910170	HSA-1/8	1/8" shanks, 10 pcs.
		9910173	HSA-3/16	3/16" shanks, 10 pcs.
		9910176	HSA-1/4	1/4" shanks, 10 pcs.
		9910177	HSA-5/16	5/16" shanks, 10 pcs.
		9910179	HSA-3/8	3/8" shanks, 10 pcs.
9910182	HSA-1/2	1/2" shanks, 10 pcs.		
	Shrink Extension Stand	9910201	SDKT-RE (Red)	Vertical stand holds up to 25 extensions.
		9910202	SDKT-BL (Blue)	
		9910203	SDKT-GR (Green)	
		9910204	SDKT-GD (Gold)	
	Wrench	8910020	W-135	Used for the assembly and disassembly of the HY-PRO® Shrink two piece tooling system extensions and base holders.





Tool Insertion

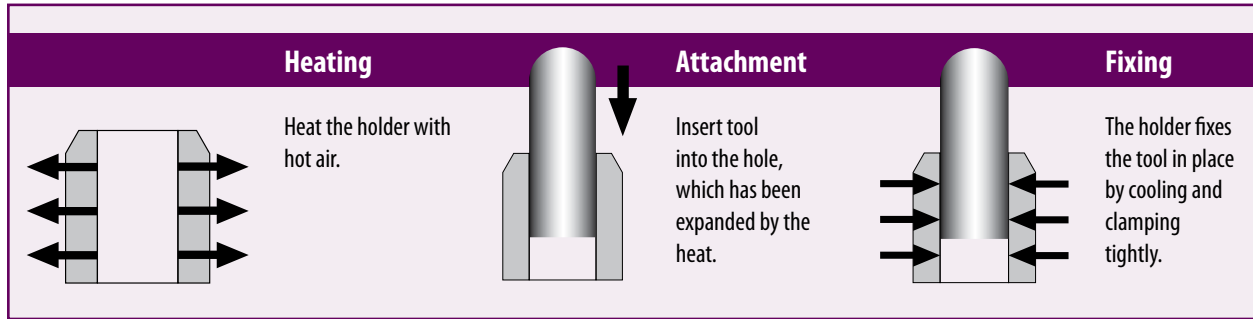

Tool Removal

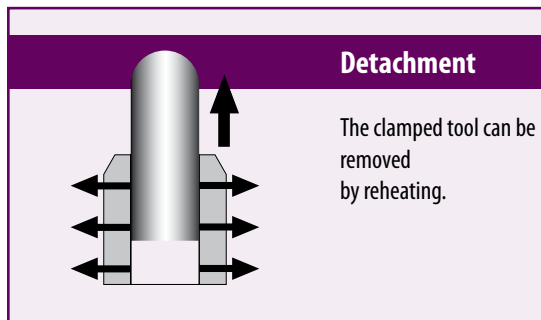


Features

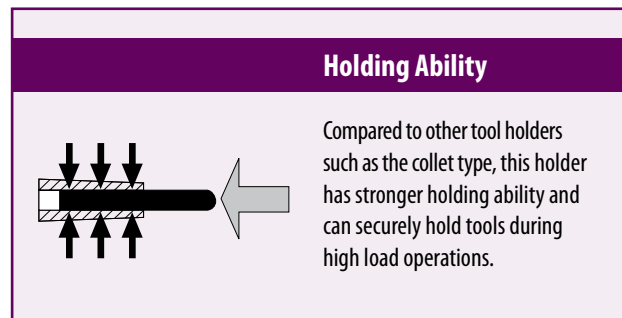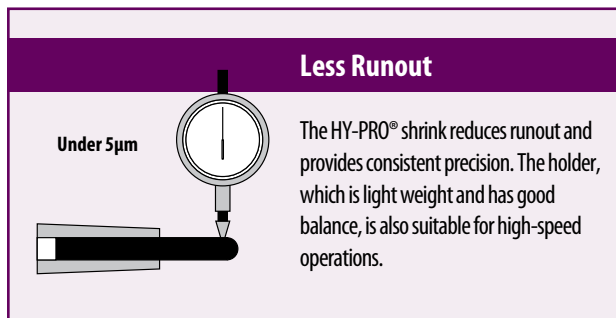



Holders		Shrink Extensions	Cutting Tools
Basic BT30 BT40 BT50 CT-40 CT-50 HSK-A63 HSK-A100 HSK-F63M	Nozzle BT40 BT50 CT-40 CT-50 HSK-A63 HSK-A100	Slim Regular Flush } \varnothing 3-12 \varnothing 1/4-1/2 in.	Carbide End Mills Carbide Drills Other Carbide Tools

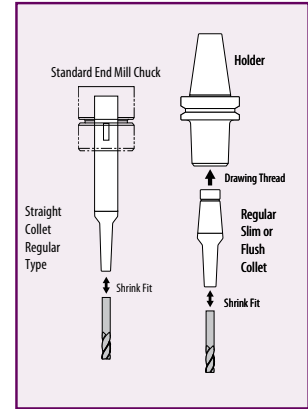

Holders

Type	Specifications	BT, CT Holders	HSK Holders
Basic Holders	Holder for Shrink Extension (without nozzle)	BT-30, -40, -50 CT-40, -50 	A63, A100 F63M
Nozzel Holders	Holder for Shrink Extention (Coolant Supply Nozzle is Optional)	BT-40, -50 CT-40, -50 	A63, A100


Extensions

Type	Application	Dimension/Size
Regular Type	For General Operations and Coolant-Through Tool	 \varnothing 1.5 inch/metric
Slim Type	Use this type when a slim holder is needed to avoid interference between the tool and the work piece	 \varnothing 1.5 inch/metric
Flush Type	Use this type when you want coolant supplied from the end face of the extension	 \varnothing 3.25~4 inch/metric




For Small Shank Diameter use h6 Shanks

The HY-PRO[®] Shrink System can be used for tools with a minimum shank diameter of 3mm. If the shank diameter is between 6mm and 12mm, the system requires at least an h7 shank tolerance. For Ø3-Ø5, use h6 shank tolerance. A wide variety of tools are applicable.

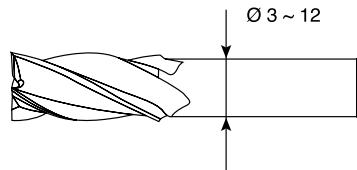

Various Coolant Supply Devices

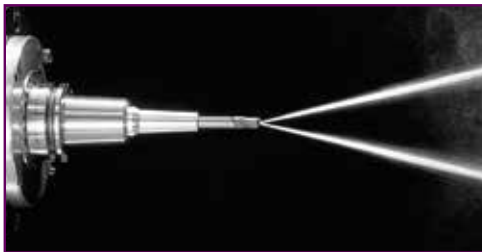

Through the Tool

Suitable when using a tool with internal coolant to supply the point of the cutting edge. This is especially effective for drilling because the coolant is guaranteed to reach the cutting area.



Through the Holder

Supplies coolant from the front face of the holder. This is used for tools without internal coolant supply and regular or slim type extensions.




Through the Collet

Supplies coolant from the front face of the shrink extensions. Although the diameter of the collet end face increases, coolant supply becomes even more effective.

Do-It-Yourself Extensions

Notes

If necessary, the shape of the shrink extension can be easily modified. This design provides the best holder shape for operations that have major interference with work materials.





1. The shape of the flush collet cannot be adjusted.
2. Other adjustments should be based on the ranges described below.
(Wall thickness should be at least 1.5mm)
3. DO NOT change the overall length.
4. For details, please refer to the instruction manual attached to the product package.

Recommended Cutting Conditions for Extension Modification

Notes

1. The cutting depth should be kept small.
2. Use water soluble coolant.
3. Use positive-rake inserts for stainless steel.

Cutting Speed (m/min)	Cutting Speed (m/min)	Feed (mm/rev)	Cutting Depth (mm)
Roughing	30 - 50	0.1	0.2
Finishing	30 - 50	0.05	0.1

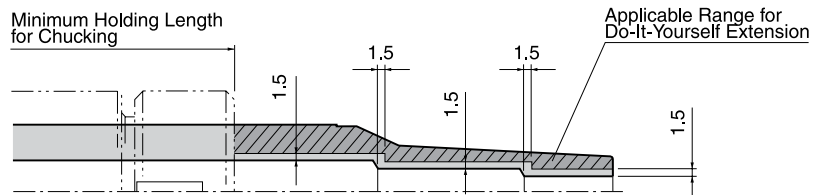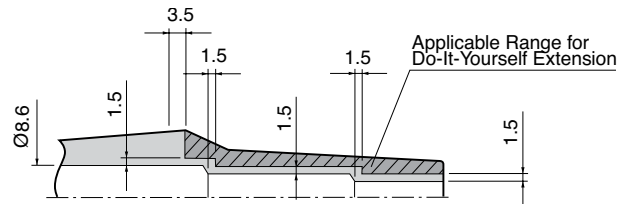



HY-PRO® Shrink - Proper Care Information

Please follow these guidelines to ensure your HY-PRO® Shrink extensions stay looking and performing like new for years to come:

- When not in use, remove tool and clean/dry the inside & outside of holder as thoroughly as possible. Apply rust-proofing oil (WD-40® for example) to help inhibit oxidation. Excessive internal rusting will lead to hairline fractures in the steel.
- Be sure to use cutters with shank diameters that adhere to ISO tolerance requirements. Remember, HY-PRO® Shrink holders are made to accommodate the following:

ø3~5mm	→	h6 tolerance ONLY!
ø6~25mm	→	h7 tolerance ONLY!


- Failure to use tools that adhere to these standards may result in complications with respect to inserting and removing tools.
- Be sure to observe minimum chucking lengths on extensions. Failure to do so can result in poor accuracy, deformation, or cracking of tool or extension.

Care Tips:

- Simple household bleach will remove oxidation from the outside of extensions. Use it to clean metal powder and debris from the insides as well to help prevent scratching & abrasions.




- Be sure to keep threads on the end of the extensions well oiled to allow for easy installation and removal from the holders.

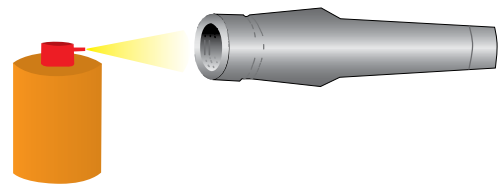



HSK-E25 Mono Series

For Standard & Coolant-Through the Tool Operations

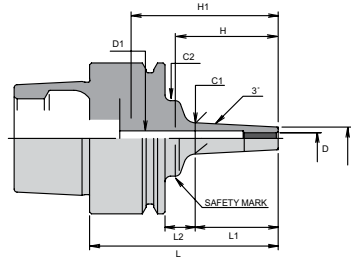

Units: mm

Type	EDP No.	Description	D	L	C	D1	L1	L2	C1	C2	H	H1
Regular	9911101	E25-SLRA3-35	3.000	35	7.500	4.0	17	8	9.3	18	9	29
	9911102	E25-SLRA4-35	4.000	35	10.000	4.3	17	8	11.8	18	12	29
	9911103	E25-SLRA6-35	6.000	35	12.000	6.6	17	8	13.8	18	18	26
Slim	9911104	E25-SLSA3-35	3.000	35	6.000	4.0	17	8	7.8	18	9	29
	9911105	E25-SLSA3-50	3.000	50	6.000	4.0	32	8	9.4	18	9	44
	9911106	E25-SLSA3.175-35	3.175	35	6.175	4.0	17	8	8.0	18	9	29
	9911107	E25-SLSA3.175-50	3.175	50	6.175	4.0	32	8	9.6	18	9	44
	9911108	E25-SLSA4-35	4.000	35	7.000	4.3	17	8	8.8	18	12	29
	9911109	E25-SLSA4-50	4.000	50	7.000	4.3	32	8	10.4	18	12	44
	9911110	E25-SLSA5-35	5.000	35	8.000	5.6	17	8	9.8	18	15	26
	9911111	E25-SLSA6-35	6.000	35	9.000	6.6	17	8	10.8	18	18	26
	9911112	E25-SLSA6-50	6.000	50	9.000	6.6	32	8	12.4	18	18	39



HSK-E32 Mono Series

For Standard & Coolant-Through the Tool Operations

Units: mm


Type	EDP No.	Description	D	L	C	D1	L1	L2	C1	C2	H	H1
Regular	9911001	E32-SLRA3-50	3.000	50	7.500	4.0	22	8	9.9	20	9	42
	9911017	E32-SLRA3-70	3.000	70	7.500	4.0	42	8	11.9	20	9	62
	9911002	E32-SLRA4-50	4.000	50	10.000	5.0	22	8	12.4	20	12	35
	9911018	E32-SLRA4-70	4.000	70	10.000	5.0	42	8	14.4	20	12	54
	9911003	E32-SLRA6-50	6.000	50	12.000	6.6	22	8	14.4	26	18	39
	9911019	E32-SLRA6-70	6.000	70	12.000	7.0	42	8	16.4	26	18	54
	9911004	E32-SLRA8-50	8.000	50	14.000	8.6	22	8	16.4	26	24	39
	9911005	E32-SLRA10-55	10.000	55	16.000	10.6	22	13	18.4	26	30	44
	9911006	E32-SLRA12-55	12.000	55	20.000	12.6	22	13	22.4	26	30	44
Slim	9911008	E32-SLSA3-50	3.000	50	6.000	4.0	22	8	8.4	20	9	42
	9911009	E32-SLSA3-70	3.000	70	6.000	4.0	42	8	10.5	20	9	62
	9911010	E32-SLSA3.175-50	3.175	50	6.175	4.0	22	8	8.5	20	9	42
	9911011	E32-SLSA3.175-70	3.175	70	6.175	4.0	42	8	10.6	20	9	62
	9911012	E32-SLSA4-50	4.000	50	7.000	5.0	22	8	9.4	20	12	34
	9911013	E32-SLSA4-70	4.000	70	7.000	5.0	42	8	11.5	20	12	54
	9911014	E32-SLSA5-50	5.000	50	8.000	6.0	22	8	10.4	20	15	34
	9911015	E32-SLSA5-70	5.000	70	8.000	6.0	42	8	12.5	20	15	54
9911016	E32-SLSA6-70	6.000	70	9.000	7.0	42	8	13.5	20	18	54	





HSK-E40 Mono Series

For Standard & Coolant-Through the Tool Operations

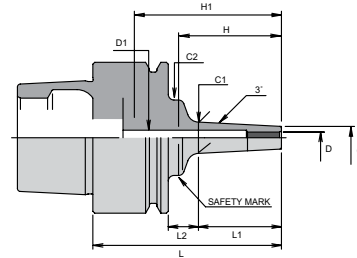

Units: mm

Type	EDP No.	Description	D	L	C	D1	L1	L2	C1	C2	H	H1
Regular	9911040	E40-SLRA3-50	3.000	50	7.500	4.0	22	8	9.8	20	9	42
	9911041	E40-SLRA3-70	3.000	70	7.500	4.0	42	8	11.9	20	9	62
	9911042	E40-SLRA4-50	4.000	50	10.000	5.0	22	8	12.3	20	12	42
	9911043	E40-SLRA4-70	4.000	70	10.000	5.0	42	8	14.4	20	12	62
	9911020	E40-SLRA6-50	6.000	50	12.000	6.6	22	8	14.4	26	18	39
	9911044	E40-SLRA6-70	6.000	70	12.000	6.6	42	8	16.4	26	18	54
	9911021	E40-SLRA8-50	8.000	50	14.000	8.6	22	8	16.4	26	24	39
	9911045	E40-SLRA8-85	8.000	85	14.000	9.0	42	23	18.4	25	24	69
	9911022	E40-SLRA10-55	10.000	55	16.000	10.6	22	13	18.4	26	30	44
	9911046	E40-SLRA10-85	10.000	85	16.000	11.0	42	23	20.4	25	30	64
	9911023	E40-SLRA12-55	12.000	55	20.000	12.6	22	13	22.4	30	30	44
	9911047	E40-SLRA12-85	12.000	85	20.000	13.0	42	23	24.4	32	30	74
	Slim	9911026	E40-SLSA3-50	3.000	50	6.000	4.0	22	8	8.4	20	9
9911027		E40-SLSA3-70	3.000	70	6.000	4.0	42	8	10.5	20	9	62
9911028		E40-SLSA3.175-50	3.175	50	6.175	4.0	22	8	8.5	20	9	42
9911029		E40-SLSA3.176-70	3.175	70	6.175	4.0	42	8	10.6	20	9	62
9911030		E40-SLSA4-50	4.000	50	7.000	5.0	22	8	9.4	20	12	42
9911031		E40-SLSA4-70	4.000	70	7.000	5.0	42	8	11.5	20	12	62
9911032		E40-SLSA5-50	5.000	50	8.000	6.0	22	8	10.4	20	15	34
9911033		E40-SLSA5-70	5.000	70	8.000	6.0	42	8	12.5	20	15	54
9911034		E40-SLSA6-50	6.000	50	9.000	6.6	22	8	11.4	20	18	39
9911035		E40-SLSA6-70	6.000	70	9.000	7.0	42	8	13.5	20	18	54
9911036		E40-SLSA8-60	8.000	60	11.000	8.6	22	18	13.4	26	24	49
9911037		E40-SLSA8-80	8.000	80	11.000	8.6	42	18	15.5	26	24	64
9911038		E40-SLSA10-60	10.000	60	13.000	10.6	22	18	15.4	26	30	49
9911039	E40-SLSA10-80	10.000	80	13.000	10.6	42	18	17.5	26	30	64	



Applicable Machine Tools:




HSK-E25	HSK-E32	HSK-E40
<ul style="list-style-type: none"> • SODICK HIGHTECH MC430L • ROKU-ROKU MEGA III/NANO-21 • MITSUBISHI μ Machining V1 • KERN HSPC2525 	<ul style="list-style-type: none"> • MAKINO V22/V33 • SODICK HIGHTECH MC430L/ MC650L/ HS150L • MORI SEIKI NVD1500DCG • MITSUI SEIKI VL30 • OKK VD300 • ROEDERS GMBH RHP600 	<ul style="list-style-type: none"> • ROKU-ROKU Cega-542 • MIKRON HSM400/ UCP600 • HERMLE C Series • DIGMA HSC800/5





Base Holders: BT, CT and HSK 2PC Series

For Standard & Coolant-Through the Tool Operations

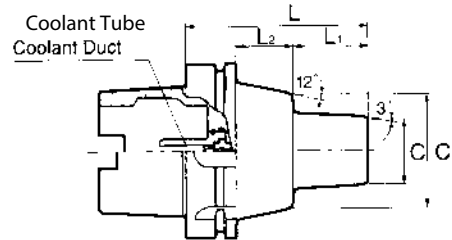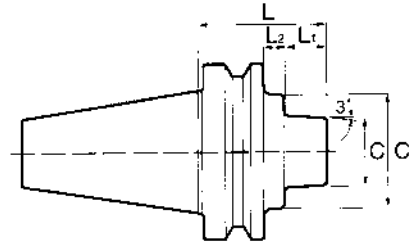

CAT Holders

Units: Inch

EDP No.	Description	L	L1	C	C1
9910002	CT40-SLK12-45	1.77	1.02	1.61	1.75
9910004	CT50-SLK12-75	2.95	1.57	1.50	2.75



BT Holders

Units: mm

EDP No.	Description	L	L1	L2	C	C1
8910000	BT30-SLK12-35 - 45 Deg.	35	13	-	38	-
8910001	BT30-SLK12-35 - 60 Deg.	35	13	-	38	-
8910002	BT40-SLK12-45	45	18	-	38	-
8910003	BT40-SLK12-75	75	48	-	38	-
8910004	BT50-SLK12-75	75	25	12	38	65



HSK Holders

Units: mm

EDP No.	Description	L	L1	L2	C	C1
9910005	HSK-E50-SLK12-75	75	49	-	38	-
8910005	HSK-A63-SLK12-75	75	49	-	38	-
8910006	HSK-A63-SLK12-135	135	109	-	38	-
9910006	HSK-F63M-SLK12-75	75	49	-	38	-
8910007	HSK-A100-SLK12-105	105	43	33	38	65



For extended gage lengths, please contact OSG's technical department for application advice.





Nozzle Type Holders: BT, CT and HSK 2PC Series

For Coolant-Through the Holder Operations

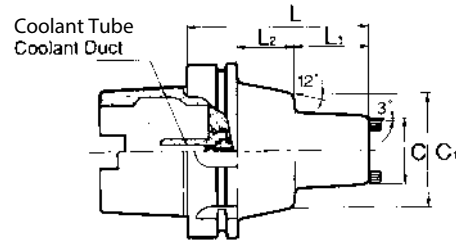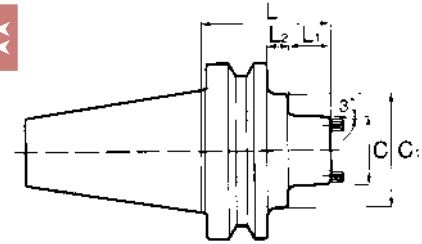

CAT Holders

Units: Inch

EDP No.	Description	L	L1	C	C1
9910008	CT40-SLK12-45F	1.77	1.02	1.61	1.75
9910011	CT50-SLK12-75F	2.95	1.57	1.61	2.75



BT Holders

Units: mm

EDP No.	Description	L	L1	L2	C	C1
8910008	BT40-SLK12-45F	45	18	-	41	-
8910009	BT40-SLK12-75F	75	48	-	41	-
8910010	BT40-SLK12-135F	135	108	-	41	-
8910011	BT50-SLK12-75F	75	25	12	41	65
8910012	BT50-SLK12-105F	105	55	12	41	65
8910013	BT50-SLK12-135F	135	85	12	41	65



HSK Holders

Units: mm

EDP No.	Description	L	L1	L2	C	C1
8910014	HSK-A63-SLK12-75F	75	49	-	41	-
8910015	HSK-A63-SLK12-135F	135	109	-	41	-
8910016	HSK-A100-SLK12-105F	105	43	33	41	65
8910017	HSK-A100-SLK12-135F	135	73	33	41	65


For lubricating through the oil holes of tools, replace the nozzle with a coolant stop screw. The pressure limit of the coolant stop screw is 3 MPa.





Regular Type Shrink Extensions

For Standard & Coolant-Through the Tool Operations

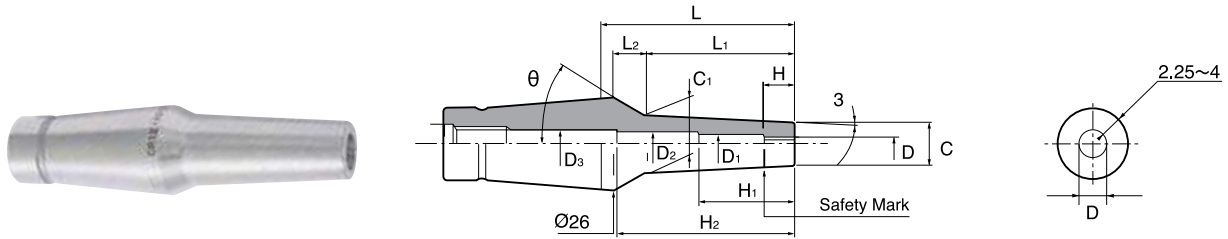

Units: Inch

EDP No.	Description	D	D1	D2	D3	L	L1	L2	H	H1	H2	C	C1	θ°	Insertion Limit
9910031	CR12-1/8-55	1/8	-	-	-	2.17	1.65	0.37	0.39	-	-	0.36	0.53	33.5	3.35
9910034	CR12-3/16-55	3/16	-	-	-	2.17	1.65	0.37	0.39	-	-	0.42	0.60	29.6	3.35
9910037	CR12-1/4-55	1/4	-	-	-	2.17	1.65	0.37	0.71	-	-	0.49	0.66	25.9	3.35
9910040	CR12-5/16-55	5/16	-	-	-	2.17	1.65	0.37	0.98	-	-	0.55	0.72	22.1	3.35
9910043	CR12-3/8-55	3/8	-	-	-	2.17	1.65	0.37	1.18	-	-	0.61	0.78	18.0	2.36
9910048	CR12-7/16-55	7/16	-	-	-	2.17	1.65	0.37	1.18	-	-	0.67	0.85	12.9	2.36
9910046	CR12-1/2-55	1/2	-	-	-	2.17	1.99	0.17	1.18	-	-	0.81	-	-	2.36

The tool should be inserted deeper than the safety mark.
Do not exceed the insertion limit.



Units: mm

EDP No.	Description	D	D1	D2	D3	L	L1	L2	H	H1	H2	C	C1	θ°	Insertion Limit
8910030	CR12-3-35	3	-	-	4.0	35	22	9.5	9.7	-	-	7.5	9.8	49.3	65
8910031	CR12-3-55	3	-	-	4.0	55	42	9.5	9.7	-	-	7.5	11.9	44.2	85
8910032	CR12-3-80	3	4	6	8.6	80	67	9.5	9.7	39.4	74.2	7.5	14.6	36.9	110
8910033	CR12-4-35	4	-	-	5.0	35	22	9.5	11.7	-	-	10	12.3	43.1	65
8910034	CR12-4-55	4	-	-	5.0	55	42	9.5	11.7	-	-	10	14.4	37.2	85
8910035	CR12-4-80	4	5	7	8.6	80	67	9.5	11.7	39.7	74.5	10	17.1	29.1	110
8910036	CR12-6-35	6	-	-	7.0	35	22	9.5	17.7	-	-	12	14.3	37.5	65
8910037	CR12-6-55	6	7	-	8.6	55	42	9.5	17.7	49.5	-	12	16.4	31.1	85
8910038	CR12-6-80	6	7	-	8.6	80	67	9.5	17.7	49.5	-	12	19.1	22.6	110
8910039	CR12-8-35	8	-	-	8.6	35	22	9.5	24.8	-	-	14	16.3	31.4	65
8910040	CR12-8-55	8	-	-	8.6	55	42	9.5	24.8	-	-	14	18.4	24.6	85
8910041	CR12-8-80	8	-	-	8.6	80	67	9.5	24.8	-	-	14	21.1	16.0	110
8910042	CR12-10-35	10	-	-	11.0	35	22	9.5	30.0	-	-	16	18.3	25.0	60
8910043	CR12-10-55	10	-	-	11.0	55	42	9.5	30.0	-	-	16	20.4	18.0	60
8910044	CR12-10-80	10	-	-	11.0	80	67	9.5	30.0	-	-	16	23.1	9.4	60
8910045	CR12-12-35	12	-	-	13.0	35	22	9.5	30.0	-	-	20	22.3	11.7	60
8910046	CR12-12-55	12	-	-	13.0	55	42	9.5	30.0	-	-	20	24.4	5.0	60
8910047	CR12-12-80	12	-	-	13.0	80	-	-	30.0	-	-	20	25.5	-	60


The tool should be inserted deeper than the safety mark.
Do not exceed the insertion limit.





Flush Type Shrink Extensions

For Coolant-Through the Collet Operations

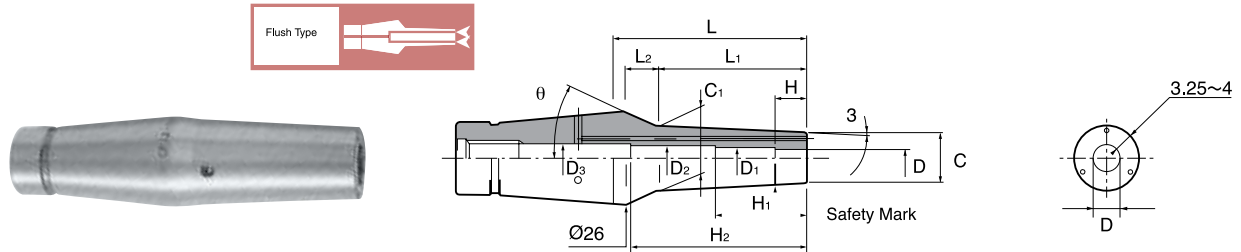

Units: Inch

EDP No.	Description	D	D1	D2	D3	L	L1	L2	H	H1	H2	C	C1	θ°	Insertion Limit
9910051	CF12-1/8-55	1/8	-	-	-	2.17	1.65	0.37	0.39	-	-	0.38	0.55	32.4	3.35
9910054	CF12-3/16-55	3/16	-	-	-	2.17	1.65	0.37	0.59	-	-	0.50	0.68	24.7	3.35
9910057	CF12-1/4-55	1/4	-	-	-	2.17	1.65	0.37	0.71	-	-	0.56	0.74	20.7	3.35
9910060	CF12-5/16-55	5/16	-	-	-	2.17	1.65	0.37	0.98	-	-	0.63	0.80	16.6	3.35
9910063	CF12-3/8-55	3/8	-	-	-	2.17	1.65	0.37	1.18	-	-	0.69	0.86	12.2	2.36
9910068	CF12-7/16-55	7/16	-	-	-	2.17	1.65	0.37	1.18	-	-	0.75	0.93	6.9	2.36
9910066	CF12-1/2-55	1/2	-	-	-	2.17	1.99	0.17	1.18	-	-	0.81	-	-	2.36

The tool should be inserted deeper than the safety mark.

The collet cannot be customized.

Do not exceed the insertion limit.



Units: mm

EDP No.	Description	D	D1	D2	D3	L	L1	L2	H	H1	H2	C	C1	θ°	Insertion Limit
8910050	CF12-3-35	3	-	-	4.0	35	22	9.5	9.7	-	-	9.5	11.8	44.4	65
8910051	CF12-3-55	3	-	-	4.0	55	42	9.5	9.7	-	-	9.5	13.9	38.7	85
8910052	CF12-3-80	3	4	6	8.6	80	67	9.5	9.7	39.4	74.2	9.5	16.5	30.7	110
8910053	CF12-4-35	4	-	-	5.0	35	22	9.5	11.7	-	-	12.0	14.3	37.5	65
8910054	CF12-4-55	4	-	-	5.0	55	42	9.5	11.7	-	-	12.0	16.4	31.1	85
8910055	CF12-4-80	4	5	7	8.6	80	67	9.5	11.7	39.7	74.5	12.0	19.0	22.6	110
8910056	CF12-6-35	6	-	-	7.0	35	22	9.5	17.7	-	-	14.0	16.3	31.4	65
8910057	CF12-6-55	6	7	-	8.6	55	42	9.5	17.7	49.5	-	14.0	18.4	24.6	85
8910058	CF12-6-80	6	7	-	8.6	80	67	9.5	17.7	49.5	-	14.0	21.0	16.0	110
8910059	CF12-8-35	8	-	-	8.6	35	22	9.5	24.8	-	-	16.0	18.3	25.0	65
8910060	CF12-8-55	8	-	-	8.6	55	42	9.5	24.8	-	-	16.0	20.4	18.0	85
8910061	CF12-8-80	8	-	-	8.6	80	67	9.5	24.8	-	-	16.0	23.0	9.4	110
8910062	CF12-10-35	10	-	-	11.0	35	22	9.5	30.0	-	-	18.0	20.3	18.3	60
8910063	CF12-10-55	10	-	-	11.0	55	42	9.5	30.0	-	-	18.0	22.4	11.4	60
8910064	CF12-10-80	10	-	-	11.0	80	-	-	30.0	-	-	18.0	-	-	60
8910065	CF12-12-35	12	-	-	13.0	35	22	9.5	30.0	-	-	20.0	22.3	11.7	60
8910066	CF12-12-55	12	-	-	13.0	55	42	9.5	30.0	-	-	20.0	22.4	5.0	60
8910067	CF12-12-80	12	-	-	13.0	80	-	-	30.0	-	-	20.0	-	-	60

The tool should be inserted deeper than the safety mark.

The collet cannot be customized.


Do not exceed the insertion limit.





Slim Type Shrink Extensions

For Long Reach & Coolant-Through the Tool Operations

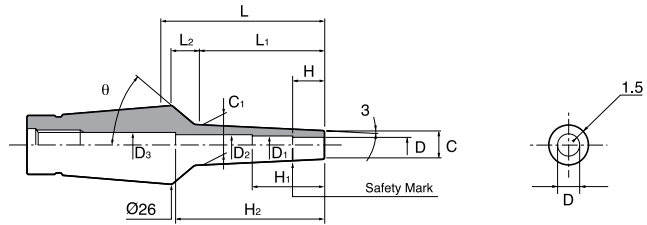

Units: Inch

EDP No.	Description	D	D1	D2	D3	L	L1	L2	H	H1	H2	C	C1	θ°	Insertion Limit
9910076	CS12-1/8-80	1/8	-	-	-	3.15	2.64	0.37	0.39	-	-	0.24	0.52	34.0	4.33
9910077	CS12-1/8-110	1/8	-	-	-	4.33	3.82	0.37	0.39	-	-	0.24	0.64	27.2	5.51
9910084	CS12-3/16-80	3/16	-	-	-	3.15	2.64	0.37	0.59	-	-	0.42	0.58	30.7	4.33
9910085	CS12-3/16-110	3/16	-	-	-	4.33	3.82	0.37	0.59	-	-	0.42	0.71	22.7	5.51
9910088	CS12-1/4-80	1/4	-	-	-	3.15	2.64	0.37	0.71	-	-	0.37	0.64	27.2	4.33
9910089	CS12-1/4-110	1/4	-	-	-	4.33	3.82	0.37	0.71	-	-	0.37	0.77	18.7	5.51
9910096	CS12-5/16-80	5/16	-	-	-	3.15	2.64	0.37	0.98	-	-	0.43	0.71	22.7	4.33
9910097	CS12-5/16-110	5/16	-	-	-	4.33	3.82	0.37	0.98	-	-	0.43	0.83	14.4	5.51
9910104	CS12-3/8-80	3/8	-	-	-	3.15	2.64	0.37	1.18	-	-	0.49	0.77	18.7	2.36
9910105	CS12-3/8-110	3/8	-	-	-	4.33	3.82	0.37	1.18	-	-	0.49	0.89	10.0	2.36
9910108	CS12-7/16-80	7/16	-	-	-	3.15	2.64	0.37	1.18	-	-	0.67	0.95	5.40	2.36
9910109	CS12-7/16-110	7/16	-	-	-	4.33	-	-	1.18	-	-	0.67	-	-	2.36
9910112	CS12-1/2-80	1/2	-	-	-	3.15	2.64	0.37	1.18	-	-	0.62	0.89	10.0	2.36
9910113	CS12-1/2-110	1/2	-	-	-	4.33	-	-	1.18	-	-	0.62	-	-	2.36


This slim collet successfully avoids interference with the work material.





Slim Type Shrink Extensions

For Long Reach & Coolant-Through the Tool Operations

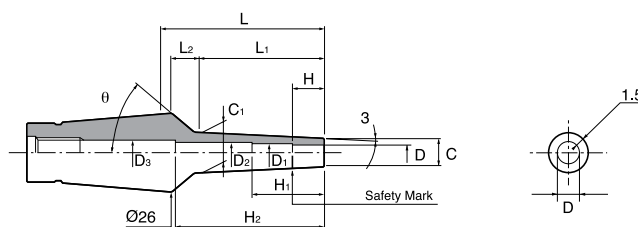

Units: mm

EDP No.	Description	D	D1	D2	D3	L	L1	L2	H	H1	H2	C	C1	θ °	Insertion Limit
8910070	CS12-3-35	3.000	-	-	4.0	35	22	9.5	9.7	-	-	6	8.3	52.7	65
8910071	CS12-3-55	3.000	-	-	4.0	55	42	9.5	9.7	-	-	6	10.4	47.9	85
8910072	CS12-3-80	3.000	4	6	8.6	80	67	9.5	9.7	39.4	74.2	6	13.0	41.2	110
8910073	CS12-3-110	3.000	4	6	8.6	110	97	9.5	9.7	39.4	104.2	6	16.2	31.8	140
8910074	CS12-3.175-35	3.175	-	-	4.0	35	22	9.5	9.7	-	-	6	8.3	52.6	65
8910075	CS12-3.175-55	3.175	-	-	4.0	55	42	9.5	9.7	-	-	6	10.4	47.9	85
8910076	CS12-3.175-80	3.175	4	6	8.6	80	67	9.5	9.7	39.4	74.2	6	13.0	41.2	110
8910077	CS12-3.175-110	3.175	4	6	8.6	110	97	9.5	9.7	39.4	104.2	6	16.2	31.8	140
8910078	CS12-4-35	4.000	-	-	5.0	35	22	9.5	11.7	-	-	7	9.3	50.4	65
8910079	CS12-4-55	4.000	-	-	5.0	55	42	9.5	11.7	-	-	7	11.4	45.5	85
8910080	CS12-4-80	4.000	5	7	8.6	80	67	9.5	11.7	39.7	74.5	7	14.0	38.3	110
8910081	CS12-4-110	4.000	5	7	8.6	110	97	9.5	11.7	39.7	104.5	7	17.2	28.7	140
8910082	CS12-5-35	5.000	-	-	6.0	35	22	9.5	14.7	-	-	8	10.3	48.1	65
8910083	CS12-5-55	5.000	6	-	8.6	55	42	9.5	14.7	49.2	-	8	12.4	42.8	85
8910084	CS12-5-80	5.000	6	-	8.6	80	67	9.5	14.7	49.2	-	8	15.0	35.4	110
8910085	CS12-5-110	5.000	6	-	8.6	110	97	9.5	14.7	69.2	-	8	18.2	25.4	140
8910086	CS12-6-35	6.000	-	-	7.0	35	22	9.5	17.7	-	-	9	11.3	45.7	65
8910087	CS12-6-55	6.000	7	-	8.6	55	42	9.5	17.7	49.5	-	9	13.4	40.1	85
8910088	CS12-6-80	6.000	7	-	8.6	80	67	9.5	17.7	49.5	-	9	16.0	32.3	110
8910089	CS12-6-110	6.000	7	-	8.6	110	97	9.5	17.7	69.5	-	9	19.2	22.1	140
8910090	CS12-7-35	7.000	-	-	8.6	35	22	9.5	19.5	-	-	10	12.3	43.1	65
8910091	CS12-7-55	7.000	-	-	8.6	55	42	9.5	19.5	-	-	10	14.4	37.2	85
8910092	CS12-7-80	7.000	-	-	8.6	80	67	9.5	19.5	-	-	10	17.0	29.1	110
8910093	CS12-7-110	7.000	-	-	8.6	110	97	9.5	19.5	-	-	10	20.2	18.8	140
8910094	CS12-8-35	8.000	-	-	8.8	35	22	9.5	24.8	-	-	11	13.3	40.4	65
8910095	CS12-8-55	8.000	-	-	8.8	55	42	9.5	24.8	-	-	11	15.4	34.2	85
8910096	CS12-8-80	8.000	-	-	8.8	80	67	9.5	24.8	-	-	11	18.0	25.9	110
8910097	CS12-8-110	8.000	-	-	8.8	110	97	9.5	24.8	-	-	11	21.2	15.5	140
8910098	CS12-9-35	9.000	-	-	10.0	35	22	9.5	30.0	-	-	12	14.3	37.5	60
8910099	CS12-9-55	9.000	-	-	10.0	55	42	9.5	30.0	-	-	12	16.4	31.1	60
8910100	CS12-9-80	9.000	-	-	10.0	80	67	9.5	30.0	-	-	12	19.0	22.6	60
8910101	CS12-9-110	9.000	-	-	10.0	110	97	9.5	30.0	-	-	12	22.2	12.2	60
8910102	CS12-10-35	10.000	-	-	11.0	35	22	9.5	30.0	-	-	13	15.3	34.5	60
8910103	CS12-10-55	10.000	-	-	11.0	55	42	9.5	30.0	-	-	13	17.4	27.9	60
8910104	CS12-10-80	10.000	-	-	11.0	80	67	9.5	30.0	-	-	13	20.0	19.3	60
8910105	CS12-10-110	10.000	-	-	11.0	110	97	9.5	30.0	-	-	13	23.2	8.9	60
8910106	CS12-11-35	11.000	-	-	12.0	35	22	9.5	30.0	-	-	14	16.3	31.4	60
8910107	CS12-11-55	11.000	-	-	12.0	55	42	9.5	30.0	-	-	14	18.4	24.6	60
8910108	CS12-11-80	11.000	-	-	12.0	80	67	9.5	30.0	-	-	14	21.0	16.0	60
8910109	CS12-11-110	11.000	-	-	12.0	110	97	9.5	30.0	-	-	14	24.2	5.7	60
8910110	CS12-12-35	12.000	-	-	13.0	35	22	9.5	30.0	-	-	15	17.3	28.2	60
8910111	CS12-12-55	12.000	-	-	13.0	55	42	9.5	30.0	-	-	15	19.4	21.3	60
8910112	CS12-12-80	12.000	-	-	13.0	80	67	9.5	30.0	-	-	15	22.0	12.7	60
8910113	CS12-12-110	12.000	-	-	13.0	110	-	-	30.0	-	-	15	-	-	60


This slim collet successfully avoids interference with the work material. The tool should be inserted deeper than the safety mark. Do not exceed the insertion limit.





Straight Regular Type Shrink Extensions

For Standard Milling/End Mill Chucks

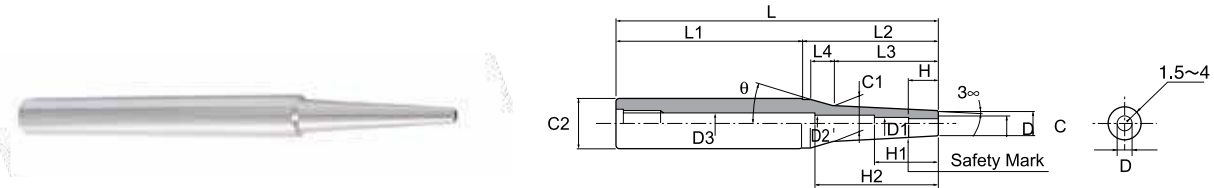

Units: Inch

EDP No.	Description	L	L1	L2	L3	L4	D	C	C1	C2	H	Insertion Limit
9910136	ST19.05-SLR1/4-110	4.33	2.95	1.38	0.87	0.374	0.2500	0.49	0.58	0.75	0.71	3.66
9910142	ST19.05-SLR5/16-110	4.33	2.95	1.38	0.87	0.374	0.3125	0.55	0.64	0.75	0.98	3.66
9910147	ST19.05-SLR3/8-110	4.33	2.95	1.38	-	-	0.3750	0.61	-	0.75	1.18	2.36
9910139	ST25.4-SLR 1/4-203	8.00	5.90	2.17	1.65	0.510	0.2500	0.49	1.00	1.00	0.71	7.36
9910144	ST25.4-SLR 5/16-203	8.00	5.90	2.17	1.65	0.510	0.3125	0.55	1.00	1.00	0.98	7.36
9910149	ST25.4-SLR 3/8-127	5.00	3.50	1.38	0.87	0.510	0.3750	0.61	1.00	1.00	1.18	2.36
9910151	ST25.4-SLR 3/8-190	7.50	5.30	2.17	1.65	0.510	0.3750	0.61	1.00	1.00	1.18	2.36
9910156	ST25.4-SLR 1/2-114	4.50	3.00	1.38	0.87	0.510	0.5000	0.81	1.00	1.00	1.18	2.36
9910158	ST25.4-SLR 1/2-178	7.00	4.70	2.17	1.43	0.740	0.5000	0.81	1.00	1.00	1.18	2.36

Shrink holder with straight shank for ordinary milling chucks.
Provides high performance of shrink fit without holder.
The tool should be inserted deeper than the safety mark.
Do not exceed the insertion limit.



Units: mm

EDP No.	Description	D	D1	D2	L	L1	L2	L3	H	H1	H2	C	C1	C2	Insertion Limit
8910401	ST16-SLRA 3-140-M 67	3	4.0	6.0	140	60	80	67	9	52.5	82.5	6	13.0	16	112
8910413	ST16-SLRA 4-140-M 60	4	5.0	8.6	140	80	60	60	12	62.5	85.0	10	-	16	112
8910424	ST20-SLRB 6-120-M 42	6	7.0	8.6	120	70	50	42	18	52.5	60.0	14	18.4	20	92
8910435	ST20-SLRB 8-100-M 30	8	8.6	-	100	70	30	30	24	40.0	-	18	-	20	72
8910406	ST25-SLRA 3-245-M 97	3	4.0	5.0	245	120	125	97	9	47.5	99.5	6	16.2	25	217
8910415	ST25-SLRA 4-245-M 97	4	5.0	6.0	245	120	125	97	12	50.5	110.5	7	17.2	25	287
8910428	ST25-SLRB 6-240-M 42	6	7.0	8.6	240	170	70	42	18	45.5	50.0	14	18.4	25	212
8910440	ST25-SLRB 8-210-M 90	8	8.6	-	210	120	90	90	24	70.0	-	18	-	25	182
8910449	ST25-SLRB10-120-M 35	10	10.6	-	120	85	35	35	30	50.0	-	22	-	25	60
8910450	ST25-SLRB10-210-M 90	10	10.6	-	210	120	90	90	30	70.0	-	22	-	25	60
8910457	ST25-SLSB12-120-M 42	12	12.6	-	120	42	50	42	30	50.0	-	19	23.4	25	60
8910458	ST25-SLSB12-150-M 80	12	12.6	-	150	80	80	80	30	60.0	-	19	-	25	60


Shrink holder with straight shank for ordinary milling chucks.
Provides high performance of shrink fit without holder.
The tool should be inserted deeper than the safety mark.
Do not exceed the insertion limit.





Straight Slim Type Shrink Extensions

For Standard Milling/End Mill Chucks

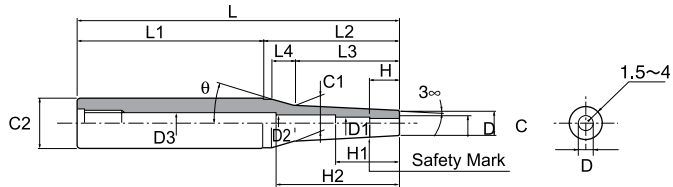

Units: Inch

EDP No.	Description	L	L1	L2	L3	L4	D	C	C1	C2	H	Insertion Limit
9910120	ST9.525-SLS1/8-80	3.15	1.75	1.40	-	-	0.1250	0.240	-	0.375	0.39	2.72
9910123	ST9.525-SLS3/16-80	3.15	1.75	1.40	-	-	0.1875	0.306	-	0.375	0.59	2.71
9910137	ST12.7-SLS1/4-80	3.15	1.75	1.40	-	-	0.2500	0.368	-	0.500	0.71	2.72
9910121	ST15.875-SLS1/8-110	4.33	2.19	2.14	1.63	0.374	0.1250	0.240	0.41	0.625	0.39	3.66
9910124	ST15.875-SLS3/16-110	4.33	2.19	2.14	1.63	0.374	0.1875	0.306	0.48	0.625	0.59	3.66
9910122	ST19.05-SLS1/8-205	8.07	3.61	4.46	3.95	0.374	0.1250	0.240	0.66	0.750	0.39	7.40
9910125	ST19.05-SLS3/16-205	8.07	3.61	4.46	-	-	0.1875	0.306	-	0.750	0.59	7.40
9910138	ST19.05-SLS1/4-110	4.33	2.95	1.38	0.87	0.374	0.2500	0.368	0.46	0.750	0.71	3.66
9910143	ST19.05-SLS5/16-110	4.33	2.95	1.38	0.87	0.374	0.3125	0.430	0.52	0.750	0.98	3.66
9910148	ST19.05-SLS3/8-110	4.33	2.95	1.38	0.87	0.374	0.3750	0.490	0.58	0.750	1.18	2.36
9910140	ST25.4-SLS 1/4-228	9.00	4.70	4.33	3.82	0.510	0.2500	0.370	1.00	1.000	0.71	8.34
9910145	ST25.4-SLS 5/16-228	9.00	4.70	4.33	3.82	0.510	0.3125	0.430	1.00	1.000	0.98	8.34
9910150	ST25.4-SLS3/8-155	6.10	3.60	2.50	1.99	0.374	0.3750	0.490	0.70	1.000	1.18	2.36
9910152	ST25.4-SLS 3/8-228	9.00	4.70	4.33	3.82	0.510	0.3750	0.490	1.00	1.000	1.18	2.36
9910157	ST25.4-SLS1/2-155	6.10	4.10	2.00	1.49	0.374	0.5000	0.620	0.77	1.000	1.18	2.36
9910159	ST25.4-SLS 1/2-228	9.00	4.70	4.33	3.82	0.510	0.5000	0.620	1.00	1.000	1.18	2.36


This slim collet successfully avoids interference with the work material. The tool should be inserted deeper than the safety mark. Do not exceed the insertion limit.





Straight Slim Type Shrink Extensions

For Standard Milling/End Mill Chucks

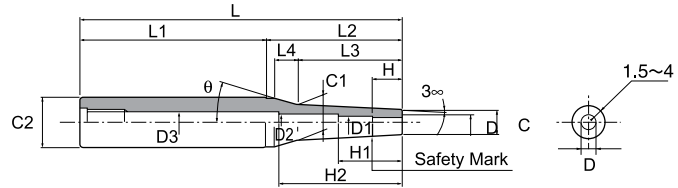

Units: mm

EDP No.	Description	D	D1	D2	L	L1	L2	L3	H	H1	H2	C	C1	C2	Insertion Limit
8910120	ST10-SLS3-80	3.000	4.0	-	80	45	35	35	9	40.0	-	6	-	10	64
8910121	ST10-SLS3.175-80	3.175	4.0	-	80	45	35	35	9.7	40.0	-	6	-	10	64
8910122	ST10-SLS4-80	4.000	5.0	-	80	45	35	35	12	40.0	-	7	-	10	64
8910123	ST10-SLS5-80	5.000	6.0	-	80	45	35	35	15	61.5	-	8	-	10	70
8910124	ST12-SLS6-80	6.000	7.0	-	80	45	35	35	15	40.0	-	9	-	12	52
8910125	ST16-SLS3-115	3.000	4.0	-	115	60	55	42	9	51.5	-	6	10.4	16	87
8910126	ST16-SLS4-115	4.000	5.0	-	115	60	55	42	12	60.0	-	7	11.4	16	87
8910127	ST16-SLS6-115	6.000	7.0	-	115	60	55	42	18	60.0	-	9	13.4	16	87
8910129	ST20-SLS3-200	3.000	4.0	6.0	200	90	110	97	9	52.5	102.5	6	16.2	20	172
8910131	ST20-SLS4-200	4.000	5.0	7.0	200	90	110	97	12	37.5	102.5	7	17.2	20	172
8910132	ST20-SLS5-200	5.000	6.0	8.6	200	90	110	110	15	69.2	161.5	8	-	20	182
8910434	ST20-SLSB 8-145-M 70	8.000	8.6	-	145	75	70	70	24	85.0	-	-	19.5	20	117
8910138	ST25-SLS5-290	5.000	6.0	8.6	290	180	97	97	15	69.2	241.5	8	18.2	25	272
8910140	ST25-SLS6-230	6.000	7.0	8.6	230	120	110	97	18	92.5	160.0	9	19.2	25	202
8910426	ST25-SLSA 6-305-M 185	6.000	7.0	8.0	305	120	185	185	18	75.5	160.5	9	-	25	277
8910142	ST25-SLS7-230	7.000	8.0	8.6	230	120	110	97	20	69.8	181.5	10	20.2	25	212
8910143	ST25-SLS7-320	7.000	8.0	8.6	320	210	110	97	20	69.8	271.5	10	20.2	25	302
8910145	ST25-SLS8-230	8.000	8.6	-	230	120	110	97	24	160.0	-	11	21.2	25	202
8910436	ST25-SLSA 8-280-M 160	8.000	8.6	-	280	120	160	160	24	140.0	-	11	-	25	252
8910147	ST25-SLS9-230	9.000	9.6	-	230	120	110	97	30	181.5	-	12	22.2	25	60
8910148	ST25-SLS9-320	9.000	9.6	-	320	210	110	97	30	271.5	-	12	22.2	25	60
8910443	ST20-SLSA10-145-M 70	10.000	10.6	-	145	75	70	70	30	85.0	-	13	-	20	60
8910445	ST25-SLSA 10-255-M 135	10.000	10.6	-	255	120	135	135	30	115.0	-	13	-	25	60
8910451	ST32-SLSA10-340-M210	10.000	10.6	12.0	340	130	210	210	30	59.5	167.5	13	-	32	312
8910154	ST25-SLS11-230	11.000	11.6	-	230	120	110	110	30	181.5	-	14	-	25	60
8910155	ST25-SLS11-320	11.000	11.6	-	320	210	110	110	30	271.5	-	14	-	25	60
8910456	ST20-SLSA12-120-M 50	12.000	12.6	-	120	70	50	50	30	60.0	-	15	-	20	60
8910159	ST25-SLS12-230	12.000	12.6	-	230	120	110	110	30	160.0	-	15	-	25	60
8910460	ST32-SLSA12-315-M185	12.000	13.0	-	315	130	185	185	30	165.0	-	15	-	32	287


Shrink holder with straight shank for ordinary milling and end mill chucks.
Provides high performance of shrink fit without holder.





Carbide Straight Type Shrink Extensions

For Increased Rigidity and Reach

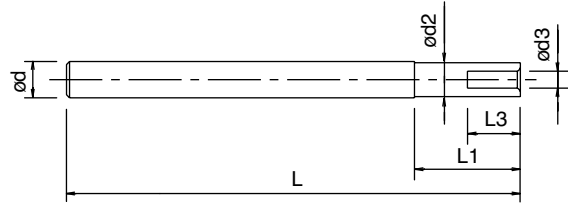

Units: mm


EDP No.	Description	L	d3	d2	d	L1	L3
8910244	ST10-6-200CS	200	6	9.9	10	40	22
8910245	ST12-6-200CS	200	6	11.9	12	42	22
8910240	ST16-10-250CS	250	10	15.9	16	60	33
8910241	ST20-12-250CS	250	12	19.9	20	70	38

Packed: 1 pc.



Carbide Straight Slim Type Shrink Extensions

For Increased Rigidity and Reach

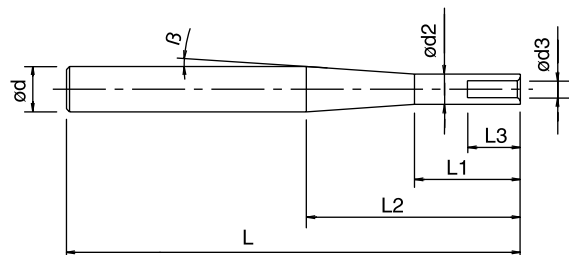

Units: mm

EDP No.	Description	L	d3	d2	d	L1	L2	β	L3
8910246	PC16-6-9.9-250CS	250	6	9.9	16	40	124	2°	22
8910247	PC16-6-11.9-250CS	250	6	11.9	16	42	80	3°	22
8910242	PC20-10-300CS	300	10	15.9	20	60	98	3°	33
8910243	PC25-12-300CS	300	12	19.9	25	70	118	3°	38

Packed: 1 pc.



List Index





List Number Index

List Number	Page No.
101	688-689
102	691-692
103	694
104	695
105	635-637
107	556
108	744
109	751
114	702
118	746
121	698-699
122	644
123	559
125	729-730
126	732-733
127	731
128	734
134	752-754
135	756
141	697
142	643
143	557
180	703
200	213-215
215	204-208
220	530
229	531
230	532
233	212
235	216-221
239	533
240	684
241	685
250	611
257	180-181
259	612
260	613
269	614
280	629-631
285	489
286	489
287	633
288	634
289	632
290	550-552
295	546
296	547
297	554
298	555
299	552
300	604-605
301	725-726
302	713-714
303	523-525
305	673
306	607
307	527
308	740
311	662
312	599-600
313	518-519
314	722-723
315	710-711
316	602
317	521
318	741
319	666

List Number	Page No.
320	610
328	743
329	664
341	663
342	606
343	526
344	601
345	520
346	608
347	528
349	669
350	603
351	522
356	670
357	467
359	665
369	466
389	509
397	609
398	529
400	991
402	993-995
403	993-995
404	993-995
408	996
409	996
410	1053
412	998-999
414	998-999
415	992
420	1052
422	1022
423	1022
424	1022
440	1055
442	1021
444	1021
445	1007
447	1009
450	1050
452	997
454	997
455	1051
460	1052
461	1008
462	1000-1001
464	1000-1001
470	1056
482	1002-1003
484	1002-1003
490	1054
492	1010
494	1010
495	1004
496	1004
497	1020
500	1025
502	1025
520	1057
521	1061
522	1076
523	1080
525	1059
526	1061
527	1059
530	1060
531	1062

List Number	Page No.
532	1078
535	1060
536	1064
540	1069
541	1065
542	1079
543	1080
544	1068
545	1070
546	1066
547	1070
548	1066
557	1070
558	1067
562	1081
563	1081
564	1082
566	1082
567	1083
568	1083
570	1084
571	1084
573	1047
574	1048
580	1058
581	1063
582	1077
591	1072
593	1072
594	1073
595	1074
596	1075
597	1075
620	1043
621	1043
640	1026
641	1044
644	1045
646	1046
660	1046
668	958
673	1041
676	1042
677	1042
690	1049
700	223
701	224
706	225
738	202-203
750	222
800	1103-1104
801	1089
802	1089
803	1089
804	1091
805	1091
806	1091
807	1093
808	1093
820	1109
845	1107
849	1093
850	1095
851	1095
852	1095
861	1097
862	1097

List Number	Page No.
863	1097
867	1099
868	1099
881	1101
882	1101
883	1101
885	1102
886	1102
887	1102
888	1102
900	1105-1106
901	1090
902	1090
903	1090
904	1092
905	1092
906	1092
907	1094
908	1094
915	1108
916	700
917	645
918	560
920	1110
949	1094
950	1096
951	1096
952	1096
961	1098
962	1098
963	1098
967	1100
968	1100
1000	260-262
1100	266-283
1150	255-257
1200	297
1250	298
1500	263-265
1600	284-296
1650	258-259
1700	243-244
1750	245-247
1760	248-249
1770	250-251
1800	252-254
1900	230-236
1950	237-239
2000	240-242
2010	950
2015	924
2021	942
2022	943
2023	944
2024	945
2041	946
2042	947
2043	948
2048	949
2050	919
2052	920
2055	841
2061	952
2064	954
2066	953
2068	955
2080	931



List Number	Page No.
2081	931
2100	925
2102	928
2104	928
2106	926-927
2108	929
2110	930
2650	957
2680	956
2843	938
2853	940
2863	932
2873	934
2874	936
2943	939
2953	941
2963	933
2973	935
2974	937
3604	856
3610	853
3619	861
3620	862
3621	863
3670	855
3690	857
3704	864
3710	854
3711	868
3712	871-876
3720	869
3721	870
3722	877
3723	878
3742	865
3770	879
3771	880
3790	858-860
3791	866-867
3794	881-882
3815	921
3820	921
3825	923
3830	923
3915	922
3920	922
4410	884
4413	901
4430	899
4440	886
4445	883
4470	890
4471	888
4472	891
4510	885
4513	902
4530	900
4540	887
4541	904
4570	890
4571	889
4572	892
4581	903
4590	896-898
4592	893-895
5171	153-155
5172	156

List Number	Page No.
5190	140-141
5200	121-127
5210	128-134
5220	135-139
5275	157
5310	158
5315	159
5320	160
5325	161
5330	162-170
5340	171-172
5600	143-143
5610	144-145
5630	146-148
5700	78-83
5705	84-85
5720	74-77
5732	178
6300	113-116
6310	117-120
6420	1427
6440	1500
6441	1502
6442	1501
6450	1427
6500	86-91
6510	92-97
6520	98-101
6530	102-104
6535	105-106
6540	107-108
6541	1503
6550	109-110
6560	111
6570	112
6600	66-69
6610	70-73
6640	1504
7010	913
7020	910
7030	914
7031	915
7032	915
7040	911
7041	912
7042	912
7072	913
7110	914
7120	911
7132	917
7140	917
7173	916
7230	918
7231	918
7500	175
7501	173
7520	174
7530	176
7532	177
8120	951
8200	830
8201	838
8202	840
8205	831
8206	835
8207	839
8208	840

List Number	Page No.
8210	832
8215	833
8220	834
8230	836
8235	837
9010	905
9011	906
9110	905
9111	906
9140	907
9144	907
9181	909
9182	909
9191	908
9192	908
9510	842
9570	852
9575	847
9576	848
9580	849-851
9581	844-845
9590	843
9592	846
9950	1511
9953	1511
9955	1512
10051	671
10052	674
10053	676
10056	680
10057	682
10059	667
10061	668
11015	615-619
11016	625
11017	627
11036	728
11051	672
11052	675
11053	677
11054	678
11055	679
11056	681
11057	683
11115	620-621
11116	626
11117	628
11118	646
12006	749
12007	750
12053	742
12054	742
13013	534
13014	536
13015	538
13019	548
13020	558
13024	537
13025	539
13039	716
13058	544
13059	623
13063	586
13113	535
13116	540
13117	542
13118	544

List Number	Page No.
13119	549
13126	541
13127	543
13158	545
13159	624
13163	587
14001	473-485
14050	468-470
14101	486-488
14150	471-472
14153	465
15001	757
15002	758
15010	446
15015	445
15020	447
16050	448-449
16150	450-452
16250	453-456
16255	461-462
16260	705-706
16350	457-460
16355	463-464
16360	707
16450	503-504
16455	505
16500	495-497
16505	492-494
16510	579-580
16515	577-578
16520	501-502
16525	500
16530	584-585
16535	583
16540	499
16545	498
16550	582
16555	581
16570	735
16575	736
16580	739
16585	738
16590	737
16600	491
16605	490
16610	661
16615	660
16620	433
16625	432
16630	434
16631	435
41000	438-439
41050	441
41100	440
41150	442
41200	436
41300	437
42000	443
42001	444
52100	1433-1434
52200	1442
52300	1478-1479
52319	1480-1483
52400	1328
52502	1337-1338
52503	1341-1342
52504	1345-1346





List Number Index

List Number	Page No.
52505	1349-1350
52510	1364
52511	1366
52600	1461
52601	1383, 1453
52602	1412, 1455
52603	1423, 1456
52604	1436, 1458
52605	1444, 1460
52700	1370
52800	1373
52900	1396
52901	1397
53000	1389
53001	1391
53100	1404
53200	1400
53201	1401
78001	1361
78002	1411
78003	1409
78004	1410
78005	1408
78006	1421
78007	1418-1419
78008	1420
78009	1416-1417
78010	1382
78011	1379-1380
78012	1381
78013	1378
78014	1435, 1459
78015	1424, 1457
78016	13,841,454
78017	1412, 1455
78018	1482-1483
78019	1462
78020	1370
78025	1463
78027	1351-1352
78028	1391
78029	1390
78030	1396
78031	1339-1340
78032	1343-1344
78033	1347-1348
78035	1484-1485
78036	1430
78037	1400
78114	1436
78120	1374
78125	1464
78130	1397, 1401
78131	1405
78220	1444, 1460
78310	1329
78320	1443
78321	1365
78340	1486
78421	1367
01J-SO	229
01S-SO	228
03A-SO	1032
03C-SO	1037
03D-SO	1040
03E-SO	1036
03F-SO	1038-1039

List Number	Page No.
03K-SO	1033
03M-SO	1034
03P-SO	1035
03V-SO	1028-1029
04V-SO	1027
05V-SO	1030-1031
0CJ-SO	227
0CS-SO	226
101C	686
101H	690
101L	704
101N	696
101-SO	332-337
102H	693
102-SO	332-337
105+	640
105A	639
105B	638
105H	641
108AL	745
108G	747
110-SO	311-315
134P	755
141C	687
142H	642
163-SO	299-304
164-SO	305-310
1AQ-SO	322-325
1BB-SO	319-321
1G7-SO	328-331
1NA-SO	341
1R5-SO	316-318
1W6-SO	326-327
1X6-SO	338-340
220D	209-211
300D	217-221
310-SO	1085
312Ni	596-597
312-SO	1087
312Ti	591-592
313Ni	515-516
313Ti	510-511
314Ni	721
314-SO	1086
314Ti	720
315Ni	709
315Ti	708
316Ti	594
317Ti	513
335Ni	506-507
336Ni	508
337Ni	588-589
338Ni	590
342STI	727
343STI	715
344Ni	598
344STI	724
344Ti	593
345Ni	517
345STI	712
345Ti	512
347Ti	595
348Ti	514
402BN	1011-1013
403BN	1011-1013
404BN	1011-1013
412BN	1015-1016

List Number	Page No.
414BN	1015-1016
415C	992
422BN	1024
423BN	1024
424BN	1024
430E	1053
442BN	1023
444BN	1023
452BN	1014
455C	1005
460C	1006
462BN	1017
464BN	1017
482BN	1018-1019
484BN	1018-1019
5950Ni	149-150
5955Ni	151-152
5BA-SO	561-562
5BB-SO	564-565
5BC-SO	567-568
5BD-SO	570-571
5BE-SO	573-574
5BF-SO	648-649
5BG-SO	651-652
5BH-SO	654-655
5BJ-SO	657-658
5BK-SO	573-574
5BL-SO	561-562
5BM-SO	564-565
5BN-SO	567-568
5BP-SO	570-571
5BS-SO	648-649
5BT-SO	651-652
5BU-SO	654-655
5BV-SO	657-658
5EA-SO	563
5EB-SO	566
5EC-SO	569
5ED-SO	572
5EF-SO	650
5EG-SO	653
5EH-SO	656
5EL-SO	563
5EM-SO	566
5EN-SO	569
5EP-SO	572
5ES-SO	650
5ET-SO	653
5EU-SO	656
5EV-SO	575
5EW-SO	576
5EX-SO	659
641R	959
751-SO	342-344
752-SO	342-344
7808H	Per Style: 1316-1321
78P5D	1353
78PAO	1375
78PAS	1371
78PDR	1428
78PFAL	1431
78PFB	1437-1438
78PFR	1445-1449
78PHC	1425
78PHP	1362
78PRC	1413
78PSE	1385, 1392

List Number	Page No.
78PSF	1398, 1402
78PSTW	1406
78PXBE	1475-1476
78PXBE-O	1476-1477
78PXBMB	1477
78PXD	1330-1334
78PXDR	1473-1474
78PXNH	1472
78PXNH-O	1472
78PXNL	1471
78PXNL-O	1471
78PXRE	1473
78PXSE	1465
78PXSE-O	1466
78PXSM	1469-1470
78PXVC	1467-1468
78PZAG	1368
HP243	182-185
HP245	186-189
HP253	190-193
HP255	194-197
HP258	198-201
HP400	975
HP410	976-977
HP411	978
HP413	986
HP416	982
HP418	983
HP419	984
HP419L	985
HP421	969-970
HP421BN	980-981
HP432	987-988
HP433	989
HP434	987-988
HP435	990
HP441	969-970
HP441BN	980-981
HP450	972
HP451	974
HP453	973
HP455	979
HP456	973
HP460	971
HP700	179
S108	717-718
S109	719
S110	701
S111	647
S125	748
VG434	961
VG436	962
VG441	960
VG441BN	965
VG446	963
VG464	964
VG534	967-968
VG541	966



EDP Index





EDP Numerical Index

EDP Number	Page No.
0135401	523
0135408	523
0135501	523
0135508	523
0135601	523
0135608	523
0135701	523
0135708	523
0135801	523
0135808	523
0135901	523
0135908	523
0136001	523
0136008	523
0136101	523
0136108	523
0136201	523
0136208	523
0136301	523
0136308	523
0136401	523
0136408	523
0136501	523
0136508	523
0136601	523
0136608	523
0136701	523
0136708	523
0136801	523
0136808	523
0136901	523
0136908	523
0137001	523
0137008	523
0137101	524
0137108	524
0137201	524
0137208	524
0137301	524
0137308	524
0137401	524
0137408	524
0137501	524
0137508	524
0137601	524
0137608	524
0137701	524
0137708	524
0137801	524
0137808	524
0137901	524
0137908	524
0138001	524
0138008	524
0138101	524
0138108	524

EDP Number	Page No.
0138201	524
0138208	524
0138301	524
0138308	524
0138401	524
0138408	524
0138501	524
0138508	524
0138601	524
0138608	524
0138701	524
0138708	524
0138801	524
0138808	524
0138901	524
0138908	524
0139001	524
0139008	524
0139101	524
0139108	524
0139201	525
0139208	525
0139301	525
0139308	525
0139401	525
0139408	525
0139501	525
0139508	525
0139601	525
0139608	525
0139701	525
0139708	525
0139801	525
0139808	525
0139901	525
0139908	525
0140001	525
0140008	525
0140101	515
0140201	515
0140301	515
0140401	515
0140501	515
0140601	515
0140701	515
0140801	515
0140901	515
0141001	515
0141101	516
0141201	516
0141301	516
0141401	516
0141501	516
0141601	516
0141701	518
0141708	518

EDP Number	Page No.
0141801	518
0141808	518
0141901	518
0141908	518
0142001	518
0142008	518
0142101	518
0142108	518
0142201	518
0142208	518
0142301	518
0142308	518
0142401	518
0142408	518
0142501	518
0142508	518
0142601	518
0142608	518
0142701	518
0142708	518
0142801	518
0142808	518
0142901	518
0142908	518
0143001	518
0143008	518
0143101	518
0143108	518
0143201	518
0143208	518
0143301	518
0143308	518
0143401	518
0143408	518
0143501	518
0143508	518
0143601	518
0143608	518
0143701	529
0143801	529
0143901	529
0144001	529
0144101	529
0144201	529
0144301	529
0144401	529
0144501	529
0144601	529
0144701	713
0144708	713
0144801	713
0144808	713
0144901	713
0144908	713
0145001	713
0145008	713

EDP Number	Page No.
0145101	713
0145108	713
0145201	713
0145208	713
0145301	713
0145308	713
0145401	713
0145408	713
0145501	713
0145508	713
0145601	713
0145608	713
0145701	713
0145708	713
0145801	713
0145808	713
0145901	713
0145908	713
0146001	713
0146008	713
0146101	713
0146108	713
0146201	713
0146208	713
0146301	713
0146308	713
0146401	713
0146408	713
0146501	713
0146508	713
0146601	713
0146608	713
0146701	713
0146708	713
0146801	713
0146808	713
0146901	713
0146908	713
0147001	713
0147008	713
0147101	713
0147108	713
0147201	713
0147208	713
0147301	713
0147308	713
0147401	713
0147408	713
0147501	713
0147508	713
0147601	713
0147608	713
0147701	713
0147708	713
0147801	713
0147808	713



EDP Number	Page No.
0147901	713
0147908	713
0148001	714
0148008	714
0148101	714
0148108	714
0148201	714
0148208	714
0148301	714
0148308	714
01J0100F-SO	229
01J0150F-SO	229
01J0200F-SO	229
01J0250F-SO	229
01J0300F-SO	229
01J0330F-SO	229
01J0350F-SO	229
01J0400F-SO	229
01J0420F-SO	229
01J0450F-SO	229
01J0500F-SO	229
01J0550F-SO	229
01J0600F-SO	229
01J0630F-SO	229
01J0650F-SO	229
01J0680F-SO	229
01J0700F-SO	229
01J0750F-SO	229
01J0800F-SO	229
01J0850F-SO	229
01J0900F-SO	229
01J0950F-SO	229
01J1000F-SO	229
01J1020F-SO	229
01J1050F-SO	229
01J1100F-SO	229
01J1150F-SO	229
01J1200F-SO	229
01J1250F-SO	229
01J1270F-SO	229
01J1300F-SO	229
01J1350F-SO	229
01J1400F-SO	229
01S0100F-SO	228
01S0150F-SO	228
01S0200F-SO	228
01S0250F-SO	228
01S0300F-SO	228
01S0330F-SO	228
01S0350F-SO	228
01S0400F-SO	228
01S0420F-SO	228
01S0450F-SO	228
01S0500F-SO	228
01S0550F-SO	228
01S0600F-SO	228

EDP Number	Page No.
01S0630F-SO	228
01S0650F-SO	228
01S0680F-SO	228
01S0700F-SO	228
01S0750F-SO	228
01S0800F-SO	228
01S0850F-SO	228
01S0900F-SO	228
01S0950F-SO	228
01S1000F-SO	228
01S1020F-SO	228
01S1050F-SO	228
01S1100F-SO	228
01S1150F-SO	228
01S1200F-SO	228
01S1250F-SO	228
01S1270F-SO	228
01S1300F-SO	228
01S1350F-SO	228
01S1400F-SO	228
03A0100X-SO	1032
03A0150X-SO	1032
03A0200X-SO	1032
03A0250X-SO	1032
03A0300X-SO	1032
03A0400X-SO	1032
03A0500X-SO	1032
03A0600X-SO	1032
03A0800X-SO	1032
03A1000X-SO	1032
03A1200X-SO	1032
03A1400X-SO	1032
03A1600X-SO	1032
03A1800X-SO	1032
03A2000X-SO	1032
03C0635-SO	1037
03C0794-SO	1037
03C0953-SO	1037
03C1270-SO	1037
03C1588-SO	1037
03C1905-SO	1037
03C2540-SO	1037
03D0001X-SO	1040
03D0635X-SO	1040
03D0794X-SO	1040
03D0953X-SO	1040
03D1270X-SO	1040
03D1588X-SO	1040
03D1905X-SO	1040
03D2540X-SO	1040
03E0600X-SO	1036
03E0635X-SO	1036
03E0794X-SO	1036
03E0800X-SO	1036
03E0953X-SO	1036
03E1000X-SO	1036

EDP Number	Page No.
03E1200X-SO	1036
03E1270X-SO	1036
03E1588X-SO	1036
03E1600X-SO	1036
03E1905X-SO	1036
03E2000X-SO	1036
03E2540X-SO	1036
03F0600X-SO	1039
03F0635X-SO	1038
03F0794X-SO	1038
03F0800X-SO	1039
03F0953X-SO	1038
03F1000X-SO	1039
03F1200X-SO	1039
03F1270X-SO	1038
03F1588X-SO	1038
03F1600X-SO	1039
03F1905X-SO	1038
03F2000X-SO	1039
03F2540X-SO	1038
03K0100X-SO	1033
03K0150X-SO	1033
03K0200X-SO	1033
03K0250X-SO	1033
03K0300X-SO	1033
03K0400X-SO	1033
03K0500X-SO	1033
03K0600X-SO	1033
03K0800X-SO	1033
03K1000X-SO	1033
03K1200X-SO	1033
03K1400X-SO	1033
03K1600X-SO	1033
03K1800X-SO	1033
03K2000X-SO	1033
03M0100X-SO	1034
03M0150X-SO	1034
03M0200X-SO	1034
03M0250X-SO	1034
03M0300X-SO	1034
03M0400X-SO	1034
03M0500X-SO	1034
03M0600X-SO	1034
03M0800X-SO	1034
03M1000X-SO	1034
03M1200X-SO	1034
03M1400X-SO	1034
03M1600X-SO	1034
03M1800X-SO	1034
03M2000X-SO	1034
03P0100X-SO	1035
03P0150X-SO	1035
03P0200X-SO	1035
03P0250X-SO	1035
03P0300X-SO	1035
03P0400X-SO	1035

EDP Number	Page No.
03P0500X-SO	1035
03P0600X-SO	1035
03P0800X-SO	1035
03P1000X-SO	1035
03P1200X-SO	1035
03P1400X-SO	1035
03P1600X-SO	1035
03P1800X-SO	1035
03P2000X-SO	1035
03V0500X-SO	1029
03V0505X-SO	1029
03V0510X-SO	1029
03V0545X-SO	1029
03V0600X-SO	1029
03V0605X-SO	1029
03V0610X-SO	1029
03V0633X-SO	1028
03V0634X-SO	1028
03V0635X-SO	1028
03V0636X-SO	1028
03V0645X-SO	1029
03V0800X-SO	1029
03V0805X-SO	1029
03V0810X-SO	1029
03V0845X-SO	1029
03V0951X-SO	1028
03V0952X-SO	1028
03V0953X-SO	1028
03V0954X-SO	1028
03V1000X-SO	1029
03V1005X-SO	1029
03V1010X-SO	1029
03V1045X-SO	1029
03V1200X-SO	1029
03V1205X-SO	1029
03V1210X-SO	1029
03V1245X-SO	1029
03V1268X-SO	1028
03V1269X-SO	1028
03V1270X-SO	1028
03V1271X-SO	1028
03V1586X-SO	1028
03V1587X-SO	1028
03V1588X-SO	1028
03V1589X-SO	1028
03V1600X-SO	1029
03V1610X-SO	1029
03V1620X-SO	1029
03V1645X-SO	1029
03V1903X-SO	1028
03V1904X-SO	1028
03V1905X-SO	1028
03V1906X-SO	1028
03V2000X-SO	1029
03V2010X-SO	1029
03V2020X-SO	1029



EDP Numerical Index

EDP Number	Page No.
03V2045X-SO	1029
03V2502X-SO	1028
03V2503X-SO	1028
03V2504X-SO	1028
03V2505X-SO	1028
04V0474X-SO	1027
04V0500X-SO	1027
04V0600X-SO	1027
04V0633X-SO	1027
04V0792X-SO	1027
04V0800X-SO	1027
04V0951X-SO	1027
04V1000X-SO	1027
04V1200X-SO	1027
04V1268X-SO	1027
04V1586X-SO	1027
04V1600X-SO	1027
04V1903X-SO	1027
04V2000X-SO	1027
05V0476X-SO	1030
05V0477X-SO	1030
05V0500X-SO	1031
05V0505X-SO	1031
05V0510X-SO	1031
05V0545X-SO	1031
05V0600X-SO	1031
05V0605X-SO	1031
05V0610X-SO	1031
05V0632X-SO	1030
05V0634X-SO	1030
05V0636X-SO	1030
05V0645X-SO	1031
05V0791X-SO	1030
05V0793X-SO	1030
05V0795X-SO	1030
05V0800X-SO	1031
05V0805X-SO	1031
05V0810X-SO	1031
05V0845X-SO	1031
05V0950X-SO	1030
05V0952X-SO	1030
05V0954X-SO	1030
05V1000X-SO	1031
05V1005X-SO	1031
05V1010X-SO	1031
05V1045X-SO	1031
05V1200X-SO	1031
05V1205X-SO	1031
05V1210X-SO	1031
05V1245X-SO	1031
05V1263X-SO	1030
05V1265X-SO	1030
05V1267X-SO	1030
05V1269X-SO	1030
05V1271X-SO	1030
05V1585X-SO	1030

EDP Number	Page No.
05V1587X-SO	1030
05V1589X-SO	1030
05V1600X-SO	1031
05V1610X-SO	1031
05V1620X-SO	1031
05V1645X-SO	1031
05V1900X-SO	1030
05V1902X-SO	1030
05V1904X-SO	1030
05V1906X-SO	1030
05V2000X-SO	1031
05V2010X-SO	1031
05V2020X-SO	1031
05V2045X-SO	1031
0CJ0600F-SO	227
0CJ0630F-SO	227
0CJ0650F-SO	227
0CJ0680F-SO	227
0CJ0700F-SO	227
0CJ0750F-SO	227
0CJ0800F-SO	227
0CJ0850F-SO	227
0CJ0900F-SO	227
0CJ0950F-SO	227
0CJ1000F-SO	227
0CJ1020F-SO	227
0CJ1050F-SO	227
0CJ1100F-SO	227
0CJ1150F-SO	227
0CJ1200F-SO	227
0CJ1250F-SO	227
0CJ1270F-SO	227
0CJ1300F-SO	227
0CJ1350F-SO	227
0CJ1400F-SO	227
0CS0600F-SO	226
0CS0630F-SO	226
0CS0650F-SO	226
0CS0680F-SO	226
0CS0700F-SO	226
0CS0750F-SO	226
0CS0800F-SO	226
0CS0850F-SO	226
0CS0900F-SO	226
0CS0950F-SO	226
0CS1000F-SO	226
0CS1020F-SO	226
0CS1050F-SO	226
0CS1100F-SO	226
0CS1150F-SO	226
0CS1200F-SO	226
0CS1250F-SO	226
0CS1270F-SO	226
0CS1300F-SO	226
0CS1350F-SO	226
0CS1400F-SO	226

EDP Number	Page No.
1000000	691
1000001	691
1000008	691
1000100	691
1000101	691
1000105	691
1000108	691
1000200	691
1000201	691
1000205	691
1000208	691
1000300	691
1000400	691
1000401	691
1000500	691
1000501	691
1000600	691
1000601	691
1000608	691
1000700	691
1000701	691
1000800	691
1000801	691
1000900	691
1001	698
1001000	691
1001100	691
1001108	691
1001300	691
1001400	691
1001600	691
1001900	691
1002	698
1002100	691
1002200	691
1002300	691
1002500	691
1003	698
1003100	691
1003200	691
1003400	691
1003408	691
1003600	691
1003700	691
1003800	691
1004200	691
1004208	691
1004300	691
1004308	691
1004400	691
1004600	691
1004800	692
1004900	692
1005000	692
1005001	692
1005100	692

EDP Number	Page No.
1005110508	671
1005110808	671
1005111008	671
1005111208	671
1005111408	671
1005111608	671
1005111808	671
1005112008	671
1005112208	671
1005112408	671
1005113008	671
1005113208	671
1005113408	671
1005113608	671
1005113808	671
1005114008	671
1005114208	671
1005114408	671
1005114608	671
1005114808	671
1005115008	671
1005115208	671
1005200	692
1005200108	674
1005200208	674
1005200308	674
1005200408	674
1005200508	674
1005200608	674
1005200708	674
1005200808	674
1005200908	674
1005201008	674
1005201108	674
1005201208	674
1005201308	674
1005201408	674
1005201508	674
1005201608	674
1005201708	674
1005201808	674
1005201908	674
1005202008	674
1005202108	674
1005202208	674
1005202308	674
1005202408	674
1005202508	674
1005202608	674
1005202708	674
1005202808	674
1005202908	674
1005203008	674
1005203108	674
1005203208	674
1005203308	674



EDP Number	Page No.
1005203408	674
1005203508	674
1005300	692
1005300108	676
1005300208	676
1005300308	676
1005300408	676
1005300508	676
1005300608	676
1005300708	676
1005300808	676
1005300908	676
1005301008	676
1005301108	676
1005301208	676
1005301308	676
1005301408	676
1005301508	676
1005301608	676
1005301708	676
1005301808	676
1005301908	676
1005302008	676
1005302108	676
1005302208	676
1005302308	676
1005302408	676
1005302508	676
1005302608	676
1005302708	676
1005302808	676
1005302908	676
1005303008	676
1005303108	676
1005303208	676
1005303308	676
1005303408	676
1005303508	676
1005500	692
1005600108	680
1005600208	680
1005600308	680
1005600408	680
1005600508	680
1005600608	680
1005600708	680
1005600808	680
1005600908	680
1005601008	680
1005601108	680
1005601208	680
1005601308	680
1005601408	680
1005601508	680
1005601608	680
1005601708	680

EDP Number	Page No.
1005601808	680
1005601908	680
1005602008	680
1005602108	680
1005602208	680
1005602308	680
1005602408	680
1005602508	680
1005602608	680
1005602708	680
1005602808	680
1005602908	680
1005700108	682
1005700208	682
1005700308	682
1005700408	682
1005700508	682
1005700608	682
1005700708	682
1005700808	682
1005700908	682
1005701008	682
1005701108	682
1005701208	682
1005701308	682
1005701408	682
1005701508	682
1005701608	682
1005701708	682
1005800	692
1005910100	667
1005910200	667
1005910300	667
1005910400	667
1005910500	667
1005910600	667
1005910700	667
1005910800	667
1005910900	667
1006100100	668
1006100300	668
1006100400	668
1006100500	668
1006100700	668
1006100800	668
1006100900	668
1006101000	668
1006101100	668
1006101300	668
1006101400	668
1006101500	668
1006101700	668
1006101800	668
1006101900	668
1006102000	668
10078505	260

EDP Number	Page No.
1007900	695
1008000	691
1008008	691
1008100	695
10081005	260
10082005	260
1008600	692
10086005	260
1008700	692
1008800	688
1008900	689
10089005	260
1009000	689
1009100	690
1009108	690
1009200	690
1009208	690
1009300	690
1009308	690
10093505	260
10093805	260
1009400	690
1009408	690
10096005	260
10098005	260
10099505	260
1010000	701
1010030-SO	332
1010035-SO	332
1010040-SO	332
1010045-SO	332
1010050-SO	332
1010055-SO	332
1010060-SO	332
1010070-SO	332
1010075-SO	332
1010080-SO	332
1010090-SO	332
1010100	691
1010100-SO	332
1010105	691
1010105-SO	332
1010108	691
1010110-SO	332
1010115-SO	332
1010120-SO	332
1010125-SO	332
1010130-SO	332
1010135-SO	332
1010140-SO	332
1010145-SO	332
10101505	260
1010150-SO	332
1010155-SO	332
1010160-SO	332
1010165-SO	332

EDP Number	Page No.
1010170-SO	332
1010175-SO	332
1010180-SO	332
1010185-SO	332
1010190-SO	332
1010195-SO	332
1010200	691
1010200-SO	332
1010205-SO	332
1010208	691
1010210-SO	332
1010215-SO	332
1010220-SO	332
1010225-SO	332
1010230-SO	332
1010235-SO	332
1010240-SO	333
1010245-SO	333
1010250-SO	333
1010255-SO	333
1010260-SO	333
1010265-SO	333
1010270-SO	333
1010275-SO	333
1010280-SO	333
1010285-SO	333
1010290-SO	333
1010295-SO	333
1010300-SO	333
1010310-SO	333
1010320-SO	333
1010325-SO	333
1010330-SO	333
1010340-SO	333
1010350-SO	333
1010360-SO	333
1010370-SO	333
1010380-SO	333
1010390-SO	333
1010400	691
10104005	260
1010400-SO	333
1010408	691
1010410-SO	333
1010420-SO	333
1010425-SO	333
1010430-SO	333
1010440-SO	333
1010450-SO	333
1010460-SO	333
1010470-SO	333
1010480-SO	334
1010490-SO	334
1010500-SO	334
1010510-SO	334
1010520-SO	334



EDP Numerical Index

EDP Number	Page No.
1010525-SO	334
1010530-SO	334
1010540-SO	334
1010550-SO	334
1010560-SO	334
1010570-SO	334
1010575-SO	334
1010580-SO	334
1010590-SO	334
1010600-SO	334
1010610-SO	334
1010620-SO	334
1010625-SO	334
1010630-SO	334
1010640-SO	334
1010650S	260
1010650-SO	334
1010660-SO	334
1010670-SO	334
1010675-SO	334
1010680-SO	334
1010690-SO	334
1010700	691
1010700-SO	334
1010708	691
1010710-SO	334
1010720-SO	334
1010730-SO	334
1010740-SO	334
1010750-SO	334
1010760-SO	335
1010770-SO	335
1010780-SO	335
1010790-SO	335
1010800	691
1010800-SO	335
1010808	691
1010810-SO	335
1010820-SO	335
1010825-SO	335
1010830-SO	335
1010840-SO	335
1010850-SO	335
1010860-SO	335
1010870-SO	335
1010875-SO	335
1010880-SO	335
1010890-SO	335
1010900	691
1010900-SO	335
1010901	691
1010908	691
1010910-SO	335
1010920-SO	335
1010925-SO	335
1010930-SO	335

EDP Number	Page No.
1010940S	260
1010940-SO	335
1010950-SO	335
1010960-SO	335
1010970-SO	335
1010975-SO	335
1010980-SO	335
1010990-SO	335
1011000	691
1011000S	260
1011000-SO	335
1011001	691
1011005	691
1011008	691
1011010-SO	335
1011020-SO	335
1011025-SO	335
1011030-SO	335
1011040-SO	335
1011050-SO	335
1011060-SO	335
1011070-SO	336
1011075-SO	336
1011080-SO	336
1011090-SO	336
1011100	691
1011100S	260
1011100-SO	336
1011101	691
1011105	691
1011108	691
1011110-SO	336
1011120-SO	336
1011130-SO	336
1011140-SO	336
1011150-SO	336
1011160-SO	336
1011170-SO	336
1011180-SO	336
1011190-SO	336
1011200	691
1011200-SO	336
1011210-SO	336
1011220-SO	336
1011225-SO	336
1011230-SO	336
1011240-SO	336
1011250-SO	336
1011260-SO	336
1011270-SO	336
1011275-SO	336
1011280-SO	336
1011290-SO	336
1011300	691
1011300S	260
1011300-SO	336

EDP Number	Page No.
1011301	691
1011310-SO	336
1011320-SO	336
1011325-SO	336
1011330-SO	336
1011340-SO	336
1011350-SO	336
1011360-SO	336
1011370-SO	336
1011380-SO	336
1011400	691
1011400-SO	336
1011401	691
1011425-SO	337
1011450-SO	337
1011475-SO	337
1011500	691
1011500-SO	337
1011501	691
1011508	691
1011525-SO	337
1011550-SO	337
1011575-SO	337
1011600	691
1011600S	260
1011600-SO	337
1011601	691
1011608	691
1011650-SO	337
1011700	691
1011700-SO	337
1011701	691
1011708	691
1011750-SO	337
1011800	691
1011800-SO	337
1011801	691
1011850-SO	337
1011900	691
1011900-SO	337
1011901	691
1011908	691
1011950-SO	337
1012000	691
1012000S	260
1012000-SO	337
1012001	691
1012008	691
1012100	691
1012101	691
1012108	691
1012200	691
1012201	691
1012205	691
1012208	691
1012300	691

EDP Number	Page No.
1012301	691
1012305	691
1012308	691
1012400	691
1012408	691
1012500	691
1012500S	260
1012501	691
1012508	691
1012600	691
1012601	691
1012608	691
1012700	691
1012800	691
1012850S	260
1012900	691
1012901	691
1013000	691
1013001	691
1013008	691
1013100	691
1013101	691
1013105	691
1013108	691
1013200	691
1013201	691
1013205	691
1013208	691
1013300	691
1013301	691
1013308	691
1013400	691
1013401	691
1013408	691
1013500	691
1013501	691
1013508	691
1013600	691
1013600S	260
1013608	691
1013700	691
1013705	691
1013708	691
1013800	691
1013805	691
1013808	691
1013900	691
1013908	691
1014000	691
1014001	691
1014005	691
1014050S	260
1014060S	260
1014100	691
1014101	691
1014105	691



EDP Number	Page No.
1014200	691
1014300	691
1014305	691
1014308	691
1014400	691
10144005	260
1014405	691
1014500	691
1014501	691
1014600	691
1014601	691
1014605	691
1014700	691
10147005	260
1014701	691
1014705	691
1014800	692
1014805	692
1014808	692
1014900	692
10149505	260
1015000	692
1015008	692
1015100	692
1015105	692
1015200	692
10152005	260
1015208	692
1015300	692
1015305	692
1015308	692
10154005	260
10156205	260
10157005	260
10159005	260
10161005	260
1016400	695
10166005	260
10169505	260
10171905	260
10173005	260
10177005	260
10180005	260
10182005	260
10185005	260
10187505	260
10189005	260
10191005	260
10193505	260
10196005	260
1019800	691
1019900	691
10199005	260
1020000	701
1020040-SO	332
1020079-SO	332

EDP Number	Page No.
10201005	261
1020119-SO	332
1020159-SO	332
1020198-SO	332
1020238-SO	333
1020278-SO	333
10203105	261
1020318-SO	333
1020357-SO	333
1020397-SO	333
10204005	261
1020437-SO	333
1020476-SO	334
1020516-SO	334
10205505	261
1020556-SO	334
1020595-SO	334
1020635-SO	334
1020675-SO	334
1020714-SO	334
1020754-SO	335
1020794-SO	335
1020833-SO	335
1020873-SO	335
10209005	261
1020913-SO	335
1020953-SO	335
1020992-SO	335
1021032-SO	335
1021072-SO	336
1021111-SO	336
1021151-SO	336
1021191-SO	336
1021230-SO	336
1021270-SO	336
10213005	261
1021310-SO	336
1021349-SO	336
1021389-SO	336
1021429-SO	337
1021468-SO	337
1021588-SO	337
10218805	261
10221005	261
10228005	261
10234005	261
10234405	261
1023600	691
1023601	691
1023608	691
1023700	691
1023701	691
1023705	691
1023708	691
1023800	691
10238005	261

EDP Number	Page No.
1023801	691
1023805	691
1023808	691
1024200	691
10242005	261
1024201	691
1024208	691
1024300	691
1024301	691
1024305	691
1024308	691
1024400	691
1024401	691
1024405	691
1024408	691
10246005	261
1024800	692
1024801	692
1024900	692
1024901	692
1024905	692
1024908	692
1025000	692
10250005	261
1025001	692
1025005	692
1025008	692
1025100	692
1025101	692
1025105	692
1025108	692
1025200	692
1025201	692
1025205	692
1025208	692
1025300	692
1025301	692
1025305	692
1025308	692
1025400	692
1025401	692
1025408	692
1025500	692
1025501	692
1025505	692
1025508	692
1025600	692
1025601	692
1025608	692
1025700	692
10257005	261
1025701	692
1025708	692
1025800	692
1025801	692
1025808	692

EDP Number	Page No.
1025900	692
1025901	692
1025905	692
1025908	692
1026100	695
10261005	261
1026200	695
10265605	261
10272005	261
10277005	261
10281205	261
1028500	692
1028600	692
10290005	261
10295005	261
10296905	261
1030000	701
10302005	261
10312505	261
10316005	261
10323005	261
10328105	261
10332005	261
10339005	261
10343805	261
10348005	261
1035600	694
10358005	261
10359405	261
10368005	261
10375005	261
10377005	261
10386005	261
10390605	261
10397005	261
1040000	701
1040100	694
1040200	694
10404005	261
10406205	261
1040700	694
10413005	262
10421905	262
10437505	262
1045100	694
1045200	694
10453105	262
1045700	694
1046000	694
1046100	694
1046200	694
10468805	262
10484405	262
1050000	647
10500005	262
1050100	694



EDP Numerical Index

EDP Number	Page No.
1050200	694
1050700	694
1050800	694
1051000	694
1051001	694
1051005	694
1051100	694
1051101	694
1051105	694
1051600	688
1051608	688
1054700	694
1059300	694
1060000	701
1060100	695
1060200	695
1061100	688
1061108	688
1061300	695
1062800	695
1063200	688
1065100	695
1065200	695
1065700	695
1065800	695
1066300	695
1066400	695
1066500	689
1067200	695
1067300	695
1067500	695
1067800	695
1067900	695
1068100	695
1068105	691
1068400	695
1068500	695
1069000	695
1069100	695
1069200	689
1069300	695
1069400	695
1070000	701
1071800	689
1071808	689
1071900	689
1072800	695
1072801	695
1072900	695
1072901	695
1073400	695
1073401	695
1073500	695
1073501	695
1074000	695
1074001	695

EDP Number	Page No.
1074100	695
1074101	695
1074300	695
1074301	695
1074400	695
1074401	695
1080000	647
10800100	717
10800200	717
10800300	717
10800400	717
10800500	717
10800600	717
10800700	717
10800800	717
10800900	717
10801000	717
10801100	717
10801200	718
10801300	718
10801400	718
10801500	718
10801600	718
10801700	718
10801800	718
10801900	718
10802000	718
10802100	718
10802200	718
10802300	718
10802400	718
10802500	718
10802600	718
10802700	718
10900100	719
10900200	719
10900300	719
10900400	719
10900500	719
10900600	719
10900700	719
10900800	719
10900900	719
10901000	719
10901100	719
10901200	719
10901300	719
10901400	719
10901500	719
1100000	688
1100008	688
1100100	688
1100100-SO	311
1100102-SO	311
1100104-SO	311
1100107-SO	311

EDP Number	Page No.
1100108	688
1100109-SO	311
1100110-SO	311
1100118-SO	311
1100120-SO	311
1100130-SO	311
1100132-SO	311
1100139-SO	311
1100140-SO	311
1100150-SO	311
1100152-SO	311
1100159-SO	311
1100160-SO	311
1100161-SO	311
1100169-SO	311
1100170-SO	311
1100178-SO	311
1100180-SO	311
1100185-SO	311
1100190-SO	311
1100193-SO	311
1100198-SO	311
1100199-SO	311
1100200	688
1100200-SO	311
1100206-SO	311
1100208	688
1100208-SO	311
1100210-SO	311
1100218-SO	311
1100220-SO	311
1100226-SO	311
1100230-SO	311
1100237-SO	312
1100238-SO	312
1100240-SO	312
1100244-SO	312
1100249-SO	312
1100250-SO	312
1100253-SO	312
1100258-SO	312
1100260-SO	312
1100264-SO	312
1100270-SO	312
1100271-SO	312
1100278-SO	312
1100279-SO	312
1100280-SO	312
1100282-SO	312
1100287-SO	312
1100290-SO	312
1100295-SO	312
1100300-SO	312
1100305-SO	312
1100310-SO	312
1100318-SO	312

EDP Number	Page No.
1100320-SO	312
1100326-SO	312
1100330-SO	312
1100340-SO	312
1100345-SO	312
1100350-SO	312
1100356-SO	312
1100357-SO	312
1100360-SO	312
1100366-SO	312
1100370-SO	312
1100373-SO	312
1100379-SO	312
1100380-SO	312
1100386-SO	312
1100390-SO	312
1100391-SO	312
1100397-SO	312
1100399-SO	312
1100400	688
1100400-SO	312
1100404-SO	312
1100409-SO	312
1100410-SO	312
1100420-SO	312
1100422-SO	312
1100430-SO	313
1100431-SO	313
1100437-SO	313
1100439-SO	313
1100440-SO	313
1100449-SO	313
1100450-SO	313
1100457-SO	313
1100460-SO	313
1100462-SO	313
1100469-SO	313
1100470-SO	313
1100476-SO	313
1100479-SO	313
1100480-SO	313
1100485-SO	313
1100490-SO	313
1100492-SO	313
1100498-SO	313
1100500	688
1100500-SO	313
1100506-SO	313
1100510-SO	313
1100511-SO	313
1100516-SO	313
1100518-SO	313
1100520-SO	313
1100522-SO	313
1100530-SO	313
1100532-SO	313



EDP Number	Page No.
1100540-SO	313
1100541-SO	313
1100550-SO	313
1100556-SO	313
1100560-SO	313
1100561-SO	313
1100570-SO	313
1100579-SO	313
1100580-SO	313
1100590-SO	313
1100595-SO	313
1100600-SO	313
1100610-SO	314
1100620-SO	314
1100630-SO	314
1100635-SO	314
1100640-SO	314
1100650-SO	314
1100660-SO	314
1100670-SO	314
1100677-SO	314
1100680-SO	314
1100690-SO	314
1100700	688
1100700-SO	314
1100710-SO	314
1100714-SO	314
1100720-SO	314
1100730-SO	314
1100740-SO	314
1100750-SO	314
1100754-SO	314
1100760-SO	314
1100770-SO	314
1100780-SO	314
1100790-SO	314
1100794-SO	314
1100800	688
1100800-SO	314
1100810-SO	314
1100820-SO	314
1100830-SO	314
1100833-SO	314
1100840-SO	314
1100850-SO	314
1100860-SO	314
1100870-SO	314
1100873-SO	314
1100880-SO	314
1100890-SO	314
1100900-SO	314
1100910-SO	314
1100913-SO	314
1100920-SO	314
1100930-SO	314
1100940-SO	314

EDP Number	Page No.
1100950-SO	314
1100953-SO	314
1100960-SO	314
1100970-SO	314
1100980-SO	314
1100990-SO	314
1100992-SO	315
1101000	688
1101000-SO	315
1101032-SO	315
1101072-SO	315
1101100	688
1101111-SO	315
1101151-SO	315
1101191-SO	315
1101200100	642
1101200300	642
1101200500	642
1101200700	642
1101200900	642
1101201100	642
1101230-SO	315
1101270-SO	315
1101300	688
1101400	688
1101500105	615
1101500205	615
1101500305	615
1101500405	615
1101500505	615
1101500605	615
1101500705	615
1101500805	615
1101500905	615
1101501005	615
1101501105	615
1101501205	615
1101501305	615
1101501405	615
1101501505	616
1101501605	616
1101501705	616
1101501805	616
1101501905	616
1101502005	616
1101502105	616
1101502205	617
1101502305	617
1101502405	617
1101502505	617
1101502605	617
1101502705	617
1101502805	617
1101502905	617
1101503005	617
1101503105	617

EDP Number	Page No.
1101503205	617
1101503305	617
1101503405	617
1101503505	617
1101503605	617
1101503705	617
1101503805	617
1101503905	617
1101504005	617
1101504105	617
1101504205	617
1101504305	618
1101504405	618
1101504505	618
1101504605	618
1101504705	618
1101504805	618
1101504905	618
1101505005	618
1101505105	618
1101505205	618
1101505305	618
1101505405	618
1101505505	617
1101505605	615
1101505705	615
1101505805	615
1101505905	617
1101506005	616
1101506105	616
1101506205	616
1101506305	617
1101506405	617
1101506505	615
1101506605	615
1101506705	615
1101506805	615
1101506905	615
1101507005	615
1101507105	615
1101507205	615
1101507305	615
1101507405	615
1101507505	615
1101507605	615
1101507705	615
1101507805	615
1101507905	615
1101508005	615
1101508105	615
1101508205	616
1101508305	616
1101508405	616
1101508505	616
1101508605	616
1101508705	616

EDP Number	Page No.
1101508805	616
1101508905	616
1101509005	616
1101509105	616
1101509205	616
1101509305	616
1101509405	616
1101509505	616
1101509605	616
1101509705	616
1101509805	616
1101509905	616
1101510005	616
1101510105	616
1101510205	616
1101510305	616
1101510405	616
1101510505	616
1101510605	616
1101510705	616
1101510805	616
1101510905	617
1101511005	617
1101511105	617
1101511205	617
1101511305	617
1101511405	617
1101511505	617
1101511605	617
1101511705	617
1101511805	617
1101511905	617
1101512005	617
1101512105	617
1101512205	617
1101512305	617
1101512405	617
1101512505	617
1101512605	617
1101512705	617
1101512805	617
1101512905	617
1101513005	617
1101513105	618
1101513205	618
1101513305	618
1101513405	618
1101513505	618
1101513605	618
1101513705	618
1101513805	618
1101513905	618
1101514005	618
1101514105	618
1101514205	618
1101514305	618



EDP Number	Page No.
1101514405	618
1101514505	618
1101514605	618
1101514705	618
1101514805	618
1101514905	618
1101515005	618
1101515105	618
1101515205	618
1101515305	618
1101515405	618
1101515505	615
1101515605	615
1101515705	615
1101515805	615
1101515905	615
1101516005	616
1101516105	616
1101516205	616
1101516305	616
1101516405	616
1101516505	616
1101516605	616
1101516705	616
1101516805	616
1101516905	616
1101517005	618
1101517105	618
1101517205	618
1101517305	618
1101517405	618
1101517505	618
1101517605	618
1101517705	618
1101517805	619
1101517905	619
1101518005	619
1101518105	619
1101518205	619
1101518305	619
1101518405	619
1101518505	619
1101518605	619
1101518705	619
1101518805	619
1101518905	619
1101519005	619
1101519105	619
1101519205	619
1101519305	619
1101519405	619
1101519505	619
1101519605	619
1101519705	619
1101519805	619
1101519905	619

EDP Number	Page No.
1101520005	619
1101520105	619
1101520205	619
1101520305	619
1101520405	619
1101520505	619
1101520605	619
1101520705	619
1101520805	619
1101520905	619
1101521005	619
1101600	688
1101600103	625
1101600203	625
1101600303	625
1101600403	625
1101600503	625
1101600603	625
1101600703	625
1101600803	625
1101600903	625
1101601003	625
1101601103	625
1101601203	625
1101601303	625
1101601403	625
1101601503	625
1101601603	625
1101601703	625
1101601803	625
1101601903	625
1101602003	625
1101602103	625
1101700	688
1101700108	627
1101700208	627
1101700308	627
1101700408	627
1101700508	627
1101700608	627
1101700708	627
1101700808	627
1101700908	627
1101701008	627
1101701108	627
1101701208	627
1101701308	627
1101701408	627
1101701508	627
1101708	688
1102500	688
1102600	688
1102800	688
1102900	688
1103600100	728
1103600108	728

EDP Number	Page No.
1103600200	728
1103600208	728
1103600300	728
1103600308	728
1103600400	728
1103600408	728
1103600500	728
1103600508	728
1103600600	728
1103600608	728
1103600700	728
1103600708	728
1103600800	728
1103600808	728
1103600900	728
1103600908	728
1103601000	728
1103601008	728
1103601100	728
1103601108	728
1103601200	728
1103601208	728
1103601300	728
1103601308	728
1103700	688
1104000	688
1105100108	672
1105100208	672
1105100308	672
1105100408	672
1105100508	672
1105100608	672
1105100708	672
1105100808	672
1105100908	672
1105101008	672
1105101108	672
1105101208	672
1105101308	672
1105101408	672
1105101508	672
1105101608	672
1105101708	672
1105101808	672
1105101908	672
1105102008	672
1105102108	672
1105102208	672
1105102308	672
1105102408	672
1105200	689
1105200108	675
1105200208	675
1105200308	675
1105200408	675
1105200508	675

EDP Number	Page No.
1105200608	675
1105200708	675
1105200808	675
1105200908	675
1105201008	675
1105201108	675
1105201208	675
1105201308	675
1105201408	675
1105201508	675
1105201608	675
1105201708	675
1105201808	675
1105201908	675
1105202008	675
1105202108	675
1105202208	675
1105202308	675
1105202408	675
1105208	689
1105300108	677
1105300208	677
1105300308	677
1105300408	677
1105300508	677
1105300608	677
1105300708	677
1105300808	677
1105301108	677
1105301208	677
1105301308	677
1105301408	677
1105301508	677
1105301608	677
1105301708	677
1105301808	677
1105301908	677
1105302008	677
1105302108	677
1105302208	677
1105302308	677
1105302408	677
1105302508	677
1105400108	678
1105400208	678
1105400308	678
1105500108	679
1105500208	679
1105500308	679
1105500408	679
1105600108	681
1105600208	681
1105600308	681
1105600408	681
1105600508	681
1105600608	681



EDP Number	Page No.
1105600708	681
1105600808	681
1105600908	681
1105601008	681
1105610108	591
1105610208	591
1105610408	591
1105610508	591
1105610608	591
1105610708	591
1105610808	591
1105610908	591
1105611008	591
1105611108	591
1105611208	591
1105611308	591
1105611408	591
1105611508	591
1105611608	591
1105611708	591
1105611808	591
1105611908	591
1105612008	591
1105612108	591
1105612208	591
1105612308	591
1105612408	591
1105612508	591
1105612608	591
1105612708	591
1105612808	591
1105612908	591
1105613008	591
1105613108	591
1105613208	591
1105613308	591
1105613408	591
1105613508	591
1105613608	591
1105613708	591
1105613808	592
1105613908	592
1105614008	592
1105614108	592
1105614208	592
1105614308	592
1105614408	592
1105614508	592
1105700108	683
1105700208	683
1105700308	683
1105700408	683
1105700508	683
1105700608	683
1105700708	683
1105700808	683

EDP Number	Page No.
1110000	688
1110008	688
1110100	688
1110108	688
1110200	688
1110208	688
1110400	688
1110500	688
1110508	688
1110700	688
1110708	688
1110800	688
1111	698
1111000	688
1111100	688
1111108	688
1111300	688
1111400	688
1111500105	620
1111500205	620
1111500305	620
1111500405	620
1111500505	620
1111500605	620
1111500705	620
1111500805	620
1111500905	620
1111501005	620
1111501105	620
1111501205	620
1111501305	620
1111501405	620
1111501505	620
1111501605	620
1111501705	620
1111501805	620
1111501905	620
1111502005	620
1111502105	620
1111502205	620
1111502305	620
1111502405	620
1111502505	620
1111502605	620
1111502705	620
1111502805	620
1111502905	620
1111503005	620
1111503105	620
1111503205	620
1111503305	620
1111503405	620
1111503505	620
1111503605	620
1111503705	620
1111503805	620

EDP Number	Page No.
1111503905	620
1111504005	620
1111504105	620
1111504205	621
1111504305	621
1111504405	621
1111504505	621
1111504605	621
1111504705	621
1111504805	621
1111504905	621
1111505005	621
1111505105	621
1111505205	621
1111505305	621
1111505405	621
1111505505	621
1111505605	621
1111505705	621
1111505805	621
1111505905	621
1111506005	621
1111506105	621
1111506205	621
1111506305	621
1111506405	621
1111506505	621
1111506605	621
1111506705	621
1111506805	621
1111506905	621
1111507005	620
1111507105	620
1111507205	620
1111507305	620
1111507405	620
1111507505	620
1111507605	620
1111507705	621
1111507805	621
1111507905	621
1111508005	621
1111508105	621
1111508205	621
1111508305	621
1111508405	621
1111508505	621
1111508605	621
1111508705	621
1111508805	621
1111600	688
1111600103	626
1111600303	626
1111600403	626
1111600503	626
1111600803	626

EDP Number	Page No.
1111600903	626
1111601003	626
1111601103	626
1111601203	626
1111601303	626
1111608	688
1111700	688
1111700108	628
1111700308	628
1111700408	628
1111700508	628
1111700808	628
1111701008	628
1111701308	628
1111800201	646
1111800301	646
1111800401	646
1111800501	646
1111800601	646
1111800701	646
1111800801	646
1111800901	646
1111801001	646
1111801101	646
1111801201	646
1111801301	646
1112	698
1112200	688
1112500	688
1112600	688
1113	698
1113400	688
1113700	688
1114000	688
1114900	689
1115200	689
1115710001	598
1115710008	598
1115710101	598
1115710108	598
1115710201	598
1115710208	598
1115710301	598
1115710308	598
1115710401	598
1115710408	598
1115710501	598
1115710508	598
1115710601	598
1115710608	598
1115710701	598
1115710708	598
1115710801	598
1115710808	598
1115800	689
1115810108	593



EDP Numerical Index

EDP Number	Page No.
1115810208	593
1115810308	593
1115810408	593
1115810508	593
1115810608	593
1115810708	593
1115810808	593
1116100	689
1116700	689
1116708	689
1120000	688
1120001	688
1120008	688
1120100	688
1120101	688
1120105	688
1120108	688
1120200	688
1120201	688
1120208	688
1120300	688
1120308	688
1120400	688
1120401	688
1120405	688
1120408	688
1120500	688
1120501	688
1120508	688
1120600	688
1120601	688
1120608	688
1120700	688
1120701	688
1120705	688
1120708	688
1120800	688
1120801	688
1120808	688
1120900	688
1120901	688
1120908	688
1121	698
1121000	688
1121001	688
1121005	688
1121008	688
1121100	688
1121101	688
1121108	688
1121200	688
1121201	688
1121208	688
1121300	688
1121301	688
1121305	688

EDP Number	Page No.
1121308	688
1121400	688
1121401	688
1121408	688
1121500	688
1121501	688
1121508	688
1121600	688
1121601	688
1121605	688
1121608	688
1121700	688
1121701	688
1121708	688
1121800	688
1121808	688
1121900	688
1121908	688
1122	698
1122000	688
1122008	688
1122100	688
1122101	688
1122108	688
1122200	688
1122201	688
1122205	688
1122208	688
1122300	688
1122301	688
1122308	688
1122400	688
1122401	688
1122408	688
1122500	688
1122501	688
1122505	688
1122508	688
1122600	688
1122601	688
1122608	688
1122700	688
1122701	688
1122708	688
1122800	688
1122801	688
1122805	688
1122808	688
1122900	688
1122901	688
1122908	688
1123	698
1123000	688
1123001	688
1123008	688
1123100	688

EDP Number	Page No.
1123101	688
1123108	688
1123200	688
1123201	688
1123208	688
1123300	688
1123301	688
1123308	688
1123400	688
1123401	688
1123408	688
1123500	688
1123501	688
1123508	688
1123600	688
1123601	688
1123608	688
1123700	688
1123701	688
1123705	688
1123708	688
1123800	688
1123801	688
1123808	688
1123900	688
1123901	688
1123908	688
1124000	688
1124001	688
1124005	688
1124008	688
1124100	688
1124101	688
1124108	688
1124200	688
1124300	688
1124308	688
1124400	688
1124408	688
1124500	689
1124508	689
1124600	689
1124608	689
1124700	689
1124708	689
1124800	689
1124808	689
1124900	689
1124901	689
1124905	689
1124908	689
1125000	689
1125001	689
1125008	689
1125100	689
1125108	689

EDP Number	Page No.
1125200	689
1125201	689
1125205	689
1125208	689
1125300	689
1125301	689
1125308	689
1125700	690
1125708	690
1125900	690
1125901	690
1125908	690
1130400	688
1130500	688
1131000	688
1131100	688
1131108	688
1131600	688
1131608	688
1131700	688
1131708	688
1135400	689
1135408	689
1135500	689
1135501	689
1135505	689
1135508	689
1135600	689
1135601	689
1135608	689
1135700	689
1135708	689
1135800	689
1135801	689
1135805	689
1135808	689
1135900	689
1135901	689
1135908	689
1136000	689
1136001	689
1136008	689
1136100	689
1136101	689
1136105	689
1136108	689
1136200	689
1136201	689
1136208	689
1136300	689
1136308	689
1136400	689
1136408	689
1136500	689
1136508	689
1136600	689



EDP Number	Page No.
1136601	689
1136608	689
1136700	689
1136701	689
1136708	689
1136800	689
1136801	689
1136808	689
1136900	689
1136908	689
1137000	689
1137001	689
1137008	689
1137100	689
1137101	689
1137108	689
1137200	689
1137201	689
1137208	689
1137300	689
1137301	689
1137308	689
1137400	689
1137401	689
1137408	689
1137500	689
1137508	689
1137600	689
1137608	689
1137700	689
1137701	689
1137708	689
1137800	689
1137808	689
1137900	689
1137901	689
1137908	689
1138000	689
1138001	689
1138008	689
1138100	689
1138101	689
1138200	689
1138208	689
1138300	689
1138308	689
1138400	689
1138401	689
1138408	689
1138500	689
1138501	689
1138508	689
1138600	689
1138601	689
1138608	689
1138700	689

EDP Number	Page No.
1138701	689
1138708	689
1138800	689
1138801	689
1138808	689
1138900	689
1138901	689
1138908	689
1139000	689
1139001	689
1139008	689
1139100	689
1139101	689
1139108	689
1139200	689
1139201	689
1139208	689
1140100	688
1140108	688
1140200	688
1140208	688
1140700	688
1140708	688
1140800	688
1140808	688
1141300	688
1141308	688
1141400	688
1141408	688
1141900	688
1142	698
1142000	688
1142200	688
1142208	688
1142300	688
1142308	688
1142500	688
1142508	688
1142600	688
1142800	688
1142900	688
1142908	688
1143100	688
1143108	688
1143400	688
1143408	688
1143500	688
1143508	688
1143700	688
1143708	688
1143800	688
1143808	688
1144000	688
1144008	688
1144100	688
1144108	688

EDP Number	Page No.
1144900	689
1144908	689
1145000	689
1145008	689
1145200	689
1145208	689
1145300	689
1145308	689
1145500	689
1145508	689
1145800	689
1145808	689
1146100	689
1146108	689
11507615	255
11509115	255
11511115	255
11511615	255
11512915	255
11513615	255
11514915	255
11515915	255
11516915	255
11517715	255
11518815	255
11520415	255
11520915	255
11521515	255
11522215	255
11523815	255
11524115	255
11526115	255
11526915	255
11529615	255
11530815	256
11533115	256
11534815	256
11535515	256
11538815	256
11541315	256
11542715	256
11544	559
11545615	256
11546215	256
11546715	256
11549215	256
11550715	256
11551115	256
11553015	256
11554615	256
11555815	256
11556	559
11556115	256
11556215	256
11557815	256
11558315	256

EDP Number	Page No.
11559315	256
11559915	256
11560415	256
11561315	256
11561815	257
11563215	257
11564115	257
11564715	257
11565015	257
11565915	257
11566815	257
11567715	257
11568415	257
11568815	257
11569415	257
11571	559
11583	559
11601	559
1160100	694
1160700	694
1161300	694
11621	559
11624	559
11650	559
1165100	694
11653	559
11680	559
11683	559
1170100	694
1170101	694
1170105	694
1170200	694
1170201	694
1170205	694
1170400	694
1170401	694
1170405	694
11705	559
1170500	694
1170501	694
1170505	694
1170700	694
1170705	694
11708	559
1170800	694
1171000	694
1171001	694
1171005	694
1171100	694
1171101	694
1171105	694
1171300	694
1171301	694
1171305	694
1171400	694
1171401	694



EDP Numerical Index

EDP Number	Page No.
1171405	694
1171600	694
1171601	694
1171605	694
1171700	694
1171701	694
1171705	694
1171900	694
1172000	694
1172200	694
1172500	694
1172501	694
1172505	694
1172600	694
1172601	694
1172605	694
1172800	694
11730	559
11735	559
11757	559
11762	559
11772	559
11799	559
1180100	694
1180200	694
1180700	694
1180800	694
1181300	694
1181400	694
1195100	695
1195101	695
1195200	695
1195201	695
1195400	695
1195401	695
1195500	695
1195501	695
1195700	695
1195800	695
1200000	635
1200001	635
1200008	635
1200100	638
1200200	635
1200201	635
1200208	635
1200400	635
1200401	635
1200408	635
1200500	638
1200600	635
1200600100	749
1200600200	749
1200600300	749
1200600400	749
1200600500	749

EDP Number	Page No.
1200600600	749
1200600700	749
1200600800	749
1200600900	749
1200601000	749
1200605	635
1200608	635
1200700	638
1200700200	750
1200700400	750
1200700500	750
1200700600	750
1200700700	750
1200800	635
1200808	635
1200900	638
1201000	635
1201008	635
1201200	635
1201208	635
1201400	635
1201405	635
1201408	635
1201600	635
1202000	635
1202008	635
1202400	635
1202405	635
1202408	635
1202600	635
1202800	636
1202805	636
1202808	636
1203200	636
1203208	636
1203400	636
1203405	636
1203408	636
1203800	636
1203805	636
1203808	636
1204200	636
1205000	635
1205001	635
1205005	635
1205008	635
1205200	635
1205201	635
1205208	635
1205300	638
1205300108	742
1205300208	742
1205300308	742
1205300408	742
1205300508	742
1205300608	742

EDP Number	Page No.
1205300708	742
1205400	635
1205400108	742
1205400208	742
1205400308	742
1205400408	742
1205400508	742
1205400608	742
1205400708	742
1205401	635
1205405	635
1205408	635
1205500	638
1205600	635
1205601	635
1205605	635
1205608	635
1205700	638
1205701	638
1205800	635
1205801	635
1205805	635
1205808	635
1206000	635
1206001	635
1206005	635
1206008	635
1206100	638
1206101	638
1206200	635
1206201	635
1206205	635
1206208	635
1206300	638
1206400	635
1206401	635
1206405	635
1206408	635
1206500	638
1206501	638
1206600	635
1206601	635
1206605	635
1206608	635
1206700	638
1206800	635
1206801	635
1207000	635
1207001	635
1207005	635
1207008	635
1207100	638
1207101	638
1207200	635
1207201	635
1207205	635

EDP Number	Page No.
1207208	635
1207300	638
1207400	635
1207401	635
1207405	635
1207408	635
1207500	638
1207600	635
1207601	635
1207605	635
1207608	635
1207700	638
1207701	638
1207800	636
1207801	636
1207805	636
1207808	636
1207900	638
1208200	636
1208201	636
1208205	636
1208208	636
1208300	638
1208400	636
1208401	636
1208405	636
1208408	636
1208500	638
1208800	636
1208801	636
1208808	636
1208900	638
1210000	635
1210001	635
1210008	635
1210600	635
1210601	635
1210608	635
1211000	635
1211001	635
1211008	635
1211400	635
1211401	635
1211408	635
1212400	635
1212401	635
1212405	635
1212408	635
1212500	638
1212501	638
1212608	635
1212800	636
1212801	636
1212805	636
1212808	636
1212900	638



EDP Number	Page No.
1212901	638
1213201	636
1213400	636
1213401	636
1213405	636
1213408	636
1213500	638
1213501	638
1213601	636
1213800	636
1213801	636
1213805	636
1213808	636
1213900	638
1213901	638
1214001	636
1214200	636
1214201	636
1214205	636
1214208	636
1214300	638
1214301	638
1214400	636
1214401	636
1214405	636
1214408	636
1214500	638
1214501	638
1214700	638
1215600	635
1215601	635
1215608	635
1216400	635
1216401	635
1216408	635
1217400	635
1217401	635
1217408	635
1217800	636
1217801	636
1217808	636
1218800	636
1218801	636
1218808	636
1220000	636
1220001	636
1220005	636
1220008	636
1220400	636
1220408	636
1220800	636
1220805	636
1220808	636
1221200	636
1221208	636
1221600	637

EDP Number	Page No.
1221608	637
1221800	637
1221808	637
1222400	637
1222408	637
1222600	637
1222608	637
1225000	636
1225001	636
1225005	636
1225008	636
1225400	636
1225405	636
1225408	636
1225500	638
1225600	636
1225605	636
1225608	636
1225800	636
1225805	636
1225808	636
1226200	636
1226205	636
1226208	636
1226400	636
1226405	636
1226408	636
1226600	637
1226601	637
1226605	637
1226608	637
1226800	637
1226805	637
1226808	637
1227000	637
1227008	637
1227200	637
1227208	637
1227400	637
1227405	637
1227408	637
1227600	637
1227608	637
1230000	636
1230001	636
1230005	636
1230008	636
1230100	638
1230101	638
1230200	636
1230201	636
1230205	636
1230208	636
1230400	636
1230401	636
1230405	636

EDP Number	Page No.
1230408	636
1230500	638
1230501	638
1230800	636
1230801	636
1230805	636
1230808	636
1230900	638
1230901	638
1231000	636
1231001	636
1231005	636
1231008	636
1231200	636
1231201	636
1231205	636
1231208	636
1231300	638
1231301	638
1231600	637
1231601	637
1231605	637
1231608	637
1231700	638
1231701	638
1231800	637
1231801	637
1231805	637
1231808	637
1232000	637
1232001	637
1232005	637
1232008	637
1232100	638
1232200	637
1232201	637
1232205	637
1232208	637
1232400	637
1232401	637
1232405	637
1232408	637
1232600	637
1232601	637
1232605	637
1232608	637
1233200	637
1233201	637
1233205	637
1233208	637
1233400	637
1233401	637
1233405	637
1233408	637
1233600	637
1233601	637

EDP Number	Page No.
1233605	637
1233608	637
1233800	637
1233801	637
1233808	637
1235400	636
1235408	636
1235600	636
1235608	636
1236200	636
1236208	636
1236400	636
1236408	636
1236500	638
1236800	637
1236805	637
1236808	637
1240000	636
1240001	636
1240005	636
1240008	636
1240200	636
1240208	636
1240800	636
1240805	636
1240808	636
1241000	636
1241001	636
1241005	636
1241008	636
1241600	637
1241601	637
1241605	637
1241608	637
1242000	637
1242005	637
1242008	637
1242200	637
1242205	637
1242208	637
1242400	637
1242405	637
1242408	637
1242600	637
1242608	637
1243200	637
1243205	637
1243208	637
1243600	637
1243605	637
1243608	637
12500100	729
12500200	729
12500300	729
12500400	729
12500500	729



EDP Numerical Index

EDP Number	Page No.
12500600	729
12500700	729
12500800	729
12500900	729
12501000	729
12501100	730
12501200	730
12501300	730
12501400	730
12501500	730
12501600	730
12501700	730
12501800	730
12501900	730
12502000	730
12502100	730
12502200	730
12502300	730
12502400	730
12502500	730
12502600	730
12502700	730
12502800	730
1250500	748
1250501	748
1250508	748
1250600	748
1250601	748
1250608	748
1251	698
1251300	748
1251301	748
1251308	748
1251400	748
1251401	748
1251408	748
1251700	748
1251701	748
1251708	748
1251800	748
1251801	748
1251808	748
1252	698
1252100	748
1252101	748
1252108	748
1252200	748
1252201	748
1252208	748
1252500	748
1252501	748
1252508	748
1252600	748
1252601	748
1252608	748
1252900	748

EDP Number	Page No.
1252901	748
1252908	748
1253	698
1253000	748
1253001	748
1253008	748
12600100	732
12600200	732
12600300	732
12600400	732
12600500	732
12600600	732
12600700	732
12600800	732
12600900	732
12601000	732
12601100	732
12601200	732
12601300	732
12601400	732
12601500	732
12601600	732
12601700	732
12601800	732
12601900	733
12602000	733
12602100	733
12602200	733
12602300	733
12602400	733
12602500	733
12602600	733
12602700	733
12602800	733
12602900	733
12603000	733
12603100	733
12603200	733
12603300	733
12603400	733
12603500	733
12603600	733
12603700	733
12603800	733
12603900	733
12604000	733
12604100	733
12604200	733
12604300	733
12604400	733
12604500	733
12604600	733
12604700	733
12604800	733
12604900	733
12605000	733

EDP Number	Page No.
12605100	733
12605200	733
12605300	733
12605400	733
1262	698
12700100	731
12700200	731
12700300	731
12700400	731
12700500	731
12700600	731
12700700	731
12700800	731
12700900	731
12701000	731
12701100	731
12701200	731
12701300	731
12701400	731
12701500	731
1271	698
1272	698
1273	698
12800100	734
12800200	734
12800300	734
12800400	734
12800500	734
12800600	734
12800700	734
12800800	734
12800900	734
12801000	734
12801100	734
12801200	734
12801300	734
12801400	734
12801500	734
1290001	700
129001	700
1290401	700
1290601	700
1290801	700
1291001	700
1291201	700
1291401	700
1291601	700
1292001	700
1292201	700
1292401	700
1292601	700
1292801	700
1293001	700
1293201	700
1293301	645
1293401	700

EDP Number	Page No.
1293501	645
1293601	700
1293701	645
1293801	700
1293901	645
1294000	645
1294100	645
1294200	645
1294201	645
1294300	645
1294301	645
1294400	645
1294401	645
1294500	645
1294501	645
1294600	645
1294601	645
1294700	645
1294701	645
1294800	645
1294801	645
1294900	645
1294901	645
1295000	645
1295001	645
1295100	645
1295101	645
1295200	645
1295300	645
1295301	645
1295400	645
1295401	645
1295500	645
1295501	645
1295600	645
1295701	645
1295801	645
1296000	560
1296100	560
1296200	560
1296300	560
1296400	560
1296500	560
1296600	560
1296700	560
1296800	560
1296900	560
1297000	560
1297100	560
1297200	560
1297300	560
1297400	560
1297500	560
1297600	560
1297700	560
1297800	560



EDP Number	Page No.
1297900	560
1298000	560
1298100	560
1298200	560
1298300	560
1298400	560
1298500	560
1298600	560
1298700	560
1298800	560
1298900	560
1299000	560
1299100	560
1299200	560
1299300	560
1299401	645
1301300508	534
1301300608	534
1301300708	534
1301300808	534
1301300908	534
1301301008	534
1301301108	534
1301301208	534
1301301308	534
1301301408	534
1301301508	534
1301301608	534
1301301708	534
1301301808	534
1301400101	536
1301400201	536
1301400301	536
1301400401	536
1301400501	536
1301400601	536
1301400701	536
1301400901	536
1301401101	536
1301401201	536
1301401401	536
1301401501	536
1301401701	536
1301401801	536
1301402001	536
1301402101	536
1301402201	536
1301402301	536
1301402401	536
1301402501	536
1301402601	536
1301402701	536
1301402801	536
1301402901	536
1301403001	536
1301403101	536

EDP Number	Page No.
1301403201	536
1301403301	536
1301403501	536
1301403601	536
1301403701	536
1301403801	536
1301403901	536
1301404001	536
1301500101	538
1301500201	538
1301500301	538
1301500401	538
1301500501	538
1301500601	538
1301500701	538
1301500901	538
1301501101	538
1301501201	538
1301501401	538
1301501501	538
1301501701	538
1301501801	538
1301502001	538
1301502101	538
1301502201	538
1301502301	538
1301502401	538
1301502501	538
1301502601	538
1301502701	538
1301502801	538
1301502901	538
1301503001	538
1301503101	538
1301503201	538
1301503301	538
1301503401	538
1301503501	538
1301503601	538
1301503701	538
1301503801	538
1301504001	538
1301900103	548
1301900203	548
1301900303	548
1301900403	548
1301900503	548
1301900603	548
1301900703	548
1301900803	548
1301900903	548
1301901003	548
1301901103	548
1301901203	548
1301901303	548
1301901403	548

EDP Number	Page No.
1301901503	548
1301901603	548
1301901703	548
1301901803	548
1301901903	548
1301902003	548
1301902103	548
1302000101	558
1302000201	558
1302000301	558
1302000401	558
1302000501	558
1302000601	558
1302000701	558
1302000801	558
1302000901	558
1302001001	558
1302001101	558
1302001201	558
1302001301	558
1302001401	558
1302001501	558
1302001601	558
1302001701	558
1302001801	558
1302001901	558
1302002001	558
1302002101	558
1302002201	558
1302002301	558
1302002401	558
1302002501	558
1302002601	558
1302400101	537
1302400201	537
1302400301	537
1302400401	537
1302400501	537
1302400601	537
1302400701	537
1302400901	537
1302401101	537
1302401201	537
1302401401	537
1302401501	537
1302401701	537
1302401801	537
1302402001	537
1302402101	537
1302402201	537
1302402301	537
1302402401	537
1302402501	537
1302402601	537
1302402701	537
1302402801	537

EDP Number	Page No.
1302402901	537
1302403001	537
1302403101	537
1302403201	537
1302403301	537
1302403501	537
1302403601	537
1302403701	537
1302403801	537
1302403901	537
1302404001	537
1302500101	539
1302500201	539
1302500301	539
1302500401	539
1302500501	539
1302500601	539
1302500701	539
1302500901	539
1302501101	539
1302501201	539
1302501401	539
1302501501	539
1302501701	539
1302501801	539
1302502001	539
1302502101	539
1302502201	539
1302502301	539
1302502401	539
1302502501	539
1302502601	539
1302502701	539
1302502801	539
1302502901	539
1302503001	539
1302503101	539
1302503201	539
1302503301	539
1302503501	539
1302503601	539
1302503701	539
1302503801	539
1302503901	539
1302504001	539
1303900100	716
1303900108	716
1303900200	716
1303900208	716
1303900300	716
1303900308	716
1303900400	716
1303900408	716
1303900500	716
1303900508	716
1303900600	716



EDP Numerical Index

EDP Number	Page No.
1303900608	716
1303900700	716
1303900708	716
1303900800	716
1303900808	716
1303900900	716
1303900908	716
1303901000	716
1303901008	716
1303901100	716
1303901108	716
1303901200	716
1303901208	716
1303901300	716
1303901308	716
1305710108	510
1305710208	510
1305710408	510
1305710508	510
1305710608	510
1305710708	510
1305710808	510
1305710908	510
1305711008	510
1305711108	510
1305711208	510
1305711308	510
1305711408	510
1305711508	510
1305711608	510
1305711708	510
1305711808	510
1305711908	510
1305712008	510
1305712108	510
1305712208	510
1305712308	510
1305712408	510
1305712508	510
1305712608	510
1305712708	510
1305712808	510
1305712908	510
1305713008	510
1305713108	510
1305713208	510
1305713308	510
1305713408	510
1305713508	510
1305713608	510
1305713708	510
1305713808	510
1305713908	510
1305714008	510
1305714108	511
1305714208	511

EDP Number	Page No.
1305714308	511
1305714408	511
1305714508	511
1305714608	510
1305800108	544
1305800208	544
1305800308	544
1305800408	544
1305800508	544
1305800608	544
1305800708	544
1305800808	544
1305800908	544
1305801008	544
1305801108	544
1305801208	544
1305900108	623
1305900208	623
1305900308	623
1305900408	623
1305900508	623
1305900608	623
1305900708	623
1305900808	623
1305900908	623
1305901008	623
1305901108	623
1305901208	623
1306300108	586
1306300208	586
1306300308	586
1306300408	586
1306300508	586
1306300608	586
1306300708	586
1306300808	586
1306300908	586
1306301008	586
1306301108	586
1306301208	586
1306301308	586
1306301408	586
1306301508	586
1306301608	586
1306301708	586
1306301808	586
1306301908	586
1306302008	586
1310000	744
1310001	744
1310005	744
1310008	744
1310100	744
1310101	744
1310105	744
1310108	744

EDP Number	Page No.
1310200	744
1310201	744
1310205	744
1310208	744
1310300	744
1310301	744
1310305	744
1310308	744
1310400	744
1310401	744
1310405	744
1310408	744
1310500	744
1310501	744
1310505	744
1310508	744
1310600	744
1310601	744
1310605	744
1310608	744
1310700	744
1310701	744
1310705	744
1310708	744
1310800	744
1310801	744
1310808	744
1310900	744
1310901	744
1310908	744
1311000	744
1311001	744
1311008	744
1311100	745
1311200	745
1311300	747
1311300508	535
1311300608	535
1311300708	535
1311300808	535
1311300908	535
1311301	747
1311301008	535
1311301108	535
1311301208	535
1311301308	535
1311301408	535
1311301508	535
1311301608	535
1311301708	535
1311301808	535
1311301908	535
1311308	747
1311400	745
1311500	745
1311600	745

EDP Number	Page No.
1311600101	540
1311600201	540
1311600401	540
1311600501	540
1311600601	540
1311600701	540
1311600801	540
1311600901	540
1311601001	540
1311601101	540
1311601201	540
1311601301	540
1311601401	540
1311601501	540
1311601601	540
1311601701	540
1311601801	540
1311601901	540
1311602001	540
1311602101	540
1311602201	540
1311602301	540
1311602401	540
1311602501	540
1311700	747
1311700101	542
1311700201	542
1311700401	542
1311700501	542
1311700601	542
1311700701	542
1311700801	542
1311700901	542
1311701	747
1311701001	542
1311701101	542
1311701201	542
1311701301	542
1311701401	542
1311701501	542
1311701601	542
1311701701	542
1311701801	542
1311701901	542
1311702001	542
1311702101	542
1311702201	542
1311702301	542
1311702401	542
1311702501	542
1311708	747
1311800	745
1311800108	622
1311800208	622
1311800408	622
1311800508	622



EDP Number	Page No.
1311800608	622
1311800708	622
1311800808	622
1311800908	622
1311801008	622
1311801108	622
1311801208	622
1311801308	622
1311801408	622
1311801508	622
1311801608	622
1311801708	622
1311801808	622
1311801908	622
1311802008	622
1311802108	622
1311802208	622
1311802308	622
1311802408	622
1311802508	622
1311900103	549
1311900303	549
1311900403	549
1311900503	549
1311900803	549
1311900903	549
1311901003	549
1311901103	549
1311901203	549
1311901303	549
1312100	747
1312101	747
1312108	747
1312500	746
1312501	746
1312505	746
1312508	746
1312600	746
1312600101	541
1312600201	541
1312600401	541
1312600501	541
1312600601	541
1312600701	541
1312600801	541
1312600901	541
1312601	746
1312601001	541
1312601101	541
1312601201	541
1312601301	541
1312601401	541
1312601501	541
1312601601	541
1312601701	541
1312601801	541

EDP Number	Page No.
1312601901	541
1312602001	541
1312602101	541
1312602201	541
1312602301	541
1312602401	541
1312602501	541
1312605	746
1312608	746
1312700	746
1312700101	543
1312700201	543
1312700401	543
1312700501	543
1312700601	543
1312700701	543
1312700801	543
1312700901	543
1312701	746
1312701001	543
1312701101	543
1312701201	543
1312701301	543
1312701401	543
1312701501	543
1312701601	543
1312701701	543
1312701801	543
1312701901	543
1312702001	543
1312702101	543
1312702201	543
1312702301	543
1312702401	543
1312702501	543
1312705	746
1312708	746
1312800	746
1312801	746
1312805	746
1312808	746
1312900	746
1312901	746
1312905	746
1312908	746
1313000	746
1313001	746
1313005	746
1313008	746
1313100	746
1313101	746
1313105	746
1313108	746
1313200	746
1313201	746
1313208	746

EDP Number	Page No.
1313300	746
1313301	746
1313308	746
1313400	746
1313401	746
1313408	746
1313500	746
1313501	746
1313508	746
1315100	747
1315101	747
1315108	747
1315200	747
1315201	747
1315208	747
1315300	747
1315301	747
1315308	747
1315400	747
1315401	747
1315408	747
1315500	747
1315501	747
1315508	747
1315600	747
1315601	747
1315608	747
1315700	747
1315701	747
1315708	747
1315800	747
1315800108	545
1315800208	545
1315800308	545
1315800408	545
1315800508	545
1315800608	545
1315800708	545
1315800808	545
1315800908	545
1315801	747
1315808	747
1315900	747
1315900108	624
1315900208	624
1315900308	624
1315900408	624
1315900508	624
1315900608	624
1315900708	624
1315900808	624
1315900908	624
1315901	747
1315908	747
1316000	747
1316001	747

EDP Number	Page No.
1316110001	517
1316110101	517
1316110201	517
1316110301	517
1316110401	517
1316110501	517
1316110601	517
1316110701	517
1316110801	517
1316210008	512
1316210108	512
1316210208	512
1316210308	512
1316210408	512
1316210508	512
1316210608	512
1316210708	512
1316210808	512
1316210908	512
1316300108	587
1316300208	587
1316300308	587
1316300408	587
1316300508	587
1316300808	587
1316300908	587
1316301008	587
1316301108	587
1316301308	587
1320000	647
1322000	701
1330100	751
1330101	751
1330200	751
1330201	751
1330300	751
1330301	751
1330400	751
1330401	751
1330500	751
1330501	751
1330600	751
1330601	751
1330700	751
1330701	751
1332600	751
1332601	751
1332700	751
1332701	751
1332800	751
1332801	751
1332900	751
1332901	751
1333000	751
1333001	751
1333100	751



EDP Numerical Index

EDP Number	Page No.
1333101	751
1333200	751
1333201	751
1351120	756
1391	698
1392	698
1393	698
140010000	473
140010001	473
140010005	473
1400100100	473
1400100101	473
1400100105	473
1400100200	473
1400100201	473
1400100205	473
1400100300	473
1400100301	473
1400100305	473
1400100400	473
1400100401	473
1400100405	473
1400100500	473
1400100501	473
1400100505	473
1400100600	473
1400100601	473
1400100700	473
1400100701	473
1400100800	473
1400100801	473
1400100805	473
1400100900	473
1400100901	473
1400100905	473
1400101000	473
1400101001	473
1400101005	473
1400101100	473
1400101101	473
1400101105	473
1400101200	473
1400101201	473
1400101300	473
1400101301	473
1400101400	473
1400101401	473
1400101405	473
1400101500	473
1400101501	473
1400101505	473
1400101600	473
1400101601	473
1400101605	473
1400101700	473
1400101701	473

EDP Number	Page No.
1400101705	473
1400101800	473
1400101801	473
1400101805	473
1400101900	473
1400101901	473
1400101905	473
1400102000	473
1400102001	473
1400102005	473
1400102100	473
1400102101	473
1400102200	473
1400102201	473
1400102205	473
1400102300	473
1400102301	473
1400102305	473
1400102400	473
1400102401	473
1400102405	473
1400102500	473
1400102501	473
1400102505	473
1400102600	473
1400102601	473
1400102605	473
1400102700	473
1400102701	473
1400102705	473
1400102800	473
1400102801	473
1400102805	473
1400102900	473
1400102901	473
1400102905	473
1400103000	473
1400103001	473
1400103005	473
1400103100	473
1400103101	473
1400103105	473
1400103200	473
1400103201	473
1400103205	473
1400103300	473
1400103301	473
1400103305	473
1400103400	473
1400103401	473
1400103500	473
1400103501	473
1400103600	473
1400103601	473
1400103700	474
1400103701	474

EDP Number	Page No.
1400103705	474
1400103800	474
1400103801	474
1400103805	474
1400103900	474
1400103901	474
1400103905	474
1400104000	474
1400104001	474
1400104100	474
1400104101	474
1400104200	474
1400104201	474
1400104300	474
1400104301	474
1400104305	474
1400104400	474
1400104401	474
1400104405	474
1400104500	474
1400104501	474
1400104505	474
1400104600	474
1400104601	474
1400104605	474
1400104700	474
1400104701	474
1400104705	474
1400104800	474
1400104801	474
1400104900	474
1400104901	474
1400104905	474
1400105000	474
1400105001	474
1400105005	474
1400105100	474
1400105101	474
1400105105	474
1400105200	474
1400105201	474
1400105205	474
1400105300	474
1400105301	474
1400105305	474
1400105400	474
1400105401	474
1400105405	474
1400105500	474
1400105501	474
1400105505	474
1400105600	474
1400105601	474
1400105605	474
1400105700	474
1400105701	474

EDP Number	Page No.
1400105705	474
1400105800	474
1400105801	474
1400105805	474
1400105900	474
1400105901	474
1400105905	474
1400106000	474
1400106001	474
1400106005	474
1400106100	474
1400106101	474
1400106105	474
1400106200	474
1400106201	474
1400106205	474
1400106300	474
1400106301	474
1400106305	474
1400106400	474
1400106401	474
1400106405	474
1400106500	474
1400106501	474
1400106505	474
1400106600	474
1400106601	474
1400106605	474
1400106700	474
1400106701	474
1400106705	474
1400106800	474
1400106801	474
1400106900	474
1400106901	474
1400107000	474
1400107001	474
1400107005	474
1400107100	474
1400107101	474
1400107105	474
1400107200	474
1400107201	474
1400107300	474
1400107301	474
1400107400	474
1400107401	474
1400107500	474
1400107501	474
1400107600	474
1400107601	474
1400107700	474
1400107701	474
1400107705	474
1400107800	474
1400107801	474



EDP Number	Page No.
1400107900	474
1400107901	474
1400107905	474
1400108000	474
1400108001	474
1400108005	474
1400108100	475
1400108101	475
1400108105	475
1400108200	475
1400108201	475
1400108205	475
1400108300	475
1400108301	475
1400108305	475
1400108400	475
1400108401	475
1400108405	475
1400108500	475
1400108501	475
1400108505	475
1400108600	475
1400108601	475
1400108605	475
1400108700	475
1400108701	475
1400108705	475
1400108800	475
1400108801	475
1400108805	475
1400108900	475
1400108901	475
1400108905	475
1400109000	475
1400109001	475
1400109005	475
1400109100	475
1400109101	475
1400109105	475
1400109200	475
1400109201	475
1400109205	475
1400109300	475
1400109301	475
1400109305	475
1400109400	475
1400109401	475
1400109405	475
1400109500	475
1400109501	475
1400109505	475
1400109600	475
1400109601	475
1400109605	475
1400109700	475
1400109701	475

EDP Number	Page No.
1400109705	475
1400109800	475
1400109801	475
1400109805	475
1400109900	475
1400109901	475
1400109905	475
1400110000	475
1400110001	475
1400110005	475
1400110100	475
1400110101	475
1400110105	475
1400110200	475
1400110201	475
1400110205	475
1400110300	475
1400110301	475
1400110305	475
1400110400	475
1400110401	475
1400110405	475
1400110500	475
1400110501	475
1400110505	475
1400110600	475
1400110601	475
1400110605	475
1400110700	475
1400110701	475
1400110705	475
1400110800	475
1400110801	475
1400110805	475
1400110900	475
1400110901	475
1400110905	475
1400111000	475
1400111001	475
1400111005	475
1400111100	475
1400111101	475
1400111105	475
1400111200	475
1400111201	475
1400111205	475
1400111300	475
1400111301	475
1400111305	475
1400111400	475
1400111401	475
1400111405	475
1400111500	475
1400111501	475
1400111505	475
1400111600	475

EDP Number	Page No.
1400111601	475
1400111605	475
1400111700	475
1400111701	475
1400111705	475
1400111800	475
1400111801	475
1400111805	475
1400111900	475
1400111901	475
1400111905	475
1400112000	476
1400112001	476
1400112005	476
1400112100	476
1400112101	476
1400112105	476
1400112200	476
1400112201	476
1400112205	476
1400112300	476
1400112301	476
1400112305	476
1400112400	476
1400112401	476
1400112405	476
1400112500	476
1400112501	476
1400112505	476
1400112600	476
1400112601	476
1400112605	476
1400112700	476
1400112701	476
1400112705	476
1400112800	476
1400112801	476
1400112805	476
1400112900	476
1400112901	476
1400112905	476
1400113000	476
1400113001	476
1400113005	476
1400113100	476
1400113101	476
1400113105	476
1400113200	476
1400113201	476
1400113205	476
1400113300	476
1400113301	476
1400113305	476
1400113400	476
1400113401	476
1400113405	476

EDP Number	Page No.
1400113500	476
1400113501	476
1400113505	476
1400113600	476
1400113601	476
1400113605	476
1400113700	476
1400113701	476
1400113705	476
1400113800	476
1400113801	476
1400113805	476
1400113900	476
1400113901	476
1400113905	476
1400114000	476
1400114001	476
1400114005	476
1400114100	476
1400114101	476
1400114105	476
1400114200	476
1400114201	476
1400114205	476
1400114300	476
1400114301	476
1400114305	476
1400114400	476
1400114401	476
1400114405	476
1400114500	476
1400114501	476
1400114505	476
1400114600	476
1400114601	476
1400114605	476
1400114700	476
1400114701	476
1400114705	476
1400114800	476
1400114801	476
1400114805	476
1400114900	476
1400114901	476
1400114905	476
1400115000	476
1400115001	476
1400115005	476
1400115100	476
1400115101	476
1400115105	476
1400115200	476
1400115201	476
1400115205	476
1400115300	476
1400115301	476



EDP Numerical Index

EDP Number	Page No.
1400115305	476
1400115400	476
1400115401	476
1400115405	476
1400115500	476
1400115501	476
1400115505	476
1400115600	476
1400115601	476
1400115605	476
1400115700	476
1400115701	476
1400115705	476
1400115800	476
1400115801	476
1400115805	476
1400115900	476
1400115901	476
1400115905	476
1400116000	476
1400116001	476
1400116005	476
1400116100	476
1400116101	476
1400116105	476
1400116200	476
1400116201	476
1400116205	476
1400116300	476
1400116301	476
1400116305	476
1400116400	476
1400116401	476
1400116405	476
1400116500	476
1400116501	476
1400116505	476
1400116600	476
1400116601	476
1400116605	476
1400116700	477
1400116701	477
1400116705	477
1400116800	477
1400116801	477
1400116805	477
1400116900	477
1400116901	477
1400116905	477
1400117000	477
1400117001	477
1400117005	477
1400117100	477
1400117101	477
1400117105	477
1400117200	477

EDP Number	Page No.
1400117201	477
1400117205	477
1400117300	477
1400117301	477
1400117305	477
1400117400	477
1400117401	477
1400117405	477
1400117500	477
1400117501	477
1400117505	477
1400117600	477
1400117601	477
1400117605	477
1400117700	477
1400117701	477
1400117705	477
1400117800	477
1400117801	477
1400117805	477
1400117900	477
1400117901	477
1400117905	477
1400118000	477
1400118001	477
1400118005	477
1400118100	477
1400118101	477
1400118105	477
1400118200	477
1400118201	477
1400118205	477
1400118300	477
1400118301	477
1400118305	477
1400118400	477
1400118401	477
1400118405	477
1400118500	477
1400118501	477
1400118505	477
1400118600	477
1400118601	477
1400118605	477
1400118700	477
1400118701	477
1400118705	477
1400118800	477
1400118801	477
1400118805	477
1400118900	477
1400118901	477
1400118905	477
1400119000	477
1400119001	477
1400119005	477

EDP Number	Page No.
1400119100	477
1400119101	477
1400119105	477
1400119200	477
1400119201	477
1400119205	477
1400119300	477
1400119301	477
1400119305	477
1400119400	477
1400119401	477
1400119405	477
1400119500	477
1400119501	477
1400119505	477
1400119600	477
1400119601	477
1400119605	477
1400119700	477
1400119701	477
1400119705	477
1400119800	477
1400119801	477
1400119805	477
1400119900	477
1400119901	477
1400119905	477
1400120000	477
1400120001	477
1400120005	477
1400120100	477
1400120101	477
1400120105	477
1400120200	477
1400120201	477
1400120205	477
1400120300	477
1400120301	477
1400120305	477
1400120400	477
1400120401	477
1400120405	477
1400120500	477
1400120501	477
1400120505	477
1400120600	477
1400120601	477
1400120605	477
1400120700	477
1400120701	477
1400120705	477
1400120800	477
1400120801	477
1400120805	477
1400120900	477
1400120901	477

EDP Number	Page No.
1400120905	477
1400121000	478
1400121001	478
1400121005	478
1400121100	478
1400121101	478
1400121105	478
1400121200	478
1400121201	478
1400121205	478
1400121300	478
1400121301	478
1400121305	478
1400121400	478
1400121401	478
1400121405	478
1400121500	478
1400121501	478
1400121505	478
1400121600	478
1400121601	478
1400121605	478
1400121700	478
1400121701	478
1400121705	478
1400121800	478
1400121801	478
1400121805	478
1400121900	478
1400121901	478
1400121905	478
1400122000	478
1400122001	478
1400122005	478
1400122100	478
1400122101	478
1400122105	478
1400122200	478
1400122201	478
1400122205	478
1400122300	478
1400122301	478
1400122305	478
1400122400	478
1400122401	478
1400122405	478
1400122500	478
1400122501	478
1400122505	478
1400122600	478
1400122601	478
1400122605	478
1400122700	478
1400122701	478
1400122705	478
1400122800	478



EDP Number	Page No.
1400122801	478
1400122805	478
1400122900	478
1400122901	478
1400122905	478
1400123000	478
1400123001	478
1400123005	478
1400123100	478
1400123101	478
1400123105	478
1400123200	478
1400123201	478
1400123205	478
1400123300	478
1400123301	478
1400123305	478
1400123400	478
1400123401	478
1400123405	478
1400123500	478
1400123501	478
1400123505	478
1400123600	478
1400123601	478
1400123605	478
1400123700	478
1400123701	478
1400123705	478
1400123800	478
1400123801	478
1400123805	478
1400123900	478
1400123901	478
1400123905	478
1400124000	478
1400124001	478
1400124005	478
1400124100	478
1400124101	478
1400124105	478
1400124200	478
1400124201	478
1400124205	478
1400124300	478
1400124301	478
1400124305	478
1400124400	478
1400124401	478
1400124405	478
1400124500	478
1400124501	478
1400124505	478
1400124600	478
1400124601	478
1400124605	478

EDP Number	Page No.
1400124700	478
1400124701	478
1400124705	478
1400124800	478
1400124801	478
1400124805	478
1400124900	478
1400124901	478
1400124905	478
1400125000	478
1400125001	478
1400125005	478
1400125100	478
1400125101	478
1400125105	478
1400125200	478
1400125201	478
1400125205	478
1400125300	478
1400125301	478
1400125305	478
1400125400	478
1400125401	478
1400125405	478
1400125500	478
1400125501	478
1400125505	478
1400125600	478
1400125601	478
1400125605	478
1400125700	479
1400125701	479
1400125705	479
1400125800	479
1400125801	479
1400125805	479
1400125900	479
1400125901	479
1400125905	479
1400126000	479
1400126001	479
1400126005	479
1400126100	479
1400126101	479
1400126105	479
1400126200	479
1400126201	479
1400126205	479
1400126300	479
1400126301	479
1400126305	479
1400126400	479
1400126401	479
1400126405	479
1400126500	479
1400126501	479

EDP Number	Page No.
1400126505	479
1400126600	479
1400126601	479
1400126605	479
1400126700	479
1400126701	479
1400126705	479
1400126800	479
1400126801	479
1400126805	479
1400126900	479
1400126901	479
1400126905	479
1400127000	479
1400127001	479
1400127005	479
1400127100	479
1400127101	479
1400127105	479
1400127200	479
1400127201	479
1400127205	479
1400127300	479
1400127301	479
1400127305	479
1400127400	479
1400127401	479
1400127405	479
1400127500	479
1400127501	479
1400127505	479
1400127600	479
1400127601	479
1400127605	479
1400127700	479
1400127701	479
1400127705	479
1400127800	479
1400127801	479
1400127805	479
1400127900	479
1400127901	479
1400127905	479
1400128000	479
1400128001	479
1400128005	479
1400128100	479
1400128101	479
1400128105	479
1400128200	479
1400128201	479
1400128205	479
1400128300	479
1400128301	479
1400128305	479
1400128400	479

EDP Number	Page No.
1400128401	479
1400128405	479
1400128500	479
1400128501	479
1400128505	479
1400128600	479
1400128601	479
1400128605	479
1400128700	479
1400128701	479
1400128705	479
1400128800	479
1400128801	479
1400128805	479
1400128900	479
1400128901	479
1400128905	479
1400129000	479
1400129001	479
1400129005	479
1400129100	479
1400129101	479
1400129105	479
1400129200	479
1400129201	479
1400129205	479
1400129300	479
1400129301	479
1400129305	479
1400129400	479
1400129401	479
1400129405	479
1400129500	479
1400129501	479
1400129505	479
1400129600	479
1400129601	479
1400129605	479
1400129700	479
1400129701	479
1400129705	479
1400129800	480
1400129801	480
1400129805	480
1400129900	480
1400129901	480
1400129905	480
1400130000	480
1400130001	480
1400130005	480
1400130100	480
1400130101	480
1400130105	480
1400130200	480
1400130201	480
1400130205	480



EDP Number	Page No.
1400130300	480
1400130301	480
1400130305	480
1400130400	480
1400130401	480
1400130405	480
1400130500	480
1400130501	480
1400130505	480
1400130600	480
1400130601	480
1400130605	480
1400130700	480
1400130701	480
1400130705	480
1400130800	480
1400130801	480
1400130805	480
1400130900	480
1400130901	480
1400130905	480
1400131000	480
1400131001	480
1400131005	480
1400131100	480
1400131101	480
1400131105	480
1400131200	480
1400131201	480
1400131205	480
1400131300	480
1400131301	480
1400131305	480
1400131400	480
1400131401	480
1400131405	480
1400131500	480
1400131501	480
1400131505	480
1400131600	480
1400131601	480
1400131605	480
1400131700	480
1400131701	480
1400131705	480
1400131800	480
1400131801	480
1400131805	480
1400131900	480
1400131901	480
1400131905	480
1400132000	480
1400132001	480
1400132005	480
1400132100	480
1400132101	480

EDP Number	Page No.
1400132105	480
1400132200	480
1400132201	480
1400132205	480
1400132300	480
1400132301	480
1400132305	480
1400132400	480
1400132401	480
1400132405	480
1400132500	480
1400132501	480
1400132505	480
1400132600	480
1400132601	480
1400132605	480
1400132700	480
1400132701	480
1400132705	480
1400132800	480
1400132801	480
1400132805	480
1400132900	480
1400132901	480
1400132905	480
1400133000	480
1400133001	480
1400133005	480
1400133100	480
1400133101	480
1400133105	480
1400133200	480
1400133201	480
1400133205	480
1400133300	480
1400133301	480
1400133305	480
1400133400	480
1400133401	480
1400133405	480
1400133500	480
1400133501	480
1400133505	480
1400133600	480
1400133601	480
1400133605	480
1400133700	480
1400133701	480
1400133705	480
1400133800	480
1400133801	480
1400133805	480
1400133900	480
1400133901	480
1400133905	480
1400134000	480

EDP Number	Page No.
1400134001	480
1400134005	480
1400134100	480
1400134101	480
1400134105	480
1400134200	480
1400134201	480
1400134205	480
1400134300	480
1400134301	480
1400134305	480
1400134400	480
1400134401	480
1400134405	480
1400134500	481
1400134501	481
1400134505	481
1400134600	481
1400134601	481
1400134605	481
1400134700	481
1400134701	481
1400134705	481
1400134800	481
1400134801	481
1400134805	481
1400134900	481
1400134901	481
1400134905	481
1400135000	481
1400135001	481
1400135005	481
1400135100	481
1400135101	481
1400135105	481
1400135200	481
1400135201	481
1400135205	481
1400135300	481
1400135301	481
1400135305	481
1400135400	481
1400135401	481
1400135405	481
1400135500	481
1400135501	481
1400135505	481
1400135600	481
1400135601	481
1400135605	481
1400135700	481
1400135701	481
1400135705	481
1400135800	481
1400135801	481
1400135805	481

EDP Number	Page No.
1400135900	481
1400135901	481
1400135905	481
1400136000	481
1400136001	481
1400136005	481
1400136100	481
1400136101	481
1400136105	481
1400136200	481
1400136201	481
1400136205	481
1400136300	481
1400136301	481
1400136305	481
1400136400	481
1400136401	481
1400136405	481
1400136500	481
1400136501	481
1400136505	481
1400136600	481
1400136601	481
1400136605	481
1400136700	481
1400136701	481
1400136705	481
1400136800	481
1400136801	481
1400136805	481
1400136900	481
1400136901	481
1400136905	481
1400137000	481
1400137001	481
1400137005	481
1400137100	481
1400137101	481
1400137105	481
1400137200	481
1400137201	481
1400137205	481
1400137300	481
1400137301	481
1400137305	481
1400137400	481
1400137401	481
1400137405	481
1400137500	481
1400137501	481
1400137505	481
1400137600	481
1400137601	481
1400137605	481
1400137700	481
1400137701	481



EDP Number	Page No.
1400137705	481
1400137800	481
1400137801	481
1400137805	481
1400137900	481
1400137901	481
1400137905	481
1400138000	481
1400138001	481
1400138005	481
1400138100	481
1400138101	481
1400138105	481
1400138200	481
1400138201	481
1400138205	481
1400138300	481
1400138301	481
1400138305	481
1400138400	481
1400138401	481
1400138405	481
1400138500	481
1400138501	481
1400138505	481
1400138600	481
1400138601	481
1400138605	481
1400138700	481
1400138701	481
1400138705	481
1400138800	481
1400138801	481
1400138805	481
1400138900	481
1400138901	481
1400138905	481
1400139000	482
1400139001	482
1400139005	482
1400139100	482
1400139101	482
1400139105	482
1400139200	482
1400139201	482
1400139205	482
1400139300	482
1400139301	482
1400139305	482
1400139400	482
1400139401	482
1400139405	482
1400139500	482
1400139501	482
1400139505	482
1400139600	482

EDP Number	Page No.
1400139601	482
1400139605	482
1400139700	482
1400139701	482
1400139705	482
1400139800	482
1400139801	482
1400139805	482
1400139900	482
1400139901	482
1400139905	482
1400140000	482
1400140001	482
1400140005	482
1400140100	482
1400140101	482
1400140105	482
1400140200	482
1400140201	482
1400140205	482
1400140300	482
1400140301	482
1400140305	482
1400140400	482
1400140401	482
1400140405	482
1400140500	482
1400140501	482
1400140505	482
1400140600	482
1400140601	482
1400140605	482
1400140700	482
1400140701	482
1400140705	482
1400140800	482
1400140801	482
1400140805	482
1400140900	482
1400140901	482
1400140905	482
1400141000	482
1400141001	482
1400141005	482
1400141100	482
1400141101	482
1400141105	482
1400141200	482
1400141201	482
1400141205	482
1400141300	482
1400141301	482
1400141305	482
1400141400	482
1400141401	482
1400141405	482

EDP Number	Page No.
1400141500	482
1400141501	482
1400141505	482
1400141600	482
1400141601	482
1400141605	482
1400141700	482
1400141701	482
1400141705	482
1400141800	482
1400141801	482
1400141805	482
1400141900	482
1400141901	482
1400141905	482
1400142000	482
1400142001	482
1400142005	482
1400142100	482
1400142101	482
1400142105	482
1400142200	482
1400142201	482
1400142205	482
1400142300	482
1400142301	482
1400142305	482
1400142400	482
1400142401	482
1400142405	482
1400142500	482
1400142501	482
1400142505	482
1400142600	482
1400142601	482
1400142605	482
1400142700	482
1400142701	482
1400142705	482
1400142800	482
1400142801	482
1400142805	482
1400142900	482
1400142901	482
1400142905	482
1400143000	482
1400143001	482
1400143005	482
1400143100	482
1400143101	482
1400143105	482
1400143200	482
1400143201	482
1400143205	482
1400143300	482
1400143301	482

EDP Number	Page No.
1400143305	482
1400143400	482
1400143401	482
1400143405	482
1400143500	482
1400143501	482
1400143505	482
1400143600	482
1400143601	482
1400143605	482
1400143700	482
1400143701	482
1400143705	482
1400143800	482
1400143801	482
1400143805	482
1400143900	483
1400143901	483
1400143905	483
1400144000	483
1400144001	483
1400144005	483
1400144100	483
1400144101	483
1400144105	483
1400144200	483
1400144201	483
1400144205	483
1400144300	483
1400144301	483
1400144305	483
1400144400	483
1400144401	483
1400144405	483
1400144500	483
1400144501	483
1400144505	483
1400144600	483
1400144601	483
1400144605	483
1400144700	483
1400144701	483
1400144705	483
1400144800	483
1400144801	483
1400144805	483
1400144900	483
1400144901	483
1400144905	483
1400145000	483
1400145001	483
1400145005	483
1400145100	483
1400145101	483
1400145105	483
1400145200	483



EDP Numerical Index

EDP Number	Page No.
1400145201	483
1400145205	483
1400145300	483
1400145301	483
1400145305	483
1400145400	483
1400145401	483
1400145405	483
1400145500	483
1400145501	483
1400145505	483
1400145600	483
1400145601	483
1400145605	483
1400145700	483
1400145701	483
1400145705	483
1400145800	483
1400145801	483
1400145805	483
1400145900	483
1400145901	483
1400145905	483
1400146000	483
1400146001	483
1400146005	483
1400146100	483
1400146101	483
1400146105	483
1400146200	483
1400146201	483
1400146205	483
1400146300	483
1400146301	483
1400146305	483
1400146400	483
1400146401	483
1400146405	483
1400146500	483
1400146501	483
1400146505	483
1400146600	483
1400146601	483
1400146605	483
1400146700	483
1400146701	483
1400146705	483
1400146800	483
1400146801	483
1400146805	483
1400146900	483
1400146901	483
1400146905	483
1400147000	483
1400147001	483
1400147005	483

EDP Number	Page No.
1400147100	483
1400147101	483
1400147105	483
1400147200	483
1400147201	483
1400147205	483
1400147300	483
1400147301	483
1400147305	483
1400147400	483
1400147401	483
1400147405	483
1400147500	483
1400147501	483
1400147505	483
1400147600	483
1400147601	483
1400147605	483
1400147700	483
1400147701	483
1400147705	483
1400147800	483
1400147801	483
1400147805	483
1400147900	483
1400147901	483
1400147905	483
1400148000	483
1400148001	483
1400148005	483
1400148100	483
1400148101	483
1400148105	483
1400148200	484
1400148201	484
1400148205	484
1400148300	484
1400148301	484
1400148305	484
1400148400	484
1400148401	484
1400148405	484
1400148500	484
1400148501	484
1400148505	484
1400148600	484
1400148601	484
1400148605	484
1400148700	484
1400148701	484
1400148705	484
1400148800	484
1400148801	484
1400148805	484
1400148900	484
1400148901	484

EDP Number	Page No.
1400148905	484
1400149000	484
1400149001	484
1400149005	484
1400149100	484
1400149101	484
1400149105	484
1400149200	484
1400149201	484
1400149205	484
1400149300	484
1400149301	484
1400149305	484
1400149400	484
1400149401	484
1400149405	484
1400149500	484
1400149501	484
1400149505	484
1400149600	484
1400149601	484
1400149605	484
1400149700	484
1400149701	484
1400149705	484
1400149800	484
1400149801	484
1400149805	484
1400149900	484
1400149901	484
1400149905	484
1400150000	484
1400150001	484
1400150005	484
1400150100	484
1400150101	484
1400150105	484
1400150200	484
1400150201	484
1400150205	484
1400150300	484
1400150301	484
1400150305	484
1400150400	484
1400150401	484
1400150405	484
1400150500	484
1400150501	484
1400150505	484
1400150600	484
1400150601	484
1400150605	484
1400150700	484
1400150701	484
1400150705	484
1400150800	484

EDP Number	Page No.
1400150801	484
1400150805	484
1400150900	484
1400150901	484
1400150905	484
1400151000	484
1400151001	484
1400151005	484
1400151100	484
1400151101	484
1400151105	484
1400151200	484
1400151201	484
1400151205	484
1400151300	484
1400151301	484
1400151305	484
1400151400	484
1400151401	484
1400151405	484
1400151500	484
1400151501	484
1400151505	484
1400151600	484
1400151601	484
1400151605	484
1400151700	484
1400151701	484
1400151705	484
1400151800	484
1400151801	484
1400151805	484
1400151900	484
1400151901	484
1400151905	484
1400152000	484
1400152001	484
1400152005	484
1400152100	484
1400152101	484
1400152105	484
1400152200	484
1400152201	484
1400152205	484
1400152300	484
1400152301	484
1400152305	484
1400152400	484
1400152401	484
1400152405	484
1400152500	484
1400152501	484
1400152505	484
1400152600	484
1400152601	484
1400152605	484



EDP Number	Page No.
1400152700	484
1400152701	484
1400152705	484
1400152800	484
1400152801	484
1400152805	484
1400152900	484
1400152901	484
1400152905	484
1400153000	484
1400153001	484
1400153005	484
1400153100	484
1400153101	484
1400153105	484
1400153200	485
1400153201	485
1400153205	485
1400153300	485
1400153301	485
1400153305	485
1400153400	485
1400153401	485
1400153405	485
1400153500	485
1400153501	485
1400153505	485
1400153600	485
1400153601	485
1400153605	485
1400153700	485
1400153701	485
1400153705	485
1400153800	485
1400153801	485
1400153805	485
1400153900	485
1400153901	485
1400153905	485
1400154000	485
1400154001	485
1400154005	485
1400154100	485
1400154101	485
1400154105	485
1400154200	485
1400154201	485
1400154205	485
1400154300	485
1400154301	485
1400154305	485
1400154400	485
1400154401	485
1400154405	485
1400154500	485
1400154501	485

EDP Number	Page No.
1400154505	485
1400154600	485
1400154601	485
1400154605	485
1400154700	485
1400154701	485
1400154705	485
1400154800	485
1400154801	485
1400154805	485
1400154900	485
1400154901	485
1400154905	485
1400155000	485
1400155001	485
1400155005	485
1400155100	485
1400155101	485
1400155105	485
1400155200	485
1400155201	485
1400155205	485
1400155300	485
1400155301	485
1400155305	485
1400155400	485
1400155401	485
1400155405	485
1400155500	485
1400155501	485
1400155505	485
1400155600	485
1400155601	485
1400155605	485
1400155700	485
1400155701	485
1400155705	485
1400155800	485
1400155801	485
1400155805	485
1400155900	485
1400155901	485
1400155905	485
1400156000	485
1400156001	485
1400156005	485
1400156100	485
1400156101	485
1400156105	485
1400156200	485
1400156201	485
1400156205	485
1400156300	485
1400156301	485
1400156305	485
1400156400	485

EDP Number	Page No.
1400156401	485
1400156405	485
1400156500	485
1400156501	485
1400156505	485
1400156600	485
1400156601	485
1400156605	485
1400156700	485
1400156701	485
1400156705	485
1400156800	485
1400156801	485
1400156805	485
1400156900	485
1400156901	485
1400156905	485
1400157000	485
1400157001	485
1400157005	485
1400157100	477
1400157101	477
1400157105	477
1400157200	477
1400157201	477
1400157205	477
1400157300	474
1400157301	474
1400157305	474
1400157400	474
1400157401	474
1400157405	474
1400157500	475
1400157501	475
1400157600	475
1400157601	475
1400157700	475
1400157701	475
1400157800	473
1400157900	473
1400158000	474
1400158100	474
1400158200	474
1400158300	475
1400158400	475
1400158500	476
1400158600	476
1400158700	478
1400158800	478
1400158900	479
1400159000	479
1400159100	479
1400159200	479
1400159300	480
1400159400	480
1400159500	482

EDP Number	Page No.
1400159600	483
1400159700	483
1400159800	474
1400159900	475
1400160000	476
1400160100	478
1405000008	468
1405000108	468
1405000208	468
1405000308	468
1405000408	468
1405000508	468
1405000608	468
1405000708	468
1405000808	468
1405000908	468
1405001008	468
1405001108	468
1405001208	468
1405001308	468
1405001408	468
1405001508	468
1405001608	468
1405001708	468
1405001808	468
1405001908	468
1405002008	468
1405002108	468
1405002208	468
1405002308	468
1405002408	468
1405002508	468
1405002608	468
1405002708	468
1405002808	468
1405002908	468
1405003008	468
1405003108	468
1405003208	468
1405003308	468
1405003408	468
1405003508	468
1405003608	468
1405003708	468
1405003808	468
1405003908	468
1405004008	468
1405004108	468
1405004208	468
1405004308	468
1405004408	468
1405004508	468
1405004608	468
1405004708	468
1405004808	469
1405004908	469



EDP Numerical Index

EDP Number	Page No.
1405005008	469
1405005108	469
1405005208	469
1405005308	469
1405005408	469
1405005508	469
1405005608	469
1405005708	469
1405005808	469
1405005908	469
1405006008	469
1405006108	469
1405006208	469
1405006308	469
1405006408	469
1405006508	469
1405006608	469
1405006708	469
1405006808	469
1405006908	469
1405007008	469
1405007108	469
1405007208	469
1405007308	469
1405007408	469
1405007508	469
1405007608	469
1405007708	469
1405007808	469
1405007908	469
1405008008	469
1405008108	469
1405008208	469
1405008308	469
1405008408	469
1405008508	469
1405008608	469
1405008708	469
1405008808	469
1405008908	470
1405009008	470
1405009108	470
1405009208	470
1405009308	470
1405009408	470
1405009508	470
1405009608	470
1405009708	470
1405009808	470
1405009908	470
1405010008	470
1405010108	470
1405010208	470
1405010308	470
1405010408	470
1405010508	470

EDP Number	Page No.
1405010608	470
1405010708	470
1405010808	470
1405010908	470
1405011008	470
1405011108	470
1405011208	470
1405011308	470
1405011408	470
1405011508	470
1405011608	470
1405011708	470
1405011808	470
1405011908	470
1405012008	470
1405012108	470
1405012208	470
1405012308	470
14060000	556
14061000	556
14064000	556
14064001	556
14064005	556
14064008	556
14065000	556
14065001	556
14065005	556
14065008	556
14070000	556
14070008	556
14071000	556
14071008	556
1410100000	486
1410100001	486
1410100005	486
1410100010	486
1410100101	486
1410100105	486
1410100200	486
1410100201	486
1410100205	486
1410100300	486
1410100301	486
1410100305	486
1410100400	486
1410100401	486
1410100405	486
1410100500	486
1410100501	486
1410100505	486
1410100600	486
1410100601	486
1410100605	486
1410100700	486
1410100701	486
1410100705	486

EDP Number	Page No.
1410100800	486
1410100801	486
1410100805	486
1410100900	486
1410100901	486
1410100905	486
1410101000	486
1410101001	486
1410101005	486
1410101100	486
1410101101	486
1410101105	486
1410101200	486
1410101201	486
1410101205	486
1410101300	486
1410101301	486
1410101305	486
1410101400	486
1410101401	486
1410101405	486
1410101500	486
1410101501	486
1410101505	486
1410101600	486
1410101601	486
1410101605	486
1410101700	486
1410101701	486
1410101705	486
1410101800	486
1410101801	486
1410101805	486
1410101900	486
1410101901	486
1410101905	486
1410102000	486
1410102001	486
1410102005	486
1410102100	486
1410102101	486
1410102105	486
1410102200	486
1410102201	486
1410102205	486
1410102300	486
1410102301	486
1410102305	486
1410102400	486
1410102401	486
1410102405	486
1410102500	486
1410102501	486
1410102505	486
1410102600	486
1410102601	486

EDP Number	Page No.
1410102605	486
1410102700	486
1410102701	486
1410102705	486
1410102800	487
1410102801	487
1410102805	487
1410102900	487
1410102901	487
1410102905	487
1410103000	487
1410103001	487
1410103005	487
1410103100	487
1410103101	487
1410103105	487
1410103200	487
1410103201	487
1410103205	487
1410103300	487
1410103301	487
1410103305	487
1410103400	487
1410103401	487
1410103405	487
1410103500	487
1410103501	487
1410103505	487
1410103600	487
1410103601	487
1410103605	487
1410103700	487
1410103701	487
1410103705	487
1410103800	487
1410103801	487
1410103805	487
1410103900	487
1410103901	487
1410103905	487
1410104000	487
1410104001	487
1410104005	487
1410104100	487
1410104101	487
1410104105	487
1410104200	487
1410104201	487
1410104205	487
1410104300	487
1410104301	487
1410104305	487
1410104400	487
1410104401	487
1410104405	487
1410104500	487



EDP Number	Page No.
1410104501	487
1410104505	487
1410104600	487
1410104601	487
1410104605	487
1410104700	487
1410104701	487
1410104705	487
1410104800	487
1410104801	487
1410104805	487
1410104900	487
1410104901	487
1410104905	487
1410105000	487
1410105001	487
1410105005	487
1410105100	488
1410105101	488
1410105105	488
1410105200	488
1410105201	488
1410105205	488
1410105300	488
1410105301	488
1410105305	488
1410105400	488
1410105401	488
1410105405	488
1410105500	488
1410105501	488
1410105505	488
1410105600	488
1410105601	488
1410105605	488
1410105700	488
1410105701	488
1410105705	488
1410105800	488
1410105801	488
1410105805	488
1410105900	488
1410105901	488
1410105905	488
1410106000	486
1410106100	486
1410106200	486
1410106300	486
1410106400	486
1410106500	486
1410106600	486
1410106700	486
1410106800	486
1410106900	486
1410107000	486
1410107100	486

EDP Number	Page No.
1410107200	486
1410107300	486
1410107400	486
1410107500	486
1410107600	486
1410107700	486
1410107800	486
1410107900	486
1410108000	486
1410108100	487
1410108200	487
1410108300	487
1410108400	487
1410108500	487
1410108600	487
1410108700	487
1410108800	487
1410108900	487
1410109000	487
1410109100	487
1410109200	487
1410109300	487
1410109400	487
1410109500	487
1410109600	487
1410109700	487
1410109800	487
1410109900	487
1410110000	487
1410110100	488
1410110200	488
1410110300	488
1410110500	487
1410110600	487
1410110700	486
1411	698
1412	698
1412400	556
1412401	556
1412405	556
1412408	556
1412500	556
1412501	556
1412505	556
1412508	556
1412800	556
1412805	556
1412808	556
1412900	556
1412901	556
1412905	556
1412908	556
1413	698
1413200	556
1413205	556
1413208	556

EDP Number	Page No.
1413300	556
1413301	556
1413305	556
1413308	556
1413400	556
1413405	556
1413408	556
1413500	556
1413501	556
1413505	556
1413508	556
1413600	556
1413700	556
1413701	556
1413708	556
1415000008	471
1415000108	471
1415000208	471
1415000308	471
1415000408	471
1415000508	471
1415000608	471
1415000708	471
1415000808	471
1415000908	471
1415001008	471
1415001108	471
1415001208	471
1415001308	471
1415001408	471
1415001508	471
1415001608	471
1415001708	471
1415001808	471
1415001908	471
1415002008	471
1415002108	471
1415002208	471
1415002308	471
1415002408	471
1415002508	471
1415002608	471
1415002708	471
1415002808	471
1415002908	471
1415003008	471
1415003108	471
1415003208	471
1415003308	471
1415003408	472
1415003508	472
1415003608	472
1415003708	472
1415003808	471
1415003908	471
1415004008	471

EDP Number	Page No.
1415004108	471
1415004208	472
1415004308	472
1415004408	472
1415004508	472
1415004608	472
1415004708	472
1415004808	472
1415004908	472
1415310100	465
1415310200	465
1415310300	465
1415310400	465
1430000	556
1430001	556
1430005	556
1430008	556
1430100	556
1430101	556
1430105	556
1430108	556
1430200	556
1430205	556
1430208	556
1430300	556
1430305	556
1430308	556
1430400	556
1430401	556
1430405	556
1430408	556
1430500	556
1430501	556
1430505	556
1430508	556
1430600	556
1430605	556
1430608	556
1430700	556
1430705	556
1430708	556
1430800	556
1430801	556
1430805	556
1430808	556
1430900	556
1430901	556
1430905	556
1430908	556
1431000	556
1431005	556
1431008	556
1431100	556
1431105	556
1431108	556
1431200	556



EDP Number	Page No.
1431205	556
1431208	556
1431300	556
1431305	556
1431308	556
1431600	556
1431605	556
1431608	556
1431700	556
1431705	556
1431708	556
1432000	556
1432001	556
1432005	556
1432008	556
1432100	556
1432101	556
1432105	556
1432108	556
1432400	556
1432405	556
1432408	556
1432500	556
1432505	556
1432508	556
1432800	556
1432808	556
1432900	556
1432905	556
1432908	556
1433200	556
1433208	556
1433300	556
1433305	556
1433308	556
1433600	556
1433605	556
1433608	556
1433700	556
1433705	556
1433708	556
1434000	556
1434008	556
1434100	556
1434105	556
1434108	556
1500100100	757
1500100200	757
1500100300	757
1500100400	757
1500100500	757
1500100600	757
1500100700	757
1500100800	757
1500100900	757
1500101000	757

EDP Number	Page No.
1500101100	757
1500101200	757
1500101300	757
1500101400	757
1500101500	757
1500101600	757
1500101700	757
1500101800	757
1500101900	757
1500102000	757
1500102100	757
1500102200	757
1500102300	757
1500102400	757
1500102500	757
1500102600	757
1500102700	757
1500102800	757
1500102900	757
1500103000	757
1500103100	757
1500103200	757
1500103300	757
1500103400	757
1500103500	757
1500103600	757
1500103700	757
1500103800	757
1500103900	757
1500104000	757
1500104100	757
1500104200	757
1500104300	757
1500104400	757
1500104500	757
1500200100	758
1500200200	758
1500200300	758
1500200400	758
1500200500	758
1500200600	758
1500200700	758
1500200800	758
1500200900	758
1500201000	758
1500201100	758
1500201200	758
1500201300	758
1500201400	758
1500201500	758
1500201600	758
1500201700	758
1500201800	758
1500201900	758
1500202000	758
1500202100	758

EDP Number	Page No.
1500202200	758
1500202300	758
1500202400	758
1500202500	758
1500202600	758
1500202700	758
1500202800	758
1501	698
1501000105	446
1501000205	446
1501500105	445
1501500205	445
1501500305	445
1501500405	445
1501500505	445
1501500605	445
1501500705	445
1501500805	445
1501500905	445
1501501005	445
1501501105	445
1501501205	445
1501501305	445
1501501405	445
1501501505	445
1502	698
1502000100	447
1502000200	447
1502000300	447
1502000400	447
1502000500	447
1502000600	447
1502000700	447
1503	698
15078505	263
15081005	263
15082005	263
15086005	263
15089005	263
15093505	263
15093805	263
15096005	263
15098005	263
15099505	263
15101505	263
15104005	263
15106505	263
15109405	263
15110005	263
15111005	263
15113005	263
15116005	263
15120005	263
15125005	263
15128505	263
15136005	263

EDP Number	Page No.
15140505	263
15140605	263
15144005	263
15147005	263
15149505	263
15152005	263
15154005	263
15156205	263
15157005	263
15159005	263
15161005	263
15166005	263
15169505	263
15171905	263
15173005	263
15177005	263
15180005	264
15182005	264
15185005	264
15187505	264
15189005	264
15191005	264
15193505	264
15196005	264
15199005	264
15201005	264
15203105	264
15204005	264
15205505	264
15209005	264
15213005	264
15218805	264
1522	698
15221005	264
15228005	264
1523	698
15234005	264
15234405	264
15238005	264
15242005	264
15246005	264
15250005	264
15257005	264
15261005	264
15265605	264
15272005	264
15277005	264
15281205	264
15290005	264
15295005	264
15296905	264
15302005	264
15312505	264
15316005	264
15323005	264
15328105	264



EDP Number	Page No.
15332005	264
15339005	264
15343805	264
15348005	264
15358005	264
15359405	264
15368	644
15368005	264
15375005	264
15377005	264
15386	644
15386005	265
15390605	265
15397005	265
15401	644
15404005	265
15406205	265
15413	644
15413005	265
15421905	265
15431	644
15437505	265
15453105	265
15456	644
15460	644
15468805	265
15480	644
15483	644
15484405	265
15500005	265
15509	644
15512	644
15531205	265
15557	644
15560	644
15562505	265
15578105	265
15593	644
15593805	265
15601	644
15625005	265
15629	644
15637	644
15645	644
15656205	265
15673	644
15687505	265
15718805	265
15750005	265
1590000	641
1590001	641
1590008	641
1590100	690
1590101	690
1590108	690
1590200	641

EDP Number	Page No.
1590201	641
1590208	641
1590300	690
1590301	690
1590308	690
1590700	690
1590701	690
1590708	690
1590800	641
1590801	641
1590808	641
1591100	690
1591108	690
1591200	641
1591208	641
1591300	690
1591308	690
1591500	690
1591508	690
1591600	641
1591601	641
1591608	641
1591800	641
1591801	641
1591808	641
1591900	690
1592000	641
1592001	641
1592008	641
1592100	690
1592400	641
1592401	641
1592408	641
1592500	690
1592508	690
1592600	641
1592601	641
1592608	641
1592700	690
1592708	690
1592800	641
1592801	641
1592808	641
1593200	641
1593201	641
1593208	641
1593400	641
1593401	641
1593408	641
1593500	693
1593600	641
1593601	641
1593608	641
1593700	690
1593708	690
1593800	641

EDP Number	Page No.
1593801	641
1593808	641
1594000	641
1594001	641
1594008	641
1594200	641
1594201	641
1594208	641
1594300	693
1594700	690
1594701	690
1594900	693
1595100	693
1595101	693
1600007	686
1600107	686
1600207	686
1600307	686
1600407	686
1600507	686
1600607	686
1600707	686
1600807	686
1600907	686
1601	698
1601007	686
1601107	686
1601207	686
1601307	686
1601407	686
1601507	686
1601607	686
1601707	686
1601807	686
1601907	686
1602	698
1602007	686
1602107	686
1602207	686
1602307	686
1602407	686
1602507	686
1602607	686
1602707	686
1602807	686
1602907	686
1603	698
1603007	686
1603107	686
1603207	686
1603307	686
1603407	686
1603507	686
1603607	686
1603707	686
1603807	686

EDP Number	Page No.
1603907	686
1604007	686
1604107	686
1604207	686
1604307	686
1604407	686
1604507	686
1604607	686
1604707	686
1604807	686
1604907	686
1605001081	449
1605001088	449
1605001121	449
1605001128	449
1605007	686
1605011211	449
1605011241	449
1605011268	449
1605011288	449
1605011826	449
1605011878	449
1605011888	449
1605012118	448
1605012126	449
1605012135	448
1605012138	448
1605012148	448
1605012205	448
1605012208	448
1605012218	448
1605012248	448
1605012526	449
1605012578	449
1605012588	449
1605013126	449
1605013768	449
1605013788	449
1605014204	448
1605014206	448
1605014216	448
1605014246	448
1605014284	448
1605014286	448
1605014816	448
1605014846	448
1605016288	449
1605017558	449
1605017588	449
1605018111	449
1605018411	449
1605034100	449
1605034107	449
1605034110	449
1605034140	449
1605034160	449





EDP Number	Page No.
1605034167	449
1605034610	449
1605034640	449
1605038117	448
1605038147	448
1605038165	448
1605038167	448
1605038217	448
1605038245	448
1605038247	448
1605038447	448
1605051617	448
1605051647	448
1605056185	448
1605056187	448
1605056217	448
1605056245	448
1605056247	448
1605056447	448
1605058110	448
1605058117	448
1605058140	448
1605058150	448
1605058180	449
1605058187	449
1605058810	449
1605058840	449
1605076118	448
1605076145	448
1605076148	448
1605076205	448
1605076208	448
1605076218	448
1605076248	448
1605076448	448
1605078111	449
1605078141	449
1605078142	449
1605078148	449
1605078149	449
1605078901	449
1605078908	449
1605078911	449
1605078941	449
1605091110	448
1605091140	448
1605091810	448
1605091840	448
1605096120	448
1605096127	448
1605096180	448
1605096187	448
1605207	686
1605400	639
1605401	639
1606000	639

EDP Number	Page No.
1608107	687
1608207	687
1608307	687
1608407	687
1608507	687
1608607	687
1608707	687
1608807	687
1611400	639
1611401	639
1611800	639
1611801	639
1612200	639
1612201	639
1612400	639
1612401	639
1612600	639
1612601	639
1615006015	450
1615006018	450
1615006754	450
1615006757	450
1615007015	450
1615007018	450
1615008015	450
1615008018	450
1615008255	450
1615008259	450
1615008754	450
1615008757	450
1615010015	450
1615010018	450
1615010110	450
1615010118	450
1615010119	450
1615010140	450
1615010148	450
1615010149	450
1615010150	450
1615010156	450
1615010255	450
1615010259	450
1615010751	450
1615012100	450
1615012106	450
1615012110	450
1615012111	450
1615012140	450
1615012141	450
1615012151	450
1615012156	450
1615012210	450
1615012240	450
1615012250	450
1615012256	450
1615012541	450

EDP Number	Page No.
1615012711	450
1615012756	450
1615014022	451
1615014027	451
1615014151	451
1615014156	451
1615014212	451
1615014242	451
1615014511	451
1615014541	451
1615016111	451
1615016141	451
1615016151	451
1615016152	451
1615016202	451
1615016207	451
1615016212	451
1615016242	451
1615018111	451
1615018141	451
1615018151	451
1615018156	451
1615018212	451
1615018242	451
1615018252	451
1615018257	451
1615020111	451
1615020141	451
1615020151	451
1615020156	451
1615020212	451
1615020242	451
1615020252	451
1615020257	451
1615022111	451
1615022141	451
1615022151	451
1615022156	451
1615022202	451
1615022207	451
1615022212	451
1615022242	451
1615022252	451
1615022257	451
1615022512	451
1615022542	451
1615024111	452
1615024141	452
1615024151	452
1615024156	452
1615024203	452
1615024207	452
1615024223	452
1615024243	452
1615024305	452
1615024309	452

EDP Number	Page No.
1615024315	452
1615024345	452
1615024349	452
1615027309	452
1615030350	452
1615033350	452
1615036411	452
1615042451	452
1615045451	452
1615060118	450
1615060148	450
1615067517	450
1615067547	450
1615070118	450
1615070148	450
1615080118	450
1615080148	450
1615081219	450
1615081249	450
1615087517	450
1615087547	450
1625000802	453
1625000803	453
1625001081	456
1625001088	456
1625001121	456
1625001128	456
1625001642	453
1625001643	453
1625001722	453
1625001723	453
1625002562	453
1625002563	453
1625002642	453
1625002643	453
1625003482	453
1625003483	453
1625003562	453
1625003563	453
1625004403	453
1625004405	453
1625004483	453
1625004485	453
1625005403	453
1625005405	453
1625005443	454
1625005445	454
1625006323	454
1625006325	454
1625006403	454
1625006405	454
1625008013	453
1625008043	453
1625008323	454
1625008325	454
1625008363	454



EDP Number	Page No.
1625008365	454
1625010216	454
1625010244	454
1625010246	454
1625010249	454
1625010316	454
1625010324	454
1625010326	454
1625010346	454
1625011211	456
1625011241	456
1625011268	456
1625011288	456
1625011826	456
1625011878	456
1625011888	456
1625012118	455
1625012126	456
1625012135	455
1625012138	455
1625012148	455
1625012205	455
1625012208	455
1625012218	455
1625012245	454
1625012247	454
1625012248	455
1625012285	454
1625012287	454
1625012417	454
1625012447	454
1625012526	456
1625012578	456
1625012588	456
1625012817	454
1625012847	454
1625013126	456
1625013768	456
1625013788	456
1625014204	454
1625014206	454
1625014216	454
1625014246	454
1625014284	454
1625014286	454
1625014816	454
1625014846	454
1625016288	456
1625016413	453
1625016443	453
1625017213	453
1625017243	453
1625017558	456
1625017588	456
1625018111	456
1625018411	456

EDP Number	Page No.
1625025613	453
1625025643	453
1625026413	453
1625026443	453
1625034100	456
1625034107	456
1625034110	456
1625034140	456
1625034160	456
1625034167	456
1625034610	456
1625034640	456
1625034813	453
1625034843	453
1625035613	453
1625035643	453
1625038117	455
1625038147	455
1625038165	455
1625038167	455
1625038217	455
1625038245	455
1625038247	455
1625038249	455
1625044015	453
1625044045	453
1625044815	453
1625044845	453
1625051617	454
1625051647	454
1625054015	453
1625054045	454
1625054415	454
1625054445	454
1625056185	454
1625056187	454
1625056217	455
1625056245	455
1625056247	455
1625058110	455
1625058117	455
1625058140	455
1625058180	455
1625058187	455
1625058410	455
1625058810	455
1625058840	455
1625063215	454
1625063245	454
1625064015	454
1625064045	454
1625076118	455
1625076145	455
1625076148	455
1625076149	455

EDP Number	Page No.
1625076205	455
1625076208	455
1625076218	455
1625076248	455
1625078111	456
1625078141	456
1625078148	456
1625078149	456
1625078901	456
1625078908	456
1625078911	456
1625078941	456
1625083215	454
1625083245	454
1625083615	454
1625083645	454
1625091117	455
1625091147	455
1625091810	455
1625091840	455
1625096120	455
1625096127	455
1625096180	455
1625096187	455
1625510226	461
1625510256	461
1625510326	461
1625510426	461
1625511428	462
1625512028	462
1625512128	461
1625512227	461
1625512228	462
1625512257	461
1625512328	461
1625512427	461
1625512827	461
1625514026	461
1625514208	462
1625514226	461
1625514256	461
1625514826	461
1625518208	462
1625518258	462
1625531627	462
1625534027	462
1625534127	462
1625534627	462
1625538127	461
1625538227	461
1625538427	461
1625538627	461
1625551127	461
1625551227	461
1625551427	461
1625551827	462

EDP Number	Page No.
1625554025	461
1625554205	461
1625554255	461
1625554425	461
1625556127	461
1625558127	462
1625558257	462
1625558827	462
1625563225	461
1625563255	461
1625564025	461
1625564255	461
1625571128	461
1625571228	461
1625575258	462
1625576128	461
1625576228	461
1625578128	462
1625578428	462
1625579828	462
1625583225	461
1625583255	461
1625583625	461
1625586255	461
1625591127	462
1625591227	462
1625591827	462
1625596827	462
1626000108	705
1626000208	705
1626000308	705
1626000408	705
1626000508	705
1626000608	705
1626000708	705
1626000808	705
1626000908	705
1626001008	705
1626001108	705
1626001208	705
1626001308	705
1626001408	705
1626001508	705
1626001608	705
1626001708	705
1626001808	705
1626001908	705
1626002008	705
1626002108	705
1626002208	705
1626002308	705
1626002408	705
1626002508	705
1626002608	705
1626002708	705
1626002808	705



EDP Numerical Index

EDP Number	Page No.
1626002908	705
1626003008	705
1626003108	705
1626003208	705
1626003308	705
1626003408	705
1626003508	705
1626003608	705
1626003708	706
1626003808	706
1626003908	706
1626004008	706
1626004108	706
1626004208	706
1626004308	706
1626004408	706
1626004508	706
1626004608	706
1626004708	706
1626004808	706
1626004908	706
1626005008	706
1626005108	706
1626005208	706
1626005308	706
1626005408	706
1626005508	706
1626005608	706
1626005708	706
1626005808	706
1630000	639
1630001	639
1630100A-SO	299
1630100-SO	299
1630102A-SO	299
1630102-SO	299
1630104A-SO	299
1630104-SO	299
1630107A-SO	299
1630107-SO	299
1630109A-SO	299
1630109-SO	299
1630110A-SO	299
1630110-SO	299
1630115A-SO	299
1630118A-SO	299
1630118-SO	299
1630119A-SO	299
1630119-SO	299
1630120A-SO	299
1630120-SO	299
1630125-SO	299
1630130A-SO	299
1630130-SO	299
1630132A-SO	299
1630132-SO	299

EDP Number	Page No.
1630135A-SO	299
1630135-SO	299
1630139A-SO	299
1630139-SO	299
1630140A-SO	299
1630140-SO	299
1630145A-SO	299
1630145-SO	299
1630150A-SO	299
1630150-SO	299
1630152A-SO	299
1630152-SO	299
1630155A-SO	299
1630155-SO	299
1630159A-SO	299
1630159-SO	299
1630160A-SO	299
1630160-SO	299
1630161A-SO	299
1630161-SO	299
1630165A-SO	299
1630165-SO	299
1630167A-SO	299
1630167-SO	299
1630169A-SO	299
1630169-SO	299
1630170A-SO	299
1630170-SO	299
1630175A-SO	299
1630175-SO	299
1630178A-SO	299
1630178-SO	299
1630180A-SO	299
1630180-SO	299
1630185A-SO	299
1630185-SO	299
1630190A-SO	299
1630190-SO	299
1630193A-SO	299
1630193-SO	299
1630195A-SO	299
1630195-SO	299
1630198A-SO	299
1630198-SO	299
1630199A-SO	299
1630199-SO	299
1630200A-SO	299
1630200-SO	299
1630205A-SO	299
1630205-SO	299
1630206A-SO	299
1630206-SO	299
1630208A-SO	299
1630208-SO	299
1630210A-SO	300
1630210-SO	300

EDP Number	Page No.
1630215A-SO	300
1630215-SO	300
1630218A-SO	300
1630218-SO	300
1630220A-SO	300
1630220-SO	300
1630225A-SO	300
1630225-SO	300
1630226A-SO	300
1630226-SO	300
1630230A-SO	300
1630230-SO	300
1630235-SO	300
1630237A-SO	300
1630237-SO	300
1630238A-SO	300
1630238-SO	300
1630240A-SO	300
1630240-SO	300
1630244A-SO	300
1630244-SO	300
1630245A-SO	300
1630245-SO	300
1630248A-SO	300
1630248-SO	300
1630249-SO	300
1630250A-SO	300
1630250-SO	300
1630253A-SO	300
1630253-SO	300
1630255-SO	300
1630258A-SO	300
1630258-SO	300
1630260A-SO	300
1630260-SO	300
1630264A-SO	300
1630264-SO	300
1630270A-SO	300
1630270-SO	300
1630271A-SO	300
1630271-SO	300
1630275A-SO	300
1630275-SO	300
1630278A-SO	300
1630278-SO	300
1630279A-SO	300
1630279-SO	300
1630280A-SO	300
1630280-SO	300
1630282A-SO	300
1630282-SO	300
1630285A-SO	300
1630285-SO	300
1630287A-SO	300
1630287-SO	300
1630290A-SO	300

EDP Number	Page No.
1630290-SO	300
1630295A-SO	300
1630295-SO	300
1630300A-SO	300
1630300-SO	300
1630305A-SO	300
1630305-SO	300
1630310A-SO	300
1630310-SO	300
1630315A-SO	300
1630315-SO	300
1630318A-SO	300
1630318-SO	300
1630320A-SO	300
1630320-SO	300
1630322A-SO	300
1630322-SO	300
1630323A-SO	300
1630323-SO	300
1630325A-SO	300
1630325-SO	300
1630326A-SO	300
1630326-SO	300
1630330A-SO	300
1630330-SO	300
1630335A-SO	300
1630335-SO	300
1630340A-SO	300
1630340-SO	300
1630345A-SO	300
1630345-SO	300
1630350A-SO	300
1630350-SO	300
1630357A-SO	300
1630357-SO	300
1630360A-SO	300
1630360-SO	300
1630366A-SO	300
1630366-SO	300
1630370A-SO	301
1630370-SO	301
1630373A-SO	301
1630373-SO	301
1630379A-SO	301
1630379-SO	301
1630380A-SO	301
1630380-SO	301
1630386A-SO	301
1630386-SO	301
1630390A-SO	301
1630390-SO	301
1630391A-SO	301
1630391-SO	301
1630397A-SO	301
1630397-SO	301
1630399A-SO	301



EDP Number	Page No.
1630399-SO	301
1630400	639
1630400A-SO	301
1630400-SO	301
1630404A-SO	301
1630404-SO	301
1630409A-SO	301
1630409-SO	301
1630410A-SO	301
1630410-SO	301
1630420A-SO	301
1630420-SO	301
1630422A-SO	301
1630422-SO	301
1630425A-SO	301
1630425-SO	301
1630430A-SO	301
1630430-SO	301
1630431A-SO	301
1630431-SO	301
1630437A-SO	301
1630437-SO	301
1630439A-SO	301
1630439-SO	301
1630440A-SO	301
1630440-SO	301
1630445A-SO	301
1630449A-SO	301
1630449-SO	301
1630450A-SO	301
1630450-SO	301
1630457A-SO	301
1630457-SO	301
1630460A-SO	301
1630460-SO	301
1630462A-SO	301
1630469A-SO	301
1630469-SO	301
1630475A-SO	301
1630475-SO	301
1630476A-SO	301
1630476-SO	301
1630479A-SO	301
1630479-SO	301
1630480A-SO	301
1630480-SO	301
1630485A-SO	301
1630485-SO	301
1630490A-SO	301
1630490-SO	301
1630492A-SO	301
1630492-SO	301
1630498A-SO	301
1630498-SO	301
1630500A-SO	301
1630500-SO	301

EDP Number	Page No.
1630506A-SO	301
1630506-SO	301
1630510A-SO	301
1630510-SO	301
1630511A-SO	301
1630511-SO	301
1630516A-SO	301
1630516-SO	301
1630518A-SO	301
1630518-SO	301
1630520A-SO	301
1630520-SO	301
1630522A-SO	301
1630522-SO	301
1630530A-SO	301
1630530-SO	301
1630532A-SO	301
1630532-SO	301
1630540A-SO	302
1630540-SO	302
1630541A-SO	302
1630541-SO	302
1630550A-SO	302
1630550-SO	302
1630556A-SO	302
1630556-SO	302
1630560A-SO	302
1630560-SO	302
1630561A-SO	302
1630561-SO	302
1630570A-SO	302
1630570-SO	302
1630575A-SO	302
1630575-SO	302
1630579A-SO	302
1630579-SO	302
1630580A-SO	302
1630580-SO	302
1630590A-SO	302
1630590-SO	302
1630594A-SO	302
1630594-SO	302
1630595A-SO	302
1630595-SO	302
1630600A-SO	302
1630600-SO	302
1630605A-SO	302
1630605-SO	302
1630610A-SO	302
1630610-SO	302
1630615A-SO	302
1630615-SO	302
1630620A-SO	302
1630620-SO	302
1630625A-SO	302
1630625-SO	302

EDP Number	Page No.
1630630A-SO	302
1630630-SO	302
1630634A-SO	302
1630634-SO	302
1630635A-SO	302
1630635-SO	302
1630640A-SO	302
1630640-SO	302
1630650A-SO	302
1630650-SO	302
1630653A-SO	302
1630653-SO	302
1630660A-SO	302
1630660-SO	302
1630663A-SO	302
1630663-SO	302
1630670A-SO	302
1630670-SO	302
1630676A-SO	302
1630676-SO	302
1630677A-SO	302
1630677-SO	302
1630680A-SO	302
1630680-SO	302
1630690A-SO	302
1630690-SO	302
1630691A-SO	302
1630691-SO	302
1630700A-SO	302
1630700-SO	302
1630704A-SO	302
1630704-SO	302
1630710A-SO	302
1630710-SO	302
1630713A-SO	302
1630713-SO	302
1630714A-SO	302
1630714-SO	302
1630720A-SO	302
1630720-SO	302
1630725A-SO	302
1630725-SO	302
1630730A-SO	302
1630730-SO	302
1630737A-SO	302
1630737-SO	302
1630740A-SO	302
1630740-SO	302
1630749A-SO	302
1630749-SO	302
1630750A-SO	302
1630750-SO	302
1630754A-SO	302
1630754-SO	302
1630760A-SO	302
1630760-SO	302
1630767A-SO	302

EDP Number	Page No.
1630767-SO	302
1630770A-SO	302
1630770-SO	302
1630780A-SO	302
1630780-SO	302
1630790A-SO	303
1630790-SO	303
1630794A-SO	303
1630794-SO	303
1630800	639
1630800A-SO	303
1630800-SO	303
1630803A-SO	303
1630803-SO	303
1630810A-SO	303
1630810-SO	303
1630820A-SO	303
1630820-SO	303
1630821A-SO	303
1630821-SO	303
1630830A-SO	303
1630830-SO	303
1630833A-SO	303
1630833-SO	303
1630840A-SO	303
1630840-SO	303
1630843A-SO	303
1630843-SO	303
1630850A-SO	303
1630850-SO	303
1630860A-SO	303
1630860-SO	303
1630861A-SO	303
1630861-SO	303
1630870A-SO	303
1630870-SO	303
1630873A-SO	303
1630873-SO	303
1630880A-SO	303
1630880-SO	303
1630884A-SO	303
1630884-SO	303
1630890A-SO	303
1630890-SO	303
1630900A-SO	303
1630900-SO	303
1630909A-SO	303
1630909-SO	303
1630910A-SO	303
1630910-SO	303
1630913A-SO	303
1630913-SO	303
1630920A-SO	303
1630920-SO	303
1630930A-SO	303
1630930-SO	303



EDP Numerical Index

EDP Number	Page No.
1630935A-SO	303
1630935-SO	303
1630940A-SO	303
1630940-SO	303
1630950A-SO	303
1630950-SO	303
1630953A-SO	303
1630953-SO	303
1630958A-SO	303
1630958-SO	303
1630960A-SO	303
1630960-SO	303
1630970A-SO	303
1630970-SO	303
1630980A-SO	303
1630980-SO	303
1630981A-SO	303
1630981-SO	303
1630990A-SO	303
1630990-SO	303
1630992A-SO	303
1630992-SO	303
1631000A-SO	303
1631000-SO	303
1631008A-SO	303
1631008-SO	303
1631020A-SO	303
1631020-SO	303
1631026A-SO	303
1631026-SO	303
1631032A-SO	303
1631032-SO	303
1631049A-SO	303
1631049-SO	303
1631050A-SO	303
1631050-SO	303
1631072A-SO	303
1631072-SO	303
1631080A-SO	303
1631080-SO	303
1631100A-SO	303
1631100-SO	303
1631111A-SO	304
1631111-SO	304
1631120A-SO	304
1631120-SO	304
1631150A-SO	304
1631150-SO	304
1631151A-SO	304
1631151-SO	304
1631191A-SO	304
1631200A-SO	304
1631200-SO	304
1631229A-SO	304
1631229-SO	304
1631250A-SO	304

EDP Number	Page No.
1631250-SO	304
1631269A-SO	304
1631269-SO	304
1631300A-SO	304
1631300-SO	304
1631310A-SO	304
1631310-SO	304
1631349-SO	304
1631389A-SO	304
1631389-SO	304
1631400-SO	304
1631600	639
1632	698
1635002043	457
1635002045	457
1635003053	457
1635003055	457
1635003353	457
1635003355	457
1635004054	458
1635004056	458
1635004074	458
1635004076	458
1635005053	458
1635005055	458
1635005084	458
1635005087	458
1635006015	458
1635006018	458
1635006754	458
1635006757	458
1635007015	458
1635007018	458
1635008015	458
1635008018	458
1635008255	458
1635008259	458
1635008754	458
1635008757	458
1635010015	459
1635010018	459
1635010110	459
1635010118	459
1635010119	459
1635010140	459
1635010148	459
1635010149	459
1635010150	459
1635010156	459
1635010255	459
1635010259	459
1635012110	459
1635012111	459
1635012120	459
1635012140	459
1635012141	459

EDP Number	Page No.
1635012151	459
1635012156	459
1635012171	459
1635012210	459
1635012215	457
1635012220	459
1635012225	457
1635012240	459
1635012245	457
1635012515	457
1635012525	457
1635012541	459
1635012545	457
1635012751	459
1635012756	459
1635014022	459
1635014027	459
1635014151	459
1635014156	459
1635014212	459
1635014242	459
1635014315	457
1635014325	457
1635014345	457
1635014511	459
1635014541	459
1635016111	459
1635016141	459
1635016151	459
1635016156	459
1635016202	459
1635016207	459
1635016212	459
1635016242	459
1635016315	457
1635016345	457
1635016353	457
1635016355	457
1635017315	457
1635017345	457
1635017353	457
1635017355	457
1635018111	460
1635018141	460
1635018151	460
1635018156	460
1635018212	459
1635018242	459
1635018252	459
1635018257	459
1635018315	457
1635018345	457
1635018353	457
1635018355	457
1635020111	460
1635020141	460

EDP Number	Page No.
1635020151	460
1635020156	460
1635020212	460
1635020242	460
1635020252	460
1635020257	460
1635022111	460
1635022121	460
1635022141	460
1635022212	460
1635022222	460
1635022242	460
1635022512	460
1635022522	460
1635022542	460
1635024111	460
1635024121	460
1635024123	460
1635024141	460
1635024155	457
1635024223	460
1635024243	460
1635024315	460
1635024325	460
1635024345	460
1635024455	457
1635025415	457
1635025445	457
1635025453	457
1635025455	457
1635026415	457
1635026425	457
1635026445	457
1635027039	460
1635030350	460
1635030515	457
1635030545	457
1635033350	460
1635033515	457
1635033545	457
1635035064	458
1635035066	458
1635035616	458
1635035646	458
1635036411	460
1635040516	458
1635040546	458
1635040716	458
1635040746	458
1635042451	460
1635045451	460
1635045716	458
1635045746	458
1635045754	458
1635045756	458
1635050515	458



EDP Number	Page No.
1635050545	458
1635050817	458
1635050847	458
1635060118	458
1635060148	458
1635067517	458
1635067547	458
1635070118	458
1635070148	458
1635080118	458
1635080148	458
1635081219	458
1635081249	458
1635087517	458
1635087547	458
1635510120	463
1635510128	463
1635510129	463
1635510229	463
1635510258	463
1635510520	463
1635512120	464
1635512121	463
1635512210	464
1635512250	464
1635512251	463
1635512520	464
1635512721	463
1635512751	463
1635514121	464
1635514222	464
1635514252	464
1635514521	464
1635516121	464
1635516222	464
1635516252	464
1635516521	464
1635518121	464
1635518252	464
1635518521	464
1635518552	464
1635520121	464
1635520222	464
1635520252	464
1635520521	464
1635530325	463
1635530525	463
1635533525	463
1635535025	463
1635535226	463
1635535626	463
1635540526	463
1635540726	463
1635545256	463
1635545526	463
1635545726	463

EDP Number	Page No.
1635547256	463
1635550255	463
1635550257	463
1635550525	463
1635550827	463
1635560727	463
1635561028	463
1635561258	463
1635567527	463
1635571028	463
1635571258	463
1635580727	463
1635581028	463
1635581229	463
1635581258	463
1635582529	463
1635587527	463
1636000108	707
1636000208	707
1636000308	707
1636000408	707
1636000508	707
1636000608	707
1636000708	707
1636000808	707
1636000908	707
1636001008	707
1636001108	707
1636001208	707
1636001308	707
1636001408	707
1636001508	707
1640025-SO	310
1640100A-SO	305
1640100-SO	305
1640102A-SO	305
1640102-SO	305
1640104A-SO	305
1640104-SO	305
1640107A-SO	305
1640107-SO	305
1640109A-SO	305
1640109-SO	305
1640110A-SO	305
1640110-SO	305
1640115A-SO	305
1640115-SO	305
1640118A-SO	305
1640118-SO	305
1640119A-SO	305
1640119-SO	305
1640120A-SO	305
1640120-SO	305
1640125A-SO	305
1640130A-SO	305
1640130-SO	305

EDP Number	Page No.
1640132A-SO	305
1640132-SO	305
1640139A-SO	305
1640139-SO	305
1640140A-SO	305
1640140-SO	305
1640145A-SO	305
1640145-SO	305
1640150A-SO	305
1640150-SO	305
1640152A-SO	305
1640152-SO	305
1640155A-SO	305
1640155-SO	305
1640159A-SO	305
1640159-SO	305
1640160A-SO	305
1640160-SO	305
1640161A-SO	305
1640161-SO	305
1640162-SO	305
1640165A-SO	305
1640165-SO	305
1640167-SO	305
1640169A-SO	305
1640169-SO	305
1640170A-SO	305
1640170-SO	305
1640175A-SO	305
1640178A-SO	305
1640178-SO	305
1640180A-SO	305
1640180-SO	305
1640185A-SO	305
1640185-SO	305
1640190A-SO	305
1640190-SO	305
1640193A-SO	305
1640193-SO	305
1640198A-SO	305
1640198-SO	305
1640199A-SO	305
1640199-SO	305
1640200A-SO	305
1640200-SO	305
1640205-SO	305
1640206A-SO	305
1640206-SO	305
1640208A-SO	305
1640208-SO	305
1640210A-SO	305
1640210-SO	305
1640215A-SO	306
1640215-SO	306
1640218A-SO	306
1640218-SO	306

EDP Number	Page No.
1640220A-SO	306
1640220-SO	306
1640226A-SO	306
1640226-SO	306
1640230A-SO	306
1640230-SO	306
1640235A-SO	306
1640235-SO	306
1640237A-SO	306
1640237-SO	306
1640238A-SO	306
1640238-SO	306
1640240A-SO	306
1640240-SO	306
1640244A-SO	306
1640244-SO	306
1640245A-SO	306
1640245-SO	306
1640249A-SO	306
1640249-SO	306
1640250A-SO	306
1640250-SO	306
1640253A-SO	306
1640253-SO	306
1640258A-SO	306
1640258-SO	306
1640260A-SO	306
1640260-SO	306
1640264A-SO	306
1640264-SO	306
1640270A-SO	306
1640270-SO	306
1640271A-SO	306
1640271-SO	306
1640275A-SO	306
1640278A-SO	306
1640278-SO	306
1640279A-SO	306
1640279-SO	306
1640280A-SO	306
1640280-SO	306
1640282A-SO	306
1640282-SO	306
1640287A-SO	306
1640287-SO	306
1640290A-SO	306
1640290-SO	306
1640295A-SO	306
1640295-SO	306
1640300A-SO	306
1640300-SO	306
1640305A-SO	306
1640305-SO	306
1640310A-SO	306
1640310-SO	306
1640315A-SO	306



EDP Numerical Index

EDP Number	Page No.
1640315-SO	306
1640318A-SO	306
1640318-SO	306
1640320A-SO	306
1640320-SO	306
1640326A-SO	306
1640326-SO	306
1640330A-SO	306
1640330-SO	306
1640335A-SO	306
1640335-SO	306
1640340A-SO	306
1640340-SO	306
1640345A-SO	306
1640345-SO	306
1640350A-SO	306
1640350-SO	306
1640357A-SO	306
1640357-SO	306
1640360-SO	306
1640366A-SO	306
1640366-SO	306
1640370A-SO	306
1640370-SO	306
1640373A-SO	306
1640373-SO	306
1640379A-SO	306
1640379-SO	306
1640380A-SO	306
1640380-SO	306
1640386A-SO	306
1640386-SO	306
1640390A-SO	306
1640390-SO	306
1640391A-SO	306
1640391-SO	306
1640397A-SO	306
1640397-SO	306
1640399A-SO	307
1640399-SO	307
1640400A-SO	307
1640400-SO	307
1640404A-SO	307
1640404-SO	307
1640409A-SO	307
1640409-SO	307
1640410A-SO	307
1640410-SO	307
1640420A-SO	307
1640420-SO	307
1640422A-SO	307
1640422-SO	307
1640430A-SO	307
1640430-SO	307
1640431A-SO	307
1640431-SO	307

EDP Number	Page No.
1640437A-SO	307
1640437-SO	307
1640439A-SO	307
1640439-SO	307
1640440A-SO	307
1640440-SO	307
1640445-SO	307
1640449A-SO	307
1640449-SO	307
1640450A-SO	307
1640450-SO	307
1640457A-SO	307
1640457-SO	307
1640460A-SO	307
1640462A-SO	307
1640462-SO	307
1640469A-SO	307
1640469-SO	307
1640476A-SO	307
1640476-SO	307
1640479A-SO	307
1640479-SO	307
1640480A-SO	307
1640480-SO	307
1640485A-SO	307
1640485-SO	307
1640490A-SO	307
1640490-SO	307
1640492A-SO	307
1640492-SO	307
1640498A-SO	307
1640498-SO	307
1640500A-SO	307
1640500-SO	307
1640506A-SO	307
1640506-SO	307
1640510A-SO	307
1640510-SO	307
1640511A-SO	307
1640511-SO	307
1640516A-SO	307
1640516-SO	307
1640518A-SO	307
1640518-SO	307
1640520A-SO	307
1640520-SO	307
1640522A-SO	307
1640522-SO	307
1640530A-SO	307
1640530-SO	307
1640532A-SO	307
1640532-SO	307
1640540A-SO	307
1640540-SO	307
1640541A-SO	307
1640541-SO	307

EDP Number	Page No.
1640550A-SO	307
1640550-SO	307
1640556A-SO	307
1640556-SO	307
1640560A-SO	307
1640560-SO	307
1640561A-SO	307
1640561-SO	307
1640570A-SO	307
1640570-SO	307
1640575A-SO	307
1640575-SO	307
1640579A-SO	307
1640579-SO	307
1640580A-SO	307
1640580-SO	307
1640590A-SO	308
1640590-SO	308
1640594A-SO	308
1640594-SO	308
1640595A-SO	308
1640595-SO	308
1640600A-SO	308
1640600-SO	308
1640605A-SO	308
1640605-SO	308
1640610A-SO	308
1640610-SO	308
1640615A-SO	308
1640615-SO	308
1640620A-SO	308
1640620-SO	308
1640625A-SO	308
1640625-SO	308
1640630A-SO	308
1640630-SO	308
1640634A-SO	308
1640634-SO	308
1640635A-SO	308
1640635-SO	308
1640640A-SO	308
1640640-SO	308
1640650A-SO	308
1640650-SO	308
1640653A-SO	308
1640653-SO	308
1640660A-SO	308
1640660-SO	308
1640663A-SO	308
1640663-SO	308
1640670A-SO	308
1640670-SO	308
1640676A-SO	308
1640676-SO	308
1640677A-SO	308
1640677-SO	308

EDP Number	Page No.
1640680A-SO	308
1640680-SO	308
1640690A-SO	308
1640690-SO	308
1640691A-SO	308
1640691-SO	308
1640700A-SO	308
1640700-SO	308
1640704A-SO	308
1640704-SO	308
1640710A-SO	308
1640710-SO	308
1640713A-SO	308
1640713-SO	308
1640714A-SO	308
1640714-SO	308
1640720A-SO	308
1640720-SO	308
1640725A-SO	308
1640725-SO	308
1640730A-SO	308
1640730-SO	308
1640737A-SO	308
1640737-SO	308
1640740A-SO	308
1640740-SO	308
1640749A-SO	308
1640749-SO	308
1640750A-SO	308
1640750-SO	308
1640754A-SO	308
1640754-SO	308
1640760A-SO	308
1640760-SO	308
1640767A-SO	308
1640767-SO	308
1640770A-SO	308
1640770-SO	308
1640780A-SO	308
1640780-SO	308
1640790A-SO	308
1640790-SO	308
1640794A-SO	308
1640794-SO	308
1640800A-SO	308
1640800-SO	308
1640803A-SO	308
1640803-SO	308
1640810A-SO	308
1640810-SO	308
1640821A-SO	308
1640821-SO	308
1640833-SO	308
1640843A-SO	308
1640843-SO	308
1640850A-SO	308



EDP Number	Page No.
1640850-SO	308
1640861A-SO	309
1640870-SO	309
1640873A-SO	309
1640873-SO	309
1640880-SO	309
1640884A-SO	309
1640884-SO	309
1640900A-SO	309
1640900-SO	309
1640913A-SO	309
1640913-SO	309
1640920A-SO	309
1640920-SO	309
1640930A-SO	309
1640935A-SO	309
1640935-SO	309
1640950A-SO	309
1640950-SO	309
1640953A-SO	309
1640953-SO	309
1640958A-SO	309
1640958-SO	309
1640960A-SO	309
1640960-SO	309
1640970A-SO	309
1640970-SO	309
1640981A-SO	309
1640981-SO	309
1640992A-SO	309
1640992-SO	309
1641000A-SO	309
1641000-SO	309
1641026A-SO	309
1641032A-SO	309
1641032-SO	309
1641049A-SO	309
1641050A-SO	309
1641050-SO	309
1641072A-SO	309
1641072-SO	309
1641100A-SO	309
1641100-SO	309
1641111A-SO	309
1641111-SO	309
1641150A-SO	309
1641150-SO	309
1641151-SO	309
1641191-SO	309
1641200A-SO	309
1641200-SO	309
1641229A-SO	309
1641229-SO	309
1641250A-SO	309
1641250-SO	309
1641269A-SO	309

EDP Number	Page No.
1641269-SO	309
1641300A-SO	309
1641300-SO	309
1641310-SO	309
1641349A-SO	309
1641349-SO	309
1641389-SO	309
1641400A-SO	309
1641429A-SO	309
1641429-SO	309
1641450-SO	309
1641468-SO	309
1641508A-SO	309
1641548-SO	309
1641588-SO	309
1645002562	503
1645003482	503
1645004402	503
1645004482	503
1645005402	503
1645006322	503
1645006323	503
1645006402	503
1645008322	503
1645008323	503
1645008362	503
1645010084	504
1645010086	504
1645010124	504
1645010126	504
1645010242	503
1645010243	503
1645010322	503
1645010323	503
1645012133	503
1645012135	503
1645012203	503
1645012205	503
1645012243	503
1645012283	503
1645014203	503
1645014205	503
1645014283	503
1645014284	503
1645034103	504
1645034105	504
1645034163	504
1645038163	503
1645038165	503
1645038243	503
1645038244	503
1645056183	503
1645056185	503
1645056243	503
1645056244	503

EDP Number	Page No.
1645058113	504
1645058115	504
1645058183	504
1645058185	504
1645076143	503
1645076145	503
1645076203	503
1645076205	503
1645078094	504
1645078096	504
1645078144	504
1645078146	504
1645096123	504
1645096125	504
1645096183	504
1645096185	504
1645502043	505
1645503054	505
1645504074	505
1645505084	505
1645506103	505
1645506105	505
1645508124	505
1645508126	505
1645510154	505
1645510156	505
1645512174	505
1645512176	505
1645514205	505
1645514207	505
1645516205	505
1645516207	505
1645518257	505
1645520258	505
1645524309	505
1645525453	505
1645526453	505
1650000108	495
1650000208	495
1650000308	495
1650000408	495
1650000508	495
1650000608	495
1650000708	495
1650000808	495
1650000908	495
1650001008	495
1650001108	495
1650001208	495
1650001308	495
1650001408	496
1650001508	496
1650001608	496
1650001708	496
1650001808	496
1650001908	496

EDP Number	Page No.
1650002008	496
1650002108	496
1650002208	496
1650002308	496
1650002408	496
1650002508	496
1650002608	496
1650002708	496
1650002808	496
1650002908	496
1650003008	495
1650003108	495
1650003208	495
1650003308	495
1650003408	495
1650003508	495
1650003608	495
1650003708	495
1650003808	495
1650003908	495
1650004008	495
1650004108	495
1650004208	495
1650004308	495
1650004408	495
1650004508	495
1650004608	495
1650004708	495
1650004808	495
1650004908	495
1650005008	495
1650005108	495
1650005208	495
1650005308	495
1650005408	496
1650005508	496
1650005608	496
1650005708	496
1650005808	496
1650005908	496
1650006008	496
1650006108	496
1650006208	496
1650006308	496
1650006408	496
1650006508	496
1650006608	496
1650006708	496
1650006808	496
1650006908	496
1650007008	496
1650007108	496
1650007208	496
1650007308	496
1650007408	496
1650007508	496



EDP Numerical Index

EDP Number	Page No.
1650007608	496
1650007708	496
1650007808	496
1650007908	496
1650008008	496
1650008108	497
1650008208	497
1650008308	497
1650008408	497
1650008508	497
1650008608	497
1650008708	497
1650008808	497
1650008908	497
1650009008	497
1650009108	497
1650009208	497
1650009308	497
1650009408	497
1650009508	497
1650009608	497
1650009708	495
1650009808	495
1650009908	495
1650010008	495
1650010108	495
1650010208	495
1650010308	495
1650010408	495
1650010508	495
1650010608	495
1650010708	495
1650010808	495
1650010908	495
1650011008	495
1650011108	495
1650011208	495
1650011308	495
1650011408	495
1650011508	495
1650011608	495
1650011708	495
1650011808	495
1650011908	495
1650012008	495
1650012108	495
1650012208	495
1650012308	496
1650012408	496
1650012508	496
1650012608	496
1650012708	496
1650012808	496
1650012908	496
1650013008	496
1650013108	496

EDP Number	Page No.
1650013208	496
1650013308	496
1650013408	496
1650013508	496
1650100	704
1650200	704
16502715	258
1650300	704
16503915	258
1650400	704
1650500	704
1650500108	492
1650500208	492
1650500308	492
1650500408	492
1650500508	492
1650500608	492
1650500708	492
1650500808	492
1650500908	492
1650501008	492
1650501108	492
1650501208	492
1650501308	492
1650501408	492
1650501508	492
1650501608	492
1650501708	492
1650501808	492
1650501908	492
1650502008	492
1650502108	492
1650502208	492
1650502308	492
1650502408	492
1650502508	492
1650502608	492
1650502708	492
1650502808	493
1650502908	493
1650503008	493
1650503108	493
1650503208	493
1650503308	493
1650503408	493
1650503508	493
1650503608	493
1650503708	493
1650503808	493
1650503908	493
1650504008	493
1650504108	493
1650504208	493
1650504308	493
1650504408	493
1650504508	493

EDP Number	Page No.
1650504608	493
1650504708	493
1650504808	493
1650504908	493
1650505008	493
1650505108	493
1650505208	493
1650505308	493
1650505408	493
1650505508	493
1650505608	492
1650505708	492
1650505808	492
1650505908	492
1650506008	493
1650506108	493
1650506208	493
1650506308	493
1650506408	493
1650506508	493
1650506608	493
1650506708	493
1650506808	493
1650506908	493
1650507008	493
1650507108	493
1650507208	493
1650507308	493
1650507408	493
1650507508	493
1650507608	494
1650507708	494
1650507808	494
1650507908	494
1650508008	494
1650508108	494
1650508208	494
1650508308	494
1650508408	494
1650508508	494
1650508608	494
1650508708	494
1650508808	494
1650508908	492
1650509008	492
1650509108	492
1650509208	492
1650509308	492
1650509408	492
1650509508	492
1650509608	492
1650509708	492
1650509808	492
1650509908	492
1650510008	492
1650510108	492

EDP Number	Page No.
1650510208	492
1650510308	492
1650510408	492
1650510508	492
1650510608	492
1650510708	492
1650510808	492
1650510908	492
1650511008	492
1650511108	492
1650511208	492
1650511308	492
1650511408	492
1650511508	492
1650511608	492
1650511708	492
1650511808	492
1650511908	492
1650512008	492
1650512108	493
1650512208	493
1650512308	493
1650512408	493
1650512508	493
1650512608	493
1650512708	493
1650512808	493
1650512908	493
1650513008	493
1650513108	492
1650513208	492
1650513308	493
16505915	258
1650600	704
1650700	704
1650800	704
16508815	258
1650900	704
1651000	704
1651000108	579
1651000208	579
1651000308	579
1651000408	579
1651000508	579
1651000608	579
1651000708	579
1651000808	579
1651000908	579
1651001008	579
1651001108	579
1651001208	579
1651001308	579
1651001408	580
1651001508	580
1651001608	580
1651001708	580



EDP Number	Page No.
1651001808	580
1651001908	580
1651002008	580
1651002108	580
1651002208	580
1651002308	580
1651002408	580
1651002508	580
1651002608	580
1651002708	580
1651002808	580
1651002908	580
1651003008	579
1651003108	579
1651003208	579
1651003308	579
1651003408	579
1651003508	579
1651003608	579
1651003708	579
1651003808	579
1651003908	579
1651004008	579
1651004108	579
1651004208	579
1651004308	579
1651004408	579
1651004508	579
1651004608	579
1651004708	579
1651004808	579
1651004908	579
1651005008	579
1651005108	579
1651005208	579
1651005308	579
1651005408	580
1651005508	579
1651005608	579
1651005708	580
1651005808	580
1651005908	580
1651006008	580
1651006108	580
1651006208	580
1651006308	580
1651006408	580
1651006508	580
1651006608	580
1651006708	580
1651006808	580
1651006908	580
1651007008	580
1651007108	580
1651007208	580
1651007308	580

EDP Number	Page No.
1651007408	580
1651007508	580
1651007608	580
1651100	704
16511915	258
1651200	704
16514615	258
1651500108	577
1651500208	577
1651500308	577
1651500408	577
1651500508	577
1651500608	577
1651500708	577
1651500808	577
1651500908	577
1651501008	577
1651501108	577
1651501208	577
1651501308	577
1651501408	577
1651501508	577
1651501608	577
1651501708	577
1651501808	577
1651501908	577
1651502008	577
1651502108	577
1651502208	577
1651502308	577
1651502408	577
1651502508	577
1651502608	577
1651502708	577
1651502808	577
1651502908	577
1651503008	577
1651503108	577
1651503208	578
1651503308	578
1651503408	578
1651503508	578
1651503608	578
1651503708	578
1651503808	578
1651503908	578
1651504008	578
1651504108	578
1651504208	578
1651504308	578
1651504408	578
1651504508	578
1651504608	578
1651504708	578
1651504808	578
1651504908	578

EDP Number	Page No.
1651505008	578
1651505108	578
1651505208	578
1651505308	578
1651505408	578
1651505508	578
1651505608	577
1651505708	577
1651505808	577
1651505908	577
1651506008	577
1651506108	577
1651506208	577
1651506308	577
1651506408	578
1651506508	578
1651506608	578
1651506708	578
1651506808	578
1651506908	578
1651507008	578
1651507108	578
1651507208	578
1651507308	578
1651507408	578
16515815	258
16518115	258
16519815	258
1652001208	501
1652001308	501
1652001408	501
1652001508	501
1652001608	501
1652001708	501
1652001808	501
1652001908	501
1652002008	501
1652002108	501
1652002208	501
1652002308	501
1652002508	501
1652002708	501
1652003308	501
1652003508	501
1652003708	501
1652004508	501
1652004708	501
1652004908	501
1652005108	501
1652006108	501
1652006308	501
1652006508	501
1652006708	501
1652006808	501
1652006908	501
1652007008	501

EDP Number	Page No.
1652007108	501
1652007208	501
1652007308	501
1652007408	501
1652007508	501
1652007708	501
1652008008	501
1652008108	501
1652008208	501
1652008308	501
1652008408	502
1652008508	502
1652008608	501
1652008708	501
1652008808	502
1652008908	502
1652009008	502
1652009108	502
1652009208	502
1652009308	502
1652009408	502
1652009508	502
16520515	258
1652500308	500
1652500608	500
1652500708	500
1652500908	500
1652501008	500
1652501108	500
1652501308	500
1652501408	500
1652501508	500
1652501708	500
1652501908	500
1652502108	500
1652502308	500
1652502508	500
1652502708	500
1652502908	500
1652503108	500
1652503308	500
1652503508	500
1652503708	500
1652503908	500
1652504108	500
1652504308	500
1652504508	500
1652504708	500
1652504908	500
1652505108	500
1652505308	500
1652505508	500
1652505608	500
1652505708	500
1652505908	500
16527715	258



EDP Numerical Index

EDP Number	Page No.
1653001208	584
1653001308	584
1653001408	584
1653001508	584
1653001608	584
1653001708	584
1653001808	584
1653001908	584
1653002008	584
1653002108	584
1653002208	584
1653002308	584
1653002508	584
1653002708	584
1653003308	584
1653003508	584
1653003708	584
1653004508	584
1653004708	584
1653004908	584
1653005108	584
1653006108	584
1653006308	584
1653006508	584
1653006708	584
1653006808	584
1653006908	584
1653007008	584
1653007108	584
1653007208	584
1653007308	584
1653007408	584
1653007508	584
1653007708	584
1653008008	584
1653008108	584
1653008208	584
1653008308	584
1653008408	584
1653008508	584
1653008608	584
1653008708	584
1653008808	584
1653008908	584
1653009008	584
1653009108	584
1653009208	585
1653009308	585
1653009408	585
1653009508	585
16531215	258
16531715	258
16534215	258
1653500708	583
1653501008	583
1653501108	583

EDP Number	Page No.
1653501308	583
1653501408	583
1653501508	583
1653501708	583
1653501808	583
1653501908	583
1653502108	583
1653502308	583
1653502508	583
1653502708	583
1653502908	583
1653503108	583
1653503308	583
1653503508	583
1653503708	583
1653503908	583
1653504108	583
1653504308	583
1653504508	583
1653504708	583
1653504908	583
1653505108	583
1653505308	583
1653505508	583
1653505708	583
1653505908	583
1653506008	583
1653506108	583
1653506308	583
16535715	258
1654000108	499
1654000208	499
1654000308	499
1654000408	499
1654000508	499
1654000608	499
1654000708	499
1654000808	499
1654000908	499
1654001008	499
1654001108	499
1654001208	499
1654001308	499
1654001408	499
1654001508	499
1654001708	499
1654001808	499
1654001908	499
1654002008	499
1654002108	499
1654002208	499
1654002308	499
1654002408	499
1654002508	499
1654002608	499

EDP Number	Page No.
1654002708	499
1654002808	499
1654002908	499
1654003008	499
1654003108	499
1654003208	499
1654003308	499
1654003408	499
1654003508	499
1654003608	499
1654003708	499
1654003808	499
1654003908	499
1654004008	499
16540815	258
16544015	258
1654500108	498
1654500208	498
1654500308	498
1654500408	498
1654500508	498
1654500608	498
1654500708	498
1654500808	498
1654500908	498
1654501008	498
1654501108	498
1654501208	498
1654501308	498
1654501408	498
1654501508	498
1654501608	498
1654501708	498
1654501808	498
1654501908	498
1654502008	498
1654502108	498
1654502208	498
1654502308	498
1654502408	498
1654502508	498
1654502608	498
1654502708	498
1654502808	498
1654502908	498
1654503008	498
1654503108	498
1654503208	498
1654503308	498
1654503408	498
1654503508	498
1654503608	498
1654503708	498
1654503808	498
1654503908	498
16547315	258

EDP Number	Page No.
1655000108	582
1655000208	582
1655000308	582
1655000408	582
1655000508	582
1655000608	582
1655000708	582
1655000808	582
1655000908	582
1655001008	582
1655001108	582
1655001208	582
1655001308	582
1655001408	582
1655001508	582
1655001608	582
1655001708	582
1655001808	582
1655001908	582
1655002008	582
1655002108	582
1655002208	582
1655002308	582
1655002408	582
1655002508	582
1655002608	582
1655002708	582
1655002808	582
1655002908	582
1655003008	582
1655003108	582
16550615	259
16553115	259
1655500108	581
1655500208	581
1655500308	581
1655500408	581
1655500508	581
1655500608	581
1655500708	581
1655500808	581
1655500908	581
1655501008	581
1655501108	581
1655501208	581
1655501308	581
1655501408	581
1655501508	581
1655501608	581
1655501708	581
1655501808	581
1655501908	581
1655502008	581
1657001008	735
1657002008	735
1657003008	735



EDP Number	Page No.
1657004008	735
1657005008	735
1657006008	735
1657007008	735
1657008008	735
1657501008	736
1657502008	736
1657503008	736
1657504008	736
1657505008	736
1657506008	736
1657507008	736
1657508008	736
1657509008	736
1657510008	736
1657511008	736
1657512008	736
1657513008	736
1657514008	736
1657515008	736
1657516008	736
1658001008	739
1658002008	739
1658003008	739
1658004008	739
1658005008	739
1658006008	739
1658501008	738
1658502008	738
1658503008	738
1658504008	738
1658505008	738
1658506008	738
1659001008	737
1659002008	737
1659003008	737
1659004008	737
1659005008	737
1659006008	737
1659007008	737
1659008008	737
1660000000	491
1660000100	491
1660000200	491
1660000300	491
1660000400	491
1660000500	491
1660000600	491
1660000700	491
1660000800	491
1660000900	491
1660001000	491
1660001100	491
1660100	704
1660200	704
1660300	704

EDP Number	Page No.
1660400	704
1660500	704
1660500000	490
1660500100	490
1660500200	490
1660500300	490
1660500400	490
1660500500	490
1660500600	490
1660500700	490
1660500800	490
1660500900	490
1660501000	490
1660501100	490
1660600	704
1660700	704
1660800	704
1660900	704
1661000	704
1661000000	661
1661000100	661
1661000200	661
1661000300	661
1661000400	661
1661000500	661
1661000600	661
1661000700	661
1661100	704
1661200	704
1661300	704
1661400	704
1661500	704
1661500200	660
1661500300	660
1661500400	660
1661500500	660
1661500600	660
1661500700	660
1661500800	660
1661500900	660
1661501000	660
1661501100	660
1661501200	660
1661501300	660
1661600	704
1661700	704
1661800	704
1661900	704
1662000	704
1662100	704
1662200	704
1662300	704
1662400	704
1662500	704
1662500017	432
1662500117	432

EDP Number	Page No.
1662500217	432
1662500317	432
1662500417	432
1662500517	432
1662500617	432
1662500717	432
1662500817	432
1662500917	432
1662501017	432
1662501117	432
1662501217	432
1662501317	432
1662501417	432
1662501517	432
1662501617	432
1662501717	432
1662501817	432
1662501917	432
1662502017	432
1662502117	432
1662502217	432
1662502317	432
1662502417	432
1662502517	432
1662502617	432
1662502717	432
1662502817	432
1662502917	432
1662600	704
1662700	704
1662800	704
1663000017	434
1663000117	434
1663000217	434
1663000317	434
1663000417	434
1663000517	434
1663100017	435
1663100117	435
1663100217	435
1663100317	435
1663100417	435
1663100517	435
1663300	704
1663400	704
1663500	704
1663600	704
1663700	704
1663800	704
1663900	704
1664000	704
1664100	704
1664200	704
1664300	704
1664400	704
1670100	696

EDP Number	Page No.
1670200	696
16710	644
16714	644
16722	644
16728	644
16734	644
1680100	696
1680200	696
1680300	696
1680400	696
1680500	696
1680600	696
1680700	696
1680800	696
1680900	696
1681000	696
1681100	696
1681200	696
1681300	696
1681400	696
1681500	696
1681600	696
1681700	696
1681800	696
1681900	696
1682000	696
1682100	696
1682200	696
1682300	696
1682400	696
1682500	696
1682600	696
1690100	703
1690200	703
1690400	703
1690500	703
1690700	703
1690800	703
1691000	703
1691100	703
1691300	703
1691400	703
1691600	703
1691700	703
1692200	703
1692300	703
1700201	599
1700208	599
1700301	599
1700308	599
1700401	599
1700408	599
1700501	599
1700508	599
1700601	599
1700608	599



EDP Numerical Index

EDP Number	Page No.
1700701	599
1700708	599
1700801	599
1700808	599
1700901	599
1700908	599
1701001	599
1701008	599
1701101	600
1701108	600
1701201	600
1701208	600
1701301	600
1701308	600
1701401	600
1701408	600
1701501	600
1701508	600
1701601	600
1701608	600
1701701	600
1701708	600
1701801	600
1701808	600
1702201	601
1702208	601
1702301	601
1702308	601
1702401	601
1702408	601
1702501	601
1702508	601
1702601	601
1702608	601
1702701	601
1702708	601
1702801	601
1702808	601
1702901	601
1702908	601
1703001	518
1703008	518
1703101	518
1703108	518
1703201	518
1703208	518
1703301	518
1703308	518
1703401	518
1703408	518
1703501	518
1703508	518
1703601	518
1703608	518
1703701	518
1703708	518

EDP Number	Page No.
1703801	518
1703808	518
1703901	518
1703908	518
1704001	518
1704008	518
1704101	518
1704108	518
1704201	518
1704208	518
1704301	518
1704308	518
1704401	518
1704408	518
1704501	518
1704508	518
1704601	518
1704608	518
1704701	518
1704708	518
1704801	518
1704808	518
1704901	518
1704908	518
1705001	518
1705008	518
1705101	519
1705108	519
1705501	520
1705508	520
1705601	520
1705608	520
1705701	520
1705708	520
1705801	520
1705808	520
1705901	520
1705908	520
1706001	520
1706008	520
1706101	520
1706108	520
1706201	520
1706208	520
1706301	596
1706308	596
1706401	596
1706501	596
1706508	596
1706601	596
1706701	596
1706708	596
1706801	596
1706901	596
1706908	596
1707001	596

EDP Number	Page No.
1707101	596
1707108	596
1707201	596
1707301	596
1707308	596
1707401	596
1707501	596
1707508	596
1707601	596
1707701	596
1707708	596
1707801	596
1707901	596
1707908	596
1708001	596
1708101	596
1708108	596
1708201	596
1708301	596
1708401	596
1708501	596
1708508	596
1708601	596
1708701	596
1708708	596
1708801	596
1708901	596
1708908	596
1709001	596
1709101	515
1709108	515
1709201	515
1709301	515
1709308	515
1709401	515
1709501	515
1709508	515
1709601	515
1709701	515
1709708	515
1709801	515
1709901	515
1709908	515
1710001	515
1710101	515
1710108	515
1710201	515
1710301	516
1710401	516
1710501	516
1710508	516
1710601	516
1710701	516
1710801	516
1710901	516
1711	698

EDP Number	Page No.
1711001	516
1711101	516
1711201	516
1711301	516
1711401	516
1711501	516
1711601	516
1711701	516
1712	698
1712401	725
1712408	725
1712501	725
1712508	725
1712601	725
1712608	725
1712701	725
1712708	725
1712801	725
1712808	725
1712901	725
1712908	725
1713	698
1713001	725
1713008	725
1713101	725
1713108	725
1713201	725
1713208	725
1713301	725
1713308	725
1713401	725
1713408	725
1713501	713
1713601	713
1713701	713
1713801	713
1713901	713
1714001	713
1714101	713
1714201	713
1714301	713
1714401	713
1714501	713
1714601	722
1714608	722
1714701	722
1714708	722
1714801	722
1714808	722
1714901	722
1714908	722
1715001	722
1715008	722
1715101	722
1715108	722
1715201	722



EDP Number	Page No.
1715208	722
1715301	722
1715308	722
1715401	722
1715408	722
1715501	722
1715508	722
1715601	722
1715608	722
1715701	710
1715708	710
1715801	710
1715808	710
1715901	710
1715908	710
1716001	710
1716008	710
1716101	710
1716108	710
1716201	710
1716208	710
1716301	710
1716308	710
1716401	710
1716408	710
1716501	710
1716508	710
1716601	710
1716608	710
1716701	710
1716708	710
1717201	596
1717301	596
1717401	596
1717501	596
1717601	596
1717701	596
1717801	597
1717901	597
1718001	597
1718101	597
1718201	597
1718301	597
1718401	597
1719001	515
1719008	515
1719101	515
1719501	515
1719508	515
1719601	515
1719701	515
1719708	515
1719801	515
1719901	515
1719908	515
1720001	515

EDP Number	Page No.
1720101	515
1720108	515
1720201	515
1720301	515
1720401	515
1720501	516
1720508	516
1720601	516
1720701	515
1720800	640
1720805	640
1721200	640
1721205	640
1721600	640
1721800	640
1721805	640
1722001	523
1722008	523
1722201	523
1722208	523
1722301	523
1722308	523
1722501	523
1722508	523
1722601	524
1722608	524
1722701	524
1722708	524
1722801	524
1722808	524
1722901	524
1722908	524
1723001	524
1723008	524
1723101	524
1723108	524
1723201	524
1723208	524
1723301	524
1723308	524
1723401	524
1723408	524
17234408	243
1723501	524
1723508	524
17236208	243
1724201	523
1724208	523
1724301	523
1724308	523
1724501	523
1724508	523
1724601	523
1724608	523
17250008	243
1725001	605

EDP Number	Page No.
1725005	605
1725008	605
1725101	605
1725105	605
1725108	605
1725201	605
1725205	605
1725208	605
1725301	605
1725305	605
1725308	605
1725401	605
1725405	605
1725408	605
1725501	604
1725601	604
17257008	243
1725801	604
1726001	524
1726008	524
1726101	524
1726108	524
1726201	525
1726208	525
1726301	525
1726308	525
1726401	525
1726408	525
17265608	243
1726801	604
1726901	604
1727001	604
1727101	604
17272008	243
1727201	604
1727301	604
1727401	604
1727501	604
1727601	604
1727701	604
1727801	604
1727901	604
1728001	604
1728101	604
17281208	243
1728201	604
1728301	604
1728401	604
1728501	604
1728601	604
1728701	604
1728801	605
1728901	605
1729001	605
1729101	605
1729201	605

EDP Number	Page No.
1729301	605
1729401	605
1729501	605
1729601	605
17296908	243
1729701	605
1729801	605
1729901	605
1730001	604
1730005	604
1730008	604
1730101	604
1730108	604
1730201	604
1730208	604
1730301	604
1730305	604
1730308	604
1730401	604
1730405	604
1730408	604
1730501	604
1730505	604
1730508	604
1730601	604
1730605	604
1730608	604
1730701	604
1730705	604
1730708	604
1730801	605
1730805	605
1730808	605
1730901	605
1730905	605
1730908	605
1731	698
1731001	605
1731005	605
1731008	605
1731101	605
1731105	605
1731108	605
1731201	605
1731205	605
1731208	605
17312508	243
1731301	605
1731305	605
1731308	605
1731401	605
1731405	605
1731408	605
17315008	243
1731501	605
1731505	605



EDP Numerical Index

EDP Number	Page No.
1731508	605
1731601	605
1731605	605
1731608	605
1731701	605
1731705	605
1731708	605
1731801	605
1731805	605
1731808	605
1731901	605
1731905	605
1731908	605
1732	698
1732001	523
1732008	523
1732101	523
1732108	523
1732201	523
1732205	523
1732208	523
1732301	523
1732305	523
1732308	523
1732401	523
1732405	523
1732408	523
1732501	523
1732505	523
1732508	523
1732601	524
1732605	524
1732608	524
1732701	524
1732705	524
1732708	524
1732801	524
1732805	524
1732808	524
17328108	243
1732901	524
1732905	524
1732908	524
1733	698
1733001	524
1733005	524
1733008	524
1733101	524
1733105	524
1733108	524
1733201	524
1733205	524
1733208	524
1733301	524
1733305	524
1733308	524

EDP Number	Page No.
1733401	524
1733405	524
1733408	524
1733501	524
1733505	524
1733508	524
1733601	525
1733608	525
1733701	525
1733708	525
1733801	525
1733805	525
1733808	525
1733901	525
1733905	525
1733908	525
1734000	673
1734100	673
1734200	673
1734300	673
17343808	243
1734400	673
1734500	673
1734601	604
1734608	604
1734701	604
1734708	604
1734801	604
1734808	604
1734901	604
1734908	604
1735001	740
1735005	740
1735101	740
1735105	740
1735201	740
1735205	740
1735301	740
1735305	740
1735401	740
1735405	740
1735501	740
1735505	740
1735601	740
1735701	740
1735801	604
1735808	604
1735901	604
1735908	604
17359408	243
1736000	743
1736100	743
1736200	743
1736300	743
1736400	743
1736501	604

EDP Number	Page No.
1736508	604
1736601	604
1736608	604
1736701	604
1736708	604
1736801	604
1736808	604
1736901	605
1736908	605
1737001	605
1737008	605
1737101	604
1737108	604
1737201	604
1737208	604
1737301	604
1737308	604
1737401	604
1737408	604
17375008	243
1737501	741
1737505	741
1737601	741
1737605	741
17377008	243
1737701	741
1737705	741
1737801	741
1737805	741
1737901	741
1737905	741
1738001	741
1738005	741
1738101	741
1738201	741
1738301	605
1738308	605
1738401	605
1738408	605
1738501	605
1738508	605
1738601	605
1738608	605
1738701	605
1738708	605
1738801	605
1738808	605
1738901	605
1738908	605
1739000	673
17390608	243
1739100	673
1739200	673
1739300	673
17393708	243
1739400	673

EDP Number	Page No.
1739500	673
1739600	673
1739700	673
1739801	604
1739805	604
1739808	604
1739905	741
1740005	610
1740105	610
1740205	610
1740305	610
1740405	610
1740505	610
1740605	610
17406208	243
1740705	610
1740805	610
1740905	610
1741005	610
1741105	610
1741205	610
1741305	610
1741405	610
1741505	610
1741605	610
1741705	610
1741805	610
1741905	610
1742005	610
1742105	610
17421908	243
1742205	610
1742305	610
1742405	610
1742505	610
1742605	610
1742705	610
1742805	610
1742905	610
17437508	243
1744605	741
1744805	740
1744905	740
1745000	673
1745100	673
1745200	673
1745300	673
17453108	243
1745400	673
1745500	673
1745600	673
1745701	526
1745801	526
1745901	526
1746001	526
1746101	526



EDP Number	Page No.
1746201	526
1746301	526
1746401	526
1746501	526
1746601	526
1746701	523
1746801	523
17468808	243
1746901	523
1747001	523
1747101	523
1747201	523
1747301	523
1747401	523
1747501	523
1747601	523
1747701	523
1748001	523
1748101	523
1748201	523
1748301	523
1748401	523
17484408	243
1748501	523
1748601	523
1748701	523
1748801	523
1748901	523
1749001	525
1749101	525
1749105	525
1749108	525
1749201	525
1749301	525
1749401	523
1749501	523
1749601	523
1749701	523
1749801	523
1749901	524
1749905	524
1749908	524
17500008	243
1750001	524
1750101	606
1750108	606
17502411	248
17503111	248
17503811	248
1750401	606
1750405	606
1750408	606
17504411	248
17504711	248
17505311	248
17505911	248

EDP Number	Page No.
17506511	248
1750701	606
1750705	606
1750708	606
17507211	248
17507711	248
17508111	248
17508511	249
17508811	249
17509111	249
17509411	249
17509611	249
17509911	249
1751001	606
1751005	606
1751008	606
17510211	249
17510511	249
17510711	249
17511011	249
17511311	249
17511511	249
17511611	249
17511711	249
17511811	249
17512011	249
1751301	606
1751305	606
1751308	606
17515311	250
1751601	606
17516011	250
1751605	606
1751608	606
17516711	250
17517311	250
17517611	250
17518211	250
17518811	250
1751901	606
1751905	606
1751908	606
17519411	250
1752001	518
1752008	518
17520111	250
17520611	250
1752101	518
17521011	250
1752108	518
17521411	250
17521711	250
1752201	518
17522011	250
1752208	518
17522311	250

EDP Number	Page No.
17522511	251
17522811	251
1752301	518
1752308	518
17523111	251
17523411	251
17523611	251
17523911	251
1752401	518
1752408	518
17524211	251
17524411	251
17524511	251
17524611	251
17524711	251
17524911	251
1752501	518
1752508	518
17525111	247
17525311	247
17525511	247
17525711	249
17525911	249
1752601	518
1752608	518
17526111	249
17526311	251
17526511	251
1752701	518
1752708	518
1752801	518
1752808	518
1752901	518
1752908	518
1753001	518
1753008	518
1753101	518
1753108	518
17531208	243
1753201	518
1753208	518
1753301	518
1753308	518
1753401	518
1753408	518
1753501	518
1753508	518
1753601	519
1753608	519
1753701	519
1753708	519
1753801	519
1753808	519
1753901	519
1753908	519
1754001	518

EDP Number	Page No.
1754008	518
1754101	518
1754108	518
1754201	518
1754208	518
17542411	245
1754301	518
1754308	518
17543111	245
17543811	245
1754401	518
1754408	518
17544411	245
17544711	245
1754501	518
1754508	518
17545311	245
17545911	245
1754601	518
1754608	518
17546511	245
1754701	518
1754708	518
17547211	246
17547711	246
1754801	518
1754808	518
17548111	246
17548511	246
17548811	246
1754901	518
1754908	518
17549111	246
17549411	246
17549611	246
17549911	246
1755001	526
17550211	246
17550511	246
17550711	247
1755101	526
17551011	247
17551311	247
17551511	247
17551611	247
17551711	247
17551811	247
1755201	526
17552011	247
1755301	526
1755401	526
1755405	526
1755408	526
1755501	526
1755601	526
1755701	526



EDP Numerical Index

EDP Number	Page No.
1755705	526
1755708	526
1755801	526
1755901	526
1756001	526
1756005	526
1756008	526
1756101	526
1756201	526
17562508	243
1756301	526
1756305	526
1756308	526
1756501	526
1756601	526
1756605	526
1756608	526
1756801	526
1756901	526
1756905	526
1756908	526
1757001	599
1757008	599
1757101	599
1757108	599
1757201	599
1757208	599
1757301	599
1757308	599
1757401	599
1757408	599
1757501	599
1757508	599
1757601	599
1757608	599
1757701	599
1757708	599
1757801	599
1757808	599
17578108	243
1757901	599
1757908	599
1758001	599
1758008	599
1758101	600
1758108	600
1758201	600
1758208	600
1758301	600
1758308	600
1758401	600
1758408	600
1758501	600
1758508	600
1758601	600
1758608	600

EDP Number	Page No.
1758701	600
1758708	600
1758801	600
1758808	600
1758901	600
1758908	600
1759001	599
1759008	599
1759101	599
1759108	599
1759201	599
1759208	599
1759301	599
1759308	599
17593808	243
1759401	599
1759408	599
1759501	599
1759508	599
1759601	599
1759608	599
1759701	599
1759708	599
1759801	599
1759808	599
1759901	599
1759908	599
1760001	599
1760008	599
1760101	599
1760108	599
1760201	599
1760208	599
1760301	599
1760308	599
1760401	599
1760408	599
1760501	599
1760508	599
1760601	599
1760608	599
1761701	524
1761801	524
1761905	525
1761908	525
1762001	525
1762101	525
1762201	524
1762301	524
1762305	524
1762308	524
1762401	524
17625008	243
1762501	524
1762601	524
1762701	524

EDP Number	Page No.
1762801	524
1762901	524
1763001	524
1763101	524
1763201	524
1763301	524
1763401	524
1763501	524
1763601	524
1763701	524
1763801	524
1763901	523
1763905	523
1763908	523
1764001	609
1764101	609
1764201	609
1764301	609
1764401	609
1764501	609
1764601	609
1764701	609
1764801	609
1764901	609
1765001	609
1765101	609
1765201	609
1765301	609
1765401	609
1765501	609
1765601	609
17656208	243
1765701	609
1765801	609
1765901	609
1766001	609
1766101	529
1766201	609
1766301	529
1766501	529
1766701	529
1766901	529
1767101	529
1767301	529
1767501	529
1767701	529
1767901	529
1768101	529
1768301	529
1768501	529
1768601	529
1768701	529
17687508	243
1768801	529
1768901	529
1769001	529

EDP Number	Page No.
1769101	529
1769201	529
1769301	529
1770001	515
1770101	515
1770201	515
1770301	515
1770401	515
1770501	515
1770601	515
1770701	515
1770801	516
1770901	516
1771001	515
1771101	515
1771201	515
1771301	516
1771401	515
1771501	596
1771601	596
1771701	596
1771801	596
17718808	243
1771901	596
1772001	596
1772101	596
1772201	596
1772301	596
1772401	596
1772501	596
1772601	606
1772701	606
1772801	606
1772901	606
1773001	606
1773101	606
1773201	606
1773301	606
1773401	606
1773501	606
17750008	243
1776201	596
1776208	596
1776301	596
1776401	604
1776408	604
17781308	243
17812508	243
17843808	243
17875008	243
17906208	243
17937508	243
17968808	243
18000008	243
18031208	243
1804000	732



EDP Number	Page No.
1804100	732
1805600	732
1805700	732
1805800	732
1805900	732
18062508	244
1806600	732
1806700	732
18093808	244
1810400	732
1810500	732
1810800	732
1810900	732
1811400	732
1811500	732
1812000	732
1812100	732
1812400	732
1812500	732
18125008	244
1812800	732
1812900	732
1813200	732
1813400	732
1813500	732
1813600	732
1813800	732
1813900	732
1820400	729
1821	698
18218808	244
1822	698
1823	698
1824000	729
1824800	729
18250008	244
1825200	729
1825600	729
1825800	729
1826400	729
1826600	729
1830400	729
1830800	729
1832000	729
1832200	729
1841	698
1842	698
1843	698
1871	698
1872	698
1873	698
1929000	701
1931	698
1932	698
1933	698
1966900	697

EDP Number	Page No.
1970000	697
1970100	697
1970101	697
1970200	697
1970201	697
1970300	697
1970400	697
1970401	697
1970500	697
1970501	697
1970600	697
1970700	697
1970701	697
1970800	697
1970801	697
1970900	697
1971000	697
1971001	697
1971100	697
1971101	697
1971200	697
1971300	697
1971301	697
1971400	697
1971401	697
1971500	697
1971600	697
1971601	697
1971700	697
1971701	697
1971800	697
1971900	697
1971901	697
1972000	697
1972001	697
1972200	697
1972201	697
1972300	697
1972301	697
1972500	697
1972501	697
1972600	697
1972601	697
1972800	697
1972801	697
1972900	697
1972901	697
1973100	697
1973101	697
1973200	697
1973201	697
1973400	697
1973401	697
1973500	697
1973501	697
1973700	697

EDP Number	Page No.
1973701	697
1973800	697
1973801	697
1974000	697
1974001	697
1974100	697
1974101	697
1974300	697
1974301	697
1974400	697
1974401	697
1974600	697
1974700	697
1974900	697
1975000	697
1975100	697
1975200	697
1975201	697
1975300	697
1975500	697
1975501	697
1975600	697
1975601	697
1975700	697
1975800	697
1975801	697
1975900	697
1975901	697
1976100	697
1976200	697
1976201	697
1976400	697
1976401	697
1976500	697
1976700	697
1976800	697
1976801	697
1977000	697
1977001	697
1977100	697
1977101	697
1977200	697
1977300	697
1977400	697
1977500	697
1977600	697
1977700	697
1978000	697
1978200	697
1978300	697
1978400	697
1978600	697
1978700	697
1978800	697
1980100	643
1980101	643

EDP Number	Page No.
1980105	643
1980108	643
1980400	643
1980401	643
1980405	643
1980408	643
1980700	643
1980701	643
1980705	643
1981	698
1981000	643
1981001	643
1981005	643
1981008	643
1981300	643
1981301	643
1981305	643
1981308	643
1981400	643
1981401	643
1981500	643
1981600	643
1981601	643
1981605	643
1981608	643
1981900	643
1981901	643
1981905	643
1981908	643
1982	698
1982000	643
1982001	643
1982100	643
1982101	643
1982200	643
1982201	643
1982300	643
1982301	643
1982400	643
1982401	643
1982500	643
1982501	643
1982600	643
1982601	643
1982700	643
1982701	643
1982800	643
1982801	643
1982900	643
1983	698
1983000	643
1983001	643
1983100	643
1983101	643
1983200	643
1983201	643



EDP Number	Page No.
1983300	643
1983400	643
1983401	643
1983500	643
1983600	643
1983700	643
1983800	643
1983900	643
1985100	557
1985105	557
1985200	557
1985201	557
1985208	557
1985400	557
1985405	557
1985408	557
1985500	557
1985501	557
1985508	557
1985700	557
1985705	557
1985708	557
1985800	557
1985801	557
1985808	557
1986000	557
1986005	557
1986008	557
1986100	557
1986101	557
1986108	557
1986300	557
1986305	557
1986308	557
1986400	557
1986401	557
1986408	557
1986600	557
1986605	557
1986608	557
1986700	557
1986701	557
1986708	557
1986900	557
1986905	557
1986908	557
1987000	557
1987001	557
1987008	557
1AQ0090-SO	322
1AQ0100-SO	322
1AQ0110-SO	322
1AQ0120-SO	322
1AQ0130-SO	322
1AQ0140-SO	322
1AQ0150-SO	322

EDP Number	Page No.
1AQ0160-SO	322
1AQ0170-SO	322
1AQ0175-SO	322
1AQ0180-SO	322
1AQ0190-SO	322
1AQ0198-SO	322
1AQ0199-SO	322
1AQ0200-SO	322
1AQ0206-SO	322
1AQ0208-SO	322
1AQ0210-SO	322
1AQ0218-SO	322
1AQ0220-SO	322
1AQ0225-SO	322
1AQ0226-SO	322
1AQ0230-SO	322
1AQ0237-SO	322
1AQ0238-SO	322
1AQ0240-SO	322
1AQ0244-SO	322
1AQ0249-SO	322
1AQ0250-SO	322
1AQ0253-SO	322
1AQ0258-SO	322
1AQ0260-SO	322
1AQ0264-SO	322
1AQ0270-SO	322
1AQ0271-SO	322
1AQ0275-SO	322
1AQ0278-SO	322
1AQ0279-SO	322
1AQ0280-SO	322
1AQ0282-SO	322
1AQ0287-SO	322
1AQ0290-SO	322
1AQ0295-SO	322
1AQ0300-SO	322
1AQ0305-SO	322
1AQ0310-SO	322
1AQ0318-SO	322
1AQ0320-SO	322
1AQ0326-SO	322
1AQ0330-SO	322
1AQ0340-SO	323
1AQ0345-SO	323
1AQ0350-SO	323
1AQ0356-SO	323
1AQ0357-SO	323
1AQ0360-SO	323
1AQ0366-SO	323
1AQ0370-SO	323
1AQ0373-SO	323
1AQ0379-SO	323
1AQ0380-SO	323
1AQ0386-SO	323
1AQ0390-SO	323

EDP Number	Page No.
1AQ0391-SO	323
1AQ0397-SO	323
1AQ0399-SO	323
1AQ0400-SO	323
1AQ0404-SO	323
1AQ0409-SO	323
1AQ0410-SO	323
1AQ0420-SO	323
1AQ0422-SO	323
1AQ0430-SO	323
1AQ0431-SO	323
1AQ0437-SO	323
1AQ0439-SO	323
1AQ0440-SO	323
1AQ0449-SO	323
1AQ0450-SO	323
1AQ0457-SO	323
1AQ0460-SO	323
1AQ0462-SO	323
1AQ0469-SO	323
1AQ0470-SO	323
1AQ0476-SO	323
1AQ0479-SO	323
1AQ0480-SO	323
1AQ0485-SO	323
1AQ0490-SO	323
1AQ0492-SO	323
1AQ0498-SO	323
1AQ0500-SO	323
1AQ0506-SO	323
1AQ0510-SO	323
1AQ0511-SO	323
1AQ0516-SO	323
1AQ0518-SO	324
1AQ0520-SO	324
1AQ0522-SO	324
1AQ0530-SO	324
1AQ0532-SO	324
1AQ0540-SO	324
1AQ0541-SO	324
1AQ0550-SO	324
1AQ0556-SO	324
1AQ0560-SO	324
1AQ0561-SO	324
1AQ0570-SO	324
1AQ0579-SO	324
1AQ0580-SO	324
1AQ0590-SO	324
1AQ0595-SO	324
1AQ0600-SO	324
1AQ0610-SO	324
1AQ0620-SO	324
1AQ0630-SO	324
1AQ0635-SO	324
1AQ0640-SO	324
1AQ0650-SO	324

EDP Number	Page No.
1AQ0653-SO	324
1AQ0660-SO	324
1AQ0670-SO	324
1AQ0675-SO	324
1AQ0680-SO	324
1AQ0690-SO	324
1AQ0691-SO	324
1AQ0700-SO	324
1AQ0710-SO	324
1AQ0714-SO	324
1AQ0720-SO	324
1AQ0730-SO	324
1AQ0740-SO	324
1AQ0750-SO	324
1AQ0754-SO	324
1AQ0760-SO	324
1AQ0770-SO	324
1AQ0780-SO	324
1AQ0790-SO	324
1AQ0794-SO	324
1AQ0800-SO	324
1AQ0810-SO	324
1AQ0820-SO	324
1AQ0830-SO	324
1AQ0833-SO	324
1AQ0840-SO	324
1AQ0843-SO	324
1AQ0850-SO	325
1AQ0860-SO	325
1AQ0870-SO	325
1AQ0873-SO	325
1AQ0880-SO	325
1AQ0890-SO	325
1AQ0900-SO	325
1AQ0910-SO	325
1AQ0913-SO	325
1AQ0920-SO	325
1AQ0930-SO	325
1AQ0940-SO	325
1AQ0950-SO	325
1AQ0953-SO	325
1AQ0960-SO	325
1AQ0970-SO	325
1AQ0980-SO	325
1AQ0990-SO	325
1AQ0992-SO	325
1AQ1000-SO	325
1AQ1020-SO	325
1AQ1032-SO	325
1AQ1050-SO	325
1AQ1072-SO	325
1AQ1100-SO	325
1AQ1111-SO	325
1AQ1150-SO	325
1AQ1200-SO	325
1AQ1229-SO	325



EDP Number	Page No.
1AQ1250-SO	325
1AQ1269-SO	325
1AQ1270-SO	325
1AQ1300-SO	325
1BB0100-SO	319
1BB0150-SO	319
1BB0160-SO	319
1BB0198-SO	319
1BB0199-SO	319
1BB0200-SO	319
1BB0206-SO	319
1BB0208-SO	319
1BB0210-SO	319
1BB0218-SO	319
1BB0226-SO	319
1BB0237-SO	319
1BB0238-SO	319
1BB0244-SO	319
1BB0249-SO	319
1BB0250-SO	319
1BB0253-SO	319
1BB0258-SO	319
1BB0264-SO	319
1BB0270-SO	319
1BB0271-SO	319
1BB0278-SO	319
1BB0279-SO	319
1BB0282-SO	319
1BB0287-SO	319
1BB0290-SO	319
1BB0295-SO	319
1BB0300-SO	319
1BB0305-SO	319
1BB0318-SO	319
1BB0326-SO	319
1BB0330-SO	319
1BB0345-SO	319
1BB0350-SO	319
1BB0356-SO	319
1BB0357-SO	319
1BB0366-SO	319
1BB0370-SO	319
1BB0373-SO	319
1BB0379-SO	320
1BB0386-SO	320
1BB0391-SO	320
1BB0397-SO	320
1BB0399-SO	320
1BB0400-SO	320
1BB0404-SO	320
1BB0409-SO	320
1BB0420-SO	320
1BB0422-SO	320
1BB0431-SO	320
1BB0437-SO	320
1BB0439-SO	320

EDP Number	Page No.
1BB0449-SO	320
1BB0450-SO	320
1BB0457-SO	320
1BB0462-SO	320
1BB0469-SO	320
1BB0476-SO	320
1BB0479-SO	320
1BB0485-SO	320
1BB0492-SO	320
1BB0498-SO	320
1BB0500-SO	320
1BB0506-SO	320
1BB0511-SO	320
1BB0516-SO	320
1BB0518-SO	320
1BB0522-SO	320
1BB0530-SO	320
1BB0532-SO	320
1BB0541-SO	320
1BB0550-SO	320
1BB0556-SO	320
1BB0561-SO	320
1BB0579-SO	320
1BB0595-SO	320
1BB0600-SO	320
1BB0634-SO	320
1BB0650-SO	320
1BB0653-SO	320
1BB0675-SO	320
1BB0680-SO	320
1BB0691-SO	320
1BB0700-SO	320
1BB0714-SO	320
1BB0730-SO	320
1BB0750-SO	320
1BB0754-SO	321
1BB0780-SO	321
1BB0794-SO	321
1BB0800-SO	321
1BB0833-SO	321
1BB0843-SO	321
1BB0850-SO	321
1BB0873-SO	321
1BB0880-SO	321
1BB0900-SO	321
1BB0913-SO	321
1BB0950-SO	321
1BB0953-SO	321
1BB0992-SO	321
1BB1000-SO	321
1BB1020-SO	321
1BB1032-SO	321
1BB1050-SO	321
1BB1072-SO	321
1BB1080-SO	321
1BB1100-SO	321

EDP Number	Page No.
1BB1111-SO	321
1BB1150-SO	321
1BB1151-SO	321
1BB1191-SO	321
1BB1200-SO	321
1BB1229-SO	321
1BB1250-SO	321
1BB1269-SO	321
1BB1300-SO	321
1G70100-SO	328
1G70150-SO	328
1G70160-SO	328
1G70170-SO	328
1G70190-SO	328
1G70198-SO	328
1G70199-SO	328
1G70200-SO	328
1G70206-SO	328
1G70208-SO	328
1G70210-SO	328
1G70218-SO	328
1G70226-SO	328
1G70237-SO	328
1G70238-SO	328
1G70244-SO	328
1G70249-SO	328
1G70250-SO	328
1G70253-SO	328
1G70258-SO	328
1G70260-SO	328
1G70264-SO	328
1G70270-SO	328
1G70271-SO	328
1G70278-SO	328
1G70279-SO	328
1G70280-SO	328
1G70282-SO	328
1G70287-SO	328
1G70290-SO	328
1G70295-SO	328
1G70300-SO	328
1G70305-SO	328
1G70310-SO	328
1G70318-SO	328
1G70320-SO	328
1G70326-SO	328
1G70330-SO	328
1G70340-SO	328
1G70345-SO	328
1G70350-SO	328
1G70356-SO	328
1G70357-SO	328
1G70360-SO	328
1G70366-SO	328
1G70370-SO	328
1G70373-SO	328

EDP Number	Page No.
1G70379-SO	328
1G70380-SO	328
1G70386-SO	328
1G70390-SO	329
1G70391-SO	329
1G70397-SO	329
1G70399-SO	329
1G70400-SO	329
1G70404-SO	329
1G70409-SO	329
1G70410-SO	329
1G70420-SO	329
1G70422-SO	329
1G70430-SO	329
1G70431-SO	329
1G70437-SO	329
1G70439-SO	329
1G70449-SO	329
1G70450-SO	329
1G70457-SO	329
1G70462-SO	329
1G70469-SO	329
1G70476-SO	329
1G70479-SO	329
1G70480-SO	329
1G70485-SO	329
1G70492-SO	329
1G70498-SO	329
1G70500-SO	329
1G70506-SO	329
1G70510-SO	329
1G70511-SO	329
1G70516-SO	329
1G70518-SO	329
1G70520-SO	329
1G70522-SO	329
1G70530-SO	329
1G70532-SO	329
1G70541-SO	329
1G70550-SO	329
1G70556-SO	329
1G70561-SO	329
1G70579-SO	329
1G70580-SO	329
1G70590-SO	329
1G70595-SO	329
1G70600-SO	329
1G70610-SO	329
1G70620-SO	329
1G70630-SO	330
1G70635-SO	330
1G70640-SO	330
1G70650-SO	330
1G70653-SO	330
1G70675-SO	330
1G70680-SO	330



EDP Number	Page No.
1G70690-SO	330
1G70691-SO	330
1G70700-SO	330
1G70714-SO	330
1G70730-SO	330
1G70750-SO	330
1G70754-SO	330
1G70770-SO	330
1G70780-SO	330
1G70790-SO	330
1G70794-SO	330
1G70800-SO	330
1G70810-SO	330
1G70820-SO	330
1G70833-SO	330
1G70840-SO	330
1G70843-SO	330
1G70850-SO	330
1G70870-SO	330
1G70873-SO	330
1G70880-SO	330
1G70890-SO	330
1G70900-SO	330
1G70913-SO	330
1G70930-SO	330
1G70950-SO	330
1G70953-SO	330
1G70960-SO	330
1G70992-SO	330
1G71000-SO	330
1G71010-SO	330
1G71020-SO	330
1G71030-SO	330
1G71032-SO	330
1G71050-SO	330
1G71060-SO	330
1G71070-SO	330
1G71072-SO	330
1G71080-SO	330
1G71100-SO	330
1G71111-SO	330
1G71130-SO	330
1G71150-SO	330
1G71170-SO	331
1G71180-SO	331
1G71200-SO	331
1G71250-SO	331
1G71269-SO	331
1G71270-SO	331
1G71280-SO	331
1G71290-SO	331
1G71300-SO	331
1NA0001-SO	341
1NA0002-SO	341
1NA0003-SO	341
1NA0004-SO	341

EDP Number	Page No.
1NA0005-SO	341
1NA0006-SO	341
1NA0007-SO	341
1R50100-SO	316
1R50150-SO	316
1R50160-SO	316
1R50198-SO	316
1R50199-SO	316
1R50200-SO	316
1R50206-SO	316
1R50208-SO	316
1R50210-SO	316
1R50218-SO	316
1R50226-SO	316
1R50237-SO	316
1R50238-SO	316
1R50244-SO	316
1R50249-SO	316
1R50250-SO	316
1R50253-SO	316
1R50258-SO	316
1R50264-SO	316
1R50271-SO	316
1R50278-SO	316
1R50279-SO	316
1R50282-SO	316
1R50287-SO	316
1R50290-SO	316
1R50295-SO	316
1R50300-SO	316
1R50305-SO	316
1R50318-SO	316
1R50326-SO	316
1R50330-SO	316
1R50345-SO	316
1R50350-SO	316
1R50356-SO	316
1R50357-SO	316
1R50366-SO	316
1R50370-SO	316
1R50373-SO	316
1R50379-SO	316
1R50386-SO	316
1R50391-SO	316
1R50397-SO	316
1R50399-SO	316
1R50400-SO	316
1R50404-SO	316
1R50409-SO	316
1R50420-SO	316
1R50422-SO	316
1R50431-SO	317
1R50437-SO	317
1R50439-SO	317
1R50449-SO	317
1R50450-SO	317

EDP Number	Page No.
1R50457-SO	317
1R50462-SO	317
1R50469-SO	317
1R50476-SO	317
1R50479-SO	317
1R50485-SO	317
1R50492-SO	317
1R50498-SO	317
1R50500-SO	317
1R50506-SO	317
1R50511-SO	317
1R50516-SO	317
1R50518-SO	317
1R50522-SO	317
1R50532-SO	317
1R50541-SO	317
1R50550-SO	317
1R50556-SO	317
1R50561-SO	317
1R50579-SO	317
1R50595-SO	317
1R50600-SO	317
1R50635-SO	317
1R50650-SO	317
1R50653-SO	317
1R50675-SO	317
1R50680-SO	317
1R50691-SO	317
1R50700-SO	317
1R50714-SO	317
1R50750-SO	317
1R50754-SO	317
1R50794-SO	317
1R50800-SO	317
1R50833-SO	317
1R50843-SO	317
1R50850-SO	317
1R50873-SO	317
1R50900-SO	317
1R50913-SO	317
1R50950-SO	317
1R50953-SO	318
1R50992-SO	318
1R51000-SO	318
1R51020-SO	318
1R51032-SO	318
1R51050-SO	318
1R51072-SO	318
1R51100-SO	318
1R51111-SO	318
1R51150-SO	318
1R51200-SO	318
1R51250-SO	318
1R51269-SO	318
1R51300-SO	318
1W60198-SO	326

EDP Number	Page No.
1W60199-SO	326
1W60206-SO	326
1W60208-SO	326
1W60218-SO	326
1W60226-SO	326
1W60237-SO	326
1W60238-SO	326
1W60244-SO	326
1W60249-SO	326
1W60250-SO	326
1W60253-SO	326
1W60258-SO	326
1W60264-SO	326
1W60271-SO	326
1W60278-SO	326
1W60279-SO	326
1W60282-SO	326
1W60287-SO	326
1W60295-SO	326
1W60305-SO	326
1W60318-SO	326
1W60326-SO	326
1W60330-SO	326
1W60345-SO	326
1W60356-SO	326
1W60357-SO	326
1W60366-SO	326
1W60373-SO	326
1W60379-SO	326
1W60386-SO	326
1W60391-SO	326
1W60397-SO	326
1W60399-SO	326
1W60400-SO	326
1W60404-SO	326
1W60409-SO	326
1W60420-SO	326
1W60422-SO	326
1W60431-SO	326
1W60437-SO	326
1W60439-SO	326
1W60449-SO	326
1W60450-SO	326
1W60457-SO	326
1W60462-SO	326
1W60469-SO	326
1W60476-SO	326
1W60479-SO	326
1W60485-SO	326
1W60492-SO	326
1W60498-SO	326
1W60500-SO	327
1W60506-SO	327
1W60511-SO	327
1W60516-SO	327
1W60518-SO	327



EDP Number	Page No.
1W60522-SO	327
1W60532-SO	327
1W60541-SO	327
1W60550-SO	327
1W60556-SO	327
1W60561-SO	327
1W60579-SO	327
1W60595-SO	327
1W60600-SO	327
1W60634-SO	327
1W60650-SO	327
1W60653-SO	327
1W60675-SO	327
1W60680-SO	327
1W60691-SO	327
1W60700-SO	327
1W60714-SO	327
1W60750-SO	327
1W60754-SO	327
1W60794-SO	327
1W60800-SO	327
1W60833-SO	327
1W60843-SO	327
1W60850-SO	327
1W60873-SO	327
1W60900-SO	327
1W60913-SO	327
1W60950-SO	327
1W60953-SO	327
1W60992-SO	327
1W61000-SO	327
1W61020-SO	327
1W61030-SO	327
1W61050-SO	327
1W61072-SO	327
1W61100-SO	327
1W61111-SO	327
1W61191-SO	327
1W61200-SO	327
1W61269-SO	327
1X60030-SO	339
1X60040-SO	340
1X60318-SO	338
1X60357-SO	338
1X60397-SO	338
1X60437-SO	338
1X60476-SO	338
1X60516-SO	338
1X60556-SO	338
1X60595-SO	338
1X60635-SO	338
1X60675-SO	338
1X60714-SO	338
1X60754-SO	338
1X60794-SO	338
1X60833-SO	338

EDP Number	Page No.
1X60873-SO	338
1X60913-SO	338
1X60953-SO	338
1X60992-SO	338
1X61032-SO	338
1X61072-SO	338
1X61111-SO	338
1X61151-SO	338
1X61191-SO	338
1X61229-SO	338
1X61269-SO	338
1X61309-SO	338
1X61349-SO	338
1X61389-SO	338
1X61429-SO	338
1X61468-SO	338
1X61588-SO	338
200-0465	213
200-0469	213
200-0520	213
200-0550	213
200-0591	213
200-0595	213
200-0625	213
200-0635	213
200-0670	213
200-0700	213
200-0730	213
200-0760	213
200-0781	213
200-0785	213
200-0787	213
200-0810	213
200-0820	213
200-0860	213
200-0890	213
200-0935	213
200-0938	213
200-0960	213
200-0980	213
200-0984	213
200-0995	213
200-1015	213
200-1040	213
200-1065	213
200-1094	213
200-1100	213
200-1110	213
200-1130	213
200-1160	213
200-1181	213
200-1200	213
200-1250	213
200-1285	213
200-1360	213
200-1378	213

EDP Number	Page No.
200-1405	213
200-1406	214
200-1440	214
200-1470	214
200-1495	214
200-1520	214
200-1540	214
200-1562	214
200-1570	214
200-1575	214
200-1590	214
200-1610	214
200-1660	214
200-1695	214
200-1719	214
200-1730	214
200-1770	214
200-1772	214
200-1800	214
200-1820	214
200-1850	214
200-1875	214
200-1890	214
200-1910	214
200-1935	214
200-1960	214
200-1968	214
200-1990	214
200-2010	214
200-2031	214
200-2040	214
200-2055	214
200-2090	214
2002100	635
2002108	635
200-2130	214
200-2165	214
200-2188	214
200-2210	214
200-2280	214
200-2340	214
200-2344	214
200-2362	214
200-2380	214
200-2420	214
200-2460	214
200-2500	214
200-2559	214
200-2570	214
200-2610	214
200-2656	214
200-2660	214
200-2720	214
200-2756	215
200-2770	215
200-2810	215

EDP Number	Page No.
200-2812	215
200-2900	215
200-2950	215
200-2953	215
200-2969	215
200-3020	215
2003100	640
200-3125	215
200-3150	215
200-3160	215
200-3230	215
200-3281	215
2003300	635
2003308	635
200-3320	215
200-3346	215
200-3390	215
200-3438	215
200-3480	215
200-3543	215
200-3580	215
200-3594	215
200-3680	215
200-3740	215
200-3750	215
200-3770	215
200-3860	215
2003900	635
2003905	635
200-3906	215
2003908	635
200-3937	215
200-3970	215
200-4040	215
200-4062	215
200-4130	215
200-4134	215
2004200	635
2004208	635
200-4219	215
200-4331	215
200-4375	215
200-4528	215
200-4531	215
200-4688	215
200-4724	215
200-4844	215
2005000	636
200-5000	215
2005005	636
2005008	636
2006000	636
2006008	636
2006500	636
2006508	636
2006600	636





EDP Numerical Index

EDP Number	Page No.
2006605	636
2006608	636
20100100	950
20100200	950
20100300	950
20100400	950
20100500	950
20100600	950
20100700	950
20100800	950
20100900	950
20101000	950
2013000	637
2013005	637
2013008	637
2013400	637
2013405	637
2013408	637
20150111	924
20150211	924
20150311	924
20150411	924
20150511	924
20150611	924
20150811	924
20151011	924
20151111	924
20151211	924
20151411	924
20151511	924
20151911	924
20152111	924
20152211	924
20152711	924
20152911	924
20153211	924
20210100	942
20210200	942
20210500	942
20210600	942
20210900	942
20211000	942
20211300	942
20211400	942
20211700	942
20211800	942
20211900	942
20212000	942
20212100	942
20212500	942
20212600	942
20212700	942
20212900	942
20213000	942
20213300	942
20213400	942

EDP Number	Page No.
20213500	942
20213600	942
20213700	942
20214100	942
20214200	942
20214500	942
20214900	942
20215000	942
20215100	942
20215200	942
20215300	942
20215400	942
20215500	942
20215600	942
20215700	942
20215800	942
20215900	942
20216000	942
20216100	942
20216200	942
20216300	942
20216400	942
20220100	943
20220200	943
20220500	943
20220600	943
20220900	943
20221000	943
20221300	943
20221400	943
20221700	943
20221800	943
20221900	943
20222000	943
20222100	943
20222200	943
20222500	943
20222600	943
20222700	943
20222900	943
20223000	943
20223300	943
20223400	943
20223500	943
20223600	943
20223700	943
20223800	943
20224100	943
20224200	943
20224500	943
20224600	943
20224900	943
20225000	943
20225100	943
20225200	943
20225300	943

EDP Number	Page No.
20225400	943
20225500	943
20225600	943
20225700	943
20225800	943
20225900	943
20226000	943
20226100	943
20226200	943
20226300	943
20226400	943
20230100	944
20230200	944
20230300	944
20230400	944
20230500	944
20230600	944
20230700	944
20230800	944
20230900	944
20231000	944
20231100	944
20231200	944
20231300	944
20231400	944
20231500	944
20231600	944
20231700	944
20231800	944
20231900	944
20232000	944
20240100	945
20240200	945
20240300	945
20240400	945
20240500	945
20240600	945
20240700	945
20240800	945
20240900	945
20241000	945
20241100	945
20241200	945
20241300	945
20241400	945
20241500	945
20241600	945
20241700	945
20241800	945
20241900	945
20242000	945
2031	699
2032	699
2033	699
20410100	946
20410200	946

EDP Number	Page No.
20410900	946
20411000	946
20411700	946
20411800	946
20411900	946
20412000	946
20412500	946
20412600	946
20412700	946
20413300	946
20413400	946
20413500	946
20413600	946
20414100	946
20414200	946
20414900	946
20415000	946
20415100	946
20415200	946
20415300	946
20415400	946
20415500	946
20415600	946
20415700	946
20415800	946
20415900	946
20416000	946
20416100	946
20416200	946
20416300	946
20416400	946
20420100	947
20420200	947
20420900	947
20421000	947
20421700	947
20421800	947
20421900	947
20422000	947
20422500	947
20422600	947
20422700	947
20423300	947
20423400	947
20423500	947
20423600	947
20424100	947
20424200	947
20424900	947
20425000	947
20425100	947
20425200	947
20425300	947
20425400	947
20425500	947
20425600	947



EDP Number	Page No.
20425700	947
20425800	947
20425900	947
20426000	947
20426100	947
20426200	947
20426300	947
20426400	947
20430100	948
20430200	948
20430300	948
20430400	948
20430500	948
20430600	948
20430700	948
20430800	948
20430900	948
20431000	948
20431100	948
20431200	948
20431300	948
20431400	948
20431500	948
20431600	948
20431700	948
20431800	948
20431900	948
20432000	948
20480100	949
20480200	949
20480300	949
20480400	949
20480500	949
20480600	949
20480700	949
20480800	949
20480900	949
20481000	949
20481100	949
20481200	949
20481300	949
20481400	949
20481500	949
20481600	949
20481700	949
20481800	949
20481900	949
20482000	949
205000111	919
205001111	919
205002111	919
205002211	919
205003111	919
205004111	919
205004211	919
205005111	919

EDP Number	Page No.
205006111	919
205006211	919
205006311	919
205007111	919
205008111	919
205009111	919
205094111	919
205094211	919
205095111	919
205096111	919
205096211	919
205096311	919
205097111	919
205098111	919
205099111	919
205200111	920
205200211	920
205201111	920
205201211	920
205202111	920
205202211	920
205202311	920
205202411	920
205203111	920
205203211	920
205204111	920
205204211	920
205204311	920
205204411	920
205205111	920
205205211	920
205206111	920
205206211	920
205206311	920
205206411	920
205206511	920
205206611	920
205206711	920
205206811	920
205206911	920
205207111	920
205207211	920
205207311	920
205207411	920
205208111	920
205208211	920
205208311	920
205208411	920
205209111	920
205209211	920
205209311	920
205209411	920
205294111	920
205294211	920
205294311	920
205294411	920

EDP Number	Page No.
205295111	920
205295211	920
205296111	920
205296211	920
205296311	920
205296411	920
205296511	920
205296611	920
205296711	920
205296811	920
205296911	920
205297111	920
205297211	920
205297311	920
205297411	920
205298111	920
205298211	920
205298311	920
205298411	920
205299111	920
205299211	920
205299311	920
205299411	920
2054000	701
2055000	701
20551001	841
20551002	841
20551003	841
20551004	841
20552501	841
20552502	841
20552503	841
20553121	841
20553122	841
20553123	841
20553751	841
20553752	841
20553753	841
20555001	841
20555002	841
20555003	841
20555004	841
20555005	841
20555006	841
20555007	841
20555008	841
20556251	841
20556252	841
20556253	841
20556254	841
20557501	841
20557502	841
20557503	841
20557504	841
2056000	647
20610116	952

EDP Number	Page No.
20610216	952
20610316	952
20610416	952
20610516	952
20610716	952
20611116	952
20611216	952
20611316	952
20611516	952
20611716	952
20612116	952
20612216	952
20612316	952
20612416	952
20612516	952
20612716	952
20613216	952
20613316	952
20613416	952
20613516	952
20613716	952
20614316	952
20614400	952
20614416	952
20614516	952
20615216	952
20615316	952
20615516	952
20615716	952
20616316	952
20616416	952
20616516	952
20616716	952
20616816	952
20617316	952
20642516	954
20643516	954
20643616	954
20645016	954
20645116	954
20660116	953
20660316	953
20660516	953
20660716	953
20682516	955
20683516	955
20683616	955
20685016	955
20685116	955
20801000	931
20806250	931
20807500	931
21000711	925
21000811	925
21000911	925
21001011	925



EDP Numerical Index

EDP Number	Page No.
21001111	925
21001211	925
21001311	925
21001411	925
21001511	925
21001611	925
21001711	925
21001811	925
21001911	925
21020011	928
21020111	928
21020211	928
21020311	928
21020411	928
2103000	645
2103600	645
2103800	645
2103801	645
2104400	645
2104401	645
2105200	645
2106000	645
21062111	926
21062211	926
21062311	926
21062411	926
21062511	926
21062611	926
21062711	926
21062811	926
21062911	926
21063011	926
21063111	926
21063211	926
21063311	926
21063411	926
21063511	926
21063611	926
21063711	926
21063811	926
21063911	926
21064011	926
21064111	926
21064211	926
21064311	926
21064411	926
21064511	926
21064611	926
21064711	926
21064811	926
21064911	926
21065011	926
21065111	926
21065211	926
21065311	926
21065411	926

EDP Number	Page No.
21065511	926
21065611	926
21065711	926
21065811	926
21065911	926
21066011	926
21066111	926
21066211	926
21066311	926
21066411	926
21066511	926
21066611	926
21066711	926
21066811	926
21066911	926
21067011	926
21067111	926
21067211	926
21067311	926
21067411	926
21067511	926
21067611	927
21067711	927
21067811	927
21067911	927
21068011	927
21068111	927
21080011	929
21080111	929
21080211	929
21080311	929
21080411	929
21080511	929
21080611	929
21080711	929
21080811	929
21080911	929
21081011	929
21081111	929
21081211	929
21081311	929
21081411	929
21081511	929
21081611	929
21081711	929
21081811	929
21081911	929
21082011	929
21082111	929
21082211	929
2141	699
2142	699
2143	699
215-0394	204
215-0433	204
215-0465	204

EDP Number	Page No.
215-0469	204
215-0472	204
215-0512	204
215-0520	204
215-0550	204
215-0551	204
215-0591	204
215-0595	204
215-0625	204
215-0630	204
215-0635	204
215-0669	204
215-0670	204
215-0700	204
215-0709	204
215-0730	204
215-0748	204
215-0760	204
215-0781	204
215-0785	204
215-0787	204
215-0810	204
215-0820	204
215-0827	204
215-0860	204
215-0866	204
215-0890	204
215-0906	204
215-0935	204
215-0938	204
215-0945	204
215-0960	204
215-0980	204
215-0984	204
215-0995	204
215-1015	204
215-1024	204
215-1040	204
215-1063	204
215-1065	204
215-1094	204
215-1100	204
215-1102	204
215-1110	204
215-1130	204
215-1142	204
215-1160	204
215-1181	205
215-1200	205
215-1220	205
215-1250	205
215-1260	205
215-1285	205
215-1299	205
215-1339	205
215-1360	205

EDP Number	Page No.
215-1378	205
215-1405	205
215-1406	205
215-1417	205
215-1440	205
215-1457	205
215-1470	205
215-1495	205
215-1496	205
215-1520	205
215-1535	205
215-1540	205
215-1562	205
215-1570	205
215-1575	205
215-1590	205
215-1610	205
215-1614	205
215-1654	205
215-1660	205
215-1693	205
215-1695	205
215-1719	205
215-1730	205
215-1732	205
215-1770	205
215-1772	205
215-1800	205
215-1811	205
215-1820	205
215-1850	205
215-1875	205
215-1890	205
215-1910	205
215-1929	205
215-1935	205
215-1960	205
215-1968	206
215-1990	206
215-2008	206
215-2010	206
215-2031	206
215-2040	206
215-2047	206
215-2055	206
215-2087	206
215-2090	206
215-2126	206
215-2130	206
215-2165	206
215-2188	206
215-2205	206
215-2210	206
215-2244	206
215-2280	206
215-2283	206



EDP Number	Page No.
215-2323	206
215-2340	206
215-2344	206
215-2362	206
215-2380	206
215-2402	206
215-2420	206
215-2441	206
215-2460	206
215-2480	206
215-2500	206
215-2520	206
215-2559	206
215-2570	206
215-2598	206
215-2610	206
215-2638	206
215-2656	206
215-2660	206
215-2677	206
215-2717	206
215-2720	206
215-2756	206
215-2770	206
215-2795	206
215-2810	206
215-2812	206
215-2835	206
215-2874	206
215-2900	206
215-2913	206
215-2950	207
215-2953	207
215-2969	207
215-2992	207
215-3020	207
215-3031	207
215-3071	207
215-3110	207
215-3125	207
215-3150	207
215-3160	207
215-3189	207
215-3228	207
215-3230	207
215-3268	207
215-3281	207
215-3307	207
215-3320	207
215-3346	207
215-3386	207
215-3390	207
215-3425	207
215-3438	207
215-3465	207
215-3480	207

EDP Number	Page No.
215-3504	207
215-3543	207
215-3580	207
215-3583	207
215-3594	207
215-3622	207
215-3661	207
215-3680	207
215-3701	207
215-3740	207
215-3750	207
215-3770	207
215-3780	207
215-3819	207
215-3858	207
215-3860	207
215-3898	207
215-3906	207
215-3937	207
215-3970	207
215-3976	207
215-4016	208
215-4040	208
215-4055	208
215-4062	208
215-4094	208
215-4130	208
215-4134	208
215-4173	208
215-4213	208
215-4219	208
215-4252	208
215-4291	208
215-4331	208
215-4370	208
215-4375	208
215-4409	208
215-4449	208
215-4488	208
215-4528	208
215-4531	208
215-4567	208
215-4606	208
215-4646	208
215-4685	208
215-4688	208
215-4724	208
215-4844	208
215-5000	208
220-0465	209
220-0469	209
220-0520	209
220-0550	209
220-0591	209
220-0595	209
220-0625	209

EDP Number	Page No.
220-0635	209
220-0670	209
220-0700	209
220-0730	209
220-0760	209
220-0781	209
220-0785	209
220-0787	209
220-0810	209
220-0820	209
220-0860	209
220-0890	209
220-0935	209
220-0938	209
220-0960	209
220-0980	209
220-0984	209
220-0995	209
220-1015	209
220-1040	209
220-1065	209
220-1094	209
220-1100	209
220-1110	209
220-1130	209
220-1160	209
220-1181	209
220-1200	209
220-1250	209
220-1285	209
220-1360	209
220-1378	209
220-1405	209
220-1406	210
220-1440	210
220-1470	210
220-1495	210
220-1520	210
220-1540	210
220-1562	210
220-1570	210
220-1575	210
220-1590	210
220-1610	210
220-1660	210
220-1695	210
220-1719	210
220-1730	210
220-1770	210
220-1772	210
220-1800	210
220-1820	210
220-1850	210
220-1875	210
220-1890	210
220-1910	210

EDP Number	Page No.
220-1935	210
220-1960	210
220-1968	210
220-1990	210
220-2010	210
220-2031	210
220-2040	210
220-2055	210
220-2090	210
220-2130	210
220-2165	210
220-2188	210
220-2210	210
220-2280	210
220-2340	210
220-2344	210
220-2362	210
220-2380	210
220-2420	210
220-2460	210
220-2500	210
220-2559	210
220-2570	210
220-2610	210
220-2656	210
220-2660	210
220-2720	210
220-2756	211
220-2770	211
220-2810	211
220-2812	211
220-2900	211
220-2950	211
220-2953	211
220-2969	211
220-3020	211
220-3125	211
220-3150	211
220-3160	211
220-3230	211
220-3281	211
220-3320	211
220-3346	211
220-3390	211
220-3438	211
220-3480	211
220-3543	211
220-3580	211
220-3594	211
220-3680	211
220-3740	211
220-3750	211
220-3770	211
220-3860	211
220-3906	211
220-3937	211



EDP Numerical Index

EDP Number	Page No.
220-3970	211
220-4040	211
220-4062	211
220-4130	211
220-4134	211
220-4219	211
220-4331	211
220-4375	211
220-4528	211
220-4531	211
220-4688	211
220-4724	211
220-4844	211
220-5000	211
2211401	530
2212401	530
2213401	530
2217801	530
2218801	530
2230001	530
2230401	530
2230801	530
2231201	530
2231601	530
2231801	530
2232001	530
2232201	530
2232401	530
2232601	530
2233201	530
2233401	530
2233601	530
2233801	530
2239201	530
2239601	530
2244001	530
2244401	530
2245001	530
2245601	530
2246201	530
2246801	530
2247201	530
2247601	530
2247701	530
2247901	530
2248001	530
2248201	530
2248301	530
2248501	530
2248601	530
2248701	530
2248801	530
2248901	530
2249001	530
2249101	530
22605	698

EDP Number	Page No.
22606	698
22611	698
22612	698
22617	698
22618	698
22621	698
22622	698
22627	698
22628	698
22633	698
22634	698
22637	698
22638	698
22643	698
22644	698
22800	669
22801	669
22802	669
22803	669
22804	669
22806	669
22807	669
22808	669
22810	669
22814	669
22817	669
22820	669
22830	669
22831	669
22833	669
22834	669
22835	669
22837	669
22839	669
22840	669
22841	669
2290401	531
2290601	531
2290801	531
2291001	531
2291401	531
2291701	531
2291801	531
2292101	531
2292201	531
2292301	531
2292501	531
2292601	531
2292801	531
22929	670
2292901	531
2293001	531
2293201	531
22933	670
2293401	531
2293601	531

EDP Number	Page No.
22941	670
22945	670
22949	670
22953	670
232	698
233	698
2330005	532
2330405	532
2330805	532
233-1181	212
2331205	532
233-1250	212
233-1406	212
233-1562	212
2331605	532
233-1719	212
2331805	532
233-1875	212
2332005	532
233-2031	212
233-2188	212
2332205	532
233-2344	212
233-2362	212
2332405	532
233-2500	212
2332605	532
233-2656	212
233-2812	212
233-2969	212
2333005	532
233-3125	212
233-3150	212
2333205	532
233-3281	212
2333405	532
233-3438	212
233-3594	212
2333605	532
233-3750	212
2333805	532
233-3906	212
233-3937	212
2334005	532
233-4062	212
2334205	532
233-4219	212
233-4375	212
2334405	532
233-4531	212
233-4688	212
233-4724	212
233-4844	212
233-5000	212
233-5312	212
233-5512	212

EDP Number	Page No.
233-5625	212
233-6250	212
233-6299	212
233-7500	212
235-0010	216
235-0020	216
235-0030	216
235-0040	216
235-0050	216
235-0060	216
2391005	533
2391405	533
2391705	533
2391805	533
2392105	533
2392205	533
2392305	533
2392505	533
2392605	533
2392805	533
2392905	533
2393005	533
2393205	533
2393405	533
2393605	533
24000	669
24001	669
24002	669
24003	669
24004	669
24006	669
24007	669
24008	669
24010	669
2401103	684
2401203	684
24014	669
2401503	684
2401603	684
24017	669
2401903	684
24020	669
2402303	684
2402403	684
2402703	684
2402803	684
24030	669
24031	669
2403203	684
24033	669
24034	669
24035	669
2403603	684
24037	669
24039	669
24040	669



EDP Number	Page No.
24041	669
2404303	684
2404403	684
24045	669
24046	669
24047	669
24048	669
24051	669
24052	669
24053	669
24054	669
24055	669
24056	669
24059	669
24060	669
24061	669
24062	669
2406303	684
2406403	684
24065	669
24066	669
24067	669
24068	669
24071	669
24072	669
24073	669
24074	669
2407503	684
2407603	684
24077	669
24078	669
2407903	684
2408003	684
2410203	685
2410303	685
2410603	685
2410803	685
2411103	685
2411203	685
2411603	685
2411703	685
2412103	685
2492800	684
2492900	684
2493000	684
2493100	684
2493203	684
2493303	684
2493403	684
2493503	684
2493603	684
2493703	684
2493803	684
2493903	684
2494003	684
2494103	684

EDP Number	Page No.
2494203	684
2494303	684
2494403	684
2494503	684
2494603	684
2494703	684
2494803	684
2494903	685
2495003	685
2495103	685
2495203	685
2495303	685
2495403	685
2495503	685
2511401	611
2512401	611
2513401	611
2517801	611
2518801	611
2530001	611
2530401	611
2530801	611
2531201	611
2531601	611
2531801	611
2532001	611
2532201	611
2532401	611
2532601	611
2533201	611
2533401	611
2533601	611
2533801	611
257-0980	180
257-1094	180
257-1250	180
257-1280	180
257-1285	180
257-1286	180
257-1299	180
257-1406	180
257-1440	180
257-1562	180
257-1570	180
257-1610	180
257-1616	180
257-1630	180
257-1719	180
257-1870	180
257-1875	180
257-1900	180
257-1906	180
257-1910	180
257-1916	180
257-1920	180
257-1930	180

EDP Number	Page No.
257-1935	180
257-1940	180
257-2010	180
257-2031	180
257-2040	180
257-2055	180
257-2180	180
257-2186	180
257-2188	180
257-2210	180
257-2280	180
257-2344	180
257-2500	180
257-2506	180
257-2510	180
257-2516	180
257-2520	180
257-2530	180
257-2656	180
257-2812	180
257-2969	180
257-3120	180
257-3125	180
257-3135	180
257-3280	180
257-3438	180
257-3500	180
257-3594	180
257-3750	181
257-3756	181
257-3906	181
257-4066	181
257-4376	181
257-5006	181
2590401	612
2590601	612
2590801	612
2591001	612
2591401	612
2591701	612
2591801	612
2592101	612
2592201	612
2592301	612
2592501	612
2592601	612
2592801	612
2592901	612
2593001	612
2593201	612
2593401	612
2593601	612
2630005	613
2630405	613
2630805	613
2631205	613

EDP Number	Page No.
2631605	613
2631805	613
2632005	613
2632205	613
2632405	613
2632605	613
2633005	613
2633205	613
2633405	613
2633605	613
2633805	613
2634005	613
2634205	613
2634405	613
26500316	957
26500616	957
26500716	957
26501316	957
26501516	957
26501716	957
26800316	956
26800516	956
26800716	956
26805316	956
26805516	956
26805716	956
26806316	956
26809316	956
26809416	956
26809516	956
26809616	956
26809716	956
2691005	614
2691405	614
2691705	614
2691805	614
2692105	614
2692205	614
2692305	614
2692505	614
2692605	614
2692805	614
2692905	614
2693005	614
2693205	614
2693405	614
2693605	614
2700100	753
2700200	753
2700300	753
2700400	753
2700500	753
2700600	753
2700700	753
2700800	753
2701000	753



EDP Numerical Index

EDP Number	Page No.
2701200	753
2701400	753
2701500	753
2702400	753
2702500	753
2702800	753
2702900	753
2703000	753
2703100	753
2703200	753
2703300	753
2703400	753
2703500	753
2703600	753
2703700	753
2703800	753
2704100	753
2704300	753
2704500	753
2704600	753
2704800	753
2704900	753
2705000	753
2705100	753
2705200	753
2705300	753
2706100	753
2706300	753
2706500	753
2706600	753
2706800	753
2706900	753
2707000	753
2707100	753
2707200	753
2707300	753
2707400	753
2707500	753
2707600	753
2707700	753
2710000	753
2710100	753
2710400	753
2710500	753
2710700	753
2710800	753
2710900	753
2711000	753
2711100	753
2711200	753
2711300	753
2711400	753
2711500	753
2711600	753
2711700	753
2711800	753

EDP Number	Page No.
2712000	753
2712100	753
2712200	753
2712300	753
2713400	753
2713800	753
2713900	753
2714000	753
2714100	753
2714200	754
2714300	754
2714400	754
2715000	754
2715100	754
2715200	754
2715300	754
2715400	754
2715500	754
2715600	754
2715700	754
2715800	754
2715900	754
2716000	754
2723000	752
2723300	752
2723400	752
2723500	752
2723700	752
2724000	752
2724100	752
2724200	752
2724400	752
2724600	752
2724700	752
2726000	753
2726200	753
2726300	753
2726400	753
2726500	753
2726600	753
2726700	753
2726900	753
2727000	753
2727100	753
2727200	753
2727300	753
2727400	753
2727600	753
2727700	753
2727800	753
2728000	753
2728200	753
2728300	753
2728400	753
2728800	753
2729100	753

EDP Number	Page No.
2729400	753
2729600	753
2729700	753
2734000	755
2734100	755
2734200	755
2734300	755
2734400	755
2734500	755
2734600	755
2805600	629
2805601	629
2805608	629
2806000	629
2806001	629
2806008	629
2806400	629
2806401	629
2806408	629
2807000	629
2807001	629
2807008	629
2807400	629
2807401	629
2807408	629
2807600	629
2807601	629
2807608	629
2807800	629
2807801	629
2807808	629
2808000	629
2808001	629
2808008	629
2808800	629
2808801	629
2808808	629
2809000	629
2809001	629
2809008	629
2809200	629
2809201	629
2809208	629
2809400	629
2809401	629
2809408	629
2809600	630
2809601	630
2809608	630
2811400	629
2811401	629
2811408	629
2812400	629
2812401	629
2812408	629
2812500	629

EDP Number	Page No.
2812501	629
2812508	629
2812800	629
2812801	629
2812808	629
2812900	629
2812901	629
2812908	629
2813400	629
2813401	629
2813408	629
2813800	629
2813801	629
2813808	629
2813900	629
2813901	629
2813908	629
2816300	629
2816301	629
2816308	629
2816400	629
2816401	629
2816408	629
2816500	629
2816501	629
2816508	629
2817400	629
2817401	629
2817408	629
2817500	629
2817501	629
2817508	629
2817600	629
2817601	629
2817608	629
2817700	629
2817701	629
2817708	629
2817800	629
2817801	629
2817808	629
2817900	629
2817901	629
2817908	629
2818000	629
2818001	629
2818008	629
2818100	629
2818101	629
2818108	629
2818400	629
2818401	629
2818408	629
2818800	629
2818801	629
2818808	629



EDP Number	Page No.
2818900	629
2818901	629
2818908	629
2819000	629
2819001	629
2819008	629
2819100	629
2819101	629
2819108	629
2823400	629
2823401	629
2823408	629
2826400	630
2826401	630
2826408	630
2826800	630
2826801	630
2826808	630
2827600	630
2827601	630
2827608	630
2830000	629
2830001	629
2830008	629
2830400	630
2830401	630
2830408	630
2830800	630
2830801	630
2830808	630
2831200	630
2831201	630
2831208	630
2831600	630
2831601	630
2831608	630
2831800	630
2831801	630
2831808	630
2832000	630
2832001	630
2832008	630
2832200	630
2832201	630
2832208	630
2832400	630
2832401	630
2832408	630
2832600	630
2832601	630
2832608	630
2833200	631
2833201	631
2833208	631
2833400	631
2833401	631

EDP Number	Page No.
2833408	631
2833600	631
2833601	631
2833608	631
2833800	631
2833801	631
2833808	631
2835400	630
2835401	630
2835408	630
2836200	630
2836201	630
2836208	630
2836800	630
2836801	630
2836808	630
2839200	631
2839201	631
2839208	631
2839600	631
2839601	631
2839608	631
2840000	629
2840001	629
2840008	629
2840400	630
2840401	630
2840408	630
2840500	630
2840501	630
2840508	630
2840600	630
2840601	630
2840608	630
2840700	630
2840701	630
2840708	630
2840800	630
2840801	630
2840808	630
2841200	630
2841201	630
2841208	630
2841300	630
2841301	630
2841308	630
2841400	630
2841401	630
2841408	630
2841500	630
2841501	630
2841508	630
2841600	630
2841601	630
2841608	630
2841700	630

EDP Number	Page No.
2841701	630
2841708	630
2841800	630
2841801	630
2841808	630
2841900	630
2841901	630
2841908	630
2842000	630
2842001	630
2842008	630
2842100	630
2842101	630
2842108	630
2842200	630
2842201	630
2842208	630
2842300	630
2842301	630
2842308	630
2842400	630
2842401	630
2842408	630
2842500	630
2842501	630
2842508	630
2842600	630
2842601	630
2842608	630
2842700	630
2842701	630
2842708	630
2842800	630
2842801	630
2842808	630
2842900	630
2842901	630
2842908	630
2843000	630
28430000	938
2843001	630
2843008	630
28430400	938
28430550	938
28430600	938
28430700	938
28430800	938
28430900	938
28431000	938
28431550	938
28431600	938
28431700	938
28431800	938
28431900	938
2843200	631
28432000	938

EDP Number	Page No.
2843201	631
28432050	938
2843208	631
28432600	938
28432700	938
28432800	938
28432900	938
28433050	938
28433100	938
28433500	938
28433800	938
28433900	938
2843400	631
2843401	631
28434050	938
2843408	631
28434100	938
28434200	938
28434300	938
28434500	938
28434900	938
28435050	938
28435100	938
28435200	938
28435300	938
28435400	938
2843600	631
2843601	631
2843608	631
2843800	631
2843801	631
2843808	631
2844000	631
2844001	631
2844008	631
2844400	631
2844401	631
2844408	631
2845001	631
2845601	631
2846201	631
2846801	631
2849801	631
2850201	631
2850401	631
2850801	631
2851001	631
2851401	631
2851601	631
2852001	631
28530000	940
28530100	940
28530200	940
28530300	940
28530400	940
28530500	940



EDP Numerical Index

EDP Number	Page No.
28530600	940
2854800	630
2854801	630
2854808	630
2855000	630
2855001	630
2855008	630
2855600	630
2855601	630
2855608	630
2855800	630
2855801	630
2855808	630
2856400	630
2856401	630
2856408	630
2856600	630
2856601	630
2856608	630
2856800	630
2856801	630
2856808	630
2857400	630
2857401	630
2857408	630
2857600	630
2857601	630
2857608	630
2857800	630
2857801	630
2857808	630
2858000	631
2858001	631
2858008	631
28630000	932
28630100	932
28630200	932
28630400	932
28630600	932
28630700	932
28630800	932
28630900	932
28631000	932
28631200	932
28631300	932
28631400	932
28631500	932
28631600	932
28631800	932
28631900	932
28632000	932
28632100	932
28632200	932
28632400	932
28632500	932
28632600	932

EDP Number	Page No.
28632700	932
28632800	932
2864200	489
2864205	489
2864208	489
2864400	489
2864405	489
2864408	489
2864600	489
2864605	489
2864608	489
2864800	489
2864805	489
2864808	489
2865000	489
2865005	489
2865008	489
2865200	489
2865205	489
2865208	489
2865400	489
2865405	489
2865408	489
2865600	489
2865605	489
2865608	489
2865800	489
2865805	489
2865808	489
2866000	489
2866005	489
2866008	489
2866200	489
2866205	489
2866208	489
2866400	489
2866405	489
2866408	489
2866600	489
2866605	489
2866608	489
2866800	489
2866805	489
2866808	489
2867000	489
2867005	489
2867008	489
2867200	489
2867205	489
2867208	489
2867400	489
2867405	489
2867408	489
2867600	489
2867605	489
2867608	489

EDP Number	Page No.
2868100	489
2868105	489
2868108	489
2868300	489
2868305	489
2868308	489
2868500	489
2868505	489
2868508	489
2868700	489
2868705	489
2868708	489
2868900	489
2868905	489
2868908	489
2869100	489
2869105	489
2869108	489
2869300	489
2869305	489
2869308	489
28730000	934
28730050	934
28730100	934
28730200	934
28730300	934
28731000	934
28731050	934
28731100	934
28731200	934
28731300	934
28731400	934
28732050	934
28732100	934
28732200	934
28732300	934
28732400	934
28732500	934
28734050	934
28734400	934
28734500	934
28734600	934
28734700	934
28734800	934
28735050	934
28735500	934
28735600	934
28735700	934
28735800	934
28735900	934
28740000	936
28740050	936
28740500	936
28740550	936
28741000	936
28741050	936

EDP Number	Page No.
28741500	936
28741550	936
28742000	936
28742500	936
28743000	936
28743500	936
28744000	936
28744500	936
2880000	633
2880001	633
2880005	633
2880200	633
2880201	633
2880205	633
2880300	633
2880301	633
2880305	633
2880400	633
2880401	633
2880405	633
2880500	633
2880501	633
2880505	633
2880600	633
2880601	633
2880605	633
2880700	633
2880701	633
2880705	633
2880800	633
2880801	633
2880805	633
2880900	633
2880901	633
2880905	633
2881000	633
2881001	633
2881005	633
2881100	633
2881101	633
2881105	633
2881200	633
2881201	633
2881205	633
2881300	633
2881301	633
2881305	633
2884100	633
2884101	633
2884105	633
2884200	633
2884201	633
2884205	633
2884300	633
2884301	633
2884305	633



EDP Number	Page No.
2884400	633
2884401	633
2884405	633
2884500	633
2884501	633
2884505	633
2884600	633
2884601	633
2884605	633
2885000	633
2885001	633
2885005	633
2885200	633
2885201	633
2885205	633
2885300	633
2885301	633
2885305	633
2885400	633
2885401	633
2885405	633
2885500	633
2885501	633
2885505	633
2885600	633
2885601	633
2885605	633
2885700	633
2885701	633
2885705	633
2885800	633
2885801	633
2885805	633
2885900	633
2885901	633
2885905	633
2886000	633
2886001	633
2886005	633
2886100	633
2886101	633
2886105	633
2886200	633
2886201	633
2886205	633
2886300	633
2886301	633
2886305	633
2886400	633
2886401	633
2886405	633
2886500	633
2886501	633
2886505	633
2886600	633
2886601	633

EDP Number	Page No.
2886605	633
2886700	633
2886701	633
2886705	633
2886800	633
2886801	633
2886805	633
2886900	633
2886901	633
2886905	633
2887000	633
2887001	633
2887005	633
2888000	634
2888001	634
2888005	634
2888100	634
2888101	634
2888105	634
2888200	634
2888201	634
2888205	634
2888300	634
2888301	634
2888305	634
2888400	634
2888401	634
2888405	634
2888500	634
2888501	634
2888505	634
2888600	634
2888601	634
2888605	634
2890400	632
2890401	632
2890408	632
2890500	632
2890501	632
2890508	632
2890600	632
2890601	632
2890608	632
2890800	632
2890801	632
2890808	632
2891000	632
2891001	632
2891008	632
2891100	632
2891101	632
2891108	632
2891300	632
2891301	632
2891308	632
2891400	632

EDP Number	Page No.
2891401	632
2891408	632
2891600	632
2891601	632
2891608	632
2891700	632
2891701	632
2891708	632
2891800	632
2891801	632
2891808	632
2892100	632
2892101	632
2892108	632
2892200	632
2892201	632
2892208	632
2892300	632
2892301	632
2892308	632
2892501	632
2892508	632
2892601	632
2892608	632
2892801	632
2892808	632
2892901	632
2892908	632
2893001	632
2893008	632
2893101	632
2893108	632
2893201	632
2893208	632
2893301	632
2893308	632
2893401	632
2893408	632
2893501	632
2893508	632
2893601	632
2893608	632
2893701	632
2893708	632
2893801	632
2893901	632
2893908	632
2894001	632
2894101	632
2894108	632
2894201	632
2894301	632
2894308	632
2894401	632
2894501	632
2894508	632

EDP Number	Page No.
2894601	632
2894701	632
2894708	632
2894801	632
2894901	632
2894908	632
2895001	632
2895101	632
2895108	632
2895201	632
2895208	632
2895301	632
2895501	632
2895508	632
2895701	632
2895708	632
2905600	550
2905601	550
2905608	550
2906000	550
2906001	550
2906008	550
2906400	550
2906401	550
2906408	550
2907000	550
2907001	550
2907008	550
2907200	550
2907201	550
2907208	550
2907400	550
2907401	550
2907408	550
2907800	550
2907801	550
2907808	550
2908800	550
2908801	550
2908808	550
2911400	550
2911401	550
2911408	550
2912400	550
2912401	550
2912408	550
2912800	550
2912801	550
2912808	550
2913400	550
2913401	550
2913408	550
2913800	550
2913801	550
2913808	550
2916500	550



EDP Numerical Index

EDP Number	Page No.
2916501	550
2916508	550
2916600	550
2916601	550
2916608	550
2916800	550
2916801	550
2916808	550
2917400	550
2917401	550
2917408	550
2917500	550
2917501	550
2917508	550
2917700	550
2917701	550
2917708	550
2917800	550
2917801	550
2917808	550
2918000	550
2918001	550
2918008	550
2918100	550
2918101	550
2918108	550
2918400	550
2918401	550
2918408	550
2918800	550
2918801	550
2918808	550
2919000	550
2919001	550
2919008	550
2919100	550
2919101	550
2919108	550
292	698
2923400	550
2923401	550
2923408	550
2923600	550
2923601	550
2923608	550
2923800	550
2923801	550
2923808	550
2926400	551
2926401	551
2926408	551
2926800	551
2926801	551
2926808	551
2927600	551
2927601	551

EDP Number	Page No.
2927608	551
2928000	550
2928001	550
2928008	550
293	698
2930000	550
2930001	550
2930008	550
2930300	550
2930301	550
2930308	550
2930400	550
2930401	550
2930408	550
2930600	550
2930601	550
2930608	550
2930800	550
2930801	550
2930808	550
2931200	551
2931201	551
2931208	551
2931500	551
2931501	551
2931508	551
2931600	551
2931601	551
2931608	551
2931800	551
2931801	551
2931808	551
2932000	551
2932001	551
2932008	551
2932200	551
2932201	551
2932208	551
2932400	551
2932401	551
2932408	551
2932600	551
2932601	551
2932608	551
2933200	551
2933201	551
2933208	551
2933400	551
2933401	551
2933408	551
2933600	551
2933601	551
2933608	551
2933800	551
2933801	551
2933808	551

EDP Number	Page No.
2935400	550
2935401	550
2935408	550
2936200	551
2936201	551
2936208	551
2936800	551
2936801	551
2936808	551
2939200	551
2939201	551
2939208	551
2939600	552
2939601	552
2939608	552
2940000	550
2940001	550
2940008	550
2940200	550
2940201	550
2940208	550
2940300	550
2940301	550
2940308	550
2940400	550
2940401	550
2940408	550
2940600	550
2940601	550
2940608	550
2940700	550
2940701	550
2940708	550
2940800	550
2940801	550
2940808	550
2941000	550
2941001	550
2941008	550
2941100	550
2941101	550
2941108	550
2941200	551
2941201	551
2941208	551
2941300	551
2941301	551
2941308	551
2941400	551
2941401	551
2941408	551
2941500	551
2941501	551
2941508	551
2941600	551
2941601	551

EDP Number	Page No.
2941608	551
2941700	551
2941701	551
2941708	551
2941800	551
2941801	551
2941808	551
2941900	551
2941901	551
2941908	551
2942000	551
2942001	551
2942008	551
2942100	551
2942101	551
2942108	551
2942200	551
2942201	551
2942208	551
2942300	551
2942301	551
2942308	551
2942400	551
2942401	551
2942408	551
2942500	551
2942501	551
2942508	551
2942600	551
2942601	551
2942608	551
2942700	551
2942701	551
2942708	551
2942800	551
2942801	551
2942808	551
2942900	551
2942901	551
2942908	551
2943000	551
2943001	551
2943008	551
2943100	551
2943101	551
2943108	551
2943200	551
2943201	551
2943208	551
2943300	551
2943301	551
2943308	551
2943600	551
2943601	551
2943608	551
2943800	551



EDP Number	Page No.
2943801	551
2943808	551
2944000	551
2944001	551
2944008	551
2944400	552
2944401	552
2944408	552
2945001	552
2945601	552
2946201	552
2946801	552
2947201	552
2947601	552
2947701	552
2947901	552
2948001	552
2948201	552
2948301	552
2948501	552
2948600	551
2948601	551
2948608	551
2948800	551
2948801	551
2948808	551
2949000	551
2949001	551
2949008	551
2951300	546
2951400	546
2952500	546
2952600	546
2953100	546
2953200	546
2953800	546
2954300	546
2954400	546
2954600	546
2955000	546
2955200	546
2955600	546
2956200	546
2956400	546
2956800	546
2956900	546
2957400	546
2957600	546
2958000	546
2963300	547
2963400	547
2963500	547
2963600	547
2963800	547
2964000	547
2964100	547

EDP Number	Page No.
2984500	554
2984501	554
2984505	554
2984600	554
2984601	554
2984605	554
2985000	554
2985001	554
2985005	554
2985200	554
2985201	554
2985205	554
2985300	554
2985301	554
2985305	554
2985400	554
2985401	554
2985405	554
2985500	554
2985501	554
2985505	554
2985600	554
2985601	554
2985605	554
2985700	554
2985701	554
2985705	554
2985800	554
2985801	554
2985805	554
2985900	554
2985901	554
2985905	554
2986000	554
2986001	554
2986005	554
2986100	554
2986101	554
2986105	554
2986200	554
2986201	554
2986205	554
2986300	554
2986301	554
2986305	554
2986400	554
2986401	554
2986405	554
2986500	554
2986501	554
2986505	554
2986600	554
2986601	554
2986605	554
2986700	554
2986701	554

EDP Number	Page No.
2986705	554
2986800	554
2986801	554
2986805	554
2986900	554
2986901	554
2986905	554
2987000	554
2987001	554
2987005	554
2988000	555
2988001	555
2988005	555
2988100	555
2988101	555
2988105	555
2988200	555
2988201	555
2988205	555
2988300	555
2988301	555
2988305	555
2988400	555
2988401	555
2988405	555
2988500	555
2988501	555
2988505	555
2988600	555
2988601	555
2988605	555
2990400	553
2990401	553
2990408	553
2990500	553
2990501	553
2990508	553
2990600	553
2990601	553
2990608	553
2990800	553
2990801	553
2990808	553
2991000	553
2991001	553
2991008	553
2991100	553
2991101	553
2991108	553
2991300	553
2991301	553
2991308	553
2991400	553
2991401	553
2991408	553
2991600	553

EDP Number	Page No.
2991601	553
2991608	553
2991700	553
2991701	553
2991708	553
2991800	553
2991801	553
2991808	553
2992100	553
2992101	553
2992108	553
2992200	553
2992201	553
2992208	553
2992300	553
2992301	553
2992308	553
2992501	553
2992601	553
2992801	553
2992901	553
2993001	553
2993101	553
2993201	553
2993301	553
2993401	553
2993501	553
2993601	553
2993701	553
2993801	553
2993901	553
2994001	553
2994101	553
2994201	553
2994301	553
2994401	553
2994501	553
2994601	553
2994701	553
2994801	553
2994901	553
2995001	553
2995101	553
2995201	553
2995301	553
2995501	553
2995701	553
3000100	638
300-0315	217
300-0354	217
300-0394	217
300-0433	217
300-0465	217
300-0469	217
300-0472	217
300-0512	217



EDP Numerical Index

EDP Number	Page No.
300-0520	217
300-0550	217
300-0551	217
300-0591	217
300-0595	217
300-0625	217
300-0630	217
300-0635	217
300-0669	217
300-0670	217
300-0700	217
300-0709	217
300-0730	217
300-0748	217
300-0760	217
300-0781	217
300-0785	217
300-0787	217
300-0810	217
300-0820	217
300-0827	217
300-0860	217
300-0866	217
300-0890	217
300-0906	217
300-0935	217
300-0938	217
300-0945	217
300-0960	217
300-0980	217
300-0984	217
300-0995	217
300-1015	217
300-1024	218
300-1040	218
300-1063	218
300-1065	218
300-1094	218
300-1100	218
300-1102	218
300-1110	218
300-1130	218
300-1142	218
300-1160	218
300-1181	218
300-1200	218
300-1220	218
300-1250	218
300-1260	218
300-1285	218
300-1299	218
300-1339	218
300-1360	218
300-1378	218
300-1405	218
300-1406	218

EDP Number	Page No.
300-1417	218
300-1440	218
300-1457	218
300-1470	218
300-1495	218
300-1496	218
300-1520	218
300-1535	218
300-1540	218
300-1562	218
300-1570	218
300-1575	218
300-1590	218
300-1610	218
300-1614	218
300-1654	218
300-1660	218
300-1693	218
300-1695	218
300-1719	218
300-1730	218
300-1732	218
300-1770	218
300-1772	218
300-1800	218
300-1811	218
300-1820	218
300-1850	219
300-1875	219
300-1890	219
300-1910	219
300-1929	219
300-1935	219
300-1960	219
300-1969	219
300-1990	219
300-2008	219
300-2010	219
300-2031	219
300-2040	219
300-2047	219
300-2055	219
300-2087	219
300-2090	219
300-2126	219
300-2130	219
300-2165	219
300-2188	219
300-2205	219
300-2210	219
300-2244	219
300-2280	219
300-2283	219
300-2323	219
300-2340	219
300-2344	219

EDP Number	Page No.
300-2362	219
300-2380	219
300-2402	219
300-2420	219
300-2441	219
300-2460	219
300-2480	219
300-2500	219
300-2520	219
300-2559	219
300-2570	219
300-2598	219
300-2610	219
300-2638	219
300-2656	219
300-2660	219
300-2677	219
300-2717	220
300-2720	220
300-2756	220
300-2770	220
300-2795	220
300-2810	220
300-2812	220
300-2835	220
300-2874	220
300-2900	220
300-2913	220
300-2950	220
300-2953	220
300-2969	220
300-2992	220
300-3020	220
300-3031	220
300-3071	220
3003100	638
300-3110	220
300-3125	220
300-3150	220
300-3160	220
300-3189	220
300-3228	220
300-3230	220
300-3268	220
300-3281	220
300-3307	220
300-3320	220
300-3346	220
300-3386	220
300-3390	220
300-3425	220
300-3438	220
300-3465	220
300-3480	220
300-3504	220
300-3543	220

EDP Number	Page No.
300-3580	220
300-3583	220
300-3594	220
300-3622	220
300-3661	220
300-3680	220
300-3701	220
300-3740	220
300-3750	220
300-3770	220
300-3780	220
300-3819	220
300-3858	221
300-3860	221
300-3898	221
300-3906	221
300-3937	221
300-3970	221
300-3976	221
300-4016	221
300-4040	221
300-4055	221
300-4062	221
300-4094	221
300-4130	221
300-4134	221
300-4173	221
300-4213	221
300-4219	221
300-4252	221
300-4291	221
300-4331	221
300-4370	221
300-4375	221
300-4409	221
300-4449	221
300-4488	221
300-4528	221
300-4531	221
300-4567	221
300-4606	221
300-4646	221
300-4685	221
300-4688	221
300-4724	221
300-4764	221
300-4803	221
300-4843	221
300-4844	221
300-4882	221
300-4921	221
300-4961	221
300-5000	221
300-5079	221
300-5118	221
30100101	725



EDP Number	Page No.
30100108	725
30100201	725
30100208	725
30100301	725
30100308	725
30100401	725
30100408	725
30100501	725
30100508	725
30100601	725
30100608	725
30100701	725
30100708	725
30100801	725
30100808	725
30100901	725
30100908	725
30101101	725
30101108	725
30101201	725
30101208	725
30101301	725
30101308	725
30101401	725
30101408	725
30101501	725
30101508	725
30101601	725
30101608	725
30101701	725
30101708	725
30101801	725
30101808	725
30101901	725
30101908	725
30102101	725
30102108	725
30102201	725
30102208	725
30102301	725
30102308	725
30102401	725
30102408	725
30102501	725
30102508	725
30102601	725
30102608	725
30102701	725
30102708	725
30102801	725
30102808	725
30102901	725
30102908	725
30103101	726
30103108	726
30103201	726

EDP Number	Page No.
30103208	726
30103301	726
30103308	726
30103401	726
30103408	726
30103501	726
30103508	726
30103601	726
30103608	726
30103701	726
30103708	726
30103801	726
30103808	726
30103901	726
30103908	726
30104101	726
30104108	726
30104201	726
30104208	726
30104301	726
30104308	726
30104401	726
30104408	726
30104501	726
30104508	726
30104601	726
30104608	726
30104701	726
30104708	726
3017406	922
3017408	922
3017410	922
3017412	922
3017456	922
3017458	922
3017460	922
3017462	922
30200101	713
30200108	713
30200201	713
30200208	713
30200301	713
30200308	713
30200401	713
30200408	713
30200501	713
30200508	713
30200701	713
30200708	713
30200801	713
30200808	713
30201001	713
30201008	713
30201101	713
30201108	713
30201201	713

EDP Number	Page No.
30201208	713
30201301	713
30201308	713
30201401	713
30201408	713
30201501	713
30201508	713
30201601	713
30201608	713
30201701	713
30201708	713
30201801	713
30201808	713
30201901	713
30201908	713
30202101	713
30202108	713
30202201	713
30202208	713
30202301	713
30202308	713
30202401	713
30202408	713
30202501	713
30202508	713
30202601	713
30202608	713
30202701	713
30202708	713
30202801	713
30202808	713
30202901	713
30202908	713
30203101	713
30203108	713
30203201	713
30203208	713
30203301	714
30203308	714
30203401	714
30203408	714
30203501	714
30203508	714
30203601	714
30203608	714
30203701	714
30203708	714
30203801	714
30203808	714
30203901	714
30203908	714
30204101	714
30204108	714
30204201	714
30204208	714
30204301	714

EDP Number	Page No.
30204308	714
30204401	714
30204408	714
30204501	714
30204508	714
30204601	714
30204608	714
30204701	714
30204708	714
30204801	714
30204808	714
30204901	714
30204908	714
30205101	714
30205108	714
30205201	714
30205208	714
30205301	714
30205308	714
30205401	714
30205408	714
30205501	714
30205508	714
30205601	714
30205608	714
30205701	714
30205708	714
30205901	714
30205908	714
30206201	714
30206208	714
30206301	714
30206308	714
30206401	714
30206408	714
30206501	714
30206508	714
30206601	714
30206608	714
30206701	714
30206708	714
30206801	714
30206808	714
30206901	714
30206908	714
3041010	887
3041015	887
3041020	887
3041025	887
3041030	887
3041035	887
3041040	887
3041045	887
3041050	887
3041055	887
3041060	887



EDP Numerical Index

EDP Number	Page No.
3041080	887
3041100	887
3041120	887
3041160	887
3041200	887
3041250	887
3041410	885
3041415	885
3041420	885
3041430	885
3041440	885
3041441	885
3041450	885
3041460	885
3041480	885
3041500	885
3041520	885
3049921	896
3049922	896
3049923	896
3049932	896
3049933	896
3049934	896
3049952	896
3049953	896
3049954	896
3049955	896
3049962	896
3049963	896
3049964	896
3049965	896
3049966	896
3049967	896
3049968	896
3049969	896
3050100	896
3050101	896
3050201	896
3050202	896
3050203	896
3050204	896
3050205	896
3050206	896
3050301	896
3050302	896
3050303	896
3050304	896
3050305	896
3050306	896
3050307	896
3050308	896
3050309	896
3050310	896
3050401	896
3050402	896
3050403	896

EDP Number	Page No.
3050404	896
3050405	896
3050406	896
3050407	896
3050408	896
3050409	896
3050410	896
3050411	896
3050412	896
3050500	896
3050501	896
3050502	896
3050503	896
3050504	896
3050505	896
3050506	896
3050507	896
3050508	896
3050509	896
3050510	896
3050601	896
3050602	896
3050603	896
3050604	896
3050605	896
3050606	896
3050607	896
3050608	896
3050609	896
3050610	896
3050611	896
3050612	896
3050802	896
3050803	896
3050804	896
3050805	896
3050806	896
3050807	896
3050808	896
3050810	896
3050812	896
3051002	896
3051003	896
3051004	896
3051005	896
3051006	896
3051007	896
3051008	896
3051009	896
3051010	896
3051012	896
3051014	896
3051016	896
3051018	896
3051020	896
3051022	896

EDP Number	Page No.
3051202	896
3051204	896
3051206	896
3051208	896
3051210	896
3051212	897
3051214	897
3051216	897
3051218	897
3051220	897
3051503	897
3051504	897
3051506	897
3051508	897
3051510	897
3051512	897
3051514	897
3051516	897
3051518	897
3051520	897
3051522	897
3051530	897
3051608	897
3051612	897
3051616	897
3051620	897
3052004	897
3052006	897
3052008	897
3052010	897
3052012	897
3052014	897
3052016	897
3052018	897
3052020	897
3052022	897
3052025	897
3052030	897
3052035	897
3052040	897
3052510	897
3052515	897
3052520	897
3052525	897
3052530	897
3052535	897
3053006	897
3053008	897
3053010	897
3053012	897
3053014	897
3053015	897
3053016	897
3053020	897
3053025	897
3053030	897

EDP Number	Page No.
3053035	897
3053040	897
3053515	897
3053520	897
3053525	897
3053530	897
3053535	897
3053540	897
3053545	897
3054008	897
3054010	897
3054012	897
3054015	897
3054016	897
3054020	897
3054025	897
3054030	897
3054035	897
3054040	897
3054045	898
3054050	898
3055010	898
3055015	898
3055020	898
3055025	898
3055030	898
3055035	898
3055040	898
3055045	898
3055050	898
3056012	898
3056020	898
3056025	898
3056030	898
3056035	898
3056040	898
3056045	898
3056050	898
30601708	607
30601808	607
30601908	607
30602008	607
30602108	607
30602208	607
30602308	607
30602408	607
30602508	607
30602608	607
30602708	607
30602808	607
30602908	607
30603008	607
30603108	607
30603208	607
30603308	607
30603408	607



EDP Number	Page No.
30603508	607
30603608	607
30603708	607
30603808	607
30603908	607
30604008	607
30604108	607
30604208	607
30604308	607
30604408	607
30604508	607
30604608	607
30604708	607
30604808	607
30604908	607
30605008	607
30605108	607
30605208	607
30605308	607
30605408	607
30605508	607
30605608	607
30701708	527
30701808	527
30701908	527
30702008	527
30702108	527
30702208	527
30702308	527
30702408	527
30702508	527
30702608	527
30702708	527
30702808	527
30702908	527
30703008	527
30703108	527
30703208	527
30703308	527
30703408	527
30703508	527
30703608	527
30703708	527
30703808	527
30703908	527
30704008	527
30704108	527
30704208	527
30704308	527
30704408	527
30704508	527
30704608	527
30704708	527
30704808	527
30704908	527
30705008	527

EDP Number	Page No.
30705108	527
30705208	527
30705308	527
30705408	527
30705508	527
30705608	527
3090002	852
3090003	852
3090004	852
3090006	852
3090008	852
3090010	852
3090012	852
3090016	852
3090020	852
3090022	852
3090026	852
3090030	852
3090202	842
3090204	842
3090206	842
3090208	842
3090210	842
3090212	842
3090216	842
3090220	842
3090222	842
3090226	842
3090230	842
3090312	842
3090316	842
3090320	842
3090322	842
3090330	842
3090512	847
3090516	847
3090520	847
3090522	847
3090526	847
3090530	847
3092041	848
3092042	848
3092061	848
3092062	848
3092063	848
3092081	848
3092082	848
3092083	848
3092101	848
3092102	848
3092103	848
3092121	848
3092122	848
3092123	848
3092161	848
3092162	848

EDP Number	Page No.
3095125	844
3095141	844
3095142	844
3095143	844
3095144	844
3095145	844
3095146	844
3095147	844
3095155	844
3095157	844
3095191	844
3095211	844
3095212	844
3095213	844
3095214	844
3095215	844
3095216	844
3095223	844
3095241	844
3095242	844
3095243	844
3095244	844
3095245	844
3095246	844
3095247	844
3095251	844
3095262	844
3095273	844
3095281	844
3095321	844
3095341	844
3095342	844
3095343	844
3095344	844
3095345	844
3095346	844
3095356	844
3095365	844
3095374	844
3095421	844
3095441	844
3095442	844
3095443	844
3095444	844
3095445	844
3095453	844
3095454	844
3095462	844
3095472	844
3095541	844
3095542	844
3095543	844
3095544	845
3095553	845
3095562	845
3095641	845

EDP Number	Page No.
3095642	845
3095643	845
3095644	845
3095651	845
3095653	845
3095661	845
3095662	845
3095841	845
3095842	845
3095843	845
3095844	845
3095851	845
3095853	845
3095862	845
3096041	845
3096042	845
3096043	845
3096044	845
3096045	845
3096046	845
3096051	845
3096053	845
3096061	845
3096064	845
3096241	845
3096242	845
3096243	845
3096244	845
3096254	845
3097223	849
3097224	849
3097225	849
3097226	849
3097227	849
3097241	849
3097242	849
3097243	849
3097244	849
3097245	849
3097246	849
3097247	849
3097248	849
3097249	849
3097251	849
3097262	849
3097273	849
3097321	849
3097341	849
3097342	849
3097343	849
3097344	850
3097345	850
3097346	850
3097356	850
3097365	850
3097374	850



EDP Numerical Index

EDP Number	Page No.
3097421	850
3097422	850
3097423	850
3097424	850
3097425	850
3097426	850
3097441	850
3097442	850
3097443	850
3097444	850
3097453	850
3097454	850
3097461	850
3097462	850
3097472	850
3097627	850
3097641	850
3097642	850
3097643	850
3097651	850
3097653	850
3097661	850
3097662	850
3097826	850
3097841	850
3097842	850
3097844	850
3097851	850
3097853	850
3097861	850
3097862	850
3098026	850
3098041	850
3098042	850
3098043	850
3098044	850
3098045	850
3098046	850
3098051	850
3098053	850
3098061	850
3098064	851
3098224	851
3098241	851
3098242	851
3098243	851
3098244	851
3098254	851
3100200A-SO	1085
3100250A-SO	1085
3100300A-SO	1085
3100350A-SO	1085
3100400A-SO	1085
3100403	893
3100404	893
3100405	893

EDP Number	Page No.
3100406	893
3100407	893
3100408	893
3100450A-SO	1085
3100500A-SO	1085
3100501	893
3100502	893
3100503	893
3100504	893
3100505	893
3100506	893
3100508	893
3100509	893
3100510	893
3100511	893
3100512	893
3100550A-SO	1085
3100600A-SO	1085
3100601	893
3100602	893
3100603	893
3100650A-SO	1085
3100700A-SO	1085
3100750A-SO	1085
3100800A-SO	1085
3100803	893
3100804	893
3100805	893
3100850A-SO	1085
3100900A-SO	1085
3100950A-SO	1085
3101000A-SO	1085
3101001	893
3101002	893
3101003	893
3101004	893
3101005	893
3101006	893
3101007	893
3101008	893
3101009	893
3101010	893
3101011	893
3101012	893
3101013	893
3101014	893
3101015	893
3101016	893
3101017	893
3101018	893
3101019	894
3101020	894
3101021	894
3101022	894
3101100A-SO	1085
3101200A-SO	1085

EDP Number	Page No.
3101201	894
3101202	894
3101203	894
3101300A-SO	1085
3101400A-SO	1085
3101500A-SO	1085
3101501	894
3101502	894
3101503	894
3101504	894
3101505	894
3101506	894
3101507	894
3101508	894
3101509	894
3101510	894
3101600A-SO	1085
3101700A-SO	1085
3101800A-SO	1085
3101900A-SO	1085
3102000A-SO	1085
3102001	894
3102002	894
3102003	894
3102004	894
3102005	894
3102006	894
3102007	894
3102008	894
3102009	894
3102010	894
3102011	894
3102012	894
3102013	894
3102014	894
3102015	894
3102016	894
3102017	894
3102018	894
3102019	894
3102020	894
3102021	894
3102022	894
3102023	894
3102024	894
3102200A-SO	1085
3102400A-SO	1085
3102500A-SO	1085
3102501	894
3102502	894
3102503	894
3102504	894
3102505	894
3102506	894
3103001	894
3103002	894

EDP Number	Page No.
3103003	894
3103004	894
3103005	894
3103006	895
3103007	895
3103008	895
3103009	895
3103010	895
3103011	895
3103012	895
3103013	895
3103014	895
3103015	895
3103016	895
3103017	895
3103018	895
3103019	895
3105010	854
3105020	854
3105030	854
3105040	854
3105050	854
3105060	854
3105080	854
3105100	854
3105120	854
3105140	854
3105150	854
3105160	854
3105200	854
3105250	854
3105300	854
3105400	854
3106100	854
3106150	854
3106200	854
3106250	854
3106301	854
3106350	854
3106400	854
3106500	854
3106502	854
3106600	854
3106601	854
3106610	854
3106620	854
3106621	854
3106630	854
3106640	854
3106641	854
3106650	854
3106660	854
3106661	854
3106670	854
3106680	854
3106690	854



EDP Number	Page No.
3106700	854
3110103	858
3110105	858
3110108	662
3110203	858
3110205	858
3110207	858
3110208	662
3110210	858
3110212	858
3110215	858
3110217	858
3110220	858
3110225	858
3110230	858
3110305	858
3110306	858
3110307	858
3110308	662
3110310	858
3110312	858
3110315	858
3110317	858
3110320	858
3110322	858
3110325	858
3110327	858
3110330	858
3110335	858
3110340	858
3110345	858
3110350	858
3110405	858
3110407	858
3110408	662
3110410	858
3110415	858
3110420	858
3110425	858
3110430	858
3110435	858
3110440	858
3110445	858
3110450	858
3110455	858
3110460	858
3110508	662
3110510	858
3110515	858
3110520	858
3110525	858
3110530	858
3110535	858
3110540	858
3110545	858
3110550	858

EDP Number	Page No.
3110555	858
3110560	858
3110570	858
3110580	858
3110590	858
3110600	858
3110608	662
3110610	858
3110615	858
3110620	858
3110625	858
3110630	858
3110635	858
3110640	858
3110645	858
3110650	858
3110655	858
3110660	858
3110665	858
3110670	858
3110675	858
3110680	858
3110685	858
3110690	858
3110695	858
3110700	858
3110708	662
3110711	858
3110712	858
3110808	662
3110820	858
3110830	858
3110840	858
3110850	858
3110860	858
3110870	858
3110880	858
3110890	858
3110900	858
3110908	662
3110912	858
3111008	662
3111025	858
3111030	858
3111040	858
3111050	858
3111060	858
3111070	858
3111080	858
3111090	858
3111100	858
3111108	662
3111112	858
3111114	858
3111116	858
3111118	858

EDP Number	Page No.
3111120	858
3111208	662
3111240	858
3111260	859
3111280	859
3111300	859
3111308	662
3111312	859
3111314	859
3111316	859
3111318	859
3111320	859
3111324	859
3111408	662
3111480	859
3111508	662
3111512	859
3111516	859
3111530	859
3111540	859
3111560	859
3111580	859
3111600	859
3111612	859
3111614	859
3111616	859
3111618	859
3111620	859
3111622	859
3111630	859
3111640	859
3111680	859
3111712	859
3111716	859
3111720	859
3111880	859
3111912	859
3111916	859
3111920	859
3112030	859
3112040	859
3112060	859
3112080	859
3112100	859
3112112	859
3112114	859
3112116	859
3112118	859
3112120	859
3112122	859
3112125	859
3112130	859
3112135	859
3112140	859
3112560	859
3112600	859

EDP Number	Page No.
3112615	859
3112620	859
3112625	859
3112630	859
3112635	859
3120200A-SO	1087
3120300A-SO	1087
3120400A-SO	1087
3120500A-SO	1087
3120600A-SO	1087
3120700A-SO	1087
3120800A-SO	1087
3120900A-SO	1087
3121000A-SO	1087
3121100A-SO	1087
3121200A-SO	1087
3121300A-SO	1087
3121400A-SO	1087
3121500A-SO	1087
3121600A-SO	1087
3121800A-SO	1087
3122000A-SO	1087
3122200A-SO	1087
3122400A-SO	1087
3122500A-SO	1087
3123060	859
3123080	859
3123100	859
3123112	859
3123114	859
3123115	859
3123116	859
3123120	859
3123125	859
3123130	859
3123135	859
3123140	859
3123600	859
3123615	859
3123620	859
3123625	859
3123630	859
3123635	859
3123640	859
3123645	859
3124080	859
3124100	859
3124112	859
3124114	859
3124115	859
3124116	859
3124120	859
3124125	859
3124130	859
3124135	859
3124140	859



EDP Numerical Index

EDP Number	Page No.
3124145	859
3124150	859
3125100	859
3125115	859
3125120	859
3125125	859
3125130	859
3125135	859
3125140	860
3125145	860
3125150	860
3126100	860
3126120	860
3126125	860
3126130	860
3126135	860
3126140	860
3126145	860
3126150	860
3130510	864
3130515	864
3130520	864
3130525	864
3130530	864
3130535	864
3130540	864
3130545	864
3130550	864
3130560	864
3130570	864
3130580	864
3130590	864
3130600	864
3130620	864
3131201	866
3131202	866
3131203	866
3131204	866
3131205	866
3131206	866
3131207	866
3131208	866
3131302	866
3131303	866
3131304	866
3131305	866
3131306	866
3131308	866
3131310	866
3131312	866
3131318	866
3131403	866
3131404	866
3131406	866
3131408	866
3131410	866

EDP Number	Page No.
3131412	866
3131414	866
3131416	866
3131418	866
3131420	866
3131424	866
3131501	866
3131502	866
3131503	866
3131504	866
3131505	866
3131506	866
3131507	866
3131508	866
3131509	866
3131510	866
3131512	866
3131515	866
3131602	866
3131603	866
3131604	866
3131605	866
3131606	866
3131607	866
3131608	866
3131610	866
3131612	866
3131615	866
3131618	866
3131702	866
3131704	866
3131706	866
3131708	866
3131710	866
3131804	866
3131806	866
3131808	866
3131810	866
3131812	866
3131814	866
3131816	866
3131820	866
3131824	866
3131904	866
3131906	866
3131908	866
3131910	866
3131915	866
3132003	866
3132004	866
3132005	866
3132006	866
3132007	866
3132008	866
3132009	866
3132010	866

EDP Number	Page No.
3132012	866
3132014	866
3132016	866
3132018	866
3132020	866
3132022	866
3132025	866
3132030	866
3132204	866
3132206	866
3132208	866
3132210	866
3132212	866
3132214	866
3132216	866
3132220	866
3132406	866
3132408	866
3132410	866
3132412	866
3132414	866
3132416	866
3132422	866
3132504	866
3132506	866
3132508	866
3132510	866
3132512	866
3132514	867
3132516	867
3132518	867
3132520	867
3132525	867
3132530	867
3132538	867
3132540	867
3132545	867
3132606	867
3132608	867
3132610	867
3132612	867
3132614	867
3132616	867
3132618	867
3132620	867
3132806	867
3132808	867
3132810	867
3132812	867
3132814	867
3132816	867
3132818	867
3132820	867
3132825	867
3133006	867
3133008	867

EDP Number	Page No.
3133010	867
3133012	867
3133014	867
3133016	867
3133018	867
3133020	867
3133025	867
3133030	867
3133035	867
3133040	867
3133050	867
3133060	867
3133508	867
3133510	867
3133512	867
3133514	867
3133516	867
3133518	867
3133520	867
3133525	867
3133530	867
3133540	867
3133550	867
3134008	867
3134010	867
3134012	867
3134014	867
3134016	867
3134018	867
3134020	867
3134025	867
3134030	867
3134035	867
3134040	867
3134050	867
3135012	867
3135016	867
3135020	867
3135025	867
3135030	867
3135035	867
3135040	867
3135045	867
3135050	867
3135060	867
3136016	867
3136020	867
3136025	867
3136030	867
3136035	867
3136040	867
3136050	867
3136060	867
31400101	722
31400108	722
31400201	722



EDP Number	Page No.
31400208	722
31400301	722
31400308	722
31400401	722
31400408	722
31400501	722
31400508	722
31400601	722
31400608	722
31400701	722
31400708	722
31400801	722
31400808	722
31400901	722
31400908	722
31401001	722
31401008	722
31401101	722
31401108	722
31401201	722
31401208	722
31401301	722
31401308	722
31401401	722
31401408	722
31401501	722
31401508	722
31401601	722
31401608	722
31401701	722
31401708	722
31401801	722
31401808	722
31401901	722
31401908	722
31402001	722
31402008	722
31402101	722
31402108	722
31402201	722
31402208	722
31402301	722
31402308	722
31402401	722
31402408	722
31402501	722
31402508	722
31402601	722
31402608	722
31402701	722
31402708	722
31402801	722
31402808	722
31402901	722
31402908	722
31403001	722

EDP Number	Page No.
31403008	722
3140300A-SO	1086
31403101	722
31403108	722
31403201	722
31403208	722
31403301	722
31403308	722
31403401	722
31403408	722
31403501	722
31403508	722
31403601	722
31403608	722
31403701	722
31403708	722
31403801	723
31403808	723
31403901	723
31403908	723
31404001	723
31404008	723
3140400A-SO	1086
31404101	723
31404108	723
31404201	723
31404208	723
31404301	723
31404308	723
3140500A-SO	1086
3140600A-SO	1086
3140700A-SO	1086
3140800A-SO	1086
3140900A-SO	1086
3141000A-SO	1086
3141100A-SO	1086
3141200A-SO	1086
3141203	702
3141300A-SO	1086
3141303	702
3141400A-SO	1086
3141500A-SO	1086
3141600A-SO	1086
3141800A-SO	1086
3141803	702
3141900A-SO	1086
3141903	702
3142000A-SO	1086
31420108	721
31420208	721
31420308	721
31420408	721
31420508	721
31420608	721
31420708	721
31420808	721

EDP Number	Page No.
31420908	721
31421008	721
3142200A-SO	1086
3142203	702
3142303	702
3142500A-SO	1086
3142803	702
3142903	702
31440108	720
31440208	720
31440308	720
31440408	720
31440508	720
31440608	720
31440708	720
31440808	720
31440908	720
31441008	720
3144203	702
3144303	702
3144803	702
3144903	702
3145203	702
3145303	702
3145803	702
3145903	702
3146203	702
3146303	702
3146403	702
3146503	702
3146603	702
3146703	702
3146803	702
3146903	702
3147203	702
3147303	702
3147803	702
3147903	702
31500101	710
31500108	710
31500201	710
31500208	710
31500301	710
31500308	710
31500401	710
31500408	710
31500501	710
31500508	710
31500601	710
31500608	710
31500701	710
31500708	710
31500801	710
31500808	710
31500901	710
31500908	710

EDP Number	Page No.
31501001	710
31501008	710
31501101	710
31501108	710
31501201	710
31501208	710
31501301	710
31501308	710
31501401	710
31501408	710
31501501	710
31501508	710
31501601	710
31501608	710
31501701	710
31501708	710
31501801	710
31501808	710
31501901	710
31501908	710
31502001	710
31502008	710
31502101	710
31502108	710
31502201	710
31502208	710
31502301	710
31502308	710
31502401	710
31502408	710
31502501	710
31502508	710
31502601	710
31502608	710
31502701	710
31502708	710
31502801	710
31502808	710
31502901	710
31502908	710
31503001	710
31503008	710
31503101	710
31503108	710
31503201	710
31503208	710
31503301	710
31503308	710
31503401	710
31503408	710
31503501	710
31503508	710
31503601	710
31503608	710
31503701	710
31503708	710



EDP Numerical Index

EDP Number	Page No.
31503801	711
31503808	711
31503901	711
31503908	711
31504001	711
31504008	711
31504101	711
31504108	711
31504201	711
31504208	711
31504301	711
31504308	711
31520108	709
31520208	709
31520308	709
31520408	709
31520508	709
31520608	709
31520708	709
31520808	709
31520908	709
31521008	709
31540108	708
31540208	708
31540308	708
31540408	708
31540508	708
31540608	708
31540708	708
31540808	708
31540908	708
31541008	708
31601108	602
31601208	602
31601308	602
31601408	602
31601508	602
31601608	602
31601708	602
31601808	602
31601908	602
31602008	602
31602108	602
31602208	602
31602308	602
31602408	602
31602508	602
31602608	602
31602708	602
31602808	602
31602908	602
31603008	602
31603108	602
31603208	602
31603308	602
31603408	602

EDP Number	Page No.
31603508	602
31603608	602
31603708	602
31603808	602
31603908	602
31604008	602
31604108	602
31604208	602
31604308	602
31604408	602
31604508	602
31604608	602
31604708	602
31604808	602
31604908	602
31605008	602
31621408	594
31621508	594
31621808	594
31621908	594
31622208	594
31622308	594
31622608	594
31622708	594
31623008	594
31623108	594
31623408	594
31623508	594
31623808	594
31623908	594
31624208	594
31624308	594
31624608	594
31624708	594
31625008	594
31625108	594
3170011	871
3170012	871
3170013	871
3170014	871
3170015	871
3170021	871
3170022	871
3170023	871
3170031	871
3170032	871
3170041	871
3170042	871
3170051	871
3170052	871
3170053	871
3170054	871
3170055	871
3170061	871
3170062	871
3170063	871

EDP Number	Page No.
3170071	871
3170072	871
3170073	872
3170074	872
3170081	872
3170082	872
3170083	872
3170084	872
3170085	872
3170091	872
3170092	872
3170093	872
3170094	872
3170095	872
3170096	872
3170097	872
3170101	872
3170102	872
3170103	872
3170104	872
3170105	872
3170106	872
3170111	872
3170112	872
3170113	872
3170114	872
3170121	872
3170122	872
3170123	872
3170131	872
3170132	872
3170133	872
3170134	872
3170135	872
3170136	872
3170137	872
3170138	872
3170139	872
3170140	872
3170141	872
3170142	872
3170143	872
3170144	872
3170145	872
3170146	872
3170147	872
3170148	872
3170149	872
3170150	872
31701508	521
3170151	872
3170152	872
3170153	872
3170154	873
3170155	873
3170156	873

EDP Number	Page No.
3170157	873
3170158	873
31701608	521
3170161	873
31701708	521
3170171	873
3170172	873
31701808	521
3170181	873
3170182	873
31701908	521
3170191	873
3170192	873
31702008	521
31702108	521
3170211	873
3170212	873
3170213	873
3170214	873
3170215	873
3170216	873
3170217	873
3170218	873
31702208	521
3170221	873
3170222	873
3170223	873
3170224	873
3170225	873
3170226	874
3170227	874
3170230	874
31702308	521
3170231	874
3170232	874
3170233	874
3170234	874
3170235	874
3170236	874
31702408	521
3170241	874
31702508	521
31702608	521
31702708	521
3170271	874
3170272	874
3170273	874
3170274	874
3170275	874
3170276	874
3170277	874
3170278	874
3170279	874
31702808	521
3170281	874
3170282	874



EDP Number	Page No.
3170283	874
3170284	874
3170285	874
3170286	874
3170287	874
3170288	874
3170289	874
31702908	521
3170291	874
3170292	874
3170293	874
3170294	874
3170295	874
3170296	874
31703008	521
3170301	874
31703108	521
31703208	521
3170321	874
3170322	874
3170323	874
3170324	874
3170325	874
3170326	874
3170327	874
3170328	874
3170329	874
3170330	874
31703308	521
3170331	874
3170332	874
3170333	874
3170334	875
3170335	875
3170336	875
3170337	875
3170338	875
31703408	521
3170341	875
3170342	875
3170343	875
3170344	875
3170345	875
3170346	875
3170347	875
31703508	521
3170351	875
31703608	521
31703708	521
3170371	875
3170372	875
3170373	875
3170374	875
3170375	875
31703808	521
3170381	875

EDP Number	Page No.
31703908	521
3170391	875
31704008	521
3170401	875
3170402	875
3170403	875
31704108	521
3170411	875
3170412	875
31704208	521
3170421	876
31704308	521
3170431	876
3170432	876
3170433	876
3170434	876
3170435	876
3170436	876
31704408	521
3170441	876
31704508	521
3170451	876
31704608	521
31704708	521
31704808	521
31704908	521
31705008	521
3172004	881
3172006	881
3172008	881
3172010	881
3172012	881
3172016	881
31721408	513
31721508	513
31721808	513
31721908	513
3172206	881
3172208	881
3172210	881
3172212	881
3172216	881
31722208	513
31722308	513
31722608	513
31722708	513
31723008	513
31723108	513
31723408	513
31723508	513
31723808	513
31723908	513
3172406	881
3172408	881
3172410	881
3172412	881

EDP Number	Page No.
3172414	881
3172416	881
31724208	513
3172422	881
31724308	513
31724608	513
31724708	513
31725008	513
3172506	881
3172508	881
3172510	881
31725108	513
3172512	881
3172514	881
3172516	881
3172518	881
3172520	881
3172606	881
3172608	881
3172610	881
3172612	881
3172614	881
3172616	881
3172618	881
3172620	881
3172625	881
3172806	881
3172808	881
3172810	881
3172812	881
3172814	881
3172816	881
3172818	882
3172820	882
3172825	882
3173006	882
3173008	882
3173010	882
3173012	882
3173014	882
3173016	882
3173018	882
3173020	882
3173025	882
3173030	882
3173508	882
3173512	882
3173516	882
3173520	882
3173525	882
3174008	882
3174012	882
3174016	882
3174020	882
3174025	882
3174030	882

EDP Number	Page No.
3181801	869
3181802	869
3181803	869
3181804	869
3181805	869
3181806	869
3181807	869
3181808	869
3181809	869
3181810	869
3181811	869
3181812	869
3181813	869
3181814	869
3181815	869
3181816	869
3181817	869
3181818	869
3181819	869
3181820	869
3181821	869
3181822	869
3181823	869
3181824	869
3181825	869
3181826	869
3181827	869
3181828	869
3181829	869
3181830	869
3181831	869
3181832	869
3181833	869
3181834	869
3181835	869
3181836	869
3181837	869
3181838	869
3181839	869
3181840	869
3181841	869
3181842	869
3181843	869
3181844	869
3181845	869
3181846	869
3181847	869
3181848	869
3181849	869
3181850	869
3181851	869
3181852	869
3181853	869
3181854	869
3181855	869
3181856	869



EDP Numerical Index

EDP Number	Page No.
3181857	869
3181858	869
3181859	869
3181860	869
3182001	870
3182002	870
3182003	870
3182004	870
3182005	870
3182006	870
3182007	870
3182008	870
3182009	870
3182010	870
3182011	870
3182012	870
3182013	870
3182014	870
3182015	870
3182016	870
3182017	870
3182018	870
3182019	870
3182020	870
3182021	870
3182022	870
3182023	870
3182024	870
3182025	870
3182026	870
3182027	870
3182028	870
3182029	870
3182030	870
3182031	870
3182032	870
3182033	870
3182034	870
3182035	870
3182036	870
3182037	870
3182038	870
3182039	870
3182040	870
3182041	870
3182042	870
3182043	870
3182044	870
3182045	870
3182046	870
3182047	870
3182048	870
3182049	870
3182050	870
3182051	870
3182052	870

EDP Number	Page No.
3182053	870
3182054	870
3182055	870
3182056	870
3182057	870
3182058	870
3182059	870
3182060	870
3182065	870
3182070	870
3182075	870
3182080	870
3182085	870
3182090	870
3182095	870
3182100	870
3182110	870
3182120	870
3182160	870
3182180	870
3182200	870
3182401	877
3182402	877
3182403	877
3182404	877
3182405	877
3182406	877
3182407	877
3182408	877
3182409	877
3182410	877
3182411	877
3182412	877
3182413	877
3182414	877
3182415	877
3182416	877
3182417	877
3182418	877
3182419	877
3182420	877
3182421	877
3182422	877
3182423	877
3182424	877
3182425	877
3182426	877
3182427	877
3182428	877
3182429	877
3182430	877
3182431	877
3182432	877
3182433	877
3182434	877
3182435	877

EDP Number	Page No.
3182436	877
3182437	877
3182438	877
3182439	877
3182440	877
3182441	877
3182442	877
3182443	877
3182444	877
3182445	877
3182446	877
3182447	877
3182448	877
3182449	877
3182450	877
3182451	877
3182452	877
3182453	877
3182454	877
3182455	877
3182456	877
3182457	877
3182458	877
3182459	877
3182460	877
3182465	877
3182470	877
3182475	877
3182480	877
3182485	877
3182490	877
3182495	877
3182500	877
3182510	877
3182520	877
3182560	877
3182580	877
3182600	877
3182602	878
3182603	878
3182604	878
3182605	878
3182606	878
3182607	878
3182608	878
3182609	878
3182610	878
3182611	878
3182612	878
3182613	878
3182614	878
3182615	878
3182616	878
3182617	878
3182618	878
3182619	878

EDP Number	Page No.
3182620	878
3182621	878
3182622	878
3182623	878
3182624	878
3182625	878
3182626	878
3182627	878
3182628	878
3182629	878
3182630	878
3182631	878
3182632	878
3182633	878
3182634	878
3182635	878
3182636	878
3182637	878
3182638	878
3182639	878
3182640	878
3182641	878
3182642	878
3182643	878
3182644	878
3182645	878
3182646	878
3182647	878
3182648	878
3182649	878
3182650	878
3182651	878
3182652	878
3182653	878
3182654	878
3182655	878
3182656	878
3182657	878
3182658	878
3182659	878
3182660	878
3182680	878
3182700	878
3182720	878
3190000	666
3190100	666
3190200	666
3190300	666
3190400	666
3190500	666
3190600	666
3190700	666
3190800	846
3190801	846
3190802	846
3190803	846



EDP Number	Page No.
3190900	666
3191000	666
3191006	846
3191007	846
3191008	846
3191009	846
3191010	846
3191011	846
3191012	846
3191013	846
3191014	846
3191015	846
3191018	846
3191019	846
3191100	666
3191200	666
3191300	666
3191400	666
3191500	666
3191501	846
3191503	846
3191505	846
3191506	846
3191507	846
3191508	846
3192001	846
3192002	846
3192003	846
3192004	846
3192013	846
3192015	846
3192019	846
3192020	846
3192021	846
3192022	846
3193008	846
3194901	843
3194902	843
3194903	843
3194904	843
3194906	843
3195004	843
3195006	843
3195008	843
3195010	843
3195012	843
3195014	843
3195016	843
3195106	843
3195108	843
3195110	843
3195112	843
3195116	843
3195206	843
3195208	843
3195210	843

EDP Number	Page No.
3195212	843
3195214	843
3195216	843
3195218	843
3195220	843
3195222	843
3195312	843
3195316	843
3195320	843
3195325	843
3195416	843
3195420	843
3195425	843
3195520	843
3195530	843
3291216	664
3291316	664
3291416	664
3291516	664
3291616	664
3291716	664
3291816	664
3297016	664
3297116	664
3297216	664
3297316	664
3297416	664
3297516	664
3297616	664
3297716	664
3297816	664
3297916	664
3298016	664
3298116	664
3298216	664
3298316	664
3298416	664
3298516	664
3298616	664
3298716	664
3298816	664
3298916	664
3299016	664
3299116	664
3299216	664
3300020	162
3300021	162
3300022	162
3300023	162
3300024	162
3300025	162
3300026	162
3300027	162
3300028	162
3300029	162
3300030	162

EDP Number	Page No.
3300031	162
3300032	162
3300033	162
3300034	162
3300035	162
3300036	162
3300037	162
3300038	162
3300039	162
3300040	162
3300041	162
3300042	162
3300043	162
3300044	162
3300045	162
3300046	162
3300047	162
3300048	162
3300049	162
3300050	162
3300051	162
3300052	162
3300053	162
3300054	162
3300055	162
3300056	162
3300057	162
3300058	162
3300059	162
3300060	162
3300061	162
3300062	162
3300063	162
3300064	162
3300065	162
3300066	162
3300067	162
3300068	162
3300069	162
3300070	163
3300071	163
3300072	163
3300073	163
3300074	163
3300075	163
3300076	163
3300077	163
3300078	163
3300079	163
3300080	163
3300081	163
3300082	163
3300083	163
3300084	163
3300085	163
3300086	163

EDP Number	Page No.
3300087	163
3300088	163
3300089	163
3300090	163
3300091	163
3300092	163
3300093	163
3300094	163
3300095	163
3300096	163
3300097	163
3300098	163
3300099	163
3300100	163
3300101	163
3300102	163
3300103	163
3300104	163
3300105	163
3300106	163
3300107	163
3300108	163
3300109	163
3300110	163
3300111	163
3300112	163
3300113	163
3300114	163
3300115	163
3300116	164
3300117	164
3300118	164
3300119	164
3300120	164
3300121	164
3300122	164
3300123	164
3300124	164
3300125	164
3300126	164
3300127	164
3300128	164
3300129	164
3300130	164
3300131	164
3300132	164
3300133	164
3300134	164
3300135	164
3300136	164
3300137	164
3300138	164
3300139	164
3300140	164
3300141	164
3300142	164



EDP Numerical Index

EDP Number	Page No.
3300143	164
3300144	164
3300145	164
3300146	164
3300147	164
3300148	164
3300149	164
3300150	164
3300151	164
3300152	164
3300153	164
3300154	164
3300155	164
3300156	164
3300157	164
3300158	164
3300159	164
3300160	164
3300161	164
3300162	164
3300163	164
3300164	164
3300165	164
3300166	165
3300167	165
3300168	165
3300169	165
3300170	165
3300171	165
3300172	165
3300173	165
3300174	165
3300175	165
3300176	165
3300177	165
3300178	165
3300179	165
3300180	165
3300181	165
3300182	165
3300183	165
3300184	165
3300185	165
3300186	165
3300187	165
3300188	165
3300189	165
3300190	165
3300191	165
3300192	165
3300193	165
3300194	165
3300195	165
3300196	165
3300197	165
3300198	165

EDP Number	Page No.
3300199	165
3300200	165
3300205	165
3300210	165
3300215	166
3300220	166
3300225	166
3300230	166
3300235	166
3300240	166
3300245	166
3300250	166
3300255	166
3300260	166
3300265	167
3300270	167
3300275	167
3300280	167
3300285	167
3300290	167
3300295	167
3300300	167
3300305	167
3300310	168
3300315	168
3300320	168
3300325	168
3300330	168
3300335	168
3300340	168
3300345	168
3300350	168
3300355	168
3300360	169
3300365	169
3300370	169
3300375	169
3300380	169
3300385	169
3300390	169
3300395	169
3300400	169
3300405	169
3300410	169
3300415	169
3300420	170
3300425	170
3300430	170
3300435	170
3300440	170
3300445	170
3300450	170
3300455	170
3300460	170
3300465	170
3300470	170

EDP Number	Page No.
3300475	170
3300480	170
3300485	170
3300490	170
3300495	170
3300500	170
3310100	747
3310101	747
3310108	747
3310500	747
3310501	747
3310508	747
3310900	747
3310901	747
3310908	747
3312500	747
3312501	747
3312508	747
3312900	747
3312901	747
3312908	747
3316330	151
3316340	151
3316349	151
3316350	151
3316360	151
3316370	151
3316380	151
3316390	151
3316400	151
3316410	151
3316415	151
3316420	151
3316430	151
3316440	151
3316450	151
3316460	151
3316470	151
3316480	151
3316490	151
3316500	151
3316510	151
3316520	151
3316530	151
3316540	151
3316550	151
3316556	151
3316560	151
3316570	151
3316580	151
3316590	151
3316600	151
3316650	152
3316680	152
3316700	152
3316750	152

EDP Number	Page No.
3316780	152
3316800	152
3316850	152
3316858	152
3316870	152
3316880	152
3316900	152
3316950	152
3316980	152
3316997	152
3317000	152
3317030	152
3317050	152
3317080	152
3317100	152
3317150	152
3317156	152
3317180	152
3317200	152
3318200	153
3318210	153
3318220	153
3318230	153
3318240	153
3318250	153
3318260	153
3318270	153
3318280	153
3318290	153
3318300	153
3318310	153
3318320	153
3318330	153
3318340	153
3318350	153
3318360	153
3318370	153
3318380	153
3318390	153
3318400	153
3318410	153
3318420	153
3318430	153
3318440	153
3318450	153
3318460	153
3318470	153
3318480	153
3318490	153
3318500	153
3318510	153
3318520	153
3318530	153
3318540	153
3318550	153
3318560	153



EDP Number	Page No.
3318570	153
3318580	153
3318590	153
3318600	153
3318610	153
3318620	154
3318630	154
3318640	154
3318650	154
3318660	154
3318670	154
3318680	154
3318690	154
3318700	154
3318710	154
3318720	154
3318730	154
3318740	154
3318750	154
3318760	154
3318770	154
3318780	154
3318790	154
3318800	154
3318810	154
3318820	154
3318830	154
3318840	154
3318850	154
3318860	154
3318870	154
3318880	154
3318890	154
3318900	154
3318910	154
3318920	154
3318930	154
3318940	154
3318950	154
3318960	154
3318970	154
3318980	154
3318990	154
3319000	154
3319010	154
3319020	154
3319030	154
3319040	154
3319050	154
3319060	154
3319070	154
3319080	154
3319090	154
3319100	154
3319110	154
3319120	154

EDP Number	Page No.
3319130	154
3319140	155
3319150	155
3319160	155
3319170	155
3319180	155
3319190	155
3319200	155
3330020	78
3330025	78
3330030	78
3330035	78
3330040	78
3330045	78
3330050	78
3330055	78
3330060	78
3330065	78
3330070	78
3330071	78
3330072	78
3330074	78
3330075	78
3330080	78
3330081	78
3330085	78
3330089	78
3330090	78
3330091	78
3330092	78
3330095	78
3330100	78
3330109	78
3330110	78
3330111	78
3330112	78
3330120	78
3330125	78
3330126	78
3330127	78
3330128	78
3330129	78
3330130	78
3330135	78
3330140	78
3330144	78
3330145	78
3330146	78
3330147	78
3330148	78
3330150	78
3330153	78
3330154	78
3330155	78
3330156	78
3330157	79

EDP Number	Page No.
3330158	79
3330160	79
3330170	79
3330175	79
3330180	79
3330182	79
3330183	79
3330184	79
3330185	79
3330186	79
3330190	79
3330195	79
3330200	79
3330210	79
3330220	79
3330230	79
3330240	79
3330250	79
3330260	79
3330270	79
3330280	79
3330290	79
3330300	79
3330310	79
3330320	79
3330330	79
3330340	79
3330350	79
3330360	79
3330370	79
3330380	79
3330390	79
3330400	79
3330410	79
3330420	79
3330430	79
3330440	79
3330450	79
3330460	79
3330470	79
3330480	80
3330490	80
3330500	80
3330510	80
3330520	80
3330530	80
3330540	80
3330550	80
3330560	80
3330570	80
3330580	80
3330590	80
3330600	80
3330610	80
3330620	80
3330630	80

EDP Number	Page No.
3330640	80
3330650	80
3330660	80
3330670	80
3330680	80
3330690	80
3330700	80
3330710	80
3330720	80
3330730	80
3330740	80
3330750	80
3330760	80
3330770	80
3330780	80
3330790	80
3330800	80
3330810	80
3330820	80
3330830	80
3330840	80
3330850	80
3330860	80
3330870	80
3330880	80
3330890	80
3330900	80
3330910	81
3330920	81
3330930	81
3330940	81
3330950	81
3330960	81
3330970	81
3330980	81
3330990	81
3331000	81
3331010	81
3331020	81
3331030	81
3331040	81
3331050	81
3331060	81
3331070	81
3331080	81
3331090	81
3331100	81
3331110	81
3331120	81
3331130	81
3331140	81
3331150	81
3331160	81
3331170	81
3331180	81
3331190	81



EDP Numerical Index

EDP Number	Page No.
3331200	81
3331210	81
3331220	81
3331230	81
3331240	81
3331250	81
3331260	81
3331270	81
3331280	81
3331290	81
3331300	81
3331310	82
3331320	82
3331330	82
3331340	82
3331350	82
3331360	82
3331370	82
3331380	82
3331390	82
3331400	82
3331410	82
3331420	82
3331430	82
3331440	82
3331450	82
3331460	82
3331470	82
3331480	82
3331490	82
3331500	82
3331510	82
3331520	82
3331530	82
3331540	82
3331550	82
3331560	82
3331570	82
3331580	82
3331590	82
3331600	82
3331650	82
3331700	82
3331750	83
3331800	83
3331850	83
3331900	83
3331950	83
3332000	83
3332300	84
3332310	84
3332320	84
3332330	84
3332340	84
3332350	84
3332360	84

EDP Number	Page No.
3332370	84
3332380	84
3332390	84
3332400	84
3332410	84
3332420	84
3332430	84
3332440	84
3332450	84
3332460	84
3332470	84
3332480	84
3332490	84
3332500	84
3332510	84
3332520	84
3332530	84
3332540	84
3332550	84
3332560	84
3332570	84
3332580	84
3332590	84
3332600	84
3332650	84
3332680	84
3332700	84
3332750	84
3332780	84
3332800	84
3332850	84
3332880	84
3332900	84
3332950	85
3332980	85
3333000	85
3333050	85
3333080	85
3333100	85
3333180	85
3333200	85
3333250	85
3333300	85
3333350	85
3333400	85
3333500	85
3333600	85
3333700	85
3333750	85
3333800	85
3334000	85
3334060	84
3334080	84
3334100	85
3334120	85
3334160	85

EDP Number	Page No.
3334200	85
3334300	74
3334302	74
3334304	74
3334305	74
3334306	74
3334307	74
3334309	74
3334312	74
3334313	74
3334314	74
3334315	74
3334317	74
3334318	74
3334319	74
3334320	74
3334321	74
3334323	74
3334326	74
3334327	74
3334328	74
3334329	74
3334331	74
3334332	74
3334333	74
3334334	74
3334335	74
3334338	74
3334339	74
3334340	74
3334341	74
3334342	74
3334344	74
3334345	74
3334346	74
3334347	74
3334348	74
3334350	74
3334351	74
3334352	74
3334353	74
3334354	74
3334356	74
3334357	74
3334358	74
3334359	74
3334360	74
3334361	74
3334362	75
3334363	75
3334364	75
3334365	75
3334367	75
3334368	75
3334369	75
3334370	75

EDP Number	Page No.
3334371	75
3334373	75
3334374	75
3334375	75
3334376	75
3334377	75
3334379	75
3334380	75
3334381	75
3334382	75
3334383	75
3334384	75
3334385	75
3334386	75
3334387	75
3334388	75
3334390	75
3334391	75
3334392	75
3334393	75
3334394	75
3334395	75
3334396	75
3334397	75
3334398	75
3334399	75
3334401	75
3334402	75
3334403	75
3334404	75
3334405	75
3334406	76
3334407	76
3334408	76
3334409	76
3334410	76
3334412	76
3334413	76
3334414	76
3334415	76
3334416	76
3334417	76
3334418	76
3334419	76
3334420	76
3334421	76
3334422	76
3334423	76
3334424	76
3334425	76
3334426	76
3334427	76
3334428	76
3334429	76
3334430	76
3334431	76



EDP Number	Page No.
3334432	76
3334433	76
3334434	76
3334435	76
3334436	76
3334437	76
3334438	76
3334439	76
3334440	76
3334441	76
3334442	76
3334443	76
3334444	76
3334445	76
3334446	76
3334447	76
3334448	76
3334449	76
3334450	76
3334451	76
3334452	76
3334453	76
3334454	76
3334455	76
3334456	77
3334457	77
3334458	77
3334459	77
3350001083	507
3350001085	507
3350001123	507
3350001125	507
3350002562	506
3350004402	506
3350004403	506
3350006322	506
3350006323	506
3350008322	506
3350008323	506
3350010243	506
3350010245	506
3350010322	506
3350010323	506
3350012133	506
3350012135	506
3350012203	506
3350012205	506
3350014203	506
3350014205	506
3350014283	506
3350014284	506
3350034103	506
3350034105	506
3350034163	506
3350038163	506

EDP Number	Page No.
3350038165	506
3350038243	506
3350038244	506
3350058113	506
3350058115	506
3350058183	506
3350058185	506
3350078093	506
3350078095	506
3350078143	506
3350078145	506
3350096183	506
3350096185	506
3350516183	506
3350516185	506
3350516243	506
3350716143	506
3350716145	506
3350716203	506
3350716205	506
3360003053	508
3360004074	508
3360005084	508
3360006105	508
3360006755	508
3360008105	508
3360008255	508
3360010156	508
3360010255	508
3360012156	508
3360012756	508
3360014156	508
3360014207	508
3360016156	508
3360016207	508
3360018156	508
3360018257	508
3360020156	508
3360020258	508
3360022156	508
3360022258	508
3360024156	508
3360024308	508
3360250453	508
3370000	701
3370001083	589
3370001085	589
3370001123	589
3370001125	589
3370002562	588
3370004402	588
3370004403	588
3370004482	588
3370006322	588
3370006323	588

EDP Number	Page No.
3370008322	588
3370008323	588
3370010242	588
3370010243	588
3370010322	588
3370010323	588
3370012133	588
3370012135	588
3370012203	588
3370012205	588
3370014203	588
3370014205	588
3370014283	588
3370014284	588
3370034103	588
3370034105	588
3370034163	588
3370034165	588
3370038163	588
3370038165	588
3370038243	588
3370038245	588
3370058113	588
3370058115	588
3370058183	588
3370058185	588
3370078093	589
3370078095	589
3370078143	589
3370078145	589
3370516183	588
3370516185	588
3370516243	588
3370516245	588
3370716143	588
3370716145	588
3370716203	588
3370716205	588
3370916183	588
3370916185	588
3380000	701
3380003053	590
3380004074	590
3380005084	590
3380006105	590
3380006755	590
3380008105	590
3380008255	590
3380010156	590
3380010255	590
3380012156	590
3380012756	590
3380014156	590
3380014207	590
3380016156	590
3380016207	590

EDP Number	Page No.
3380018156	590
3380018257	590
3380020156	590
3380020258	590
3380022156	590
3380022258	590
3380024156	590
3380024308	590
3380250453	590
34200101	727
34200108	727
34200201	727
34200208	727
34200301	727
34200308	727
34200401	727
34200408	727
34200501	727
34200508	727
34200601	727
34200608	727
34200701	727
34200708	727
34200801	727
34200808	727
34200901	727
34200908	727
34201001	727
34201008	727
34201101	727
34201108	727
34201201	727
34201208	727
34201301	727
34201308	727
34201401	727
34201408	727
34201501	727
34201508	727
34300101	715
34300108	715
34300201	715
34300208	715
34300301	715
34300308	715
34300401	715
34300408	715
34300501	715
34300508	715
34300601	715
34300608	715
34300701	715
34300708	715
34300801	715
34300808	715
34300901	715



EDP Numerical Index

EDP Number	Page No.
34300908	715
34301001	715
34301008	715
34301101	715
34301108	715
34301201	715
34301208	715
34301301	715
34301308	715
34301401	715
34301408	715
34301501	715
34301508	715
34400101	724
34400108	724
34400201	724
34400208	724
34400301	724
34400308	724
34400401	724
34400408	724
34400501	724
34400508	724
34400601	724
34400608	724
34400701	724
34400708	724
34400801	724
34400808	724
34400901	724
34400908	724
34401001	724
34401008	724
34401101	724
34401108	724
34401201	724
34401208	724
34401301	724
34401308	724
34401401	724
34401408	724
34401501	724
34401508	724
34500101	712
34500108	712
34500201	712
34500208	712
34500301	712
34500308	712
34500401	712
34500408	712
34500501	712
34500508	712
34500601	712
34500608	712
34500701	712

EDP Number	Page No.
34500708	712
34500801	712
34500808	712
34500901	712
34500908	712
34501001	712
34501008	712
34501101	712
34501108	712
34501201	712
34501208	712
34501301	712
34501308	712
34501401	712
34501408	712
34501501	712
34501508	712
34600508	608
34600608	608
34600708	608
34600808	608
34600908	608
34601008	608
34601108	608
34601208	608
34601308	608
34601408	608
34601508	608
34601608	608
34601708	608
34601808	608
34601908	608
34602008	608
34602108	608
34602208	608
34602308	608
34602408	608
34700508	528
34700608	528
34700708	528
34700808	528
34700908	528
34701008	528
34701108	528
34701208	528
34701308	528
34701408	528
34701508	528
34701608	528
34701708	528
34701808	528
34701908	528
34702008	528
34702108	528
34702208	528
34702308	528

EDP Number	Page No.
34702408	528
34720508	595
34720708	595
34720908	595
34721008	595
34721208	595
34721408	595
34721608	595
34721808	595
34722008	595
34722208	595
34820608	514
34820808	514
34821008	514
34821108	514
34821308	514
34821508	514
34821708	514
34821908	514
34822108	514
34822308	514
35000408	603
35000508	603
35000608	603
35000708	603
35000808	603
35000908	603
35001008	603
35001108	603
35001208	603
35001308	603
35001408	603
35001508	603
35001608	603
35001708	603
35001808	603
35001908	603
35002008	603
35002108	603
35002208	603
35002308	603
35100608	522
35100708	522
35100808	522
35100908	522
35101008	522
35101108	522
35101208	522
35101308	522
35101408	522
35101508	522
35101608	522
35101708	522
35101808	522
35101908	522
35102008	522

EDP Number	Page No.
35102108	522
35102208	522
35102308	522
35102408	522
352	698
353	698
3590116	665
3590216	665
3590316	665
3590416	665
3590516	665
3590616	665
3590716	665
36040111	856
36040211	856
36040311	856
36040411	856
36040511	856
36040611	856
36040711	856
36040811	856
36040911	856
36041011	856
36041111	856
36041211	856
36041311	856
36041411	856
36041511	856
36041611	856
36041711	856
36100111	853
36100211	853
36100311	853
36100411	853
36100511	853
36100611	853
36100711	853
36100811	853
36100911	853
36101011	853
36190001	861
36190002	861
36190003	861
36190004	861
36190005	861
36190006	861
36190007	861
36190008	861
36190009	861
36190010	861
36190011	861
36190012	861
36200001	862
36200002	862
36200003	862
36200004	862



EDP Number	Page No.
36200005	862
36200006	862
36200007	862
36200008	862
36200009	862
36200010	862
36200011	862
36200012	862
36200013	862
36200014	862
36200015	862
36200016	862
36210001	863
36210002	863
36210003	863
36210004	863
36210005	863
36210006	863
36210007	863
36210008	863
36210009	863
36210010	863
36210011	863
36210012	863
36210013	863
36210014	863
36210015	863
36210016	863
36700111	855
36700211	855
36700311	855
36700411	855
36700511	855
36700611	855
36700711	855
36700811	855
36700911	855
36701011	855
36701111	855
36701211	855
36701311	855
36701411	855
36701511	855
36701611	855
36701711	855
36701811	855
36701911	855
36702011	855
36702111	855
36702211	855
36702311	855
36702411	855
36702511	855
36702611	855
36702711	855
36702811	855

EDP Number	Page No.
36702911	855
36703011	855
36703111	855
36703211	855
36703311	855
36703411	855
36703511	855
36703611	855
36703711	855
36703811	855
36703911	855
36704011	855
36704111	855
36704211	855
36704311	855
36704411	855
36704511	855
36900111	857
36900211	857
36900311	857
36900411	857
36900511	857
36900611	857
36900711	857
36900811	857
36900911	857
36901011	857
36901111	857
36901211	857
36901311	857
36901411	857
36901511	857
36901611	857
36901711	857
36901811	857
37110000	868
37110001	868
37110002	868
37110003	868
37110004	868
37110005	868
37110006	868
37110007	868
37110008	868
37110009	868
37110010	868
37110011	868
37110012	868
37420000	865
37420001	865
37420002	865
37420003	865
37420004	865
37420005	865
37420006	865
37420007	865

EDP Number	Page No.
37420008	865
37420009	865
37420010	865
37420011	865
37420012	865
37420013	865
37420014	865
37420015	865
37420016	865
37420017	865
37420018	865
37420019	865
37420020	865
37420021	865
37420022	865
37420023	865
37420024	865
37420025	865
37420026	865
37420027	865
37420028	865
37700000	879
37700001	879
37700002	879
37700003	879
37700004	879
37700005	879
37700006	879
37700007	879
37700008	879
37700009	879
37700010	879
37700011	879
37700012	879
37700013	879
37700014	879
37700015	879
37700016	879
37700017	879
37700018	879
37700019	879
37700020	879
37700021	879
37700022	879
37700023	879
37700024	879
37700025	879
37700026	879
37700027	879
37700028	879
37700029	879
37700030	879
37700031	879
37700032	879
37700033	879
37700034	879

EDP Number	Page No.
37700035	879
37700036	879
37710000	880
37710001	880
37710002	880
37710003	880
37710004	880
37710005	880
37710006	880
37710007	880
37710008	880
37710009	880
37710010	880
37710011	880
37710012	880
37710013	880
37710014	880
37710015	880
37710016	880
37710017	880
37710018	880
37710019	880
37710020	880
37710021	880
37710022	880
37710023	880
37710024	880
37710025	880
37710026	880
38150111	921
38150911	921
38151711	921
38152511	921
38153311	921
38154111	921
38154911	921
38200211	921
38201011	921
38201811	921
38202611	921
38203411	921
38204211	921
38205011	921
38250511	923
38251311	923
38252111	923
38252911	923
38253711	923
38254511	923
38255311	923
38300611	923
38301411	923
38302211	923
38303011	923
38303811	923
38304611	923



EDP Numerical Index

EDP Number	Page No.
38305411	923
3900001	440
3900011	440
3900012	440
3900021	440
3900023	440
3900032	440
3900034	440
3900043	440
3900044	440
3900053	440
3900054	440
3900073	440
3900075	440
3900084	440
3900086	440
3900495	437
3900496	437
3900497	437
3900498	437
3900499	437
3900500	437
3900501	437
3900502	437
3900503	437
3900504	437
391	698
39150811	922
39151211	922
39151611	922
39152011	922
39152411	922
392	698
39200911	922
39201311	922
39201711	922
39202111	922
39202511	922
393	698
400-1000	991
400-2362	991
400-2500	991
400-3125	991
400-3150	991
400-3750	991
400-3937	991
400-4724	991
400-5000	991
400-6250	991
400-6299	991
400-7500	991
400-7874	991
400-9843	991
402-0197	995
402-019711	995
402-0197-BN	1013

EDP Number	Page No.
402-0197-BN11	1013
402-0312	993
402-031211	993
402-0312-BN	1011
402-0312-BN11	1011
402-0394	995
402-039411	995
402-0394-BN	1013
402-0394-BN11	1013
402-0469	993
402-046911	993
402-0469-BN	1011
402-0469-BN11	1011
402-0591	995
402-059111	995
402-0591-BN	1013
402-0591-BN11	1013
402-0625	993
402-062511	993
402-0625-BN	1011
402-0625-BN11	1011
402-0781	993
402-078111	993
402-0781-BN	1011
402-0781-BN11	1011
402-0787	995
402-078711	995
402-0787-BN	1013
402-0787-BN11	1013
402-0938	993
402-093811	993
402-0938-BN	1011
402-0938-BN11	1011
402-0939	993
402-0984	995
402-098411	995
402-0984-BN	1013
402-0984-BN11	1013
402-1000	994
402-100011	994
402-1000-BN	1012
402-1000-BN11	1012
402-1094	993
402-109411	993
402-1094-BN	1011
402-1094-BN11	1011
402-1181	995
402-118111	995
402-1181-BN	1013
402-1181-BN11	1013
402-1250	993
402-125011	993
402-1250-BN	1011
402-1250-BN11	1011
402-1378	995
402-137811	995

EDP Number	Page No.
402-1378-BN	1013
402-1378-BN11	1013
402-1406	993
402-140611	993
402-1406-BN	1011
402-1406-BN11	1011
402-1562	993
402-156211	993
402-1562-BN	1011
402-1562-BN11	1011
402-1575	995
402-157511	995
402-1575-BN	1013
402-1575-BN11	1013
402-1719	993
402-171911	993
402-1719-BN	1011
402-1719-BN11	1011
402-1772	995
402-177211	995
402-1772-BN	1013
402-1772-BN11	1013
402-1875	993
402-187511	993
402-1875-BN	1011
402-1875-BN11	1011
402-1968	995
402-196811	995
402-1968-BN	1013
402-1968-BN11	1013
402-2031	993
402-203111	993
402-2031-BN	1011
402-2031-BN11	1011
402-2188	993
402-218811	993
402-2188-BN	1011
402-2188-BN11	1011
402-2344	993
402-234411	993
402-2344-BN	1011
402-2344-BN11	1011
402-2362	995
402-236211	995
402-2362-BN	1013
402-2362-BN11	1013
402-2500	993
402-250011	993
402-2500-BN	1011
402-2500-BN11	1011
402-2656	993
402-265611	993
402-2656-BN	1011
402-2656-BN11	1011
402-2756	995
402-275611	995

EDP Number	Page No.
402-2756-BN	1013
402-2756-BN11	1013
402-2812	993
402-281211	993
402-2812-BN	1011
402-2812-BN11	1011
402-2969	993
402-296911	993
402-2969-BN	1011
402-2969-BN11	1011
402-3125	993
402-312511	993
402-3125-BN	1011
402-3125-BN11	1011
402-3150	995
402-315011	995
402-3150-BN	1013
402-3150-BN11	1013
402-3281	993
402-328111	993
402-3281-BN	1011
402-3281-BN11	1011
402-3438	993
402-343811	993
402-3438-BN	1011
402-3438-BN11	1011
402-3543	995
402-354311	995
402-3543-BN	1013
402-3543-BN11	1013
402-3594	993
402-359411	993
402-3594-BN	1011
402-3594-BN11	1011
402-3750	993
402-375008	993
402-375011	993
402-3750-BN	1011
402-3750-BN11	1011
402-3906	993
402-390611	993
402-3906-BN	1011
402-3906-BN11	1011
402-3937	995
402-393711	995
402-3937-BN	1013
402-3937-BN11	1013
402-4062	993
402-406211	993
402-4062-BN	1011
402-4062-BN11	1011
402-4219	993
402-421911	993
402-4219-BN	1011
402-4219-BN11	1011
402-4331	995



EDP Number	Page No.
402-433111	995
402-4331-BN	1013
402-4331-BN11	1013
402-4375	993
402-437511	993
402-4375-BN	1011
402-4375-BN11	1011
402-4531	993
402-453111	993
402-4531-BN	1011
402-4531-BN11	1011
402-4688	993
402-468811	993
402-4688-BN	1011
402-4688-BN11	1011
402-4724	995
402-472411	995
402-4724-BN	1013
402-4724-BN11	1013
402-4844	993
402-484411	993
402-4844-BN	1011
402-4844-BN11	1011
402-5000	993
402-500011	993
402-5000-BN	1011
402-5000-BN11	1011
402-5512	995
402-551211	995
402-5512-BN	1013
402-5512-BN11	1013
402-5625	994
402-562508	994
402-562511	994
402-5625-BN	1011
402-5625-BN11	1011
402-6250	994
402-625011	994
402-6250-BN	1012
402-6250-BN11	1012
402-6299	995
402-629911	995
402-6299-BN	1013
402-6299-BN11	1013
402-6875	994
402-687511	994
402-6875-BN	1012
402-6875-BN11	1012
402-7087	995
402-708711	995
402-7087-BN	1013
402-7087-BN11	1013
402-7500	994
402-750011	994
402-7500-BN	1012
402-7500-BN11	1012

EDP Number	Page No.
402-7874	995
402-787411	995
402-7874-BN	1013
402-7874-BN11	1013
402-8661	995
402-866111	995
402-8661-BN	1013
402-8661-BN11	1013
402-8750	994
402-875011	994
402-8750-BN	1012
402-8750-BN11	1012
402-9843	995
402-984311	995
402-9843-BN	1013
402-9843-BN11	1013
403-0394	995
403-039411	995
403-0394-BN	1013
403-0394-BN11	1013
403-0591	995
403-059111	995
403-0591-BN	1013
403-0591-BN11	1013
403-0625	993
403-062511	993
403-0625-BN	1011
403-0625-BN11	1011
403-0781	993
403-078111	993
403-0781-BN	1011
403-0781-BN11	1011
403-0787	995
403-078711	995
403-0787-BN	1013
403-0787-BN11	1013
403-0938	993
403-093811	993
403-0938-BN	1011
403-0938-BN11	1011
403-0939	993
403-0984	995
403-098411	995
403-0984-BN	1013
403-0984-BN11	1013
403-1000	994
403-100011	994
403-1000-BN	1012
403-1000-BN11	1012
403-1094	993
403-109411	993
403-1094-BN	1011
403-1094-BN11	1011
403-1181	995
403-118111	995
403-1181-BN	1013

EDP Number	Page No.
403-1181-BN11	1013
403-1250	993
403-125011	993
403-1250-BN	1011
403-1250-BN11	1011
403-1378	995
403-137811	995
403-1378-BN	1013
403-1378-BN11	1013
403-1406	993
403-140611	993
403-1406-BN	1011
403-1406-BN11	1011
403-1562	993
403-156211	993
403-1562-BN	1011
403-1562-BN11	1011
403-1575	995
403-157511	995
403-1575-BN	1013
403-1575-BN11	1013
403-1719	993
403-171911	993
403-1719-BN	1011
403-1719-BN11	1011
403-1772	995
403-177211	995
403-1772-BN	1013
403-1772-BN11	1013
403-1875	993
403-187511	993
403-1875-BN	1011
403-1875-BN11	1011
403-1968	995
403-196811	995
403-1968-BN	1013
403-1968-BN11	1013
403-2031	993
403-203111	993
403-2031-BN	1011
403-2031-BN11	1011
403-2188	993
403-218811	993
403-2188-BN	1011
403-2188-BN11	1011
403-2344	993
403-234411	993
403-2344-BN	1011
403-2344-BN11	1011
403-2362	995
403-236211	995
403-2362-BN	1013
403-2362-BN11	1013
403-2500	993
403-250011	993
403-2500-BN	1011

EDP Number	Page No.
403-2500-BN11	1011
403-2656	993
403-265611	993
403-2656-BN	1011
403-2656-BN11	1011
403-2756	995
403-275611	995
403-2756-BN	1013
403-2756-BN11	1013
403-2812	993
403-281211	993
403-2812-BN	1011
403-2969	993
403-296911	993
403-2969-BN	1011
403-2969-BN11	1011
403-3125	993
403-312511	993
403-3125-BN	1011
403-3125-BN11	1011
403-3150	995
403-315011	995
403-3150-BN	1013
403-3150-BN11	1013
403-3543	995
403-354311	995
403-3543-BN	1013
403-3543-BN11	1013
403-3750	993
403-375011	993
403-3750-BN	1011
403-3750-BN11	1011
403-3937	995
403-393711	995
403-3937-BN	1013
403-3937-BN11	1013
403-4331	995
403-433111	995
403-4331-BN	1013
403-4331-BN11	1013
403-4375	993
403-437511	993
403-4375-BN	1011
403-4375-BN11	1011
403-4724	995
403-472411	995
403-4724-BN	1013
403-4724-BN11	1013
403-5000	993
403-500011	993
403-5000-BN	1011
403-5000-BN11	1011
403-5512	995
403-551211	995
403-5512-BN	1013
403-5512-BN11	1013



EDP Numerical Index

EDP Number	Page No.
403-5625	994
403-562511	994
403-5625-BN	1011
403-5625-BN11	1011
403-6250	994
403-625011	994
403-6250-BN	1012
403-6250-BN11	1012
403-6299	995
403-629911	995
403-6299-BN	1013
403-6299-BN11	1013
403-6875	994
403-687511	994
403-6875-BN	1012
403-6875-BN11	1012
403-7087	995
403-708711	995
403-7087-BN	1013
403-7087-BN11	1013
403-7500	994
403-750011	994
403-7500-BN	1012
403-7500-BN11	1012
403-7874	995
403-787411	995
403-7874-BN	1013
403-7874-BN11	1013
403-8661	995
403-866111	995
403-8661-BN	1013
403-8661-BN11	1013
403-8750	994
403-875011	994
403-8750-BN	1012
403-8750-BN11	1012
403-9843	995
403-984311	995
403-9843-BN	1013
403-9843-BN11	1013
404-0312	993
404-031211	993
404-0312-BN	1011
404-0312-BN11	1011
404-0394	995
404-039411	995
404-0394-BN	1013
404-0394-BN11	1013
404-0469	993
404-046911	993
404-0469-BN	1011
404-0469-BN11	1011
404-0591	995
404-059111	995
404-0591-BN	1013
404-0591-BN11	1013

EDP Number	Page No.
404-0625	993
404-062511	993
404-0625-BN	1011
404-0625-BN11	1011
404-0781	993
404-078111	993
404-0781-BN	1011
404-0781-BN11	1011
404-0787	995
404-078711	995
404-0787-BN	1013
404-0787-BN11	1013
404-0938	993
404-093811	993
404-0938-BN	1011
404-0938-BN11	1011
404-0939	993
404-093911	993
404-0984	995
404-098411	995
404-0984-BN	1013
404-0984-BN11	1013
404-1000	994
404-100011	994
404-1000-BN	1012
404-1000-BN11	1012
404-1094	993
404-109411	993
404-1094-BN	1011
404-1094-BN11	1011
404-1181	995
404-118111	995
404-1181-BN	1013
404-1181-BN11	1013
404-1250	993
404-125011	993
404-1250-BN	1011
404-1250-BN11	1011
404-1378	995
404-137811	995
404-1378-BN	1013
404-1378-BN11	1013
404-1406	993
404-140611	993
404-1406-BN	1011
404-1406-BN11	1011
404-1562	993
404-156211	993
404-1562-BN	1011
404-1562-BN11	1011
404-1575	995
404-157511	995
404-1575-BN	1013
404-1575-BN11	1013
404-1719	993
404-171911	993

EDP Number	Page No.
404-1719-BN	1011
404-1719-BN11	1011
404-1772	995
404-177211	995
404-1772-BN	1013
404-1772-BN11	1013
404-1875	993
404-187511	993
404-1875-BN	1011
404-1875-BN11	1011
404-1968	995
404-196811	995
404-1968-BN	1013
404-1968-BN11	1013
404-2031	993
404-203111	993
404-2031-BN	1011
404-2031-BN11	1011
404-2188	993
404-218811	993
404-2188-BN	1011
404-2188-BN11	1011
404-2344	993
404-234411	993
404-2344-BN	1011
404-2344-BN11	1011
404-2362	995
404-236211	995
404-2362-BN	1013
404-2362-BN11	1013
404-2500	993
404-250011	993
404-2500-BN	1011
404-2500-BN11	1011
404-2656	993
404-265611	993
404-2656-BN	1011
404-2656-BN11	1011
404-2756	995
404-275611	995
404-2756-BN	1013
404-2756-BN11	1013
404-2812	993
404-281211	993
404-2812-BN	1011
404-2812-BN11	1011
404-2969	993
404-296911	993
404-2969-BN	1011
404-2969-BN11	1011
404-3125	993
404-312511	993
404-3125-BN	1011
404-3125-BN11	1011
404-3150	995
404-315011	995

EDP Number	Page No.
404-3150-BN	1013
404-3150-BN11	1013
404-3281	993
404-328111	993
404-3281-BN	1011
404-3281-BN11	1011
404-3438	993
404-343811	993
404-3438-BN	1011
404-3438-BN11	1011
404-3543	995
404-354311	995
404-3543-BN	1013
404-3543-BN11	1013
404-3594	993
404-359411	993
404-3594-BN	1011
404-3594-BN11	1011
404-3750	993
404-375011	993
404-3750-BN	1011
404-3750-BN11	1011
404-3906	993
404-390611	993
404-3906-BN	1011
404-3906-BN11	1011
404-3937	995
404-393711	995
404-3937-BN	1013
404-3937-BN11	1013
404-4062	993
404-406211	993
404-4062-BN	1011
404-4062-BN11	1011
404-4219	993
404-421911	993
404-4219-BN	1011
404-4219-BN11	1011
404-4331	995
404-433111	995
404-4331-BN	1013
404-4331-BN11	1013
404-4375	993
404-437511	993
404-4375-BN	1011
404-4375-BN11	1011
404-4531	993
404-453111	993
404-4531-BN	1011
404-4531-BN11	1011
404-4688	993
404-468811	993
404-4688-BN	1011
404-4688-BN11	1011
404-4724	995
404-472411	995



EDP Number	Page No.
404-4724-BN	1013
404-4724-BN11	1013
404-4844	993
404-484411	993
404-4844-BN	1011
404-4844-BN11	1011
404-5000	993
404-500011	993
404-5000-BN	1011
404-5000-BN11	1011
404-5512	995
404-551211	995
404-5512-BN	1013
404-5512-BN11	1013
404-5625	994
404-562511	994
404-5625-BN	1011
404-5625-BN11	1011
404-6250	994
404-625011	994
404-6250-BN	1012
404-6250-BN11	1012
404-6299	995
404-629911	995
404-6299-BN	1013
404-6299-BN11	1013
404-6875	994
404-687511	994
404-6875-BN	1012
404-6875-BN11	1012
404-7087	995
404-708711	995
404-7087-BN	1013
404-7087-BN11	1013
404-7500	994
404-750011	994
404-7500-BN	1012
404-7500-BN11	1012
404-7874	995
404-787411	995
404-7874-BN	1013
404-7874-BN11	1013
404-8661	995
404-866111	995
404-8661-BN	1013
404-8661-BN11	1013
404-8750	994
404-875011	994
404-8750-BN	1012
404-8750-BN11	1012
404-9843	995
404-984311	995
404-9843-BN	1013
404-9843-BN11	1013
408-1000	996
408-1250	996

EDP Number	Page No.
408-1562	996
408-1875	996
408-2500	996
408-2812	996
408-3125	996
408-3750	996
408-4375	996
408-5000	996
408-5625	996
408-6250	996
408-6875	996
408-7500	996
409-0625	996
409-0781	996
409-0938	996
409-1000	996
409-1094	996
409-1250	996
409-1562	996
409-1875	996
409-2188	996
409-2500	996
409-2812	996
409-3125	996
409-3750	996
409-375011	996
409-4375	996
409-5000	996
409-5625	996
409-6250	996
409-6875	996
409-7500	996
409-8750	996
4100000411	438
4100000511	438
4100000611	438
4100000711	438
4100000811	438
4100000911	438
4100001011	438
4100001111	438
4100001211	438
4100001311	438
4100001411	438
4100001511	438
4100001611	438
4100001711	438
4100001811	438
4100001911	438
4100002011	438
4100002111	438
4100002211	438
4100002311	438
4100002411	438
4100002511	438
4100002611	439

EDP Number	Page No.
4100002711	439
4100002811	438
4100002911	438
4100003011	438
4100003111	438
4100003211	438
4100003311	438
4100003411	438
4100003511	438
4100003611	438
4100003711	438
4100003811	438
4100003911	438
4100004011	438
4100004111	438
4100004211	438
4100004311	438
4100004411	438
4100004511	438
4100004611	438
4100004711	438
4100004811	438
4100004911	438
4100005011	439
4100005111	439
4105000111	441
4105000211	441
4105000311	441
4105000411	441
4105000511	441
4105000611	441
4105000711	441
4105000811	441
4105000911	441
4105001011	441
4105001111	441
4105001211	441
4105001311	441
4105001411	441
4105001511	441
4105001611	441
4105001711	441
4105001811	441
4105001911	441
4105002011	441
4105200	1053
4105300	1053
4105400	1053
4105700	1053
411	698
4110000111	440
4110000211	440
4110000311	440
4110000411	440
4110000511	440
4110000611	440

EDP Number	Page No.
4110000711	440
4110000811	440
4110000911	440
4110001011	440
4110001111	440
4110001211	440
412	698
4120000115	436
4120000215	436
4120000315	436
4120000413	436
4120000513	436
4120000613	436
4120000713	436
4120000813	436
4120000913	436
4120001013	436
412-0312	998
412-031208	998
412-031211	998
412-0312-BN	1015
412-0312-BN11	1015
412-0394	999
412-0394-BN	1016
412-0394-BN11	1016
412-0469	998
412-046911	998
412-0469-BN	1015
412-0591	999
412-0591-BN	1016
412-0625	998
412-062511	998
412-0625-BN	1015
412-0625-BN11	1015
412-0781	998
412-0781-BN	1015
412-0787	999
412-0787-BN	1016
412-0938	998
412-093808	998
412-0938-BN	1015
412-0984	999
412-0984-BN	1016
412-1094	998
412-1094-BN	1015
412-1181	999
412-1181-BN	1016
412-1250	998
412-125011	998
412-1250-BN	1015
412-1250-BN11	1015
412-1378	999
412-1378-BN	1016
412-1406	998
412-1406-BN	1015
412-1562	998



EDP Numerical Index

EDP Number	Page No.
412-156208	998
412-1562-BN	1015
412-1562-BN11	1015
412-1575	999
412-1575-BN	1016
412-1575-BN11	1016
412-1772	999
412-1772-BN	1016
412-1875	998
412-187508	998
412-187511	998
412-1875-BN	1015
412-1875-BN11	1015
412-1968	999
412-1968-BN	1016
412-2188	998
412-2188-BN	1015
412-2362	999
412-2362-BN	1016
412-2500	998
412-250011	998
412-2500-BN	1015
412-2500-BN11	1015
412-2756	999
412-2756-BN	1016
412-3125	998
412-312511	998
412-3125-BN	1015
412-3150	999
412-3150-BN	1016
412-3543	999
412-3543-BN	1016
412-3750	998
412-375011	998
412-3750-BN	1015
412-3750-BN11	1015
412-3937	999
412-3937-BN	1016
412-4331	999
412-4331-BN	1016
412-4375	998
412-4375-BN	1015
412-4724	999
412-4724-BN	1016
412-5000	998
412-500008	998
412-500011	998
412-5000-BN	1015
412-5000-BN11	1015
412-6250	998
412-6250-BN	1015
412-7500	998
412-7500-BN	1015
413	698
414-0312	998
414-031211	998

EDP Number	Page No.
414-0312-BN	1015
414-0312-BN11	1015
414-0394	999
414-039411	999
414-0394-BN	1016
414-0394-BN11	1016
414-0469	998
414-046911	998
414-0469-BN	1015
414-0469-BN11	1015
414-0591	999
414-0591-BN	1016
414-0625	998
414-062511	998
414-0625-BN	1015
414-0625-BN11	1015
414-0781	998
414-078111	998
414-0781-BN	1015
414-0781-BN11	1015
414-0787	999
414-0787-BN	1016
414-0938	998
414-093811	998
414-0938-BN	1015
414-0938-BN08	1015
414-0938-BN11	1015
414-0984	999
414-0984-BN	1016
414-1094	998
414-109411	998
414-1094-BN	1015
414-1181	999
414-1181-BN	1016
414-1250	998
414-125011	998
414-1250-BN	1015
414-1250-BN08	1015
414-1250-BN11	1015
414-1378	999
414-1378-BN	1016
414-1406	998
414-140611	998
414-1406-BN	1015
414-1562	998
414-156211	998
414-1562-BN	1015
414-1562-BN08	1015
414-1575	999
414-1575-BN	1016
414-1772	999
414-1772-BN	1016
414-1875	998
414-187511	998
414-1875-BN	1015
414-1875-BN11	1015

EDP Number	Page No.
414-1968	999
414-196811	999
414-1968-BN	1016
414-2188	998
414-218811	998
414-2188-BN	1015
414-2362	999
414-2362-BN	1016
414-2500	998
414-250011	998
414-2500-BN	1015
414-2500-BN11	1015
414-2756	999
414-2756-BN	1016
414-3125	998
414-312511	998
414-3125-BN	1015
414-3125-BN08	1015
414-3125-BN11	1015
414-3150	999
414-3150-BN	1016
414-3543	999
414-3543-BN	1016
414-3750	998
414-375011	998
414-3750-BN	1015
414-3750-BN08	1015
414-3750-BN11	1015
414-3937	999
414-3937-BN	1016
414-4331	999
414-4331-BN	1016
414-4375	998
414-437511	998
414-4375-BN	1015
414-4724	999
414-4724-BN	1016
414-5000	998
414-500011	998
414-5000-BN	1015
414-5000-BN08	1015
414-6250	998
414-625011	998
414-6250-BN	1015
414-7500	998
414-750011	998
414-7500-BN	1015
415-1000	992
415-1001	992
415-1250	992
415-1251	992
415-1561	992
415-1562	992
415-1871	992
415-1875	992
415-2181	992

EDP Number	Page No.
415-2188	992
415-2500	992
415-2501	992
415-3121	992
415-3125	992
415-3750	992
415-3751	992
415-4375	992
415-5000	992
415-5001	992
415-5621	992
415-5625	992
415-6250	992
415-6251	992
415-7500	992
415-7501	992
415-8750	992
415-8751	992
4200000111	443
4200000211	443
4200000311	443
4200000411	443
4200000511	443
4200000611	443
4200100111	444
4200100211	444
4200100311	444
4200100411	444
4200100511	444
4200100611	444
4200100711	444
4200100811	444
4205000	1052
4205100	1052
4205200	1052
4205300	1052
4205400	1052
4205500	1052
4205600	1052
4205700	1052
4205800	1052
4205900	1052
422-0312	1022
422-0312-BN	1024
422-0312-BN11	1024
422-0469	1022
422-0469-BN	1024
422-0469-BN11	1024
422-0625	1022
422-062511	1022
422-0625-BN	1024
422-0625-BN11	1024
422-0781	1022
422-0781-BN	1024
422-0938	1022



EDP Number	Page No.
422-093811	1022
422-0938-BN	1024
422-1094	1022
422-1094-BN	1024
422-1250	1022
422-125011	1022
422-1250-BN	1024
422-1250-BN11	1024
422-1406	1022
422-1406-BN	1024
422-1562	1022
422-1562-BN	1024
422-1875	1022
422-187511	1022
422-1875-BN	1024
422-2188	1022
422-218811	1022
422-2188-BN	1024
422-2500	1022
422-250011	1022
422-2500-BN	1024
422-3125	1022
422-312511	1022
422-3125-BN	1024
422-3750	1022
422-375011	1022
422-3750-BN	1024
422-4375	1022
422-4375-BN	1024
422-5000	1022
422-500011	1022
422-5000-BN	1024
423-0312	1022
423-0312-BN	1024
423-0469	1022
423-0469-BN	1024
423-0625	1022
423-0625-BN	1024
423-0938	1022
423-0938-BN	1024
423-1250	1022
423-1250-BN	1024
423-1562	1022
423-1562-BN	1024
423-1875	1022
423-1875-BN	1024
423-2188	1022
423-2188-BN	1024
423-2500	1022
423-250011	1022
423-2500-BN	1024
423-3125	1022
423-3125-BN	1024
423-3750	1022
423-375011	1022
423-3750-BN	1024

EDP Number	Page No.
423-4375	1022
423-4375-BN	1024
423-5000	1022
423-500011	1022
423-5000-BN	1024
424-0312	1022
424-031211	1022
424-0312-BN	1024
424-0312-BN11	1024
424-0469	1022
424-046911	1022
424-0469-BN	1024
424-0469-BN11	1024
424-0625	1022
424-062511	1022
424-0625-BN	1024
424-0625-BN11	1024
424-0781	1022
424-078111	1022
424-0781-BN	1024
424-0938	1022
424-093811	1022
424-0938-BN	1024
424-0938-BN11	1024
424-1094	1022
424-109411	1022
424-1094-BN	1024
424-1250	1022
424-125011	1022
424-1250-BN	1024
424-1250-BN11	1024
424-1406	1022
424-1406-BN	1024
424-1562	1022
424-156211	1022
424-1562-BN	1024
424-1875	1022
424-187511	1022
424-1875-BN	1024
424-1875-BN11	1024
424-2188	1022
424-2188-BN	1024
424-2500	1022
424-250011	1022
424-2500-BN	1024
424-2500-BN11	1024
424-3125	1022
424-312511	1022
424-3125-BN	1024
424-3750	1022
424-375011	1022
424-3750-BN	1024
424-3750-BN11	1024
424-4375	1022
424-4375-BN	1024
424-5000	1022

EDP Number	Page No.
424-500011	1022
424-5000-BN	1024
424-5000-BN11	1024
4300100	1053
4300300	1053
4300500	1053
4300700	1053
4301200	1053
4301300	1053
4301500	1053
4301700	1053
4302100	1053
4309700	1053
4310100	1053
4310300	1053
4310500	1053
4310700	1053
4310900	1053
4312100	1053
4312300	1053
4312500	1053
4313300	1053
4313500	1053
4313700	1053
4400100	1055
4400300	1055
4400500	1055
4400700	1055
4401300	1055
4401500	1055
44100111	884
44100211	884
44100511	884
44100711	884
44100911	884
44101111	884
44101311	884
44101411	884
44101611	884
4410500	1055
4410900	1055
4412100	1055
4412500	1055
44130113	901
44130213	901
44130313	901
44130513	901
44130613	901
44130713	901
44130813	901
44130913	901
4413300	1055
4413700	1055
4420900	1055
4421100	1055
442-1250	1021

EDP Number	Page No.
442-1250-BN	1023
442-1562	1021
442-1562-BN	1023
442-1875	1021
442-1875-BN	1023
442-2188	1021
442-2188-BN	1023
442-2500	1021
442-2500-BN	1023
442-2812	1021
442-2812-BN	1023
442-3125	1021
442-3125-BN	1023
442-3438	1021
442-3438-BN	1023
442-3750	1021
442-3750-BN	1023
442-4375	1021
442-4375-BN	1023
442-5000	1021
442-5000-BN	1023
44301111	899
44301311	899
44301411	899
44301611	899
44400311	886
44400511	886
44400711	886
44400911	886
44401111	886
44401311	886
44401411	886
44401611	886
44401811	886
44402011	886
444-1250	1021
444-125011	1021
444-1250-BN	1023
444-1250-BN11	1023
444-1562	1021
444-1562-BN	1023
444-1875	1021
444-187511	1021
444-1875-BN	1023
444-2188	1021
444-2188-BN	1023
444-2500	1021
444-250011	1021
444-2500-BN	1023
444-2812	1021
444-2812-BN	1023
444-3125	1021
444-3125-BN	1023
444-3438	1021
444-3438-BN	1023
444-3750	1021



EDP Numerical Index

EDP Number	Page No.
444-375011	1021
444-3750-BN	1023
444-4375	1021
444-4375-BN	1023
444-5000	1021
44450001	883
44450002	883
44450003	883
44450004	883
44450005	883
44450006	883
444-5000-BN	1023
445-0394	1007
445-0591	1007
445-0625	1007
445-0787	1007
445-0938	1007
445-0984	1007
445-1000	1007
445-1181	1007
445-1250	1007
445-1378	1007
445-1562	1007
445-1575	1007
445-1772	1007
445-1875	1007
445-1968	1007
445-2188	1007
445-2362	1007
445-2500	1007
445-2756	1007
445-2812	1007
445-3125	1007
445-3150	1007
445-3543	1007
445-3750	1007
445-3937	1007
445-4331	1007
445-4375	1007
445-4724	1007
445-5000	1007
445-5512	1007
445-5625	1007
445-6250	1007
445-6299	1007
445-6875	1007
445-7087	1007
445-7500	1007
445-7874	1007
445-8750	1007
44700111	890
44700211	890
44700311	890
44700411	890
44700511	890
44700611	890

EDP Number	Page No.
447-0625	1009
447-1000	1009
447100111	888
447100311	888
447100511	888
447100611	888
447100711	888
447101011	888
447101111	888
447101411	888
447101511	888
447101611	888
447102011	888
447102111	888
447102211	888
447102611	888
447102711	888
447-1250	1009
447-125011	1009
447-1875	1009
447-187511	1009
447200013	891
447200113	891
447200213	891
447200313	891
447200413	891
447200513	891
447-2500	1009
447-250011	1009
447-3125	1009
447-3750	1009
447-5000	1009
447-6250	1009
447-7500	1009
4500000	1050
4500100	1050
4500300	1050
4500500	1050
4500508	1050
4500700	1050
4500708	1050
4500800	1050
4500808	1050
4500900	1050
4501000	1050
4501008	1050
4501100	1050
4501300	1050
4501500	1050
4501600	1050
4501700	1050
4501900	1050
4502100	1050
4502300	1050
4509000	1050
4509100	1050

EDP Number	Page No.
4509200	1050
4509400	1050
4509500	1050
4509700	1050
4509800	1050
4509900	1050
451	698
4510100	1050
4510500	1050
4510508	1050
4510700	1050
4510900	1050
4510908	1050
4511500	1050
4511900	1050
4512100	1050
4512300	1050
4512500	1050
45130001	902
45130002	902
45130003	902
45130004	902
45130005	902
45130006	902
45130007	902
45130008	902
45130009	902
4513100	1050
4513300	1050
4513308	1050
4513500	1050
4513700	1050
4513900	1050
4514500	1050
452	698
4520100	1050
4520500	1050
452-0625	997
452-0625-BN	1014
4520700	1050
4520900	1050
452-0938	997
452-0938-BN	1014
452-1000	997
452-1000-BN	1014
4521100	1050
452-1250	997
452-1250-BN	1014
4521300	1050
452-1562	997
452-1562-BN	1014
452-1875	997
452-1875-BN	1014
452-2188	997
452-2188-BN	1014
452-2500	997

EDP Number	Page No.
452-250011	997
452-2500-BN	1014
452-2812	997
452-2812-BN	1014
452-3125	997
452-3125-BN	1014
452-3750	997
452-3750-BN	1014
452-4375	997
452-5000	997
452-5000-BN	1014
452-5625	997
452-5625-BN	1014
452-6250	997
452-6250-BN	1014
452-6875	997
452-6875-BN	1014
452-7500	997
452-7500-BN	1014
453	698
45300001	900
45300002	900
45300003	900
45300004	900
454-0625	997
454-0938	997
454-1000	997
45410000	904
45410001	904
45410002	904
45410003	904
45410004	904
45410005	904
45410006	904
45410007	904
45410008	904
45410009	904
45410010	904
45410011	904
45410012	904
45410013	904
45410014	904
45410015	904
45410016	904
45410017	904
45410018	904
45410019	904
45410020	904
45410021	904
45410022	904
45410023	904
45410024	904
45410025	904
45410026	904
454-1250	997
454-1562	997



EDP Number	Page No.
454-1875	997
454-2188	997
454-2500	997
454-2812	997
454-3125	997
454-3750	997
454-4375	997
454-5000	997
454-5625	997
454-6250	997
454-6875	997
454-7500	997
4550008	1051
4550011	1051
4550108	1051
4550111	1051
4550308	1051
4550311	1051
4550408	1051
4550411	1051
4550508	1051
4550511	1051
4550608	1051
4550708	1051
4550711	1051
455-1000	1005
4551208	1051
4551211	1051
455-1250	1005
455-125008	1005
455-1251	1005
455-125108	1005
455-125111	1005
4551308	1051
4551311	1051
4551408	1051
4551508	1051
4551511	1051
455-1562	1005
455-156208	1005
455-156211	1005
4551608	1051
455-1875	1005
455-187508	1005
455-1876	1005
455-187608	1005
455-187611	1005
4552108	1051
455-2188	1005
455-2500	1005
455-250008	1005
455-2501	1005
455-250108	1005
455-250111	1005
455-2502	1005
455-250208	1005

EDP Number	Page No.
455-250211	1005
455-2812	1005
455-3125	1005
455-3126	1005
455-312608	1005
455-312611	1005
455-3127	1005
455-312708	1005
455-312711	1005
455-3750	1005
455-3751	1005
455-375108	1005
455-375111	1005
455-3752	1005
455-375208	1005
455-375211	1005
455-3753	1005
455-375308	1005
455-375311	1005
455-4375	1005
455-437508	1005
455-4376	1005
455-437608	1005
455-4377	1005
455-5000	1005
455-5001	1005
455-500108	1005
455-500111	1005
455-5002	1005
455-500208	1005
455-500211	1005
455-5003	1005
455-500308	1005
455-500311	1005
455-5625	1005
455-6250	1005
455-625008	1005
455-6251	1005
455-625108	1005
455-625111	1005
455-7500	1005
455-750008	1005
455-7501	1005
455-750108	1005
455-750111	1005
455-7502	1005
455-750208	1005
455-750211	1005
4558908	1051
4559008	1051
4559011	1051
4559108	1051
4559111	1051
4559208	1051
4559211	1051
4559308	1051

EDP Number	Page No.
4559311	1051
4559408	1051
4559411	1051
4559508	1051
4559511	1051
4559608	1051
4559611	1051
4559708	1051
4559711	1051
4559808	1051
4559811	1051
4559908	1051
4560008	1051
4560108	1051
4560111	1051
4560308	1051
4560408	1051
4560508	1051
4560511	1051
4560708	1051
4560711	1051
4560908	1051
4560911	1051
4561008	1051
4561208	1051
4562108	1051
4562111	1051
4562308	1051
4562311	1051
4562508	1051
4562511	1051
4563308	1051
4563311	1051
4563508	1051
4563511	1051
4563708	1051
4563711	1051
4569108	1051
4569808	1051
457002011	890
457003011	890
457004011	890
457005011	890
457006011	890
457007011	890
457008011	890
457009011	890
457010011	890
457011011	890
457012011	890
457013011	890
4570708	1051
4570908	1051
457103011	889
457103111	889
457103211	889

EDP Number	Page No.
457103311	889
457104011	889
457104111	889
457104211	889
457104311	889
457105011	889
457105111	889
457105211	889
457105311	889
457106011	889
457106111	889
457106211	889
457106311	889
457108011	889
457108111	889
457108211	889
457108311	889
457110011	889
457110111	889
457110211	889
457110311	889
457110411	889
457110511	889
4571108	1051
4571111	1051
457112011	889
457112111	889
457112211	889
457112311	889
4571308	1051
45810026	903
45810035	903
45810040	903
45810072	903
45810073	903
45810078	903
45810083	903
45810140	903
45810144	903
45810145	903
45810150	903
45810152	903
45810154	903
45810156	903
45810175	903
45810178	903
45810180	903
4600100	1052
4600300	1052
4600500	1052
4600600	1052
4600700	1052
460-1000	1006
46011	756
4601200	1052
460-1250	1006



EDP Numerical Index

EDP Number	Page No.
4601300	1052
46015	756
4601500	1052
46017	756
460-1875	1006
46020	756
46023	756
460-2362	1006
460-2500	1006
46029	756
460-3125	1006
460-3150	1006
46034	756
460-3750	1006
46038	756
460-3937	1006
460-4375	1006
460-4724	1006
460-5000	1006
460-5512	1006
460-6250	1006
460-6299	1006
46064	756
46068	756
46070	756
460-7087	1006
46074	756
460-7500	1006
460-7874	1006
46079	756
46080	756
46082	756
46085	756
46086	756
46087	756
46089	756
46093	756
460-9843	1006
4610400	1052
4610500	1052
4610700	1052
4610900	1052
461-1000	1008
461-1181	1008
461-1250	1008
461-1562	1008
461-1575	1008
461-1875	1008
461-187511	1008
461-1968	1008
4612100	1052
4612300	1052
461-2362	1008
4612500	1052
461-2500	1008
461-250011	1008

EDP Number	Page No.
461-2756	1008
461-2812	1008
461-3125	1008
461-3150	1008
4613300	1052
461-3543	1008
4613700	1052
461-3750	1008
461-375011	1008
461-3937	1008
46142	756
46143	756
461-4331	1008
461-4375	1008
46144	756
46147	756
461-4724	1008
461-5000	1008
46152	756
46153	756
46154	756
46155	756
461-5512	1008
461-5625	1008
461-6250	1008
461-6299	1008
46163	756
46164	756
46165	756
461-6875	1008
461-7087	1008
461-7500	1008
461-7874	1008
461-8661	1008
461-9843	1008
462-1000	1000
462-1000-BN	1017
462-1181	1001
462-1181-BN	1017
462-1250	1000
462-125011	1000
462-1250-BN	1017
462-1575	1001
462-1575-BN	1017
462-1875	1000
462-1875-BN	1017
462-1968	1001
462-1968-BN	1017
462-2362	1001
462-2362-BN	1017
462-2500	1000
462-250011	1000
462-2500-BN	1017
462-2500-BN08	1017
46227	756
46228	756

EDP Number	Page No.
46230	756
462-3125	1000
462-312511	1000
462-3125-BN	1017
462-3150	1001
462-3150-BN	1017
462-3750	1000
462-375008	1000
462-375011	1000
462-3750-BN	1017
46239	756
462-3937	1001
462-3937-BN	1017
46241	756
462-4375	1000
462-4375-BN	1017
462-4724	1001
462-4724-BN	1017
462-5000	1000
462-5000-BN	1017
462-5001	1000
462-500108	1000
46251	756
46253	756
462-5512	1001
462-5512-BN	1017
462-6250	1000
462-625008	1000
462-6250-BN	1017
462-6299	1001
462-6299-BN	1017
46263	756
46265	756
462-7087	1001
462-7087-BN	1017
462-7500	1000
462-7500-BN	1017
46276	756
462-7874	1001
462-7874-BN	1017
46279	756
462-9843	1001
462-9843-BN	1017
46329	756
46331	756
46341	756
46344	756
46347	756
464-1000	1000
464-100008	1000
464-1000-BN	1017
464-1181	1001
464-1181-BN	1017
464-1250	1000
464-125011	1000
464-1250-BN	1017

EDP Number	Page No.
464-1250-BN11	1017
464-1575	1001
464-1575-BN	1017
464-1875	1000
464-187511	1000
464-1875-BN	1017
464-1875-BN11	1017
464-1968	1001
464-196811	1001
464-1968-BN	1017
464-2362	1001
464-236211	1001
464-2362-BN	1017
464-2500	1000
464-250011	1000
464-2500-BN	1017
464-2500-BN11	1017
464-3125	1000
464-312511	1000
464-3125-BN	1017
464-3150	1001
464-315011	1001
464-3150-BN	1017
464-3750	1000
464-375011	1000
464-3750-BN	1017
464-3750-BN11	1017
464-3937	1001
464-393711	1001
464-3937-BN	1017
464-4375	1000
464-437508	1000
464-437511	1000
464-4375-BN	1017
464-4724	1001
464-472411	1001
464-4724-BN	1017
464-5000	1000
464-500011	1000
464-5000-BN	1017
464-5000-BN08	1017
464-5000-BN11	1017
464-5001	1000
464-500108	1000
464-5512	1001
464-5512-BN	1017
464-6250	1000
464-625011	1000
464-6250-BN	1017
464-6299	1001
464-6299-BN	1017
464-7087	1001
464-7087-BN	1017
464-7500	1000
464-750011	1000
464-7500-BN	1017



EDP Number	Page No.
464-7874	1001
464-787411	1001
464-7874-BN	1017
464-9843	1001
464-9843-BN	1017
4700000	1056
4700100	1056
4700200	1056
4700300	1056
4700500	1056
4700600	1056
4700700	1056
4700900	1056
4701300	1056
4701400	1056
4701500	1056
4701700	1056
4701900	1056
4702100	1056
4709100	1056
4709400	1056
4709500	1056
4709600	1056
4709700	1056
4710000	1056
4710100	1056
4710500	1056
4710600	1056
4710900	1056
4711500	1056
4712100	1056
4712300	1056
4712500	1056
4713300	1056
4713500	1056
4713700	1056
4713900	1056
4716100	1056
4716500	1056
4716900	1056
4720100	1056
4720500	1056
4720900	1056
4721100	1056
4721300	1056
4726500	1056
4726700	1056
4726900	1056
4727100	1056
4727300	1056
48106421	892
48106433	892
48106445	892
48106467	892
48106489	892
48106509	892

EDP Number	Page No.
48106533	892
48159050	146
48159065	146
48159070	146
48159085	146
48159090	147
48172201	165
48172202	165
48172203	165
48172204	165
48172206	165
48172207	165
48172208	165
48172209	165
48172211	165
48172212	166
48172213	166
48172214	166
48172216	166
48172217	166
48172218	166
48172219	166
48172221	166
48172222	166
48172223	166
48172224	166
48172226	166
48172227	166
48172228	166
48172229	166
48172231	166
48172232	166
48172233	166
48172234	166
48172236	166
48172237	166
48172238	166
48172239	166
48172241	166
48172242	166
48172243	166
48172244	166
48172246	166
48172247	166
48172248	166
48172249	166
48172251	166
48172252	166
48172253	166
48172254	166
48172256	166
48172257	166
48172258	166
48172259	166
48172261	166
48172262	167

EDP Number	Page No.
48172263	167
48172264	167
48172266	167
48172267	167
48172268	167
48172269	167
48172271	167
48172272	167
48172273	167
48172274	167
48172276	167
48172277	167
48172278	167
48172279	167
48172281	167
48172282	167
48172283	167
48172284	167
48172286	167
48172287	167
48172288	167
48172289	167
48172291	167
48172292	167
48172293	167
48172294	167
48172296	167
48172297	167
48172298	167
48172299	167
48172301	167
48172302	167
48172303	167
48172304	167
48172306	167
48172307	167
48172308	168
48172309	168
48172311	168
48172312	168
48172313	168
48172314	168
48172316	168
48172317	168
48172318	168
48172319	168
48172321	168
48172322	168
48172323	168
48172324	168
48172326	168
48172327	168
48172328	168
48172329	168
48172331	168
48172332	168

EDP Number	Page No.
48172333	168
48172334	168
48172336	168
48172337	168
48172338	168
48172339	168
48172341	168
48172342	168
48172343	168
48172344	168
48172346	168
48172347	168
48172348	168
48172349	168
48172351	168
48172352	168
48172353	168
48172354	168
48172356	168
48172357	168
48172358	169
48172359	169
48172361	169
48172362	169
48172363	169
48172364	169
48172366	169
48172367	169
48172368	169
48172369	169
48172371	169
48172372	169
48172373	169
48172374	169
48172376	169
48172377	169
48172378	169
48172379	169
48172381	169
48172382	169
48172383	169
48172384	169
48172386	169
48172387	169
48172388	169
48172389	169
48172391	169
48172392	169
48172393	169
48172394	169
48172396	169
48172397	169
48172398	169
48172399	169
48173001	1329
48173002	1329



EDP Number	Page No.
48173003	1329
48173004	1329
48173005	1329
48173006	1329
48173007	1329
48173008	1329
48173009	1329
48173010	1329
48173011	1329
48173012	1329
48173013	1329
48173014	1329
48173015	1329
48173016	1329
48173017	1329
48173018	1329
48173019	1329
48173020	1329
48173021	1329
48173022	1329
48173023	1329
48173024	1329
48173025	1329
48173026	1329
48174001	1482
48174002	1482
48174003	1482
48174004	1482
48174005	1482
48174006	1482
48174007	1482
48174008	1482
48174009	1482
48174010	1482
48174011	1482
48174012	1482
48174013	1482
48174014	1482
48174015	1482
48174016	1482
48174017	1482
48174018	1482
48174019	1482
48174020	1482
48174021	1482
48174022	1482
48174023	1482
48174024	1482
48174025	1482
48174026	1482
482	698
482-1000	1002
482-1000-BN	1018
482-1181	1003
482-1181-BN	1019
482-1250	1002

EDP Number	Page No.
482-125011	1002
482-1250-BN	1018
482-1250-BN11	1018
482-1575	1003
482-1575-BN	1019
482-1875	1002
482-187508	1002
482-1875-BN	1018
482-1875-BN11	1018
482-1876	1002
482-1968	1003
482-1968-BN	1019
482-2362	1003
482-2362-BN	1019
482-2500	1002
482-250011	1002
482-2500-BN	1018
482-2500-BN11	1018
482-2501	1002
482-250108	1002
482-2502	1002
482-250208	1002
482-3125	1002
482-3125-BN	1018
482-3150	1003
482-3150-BN	1019
482-3750	1002
482-3750-BN	1018
482-3937	1003
482-3937-BN	1019
482-4375	1002
482-4375-BN	1018
482-4724	1003
482-4724-BN	1019
482-5000	1002
482-500008	1002
482-500011	1002
482-5000-BN	1018
482-5512	1003
482-5512-BN	1019
482-6250	1002
482-6250-BN	1018
482-6299	1003
482-6299-BN	1019
482-7087	1003
482-7087-BN	1019
482-7500	1002
482-7500-BN	1018
482-7874	1003
482-7874-BN	1019
482-9843	1003
482-9843-BN	1019
48309001	1484
48309002	1484
48309003	1484
48309004	1484

EDP Number	Page No.
48309005	1484
48309006	1484
48309007	1484
48309008	1484
48309009	1484
48309010	1484
48309011	1484
48309012	1484
48309013	1484
48309014	1484
48309015	1484
48309016	1484
48309017	1484
48309018	1484
48309019	1484
48309020	1484
484-1000	1002
484-100008	1002
484-100011	1002
484-1000-BN	1018
484-1181	1003
484-1181-BN	1019
484-1250	1002
484-125011	1002
484-1250-BN	1018
484-1250-BN11	1018
484-1575	1003
484-1575-BN	1019
484-1875	1002
484-187511	1002
484-1875-BN	1018
484-1875-BN11	1018
484-1876	1002
484-187608	1002
484-1968	1003
484-1968-BN	1019
484-2362	1003
484-2362-BN	1019
484-2500	1002
484-250011	1002
484-2500-BN	1018
484-2500-BN11	1018
484-2501	1002
484-250108	1002
484-2502	1002
484-250208	1002
484-3125	1002
484-312511	1002
484-3125-BN	1018
484-3125-BN11	1018
484-3126	1002
484-312608	1002
484-3127	1002
484-312708	1002
484-3150	1003
484-3150-BN	1019

EDP Number	Page No.
484-3750	1002
484-375011	1002
484-3750-BN	1018
484-3750-BN11	1018
484-3751	1002
484-375108	1002
484-3752	1002
484-375208	1002
484-3753	1002
484-3937	1003
484-3937-BN	1019
484-4375	1002
484-4375-BN	1018
484-4724	1003
484-4724-BN	1019
484-5000	1002
484-500011	1002
484-5000-BN	1018
484-5000-BN11	1018
484-5001	1002
484-500108	1002
484-5512	1003
484-5512-BN	1019
484-6250	1002
484-625011	1002
484-6250-BN	1018
484-6251	1002
484-625108	1002
484-6299	1003
484-6299-BN	1019
484-7087	1003
484-7087-BN	1019
484-7500	1002
484-750011	1002
484-7500-BN	1018
484-7501	1002
484-7874	1003
484-7874-BN	1019
484-9843	1003
484-9843-BN	1019
4900100	1054
4900300	1054
4900500	1054
4900600	1054
4900700	1054
4900800	1054
4900900	1054
4901100	1054
4901300	1054
4901400	1054
4901500	1054
4901700	1054
4901900	1054
4902100	1054
4902300	1054
4909000	1054



EDP Number	Page No.
4909100	1054
4909200	1054
4909400	1054
4909500	1054
4909700	1054
4909800	1054
4909900	1054
4910100	1054
4910500	1054
4910700	1054
4910900	1054
4911500	1054
4911900	1054
4912100	1054
4912300	1054
4912500	1054
4913100	1054
4913300	1054
4913500	1054
4913700	1054
4913900	1054
4914500	1054
4920100	1054
492-0150	1010
492-0200	1010
492-0250	1010
492-0300	1010
492-0350	1010
492-0400	1010
492-0450	1010
4920500	1054
492-0500	1010
492-0550	1010
492-0600	1010
4920700	1054
4920900	1054
4921100	1054
4921300	1054
4926100	1054
4926500	1054
4926700	1054
4926900	1054
4927100	1054
4927300	1054
494-0350	1010
494-0400	1010
494-0450	1010
494-0500	1010
494-0550	1010
494-0600	1010
495-1000	1004
495-1002	1004
495-1003	1004
495-1004	1004
495-1006	1004
495-1009	1004

EDP Number	Page No.
495-1251	1004
495-1872	1004
495-1873	1004
495-2502	1004
495-2503	1004
495-2504	1004
495-3122	1004
495-3123	1004
495-3124	1004
495-3752	1004
495-3753	1004
495-3754	1004
495-5002	1004
495-5003	1004
495-5004	1004
495-5006	1004
495-6252	1004
495-6253	1004
495-6254	1004
495-6256	1004
495-6259	1004
495-7500	1004
495-7502	1004
495-7503	1004
495-7504	1004
495-7506	1004
495-7509	1004
496-1000	1004
496-1002	1004
496-1003	1004
496-1004	1004
496-1006	1004
496-1009	1004
496-1251	1004
496-125111	1004
496-1872	1004
496-187211	1004
496-1873	1004
496-187311	1004
496-2502	1004
496-250211	1004
496-2503	1004
496-250311	1004
496-2504	1004
496-3122	1004
496-312211	1004
496-3123	1004
496-312311	1004
496-3124	1004
496-3752	1004
496-3753	1004
496-375311	1004
496-3754	1004
496-375411	1004
496-5002	1004
496-500211	1004

EDP Number	Page No.
496-5003	1004
496-500311	1004
496-5004	1004
496-5006	1004
496-500611	1004
496-6252	1004
496-6253	1004
496-6254	1004
496-6256	1004
496-6259	1004
496-7500	1004
496-7502	1004
496-7503	1004
496-750311	1004
496-7504	1004
496-7506	1004
496-7509	1004
497-1000	1020
497-1181	1020
497-1250	1020
497-1575	1020
497-1875	1020
497-1968	1020
497-2362	1020
497-2500	1020
497-3125	1020
497-3150	1020
497-3750	1020
497-3937	1020
497-4331	1020
497-4375	1020
497-4724	1020
497-5000	1020
497-5512	1020
497-5625	1020
497-6250	1020
497-6299	1020
497-7087	1020
497-7500	1020
497-7874	1020
500-0938	1025
500-1250	1025
5001400	556
5001405	556
5001500	556
5001505	556
5001508	556
5001800	556
5001808	556
500-1875	1025
5001900	556
5001908	556
500-2500	1025
5002600	556
5002700	556
5002705	556

EDP Number	Page No.
5002708	556
500-3125	1025
5003400	556
5003405	556
5003408	556
5003500	556
5003505	556
5003508	556
500-3750	1025
500-4375	1025
5004600	556
5004608	556
5004700	556
5004705	556
5004708	556
500-5000	1025
5005400	556
5005408	556
5005500	556
5005505	556
5005508	556
5006200	556
5006205	556
5007000	556
5007008	556
5007100	556
5007108	556
502-0938	1025
502-1250	1025
502-1875	1025
502-2500	1025
502-3125	1025
502-3750	1025
502-4375	1025
502-5000	1025
511	698
512	698
513	698
517112113	155
517112613	155
517114113	155
517114613	155
517115613	155
517116113	155
517116613	155
517117613	155
517118613	155
519012017	140
519012517	140
519013817	140
519015017	140
519016217	140
519016317	140
519017517	140
519017917	140
519019817	141





EDP Numerical Index

EDP Number	Page No.
519022017	140
519022517	140
519023817	140
519025017	140
519026217	140
519026317	140
519027517	140
519027917	140
519029817	141
519032017	140
519032517	140
519033817	140
519035017	140
519036217	140
519036317	140
519037517	140
519037917	140
519039817	141
520009312	121
5200100	1057
5200105	1057
520010912	121
520011612	121
520012512	121
520013212	121
520013512	121
520013812	121
520014012	121
520014812	121
520015212	121
520015612	121
520015912	121
520016112	121
520016312	122
520016812	122
520017112	122
520017512	122
520018312	122
520018712	122
5200200	1057
520020212	122
520020312	122
5200205	1057
520020712	122
520021312	122
520021512	122
520021812	122
520023412	122
520024212	122
520025712	123
520026112	123
520026512	123
520027012	123
520027712	123
520028112	123
520029612	123

EDP Number	Page No.
5200300	1057
5200305	1057
520031212	123
520032012	124
520032812	124
520033212	124
520033712	124
520034012	124
520034112	124
520034312	124
520034812	124
520035912	124
520037512	124
520037612	124
520039012	124
5200400	1057
5200405	1057
520040612	125
520041112	125
520042212	125
520042712	125
520043712	125
520045312	125
520046912	125
520048512	125
520049012	126
520049912	126
5200500	1057
520050012	126
5200505	1057
520051512	126
520053112	126
520054612	126
520055512	126
520055912	126
520056212	126
520056312	126
520056612	126
520057412	126
520057812	126
520057912	126
520058212	127
520058612	127
5200600	1057
5200605	1057
520062512	127
520063312	127
520065612	127
520066312	127
520069312	127
520069612	127
520069812	127
5200700	1057
520073312	127
520075012	127
520075712	127

EDP Number	Page No.
520077412	127
520077612	127
520077812	127
5201100	1057
5201105	1057
5201200	1057
5201300	1057
5201305	1057
5201400	1057
5201500	1057
5201505	1057
5201600	1057
5201700	1057
5201800	1057
5201900	1057
5202100	1057
5202105	1057
5202200	1057
5202300	1057
5202400	1057
5202500	1057
5202600	1057
5202700	1057
5202800	1057
5202900	1057
5203100	1057
5203105	1057
5203200	1057
5203205	1057
5203300	1057
5203305	1057
5203400	1057
5203500	1057
5204100	1057
5204105	1057
5204200	1057
5204300	1057
5204400	1057
5205100	1057
5205105	1057
5205200	1057
5205300	1057
5205400	1057
5205500	1057
5206100	1057
5206200	1057
5206300	1057
5206400	1057
5207400	1057
5209100	1057
5209200	1057
5209300	1057
5209400	1057
5209500	1057
5209700	1057
52100000	1433

EDP Number	Page No.
52100001	1433
52100002	1433
52100003	1433
52100004	1433
52100005	1433
52100006	1434
52100007	1434
52100008	1434
52100009	1434
52100010	1434
52100011	1434
52100012	1434
52100013	1434
52100014	1434
52100015	1434
52100016	1433
52100017	1433
52100018	1434
52100019	1434
52100020	1433
52100021	1433
52100022	1433
52100023	1433
52100024	1433
52100025	1433
52100026	1433
52100027	1433
52100028	1433
52100029	1433
52100030	1433
52100031	1433
52100032	1433
52100033	1433
52100034	1433
52100035	1433
52100036	1433
52100037	1433
52100038	1433
52100039	1433
52100040	1433
52100041	1433
52100042	1433
52100043	1433
52100044	1433
52100045	1433
52100046	1433
52100047	1434
52100048	1434
52100049	1434
52100050	1434
52100051	1434
52100052	1434
52100053	1434
52100054	1434
52100055	1434
52100056	1434



EDP Number	Page No.
52100057	1434
52100058	1434
52100059	1434
52100060	1434
52100061	1434
52100062	1434
521009312	128
5210100	1061
52101000	1437
52101001	1437
52101002	1437
52101003	1437
52101004	1437
52101005	1437
52101006	1437
52101010	1437
52101011	1437
52101012	1437
52101013	1437
52101014	1437
52101015	1437
52101016	1437
52101020	1437
52101021	1437
52101022	1437
52101023	1437
52101024	1437
52101025	1437
52101026	1437
52101030	1437
52101031	1437
52101032	1437
52101033	1437
52101034	1437
52101035	1437
52101036	1437
52101040	1437
52101041	1437
52101042	1437
52101043	1437
52101044	1437
52101045	1437
52101046	1437
52101051	1437
52101052	1437
52101053	1437
52101054	1437
52101055	1437
52101056	1437
521012512	128
521015612	128
521016112	128
521017112	128
521018712	129
5210200	1061
521020312	129

EDP Number	Page No.
521021312	129
521021812	129
521023412	129
521025712	129
521026512	130
521028112	130
521029612	130
5210300	1061
521031212	130
521032812	130
521033212	130
521034312	131
521035912	131
521037512	131
521039012	131
5210400	1061
521040612	131
521042212	132
521043812	132
521045312	132
521046912	132
521048512	132
5210500	1061
521050012	132
521053112	133
521055512	133
521055912	133
521056212	133
521056312	133
521056612	133
521057412	133
521057812	133
521058212	133
521058612	133
5210600	1061
521062512	134
521063312	134
521065612	134
521075012	134
521075712	134
5211100	1061
5211200	1061
5211300	1061
5211500	1061
5212100	1061
5213100	1061
5213200	1061
5213300	1061
5214100	1061
5214300	1061
5215100	1061
5215200	1061
5216100	1061
5216200	1061
5217100	1061
5219600	1061

EDP Number	Page No.
52200000	1442
52200001	1442
52200002	1442
52200003	1442
52200004	1442
52200005	1442
52200006	1442
52200007	1442
52200008	1442
52200009	1442
52200010	1442
52200011	1442
52200012	1442
52200013	1442
52200014	1442
52200015	1442
52200016	1442
52200017	1442
52200018	1442
52200019	1442
52200020	1442
52200021	1442
52200022	1442
52200023	1442
52200024	1442
52200025	1442
52200026	1442
52200027	1442
52200028	1442
52200029	1442
52200030	1442
52200031	1442
52200032	1442
52200033	1442
52200034	1442
522009312	135
5220100	1076
52201000	1445
52201001	1445
52201002	1445
52201003	1445
52201004	1445
52201005	1445
52201006	1445
52201007	1445
52201008	1445
52201009	1445
52201010	1445
52201011	1445
52201012	1445
52201013	1445
52201014	1445
52201015	1445
52201016	1445
52201017	1445
52201018	1445

EDP Number	Page No.
52201019	1445
52201020	1445
52201021	1445
52201022	1445
52201023	1445
52201024	1445
52201025	1445
52201026	1445
52201027	1445
52201028	1445
52201029	1445
52201030	1445
52201031	1445
5220105	1076
52201050	1445
52201051	1445
52201052	1445
52201053	1445
52201054	1445
52201055	1445
52201056	1445
52201057	1445
52201058	1445
52201059	1446
52201060	1446
52201061	1446
52201062	1446
52201063	1446
52201064	1446
52201065	1446
52201066	1446
52201067	1446
52201068	1446
52201069	1446
52201070	1446
52201071	1446
52201072	1446
52201073	1446
52201074	1446
52201075	1446
52201076	1446
52201077	1446
52201078	1446
52201079	1445
52201080	1445
52201081	1445
522010912	135
52201100	1446
52201101	1446
52201102	1446
52201103	1446
52201104	1446
52201105	1446
52201106	1446
52201107	1446
52201108	1446



EDP Number	Page No.
52201109	1446
52201110	1446
52201111	1446
52201112	1446
52201113	1446
52201114	1446
52201115	1446
52201116	1446
522012512	135
522015612	135
522016112	135
522017212	135
522018712	136
5220200	1076
522020312	136
5220205	1076
522021312	136
522021812	136
522023412	136
522025012	136
522025712	136
522026512	136
522028112	137
522029612	137
5220300	1076
5220305	1076
522031212	137
522032812	137
522033112	137
522034312	137
522035912	137
522037512	138
522039012	138
5220400	1076
5220405	1076
522040612	138
522042212	138
522043712	138
522045312	138
522047612	138
522048012	138
522048412	138
522048812	138
522049212	139
522049312	139
522049612	139
5220500	1076
522050012	139
5220505	1076
5221100	1076
5221105	1076
5222100	1076
5222105	1076
5223100	1076
5223105	1076
5224100	1076

EDP Number	Page No.
5224105	1076
5225100	1076
5225105	1076
5226000	1076
5226100	1076
5226200	1076
5226300	1076
5226400	1076
5226500	1076
5226600	1076
5226700	1076
5226800	1076
5226900	1076
5227000	1076
5227100	1076
5227200	1076
5227300	1076
5227400	1076
5227500	1076
5227600	1076
5227700	1076
5227800	1076
5228000	1076
5228100	1076
5228200	1076
5229100	1076
5229200	1076
5229300	1076
5229400	1076
5229500	1076
5229600	1076
5229605	1076
5229700	1076
5229800	1076
5229900	1076
52300000	1478
52300001	1478
52300002	1478
52300003	1478
52300004	1478
52300005	1478
52300006	1478
52300007	1478
52300008	1478
52300009	1478
52300010	1478
52300011	1478
52300012	1478
52300013	1478
52300014	1478
52300015	1478
52300016	1478
52300017	1478
52300018	1478
52300019	1478
52300020	1479

EDP Number	Page No.
52300021	1479
52300022	1479
52300023	1479
52300024	1478
52300025	1478
52300026	1478
52300027	1478
52300028	1478
52300029	1478
5230100	1080
52301000	1465
52301001	1465
52301002	1465
52301003	1465
52301004	1465
52301005	1465
52301006	1465
52301007	1465
52301008	1465
52301009	1465
52301010	1465
52301011	1465
52301012	1465
52301013	1465
52301014	1465
52301015	1465
52301016	1465
52301017	1465
52301018	1465
52301019	1465
52301020	1465
52301021	1465
52301022	1465
52301023	1465
52301024	1465
5230200	1080
52302000	1469
52302001	1469
52302002	1469
52302003	1469
52302004	1469
52302005	1469
52302006	1469
52302007	1469
52302008	1469
52302009	1469
52302010	1469
52302011	1469
52302012	1469
52302013	1469
52302014	1469
52302015	1469
52302016	1469
52302017	1469
52302018	1469
52302019	1469

EDP Number	Page No.
52302020	1469
52302021	1469
52302022	1469
52302023	1469
52302024	1469
52302025	1469
52302026	1469
52302027	1469
52302028	1469
5230300	1080
52303000	1471
52303001	1471
52303002	1471
52303003	1471
52303004	1471
5230400	1080
52304000	1472
52304001	1472
52304002	1472
52304003	1472
52304004	1472
5230500	1080
52305000	1473
52305001	1473
52305002	1473
52305003	1473
52305004	1473
52306000	1476
52306001	1476
52306002	1476
52306003	1476
52306004	1476
52307000	1477
52307001	1477
52307002	1477
52307003	1477
52307004	1477
52308000	1467
52308001	1467
52308002	1467
52308003	1467
52308004	1467
52308005	1467
52308006	1467
52308007	1467
52308008	1467
52308009	1467
52308010	1467
52308011	1467
52308012	1467
52308013	1467
52308014	1467
52308015	1467
52308016	1467
52308017	1467
52308018	1467



EDP Number	Page No.
52308019	1467
52308020	1467
52308021	1467
52308022	1467
52308023	1467
52308024	1467
52308025	1467
52308026	1467
52309000	1473
52309001	1473
52309002	1473
52309003	1473
52309004	1473
52309005	1473
52309006	1473
52309007	1473
52309008	1473
52309009	1473
52310000	1474
52310001	1474
52310002	1474
52310003	1474
52310004	1474
52310005	1474
52310006	1474
52310007	1474
52310008	1474
52310009	1474
5231100	1080
52311000	1475
52311001	1475
52311002	1475
52311003	1475
52311004	1475
52314000	1466
52314001	1466
52314002	1466
52314005	1466
52314006	1466
52314007	1466
52314010	1466
52314011	1466
52314012	1466
52314015	1466
52314016	1466
52314017	1466
52315000	1471
52315001	1471
52315002	1471
52315003	1471
52316000	1472
52316001	1472
52316002	1472
52316003	1472
52317000	1476
52317001	1476

EDP Number	Page No.
52317002	1476
52318000	1477
52318001	1477
52318002	1477
52319000	1480
52319001	1480
52319002	1480
52319003	1480
52319004	1480
52319005	1480
52319006	1480
52319007	1480
52319008	1480
52319009	1480
52319010	1480
52319011	1480
52319012	1480
52319013	1480
52319014	1480
52319015	1480
52319016	1480
52319017	1480
52319018	1480
52319019	1480
52319020	1481
52319021	1481
52319022	1481
52319023	1481
5232100	1080
5233100	1080
5235100	1080
5239600	1080
52400000	1328
52400001	1328
52400002	1328
52400003	1328
52400004	1328
52400005	1328
52400006	1328
52400007	1328
52400008	1328
52400009	1328
52400010	1328
52400011	1328
52400012	1328
52400100	1328
52400101	1328
52400102	1328
52400103	1328
52400104	1328
52400105	1328
52400106	1328
52400107	1328
52400108	1328
52400109	1328
52400110	1328

EDP Number	Page No.
52400111	1328
52400112	1328
52401000	1330
52401001	1330
52401002	1330
52401003	1330
52401004	1330
52401005	1330
52401006	1330
52401007	1330
52401008	1330
52401009	1330
52401010	1330
52401011	1331
52401012	1331
52401013	1331
52401014	1330
52401015	1330
52401016	1330
52401017	1330
52401018	1330
52401019	1330
52401020	1330
52401021	1330
52401022	1330
52401023	1330
52401024	1330
52401025	1331
52401026	1331
52401027	1331
52402000	1332
52402001	1332
52402002	1332
52402003	1332
52402004	1332
52402005	1332
52402006	1332
52402007	1332
52402008	1332
52402009	1332
52402010	1332
52402011	1332
52402012	1332
52402013	1333
52402014	1332
52402015	1332
52402016	1332
52402017	1332
52402018	1332
52402019	1332
52402020	1332
52402021	1332
52402022	1332
52402023	1332
52402024	1332
52402025	1332

EDP Number	Page No.
52402026	1333
52402027	1333
52403000	1334
52403001	1334
52403002	1334
52403003	1334
52403004	1334
52403005	1334
52403006	1334
52403007	1334
52403008	1334
52403009	1334
52403010	1334
52403011	1334
52403012	1334
52403013	1334
52403014	1334
52403015	1334
52403016	1334
52403017	1334
52403018	1334
52403019	1334
52403020	1334
52403021	1334
52403022	1334
52403023	1334
52403024	1334
52403025	1334
52403026	1334
52403027	1334
52502000	1337
52502001	1337
52502002	1337
52502003	1337
52502004	1337
52502005	1337
52502006	1337
52502007	1337
52502008	1337
52502009	1337
52502010	1337
52502011	1337
52502012	1337
52502013	1338
52502014	1338
52502015	1338
52502016	1338
52502017	1338
52502018	1338
52502019	1338
52502020	1338
52502021	1338
52502022	1338
52502023	1338
52502024	1338
52502025	1338



EDP Number	Page No.
52502026	1337
52502027	1337
52502028	1337
52502029	1337
52502030	1337
52502031	1337
52502032	1337
52502033	1337
52502034	1337
52502035	1337
52502036	1337
52502037	1337
52502038	1337
52502039	1337
52502040	1337
52502041	1337
52502042	1337
52502043	1337
52502044	1337
52502045	1337
52502046	1337
52502047	1337
52502048	1337
52502049	1337
52502050	1338
52502051	1338
52502052	1338
52502053	1338
52502054	1338
52502055	1338
52502056	1338
52502057	1338
52502058	1338
52502059	1338
52502060	1338
52502061	1338
52502062	1338
52502063	1337
52502064	1337
52502065	1337
52502066	1337
52502067	1337
52502068	1337
52502069	1337
52503000	1341
52503001	1341
52503002	1341
52503003	1341
52503004	1341
52503005	1341
52503006	1341
52503007	1341
52503008	1341
52503009	1341
52503010	1341
52503011	1341

EDP Number	Page No.
52503012	1341
52503013	1342
52503014	1342
52503015	1342
52503016	1342
52503017	1342
52503018	1342
52503019	1342
52503020	1342
52503021	1342
52503022	1342
52503023	1342
52503024	1342
52503025	1342
52503026	1341
52503027	1341
52503028	1341
52503029	1341
52503030	1341
52503031	1341
52503032	1341
52503033	1341
52503034	1341
52503035	1341
52503036	1341
52503037	1341
52503038	1341
52503039	1341
52503040	1341
52503041	1341
52503042	1341
52503043	1341
52503044	1341
52503045	1341
52503046	1341
52503047	1341
52503048	1341
52503049	1341
52503050	1342
52503051	1342
52503052	1342
52503053	1342
52503054	1342
52503055	1342
52503056	1342
52503057	1342
52503058	1342
52503059	1342
52503060	1342
52503061	1342
52503062	1342
52503063	1341
52503064	1341
52503065	1341
52503066	1341
52503067	1341

EDP Number	Page No.
52503068	1341
52503069	1341
52504000	1345
52504001	1345
52504002	1345
52504003	1345
52504004	1345
52504005	1345
52504006	1345
52504007	1345
52504008	1345
52504009	1345
52504010	1345
52504011	1345
52504012	1345
52504013	1346
52504014	1346
52504015	1346
52504016	1346
52504017	1346
52504018	1346
52504019	1346
52504020	1346
52504021	1346
52504022	1346
52504023	1346
52504024	1346
52504025	1346
52504026	1345
52504027	1345
52504028	1345
52504029	1345
52504030	1345
52504031	1345
52504032	1345
52504033	1345
52504034	1345
52504035	1345
52504036	1345
52504037	1345
52504038	1345
52504039	1345
52504040	1345
52504041	1345
52504042	1345
52504043	1345
52504044	1345
52504045	1345
52504046	1345
52504047	1345
52504048	1345
52504049	1345
52504050	1346
52504051	1346
52504052	1346
52504053	1346

EDP Number	Page No.
52504054	1346
52504055	1346
52504056	1346
52504057	1346
52504058	1346
52504059	1346
52504060	1346
52504061	1346
52504062	1346
52504063	1345
52504064	1345
52504065	1345
52504066	1345
52504067	1345
52504068	1345
52504069	1345
52505000	1059
52505000	1349
52505001	1349
52505002	1349
52505003	1349
52505004	1349
52505005	1349
52505006	1349
52505007	1349
52505008	1349
52505009	1349
52505010	1349
52505011	1349
52505012	1349
52505013	1350
52505014	1350
52505015	1350
52505016	1350
52505017	1350
52505018	1350
52505019	1350
52505020	1350
52505021	1350
52505022	1350
52505023	1350
52505024	1350
52505025	1350
52505026	1349
52505027	1349
52505028	1349
52505029	1349
52505030	1349
52505031	1349
52505032	1349
52505033	1349
52505034	1349
52505035	1349
52505036	1349
52505037	1349
52505038	1349



EDP Number	Page No.
52505039	1349
52505040	1349
52505041	1349
52505042	1349
52505043	1349
52505044	1349
52505045	1349
52505046	1349
52505047	1349
52505048	1349
52505049	1349
52505050	1350
52505051	1350
52505052	1350
52505053	1350
52505054	1350
52505055	1350
52505056	1350
52505057	1350
52505058	1350
52505059	1350
52505060	1350
52505061	1350
52505062	1350
52505063	1349
52505064	1349
52505065	1349
52505066	1349
52505067	1349
52505068	1349
52505069	1349
52510000	1364
52510001	1364
52510002	1364
52510003	1364
52510004	1364
52510005	1364
52510006	1364
52510007	1364
52510008	1364
52510009	1364
52510010	1364
52510011	1364
52510012	1364
5251100	1059
52511000	1366
52511001	1366
52511002	1366
52511003	1366
52511004	1366
52511005	1366
5252100	1059
5253100	1059
5254100	1059
5255100	1059
5255200	1059

EDP Number	Page No.
5255300	1059
5256100	1059
5256200	1059
5256300	1059
5256400	1059
5257400	1059
52600000	1461
52600001	1461
52600002	1461
52600003	1461
52600004	1461
52600005	1461
52600010	1461
52600011	1461
52600012	1461
52600013	1461
52600014	1461
52600015	1461
52600016	1461
52600017	1461
52600018	1461
52600019	1461
5260100	1061
52601000	1383
52601000	1453
52601001	1383
52601001	1453
52601002	1383
52601002	1453
52601003	1383
52601003	1453
52601004	1383
52601004	1453
52601005	1383
52601005	1453
52601006	1383
52601006	1453
5260200	1061
52602000	1412
52602000	1455
52602001	1412
52602001	1455
52602002	1412
52602002	1455
52602003	1412
52602003	1455
52602004	1412
52602004	1455
5260300	1061
52603000	1422
52603000	1456
52603001	1422
52603001	1456
52603002	1422
52603002	1456
52603003	1422

EDP Number	Page No.
52603003	1456
52603004	1422
52603004	1456
52603005	1422
52603005	1456
52603006	1422
52603006	1456
52603007	1422
52603007	1456
5260400	1061
52604000	1436
52604000	1458
52604001	1436
52604001	1458
52604002	1436
52604002	1458
52604003	1436
52604003	1458
52604004	1436
52604004	1458
5260500	1061
52605000	1444
52605000	1460
52605001	1444
52605001	1460
52605002	1444
52605002	1460
52605003	1444
52605003	1460
52605004	1444
52605004	1460
5261100	1061
5262100	1061
5263100	1061
5265100	1061
5269600	1061
52700000	1370
52700001	1370
52700002	1370
52700003	1370
52700004	1370
52700005	1370
52700006	1371
5270100	1059
5270200	1059
5270300	1059
5270400	1059
5270500	1059
5271100	1059
5272100	1059
5273100	1059
5274100	1059
5275100	1059
5276100	1059
52800000	1373
52800001	1373

EDP Number	Page No.
52800002	1373
52800003	1373
52800004	1373
52800005	1373
52800006	1373
52800007	1373
52800008	1373
52800009	1373
52900000	1396
52900001	1396
52900002	1396
52900004	1396
52900005	1396
52900006	1396
52901000	1397
52901001	1397
52901002	1397
53000000	1389
53000001	1389
53000002	1389
53000003	1389
53000004	1389
53000005	1389
53000006	1389
53000007	1389
53000008	1389
53000009	1389
53000010	1389
53000011	1389
53001000	1391
53001001	1391
53001002	1391
5300300	1060
5300400	1060
5300500	1060
5300600	1060
5301100	1060
5302100	1060
5303100	1060
5303200	1060
5303300	1060
5304100	1060
5305100	1060
5306100	1060
5306200	1060
5306300	1060
5306400	1060
53100000	1404
53100001	1404
53100002	1404
53100003	1404
53100004	1404
53100005	1404
53100006	1404
53100007	1404
53100008	1404



EDP Numerical Index

EDP Number	Page No.
53100009	1404
53100010	1404
53100011	1404
5310100	1062
5310200	1062
5310300	1062
5310400	1062
5310500	1062
5310600	1062
5310700	1062
5311100	1062
5311200	1062
5311300	1062
5311500	1062
5312100	1062
5312300	1062
5312500	1062
5312700	1062
5313100	1062
5313200	1062
5313300	1062
5314100	1062
5314200	1062
5315100	1062
5315200	1062
5315300	1062
5315500	1062
5316100	1062
5316200	1062
5316300	1062
5316400	1062
53200000	1400
53200001	1400
53200002	1400
53200003	1400
5320100	1078
53201000	1401
53201001	1401
53201002	1401
53201003	1401
53201004	1401
53201005	1401
53201006	1401
5320200	1078
5320300	1078
5320400	1078
5320500	1078
5321100	1078
5322100	1078
5323100	1078
5324100	1078
5325100	1078
5329600	1078
5329800	1078
5350300	1060
5350400	1060

EDP Number	Page No.
5350500	1060
5351000	1060
5351100	1060
5352100	1060
5353100	1060
5355100	1060
5356100	1060
5356200	1060
5356400	1060
5360300	1064
5360400	1064
5360500	1064
5361000	1064
5361100	1064
5362100	1064
5363100	1064
5364100	1064
5365100	1064
5366100	1064
5366200	1064
5366400	1064
5400100	1069
5400105	1069
5400200	1069
5400205	1069
5400300	1069
5400305	1069
5400400	1069
5400405	1069
5400500	1069
5400505	1069
5400600	1069
5400605	1069
5400700	1069
5401100	1069
5401105	1069
5401200	1069
5401300	1069
5401305	1069
5401400	1069
5401500	1069
5401505	1069
5401600	1069
5401700	1069
5401800	1069
5401900	1069
5402100	1069
5402200	1069
5402300	1069
5402400	1069
5402500	1069
5402600	1069
5402700	1069
5402800	1069
5402900	1069
5403100	1069

EDP Number	Page No.
5403105	1069
5403200	1069
5403205	1069
5403300	1069
5403305	1069
5403400	1069
5403500	1069
5404100	1069
5404200	1069
5404300	1069
5404400	1069
5405100	1069
5405105	1069
5405200	1069
5405300	1069
5405400	1069
5405500	1069
5406100	1069
5406200	1069
5406300	1069
5406400	1069
5407400	1069
5408400	1069
5409100	1069
5409200	1069
5409300	1069
5409400	1069
5409500	1069
5409700	1069
5410100	1065
5410105	1065
5410108	1065
5410200	1065
5410205	1065
5410208	1065
5410300	1065
5410305	1065
5410308	1065
5410400	1065
5410405	1065
5410408	1065
5410500	1065
5410505	1065
5410508	1065
5410900	1065
5411000	1065
5411008	1065
5411100	1065
5411105	1065
5411500	1065
5411700	1065
5412000	1065
5412008	1065
5412100	1065
5412105	1065
5412108	1065

EDP Number	Page No.
5412111	1065
5412200	1065
5412500	1065
5412508	1065
5412600	1065
5413000	1065
5413100	1065
5413105	1065
5413108	1065
5413500	1065
5414100	1065
5414105	1065
5414108	1065
5414500	1065
5414900	1065
5415000	1065
5415100	1065
5415105	1065
5415108	1065
5415111	1065
5415200	1065
5415500	1065
5415511	1065
5415600	1065
5416100	1065
5416108	1065
5416200	1065
5416208	1065
5416400	1065
5416500	1065
5416600	1065
5417000	1065
5417100	1065
5417108	1065
5418400	1065
5420100	1079
5420105	1079
5420200	1079
5420205	1079
5420300	1079
5420305	1079
5420400	1079
5420405	1079
5420500	1079
5420505	1079
5421100	1079
5421105	1079
5422100	1079
5422105	1079
5423100	1079
5423105	1079
5424100	1079
5424105	1079
5425100	1079
5425105	1079
5426000	1079



EDP Number	Page No.
5426100	1079
5426200	1079
5426300	1079
5426400	1079
5426500	1079
5426600	1079
5426700	1079
5426800	1079
5426900	1079
5427000	1079
5427100	1079
5427200	1079
5427300	1079
5427400	1079
5427500	1079
5427600	1079
5428000	1079
5428100	1079
5428200	1079
5428300	1079
5429100	1079
5429200	1079
5429300	1079
5429400	1079
5429500	1079
5429600	1079
5429605	1079
5429700	1079
5429800	1079
5429900	1079
5430100	1080
5430200	1080
5430300	1080
5430400	1080
5430500	1080
5431100	1080
5432100	1080
5433100	1080
5434100	1080
5435100	1080
5440500	1068
5441100	1068
5442100	1068
5442200	1068
5443100	1068
5444100	1068
5445100	1068
5446100	1068
5446200	1068
5449700	1068
5450300	1070
5450400	1070
5450500	1070
5451000	1070
5451100	1070
5452100	1070

EDP Number	Page No.
5453100	1070
5454100	1070
5455100	1070
5455200	1070
5455300	1070
5455500	1070
5456100	1070
5456200	1070
5456300	1070
5456400	1070
5457400	1070
5458400	1070
5460300	1066
5460308	1066
5460400	1066
5460408	1066
5460500	1066
5460508	1066
5461100	1066
5461108	1066
5461500	1066
5462100	1066
5462108	1066
5462500	1066
5463100	1066
5463108	1066
5463500	1066
5464100	1066
5464108	1066
5464500	1066
5465100	1066
5465108	1066
5465500	1066
5466100	1066
5466400	1066
5466500	1066
5466600	1066
5468400	1066
5469400	1066
5475100	1070
5476100	1070
5476200	1070
5476300	1070
5476400	1070
5483100	1066
5484100	1066
5484108	1066
5485100	1066
5485108	1066
5485208	1066
5486100	1066
5486108	1066
5486200	1066
5486208	1066
5570300	1071
5570400	1071

EDP Number	Page No.
5570500	1071
5571100	1071
5572100	1071
5573100	1071
5574100	1071
5575100	1071
5576100	1071
5576200	1071
5578400	1071
5580300	1067
5580400	1067
5580500	1067
5581100	1067
5581108	1067
5581500	1067
5582100	1067
5582108	1067
5582500	1067
5583100	1067
5583108	1067
5583500	1067
5584100	1067
5584108	1067
5584500	1067
5585100	1067
5585108	1067
5585500	1067
5585508	1067
5586100	1067
5586500	1067
5586600	1067
5588400	1067
560016011	142
560016111	142
560016311	142
560016511	142
560016811	142
560016911	142
560017211	142
560017311	142
560017511	142
560017711	142
560018511	142
560018711	142
560018911	142
560019211	142
560020311	142
560021311	142
560021911	142
560023411	142
560032811	142
560045311	142
560046911	142
560050011	142
560059311	143
560063311	143

EDP Number	Page No.
560066311	143
560071811	143
560075711	143
561016011	144
561016111	144
561016511	144
561017211	144
561018111	144
561018511	144
561018711	144
561018911	144
561019211	144
561021311	144
561021911	144
561023411	144
561025011	144
561029711	144
561032811	144
561033211	144
561035911	144
561046911	144
561048411	144
561059311	145
561062511	145
561068711	145
561071811	145
561075011	145
561075711	145
5627000	1081
5627100	1081
5627200	1081
5627300	1081
5627400	1081
5627500	1081
5627600	1081
5627700	1081
5627800	1081
5627900	1081
5628000	1081
563020011	146
563020311	146
563020411	146
563020811	146
563021211	146
563021311	146
563021811	146
563022011	146
563022411	146
563022811	146
563023211	146
563023411	146
563024011	146
563024411	146
563024811	146
563025011	146
563025211	146



EDP Numerical Index

EDP Number	Page No.
563025711	146
563025911	146
563026311	146
563026511	146
563026711	146
563027111	146
563027911	146
563028111	146
563028311	146
563028711	146
563029111	146
563029611	146
563029911	146
563030311	146
563030711	146
563031111	146
563031211	146
563031811	146
563032211	146
563032611	146
563032811	146
563033011	146
563033111	146
563033811	146
563034211	146
563034311	146
563034611	146
563035011	147
563035811	147
563035911	147
563036211	147
563036611	147
563037011	147
563037511	147
563037811	147
563038111	147
563038511	147
563038911	147
563039011	147
563039711	147
563040111	147
563040511	147
563040611	147
563040911	147
563041211	147
563041311	147
563041711	147
563042211	147
563042511	147
563042911	147
563043311	147
563043711	147
563043811	147
563044011	147
563044411	147
563044811	147

EDP Number	Page No.
563045311	147
563045611	147
563046011	147
563046411	147
563047611	147
563048011	147
563048411	147
563048811	147
563049211	147
563049611	147
563050011	147
563053111	147
563053211	147
563055111	148
563056211	148
563056811	147
563057011	148
563062511	148
5637000	1081
5637100	1081
5637200	1081
5637300	1081
5637400	1081
5637500	1081
5637600	1081
5637700	1081
5637800	1081
5637900	1081
5638000	1081
5647200	1082
5647400	1082
5647600	1082
5647800	1082
5648000	1082
5667200	1082
5667400	1082
5667600	1082
5667800	1082
5668000	1082
5677200	1083
5677400	1083
5677600	1083
5677800	1083
5678000	1083
5687200	1083
5687400	1083
5687600	1083
5687800	1083
5688000	1083
570001511	78
570003111	78
570004611	78
570006211	79
570007811	79
570009311	79
570012511	79

EDP Number	Page No.
570015611	79
570018711	80
570021811	80
570025011	80
570028111	80
570031211	80
570032811	80
570035911	81
570037511	81
570040611	81
570043711	81
570045311	81
570046811	81
570056211	82
570062511	82
570068711	83
570075011	83
570512517	84
570515617	84
570518717	84
570521817	84
570525017	84
570528117	84
570531217	84
570532817	84
570535917	85
570537517	85
570540617	85
570543717	85
570545317	85
570546817	85
570550017	85
570556217	85
570562517	85
570568717	85
570575017	85
5707200	1084
5707400	1084
5707600	1084
5707800	1084
5708000	1084
5717200	1084
5717400	1084
5717600	1084
5717800	1084
5718000	1084
572012517	74
572015617	74
572018717	74
572021817	74
572025017	74
572028117	74
572031217	75
572032817	75
572035917	75
572037517	75

EDP Number	Page No.
572040617	75
572043717	75
572045317	75
572046817	76
572056217	76
572062517	76
572068717	76
572075017	77
5730100	1047
5730108	1047
5730200	1047
5730300	1047
5730308	1047
5730400	1047
5730408	1047
5730500	1047
5730508	1047
5730600	1047
5730608	1047
5730700	1047
5730708	1047
5730800	1047
5730808	1047
5730900	1047
5730908	1047
5731000	1047
5731008	1047
5731100	1047
5731108	1047
5731200	1047
5731208	1047
5731400	1047
5731408	1047
5731500	1047
5731508	1047
5731600	1047
5731608	1047
5731700	1047
5731708	1047
5731900	1047
5731908	1047
5732000	1047
5732008	1047
5732100	1047
5732108	1047
573219111	178
573225111	178
5732300	1047
5732308	1047
573237611	178
5732400	1047
5732408	1047
573250111	178
5732600	1047
5732608	1047
5732700	1047



EDP Number	Page No.
5732708	1047
5732800	1047
5732808	1047
5733000	1047
5733008	1047
5733200	1047
5733208	1047
5733400	1047
5733408	1047
5733500	1047
5733508	1047
5733700	1047
5733708	1047
5733900	1047
5733908	1047
5740100	1048
5740108	1048
5740200	1048
5740208	1048
5740300	1048
5740308	1048
5740400	1048
5740408	1048
5740500	1048
5740508	1048
5740600	1048
5740608	1048
5740700	1048
5740708	1048
5740800	1048
5740808	1048
5740900	1048
5740908	1048
5741000	1048
5741008	1048
5741100	1048
5741108	1048
5741200	1048
5741208	1048
5741400	1048
5741408	1048
5741500	1048
5741508	1048
5741600	1048
5741608	1048
5741700	1048
5741708	1048
5741900	1048
5741908	1048
5742000	1048
5742008	1048
5742100	1048
5742108	1048
5742300	1048
5742308	1048
5742400	1048

EDP Number	Page No.
5742408	1048
5742600	1048
5742608	1048
5742700	1048
5742708	1048
5742800	1048
5742808	1048
5743000	1048
5743008	1048
5743200	1048
5743208	1048
5743400	1048
5743408	1048
5743500	1048
5743508	1048
5743700	1048
5743708	1048
5743900	1048
5743908	1048
5800100	1058
5800200	1058
5800300	1058
5800400	1058
5800500	1058
5800600	1058
5800700	1058
5800800	1058
5800900	1058
5801100	1058
5801200	1058
5801300	1058
5801400	1058
5802100	1058
5802200	1058
5802300	1058
5803100	1058
5803200	1058
5803300	1058
5804100	1058
5804200	1058
5805100	1058
5805200	1058
5805300	1058
5806100	1058
5806200	1058
5806300	1058
5806400	1058
5806500	1058
5808100	1058
5808200	1058
5808300	1058
5808400	1058
5808500	1058
5808600	1058
5808700	1058
5808800	1058

EDP Number	Page No.
5808900	1058
5809100	1058
5809200	1058
5809300	1058
581	698
5810100	1063
5810200	1063
5810300	1063
5810400	1063
5810500	1063
5810600	1063
5810700	1063
5810800	1063
5810900	1063
5811100	1063
5811200	1063
5811300	1063
5811400	1063
5812100	1063
5812200	1063
5812300	1063
5813100	1063
5813200	1063
5813300	1063
5814100	1063
5814200	1063
5815100	1063
5815200	1063
5815300	1063
5816100	1063
5816200	1063
5816300	1063
5816400	1063
5818100	1063
5818200	1063
5818300	1063
5818400	1063
5818500	1063
5818600	1063
5818700	1063
5818800	1063
5818900	1063
5819100	1063
5819200	1063
5819300	1063
582	698
5820100	1077
5820200	1077
5820300	1077
5820400	1077
5820500	1077
5820600	1077
5820700	1077
5820800	1077
5820900	1077
5821100	1077

EDP Number	Page No.
5821200	1077
5821300	1077
5821400	1077
5822100	1077
5822200	1077
5822300	1077
5823100	1077
5823200	1077
5823300	1077
5824100	1077
5824200	1077
5825100	1077
5825200	1077
5827100	1077
5827200	1077
5827400	1077
5827500	1077
5828100	1077
5828200	1077
5828300	1077
5828400	1077
5828500	1077
5828600	1077
5828700	1077
5828800	1077
5828900	1077
5829100	1077
5829200	1077
5829300	1077
583	698
591	698
5910100	1072
5910200	1072
5911100	1072
5911200	1072
5912100	1072
5912400	1072
5914100	1072
5914200	1072
5914300	1072
5915100	1072
5915200	1072
5916100	1072
5916300	1072
5916400	1072
5916500	1072
5917100	1072
5917200	1072
5917300	1072
5918100	1072
5918200	1072
5918300	1072
5919100	1072
592	698
593	698
5930100	1072



EDP Numerical Index

EDP Number	Page No.
5930200	1072
5931100	1072
5931200	1072
5931300	1072
5932100	1072
5932300	1072
5934200	1072
5934300	1072
5935100	1072
5935200	1072
5936100	1072
5936300	1072
5936400	1072
5936500	1072
5937100	1072
5937200	1072
5937300	1072
5938100	1072
5938200	1072
5938300	1072
5939100	1072
5942200	1073
5942300	1073
5942400	1073
5942500	1073
5942600	1073
5943100	1073
5943200	1073
5943300	1073
5944200	1073
5944300	1073
5944400	1073
5944700	1073
5944800	1073
5944900	1073
5945000	1073
5945100	1073
5945200	1073
5945400	1073
5945500	1073
5945600	1073
5945700	1073
5946100	1073
5946200	1073
5946300	1073
5946400	1073
5946500	1073
5946600	1073
5947100	1073
5947200	1073
5947300	1073
5948100	1073
5948200	1073
595011811	149
595012511	149
595013011	149

EDP Number	Page No.
595013411	149
595013711	149
595013811	149
595013911	149
595014211	149
595014611	149
595015011	149
595015411	149
595015611	149
595015711	149
595016111	149
595016311	149
595016511	149
595016911	149
595017111	149
595017311	149
595017711	149
595018111	149
595018511	149
595018711	149
595018911	149
595019311	149
595019711	149
595020111	149
595020311	149
595020511	149
595020611	149
595020911	149
595021311	149
595021611	149
595021711	149
595021811	149
595021911	149
595022011	149
595022411	149
595022811	149
595023211	149
595023411	149
595023611	149
595025011	150
595025611	150
595026211	150
595026511	150
595026811	150
595027411	150
595027611	150
595028111	150
595029511	150
595029611	150
595030711	150
595031211	150
595031511	150
595031711	150
595032811	150
595033411	150
595033511	150

EDP Number	Page No.
595033811	150
595034211	150
595034311	150
595034611	150
595035411	150
595035911	150
595037011	150
595037411	150
595037511	150
595038611	150
595038911	150
595039011	150
595039311	150
595039411	150
595040511	150
595040611	150
595041311	150
595042211	150
595042511	150
595042611	150
595043311	150
595043711	150
595045211	150
595045311	150
595045411	150
595045511	150
595046511	150
595046811	150
595047211	150
595048411	150
595050011	150
5952100	1074
5952200	1074
5952300	1074
5952400	1074
5952500	1074
5952600	1074
5953100	1074
5953200	1074
5953300	1074
5954200	1074
5954300	1074
5954400	1074
5954700	1074
5954800	1074
5954900	1074
5955000	1074
5955100	1074
595511811	151
595512511	151
595513911	151
595515611	151
595517111	151
595518711	151
5955200	1074
595520311	151

EDP Number	Page No.
595520611	151
595521611	151
595521811	151
595523411	151
595525011	152
595526211	152
595526511	152
595527411	152
595528111	152
595529611	152
595531211	152
595531711	152
595532811	152
595533511	152
595534311	152
595535911	152
595537011	152
595537511	152
595538911	152
595539011	152
5955400	1074
595540611	152
595542211	152
595542611	152
595543711	152
595545211	152
595545311	152
595546811	152
595548411	152
5955500	1074
595550011	152
5955600	1074
5955700	1074
5956100	1074
5956200	1074
5956300	1074
5956400	1074
5956500	1074
5956600	1074
5957100	1074
5957200	1074
5957300	1074
5958100	1074
5961200	1075
5962200	1075
5962300	1075
5962400	1075
5964200	1075
5964300	1075
5964700	1075
5965200	1075
5966100	1075
5966300	1075
5966400	1075
5967200	1075
5968100	1075



EDP Number	Page No.
5972400	1075
5974200	1075
5974500	1075
5976100	1075
5976300	1075
5976400	1075
5BA0280-SO	561
5BA0290-SO	561
5BA0320-SO	561
5BA0330-SO	561
5BA0350-SO	561
5BA0360-SO	561
5BA0420-SO	561
5BA0430-SO	561
5BA0480-SO	561
5BA0490-SO	561
5BA0550-SO	561
5BA0560-SO	561
5BA0640-SO	561
5BA0650-SO	561
5BA0790-SO	561
5BA0800-SO	561
5BA0950-SO	561
5BA0960-SO	561
5BA1110-SO	562
5BA1120-SO	562
5BA1270-SO	562
5BA1280-SO	562
5BA1430-SO	562
5BA1440-SO	562
5BA1590-SO	562
5BA1600-SO	562
5BA1910-SO	562
5BA1920-SO	562
5BA2220-SO	562
5BA2230-SO	562
5BA2540-SO	562
5BA2550-SO	562
5BA2860-SO	562
5BA2870-SO	562
5BA3180-SO	562
5BA3190-SO	562
5BB0284-SO	564
5BB0294-SO	564
5BB0324-SO	564
5BB0334-SO	564
5BB0354-SO	564
5BB0364-SO	564
5BB0424-SO	564
5BB0434-SO	564
5BB0484-SO	564
5BB0494-SO	564
5BB0554-SO	564
5BB0564-SO	564
5BB0644-SO	564
5BB0654-SO	564

EDP Number	Page No.
5BB0794-SO	564
5BB0804-SO	564
5BB0954-SO	564
5BB0964-SO	564
5BB1114-SO	564
5BB1124-SO	564
5BB1274-SO	564
5BB1284-SO	564
5BB1434-SO	565
5BB1444-SO	565
5BB1594-SO	565
5BB1604-SO	565
5BB1914-SO	565
5BB1924-SO	565
5BB2224-SO	565
5BB2234-SO	565
5BB2544-SO	565
5BB2554-SO	565
5BB2864-SO	565
5BB2874-SO	565
5BB3184-SO	565
5BB3194-SO	565
5BC0280-SO	567
5BC0290-SO	567
5BC0320-SO	567
5BC0330-SO	567
5BC0350-SO	567
5BC0360-SO	567
5BC0420-SO	567
5BC0430-SO	567
5BC0480-SO	567
5BC0490-SO	567
5BC0550-SO	567
5BC0560-SO	567
5BC0640-SO	567
5BC0650-SO	567
5BC0790-SO	567
5BC0800-SO	567
5BC0950-SO	567
5BC0960-SO	567
5BC1110-SO	568
5BC1120-SO	568
5BC1270-SO	568
5BC1280-SO	568
5BC1430-SO	568
5BC1440-SO	568
5BC1590-SO	568
5BC1600-SO	568
5BC1910-SO	568
5BC1920-SO	568
5BC2220-SO	568
5BC2230-SO	568
5BC2540-SO	568
5BC2550-SO	568
5BC2860-SO	568
5BC2870-SO	568

EDP Number	Page No.
5BC3180-SO	568
5BC3190-SO	568
5BD0285-SO	570
5BD0295-SO	570
5BD0325-SO	570
5BD0335-SO	570
5BD0355-SO	570
5BD0365-SO	570
5BD0425-SO	570
5BD0435-SO	570
5BD0485-SO	570
5BD0495-SO	570
5BD0555-SO	570
5BD0565-SO	570
5BD0645-SO	570
5BD0655-SO	570
5BD0795-SO	570
5BD0805-SO	570
5BD0955-SO	570
5BD0965-SO	570
5BD1115-SO	570
5BD1125-SO	570
5BD1275-SO	570
5BD1285-SO	570
5BD1435-SO	571
5BD1445-SO	571
5BD1595-SO	571
5BD1605-SO	571
5BD1915-SO	571
5BD1925-SO	571
5BD2225-SO	571
5BD2235-SO	571
5BD2545-SO	571
5BD2555-SO	571
5BD2865-SO	571
5BD2875-SO	571
5BD3185-SO	571
5BD3195-SO	571
5BE0280-SO	573
5BE0290-SO	573
5BE0320-SO	573
5BE0330-SO	573
5BE0350-SO	573
5BE0360-SO	573
5BE0420-SO	573
5BE0430-SO	573
5BE0480-SO	573
5BE0490-SO	573
5BE0550-SO	573
5BE0560-SO	573
5BE0640-SO	573
5BE0650-SO	573
5BE0790-SO	573
5BE0800-SO	573
5BE0950-SO	573
5BE0960-SO	573

EDP Number	Page No.
5BE1110-SO	574
5BE1120-SO	574
5BE1270-SO	574
5BE1280-SO	574
5BE1430-SO	574
5BE1440-SO	574
5BE1590-SO	574
5BE1600-SO	574
5BE1910-SO	574
5BE1920-SO	574
5BE2220-SO	574
5BE2230-SO	574
5BE2540-SO	574
5BE2550-SO	574
5BE2860-SO	574
5BE2870-SO	574
5BE3180-SO	574
5BE3190-SO	574
5BF0280-SO	648
5BF0290-SO	648
5BF0320-SO	648
5BF0330-SO	648
5BF0350-SO	648
5BF0360-SO	648
5BF0420-SO	648
5BF0430-SO	648
5BF0480-SO	648
5BF0490-SO	648
5BF0550-SO	648
5BF0560-SO	648
5BF0640-SO	648
5BF0650-SO	648
5BF0790-SO	648
5BF0800-SO	648
5BF0950-SO	648
5BF0960-SO	648
5BF1110-SO	648
5BF1120-SO	648
5BF1270-SO	648
5BF1280-SO	648
5BF1430-SO	648
5BF1440-SO	648
5BF1590-SO	649
5BF1600-SO	649
5BF1910-SO	649
5BF1920-SO	649
5BF2220-SO	649
5BF2230-SO	649
5BF2540-SO	649
5BF2550-SO	649
5BF2860-SO	649
5BF2870-SO	649
5BF3180-SO	649
5BF3190-SO	649
5BG0284-SO	651
5BG0294-SO	651



EDP Number	Page No.
5BG0324-SO	651
5BG0334-SO	651
5BG0354-SO	651
5BG0364-SO	651
5BG0424-SO	651
5BG0434-SO	651
5BG0484-SO	651
5BG0494-SO	651
5BG0554-SO	651
5BG0564-SO	651
5BG0644-SO	651
5BG0654-SO	651
5BG0794-SO	651
5BG0804-SO	651
5BG0954-SO	651
5BG0964-SO	651
5BG1114-SO	652
5BG1124-SO	652
5BG1274-SO	652
5BG1284-SO	652
5BG1434-SO	652
5BG1444-SO	652
5BG1594-SO	652
5BG1604-SO	652
5BG1914-SO	652
5BG1924-SO	652
5BG2224-SO	652
5BG2234-SO	652
5BG2544-SO	652
5BG2554-SO	652
5BG2864-SO	652
5BG2874-SO	652
5BG3184-SO	652
5BG3194-SO	652
5BH0280-SO	654
5BH0290-SO	654
5BH0320-SO	654
5BH0330-SO	654
5BH0350-SO	654
5BH0360-SO	654
5BH0420-SO	654
5BH0430-SO	654
5BH0480-SO	654
5BH0490-SO	654
5BH0550-SO	654
5BH0560-SO	654
5BH0640-SO	654
5BH0650-SO	654
5BH0790-SO	654
5BH0800-SO	654
5BH0950-SO	654
5BH0960-SO	654
5BH1110-SO	654
5BH1120-SO	654
5BH1270-SO	654
5BH1280-SO	654

EDP Number	Page No.
5BH1430-SO	654
5BH1440-SO	654
5BH1590-SO	655
5BH1600-SO	655
5BH1910-SO	655
5BH1920-SO	655
5BH2220-SO	655
5BH2230-SO	655
5BH2540-SO	655
5BH2541-SO	655
5BH2860-SO	655
5BH2870-SO	655
5BH3180-SO	655
5BH3190-SO	655
5BJ0280-SO	657
5BJ0290-SO	657
5BJ0320-SO	657
5BJ0330-SO	657
5BJ0350-SO	657
5BJ0360-SO	657
5BJ0420-SO	657
5BJ0430-SO	657
5BJ0480-SO	657
5BJ0490-SO	657
5BJ0550-SO	657
5BJ0560-SO	657
5BJ0640-SO	657
5BJ0650-SO	657
5BJ0790-SO	657
5BJ0800-SO	657
5BJ0950-SO	657
5BJ0960-SO	657
5BJ1110-SO	658
5BJ1120-SO	658
5BJ1270-SO	658
5BJ1280-SO	658
5BJ1430-SO	658
5BJ1440-SO	658
5BJ1590-SO	658
5BJ1600-SO	658
5BJ1910-SO	658
5BJ1920-SO	658
5BJ2220-SO	658
5BJ2230-SO	658
5BJ2540-SO	658
5BJ2550-SO	658
5BJ2860-SO	658
5BJ2870-SO	658
5BJ3180-SO	658
5BJ3190-SO	658
5BK0280-SO	573
5BK0290-SO	573
5BK0320-SO	573
5BK0330-SO	573
5BK0350-SO	573
5BK0360-SO	573

EDP Number	Page No.
5BK0420-SO	573
5BK0430-SO	573
5BK0480-SO	573
5BK0490-SO	573
5BK0550-SO	573
5BK0560-SO	573
5BK0640-SO	573
5BK0650-SO	573
5BK0790-SO	573
5BK0800-SO	573
5BK0950-SO	573
5BK0960-SO	573
5BK1110-SO	574
5BK1120-SO	574
5BK1270-SO	574
5BK1280-SO	574
5BK1430-SO	574
5BK1440-SO	574
5BK1590-SO	574
5BK1600-SO	574
5BK1910-SO	574
5BK1920-SO	574
5BK2220-SO	574
5BK2230-SO	574
5BK2540-SO	574
5BK2550-SO	574
5BK2860-SO	574
5BK2870-SO	574
5BK3180-SO	574
5BK3190-SO	574
5BL0280-SO	561
5BL0290-SO	561
5BL0320-SO	561
5BL0330-SO	561
5BL0350-SO	561
5BL0360-SO	561
5BL0420-SO	561
5BL0430-SO	561
5BL0480-SO	561
5BL0490-SO	561
5BL0550-SO	561
5BL0560-SO	561
5BL0640-SO	561
5BL0650-SO	561
5BL0790-SO	561
5BL0800-SO	561
5BL0950-SO	561
5BL0960-SO	561
5BL1110-SO	562
5BL1120-SO	562
5BL1270-SO	562
5BL1280-SO	562
5BL1430-SO	562
5BL1440-SO	562
5BL1590-SO	562
5BL1600-SO	562

EDP Number	Page No.
5BL1910-SO	562
5BL1920-SO	562
5BL2220-SO	562
5BL2230-SO	562
5BL2540-SO	562
5BL2550-SO	562
5BL2860-SO	562
5BL2870-SO	562
5BL3180-SO	562
5BL3190-SO	562
5BM0284-SO	564
5BM0294-SO	564
5BM0324-SO	564
5BM0334-SO	564
5BM0354-SO	564
5BM0364-SO	564
5BM0424-SO	564
5BM0434-SO	564
5BM0484-SO	564
5BM0494-SO	564
5BM0554-SO	564
5BM0564-SO	564
5BM0644-SO	564
5BM0654-SO	564
5BM0794-SO	564
5BM0804-SO	564
5BM0954-SO	564
5BM0964-SO	564
5BM1114-SO	564
5BM1124-SO	564
5BM1274-SO	564
5BM1284-SO	564
5BM1434-SO	565
5BM1444-SO	565
5BM1594-SO	565
5BM1604-SO	565
5BM1914-SO	565
5BM1924-SO	565
5BM2224-SO	565
5BM2234-SO	565
5BM2544-SO	565
5BM2554-SO	565
5BM2864-SO	565
5BM2874-SO	565
5BM3184-SO	565
5BM3194-SO	565
5BN0280-SO	567
5BN0290-SO	567
5BN0320-SO	567
5BN0330-SO	567
5BN0350-SO	567
5BN0360-SO	567
5BN0420-SO	567
5BN0430-SO	567
5BN0480-SO	567
5BN0490-SO	567



EDP Number	Page No.
5BN0550-SO	567
5BN0560-SO	567
5BN0640-SO	567
5BN0650-SO	567
5BN0790-SO	567
5BN0800-SO	567
5BN0950-SO	567
5BN0960-SO	567
5BN1110-SO	568
5BN1120-SO	568
5BN1270-SO	568
5BN1280-SO	568
5BN1430-SO	568
5BN1440-SO	568
5BN1590-SO	568
5BN1600-SO	568
5BN1910-SO	568
5BN1920-SO	568
5BN2220-SO	568
5BN2230-SO	568
5BN2540-SO	568
5BN2550-SO	568
5BN2860-SO	568
5BN2870-SO	568
5BN3180-SO	568
5BN3190-SO	568
5BP0285-SO	570
5BP0295-SO	570
5BP0325-SO	570
5BP0335-SO	570
5BP0355-SO	570
5BP0365-SO	570
5BP0425-SO	570
5BP0435-SO	570
5BP0485-SO	570
5BP0495-SO	570
5BP0555-SO	570
5BP0565-SO	570
5BP0645-SO	570
5BP0655-SO	570
5BP0795-SO	570
5BP0805-SO	570
5BP0955-SO	570
5BP0965-SO	570
5BP1115-SO	570
5BP1125-SO	570
5BP1275-SO	570
5BP1285-SO	570
5BP1435-SO	571
5BP1445-SO	571
5BP1595-SO	571
5BP1605-SO	571
5BP1915-SO	571
5BP1925-SO	571
5BP2225-SO	571
5BP2235-SO	571

EDP Number	Page No.
5BP2545-SO	571
5BP2555-SO	571
5BP2865-SO	571
5BP2875-SO	571
5BP3185-SO	571
5BP3195-SO	571
5BS0280-SO	648
5BS0290-SO	648
5BS0320-SO	648
5BS0330-SO	648
5BS0350-SO	648
5BS0360-SO	648
5BS0420-SO	648
5BS0430-SO	648
5BS0480-SO	648
5BS0490-SO	648
5BS0550-SO	648
5BS0560-SO	648
5BS0640-SO	648
5BS0650-SO	648
5BS0790-SO	648
5BS0800-SO	648
5BS0950-SO	648
5BS0960-SO	648
5BS1110-SO	648
5BS1120-SO	648
5BS1270-SO	648
5BS1280-SO	648
5BS1430-SO	648
5BS1440-SO	648
5BS1590-SO	649
5BS1600-SO	649
5BS1910-SO	649
5BS1920-SO	649
5BS2220-SO	649
5BS2230-SO	649
5BS2540-SO	649
5BS2550-SO	649
5BS2860-SO	649
5BS2870-SO	649
5BS3180-SO	649
5BS3190-SO	649
5BT0284-SO	651
5BT0294-SO	651
5BT0324-SO	651
5BT0334-SO	651
5BT0354-SO	651
5BT0364-SO	651
5BT0424-SO	651
5BT0434-SO	651
5BT0484-SO	651
5BT0494-SO	651
5BT0554-SO	651
5BT0564-SO	651
5BT0644-SO	651
5BT0654-SO	651

EDP Number	Page No.
5BT0794-SO	651
5BT0804-SO	651
5BT0954-SO	651
5BT0964-SO	651
5BT1114-SO	652
5BT1124-SO	652
5BT1274-SO	652
5BT1284-SO	652
5BT1434-SO	652
5BT1444-SO	652
5BT1594-SO	652
5BT1604-SO	652
5BT1914-SO	652
5BT1924-SO	652
5BT2224-SO	652
5BT2234-SO	652
5BT2544-SO	652
5BT2554-SO	652
5BT2864-SO	652
5BT2874-SO	652
5BT3184-SO	652
5BT3194-SO	652
5BU0280-SO	654
5BU0290-SO	654
5BU0320-SO	654
5BU0330-SO	654
5BU0350-SO	654
5BU0360-SO	654
5BU0420-SO	654
5BU0430-SO	654
5BU0480-SO	654
5BU0490-SO	654
5BU0550-SO	654
5BU0560-SO	654
5BU0640-SO	654
5BU0650-SO	654
5BU0790-SO	654
5BU0800-SO	654
5BU0950-SO	654
5BU0960-SO	654
5BU1110-SO	654
5BU1120-SO	654
5BU1270-SO	654
5BU1280-SO	654
5BU1430-SO	654
5BU1440-SO	654
5BU1590-SO	655
5BU1600-SO	655
5BU1910-SO	655
5BU1920-SO	655
5BU2220-SO	655
5BU2230-SO	655
5BU2540-SO	655
5BU2550-SO	655
5BU2860-SO	655
5BU2870-SO	655

EDP Number	Page No.
5BU3180-SO	655
5BU3190-SO	655
5BV0280-SO	657
5BV0290-SO	657
5BV0320-SO	657
5BV0330-SO	657
5BV0350-SO	657
5BV0360-SO	657
5BV0420-SO	657
5BV0430-SO	657
5BV0480-SO	657
5BV0490-SO	657
5BV0550-SO	657
5BV0560-SO	657
5BV0640-SO	657
5BV0650-SO	657
5BV0790-SO	657
5BV0800-SO	657
5BV0950-SO	657
5BV0960-SO	657
5BV1110-SO	658
5BV1120-SO	658
5BV1270-SO	658
5BV1280-SO	658
5BV1430-SO	658
5BV1440-SO	658
5BV1590-SO	658
5BV1600-SO	658
5BV1910-SO	658
5BV1920-SO	658
5BV2220-SO	658
5BV2230-SO	658
5BV2540-SO	658
5BV2550-SO	658
5BV2860-SO	658
5BV2870-SO	658
5BV3180-SO	658
5BV3190-SO	658
5EA0300-SO	563
5EA0350-SO	563
5EA0400-SO	563
5EA0500-SO	563
5EA0600-SO	563
5EA0700-SO	563
5EA0800-SO	563
5EA1000-SO	563
5EA1200-SO	563
5EA1214-SO	563
5EA1400-SO	563
5EA1414-SO	563
5EA1600-SO	563
5EA1614-SO	563
5EA1800-SO	563
5EA1814-SO	563
5EA2000-SO	563
5EA2200-SO	563



EDP Number	Page No.
5EA2400-SO	563
5EB0304-SO	566
5EB0354-SO	566
5EB0404-SO	566
5EB0504-SO	566
5EB0604-SO	566
5EB0614-SO	566
5EB0704-SO	566
5EB0714-SO	566
5EB0804-SO	566
5EB0814-SO	566
5EB1004-SO	566
5EB1014-SO	566
5EB1204-SO	566
5EB1214-SO	566
5EB1404-SO	566
5EB1414-SO	566
5EB1604-SO	566
5EB1614-SO	566
5EB1804-SO	566
5EB1814-SO	566
5EB2004-SO	566
5EB2204-SO	566
5EB2404-SO	566
5EC0300-SO	569
5EC0400-SO	569
5EC0500-SO	569
5EC0514-SO	569
5EC0600-SO	569
5EC0614-SO	569
5EC0700-SO	569
5EC0800-SO	569
5EC0814-SO	569
5EC1000-SO	569
5EC1014-SO	569
5EC1200-SO	569
5EC1400-SO	569
5EC1600-SO	569
5EC1800-SO	569
5EC2000-SO	569
5EC2200-SO	569
5EC2400-SO	569
5ED0305-SO	572
5ED0355-SO	572
5ED0405-SO	572
5ED0505-SO	572
5ED0605-SO	572
5ED0705-SO	572
5ED0805-SO	572
5ED1005-SO	572
5ED1205-SO	572
5ED1405-SO	572
5ED1605-SO	572
5ED1805-SO	572
5ED2005-SO	572
5ED2205-SO	572

EDP Number	Page No.
5ED2405-SO	572
5EF0300-SO	650
5EF0350-SO	650
5EF0400-SO	650
5EF0450-SO	650
5EF0500-SO	650
5EF0600-SO	650
5EF0700-SO	650
5EF0800-SO	650
5EF1000-SO	650
5EF1200-SO	650
5EF1400-SO	650
5EF1410-SO	650
5EF1600-SO	650
5EF1610-SO	650
5EF1800-SO	650
5EF1810-SO	650
5EF2000-SO	650
5EF2200-SO	650
5EF2400-SO	650
5EG0304-SO	653
5EG0354-SO	653
5EG0404-SO	653
5EG0454-SO	653
5EG0504-SO	653
5EG0604-SO	653
5EG0614-SO	653
5EG0704-SO	653
5EG0714-SO	653
5EG0804-SO	653
5EG0814-SO	653
5EG1004-SO	653
5EG1014-SO	653
5EG1204-SO	653
5EG1214-SO	653
5EG1404-SO	653
5EG1414-SO	653
5EG1604-SO	653
5EG1614-SO	653
5EG1804-SO	653
5EG1814-SO	653
5EG2004-SO	653
5EG2204-SO	653
5EG2404-SO	653
5EH0300-SO	656
5EH0400-SO	656
5EH0500-SO	656
5EH0600-SO	656
5EH0610-SO	656
5EH0700-SO	656
5EH0800-SO	656
5EH0810-SO	656
5EH1000-SO	656
5EH1010-SO	656
5EH1200-SO	656
5EH1210-SO	656

EDP Number	Page No.
5EH1400-SO	656
5EH1600-SO	656
5EH1800-SO	656
5EH2000-SO	656
5EH2200-SO	656
5EH2400-SO	656
5EL0600-SO	563
5EL0800-SO	563
5EL1010-SO	563
5EL1190-SO	563
5EL1200-SO	563
5EL1400-SO	563
5EL1414-SO	563
5EL1600-SO	563
5EL1614-SO	563
5EL1800-SO	563
5EL1814-SO	563
5EL2000-SO	563
5EL2200-SO	563
5EM0604-SO	566
5EM0804-SO	566
5EM0814-SO	566
5EM1004-SO	566
5EM1014-SO	566
5EM1194-SO	566
5EM1204-SO	566
5EM1404-SO	566
5EM1414-SO	566
5EM1604-SO	566
5EM1614-SO	566
5EM1804-SO	566
5EM1814-SO	566
5EM2004-SO	566
5EM2204-SO	566
5EN0600-SO	569
5EN0800-SO	569
5EN0814-SO	569
5EN1000-SO	569
5EN1010-SO	569
5EN1014-SO	569
5EN1200-SO	569
5EN1214-SO	569
5EN1400-SO	569
5EN1600-SO	569
5EN1800-SO	569
5EN2000-SO	569
5EN2200-SO	569
5EP0605-SO	572
5EP0705-SO	572
5EP0805-SO	572
5EP0995-SO	572
5EP1005-SO	572
5EP1015-SO	572
5EP1205-SO	572
5EP1214-SO	572
5EP1235-SO	572

EDP Number	Page No.
5EP1405-SO	572
5EP1605-SO	572
5EP1805-SO	572
5EP2005-SO	572
5EP2205-SO	572
5ES0600-SO	650
5ES0800-SO	650
5ES1000-SO	650
5ES1010-SO	650
5ES1200-SO	650
5ES1210-SO	650
5ES1400-SO	650
5ES1410-SO	650
5ES1600-SO	650
5ES1610-SO	650
5ES1800-SO	650
5ES1810-SO	650
5ES2000-SO	650
5ES2200-SO	650
5ET0604-SO	653
5ET0804-SO	653
5ET0814-SO	653
5ET1004-SO	653
5ET1014-SO	653
5ET1194-SO	653
5ET1204-SO	653
5ET1404-SO	653
5ET1414-SO	653
5ET1604-SO	653
5ET1614-SO	653
5ET1804-SO	653
5ET1814-SO	653
5ET2004-SO	653
5ET2204-SO	653
5EU0600-SO	656
5EU0800-SO	656
5EU0810-SO	656
5EU1000-SO	656
5EU1200-SO	656
5EU1210-SO	656
5EU1400-SO	656
5EU1600-SO	656
5EU1800-SO	656
5EU2000-SO	656
5EU2200-SO	656
5EV0300-SO	575
5EV0400-SO	575
5EV0500-SO	575
5EV0600-SO	575
5EV0800-SO	575
5EV1000-SO	575
5EV1200-SO	575
5EV1400-SO	575
5EV1600-SO	575
5EV1800-SO	575
5EV2000-SO	575



EDP Number	Page No.
5EV2200-SO	575
5EV2400-SO	575
5EW0300-SO	576
5EW0400-SO	576
5EW0500-SO	576
5EW0600-SO	576
5EW0800-SO	576
5EW1000-SO	576
5EW1200-SO	576
5EW1400-SO	576
5EW1600-SO	576
5EW1800-SO	576
5EW2000-SO	576
5EW2200-SO	576
5EW2400-SO	576
5EX0300-SO	659
5EX0400-SO	659
5EX0500-SO	659
5EX0600-SO	659
5EX0800-SO	659
5EX1000-SO	659
5EX1200-SO	659
5EX1400-SO	659
5EX1600-SO	659
5EX1800-SO	659
5EX2000-SO	659
5EX2200-SO	659
5EX2400-SO	659
6002600	732
6002700	732
6003200	732
6003300	732
6004500	732
6004600	732
6006000	732
6006100	732
6006600	732
6006700	732
6007500	732
6007600	732
6008100	732
6008200	732
6010200	732
6010300	732
6013200	732
6013300	732
6014400	732
6014500	732
6015600	732
6015700	732
6016500	732
6016600	732
6018300	732
6018400	732
6018600	732
6018700	732

EDP Number	Page No.
6019600	732
6019800	732
6019900	732
6022000	732
612	698
61505	266
6150511	266
61506	266
6150611	266
61507	266
6150711	266
61508	266
61509	266
61510	267
6151011	267
61511	267
6151111	267
61512	267
6151211	267
61513	267
61514	268
6151411	268
61515	268
6151511	268
61516	268
6151611	268
61517	268
6151711	268
61518	268
6151811	268
61519	269
6151911	269
61520	269
6152011	269
61521	269
61522	269
6152211	269
61523	270
6152311	270
61524	270
6152411	270
61525	270
6152511	270
61526	270
6152611	270
61527	270
6152711	270
61528	271
6152811	271
61529	271
6152911	271
61530	271
6153011	271
61531	271
6153111	271
61532	272

EDP Number	Page No.
6153211	272
61533	272
6153311	272
61534	272
6153411	272
61535	272
6153511	272
61536	272
61537	273
6153711	273
61538	273
6153811	273
61539	273
61540	273
6154011	273
61541	274
6154111	274
61542	274
6154211	274
61543	274
6154311	274
61544	274
6154411	274
61545	274
6154511	274
61546	275
6154611	275
61547	275
6154711	275
61548	275
6154811	275
61549	275
6154911	275
61550	276
6155011	276
61551	276
6155111	276
61552	276
6155211	276
61553	276
6155311	276
61554	276
61555	277
6155511	277
61556	277
6155611	277
61557	277
61558	277
6155811	277
61559	278
6155911	278
61560	278
6156011	278
61561	278
6156111	278
61562	278

EDP Number	Page No.
61563	278
6156311	278
61564	278
6156411	278
61565	278
6156511	278
61566	278
6156611	278
61567	278
6156711	278
61568	278
6156811	278
61569	278
6156911	278
61570	278
6157011	278
61571	278
6157111	278
61572	278
6157211	278
61573	278
6157311	278
61574	278
6157411	278
61575	278
6157511	278
61576	279
61577	279
6157711	279
61578	279
61579	279
6157911	279
61580	279
6158011	279
61581	279
6158111	279
61582	279
6158211	279
61583	279
6158311	279
61584	279
61585	279
6158511	279
61586	279
6158611	279
61587	279
61588	279
6158811	279
61589	279
61590	279
6159011	279
61591	279
61592	279
61593	279
61594	279
61595	279



EDP Numerical Index

EDP Number	Page No.
6159511	279
61596	279
6159611	279
61597	280
61598	280
6159811	280
61599	280
6159911	280
61600	280
6160011	280
61601	280
61602	280
6160211	280
61603	280
6160311	280
61604	280
61605	280
6160511	280
61606	280
61607	280
6160711	280
61608	280
61609	280
61610	280
6161011	280
61611	280
6161111	280
61612	280
61613	280
61614	280
61615	280
6161511	280
61616	280
61617	280
61618	280
61619	280
61620	281
6162011	281
61621	281
61622	281
61623	281
6162311	281
61624	281
6162411	281
61625	281
6162511	281
61626	281
6162611	281
61627	281
6162711	281
61628	281
6162811	281
61629	281
6162911	281
61630	281
6163011	281

EDP Number	Page No.
61631	281
6163111	281
61632	281
61633	281
61634	281
61635	281
6163511	281
61636	281
61637	281
61638	281
61639	281
61640	281
6164011	281
61641	281
6164111	281
61642	281
61643	281
6164311	281
61644	281
61645	281
6164511	281
61646	281
61647	281
61648	281
61649	281
61650	281
6165011	281
61651	281
61652	281
61653	281
6165311	281
61654	281
61655	281
61656	281
61657	281
61658	281
61659	281
6165911	281
61660	281
6166011	281
61661	281
6166111	281
61662	281
61663	282
61664	282
61665	282
6166511	282
61666	282
61667	282
6166711	282
61668	282
61669	282
61670	282
61671	282
6167111	282
61672	282

EDP Number	Page No.
6167211	282
61673	282
61674	282
61675	282
61676	282
61677	282
6167711	282
61678	282
61679	282
61680	282
6168011	282
61681	282
61682	282
61683	282
61684	282
61685	282
61686	282
61687	282
61688	282
61689	282
61690	282
61691	282
6169111	282
61692	282
61693	282
61694	282
61695	282
61696	282
61697	282
61698	282
61699	282
61700	282
61705	282
61710	282
6171011	282
61715	282
6171511	282
61720	282
61725	282
61730	282
6173011	282
61735	282
61740	282
61745	283
61750	283
61755	283
61760	283
61765	283
61770	283
61775	283
61780	283
61785	283
61790	283
61795	283
61800	283
61805	283

EDP Number	Page No.
61810	283
61815	283
61820	283
6200100	1043
6200200	1043
6200300	1043
6200400	1043
6200500	1043
6201100	1043
6202100	1043
6203100	1043
6205100	1043
6206100	1043
6206200	1043
6210100	1043
6210200	1043
6210300	1043
6210400	1043
6210500	1043
6211100	1043
6212100	1043
6213100	1043
6215100	1043
6216100	1043
6216200	1043
62520	284
6252011	284
62521	284
62522	284
6252211	284
62523	284
62524	284
6252411	284
62525	285
6252511	285
62526	285
62527	285
62528	285
62529	286
6252911	286
62530	286
6253011	286
62531	286
6253111	286
62532	286
6253211	286
62533	286
6253311	286
62534	287
62535	287
6253511	287
62536	287
62537	287
6253711	287
62538	288
6253811	288



EDP Number	Page No.
62539	288
62540	288
6254011	288
62541	288
62542	288
62543	289
62544	289
62545	289
6254511	289
62546	289
62547	290
62548	290
6254811	290
62549	290
62550	290
62551	290
62552	291
6255211	291
62553	291
62554	291
62555	291
6255511	291
62556	292
62557	292
62558	292
62559	292
62560	292
62561	293
6256111	293
62562	293
62563	293
62564	293
62565	293
6256511	293
62566	293
6256611	293
62567	293
62568	293
6256811	293
62569	293
62570	293
6257011	293
62571	293
62572	293
62573	293
62574	293
6257411	293
62575	293
62576	293
62577	293
6257711	293
62578	293
62579	293
6257911	293
62580	293
62581	293

EDP Number	Page No.
62582	293
62583	294
62584	294
62585	294
6258511	294
62586	294
6258611	294
62587	294
62588	294
62589	294
62590	294
62591	294
6259111	294
62592	294
6259211	294
62593	294
62594	294
62595	294
6259511	294
62596	294
62597	294
62598	294
6259811	294
62599	294
62600	294
62601	294
62602	294
6260211	294
62603	294
62604	294
62605	294
62606	295
62607	295
6260711	295
62608	295
62609	295
6260911	295
62610	295
6261011	295
62611	295
6261111	295
62612	295
62613	295
62614	295
62615	295
62616	295
62617	295
62618	295
62619	295
62620	295
62621	295
62622	295
62623	295
6262311	295
62624	295
6262411	295

EDP Number	Page No.
62625	295
62626	295
6262611	295
62627	295
6262711	295
62628	295
62629	295
62630	295
62635	295
62640	295
62641	295
62645	296
62650	296
6265011	296
62655	296
62656	296
62660	296
62665	296
62670	296
62675	296
62676	296
62680	296
62685	296
62690	296
62695	296
62696	296
62700	296
62705	296
62710	296
62715	296
62720	296
62725	296
62730	296
6273011	296
62735	296
62740	296
62745	296
62750	296
62755	296
62760	296
62765	296
62770	296
62780	296
62790	296
62800	296
62810	296
62820	296
62903	297
62904	297
62906	297
62908	297
62910	297
62912	297
62916	297
62918	297
62920	297

EDP Number	Page No.
62923	297
62924	297
62926	297
62928	297
62930	297
62932	297
62936	297
62938	297
62940	297
630012311	113
630015511	113
630016111	113
630017111	113
630018611	113
630020211	113
630021311	114
630021711	114
630023311	114
630024911	114
630025711	114
630026411	114
630028011	114
630029511	114
630031111	114
630032711	114
630033111	114
630034211	114
630035811	115
630037411	115
630038911	115
630040511	115
630042111	115
630043711	115
630045211	115
630046811	115
630047611	115
630048011	115
630048311	115
630048811	115
630049211	115
630049611	115
630049911	115
630050311	115
630050711	116
630051111	116
630051411	116
630051911	116
630052311	116
630052711	116
630053211	116
630055111	116
630056111	116
630057011	116
630059011	116
630061011	116
630062311	116



EDP Numerical Index

EDP Number	Page No.
630062911	116
630064911	116
630066911	116
630068911	116
630070811	116
630072811	116
630074811	116
630074911	116
630076711	116
630078711	116
631012311	117
631015511	117
631016111	117
631017111	117
631018611	117
631020211	117
631021311	118
631021711	118
631023311	118
631024911	118
631025711	118
631026411	118
631028011	118
631029511	118
631031111	118
631032711	118
631033111	118
631034211	118
631035811	119
631037411	119
631038911	119
631040511	119
631042111	119
631043711	119
631045211	119
631046811	119
631048411	119
631050011	119
631051511	120
631056111	120
631062311	120
631074911	120
63503	298
63504	298
63506	298
63508	298
63510	298
63512	298
63516	298
63518	298
63520	298
63603	297
63604	297
63606	297
63608	297
63610	297

EDP Number	Page No.
63612	297
63616	297
63618	297
63620	297
63653	297
63654	297
63656	297
63658	297
63660	297
63662	297
63703	297
63704	297
63706	297
63708	297
63710	297
63712	297
640-0621	1026
640-0622	1026
640-0623	1026
640-0624	1026
640-0931	1026
640-0932	1026
640-0933	1026
640-0934	1026
640-1251	1026
640-1252	1026
640-1253	1026
640-1254	1026
640-1871	1026
640-1872	1026
640-1873	1026
640-1874	1026
640-1881	1026
640-1882	1026
640-1883	1026
640-1884	1026
640-2501	1026
640-2502	1026
640-2503	1026
640-2504	1026
640-2511	1026
640-2512	1026
640-2513	1026
640-2514	1026
640-3121	1026
640-3122	1026
640-3123	1026
640-3124	1026
640-3751	1026
640-3752	1026
640-3753	1026
640-3754	1026
640-5001	1026
640-5002	1026
640-5003	1026
640-5004	1026

EDP Number	Page No.
641	698
6410100	1044
6410200	1044
6410300	1044
6410400	1044
6410500	1044
6410600	1044
6411100	1044
6411500	1044
641-1871	959
641-1872	959
641-1873	959
641-1874	959
6412100	1044
6412500	1044
641-2501	959
641-2502	959
641-2503	959
641-2504	959
6413100	1044
6413500	1044
641-3751	959
641-3752	959
641-3753	959
641-3754	959
6414100	1044
6414500	1044
641-5001	959
641-5002	959
641-5003	959
641-5004	959
6415100	1044
6415500	1044
6416100	1044
6416200	1044
6416400	1044
642	698
643	698
6440500	1045
6441100	1045
6441500	1045
6442100	1045
6442500	1045
6443100	1045
6443500	1045
6444100	1045
6444500	1045
6445100	1045
6445500	1045
6446100	1045
6446200	1045
6446500	1045
6446600	1045
6450001	1427
6450002	1427
6460300	1046

EDP Number	Page No.
6460500	1046
6461100	1046
6461500	1046
6462100	1046
6462500	1046
6463100	1046
6463500	1046
6464100	1046
6464500	1046
6465100	1046
6465500	1046
6466100	1046
6466200	1046
6466400	1046
650007812	86
650008212	86
650008612	86
650009312	86
650009412	86
650010612	86
650010912	86
650011161	86
650011631	86
650012511	86
650013231	86
650013561	86
650013871	86
650014051	86
650014841	86
650015211	86
650015511	86
650015911	86
650016011	86
650016311	86
650016711	86
650017111	86
650017511	86
650018311	86
650018711	87
650020211	87
650020291	87
650020701	87
650021211	87
650021521	87
650021711	87
650023311	87
650024211	87
650025011	87
650025611	87
650026211	87
650026411	87
650026911	87
650027701	88
650028011	88
650029611	88
650031211	88



EDP Number	Page No.
650032111	88
650032711	88
650033011	88
650033611	88
650034011	88
650034111	88
650034211	88
650034811	88
650035811	88
650037511	88
650037601	89
650038911	89
650040511	89
650041011	89
650042111	89
650042661	89
650043711	89
650045211	89
650046711	89
650048411	90
650049011	90
650049811	90
650050011	90
650051501	90
650053011	90
650054601	90
650056111	90
650057711	90
650062511	91
650063311	91
650065511	91
650066311	91
650069321	91
650069601	91
650069801	91
650073311	91
650075011	91
650075711	91
650077401	91
650077661	91
650077801	91
651	698
651007812	92
651008212	92
651008612	92
651009312	92
651009412	92
651010612	92
651012511	92
651015511	92
651016011	92
651017111	92
651018711	92
651020211	93
651021311	93
651021711	93

EDP Number	Page No.
651023311	93
651025011	93
651025611	93
651026411	93
651028011	93
651029611	93
651031211	93
651032711	94
651033111	94
651034211	94
651035811	94
651037511	94
651038911	94
651040511	94
651042111	94
651043711	95
651045211	95
651046711	95
651048411	95
651050011	95
651053011	96
651056111	96
651062511	96
651063311	96
651065511	96
651075011	97
651075711	97
652	698
652009312	98
652010911	98
652012511	98
652015511	98
652016011	98
652017111	98
652018711	98
652020211	98
652021311	98
652021711	98
652023311	99
652025011	99
652025611	99
652026411	99
652028011	99
652029611	99
652031211	99
652032711	99
652033111	99
652035211	99
652035711	100
652037511	100
652038811	100
652040711	100
652042111	100
652043811	100
652045211	100
652050011	100

EDP Number	Page No.
652053011	101
652056111	101
652062511	101
653	698
653007812	102
653008212	102
653008612	102
653009012	102
653009312	102
653009412	102
653009812	102
653010212	102
653010612	102
653010912	102
653011012	102
653011412	102
653012212	102
653012512	102
653012612	102
653012912	102
653013312	102
653014112	102
653014512	102
653014912	102
653015312	102
653015612	102
653016012	102
653018712	102
653020012	102
653020212	102
653020412	102
653020812	102
653021112	102
653021212	102
653021712	102
653022012	102
653022412	102
653022812	102
653023212	103
653025012	103
653025612	103
653026412	103
653027912	103
653028012	103
653028312	103
653028712	103
653029112	103
653029912	103
653030312	103
653030712	103
653031112	103
653031212	103
653033112	103
653034212	103
653035812	104
653036212	104

EDP Number	Page No.
653036612	104
653037012	104
653037512	104
653037812	104
653038112	104
653038512	104
653038912	104
653042312	104
653043712	104
653043812	104
653044012	104
653044412	104
653044812	104
653045212	104
653045412	104
653045612	104
653046012	104
653046412	104
653046812	104
653050012	104
653056112	104
653512512	105
653514112	105
653515612	105
653517212	105
653518712	105
653520312	105
653521312	105
653521912	105
653523412	105
653525012	105
653526612	105
653528112	105
653529712	105
653531312	105
653532812	105
653534412	105
653535912	105
653537512	106
653539112	106
653540612	106
653542212	106
653543712	106
653545312	106
653546912	106
653550012	106
653553112	106
653556312	106
654012512	107
654014012	107
654015612	107
654017212	107
654018712	107
654020212	107
654021312	107
654021712	107



EDP Numerical Index

EDP Number	Page No.
654023412	107
654025012	107
654026412	107
654028012	107
654029612	107
654031212	107
654032812	108
654034212	108
654035912	108
654037512	108
654039012	108
654040612	108
654042112	108
654043712	108
654045212	108
654045412	108
654046812	108
654050012	108
654053112	108
654056112	108
655011812	109
655012512	109
655014012	109
655015612	109
655017212	109
655018712	109
655020212	109
655021312	109
655021712	109
655023412	109
655025012	109
655026412	109
655028012	109
655029612	109
655031212	109
655032812	109
655034212	109
655035912	110
655037512	110
655039012	110
655040612	110
655041212	110
655042112	110
655043212	110
655043712	110
655045212	110
655045412	110
655046812	110
655047212	110
655049112	110
655050012	110
655053112	110
655056112	110
656012512	111
656015612	111
656018712	111

EDP Number	Page No.
656025012	111
656031212	111
656037512	111
657012512	112
657015612	112
657018712	112
657025012	112
657031212	112
660012517	66
660013217	66
660013517	66
660013817	66
660014017	66
660014817	66
660015617	66
660015917	66
660016117	66
660016317	66
660016817	66
660017217	66
660017517	66
660018317	66
660018717	66
660020317	66
660021317	66
660021817	66
660023417	66
660025017	67
660025717	67
660026517	67
660028117	67
660029617	67
6600300	1046
660031217	67
660032817	67
660033217	67
660034317	67
660035917	67
660037517	68
660039017	68
6600400	1046
660040617	68
660042217	68
660043717	68
660045317	68
660046817	68
660048417	68
6600500	1046
660050017	68
660053117	68
660056217	68
660059317	69
6600600	1046
660062517	69
660065617	69
660066317	69

EDP Number	Page No.
660068717	69
660070317	69
660071817	69
660075017	69
6601100	1046
6602100	1046
6603100	1046
6604100	1046
6605100	1046
661012517	70
661015617	70
661016117	70
661017217	70
661018717	70
661020317	70
661021317	70
661021817	70
661023417	70
661025017	70
661025717	70
661026517	70
661028117	71
661029617	71
661031217	71
661032817	71
661033217	71
661034317	71
661035917	71
661037517	71
661039017	71
661040617	71
661042217	71
661043717	72
661045317	72
661046817	72
661048417	72
661050017	72
661053117	72
661056217	72
661059317	72
661062517	72
661065617	72
661066317	72
661068717	72
661070317	72
661071817	73
661075017	73
662	698
664001	1504
668-2501	958
668-3751	958
668-3752	958
668-5001	958
668-5002	958
6737005	1041
6737105	1041

EDP Number	Page No.
6737205	1041
6737305	1041
6737405	1041
6737505	1041
6737605	1041
6737705	1041
6737805	1041
6737905	1041
6738005	1041
6767205	1042
6767405	1042
6767605	1042
6767805	1042
6768005	1042
6777205	1042
6777405	1042
6777605	1042
6777805	1042
6778005	1042
68802B	1513
6900105	1049
6900305	1049
6900505	1049
6900705	1049
6900905	1049
6901305	1049
6901505	1049
6901705	1049
6909105	1049
6909405	1049
6909705	1049
6909805	1049
6910105	1049
6910505	1049
6910905	1049
6912105	1049
6912305	1049
6912505	1049
6913305	1049
6913505	1049
692	698
6920105	1049
6920505	1049
6920705	1049
6920905	1049
700-1000	223
700-1001	223
700-1002	223
700-1250	223
700-1251	223
700-1252	223
700-1871	223
700-1872	223
700-1875	223
700-2500	223
700-2501	223



EDP Number	Page No.
700-2502	223
7002600	729
7003200	729
700-3750	223
700-3751	223
700-3752	223
7004400	729
7005000	729
700-5000	223
700-5001	223
700-5002	223
700-6250	223
700-6251	223
700-6252	223
700-6253	223
700-6254	223
700-6255	223
7007100	729
700-7500	223
700-7501	223
700-7502	223
7008600	729
7009800	729
70100116	913
70100216	913
70100316	913
70100416	913
70100516	913
70100716	913
70100816	913
70100916	913
70101116	913
70101316	913
70101416	913
70101616	913
70105716	913
70106116	913
70106416	913
70106616	913
7010700	729
701-1000	224
701-1001	224
701-1002	224
701-2500	224
701-2501	224
701-2502	224
701-3750	224
701-3751	224
701-3752	224
7014700	729
701-5000	224
701-5001	224
701-5002	224
7015300	729
7015900	729
7016200	729

EDP Number	Page No.
701-6250	224
701-6251	224
701-6252	224
7017100	729
7017400	729
701-7500	224
701-7501	224
701-7502	224
7018000	729
7018300	729
70200016	910
70200116	910
70200216	910
70200316	910
70200416	910
70200516	910
70200716	910
70200816	910
70200916	910
70201116	910
70201316	910
70201416	910
70201616	910
70205716	910
70206116	910
70206416	910
70206616	910
70300116	914
70300216	914
70300316	914
70300416	914
70300516	914
70300716	914
70300916	914
70301116	914
70301316	914
70301416	914
70301616	914
70310916	915
70311116	915
70311416	915
70311616	915
70320116	915
70320216	915
70320316	915
70320416	915
70320516	915
70320616	915
70320716	915
70320816	915
70400316	911
70400416	911
70400516	911
70400716	911
70400916	911
70401116	911

EDP Number	Page No.
70401316	911
70401416	911
70401616	911
70410716	912
70410916	912
70411116	912
70411416	912
70411616	912
70420116	912
70420216	912
70420316	912
70420416	912
70420516	912
70420616	912
70420716	912
70420816	912
706-1000-060	225
706-1000-082	225
706-1000-090	225
706-2500-060	225
706-2500-082	225
706-2500-090	225
706-3750-060	225
706-3750-082	225
706-3750-090	225
706-5000-060	225
706-5000-082	225
706-5000-090	225
706-6250-060	225
706-6250-082	225
706-6250-090	225
706-7500-060	225
706-7500-082	225
706-7500-090	225
70720116	913
70720216	913
70720316	913
70720416	913
70720516	913
70720616	913
70720716	913
70720816	913
71100116	914
71100216	914
71100316	914
71100416	914
71100616	914
71100816	914
71101016	914
71101216	914
71200116	911
71200216	911
71200316	911
71200416	911
71200616	911
71200816	911

EDP Number	Page No.
71201016	911
71201216	911
71320116	917
71320216	917
71320316	917
71320416	917
71320516	917
71320616	917
71320716	917
71320816	917
71320916	917
71321016	917
71400116	917
71400216	917
71400316	917
71400416	917
71400516	917
71400616	917
71400716	917
71400816	917
71400916	917
71401016	917
71730116	916
71730216	916
71730316	916
71730416	916
71730516	916
71730616	916
71730716	916
71730816	916
71730916	916
71731016	916
72300116	918
72300216	918
72300416	918
72300516	918
72300616	918
72300716	918
72300816	918
72310116	918
72310216	918
72310316	918
72310416	918
72310516	918
72310616	918
72310716	918
72310816	918
731	698
732	698
733	698
73801000	202
73801100	202
73801100	203
73801200	202
73801300	202
73801400	203



EDP Numerical Index

EDP Number	Page No.
73801500	203
73801600	203
73801700	203
73802000	202
73803000	203
73803500	203
73804000	202
73805000	202
73806000	202
73807000	203
73808100	202
73809000	202
73809100	202
73809200	202
73809300	202
73811000	202
73812000	202
73813005	203
73817000	203
73818119	202
73819000	202
73819011	202
73819100	202
73819111	202
741	698
742	698
743	698
750009816	175
750012816	175
750012916	175
750016116	175
750016216	175
750018716	175
750019016	175
750019116	175
750019216	175
750019316	175
750019416	175
750019516	175
750019716	175
750021816	175
750022116	175
750025016	175
750025116	175
750025316	175
750025416	175
750025516	175
750031216	175
750031316	175
750031416	175
750031516	175
750037516	175
750037616	175
750037716	175
750037816	175
750043816	175

EDP Number	Page No.
750050116	175
750-0625	222
750-0781	222
750-0938	222
750-1094	222
750109816	173
750112916	173
750116116	173
750119116	173
750119216	173
750122116	173
750-1250	222
750125116	173
750125216	173
750131316	173
750137616	173
750137716	173
750-1406	222
750143816	173
750150116	173
750-1562	222
750-1719	222
750-1875	222
750-2031	222
750-2188	222
750-2344	222
750-2500	222
750-2812	222
750-3125	222
750-3438	222
750-3750	222
751	698
7510200-SO	342
7510240-SO	342
7510250-SO	342
7510260-SO	342
7510270-SO	342
7510280-SO	342
7510300-SO	342
7510310-SO	342
7510320-SO	342
7510340-SO	342
7510350-SO	342
7510360-SO	342
7510380-SO	342
7510400-SO	342
7510410-SO	342
7510420-SO	342
7510430-SO	342
7510440-SO	342
7510450-SO	342
7510480-SO	342
7510490-SO	342
7510500-SO	342
7510510-SO	342
7510520-SO	342

EDP Number	Page No.
7510530-SO	342
7510540-SO	342
7510550-SO	342
7510560-SO	342
7510570-SO	342
7510580-SO	342
7510600-SO	342
7510610-SO	342
7510620-SO	342
7510630-SO	342
7510640-SO	342
7510650-SO	342
7510660-SO	342
7510670-SO	342
7510680-SO	342
7510700-SO	342
7510710-SO	342
7510720-SO	342
7510730-SO	342
7510750-SO	342
7510780-SO	343
7510790-SO	343
7510800-SO	343
7510810-SO	343
7510820-SO	343
7510830-SO	343
7510840-SO	343
7510850-SO	343
7510860-SO	343
7510880-SO	343
7510890-SO	343
7510900-SO	343
7510910-SO	343
7510950-SO	343
7510960-SO	343
7510970-SO	343
7510980-SO	343
7510990-SO	343
7511000-SO	343
7511010-SO	343
7511020-SO	343
7511030-SO	343
7511050-SO	343
7511060-SO	343
7511070-SO	343
7511080-SO	343
7511090-SO	343
7511100-SO	343
7511110-SO	343
7511150-SO	343
7511170-SO	343
7511180-SO	343
7511190-SO	343
7511200-SO	343
7511210-SO	343
7511220-SO	343

EDP Number	Page No.
7511230-SO	343
7511240-SO	343
7511250-SO	343
7511260-SO	343
7511270-SO	343
7511280-SO	344
7511290-SO	344
7511300-SO	344
7511350-SO	344
7511400-SO	344
7511450-SO	344
7511500-SO	344
7511550-SO	344
7511600-SO	344
7511700-SO	344
7511800-SO	344
7512000-SO	344
752	698
752009816	174
752012916	174
752016116	174
752019216	174
752022116	174
752025116	174
752031316	174
7520318-SO	342
752037616	174
752043816	174
7520476-SO	342
752050116	174
7520635-SO	342
7520794-SO	343
7520953-SO	343
7521111-SO	343
7521270-SO	343
7521429-SO	344
7521588-SO	344
7521905-SO	344
753	698
753009816	176
753012916	176
753016116	176
753019116	176
753022116	176
753025116	176
753031316	176
753037616	176
753043816	176
753050116	176
753209816	177
753212916	177
753216116	177
753219116	177
753222116	177
753225116	177
753231316	177



EDP Number	Page No.
753237616	177
753243816	177
753250116	177
7800000	1427
7800004	1427
7800009	1427
7800013	1427
7800052	1427
7800053	1427
7800054	1427
7800055	1427
7800056	1427
7800057	1427
7800058	1427
7800059	1427
7800060	1427
7800061	1427
7800062	1427
7800063	1427
7800100	1361
7800101	1361
7800102	1361
7800103	1361
7800104	1361
7800105	1361
7800106	1361
7800107	1361
7800108	1361
7800109	1361
7800110	1361
7800111	1361
7800112	1361
7800113	1361
7800114	1361
7800115	1361
7800116	1361
7800117	1361
7800118	1361
7800119	1361
7800120	1361
7800121	1361
7800122	1361
7800123	1361
7800124	1361
7800125	1361
7800126	1361
7800127	1361
7800128	1361
7800130	1361
7800131	1361
7800132	1361
7800133	1361
7800134	1361
7800135	1361
7800136	1361
7800137	1361

EDP Number	Page No.
7800138	1361
7800139	1361
7800140	1361
7800200	1411
7800201	1411
7800202	1411
7800203	1411
7800204	1411
7800206	1411
7800207	1411
7800208	1411
7800209	1411
7800210	1411
7800211	1411
7800212	1411
7800213	1411
7800214	1411
7800216	1411
7800217	1411
7800218	1411
7800219	1411
7800300	1409
7800301	1409
7800302	1409
7800303	1409
7800304	1409
7800305	1409
7800306	1409
7800307	1409
7800308	1409
7800309	1409
7800310	1409
7800311	1409
7800312	1409
7800313	1409
7800314	1409
7800315	1409
7800316	1409
7800317	1409
7800318	1409
7800319	1409
7800320	1409
7800321	1409
7800322	1409
7800323	1409
7800324	1409
7800325	1409
7800400	1410
7800401	1410
7800402	1410
7800403	1410
7800404	1410
7800405	1410
7800406	1410
7800407	1410
7800408	1410

EDP Number	Page No.
7800409	1410
7800410	1410
7800411	1410
7800412	1410
7800413	1410
7800414	1410
7800415	1410
7800416	1410
7800500	1408
7800501	1408
7800502	1408
7800503	1408
7800504	1408
7800505	1408
7800506	1408
7800507	1408
7800508	1408
7800509	1408
7800600	1421
7800601	1421
7800603	1421
7800605	1421
7800606	1421
7800607	1421
7800608	1421
7800610	1421
7800612	1421
7800613	1421
7800614	1421
7800615	1421
7800616	1421
7800617	1421
7800618	1421
7800700	1418
7800701	1418
7800702	1418
7800703	1418
7800704	1418
7800705	1418
7800706	1418
7800707	1418
7800708	1419
7800709	1419
7800710	1419
7800711	1419
7800712	1419
7800713	1419
7800714	1419
7800715	1419
7800716	1418
7800717	1418
7800718	1418
7800719	1418
7800720	1418
7800721	1418
7800722	1418

EDP Number	Page No.
7800723	1418
7800724	1419
7800725	1419
7800726	1419
7800727	1419
7800728	1419
7800729	1419
7800730	1419
7800731	1419
7800732	1419
7800733	1419
7800734	1419
7800735	1419
7800736	1419
7800737	1419
7800738	1419
7800739	1419
7800740	1418
7800741	1418
7800742	1419
7800743	1419
7800744	1419
7800745	1419
7800750	1418
7800751	1418
7800752	1418
7800753	1418
7800754	1418
7800755	1418
7800756	1418
7800757	1418
7800758	1418
7800759	1418
7800760	1418
7800761	1418
7800762	1418
7800763	1418
7800764	1418
7800765	1418
7800766	1418
7800767	1418
7800800	1420
7800801	1420
7800802	1420
7800803	1420
7800804	1420
7800805	1420
7800806	1420
7800807	1420
7800808	1420
7800809	1420
7800810	1420
7800811	1420
7800900	1416
7800901	1416
7800902	1416



EDP Numerical Index

EDP Number	Page No.
7800903	1416
7800904	1416
7800905	1416
7800906	1416
7800907	1416
7800908	1416
7800909	1416
7800910	1416
7800911	1416
7800912	1416
7800913	1416
7800914	1416
7800915	1416
7800916	1416
7800917	1416
7800918	1416
7800919	1416
7800920	1416
7800921	1416
7800922	1416
7800923	1416
7800924	1416
7800925	1416
7800926	1416
7800927	1416
7800928	1416
7800929	1416
7800930	1416
7800931	1416
7800932	1417
7800933	1417
7800934	1417
7800935	1417
7800936	1417
7800937	1417
7800938	1417
7800939	1417
7800940	1417
7800941	1417
7800942	1417
7800943	1417
7800944	1417
7800945	1417
7801000	1382
7801001	1382
7801002	1382
7801003	1382
7801004	1382
7801005	1382
7801006	1382
7801007	1382
7801008	1382
7801009	1382
7801010	1382
7801011	1382
7801012	1382

EDP Number	Page No.
7801014	1382
7801015	1382
7801016	1382
7801017	1382
7801018	1382
7801020	1382
7801021	1382
7801022	1382
7801023	1382
7801024	1382
7801025	1382
7801026	1382
7801027	1382
7801100	1379
7801101	1379
7801102	1379
7801103	1379
7801104	1379
7801105	1379
7801106	1379
7801107	1379
7801108	1379
7801109	1379
7801110	1379
7801111	1379
7801112	1379
7801113	1379
7801114	1379
7801115	1379
7801116	1379
7801117	1379
7801118	1379
7801119	1379
7801120	1379
7801121	1379
7801122	1379
7801123	1379
7801124	1379
7801125	1379
7801126	1379
7801127	1379
7801128	1379
7801129	1379
7801130	1379
7801131	1379
7801132	1379
7801133	1380
7801134	1380
7801135	1380
7801136	1380
7801137	1380
7801138	1380
7801139	1379
7801140	1379
7801141	1379
7801142	1379

EDP Number	Page No.
7801143	1380
7801144	1380
7801200	1381
7801201	1381
7801202	1381
7801203	1381
7801204	1381
7801205	1381
7801206	1381
7801207	1381
7801208	1381
7801209	1381
7801210	1381
7801211	1381
7801212	1381
7801213	1381
7801214	1381
7801215	1381
7801216	1381
7801217	1381
7801300	1378
7801301	1378
7801302	1378
7801303	1378
7801304	1378
7801305	1378
7801306	1378
7801307	1378
7801308	1378
7801309	1378
7801310	1378
7801320	1378
7801321	1378
7801323	1378
7801324	1378
7801325	1378
7801330	1378
7801332	1378
7801333	1378
7801334	1378
7801335	1378
7801336	1378
7801337	1378
7801338	1378
7801339	1378
7801340	1378
7801341	1378
7801342	1378
7801343	1378
7801344	1378
7801345	1378
7801346	1378
7801347	1378
7801348	1378
7801349	1378
7801350	1378

EDP Number	Page No.
7801351	1378
7801352	1378
7801353	1378
7801354	1378
7801355	1378
7801356	1378
7801400	1435
7801401	1435
7801402	1435
7801403	1435
7801404	1435
7801405	1435
7801406	1435
7801407	1435
7801419	1435
7801420	1435
7801421	1435
7801422	1435
7801423	1435
7801424	1435
7801425	1435
7801426	1435
7801427	1435
7801429	1435
7801430	1435
7801431	1435
7801432	1435
7801433	1435
7801434	1435
7801435	1435
7801436	1435
7801437	1435
7801439	1435
7801440	1435
7801441	1435
7801442	1435
7801443	1435
7801444	1435
7801445	1435
7801446	1435
7801447	1435
7801490	1436
7801490	1459
7801491	1436
7801491	1459
7801492	1436
7801492	1459
7801493	1436
7801493	1459
7801494	1436
7801494	1459
7801495	1436
7801495	1459
7801500	1423
7801500	1457
7801501	1423



EDP Number	Page No.
7801501	1457
7801502	1423
7801502	1457
7801503	1423
7801503	1457
7801504	1423
7801504	1457
7801505	1423
7801505	1457
7801506	1423
7801506	1457
7801507	1423
7801507	1457
7801508	1423
7801508	1457
7801509	1423
7801509	1457
7801510	1423
7801510	1457
7801511	1423
7801511	1457
7801512	1423
7801512	1457
7801520	1423
7801520	1457
7801521	1423
7801521	1457
7801522	1423
7801522	1457
7801523	1423
7801523	1457
7801524	1423
7801524	1457
7801525	1423
7801525	1457
7801526	1423
7801526	1457
7801527	1423
7801527	1457
7801528	1423
7801528	1457
7801529	1423
7801529	1457
7801530	1423
7801530	1457
7801531	1423
7801531	1457
7801532	1423
7801532	1457
7801600	1384
7801600	1454
7801601	1384
7801601	1454
7801602	1384
7801602	1454
7801603	1384

EDP Number	Page No.
7801603	1454
7801604	1384
7801604	1454
7801605	1384
7801605	1454
7801606	1384
7801606	1454
7801607	1384
7801607	1454
7801608	1384
7801608	1454
7801609	1384
7801609	1454
7801610	1384
7801610	1454
7801611	1384
7801611	1454
7801612	1384
7801612	1454
7801613	1384
7801613	1454
7801614	1384
7801614	1454
7801615	1384
7801615	1454
7801616	1384
7801616	1454
7801617	1384
7801617	1454
7801618	1384
7801618	1454
7801619	1384
7801619	1454
7801700	1412
7801700	1455
7801701	1412
7801701	1455
7801702	1412
7801702	1455
7801703	1412
7801703	1455
7801704	1412
7801704	1455
7801705	1412
7801705	1455
7801706	1412
7801706	1455
7801707	1412
7801707	1455
7801890	1488
7801891	1488
7801892	1488
7801893	1483
7801894	1483
7801895	1483
7801896	1483

EDP Number	Page No.
7801897	1488
7801900	1462
7801901	1462
7801902	1462
7801903	1462
7801904	1462
7801905	1462
7801910	1462
7801911	1462
7801912	1462
7801913	1462
7801914	1462
7801915	1462
7801916	1462
7801917	1462
7801918	1462
7801919	1462
7802000	1370
7802001	1370
7802002	1370
7802003	1370
7802004	1370
7802020	1374
7802021	1374
7802022	1374
7802023	1374
7802024	1374
7802089	1374
7802091	1374
7802093	1374
7802095	1374
7802500	1463
7802501	1463
7802502	1463
7802503	1463
7802504	1463
7802505	1463
7802506	1463
7802507	1463
7802508	1463
7802509	1463
7802510	1463
7802511	1463
7802512	1463
7802513	1463
7802514	1463
7802515	1463
7802516	1463
7802517	1463
7802518	1463
7802519	1463
7802520	1463
7802521	1463
7802522	1463
7802523	1463
7802524	1463

EDP Number	Page No.
7802525	1463
7802526	1463
7802527	1463
7802528	1463
7802529	1463
7802530	1463
7802531	1463
7802550	1464
7802551	1464
7802552	1464
7802553	1464
7802554	1464
7802555	1464
7802556	1464
7802557	1464
7802558	1464
7802559	1464
7802560	1464
7802561	1464
7802562	1464
7802563	1464
7802564	1464
7802565	1464
7802566	1464
7802567	1464
7802568	1464
7802569	1464
7802570	1464
7802571	1464
7802572	1464
7802573	1464
7802717	1351
7802718	1351
7802719	1351
7802720	1351
7802721	1351
7802722	1351
7802723	1351
7802724	1351
7802725	1351
7802726	1351
7802727	1351
7802728	1351
7802729	1351
7802730	1351
7802731	1351
7802732	1351
7802733	1351
7802734	1351
7802735	1351
7802736	1351
7802737	1351
7802738	1351
7802739	1351
7802740	1351
7802741	1351



EDP Numerical Index

EDP Number	Page No.
7802742	1351
7802743	1351
7802744	1351
7802745	1351
7802746	1351
7802747	1351
7802748	1351
7802749	1351
7802750	1352
7802751	1352
7802752	1352
7802753	1352
7802754	1352
7802755	1352
7802756	1352
7802757	1352
7802758	1352
7802759	1352
7802760	1352
7802761	1352
7802762	1352
7802763	1352
7802764	1352
7802765	1352
7802766	1352
7802767	1352
7802768	1352
7802769	1352
7802770	1352
7802771	1352
7802772	1352
7802773	1352
7802774	1352
7802775	1352
7802776	1352
7802777	1352
7802778	1352
7802779	1352
7802780	1351
7802781	1351
7802782	1351
7802783	1351
7802784	1351
7802785	1351
7802790	1351
7802791	1351
7802792	1351
7802793	1351
7802794	1351
7802795	1351
7802796	1351
7802797	1351
7802850	1391
7802851	1391
7802852	1391
7802900	1390

EDP Number	Page No.
7802901	1390
7802902	1390
7802903	1390
7802904	1390
7802905	1390
7802906	1390
7803001	1396
7803002	1396
7803003	1396
7803011	1397
7803012	1397
7803013	1397
7803100	1405
7803101	1405
7803102	1405
7803103	1405
7803104	1405
7803105	1405
7803106	1405
7803107	1405
7803108	1405
7803109	1405
7803110	1405
7803111	1405
7803112	1405
7803113	1405
7803114	1405
7803115	1405
7803117	1339
7803118	1339
7803119	1339
7803120	1339
7803121	1339
7803122	1339
7803123	1339
7803124	1339
7803125	1339
7803126	1339
7803127	1339
7803128	1339
7803129	1339
7803130	1339
7803131	1339
7803132	1339
7803133	1339
7803134	1339
7803135	1339
7803136	1339
7803137	1339
7803138	1339
7803139	1339
7803140	1339
7803141	1339
7803142	1339
7803143	1339
7803144	1339

EDP Number	Page No.
7803145	1339
7803146	1339
7803147	1339
7803148	1339
7803149	1339
7803150	1340
7803151	1340
7803152	1340
7803153	1340
7803154	1340
7803155	1340
7803156	1340
7803157	1340
7803158	1340
7803159	1340
7803160	1340
7803161	1340
7803162	1340
7803163	1340
7803164	1340
7803165	1340
7803166	1340
7803167	1340
7803168	1340
7803169	1340
7803170	1340
7803171	1340
7803172	1340
7803173	1340
7803174	1340
7803175	1340
7803176	1340
7803177	1340
7803178	1340
7803179	1340
7803180	1339
7803181	1339
7803182	1339
7803183	1339
7803184	1339
7803185	1339
7803190	1339
7803191	1339
7803192	1339
7803193	1339
7803194	1339
7803195	1339
7803196	1339
7803197	1339
7803210	1343
7803211	1343
7803212	1343
7803213	1343
7803214	1343
7803215	1343
7803216	1343

EDP Number	Page No.
7803217	1343
7803218	1343
7803219	1343
7803220	1343
7803221	1343
7803222	1343
7803223	1343
7803224	1343
7803225	1343
7803226	1343
7803227	1343
7803228	1343
7803229	1343
7803230	1343
7803231	1343
7803232	1343
7803233	1343
7803234	1343
7803235	1343
7803236	1343
7803237	1343
7803238	1343
7803239	1343
7803240	1343
7803241	1343
7803242	1343
7803243	1343
7803244	1344
7803245	1344
7803246	1344
7803247	1344
7803248	1344
7803249	1344
7803250	1344
7803251	1344
7803252	1344
7803253	1344
7803254	1344
7803255	1344
7803256	1344
7803257	1344
7803258	1344
7803259	1344
7803260	1344
7803261	1344
7803262	1344
7803263	1344
7803264	1344
7803265	1344
7803266	1344
7803267	1344
7803268	1344
7803269	1344
7803270	1344
7803271	1344
7803272	1344



EDP Number	Page No.
7803273	1344
7803274	1344
7803275	1344
7803276	1344
7803277	1344
7803278	1344
7803279	1344
7803290	1343
7803291	1343
7803292	1343
7803293	1343
7803294	1343
7803295	1343
7803296	1344
7803297	1344
7803300	1343
7803301	1344
7803302	1344
7803303	1344
7803304	1344
7803305	1344
7803306	1344
7803307	1344
7803308	1344
7803309	1344
7803311	1347
7803312	1347
7803313	1347
7803314	1347
7803315	1347
7803316	1347
7803317	1347
7803318	1347
7803319	1347
7803320	1347
7803321	1347
7803322	1347
7803323	1347
7803324	1347
7803325	1347
7803326	1347
7803327	1347
7803328	1347
7803329	1347
7803330	1347
7803331	1347
7803332	1347
7803333	1347
7803334	1347
7803335	1347
7803336	1347
7803337	1347
7803338	1347
7803339	1347
7803340	1347
7803341	1347

EDP Number	Page No.
7803342	1347
7803343	1347
7803344	1347
7803345	1347
7803346	1347
7803347	1347
7803348	1347
7803349	1347
7803350	1348
7803351	1348
7803352	1348
7803353	1348
7803354	1348
7803355	1348
7803356	1348
7803357	1348
7803358	1348
7803359	1348
7803360	1348
7803361	1348
7803362	1348
7803363	1348
7803364	1348
7803365	1348
7803366	1348
7803367	1348
7803368	1348
7803369	1348
7803370	1348
7803371	1348
7803372	1348
7803373	1348
7803374	1348
7803375	1348
7803376	1348
7803377	1348
7803378	1348
7803379	1348
7803390	1347
7803391	1347
7803392	1347
7803393	1347
7803394	1347
7803395	1347
7803396	1347
7803397	1347
7803551	1485
7803552	1485
7803553	1485
7803554	1485
7803600	1430
7803601	1430
7803602	1430
7803603	1430
7803604	1430
7803605	1430

EDP Number	Page No.
7803606	1430
7803607	1430
7803608	1430
7803609	1430
7803610	1430
7803611	1430
7803612	1430
7803613	1430
7803614	1430
7803615	1430
7803616	1430
7803617	1430
7803618	1430
7803619	1430
7803620	1430
7803621	1430
7803622	1430
7803623	1430
7803624	1430
7803625	1430
7803626	1430
7803627	1430
7803628	1430
7803629	1430
7803630	1430
7803700	1400
7803701	1400
7803702	1401
7803703	1401
7803706	1401
7803707	1401
7803708	1401
7803709	1401
7808000	1371
7808000	1428
7808001	1428
7808002	1428
7808096	1354
7808096	1368
7808100	1362
7808102	1362
7808104	1362
7808105	1424
7808107	1386
7808107	1393
7808108	1362
7808109	1386
7808109	1393
7808110	1362
7808110	1398
7808110	1402
7808111	1362
7808111	1424
7808112	1413
7808112	1424
7808113	1362

EDP Number	Page No.
7808113	1413
7808113	1424
7808114	1354
7808114	1368
7808115	1386
7808115	1393
7808116	1413
7808117	1439
7808117	1450
7808118	1439
7808118	1450
7808119	1439
7808119	1450
7808120	1439
7808120	1450
7808121	1439
7808121	1450
7808122	1439
7808122	1450
7808123	1439
7808123	1450
7808124	1439
7808124	1450
7808125	1431
7808129	1402
7808129	1406
7808130	1376
7808131	1371
7808132	1393
7808132	1402
7808133	1393
7808133	1402
7808134	1393
7808134	1402
7808135	1354
7808135	1368
7808136	1354
7808137	1354
7808137	1368
7808138	1354
7808138	1368
7808139	1354
7808140	1376
7808141	1376
7808142	1431
7808143	1431
7808150	1386
7808150	1424
7808151	1376
7808151	1386
7808151	1406
7808151	1413
7808203	1362
7808203	1439
7808203	1450
7808204	1362



EDP Numerical Index

EDP Number	Page No.
7808204	1439
7808204	1450
7808205	1362
7808205	1398
7808205	1402
7808205	1424
7808205	1439
7808205	1450
7808205	1507
7808207	1413
7808207	1439
7808207	1450
7808208	1362
7808208	1376
7808208	1402
7808208	1406
7808208	1413
7808208	1424
7808208	1439
7808208	1450
7808208	1503
7808209	1362
7808209	1376
7808209	1413
7808209	1424
7808209	1439
7808209	1450
7808211	1431
7808212	1439
7808212	1450
7808223	1354
7808223	1368
7808225	1354
7808225	1386
7808225	1393
7808226	1354
7808226	1368
7808228	1354
7808228	1386
7808228	1393
7808229	1354
7808229	1368
7808231	1431
7808282	1335
7808283	1335
7808284	1335
7810000	1428
7811009	1413
7811010	1385
7811010	1392
7811013	1413
7811014	1385
7811014	1392
7811015	1385
7811015	1392
7811016	1413

EDP Number	Page No.
7811017	1385
7811017	1392
7811018	1385
7811018	1392
7811019	1385
7811019	1392
7811020	1385
7811020	1392
7811021	1385
7811021	1392
7811022	1385
7811022	1392
7811023	1385
7811023	1392
7811024	1385
7811024	1392
7811046	1385
7811046	1392
7811048	1385
7811048	1392
7811049	1385
7811049	1392
7811076	1398
7811076	1402
7811087	1406
7811625	1398
7811625	1402
7812017	1413
7812018	1413
7812019	1413
7812020	1424
7812022	1424
7812025	1385
7812025	1392
7812029	1385
7812029	1392
7812033	1385
7812033	1392
7812058	1385
7812058	1392
7812060	1371
7812062	1375
7812064	1375
7812075	1398
7812075	1402
7812086	1375
7812088	1406
7812090	1406
7812092	1424
7812624	1398
7812624	1402
7813008	1413
7813011	1413
7813014	1413
7813020	1424
7813022	1424

EDP Number	Page No.
7813025	1385
7813025	1392
7813026	1385
7813026	1392
7813028	1385
7813028	1392
7813032	1385
7813032	1392
7813033	1385
7813033	1392
7813034	1385
7813034	1392
7813035	1385
7813035	1392
7813036	1385
7813036	1392
7813038	1385
7813038	1392
7813053	1385
7813053	1392
7813054	1385
7813054	1392
7813055	1385
7813055	1392
7813057	1385
7813057	1392
7813058	1385
7813058	1392
7813061	1371
7813062	1375
7813063	1375
7813073	1398
7813073	1402
7813074	1398
7813074	1402
7813077	1385
7813077	1392
7813078	1385
7813078	1392
7813079	1385
7813079	1392
7813080	1385
7813080	1392
7813081	1385
7813081	1392
7813082	1385
7813082	1392
7813088	1406
7813089	1406
7813092	1424
7813094	1406
7813095	1406
7813096	1406
7813623	1398
7813623	1402
7814008	1413

EDP Number	Page No.
7814009	1413
7814011	1413
7814018	1413
7814019	1413
7814020	1424
7814022	1424
7814024	1385
7814024	1392
7814025	1385
7814025	1392
7814026	1385
7814026	1392
7814029	1385
7814029	1392
7814030	1413
7814032	1385
7814032	1392
7814033	1385
7814033	1392
7814035	1385
7814035	1392
7814038	1385
7814038	1392
7814039	1385
7814039	1392
7814053	1385
7814053	1392
7814054	1385
7814054	1392
7814055	1385
7814055	1392
7814057	1385
7814057	1392
7814058	1385
7814058	1392
7814061	1371
7814062	1375
7814063	1375
7814064	1375
7814073	1398
7814073	1402
7814074	1398
7814074	1402
7814077	1385
7814077	1392
7814078	1385
7814078	1392
7814079	1385
7814079	1392
7814080	1385
7814080	1392
7814081	1385
7814081	1392
7814082	1385
7814082	1392
7814088	1406



EDP Number	Page No.
7814089	1406
7814092	1424
7814094	1406
7814095	1406
7814096	1406
7814101	1368
7814103	1368
7814106	1368
7814109	1368
7814111	1368
7814621	1398
7814621	1402
7815010	1413
7815012	1413
7815015	1413
7815021	1424
7815023	1424
7815027	1385
7815027	1392
7815031	1385
7815031	1392
7815050	1413
7815051	1413
7815052	1413
7815056	1385
7815056	1392
7815101	1368
7815103	1368
7815106	1368
7815109	1368
7815111	1368
7816021	1424
7816023	1424
7816027	1385
7816027	1392
7816031	1385
7816031	1392
7816034	1385
7816034	1392
7816040	1385
7816040	1392
7816041	1385
7816041	1392
7816042	1385
7816042	1392
7816043	1385
7816043	1392
7816044	1385
7816044	1392
7816050	1413
7816051	1413
7816052	1413
7816056	1385
7816056	1392
7816073	1398
7816073	1402

EDP Number	Page No.
7816085	1375
7816091	1406
7816093	1424
7816620	1398
7816620	1402
7817001	1362
7817002	1362
7817003	1362
7817004	1362
7817005	1362
7817006	1362
7817007	1362
7818001	1362
7818002	1362
7818003	1362
7818004	1362
7818005	1362
7818006	1362
7818007	1362
7819061	1371
7820010	1438
7820011	1438
7820012	1438
7820013	1438
7820014	1438
7820015	1438
7820016	1438
7820018	1438
7820019	1438
7820020	1438
7820021	1438
7820022	1438
7820023	1438
7820024	1438
7820025	1438
7820026	1438
7820030	1438
7820031	1438
7820032	1438
7820033	1438
7820034	1438
7820035	1438
7820036	1438
7820039	1438
7820040	1438
7820041	1438
7820042	1438
7820043	1438
7820044	1438
7820045	1438
7820046	1438
7820047	1438
7820048	1438
7820049	1438
7820050	1438
7820051	1438

EDP Number	Page No.
7820052	1438
7820053	1438
7820054	1438
7820055	1438
7820056	1438
7820060	1438
7820061	1438
7820062	1438
7820063	1438
7820064	1438
7820065	1438
7820066	1438
7820200	1447
7820201	1447
7820202	1447
7820203	1447
7820204	1447
7820205	1447
7820206	1447
7820207	1447
7820208	1447
7820209	1447
7820210	1447
7820211	1447
7820212	1447
7820213	1447
7820214	1447
7820215	1447
7820216	1447
7820217	1447
7820218	1447
7820219	1447
7820220	1447
7820221	1447
7820222	1447
7820223	1448
7820224	1448
7820225	1448
7820226	1448
7820227	1448
7820228	1448
7820229	1448
7820230	1448
7820231	1448
7820232	1448
7820233	1448
7820234	1448
7820235	1448
7820236	1448
7820237	1448
7820250	1448
7820251	1448
7820252	1448
7820253	1448
7820254	1448
7820255	1448

EDP Number	Page No.
7820256	1448
7820257	1448
7820258	1448
7820259	1448
7820260	1448
7820261	1448
7820262	1448
7820263	1449
7820264	1449
7820265	1449
7820266	1449
7820267	1449
7820268	1449
7820269	1449
7820270	1449
7820271	1449
7820272	1449
7820273	1449
7820274	1449
7820275	1449
7820276	1449
7820277	1449
7820278	1449
7820279	1449
7820280	1449
7820281	1449
7820282	1449
7820283	1449
7820284	1449
7820285	1449
7820286	1449
7820287	1449
7820300	1449
7820301	1449
7820302	1449
7820303	1449
7820304	1449
7820305	1449
7820306	1449
7820307	1449
7820308	1449
7820309	1449
7820310	1449
7820311	1449
7820312	1449
7820313	1449
7820314	1449
7820350	1447
7820351	1447
7820352	1447
7820353	1447
7820354	1447
7820355	1447
7820356	1447
7820357	1447
7820358	1447



EDP Numerical Index

EDP Number	Page No.
7820359	1447
7820360	1447
7820361	1447
7820362	1447
7820363	1447
7820364	1447
7820365	1447
7820366	1447
7820367	1447
7820368	1447
7820369	1447
7820370	1447
7820371	1447
7820372	1448
7820373	1448
7820374	1448
7820375	1448
7820400	1448
7820401	1448
7820402	1448
7820403	1448
7820404	1448
7820405	1448
7820406	1448
7820407	1448
7820408	1448
7820409	1448
7820410	1448
7820411	1448
7820412	1448
7820413	1448
7820414	1449
7820415	1449
7820416	1449
7820417	1449
7820418	1449
7820419	1449
7820420	1449
7820421	1449
7820422	1449
7820423	1449
7820424	1449
7820425	1449
7820450	1449
7820451	1449
7820452	1449
7820500	1431
7820501	1431
7820502	1431
7821062	1375
7821086	1375
7821088	1406
7821090	1406
7823064	1353
7823065	1353
7823066	1353

EDP Number	Page No.
7823067	1353
7823068	1353
7823069	1353
7823071	1353
7823072	1353
7823073	1353
7823075	1353
7823097	1353
7823098	1353
7823163	1353
7823164	1353
7823165	1353
7823166	1353
7823167	1353
7823168	1353
7823169	1353
7823171	1353
7823172	1353
7823173	1353
7823175	1353
7823197	1353
7823263	1353
7823264	1353
7823265	1353
7823266	1353
7823267	1353
7823268	1353
7823269	1353
7823271	1353
7823272	1353
7823273	1353
7823275	1353
7823297	1353
7824035	1385
7824035	1392
7824036	1385
7824036	1392
7824083	1413
7824084	1413
7825008	1413
7825009	1413
7825011	1413
7825017	1413
7825018	1413
7825019	1413
7825020	1424
7825022	1424
7825024	1385
7825024	1392
7825024	1392
7825025	1385
7825025	1392
7825026	1385
7825026	1392
7825029	1385
7825029	1392

EDP Number	Page No.
7825032	1385
7825032	1392
7825033	1385
7825033	1392
7825035	1385
7825035	1392
7825039	1385
7825039	1392
7825057	1385
7825057	1392
7825058	1385
7825058	1392
7825062	1375
7825063	1375
7825073	1398
7825073	1402
7825074	1398
7825073	1402
7825088	1406
7825089	1406
7825092	1424
7825622	1398
7825622	1402
7826008	1413
7826011	1413
7826014	1413
7826020	1424
7826022	1424
7826025	1385
7826025	1392
7826026	1385
7826026	1392
7826029	1385
7826029	1392
7826032	1385
7826032	1392
7826057	1385
7826057	1392
7826062	1375
7826063	1375
7826092	1424
7827020	1424
7827022	1424
7827025	1385
7827025	1392
7827026	1385
7827026	1392
7827028	1385
7827028	1392
7827032	1385
7827032	1392
7827033	1385
7827033	1392
7827057	1385
7827057	1392
7827058	1385

EDP Number	Page No.
7827058	1392
7827062	1375
7827063	1375
7827088	1406
7827092	1424
7828020	1424
7828022	1424
7828025	1385
7828025	1392
7828026	1385
7828026	1392
7828028	1385
7828028	1392
7828032	1385
7828032	1392
7828033	1385
7828033	1392
7828057	1385
7828057	1392
7828058	1385
7828058	1392
7828062	1375
7828063	1375
7828088	1406
7828092	1424
7829064	1353
7829065	1353
7829066	1353
7829067	1353
7829068	1353
7829069	1353
7829071	1353
7829072	1353
7829073	1353
7829075	1353
7829097	1353
7829098	1353
7829994	1465
7829995	1465
7829996	1465
7829997	1465
7829998	1465
7830004	1465
7830005	1465
7830006	1465
7830007	1465
7830008	1465
7830009	1465
7830010	1465
7830011	1465
7830012	1465
7830013	1465
7830014	1465
7830015	1465
7830016	1465
7830017	1465



EDP Number	Page No.
7830018	1465
7830019	1465
7830020	1465
7830021	1465
7830022	1465
7830023	1465
7830054	1466
7830056	1466
7830058	1466
7830059	1466
7830061	1466
7830064	1466
7830065	1466
7830067	1466
7830069	1466
7830070	1466
7830071	1466
7830074	1466
7830094	1469
7830095	1469
7830096	1469
7830097	1469
7830104	1469
7830105	1469
7830106	1469
7830107	1469
7830108	1469
7830109	1469
7830110	1469
7830111	1469
7830112	1469
7830113	1469
7830114	1469
7830115	1469
7830116	1469
7830117	1469
7830118	1469
7830119	1469
7830120	1469
7830121	1470
7830122	1470
7830123	1470
7830124	1470
7830125	1470
7830126	1470
7830127	1470
7830128	1470
7830129	1470
7830200	1473
7830201	1473
7830202	1473
7830203	1473
7830250	1476
7830251	1476
7830252	1476
7830253	1476

EDP Number	Page No.
7830261	1477
7830262	1477
7830263	1477
7830270	1475
7830271	1475
7830272	1475
7830273	1475
7830281	1476
7830282	1476
7830283	1476
7830300	1477
7830301	1477
7830302	1477
7830303	1477
7830349	1473
7830350	1473
7830351	1473
7830352	1473
7830353	1473
7830354	1473
7830355	1473
7830356	1473
7830369	1474
7830370	1474
7830371	1474
7830372	1474
7830373	1474
7830374	1474
7830375	1474
7830376	1474
7830400	1471
7830401	1471
7830402	1471
7830403	1471
7830404	1471
7830411	1471
7830412	1471
7830413	1471
7830414	1471
7830450	1472
7830451	1472
7830452	1472
7830453	1472
7830454	1472
7830461	1472
7830462	1472
7830463	1472
7830464	1472
7831140	1330
7831145	1330
7831150	1330
7831155	1330
7831160	1330
7831165	1330
7831167	1330
7831170	1330

EDP Number	Page No.
7831175	1330
7831180	1330
7831185	1330
7831187	1330
7831190	1330
7831195	1330
7831200	1330
7831205	1330
7831207	1330
7831210	1330
7831215	1330
7831220	1330
7831224	1330
7831225	1330
7831230	1331
7831235	1331
7831240	1331
7831245	1331
7831250	1331
7831254	1331
7831351	1330
7831352	1330
7831353	1330
7831354	1330
7831355	1330
7831356	1331
7831440	1332
7831445	1332
7831450	1332
7831455	1332
7831460	1332
7831465	1332
7831467	1332
7831470	1332
7831475	1332
7831480	1332
7831485	1332
7831487	1332
7831490	1332
7831495	1332
7831500	1332
7831505	1332
7831507	1332
7831510	1332
7831515	1332
7831520	1332
7831524	1332
7831525	1332
7831530	1332
7831535	1332
7831540	1333
7831545	1333
7831550	1333
7831554	1333
7831740	1334
7831745	1334

EDP Number	Page No.
7831750	1334
7831755	1334
7831760	1334
7831765	1334
7831767	1334
7831770	1334
7831775	1334
7831780	1334
7831785	1334
7831787	1334
7831790	1334
7831795	1334
7831800	1334
7831805	1334
7831807	1334
7831810	1334
7831815	1334
7831820	1334
7831824	1334
7831825	1334
7831830	1334
7831835	1334
7831840	1334
7831845	1334
7831850	1334
7831854	1334
7832000	1443
7832001	1443
7832002	1443
7832003	1443
7832004	1443
7832005	1443
7832006	1443
7832007	1443
7832019	1443
7832020	1443
7832021	1443
7832022	1443
7832023	1443
7832024	1443
7832025	1443
7832026	1443
7832027	1443
7832029	1443
7832030	1443
7832031	1443
7832032	1443
7832033	1443
7832034	1443
7832035	1443
7832036	1443
7832037	1443
7832039	1443
7832040	1443
7832041	1443
7832042	1443



EDP Numerical Index

EDP Number	Page No.
7832043	1443
7832044	1443
7832045	1443
7832046	1443
7832047	1443
7832090	1444
7832090	1460
7832091	1444
7832091	1460
7832092	1444
7832092	1460
7832093	1444
7832093	1460
7832094	1444
7832094	1460
7832095	1444
7832095	1460
7832096	1444
7832096	1460
7832100	1365
7832101	1365
7832102	1365
7832103	1365
7832104	1365
7832105	1365
7832106	1365
7832107	1365
7832108	1365
7832109	1365
7832110	1365
7832111	1367
7832112	1367
7832113	1367
7832114	1367
7832115	1367
7832116	1367
7832117	1367
7834001	1486
7834002	1486
7834003	1486
7834004	1486
7834011	1486
7834012	1486
7834013	1486
7834014	1486
7834994	1467
7834995	1467
7834996	1467
7834997	1467
7834998	1467
7834999	1467
7835000	1467
7835001	1467
7835002	1467
7835003	1467
7835004	1467
7835005	1467
7835006	1467
7835007	1467

EDP Number	Page No.
7835008	1467
7835009	1467
7835010	1467
7835011	1467
7835012	1467
7835013	1467
7835014	1468
7835015	1468
7835016	1468
7835017	1468
7835018	1468
7835019	1468
7835020	1468
7835021	1468
7835022	1468
7835023	1468
7835024	1468
7835025	1468
7835026	1468
7835027	1468
7835028	1468
7835029	1468
7835030	1468
7835031	1468
7835032	1468
7835033	1468
7835034	1468
7835035	1468
7835036	1468
7835037	1468
7835038	1468
7835039	1468
7835040	1468
792	698
79910	1511
79911	1511
79912	1511
79913	1511
79917	1511
79918	1511
79919	1511
79920	1511
79921	1511
79922	1512
79923	1512
79924	1511
79925	1511
79926	1511
79960	1511
79961	1511
8003000	717
8003600	717
8005400	717
8005700	717
8006900	717
8007200	717
8007800	717
800-8001	1103
800-8001-30	1104

EDP Number	Page No.
800-8002	1103
800-8002-30	1104
800-8003	1103
800-8003-30	1104
800-8004	1103
800-8004-30	1104
800-8005	1103
800-8005-30	1104
800-8006	1103
800-8006-30	1104
800-8007	1103
800-8007-30	1104
800-8008	1103
800-8008-30	1104
800-8009-30	1104
800-8010	1103
800-8010-30	1104
800-8011	1103
800-8011-30	1104
800-8012	1103
800-8012-30	1104
800-8013	1103
800-8013-30	1104
800-8014	1103
800-8014-30	1104
800-8015	1103
800-8015-30	1104
800-8016	1103
800-8016-30	1104
800-8017	1103
800-8017-30	1104
800-8018	1103
800-8018-30	1104
800-8019	1103
800-8019-30	1104
800-8020	1103
800-8020-30	1104
8008100	717
8008626	1503
8008700	717
8008747	1503
8008748	1503
8009000	717
8009023	1501
8009063	1503
8010900	717
801-1000	1089
801-1000-60	1089
801-1000-60-EC	1089
801-1000-EC	1089
8011200	717
801-1250	1089
801-1250-60	1089
801-1250-60-EC	1089
801-1250-EC	1089
8011800	717
801-1875	1089
801-1875-60	1089
801-1875-60-EC	1089

EDP Number	Page No.
801-1875-EC	1089
8012100	717
801-2362	1089
801-2362-EC	1089
801-2500	1089
801-2500-EC	1089
8013000	717
801-3125	1089
801-3125-60	1089
801-3125-60-EC	1089
801-3125-EC	1089
8013300	717
8013600	717
8013700	717
801-3750	1089
801-3750-60	1089
801-3750-60-EC	1089
801-3750-EC	1089
801-4375	1089
801-4375-60	1089
801-4375-60-EC	1089
801-4375-EC	1089
801-5000	1089
801-5000-60	1089
801-5000-60-EC	1089
801-5000-EC	1089
801-5001	1089
801-5001-60	1089
801-5001-60-EC	1089
801-5001-EC	1089
8015400	717
8015700	717
8015800	717
8015900	717
801-6250	1089
801-6250-60	1089
801-6250-60-EC	1089
801-6250-EC	1089
8017000	717
8017400	717
8017500	717
801-7500	1089
801-7500-60	1089
801-7500-60-EC	1089
801-7500-EC	1089
801-7501	1089
801-7501-60	1089
801-7501-60-EC	1089
801-7501-EC	1089
8018000	717
8018400	717
8019000	703
8020000	703
802-1250	1089
802-1250-60	1089
802-1875	1089
802-1875-60	1089
802-2362	1089
802-2500	1089



EDP Number	Page No.
802-3125	1089
802-3125-60	1089
802-3750	1089
802-3750-60	1089
802-4375	1089
802-4375-60	1089
802-5000	1089
802-5000-60	1089
802-6250	1089
802-6250-60	1089
802-7500	1089
802-7500-60	1089
803-2362	1089
803-2500	1089
8033300	1501
803-3750	1089
803-3750-60	1089
803-5000	1089
803-5000-60	1089
803-5001	1089
803-5001-60	1089
803-6250	1089
803-6250-60	1089
803-7500	1089
803-7500-60	1089
803-7501	1089
803-7501-60	1089
803-7502	1089
803-7502-60	1089
804-2362	1091
804-2500	1091
804-3125	1091
804-3125-60	1091
804-3750	1091
804-3750-60	1091
804-5000	1091
804-5000-60	1091
804-5001	1091
804-5001-60	1091
804-6250	1091
804-6250-60	1091
804-7500	1091
804-7500-60	1091
804-7501	1091
804-7501-60	1091
805-2362	1091
805-2363	1091
805-2364	1091
805-2500	1091
805-2501	1091
805-2502	1091
805-3750	1091
805-3750-60	1091
805-5000	1091
805-5000-60	1091
805-6250	1091
805-6250-60	1091
8059301	1501
806-2362	1091

EDP Number	Page No.
806-2500	1091
806-3750	1091
806-3750-60	1091
806-5000	1091
806-5000-60	1091
806-6250	1091
806-6250-60	1091
806-7500	1091
806-7500-60	1091
8070255	1500
8070256	1500
8070257	1500
8070265	1502
8070266	1502
8070267	1502
807-2362	1093
807-2500	1093
807-3125	1093
807-3125-60	1093
807-3750	1093
807-3750-60	1093
807-5000	1093
807-5000-60	1093
807-6250	1093
807-6250-60	1093
807-7500	1093
807-7500-60	1093
8080801	1503
808-1000	1093
808-1000-60	1093
808-1250	1093
808-1250-60	1093
808-1875	1093
808-1875-60	1093
808-2362	1093
808-2500	1093
808-3125	1093
808-3125-60	1093
808-3750	1093
808-3750-60	1093
808-5000	1093
808-5000-60	1093
808-6250	1093
808-6250-60	1093
808-7500	1093
808-7500-60	1093
8091278	1501
815-0001	1107
815-0001-30	1107
815-0002	1107
815-0002-30	1107
815-0003	1107
815-0003-30	1107
815-0004	1107
815-0004-30	1107
815-0005	1107
815-0005-30	1107
815-0006	1107
815-0006-30	1107

EDP Number	Page No.
815-0007	1107
815-0007-30	1107
815-0008	1107
815-0008-30	1107
815-0009	1107
815-0009-30	1107
820-0001	1109
820-0001-30	1109
820-0002	1109
82000021	830
820-0002-30	1109
820-0003	1109
820-0003-30	1109
820-0004	1109
820-0004-30	1109
820-0005	1109
820-0005-30	1109
820-0006	1109
820-0006-30	1109
820-0007	1109
820-0007-30	1109
820-0008	1109
820-0008-30	1109
820-0009	1109
820-0009-30	1109
820-0010	1109
820-0010-30	1109
820-0011	1109
820-0011-30	1109
820-0012	1109
820-0012-30	1109
82000221	830
82000421	830
82000621	830
82000821	830
82001021	830
82001221	830
82001421	830
82001621	830
82001821	830
82002021	830
82002221	830
82002421	830
82002621	830
82002821	830
82003021	830
82003221	830
82003421	830
82004421	830
82004621	830
82004821	830
82005021	830
82005221	830
82005421	830
82010021	838
82010121	838
82010221	838
82010321	838
82010421	838

EDP Number	Page No.
82010521	838
82010621	838
82010721	838
82020021	840
82020121	840
82020221	840
82020321	840
82020421	840
82020521	840
82020621	840
82020721	840
82100021	832
82100221	832
82100421	832
82100621	832
82100821	832
82101021	832
82101221	832
82101421	832
82101621	832
82101821	832
82102021	832
82102221	832
82102421	832
82102621	832
82102821	832
82103021	832
82103221	832
82103421	832
82103621	832
82103821	832
82104021	832
82104221	832
82104421	832
82104621	832
82104821	832
82105021	832
82105221	832
82105421	832
82105621	832
82105821	832
82106021	832
82106221	832
82106421	832
82106621	832
82106821	832
82107021	832
82107221	832
82107421	832
82107621	832
82107821	832
82108021	832
82108221	832
82108421	832
82108621	832
82108821	832
82109021	832
82109221	832
82109421	832





EDP Numerical Index

EDP Number	Page No.
82109621	832
82109821	832
82109921	832
82200021	834
82200221	834
82200421	834
82200621	834
82200821	834
82201021	834
82201221	834
82201421	834
82201621	834
82201821	834
82202021	834
82202221	834
82202421	834
82202621	834
82202821	834
82203021	834
82203221	834
82203421	834
82203621	834
82203821	834
82204021	834
82204221	834
82204421	834
82204621	834
82204821	834
82205021	834
82205221	834
82205421	834
82300021	836
82300121	836
82300221	836
82300321	836
82300421	836
82300521	836
82300621	836
82300721	836
82300821	836
82300921	836
82301021	836
82301121	836
82301221	836
82301321	836
82301421	836
82301521	836
8304701	442
8304711	442
8304712	442
8304721	442
8304723	442
8304732	442
8304734	442
8304743	442
8304744	442
8304753	442
8304754	442
8304773	442

EDP Number	Page No.
8304775	442
8304784	442
8304786	442
8315054	466
8315055	466
8315060	466
8315061	466
8315066	466
8315067	466
8315072	466
8315073	466
8315084	466
8315085	466
8315096	466
8315097	466
8315102	466
8315103	466
8315114	466
8315115	466
8315120	466
8315121	466
8315126	466
8315127	466
8315254	509
8315255	509
8315260	509
8315261	509
8315266	509
8315267	509
8315272	509
8315273	509
8315284	509
8315285	509
8315296	509
8315297	509
8315302	509
8315303	509
8315314	509
8315315	509
8315633	467
8315639	467
8315645	467
8315649	467
8315653	467
8315657	467
8315661	467
8330049	663
8330055	663
8330061	663
8330067	663
8330073	663
8330085	663
8330087	663
8330097	663
8330099	663
8330101	663
8330115	663
8330117	663
8330119	663

EDP Number	Page No.
8330121	663
8330123	663
8330125	663
8330131	663
8330133	663
8330139	663
8330141	663
8330147	663
8330149	663
8331000	433
8331001	433
8331003	433
8331004	433
8331005	433
8331006	433
8331007	433
8331008	433
8331009	433
8331010	433
8331011	433
8331015	433
8331016	433
8331018	433
8331019	433
8331020	433
8331021	433
8331022	433
8331024	433
8331025	433
849-1000	1093
849-1000-60	1093
849-2362	1093
849-2500	1093
849-3750	1093
849-3750-60	1093
849-5000	1093
849-5000-60	1093
849-6250	1093
849-6250-60	1093
849-7500	1093
849-7500-60	1093
850-1000	1095
850-1000-60	1095
8502010	951
8502015	951
8502020	951
8502025	951
8502030	951
8502035	951
8502040	951
8502045	951
8502050	951
8502055	951
8502060	951
8502065	951
8502070	951
8502075	951
8502080	951
8502085	951

EDP Number	Page No.
8502090	951
8502095	951
8502100	951
8502105	951
8502110	951
8502115	951
8502120	951
8502130	951
8502140	951
8502150	951
8502160	951
850-2362	1095
850-2500	1095
850-3750	1095
850-3750-60	1095
850-5000	1095
850-5000-60	1095
850-6250	1095
850-6250-60	1095
850-7500	1095
850-7500-60	1095
851	698
851-3125	1095
851-3125-60	1095
851-5000	1095
851-5000-60	1095
851-6250	1095
851-6250-60	1095
851-7500	1095
851-7500-60	1095
852	698
852-2362	1095
852-2500	1095
852-3750	1095
852-3750-60	1095
852-5000	1095
852-5000-60	1095
8525210	908
8525211	908
8525212	908
8525213	908
8525214	908
8525215	908
8525216	908
8525217	908
8525218	908
8525219	908
8525220	908
8525221	908
8525222	908
8525223	908
8525224	908
8525225	908
8525226	908
8525227	908
8525228	908
8525229	908
8525230	908
8525304	908



EDP Number	Page No.
8525305	908
8525306	908
8525307	908
8525308	908
8525309	908
8525310	908
8525622	908
8525623	908
8525633	908
8525634	908
8525654	908
8525655	908
8525656	908
8525657	908
8525854	908
8525855	908
8525856	908
8525857	908
8525877	908
8525903	908
8525904	908
8525905	908
8525956	908
8525957	908
8526210	909
8526211	909
8526220	909
8526221	909
8526222	909
8526223	909
8526231	909
8526232	909
8526233	909
8526241	909
8526242	909
8526243	909
8526245	909
852-6250	1095
852-6250-60	1095
8526261	909
8526262	909
8526263	909
8526265	909
8526410	909
8526411	909
8526420	909
8526421	909
8526422	909
8526423	909
8526431	909
8526432	909
8526433	909
8526441	909
8526442	909
8526443	909
8526445	909
8526461	909
8526462	909
8526463	909

EDP Number	Page No.
8526465	909
852-7500	1095
852-7500-60	1095
8528822	933
8528823	933
8528826	933
8528862	933
8528863	933
8528866	933
8528902	933
8528903	933
8528906	933
8528952	933
8528953	933
8528956	933
853	698
8533249	935
8533250	935
8533251	935
8533252	935
8533253	935
8533254	935
8533255	935
8533256	935
8533257	935
8533258	935
8533259	935
8533260	935
8533261	935
8533262	935
8533263	935
8533264	935
8533265	935
8533266	935
8533267	935
8533268	935
8533269	935
8533270	935
8533300	937
8533301	937
8533302	937
8533303	937
8533304	937
8533305	937
8533306	937
8533307	937
8533308	937
8533309	937
8533310	937
8533311	937
8533350	939
8533351	939
8533352	939
8533353	939
8533354	939
8533355	939
8533356	939
8533357	939
8533358	939

EDP Number	Page No.
8533359	939
8533360	939
8533361	939
8533362	939
8533363	939
8533364	939
8533365	939
8533366	939
8533400	941
8533401	941
8533402	941
8533403	941
8533404	941
8533405	941
8555320	928
8555321	930
8555322	930
8555323	930
8555324	930
8555325	930
8555326	930
8555360	928
8555361	930
8555362	930
8555363	930
8555364	930
8555365	930
8555366	930
8555400	928
8555401	930
8555402	930
8555403	930
8555404	930
8555405	930
8555406	930
8555407	930
8555450	928
8555716	931
8555720	931
8555725	931
8555830	831
8555840	831
8555850	831
8555860	831
8555880	831
8555900	831
8555920	831
8555960	831
8556000	831
8556010	831
8556050	833
8556060	833
8556070	833
8556080	833
8556090	833
8556100	833
8556110	833
8556120	833
8556130	833

EDP Number	Page No.
8556140	833
8556150	833
8556160	833
8556170	833
8556180	833
8556190	833
8556200	833
8556210	833
8556220	833
8556230	833
8556240	833
8556250	833
8556260	833
8556270	833
8556280	833
8556290	833
8556300	833
8556310	833
8556320	839
8556321	840
8556322	839
8556323	840
8556324	839
8556325	840
8556326	839
8556327	840
8556328	839
8556329	840
8556330	839
8556331	840
8556332	839
8556333	840
8556334	839
8556335	840
8556430	835
8556440	835
8556450	835
8556460	835
8556480	835
8556500	835
8556520	835
8556618	837
8556630	837
8556724	837
8556740	837
8556830	837
8556850	837
8556936	837
8556960	837
8567130	157
8567140	157
8567150	157
8567160	157
8567165	157
8567170	157
8567180	157
8567190	157
8567200	157
8567340	157



EDP Numerical Index

EDP Number	Page No.
8567345	157
8567350	157
8567355	157
8567360	157
8567370	157
8567380	157
8567390	157
8567400	157
8567450	157
8567455	157
8567460	157
8567470	157
8567480	157
8569010	158
8569011	158
8569012	158
8569013	158
8569014	158
8569015	158
8569016	158
8569017	158
8569018	158
8569019	158
8569020	158
8569025	158
8569030	158
8577050	171
8577054	171
8577055	171
8577056	171
8577060	171
8577063	171
8577064	171
8577065	171
8577070	171
8577071	171
8577072	171
8577073	171
8577074	171
8577075	171
8577080	171
8577081	171
8577082	171
8577090	171
8577091	171
8577092	171
8577100	171
8577110	171
8577111	171
8577112	171
8577115	171
8577120	171
8577127	171
8577128	171
8577129	171
8577130	171
8577140	171
8577145	171
8577146	171

EDP Number	Page No.
8577147	171
8577150	171
8577151	171
8577152	171
8577153	171
8577155	171
8577156	171
8577157	172
8577160	172
8577170	172
8577180	172
8577181	172
8577182	172
8577183	172
8577190	172
8577198	172
8577199	172
8577200	172
8577210	172
8577212	172
8577213	172
8577214	172
8577220	172
8577229	172
8577230	172
8577231	172
8577239	172
8577240	172
8577241	172
8577242	172
8577250	172
8577255	172
8577256	172
8577257	172
8577260	172
8577270	172
8577277	172
8577278	172
8577279	172
8577280	172
8577290	172
8577300	172
8589002	160
8589003	160
8589004	160
8589005	160
8589008	160
8589052	160
8589053	160
8589054	160
8589055	160
8589058	160
8589102	161
8589103	161
8589104	161
8589105	161
8589108	161
8589152	161
8589153	161

EDP Number	Page No.
8589154	161
8589155	161
8589158	161
8589205	159
8589255	159
8593020	240
8593021	240
8593022	240
8593023	240
8593024	240
8593025	240
8593026	240
8593027	240
8593028	240
8593029	240
8593030	240
8593031	240
8593032	240
8593033	240
8593034	240
8593035	240
8593036	240
8593037	240
8593038	240
8593039	240
8593040	240
8593041	240
8593042	240
8593043	240
8593044	240
8593045	240
8593046	240
8593047	240
8593048	240
8593049	240
8593050	240
8593051	240
8593052	240
8593053	240
8593054	240
8593055	240
8593056	240
8593057	240
8593058	240
8593059	240
8593060	240
8593061	240
8593062	240
8593063	240
8593064	240
8593065	240
8593066	240
8593067	240
8593068	240
8593069	240
8593070	240
8593071	240
8593072	240
8593073	241

EDP Number	Page No.
8593074	241
8593075	241
8593076	241
8593077	241
8593078	241
8593079	241
8593080	241
8593081	241
8593082	241
8593083	241
8593084	241
8593085	241
8593086	241
8593087	241
8593088	241
8593089	241
8593090	241
8593091	241
8593092	241
8593093	241
8593094	241
8593095	241
8593096	241
8593097	241
8593098	241
8593099	241
8593100	241
8593101	241
8593102	241
8593103	241
8593104	241
8593105	241
8593106	241
8593107	241
8593108	241
8593109	241
8593110	241
8593111	241
8593112	241
8593113	241
8593114	241
8593115	241
8593116	241
8593117	241
8593118	241
8593119	241
8593120	241
8593121	241
8593122	242
8593123	242
8593124	242
8593125	242
8593126	242
8593127	242
8593128	242
8593129	242
8593130	242
8593135	242
8593140	242



EDP Number	Page No.
8593145	242
8593150	242
8593155	242
8593160	242
8593165	242
8593170	242
8593175	242
8593180	242
8593185	242
8593190	242
8593195	242
8593200	242
8593205	242
8593210	242
8593215	242
8593220	242
8593225	242
8593230	242
8593235	242
8593240	242
8593245	242
8593250	242
8593255	242
8593260	242
8593265	242
8593270	242
8593280	242
8593290	242
8593300	242
8593310	242
8593320	242
8594020	252
8594021	252
8594022	252
8594023	252
8594024	252
8594025	252
8594026	252
8594027	252
8594028	252
8594029	252
8594030	252
8594031	252
8594032	252
8594033	252
8594034	252
8594035	252
8594036	252
8594037	252
8594038	252
8594039	252
8594040	252
8594041	252
8594042	252
8594043	252
8594044	252
8594045	252
8594046	252
8594047	252

EDP Number	Page No.
8594048	252
8594049	252
8594050	252
8594051	252
8594052	252
8594053	252
8594054	252
8594055	252
8594056	252
8594057	252
8594058	252
8594059	252
8594060	252
8594061	252
8594062	252
8594063	252
8594064	252
8594065	252
8594066	252
8594067	252
8594068	252
8594069	252
8594070	252
8594071	252
8594072	253
8594073	253
8594074	253
8594075	253
8594076	253
8594077	253
8594078	253
8594079	253
8594080	253
8594081	253
8594082	253
8594083	253
8594084	253
8594085	253
8594086	253
8594087	253
8594088	253
8594089	253
8594090	253
8594091	253
8594092	253
8594093	253
8594094	253
8594095	253
8594096	253
8594097	253
8594098	253
8594099	253
8594100	253
8594101	253
8594102	253
8594103	253
8594104	253
8594105	253
8594106	253

EDP Number	Page No.
8594107	253
8594108	253
8594109	253
8594110	253
8594111	253
8594112	253
8594113	253
8594114	253
8594115	253
8594116	253
8594117	253
8594118	253
8594119	253
8594120	254
8594121	254
8594122	254
8594123	254
8594124	254
8594125	254
8594126	254
8594127	254
8594128	254
8594129	254
8594130	254
8595051	266
859505111	266
8595052	266
8595053	266
8595054	266
8595055	266
8595056	266
8595057	266
859505711	266
8595058	266
8595059	266
8595061	266
8595062	266
8595063	266
8595064	266
859506411	266
8595065	266
859506511	266
8595066	266
8595067	266
8595068	266
8595069	266
8595071	266
859507111	266
8595072	266
8595073	266
8595074	266
8595075	266
8595076	266
8595077	266
8595078	266
8595079	266
859507911	266
8595081	266
859508111	266

EDP Number	Page No.
8595082	266
8595083	266
8595084	266
859508411	266
8595085	266
8595086	266
8595087	266
8595088	266
8595089	266
8595091	266
859509111	266
8595092	266
8595093	266
8595094	266
8595095	266
8595096	267
8595097	267
8595098	267
8595099	267
8595101	267
8595102	267
859510211	267
8595103	267
859510311	267
8595104	267
8595105	267
8595106	267
8595107	267
8595108	267
8595109	267
859510911	267
8595111	267
8595112	267
8595113	267
8595114	267
859511411	267
8595115	267
8595116	267
8595117	267
8595118	267
859511811	267
8595119	267
859511911	267
8595121	267
8595122	267
859512211	267
8595123	267
8595124	267
8595125	267
859512511	267
8595126	267
8595127	267
859512711	267
8595128	267
8595129	267
8595131	267
8595132	267
859513211	267
8595133	267



EDP Numerical Index

EDP Number	Page No.
8595134	267
8595135	267
859513511	267
8595136	267
8595137	267
8595138	267
8595139	268
8595141	268
859514111	268
8595142	268
8595143	268
8595144	268
859514411	268
8595145	268
859514511	268
8595146	268
8595147	268
8595148	268
8595149	268
8595151	268
859515111	268
8595152	268
859515211	268
8595153	268
8595154	268
8595155	268
859515511	268
8595156	268
859515611	268
8595157	268
859515711	268
8595158	268
859515811	268
8595159	268
859515911	268
8595161	268
859516111	268
8595162	268
859516211	268
8595163	268
8595164	268
8595165	268
859516511	268
8595166	268
8595167	268
8595168	268
8595169	268
8595171	268
859517111	268
8595172	268
859517211	268
8595173	268
8595174	268
859517411	268
8595175	268
859517511	268
8595176	268
859517611	268
8595177	268

EDP Number	Page No.
859517711	268
8595178	268
859517811	268
8595179	268
8595181	268
8595182	268
8595183	268
8595184	268
8595185	269
859518511	269
8595186	269
8595187	269
8595188	269
8595189	269
8595191	269
859519111	269
8595192	269
8595193	269
8595194	269
8595195	269
859519511	269
8595196	269
8595197	269
859519711	269
8595198	269
859519811	269
8595199	269
859519911	269
8595201	269
8595202	269
8595203	269
8595204	269
8595205	269
859520511	269
8595206	269
8595207	269
8595208	269
859520811	269
8595209	269
8595211	269
8595212	269
8595213	269
8595214	269
8595215	269
859521511	269
8595216	269
8595217	269
8595218	269
8595219	269
859521911	269
8595221	269
8595222	269
8595223	269
8595224	269
8595225	269
859522511	269
8595226	269
859522611	269
8595227	269

EDP Number	Page No.
8595228	270
8595229	270
8595231	270
8595232	270
8595233	270
8595234	270
8595235	270
8595236	270
8595237	270
859523711	270
8595238	270
859523811	270
8595239	270
859523911	270
8595241	270
859524111	270
8595242	270
859524211	270
8595243	270
8595244	270
859524411	270
8595245	270
859524511	270
8595246	270
859524611	270
8595247	270
8595248	270
8595249	270
859524911	270
8595251	270
8595252	270
859525211	270
8595253	270
859525311	270
8595254	270
8595255	270
859525511	270
8595256	270
8595257	270
8595258	270
859525811	270
8595259	270
8595261	270
8595262	270
8595263	270
8595264	270
859526411	270
8595265	270
859526511	270
8595266	270
859526611	270
8595267	270
8595268	270
8595269	270
8595271	270
859527111	270
8595272	270
8595273	270
8595274	271

EDP Number	Page No.
8595275	271
8595276	271
8595277	271
8595278	271
859527811	271
8595279	271
859527911	271
8595281	271
8595282	271
859528211	271
8595283	271
859528311	271
8595284	271
8595285	271
859528511	271
8595286	271
859528611	271
8595287	271
8595288	271
8595289	271
8595291	271
8595292	271
8595293	271
8595294	271
8595295	271
859529511	271
8595296	271
8595297	271
8595298	271
8595299	271
8595301	271
8595302	271
8595303	271
8595304	271
8595305	271
859530511	271
8595306	271
8595307	271
8595308	271
8595309	271
8595311	271
8595312	271
8595313	271
8595314	271
8595315	271
859531511	271
8595316	271
8595317	272
8595318	272
859531811	272
8595319	272
8595321	272
8595322	272
859532211	272
8595323	272
8595324	272
8595325	272
859532511	272
8595326	272



EDP Number	Page No.
859532611	272
8595327	272
859532711	272
8595328	272
8595329	272
859532911	272
8595331	272
8595332	272
8595333	272
8595334	272
8595335	272
859533511	272
8595336	272
8595337	272
8595338	272
8595339	272
8595341	272
8595342	272
8595343	272
8595344	272
8595345	272
859534511	272
8595346	272
859534611	272
8595347	272
859534711	272
8595348	272
8595349	272
8595351	272
8595352	272
8595353	272
8595354	272
8595355	272
8595356	272
8595357	272
859535711	272
8595358	272
8595359	272
8595361	272
8595362	272
8595363	273
8595364	273
8595365	273
8595366	273
859536611	273
8595367	273
8595368	273
8595369	273
8595371	273
8595372	273
8595373	273
859537311	273
8595374	273
8595375	273
859537511	273
8595376	273
8595377	273
8595378	273
8595379	273

EDP Number	Page No.
8595381	273
8595382	273
8595383	273
8595384	273
8595385	273
859538511	273
8595386	273
859538611	273
8595387	273
8595388	273
8595389	273
8595391	273
859539111	273
8595392	273
8595393	273
8595394	273
8595395	273
859539511	273
8595396	273
8595397	273
859539711	273
8595398	273
8595399	273
859539911	273
8595401	273
8595402	273
8595403	273
8595404	273
859540411	273
8595405	273
8595406	274
8595407	274
8595408	274
8595409	274
859540911	274
8595411	274
8595412	274
8595413	274
8595414	274
8595415	274
859541511	274
8595416	274
8595417	274
859541711	274
8595418	274
8595419	274
8595421	274
8595422	274
859542211	274
8595423	274
8595424	274
8595425	274
8595426	274
8595427	274
8595428	274
8595429	274
8595431	274
8595432	274
8595433	274

EDP Number	Page No.
859543311	274
8595434	274
8595435	274
8595436	274
8595437	274
859543711	274
8595438	274
8595439	274
8595441	274
859544111	274
8595442	274
8595443	274
8595444	274
8595445	274
859544511	274
8595446	274
8595447	274
8595448	274
8595449	274
8595451	274
8595452	275
8595453	275
8595454	275
8595455	275
8595456	275
8595457	275
859545711	275
8595458	275
8595459	275
8595461	275
8595462	275
859546211	275
8595463	275
8595464	275
8595465	275
8595466	275
8595467	275
8595468	275
8595469	275
8595471	275
8595472	275
8595473	275
8595474	275
8595475	275
859547511	275
8595476	275
859547611	275
8595477	275
8595478	275
8595479	275
8595481	275
8595482	275
8595483	275
8595484	275
8595485	275
8595486	275
859548611	275
8595487	275
859548711	275

EDP Number	Page No.
8595488	275
859548811	275
8595489	275
8595491	275
8595492	275
8595493	275
8595494	275
8595495	276
8595496	276
859549611	276
8595497	276
8595498	276
859549811	276
8595499	276
8595501	276
8595502	276
8595503	276
8595504	276
8595505	276
859550511	276
8595506	276
8595507	276
8595508	276
8595509	276
8595511	276
859551111	276
8595512	276
8595513	276
8595514	276
8595515	276
8595516	276
859551611	276
8595517	276
8595518	276
859551811	276
8595519	276
8595521	276
8595522	276
859552211	276
8595523	276
8595524	276
8595525	276
8595526	276
8595527	276
8595528	276
8595529	276
8595531	276
8595532	276
8595533	276
8595534	276
8595535	276
8595536	276
8595537	276
8595538	276
8595539	276
8595541	276
8595542	277
8595543	277
8595544	277



EDP Numerical Index

EDP Number	Page No.
8595545	277
859554511	277
8595546	277
8595547	277
8595548	277
859554811	277
8595549	277
8595551	277
8595552	277
8595553	277
8595554	277
8595555	277
8595556	277
859555611	277
8595557	277
8595558	277
8595559	277
8595561	277
8595562	277
8595563	277
8595564	277
8595565	277
859556511	277
8595566	277
8595567	277
8595568	277
8595569	277
8595571	277
8595572	277
859557211	277
8595573	277
8595574	277
8595575	277
859557511	277
8595576	277
8595577	277
8595578	277
859557811	277
8595579	277
859557911	277
8595581	277
8595582	277
8595583	277
8595584	277
8595585	278
8595586	278
8595587	278
8595588	278
8595589	278
8595591	278
8595592	278
8595593	278
8595594	278
8595595	278
859559511	278
8595596	278
8595597	278
859559711	278
8595598	278

EDP Number	Page No.
8595599	278
8595605	278
8595615	278
8595625	278
8595635	278
859563511	278
8595645	278
8595655	278
859565511	278
8595665	278
8595675	278
859567511	278
8595685	278
859568511	278
8595695	278
8595705	278
8595715	278
859571511	278
8595725	278
8595735	278
8595745	278
8595755	279
859575511	279
8595765	279
859576511	279
8595775	279
859577511	279
8595785	279
8595795	279
859579511	279
8595805	279
8595815	279
8595825	279
8595835	279
859583511	279
8595845	279
8595855	279
8595865	279
8595875	279
859587511	279
8595885	279
8595895	279
8595905	279
8595915	279
8595925	279
8595935	279
8595945	279
8595955	279
8595965	279
859596511	279
8595975	280
8595985	280
8595995	280
8596005	280
8596015	280
859601511	280
8596025	280
8596035	280
859603511	280

EDP Number	Page No.
8596045	280
8596055	280
8596065	280
8596075	280
8596085	280
8596095	280
8596105	280
8596115	280
8596125	280
8596135	280
8596145	280
8596155	280
8596165	280
8596175	280
8596185	280
8596195	280
8597201	284
8597202	284
8597203	284
8597204	284
859720411	284
8597205	284
8597206	284
8597207	284
8597208	284
859720811	284
8597209	284
8597211	284
8597212	284
8597213	284
8597214	284
8597215	284
8597216	284
8597217	284
8597218	284
859721811	284
8597219	284
8597221	284
8597222	284
8597223	284
8597224	284
8597225	284
8597226	284
859722611	284
8597227	284
8597228	284
859722811	284
8597229	284
8597231	284
8597232	284
8597233	284
8597234	284
8597235	284
8597236	284
8597237	284
8597238	284
859723811	284
8597239	284
8597241	284

EDP Number	Page No.
8597242	284
8597243	284
8597244	284
8597245	284
8597246	285
8597247	285
8597248	285
8597249	285
8597251	285
8597252	285
8597253	285
8597254	285
8597255	285
859725511	285
8597256	285
8597257	285
8597258	285
859725811	285
8597259	285
8597261	285
8597262	285
8597263	285
8597264	285
8597265	285
8597266	285
8597267	285
8597268	285
8597269	285
8597271	285
8597272	285
8597273	285
8597274	285
8597275	285
8597276	285
8597277	285
8597278	285
859727811	285
8597279	285
859727911	285
8597281	285
859728111	285
8597282	285
8597283	285
8597284	285
8597285	285
8597286	285
859728611	285
8597287	285
8597288	285
8597289	286
8597291	286
8597292	286
8597293	286
8597294	286
859729411	286
8597295	286
8597296	286
8597297	286
8597298	286



EDP Number	Page No.
8597299	286
8597301	286
8597302	286
8597303	286
8597304	286
859730411	286
8597305	286
859730511	286
8597306	286
8597307	286
8597308	286
8597309	286
8597311	286
8597312	286
8597313	286
8597314	286
8597315	286
8597316	286
8597317	286
8597318	286
859731811	286
8597319	286
8597321	286
8597322	286
8597323	286
8597324	286
8597325	286
8597326	286
8597327	286
8597328	286
8597329	286
8597331	286
8597332	286
8597333	286
8597334	286
8597335	287
8597336	287
8597337	287
8597338	287
8597339	287
8597341	287
8597342	287
8597343	287
8597344	287
8597345	287
859734511	287
8597346	287
8597347	287
8597348	287
8597349	287
8597351	287
8597352	287
8597353	287
8597354	287
8597355	287
8597356	287
8597357	287
859735711	287
8597358	287

EDP Number	Page No.
859735811	287
8597359	287
8597361	287
8597362	287
8597363	287
8597364	287
8597365	287
8597366	287
8597367	287
8597368	287
8597369	287
8597371	287
8597372	287
8597373	287
8597374	287
8597375	287
8597376	287
8597377	287
8597378	288
8597379	288
8597381	288
8597382	288
859738211	288
8597383	288
859738311	288
8597384	288
859738411	288
8597385	288
8597386	288
8597387	288
8597388	288
8597389	288
8597391	288
8597392	288
8597393	288
8597394	288
8597395	288
8597396	288
8597397	288
859739711	288
8597398	288
8597399	288
859739911	288
8597401	288
8597402	288
8597403	288
8597404	288
859740411	288
8597405	288
8597406	288
8597407	288
8597408	288
8597409	288
859740911	288
8597411	288
8597412	288
8597413	288
8597414	288
8597415	288

EDP Number	Page No.
8597416	288
8597417	288
8597418	288
8597419	288
8597421	288
8597422	288
859742211	288
8597423	288
8597424	289
8597425	289
8597426	289
8597427	289
8597428	289
8597429	289
8597431	289
8597432	289
8597433	289
8597434	289
8597435	289
8597436	289
8597437	289
859743711	289
8597438	289
8597439	289
8597441	289
8597442	289
8597443	289
8597444	289
8597445	289
8597446	289
8597447	289
8597448	289
8597449	289
8597451	289
8597452	289
8597453	289
8597454	289
8597455	289
8597456	289
8597457	289
859745711	289
8597458	289
8597459	289
8597461	289
8597462	289
8597463	289
8597464	289
8597465	289
8597466	289
8597467	290
8597468	290
8597469	290
8597471	290
8597472	290
8597473	290
8597474	290
8597475	290
859747511	290
8597476	290

EDP Number	Page No.
859747611	290
8597477	290
8597478	290
8597479	290
8597481	290
8597482	290
8597483	290
8597484	290
8597485	290
859748511	290
8597486	290
8597487	290
8597488	290
8597489	290
8597491	290
8597492	290
8597493	290
8597494	290
8597495	290
8597496	290
8597497	290
8597498	290
859749811	290
8597499	290
8597501	290
8597502	290
859750211	290
8597503	290
8597504	290
8597505	290
8597506	290
8597507	290
8597508	290
8597509	290
8597511	290
859751111	290
8597512	290
8597513	291
8597514	291
8597515	291
8597516	291
859751611	291
8597517	291
8597518	291
8597519	291
8597521	291
8597522	291
8597523	291
8597524	291
8597525	291
8597526	291
8597527	291
8597528	291
8597529	291
8597531	291
859753111	291
8597532	291
8597533	291
8597534	291



EDP Numerical Index

EDP Number	Page No.
8597535	291
8597536	291
8597537	291
8597538	291
8597539	291
8597541	291
8597542	291
8597543	291
8597544	291
8597545	291
8597546	291
8597547	291
859754711	291
8597548	291
8597549	291
8597551	291
8597552	291
8597553	291
8597554	291
8597555	291
8597556	292
8597557	292
8597558	292
8597559	292
8597561	292
859756111	292
8597562	292
8597563	292
8597564	292
8597565	292
8597566	292
8597567	292
8597568	292
8597569	292
8597571	292
8597572	292
8597573	292
8597574	292
8597575	292
8597576	292
8597577	292
8597578	292
8597579	292
8597581	292
8597582	292
8597583	292
8597584	292
8597585	292
8597586	292
8597587	292
8597588	292
8597589	292
8597591	292
8597592	292
8597593	292
8597594	292
8597595	292
859759511	292
8597596	292

EDP Number	Page No.
8597597	292
8597598	292
8597599	292
8597605	292
8597615	293
8597625	293
8597635	293
859763511	293
8597645	293
8597655	293
8597665	293
8597675	293
859767511	293
8597685	293
8597695	293
8597705	293
8597715	293
8597725	293
859772511	293
8597735	293
8597745	293
8597755	293
8597765	293
8597775	293
8597785	293
8597795	293
8597805	293
8597815	293
8597825	294
8597835	294
8597845	294
8597855	294
8597865	294
8597875	294
8597885	294
8597895	294
8597905	294
8597915	294
8597925	294
859792511	294
8597935	294
859793511	294
8597945	294
8597955	294
8597965	294
8597975	294
8597985	294
8597995	294
8598005	294
8598015	294
8598025	294
8598035	294
8598045	294
8598055	295
8598065	295
8598075	295
8598085	295
8598095	295
8598105	295

EDP Number	Page No.
8598115	295
8598125	295
8598135	295
8598145	295
8598155	295
8598165	295
8598175	295
8598185	295
8598195	295
8599005	230
8599006	230
8599007	230
8599008	230
8599009	230
8599010	230
8599013	230
8599014	230
8599015	231
8599017	231
8599018	231
8599135	235
8599136	235
8599140	236
8599142	236
8599145	236
8599146	236
8599150	236
8599155	236
8599157	236
8599160	236
8599165	236
8599170	236
8599175	236
8599177	236
8599180	236
8599185	236
8599190	236
8599195	236
8599200	236
8608055	230
8608056	230
8608057	230
8608061	230
8608063	230
8608065	230
8608066	230
8608068	230
8608069	230
8608071	230
8608074	230
8608075	230
8608082	230
8608083	230
8608085	230
8608088	230
8608089	230
8608094	230
8608095	230
8608099	230

EDP Number	Page No.
8608102	230
8608104	230
8608105	230
8608106	230
8608107	230
8608109	230
8608113	230
8608114	230
8608118	230
8608119	230
8608122	230
8608124	230
8608125	230
8608126	230
8608127	230
8608128	230
8608129	230
8608131	230
8608132	230
8608146	230
8608147	230
8608148	230
8608151	231
8608153	231
8608155	231
8608159	231
8608161	231
8608162	231
8608163	231
8608164	231
8608166	231
8608169	231
8608176	231
8608177	231
8608178	231
8608182	231
8608185	231
8608193	231
8608198	231
8608199	231
8608203	231
8608204	231
8608206	231
8608208	231
8608213	231
8608215	231
8608216	231
8608218	231
8608222	231
8608226	231
8608231	231
8608233	231
8608237	231
8608238	231
8608244	231
8608246	231
8608249	231
8608253	231
8608258	231



EDP Number	Page No.
8608264	232
8608271	232
8608278	232
8608279	232
8608281	232
8608282	232
8608287	232
8608295	232
8608305	232
8608318	232
8608319	232
8608326	232
8608336	232
8608345	232
8608352	232
8608357	232
8608366	232
8608373	232
8608377	232
8608386	232
8608391	232
8608397	232
8608399	232
8608404	232
8608409	232
8608415	232
8608422	232
8608427	232
8608431	232
8608437	232
8608439	232
8608445	233
8608457	233
8608462	233
8608466	233
8608476	233
8608479	233
8608485	233
8608491	233
8608498	233
8608505	233
8608511	233
8608515	233
8608516	233
8608518	233
8608522	233
8608526	233
8608531	233
8608541	233
8608546	233
8608556	233
8608561	233
8608579	233
8608595	233
8608635	233
8608675	234
8608714	234
8608754	234
8608794	234

EDP Number	Page No.
8608833	234
8608873	234
8608913	234
8608952	234
8608954	235
8608956	236
8608958	236
8608960	236
8608962	236
8608964	236
8608966	236
8608968	236
8608992	235
8609032	235
8609072	235
8609111	235
8609151	235
8609191	235
8609349	235
8609429	236
8609588	236
8609667	236
8609905	236
8612199	237
8612206	237
8612208	237
8612218	237
8612226	237
8612237	237
8612238	237
8612244	237
8612249	237
8612253	237
8612258	237
8612264	237
8612271	237
8612278	237
8612279	237
8612282	237
8612287	237
8612295	237
8612305	237
8612317	237
8612326	237
8612345	237
8612357	237
8612366	237
8612373	237
8612380	237
8612386	237
8612391	237
8612397	237
8612399	237
8612404	237
8612409	237
8612422	237
8612430	237
8612437	237
8612439	237

EDP Number	Page No.
8612450	237
8612457	237
8612462	237
8612470	237
8612476	238
8612480	238
8612485	238
8612491	238
8612498	238
8612505	238
8612511	238
8612516	238
8612518	238
8612522	238
8612531	238
8612541	238
8612556	238
8612561	238
8612579	238
8612594	238
8612595	238
8612604	238
8612615	238
8612625	238
8612635	238
8612653	238
8612663	238
8612675	238
8612690	238
8612703	238
8612714	238
8612737	238
8612749	238
8612754	238
8612767	238
8612794	238
8612803	238
8612820	238
8612833	238
8612843	238
8612861	238
8612873	238
8612884	238
8612909	238
8612913	238
8612934	238
8612952	238
8612957	238
8612980	238
8612992	238
8613008	238
8613026	238
8613032	238
8613049	238
8613072	239
8613111	239
8613151	239
8613191	239
8613230	239

EDP Number	Page No.
8613270	239
8613349	239
8613429	239
8613588	239
8613667	239
8613746	239
861-3750	1097
861-3750-60	1097
861-5000	1097
861-5000-60	1097
862	698
8622816	245
8622818	245
8622820	245
8622821	245
8622822	245
8622823	245
8622824	245
8622825	245
8622826	245
8622827	245
8622828	245
8622829	245
8622830	245
8622831	245
8622832	245
8622833	245
8622834	245
8622835	245
8622836	245
8622837	245
8622838	245
8622839	245
8622840	245
8622841	245
8622842	245
8622843	245
8622844	245
8622845	245
8622846	245
8622847	245
8622848	245
8622849	245
8622850	245
8622851	245
8622852	246
8622853	246
8622854	246
8622855	246
8622856	246
8622857	246
8622858	246
8622859	246
8622860	246
8622861	246
8622862	246
8622863	246
8622864	246
8622865	246



EDP Numerical Index

EDP Number	Page No.
8622866	246
8622867	246
8622868	246
8622869	246
8622870	246
8622871	246
8622872	246
8622873	246
8622874	246
8622875	246
8622876	246
8622877	246
8622878	246
8622879	246
8622880	246
8622881	246
8622882	246
8622883	246
8622884	246
8622885	246
8622886	246
8622887	246
8622888	246
8622889	246
8622890	246
8622891	246
8622892	246
8622893	247
8622894	247
8622895	247
8622896	247
8622897	247
8622898	247
8622899	247
8622900	247
8622901	247
8622902	247
8622903	247
8622904	247
8622905	247
8622906	247
8622907	247
8622908	247
8622909	247
8622910	247
8622911	247
8622912	247
8622913	247
8622914	247
8622915	247
8622916	247
8622917	247
8622918	247
8622919	247
8622920	247
8623016	248
8623018	248
8623020	248
8623021	248

EDP Number	Page No.
8623022	248
8623023	248
8623024	248
8623025	248
8623026	248
8623027	248
8623028	248
8623029	248
8623030	248
8623031	248
8623032	248
8623033	248
8623034	248
8623035	248
8623036	248
8623037	248
8623038	248
8623039	248
8623040	248
8623041	248
8623042	248
8623043	248
8623044	248
8623045	248
8623046	248
8623047	248
8623048	248
8623049	248
8623050	248
8623051	248
8623052	248
8623053	248
8623054	248
8623055	248
8623056	248
8623057	248
8623058	248
8623060	249
8623062	249
8623063	249
8623065	249
8623066	249
8623068	249
8623069	249
8623070	249
8623071	249
8623075	249
8623080	249
8623081	249
8623082	249
8623085	249
8623086	249
8623088	249
8623090	249
8623093	249
8623095	249
8623097	249
8623098	249
8623100	249

EDP Number	Page No.
8623105	249
8623110	249
8623115	249
8623118	249
8623120	249
8623216	250
8623218	250
8623220	250
8623221	250
8623222	250
8623223	250
8623224	250
8623225	250
8623226	250
8623227	250
8623228	250
8623229	250
8623230	250
8623231	250
8623232	250
8623233	250
8623234	250
8623235	250
8623237	250
8623238	250
8623240	250
8623241	250
8623242	250
8623243	250
8623245	250
8623246	250
8623248	250
8623250	250
8623251	250
8623252	250
8623255	250
8623257	250
8623258	250
8623260	250
8623265	250
8623270	250
8623275	250
8623280	251
8623281	251
8623282	251
8623285	251
8623290	251
8623300	251
8623310	251
8623320	251
862-3750	1097
862-3750-60	1097
862-5000	1097
862-5000-60	1097
863-3750	1097
863-3750-60	1097
863-5000	1097
863-5000-60	1097
8650100	255

EDP Number	Page No.
8650150	255
8650180	255
8650181	255
8650183	255
8650200	255
8650211	255
8650213	255
8650228	255
8650230	255
8650238	255
8650240	255
8650250	255
8650260	255
8650276	255
8650278	255
8650280	255
8650300	255
8650320	255
8650325	255
8650330	255
8650340	255
8650350	256
8650365	256
8650367	256
8650390	256
8650400	256
8650410	256
8650420	256
8650430	256
8650450	256
8650459	256
8650463	256
8650500	256
8650510	256
8650520	256
8650548	256
8650550	256
8650600	256
8650680	256
8650690	256
8650700	256
8650734	256
8650738	256
8650800	256
8650810	256
8650850	256
8650860	256
8650880	256
8650900	256
8650918	257
8650920	257
8650924	257
8650934	257
8650936	257
8651000	257
8651030	257
8651040	257
8651050	257
8651100	257



EDP Number	Page No.
8651200	257
8655200	258
8655230	258
8655250	258
8655260	258
8655280	258
8655300	258
8655330	258
8655340	258
8655350	258
8655400	258
8655420	258
8655430	258
8655450	258
8655500	258
8655510	258
8655520	258
8655550	258
8655600	258
8655680	258
8655690	258
8655700	258
8655800	258
8655850	258
8655860	258
8655880	258
8655900	258
8656000	258
8656030	258
8656040	258
8656050	259
8656100	259
8656200	259
8660530	142
8660540	142
8660570	142
8660610	142
8660620	142
8660630	142
8660660	142
8660670	142
8660760	142
8660770	142
8660780	142
8660840	142
8660980	142
8660990	142
8661000	142
8661010	142
8661050	142
8661060	142
8661070	142
8661190	142
8661210	142
8661220	142
8661230	142
8661250	142
8661260	142
8661270	142

EDP Number	Page No.
8661310	142
8661320	142
8661340	142
8661420	143
8661430	143
8661440	143
8661450	143
8661460	143
8661470	143
8661480	143
8661490	143
8661500	143
8661540	143
8661570	143
8661580	143
8661850	143
8661950	143
8662000	143
8662570	144
8662590	144
8662640	144
8662710	144
8662720	144
8662740	144
8662760	144
8662770	144
8662790	144
8662800	144
8662830	144
8662860	144
8662880	144
8662990	144
8663070	144
8663080	144
8663090	144
8663120	144
8663130	144
8663160	144
8663210	144
8663230	144
8663240	144
8663270	144
8663280	144
8663290	144
8663310	144
8663320	144
8663330	144
8663340	144
8663390	144
8663410	145
8663430	145
8663450	145
8663460	145
8663470	145
8663480	145
8663490	145
8663500	145
8663530	145
8663540	145

EDP Number	Page No.
8663560	145
8663570	145
8663580	145
8663590	145
8663600	145
8663650	145
8663800	145
8663850	145
8663900	145
8663950	145
8664000	145
8664055	146
8664060	146
8664075	146
8664080	146
8664095	147
8664100	147
8664115	147
8664120	147
8665200	121
8665210	121
8665220	121
8665230	121
8665240	121
8665250	121
8665260	121
8665270	121
8665280	121
8665290	121
8665300	121
8665310	121
8665315	121
8665320	121
8665326	121
8665330	121
8665340	121
8665350	121
8665360	121
8665370	121
8665375	121
8665380	121
8665390	121
8665400	121
8665410	121
8665420	122
8665430	122
8665440	122
8665450	122
8665460	122
8665470	122
8665480	122
8665485	122
8665490	122
8665500	122
8665510	122
8665520	122
8665525	122
8665530	122
8665540	122

EDP Number	Page No.
8665550	122
8665560	122
8665570	122
8665580	122
8665590	122
8665600	122
8665610	122
8665620	123
8665625	123
8665630	123
8665635	123
8665640	123
8665650	123
8665660	123
8665670	123
8665675	123
8665680	123
8665690	123
8665700	123
8665710	123
8665720	123
8665725	123
8665730	123
8665740	123
8665750	123
8665760	123
8665770	123
8665775	123
8665780	123
8665790	123
8665800	123
8665810	123
8665820	124
8665825	124
8665830	124
8665840	124
8665850	124
8665860	124
8665870	124
8665875	124
8665880	124
8665890	124
8665900	124
8665910	124
8665920	124
8665925	124
8665930	124
8665940	124
8665950	124
8665960	124
8665970	124
8665975	124
8665980	124
8665990	124
8666000	124
8666010	124
8666020	124
8666025	125
8666030	125



EDP Numerical Index

EDP Number	Page No.
8666040	125
8666050	125
8666060	125
8666070	125
8666075	125
8666080	125
8666090	125
8666100	125
8666110	125
8666120	125
8666130	125
8666140	125
8666150	125
8666160	125
8666170	125
8666180	125
8666190	125
8666200	125
8666210	125
8666220	125
8666230	125
8666240	126
8666250	126
8666260	126
8666270	126
8666275	126
8666280	126
8666290	126
8666300	126
8666310	126
8666320	126
8666330	126
8666340	126
8666350	126
8666360	126
8666370	126
8666380	126
8666390	126
8666400	126
8666410	126
8666420	126
8666430	126
8666440	126
8666450	126
8666460	126
8666470	126
8666480	126
8666490	127
8666500	127
8666510	127
8666520	127
8666530	127
8666540	127
8666550	127
8666560	127
8666570	127
8666580	127
8666590	127
8666600	127

EDP Number	Page No.
8666650	127
8666700	127
8666750	127
8666800	127
8666850	127
8666900	127
8666950	127
8667000	127
8667200	128
8667210	128
8667220	128
8667230	128
8667240	128
8667250	128
8667260	128
8667270	128
8667276	128
8667278	128
8667280	128
8667290	128
8667300	128
8667310	128
8667315	128
8667320	128
8667326	128
8667330	128
8667340	128
8667350	128
8667360	128
8667366	128
8667368	128
8667370	128
8667375	128
8667380	128
8667390	128
8667400	128
8667410	128
8667420	128
8667430	128
8667440	128
8667450	128
8667460	128
8667462	129
8667464	129
8667470	129
8667480	129
8667485	129
8667490	129
8667500	129
8667510	129
8667520	129
8667525	129
8667530	129
8667540	129
8667550	129
8667552	129
8667554	129
8667560	129
8667570	129

EDP Number	Page No.
8667580	129
8667590	129
8667600	129
8667610	129
8667620	129
8667625	129
8667630	129
8667635	129
8667640	129
8667650	129
8667660	129
8667670	130
8667675	130
8667680	130
8667690	130
8667700	130
8667710	130
8667720	130
8667725	130
8667730	130
8667736	130
8667738	130
8667740	130
8667750	130
8667752	130
8667754	130
8667760	130
8667770	130
8667775	130
8667780	130
8667790	130
8667800	130
8667810	130
8667820	130
8667825	130
8667830	130
8667840	130
8667850	130
8667860	130
8667870	130
8667875	131
8667880	131
8667890	131
8667900	131
8667910	131
8667920	131
8667924	131
8667925	131
8667926	131
8667930	131
8667936	131
8667938	131
8667940	131
8667950	131
8667952	131
8667954	131
8667960	131
8667970	131
8667975	131

EDP Number	Page No.
8667980	131
8667990	131
8668000	131
8668010	131
8668020	131
8668025	131
8668030	131
8668040	131
8668050	131
8668060	131
8668070	132
8668075	132
8668080	132
8668090	132
8668100	132
8668110	132
8668120	132
8668122	132
8668124	132
8668130	132
8668136	132
8668138	132
8668140	132
8668150	132
8668160	132
8668170	132
8668180	132
8668190	132
8668200	132
8668210	132
8668220	132
8668230	132
8668240	132
8668250	132
8668260	132
8668270	132
8668275	132
8668280	132
8668290	133
8668300	133
8668310	133
8668320	133
8668325	133
8668330	133
8668340	133
8668350	133
8668360	133
8668370	133
8668380	133
8668390	133
8668400	133
8668410	133
8668420	133
8668430	133
8668440	133
8668450	133
8668460	133
8668470	133
8668480	133



EDP Number	Page No.
8668490	133
8668500	133
8668510	133
8668520	133
8668525	133
8668530	133
8668540	133
8668550	133
8668560	134
8668570	134
8668580	134
8668590	134
8668600	134
8668650	134
8668700	134
8668750	134
8668800	134
8668850	134
8668900	134
8668950	134
8669000	134
8670200	113
8670210	113
8670220	113
8670230	113
8670240	113
8670250	113
8670260	113
8670270	113
8670280	113
8670290	113
8670300	113
8670310	113
8670320	113
8670330	113
8670340	113
8670350	113
8670360	113
8670370	113
8670380	113
8670390	113
8670400	113
8670410	113
8670420	113
8670430	113
8670440	113
8670450	113
8670460	113
8670470	113
8670480	113
8670490	113
8670500	113
8670510	113
8670520	113
8670530	113
8670540	114
8670550	114
8670560	114
8670570	114

EDP Number	Page No.
8670580	114
8670590	114
8670600	114
8670610	114
8670620	114
8670630	114
8670640	114
8670650	114
8670660	114
8670670	114
8670680	114
8670690	114
8670700	114
8670710	114
8670720	114
8670730	114
8670740	114
8670750	114
8670760	114
8670770	114
8670780	114
8670790	114
8670800	114
8670810	114
8670820	114
8670830	114
8670840	114
8670850	114
8670860	114
8670870	114
8670880	114
8670890	114
8670900	114
8670910	115
8670920	115
8670930	115
8670940	115
8670950	115
8670960	115
8670970	115
8670980	115
8670990	115
8671000	115
8671010	115
8671020	115
8671030	115
8671040	115
8671050	115
8671060	115
8671070	115
8671080	115
8671090	115
8671100	115
8671110	115
8671120	115
8671130	115
8671140	115
8671150	115
8671160	115

EDP Number	Page No.
8671170	115
8671180	115
8671190	115
8671200	115
8672200	117
8672210	117
8672220	117
8672230	117
8672240	117
8672250	117
8672260	117
8672270	117
8672280	117
8672290	117
8672300	117
8672310	117
8672320	117
8672330	117
8672340	117
8672350	117
8672360	117
8672370	117
8672380	117
8672390	117
8672400	117
8672410	117
8672420	117
8672430	117
8672440	117
8672450	117
8672460	117
8672470	117
8672480	117
8672490	117
8672500	117
8672510	117
8672520	117
8672530	117
8672540	118
8672550	118
8672560	118
8672570	118
8672580	118
8672590	118
8672600	118
8672610	118
8672620	118
8672630	118
8672640	118
8672650	118
8672660	118
8672670	118
8672680	118
8672690	118
8672700	118
8672710	118
8672720	118
8672730	118
8672740	118

EDP Number	Page No.
8672750	118
8672760	118
8672770	118
8672780	118
8672790	118
8672800	118
8672810	118
8672820	118
8672830	118
8672840	118
8672850	118
8672860	118
8672870	118
8672880	118
8672890	118
8672900	118
8672910	118
8672920	119
8672930	119
8672940	119
8672950	119
8672960	119
8672970	119
8672980	119
8672990	119
8673000	119
8673010	119
8673020	119
8673030	119
8673040	119
8673050	119
8673060	119
8673070	119
8673080	119
8673090	119
8673100	119
8673110	119
8673120	119
8673130	119
8673140	119
8673150	119
8673160	119
8673170	119
8673180	119
8673190	119
8673200	119
8673210	119
8673220	119
8673230	119
8673240	119
8673250	119
8673260	119
8673270	119
8673280	119
8673290	120
8673300	120
8673310	120
8673320	120
8673330	120



EDP Number	Page No.
8673340	120
8673350	120
8673400	120
8673450	120
8673500	120
8673550	120
8673600	120
8673650	120
8673700	120
8673750	120
867-3750	1099
867-3750-60	1099
8673800	120
8673850	120
8673900	120
8673950	120
8674000	120
867-5000	1099
867-5000-60	1099
8680410	122
8680420	122
8680430	122
8680440	122
8680450	122
8680460	122
8680470	122
8680480	122
8680490	122
8680500	122
8680610	122
8680620	123
8680630	123
8680640	123
8680650	123
8680660	123
8680670	123
8680680	123
8680690	123
8680700	123
8680810	123
8680820	124
8680830	124
8680840	124
8680850	124
8680860	124
8680870	124
8680880	124
8680890	124
8680900	124
8681010	124
8681020	125
8681030	125
8681040	125
8681050	125
8681060	125
8681070	125
8681080	125
8681090	125
8681100	125

EDP Number	Page No.
8681210	125
8681220	125
8681230	125
8681240	126
8681250	126
8681260	126
8681280	126
8681290	126
8681300	126
8681450	126
8681500	127
8681650	127
8681700	127
8681850	127
8681900	127
8682410	128
8682420	128
8682430	128
8682440	128
8682450	128
8682460	128
8682470	129
8682480	129
8682490	129
8682500	129
8682610	129
8682620	129
8682630	129
8682640	129
8682650	129
8682660	130
8682670	130
8682680	130
8682690	130
8682700	130
8682810	130
8682820	130
8682830	130
8682840	130
8682850	130
8682860	130
8682870	131
8682880	131
8682890	131
8682900	131
8683010	131
8683020	131
8683030	131
8683040	131
8683050	131
8683060	132
8683070	132
8683080	132
8683090	132
8683100	132
8683210	132
8683220	132
8683230	132
8683240	132

EDP Number	Page No.
8683250	132
8683260	132
8683280	133
8683290	133
8683300	133
8683450	133
8683500	133
8683650	134
8683700	134
868-3750	1099
868-3750-60	1099
8683850	134
8683900	134
8684310	135
8684320	135
8684330	135
8684340	135
8684350	135
8684360	135
8684370	135
8684380	135
8684390	135
8684400	135
8684410	135
8684420	135
8684430	135
8684440	135
8684450	135
8684460	136
8684470	136
8684480	136
8684490	136
8684500	136
8684510	136
8684520	136
8684530	136
8684540	136
8684550	136
8684560	136
8684570	136
8684580	136
8684590	136
8684600	136
8684610	136
8684620	136
8684630	136
8684640	136
8684650	136
8684660	136
8684670	136
8684680	136
8684690	136
8684700	137
8684710	137
8684720	137
8684730	137
8684740	137
8684750	137
8684760	137

EDP Number	Page No.
8684770	137
8684780	137
8684790	137
8684800	137
8684810	137
8684820	137
8684830	137
8684840	137
8684850	137
8684860	137
8684870	137
8684880	137
8684890	137
8684900	137
8684910	137
8684920	137
8684930	137
8684940	137
8684950	138
8684960	138
8684970	138
8684980	138
8684990	138
8685000	138
868-5000	1099
868-5000-60	1099
8685010	138
8685020	138
8685030	138
8685040	138
8685050	138
8685060	138
8685070	138
8685080	138
8685090	138
8685100	138
8685110	138
8685120	138
8685130	138
8685140	138
8685150	138
8685160	138
8685170	138
8685180	138
8685190	138
8685200	138
8686200	135
8686210	135
8686220	135
8686230	135
8686240	135
8686250	135
8686260	135
8686270	135
8686280	135
8686290	135
8686300	135
8686410	135
8686420	135



EDP Number	Page No.
8686430	135
8686440	135
8686450	135
8686460	136
8686470	136
8686480	136
8686490	136
8686500	136
8686610	136
8686620	136
8686630	136
8686640	136
8686650	136
8686660	136
8686670	136
8686680	136
8686690	136
8686700	137
8686810	137
8686820	137
8686830	137
8686840	137
8686850	137
8686860	137
8686870	137
8686880	137
8686890	137
8686900	137
8687010	138
8687020	138
8687030	138
8687040	138
8687050	138
8687060	138
8687070	138
8687080	138
8687090	138
8687100	138
8688933	140
8688934	140
8688935	140
8688936	140
8688937	140
8688938	140
8688957	140
8688958	140
8688959	140
8688960	140
8688961	140
8688962	140
8688966	140
8688967	140
8688968	140
8688969	140
8688970	140
8688971	140
8690230	86
8690250	86
8690260	86

EDP Number	Page No.
8690280	86
8690290	86
8690300	86
8690310	86
8690320	86
8690330	86
8690340	86
8690350	86
8690360	86
8690370	86
8690380	86
8690390	86
8690400	86
8690410	86
8690420	86
8690430	86
8690440	86
8690450	86
8690460	86
8690470	87
8690480	87
8690490	87
8690500	87
8690510	87
8690520	87
8690530	87
8690540	87
8690550	87
8690560	87
8690570	87
8690580	87
8690590	87
8690600	87
8690610	87
8690620	87
8690630	87
8690640	87
8690650	87
8690660	87
8690670	87
8690680	87
8690690	88
8690700	88
8690710	88
8690720	88
8690730	88
8690740	88
8690750	88
8690760	88
8690770	88
8690780	88
8690790	88
8690800	88
8690810	88
8690820	88
8690830	88
8690840	88
8690850	88
8690860	88

EDP Number	Page No.
8690870	88
8690880	88
8690890	88
8690900	88
8690910	88
8690920	88
8690930	88
8690940	88
8690950	88
8690960	89
8690970	89
8690980	89
8690990	89
8691000	89
8691010	89
8691020	89
8691030	89
8691040	89
8691050	89
8691060	89
8691070	89
8691080	89
8691090	89
8691100	89
8691110	89
8691120	89
8691130	89
8691140	89
8691150	89
8691160	89
8691170	89
8691180	89
8691190	89
8691200	89
8691210	89
8691220	89
8691230	90
8691240	90
8691250	90
8691260	90
8691270	90
8691280	90
8691290	90
8691300	90
8691310	90
8691320	90
8691330	90
8691340	90
8691350	90
8691360	90
8691370	90
8691380	90
8691390	90
8691400	90
8691410	90
8691420	90
8691430	90
8691440	90
8691450	90

EDP Number	Page No.
8691460	90
8691470	90
8691480	90
8691490	90
8691500	91
8691510	91
8691520	91
8691530	91
8691540	91
8691550	91
8691560	91
8691570	91
8691580	91
8691590	91
8691600	91
8691650	91
8691700	91
8691750	91
8691800	91
8691850	91
8691900	91
8691950	91
8692000	91
8692230	92
8692250	92
8692260	92
8692278	92
8692280	92
8692290	92
8692300	92
8692310	92
8692320	92
8692330	92
8692340	92
8692350	92
8692360	92
8692370	92
8692380	92
8692390	92
8692400	92
8692410	92
8692420	92
8692430	92
8692440	92
8692450	92
8692460	92
8692470	92
8692480	92
8692490	92
8692500	92
8692510	92
8692520	93
8692530	93
8692540	93
8692550	93
8692560	93
8692570	93
8692580	93
8692590	93





EDP Numerical Index

EDP Number	Page No.
8692600	93
8692610	93
8692620	93
8692630	93
8692640	93
8692650	93
8692660	93
8692670	93
8692680	93
8692690	93
8692700	93
8692710	93
8692720	93
8692730	93
8692740	93
8692750	93
8692760	93
8692770	93
8692780	93
8692790	93
8692800	93
8692810	94
8692820	94
8692830	94
8692840	94
8692850	94
8692860	94
8692870	94
8692880	94
8692890	94
8692900	94
8692910	94
8692920	94
8692930	94
8692940	94
8692950	94
8692960	94
8692970	94
8692980	94
8692990	94
8693000	94
8693010	94
8693020	94
8693030	94
8693040	94
8693050	94
8693060	94
8693070	94
8693080	95
8693090	95
8693100	95
8693110	95
8693120	95
8693130	95
8693140	95
8693150	95
8693160	95
8693170	95
8693180	95

EDP Number	Page No.
8693190	95
8693200	95
8693210	95
8693220	95
8693230	95
8693240	95
8693250	95
8693260	95
8693270	95
8693280	95
8693290	95
8693300	95
8693310	96
8693320	96
8693330	96
8693340	96
8693350	96
8693360	96
8693370	96
8693380	96
8693390	96
8693400	96
8693410	96
8693420	96
8693430	96
8693440	96
8693450	96
8693460	96
8693470	96
8693480	96
8693490	96
8693500	96
8693510	96
8693520	96
8693530	96
8693540	96
8693550	96
8693560	96
8693570	96
8693580	96
8693590	96
8693600	96
8693650	96
8693700	96
8693750	96
8693800	96
8693850	97
8693900	97
8693950	97
8694000	97
8694200	98
8694210	98
8694220	98
8694230	98
8694240	98
8694250	98
8694260	98
8694270	98
8694280	98

EDP Number	Page No.
8694290	98
8694300	98
8694310	98
8694320	98
8694330	98
8694340	98
8694350	98
8694360	98
8694370	98
8694380	98
8694390	98
8694400	98
8694450	98
8694500	98
8694550	98
8694600	99
8694650	99
8694700	99
8694750	99
8694800	99
8694850	99
8694900	100
8694950	100
8695000	100
8695050	100
8695100	100
8695150	100
8695200	100
8695250	100
8696300	102
8696350	102
8696400	102
8696450	102
8696500	102
8696550	102
8696600	103
8696620	103
8696650	103
8696700	103
8696750	103
8696800	103
8696830	103
8696850	103
8696900	103
8696950	104
8697000	104
8697100	104
8697200	104
8698300	105
8698320	105
8698350	105
8698400	105
8698550	105
8698600	105
8698750	105
8698800	105
8698950	105
8699000	106
8699200	106

EDP Number	Page No.
8700410	86
8700420	86
8700430	86
8700440	86
8700450	86
8700460	86
8700470	87
8700480	87
8700490	87
8700500	87
8700610	87
8700620	87
8700630	87
8700640	87
8700650	87
8700660	87
8700670	87
8700680	87
8700690	88
8700700	88
8700810	88
8700820	88
8700830	88
8700840	88
8700850	88
8700860	88
8700870	88
8700880	88
8700890	88
8700900	88
8701010	89
8701020	89
8701030	89
8701040	89
8701050	89
8701060	89
8701070	89
8701080	89
8701090	89
8701100	89
8701210	89
8701220	89
8701230	90
8701240	90
8701250	90
8701260	90
8701270	90
8701280	90
8701290	90
8701300	90
8701410	90
8701420	90
8701430	90
8701440	90
8701450	90
8701460	90
8701470	90
8701480	90
8701490	90



EDP Number	Page No.
8701500	91
8701650	91
8701700	91
8701850	91
8701900	91
8702410	92
8702420	92
8702430	92
8702440	92
8702450	92
8702460	92
8702470	92
8702480	92
8702490	92
8702500	92
8702610	93
8702620	93
8702630	93
8702640	93
8702650	93
8702660	93
8702670	93
8702680	93
8702690	93
8702700	93
8702810	94
8702820	94
8702830	94
8702840	94
8702850	94
8702860	94
8702870	94
8702880	94
8702890	94
8702900	94
8703010	94
8703020	94
8703030	94
8703040	94
8703050	94
8703060	94
8703070	94
8703080	95
8703090	95
8703100	95
8703210	95
8703220	95
8703230	95
8703240	95
8703250	95
8703260	95
8703270	95
8703280	95
8703290	95
8703300	95
8703410	96
8703420	96
8703430	96
8703440	96

EDP Number	Page No.
8703450	96
8703460	96
8703470	96
8703480	96
8703490	96
8703500	96
8703650	96
8703700	96
8703850	97
8703900	97
8704410	98
8704420	98
8704430	98
8704440	98
8704450	98
8704460	98
8704470	98
8704480	98
8704490	98
8704500	98
8704510	98
8704520	98
8704530	98
8704540	98
8704560	98
8704570	98
8704580	99
8704590	99
8704610	99
8704620	99
8704630	99
8704640	99
8704650	99
8704660	99
8704670	99
8704680	99
8704690	99
8704700	99
8704710	99
8704720	99
8704730	99
8704740	99
8704760	99
8704770	99
8704780	99
8704790	99
8704810	99
8704820	99
8704830	99
8704840	99
8704850	99
8704860	99
8704870	99
8704880	99
8704890	99
8704900	100
8704910	100
8704920	100
8704930	100

EDP Number	Page No.
8704940	100
8704960	100
8704970	100
8704980	100
8704990	100
8705010	100
8705020	100
8705030	100
8705040	100
8705050	100
8705060	100
8705070	100
8705080	100
8705090	100
8705100	100
8705110	100
8705120	100
8705130	100
8705140	100
8705160	100
8705170	100
8705180	100
8705190	100
8705210	100
8705220	100
8705230	100
8705240	100
8705250	100
8705260	100
8705350	101
8705400	101
8705450	101
8706300	107
8706320	107
8706350	107
8706400	107
8706450	107
8706500	107
8706550	107
8706600	107
8706650	107
8706700	107
8706750	107
8706800	107
8706850	108
8706900	108
8706950	108
8707000	108
8707100	108
8707200	108
8708320	109
8708350	109
8708400	109
8708450	109
8708500	109
8708550	109
8708600	109
8708650	109
8708700	109

EDP Number	Page No.
8708750	109
8708800	109
8708850	109
8708900	110
8708950	110
8709000	110
871	698
8710410	102
8710420	102
8710430	102
8710440	102
8710450	102
8710460	102
8710470	102
8710480	102
8710490	102
8710500	102
8710610	103
8710620	103
8710630	103
8710640	103
8710650	103
8710660	103
8710670	103
8710680	103
8710690	103
8710700	103
8710810	103
8710820	103
8710830	103
8710840	103
8710850	103
8710860	103
8710870	103
8710880	103
8710890	103
8710900	103
8711010	104
8711020	104
8711030	104
8711040	104
8711050	104
8711060	104
8711070	104
8711080	104
8711090	104
8711100	104
8711250	104
8712440	105
8712450	105
8712480	105
8712500	105
8712510	105
8712520	105
8712620	105
8712650	105
8712700	105
8712810	105
8712820	105



EDP Numerical Index

EDP Number	Page No.
8712850	105
8712900	105
8712940	105
8712980	106
8713050	106
8713100	106
8713150	106
8713250	106
8714450	107
8714480	107
8714500	107
8714510	107
8714520	107
8714620	107
8714650	107
8714700	107
8714810	108
8714850	108
8714900	108
8714940	108
8714980	108
8715050	108
8715100	108
8715250	108
8716450	109
8716480	109
8716500	109
8716510	109
8716520	109
8716620	109
8716650	109
8716700	109
8716810	109
8716850	109
8716900	110
8716940	110
8716980	110
8717300	111
8717400	111
8717500	111
8717600	111
8717800	111
8718000	111
8718300	112
8718400	112
8718500	112
8718600	112
8718800	112
872	698
8720300	66
8720330	66
8720350	66
8720366	66
8720386	66
8720400	66
8720410	66
8720420	66
8720430	66
8720440	66

EDP Number	Page No.
8720450	66
8720460	66
8720470	66
8720480	66
8720490	66
8720500	66
8720510	66
8720520	66
8720530	66
8720540	66
8720550	66
8720560	66
8720570	66
8720580	66
8720590	66
8720600	66
8720610	67
8720620	67
8720630	67
8720640	67
8720650	67
8720660	67
8720670	67
8720680	67
8720690	67
8720700	67
8720710	67
8720720	67
8720730	67
8720738	67
8720740	67
8720750	67
8720760	67
8720770	67
8720780	67
8720790	67
8720800	67
8720810	67
8720820	67
8720830	67
8720840	67
8720850	67
8720860	67
8720870	67
8720880	67
8720890	67
8720900	67
8720910	67
8720920	67
8720925	67
8720930	67
8720938	67
8720940	67
8720950	67
8720960	68
8720970	68
8720980	68
8720990	68
8721000	68

EDP Number	Page No.
8721010	68
8721020	68
8721030	68
8721040	68
8721050	68
8721060	68
8721070	68
8721080	68
8721090	68
8721100	68
8721110	68
8721120	68
8721125	68
8721130	68
8721138	68
8721140	68
8721150	68
8721160	68
8721170	68
8721180	68
8721190	68
8721200	68
8721250	68
8721300	68
8721325	68
8721330	68
8721338	68
8721350	68
8721400	68
8721410	68
8721420	68
8721430	68
8721450	68
8721500	68
8721520	69
8721530	69
8721550	69
8721600	69
8721650	69
8721700	69
8721725	69
8721750	69
8721800	69
8721850	69
8721900	69
8721925	69
8721950	69
8722000	69
8722300	70
8722330	70
8722350	70
8722366	70
8722400	70
8722410	70
8722420	70
8722430	70
8722440	70
8722450	70
8722460	70

EDP Number	Page No.
8722470	70
8722480	70
8722490	70
8722500	70
8722510	70
8722520	70
8722530	70
8722540	70
8722550	70
8722560	70
8722570	70
8722580	70
8722590	70
8722600	70
8722610	70
8722620	70
8722630	70
8722640	70
8722650	70
8722660	70
8722670	70
8722680	70
8722690	70
8722700	70
8722710	70
8722720	71
8722730	71
8722738	71
8722740	71
8722750	71
8722760	71
8722770	71
8722780	71
8722790	71
8722800	71
8722810	71
8722820	71
8722830	71
8722840	71
8722850	71
8722860	71
8722870	71
8722880	71
8722890	71
8722900	71
8722910	71
8722920	71
8722925	71
8722930	71
8722938	71
8722940	71
8722950	71
8722960	71
8722970	71
8722980	71
8722990	71
8723000	71
8723010	71
8723020	71



EDP Number	Page No.
8723030	71
8723040	71
8723050	71
8723060	71
8723070	71
8723080	72
8723090	72
8723100	72
8723110	72
8723120	72
8723125	72
8723130	72
8723138	72
8723140	72
8723150	72
8723160	72
8723170	72
8723180	72
8723190	72
8723200	72
8723250	72
8723300	72
8723325	72
8723330	72
8723338	72
8723350	72
8723400	72
8723410	72
8723420	72
8723430	72
8723450	72
8723500	72
8723520	72
8723530	72
8723550	72
8723600	72
8723650	72
8723700	72
8723725	72
8723750	72
8723800	72
8723850	73
8723900	73
8723925	73
8723950	73
8724000	73
873	698
87700	156
87702	156
87703	156
87704	156
87705	156
87706	156
87707	156
87708	156
87709	156
87710	156
87781	156
87782	156

EDP Number	Page No.
881	698
881-2362	1101
881-2500	1101
881-3125-60	1101
881-3750	1101
881-3750-60	1101
881-5000	1101
881-5000-60	1101
881-6250	1101
881-6250-60	1101
881-7500	1101
881-7500-60	1101
882	698
882-2362	1101
882-2500	1101
882-3750	1101
882-3750-60	1101
882-5000	1101
882-5000-60	1101
882-6250	1101
882-6250-60	1101
882-7500	1101
882-7500-60	1101
883	698
883-2362	1101
883-2500	1101
883-3750	1101
883-3750-60	1101
883-5000	1101
883-5000-60	1101
883-6250	1101
883-6250-60	1101
883-7500	1101
883-7500-60	1101
885-5000	1102
885-5000-60	1102
885-6250	1102
885-6250-60	1102
885-7500	1102
885-7500-60	1102
886-3750	1102
886-3750-60	1102
886-5000	1102
886-5000-60	1102
886-6250	1102
886-6250-60	1102
886-7500	1102
886-7500-60	1102
887-3750	1102
887-3750-60	1102
887-5000	1102
887-5000-60	1102
887-6250	1102
887-6250-60	1102
887-7500	1102
887-7500-60	1102
888-2362	1102
888-2500	1102
888-3125-60	1102

EDP Number	Page No.
888-3750	1102
888-3750-60	1102
888-5000	1102
888-5000-60	1102
888-6250	1102
888-6250-60	1102
8910000	1487
8910000	1523
8910001	1487
8910001	1523
8910002	1487
8910002	1523
8910003	1487
8910003	1523
8910004	1523
8910005	1487
8910005	1523
8910006	1487
8910006	1523
8910007	1523
8910008	1524
8910009	1524
8910010	1524
8910011	1524
8910012	1524
8910013	1524
8910014	1524
8910015	1524
8910016	1524
8910017	1524
8910020	1515
8910030	1525
8910031	1525
8910032	1525
8910033	1525
8910034	1525
8910035	1525
8910036	1525
8910037	1525
8910038	1525
8910039	1525
8910040	1525
8910041	1525
8910042	1525
8910043	1525
8910044	1525
8910045	1525
8910046	1525
8910047	1525
8910050	1526
8910051	1526
8910052	1526
8910053	1526
8910054	1526
8910055	1526
8910056	1526
8910057	1526
8910058	1526
8910059	1526

EDP Number	Page No.
8910060	1526
8910061	1526
8910062	1526
8910063	1526
8910064	1526
8910065	1526
8910066	1526
8910067	1526
8910070	1528
8910071	1528
8910072	1528
8910073	1528
8910074	1528
8910075	1528
8910076	1528
8910077	1528
8910078	1528
8910079	1528
8910080	1528
8910081	1528
8910082	1528
8910083	1528
8910084	1528
8910085	1528
8910086	1528
8910087	1528
8910088	1528
8910089	1528
8910090	1528
8910091	1528
8910092	1528
8910093	1528
8910094	1528
8910095	1528
8910096	1528
8910097	1528
8910098	1528
8910099	1528
8910100	1528
8910101	1528
8910102	1528
8910103	1528
8910104	1528
8910105	1528
8910106	1528
8910107	1528
8910108	1528
8910109	1528
8910110	1528
8910111	1528
8910112	1528
8910113	1528
8910120	1531
8910121	1531
8910122	1531
8910123	1531
8910124	1531
8910125	1531
8910126	1531



EDP Number	Page No.
8910127	1531
8910129	1531
8910131	1531
8910132	1531
8910138	1531
8910140	1531
8910142	1531
8910143	1531
8910145	1531
8910147	1531
8910148	1531
8910154	1531
8910155	1531
8910159	1531
8910171	1514
8910172	1515
8910174	1515
8910176	1515
8910178	1515
8910180	1515
8910182	1515
8910183	1515
8910240	1532
8910241	1532
8910242	1532
8910243	1532
8910244	1532
8910245	1532
8910246	1532
8910247	1532
8910401	1529
8910406	1529
8910413	1529
8910415	1529
8910424	1529
8910426	1531
8910428	1529
8910434	1531
8910435	1529
8910436	1531
8910440	1529
8910443	1531
8910445	1531
8910449	1529
8910450	1529
8910451	1531
8910456	1531
8910457	1529
8910458	1529
8910460	1531
900-9001	1105
900-9001-30	1106
900-9002	1105
900-9002-30	1106
900-9003	1105
900-9003-30	1106
900-9004	1105
900-9004-30	1106
900-9005	1105

EDP Number	Page No.
900-9005-30	1106
900-9006	1105
900-9006-30	1106
900-9007	1105
900-9007-30	1106
900-9008	1105
900-9008-30	1106
900-9009	1105
900-9009-30	1106
900-9010	1105
900-9010-30	1106
900-9011	1105
900-9011-30	1106
900-9012	1105
900-9012-30	1106
900-9013	1105
900-9013-30	1106
900-9014	1105
900-9014-30	1106
900-9015	1105
900-9015-30	1106
900-9016	1105
900-9016-30	1106
900-9017	1105
900-9017-30	1106
900-9018	1105
900-9018-30	1106
900-9019	1105
900-9019-30	1106
900-9020	1105
900-9020-30	1106
90100111	905
90100311	905
90100711	905
90100911	905
90101111	905
90101311	905
90101411	905
90101611	905
901-1000	1090
901-1000-60	1090
901-1000-60-EC	1090
901-1000-EC	1090
90110111	906
90110211	906
90110311	906
90110411	906
90110511	906
90110611	906
90110711	906
901-1250	1090
901-1250-60	1090
901-1250-60-EC	1090
901-1250-EC	1090
901-1875	1090
901-1875-60	1090
901-1875-60-EC	1090
901-1875-EC	1090
901-2362	1090

EDP Number	Page No.
901-2362-EC	1090
901-2500	1090
901-2500-EC	1090
901-3125	1090
901-3125-60	1090
901-3125-60-EC	1090
901-3125-EC	1090
901-3750	1090
901-3750-60	1090
901-3750-60-EC	1090
901-3750-EC	1090
901-4375	1090
901-4375-60	1090
901-4375-60-EC	1090
901-4375-EC	1090
901-5000	1090
901-5000-60	1090
901-5000-60-EC	1090
901-5000-EC	1090
901-5001	1090
901-5001-60	1090
901-5001-60-EC	1090
901-6250	1090
901-6250-60	1090
901-6250-60-EC	1090
901-6250-EC	1090
901-7500	1090
901-7500-60	1090
901-7500-60-EC	1090
901-7500-EC	1090
901-7501	1090
901-7501-60	1090
901-7501-60-EC	1090
901-7501-EC	1090
902-1250	1090
902-1250-60	1090
902-1875	1090
902-1875-60	1090
902-2362	1090
902-2500	1090
902-3125	1090
902-3125-60	1090
902-3750	1090
902-3750-60	1090
902-4375	1090
902-4375-60	1090
902-5000	1090
902-5000-60	1090
902-6250	1090
902-6250-60	1090
902-7500	1090
902-7500-60	1090
903-2362	1090
903-2500	1090
903-3750	1090
903-3750-60	1090
903-5000	1090
903-5000-60	1090
903-5001	1090

EDP Number	Page No.
903-5001-60	1090
903-6250	1090
903-6250-60	1090
903-7500	1090
903-7500-60	1090
903-7501	1090
903-7501-60	1090
903-7502	1090
903-7502-60	1090
904-2362	1092
904-2500	1092
904-3125	1092
904-3125-60	1092
904-3750	1092
904-3750-60	1092
904-5000	1092
904-5000-60	1092
904-5001	1092
904-5001-60	1092
904-6250	1092
904-6250-60	1092
904-7500	1092
904-7500-60	1092
904-7501	1092
904-7501-60	1092
905-2362	1092
905-2363	1092
905-2364	1092
905-2500	1092
905-2501	1092
905-2502	1092
905-3750	1092
905-3750-60	1092
905-5000	1092
905-5000-60	1092
905-6250	1092
905-6250-60	1092
906-2362	1092
906-2500	1092
906-3750	1092
906-3750-60	1092
906-5000	1092
906-5000-60	1092
906-6250	1092
906-6250-60	1092
906-7500	1092
906-7500-60	1092
907-2362	1094
907-2500	1094
907-3125	1094
907-3125-60	1094
907-3750	1094
907-3750-60	1094
907-5000	1094
907-5000-60	1094
907-6250	1094
907-6250-60	1094
907-7500	1094
907-7500-60	1094



EDP Number	Page No.
908-1000	1094
908-1000-60	1094
908-1250	1094
908-1250-60	1094
908-1875	1094
908-1875-60	1094
908-2362	1094
908-2500	1094
908-3125	1094
908-3125-60	1094
908-3750	1094
908-3750-60	1094
908-5000	1094
908-5000-60	1094
908-6250	1094
908-6250-60	1094
908-7500	1094
908-7500-60	1094
91100111	905
91100211	905
91100311	905
91100411	905
91100611	905
91100811	905
91101011	905
91110111	906
91110211	906
91110311	906
91110411	906
91110511	906
91110611	906
91110711	906
91400311	907
91400411	907
91400511	907
91400611	907
91400811	907
91401011	907
91401211	907
91440611	907
91440811	907
91441011	907
91441111	907
91441211	907
91441311	907
915-0001	1108
915-0001-30	1108
915-0002	1108
915-0002-30	1108
915-0003	1108
915-0003-30	1108
915-0004	1108
915-0004-30	1108
915-0005	1108
915-0005-30	1108
915-0006	1108
915-0006-30	1108
915-0007	1108
915-0007-30	1108

EDP Number	Page No.
915-0008	1108
915-0008-30	1108
915-0009	1108
915-0009-30	1108
920-0001	1110
920-0001-30	1110
920-0002	1110
920-0002-30	1110
920-0003	1110
920-0003-30	1110
920-0004	1110
920-0004-30	1110
920-0005	1110
920-0005-30	1110
920-0006	1110
920-0006-30	1110
920-0007	1110
920-0007-30	1110
920-0008	1110
920-0008-30	1110
920-0009	1110
920-0009-30	1110
920-0010	1110
920-0010-30	1110
920-0011	1110
920-0011-30	1110
920-0012	1110
920-0012-30	1110
9342019	446
9342020	446
9342021	446
9342022	446
9342025	446
9342027	446
9342028	445
9342029	445
9342030	445
9342031	445
9342033	445
9342034	445
9342035	445
9342036	445
9342037	445
9342038	445
9342047	447
9342048	447
9342049	447
9342050	447
9342051	447
9342054	447
949-1000	1094
949-1000-60	1094
949-2362	1094
949-2500	1094
949-3750	1094
949-3750-60	1094
949-5000	1094
949-5000-60	1094
949-6250	1094

EDP Number	Page No.
949-6250-60	1094
949-7500	1094
949-7500-60	1094
950-1000	1096
950-1000-60	1096
950-2362	1096
950-2500	1096
950-3750	1096
950-3750-60	1096
950-5000	1096
950-5000-60	1096
950-6250	1096
950-6250-60	1096
950-7500	1096
950-7500-60	1096
951-3125	1096
951-3125-60	1096
951-5000	1096
951-5000-60	1096
951-6250	1096
951-6250-60	1096
951-7500	1096
951-7500-60	1096
952-2362	1096
952-2500	1096
952-3750	1096
952-3750-60	1096
952-5000	1096
952-5000-60	1096
952-6250	1096
952-6250-60	1096
952-7500	1096
952-7500-60	1096
9598615	233
9598665	234
9598686	234
9598704	234
9598815	234
9598856	234
9598868	234
9598886	234
9598955	234
9599020	231
9599021	231
9599022	231
9599023	231
9599024	231
9599025	231
9599026	232
9599027	232
9599028	232
9599029	232
9599030	232
9599031	232
9599032	232
9599033	232
9599034	232
9599035	232
9599036	232

EDP Number	Page No.
9599037	232
9599038	232
9599039	232
9599040	232
9599041	232
9599042	232
9599043	232
9599044	232
9599045	233
9599046	233
9599047	233
9599048	233
9599049	233
9599050	233
9599051	233
9599052	233
9599053	233
9599054	233
9599055	233
9599056	233
9599057	233
9599058	233
9599059	233
9599060	233
9599061	233
9599062	233
9599063	233
9599064	233
9599065	233
9599066	234
9599067	234
9599068	234
9599069	234
9599070	234
9599071	234
9599072	234
9599073	234
9599074	234
9599075	234
9599076	234
9599077	234
9599078	234
9599079	234
9599080	234
9599081	234
9599082	234
9599083	234
9599084	234
9599085	234
9599086	234
9599087	234
9599088	234
9599089	234
9599090	234
9599091	234
9599092	234
9599093	234
9599094	234
9599095	234





EDP Numerical Index

EDP Number	Page No.
9599096	234
9599097	234
9599098	234
9599099	234
9599100	235
9599101	235
9599102	235
9599103	235
9599104	235
9599105	235
9599106	235
9599107	235
9599108	235
9599109	235
9599110	235
9599111	235
9599112	235
9599113	235
9599114	235
9599115	235
9599116	235
9599117	235
9599118	235
9599119	235
9599120	235
9599121	235
9599122	235
9599123	235
9599124	235
9599125	235
9599126	235
9599127	235
9599128	235
9599129	235
9599130	235
9599144	235
9599186	235
9599245	235
9599268	235
9599308	235
9599387	236
9599468	236
9599684	236
9599976	236
961-3750	1098
961-3750-60	1098
961-5000	1098
961-5000-60	1098
962-3750	1098
962-3750-60	1098
962-5000	1098
962-5000-60	1098
963-3750	1098
963-3750-60	1098
963-5000	1098
963-5000-60	1098
967-3750	1100
967-3750-60	1100
967-5000	1100

EDP Number	Page No.
967-5000-60	1100
968-3750	1100
968-3750-60	1100
968-5000	1100
968-5000-60	1100
981	698
982	698
983	698
991	698
9910002	1487
9910002	1523
9910004	1523
9910005	1487
9910005	1523
9910006	1523
9910008	1524
9910011	1524
9910031	1525
9910034	1525
9910037	1525
9910040	1525
9910043	1525
9910046	1525
9910048	1525
9910051	1526
9910054	1526
9910057	1526
9910060	1526
9910063	1526
9910066	1526
9910068	1526
9910076	1527
9910077	1527
9910084	1527
9910085	1527
9910088	1527
9910089	1527
9910096	1527
9910097	1527
9910104	1527
9910105	1527
9910108	1527
9910109	1527
9910112	1527
9910113	1527
9910120	1530
9910121	1530
9910122	1530
9910123	1530
9910124	1530
9910125	1530
9910136	1529
9910137	1530
9910138	1530
9910139	1529
9910140	1530
9910142	1529
9910143	1530
9910144	1529

EDP Number	Page No.
9910145	1530
9910147	1529
9910148	1530
9910149	1529
9910150	1530
9910151	1529
9910152	1530
9910156	1529
9910157	1530
9910158	1529
9910159	1530
9910170	1515
9910173	1515
9910176	1515
9910177	1515
9910179	1515
9910182	1515
9910201	1515
9910202	1515
9910203	1515
9910204	1515
9910205	1514
9910213	1515
9910215	1515
9910217	1515
9910219	1515
9910220	1514
9910222	1514
9910224	1514
9910225	1514
9910226	1514
9910227	1514
9910228	1514
9910229	1514
9910230	1514
9910232	1514
9911001	1521
9911002	1521
9911003	1521
9911004	1521
9911005	1521
9911006	1521
9911008	1521
9911009	1521
9911010	1521
9911011	1521
9911012	1521
9911013	1521
9911014	1521
9911015	1521
9911016	1521
9911017	1521
9911018	1521
9911019	1521
9911020	1522
9911021	1522
9911022	1522
9911023	1522
9911026	1522

EDP Number	Page No.
9911027	1522
9911028	1522
9911029	1522
9911030	1522
9911031	1522
9911032	1522
9911033	1522
9911034	1522
9911035	1522
9911036	1522
9911037	1522
9911038	1522
9911039	1522
9911040	1522
9911041	1522
9911042	1522
9911043	1522
9911044	1522
9911045	1522
9911046	1522
9911047	1522
9911101	1521
9911102	1521
9911103	1521
9911104	1521
9911105	1521
9911106	1521
9911107	1521
9911108	1521
9911109	1521
9911110	1521
9911111	1521
9911112	1521
992	698
993	698
99632	1504
99634	1504
99640	1504
HP243-0394	182
HP243-0433	182
HP243-0469	182
HP243-0472	182
HP243-0512	182
HP243-0551	182
HP243-0591	182
HP243-0626	182
HP243-0630	182
HP243-0669	182
HP243-0709	182
HP243-0748	182
HP243-0780	182
HP243-0787	182
HP243-0827	182
HP243-0866	182
HP243-0906	182
HP243-0937	182
HP243-0945	182
HP243-0984	182
HP243-1024	182



EDP Number	Page No.
HP243-1063	182
HP243-1094	182
HP243-1102	182
HP243-1142	182
HP243-1181	182
HP243-1220	182
HP243-1248	182
HP243-1260	182
HP243-1299	182
HP243-1339	182
HP243-1378	182
HP243-1406	182
HP243-1417	182
HP243-1457	182
HP243-1496	182
HP243-1535	182
HP243-1563	182
HP243-1575	182
HP243-1610	182
HP243-1614	182
HP243-1654	182
HP243-1693	182
HP243-1720	182
HP243-1732	182
HP243-1772	182
HP243-1811	182
HP243-1831	182
HP243-1850	182
HP243-1874	182
HP243-1890	183
HP243-1929	183
HP243-1969	183
HP243-2008	183
HP243-2031	183
HP243-2047	183
HP243-2087	183
HP243-2126	183
HP243-2130	183
HP243-2165	183
HP243-2189	183
HP243-2205	183
HP243-2244	183
HP243-2283	183
HP243-2323	183
HP243-2343	183
HP243-2362	183
HP243-2402	183
HP243-2441	183
HP243-2480	183
HP243-2500	183
HP243-2520	183
HP243-2559	183
HP243-2571	183
HP243-2598	183
HP243-2638	183
HP243-2657	183
HP243-2677	183
HP243-2717	183
HP243-2756	183

EDP Number	Page No.
HP243-2795	183
HP243-2811	183
HP243-2835	183
HP243-2874	183
HP243-2913	183
HP243-2953	183
HP243-2969	183
HP243-2992	183
HP243-3031	183
HP243-3071	183
HP243-3110	183
HP243-3126	183
HP243-3150	183
HP243-3189	183
HP243-3228	183
HP243-3268	183
HP243-3280	184
HP243-3307	184
HP243-3319	184
HP243-3346	184
HP243-3386	184
HP243-3425	184
HP243-3437	184
HP243-3465	184
HP243-3504	184
HP243-3543	184
HP243-3583	184
HP243-3594	184
HP243-3622	184
HP243-3642	184
HP243-3661	184
HP243-3701	184
HP243-3740	184
HP243-3748	184
HP243-3780	184
HP243-3819	184
HP243-3858	184
HP243-3898	184
HP243-3906	184
HP243-3937	184
HP243-3976	184
HP243-4016	184
HP243-4055	184
HP243-4063	184
HP243-4094	184
HP243-4134	184
HP243-4173	184
HP243-4213	184
HP243-4220	184
HP243-4252	184
HP243-4291	184
HP243-4331	184
HP243-4370	184
HP243-4374	184
HP243-4409	184
HP243-4449	184
HP243-4488	184
HP243-4528	184
HP243-4531	184

EDP Number	Page No.
HP243-4567	184
HP243-4606	184
HP243-4646	184
HP243-4685	184
HP243-4689	184
HP243-4724	184
HP243-4764	185
HP243-4803	185
HP243-4843	185
HP243-4882	185
HP243-4921	185
HP243-4961	185
HP243-5000	185
HP243-5039	185
HP243-5079	185
HP243-5118	185
HP243-5157	185
HP243-5197	185
HP243-5236	185
HP243-5276	185
HP243-5311	185
HP243-5315	185
HP243-5394	185
HP243-5512	185
HP243-5626	185
HP243-5709	185
HP243-5780	185
HP243-5787	185
HP243-5906	185
HP243-5937	185
HP243-6102	185
HP243-6181	185
HP243-6248	185
HP243-6299	185
HP243-6339	185
HP243-6496	185
HP243-6563	185
HP243-6693	185
HP243-6890	185
HP243-7087	185
HP243-7283	185
HP243-7480	185
HP243-7500	185
HP243-7579	185
HP243-7677	185
HP243-7874	185
HP245-0394	186
HP245-0433	186
HP245-0469	186
HP245-0472	186
HP245-0512	186
HP245-0551	186
HP245-0591	186
HP245-0626	186
HP245-0630	186
HP245-0669	186
HP245-0709	186
HP245-0748	186
HP245-0780	186

EDP Number	Page No.
HP245-0787	186
HP245-0827	186
HP245-0866	186
HP245-0906	186
HP245-0937	186
HP245-0945	186
HP245-0984	186
HP245-1024	186
HP245-1063	186
HP245-1094	186
HP245-1102	186
HP245-1142	186
HP245-1181	186
HP245-1220	186
HP245-1248	186
HP245-1260	186
HP245-1299	186
HP245-1339	186
HP245-1378	186
HP245-1406	186
HP245-1417	186
HP245-1457	186
HP245-1496	186
HP245-1535	186
HP245-1563	186
HP245-1575	186
HP245-1610	186
HP245-1614	186
HP245-1654	186
HP245-1693	186
HP245-1720	186
HP245-1732	186
HP245-1772	186
HP245-1811	186
HP245-1831	186
HP245-1850	186
HP245-1874	186
HP245-1890	187
HP245-1929	187
HP245-1969	187
HP245-2008	187
HP245-2031	187
HP245-2047	187
HP245-2087	187
HP245-2126	187
HP245-2130	187
HP245-2165	187
HP245-2189	187
HP245-2205	187
HP245-2244	187
HP245-2283	187
HP245-2323	187
HP245-2343	187
HP245-2362	187
HP245-2402	187
HP245-2441	187
HP245-2480	187
HP245-2500	187
HP245-2520	187



EDP Numerical Index

EDP Number	Page No.
HP245-2559	187
HP245-2571	187
HP245-2598	187
HP245-2638	187
HP245-2657	187
HP245-2677	187
HP245-2717	187
HP245-2756	187
HP245-2795	187
HP245-2811	187
HP245-2835	187
HP245-2874	187
HP245-2913	187
HP245-2953	187
HP245-2969	187
HP245-2992	187
HP245-3031	187
HP245-3071	187
HP245-3110	187
HP245-3126	187
HP245-3150	187
HP245-3189	187
HP245-3228	187
HP245-3268	187
HP245-3280	188
HP245-3307	188
HP245-3319	188
HP245-3346	188
HP245-3386	188
HP245-3425	188
HP245-3437	188
HP245-3465	188
HP245-3504	188
HP245-3543	188
HP245-3583	188
HP245-3594	188
HP245-3622	188
HP245-3642	188
HP245-3661	188
HP245-3701	188
HP245-3740	188
HP245-3748	188
HP245-3780	188
HP245-3819	188
HP245-3858	188
HP245-3898	188
HP245-3906	188
HP245-3937	188
HP245-3976	188
HP245-4016	188
HP245-4055	188
HP245-4063	188
HP245-4094	188
HP245-4134	188
HP245-4173	188
HP245-4213	188
HP245-4220	188
HP245-4252	188
HP245-4291	188

EDP Number	Page No.
HP245-4331	188
HP245-4370	188
HP245-4374	188
HP245-4409	188
HP245-4449	188
HP245-4488	188
HP245-4528	188
HP245-4531	188
HP245-4567	188
HP245-4606	188
HP245-4646	188
HP245-4685	188
HP245-4689	188
HP245-4724	188
HP245-4764	189
HP245-4803	189
HP245-4843	189
HP245-4882	189
HP245-4921	189
HP245-4961	189
HP245-5000	189
HP245-5039	189
HP245-5079	189
HP245-5118	189
HP245-5157	189
HP245-5197	189
HP245-5236	189
HP245-5276	189
HP245-5311	189
HP245-5315	189
HP245-5394	189
HP245-5512	189
HP245-5626	189
HP245-5709	189
HP245-5780	189
HP245-5787	189
HP245-5906	189
HP245-5937	189
HP245-6102	189
HP245-6181	189
HP245-6248	189
HP245-6299	189
HP245-6339	189
HP245-6496	189
HP245-6563	189
HP245-6693	189
HP245-6890	189
HP245-7087	189
HP245-7283	189
HP245-7480	189
HP245-7500	189
HP245-7579	189
HP245-7677	189
HP245-7874	189
HP253-1181	190
HP253-1220	190
HP253-1248	190
HP253-1260	190
HP253-1299	190

EDP Number	Page No.
HP253-1339	190
HP253-1378	190
HP253-1406	190
HP253-1417	190
HP253-1457	190
HP253-1496	190
HP253-1535	190
HP253-1563	190
HP253-1575	190
HP253-1610	190
HP253-1614	190
HP253-1654	190
HP253-1693	190
HP253-1720	190
HP253-1732	190
HP253-1772	190
HP253-1811	190
HP253-1831	190
HP253-1850	190
HP253-1874	190
HP253-1890	190
HP253-1929	190
HP253-1969	190
HP253-2008	190
HP253-2031	190
HP253-2047	190
HP253-2087	190
HP253-2126	190
HP253-2130	190
HP253-2165	190
HP253-2189	190
HP253-2205	190
HP253-2244	190
HP253-2283	190
HP253-2323	190
HP253-2343	190
HP253-2362	190
HP253-2402	190
HP253-2441	190
HP253-2480	190
HP253-2500	190
HP253-2520	190
HP253-2559	190
HP253-2571	190
HP253-2598	190
HP253-2638	191
HP253-2657	191
HP253-2677	191
HP253-2717	191
HP253-2756	191
HP253-2795	191
HP253-2811	191
HP253-2835	191
HP253-2874	191
HP253-2913	191
HP253-2953	191
HP253-2969	191
HP253-2992	191
HP253-3031	191

EDP Number	Page No.
HP253-3071	191
HP253-3110	191
HP253-3126	191
HP253-3150	191
HP253-3189	191
HP253-3228	191
HP253-3268	191
HP253-3280	191
HP253-3307	191
HP253-3319	191
HP253-3346	191
HP253-3386	191
HP253-3425	191
HP253-3437	191
HP253-3465	191
HP253-3504	191
HP253-3543	191
HP253-3583	191
HP253-3594	191
HP253-3622	191
HP253-3642	191
HP253-3661	191
HP253-3701	191
HP253-3740	191
HP253-3748	191
HP253-3780	191
HP253-3819	191
HP253-3858	191
HP253-3898	191
HP253-3906	191
HP253-3937	191
HP253-3976	191
HP253-4016	192
HP253-4055	192
HP253-4063	192
HP253-4094	192
HP253-4134	192
HP253-4173	192
HP253-4213	192
HP253-4220	192
HP253-4252	192
HP253-4291	192
HP253-4331	192
HP253-4370	192
HP253-4374	192
HP253-4409	192
HP253-4449	192
HP253-4488	192
HP253-4528	192
HP253-4531	192
HP253-4567	192
HP253-4606	192
HP253-4646	192
HP253-4685	192
HP253-4689	192
HP253-4724	192
HP253-4764	192
HP253-4803	192
HP253-4843	192



EDP Number	Page No.
HP253-4882	192
HP253-4921	192
HP253-4961	192
HP253-5000	192
HP253-5039	192
HP253-5079	192
HP253-5118	192
HP253-5157	192
HP253-5197	192
HP253-5236	192
HP253-5276	192
HP253-5311	192
HP253-5315	192
HP253-5394	192
HP253-5512	192
HP253-5626	192
HP253-5709	192
HP253-5780	192
HP253-5787	192
HP253-5906	192
HP253-5937	192
HP253-6102	192
HP253-6181	192
HP253-6248	193
HP253-6299	193
HP253-6339	193
HP253-6496	193
HP253-6563	193
HP253-6693	193
HP253-6890	193
HP253-7087	193
HP253-7283	193
HP253-7480	193
HP253-7500	193
HP253-7579	193
HP253-7677	193
HP253-7874	193
HP255-1181	194
HP255-1220	194
HP255-1248	194
HP255-1260	194
HP255-1299	194
HP255-1339	194
HP255-1378	194
HP255-1406	194
HP255-1417	194
HP255-1457	194
HP255-1496	194
HP255-1535	194
HP255-1563	194
HP255-1575	194
HP255-1610	194
HP255-1614	194
HP255-1654	194
HP255-1693	194
HP255-1720	194
HP255-1732	194
HP255-1772	194
HP255-1811	194

EDP Number	Page No.
HP255-1831	194
HP255-1850	194
HP255-1874	194
HP255-1890	194
HP255-1929	194
HP255-1969	194
HP255-2008	194
HP255-2031	194
HP255-2047	194
HP255-2087	194
HP255-2126	194
HP255-2130	194
HP255-2165	194
HP255-2189	194
HP255-2205	194
HP255-2244	194
HP255-2283	194
HP255-2323	194
HP255-2343	194
HP255-2362	194
HP255-2402	194
HP255-2441	194
HP255-2480	194
HP255-2500	194
HP255-2520	194
HP255-2559	194
HP255-2571	194
HP255-2598	194
HP255-2638	195
HP255-2657	195
HP255-2677	195
HP255-2717	195
HP255-2756	195
HP255-2795	195
HP255-2811	195
HP255-2835	195
HP255-2874	195
HP255-2913	195
HP255-2953	195
HP255-2969	195
HP255-2992	195
HP255-3031	195
HP255-3071	195
HP255-3110	195
HP255-3126	195
HP255-3150	195
HP255-3189	195
HP255-3228	195
HP255-3268	195
HP255-3280	195
HP255-3307	195
HP255-3319	195
HP255-3346	195
HP255-3386	195
HP255-3425	195
HP255-3437	195
HP255-3465	195
HP255-3504	195
HP255-3543	195

EDP Number	Page No.
HP255-3583	195
HP255-3594	195
HP255-3622	195
HP255-3642	195
HP255-3661	195
HP255-3701	195
HP255-3740	195
HP255-3748	195
HP255-3780	195
HP255-3819	195
HP255-3858	195
HP255-3898	195
HP255-3906	195
HP255-3937	195
HP255-3976	196
HP255-4016	196
HP255-4055	196
HP255-4063	196
HP255-4094	196
HP255-4134	196
HP255-4173	196
HP255-4213	196
HP255-4220	196
HP255-4252	196
HP255-4291	196
HP255-4331	196
HP255-4370	196
HP255-4374	196
HP255-4409	196
HP255-4449	196
HP255-4488	196
HP255-4528	196
HP255-4531	196
HP255-4567	196
HP255-4606	196
HP255-4646	196
HP255-4685	196
HP255-4689	196
HP255-4724	196
HP255-4764	196
HP255-4803	196
HP255-4843	196
HP255-4882	196
HP255-4921	196
HP255-4961	196
HP255-5000	196
HP255-5039	196
HP255-5079	196
HP255-5118	196
HP255-5157	196
HP255-5197	196
HP255-5236	196
HP255-5276	196
HP255-5311	196
HP255-5315	196
HP255-5394	196
HP255-5512	196
HP255-5626	196
HP255-5709	196

EDP Number	Page No.
HP255-5780	196
HP255-5787	196
HP255-5906	196
HP255-5937	196
HP255-6102	196
HP255-6181	197
HP255-6248	197
HP255-6299	197
HP255-6339	197
HP255-6496	197
HP255-6563	197
HP255-6693	197
HP255-6890	197
HP255-7087	197
HP255-7283	197
HP255-7480	197
HP255-7500	197
HP255-7579	197
HP255-7677	197
HP255-7874	197
HP258-1181	198
HP258-1220	198
HP258-1248	198
HP258-1260	198
HP258-1299	198
HP258-1339	198
HP258-1378	198
HP258-1406	198
HP258-1417	198
HP258-1457	198
HP258-1496	198
HP258-1535	198
HP258-1563	198
HP258-1575	198
HP258-1610	198
HP258-1614	198
HP258-1654	198
HP258-1693	198
HP258-1720	198
HP258-1732	198
HP258-1772	198
HP258-1811	198
HP258-1831	198
HP258-1850	198
HP258-1874	198
HP258-1890	198
HP258-1929	198
HP258-1969	198
HP258-2008	198
HP258-2031	198
HP258-2047	198
HP258-2087	198
HP258-2126	198
HP258-2130	198
HP258-2165	198
HP258-2189	198
HP258-2205	198
HP258-2244	198
HP258-2283	198



EDP Number	Page No.
HP258-2323	198
HP258-2343	198
HP258-2362	198
HP258-2402	198
HP258-2441	198
HP258-2480	198
HP258-2500	198
HP258-2520	198
HP258-2559	198
HP258-2571	198
HP258-2598	198
HP258-2638	199
HP258-2657	199
HP258-2677	199
HP258-2717	199
HP258-2756	199
HP258-2795	199
HP258-2811	199
HP258-2835	199
HP258-2874	199
HP258-2913	199
HP258-2953	199
HP258-2969	199
HP258-2992	199
HP258-3031	199
HP258-3071	199
HP258-3110	199
HP258-3126	199
HP258-3150	199
HP258-3189	199
HP258-3228	199
HP258-3268	199
HP258-3280	199
HP258-3307	199
HP258-3319	199
HP258-3346	199
HP258-3386	199
HP258-3425	199
HP258-3437	199
HP258-3465	199
HP258-3504	199
HP258-3543	199
HP258-3583	199
HP258-3594	199
HP258-3622	199
HP258-3642	199
HP258-3661	199
HP258-3701	199
HP258-3740	199
HP258-3748	199
HP258-3780	199
HP258-3819	199
HP258-3858	199
HP258-3898	199
HP258-3906	199
HP258-3937	199
HP258-3976	200
HP258-4016	200
HP258-4055	200

EDP Number	Page No.
HP258-4063	200
HP258-4094	200
HP258-4134	200
HP258-4173	200
HP258-4213	200
HP258-4220	200
HP258-4252	200
HP258-4291	200
HP258-4331	200
HP258-4370	200
HP258-4374	200
HP258-4409	200
HP258-4449	200
HP258-4488	200
HP258-4528	200
HP258-4531	200
HP258-4567	200
HP258-4606	200
HP258-4646	200
HP258-4685	200
HP258-4689	200
HP258-4724	200
HP258-4764	200
HP258-4803	200
HP258-4843	200
HP258-4882	200
HP258-4921	200
HP258-4961	200
HP258-5000	200
HP258-5039	200
HP258-5079	200
HP258-5118	200
HP258-5157	200
HP258-5197	200
HP258-5236	200
HP258-5276	200
HP258-5311	200
HP258-5315	200
HP258-5394	200
HP258-5512	200
HP258-5626	200
HP258-5709	200
HP258-5780	200
HP258-5787	200
HP258-5906	200
HP258-5937	200
HP258-6102	200
HP258-6181	201
HP258-6248	201
HP258-6299	201
HP258-6496	201
HP258-6563	201
HP258-6693	201
HP258-6890	201
HP258-7087	201
HP258-7283	201
HP258-7480	201
HP258-7500	201
HP258-7677	201

EDP Number	Page No.
HP258-7874	201
HP400-1000	975
HP400-1181	975
HP400-1575	975
HP400-1968	975
HP400-2362	975
HP400-2500	975
HP400-3125	975
HP400-3150	975
HP400-3750	975
HP400-3937	975
HP400-4724	975
HP400-5000	975
HP400-6250	975
HP400-6299	975
HP400-7500	975
HP400-7874	975
HP400-9843	975
HP410-0197	977
HP410-0236	977
HP410-0312	976
HP410-0315	977
HP410-0394	977
HP410-0472	977
HP410-0551	977
HP410-0591	977
HP410-0625	976
HP410-0630	977
HP410-0709	977
HP410-0787	977
HP410-0938	976
HP410-0984	977
HP410-1250	976
HP410-1875	976
HP411-1181	978
HP411-1250	978
HP411-1378	978
HP411-1575	978
HP411-1875	978
HP411-1969	978
HP411-2362	978
HP411-2500	978
HP413-0312	986
HP413-0394	986
HP413-0472	986
HP413-0551	986
HP413-0591	986
HP413-0625	986
HP413-0630	986
HP413-0709	986
HP413-0787	986
HP413-0938	986
HP413-0984	986
HP413-1181	986
HP413-1250	986
HP413-1378	986
HP413-1575	986
HP413-1875	986
HP413-1969	986

EDP Number	Page No.
HP413-2362	986
HP416-0312	982
HP416-0394	982
HP416-0472	982
HP416-0551	982
HP416-0591	982
HP416-0625	982
HP416-0630	982
HP416-0709	982
HP416-0787	982
HP416-0938	982
HP416-0984	982
HP416-1181	982
HP416-1250	982
HP416-1378	982
HP416-1575	982
HP416-1576	982
HP416-1772	982
HP416-1875	982
HP416-1969	982
HP416-2165	982
HP416-2362	982
HP416-2500	982
HP416-2559	982
HP416-2756	982
HP416-2953	982
HP416-3125	982
HP416-3150	982
HP416-3346	982
HP416-3543	982
HP416-3740	982
HP416-3750	982
HP416-3937	982
HP416-4331	982
HP416-4724	982
HP416-5000	982
HP416-5118	982
HP416-5512	982
HP416-5906	982
HP416-6299	982
HP416-7087	982
HP416-7874	982
HP416-9843	982
HP418-0390	983
HP418-0391	983
HP418-0392	983
HP418-0780	983
HP418-0781	983
HP418-0782	983
HP418-0938	983
HP418-1180	983
HP418-1181	983
HP418-1250	983
HP418-1570	983
HP418-1571	983
HP418-1875	983
HP418-1960	983
HP418-1961	983
HP418-2360	983



EDP Number	Page No.
HP418-2361	983
HP418-2500	983
HP418-3150	983
HP418-3151	983
HP418-3750	983
HP418-3930	983
HP418-3931	983
HP418-4720	983
HP418-4721	983
HP419-0197	984
HP419-0236	984
HP419-0312	984
HP419-0315	984
HP419-0394	984
HP419-0472	984
HP419-0551	984
HP419-0591	984
HP419-0625	984
HP419-0630	984
HP419-0709	984
HP419-0787	984
HP419-0938	984
HP419-0984	984
HP419-1181	984
HP419-1250	984
HP419-1378	984
HP419-1575	984
HP419-1875	984
HP419-1969	984
HP419-2362	984
HP419L-0236	985
HP419L-0315	985
HP419L-0394	985
HP419L-0472	985
HP419L-0551	985
HP419L-0591	985
HP419L-0630	985
HP419L-0709	985
HP419L-0787	985
HP419L-1181	985
HP421-0394	970
HP421-0394-BN	981
HP421-0469	969
HP421-0469-BN	980
HP421-0591	970
HP421-0591-BN	981
HP421-0625	969
HP421-0625-BN	980
HP421-0781	969
HP421-0781-BN	980
HP421-0787	970
HP421-0787-BN	981
HP421-0938	969
HP421-0938-BN	980
HP421-0984	970
HP421-0984-BN	981
HP421-1000	969
HP421-1000-BN	980
HP421-1094	969

EDP Number	Page No.
HP421-1094-BN	980
HP421-1181	970
HP421-1181-BN	981
HP421-1250	969
HP421-1250-BN	980
HP421-1378	970
HP421-1378-BN	981
HP421-1406	969
HP421-1406-BN	980
HP421-1562	969
HP421-1562-BN	980
HP421-1575	970
HP421-1575-BN	981
HP421-1719	969
HP421-1719-BN	980
HP421-1772	970
HP421-1772-BN	981
HP421-1875	969
HP421-1875-BN	980
HP421-1968	970
HP421-1968-BN	981
HP421-2031	969
HP421-2031-BN	980
HP421-2188	969
HP421-2188-BN	980
HP421-2362	970
HP421-2362-BN	981
HP421-2500	969
HP421-2500-BN	980
HP421-2756	970
HP421-2756-BN	981
HP421-2812	969
HP421-2812-BN	980
HP421-3125	969
HP421-3125-BN	980
HP421-3150	970
HP421-3150-BN	981
HP421-3438	969
HP421-3438-BN	980
HP421-3543	970
HP421-3543-BN	981
HP421-3750	969
HP421-3750-BN	980
HP421-3937	970
HP421-3937-BN	981
HP421-4062	969
HP421-4062-BN	980
HP421-4331	970
HP421-4331-BN	981
HP421-4375	969
HP421-4375-BN	980
HP421-4724	970
HP421-4724-BN	981
HP421-5000	969
HP421-5000-BN	980
HP421-5512	970
HP421-5512-BN	981
HP421-5625	969
HP421-5625-BN	980

EDP Number	Page No.
HP421-6250	969
HP421-6250-BN	980
HP421-6299	970
HP421-6299-BN	981
HP421-6875	969
HP421-6875-BN	980
HP421-7087	970
HP421-7087-BN	981
HP421-7500	969
HP421-7500-BN	980
HP421-7874	970
HP421-7874-BN	981
HP421-8661	970
HP421-8661-BN	981
HP421-8750	969
HP421-8750-BN	980
HP421-9843	970
HP421-9843-BN	981
HP432-1006	987
HP432-1009	987
HP432-1012	987
HP432-1181	988
HP432-1182	988
HP432-1251	987
HP432-1575	988
HP432-1576	988
HP432-1577	988
HP432-1872	987
HP432-1960	988
HP432-1961	988
HP432-1962	988
HP432-2360	988
HP432-2361	988
HP432-2362	988
HP432-2363	988
HP432-2364	988
HP432-2502	987
HP432-2503	987
HP432-3122	987
HP432-3123	987
HP432-3150	988
HP432-3151	988
HP432-3152	988
HP432-3153	988
HP432-3752	987
HP432-3753	987
HP432-3930	988
HP432-3931	988
HP432-3932	988
HP432-3933	988
HP432-3934	988
HP432-4720	988
HP432-4721	988
HP432-4722	988
HP432-4723	988
HP432-4724	988
HP432-5002	987
HP432-5003	987
HP432-5006	987

EDP Number	Page No.
HP432-6253	987
HP432-6256	987
HP432-6259	987
HP432-7506	987
HP432-7509	987
HP432-7512	987
HP433-1181	989
HP433-1182	989
HP433-1575	989
HP433-1576	989
HP433-1577	989
HP433-1960	989
HP433-1961	989
HP433-1962	989
HP433-2360	989
HP433-2361	989
HP433-2362	989
HP433-2363	989
HP433-2364	989
HP433-3150	989
HP433-3151	989
HP433-3152	989
HP433-3153	989
HP433-3930	989
HP433-3931	989
HP433-3932	989
HP433-3933	989
HP433-3934	989
HP433-4720	989
HP433-4721	989
HP433-4722	989
HP433-4723	989
HP433-4724	989
HP434-1006	987
HP434-1009	987
HP434-1012	987
HP434-1181	988
HP434-1182	988
HP434-1251	987
HP434-1575	988
HP434-1576	988
HP434-1577	988
HP434-1872	987
HP434-1960	988
HP434-1961	988
HP434-1962	988
HP434-2360	988
HP434-2361	988
HP434-2362	988
HP434-2363	988
HP434-2364	988
HP434-2502	987
HP434-2503	987
HP434-3122	987
HP434-3123	987
HP434-3150	988
HP434-3151	988
HP434-3152	988
HP434-3153	988



EDP Number	Page No.
HP434-3752	987
HP434-3753	987
HP434-3930	988
HP434-3931	988
HP434-3932	988
HP434-3933	988
HP434-3934	988
HP434-4720	988
HP434-4721	988
HP434-4722	988
HP434-4723	988
HP434-4724	988
HP434-5002	987
HP434-5003	987
HP434-5006	987
HP434-6253	987
HP434-6256	987
HP434-6259	987
HP434-7506	987
HP434-7509	987
HP434-7512	987
HP435-1181	990
HP435-1182	990
HP435-1575	990
HP435-1576	990
HP435-1577	990
HP435-1960	990
HP435-1961	990
HP435-1962	990
HP435-2360	990
HP435-2361	990
HP435-2362	990
HP435-2363	990
HP435-2364	990
HP435-3150	990
HP435-3151	990
HP435-3152	990
HP435-3153	990
HP435-3930	990
HP435-3931	990
HP435-3932	990
HP435-3933	990
HP435-3934	990
HP435-4720	990
HP435-4721	990
HP435-4722	990
HP435-4723	990
HP435-4724	990
HP441-0394	970
HP441-0394-BN	981
HP441-0469	969
HP441-0469-BN	980
HP441-0591	970
HP441-0591-BN	981
HP441-0625	969
HP441-0625-BN	980
HP441-0781	969
HP441-0781-BN	980
HP441-0787	970

EDP Number	Page No.
HP441-0787-BN	981
HP441-0938	969
HP441-0938-BN	980
HP441-0984	970
HP441-0984-BN	981
HP441-1000	969
HP441-1000-BN	980
HP441-1094	969
HP441-1094-BN	980
HP441-1181	970
HP441-1181-BN	981
HP441-1250	969
HP441-1250-BN	980
HP441-1378	970
HP441-1378-BN	981
HP441-1406	969
HP441-1406-BN	980
HP441-1562	969
HP441-1562-BN	980
HP441-1575	970
HP441-1575-BN	981
HP441-1719	969
HP441-1719-BN	980
HP441-1772	970
HP441-1772-BN	981
HP441-1875	969
HP441-1875-BN	980
HP441-1968	970
HP441-1968-BN	981
HP441-2031	969
HP441-2031-BN	980
HP441-2188	969
HP441-2188-BN	980
HP441-2362	970
HP441-2362-BN	981
HP441-2500	969
HP441-2500-BN	980
HP441-2756	970
HP441-2756-BN	981
HP441-2812	969
HP441-2812-BN	980
HP441-3125	969
HP441-3125-BN	980
HP441-3150	970
HP441-3150-BN	981
HP441-3438	969
HP441-3438-BN	980
HP441-3543	970
HP441-3543-BN	981
HP441-3750	969
HP441-3750-BN	980
HP441-3937	970
HP441-3937-BN	981
HP441-4062	969
HP441-4062-BN	980
HP441-4331	970
HP441-4331-BN	981
HP441-4375	969
HP441-4375-BN	980

EDP Number	Page No.
HP441-4724	970
HP441-4724-BN	981
HP441-5000	969
HP441-5000-BN	980
HP441-5512	970
HP441-5512-BN	981
HP441-5625	969
HP441-5625-BN	980
HP441-6250	969
HP441-6250-BN	980
HP441-6299	970
HP441-6299-BN	981
HP441-6875	969
HP441-6875-BN	980
HP441-7087	970
HP441-7087-BN	981
HP441-7500	969
HP441-7500-BN	980
HP441-7874	970
HP441-7874-BN	981
HP441-8661	970
HP441-8661-BN	981
HP441-8750	969
HP441-8750-BN	980
HP441-9843	970
HP441-9843-BN	981
HP450-1000	972
HP450-1181	972
HP450-1250	972
HP450-1575	972
HP450-1875	972
HP450-1969	972
HP450-2362	972
HP450-2500	972
HP450-3125	972
HP450-3150	972
HP450-3750	972
HP450-3937	972
HP450-4375	972
HP450-4724	972
HP450-5000	972
HP450-5512	972
HP450-5625	972
HP450-6250	972
HP450-6299	972
HP450-7087	972
HP450-7500	972
HP450-7874	972
HP450-8661	972
HP450-8750	972
HP450-9843	972
HP451-1000	974
HP451-1250	974
HP451-1575	974
HP451-1875	974
HP451-2362	974
HP451-2500	974
HP451-3125	974
HP451-3150	974

EDP Number	Page No.
HP451-3750	974
HP451-3937	974
HP451-4375	974
HP451-4724	974
HP451-5000	974
HP451-6250	974
HP451-6299	974
HP451-7500	974
HP451-7874	974
HP453-1575	973
HP453-2362	973
HP453-3150	973
HP453-3937	973
HP453-4724	973
HP453-6299	973
HP453-7874	973
HP455-1000	979
HP455-1181	979
HP455-1250	979
HP455-1562	979
HP455-1575	979
HP455-1875	979
HP455-1968	979
HP455-2188	979
HP455-2362	979
HP455-2500	979
HP455-2756	979
HP455-2812	979
HP455-3125	979
HP455-3150	979
HP455-3750	979
HP455-3937	979
HP455-4331	979
HP455-4375	979
HP455-4724	979
HP455-5000	979
HP455-5512	979
HP455-5625	979
HP455-6250	979
HP455-6299	979
HP455-7500	979
HP455-7874	979
HP455-9843	979
HP456-2363	973
HP456-2364	973
HP456-3151	973
HP456-3152	973
HP456-3938	973
HP456-3939	973
HP456-4725	973
HP456-4726	973
HP456-4727	973
HP460-1000	971
HP460-1181	971
HP460-1250	971
HP460-1575	971
HP460-1875	971
HP460-1968	971
HP460-2362	971



EDP Number	Page No.
HP460-2500	971
HP460-3125	971
HP460-3150	971
HP460-3750	971
HP460-3937	971
HP460-4375	971
HP460-4724	971
HP460-5000	971
HP460-5512	971
HP460-6250	971
HP460-6299	971
HP460-7087	971
HP460-7500	971
HP460-7874	971
HP460-9843	971
HP700-0980	179
HP700-1285	179
HP700-1610	179
HP700-1910	179
HP700-2500	179
HP700-2512	179
VG434-1000	961
VG434-1001	961
VG434-1002	961
VG434-1003	961
VG434-1004	961
VG434-1005	961
VG434-1006	961
VG434-1007	961
VG434-1250	961
VG434-1251	961
VG434-1875	961
VG434-1876	961
VG434-2500	961
VG434-2501	961
VG434-2502	961
VG434-2503	961
VG434-2504	961
VG434-3125	961
VG434-3126	961
VG434-3750	961
VG434-3751	961
VG434-3752	961
VG434-3753	961
VG434-3754	961
VG434-3755	961
VG434-3756	961
VG434-3757	961
VG434-3758	961
VG434-3759	961
VG434-4375	961
VG434-4376	961
VG434-4377	961
VG434-4378	961
VG434-5000	961
VG434-5001	961
VG434-5002	961
VG434-5003	961
VG434-5004	961

EDP Number	Page No.
VG434-5005	961
VG434-5006	961
VG434-5007	961
VG434-5008	961
VG434-5009	961
VG434-5010	961
VG434-5011	961
VG434-5012	961
VG434-5013	961
VG434-5014	961
VG434-5015	961
VG434-5016	961
VG434-5017	961
VG434-5018	961
VG434-5019	961
VG434-5020	961
VG434-5021	961
VG434-6250	961
VG434-6251	961
VG434-6252	961
VG434-6253	961
VG434-6254	961
VG434-6255	961
VG434-6256	961
VG434-6257	961
VG434-7500	961
VG434-7501	961
VG434-7502	961
VG434-7503	961
VG434-7504	961
VG434-7505	961
VG434-7506	961
VG434-7507	961
VG434-7508	961
VG434-7509	961
VG434-7510	961
VG434-7511	961
VG436-1000	962
VG436-1001	962
VG436-1250	962
VG436-1251	962
VG436-1252	962
VG436-1875	962
VG436-1876	962
VG436-2500	962
VG436-2501	962
VG436-3125	962
VG436-3126	962
VG436-3750	962
VG436-3751	962
VG436-4375	962
VG436-4376	962
VG436-5000	962
VG436-5001	962
VG436-5002	962
VG436-5003	962
VG436-6250	962
VG436-6251	962
VG436-6252	962

EDP Number	Page No.
VG436-7500	962
VG436-7501	962
VG436-7502	962
VG441-1000	960
VG441-1000-BN	965
VG441-1001	960
VG441-1002	960
VG441-1003	960
VG441-1004	960
VG441-1005	960
VG441-1006	960
VG441-1007	960
VG441-1008	960
VG441-1009	960
VG441-1010-BN	965
VG441-1250	960
VG441-1250-BN	965
VG441-1875	960
VG441-1875-BN	965
VG441-2500	960
VG441-2500-BN	965
VG441-2501	960
VG441-2502	960
VG441-3125	960
VG441-3125-BN	965
VG441-3126	960
VG441-3127	960
VG441-3750	960
VG441-3750-BN	965
VG441-3751	960
VG441-3752	960
VG441-3753	960
VG441-3754	960
VG441-3755	960
VG441-3756	960
VG441-3757	960
VG441-4375	960
VG441-4375-BN	965
VG441-4376	960
VG441-5000	960
VG441-5000-BN	965
VG441-5001	960
VG441-5002	960
VG441-5003	960
VG441-5004	960
VG441-5005	960
VG441-5006	960
VG441-5007	960
VG441-5008	960
VG441-5009	960
VG441-5010	960
VG441-5010-BN	965
VG441-5011	960
VG441-5012	960
VG441-5013	960
VG441-6250	960
VG441-6250-BN	965
VG441-6251	960
VG441-6252	960

EDP Number	Page No.
VG441-6253	960
VG441-6254	960
VG441-6255	960
VG441-6256	960
VG441-6257	960
VG441-6258	960
VG441-6259	960
VG441-7500	960
VG441-7500-BN	965
VG441-7501	960
VG441-7502	960
VG441-7503	960
VG441-7504	960
VG441-7505	960
VG441-7506	960
VG441-7507	960
VG441-7508	960
VG441-7509	960
VG441-7510	960
VG441-7511	960
VG446-1000	963
VG446-1001	963
VG446-1002	963
VG446-1003	963
VG446-1004	963
VG446-1005	963
VG446-2500	963
VG446-2501	963
VG446-2502	963
VG446-3750	963
VG446-3751	963
VG446-3752	963
VG446-5000	963
VG446-5001	963
VG446-5002	963
VG446-5003	963
VG446-6250	963
VG446-6251	963
VG446-6252	963
VG446-6253	963
VG446-7500	963
VG446-7501	963
VG446-7502	963
VG446-7503	963
VG446-7504	963
VG464-1000	964
VG464-1001	964
VG464-1002	964
VG464-1003	964
VG464-2500	964
VG464-2501	964
VG464-3750	964
VG464-3751	964
VG464-5000	964
VG464-5001	964
VG464-5002	964
VG464-5003	964
VG464-6250	964
VG464-6251	964





EDP Numerical Index

EDP Number	Page No.
VG464-6252	964
VG464-6253	964
VG464-7500	964
VG464-7501	964
VG464-7502	964
VG464-7503	964
VG534-1000	968
VG534-1001	968
VG534-1002	968
VG534-1003	968
VG534-1004	968
VG534-1005	968
VG534-1006	968
VG534-1007	968
VG534-1010	968
VG534-1011	968
VG534-1012	968
VG534-1013	968
VG534-1017	968
VG534-1018	968
VG534-1019	968
VG534-1020	968
VG534-1875	967
VG534-1876	967
VG534-1877	967
VG534-1878	967
VG534-2502	967
VG534-2503	967
VG534-2504	967
VG534-2505	967
VG534-2506	967
VG534-2507	967
VG534-3122	967
VG534-3123	967
VG534-3124	967
VG534-3751	967
VG534-3752	967
VG534-3753	967
VG534-3755	967
VG534-3756	967
VG534-3757	967
VG534-3758	967
VG534-3759	967
VG534-3760	967
VG534-3764	967
VG534-3765	967
VG534-3766	967
VG534-5000	967
VG534-5001	967
VG534-5002	967
VG534-5003	967
VG534-5004	967
VG534-5006	967
VG534-5007	967
VG534-5008	967
VG534-5009	967
VG534-5010	967
VG534-5011	967
VG534-5012	967

EDP Number	Page No.
VG534-5013	967
VG534-5015	967
VG534-5016	967
VG534-5017	967
VG534-5018	967
VG534-5019	967
VG534-5020	967
VG534-5021	967
VG534-5024	967
VG534-5025	967
VG534-5026	967
VG534-5027	967
VG534-6250	967
VG534-6251	967
VG534-6252	967
VG534-6254	967
VG534-6255	967
VG534-6256	967
VG534-6258	967
VG534-6259	967
VG534-6260	967
VG534-6265	967
VG534-6266	967
VG534-6267	967
VG534-7500	967
VG534-7501	968
VG534-7502	968
VG534-7503	968
VG534-7504	967
VG534-7505	968
VG534-7506	968
VG534-7507	968
VG534-7508	967
VG534-7509	967
VG534-7510	967
VG534-7511	967
VG534-7515	967
VG534-7516	967
VG534-7517	967
VG534-7518	967
VG541-1000	966
VG541-1005	966
VG541-1010	966
VG541-1011	966
VG541-1249	966
VG541-1250	966
VG541-1874	966
VG541-1875	966
VG541-2500	966
VG541-2501	966
VG541-3124	966
VG541-3125	966
VG541-3750	966
VG541-3751	966
VG541-3752	966
VG541-3753	966
VG541-5000	966
VG541-5002	966
VG541-5007	966

EDP Number	Page No.
VG541-5009	966
VG541-6250	966
VG541-6251	966
VG541-6255	966
VG541-6256	966
VG541-7501	966
VG541-7507	966
VG541-7512	966
VG541-7513	966





shaping your dreams

TEXAS

(National Headquarters)

1945 West Walnut Hill Ln.
Irving, TX 75038, USA
Toll Free: 800-837-2223
Fax: 800-837-3334

ILLINOIS

620 Stetson Avenue
St. Charles, IL 60174, USA
Toll Free: 800-837-2223
Fax: 800-837-3334

CALIFORNIA

1921 Miraloma Ave. Suite B
Placentia, CA 92870, USA
Toll Free: 800-837-2223
Fax: 714-528-9209

OHIO

3611 Socialville Foster Rd.
Ste 102
Mason, OH 45040, USA
Phone: 513-755-3360
Fax: 513-755-3362

CANADA

538 King Forest Court
Burlington, ON L7P 5C1, Canada
Toll Free: 800-263-4861
Fax: 905-632-8466

MEXICO

Avenida Central No. 186
Col. Nueva Industrial Vallejo
07700 Ciudad de Mexico, D.F., Mexico
Phone: (52) 55-51-19-3363
Fax: (52) 55-51-19-3370

