


# DEWALT®

## ANCHORS & FASTENERS

# DUST X+™

## ANCHOR INSTALLATION SYSTEM

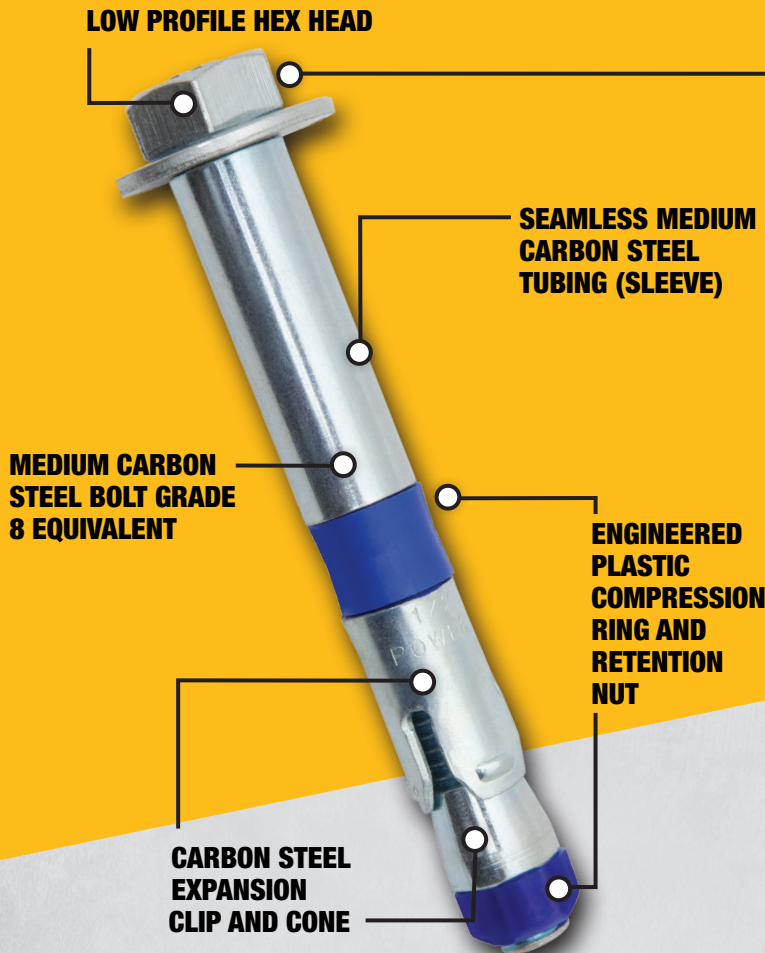

LOW PROFILE HEX HEAD


SEAMLESS MEDIUM  
CARBON STEEL  
TUBING (SLEEVE)

MEDIUM CARBON  
STEEL BOLT GRADE  
8 EQUIVALENT

ENGINEERED  
PLASTIC  
COMPRESSION  
RING AND  
RETENTION  
NUT

CARBON STEEL  
EXPANSION  
CLIP AND CONE

### TOP VIEW

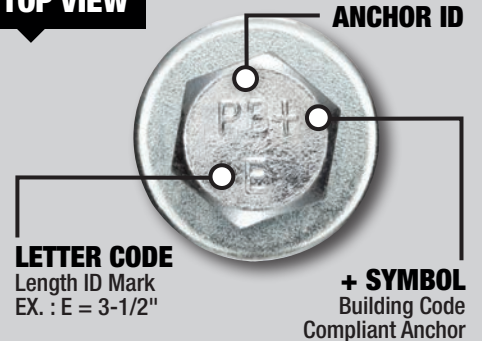

### TYPICAL APPLICATIONS

- Structural connections, like beam and column anchorage
- Safety-related attachments and tension zone applications
- Interior applications / low level corrosion environment
- Heavy duty applications

### APPROVALS



ESR-3260  
Concrete  
(1/2"-3/4"  
diameters)

IBC  
IRC

2015  
2012  
2009



Recognition in cracked  
and uncracked concrete including  
seismic and wind loading  
(Category 1 Anchors)

### BASE MATERIALS



Normal  
Weight  
Concrete



Lightweight  
Concrete

## HEAVY DUTY SLEEVE ANCHOR

## Power-Bolt®+

## POWER-BOLT®+

CAT #	ANCHOR SIZE	MAX FIXTURE THICK.	CTN	MSTR
6902SD	1/4" x 1-3/4"	1/2"	100	600
6906SD	1/4" x 3"	1-3/4"	100	600
6911SD	3/8" x 1-7/8"	1/4"	50	300
6910SD	3/8" x 2-1/4"	1/4"	50	300
6913SD	3/8" x 3"	1"	50	300
6914SD	3/8" x 3-1/2"	1-1/2"	50	300
6916SD	3/8" x 4"	2"	50	300
6930SD*	1/2" x 2-3/4"	1/4"	50	200
6932SD	1/2" x 3-1/2"	1/4"	50	200
6934SD	1/2" x 4-3/4"	1-1/2"	25	150
6936SD	1/2" x 5-3/4"	2-1/2"	25	150
6940SD*	5/8" x 3"	1/4"	20	120
6942SD	5/8" x 4"	1/4"	15	90
6944SD	5/8" x 5"	1-1/4"	15	90
6945SD	5/8" x 6"	2-1/4"	15	90
6947SD	5/8" x 8-1/2"	4-3/4"	10	40
6950SD	3/4" x 3-1/2"	1/4"	15	90
6952SD	3/4" x 4-1/4"	1-1/4"	10	60
6954SD	3/4" x 5-1/4"	2-1/4"	10	60
6956SD	3/4" x 7-1/4"	4-1/4"	10	40
6957SD	3/4" x 8-1/4"	3-7/8"	10	40

\* Less than the minimum standard anchor length for Strength Design or not included in ESR-3260. Published size includes the diameter and the length which is measured from below the washer to the end of the anchor.




➤ Structural column connection



### UPGRADE FROM TRADITIONAL HOLE CLEANING



### STRUCTURAL DESIGN SOFTWARE FOR ANCHORING TO CONCRETE



Download DDA™ and experience our free concrete anchoring design software.

[DEWALT.COM/DDA](http://DEWALT.COM/DDA)

## RELATED PRODUCTS



**DCH293R2DH**  
20V MAX\* XR® SDS PLUS ROTARY HAMMER W/DUST COLLECTION



**DCH273P2DHO**  
20V MAX\* XR® SDS PLUS ROTARY HAMMER W/ON-BOARD DUST EXTRACTOR



**DWH050K**  
LARGE HAMMER DUST EXTRACTION - HOLE CLEANING



**DWV012**  
10-GALLON HEPA/RRP WET/DRY DUST EXTRACTOR



**HOLLOW DRILL BIT**  
SDS PLUS AND SDS MAX CARBIDE

\*For 20V MAX\* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

# 1-800-4-DEWALT

# www.DEWALT.com

Copyright ©2021 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWBLT+SS