



DEUTSCH

INDUSTRIAL PRODUCTS DIVISION
3850 Industrial Avenue • Hemet, CA 92545

Title <i>INSTRUCTION GUIDE FOR DTT-12-00</i>	Drawing Number <i>0425-036-0000</i>
---	--

Revisions			
	Description	Date	Approved
A	Revised per E.O. P19059	<i>5/1/06</i>	<i>T.D. Meyer</i>

1. WIRE PREPARATION

Prior to crimping contacts, wire must be stripped to a length of $.250" \pm .025"$ [6.35± 0.64]. Wire should have no insulation tearing or stretching and no conductor strands missing or damaged.

2. CONTACT LOADING

Cycle handles to release ratchet and fully open crimp jaws. Insert contact into desired nest. Verify that contact is fully inserted into locator block. Adjust alignment and width of crimp wings if necessary to insure capture by crimp jaws.

WARNING

**Terminals may have sharp edges. Use finger protection to avoid cuts.
Do not place fingers in tool areas, which may pinch during crimp cycle.
Use safety glasses to avoid eye injury.**

3. HAND-CRIMP CYCLE

Close crimp tool until full-cycle ratchet control releases.

4. CONTACT REMOVAL

After completing the crimp cycle, open jaws fully.

5. MAINTENANCE and INSPECTION

Maintenance and inspection should be performed regularly. Tool should be wiped clean with special emphasis on the crimping cavities. Tool may be cleaned by immersing in a suitable commercial solvent or cleaner which does not attack paints or plastic material. The tool should be re-lubricated after cleaning using a light film of medium weight oil on bearing surfaces and pivot pins. When not in use, keep handles closed to prevent objects from becoming lodged in the crimping dies. Store in a clean dry area.

6. RECOMMENDED CAVITY FOR WIRE GAUGE AND INSULATION TYPES

Use this Table 1 to insure best crimp results with Deutsch stamped and formed contacts 1060-12-01** (PIN), and 1062-12-01** (SOCKET):

Table 1. Cavity and Wire Gauge and Insulation Types

Cavity	Wire Gauge and Insulation Types	Insulation Range
A	2.0 mm ² 14 AWG (SXL, GXL, TXL) 2.5 mm ² 3.0 mm ² 12 AWG (TXL)	.095 - .132 [2.41 - 3.35]
B	12 AWG (SXL, GXL) 4.0 mm ²	.130 - .180 [3.30 - 4.57]

Revision Letter: <i>A</i>	Engineering Order Number: <i>P19059</i>	Page <i>1</i> of <i>3</i>
---------------------------	---	---------------------------

I N F O R M A T I O N



7. CALIARATION


Table 2.

*Use conductor type per SAE J1128 AND ISO 6722(Metric)

Cavity	Wire*	Conductor Height (1)	Conductor Width	Insulation Height	Insulation Width
A	14 AWG 3.0 mm ²	.067-.072	.122-.133	.120-.131	.130-.150
		.070-.082	.122-.133	.125-.160	.130-.150
B	12 AWG (SXL, GXL) 4.0 mm ²	.070-.082	.122-.133	.125-.160	.130-.150
		.075-.090	.122-.133	.150-.170	.150-.170

Note: check tool calibration values after 5,000 crimps (or 6 months). Visually inspect for loose hardware and broken or missing parts.

- (1) Measure conductor height with a blade and point micrometer to prevent false readings which include crimp flash (burr).

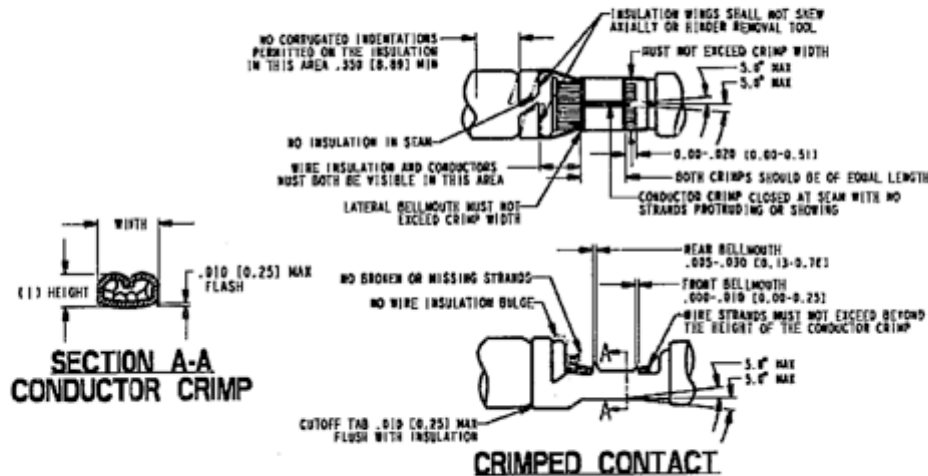



DEUTSCH


INDUSTRIAL PRODUCTS DIVISION

3850 Industrial Avenue • Hemet, CA 92545

Title
INSTRUCTION GUIDE FOR DTT-12-00

Drawing Number
0425-036-0000

8. ECCENTRIC ADJUSTMENT (Crimping Force)

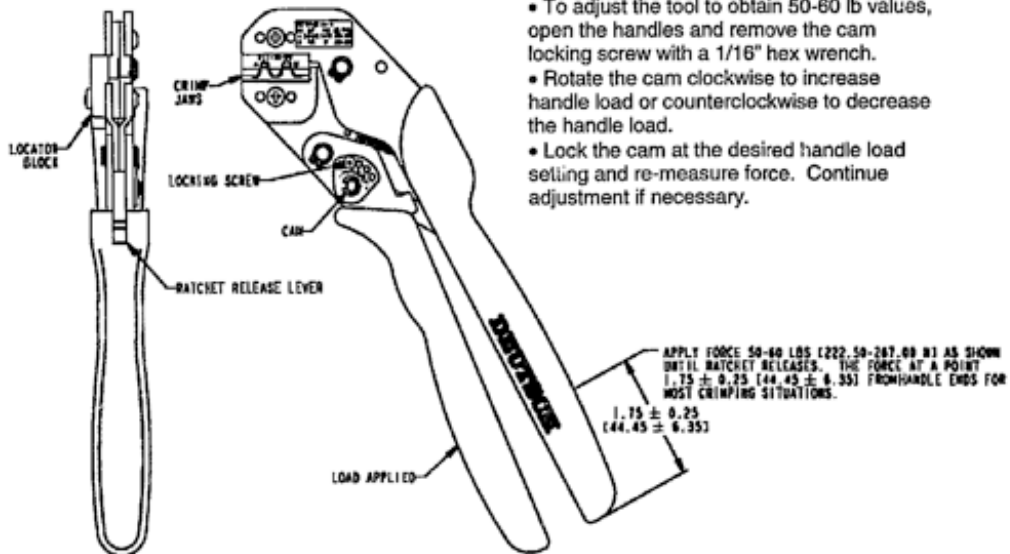

Revision Letter: *A* Engineering Order Number: *P19059* Page *3* of *3*

INFORMATION