



Rigid Metal Conduit, IMC or EMT “K-Clamps”

Catalog No.	Size (In.)	Wt. Lbs. Per 100	Std. Pkg.
Right Angle Type—Hot Dip/Mechanically Galvanized*—For Rigid, IMC, EMT			
PC-50RA	1/2	37.0	50
PC-75RA	3/4	40.0	50
PC-100RA	1	42.0	50
PC-125RA	1-1/4	49.0	25
PC-150RA	1-1/2	54.0	25
PC-200RA	2	71.0	25
PC-250RA	2-1/2	95.0	10
PC-300RA	3	107.0	10
PC-350RA	3-1/2	120.0	10
PC-400RA	4	131.0	10
PC-500RA+	5	160.0	5
PC-600RA+	6	195.0	5




Right Angle Type

Parallel Type—Hot Dip/Mechanically Galvanized*—For Rigid, IMC, EMT			
PC-50PAR	1/2	50.0	50
PC-75PAR	3/4	53.0	50
PC-100PAR	1	60.0	50
PC-125PAR	1-1/4	70.0	25
PC-150PAR	1-1/2	82.0	25
PC-200PAR	2	132.0	25
PC-250PAR	2-1/2	192.0	10
PC-300PAR	3	194.0	10
PC-350PAR	3-1/2	216.0	10
PC-400PAR	4	232.0	10



Parallel Type


Edge Type—Hot Dip/Mechanically Galvanized*—For Rigid Conduit Only			
PC-50ET	1/2	63.0	50
PC-75ET	3/4	69.0	50
PC-100ET	1	82.0	50
PC-125ET	1-1/4	95.0	25
PC-150ET	1-1/2	108.0	25
PC-200ET	2	121.0	25
PC-250ET	2-1/2	153.0	10
PC-300ET	3	214.0	10



Edge Type

*Malleable castings are hot dip galvanized. Hardware is mechanically galvanized.

Catalog No.	Size (In.)	Dimensions in Inches			UNC Thread Size	Wt. Lbs. Per 100	Std. Pkg.
		A	B	C			
Heavy-Duty U-Bolts with Hex Nuts+—Mechanically Galvanized—For Rigid, IMC, EMT							
UBC-50	1/2	1-1/4	2-3/8	1-1/2	5/16-18	12.0	200
UBC-75	3/4	1-7/16	2-3/4	1-1/2	5/16-18	14.0	200
UBC-100	1	1-11/16	3	1-1/2	5/16-18	17.0	100
UBC-125	1-1/4	2-1/16	3-1/8	1-1/2	5/16-18	19.0	50
UBC-150	1-1/2	2-5/16	3-1/2	1-1/2	5/16-18	21.0	50
UBC-200	2	2-13/16	4-3/8	1-7/8	3/8-16	28.0	50
UBC-250	2-1/2	3-3/8	4-3/4	1-7/8	3/8-16	37.0	25
UBC-300	3	4	5-3/8	1-7/8	3/8-16	42.0	25
UBC-350	3-1/2	4-1/2	5-3/4	1-7/8	3/8-16	46.0	20
UBC-400	4	5	6-5/8	1-7/8	3/8-16	51.0	20
UBC-500	5	6-1/16	7-3/8	2	3/8-16	62.0	5
UBC-600	6	7-1/8	8-3/8	2	3/8-16	76.0	5



+Not CSA Certified UL Listing Not Applicable

Rigid Metal Conduit, IMC or EMT Hang-On® Hangers

Catalog No.	Size (In.)	Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
-------------	------------	---------------------	--------------	--------------

Hang-On® Conduit Hangers with Swing Bolts




H50-SWB	1/2	5.7	50	200
H75-SWB	3/4	7.0	50	200
H100-SWB	1	8.8	50	100
H125-SWB	1-1/4	10.0	50	100
H150-SWB	1-1/2	16.0	25	100
H200-SWB	2	25.8	—	25

Hang-On® Conduit Hangers with Bolts



H50WB	1/2	6.0	50	200
H75WB	3/4	7.0	50	200
H100WB	1	9.0	50	100
H125WB	1-1/4	10.0	50	100
H150WB	1-1/2	16.0	25	100
H200WB	2	25.8	—	25
H250WB	2-1/2	26.0	—	25
H300WB	3	30.0	—	25
H350WB	3-1/2	38.0	—	10
H400WB	4	90.0	—	10

UL Listing Not Applicable

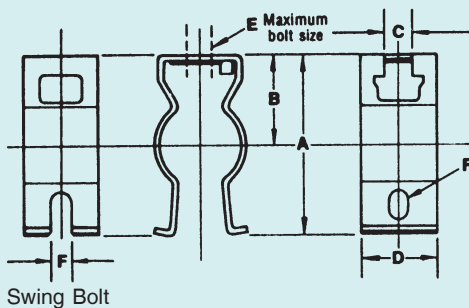


Dimensions in Inches

Cat No.	A	B	C	D	E	F
H50WB	1-7/8	7/8	9/32	3/4	1/4	9/32
H75WB	2	29/32	9/32	7/8	1/4	9/32
H100WB	2-13/32	1-5/32	9/32	7/8	1/4	9/32
H125WB	2-13/16	1-3/8	9/32	7/8	1/4	9/32
H150WB	3-7/32	1-5/8	11/16	1	5/16	9/32
H200WB	3-3/4	1-7/8	11/32	1-1/4	5/16	9/32
H250WB	4-7/32	2-1/8	11/32	1-1/4	5/16	9/32
H300WB	4-7/8	2-3/8	11/32	1-1/4	5/16	9/32
H350WB	5-3/8	2-11/16	11/32	1-1/4	5/16	9/32
H400WB	6-7/16	3	17/32	1-3/4	1/2	17/32
H50-SWB	1-23/32	7/8	9/32	3/4	1/4	13/64
H75-SWB	1-27/32	29/32	9/32	7/8	1/4	13/64
H100-SWB	2-11/32	1-5/32	9/32	7/8	1/4	13/64
H125-SWB	2-21/32	1-3/8	9/32	7/8	1/4	13/64
H150-SWB	3-1/16	1-5/8	11/32	1	5/16	13/64
H200-SWB	3-19/32	1-7/8	11/32	1-1/4	5/16	13/64


Beam Clamps, Clamps and Clamp Backs for Rigid Metal Conduit or IMC



Catalog No.	Dimensions in Inches					Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
	A	B	C	D	E			
Beam Clamps—Malleable Iron—Hot Dipped Galvanized								
BH-500	1-5/8	1	7/8	15/16	1/4-20	22.0	25	100
BH-500-10	1-5/8	1	7/8	15/16	10-24	21.5	25	100
BH-501	1-13/16	1-1/2	1-1/8	15/16	5/16-18	45.0	10	50
BH-502	2-1/16	2	1-3/8	1	3/8-16	83.0	5	25
BH-503	2-1/4	2-5/8	1-11/16	1-1/8	1/2-13	152.0	5	25

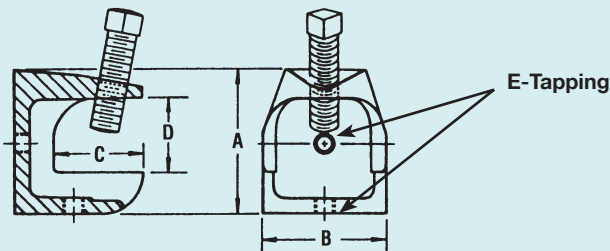


Catalog No.	Size (In.)	Dimensions in Inches			Recommended Bolt Dia. (In.)	Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
		A	B	C	D			
One-Hole Clamps—Malleable Iron—Hot Dipped Galvanized								
CL-50MN	1/2	1	15/16	5/8	1/4	6	50	500
CL-75MN	3/4	1-3/16	1-7/32	3/4	1/4	8	50	500
CL-100MN	1	1-3/8	1-1/2	7/8	1/4	14	50	200
CL-125MN	1-1/4	1-5/8	1-13/16	7/8	3/8	21	25	100
CL-150MN	1-1/2	1-13/16	2-1/8	15/16	3/8	27	25	100
CL-200MN	2	2-5/16	2-5/8	1-1/16	1/2	48	5	25
CL-250MN	2-1/2	2-9/16	3	1-5/16	1/2	71	5	25
CL-300MN	3	3-3/16	3-13/16	1-1/2	1/2	107	5	25
CL-350MN	3-1/2	3-3/8	4-7/16	1-11/16	5/8	172	2	10
CL-400MN	4	3-3/4	5	1-15/16	5/8	266	2	10
CL-500MN+	5	4-3/4	6-1/2	2-1/2	5/8	433	—	5
CL-600MN+	6	5-5/8	7-1/2	2-3/4	1	620	—	5







Clamp Backs—Malleable Iron—Hot Dipped Galvanized

CLB-50MN	1/2	2-7/16	1-1/16	7/16	1/4	9	25	250
CLB-75MN	3/4	2-1/2	1-1/8	1/2	1/4	11	25	250
CLB-100MN	1	3-3/16	1-5/16	9/16	1/4	18	20	100
CLB-125MN	1-1/4	3-11/16	1-7/16	3/4	3/8	24	20	100
CLB-150MN	1-1/2	3-15/16	1-9/16	13/16	3/8	32	25	100
CLB-200MN	2	5-1/8	2	3/4	1/2	54	10	50
CLB-250MN	2-1/2	5-3/4	2-1/2	3/4	1/2	71	10	50
CLB-300MN	3	7-1/8	2-13/16	13/16	1/2	104	10	50
CLB-350MN	3-1/2	8	3-1/4	1	5/8	159	—	10
CLB-400MN	4	8-3/4	3-7/16	1	5/8	183	—	10
CLB-500MN+	5	10-1/16	3-3/4	1-1/4	5/8	328	—	5
CLB-600MN+	6	11-13/16	3-15/16	1-1/2	1	478	—	4



Rigid Metal Conduit or IMC Clamps and Clamp Backs



Catalog No.	Size (In.)	Dimension in Inches			Hole Dia.	Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
		A	B	C				
Combination Clamp and Clamp Backs—Steel								
CL-50CB	1/2	—	—	—	—	5.0	100	500
CL-75CB	3/4	—	—	—	—	5.0	—	100
CL-100CB	1	—	—	—	—	6.0	—	100

One-Hole Clamps—Steel

CL-25	1/4	5/8	15/32	19/32	1/4	1.7	100	1000
CL-38	3/8	13/16	5/8	11/16	9/32	2.6	100	1000
CL-50	1/2	1	3/4	15/16	9/32	5.0	100	500
CL-75	3/4	1-5/32	3/4	1-1/8	9/32	5.9	100	500
CL-100	1	1-11/32	7/8	1-7/16	11/32	12.2	50	100
CL-125	1-1/4	1-11/16	1	1-25/32	13/32	19.0	25	100
CL-150	1-1/2	1-15/16	1-1/8	2	13/32	25.0	25	50
CL-200	2	2-11/32	1-3/16	2-17/32	15/32	38.0	5	25
CL-250	2-1/2	2-13/16	1-1/4	3-1/32	9/16	76.0	5	25
CL-300	3	3-5/16	1-1/4	3-21/32	9/16	93.0	5	10
CL-350	3-1/2	3-7/16	1-1/2	4-5/32	11/16	123.0	2	10
CL-400	4	3-25/32	1-1/2	4-21/32	11/16	140.0	2	10

Clamp Backs—Steel (Can also be used with EMT)



CLB-50	1/2	2-1/16	7/8	1/4	—	5.0	100	500
CLB-75	3/4	2-1/2	1	1/4	—	7.0	—	100
CLB-100	1	2-11/16	1-1/8	1/4	—	8.6	—	100

2-Hole Pipe Straps—Steel


CF-250	1/4	1-1/4	5/8	5/8	3/16	1.6	—	500
CF-375	3/8	1-1/2	5/8	3/4	3/16	1.2	—	250
CF-500	1/2	1-19/32	5/8	29/32	3/16	1.4	—	250
CF-750	3/4	2-3/32	5/8	1-1/18	3/16	1.6	—	250
CF-100	1	2-7/16	3/4	1-3/8	3/16	3.5	—	100
CF-125	1-1/4	2-21/32	3/4	1-3/4	1/4	4.0	—	100
CF-150	1-1/2	3-19/32	1	2	1/4	9.0	—	50
CF-200	2	4-1/16	1-1/4	2-1/2	1/4	12.0	—	50
CF-250H	2-1/2	4-3/8	1	2-13/16	17/64	5.7	25	100
CF-300H	3	5	1	3-3/8	17/64	8.0	25	100
CF-350H	3-1/2	6-1/4	1	3-7/8	21/64	8.7	25	50
CF-400H	4	7	1-1/4	4-3/8	9/32	9.4	10	50

Rigid Metal Conduit, IMC or EMT Pipe Hangers


- Unique design accommodates more sizes of conduit with fewer clamps for lower inventories.
- Suitable for Rigid, IMC, EMT and Flexible Metal Conduit.
- Suitable for conduit runs on vertical and horizontal beams.



Catalog No.	Size (In.)	Dimension in Inches				Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
		A	B	C	D			
Type AJ—for Single Line Conduit								
AJ-50-75	1/2-3/4	1-3/4	1-5/16	1-17/32	2-7/16	56.3	—	25
AJ-100	1	2-1/16	1-13/32	1-13/16	2-3/4	62.5	—	25
AJ-125-150	1-1/4—1-1/2	2-11/16	2-1/16	2-5/8	3-11/16	115.6	—	10
AJ-200	2	3-5/16	2-5/16	3-1/8	4-5/16	137.5	—	10




Doubles lines of conduit running perpendicular to beam using "CHD" hanger.



Single line of conduit running parallel to beam using "CH" hanger.

Catalog No.	Rigid Size (In.)	EMT Size (In.)	Dim. A (In.)	Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
Type CH—for Single Line Conduit						
CH-50S	1/2-3/4	1/2-3/4-1	21/32	77.0	—	25
CH-125S	1	1-1/4—1-1/2	21/32	95.0	—	25
Type CHD—for Double Lines of Conduit						
CH-50D	1/2-3/4	1/2-3/4-1	21/32	80.0	—	25
CH-125D	1	1-1/4—1-1/2	21/32	107.0	—	25
Single Accessories						
CHL-50	1/2-3/4	1/2-3/4-1	—	12.0	10	100
CHL-125	1	1-1/4—1-1/2	—	30.0	10	100
Double Accessories						
CHL-50D	1/2-3/4	1/2-3/4-1	—	16.0	10	100
CHL-125D	1	1-1/2—1-1/2	—	41.0	10	50
Type CH Clamp Body						
CH		Fits All Parts	21/32	65.0	—	50
3/8 Inch Guy Wire Conduit Clamp Hanger—Rigid or IMC						
CH-50	1/2	For	—	15.0	10	100
CH-75	3/4	Rigid	—	15.0	10	100
CH-100	1	Conduit	—	18.0	10	100

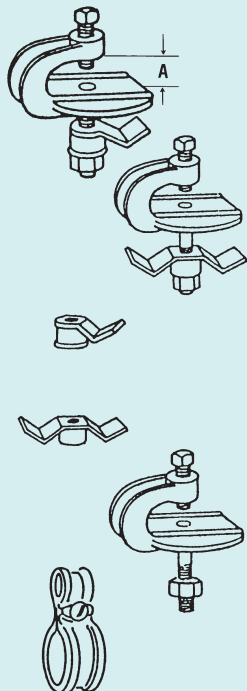

“TCC” Single and “TCCD” Double Conduit Cable Tray Clamps

Application

● For supporting rigid conduit to cable tray flange at each location where tray cable exits the tray and is run through rigid conduit raceway to control panel boards, motor starters and other electrical devices.

Features

- Clamps mount on all types of tray configurations (inside, outside or double flange).
- Exclusive design provides full 360° swivel, allowing exit conduit positioning at any angle, eliminating the need for separate inside or outside flange clamps, and field modification.
- Unique clamp mounting provides greater cable capacity and working area within the tray by reducing internal clamp obstruction.
- Exclusive double conduit clamps Type TCD conserve space where multiple cables exit the tray at one location.
- Only four clamps are necessary to handle a conduit range from 1/2” through 4”.
- Fewer catalog numbers reduce jobsite inventory and the chances of errors and confusion.

Standard Materials







- Base and conduit clamp are malleable iron, hot dip galvanized.
- Nuts, bolts and other hardware are steel, mechanically galvanized.
- Cable tray grounding clamp, aluminum.

Size Range

- Type TCC (single conduit clamp) available in 1/2” through 4” conduit size.
- Type TCCD (double conduit clamp) available in 1/2” through 2” conduit size.

Compliances

- UL 467 grounding and bonding.

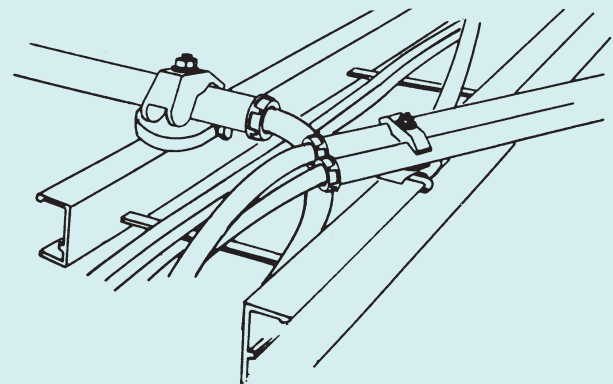

Catalog No.	Rigid Size (In.)	Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
Type “TCC” for Single Line Conduit—Hot Dip/Mechanically Galvanized				
TCC-50100G	1/2, 3/4, 1	100.0	5	10
TCC-125200G	1-1/4, 1-1/2, 2	231.3	1	5
TCC-250300G	2-1/2, 3	446.9	1	5
TCC-350400G	3-1/2, 4	449.1	1	5
Type “TCCD” for Double Line Conduit—Hot Dip/Mechanically Galvanized				
TCCD-50100G	1/2, 3/4, 1	90.7	2	10
TCCD-125200G	1-1/4, 1-1/2, 2	200.0	1	5
Cable Tray Grounding Conductor Clamp—Aluminum				
TCGC	For #6 to 2/0 wire size	18.8	10	50