




# Hillsdale Terminal

## 22-18 A.W.G. Vinyl Rings

Phone - 1-800-447-3150

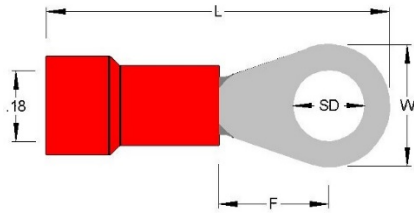

- 110 Copper Alloy .028 thickness
- Electro-Tin Plated terminal
  - .0001"-.0003"
- PVC Insulator
- Terminal I.D. - .078

Part #	Stud Size	Barrel Length	Length	W	Stud Diameter (SD)	F	Voltage
50014	#4	1/4	.80	.225	.122/.125	.223	600V
50020*	#6	1/4	.87	.290	.139/.142	.260	600V
50021	#6 slim	1/4	.80	.225	.138/.142	.223	600V
50021S	#4-6 Serrated	1/4	.80		.138/.142		600V
50030*	#8	1/4	.88	.324	.168/.171	.250	600V
50038	#8 Slim	1/4	.87	.290	.168/.171	.260	600V
50040*	#10	1/4	.88	.324	.194/.197	.250	600V
50040M*	6-8-10	1/4	1.02	.34	NA	.345	600V
50041*	1/4	1/4	1.11	.470	.263/.265	.405	600V
50042*	5/16	1/4	.1.11	.470	.324/.327	.405	600V
50043*	3/8	1/4	1.20	.558	.394/.398	.405	600V
50044*	1/4 slim	1/4	.1.03	.430	.263/.265	.345	600V
50044E	1/4 short	.190	.96	.430	.263/.265	.345	600V

All dimensions are in "inches"

\* = UL and CSA listed part

~ = CSA listed part

### Required per UL/CSA Requirements:

- 75° C Max. Temperature Rating
- One crimp required
- Solid or Stranded wire

- Crimp tool HT #20592-NH30
- Strip Length 9/32" (7.1mm)

### Agency and Compliance:

- UL Listed, investigated to UL 486 A-B, File NO. ZMVV.E68376
- CSA 22.2 No. 65-03, Certification NO. 207131

**WARNING!** Installation of electrical wire and terminals can be hazardous if done improperly. Improper use can result in personal injury or property damage. For safe wiring practices, consult National Electrical Code and/or your local building inspector. A licensed electrical contractor or engineer must be consulted to determine that the correct wire and terminal size is used and that it is properly and safely installed for all applications.

All statements, procedural information, and recommendations related to Hillsdale Terminal's products are based on data believed to be reliable, but the precision or completeness is not definite. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You accept all risks and liability associated with such use. Any statements related to the product which are not in Hillsdale Terminal's current publications shall have no force or effect unless expressly agreed upon, in writing, by a sanctioned member of Hillsdale Terminal.