



# REPLACEMENT HARNESS


FITTING INSTRUCTIONS




OXFORD, ENGLAND

## EV06131™ REPLACEMENT HARNESS FITTING INSTRUCTIONS


FITTING THE NEW HARNESS CONTINUED

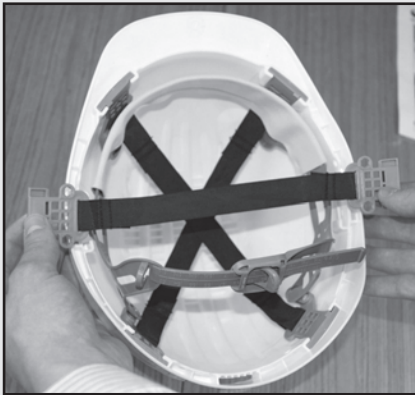

**STEP 5:** Take the final strap of the harness and place across the middle of the helmet.

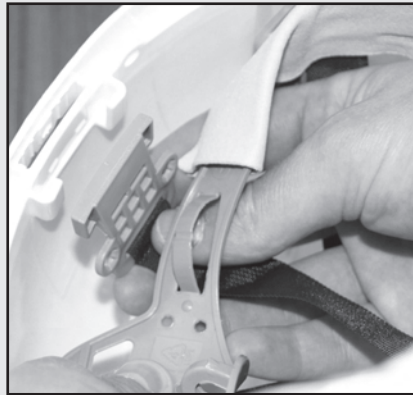


**STEP 6:** Tuck the first clip under the headband and align in the slot in the helmets shell. Push downwards until you hear the clip click into place.

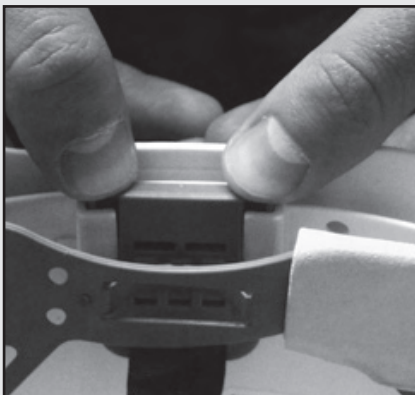

**STEP 7:** Repeat on the other side making sure to tuck the clip under the headband and clip firmly into the slot in the helmets shell.

EV06131™ COMPLETE WITH NEW HARNESS

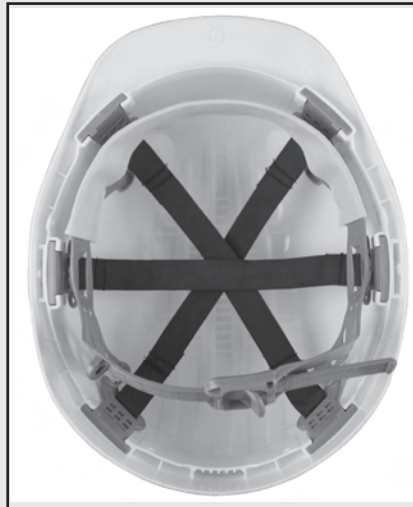

**Warning: Failure To Replace The Harness Correctly Will Compromise The Performance Of The Helmet**



JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA

TECHNICAL HELPLINE:+44(0)1993 826051

Email: [technical.service@jsp.co.uk](mailto:technical.service@jsp.co.uk)




# REPLACEMENT HARNESS


## FITTING INSTRUCTIONS




### REMOVING THE OLD HARNESS

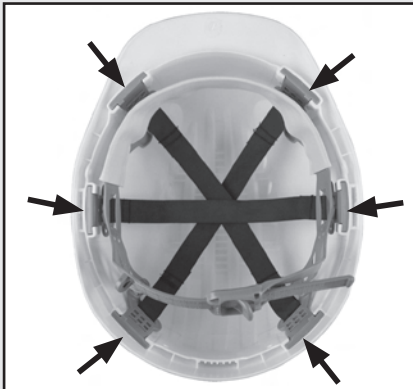


**STEP 1:** Locate the six clips on the inside of the helmet.

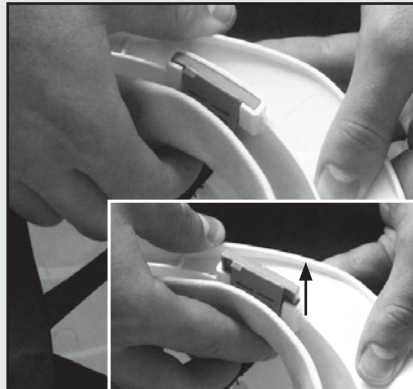

**STEP 2:** Grasp the bottom of the clip and push upwards to remove the clip from the slot in the helmet's shell.

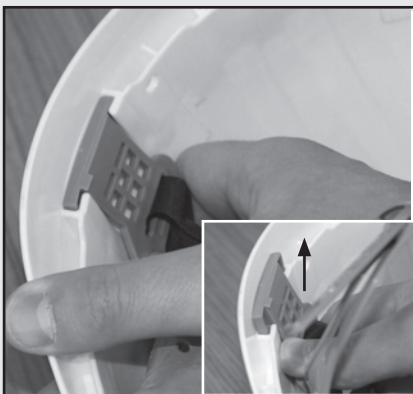

**STEP 3:** Repeat for all six clips until the harness is free from the helmet's shell.

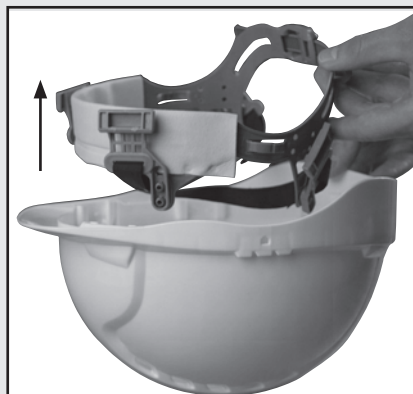

**STEP 4:** Remove the old harness from the helmet's shell.

**Warning: Failure To Replace The Harness Correctly Will Compromise The Performance Of The Helmet**



JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA  
TECHNICAL HELPLINE:+44(0)1993 826051  
Email: technical.service@jsp.co.uk

RFAZ-009-100



# REPLACEMENT HARNESS

## FITTING INSTRUCTIONS




### FITTING THE NEW HARNESS



**STEP 1:** Before fitting the replacement harness make sure you have all the components of the new harness pictured above and the helmet's shell from before.



**STEP 2:** Place the slip ratchet and head piece into the helmet's shell making sure the sweatband is at the peak and the slip ratchet is at the rear.

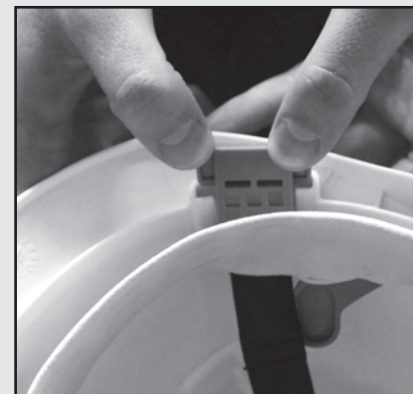

**STEP 3:** Align the clips with the slots in the helmet's shell and push downwards until you hear the clip click into place.



**STEP 4:** Repeat for all four clips making sure they are firmly pressed in place.

CONTINUES ON REAR →



JSP Ltd, Worsham Mill, Minster Lovell Oxfordshire, OX29 0TA  
TECHNICAL HELPLINE:+44(0)1993 826051  
Email: technical.service@jsp.co.uk

RFAZ-009-100