



VALUE AT THE SPINDLE®

2021 Global Product Catalog



www.kyocera-sgstool.com

ISO 9001:2015 Certified



VALUE AT THE SPINDLE®

KYOCERA SGS Precision Tools (KSPT) is an ISO 9001:2015 Certified manufacturer of industry leading round solid carbide cutting tools. State of the art manufacturing and warehouse facilities have the capacity and processes to meet the quality and delivery demands of customers in all markets around the world. Complete inspections performed within its metallurgical lab and manufacturing quality departments ensure the use of high quality carbide and reliable manufacturing consistency regardless of when a cutting tool is produced.

KSPT is proud to have pioneered some of the world's most advanced cutting technologies due to rigorous testing of tools, coatings, and materials within its Global Innovation Center. It is this commitment to innovation that has launched patented products and technologies like the Z-Carb with its variable geometry and cutting edge preparation, Series 43 APR® and APF® ultra high performance aluminum cutting tools, and the JetStream coolant technology.

SGS has become an important part of the KYOCERA Precision Tools family, and while the name has changed, one thing has not. Its dedicated people and their relentless commitment to the customer. KSPT Technical Sales Engineers, Application Specialists, and Distribution Partners blanket the globe, delivering reliable service and support to all market segments. It is these people and products that drive innovative application strategies and cutting tool technologies into the end user, continually exceeding expectations and providing the most Value at the Spindle®.



Table of Contents

KYOCERA SGS Precision Tools	2
KYOCERA SGS Precision Tools Europe Ltd. .	4
Global Innovation Center	5
Tooling Services.....	6
Tech Hub	7
Medical Divison	8
Tool Wizard®	9
 OVERVIEW	
Common Legend.....	11
End Mill Legend.....	12
Drill Legend.....	13
Router Legend	14
COATINGS	15
 MILLING	
High Performance End Mills.....	16
End Mill Matrix.	22
High Performance Aluminum End Mills . .	122
General Purpose End Mills.....	168
HOLE MAKING	
High Performance Drills	224
General Purpose Drills	284
General Purpose Countersinks	310
General Purpose Reamers	326
 ROUTING	
High Performance Routers.....	334
General Purpose Routers	348
 TECHNICAL INFORMATION	
EDP Index	352
KSPT Reference Information	369
Decimal Equivalent Chart	370
Hardness Conversion Chart.....	371





VALUE AT THE SPINDLE®



MORE THAN JUST ANOTHER CUTTING TOOL SUPPLIER

KYOCERA SGS PRECISION TOOLS EUROPE, LTD.

The state of the art KYOCERA SGS Precision Tools Europe facility is located in Wokingham, England and is focused on the manufacture of special cutting tools, high accuracy form tools, tool modifications and regrinds. A highly skilled team of professionals specialize in the supply and support of high performance tools for the Aerospace, Medical, Power Generation and Motorsport markets.

KYOCERA SGS Precision Tools Europe also offers a full range of end mill and drill products as follows:

- Multi-Million Euro Warehouse Stocking Full Range of Catalog Products
- Same Day Shipment on Stock Items
- Multi-Lingual Sales and Technical Support
- Online Portal for Stock Availability, Pricing, Discount Information and 24-Hour Order Placement
- High Performance Product and Application Training, Including the New KYOCERA SGS Tool Clinic

Additional services provided at this facility include:

- A Fast Track for Special Tools Via Our Rapid Response Centre
- Product Research and Development
- Product Engineering and Tool Application Support
- CAD/CAM Software Support





GLOBAL INNOVATION CENTER

INNOVATIVE CUTTING TOOL TECHNOLOGIES

The Global Innovation Center is an environment conducive to innovation. Through testing and development, the dedicated KYOCERA SGS Precision Tools Team focuses on the latest technical competence and machining techniques to bring a continuous stream of new products and advancements to market.

- Cutting Edge Equipment
- Highly Engineered Technology
- Incorporation of innovative machine tool technology for Research and Development

TECHNICAL TRAINING & EDUCATION

Our knowledge-based selling programs are specifically designed to challenge and educate by facilitating programs that mix classroom presentation with hands-on experience. Our own KSPT team members go through the same core training we provide to our valued distribution partners.

- KSPT Campus Tool Clinics
- On-Site Customer Training
- Basic, Advanced and Expert Level Material
- Market-Driven Knowledge

APPLICATION ENGINEERING

The KSPT expertise and global market knowledge allows us to translate customer needs into a commercial sales strategy. The portfolio of KSPT products and services offer an unparalleled track record in performance, cost savings, quality and value at the spindle.

- Market-Driven Productivity Improvements, including the Z-Carb HPR and S-Carb APR/APF®
- Tooling Solutions which include development of new tool geometries, extreme lab testing parameters and extensive field testing
- Technical Support and Troubleshooting
- Research and Development



TOOLING SERVICES

KSPT is committed to providing superior tooling services in the areas of Reconditioning, Recoating, Regrinding, Specials and Alterations. These services are offered to provide unique solutions and enhanced tool life with involvement from the KSPT Technical Support Team.

KSPT proudly offers Tooling Services in North America and Europe.



KSPT TOOLING SERVICES FACILITIES

UNITED STATES OF AMERICA KSPT

150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146

KYOCERA SGS Precision Tools West Coast Service Center

1814 W. Collins Ave.
Orange, California 92867
phone: (714) 363-3701
fax: (714) 363-3711
email: sgswest@kyocera-sgstool.com

EUROPE KSPTE

10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com



BEFORE

KYOCERA SGS Precision Tools

Tech Hub
149 Slayton Avenue
Danville, VA 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com



AFTER



KYOCERA SGS Tech Hub LLC

The KYOCERA SGS Tech Hub (KSTH) is an independent subsidiary of KYOCERA SGS Precision Tools Inc. created to focus on custom high-performance cutting tool solutions, while exploring emerging technologies. The state-of-the-art custom facility is designed with the purpose and resources to provide MORE than a cutting tool. KSTH provides a complete scope of services and works with customers to tailor solutions from conception to application and beyond.

SPECIAL CUTTING TOOL SOLUTIONS

KSTH considers each opportunity as a priority project and understands the challenges special tailored tooling present to our end users. Our sole focus is supporting a culture required for applying custom solutions yielding a return on investment with our technical expertise, close collaboration and effective communication. Besides KSTH providing quotation requests within a 24-hour period, we also offer:

- Aggressive Deliveries
- Improved Value Proposition
- Global Resources and Technology
- Full Project Proposal and Management
- Detailed Drawings
- Solid Models
- Process Plans
- Cutting Strategies and Simulations
- Quality Assurance Documentation (ISO 9001:2015 Certified)
- Testing and Validation
- Onsite Application and Optimization Support
- Cradle to Grave Product Support
- Constant Access to KSTH Staff

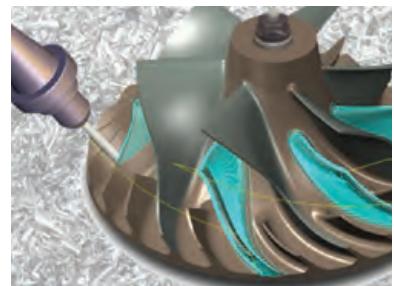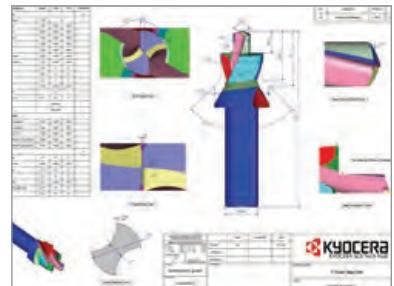

KYOCERA SGS Tech Hub LLC
149 Slayton Avenue
Danville, VA 24540
US and Canada: (434) 791-2020
Fax US & Canada: (434) 791-2044
web: www.kyocera-techhub.com





KYOCERA SGS Precision Tools Medical Division

WHO WE ARE

With over 20 years of industry experience, KSPT Medical produces unique, customer designed orthopedic devices using highly trained engineers dedicated to new technology. KSPT Medical is a division of KYOCERA SGS Precision Tools, who proudly pioneered some of the world's most advanced metal cutting technology and sells to more than 60 countries. With over 20 years of industry experience, KSPT Medical Division is ISO 13485:2016 Certified and is FDA Registered in the production of medical devices in the orthopedic marketplace.

ENGINEERING

We approach each opportunity as a project and manage it as such. We pride ourselves on engineering each project to the specific needs of our customers. Providing quotes often within 24 hours and following through with detailed drawings, solid models, process plans, and program simulations if needed. Our goal is to work hand in hand with the end user and maintain constant communication to customize our support to their needs.

MACHINING CAPABILITIES

- GRINDING
- MILLING
- TURNING
- PROFILING
- BENDING
- Services Offered; Welding, Various Coatings, Anodizing, Passivation, Electropolishing, Laser Etching and Heat Treating

KYOCERA SGS Precision Tools Medical Division

724 East Swihart Street

Columbia City, Indiana 46725

phone: (260) 244-7677

fax: (260) 244-7466

To Request a Quote:

rfq@kyocera-sgstool.com

Customer Service and Orders:

salesmd@kyocera-sgstool.com



REGISTERED ISO 13485:2016 Certified



VALUE AT THE SPINDLE®

An interactive and dynamic platform to help select the correct SGS tool for the operation and provide optimal machining parameters.

- A quick and reliable 3 step process:
 1. Choose the material
 2. Enter the application
 3. From the list of recommended results, choose the tool that best fits your machining needs
- Speed & Feed rates will be generated based on application parameters combined with the selected tool's capabilities in the desired material.

TO SIGN UP FOR THE TOOLWIZARD®:

1. Visit Toolwizard.kyocera-sgstool.com
2. Register for an account
3. Start calculating
4. Start saving!



Common Legend
 Leyenda habitual
 Légende commune
 Gemeinsame Legende

TO ORDER: Please specify quantity and EDP number.

PARA SU PEDIDO: Por favor especifique cantidad y número de EDP.

POUR COMMANDER: Veuillez préciser la quantité et le code article EDP.

BESTELLEN: Bitte Menge und EDV-Nummer angeben.

RETURN POLICY: An RMA number must accompany all product returns.

Contact your Customer Service Representative for an RMA number.

DEVOLUCIONES: Todo material devuelto debe ir acompañado de un número de RMA correspondiente.

Para solicitarlo, póngase en contacto con su Representante de Atención al Cliente.

POLITIQUE DE RETOUR: Tous les produits retournés doivent être accompagnés d'un numéro RMA.

Contacter votre interlocuteur commercial pour obtenir un numéro RMA.

RÜCKNAHMEGARANTIE: Eine RMA-Nummer (Rücksendegenehmigung) muss bei allen Produktrücksendungen beiliegen.

Wenden Sie sich bitte an Ihren Kundendienstmitarbeiter für RMA-Nummer.

**REGULATION SAFETY GLASSES SHOULD ALWAYS BE WORN WHEN
USING HIGH-SPEED CUTTING EQUIPMENT**

**DEBEN USARSE GAFAS PROTECTORAS CUANDO SE UTILICEN EQUIPOS
DE ALTA VELOCIDAD**

**DES LUNETTES DE SÉCURITE DOIVENT ÊTRE IMPÉRATIVEMENT
PORTÉES LORS D'UTILISATION D'OUTILS À GRANDE VITESSE**

**BEI SCHNELLLAUFENDEN SPANABHEBENDEN MASCHINEN MÜSSEN IMMER
DIE VORGESCHRIEBENEN SICHERHEITSBRILLEN GETRAGEN WERDEN**



WARNING: This product can expose you to chemicals including Cobalt, which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov



ADVERTENCIA: Este producto puede exponerlo a químicos como el Cobalto, reconocido como cancerígeno en el estado de California. Para mas informacion visite esta pagina web: www.p65warnings.ca.gov



ATTENTION: Ce produit vous expose aux produits chimiques incluant le Cobalt, qui est reconnu par l'Etat de Californie à être une cause de cancer. Pour plus d'information veuillez regarder sur: www.p65warnings.ca.gov



WARNUNG: Dieses Produkt kann Sie mit Chemikalien wie Kobalt aussetzen, das dem Staat Kalifornien als krebsfördernd bekannt ist. Für weitere Informationen, besuchen Sie: www.p65warnings.ca.gov

**INTELLECTUAL PROPERTY
PROPIEDAD INTELECTUAL
PROPRIÉTÉ INTELLECTUELLE
GEISTIGES EIGENTUM**

KYOCERA SGS Precision Tools holds more than 20 patents globally. Please visit our website at www.kyocera-sgstool.com to learn more.

KYOCERA SGS Precision Tools posee más de 20 patentes a nivel mundial. Para más información, visite nuestra página web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools possède plus de 20 brevets mondialement reconnus. Pour plus d'information, veuillez consulter notre site web www.kyocera-sgstool.com.

KYOCERA SGS Precision Tools besitzt mehr als 20 Patente weltweit. Bitte besuchen Sie unsere Webseite www.kyocera-sgstool.com für weitere Informationen.

Common Legend

Leyenda habitual


Légende commune

Gemeinsame Legende

MATERIALS MATERIALES MATÉRIAUX WERKSTOFFE

 Steels Aceros Aciers Stähle	 Stainless Steels Aceros Inoxidables Aciérs inoxydables Nichrostende Stähle	 Cast Iron Acero de Fundición Fonte Grauguss	 High Temp Alloys Aleaciones Termorresistentes Alliages hautes températures Warmfeste Legierungen
 Titanium Titánio Titane Titan	 Non-Ferrous No Férricos Non Ferreux Nichteisenmetalle	 Plastics/Composites Plásticos/Resinas Plastiques/Composites Kunststoffe/Verbundkunststoffe	 Hardened Steels Aceros Endurecidos Aciers Trempés Gehärteter Stahl

TOOL LENGTH LONGITUDES DE HERRAMIENTAS LONGUEUR DE L'OUTIL WERKZEUGLÄNGE

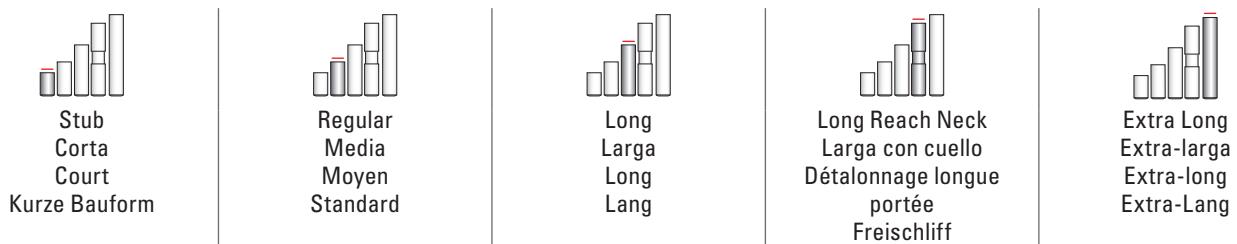

FLUTES FILOS DENTS SCHNEIDEN

 2 Flutes 2 Filos 2 Dents 2 Schneiden	 3 Flutes 3 Filos 3 Dents 3 Schneiden	 4 Flutes 4 Filos 4 Dents 4 Schneiden	 5 Flutes 5 Filos 5 Dents 5 Schneiden	 6 Flutes 6 Filos 6 Dents 6 Schneiden	 7 Flutes 7 Filos 7 Dents 7 Schneiden
 8 Flutes 8 Filos 8 Dents 8 Schneiden	 9 Flutes 9 Filos 9 Dents 9 Schneiden	 10 Flutes 10 Filos 10 Dents 10 Schneiden	 11 Flutes 11 Filos 11 Dents 11 Schneiden	 12 Flutes 12 Filos 12 Dents 12 Schneiden	

End Mill Legend

Leyenda fresas


Légende fraise

Fräser-Legende


END CONFIGURATIONS CONFIGURACIONES DE LA PUNTA FORME DE L'OUTIL EN BOUT ENDENAUSFÜHRUNG



Ball
Esférica
Boule
Kugelkopf



Corner
Plana con
borde romo
Rayon
mit Eckenradius



Square
Plana
Non rayonné
Scharfkantig

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade



Weldon Flat
Weldon plano
Méplat Weldon
Spannfläche

HELIX ANGLES ANGULOS DE LAS HELICES SPANWINKEL ANGLES DE L'HÉLICE



Right Spiral
Hélice con corte
a la derecha
Hélice droite
Rechtsspirale



Left Spiral
Hélice con corte
a la izquierda
Hélice gauche
Linksspirale



Variable Right Spiral
Hélice con corte a
la derecha y ángulo
variable
Hélice droite variable
Rechtsspirale, variabel



Internal Coolant
Refrigeración interna
Refroidissement interne
Innenkühlung



JetStream Coolant Slots
Ranuras de refrigeración
JetStream
Fentes de
refroidissement
JetStream
JetStream-
Kühlmittelschlitz

RAKE ANGLE ANGULO DE DESPRENDIMIENTO ANGLE DE COUPE SPANWINKEL



Positive
Positivo
Positif
Positiv



Neutral
Neutro
Neutre
Neutral



Negative
Negativo
Négatif
Negativ



Variable
Variable
Variable
Variabel

ADDITIONAL GEOMETRY GEOMETRÍAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE WEITERE BAUFORMEN



Flute Spacing Unequal
Espaciado desigual de
los filos
Denture décalée
Nutenabstand Ungleicht



Chip Breaker
Rompevirutas
Brise-copeaux
Spanteiler

All tools are in Right Cut Direction unless noted

Todas las herramientas son con corte a la derecha a menos que se indique lo contrario

Tous les outils ont une coupe à droite, sauf indications contraires

Alle Werkzeuge sind rechtsschneidend, soweit nicht anders angegeben

Drill Legend

Leyenda brocas

Légende perçage

Bohrer-Legende

SHANK TYPE

TIPO DE VÁSTAGO

TYPE DE TIGE

SCHAFTART



Common
Normal
Dégagée
Standard



Straight
Recto
Cylindrique
Gerade

REACH

ALCANCE

LONGUEUR

NUTZLÄNGE

3xD

>3xD Reach
Alcance >3xD
>Longueur 3xD
>3xD Nutzlänge

5xD

5xD Reach
Alcance 5xD
Longueur 5xD
5xD Nutzlänge

8xD

8xD Reach
Alcance 8xD
Longueur 8xD
8xD Nutzlänge

HELIX ANGLES

ANGULOS DE LAS HELICES

ANGLES DE L'HÉLICE

SPANWINDEL



Right Spiral
Hélice con corte
a la derecha
Hélice à droite
Rechtsspirale



None
Ninguno
Aucun
gerade genutet

COOLANT OPTIONS

OPCIONES DE REFRIGERACIÓN

OPTIONS DE REFROIDISSEMENT

KÜHLSCHMIERMITTEL-OPTIONEN



Internal Coolant
Refrigeración interna
Refroidissement interne
Innenkühlung



External Coolant
Refrigeración externa
Refroidissement
externe
Auskühlung

POINT ANGLE

ANGULO DE PUNTA

POINT D'ANGLE

SPITZENWINKEL



Drill Point
Angulo de la Punta
Point de perçage
Bohrspitze

CHAMFER ANGLE

ÁNGULO DE CHAFLÁN

ANGLE DE CHANFREIN

FASENWINKEL



Chamfer Angle
Ángulo de chaflán
Angle de chanfrein
Fasenwinkel

Router Legend

Leyenda ranuradores

Légende détourage

Konturenfräser-Legende

SHANK TYPE
TIPO DE VÁSTAGO
TYPE DE TIGE
SCHAFTART



Straight
Recto
Cylindrique
Gerade

RAKE ANGLE
ANGULO DE DESPRENDIMIENTO
ANGLE DE PENTE
SPANWINKEL



Positive
Positivo
Positif
Positiv



Neutral
Neutro
Neutre
Neutral



Negative
Negativo
Négatif
Negativ



Variable
Variable
Variable
Variabel

HELIX ANGLES
ANGULOS DE LAS HELICES
ANGLES DE L'HÉLICE
SPANWINKEL



Right Spiral
Hélice con corte
a la derecha
Hélice à droite
Rechtsspirale



Left Spiral
Hélice con corte
a la izquierda
Hélice à gauche
Linksspirale

ADDITIONAL GEOMETRY
GEOMETRÍAS ADICIONALES
GÉOMÉTRIE SUPPLÉMENTAIRE
WEITERE BAUFORMEN



Left Hand Cut
Direction
Fresado sentido
izquierda
Coupe vers la
gauche
Rechtsschneidend



Right Hand Cut
Direction
Fresado sentido
derecha
Coupe vers la droite
Linksschneidend



Chip Breaker
Rompevirutas
Brise-copeaux
Spanbrecher



Drill Point
Angulo de la Punta
Point de perçage
Bohrspitze

Ti-NAMITE® and Di-NAMITE® Tool Coatings are specifically engineered for KSPT solid carbide rotary tools. The coating lineup includes proprietary processes that result in optimized tool life and increased speed and feed rates in a variety of applications.



	Coating	Identifying Color	Layer Structure	Thickness	Hardness (HV)	Coefficient of Friction (Fretting)	Thermal Stability	General Information
	Titanium Nitride (TiN)	gold	Multilayer	1–5 microns	2200	0.40–0.65	600°C / 1112°F	A general purpose coating with good adhesion and abrasion resistant properties. Suitable for a wide variety of materials.
	Aluminum Titanium Nitride (AlTiN)	dark grey	Nano structure	1–5 microns	3700	0.30	1100°C / 2010°F	Excellent thermal and chemical resistance allows for dry cutting and improvements in performance of carbide. The coating has a high hardness giving great protection against abrasive wear and erosion.
	Titanium DiBoride (TiB ₂)	light grey-silver	Monolayer	1–2 microns	4000	0.10–0.20	850°C / 1562°F	This ceramic based coating ensures a smooth surface and a low affinity to cold welding or edge build up, which makes it optimal for aluminum and copper applications. It has high toughness and high hardness.
	Titanium Carbonitride (TiCN)	pink-red	Multilayer	1–5 microns	3000	0.30–0.45	400°C / 752°F	A very wear resistant coating with high toughness and shock resistance. Good in interrupted cuts found in applications like milling.
	Proprietary (TX)	black	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	The structural design of Ti-Namite-X is adapted to meet a diverse range of applications; everything from high- and low-alloy steels to hardened materials (up to 65 HRC core hardness). Ti-Namite-X is suitable for operations which require high cutting speeds, high temperatures at the cutting edge, and high metal removal rates.
	Crystalline Diamond (Diamond)	black	Monolayer	6–20 microns	>8000	0.15–0.20	800°C / 1470°F	This is the hardest coating available with the best abrasion resistance. It is carbon based so it is limited in application capabilities. This coating is suitable for machining highly abrasive, non-ferrous materials such as CFRP and graphite.
	Proprietary (TM)	copper	Nano Composite	1–5 microns	3600	0.45	1150°C / 2100°F	Features include high wear resistance, reduced friction, and excellent prevention of edge build up. This coating provides superior material removal rates and tool life when used in high performance operations with difficult to machine materials like titanium.

Other coatings available upon request.



VALUE AT THE SPINDLE®

High Performance End Mills



 **Milling**

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE
Z-Carb-HPR	Z5	5 Flute Rougher Square End Fractional	28
	Z5CR	5 Flute Rougher Corner Radius Fractional	28
	Z5MCR	5 Flute Rougher Corner Radius Metric	35
Z-Carb-AP	Z1PCR	4 Flute Variable Rake Corner Radius Fractional	39
	Z1PLC	4 Flute Variable Rake Long Reach Corner Radius Fractional	41
	Z1PLB	4 Flute Variable Rake Ball End Long Reach Fractional	42
	Z1MPCR	4 Flute Variable Rake Corner Radius Metric	45
	Z1MPIC	4 Flute Variable Rake Intermediate Reach Corner Radius Metric	46
	Z1MPLC	4 Flute Variable Rake Long Reach Corner Radius Metric	46
Z-Carb	Z1	4 Flute Variable Geometry Square End Fractional	49
	Z16CR	4 Flute Variable Geometry Corner Radius Fractional	49
	Z1B	4 Flute Variable Geometry Ball End Fractional	50
	Z1M	4 Flute Variable Geometry Square End Metric	53
	Z1MB	4 Flute Variable Geometry Ball End Metric	54
Z-Carb-HTA	ZH1CR	4 Flute Variable Geometry High Temp Alloys Corner Radius Fractional	57
	ZH1MCR	4 Flute Variable Geometry High Temp Alloys Corner Radius Metric	59
	ZH1MCRS	4 Flute Variable Geometry High Temp Alloys Stub Corner Radius Metric	59
Z-Carb-MD	ZD1CR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Fractional	61
	ZD1MCR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Metric	61
V-Carb	55	5 Flute Finisher & Semi-Finisher Square End Fractional	63
	55CR	5 Flute Finisher & Semi-Finisher Corner Radius Fractional	63
	55M	5 Flute Finisher & Semi-Finisher Square End Metric	65
	55MCR	5 Flute Finisher & Semi-Finisher Corner Radius Metric	65
	55B	5 Flute Finisher & Semi-Finisher Ball End Fractional	68
	55MB	5 Flute Finisher & Semi-Finisher Ball End Metric	68
T-Carb®	51	6 Flute High Speed Machining Square End Fractional	74
	51CR	6 Flute High Speed Machining Corner Radius Fractional	74
	51L	6 Flute High Speed Machining Square End Long Reach Fractional	75
	51LC	6 Flute High Speed Machining Long Reach Corner Radius Fractional	75
	51M	6 Flute High Speed Machining Square End Metric	78
	51MCR	6 Flute High Speed Machining Corner Radius Metric	78
	51ML	6 Flute High Speed Machining Square End Long Reach Metric	79
	51MLC	6 Flute High Speed Machining Long Reach Corner Radius Metric	79

Speed & Feed Recommendations listed after each series

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE
H-Carb	77	7 Flute High Efficiency Square End Fractional	82
	77CR	7 Flute High Efficiency Corner Radius Fractional	82
	77M	7 Flute High Efficiency Square End Metric	84
	77MCR	7 Flute High Efficiency Corner Radius Metric	84
Multi-Carb	66	Multi-Flute Finisher Square End Fractional	90
	66CR	Multi-Flute Finisher Corner Radius Fractional	90
	66M	Multi-Flute Finisher Square End Metric	93
	66MCR	Multi-Flute Finisher Corner Radius Metric	93
Series 33	33CR	3 Flute Difficult to Machine Materials Corner Radius Fractional	97
	33MCR	3 Flute Difficult to Machine Materials Corner Radius Metric	100
Series 7	7	4 Flute Variable Geometry Long Length Square End Fractional	103
	7M	4 Flute Variable Geometry Long Length Square End Metric	103
	7B	4 Flute Variable Geometry Long Length Ball End Fractional	104
	7MB	4 Flute Variable Geometry Long Length Ball End Metric	104
Turbo-Carb	56B	2 Flute Contouring Long Reach Ball End Fractional	107
	56MB	2 Flute Contouring Long Reach Ball End Metric	107
Power-Carb®	57	6 Flute Finisher Square End Fractional	110
	57M	6 Flute Finisher Square End Metric	110
CFRP Slow Helix	27	4 Flute Slow Helix Square End Fractional	113
	27M	4 Flute Slow Helix Square End Metric	113
Picatinny Rail Tools		3 Flute Non-Ferrous Recoil Groove Tool Groove Fractional	116
		5 Flute Non-Ferrous Dovetail Form Tool Fractional	116
		3 Flute Ferrous Recoil Groove Tool Fractional	117
		5 Flute Ferrous Dovetail Form Tool Fractional	117

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA
Z-Carb-HPR	Z5	5 filos, desbastador, punta cuadrada, fraccional	28
	Z5CR	5 filos, desbastador, radio angulado, fraccional	28
	Z5MCR	5 filos, desbastador, radio angulado, métrico	35
Z-Carb-AP	Z1PCR	4 filos, inclinación variable, radio angulado, fraccional	39
	Z1PLC	4 filos, inclinación variable, largo alcance, radio angulado, fraccional	41
	Z1PLB	4 filos, inclinación variable, punta esférica, largo alcance, fraccional	42
	Z1MPCR	4 filos, inclinación variable, radio angulado, métrico	45
	Z1MPIC	4 filos, inclinación variable, medio alcance, radio angulado, métrico	46
	Z1MPLC	4 filos, inclinación variable, largo alcance, radio angulado, métrico	46
Z-Carb	Z1	4 filos, geometría variable, punta cuadrada, fraccional	49
	Z16CR	4 filos, geometría variable, radio angulado, fraccional	49
	Z1B	4 filos, geometría variable, punta esférica, fraccional	50
	Z1M	4 filos, geometría variable, punta cuadrada, métrico	53
	Z1MB	4 filos, geometría variable, punta esférica, métrico	54
Z-Carb-HTA	ZH1CR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, fraccional	57
	ZH1MCR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, métrico	59
	ZH1MCRS	4 filos, geometría variable, aleaciones termorresistentes, versión corta, radio angulado, métrico	59
Z-Carb-MD	ZD1CR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, fraccional	61
	ZD1MCR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, métrico	61
V-Carb	55	5 filos, acabador y semiacabador, punta cuadrada, fraccional	63
	55CR	5 filos, acabador y semiacabador, radio angulado, fraccional	63
	55M	5 filos, acabador y semiacabador, punta cuadrada, métrico	65
	55MCR	5 filos, acabador y semiacabador, radio angulado, métrico	65
	55B	5 filos, acabador y semiacabador, punta esférica, fraccional	68
T-Carb®	55MB	5 filos, acabador y semiacabador, punta esférica, métrico	68
	51	6 filos, mecanizado de alta velocidad, punta cuadrada, fraccional	74
	51CR	6 filos mecanizado de alta velocidad, radio angulado, fraccional	74
	51L	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, fraccional	75
	51LC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, fraccional	75
	51M	6 filos, mecanizado de alta velocidad, punta cuadrada, métrico	78
	51MCR	6 filos mecanizado de alta velocidad, radio angulado, métrico	78
	51ML	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, métrico	79
	51MLC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, métrico	79
	77	7 filos de alta eficiencia, punta cuadrada, fraccional	82
H-Carb	77CR	7 filos de alta eficiencia, radio angulado, fraccional	82
	77M	7 filos métrica de alta eficiencia, punta cuadrada, métrico	84
	77MCR	7 filos métrica de alta eficiencia, radio angulado, métrico	84
Multi-Carb	66	Filo múltiple, acabador, punta cuadrada, fraccional	90
	66CR	Filo múltiple, acabador, radio angulado, fraccional	90
	66M	Filo múltiple, acabador, punta cuadrada, métrico	93
	66MCR	Filo múltiple, acabador, radio angulado, métrico	93
Serie 33	33CR	3 filos, materiales difíciles de mecanizar, radio angulado, fraccional	97
	33MCR	3 filos, materiales difíciles de mecanizar, radio angulado, métrico	100
Serie 7	7	4 filos, geometría variable, longitud larga, punta cuadrada, fraccional	103
	7M	4 filos, geometría variable, longitud larga, punta cuadrada, métrico	103
	7B	4 filos, geometría variable, longitud larga, punta esférica, fraccional	104
	7MB	4 filos, geometría variable, longitud larga, punta esférica, métrico	104
Turbo-Carb	56B	2 filos, contorneado, largo alcance, punta esférica, fraccional	107
	56MB	2 filos, contorneado, largo alcance, punta esférica, métrico	107
Power-Carb®	57	6 filos, acabador, punta cuadrada, fraccional	110
	57M	6 filos, acabador, punta cuadrada, métrico	110
Helicoidal de avance lento CFRP	27	4 filos, helicoidal de avance lento, punta cuadrada, fraccional	113
	27M	4 filos, helicoidal de avance lento, punta cuadrada, métrico	113
Herramientas de riel Picatinny		Herramienta de ranura de retroceso no ferrosa de 3 filos fraccional	116
		Herramienta de forma de cola de milano no ferrosa de 5 filos fraccional	116
		Herramienta de ranura de retroceso ferroso de 3 filos fraccional	117
		Herramienta de cola de milano ferrosa de 5 filos fraccional	117

Recomendaciones de velocidades y avances mostradas tras cada serie

Fraisage

FRAISES A DETOURER UNIVERSELLES	SÉRIES	DESCRIPTION	PAGE
Z-Carb-HPR	Z5	5 dents non rayonné pour l'ébauche (fractionnel)	28
	Z5CR	5 dents rayonnée pour l'ébauche (fractionnel)	28
	Z5MCR	5 dents rayonnée pour l'ébauche (métrique)	35
Z-Carb-AP	Z1PCR	4 dents pas décalé et hélice variable rayonnés (fractionnel)	39
	Z1PLC	4 dents pas décalé et hélice variable rayonnés (fractionnel)	41
	Z1PLB	4 dents à vague de coupe variable longue portée à bout hémisphérique (fractionnel)	42
	Z1MPCR	4 dents pas décalé et hélice variable rayonnés (métrique)	45
	Z1MPIC	4 dents pas décalé, hélice variable, détalonné, rayonnés (métrique)	46
	Z1MPLC	4 dents pas décalé et hélice variable rayonnés (métrique)	46
Z-Carb	Z1	4 dents géométrie variable non rayonné (fractionnel)	49
	Z16CR	4 dents géométrie variable rayonné (fractionnel)	49
	Z1B	4 dents géométrie variable à bout hémisphérique (fractionnel)	50
	Z1M	4 dents géométrie variable non rayonné (métrique)	53
	Z1MB	4 dents géométrie variable à bout hémisphérique (métrique)	54
Z-Carb-HTA	ZH1CR	4 dents géométrie variable alliages haute température rayonné (fractionnel)	57
	ZH1MCR	4 dents géométrie variable alliages haute température rayonné (métrique)	59
	ZH1MCRS	4 dents géométrie variable, alliages haute température, longueur de l'outil court, rayonné (métrique)	59
Z-Carb-MD	ZD1CR	4 dents géométrie variable matériaux durs longue portée rayonné (fractionnel)	61
	ZD1MCR	4 dents géométrie variable matériaux durs longue portée rayonné (métrique)	61
V-Carb	55	5 dents en bout de finition et semi-finition plat (fractionnel)	63
	55CR	5 dents en bout finition et semi-finition rayonné (fractionnel)	63
	55M	5 dents en bout de finition et semi-finition plat (métrique)	65
	55MCR	5 dents en bout finition et semi-finition rayonné (métrique)	65
	55B	5 dents en bout de finition et semi-finition hémisphérique (fractionnel)	68
	55MB	5 dents en bout de finition et semi-finition hémisphérique (métrique)	68
T-Carb®	51	6 dents pour usinage grande vitesse non rayonné (fractionnel)	74
	51CR	6 dents pour usinage grande vitesse rayonné (fractionnel)	74
	51L	6 dents pour usinage grande vitesse non rayonné extra longue (fractionnel)	75
	51LC	6 dents pour usinage grande vitesse extra longue rayonné (fractionnel)	75
	51M	6 dents pour usinage grande vitesse non rayonné (métrique)	78
	51MCR	6 dents pour usinage grande vitesse rayonné (métrique)	78
	51ML	6 dents pour usinage grande vitesse non rayonné extra longue (métrique)	79
	51MLC	6 dents pour usinage grande vitesse extra longue rayonné (métrique)	79
H-Carb	77	7 dents hautes performances droite côtes (fractionnel)	82
	77CR	7 dents hautes performances torique côtes (fractionnel)	82
	77M	7 dents hautes performances droite côtes (métrique)	84
	77MCR	7 dents hautes performances torique côtes (métrique)	84
Multi-Carb	66	Multi-dents non rayonné pour finition (fractionnel)	90
	66CR	Multi-dents rayonné pour finition (fractionnel)	90
	66M	Multi-dents non rayonné pour finition (métrique)	93
	66MCR	Multi-dents rayonné pour finition (métrique)	93
Série 33	33CR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (fractionnel)	97
	33MCR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (métrique)	100
Série 7	7	4 dents géométrie variable à queue longue non rayonné (fractionnel)	103
	7M	4 dents géométrie variable à queue longue non rayonné (métrique)	103
	7B	4 dents géométrie variable à queue longue à bout hémisphérique (fractionnel)	104
	7MB	4 dents géométrie variable à queue longue à bout hémisphérique (métrique)	104
Turbo-Carb	56B	2 dents contournage longue portée à bout hémisphérique (fractionnel)	107
	56MB	2 dents contournage longue portée à bout hémisphérique (métrique)	107
Power-Carb®	57	6 dents en bout de finition plat (fractionnel)	110
	57M	6 dents en bout de finition plat (métrique)	110
CFRP hélice lente	27	4 dents hélice lente non rayonné (fractionnel)	113
	27M	4 dents hélice lente non rayonné (métrique)	113
Outils de rail Picatinny		Outil de rainure de recul non ferreux à 3 dents (fractionnel)	116
		Outil de forme en queue d'aronde non ferreux à 5 dents (fractionnel)	116
		Outil de rainure de recul ferreux à 3 dents (fractionnel)	117
		Outil en queue d'aronde ferreux à 5 dents (fractionnel)	117

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-SCHAFTFRÄSER	SERIE	BESCHREIBUNG	SEITE
Z-Carb-HPR	Z5	Zölliger Schrupfräser mit 5 Schneiden ohne Eckenradien	28
	Z5CR	Zölliger Schrupfräser mit 5 Schneiden und Eckenradien	28
	Z5MCR	Schrupfräser mit 5 Schneiden und Eckenradien	35
Z-Carb-AP	Z1PCR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	39
	Z1PLC	Zölliger Langlochfräser mit 4 variablen Schneiden und Eckenradien	41
	Z1PLB	Zölliger Radiusschaftfräser mit 4 Schneiden und variablem Spanwinkel	42
	Z1MPCR	Fräser mit 4 Schneiden und variablen Spanwinkel	45
	Z1MPIC	Fräser mittlerer Länge mit 4 variablen Schneiden und Eckenradien	46
	Z1MPLC	Langlochfräser mit 4 variablen Schneiden und Eckenradien	46
Z-Carb	Z1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	49
	Z16CR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	49
	Z1B	Zölliger Radiusschaftfräser mit 4 Schneiden und variabler Form	50
	Z1M	Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	53
	Z1MB	Radiusschaftfräser mit 4 Schneiden und variabler Form	54
Z-Carb-HTA	ZH1CR	Hochwarmfester zölliger Fräser mit 4 variablen Schneiden und Eckenradien	57
	ZH1MCR	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	59
	ZH1MCRS	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	59
Z-Carb-MD	ZD1CR	Zölliger Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	61
	ZD1MCR	Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	61
V-Carb	55	Zölliger Schlitz- und Halbschlitzfräser mit 5 Schneiden ohne Eckenradien und variabler Form	63
	55CR	Zölliger Schlitz- und Halbschlitzfräser mit 5 Schneiden ohne Eckenradien	63
	55M	Schlitz- und Halbschlitzfräser mit 5 Schneiden ohne Eckenradien und variabler Form	65
	55MCR	Schlitz- und Halbschlitzfräser mit 5 Schneiden und Eckenradien	65
	55B	Schlitz- und Halbschlitz-Radiusschaftfräser mit 5 Schneiden ohne Eckenradien	68
	55MB	Schlitz- und Halbschlitz-Radiusschaftfräser mit 5 Schneiden und variabler Form	68
T-Carb®	51	Zölliger Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	74
	51CR	Zölliger Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	74
	51L	Zölliger Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	75
	51ML	Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	75
	51M	Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	78
	51MCR	Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien aus Schnellstahl	78
	51LC	Zölliger Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	79
	51MLC	Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	79
H-Carb	77	Zölliger Hocheffizienter mit 7 Schneiden ohne Eckenradien	82
	77CR	Zölliger Hocheffizienter mit 7 Schneiden und Eckenradien	82
	77M	Hocheffizienter mit 7 Schneiden ohne Eckenradien	84
	77MCR	Hocheffizienter mit 7 Schneiden und Eckenradien	84
Multi-Carb	66	Zölliger mehrschneidiger Schlitzfräser ohne Eckenradien	90
	66CR	Zölliger mehrschneidiger Schlitzfräser mit Eckenradien	90
	66M	mehrschneidiger Schlitzfräser ohne Eckenradien	93
	66MCR	mehrschneidiger Schlitzfräser mit Eckenradien	93
Serie 33	33CR	Zölliger Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	97
	33MCR	Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	100
Serie 7	7	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	103
	7M	Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	103
	7B	Zölliger Langloch-Radiusschaftfräser mit 4 Schneiden und variabler Form	104
	7MB	Langloch-Radiusschaftfräser mit 4 Schneiden und variabler Form	104
Turbo-Carb	56B	Zölliger Langloch-Profil-Radiusschaftfräser mit 2 Schneiden	107
	56MB	Langloch-Profil-Radiusschaftfräser mit 2 Schneiden	107
Power-Carb®	57	Zölliger Schlitzfräser mit 6 Schneiden ohne Eckenradien	110
	57M	Schlitzfräser mit 6 Schneiden ohne Eckenradien	110
CFRP Slow Helix	27	Zölliger Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	113
	27M	Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	113
Picatinny Schienenwerkzeuge	3	3 Flöte Nichteisen-Rückstoßnut Nut Grove Bruchteil	116
	5	5 Flöte Nichteisen-Schwalbenschwanzform-Werkzeug Bruchteil	116
	3	3 Rillen-Eisenrückstoß-Nutwerkzeug fraktioniert	117
	5	5 Flöte Eisen Schwalbenschwanz Werkzeug gebrochen	117


Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

End Mill Matrix

SGS End Mill Matrix					Preferred Cut Type for Series					Toolpath Preference*	Flute Count					
Name	Series	Page	Material		• Good	•• Better	••• Best	Not Recommended	Heavy	Moderate	Light	Fine	Finish	1st	2nd	
Series 33	33	97	Steel P0 to P6 Stainless Steel M1 to M3	Cast Iron K1 to K3	High Temp Alloy S1 to S3	Titanium Alloy S4	Hardened Steel H1 to H4	Non Ferrous N1 to N4	Non Ferrous N5 to N7	Heavy 100%~40% Ae ≤ 100% Ap	Moderate 100%~40% Ae ≤ 150% Ap	Light 25%~10% Ae ≤ 250% Ap	Fine 10%~2% Ae ≤ 450% Ap	Finish 2%~0% Ae any Ap	Standard HEM	3
Z-Carb	Z1	49								•••	•••	••	••	•	Standard HEM	4
Z-Carb-AP	Z1P	39								•••	•••	••	••	•	Standard HEM	4
Z-Carb-HTA	ZH1	57								•••	•••	••	••	•	Standard HEM	4
Series 7	7	103								•	•	•	•••	•••	HEM Standard	4
Z-Carb HPR	Z5	28								••	•••	•••	••	•	HEM Standard	5
V-Carb	55	63								•	••	•••	•••	•••	HEM Standard	5
T-Carb®	51	74								•	•	••	•••	•••	HEM Standard	6
H-Carb	77	82								•	•	•	•••	•••	HEM Standard	7
Multi Carb	66	90								•	•	•	••	•••	HEM Standard	7, 9, 11
Turbo Carb	56B	107								•	•	••	•••	•••	HEM Standard	2
Z-Carb-MD	ZD1	61								•••	•••	••	••	••	Standard HEM	4
Power-Carb®	57	110								•	•	••	•••	•••	HEM Standard	6
Ski-Carb	44	163								••	••	••	•••	•••	Standard HEM	2
S-Carb® 2 Flute	47	157								•••	•••	••	••	•	Standard HEM	2
S-Carb® 3 Flute	43	136								•••	•••	••	••	•	Standard HEM	3
S-Carb® Chipbreaker	43CB	146								•••	•••	••	••	NR	Standard HEM	3
S-Carb® APR-3®	43APR-3	127								•••	•••	••	••	NR	Standard HEM	3
S-Carb APR-4®	43APR-4	130								•••	•••	••	••	NR	Standard HEM	4
S-Carb APF®	43APF	132								•	•	••	•••	•••	Standard HEM	4
Slow Helix	27	113								•	•	••	•••	•••	Standard HEM	4
CCR	20-CCR	338								•••	•••	••	••	NR	Standard HEM	5, 8, 10, 12
CCR	31-CCR	342								•••	•••	••	••	NR	Standard HEM	5, 7, 8, 10
Compression Router	25	345								•	•	••	••	•••	Standard HEM	4, 6, 8
Up Cut Router	21	348								•••	•••	••	••	•	Standard HEM	2
Down Cut Router	22	349								•	•	••	••	•••	Standard HEM	2

Preferred materials for each Series are highlighted above

Cut depths (Ae & Ap) are based on a percentage of the cutter diameter (DC)

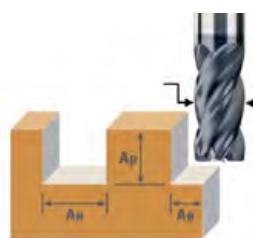

Steel P0 to P6 Stainless Steel M1 to M3	Cast Iron K1 to K3	High Temp Alloy S1 to S3	Titanium Alloy S4	Hardened Steel H1 to H4	Non Ferrous N1 to N4	Non Ferrous N5 to N7
↙ Coolant required in these materials	↙ Coolant required in these materials	↙ Coolant required in these materials	↙ Coolant required in these materials	↙ Coolant required in these materials	↙ Coolant required in these materials	↙ Coolant required in these materials



↙ Coolant required in these materials
🚫 Plunging not recommended in these materials

Material hardness and machinability affect speed, feed, and cut depths

Long flute or long reach tools require reduced rates and cut depth

Unless marked "NR", a high quality finish can be achieved with any Series tool with adjustments to speed and feed

End Mill Matrix

Cut Diameter Range inch mm	Cut Length Availability (x DC)**	Reach Option (x DC)**	End Styles Square Radius Ball	Chipbreaker Option	Shank Option Solid Round, Weldon Flat, Jet Stream, Coolant Hole	Center Cutting	Maximum Recommended Ramp Angle ***	Helix Angle	Flute Index	Coating
0.125 to 1 3 to 20	2.25 to 3	—	R	By Request	SR, WF	Yes	90	32 / 48	Unequal	Ti-Namite-A
0.125 to 1 3 to 25	1.25 to 3	—	R, B	By Request	SR, WF, JS	Yes	90	35 / 38	Unequal	Ti-Namite-A
0.0156 to 1 1 to 25	1 to 3.25	2.5 to 8.5	S, R, B	By Request	SR, WF, JS	Yes	90	35 / 38	Unequal	Ti-Namite-X
0.250 to 1 6 to 20	1.25 to 3	—	R	By Request	SR, WF	Yes	20	38 / 41	Unequal	Ti-Namite-A
0.125 to 1 3 to 25	2.25 to 8.25	—	S, B	By Request	SR	Yes	1	38	Unequal	Ti-Namite-A
0.125 - 1 6 - 25	1 to 3	—	S, R	By Request	SR, WF, CH	No	7	37	Unequal	Ti-Namite-M Ti-Namite-A
0.125 - 1 6 - 20	1.25 to 5	—	S, R, B	By Request	SR, WF	Yes	5	45	Unequal	Ti-Namite-A
0.250 to 1 6 to 20	1.25 to 3	3.25 to 5.5	S, R	By Request	SR	Yes	3	41	Unequal	Ti-Namite-X
0.250 to 1 6 to 25	2.5 to 4	—	S, R	In Stock Available	SR	No	1	37	Unequal	Ti-Namite-M Ti-Namite-A
0.188 to 1 6 to 25	1.5 to 3.25	—	S, R	By Request	SR	No	1	35	Equal	Ti-Namite-A
0.031 to 0.750 1 to 20	1	2 to 2.25	B	By Request	SR	Yes	25	30	Equal	Ti-Namite-A
0.118 to 0.750 5 to 20	1 to 1.25	2.25 to 5	R	By Request	SR	Yes	2	42 / 45	Unequal	Ti-Namite-A
0.250 to 0.500 6 to 20	2 to 2.25	—	S	By Request	SR	Yes	1	45	Equal	Ti-Namite-A
0.250 to 1 3 to 20	1.25 to 7	—	S, R	By Request	SR, WF	Yes	90	45	Equal	Ti-Namite-B
0.125 to 1 3 to 25	1 to 3	3 to 9	S, B	By Request	SR	Yes	90	35	Equal	Ti-Namite-B
0.125 to 1 3 to 25	1 to 7	2.25 to 8.5	S, R, B	By Request	SR	Yes	90	38	Equal	Ti-Namite-B
0.250 to 1 6 to 20	1 to 7	2.5 to 8.5	R	Standard	SR	Yes	90	38	Equal	Ti-Namite-B
0.750 to 1 12 to 26	1.25 to 1.75	3 to 4	S, R	Standard	CH	Yes	90	38	Unequal	Ti-Namite-B
20 to 25	1.25 to 1.75	2.25 to 3.5	S, R	Standard	CH	Yes	90	38 / 41	Unequal	Ti-Namite-B
0.500 to 0.750 6 to 25	2.5 to 4	3 to 5	S, R	By Request	CH	Yes	25	38 / 41	Unequal	Ti-Namite-B
0.250 to 0.750 6 to 16	1.75 to 4	—	S	By Request	SR	Yes	5	10, 12	Unequal	Di-Namite (optional)
0.250 to 0.500 2 to 12	2.75 to 4	—	S	Standard	SR	Based upon end style	5 (for end cut styles)	15	Equal	Di-Namite (optional)
0.250 to 0.500 6 to 12	2.75 to 4	—	S	Standard	SR	Based upon end style	5 (for end cut styles)	15	Equal	Di-Namite (optional)
0.250 to 0.500 6 to 12	2.75 to 4	—	S	By Request	SR	Yes	5	30	Equal	Di-Namite (optional)
0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	By Request	SR	Yes	90	35	Equal	various optional
0.125 to 0.750 3 to 12	2.5 to 4.25	—	S	By Request	SR	Yes	—	35	Equal	various optional



Standard Toolpath



HEM Toolpath

* HEM toolpaths are usually preferred in most situations. However, standard paths may be more efficient with moderate to heavy cut types

** some variations of Cut Length and Reach are based upon Cut Diameter

*** shown is general recommendation for most materials, lower ramp angles are required for materials with lower machinability

For complete application recommendations refer to the SGS Tool Wizard®



Application Tips

Tool	<ul style="list-style-type: none">• Whenever possible, select an end mill with the largest diameter, shortest flute length, and shortest overall length for the best rigidity• Long flute tools are not intended for pocketing, slotting, or heavy profiling – limit Ae to .02D• High Performance tools minimize cycle time and extend tool life
Tool Holders	<ul style="list-style-type: none">• Holders with adequate gripping pressure and TIR are required• Stub holders or zero length collet style holders are recommended for heavy stock removal• When using solid holders, hand ground screw flats are not recommended
Workpiece	<ul style="list-style-type: none">• Secure clamping of the workpiece will reduce chatter and deflection
Machine	<ul style="list-style-type: none">• Spindle must be in optimum condition for precise TIR and maximum tool life• Sufficient horsepower is required to perform at recommended speeds and feeds• Reduce rates for low power machines to prevent workpiece and / or tool damage
Coolant	<ul style="list-style-type: none">• Avoid re-milling chips through use of air blast or liquid coolant as necessary• Maintain clean coolant with appropriate concentration• General recommendations:<ul style="list-style-type: none">—Water Soluble Oil or Air Blast: Tool Steels, Mold & Die Steels, Carbon or Alloy Steels—Water Soluble Oil: Stainless Steels, Titanium, High Temperature Alloys, Non-Ferrous Alloys
Methods	<ul style="list-style-type: none">• Climb milling is generally preferred• Attention to programming details, tool holders, TIR, balance, fixturing, etc. improve cutting tool performance and extend tool life

END MILLING GUIDELINE

DC = cutting diameter APMX = flute length

Speeds and Feeds for Cut Types are based on Radial Width (A_e) and Axial Depth (A_p)


Reductions to Speeds and Feeds may be necessary when:

- A_e and A_p exceed recommendations
- Using long flute or extended reach tools
- Using long tool holders
- Machining materials harder than listed


ENTRY METHODS



Pre-drilling is the preferred entry method for most applications.

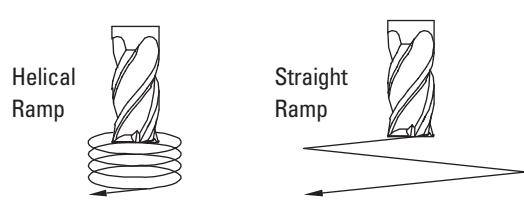

Alternative methods are helical and straight ramping. High ramp angles require reduced feed. Lower ramp angles will allow higher feed rates and extend tool life. Use slotting speeds and feeds for ramp angles of 1° to 2°. Reduce feed to 25% when ramp angles approach 6°. General purpose tools and/or difficult to machine materials will require lower ramp angles and reduced feed.



Plunge only in non-ferrous and short-chipping materials using slotting speeds and 25% slotting feeds.

Recomendaciones de uso



Herramientas	<ul style="list-style-type: none"> Siempre que sea posible, seleccione la herramienta de mayor diámetro y menor longitud total y de filo para obtener una mayor rigidez. Las herramientas con filos largos no son recomendadas para operaciones de apertura de cajas en el maquinado, operación de ranurado o perfilado pesado – limitar la profundidad radial (A_e) a .02D Las herramientas de alto desempeño minimizan el tiempo de ciclo del maquinado y extienden la vida útil de la herramienta
Portaherramientas	<ul style="list-style-type: none"> Los Portaherramientas deberán tener buena presión de amarre para la sujeción de la herramienta y una concentricidad máxima indicada (TIR) Se recomienda usar portaherramientas de amarre directo cortos, o de boquilla con longitud cero para lograr un máximo arranque de viruta Cuando se utilicen portaherramientas de amarre directo, no se recomienda hacer manualmente el plano para la sujeción del tornillo en el zanco de la herramienta
Pieza a maquinar	<ul style="list-style-type: none"> La buena sujeción de la pieza a maquinar reducirá la vibración y la desviación de la herramienta
Máquina	<ul style="list-style-type: none"> El husillo de la maquina debe estar en condiciones optimas, para asegurar la concentración de giro (TIR) y asegurar el máximo rendimiento de la herramienta Para lograr los avances y velocidades recomendados, se necesita suficiente potencia (HP) en la maquina Reducir los parámetros de corte en maquinas de baja potencia (HP) para prevenir el daño en la herramienta o pieza de trabajo
Refrigeración	<ul style="list-style-type: none"> Evite el re-maquinado de virutas usando aire a presión o líquido refrigeración según sea necesario Mantener limpia la refrigeración con su concentración adecuada Recomendaciones generales: <ul style="list-style-type: none"> –Para el maquinado de aceros de herramienta, para Moldes y Dados o Aleaciones de Bajo Carbón, utilice Aceite Soluble en Agua o aire a presión –Para el maquinado de Aleaciones Inoxidables, Aleaciones Termorresistentes, Titanio y Aleaciones No Ferrosas, utilice solamente Aceite Soluble en Agua
Métodos	<ul style="list-style-type: none"> Se recomienda el maquinado en sentido ascendente o trepado El cuidado en los detalles de la programación, la concentración de giro (TIR) el balance de los portaherramientas, la sujeción de la pieza a maquinar, etc. son factores que contribuyen a prolongar la vida de la herramienta

GUÍAS DE FRESADO

DC = diámetro de corte APMX = largo de filo

Las velocidades y avances para cortes están basados en la profundidad radial ($-|A_e|-$), y profundidad axial ($\frac{A_p}{\downarrow}$)

Reducciones en velocidades y avances serán necesarias cuando:

- A_e y A_p excede las recomendaciones
- Se utilicen filos largos o herramientas de largo alcance
- Se utilicen portaherramientas largos
- Se maquinan materiales más duros que los recomendados


MÉTODOS DE ENTRADA



Preferentemente usar un barreno previo como método de entrada para la mayor parte de las aplicaciones.



Los métodos alternativos son las rampas helicoidales y rectas. Un ángulo elevado de rampa necesita un avance reducido. Un ángulo de rampa inferior permitirá tasas de avance más elevadas y una mayor duración de la herramienta. Usar velocidades y alcances de ranurado para ángulos de rampa de 1° a 2°. Disminuir el avance un 25% cuando los ángulos de rampa se aproximan a 6°. Las herramientas de uso general y/o materiales difíciles de mecanizar precisarán ángulos de rampa inferiores y un avance reducido.

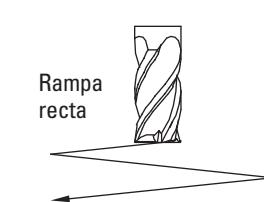

Este método se puede utilizar únicamente en materiales no ferrosos y materiales de formación de virutas cortas, usando la velocidad de ranurado y el 25% de su avance.

Conseils relatifs à l'application

Outil	<ul style="list-style-type: none">Chaque fois que possible, choisissez une fraise de plus grand diamètre possible, la plus courte possible, elle garantira la meilleure rigiditéLes outils longs ne sont pas optimum pour l'ébauche, le pocketing, le rainurage – Ae limité à 0,02 DLes outils Haute performance optimisent les temps de cycle et de augmentent la durée de vie
Porte-outils	<ul style="list-style-type: none">Des attachements à serrage puissant et à faux rond précis sont recommandésAttachements à méplats ou pinces à serrage nominale sont recommandées pour les ébauchesLorsque vous utilisez des attachement rigides, les serrage de l'outil par vis ne sont pas recommandés
Pièce	<ul style="list-style-type: none">Le système de fixation et de bridage de la pièce devra permettre de réduire les vibrations et la déformation
Machine	<ul style="list-style-type: none">Broche doit être en bon état optimal au niveau de son faux rondSuffisamment puissance est nécessaire pour effectuer à des vitesses recommandées et se nourritRéduire les efforts pour les machines de faible puissance pour éviter l'endommagement de la pièce et / ou de l'outil
Liquide de refroidissement	<ul style="list-style-type: none">Évitez les recyclage de copeaux par l'utilisation de soufflage d'air comprimé ou de liquide de refroidissement.Maintenir le lubrifiant propre à la concentration appropriéeRecommandations générales –<ul style="list-style-type: none">Huile soluble ou Air comprimé: aciers à outils, aciers pour moules, aciers au carbone ou alliésHuile soluble: aciers inoxydables, titane, alliages à haute température, alliages non ferreux
Méthodes	<ul style="list-style-type: none">L'usinage en avalant est généralement préconiséAttention à la programmation, porte-outils, faux rond, équilibrage, fixation, etc améliorent les performances de l'outil en coupe et prolonge la durée de vie

GUIDE DU FRAISAGE


DC = diamètre de coupe APMX = longueur de coupe

Vitesses & avances pour ces cas d'usinage sont basées sur l'engagement radial ($|Ae|$), et axial ($\frac{1}{Ap}$)

La réduction de la vitesse et de l'avance doit être nécessaire quand:

- Les engagements Ae et Ap sont importants
- Des dentures longues ou des séries longues sont utilisées
- Des attachement longs sont utilisés
- Lors d'usinage de matériaux durs

TYPES D'ENTREE MATERIE

Preperçage		 Ramping hélicoïdal	 Ramping droit	 Plongée
Le préperçage est la méthode préférable dans la plupart de applications.		Les autres méthodes sont un ramping hélicoïdal et un ramping droit. Les angles de ramping élevés exigent une avance inférieure. Les angles de ramping inférieurs permettent les taux d'avance supérieurs et prolongeront la vie de l'outil. Utilisez des avances et vitesses de mortaisage pour les angles de ramping de 1° à 2°. Réduisez l'avance à 25 % lorsque les angles de ramping avoisinent 6°. Les outils tout usage et/ou les matériaux difficiles à usiner exigeront des angles de ramping inférieurs et une charge réduite.		Plongée uniquement dans les non ferreux. Vitesse rainurage et avances réduites de 25%.

Werkzeug	<ul style="list-style-type: none"> • Wählen Sie möglichst immer den Schaftfräser mit dem größten Durchmesser, der kürzesten Schneide und Gesamtlänge, um eine hohe Steifigkeit zu erhalten • Langlochschafträser sind nicht zum Taschen-, Schlitz- oder Profilfräsen bestimmt – die Dehnung auf Ae 0,2 der Streckgrenze nicht überschreiten • Hochleistungswerkzeuge minimieren die Bearbeitungszeit und verlängern die Werkzeugstandzeit
Werkzeughalter	<ul style="list-style-type: none"> • Es werden Spannzangen mit genauem Rundlauf benötigt • Steilkegel oder bündige Spannfutter werden bei hohem Materialabtrag empfohlen • Von der Verwendung fester handverschraubter Halterungen wird abgeraten
Werkstück	<ul style="list-style-type: none"> • Sicherer Werkzeugspannen verringert Vibrationen und das Auswandern aus der Spannvorrichtung
Werkzeugmaschine	<ul style="list-style-type: none"> • Die Spindel muss in optimalem Zustand sein, um einen genauen Rundlauf und maximale Standzeit zu erzielen • Für die empfohlenen Drehzahlen und Vorschubgeschwindigkeiten ist genügend Leistung bereitzustellen • Bei leistungsschwachen Antrieben sind die Werte zu verringern, um Beschädigungen am Werkstück und/oder Werkzeug zu vermeiden
Kühlmittel	<ul style="list-style-type: none"> • Das Stauen der Späne durch Luftstrahl oder flüssige Kühlmittel möglichst verhindern • Kühlmittel in geeigneter Konzentration verwenden • Allgemeine Empfehlungen: <ul style="list-style-type: none"> – Wasser-Öl-Emulsionen oder Luftstrahl: Werkzeugstähle, Form- und Schneidstähle, unlegierte oder legierte Stähle – Wasser-Öl-Emulsion: Nichtrostender Stahl, Titan, Warmfeste Legierungen, Nichteisenlegierungen
Verfahren	<ul style="list-style-type: none"> • Vorzugsweise Gleichlauffräsen anwenden • Das Beachten der Fräsparameter, Werkzeughalter, Rundlauf, Auswuchten, Einspannen, usw. verbessert die Schnittleistung und verlängert die Standzeit

RICHTWERTE ZUM FRÄSEN

DC = Fräsdurchmesser APMX = Schnittlänge

Drehzahl und Vorschub für Fräsaufgaben hängen von Radialbreite (A_e) und Frästiefe (A_p) ab

Drehzahl und Vorschub müssen ggfs. verringert werden wenn:

- die empfohlenen Werte für Ae und Ap überschritten werden
- lange Schneiden oder Langschaftfräser verwendet werden
- lange Werkzeughalter verwendet werden
- die Werkstoffe härter als vorgesehen sind

VORBEREITUNGEN

Vorbohrung



Vorbohren ist in den meisten Fällen ratsam.



Zirkulareintauchfräsen
Alternative Verfahren sind Zirkulareintauchen und Schrägeintauchen. Starke Tauchwinkel erfordern verringerte Vorschubgeschwindigkeiten. Geringe Tauchwinkel ermöglichen höhere Vorschubgeschwindigkeiten und verlängern die Standzeit. Verwenden Sie die Drehzahlen und Vorschübe zum Schlitzfräsen für Tauchwinkel von 1° bis 2°. Den Vorschub auf 25 % verringern, wenn der Tauchwinkel 6° erreicht. Standardwerkzeuge und / oder schwer zu bearbeitende Werkstoffe verlangen kleine Tauchwinkel und verringerte Vorschubgeschwindigkeiten.




Stechen




Stechen Sie in Nichteisenmetalle und kurzspanende Werkstoffe nur mit Schlitzfräsdrehzahl und 25 % der Schlitzvorschubgeschwindigkeit ein.


FRACTIONAL

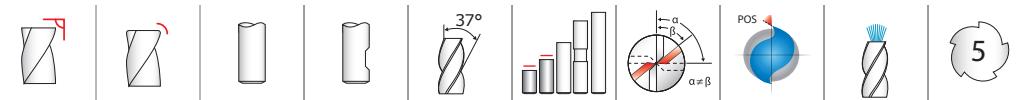Z-Carb-HPR
**Z5 •
Z5CR**
FRACTIONAL SERIES

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



For patent information visit
www.ksptpatents.com

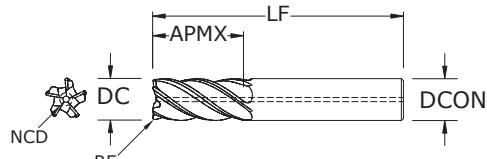

TOLERANCES (inch)

1/8–1/4 DIAMETER
DC = +0.0000/-0.0012
DCON = h₆
RE = +0.0000/-0.0020

>1/4–3/8 DIAMETER
DC = +0.0000/-0.0016
DCON = h₆
RE = +0.0000/-0.0020

>3/8–1 DIAMETER
DC = +0.0000/-0.0020
DCON = h₆
RE = +0.0000/-0.0020

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	EDP NO.				
						TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM)	TI-NAMITE-M (TM) W/ FLAT
1/8	1/4	1-1/2	1/8	—	0.0440	38500	—	—	37000	—
1/8	1/4	1-1/2	1/8	0.010	0.0440	38771	—	—	38770	—
1/8	1/4	1-1/2	1/8	0.015	0.0440	38525	—	—	37001	—
1/8	1/4	1-1/2	1/8	0.030	0.0440	38773	—	—	38772	—
1/8	3/8	1-1/2	1/8	—	0.0440	37180	—	—	37002	—
1/8	3/8	1-1/2	1/8	0.010	0.0440	38775	—	—	38774	—
1/8	3/8	1-1/2	1/8	0.015	0.0290	37181	—	—	37003	—
1/8	3/8	1-1/2	1/8	0.030	0.0290	38777	—	—	38776	—
3/16	5/16	2	3/16	—	0.0660	38501	—	—	37004	—
3/16	5/16	2	3/16	0.010	0.0660	38779	—	—	38778	—
3/16	5/16	2	3/16	0.015	0.0660	38526	—	—	37005	—
3/16	5/16	2	3/16	0.030	0.0660	38781	—	—	38780	—
3/16	1/2	2	3/16	—	0.0660	37182	—	—	37006	—
3/16	1/2	2	3/16	0.010	0.0660	38783	—	—	38782	—
3/16	1/2	2	3/16	0.015	0.0660	37183	—	—	37007	—
3/16	1/2	2	3/16	0.030	0.0660	38785	—	—	38784	—
1/4	3/8	2-1/2	1/4	—	0.0880	38502	—	—	37008	—
1/4	3/8	2-1/2	1/4	0.010	0.0880	38787	—	—	38786	—
1/4	3/8	2-1/2	1/4	0.015	0.0880	38527	—	—	37009	—
1/4	3/8	2-1/2	1/4	0.030	0.0880	38528	—	—	37010	—
1/4	3/8	2-1/2	1/4	0.060	0.0750	38789	—	—	38788	—
1/4	3/8	2-1/2	1/4	0.090	0.0880	38791	—	—	38790	—
1/4	1/2	2-1/2	1/4	—	0.0880	37184	—	—	37011	—
1/4	1/2	2-1/2	1/4	0.010	0.0880	38793	—	—	38792	—
1/4	1/2	2-1/2	1/4	0.015	0.0880	37185	—	—	37012	—
1/4	1/2	2-1/2	1/4	0.030	0.0880	37186	—	—	37013	—
1/4	1/2	2-1/2	1/4	0.060	0.0750	38795	—	—	38794	—
1/4	1/2	2-1/2	1/4	0.090	0.0880	38797	—	—	38796	—

continued on next page



FRACTIONAL Z-Carb-HPR

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆



RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020

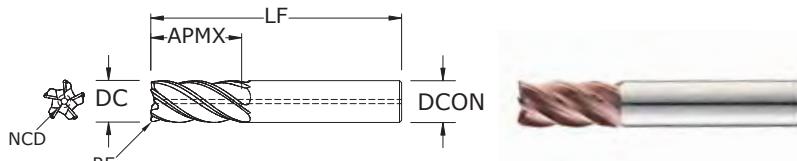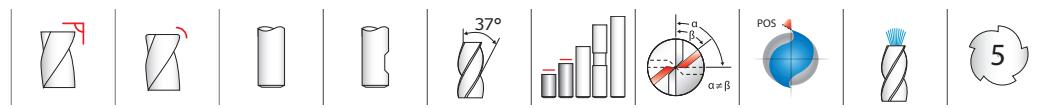


Z5 • Z5CR
FRACTIONAL SERIES

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	EDP NO.					
						TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM)	TI-NAMITE-M (TM) W/FLAT	TI-NAMITE-M (TM) W/INTERNAL COOLANT
5/16	7/16	2-1/2	5/16	—	0.1090	38503	—	—	37014	—	—
5/16	7/16	2-1/2	5/16	0.010	0.1090	38799	—	—	38798	—	—
5/16	7/16	2-1/2	5/16	0.015	0.1090	38529	—	—	37015	—	—
5/16	7/16	2-1/2	5/16	0.030	0.1090	38801	—	—	38800	—	—
5/16	7/16	2-1/2	5/16	0.060	0.1090	38803	—	—	38802	—	—
5/16	7/16	2-1/2	5/16	0.090	0.0640	38805	—	—	38804	—	—
5/16	5/8	2-1/2	5/16	—	0.1090	38504	—	—	37016	—	—
5/16	5/8	2-1/2	5/16	0.010	0.0640	38807	—	—	38806	—	—
5/16	5/8	2-1/2	5/16	0.015	0.1090	38530	—	—	37017	—	—
5/16	5/8	2-1/2	5/16	0.030	0.1090	38809	—	—	38808	—	—
5/16	5/8	2-1/2	5/16	0.060	0.1090	38811	—	—	38810	—	—
5/16	5/8	2-1/2	5/16	0.090	0.0640	38813	—	—	38812	—	—
3/8	1/2	2-1/2	3/8	—	0.1310	38505	—	—	37018	—	—
3/8	1/2	2-1/2	3/8	0.010	0.1310	38815	—	—	38814	—	—
3/8	1/2	2-1/2	3/8	0.015	0.1310	38531	—	—	37019	—	—
3/8	1/2	2-1/2	3/8	0.030	0.1310	38532	—	—	37020	—	—
3/8	1/2	2-1/2	3/8	0.060	0.1310	38817	—	—	38816	—	—
3/8	1/2	2-1/2	3/8	0.090	0.0830	38819	—	—	38818	—	—
3/8	3/4	2-1/2	3/8	—	0.1310	37187	—	—	37021	—	—
3/8	3/4	2-1/2	3/8	0.010	0.1310	38821	—	—	38820	—	—
3/8	3/4	2-1/2	3/8	0.015	0.1310	37188	—	—	37022	—	—
3/8	3/4	2-1/2	3/8	0.030	0.1310	37189	37174	—	37023	—	—
3/8	3/4	2-1/2	3/8	0.060	0.1310	38823	—	—	38822	—	—
3/8	3/4	2-1/2	3/8	0.090	0.0830	38825	—	—	38824	—	—
7/16	5/8	2-1/2	7/16	0.015	0.1530	37164	—	—	37160	—	—
7/16	5/8	2-1/2	7/16	0.030	0.1530	37165	—	—	37161	—	—
7/16	7/8	2-3/4	7/16	0.015	0.1530	37166	—	—	37162	—	—
7/16	7/8	2-3/4	7/16	0.030	0.1530	37167	—	—	37163	—	—

continued on next page

FRACTIONAL

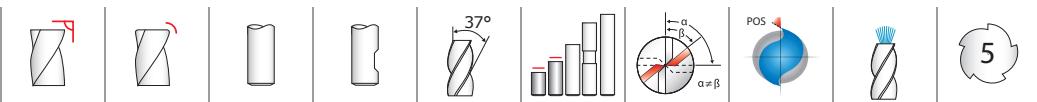Z-Carb-HPR**Z5 •
Z5CR**


FRACTIONAL SERIES

CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

STEELS**STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com

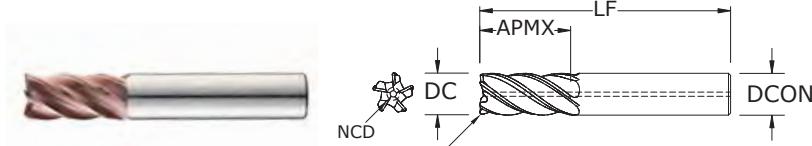**TOLERANCES (inch)****1/8-1/4 DIAMETER**

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	EDP NO.				
						TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM)	TI-NAMITE-M (TM) W/ FLAT
1/2	5/8	3	1/2	—	0.1750	38506	38512	37320	37024	37030
1/2	5/8	3	1/2	0.010	0.1750	38827	38829	38831	38826	38828
1/2	5/8	3	1/2	0.015	0.1750	38533	38578	37330	37025	37031
1/2	5/8	3	1/2	0.030	0.1750	38534	38579	37332	37026	37032
1/2	5/8	3	1/2	0.060	0.1750	38535	38580	37334	37027	37033
1/2	5/8	3	1/2	0.090	0.1750	38536	38581	37337	37028	37034
1/2	5/8	3	1/2	0.120	0.1750	38537	38582	37339	37029	37035
1/2	1	3	1/2	—	0.1750	38507	38513	37322	37036	37042
1/2	1	3	1/2	0.010	0.1750	38833	38835	38837	38832	38834
1/2	1	3	1/2	0.015	0.1750	38538	38583	37341	37037	37043
1/2	1	3	1/2	0.030	0.1750	38539	38584	37343	37038	37044
1/2	1	3	1/2	0.060	0.1750	38540	38585	37345	37039	37045
1/2	1	3	1/2	0.090	0.1750	38541	38586	37348	37040	37046
1/2	1	3	1/2	0.120	0.1750	38542	38587	37350	37041	37047
1/2	1-1/4	3-1/4	1/2	—	0.1750	37190	37194	37325	37048	37054
1/2	1-1/4	3-1/4	1/2	0.010	0.1750	38839	38841	38843	38838	38840
1/2	1-1/4	3-1/4	1/2	0.015	0.1750	37191	37195	37352	37049	37055
1/2	1-1/4	3-1/4	1/2	0.030	0.1750	37192	37196	37354	37050	37056
1/2	1-1/4	3-1/4	1/2	0.060	0.1750	37193	37197	37356	37051	37057
1/2	1-1/4	3-1/4	1/2	0.090	0.1750	38543	38588	37359	37052	37058
1/2	1-1/4	3-1/4	1/2	0.120	0.1750	38544	38589	37361	37053	37059
5/8	3/4	3-1/2	5/8	—	0.2630	38508	38514	38518	37060	37067
5/8	3/4	3-1/2	5/8	0.010	0.2190	38845	38847	38849	38844	38846
5/8	3/4	3-1/2	5/8	0.015	0.2190	38545	38590	38623	37061	37068
5/8	3/4	3-1/2	5/8	0.030	0.2190	38546	38591	38624	37062	37069
5/8	3/4	3-1/2	5/8	0.060	0.2190	38547	38592	38625	37063	37070
5/8	3/4	3-1/2	5/8	0.090	0.2190	38548	38593	38626	37064	37071
5/8	3/4	3-1/2	5/8	0.120	0.2190	38549	38594	38627	37065	37072
5/8	3/4	3-1/2	5/8	0.190	0.2190	38550	38595	38628	37066	37073
5/8	1-1/4	3-1/2	5/8	—	0.2190	37198	37202	38519	37074	37081

continued on next page



FRACTIONAL

Z-Carb-HPR

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆



RE = +0.0000/-0.0020

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020

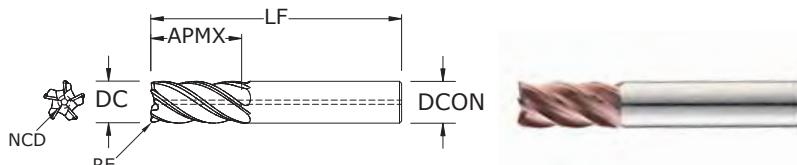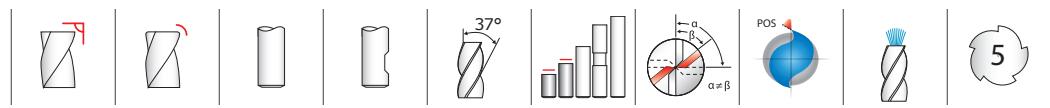


Z5 • Z5CR
FRACTIONAL SERIES

CONTINUED


CUTTING DIAMETER DC	inch				NON-CUTTING CENTER DIAMETER NCD	EDP NO.					
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE		TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM)	TI-NAMITE-M (TM) W/FLAT	TI-NAMITE-M (TM) W/INTERNAL COOLANT
5/8	1-1/4	3-1/2	5/8	0.010	0.2190	38851	38853	38855	38850	38852	38854
5/8	1-1/4	3-1/2	5/8	0.015	0.2190	37199	37203	38629	37075	37082	37268
5/8	1-1/4	3-1/2	5/8	0.030	0.2190	37200	37204	38630	37076	37083	37269
5/8	1-1/4	3-1/2	5/8	0.060	0.2190	37201	37205	38631	37077	37084	37270
5/8	1-1/4	3-1/2	5/8	0.090	0.2190	38551	38596	38632	37078	37085	37271
5/8	1-1/4	3-1/2	5/8	0.120	0.2190	38552	38597	38633	37079	37086	37272
5/8	1-1/4	3-1/2	5/8	0.190	0.2190	38553	38598	38634	37080	37087	37273
3/4	7/8	4	3/4	—	0.2630	38509	38515	38520	37088	37095	37274
3/4	7/8	4	3/4	0.010	0.2630	38857	38859	38861	38856	38858	38860
3/4	7/8	4	3/4	0.030	0.2630	38554	38599	38635	37089	37096	37275
3/4	7/8	4	3/4	0.060	0.2630	38555	38600	38636	37090	37097	37276
3/4	7/8	4	3/4	0.090	0.2630	38556	38601	38637	37091	37098	37277
3/4	7/8	4	3/4	0.120	0.2630	38557	38602	38638	37092	37099	37278
3/4	7/8	4	3/4	0.190	0.2630	38558	38603	38639	37093	37100	37279
3/4	7/8	4	3/4	0.250	0.2630	38559	38604	38640	37094	37101	37280
3/4	1-1/2	4	3/4	—	0.2630	37206	37210	38521	37102	37109	37281
3/4	1-1/2	4	3/4	0.010	0.2630	38863	38865	38867	38862	38864	38866
3/4	1-1/2	4	3/4	0.030	0.2630	37207	37211	38641	37103	37110	37282
3/4	1-1/2	4	3/4	0.060	0.2630	37208	37212	38642	37104	37111	37283
3/4	1-1/2	4	3/4	0.090	0.2630	38560	38605	38643	37105	37112	37284
3/4	1-1/2	4	3/4	0.120	0.2630	37209	37213	38644	37106	37113	37285
3/4	1-1/2	4	3/4	0.190	0.2630	38561	38606	38645	37107	37114	37286
3/4	1-1/2	4	3/4	0.250	0.2630	38562	38607	38646	37108	37115	37287
3/4	1-5/8	4	3/4	0.030	0.2630	37222	—	—	37223	—	—
3/4	1-5/8	4	3/4	0.060	0.2630	37224	—	—	37225	—	—
3/4	1-5/8	4	3/4	0.090	0.2630	37226	—	—	37227	—	—
3/4	1-5/8	4	3/4	0.120	0.2630	37228	—	—	37229	—	—
3/4	2	4-1/2	3/4	0.030	0.2630	37230	—	—	37231	—	—
3/4	2	4-1/2	3/4	0.060	0.2630	37232	—	—	37233	—	—
3/4	2	4-1/2	3/4	0.090	0.2630	37234	—	—	37235	—	—

continued on next page

FRACTIONAL

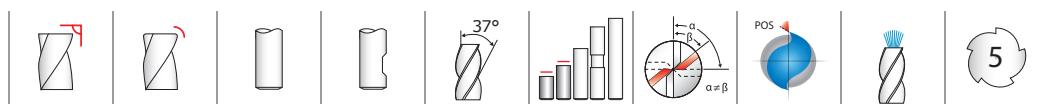Z-Carb-HPR**Z5 •
Z5CR**

FRACTIONAL SERIES

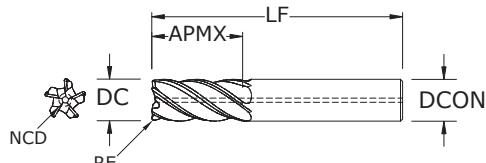**TOLERANCES (inch)****1/8–1/4 DIAMETER**

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.0000/-0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.0000/-0.0020

>3/8–1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0020

CONTINUED


- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

STEELS**STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch				EDP NO.					
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM)	TI-NAMITE-M (TM) W/ FLAT	TI-NAMITE-M (TM) W/ INTERNAL COOLANT
3/4	2	4-1/2	3/4	0.120	0.2630	37236	—	—	37237	—	—
1	1-1/8	4	1	—	0.3500	38510	38516	38522	37116	37123	37288
1	1-1/8	4	1	0.010	0.3500	38869	38871	38873	38868	38870	38872
1	1-1/8	4	1	0.030	0.3500	38563	38608	38647	37117	37124	37289
1	1-1/8	4	1	0.060	0.3500	38564	38609	38648	37118	37125	37290
1	1-1/8	4	1	0.090	0.3500	38565	38610	38649	37119	37126	37291
1	1-1/8	4	1	0.120	0.3500	38566	38611	38650	37120	37127	37292
1	1-1/8	4	1	0.190	0.3500	38567	38612	38651	37121	37128	37293
1	1-1/8	4	1	0.250	0.3500	38568	38613	38652	37122	37129	37294
1	1-1/2	4	1	—	0.3500	37214	37218	38523	37130	37137	37295
1	1-1/2	4	1	0.010	0.3500	38875	38877	38879	38874	38876	38878
1	1-1/2	4	1	0.030	0.3500	37215	37219	38653	37131	37138	37296
1	1-1/2	4	1	0.060	0.3500	37216	37220	38654	37132	37139	37297
1	1-1/2	4	1	0.090	0.3500	38569	38614	38655	37133	37140	37298
1	1-1/2	4	1	0.120	0.3500	37217	37221	38656	37134	37141	37299
1	1-1/2	4	1	0.190	0.3500	38570	38615	38657	37135	37142	37300
1	1-1/2	4	1	0.250	0.3500	38571	38616	38658	37136	37143	37301
1	2	4-1/2	1	—	0.3500	38511	38517	38524	37144	37151	37302
1	2	4-1/2	1	0.010	0.3500	38881	38883	38885	38880	38882	38884
1	2	4-1/2	1	0.030	0.3500	38572	38617	38659	37145	37152	37303
1	2	4-1/2	1	0.060	0.3500	38573	38618	38660	37146	37153	37304
1	2	4-1/2	1	0.090	0.3500	38574	38619	38661	37147	37154	37305
1	2	4-1/2	1	0.120	0.3500	38575	38620	38662	37148	37155	37306
1	2	4-1/2	1	0.190	0.3500	38576	38621	38663	37149	37156	37307
1	2	4-1/2	1	0.250	0.3500	38577	38622	38664	37150	37157	37308


FRACTIONAL
Z-Carb-HPR



Series Z5, Z5CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	555 (444-666)	RPM Fz Feed (ipm)	16961 0.00046 39.0	8480 0.0012 50.9	5654 0.0023 65.0	4240 0.0031 65.7	3392 0.0034 57.7	2827 0.0037 52.3	2120 0.0043 45.6
		Slot 	1	≤ 1	440 (352-528)	RPM Fz Feed (ipm)	13446 0.00046 30.9	6723 0.0012 40.3	4482 0.0023 51.5	3362 0.0031 52.1	2689 0.0034 45.7	2241 0.0037 41.5	1681 0.0043 36.1
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	315 (252-378)	RPM Fz Feed (ipm)	9626 0.00034 16.4	4813 0.0009 21.7	3209 0.0017 27.3	2407 0.0023 27.7	1925 0.0026 25.0	1604 0.0028 22.5	1203 0.0032 19.3
		Slot 	1	≤ 1	250 (200-300)	RPM Fz Feed (ipm)	7640 0.00034 13.0	3820 0.0009 17.2	2547 0.0017 21.6	1910 0.0023 22.0	1528 0.0026 19.9	1273 0.0028 17.8	955 0.0032 15.3
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	445 (356-534)	RPM Fz Feed (ipm)	13599 0.00042 28.6	6800 0.0011 37.4	4533 0.0021 47.6	3400 0.0028 47.6	2720 0.0031 42.2	2267 0.0034 38.5	1700 0.0039 33.1
		Slot 	1	≤ 1	355 (284-426)	RPM Fz Feed (ipm)	10849 0.00042 22.8	5424 0.0011 29.8	3616 0.0021 38.0	2712 0.0028 38.0	2170 0.0031 33.6	1808 0.0034 30.7	1356 0.0039 26.4
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM Fz Feed (ipm)	10390 0.00031 16.1	5195 0.0008 21.8	3463 0.0016 27.7	2598 0.0021 27.3	2078 0.0023 23.9	1732 0.0025 21.6	1299 0.0029 18.8
		Slot 	1	≤ 1	270 (216-324)	RPM Fz Feed (ipm)	8251 0.00031 12.8	4126 0.0008 17.3	2750 0.0016 22.0	2063 0.0021 21.7	1650 0.0023 19.0	1375 0.0025 17.2	1031 0.0029 15.0
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	490 (392-588)	RPM Fz Feed (ipm)	14974 0.00034 25.5	7487 0.0009 33.7	4991 0.0017 42.4	3744 0.0023 43.1	2995 0.0026 38.9	2496 0.0028 34.9	1872 0.0032 29.9
		Slot 	1	≤ 1	390 (312-468)	RPM Fz Feed (ipm)	11918 0.00034 20.3	5959 0.0009 26.8	3973 0.0017 33.8	2980 0.0023 34.3	2384 0.0026 31.0	1986 0.0028 27.8	1490 0.0032 23.8
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM Fz Feed (ipm)	10390 0.00027 14.0	5195 0.0007 18.2	3463 0.0014 24.2	2598 0.0018 23.4	2078 0.0020 20.8	1732 0.0022 19.0	1299 0.0025 16.2
		Slot 	1	≤ 1	270 (216-324)	RPM Fz Feed (ipm)	8251 0.00027 11.1	4126 0.0007 14.4	2750 0.0014 19.3	2063 0.0018 18.6	1650 0.0020 16.5	1375 0.0022 15.1	1031 0.0025 12.9
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	310 (248-372)	RPM Fz Feed (ipm)	9474 0.00027 12.8	4737 0.0007 16.6	3158 0.0014 22.1	2368 0.0018 21.3	1895 0.0020 18.9	1579 0.0022 17.4	1184 0.0025 14.8
		Slot 	1	≤ 1	250 (200-300)	RPM Fz Feed (ipm)	7640 0.00027 10.3	3820 0.0007 13.4	2547 0.0014 17.8	1910 0.0018 17.2	1528 0.0020 15.3	1273 0.0022 14.0	955 0.0025 11.9

continued on next page

FRACTIONAL

Z-Carb-HPR

Series Z5, Z5CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in									
					1/8	1/4	3/8	1/2	5/8	3/4	1			
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile	≤ 0.5	≤ 1.5	80 (64-96)	RPM	2445	1222	815	611	489	407	306
			Slot	1	≤ 1	65 (52-78)	Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238
		≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.5	≤ 1.5	62 (50-74)	RPM	1986	993	662	497	397	331	248
			Slot	1	≤ 1	50 (40-60)	Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile	≤ 0.5	≤ 1.5	62 (50-74)	RPM	1895	947	632	474	379	316	237
			Slot	1	≤ 1	50 (40-60)	Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170
		≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	215 (172-258)	RPM	1528	764	509	382	306	255	191
			Slot	1	≤ 1	170 (136-204)	Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile	≤ 0.5	≤ 1.5	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
			Slot	1	≤ 1	170 (136-204)	Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
		≤ 440 Bhn or ≤ 47 HRc	Profile	≤ 0.5	≤ 1.5	75 (60-90)	RPM	5195	2598	1732	1299	1039	866	649
			Slot	1	≤ 1	60 (48-72)	Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3AlI	≤ 440 Bhn or ≤ 47 HRc	Profile	≤ 0.5	≤ 1.5	75 (60-90)	RPM	2292	1146	764	573	458	382	287
			Slot	1	≤ 1	60 (48-72)	Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
		≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.5	≤ 1.5	185 (148-222)	RPM	1834	917	611	458	367	306	229
			Slot	1	≤ 1	145 (116-174)	Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



METRIC

Z-Carb-HPR

TOLERANCES (mm)
6 DIAMETER

DC = +0,000/-0,030

DCON = h6

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h6



RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h6

RE = +0,000/-0,050

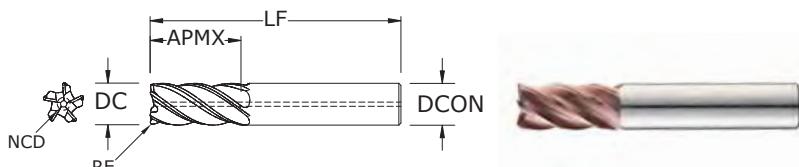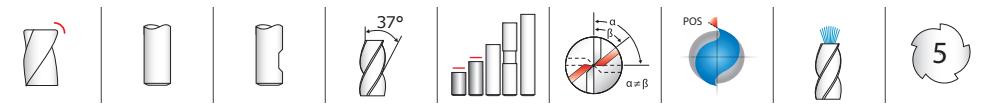


Z5MCR

METRIC SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	EDP NO.					
						TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM)	TI-NAMITE-M (TM) W/FLAT	TI-NAMITE-M (TM) W/INTERNAL COOLANT
6,0	9,0	54,0	6,0	0,5	2,11	48000	—	—	47000	—	—
6,0	13,0	57,0	6,0	0,3	2,11	48001	—	—	47001	—	—
6,0	13,0	57,0	6,0	0,5	2,11	47120	—	—	47002	—	—
6,0	13,0	57,0	6,0	1,0	2,11	48002	—	—	47003	—	—
6,0	13,0	57,0	6,0	1,5	2,11	48003	—	—	47004	—	—
8,0	11,0	58,0	8,0	0,5	2,79	48004	—	—	47005	—	—
8,0	18,0	63,0	8,0	0,5	2,79	47121	—	—	47006	—	—
8,0	18,0	63,0	8,0	1,0	2,79	47122	—	—	47007	—	—
8,0	18,0	63,0	8,0	1,5	2,79	48005	—	—	47008	—	—
8,0	18,0	63,0	8,0	2,0	2,79	48006	—	—	47009	—	—
10,0	13,0	66,0	10,0	1,0	2,79	48007	—	—	47010	—	—
10,0	22,0	72,0	10,0	0,5	3,51	47123	—	—	47011	—	—
10,0	22,0	72,0	10,0	1,0	3,51	47124	—	—	47012	—	—
10,0	22,0	72,0	10,0	1,5	3,51	48008	—	—	47013	—	—
10,0	22,0	72,0	10,0	2,0	3,51	48009	—	—	47014	—	—
10,0	22,0	72,0	10,0	2,5	3,51	48010	—	—	47015	—	—
12,0	15,0	73,0	12,0	1,0	4,19	48011	48029	—	47016	47024	—
12,0	26,0	83,0	12,0	0,5	4,19	47125	47128	47160	47017	47025	47161
12,0	26,0	83,0	12,0	0,76	4,19	47126	47129	47162	47018	47026	47163
12,0	26,0	83,0	12,0	1,0	4,19	47127	47130	47164	47019	47027	47165
12,0	26,0	83,0	12,0	1,5	4,19	48012	48030	47166	47020	47028	47167
12,0	26,0	83,0	12,0	2,0	4,19	48013	48031	47168	47021	47029	47169
12,0	26,0	83,0	12,0	2,5	4,19	48014	48032	47170	47022	47030	47171
12,0	26,0	83,0	12,0	3,0	4,19	48015	48033	47172	47023	47031	47173
16,0	19,0	82,0	16,0	1,0	5,59	48016	48034	48056	47032	47039	47046
16,0	19,0	82,0	16,0	1,5	5,59	48070	—	—	48071	—	—
16,0	35,0	92,0	16,0	1,0	5,59	47131	48035	47134	47033	47040	47047
16,0	35,0	92,0	16,0	1,5	5,59	48017	48036	48057	47034	47041	47048

continued on next page


- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)




For patent information visit
www.ksptpatents.com

METRIC

Z-Carb-HPR

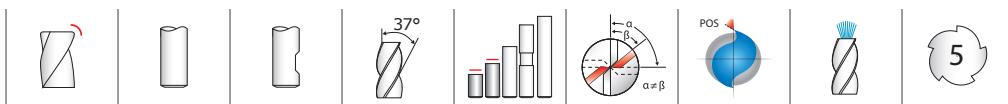

Z5MCR METRIC SERIES

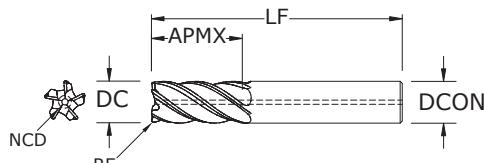**TOLERANCES (mm)****6 DIAMETER**

DC = +0,000/-0,030

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,040

DCON = h₆

RE = +0,000/-0,050

>10-25 DIAMETER

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050


CONTINUED

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and patented edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

	STEELS
	STAINLESS STEELS
	CAST IRON
	HIGH TEMP ALLOYS
	TITANIUM
	HARDENED STEELS

For patent information visit
www.ksptpatents.com

METRIC
Z-Carb-HPR




Series Z5MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm										
					6	8	10	12	16	20	25				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	169 (135-203)	RPM	8967	6725	5380	4484	3363	2690	2152
			Slot		1	≤ 1	134 (107-161)	Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108
		$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	96 (77-115)	RPM	7109	5332	4265	3555	2666	2133	1706
			Slot		1	≤ 1	76 (61-91)	Fz	0.029	0.049	0.061	0.074	0.087	0.099	0.108
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	136 (109-163)	RPM	5089	3817	3054	2545	1909	1527	1221
			Slot		1	≤ 1	108 (87-130)	Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080
			Profile		≤ 0.5	≤ 1.5	104 (83-124)	RPM	4039	3029	2424	2020	1515	1212	969
			Slot		1	≤ 1	82 (66-99)	Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080
	K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile		≤ 0.5	≤ 1.5	136 (109-163)	RPM	7190	5392	4314	3595	2696	2157	1726
			Slot		1	≤ 1	108 (87-130)	Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098
			Profile		≤ 0.5	≤ 1.5	104 (83-124)	RPM	5736	4302	3441	2868	2151	1721	1377
			Slot		1	≤ 1	82 (66-99)	Fz	0.026	0.045	0.056	0.067	0.079	0.091	0.098
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
			Slot		1	≤ 1	82 (66-99)	Fz	0.020	0.034	0.043	0.050	0.059	0.067	0.073
			Profile		≤ 0.5	≤ 1.5	104 (83-124)	Feed (mm/min)	554	703	703	692	606	549	478
			Slot		1	≤ 1	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	Profile		≤ 0.5	≤ 1.5	149 (119-179)	Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080
			Slot		1	≤ 1	119 (95-143)	Feed (mm/min)	855	1077	1077	1092	988	887	760
			Profile		≤ 0.5	≤ 1.5	104 (83-124)	RPM	6301	4726	3781	3151	2363	1890	1512
			Slot		1	≤ 1	82 (66-99)	Fz	0.022	0.036	0.045	0.055	0.067	0.075	0.080
	M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	Profile		≤ 0.5	≤ 1.5	104 (83-124)	Feed (mm/min)	680	857	857	869	786	706	605
			Slot		1	≤ 1	82 (66-99)	RPM	5493	4120	3296	2747	2060	1648	1318
			Profile		≤ 0.5	≤ 1.5	104 (83-124)	Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063
			Slot		1	≤ 1	82 (66-99)	Feed (mm/min)	461	615	615	593	527	483	412
	M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	Profile		≤ 0.5	≤ 1.5	94 (76-113)	RPM	4362	3272	2617	2181	1636	1309	1047
			Slot		1	≤ 1	76 (61-91)	Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063
			Profile		≤ 0.5	≤ 1.5	94 (76-113)	Feed (mm/min)	366	489	489	471	419	384	327
			Slot		1	≤ 1	76 (61-91)	RPM	5009	3756	3005	2504	1878	1503	1202
	M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	Profile		≤ 0.5	≤ 1.5	94 (76-113)	Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063
			Slot		1	≤ 1	76 (61-91)	Feed (mm/min)	421	561	561	541	481	441	376
			Profile		≤ 0.5	≤ 1.5	94 (76-113)	RPM	4039	3029	2424	2020	1515	1212	969
			Slot		1	≤ 1	76 (61-91)	Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.063

continued on next page

METRIC

Z-Carb-HPR



Series Z5MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20	25		
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	1293	969	776	646	485	388	310
		Slot 	1	≤ 1	20 (16-24)	Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599
	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	1050	788	630	525	394	315	252
		Slot 	1	≤ 1	15 (12-18)	Fz	0.0160	0.0272	0.0340	0.0409	0.0478	0.0531	0.0599
		Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	1002	751	601	501	376	301	240
		Slot 	1	≤ 1	15 (12-18)	Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	808	606	485	404	303	242	194
		Slot 	1	≤ 1	52 (41-62)	Fz	0.0112	0.0192	0.0239	0.0284	0.0333	0.0371	0.0420
	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	3474	2605	2084	1737	1303	1042	834
		Slot 	1	≤ 1	52 (41-62)	Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.070
		Profile 	≤ 0.5	≤ 1.5	66 (52-79)	Feed (mm/min)	333	417	417	417	367	333	292
		Slot 	1	≤ 1	52 (41-62)	Feed (mm/min)	2747	2060	1648	1373	1030	824	659
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3AlI	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	RPM	969	727	606	454	364	291	
		Slot 	1	≤ 1	18 (15-22)	Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071
	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	Feed (mm/min)	116	145	145	145	128	116	103
		Slot 	1	≤ 1	18 (15-22)	RPM	969	727	582	485	364	291	233
		Profile 	≤ 0.5	≤ 1.5	23 (18-27)	Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071
		Slot 	1	≤ 1	18 (15-22)	Feed (mm/min)	93	116	116	116	102	93	83
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	RPM	2989	2242	1793	1495	1121	897	717
		Slot 	1	≤ 1	44 (35-53)	Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065
	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	Feed (mm/min)	251	335	335	323	287	263	233
		Slot 	1	≤ 1	44 (35-53)	RPM	2343	1757	1406	1171	879	703	562
		Profile 	≤ 0.5	≤ 1.5	56 (45-68)	Fz	0.017	0.030	0.037	0.043	0.051	0.059	0.065
		Slot 	1	≤ 1	44 (35-53)	Feed (mm/min)	197	262	262	253	225	206	183

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$ mm/min = $F_z \times 5 \times rpm$

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed



reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



FRACTIONAL Z-Carb-AP

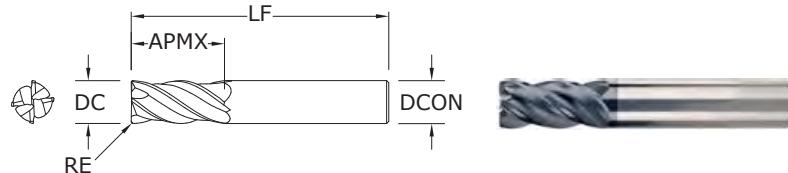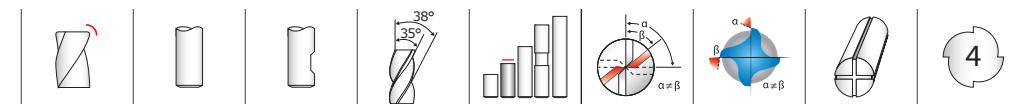

Z1PCR FRACTIONAL SERIES

TOLERANCES (inch)

<1/8 DIAMETER
DC = +0.0005/-0.0005
DCON = h₆

RE = +0.000/-0.0010
DCON = h₆

1/8-1/4 DIAMETER
DC = +0.000/-0.0012
DCON = h₆

RE = +0.000/-0.0020
DCON = h₆

>1/4-3/8 DIAMETER
DC = +0.000/-0.0016
DCON = h₆

RE = +0.000/-0.0020
DCON = h₆

>3/8-1 DIAMETER
DC = +0.000/-0.0020
DCON = h₆

RE = +0.000/-0.0020
DCON = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS

For patent information visit www.ksptpatents.com

inch					Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	36874*	—	—
1/64	1/32	1-1/2	1/8	.002	36875*	—	—
1/32	5/64	1-1/2	1/8	.005	36876*	—	—
3/64	7/64	1-1/2	1/8	.005	36872*	—	—
1/16	3/16	1-1/2	1/8	.005	36877*	—	—
5/64	3/16	1-1/2	1/8	.005	36873*	—	—
3/32	9/32	1-1/2	1/8	.010	36878*	—	—
7/64	3/8	1-1/2	1/8	.010	36370	—	—
1/8	3/8	1-1/2	1/8	.010	36851	—	—
1/8	3/8	1-1/2	1/8	.015	36371	—	—
3/16	7/16	2	3/16	.010	36852	—	—
3/16	7/16	2	3/16	.015	36722	—	—
3/16	7/16	2	3/16	.030	36372	—	—
1/4	1/2	2-1/2	1/4	.010	36723	—	—
1/4	1/2	2-1/2	1/4	.015	36853	—	—
1/4	1/2	2-1/2	1/4	.020	36373	—	—
1/4	3/4	2-1/2	1/4	.010	36599	—	—
1/4	3/4	2-1/2	1/4	.015	36600	—	—
1/4	3/4	2-1/2	1/4	.020	36854	—	—
1/4	3/4	2-1/2	1/4	.030	36601	—	—
5/16	13/16	2-1/2	5/16	.015	36724	—	—
5/16	13/16	2-1/2	5/16	.020	36855	—	—
5/16	13/16	2-1/2	5/16	.030	36374	—	—
3/8	7/8	2-1/2	3/8	.010	36375	36701	—
3/8	7/8	2-1/2	3/8	.015	36725	36736	—
3/8	7/8	2-1/2	3/8	.020	36856	36864	—
3/8	7/8	2-1/2	3/8	.030	36376	36702	—
3/8	7/8	2-1/2	3/8	.060	36727	36738	—
7/16	1	2-3/4	7/16	.020	36857	36865	—
1/2	1	3	1/2	.010	36378	36704	36804
1/2	1	3	1/2	.015	36729	36740	36810
1/2	1	3	1/2	.030	36858	36866	36805
1/2	1	3	1/2	.060	36380	36706	36811
1/2	1	3	1/2	.090	36381	36707	36812


*Variable flute spacing. Helix and rake do not vary.

continued on next page

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


Z1PCR
FRACTIONAL SERIES

CONTINUED

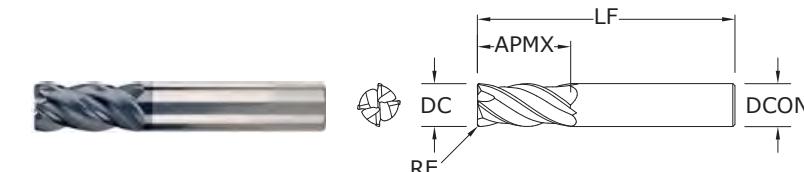

inch					EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream
1/2	1	3	1/2	.125	36731	36742	36813
1/2	1-1/4	3-1/4	1/2	.010	36602	36603	—
1/2	1-1/4	3-1/4	1/2	.015	36604	36605	—
1/2	1-1/4	3-1/4	1/2	.030	36859	36867	—
1/2	1-1/4	3-1/4	1/2	.060	36610	36611	—
1/2	1-1/4	3-1/4	1/2	.090	36612	36613	—
1/2	1-1/4	3-1/4	1/2	.125	36614	36615	—
9/16	1-1/8	3-1/2	9/16	.030	36860	36868	36806
5/8	1-1/4	3-1/2	5/8	.030	36383	36709	36814
5/8	1-1/4	3-1/2	5/8	.040	36861	36869	36807
5/8	1-1/4	3-1/2	5/8	.060	36384	36710	36815
5/8	1-1/4	3-1/2	5/8	.090	36385	36711	36816
5/8	1-1/4	3-1/2	5/8	.125	36733	36744	36817
3/4	1-1/2	4	3/4	.030	36386	36712	36818
3/4	1-1/2	4	3/4	.040	36862	36870	36808
3/4	1-1/2	4	3/4	.060	36387	36713	36819
3/4	1-1/2	4	3/4	.090	36388	36714	36820
3/4	1-1/2	4	3/4	.125	36389	36715	36821
1	1-1/2	4	1	.030	36390	36716	36822
1	1-1/2	4	1	.040	36863	36871	36809
1	1-1/2	4	1	.060	36391	36717	36823
1	1-1/2	4	1	.090	36392	36718	36824
1	1-1/2	4	1	.125	36393	36719	36825

TOLERANCES (inch)

<1/8 DIAMETER

DC = +0.0005/-0.0005

DCON = h₆

RE = +0.000/-0.0010

1/8-1/4 DIAMETER

DC = +0.000/-0.0012

DCON = h₆

RE = +0.000/-0.0020

>1/4-3/8 DIAMETER

DC = +0.000/-0.0016

DCON = h₆

RE = +0.000/-0.0020

>3/8-1 DIAMETER

DC = +0.000/-0.0020

DCON = h₆

RE = +0.000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS



TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com



FRACTIONAL Z-Carb-AP

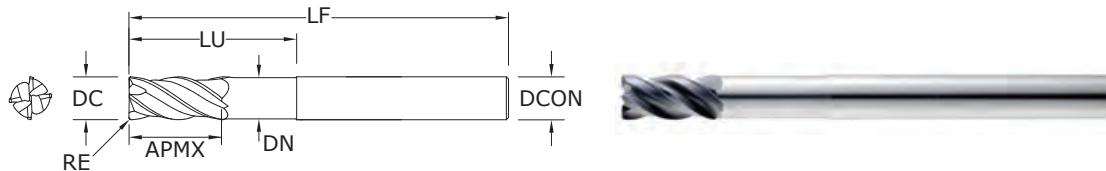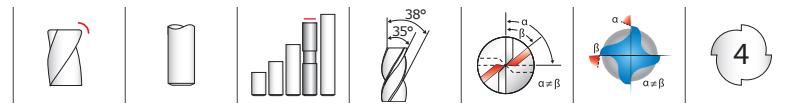

Z1PLC
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.000/-0.005

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.000/-0.005

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.000/-0.005

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE-X
1/4	1/2	2-1/2	1/4	1-1/8	.230	.020	36447
1/4	1/2	3-1/2	1/4	1-5/8	.230	.020	36448
1/4	1/2	4	1/4	1-1/4	.230	.020	36450
1/4	1/2	4	1/4	2-1/8	.230	.020	36449
5/16	13/16	3	5/16	1-3/8	.293	.020	36453
5/16	13/16	4	5/16	2	.293	.020	36454
5/16	13/16	4	5/16	1-5/8	.293	.020	36452
3/8	7/8	3	3/8	1-5/8	.355	.020	36457
3/8	7/8	5	3/8	1-7/8	.355	.020	36456
3/8	7/8	4	3/8	2-3/8	.355	.020	36458
7/16	1	6	7/16	2	.418	.020	36460
1/2	1	4	1/2	2	.480	.030	36463
1/2	1	5	1/2	3	.480	.030	36464
1/2	1	6	1/2	2-1/4	.480	.030	36462
9/16	1-1/8	6	9/16	2-1/2	.543	.030	36466
5/8	1-1/4	5	5/8	2-1/2	.605	.040	36468
5/8	1-1/4	6	5/8	3-3/4	.605	.040	36469
5/8	1-1/4	6	5/8	3	.605	.040	36470
3/4	1-1/2	6	3/4	3-1/2	.730	.040	36472
1	1-1/2	6	1	3	.980	.040	36475
1	1-1/2	6	1	4	.980	.040	36474


- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

FRACTIONAL

Z-Carb-AP**Z1PLB**


FRACTIONAL SERIES

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Long reach design allows for deeper and faster cuts
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC ($\leq 420 \text{ Bhn}$)

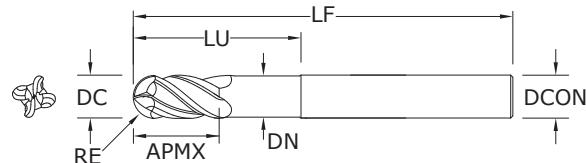


inch							TOLERANCES (inch)
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	EDP NO.	1/4 DIAMETER
1/4	1/2	4	1/4	1-1/4	.230	36480	DC = +0.0000/-0.0012
5/16	13/16	4	5/16	1-5/8	.293	36482	D _{CON} = h ₆
3/8	7/8	5	3/8	1-7/8	.355	36486	R _E = +0.0000/-0.0006
7/16	1	6	7/16	2	.418	38490	>1/4-3/8 DIAMETER
1/2	1	6	1/2	2-1/4	.480	38492	DC = +0.0000/-0.0016
9/16	1-1/8	6	9/16	2-1/2	.543	38496	D _{CON} = h ₆
5/8	1-1/4	6	5/8	3	.605	36500	R _E = +0.0000/-0.0008
3/4	1-1/2	6	3/4	3-1/2	.730	36502	>3/8-1 DIAMETER
1	1-1/2	6	1	4	.980	36504	DC = +0.0000/-0.0020

RE = 1/2 Cutting Diameter (DC)



For patent information visit
www.ksptpatents.com

FRACTIONAL Z-Carb-AP




Series
Z1, Z16CR, Z1PCR,
Z1PLC, Z1PLB
Fractional

P	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in									
					1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	555 (444-666)	RPM	135904	16961	8480	5654	4240	3392	2827	2120
					Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	440 (352-528)	RPM	107744	13446	6723	4482	3362	2689	2241	1681
					Fz	0.00005	0.00046	0.0012	0.0023	0.0031	0.0034	0.0037	0.0043	
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	315 (252-378)	RPM	77135	9626	4813	3209	2407	1925	1604	1203
					Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1	250 (200-300)	RPM	61218	7640	3820	2547	1910	1528	1273	955
					Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	490 (392-588)	RPM	119987	14974	7487	4991	3744	2995	2496	1872
					Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1	390 (312-468)	RPM	95500	11918	5959	3973	2980	2384	1986	1490
					Fz	0.00004	0.00034	0.0009	0.0017	0.0023	0.0026	0.0028	0.0032	
M STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	83256	10390	5195	3463	2598	2078	1732	1299
					Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1	270 (216-324)	RPM	66115	8251	4126	2750	2063	1650	1375	1031
					Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	310 (248-372)	RPM	75910	9474	4737	3158	2368	1895	1579	1184
					Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Slot 	1	≤ 1	250 (200-300)	RPM	61218	7640	3820	2547	1910	1528	1273	955
					Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	445 (356-534)	RPM	108968	13599	6800	4533	3400	2720	2267	1700
					Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039	
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Slot 	1	≤ 1	355 (284-426)	RPM	86929	10849	5424	3616	2712	2170	1808	1356
					Fz	0.00005	0.00042	0.0011	0.0021	0.0028	0.0031	0.0034	0.0039	

continued on next page

FRACTIONAL

Z-Carb-AP

Series Z1, Z16CR, Z1PCR, Z1PLC, Z1PLB Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in									
					1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340	RPM	83256	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Slot 	1	≤ 1	270	RPM	66115	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.00004	0.00031	0.0008	0.0016	0.0021	0.0023	0.0025	0.0029
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	80	RPM	19590	2445	1222	815	611	489	407	306
					(64-96)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	65	RPM	15917	1986	993	662	497	397	331	248
					(52-78)	Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	62	RPM	15182	1895	947	632	474	379	316	237
					(50-74)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	50	RPM	12244	1528	764	509	382	306	255	191
					(40-60)	Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017
T TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	215	RPM	52647	6570	3285	2190	1643	1314	1095	821
					(172-258)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	170	RPM	41628	5195	2598	1732	1299	1039	866	649
					(136-204)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
T TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	75	RPM	18365	2292	1146	764	573	458	382	287
					(60-90)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	60	RPM	14692	1834	917	611	458	367	306	229
					(48-72)	Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	185	RPM	45301	5654	2827	1885	1413	1131	942	707
					(148-222)	Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	145	RPM	35506	4431	2216	1477	1108	886	739	554
					(116-174)	Fz	0.00003	0.00028	0.0007	0.0014	0.0018	0.0020	0.0022	0.0026

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm

maximum Slotted Ap for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .25 x DC



maximum Profile Ae for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .20 x DC

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

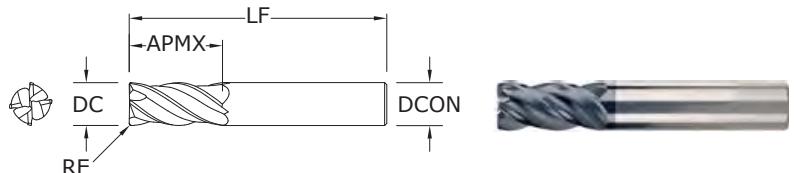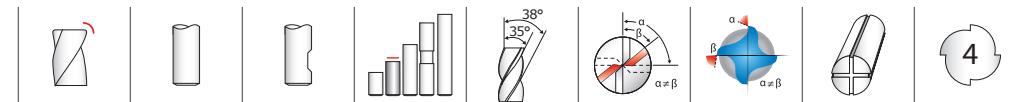

Z1MPCR
METRIC SERIES

TOLERANCES (mm)

<3 DIAMETER

DC = +0,012/-0,012

DCON = h₆

RE = +0,000/-0,025

3–6 DIAMETER

DC = +0,000/-0,030

DCON = h₆

RE = +0,000/-0,050

>6–10 DIAMETER

DC = +0,000/-0,040

DCON = h₆

RE = +0,000/-0,050

>10–25 DIAMETER

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


TITANIUM

For patent
information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO. Ti-NAMITE-X	EDP NO. Ti-NAMITE-X W/FLAT	JetStream
1,0	3,0	57,0	6,0	0,1	46873*	—	—
1,5	4,5	57,0	6,0	0,1	46849*	—	—
2,0	6,0	57,0	6,0	0,2	46850*	—	—
2,5	7,0	57,0	6,0	0,2	46874*	—	—
3,0	8,0	57,0	6,0	0,3	46851	—	—
3,0	8,0	57,0	6,0	0,5	46880	—	—
4,0	11,0	57,0	6,0	0,3	46852	—	—
4,0	11,0	57,0	6,0	0,5	46881	—	—
5,0	13,0	57,0	6,0	0,3	46853	—	—
6,0	13,0	57,0	6,0	0,25	46882	—	—
6,0	13,0	57,0	6,0	0,5	46854	—	—
6,0	13,0	57,0	6,0	1,0	46855	—	—
6,0	13,0	57,0	6,0	1,5	46884	—	—
8,0	19,0	63,0	8,0	0,5	46856	—	—
8,0	19,0	63,0	8,0	1,0	46857	—	—
8,0	19,0	63,0	8,0	1,5	46886	—	—
8,0	19,0	63,0	8,0	2,0	46887	—	—
10,0	22,0	72,0	10,0	0,5	46858	—	—
10,0	22,0	72,0	10,0	1,0	46859	—	—
10,0	22,0	72,0	10,0	1,5	46889	—	—
10,0	22,0	72,0	10,0	2,0	46890	—	—
10,0	22,0	72,0	10,0	2,5	46891	—	—
12,0	26,0	83,0	12,0	0,5	46860	46909	—
12,0	26,0	83,0	12,0	0,75	46861	46910	46493
12,0	26,0	83,0	12,0	1,0	46893	46911	—
12,0	26,0	83,0	12,0	1,5	46894	46912	—
12,0	26,0	83,0	12,0	2,0	46895	46913	—
12,0	26,0	83,0	12,0	2,5	46896	46914	—
12,0	26,0	83,0	12,0	3,0	42718	46915	42719
14,0	26,0	83,0	14,0	1,0	46862	46916	46494
16,0	32,0	92,0	16,0	1,0	46863	46917	46495
16,0	32,0	92,0	16,0	1,5	46898	46918	—
16,0	32,0	92,0	16,0	2,0	46899	46919	—
16,0	32,0	92,0	16,0	2,5	46900	46920	—
16,0	32,0	92,0	16,0	3,0	46864	46921	42721
16,0	32,0	92,0	16,0	4,0	46867	46944	—
20,0	38,0	104,0	20,0	1,0	46865	46922	46497
20,0	38,0	104,0	20,0	1,5	46903	46923	—
20,0	38,0	104,0	20,0	2,0	46904	46924	—
20,0	38,0	104,0	20,0	2,5	46905	46925	—
20,0	38,0	104,0	20,0	3,0	42722	46926	42723
20,0	38,0	104,0	20,0	4,0	46868	46945	—
20,0	38,0	104,0	20,0	5,0	46869	46946	—
25,0	38,0	104,0	25,0	1,0	46866	46927	46498


*Variable flute spacing. Helix and rake do not vary.

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

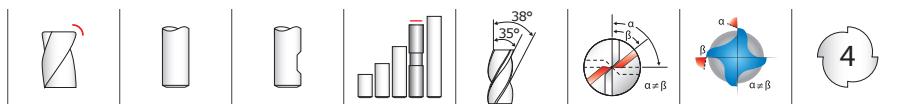
Z-Carb-AP**Z1MPIC • Z1MPLC**

METRIC SERIES


- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

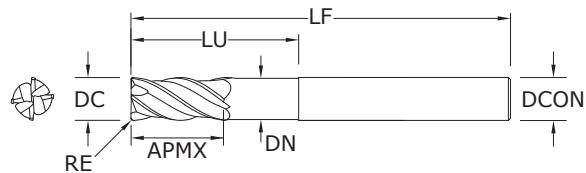

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm						EDP NO.		TOLERANCES (mm)
		OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE-X	Ti-NAMITE-X W/FLAT		
6,0	8,0	75,0	6,0	24,0	5,49	0,5	46821	—	6 DIAMETER DC = +0,000/-0,030 DCON = h ₆ RE = +0,000/-0,050	
8,0	10,0	75,0	8,0	32,0	7,49	1,0	46822	—		
8,0	10,0	75,0	8,0	32,0	7,49	2,0	46823	—		
10,0	12,0	100,0	10,0	40,0	9,50	1,0	46824	—		
10,0	12,0	100,0	10,0	40,0	9,50	2,0	46825	—		
12,0	15,0	100,0	12,0	48,0	11,48	1,0	46826	46928	>6-10 DIAMETER DC = +0,000/-0,040 DCON = h ₆ RE = +0,000/-0,050	
12,0	15,0	100,0	12,0	48,0	11,48	1,5	46827	46929		
12,0	15,0	100,0	12,0	48,0	11,48	2,0	46828	46930		
12,0	15,0	100,0	12,0	48,0	11,48	3,0	46829	46931		
12,0	26,0	83,0	12,0	36,0	11,48	2,5	—	42731	>10-20 DIAMETER DC = +0,000/-0,050 DCON = h ₆ RE = +0,000/-0,050	
12,0	26,0	83,0	12,0	36,0	11,48	3,0	—	42732		
12,0	26,0	83,0	12,0	36,0	11,48	4,0	—	42733		
16,0	32,0	92,0	16,0	42,0	15,49	2,5	—	42734		
16,0	32,0	92,0	16,0	42,0	15,49	4,0	—	42735		
16,0	32,0	92,0	16,0	42,0	15,49	6,0	—	42736		
16,0	20,0	115,0	16,0	65,0	15,49	1,0	46830	46932		
16,0	20,0	115,0	16,0	65,0	15,49	1,5	46831	46933		
16,0	20,0	115,0	16,0	65,0	15,49	2,0	46832	46934		
16,0	20,0	115,0	16,0	65,0	15,49	3,0	46833	46935		
16,0	20,0	115,0	16,0	65,0	15,49	4,0	46834	46936		
16,0	20,0	115,0	16,0	65,0	15,49	5,0	46835	46937		
20,0	24,0	140,0	20,0	80,0	19,48	1,0	46836	46938		
20,0	24,0	140,0	20,0	80,0	19,48	1,5	46837	46939		
20,0	24,0	140,0	20,0	80,0	19,48	2,0	46838	46940		
20,0	24,0	140,0	20,0	80,0	19,48	3,0	46839	46941		
20,0	24,0	140,0	20,0	80,0	19,48	4,0	46840	46942		
20,0	24,0	140,0	20,0	80,0	19,48	5,0	46841	46943		
20,0	38,0	104,0	20,0	52,0	19,48	2,5	—	42737		
20,0	38,0	104,0	20,0	52,0	19,48	4,0	—	42738		
20,0	38,0	104,0	20,0	52,0	19,48	6,0	—	42739		




For patent information visit
www.ksptpatents.com

Z-Carb-AP

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm										
					1	3	6	8	10	12	16	20	25		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5 (135-203)	169	RPM	53803	17934	8967	6725	5380	4484	3363	2690	2152
					Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
	≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1 (107-161)	134	RPM	42654	14218	7109	5332	4265	3555	2666	2133	1706
					Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5 (77-115)	96	RPM	30537	10179	5089	3817	3054	2545	1909	1527	1221
					Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
	≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1 (61-91)	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
					Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5 (119-179)	149	RPM	47501	15834	7917	5938	4750	3958	2969	2375	1900
					Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
	≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1 (95-143)	119	RPM	37807	12602	6301	4726	3781	3151	2363	1890	1512
					Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
M STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5 (83-124)	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
					Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
	≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1 (66-99)	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
					Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
K STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5 (76-113)	94	RPM	30052	10017	5009	3756	3005	2504	1878	1503	1202
					Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
	≤ 220 Bhn or ≤ 19 HRc	Slot 	1	≤ 1 (61-91)	76	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
					Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063	
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.5	≤ 1.5 (109-163)	136	RPM	43139	14380	7190	5392	4314	3595	2696	2157	1726
					Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
	≤ 220 Bhn or ≤ 19 HRc	Slot 	1	≤ 1 (87-130)	108	RPM	34414	11471	5736	4302	3441	2868	2151	1721	1377
					Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098	

continued on next page

Z-Carb-AP

Series Z1M, Z1MPCR, Z1MPIC, Z1MPLC Metric		Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm										
						1	3	6	8	10	12	16	20	25		
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	104	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074
		$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Slot 	1	≤ 1	82	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
						(66-99)	Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	24	RPM	7755	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
		$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	20	RPM	6301	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	19	RPM	6010	2003	1002	751	601	501	376	301	240
						(15-23)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
		$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	15	RPM	4847	1616	808	606	485	404	303	242	194
						(12-18)	Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	66	RPM	20842	6947	3474	2605	2084	1737	1303	1042	834
						(52-79)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
		$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Slot 	1	≤ 1	52	RPM	16480	5493	2747	2060	1648	1373	1030	824	659
						(41-62)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
H	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	23	RPM	7271	2424	1212	909	727	606	454	364	291
						(18-27)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
		$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	18	RPM	5816	1939	969	727	582	485	364	291	233
						(15-22)	Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	56	RPM	17934	5978	2989	2242	1793	1495	1121	897	717
						(45-68)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065
		$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	44	RPM	14057	4686	2343	1757	1406	1171	879	703	562
						(35-53)	Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065

Bhn (Brinell) HRc (Rockwell C)
rpm = $(V_c \times 1000) / (DC \times 3.14)$
mm/min = Fz x 4 x rpm

maximum Slotting Ap for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .25 x DC



maximum Profile Ae for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .20 x DC

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

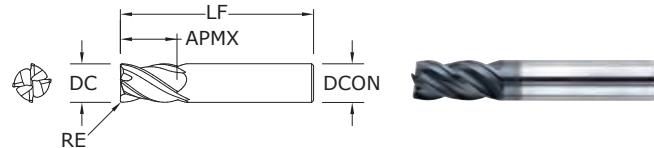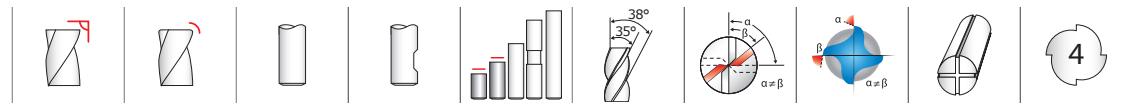

**Z1 •
Z16CR**
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.000/-0.002

>1/4–3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆


RE = +0.000/-0.002

>3/8–3/4 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.000/-0.002



For patent information visit
www.ksptpatents.com

inch					Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	36505	—	—
1/8	1/4	1-1/2	1/8	.015	36404	—	—
1/8	3/8	1-1/2	1/8	—	36506	—	—
5/32	5/16	2	3/16	.015	36406	—	—
5/32	7/16	2	3/16	—	36507	—	—
3/16	3/8	2	3/16	.015	36408	—	—
3/16	7/16	2	3/16	—	36508	—	—
7/32	3/8	2	1/4	.020	36416	—	—
1/4	1/2	2-1/2	1/4	—	36509	—	—
1/4	7/16	2	1/4	.020	36596	—	—
1/4	3/4	2-1/2	1/4	—	36418	—	—
9/32	5/8	2-1/2	5/16	—	36511	—	—
5/16	1/2	2	5/16	.020	36420	—	—
5/16	13/16	2-1/2	5/16	—	36422	—	—
11/32	13/16	2-1/2	3/8	—	36513	—	—
3/8	5/8	2	3/8	.020	36424	36530	—
3/8	7/8	2-1/2	3/8	—	36426	36531	—
13/32	15/16	2-3/4	7/16	—	36515	—	—
7/16	5/8	2-1/2	7/16	.020	36428	36532	—
7/16	1	2-3/4	7/16	—	36430	36533	—
15/32	1	3	1/2	—	36517	—	—
1/2	5/8	2-1/2	1/2	.030	36432	36534	36826
1/2	1	3	1/2	—	36597	36598	—
1/2	1-1/4	3-1/4	1/2	—	36436	36535	36827
9/16	1-1/8	3-1/2	9/16	—	36440	36536	36828
5/8	3/4	3	5/8	.040	36519	—	—
5/8	1-1/4	3-1/2	5/8	—	36520	—	—
3/4	1	3	3/4	.040	36442	36537	36829
3/4	1-1/2	4	3/4	—	36444	36538	36830
1	1-1/2	4	1	—			

Refer to page 43 for speed & feed recommendations

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


FRACTIONAL Z-Carb



Z1B

FRACTIONAL SERIES

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

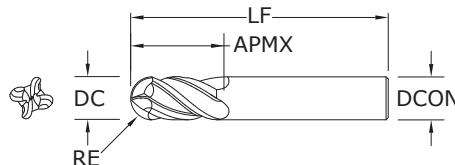

inch				EDP NO.		
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE-X (TX)	Ti-NAMITE-X (TX) W/FLAT	JetStream
1/8	3/8	1-1/2	1/8	36358	—	—
5/32	7/16	2	3/16	36357	—	—
3/16	7/16	2	3/16	36359	—	—
7/32	7/16	2-1/2	1/4	36361	—	—
1/4	1/2	2-1/2	1/4	36344	—	—
1/4	3/4	2-1/2	1/4	36590	—	—
9/32	5/8	2-1/2	5/16	36353	—	—
5/16	13/16	2-1/2	5/16	36345	—	—
11/32	13/16	2-1/2	3/8	36354	—	—
3/8	7/8	2-1/2	3/8	36346	36539	—
13/32	15/16	2-3/4	7/16	36355	36540	—
7/16	1	2-3/4	7/16	36347	36541	—
15/32	1	3	1/2	36356	36542	—
1/2	1	3	1/2	36348	36543	36846
1/2	1-1/4	3-1/4	1/2	36591	36592	—
9/16	1-1/8	3-1/2	9/16	36349	36544	36847
5/8	1-1/4	3-1/2	5/8	36350	36545	36848
3/4	1-1/2	4	3/4	36351	36546	36849
1	1-1/2	4	1	36352	36547	36850

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = $+0.0000/-0.0012$
DCON = h_6
RE = $+0.0000/-0.0006$

>1/4–3/8 DIAMETER

DC = $+0.0000/-0.0016$
DCON = h_6
RE = $+0.0000/-0.0008$

>3/8–1 DIAMETER

DC = $+0.0000/-0.0020$
DCON = h_6
RE = $+0.0000/-0.0010$

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS


For patent information visit www.ksptpatents.com



Series Z1B Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (444-666)	555	RPM	16961	8480	5654	4240	3392	2827	2120
					Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035	
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1 (352-528)	440	RPM	13446	6723	4482	3362	2689	2241	1681
					Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035	
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (252-378)	315	RPM	9626	4813	3209	2407	1925	1604	1203
					Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1 (200-300)	250	RPM	7640	3820	2547	1910	1528	1273	955
					Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027	
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (392-588)	490	RPM	14974	7487	4991	3744	2995	2496	1872
					Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1 (312-468)	390	RPM	11918	5959	3973	2980	2384	1986	1490
					Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (272-408)	340	RPM	10390	5195	3463	2598	2078	1732	1299
					Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1 (216-324)	270	RPM	8251	4126	2750	2063	1650	1375	1031
					Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (248-372)	310	RPM	9474	4737	3158	2368	1895	1579	1184
					Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Slot 	1	≤ 1 (200-300)	250	RPM	7640	3820	2547	1910	1528	1273	955
					Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (356-534)	445	RPM	13599	6800	4533	3400	2720	2267	1700
					Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034	
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Slot 	1	≤ 1 (284-426)	355	RPM	10849	5424	3616	2712	2170	1808	1356
					Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034	

continued on next page

FRACTIONAL Z-Carb



Series Z1B Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
					Fz (272-408)	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025	
	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Slot 	1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
					Fz (216-324)	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	80 (64-96)	RPM	2445	1222	815	611	489	407	306
					Fz (64-96)	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015	
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	65 (52-78)	RPM	1986	993	662	497	397	331	248
					Fz (52-78)	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	62 (50-74)	RPM	1895	947	632	474	379	316	237
					Fz (50-74)	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010	
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	50 (40-60)	RPM	1497	749	499	374	299	250	187
					Fz (40-60)	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
					Fz (172-258)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	170 (136-204)	RPM	5195	2598	1732	1299	1039	866	649
					Fz (136-204)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	75 (60-90)	RPM	2292	1146	764	573	458	382	287
					Fz (60-90)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	60 (48-72)	RPM	1834	917	611	458	367	306	229
					Fz (48-72)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707
					Fz (148-222)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	145 (116-174)	RPM	4431	2216	1477	1108	886	739	554
					Fz (116-174)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	

Bhn (Brinell) HRc (Rockwell C)



rpm = $V_c \times 3.82 / DC$

ipm = $F_z \times 4 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

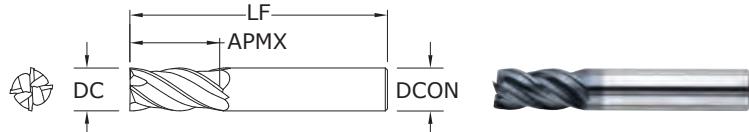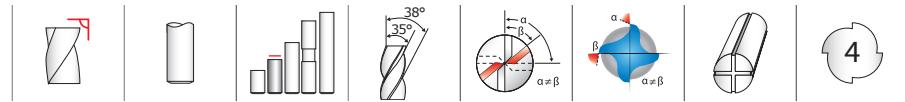

Z1M
METRIC SERIES

TOLERANCES (mm)

3–6 DIAMETER

DC = +0,000/-0,030
DCON = h₆

>6–10 DIAMETER

DC = +0,000/-0,040
DCON = h₆

>10–25 DIAMETER

DC = +0,000/-0,050
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


HARDENED STEELS

For patent information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.	
				Ti-NAMITE-X (TX)	JetStream
3,0	8,0	57,0	6,0	46357	—
4,0	11,0	57,0	6,0	46358	—
5,0	13,0	57,0	6,0	46359	—
6,0	13,0	57,0	6,0	46360	—
8,0	19,0	63,0	8,0	46362	—
10,0	22,0	72,0	10,0	46364	—
12,0	26,0	83,0	12,0	46366	—
14,0	26,0	83,0	14,0	46368	46506
16,0	32,0	92,0	16,0	46370	46507
18,0	32,0	92,0	18,0	46372	46508
20,0	38,0	104,0	20,0	46374	46509
25,0	38,0	104,0	25,0	46376	46510

Refer to page 47 for speed & feed recommendations

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)


Z1MB
METRIC SERIES

- Unequal helix design reduces damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

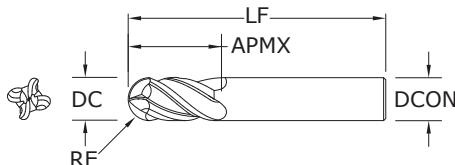

RE = 1/2 Cutting Diameter (DC)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE-X (TX)	JetStream
3,0	8,0	57,0	6,0	46354	—
4,0	11,0	57,0	6,0	46355	—
5,0	13,0	57,0	6,0	46356	—
6,0	13,0	57,0	6,0	46343	—
8,0	19,0	63,0	8,0	46344	—
10,0	22,0	72,0	10,0	46345	—
12,0	26,0	83,0	12,0	46346	—
14,0	26,0	83,0	14,0	46347	46518
16,0	32,0	92,0	16,0	46348	46519
18,0	32,0	92,0	18,0	46349	46520
20,0	38,0	104,0	20,0	46350	46521
25,0	38,0	104,0	25,0	46351	46522

TOLERANCES (mm)**3–6 DIAMETER**

DC = +0,000/-0,030
DCON = h₆


RE = +0,000/-0,015

>6–10 DIAMETER


DC = +0,000/-0,040
DCON = h₆
RE = +0,000/-0,020

>10–25 DIAMETER

DC = +0,000/-0,050
DCON = h₆
RE = +0,000/-0,025



For patent information visit
www.ksptpatents.com




Series Z1MB Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm									
					3	6	8	10	12	16	20	25		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (135-203)	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
					Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088	
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1 (107-161)	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706
					Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088	
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (77-115)	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
					Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1 (61-91)	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068	
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (119-179)	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
					Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1 (95-143)	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512
					Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (83-124)	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1 (66-99)	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (76-113)	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
					Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Slot 	1	≤ 1 (61-91)	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (109-163)	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085	
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Slot 	1	≤ 1 (87-130)	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085	

continued on next page

METRIC

Z-Carb



Series Z1MB Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm										
					3	6	8	10	12	16	20	25			
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063	
		≤ 260 Bhn or ≤ 26 HRc	Slot 	1	≤ 1	82 (66-99)	RPM	8725	4362	3272	2617	2181	1636	1309	1047
						Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	2585	1293	969	776	646	485	388	310
						Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038	
		≤ 300 Bhn or ≤ 32 HRc	Slot 	1	≤ 1	20 (16-24)	RPM	2100	1050	788	630	525	394	315	252
						Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	2003	1002	751	601	501	376	301	240
						Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025	
		≤ 400 Bhn or ≤ 43 HRc	Slot 	1	≤ 1	15 (12-18)	RPM	1583	792	594	475	396	297	238	190
						Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025	
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	6947	3474	2605	2084	1737	1303	1042	834
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
		≤ 350 Bhn or ≤ 38 HRc	Slot 	1	≤ 1	52 (41-62)	RPM	5493	2747	2060	1648	1373	1030	824	659
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
H	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	RPM	2424	1212	909	727	606	454	364	291
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
		≤ 440 Bhn or ≤ 47 HRc	Slot 	1	≤ 1	18 (15-22)	RPM	1939	969	727	582	485	364	291	233
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	RPM	5978	2989	2242	1793	1495	1121	897	717
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
		≤ 375 Bhn or ≤ 40 HRc	Slot 	1	≤ 1	44 (35-53)	RPM	4686	2343	1757	1406	1171	879	703	562
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

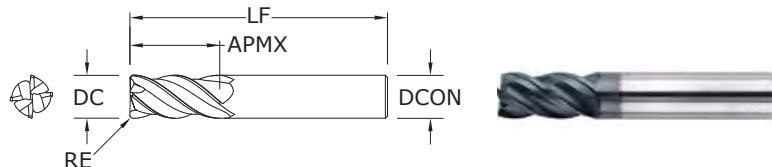

ZH1CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/4 DIAMETER
DC = +0.0000/-0.0012
DCON = h₆
RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER
DC = +0.0000/-0.0016
DCON = h₆
RE = +0.0000/-0.0020

>3/8-1 DIAMETER
DC = +0.0000/-0.0020
DCON = h₆
RE = +0.0000/-0.0020


 **HIGH TEMP ALLOYS**
 **TITANIUM**

For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	Ti-NAMITE-A (AITiN)	Ti-NAMITE-A (AITiN) W/FLAT
1/4	1/2	2-1/2	1/4	.020	36570	—
1/4	3/4	2-1/2	1/4	.020	36616	—
5/16	13/16	2-1/2	5/16	.020	36571	—
3/8	7/8	2-1/2	3/8	.020	36572	36555
7/16	1	2-3/4	7/16	.020	36573	36556
1/2	1	3	1/2	.030	36574	36557
1/2	1-1/4	3-1/4	1/2	.030	36618	36617
9/16	1-1/8	3-1/2	9/16	.030	36575	36558
5/8	1-1/4	3-1/2	5/8	.040	36576	36559
3/4	1-1/2	4	3/4	.040	36577	36560
1	1-1/2	4	1	.040	36578	36561

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depth of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL

Z-Carb-HTA

Series ZH1CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	Diameter (DC) (inch)					
					1/4	3/8	1/2	3/4	1	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	85	RPM	1299	866	649	433	325
				(68-102)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023
		≤ 400 Bhn or ≤ 43 HRc	Slot 	70	RPM	1070	713	535	357	267
				(56-84)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	70	RPM	1070	713	535	357	267
				(56-84)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
		≤ 350 Bhn or ≤ 38 HRc	Slot 	55	RPM	840	560	420	280	210
				(44-66)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	215	RPM	3285	2190	1643	1095	821
				(172-258)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
		≤ 440 Bhn or ≤ 47 HRc	Slot 	170	RPM	2598	1732	1299	866	649
				(136-204)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	75	RPM	1146	764	573	382	287
				(60-90)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
		≤ 440 Bhn or ≤ 47 HRc	Slot 	60	RPM	917	611	458	306	229
				(48-72)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC



ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

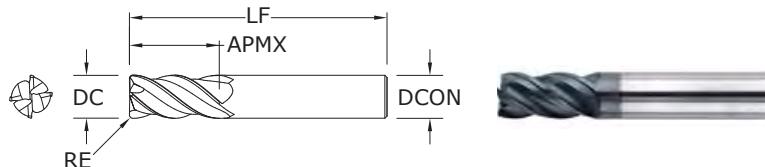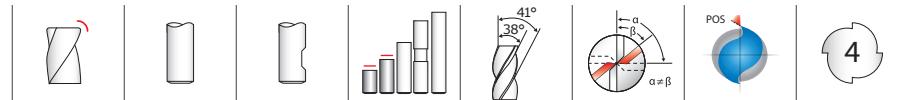

ZH1MCRS • ZH1MCR METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030
DCON = h₆
RE = +0,000/-0,050

>6–10 DIAMETER

DC = +0,000/-0,040
DCON = h₆
RE = +0,000/-0,050

>10–20 DIAMETER

DC = +0,000/-0,050
DCON = h₆
RE = +0,000/-0,050

HIGH TEMP ALLOYS


TITANIUM

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
6,0	10,0	54,0	6,0	0,50	—	42712
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	12,0	58,0	8,0	0,50	—	42713
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	14,0	66,0	10,0	0,50	—	42714
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	16,0	73,0	12,0	0,75	—	42715
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	22,0	82,0	16,0	1,00	—	42716
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
16,0	32,0	92,0	16,0	4,0	46482	46483
20,0	26,0	92,0	20,0	1,00	—	42717
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depth of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

Z-Carb-HTA



Series ZH1MCRS, ZH1MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm					
					6	10	12	20		
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (21-31)	26	RPM	1373	824	687	412
					Fz	0.017	0.032	0.041	0.053	
		Slot 	1	≤ 1 (17-26)	21	RPM	1131	679	565	339
					Fz	0.017	0.032	0.041	0.053	
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (17-26)	21	RPM	1131	679	565	339
					Fz	0.012	0.024	0.029	0.037	
		Slot 	1	≤ 1 (13-20)	17	RPM	889	533	444	267
					Fz	0.012	0.024	0.029	0.037	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (52-79)	66	RPM	3474	2084	1737	1042
					Fz	0.019	0.041	0.049	0.057	
		Slot 	1	≤ 1 (41-62)	52	RPM	2747	1648	1373	824
					Fz	0.019	0.041	0.049	0.057	
	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (18-27)	23	RPM	1212	727	606	364
					Fz	0.019	0.041	0.049	0.057	
		Slot 	1	≤ 1 (15-22)	18	RPM	969	582	485	291
					Fz	0.019	0.041	0.049	0.057	

Bhn (Brinell) HRc (Rockwell C)



rpm = $(V_c \times 1000) / (DC \times 3.14)$ ipm = $F_z \times 4 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

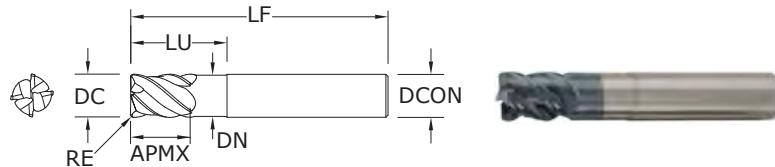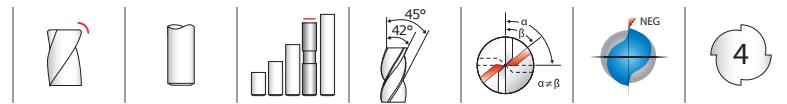

ZD1CR
FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.0000/-0.0020

>1/4–3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.0000/-0.0020

>3/8–3/4 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆


RE = +0.0000/-0.0020

HARDENED STEELS

For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	inch			EDP NO.
				REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	
1/8	5/32	2-1/2	1/4	1/2	.110	.010	36780
3/16	7/32	2-1/2	1/4	3/4	.172	.020	36781
1/4	9/32	2-1/2	1/4	3/4	.235	.020	36782
5/16	13/32	2-1/2	5/16	1	.297	.040	36783
3/8	15/32	2-1/2	3/8	1	.360	.040	36784
7/16	9/16	2-3/4	7/16	1	.422	.040	36785
1/2	5/8	3	1/2	1-1/4	.485	.040	36786
1/2	5/8	4-1/2	1/2	2-1/4	.485	.040	36787
5/8	3/4	3-1/2	5/8	1-1/2	.610	.040	36788
5/8	3/4	4-1/2	5/8	2-1/4	.610	.040	36789
5/8	3/4	5-1/2	5/8	3-1/4	.610	.040	36790
3/4	15/16	4	3/4	1-3/4	.735	.060	36791
3/4	15/16	4-1/2	3/4	2-1/4	.735	.060	36792
3/4	15/16	5-1/2	3/4	3-1/4	.735	.060	36793

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRc (327 to 654 Bhn)

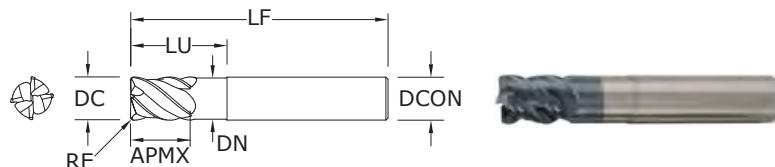

ZD1MCR
METRIC SERIES

TOLERANCES (mm)

3–6 DIAMETER

DC = +0.000/-0.030

DCON = h₆

RE = +0.000/-0.050

>6–10 DIAMETER

DC = +0.000/-0.040

DCON = h₆

RE = +0.000/-0.050

>10–20 DIAMETER

DC = +0.000/-0.050

DCON = h₆

RE = +0.000/-0.050

HARDENED STEELS


For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	mm			EDP NO.
				REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	
3,0	4,0	57,0	6,0	15,0	2,62	0,2	46560
4,0	5,0	57,0	6,0	15,0	3,61	0,3	46561
5,0	6,0	57,0	6,0	15,0	4,60	0,5	46562
6,0	7,0	57,0	6,0	15,0	5,61	1,0	46563
8,0	10,0	63,0	8,0	25,0	7,62	1,0	46564
10,0	12,0	72,0	10,0	30,0	9,60	1,0	46565
12,0	15,0	83,0	12,0	35,0	11,61	1,0	46566
16,0	20,0	92,0	16,0	45,0	15,60	1,5	46567
20,0	24,0	104,0	20,0	55,0	19,61	2,0	46568

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRc (327 to 654 Bhn)

FRACTIONAL & METRIC

Z-Carb-MD



Series ZD1CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	Diameter (DC) (inch)							
					1/8	1/4	3/8	1/2	5/8	3/4		
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	405 (324-486)	RPM	12377	6188	4126	3094	2475	2063
		Slot 	1	≤ 0.4	320 (256-384)	RPM	9779	4890	3260	2445	1956	1630
	$\leq 475 \text{ Bhn}$ or $\leq 50 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	210 (168-252)	RPM	6418	3209	2139	1604	1284	1070
		Slot 	1	≤ 0.4	170 (136-204)	RPM	5195	2598	1732	1299	1039	866
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 655 \text{ Bhn}$ or $\leq 60 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	90 (72-108)	RPM	2750	1375	917	688	550	458
		Slot 	1	≤ 0.4	70 (56-84)	RPM	2139	1070	713	535	428	357
						Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
						Feed (ipm)	2.2	2.8	3.7	3.6	3.7	3.3

Bhn (Brinell) HRc (Rockwell C)

rpm = $V_c \times 3.82 / DC$

ipm = $F_z \times 4 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling ($.02 \times DC$ maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series ZD1MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	Diameter (DC) (mm)								
					3	6	8	10	12	16	20		
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	123 (99-148)	RPM	13087	6544	4908	3926	3272	2454	1963
		Slot 	1	≤ 0.4	98 (78-117)	RPM	10340	5170	3878	3102	2585	1939	1551
	$\leq 475 \text{ Bhn}$ or $\leq 50 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	64 (51-77)	RPM	6786	3393	2545	2036	1696	1272	1018
		Slot 	1	≤ 0.4	52 (41-62)	RPM	5493	2747	2060	1648	1373	1030	824
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 655 \text{ Bhn}$ or $\leq 60 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	27 (22-33)	RPM	2908	1454	1091	872	727	545	436
		Slot 	1	≤ 0.4	21 (17-26)	RPM	2262	1131	848	679	565	424	339
						Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
						Feed (mm/min)	56	70	93	93	91	79	84

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$



ipm = $F_z \times 4 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling ($.02 \times DC$ maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

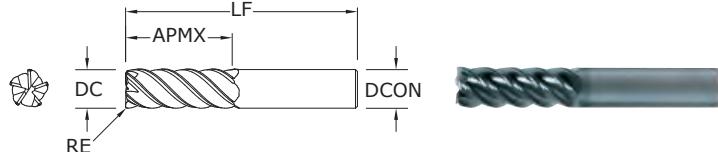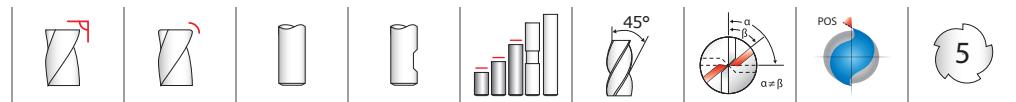

**55 •
55CR**

FRACTIONAL SERIES

TOLERANCES (inch)

DC = +0.0000/-0.0020
 DCON = h₆
 RE = +0.0000/-0.0020


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					Ti-NAMITE-A (AITiN)	Ti-NAMITE-A (AITiN) W/FLAT
1/8	1/4	1-1/2	1/8	—	32672	—
1/8	1/4	1-1/2	1/8	.010	32606	—
1/8	1/2	1-1/2	1/8	—	32655	—
1/8	1/2	1-1/2	1/8	.010	32607	—
5/32	5/16	2	3/16	.010	32608	—
5/32	9/16	2	3/16	—	32656	—
5/32	9/16	2	3/16	.010	32609	—
3/16	5/16	2	3/16	—	32673	—
3/16	5/16	2	3/16	.010	32610	—
3/16	5/8	2	3/16	—	32657	—
3/16	5/8	2	3/16	.010	32611	—
7/32	3/8	2	1/4	.015	32612	—
7/32	3/4	2-1/2	1/4	.015	32613	—
7/32	3/4	2-1/2	1/4	—	32658	—
1/4	3/8	2	1/4	.015	32614	—
1/4	3/8	2	1/4	—	32674	—
1/4	3/4	2-1/2	1/4	—	32659	—
1/4	3/4	2-1/2	1/4	.015	32615	—
1/4	1-1/4	4	1/4	.015	32616	—
5/16	7/16	2	5/16	—	32675	—
5/16	7/16	2	5/16	.015	32619	—
5/16	13/16	2-1/2	5/16	—	32660	—
5/16	13/16	2-1/2	5/16	.015	32620	—
5/16	1-1/4	4	5/16	.015	32621	—
3/8	1/2	2	3/8	—	32676	32677
3/8	1/2	2	3/8	.015	32625	32591
3/8	1/2	2	3/8	.030	32592	32593
3/8	1	2-1/2	3/8	—	32661	32662
3/8	1	2-1/2	3/8	.015	32626	32628
3/8	1	2-1/2	3/8	.030	32573	32574
3/8	1-1/2	4	3/8	.015	32627	—
3/8	1-1/2	4	3/8	.030	32569	—


continued on next page

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

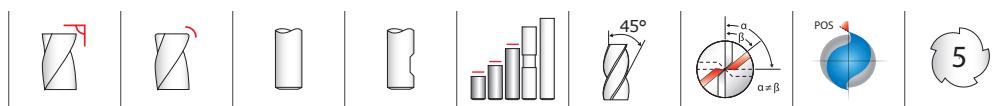

55 • 55CR

FRACTIONAL SERIES

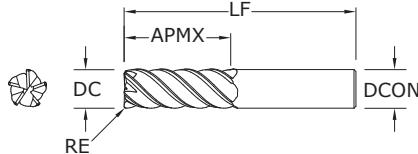

CONTINUED

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					Ti-NAMITE-A (AITiN)	Ti-NAMITE-A (AITiN) W/FLAT
7/16	1	2-3/4	7/16	—	32663	—
7/16	1	2-3/4	7/16	.015	32632	—
7/16	2	4	7/16	.015	32633	—
1/2	5/8	2-1/2	1/2	—	32678	32679
1/2	5/8	2-1/2	1/2	.030	32594	32595
1/2	5/8	2-1/2	1/2	.060	32596	32597
1/2	1-1/4	3	1/2	—	32664	32665
1/2	1-1/4	3	1/2	.030	32575	32576
1/2	1-1/4	3	1/2	.060	32577	32578
1/2	2	4	1/2	.030	32685	—
1/2	2	4	1/2	.060	32686	—
5/8	3/4	3	5/8	—	32680	32681
5/8	3/4	3	5/8	.030	32598	32599
5/8	3/4	3	5/8	.060	32600	32601
5/8	1-5/8	3-1/2	5/8	—	32666	32667
5/8	1-5/8	3-1/2	5/8	.030	32579	32580
5/8	1-5/8	3-1/2	5/8	.060	32581	32582
5/8	2-1/2	5	5/8	.030	32570	—
5/8	2-1/2	5	5/8	.060	32687	—
3/4	1	3	3/4	.030	32602	32603
3/4	1	3	3/4	.060	32604	32605
3/4	1-5/8	4	3/4	—	32668	32669
3/4	1-5/8	4	3/4	.030	32583	32584
3/4	1-5/8	4	3/4	.060	32585	32586
3/4	3-1/4	6	3/4	.030	32571	—
3/4	3-1/4	6	3/4	.060	32688	—
1	1-1/2	4	1	—	32670	32671
1	1-1/2	4	1	.030	32587	32588
1	1-1/2	4	1	.060	32589	32590
1	2-5/8	6	1	.030	32572	—
1	2-5/8	6	1	.060	32689	—

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h6

RE = +0.0000/-0.0020

STEELS

STAINLESS STEELS



CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com

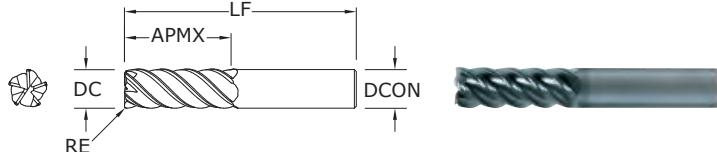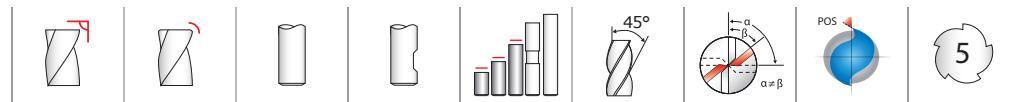

55M • 55MCR
METRIC SERIES

TOLERANCES (mm)


DC = +0,000/-0,050
DCON = h₆
RE = +0,000/-0,050

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDEDED STEELS

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
6,0	12,0	50,0	6,0	—	42606	—
6,0	12,0	50,0	6,0	0,5	42660	—
6,0	19,0	63,0	6,0	—	42607	—
6,0	19,0	63,0	6,0	0,25	42661	—
6,0	19,0	63,0	6,0	0,5	42662	—
6,0	19,0	63,0	6,0	1,0	42663	—
6,0	19,0	63,0	6,0	1,5	42664	—
6,0	25,0	75,0	6,0	—	42608	—
6,0	25,0	75,0	6,0	0,5	42665	—
8,0	12,0	50,0	8,0	—	42609	—
8,0	12,0	50,0	8,0	0,5	42666	—
8,0	20,0	63,0	8,0	—	42610	—
8,0	20,0	63,0	8,0	0,5	42667	—
8,0	20,0	63,0	8,0	1,0	42668	—
8,0	20,0	63,0	8,0	1,5	42669	—
8,0	20,0	63,0	8,0	2,0	42670	—
8,0	25,0	75,0	8,0	—	42611	—
8,0	25,0	75,0	8,0	0,5	42671	—
10,0	16,0	50,0	10,0	—	42612	—
10,0	16,0	50,0	10,0	0,5	42672	—
10,0	22,0	75,0	10,0	—	42622	42613
10,0	22,0	75,0	10,0	0,5	42673	—
10,0	22,0	75,0	10,0	1,0	42674	—
10,0	22,0	75,0	10,0	1,5	42675	—
10,0	22,0	75,0	10,0	2,0	42676	—
10,0	22,0	75,0	10,0	2,5	42677	—
10,0	38,0	100,0	10,0	—	42614	—
10,0	38,0	100,0	10,0	0,5	42678	—
12,0	19,0	63,0	12,0	—	42615	—
12,0	19,0	63,0	12,0	0,5	42679	—
12,0	25,0	75,0	12,0	—	42616	42623
12,0	25,0	75,0	12,0	0,5	42680	—


continued on next page

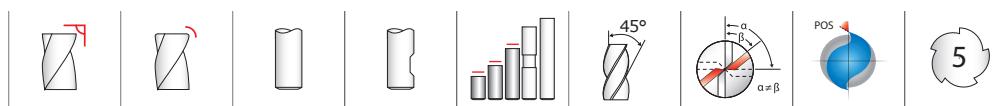

55M • 55MCR

METRIC SERIES


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

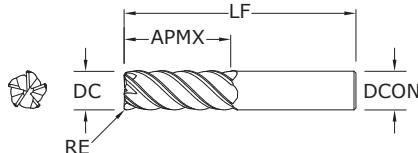



CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	TOLERANCES (mm)
					Ti-NAMITE-A (AITiN)	Ti-NAMITE-A (AITiN) W/FLAT
12,0	25,0	75,0	12,0	1,0	42681	DC = +0,000/-0,050 DCON = h6 RE = +0,000/-0,050
12,0	25,0	75,0	12,0	1,5	42682	
12,0	25,0	75,0	12,0	2,0	42683	
12,0	25,0	75,0	12,0	2,5	42684	
12,0	25,0	75,0	12,0	3,0	42685	
12,0	50,0	100,0	12,0	—	42617	STEELS
12,0	50,0	100,0	12,0	0,5	42686	STAINLESS STEELS
12,0	50,0	100,0	12,0	3,0	42630	CAST IRON
12,0	50,0	100,0	12,0	4,0	42631	HIGH TEMP ALLOYS
16,0	32,0	89,0	16,0	—	42618	TITANIUM
16,0	32,0	89,0	16,0	1,0	42687	HARDENED STEELS
16,0	32,0	89,0	16,0	1,5	42688	
16,0	32,0	89,0	16,0	2,0	42689	
16,0	32,0	89,0	16,0	2,5	42690	
16,0	32,0	89,0	16,0	3,0	42691	
16,0	32,0	89,0	16,0	4,0	42692	
16,0	50,0	100,0	16,0	—	42626	
16,0	50,0	100,0	16,0	2,0	42656	
16,0	50,0	100,0	16,0	2,5	42657	
16,0	50,0	100,0	16,0	3,0	42658	
16,0	50,0	100,0	16,0	4,0	42659	
16,0	50,0	100,0	16,0	5,0	42628	
16,0	75,0	150,0	16,0	—	42619	
16,0	75,0	150,0	16,0	1,0	42693	
16,0	75,0	150,0	16,0	3,0	42632	
16,0	75,0	150,0	16,0	4,0	42633	
20,0	38,0	100,0	20,0	—	42620	continued on next page
20,0	38,0	100,0	20,0	1,0	42694	
20,0	38,0	100,0	20,0	1,5	42695	
20,0	38,0	100,0	20,0	2,0	42696	
20,0	38,0	100,0	20,0	2,5	42697	
20,0	38,0	100,0	20,0	3,0	42698	
20,0	38,0	100,0	20,0	4,0	42699	
20,0	38,0	100,0	20,0	5,0	42700	

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h6
RE = +0,000/-0,050



For patent information visit www.ksptpatents.com

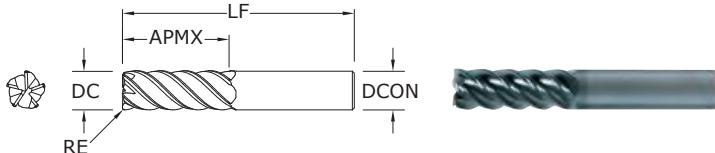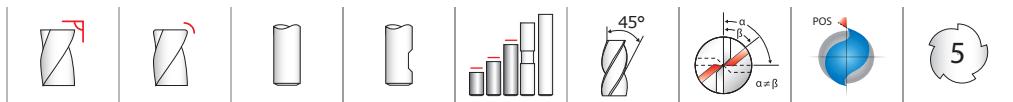

**55M •
55MCR**
METRIC SERIES

CONTINUED

TOLERANCES (mm)

DC = +0,000/-0,050
 DCON = h₆
 RE = +0,000/-0,050

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS


For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
20,0	38,0	100,0	20,0	6,0	42648	—
20,0	50,0	100,0	20,0	—	42627	—
20,0	50,0	100,0	20,0	2,0	42649	—
20,0	50,0	100,0	20,0	2,5	42650	—
20,0	50,0	100,0	20,0	3,0	42651	—
20,0	50,0	100,0	20,0	4,0	42652	—
20,0	50,0	100,0	20,0	5,0	42653	—
20,0	50,0	100,0	20,0	6,0	42654	—
20,0	75,0	150,0	20,0	—	42621	—
20,0	75,0	150,0	20,0	1,0	42701	—
20,0	75,0	150,0	20,0	2,0	42702	—
20,0	75,0	150,0	20,0	3,0	42703	—
20,0	75,0	150,0	20,0	4,0	42704	—
20,0	75,0	150,0	20,0	5,0	42705	—
20,0	75,0	150,0	20,0	6,0	42655	—

**55B**

FRACTIONAL SERIES

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

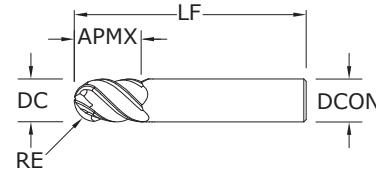

RE = 1/2 Cutting Diameter (DC)

inch

EDP NO.

Ti-NAMITE-A
(AlTiN)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
1/4	3/4	2-1/2	1/4	32500
5/16	13/16	2-1/2	5/16	32501
3/8	1	2-1/2	3/8	32502
1/2	1-1/4	3	1/2	32503
5/8	1-5/8	3-1/2	5/8	32504
3/4	1-5/8	4	3/4	32505
1	1-1/2	4	1	32506

TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h6

RE = +0.0005/-0.0010

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


TITANIUM

HARDENED STEELS

55MB

METRIC SERIES

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

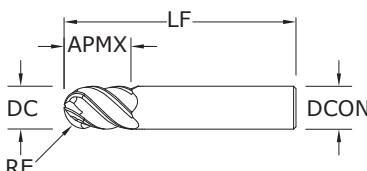

mm

EDP NO.

Ti-NAMITE-A
(AlTiN)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
6,0	13,0	57,0	6,0	42750
8,0	19,0	63,0	8,0	42751
10,0	22,0	72,0	10,0	42752
12,0	26,0	83,0	12,0	42753
16,0	32,0	92,0	16,0	42754
20,0	38,0	104,0	20,0	42755

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h6

RE = +0,000/-0,025

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com


FRACTIONAL V-Carb



Series 55, 55CR, 55B Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	385	RPM	11766	5883	3922	2941	2353	1961	1471
					(308-462)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0028	0.0032
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	630	RPM	19253	9626	6418	4813	3851	3209	2407
					(504-756)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0055	0.0064
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	325	RPM	9932	4966	3311	2483	1986	1655	1242
					(260-390)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0021	0.0024
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	530	RPM	16197	8098	5399	4049	3239	2699	2025
					(424-636)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0041	0.0048
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	370	RPM	11307	5654	3769	2827	2261	1885	1413
					(296-444)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	560	RPM	17114	8557	5705	4278	3423	2852	2139
					(448-672)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	255	RPM	7793	3896	2598	1948	1559	1299	974
					(204-306)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	385	RPM	11766	5883	3922	2941	2353	1961	1471
					(308-462)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898
					(188-282)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	355	RPM	10849	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	470	RPM	14363	7182	4788	3591	2873	2394	1795
					(376-564)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	705	RPM	21545	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0059	0.0064

continued on next page

FRACTIONAL V-Carb



Series 55, 55CR, 55B Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	360 (288-432)	RPM	11002	5501	3667	2750	2200	1834	1375
					Fz (288-432)	Feed (ipm)	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	540 (432-648)	RPM	16502	8251	5501	4126	3300	2750	2063
					Fz (432-648)	Feed (ipm)	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	70 (56-84)	RPM	2139	1070	713	535	428	357	267
					Fz (56-84)	Feed (ipm)	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	107 (86-128)	RPM	3270	1635	1090	817	654	545	409
					Fz (86-128)	Feed (ipm)	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	55 (44-66)	RPM	1681	840	560	420	336	280	210
					Fz (44-66)	Feed (ipm)	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	85 (68-102)	RPM	2598	1299	866	649	520	433	325
					Fz (68-102)	Feed (ipm)	0.0003	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
T TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	235 (188-282)	RPM	7182	3591	2394	1795	1436	1197	898
					Fz (188-282)	Feed (ipm)	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
	$\leq 400 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490
					Fz (312-468)	Feed (ipm)	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
T TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	85 (68-102)	RPM	2598	1299	866	649	520	433	325
					Fz (68-102)	Feed (ipm)	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	140 (112-168)	RPM	4278	2139	1426	1070	856	713	535
					Fz (112-168)	Feed (ipm)	0.0005	0.0013	0.0024	0.0032	0.0040	0.0042	0.0045
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	175 (140-210)	RPM	5348	2674	1783	1337	1070	891	669
					Fz (140-210)	Feed (ipm)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	290 (232-348)	RPM	8862	4431	2954	2216	1772	1477	1108
					Fz (232-348)	Feed (ipm)	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = $V_c \times 3.82 / DC$

ipm = $F_z \times 5 \times rpm$


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series
55M, 55MCR,
55MB
Metric


	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	117 (94-141)	RPM	6220	4665	3732	3110	2333	1866
			HSM 	≤ 0.05	≤ 2	192 (154-230)	RPM	10179	7634	6107	5089	3817	3054
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	99 (79-119)	RPM	5251	3938	3151	2626	1969	1575
			HSM 	≤ 0.05	≤ 2	162 (129-194)	RPM	8563	6422	5138	4282	3211	2569
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	113 (90-135)	RPM	5978	4484	3587	2989	2242	1793
			HSM 	≤ 0.05	≤ 2	171 (137-205)	RPM	9048	6786	5429	4524	3393	2714
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	78 (62-93)	RPM	4120	3090	2472	2060	1545	1236
			HSM 	≤ 0.05	≤ 2	117 (94-141)	RPM	6220	4665	3732	3110	2333	1866
S	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	72 (57-86)	RPM	3797	2848	2278	1898	1424	1139
			HSM 	≤ 0.05	≤ 2	108 (87-130)	RPM	5736	4302	3441	2868	2151	1721

continued on next page

V-Carb

Series 55M, 55MCR, 55MB Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20			
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	143 (115-172)	RPM	7594	5695	4556	3797	2848	2278
			HSM 	≤ 0.05	≤ 2	215 (172-258)	RPM	11391	8543	6834	5695	4271	3417
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	110 (88-132)	RPM	5816	4362	3490	2908	2181	1745
			HSM 	≤ 0.05	≤ 2	165 (132-198)	RPM	8725	6544	5235	4362	3272	2617
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	21 (17-26)	RPM	1131	848	679	565	424	339
			HSM 	≤ 0.05	≤ 2	33 (26-39)	RPM	1729	1297	1037	864	648	519
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	17 (13-20)	RPM	889	666	533	444	333	267
			HSM 	≤ 0.05	≤ 2	26 (21-31)	RPM	1373	1030	824	687	515	412

continued on next page




Series 55M, 55MCR, 55MB Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
					6	8	10	12	16	20		
S TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.25	≤ 1.5	72 (57-86)	RPM	3797	2848	2278	1898	1424	1139
					Fz	0.014	0.026	0.043	0.048	0.054	0.061	
		HSM 	≤ 0.05	≤ 2	119 (95-143)	RPM	6301	4726	3781	3151	2363	1890
					Fz	0.031	0.051	0.085	0.096	0.105	0.120	
	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.25	≤ 1.5	26 (21-31)	RPM	1373	1030	824	687	515	412
					Fz	0.014	0.026	0.043	0.048	0.054	0.061	
		HSM 	≤ 0.05	≤ 2	43 (34-51)	RPM	2262	1696	1357	1131	848	679
					Fz	0.031	0.051	0.085	0.096	0.108	0.120	
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.25	≤ 1.5	53 (43-64)	RPM	2827	2121	1696	1414	1060	848
					Fz	0.012	0.021	0.035	0.038	0.044	0.048	
		HSM 	≤ 0.05	≤ 2	88 (71-106)	RPM	4686	3514	2811	2343	1757	1406
					Fz	0.024	0.041	0.067	0.077	0.084	0.093	
					Feed (mm/min)	562	712	937	900	742	656	

Bhn (Brinell) HRc (Rockwell C)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 mm/min = Fz x 5 x rpm

HSM (High Speed Machining)


reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x DC maximum)
 reduce Ap to 1 x DC (maximum) when profile milling with long or extra long flute length tools
 feed rates listed have chip thinning adjustments included where applicable
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



51 • 51CR

FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

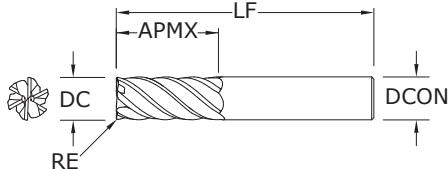



CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.
1/4	3/4	2-1/2	1/4	—	35100
1/4	3/4	2-1/2	1/4	.015	35112
1/4	3/4	2-1/2	1/4	.030	35150
3/8	1	2-1/2	3/8	—	35101
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	—	35102
1/2	1-1/4	3	1/2	.015	35151
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.060	35152
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	—	35103
5/8	1-5/8	3-1/2	5/8	.015	35153
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.060	35154
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
5/8	1-5/8	3-1/2	5/8	.190	35155
3/4	1-5/8	4	3/4	—	35104
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.060	35156
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
3/4	1-5/8	4	3/4	.190	35157
3/4	1-5/8	4	3/4	.250	35158
1	2-5/8	6	1	—	35105
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.060	35159
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126
1	2-5/8	6	1	.190	35160
1	2-5/8	6	1	.250	35161

TOLERANCES (inch)

DC = $+0.0000/-0.0020$
DCON = h_6
RE = $+0.0000/-0.0020$



For patent information visit www.ksptpatents.com

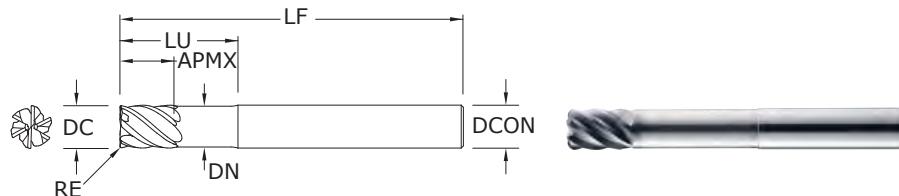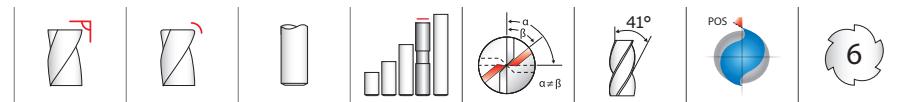
**51L •
51LC**
FRACTIONAL SERIES
TOLERANCES (inch)

DC = $+0.0000/-0.0020$
 DCON = h_6
 RE = $+0.0000/-0.0020$




For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				EDP NO.
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	
1/4	3/8	4	1/4	1-1/8	.237	—	35106
1/4	3/8	4	1/4	1-1/8	.237	.015	35127
1/4	3/8	4	1/4	1-1/8	.237	.030	35180
3/8	1/2	4	3/8	2-1/8	.356	—	35107
3/8	1/2	4	3/8	2-1/8	.356	.015	35128
3/8	1/2	4	3/8	2-1/8	.356	.030	35129
1/2	5/8	4	1/2	2-1/4	.475	—	35108
1/2	5/8	4	1/2	2-1/4	.475	.015	35181
1/2	5/8	4	1/2	2-1/4	.475	.030	35130
1/2	5/8	4	1/2	2-1/4	.475	.060	35182
1/2	5/8	4	1/2	2-1/4	.475	.090	35131
1/2	5/8	4	1/2	2-1/4	.475	.120	35132
5/8	3/4	5	5/8	2-1/2	.594	—	35109
5/8	3/4	5	5/8	2-1/2	.594	.015	35183
5/8	3/4	5	5/8	2-1/2	.594	.030	35133
5/8	3/4	5	5/8	2-1/2	.594	.060	35184
5/8	3/4	5	5/8	2-1/2	.594	.090	35134
5/8	3/4	5	5/8	2-1/2	.594	.120	35135
5/8	3/4	5	5/8	2-1/2	.594	.190	35185
3/4	1	6	3/4	3-3/8	.712	—	35110
3/4	1	6	3/4	3-3/8	.712	.030	35136
3/4	1	6	3/4	3-3/8	.712	.060	35186
3/4	1	6	3/4	3-3/8	.712	.090	35137
3/4	1	6	3/4	3-3/8	.712	.120	35138
3/4	1	6	3/4	3-3/8	.712	.190	35187
3/4	1	6	3/4	3-3/8	.712	.250	35188
1	1-1/4	6	1	3-3/8	.950	—	35111
1	1-1/4	6	1	3-3/8	.950	.030	35139
1	1-1/4	6	1	3-3/8	.950	.060	35189
1	1-1/4	6	1	3-3/8	.950	.090	35140
1	1-1/4	6	1	3-3/8	.950	.120	35141
1	1-1/4	6	1	3-3/8	.950	.190	35190
1	1-1/4	6	1	3-3/8	.950	.250	35191


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL T-Carb®



Series 51, 51CR, 51L, 51LC Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	720	RPM	11002	7334	5501	4401	3667	2750
					(576-864)	Fz	0.0020	0.0035	0.0050	0.0055	0.0061	0.0071
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	915	RPM	13981	9321	6991	5592	4660	3495
					(732-1098)	Fz	0.0028	0.0053	0.0070	0.0077	0.0085	0.0100
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	490	RPM	7487	4991	3744	2995	2496	1872
					(392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	620	RPM	9474	6316	4737	3789	3158	2368
					(496-744)	Fz	0.0021	0.0039	0.0052	0.0057	0.0062	0.0073
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	510	RPM	7793	5195	3896	3117	2598	1948
					(459-561)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	650	RPM	9932	6621	4966	3973	3311	2483
					(585-715)	Fz	0.0021	0.0038	0.0051	0.0056	0.0061	0.0072
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	350	RPM	5348	3565	2674	2139	1783	1337
					(315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	450	RPM	6876	4584	3438	2750	2292	1719
					(405-495)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	325	RPM	4966	3311	2483	1986	1655	1242
					(293-358)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	410	RPM	6265	4177	3132	2506	2088	1566
					(369-451)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059

continued on next page



Series 51, 51CR, 51L, 51LC Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/4	3/8	1/2	5/8	3/4	1		
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.1	≤ 1	105 (84-126)	RPM	1604	1070	802	642	535	401
					Fz (Feed (ipm))	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050	
		HSM 	≤ 0.05	≤ 2	130 (104-156)	RPM	1986	1324	993	795	662	497
					Fz (Feed (ipm))	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067	
	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.1	≤ 1	80 (64-96)	RPM	1222	815	611	489	407	306
					Fz (Feed (ipm))	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
		HSM 	≤ 0.05	≤ 2	100 (80-120)	RPM	1528	1019	764	611	509	382
					Fz (Feed (ipm))	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.1	≤ 1	280 (224-336)	RPM	4278	2852	2139	1711	1426	1070
					Fz (Feed (ipm))	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
		HSM 	≤ 0.05	≤ 2	355 (284-426)	RPM	5424	3616	2712	2170	1808	1356
					Fz (Feed (ipm))	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.1	≤ 1	155 (124-186)	RPM	2368	1579	1184	947	789	592
					Fz (Feed (ipm))	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
		HSM 	≤ 0.05	≤ 2	200 (160-240)	RPM	3056	2037	1528	1222	1019	764
					Fz (Feed (ipm))	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	≤ 1	240 (192-288)	RPM	3667	2445	1834	1467	1222	917
					Fz (Feed (ipm))	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043	
		HSM 	≤ 0.05	≤ 2	305 (244-366)	RPM	4660	3107	2330	1864	1553	1165
					Fz (Feed (ipm))	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC


ipm = Fz x 6 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

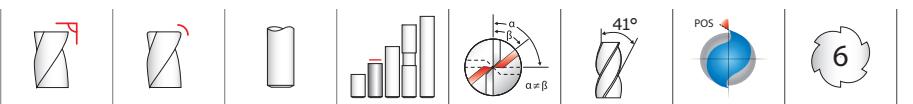

51M • 51MCR

METRIC SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

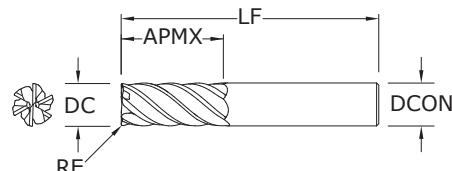



CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.
6,0	19,0	63,0	6,0	—	45100
6,0	19,0	63,0	6,0	0,5	45112
6,0	19,0	63,0	6,0	1,0	45170
6,0	19,0	63,0	6,0	1,5	45171
8,0	20,0	63,0	8,0	—	45101
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
8,0	20,0	63,0	8,0	1,2	45150
8,0	20,0	63,0	8,0	1,5	45172
8,0	20,0	63,0	8,0	2,0	45173
10,0	22,0	75,0	10,0	—	45102
10,0	22,0	75,0	10,0	0,5	45174
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
10,0	22,0	75,0	10,0	2,5	45175
12,0	26,0	83,0	12,0	—	45103
12,0	26,0	83,0	12,0	0,5	45176
12,0	26,0	83,0	12,0	0,76	45177
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
12,0	26,0	83,0	12,0	2,5	45178
12,0	26,0	83,0	12,0	3,0	45179
16,0	32,0	92,0	16,0	—	45104
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
16,0	32,0	92,0	16,0	2,5	45180
16,0	32,0	92,0	16,0	3,0	45181
16,0	32,0	92,0	16,0	4,0	45182
20,0	38,0	104,0	20,0	—	45105
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126
20,0	38,0	104,0	20,0	2,5	45183
20,0	38,0	104,0	20,0	3,0	45184
20,0	38,0	104,0	20,0	4,0	45185
20,0	38,0	104,0	20,0	5,0	45186

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h6
RE = +0,000/-0,050



For patent information visit www.ksptpatents.com

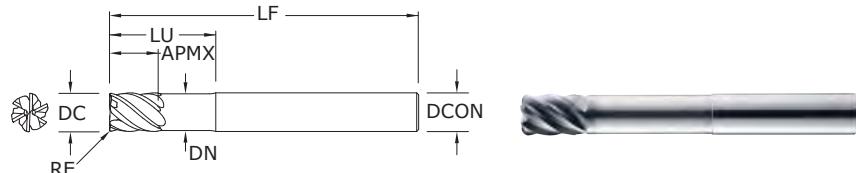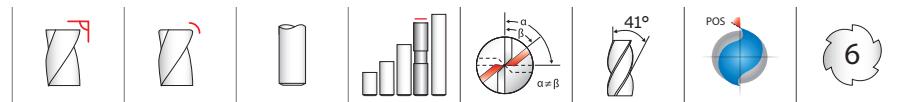

**51ML •
51MLC**
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h6
RE = +0,000/-0,050




For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	EDP NO.
mm							TI-NAMITE-X (TX)
6,0	8,0	75,0	6,0	32,0	5,69	—	45106
6,0	8,0	75,0	6,0	32,0	5,69	0,5	45127
6,0	8,0	75,0	6,0	32,0	5,69	1,0	45187
6,0	8,0	75,0	6,0	32,0	5,69	1,5	45188
8,0	10,0	75,0	8,0	32,0	7,59	—	45107
8,0	10,0	75,0	8,0	32,0	7,59	0,5	45128
8,0	10,0	75,0	8,0	32,0	7,59	1,0	45129
8,0	10,0	75,0	8,0	32,0	7,59	1,5	45189
8,0	10,0	75,0	8,0	32,0	7,59	2,0	45190
10,0	12,0	100,0	10,0	40,0	9,50	—	45108
10,0	12,0	100,0	10,0	40,0	9,50	0,5	45191
10,0	12,0	100,0	10,0	40,0	9,50	1,0	45130
10,0	12,0	100,0	10,0	40,0	9,50	1,5	45131
10,0	12,0	100,0	10,0	40,0	9,50	2,0	45132
10,0	12,0	100,0	10,0	40,0	9,50	2,5	45192
12,0	15,0	100,0	12,0	48,0	11,38	—	45109
12,0	15,0	100,0	12,0	48,0	11,38	0,5	45193
12,0	15,0	100,0	12,0	48,0	11,38	0,76	45194
12,0	15,0	100,0	12,0	48,0	11,38	1,0	45133
12,0	15,0	100,0	12,0	48,0	11,38	1,5	45134
12,0	15,0	100,0	12,0	48,0	11,38	2,0	45135
12,0	15,0	100,0	12,0	48,0	11,38	2,5	45195
12,0	15,0	100,0	12,0	48,0	11,38	3,0	45196
16,0	20,0	115,0	16,0	65,0	15,19	—	45110
16,0	20,0	115,0	16,0	65,0	15,19	1,0	45136
16,0	20,0	115,0	16,0	65,0	15,19	1,5	45137
16,0	20,0	115,0	16,0	65,0	15,19	2,0	45138
16,0	20,0	115,0	16,0	65,0	15,19	2,5	45197
16,0	20,0	115,0	16,0	65,0	15,19	3,0	45198
16,0	20,0	115,0	16,0	65,0	15,19	4,0	45199
20,0	24,0	150,0	20,0	80,0	19,00	—	45111
20,0	24,0	150,0	20,0	80,0	19,00	1,0	45139
20,0	24,0	150,0	20,0	80,0	19,00	1,5	45140
20,0	24,0	150,0	20,0	80,0	19,00	2,0	45141
20,0	24,0	150,0	20,0	80,0	19,00	2,5	45200
20,0	24,0	150,0	20,0	80,0	19,00	3,0	45201
20,0	24,0	150,0	20,0	80,0	19,00	4,0	45202
20,0	24,0	150,0	20,0	80,0	19,00	5,0	45203

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


METRIC
T-Carb®

Series
51M, 51MCR,
51ML, 51MLC
Metric



	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	219 (176-263)	RPM	11633	8725	6980	5816	4362	3490
			HSM 	≤ 0.05	≤ 2	279 (223-335)	RPM	14784	11088	8870	7392	5544	4435
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	149 (119-179)	RPM	7917	5938	4750	3958	2969	2375
			HSM 	≤ 0.05	≤ 2	189 (151-227)	RPM	10017	7513	6010	5009	3756	3005
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	155 (140-171)	RPM	8240	6180	4944	4120	3090	2472
			HSM 	≤ 0.05	≤ 2	198 (178-218)	RPM	10502	7877	6301	5251	3938	3151
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	107 (96-117)	RPM	5655	4241	3393	2827	2121	1696
			HSM 	≤ 0.05	≤ 2	137 (123-151)	RPM	7271	5453	4362	3635	2726	2181
S	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.1	≤ 1	99 (89-109)	RPM	5251	3938	3151	2626	1969	1575
			HSM 	≤ 0.05	≤ 2	125 (112-137)	RPM	6624	4968	3975	3312	2484	1987
							Fz	0.029	0.049	0.061	0.073	0.086	0.096
							Feed (mm/min)	914	1158	1153	1150	1016	907

continued on next page



Series
**51M, 51MCR,
51ML, 51MLC**
Metric

	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
					6	8	10	12	16	20		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile 	≤ 0.1	≤ 1	32	RPM	1696	1272	1018	848	636	509
					(26-38)	Fz	0.034	0.057	0.071	0.085	0.100	0.110
		HSM 	≤ 0.05	≤ 2	40	RPM	2100	1575	1260	1050	788	630
					(32-48)	Fz	0.046	0.077	0.097	0.120	0.140	0.150
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile 	≤ 0.1	≤ 1	24	RPM	1293	969	776	646	485	388
					(20-29)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
		HSM 	≤ 0.05	≤ 2	30	RPM	1616	1212	969	808	606	485
					(24-37)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile 	≤ 0.1	≤ 1	85	RPM	4524	3393	2714	2262	1696	1357
					(68-102)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
		HSM 	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile 	≤ 0.1	≤ 1	47	RPM	2504	1878	1503	1252	939	751
					(38-57)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
		HSM 	≤ 0.05	≤ 2	61	RPM	3231	2424	1939	1616	1212	969
					(49-73)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	Profile 	≤ 0.1	≤ 1	73	RPM	3878	2908	2327	1939	1454	1163
					(59-88)	Fz	0.029	0.049	0.061	0.073	0.086	0.096
		HSM 	≤ 0.05	≤ 2	93	RPM	4928	3696	2957	2464	1848	1478
					(74-112)	Fz	0.040	0.069	0.086	0.103	0.120	0.134

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$

mm/min = $F_z \times 6 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)


feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL H-Carb



77 • 77CR FRACTIONAL SERIES

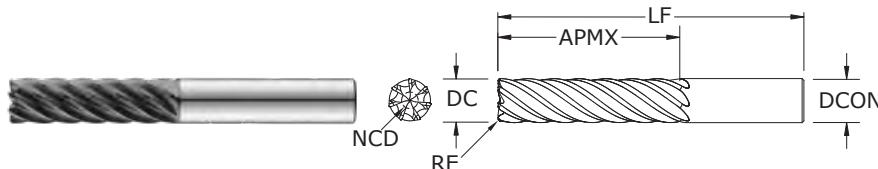

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials \leq 45 HRC (\leq 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch				NON-CUTTING CENTER DIAMETER NCD	EDP NO.			
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	TI-NAMITE-A (TA) EDP NO.		TI-NAMITE-A (TA) CHIP BREAKER	TI-NAMITE-M (TM) EDP NO.	TI-NAMITE-M (TM) CHIP BREAKER	
1/4	5/8	2-1/2	1/4	—	0.0845	77100	77102	77101	77103	
1/4	5/8	2-1/2	1/4	.015	0.0845	77104	77106	77105	77107	
1/4	5/8	2-1/2	1/4	.030	0.0845	77108	77110	77109	77111	
1/4	3/4	2-1/2	1/4	—	0.0845	77112	77114	77113	77115	
1/4	3/4	2-1/2	1/4	.015	0.0845	77116	77118	77117	77119	
1/4	3/4	2-1/2	1/4	.030	0.0845	77120	77122	77121	77123	
1/4	1	3	1/4	—	0.0845	77124	77126	77125	77127	
1/4	1	3	1/4	.015	0.0845	77128	77130	77129	77131	
1/4	1	3	1/4	.030	0.0845	77132	77134	77133	77135	
3/8	15/16	3	3/8	—	0.1268	77136	77138	77137	77139	
3/8	15/16	3	3/8	.015	0.1268	77140	77142	77141	77143	
3/8	15/16	3	3/8	.030	0.1268	77144	77146	77145	77147	
3/8	1-1/8	3-1/4	3/8	—	0.1268	77148	77150	77149	77151	
3/8	1-1/8	3-1/4	3/8	.015	0.1268	77152	77154	77153	77155	
3/8	1-1/8	3-1/4	3/8	.030	0.1268	77156	77158	77157	77159	
3/8	1-1/2	3-1/2	3/8	—	0.1268	77160	77162	77161	77163	
3/8	1-1/2	3-1/2	3/8	.015	0.1268	77164	77166	77165	77167	
3/8	1-1/2	3-1/2	3/8	.030	0.1268	77168	77170	77169	77171	
1/2	1-1/4	3-1/4	1/2	—	0.1690	77172	77174	77173	77175	
1/2	1-1/4	3-1/4	1/2	.030	0.1690	77176	77178	77177	77179	
1/2	1-1/4	3-1/4	1/2	.060	0.1690	77180	77182	77181	77183	
1/2	1-1/2	3-1/2	1/2	—	0.1690	77184	77186	77185	77187	
1/2	1-1/2	3-1/2	1/2	.030	0.1690	77188	77190	77189	77191	
1/2	1-1/2	3-1/2	1/2	.060	0.1690	77192	77194	77193	77195	
1/2	2	4	1/2	—	0.1690	77196	77198	77197	77199	
1/2	2	4	1/2	.030	0.1690	77200	77202	77201	77203	
1/2	2	4	1/2	.060	0.1690	77204	77206	77205	77207	
5/8	1-9/16	3-3/4	5/8	—	0.2113	77208	77210	77209	77211	
5/8	1-9/16	3-3/4	5/8	.030	0.2113	77212	77214	77213	77215	
5/8	1-9/16	3-3/4	5/8	.060	0.2113	77216	77218	77217	77219	


continued on next page

TOLERANCES (inch)

1/8-1/4 DIAMETER
DC = $+0.0000/-0.0012$
DCON = h_6
RE = $+0.000/-0.002$
>1/4-3/8 DIAMETER
DC = $+0.0000/-0.0016$
DCON = h_6
RE = $+0.000/-0.002$
>3/8-1 DIAMETER
DC = $+0.0000/-0.0020$
DCON = h_6
RE = $+0.000/-0.002$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
HARDENED STEELS

For patent information visit www.ksptpatents.com

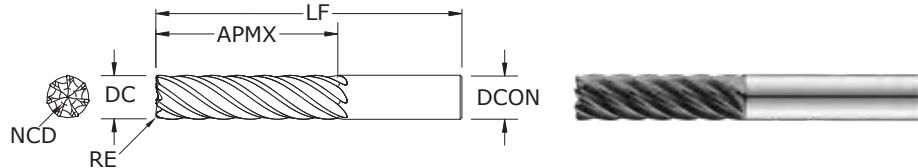

77 •
77CR
FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0012

DCON = h₆

RE = +0.000 / -0.002

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

DCON = h₆

RE = +0.000 / -0.002

>3/8-1 DIAMETER

DC = +0.0000/-0.0020

DCON = h₆

RE = +0.000 / -0.002

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS


For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	EDP NO.			
						TI-NAMITE-A (TA) EDP NO.	TI-NAMITE-A (TA) EDP NO. CHIP BREAKER	TI-NAMITE-M (TM) EDP NO.	TI-NAMITE-M (TM) EDP NO. CHIP BREAKER
5/8	1-7/8	4	5/8	—	0.2113	77220	77222	77221	77223
5/8	1-7/8	4	5/8	.030	0.2113	77224	77226	77225	77227
5/8	1-7/8	4	5/8	.060	0.2113	77228	77230	77229	77231
5/8	2-1/2	4-1/2	5/8	—	0.2113	77232	77234	77233	77235
5/8	2-1/2	4-1/2	5/8	.030	0.2113	77236	77238	77237	77239
5/8	2-1/2	4-1/2	5/8	.060	0.2113	77240	77242	77241	77243
3/4	1-7/8	4	3/4	—	0.2535	77244	77246	77245	77247
3/4	1-7/8	4	3/4	.030	0.2113	77248	77250	77249	77251
3/4	1-7/8	4	3/4	.060	0.2113	77252	77254	77253	77255
3/4	1-7/8	4	3/4	.120	0.2113	77256	77258	77257	77259
3/4	2-1/4	4-1/2	3/4	—	0.2535	77260	77262	77261	77263
3/4	2-1/4	4-1/2	3/4	.030	0.2535	77264	77266	77265	77267
3/4	2-1/4	4-1/2	3/4	.060	0.2535	77268	77270	77269	77271
3/4	2-1/4	4-1/2	3/4	.120	0.2535	77272	77274	77273	77275
3/4	3	5-1/4	3/4	—	0.2535	77276	77278	77277	77279
3/4	3	5-1/4	3/4	.030	0.2535	77280	77282	77281	77283
3/4	3	5-1/4	3/4	.060	0.2535	77284	77286	77285	77287
3/4	3	5-1/4	3/4	.120	0.2535	77288	77290	77289	77291
1	2-1/2	5-1/2	1	—	0.3380	77292	77294	77293	77295
1	2-1/2	5-1/2	1	.030	0.3380	77296	77298	77297	77299
1	2-1/2	5-1/2	1	.060	0.3380	77300	77302	77301	77303
1	2-1/2	5-1/2	1	.120	0.3380	77304	77306	77305	77307
1	3	6	1	—	0.3380	77308	77310	77309	77311
1	3	6	1	.030	0.3380	77312	77314	77313	77315
1	3	6	1	.060	0.3380	77316	77318	77317	77319
1	3	6	1	.120	0.3380	77320	77322	77321	77323
1	4	7	1	—	0.3380	77324	77326	77325	77327
1	4	7	1	.030	0.3380	77328	77330	77329	77331
1	4	7	1	.060	0.3380	77332	77334	77333	77335
1	4	7	1	.120	0.3380	77336	77338	77337	77339



**77M •
77MCR**
METRIC SERIES

- Specializes in deep axial trochoidal and high-speed milling applications
- Optimized core improves rigidity, chip flow and reduces deflection
- Chip Breaker design breaks up chips from the long flute length allowing for better chip flow and evacuation in deep pocketing operations
- Recommended for materials \leq 45 HRC (\leq 420 Bhn)

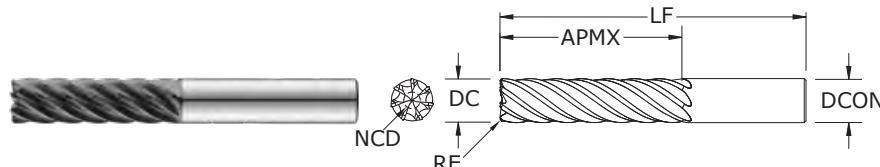

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	EDP NO.			
						TI-NAMITE-A (TA) EDP NO.	TI-NAMITE-A (TA) CHIP BREAKER EDP NO.	TI-NAMITE-M (TM) EDP NO.	TI-NAMITE-M (TM) CHIP BREAKER EDP NO.
6,0	15,0	63,0	6,0	—	2,03	74300	74302	74301	74303
6,0	15,0	63,0	6,0	0,3	2,03	74304	74306	74305	74307
6,0	15,0	63,0	6,0	0,5	2,03	74308	74310	74309	74311
6,0	18,0	63,0	6,0	—	2,03	74316	74318	74317	74319
6,0	18,0	63,0	6,0	0,3	2,03	74320	74322	74321	74323
6,0	18,0	63,0	6,0	0,5	2,03	74324	74326	74325	74327
6,0	24,0	75,0	6,0	—	2,03	74332	74334	74333	74335
6,0	24,0	75,0	6,0	0,3	2,03	74336	74338	74337	74339
6,0	24,0	75,0	6,0	0,5	2,03	74340	74342	74341	74343
8,0	20,0	75,0	8,0	—	2,71	74348	74350	74349	74351
8,0	20,0	75,0	8,0	0,5	2,71	74352	74354	74353	74355
8,0	20,0	75,0	8,0	1,0	2,71	74356	74358	74357	74359
8,0	20,0	75,0	8,0	2,0	2,71	74360	74362	74361	74363
8,0	24,0	75,0	8,0	—	2,71	74364	74366	74365	74367
8,0	24,0	75,0	8,0	0,5	2,71	74368	74370	74369	74371
8,0	24,0	75,0	8,0	1,0	2,71	74372	74374	74373	74375
8,0	24,0	75,0	8,0	2,0	2,71	74376	74378	74377	74379
8,0	32,0	85,0	8,0	—	2,71	74380	74382	74381	74383
8,0	32,0	85,0	8,0	0,5	2,71	74384	74386	74385	74387
8,0	32,0	85,0	8,0	1,0	2,71	74388	74390	74389	74391
8,0	32,0	85,0	8,0	2,0	2,71	74392	74394	74393	74395
10,0	25,0	75,0	10,0	—	3,38	74396	74398	74397	74399
10,0	25,0	75,0	10,0	0,5	3,38	74400	74402	74401	74403
10,0	25,0	75,0	10,0	1,0	3,38	74404	74406	74405	74407
10,0	30,0	80,0	10,0	—	3,38	74408	74410	74409	74411
10,0	30,0	80,0	10,0	0,5	3,38	74412	74414	74413	74415
10,0	30,0	80,0	10,0	1,0	3,38	74416	74418	74417	74419
10,0	40,0	100,0	10,0	—	3,38	74420	74422	74421	74423
10,0	40,0	100,0	10,0	0,5	3,38	74424	74426	74425	74427
10,0	40,0	100,0	10,0	1,0	3,38	74428	74430	74429	74431
12,0	30,0	83,0	12,0	—	4,06	74432	74434	74433	74435
12,0	30,0	83,0	12,0	0,5	4,06	74436	74438	74437	74439
12,0	30,0	83,0	12,0	1,0	4,06	74440	74442	74441	74443
12,0	36,0	83,0	12,0	—	4,06	74444	74446	74445	74447
12,0	36,0	83,0	12,0	0,5	4,06	74448	74450	74449	74451
12,0	36,0	83,0	12,0	1,0	4,06	74452	74454	74453	74455

continued on next page

www.kyocera-sgstool.com

TOLERANCES (mm)

6 DIAMETER

DC = $+0,000/-0,030$

DCON = h_6

RE = $+0,000/-0,050$

>6–10 DIAMETER

DC = $+0,000/-0,040$

DCON = h_6

RE = $+0,000/-0,050$

>10–25 DIAMETER

DC = $+0,000/-0,050$

DCON = h_6

RE = $+0,000/-0,050$

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit www.ksptpatents.com

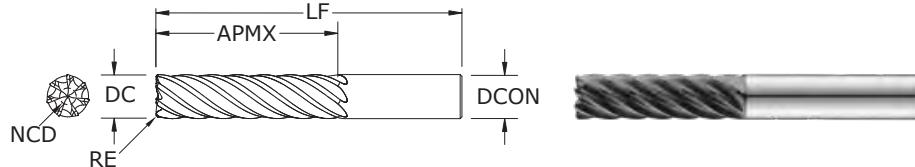

**77M •
77MCR**
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030
DCON = h₆
RE = +0,000/-0,050

>6–10 DIAMETER

DC = +0,000/-0,040
DCON = h₆
RE = +0,000/-0,050

>10–25 DIAMETER

DC = +0,000/-0,050
DCON = h₆
RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


NON-FERROUS

HARDENED STEELS

For patent information visit
www.ksptpatents.com


mm							EDP NO.				CONTINUED
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	TI-NAMITE-A (TA) EDP NO.	TI-NAMITE-A (TA) EDP NO. CHIP BREAKER	TI-NAMITE-M (TM) EDP NO.	TI-NAMITE-M (TM) EDP NO. CHIP BREAKER		
12,0	48,0	100,0	12,0	—	4,06	74456	74458	74457	74459		
12,0	48,0	100,0	12,0	0,5	4,06	74460	74462	74461	74463		
12,0	48,0	100,0	12,0	1,0	4,06	74464	74466	74465	74467		
16,0	40,0	92,0	16,0	—	5,41	74468	74470	74469	74471		
16,0	40,0	92,0	16,0	0,5	5,41	74472	74474	74473	74475		
16,0	40,0	92,0	16,0	1,0	5,41	74476	74478	74477	74479		
16,0	48,0	100,0	16,0	—	5,41	74480	74482	74481	74483		
16,0	48,0	100,0	16,0	0,5	5,41	74484	74486	74485	74487		
16,0	48,0	100,0	16,0	1,0	5,41	74488	74490	74489	74491		
16,0	64,0	115,0	16,0	—	5,41	74492	74494	74493	74495		
16,0	64,0	115,0	16,0	0,5	5,41	74496	74498	74497	74499		
16,0	64,0	115,0	16,0	1,0	5,41	74500	74502	74501	74503		
20,0	50,0	100,0	20,0	—	6,76	74504	74506	74505	74507		
20,0	50,0	100,0	20,0	0,5	6,76	74508	74510	74509	74511		
20,0	50,0	100,0	20,0	1,0	6,76	74512	74514	74513	74515		
20,0	50,0	100,0	20,0	2,0	6,76	74516	74518	74517	74519		
20,0	60,0	115,0	20,0	—	6,76	74520	74522	74521	74523		
20,0	60,0	115,0	20,0	0,5	6,76	74524	74526	74525	74527		
20,0	60,0	115,0	20,0	1,0	6,76	74528	74530	74529	74531		
20,0	60,0	115,0	20,0	2,0	6,76	74532	74534	74533	74535		
20,0	80,0	140,0	20,0	—	6,76	74536	74538	74537	74539		
20,0	80,0	140,0	20,0	0,5	6,76	74540	74542	74541	74543		
20,0	80,0	140,0	20,0	1,0	6,76	74544	74546	74545	74547		
20,0	80,0	140,0	20,0	2,0	6,76	74548	74550	74549	74551		
25,0	63,0	135,0	25,0	—	8,45	74552	74554	74553	74555		
25,0	63,0	135,0	25,0	1,0	8,45	74556	74558	74557	74559		
25,0	63,0	135,0	25,0	2,0	8,45	74560	74562	74561	74563		
25,0	63,0	135,0	25,0	3,0	8,45	74564	74566	74565	74567		
25,0	75,0	150,0	25,0	—	8,45	74568	74570	74569	74571		
25,0	75,0	150,0	25,0	1,0	8,45	74572	74574	74573	74575		
25,0	75,0	150,0	25,0	2,0	8,45	74576	74578	74577	74579		
25,0	75,0	150,0	25,0	3,0	8,45	74580	74582	74581	74583		
25,0	100,0	170,0	25,0	—	8,45	74584	74586	74585	74587		
25,0	100,0	170,0	25,0	1,0	8,45	74588	74590	74589	74591		
25,0	100,0	170,0	25,0	2,0	8,45	74592	74594	74593	74595		
25,0	100,0	170,0	25,0	3,0	8,45	74596	74598	74597	74599		

FRACTIONAL H-Carb



Series 77, 77CR Fractional		Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	D ₁ • inch									
						1/4	3/8	1/2	5/8	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM	2.5xD	816 (653-979)	RPM	11552	7701	5776	4621	3851	2888			
				≤ 0.2	$\leq \text{APMX}$	Fz	0.0015	0.0024	0.0031	0.0035	0.0038	0.0042			
			HSM	3xD	845 (676-1014)	Fz	0.0017	0.0027	0.0035	0.0040	0.0043	0.0047			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	121	129	125	113	102	85			
			HSM	4xD	756 (605-907)	Fz	0.0018	0.0028	0.0036	0.0041	0.0044	0.0049			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	146	151	146	133	119	99			
									RPM	8419	5613	4210	3368	2806	2105
			HSM	2.5xD	595 (476-714)	Fz	0.0009	0.0019	0.0026	0.0028	0.0031	0.0035			
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86120, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	HSM	3xD	616 (493-739)	Fz	0.0010	0.0021	0.0030	0.0033	0.0035	0.0039			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	59	83	88	78	69	57			
			HSM	4xD	551 (441-661)	Fz	0.0011	0.0022	0.0031	0.0034	0.0036	0.0041			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	65	86	91	80	71	60			
									RPM	9137	6092	4569	3655	3046	2284
			HSM	2.5xD	646 (517-775)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0032			
				≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	58	72	74	64	60	51			
			HSM	3xD	669 (535-803)	Fz	0.0010	0.0019	0.0026	0.0029	0.0031	0.0036			
P	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM	4xD	598 (478-718)	Fz	0.0011	0.0020	0.0027	0.0030	0.0033	0.0037			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	70	85	86	77	70	59			
									RPM	6020	4014	3010	2408	2007	1505
			HSM	2.5xD	425 (340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030			
				≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	29	39	40	39	37	32			
			HSM	3xD	440 (352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	34	45	44	42	41	36			
			HSM	4xD	394 (315-473)	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$		≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	34	45	46	44	42	37			
									RPM	6020	4014	3010	2408	2007	1505
			HSM	2.5xD	425 (340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030			
				≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	29	39	40	39	37	32			
			HSM	3xD	440 (352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	34	45	44	42	41	36			
			HSM	4xD	394 (315-473)	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	34	45	46	44	42	37			
P	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	HSM	2.5xD	408 (326-490)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030			
				≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	28	38	38	37	35	30			
			HSM	3xD	422 (338-506)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0034			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	32	43	42	40	39	34			
			HSM	4xD	378 (302-454)	Fz	0.0008	0.0016	0.0022	0.0026	0.0030	0.0035			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	32	43	44	42	40	35			
									RPM	5776	3851	2888	2310	1925	1444
			HSM	2.5xD	408 (326-490)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030			
P	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$		≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	28	38	38	37	35	30			
			HSM	3xD	739 (591-887)	Fz	0.0011	0.0020	0.0027	0.0033	0.0037	0.0042			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	78	94	95	93	87	73			
			HSM	4xD	661 (529-793)	Fz	0.0012	0.0021	0.0028	0.0034	0.0039	0.0043			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	85	99	99	96	92	76			
									RPM	10100	6733	5050	4040	3367	2525
			HSM	2.5xD	714 (571-857)	Fz	0.0010	0.0018	0.0024	0.0028	0.0033	0.0037			
				≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	71	85	85	79	78	65			
P	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	HSM	3xD	739 (591-887)	Fz	0.0011	0.0020	0.0027	0.0033	0.0037	0.0042			
				≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	34	45	44	42	41	39			
			HSM	4xD	661 (529-793)	Fz	0.0012	0.0021	0.0028	0.0034	0.0039	0.0043			
				≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	34	45	46	44	42	37			
									RPM	6020	4014	3010	2408	2007	1505
			HSM	2.5xD	425 (340-510)	Fz	0.0007	0.0014	0.0019	0.0023	0.0026	0.0030			
				≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	29	39	40	39	37	32			
			HSM	3xD	440 (352-528)	Fz	0.0008	0.0016	0.0021	0.0025	0.0029	0.0037			

continued on next page



Series 77, 77CR Fractional	Hardness	$Ae \times D_1$	$Ap \times D_1$	V_c (sfm)	$D_1 \bullet \text{inch}$						
					1/4	3/8	1/2	5/8	3/4	1	
N NON-FERROUS MATERIALS		Not Recommended for this Material Group									
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	HSM	2.5xD	136 (109-163)	RPM	1925	1284	963	770	642	481
			≤ 0.2	$\leq \text{APMX}$	Fz	0.0006	0.0011	0.0016	0.0018	0.0021	0.0025
		HSM	3xD	141 (113-169)	Fz	0.0007	0.0012	0.0018	0.0021	0.0024	0.0028
			≤ 0.15	$\leq \text{APMX}$	Fz	0.0007	0.0013	0.0018	0.0022	0.0025	0.0029
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	HSM	4xD	126 (101-151)	RPM	1207	805	604	483	402	302
			≤ 0.1	$\leq \text{APMX}$	Fz	0.0006	0.0011	0.0015	0.0018	0.0021	0.0025
		HSM	2.5xD	85 (68-102)	Fz	0.0005	0.0009	0.0013	0.0015	0.0018	0.0022
			≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	8	10	11	10	9	8
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	HSM	3xD	88 (70-106)	Fz	0.0005	0.0010	0.0015	0.0018	0.0020	0.0025
			≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	4	6	6	6	6	5
		HSM	4xD	79 (63-95)	Fz	0.0006	0.0011	0.0015	0.0018	0.0021	0.0026
			≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	5	6	6	6	6	5
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc	HSM	2.5xD	289 (231-347)	RPM	4095	2730	2048	1638	1365	1024
			≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	23	29	30	28	27	23
		HSM	3xD	299 (239-359)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036
			≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	26	32	33	29	27	26
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	HSM	4xD	268 (214-322)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037
			≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	26	34	34	33	32	27
		HSM	2.5xD	170 (136-204)	RPM	2399	1599	1199	960	800	600
			≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	13	17	18	16	16	13
H	≤ 375 Bhn or ≤ 40 HRc	HSM	3xD	176 (141-211)	Fz	0.0009	0.0017	0.0023	0.0025	0.0028	0.0036
			≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	15	19	19	17	16	15
		HSM	4xD	157 (126-188)	Fz	0.0009	0.0018	0.0024	0.0029	0.0033	0.0037
			≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	15	20	20	19	18	16
H	≤ 375 Bhn or ≤ 40 HRc	HSM	2.5xD	272 (218-326)	RPM	3851	2567	1925	1540	1284	963
			≤ 0.2	$\leq \text{APMX}$	Feed (ipm)	16	20	19	18	18	16
		HSM	3xD	282 (226-338)	Fz	0.0007	0.0012	0.0016	0.0019	0.0022	0.0027
			≤ 0.15	$\leq \text{APMX}$	Feed (ipm)	19	22	22	20	20	18
H	≤ 375 Bhn or ≤ 40 HRc	HSM	4xD	252 (202-302)	Fz	0.0007	0.0013	0.0017	0.0020	0.0023	0.0028
			≤ 0.1	$\leq \text{APMX}$	Feed (ipm)	19	23	23	22	21	19

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = $V_c \times 3.82 / DC$

mm/min = $F_z \times 7 \times rpm$


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)

METRIC
H-Carb



Series 77M, 77MCR Metric		Hardness	$A_e \times D_1$	$A_p \times D_1$	V_c (m/min)	$D_1 \bullet \text{mm}$								
						6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM	2.5xD	284 (227-341)	RPM	12208	9156	7325	6104	4578	3662	2930	
			HSM	3xD	257 (206-308)	Fz	0.0413 Feed (ipm)	3529	2634	3282	3038	2849	2597	2154
			HSM	4xD	230 (184-276)	Fz	0.0362 Feed (ipm)	2965	2955	3676	3405	3192	2910	2412
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0480 Feed (ipm)	3094	3076	3830	3546	3323	3030	1885
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	HSM	2.5xD	132 (106-159)	RPM	8068	6051	4841	4034	3025	2420	1936	
			HSM	3xD	138 (111-166)	Fz	0.0213 Feed (ipm)	1203	1207	1735	1723	1506	1401	1186
			HSM	4xD	152 (122-182)	Fz	0.0249 Feed (ipm)	1350	1351	1945	1929	1688	1569	1328
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0597 Feed (ipm)	1406	1406	2023	2008	1758	1633	1384
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM	2.5xD	197 (158-236)	RPM	9660	7245	5796	4830	3623	2898	2318	
			HSM	3xD	204 (163-245)	Fz	0.0216 Feed (ipm)	1461	1445	1818	1803	1610	1515	1298
			HSM	4xD	182 (146-218)	Fz	0.0252 Feed (ipm)	1636	1618	2037	2022	1803	1698	1454
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0332 Feed (ipm)	1704	1684	2122	2104	1879	1767	1514
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM	2.5xD	130 (104-156)	RPM	6369	4777	3822	3185	2389	1911	1529	
			HSM	3xD	134 (107-161)	Fz	0.0168 Feed (ipm)	749	739	993	963	976	927	803
			HSM	4xD	120 (96-144)	Fz	0.0188 Feed (ipm)	838	829	1113	1079	1095	1039	899
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0196 Feed (ipm)	874	863	1158	1124	1140	1082	936
P	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, CUSTOM 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	HSM	2.5xD	124 (99-149)	RPM	6104	4578	3662	3052	2289	1831	1465	
			HSM	3xD	129 (103-155)	Fz	0.0168 Feed (ipm)	718	708	952	923	936	888	769
			HSM	4xD	115 (92-138)	Fz	0.0188 Feed (ipm)	803	795	1066	1034	1050	996	861
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0196 Feed (ipm)	837	827	1110	1077	1093	1037	897
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	HSM	2.5xD	218 (174-262)	RPM	10722	8041	6433	5361	4021	3217	2573	
			HSM	3xD	225 (180-270)	Fz	0.0239 Feed (ipm)	1794	1773	2135	2098	2145	1981	1666
			HSM	4xD	202 (162-242)	Fz	0.0268 Feed (ipm)	2011	1987	2391	2349	2404	2220	1866
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0279 Feed (ipm)	2094	2071	2490	2447	2502	2312	1944
P	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	HSM	2.5xD	130 (104-156)	RPM	6369	4777	3822	3185	2389	1911	1529	
			HSM	3xD	134 (107-161)	Fz	0.0168 Feed (ipm)	749	739	993	963	976	927	803
			HSM	4xD	120 (96-144)	Fz	0.0188 Feed (ipm)	838	829	1113	1079	1095	1039	899
			HSM	≤ 0.2 $\leq APMX$	≤ 0.15 $\leq APMX$	Fz	0.0196 Feed (ipm)	874	863	1158	1124	1140	1082	936
N	NON-FERROUS MATERIALS	Not Recommended for this Material Group												

continued on next page



Series 77M, 77MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	D ₁ • mm									
					6	8	10	12	16	20	25			
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Brn or ≤ 32 HRc	HSM	2.5xD	41 (33-49)	RPM	2017	1513	1210	1008	756	605	484	
			HSM	3xD	43 (34-52)	Fz	0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625	
			HSM	4xD	38 (30-46)	Fz	0.0157	0.0205	0.0330	0.0398	0.0512	0.0627	0.0700	
			HSM	≤ 0.2 ≤ APMX	Feed (ipm)	198	194	249	251	242	237	212		
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Brn or ≤ 43 HRc	HSM	2.5xD	26 (21-31)	Fz	0.0163	0.0213	0.0344	0.0415	0.0533	0.0653	0.0729	
			HSM	3xD	27 (22-32)	Fz	0.0114	0.0152	0.0243	0.0305	0.0381	0.0480	0.0550	
			HSM	4xD	24 (19-29)	Fz	0.0128	0.0171	0.0273	0.0342	0.0427	0.0538	0.0616	
			HSM	≤ 0.1 ≤ APMX	Feed (ipm)	114	114	146	152	143	144	132		
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Brn or ≤ 38 HRc	HSM	2.5xD	88 (70-106)	RPM	4352	3264	2611	2176	1632	1306	1045	
			HSM	≤ 0.2 ≤ APMX	Feed (ipm)	582	580	726	736	725	683	585		
			HSM	3xD	91 (73-109)	Fz	0.0151	0.0213	0.0285	0.0445	0.0541	0.0711	0.0837	0.0896
			HSM	≤ 0.15 ≤ APMX	Feed (ipm)	649	651	813	824	812	765	655		
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Brn or ≤ 47 HRc	HSM	4xD	82 (66-98)	Fz	0.0191	0.0222	0.0296	0.0463	0.0563	0.0741	0.0871	0.0933
			HSM	≤ 0.1 ≤ APMX	Feed (ipm)	676	676	846	858	847	796	682		
			HSM	2.5xD	52 (42-62)	RPM	2548	1911	1529	1274	955	764	611	
			HSM	≤ 0.2 ≤ APMX	Feed (ipm)	291	340	425	431	425	400	342		
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Brn or ≤ 40 HRc		HSM	3xD	54 (43-65)	Fz	0.0182	0.0285	0.0445	0.0541	0.0711	0.0837	0.0896	
			HSM	≤ 0.15 ≤ APMX	Feed (ipm)	325	381	476	482	476	448	384		
			HSM	4xD	48 (38-58)	Fz	0.0190	0.0296	0.0463	0.0563	0.0741	0.0871	0.0933	
			HSM	≤ 0.1 ≤ APMX	Feed (ipm)	339	396	495	502	496	466	399		
			HSM	2.5xD	83 (66-100)	RPM	4087	3065	2452	2044	1533	1226	981	
			HSM	≤ 0.2 ≤ APMX	Feed (ipm)	401	393	505	509	490	481	429		
			HSM	3xD	86 (69-103)	Fz	0.0140	0.0183	0.0294	0.0356	0.0457	0.0560	0.0625	
			HSM	≤ 0.15 ≤ APMX	Feed (ipm)	449	440	566	569	549	538	481		
			HSM	4xD	77 (62-92)	Fz	0.0157	0.0213	0.0344	0.0415	0.0533	0.0653	0.0729	
			HSM	≤ 0.1 ≤ APMX	Feed (ipm)	466	457	590	594	572	560	501		

Brn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = $(V_c \times 1000) / (D_1 \times 3.14)$


mm/min = $F_z \times 7 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

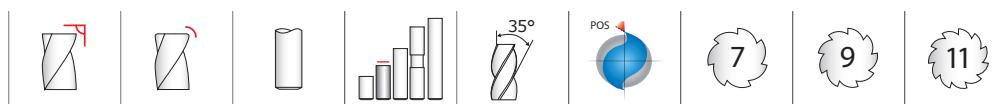

66 • 66CR

FRACTIONAL SERIES


- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials \leq 45 HRc (\leq 420 Bhn)

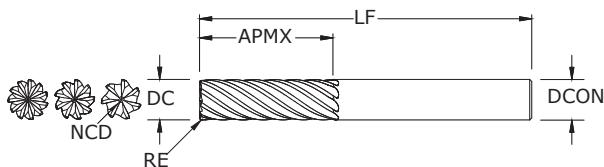

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	TOLERANCES (inch)	
							EDP NO.	
3/16	5/8	2	3/16	—	0.0550	7	36620	STEELS
3/16	5/8	2	3/16	.010	0.0550	7	36627	STAINLESS STEELS
1/4	3/4	2-1/2	1/4	—	0.0650	7	36621	CAST IRON
1/4	3/4	2-1/2	1/4	.015	0.0650	7	36628	HIGH TEMP ALLOYS
3/8	1	3	3/8	—	0.0810	7	36622	TITANIUM
3/8	1	3	3/8	.015	0.0810	7	36629	HARDENED STEELS
1/2	1-1/4	3	1/2	—	0.1340	9	36623	
1/2	1-1/4	3	1/2	.030	0.1340	9	36630	
1/2	1-1/4	3	1/2	.090	0.1340	9	36631	
1/2	1-1/4	3	1/2	.120	0.1340	9	36632	
5/8	1-5/8	3-1/2	5/8	—	0.1150	9	36624	
5/8	1-5/8	3-1/2	5/8	.030	0.1150	9	36633	
5/8	1-5/8	3-1/2	5/8	.090	0.1150	9	36634	
5/8	1-5/8	3-1/2	5/8	.120	0.1150	9	36635	
3/4	1-5/8	4	3/4	—	0.1750	11	36625	
3/4	1-5/8	4	3/4	.030	0.1750	11	36636	
3/4	1-5/8	4	3/4	.090	0.1750	11	36637	
3/4	1-5/8	4	3/4	.120	0.1750	11	36638	
1	2	6	1	—	0.3000	11	36626	
1	2	6	1	.030	0.3000	11	36639	
1	2	6	1	.090	0.3000	11	36640	
1	2	6	1	.120	0.3000	11	36641	


Neck Option Available

DC = $+0.0000/-0.0020$
DCON = h_6
RE = $+0.0000/-0.0020$



For patent information visit www.ksptpatents.com


FRACTIONAL
Multi-Carb



Series 66, 66CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					3/16	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	635	RPM	12937	9703	6469	4851	3881	3234	2426
					(508-762)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	762	RPM	15524	11643	7762	5822	4657	3881	2911
					(610-914)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	360	RPM	7334	5501	3667	2750	2200	1834	1375
					(288-432)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	432	RPM	8801	6601	4401	3300	2640	2200	1650
					(346-518)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	560	RPM	11409	8557	5705	4278	3423	2852	2139
					(448-672)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	448	RPM	9127	6845	4564	3423	2738	2282	1711
					(358-538)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	385	RPM	7844	5883	3922	2941	2353	1961	1471
					(308-462)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	462	RPM	9412	7059	4706	3530	2824	2353	1765
					(370-554)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	355	RPM	7233	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	426	RPM	8679	6509	4340	3255	2604	2170	1627
					(341-511)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	705	RPM	14363	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	846	RPM	17236	12927	8618	6463	5171	4309	3232
					(677-1015)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034

continued on next page

FRACTIONAL Multi-Carb



Series 66, 66CR Fractional		Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile					3/16	1/4	3/8	1/2	5/8	3/4	1		
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	540 (432-648)	RPM	11002	8251	5501	4126	3300	2750	2063	
					Fz (432-648)	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032		
	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	648 (518-778)	RPM	13202	9901	6601	4951	3961	3300	2475	
					Fz (518-778)	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	105 (84-126)	RPM	2139	1604	1070	802	642	535	401
						Fz (84-126)	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
		$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	126 (101-151)	RPM	2567	1925	1284	963	770	642	481
						Fz (101-151)	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021	
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	85 (68-102)	RPM	1732	1299	866	649	520	433	325
						Fz (68-102)	0.0003	0.0005	0.0009	0.0011	0.0014	0.0015	0.0016	
		$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	102 (82-122)	RPM	2078	1559	1039	779	623	520	390
						Fz (82-122)	0.0002	0.0004	0.0007	0.0009	0.0011	0.0012	0.0013	
T	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 400 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	390 (312-468)	RPM	7946	5959	3973	2980	2384	1986	1490
						Fz (312-468)	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029	
		$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	468 (374-562)	RPM	9535	7151	4767	3576	2860	2384	1788
						Fz (374-562)	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023	
F	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	140 (112-168)	RPM	2852	2139	1426	1070	856	713	535
						Fz (112-168)	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029	
		$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	168 (134-202)	RPM	3423	2567	1711	1284	1027	856	642
						Fz (134-202)	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023	

Bhn (Brinell) HRc (Rockwell C)

rpm = $V_c \times 3.82 / DC$

ipm = $F_z \times \text{number of flutes} \times rpm$

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**66M •
66MCR**
METRIC SERIES

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h6

RE = +0,000/-0,050

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


HARDENED STEELS

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	EDP NO.	
							TI-NAMITE-X	
6,0	19,0	63,0	6,0	—	1,63	7	46620	
8,0	20,0	63,0	8,0	0,5	1,63	7	46627	
6,0	19,0	63,0	6,0	1,0	1,63	7	46628	
8,0	20,0	63,0	8,0	—	1,78	7	46621	
8,0	20,0	63,0	8,0	0,5	1,78	7	46629	
8,0	20,0	63,0	8,0	1,0	1,78	7	46630	
8,0	20,0	63,0	8,0	1,5	1,78	7	46631	
10,0	22,0	75,0	10,0	—	2,03	7	46622	
10,0	22,0	75,0	10,0	0,5	2,03	7	46632	
10,0	22,0	75,0	10,0	1,0	2,03	7	46633	
10,0	22,0	75,0	10,0	1,5	2,03	7	46634	
10,0	22,0	75,0	10,0	2,0	2,03	7	46635	
12,0	26,0	83,0	12,0	—	3,45	9	46623	
12,0	26,0	83,0	12,0	1,0	3,45	9	46636	
12,0	26,0	83,0	12,0	1,5	3,45	9	46637	
12,0	26,0	83,0	12,0	2,0	3,45	9	46638	
12,0	26,0	83,0	12,0	2,5	3,45	9	46639	
12,0	26,0	83,0	12,0	3,0	3,45	9	46640	
16,0	32,0	92,0	16,0	—	2,92	9	46624	
16,0	32,0	92,0	16,0	1,0	2,92	9	46641	
16,0	32,0	92,0	16,0	1,5	2,92	9	46642	
16,0	32,0	92,0	16,0	2,0	2,92	9	46643	
16,0	32,0	92,0	16,0	2,5	2,92	9	46644	
16,0	32,0	92,0	16,0	3,0	2,92	9	46645	
16,0	32,0	92,0	16,0	4,0	2,92	9	46646	
20,0	38,0	104,0	20,0	—	4,57	11	46625	
20,0	38,0	104,0	20,0	1,0	4,57	11	46647	
20,0	38,0	104,0	20,0	1,5	4,57	11	46648	
20,0	38,0	104,0	20,0	2,0	4,57	11	46649	
20,0	38,0	104,0	20,0	2,5	4,57	11	46650	
20,0	38,0	104,0	20,0	3,0	4,57	11	46651	
20,0	38,0	104,0	20,0	4,0	4,57	11	46652	

continued on next page


Neck Option Available

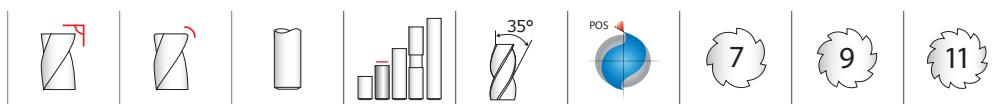

66M • 66MCR

METRIC SERIES

CONTINUED

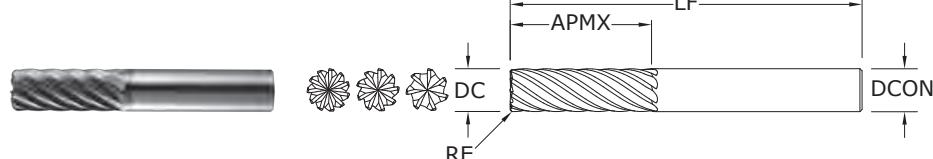


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NON-CUTTING CENTER DIAMETER NCD	NO. OF FLUTES	EDP NO.	
							TI-NAMITE-X	TOLERANCES (mm)
20,0	38,0	104,0	20,0	5,0	4,57	11	46653	DC = +0,000/-0,050
25,0	38,0	104,0	25,0	—	7,49	11	46626	DCON = h ₆
25,0	38,0	104,0	25,0	1,0	7,49	11	46654	RE = +0,000/-0,050
25,0	38,0	104,0	25,0	1,5	7,49	11	46655	
25,0	38,0	104,0	25,0	2,0	7,49	11	46656	
25,0	38,0	104,0	25,0	2,5	7,49	11	46657	
25,0	38,0	104,0	25,0	3,0	7,49	11	46658	
25,0	38,0	104,0	25,0	4,0	7,49	11	46659	
25,0	38,0	104,0	25,0	5,0	7,49	11	46660	


Neck Option Available

TOLERANCES (mm)

DC = +0,000/-0,050
 DCON = h₆
 RE = +0,000/-0,050




For patent information visit
www.ksptpatents.com



Series 66M, 66MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20	25		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	194	RPM	10260	7695	6156	5130	3847	3078	2462
					(155-232)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	232	RPM	12312	9234	7387	6156	4617	3693	2955
					(186-279)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	110	RPM	5816	4362	3490	2908	2181	1745	1396
					(88-132)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	132	RPM	6980	5235	4188	3490	2617	2094	1675
					(105-158)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	171	RPM	9048	6786	5429	4524	3393	2714	2171
					(137-205)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	137	RPM	7238	5429	4343	3619	2714	2171	1737
					(109-164)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	117	RPM	6220	4665	3732	3110	2333	1866	1493
					(94-141)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	141	RPM	7465	5598	4479	3732	2799	2239	1791
					(113-169)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	108	RPM	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	130	RPM	6883	5162	4130	3441	2581	2065	1652
					(104-156)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	215	RPM	11391	8543	6834	5695	4271	3417	2734
					(172-258)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	258	RPM	13669	10252	8201	6834	5126	4101	3281
					(206-309)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084

continued on next page

Multi-Carb



Series 66M, 66MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
					6	8	10	12	16	20	25	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	Profile ≤ 0.05	≤ 1	165	RPM	8725	6544	5235	4362	3272	2617	2094
				(132-198)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
				198	RPM	10470	7852	6282	5235	3926	3141	2513
		Finish ≤ 0.02	≤ 2	(158-237)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
				1266	Feed (mm/min)	1595	1595	2080	2099	2211	1769	
				38	RPM	2036	1527	1221	1018	763	611	489
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Profile ≤ 0.05	≤ 1	32	RPM	1696	1272	1018	848	636	509	407
				(26-38)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
				199	Feed (mm/min)	266	213	330	337	358	291	
		Finish ≤ 0.02	≤ 2	(31-46)	RPM	2036	1527	1221	1018	763	611	489
				192	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
				255	Feed (mm/min)	255	317	324	344	344	279	
H	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Profile ≤ 0.05	≤ 1	26	RPM	1373	1030	824	687	515	412	330
				(21-31)	Fz	0.012	0.019	0.024	0.026	0.036	0.040	0.040
				115	Feed (mm/min)	138	138	163	166	181	145	
		Finish ≤ 0.02	≤ 2	31	RPM	1648	1236	989	824	618	494	396
				(25-37)	Fz	0.010	0.015	0.019	0.021	0.029	0.032	0.032
				111	Feed (mm/min)	133	133	157	159	174	139	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profile ≤ 0.05	≤ 1	119	RPM	6301	4726	3781	3151	2363	1890	1512
				(95-143)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
				847	Feed (mm/min)	1059	1059	1429	1415	1497	1206	
		Finish ≤ 0.02	≤ 2	143	RPM	7561	5671	4537	3781	2836	2268	1815
				(114-171)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
				813	Feed (mm/min)	1016	1016	1372	1359	1437	1158	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profile ≤ 0.05	≤ 1	43	RPM	2262	1696	1357	1131	848	679	543
				(34-51)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
				304	Feed (mm/min)	380	380	513	508	537	433	
		Finish ≤ 0.02	≤ 2	51	RPM	2714	2036	1629	1357	1018	814	651
				(41-61)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
				292	Feed (mm/min)	365	365	492	488	516	416	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	Profile ≤ 0.05	≤ 1	88	RPM	4686	3514	2811	2343	1757	1406	1125
				(71-106)	Fz	0.014	0.026	0.032	0.038	0.051	0.056	0.055
				472	Feed (mm/min)	630	630	810	810	866	680	
		Finish ≤ 0.02	≤ 2	106	RPM	5623	4217	3374	2811	2108	1687	1349
				(85-127)	Fz	0.012	0.020	0.026	0.031	0.041	0.045	0.044
				453	Feed (mm/min)	605	605	777	777	831	653	

Bhn (Brinell) HRc (Rockwell C)


rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

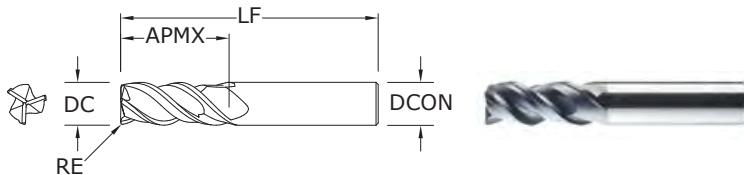
33CR

FRACTIONAL SERIES

TOLERANCES (inch)
1/8-1/4 DIAMETER
DC = +0.0000/-0.0012

DCON = h₆
RE = +0.0000/-0.0020

>1/4-3/8 DIAMETER
DC = +0.0000/-0.0016

DCON = h₆
RE = +0.0000/-0.0020

>3/8-1 DIAMETER
DC = +0.0000/-0.0020

DCON = h₆
RE = +0.0000/-0.0020


-  STEELS
-  STAINLESS STEELS
-  CAST IRON
-  HIGH TEMP ALLOYS
-  TITANIUM
-  HARDENED STEELS

For patent
information visit
www.ksptpatents.com

inch					EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	TI-NAMITE-A (AITIN)
1/8	3/8	2-1/2	1/4	.015	33345
3/16	9/16	2-1/2	1/4	.015	33346
1/4	3/4	2-1/2	1/4	.020	33347
5/16	13/16	2-1/2	5/16	.020	33348
3/8	1	2-1/2	3/8	.020	33349
7/16	1-1/8	2-3/4	7/16	.020	33350
1/2	1-1/4	3-1/4	1/2	.030	33351
5/8	1-1/2	3-1/2	5/8	.040	33352
3/4	1-3/4	4	3/4	.040	33353
1	2-1/4	5	1	.040	33354


- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Series 33



Series 33CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (440-660)	550	RPM	16808	8404	5603	4202	3362	2801	2101
					Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043	
	$\leq 375 \text{ Bhn}$ $\text{or} \leq 40 \text{ HRc}$	Slot 	1	≤ 1 (352-528)	440	RPM	13446	6723	4482	3362	2689	2241	1681
					Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043	
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ $\text{or} \leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (252-378)	315	RPM	9626	4813	3209	2407	1925	1604	1203
					Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032	
	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Slot 	1	≤ 1 (200-300)	250	RPM	7640	3820	2547	1910	1528	1273	955
					Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032	
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (392-588)	490	RPM	14974	7487	4991	3744	2995	2496	1872
					Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035	
	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Slot 	1	≤ 1 (312-468)	390	RPM	11918	5959	3973	2980	2384	1986	1490
					Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (272-408)	340	RPM	10390	5195	3463	2598	2078	1732	1299
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Slot 	1	≤ 1 (216-324)	270	RPM	8251	4126	2750	2063	1650	1375	1031
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ $\text{or} \leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (248-372)	310	RPM	9474	4737	3158	2368	1895	1579	1184
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
	$\leq 325 \text{ Bhn}$ $\text{or} \leq 35 \text{ HRc}$	Slot 	1	≤ 1 (200-300)	250	RPM	7640	3820	2547	1910	1528	1273	955
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ $\text{or} \leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (356-534)	445	RPM	13599	6800	4533	3400	2720	2267	1700
					Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039	
	$\leq 220 \text{ Bhn}$ $\text{or} \leq 19 \text{ HRc}$	Slot 	1	≤ 1 (284-426)	355	RPM	10849	5424	3616	2712	2170	1808	1356
					Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039	

continued on next page



Series 33CR Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in									
					1/8	1/4	3/8	1/2	5/8	3/4	1			
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
						Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Slot 	270 (216-324)	≤ 1	RPM	8251	4126	2750	2063	1650	1375	1031	
						Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	80 (64-96)	RPM	2445	1222	815	611	489	407	306
						Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024	
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Slot 	65 (52-78)	≤ 1	RPM	1986	993	662	497	397	331	248	
						Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024	
H	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
						Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	170 (136-204)	≤ 1	RPM	5195	2598	1732	1299	1039	866	649	
						Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	

Bhn (Brinell) HRc (Rockwell C)

rpm = $V_c \times 3.82 / DC$

ipm = $F_z \times 3 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



33MCR

METRIC SERIES

- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.
3,0	9,0	57,0	6,0	0,3	43445
3,0	9,0	57,0	6,0	0,5	43470
4,0	12,0	57,0	6,0	0,3	43446
4,0	12,0	57,0	6,0	0,5	43471
5,0	15,0	57,0	6,0	0,3	43447
5,0	15,0	57,0	6,0	0,5	43472
6,0	18,0	57,0	6,0	0,5	43448
6,0	18,0	57,0	6,0	1,0	43473
6,0	18,0	57,0	6,0	1,5	43474
6,0	18,0	57,0	6,0	2,0	43475
8,0	20,0	63,0	8,0	0,5	43449
8,0	20,0	63,0	8,0	1,0	43476
8,0	20,0	63,0	8,0	1,5	43477
8,0	20,0	63,0	8,0	2,0	43478
10,0	27,0	72,0	10,0	0,5	43450
10,0	27,0	72,0	10,0	1,0	43479
10,0	27,0	72,0	10,0	1,5	43480
10,0	27,0	72,0	10,0	2,0	43481
10,0	27,0	72,0	10,0	2,5	43482
12,0	30,0	83,0	12,0	0,5	43451
12,0	30,0	83,0	12,0	1,0	43483
12,0	30,0	83,0	12,0	1,5	43484
12,0	30,0	83,0	12,0	2,0	43485
12,0	30,0	83,0	12,0	2,5	43486
12,0	30,0	83,0	12,0	3,0	43487
12,0	30,0	83,0	12,0	4,0	43488
16,0	38,0	92,0	16,0	1,0	43452
16,0	38,0	92,0	16,0	1,5	43489
16,0	38,0	92,0	16,0	2,0	43490
16,0	38,0	92,0	16,0	2,5	43491
16,0	38,0	92,0	16,0	3,0	43492
16,0	38,0	92,0	16,0	4,0	43493
20,0	46,0	104,0	20,0	1,0	43453
20,0	46,0	104,0	20,0	2,0	43494
20,0	46,0	104,0	20,0	2,5	43495
20,0	46,0	104,0	20,0	3,0	43496
20,0	46,0	104,0	20,0	4,0	43497

TOLERANCES (mm)**3–6 DIAMETER**


DC = +0,000/-0,030
 DCON = h₆
 RE = +0,000/-0,050

>6–10 DIAMETER

DC = +0,000/-0,040
 DCON = h₆
 RE = +0,000/-0,050


>10–20 DIAMETER

DC = +0,000/-0,050
 DCON = h₆
 RE = +0,000/-0,050



For patent information visit www.ksptpatents.com


METRIC
Series 33



Series 33MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm									
					3	6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	168	RPM	17773	8886	6665	5332	4443	3332	2666		
				≤ 0.5	≤ 1.5	(134-201)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107
			Slot	134	RPM	14218	7109	5332	4265	3555	2666	2133		
				1	≤ 1	(107-161)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile	96	RPM	10179	5089	3817	3054	2545	1909	1527		
				≤ 0.5	≤ 1.5	(77-115)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080
			Slot	76	RPM	8078	4039	3029	2424	2020	1515	1212		
				1	≤ 1	(61-91)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080
	M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	Profile	149	RPM	15834	7917	5938	4750	3958	2969	2375		
				≤ 0.5	≤ 1.5	(119-179)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
			Slot	119	RPM	12602	6301	4726	3781	3151	2363	1890		
				1	≤ 1	(95-143)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085
		STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	Profile	104	RPM	10987	5493	4120	3296	2747	2060	1648		
				≤ 0.5	≤ 1.5	(83-124)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
			Slot	82	RPM	8725	4362	3272	2617	2181	1636	1309		
				1	≤ 1	(66-99)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
	K	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	Profile	94	RPM	10017	5009	3756	3005	2504	1878	1503		
				≤ 0.5	≤ 1.5	(76-113)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
			Slot	76	RPM	8078	4039	3029	2424	2020	1515	1212		
				1	≤ 1	(61-91)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069
		CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Profile	136	RPM	14380	7190	5392	4314	3595	2696	2157		
				≤ 0.5	≤ 1.5	(109-163)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096
			Slot	108	RPM	11471	5736	4302	3441	2868	2151	1721		
				1	≤ 1	(87-130)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096

continued on next page

Series 33



Series 33MCR Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm									
					3	6	8	10	12	16	20			
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	10987	5493	4120	3296	2747	2060	1648
				Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072			
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Slot 	1	≤ 1	82 (66-99)	RPM	8725	4362	3272	2617	2181	1636	1309
				Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072			
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	2585	1293	969	776	646	485	388
				Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059			
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Slot 	1	≤ 1	20 (16-24)	RPM	2100	1050	788	630	525	394	315
				Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059			
H	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	2003	1002	751	601	501	376	301
				Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043			
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	15 (12-18)	RPM	1583	792	594	475	396	297	238
				Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043			

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$

mm/min = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



7

FRACTIONAL SERIES



TOLERANCES (inch)

DC = +0.0000/-0.0020
DCON = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS

For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
1/8	3/4	2-1/4	1/8	70470
1/8	1	3	1/8	70471
3/16	3/4	2-1/2	3/16	70472
3/16	1-1/8	3	3/16	70473
1/4	1-1/8	3	1/4	70474
1/4	1-1/2	4	1/4	70475
5/16	1-1/8	3	5/16	70476
5/16	1-5/8	4	5/16	70477
3/8	1-1/8	3	3/8	70478
3/8	1-3/4	4	3/8	70479
7/16	2	4-1/2	7/16	70480
7/16	3	6	7/16	70481
1/2	2	4-1/2	1/2	70482
1/2	3	6	1/2	70483
5/8	2-1/4	5	5/8	70484
5/8	3	6	5/8	70485
3/4	2-1/4	5	3/4	70486
3/4	3	6	3/4	70487
1	2-1/4	5	1	70488
1	3	6	1	70489

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



TOLERANCES (mm)



DC = +0,000/+0,050
DCON = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS

For patent information visit www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
3,0	25,0	75,0	3,0	70551
4,0	25,0	75,0	4,0	70552
5,0	25,0	75,0	5,0	70553
6,0	25,0	75,0	6,0	70554
8,0	25,0	75,0	8,0	70555
10,0	38,0	100,0	10,0	70556
12,0	50,0	100,0	12,0	70557
12,0	75,0	150,0	12,0	70558
14,0	75,0	150,0	14,0	70559
16,0	75,0	150,0	16,0	70560
18,0	75,0	150,0	18,0	70561
20,0	75,0	150,0	20,0	70562
25,0	75,0	150,0	25,0	70563

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

**7B**

FRACTIONAL SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

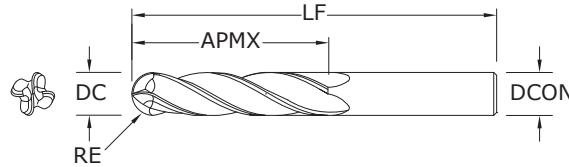

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
1/8	3/4	2-1/4	1/8	70441
1/8	1	3	1/8	70442
3/16	3/4	2-1/2	3/16	70444
3/16	1-1/8	3	3/16	70445
1/4	1-1/8	3	1/4	70447
1/4	1-1/2	4	1/4	70448
5/16	1-1/8	3	5/16	70450
5/16	1-5/8	4	5/16	70451
3/8	1-1/8	3	3/8	70453
3/8	1-3/4	4	3/8	70454
7/16	2	4-1/2	7/16	70456
7/16	3	6	7/16	70457
1/2	2	4-1/2	1/2	70459
1/2	3	6	1/2	70460
5/8	2-1/4	5	5/8	70462
5/8	3	6	5/8	70463
3/4	2-1/4	5	3/4	70465
3/4	3	6	3/4	70466
1	2-1/4	5	1	70468
1	3	6	1	70469

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

DC = $+0.0000/-0.0020$ DCON = h_6 RE = $+0.0000/-0.0010$

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


HARDENED STEELS

For patent information visit
www.ksptpatents.com

7MB

METRIC SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

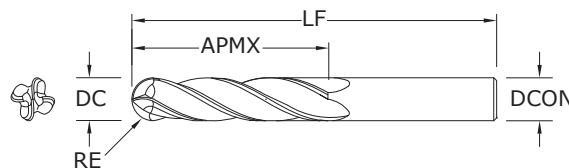

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
3,0	25,0	75,0	3,0	70527
4,0	25,0	75,0	4,0	70529
5,0	25,0	75,0	5,0	70531
6,0	25,0	75,0	6,0	70533
8,0	25,0	75,0	8,0	70535
10,0	38,0	100,0	10,0	70537
12,0	50,0	100,0	12,0	70539
12,0	75,0	150,0	12,0	70540
14,0	75,0	150,0	14,0	70542
16,0	75,0	150,0	16,0	70544
18,0	75,0	150,0	18,0	70546
20,0	75,0	150,0	20,0	70548
25,0	75,0	150,0	25,0	70550

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

DC = $+0.0000/+0.0050$ DCON = h_6 RE = $+0.0000/-0.025$

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit
www.ksptpatents.com

FRACTIONAL
Series 7



Series 7, 7B Fractional			Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
							1/8	1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	480 (384-576)	RPM	14669	7334	4890	3667	2934	2445	1834
						Fz Feed (ipm)	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish	≤ 0.02	≤ 2	275 (220-330)	RPM	8404	4202	2801	2101	1681	1401	1051
						Fz Feed (ipm)	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
K	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	420 (336-504)	RPM	12835	6418	4278	3209	2567	2139	1604
						Fz Feed (ipm)	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
S	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	290 (232-348)	RPM	8862	4431	2954	2216	1772	1477	1108
						Fz Feed (ipm)	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
H	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish	≤ 0.02	≤ 2	265 (212-318)	RPM	8098	4049	2699	2025	1620	1350	1012
						Fz Feed (ipm)	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
S	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish	≤ 0.02	≤ 2	605 (484-726)	RPM	18489	9244	6163	4622	3698	3081	2311
						Fz Feed (ipm)	0.0006	0.0015	0.0028	0.0037	0.0046	0.0047	0.0051	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish	≤ 0.02	≤ 2	80 (64-96)	RPM	2445	1222	815	611	489	407	306
						Fz Feed (ipm)	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish	≤ 0.02	≤ 2	65 (52-78)	RPM	1986	993	662	497	397	331	248
						Fz Feed (ipm)	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish	≤ 0.02	≤ 2	300 (240-360)	RPM	9168	4584	3056	2292	1834	1528	1146
						Fz Feed (ipm)	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
T	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Finish	≤ 0.02	≤ 2	105 (84-126)	RPM	3209	1604	1070	802	642	535	401
						Fz Feed (ipm)	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish	≤ 0.02	≤ 2	230 (184-276)	RPM	7029	3514	2343	1757	1406	1171	879
						Fz Feed (ipm)	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fz x 4 x rpm


reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

METRIC

Series 7



Series 7M, 7MB Metric		Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm									
						3	6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	146 (117-176)	RPM	15511	7755	5816	4653	3878	2908	2327	1861
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish	≤ 0.02	≤ 2	84 (67-101)	RPM	8886	4443	3332	2666	2222	1666	1333	1066
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	128 (102-154)	RPM	13572	6786	5089	4072	3393	2545	2036	1629
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	88 (71-106)	RPM	9371	4686	3514	2811	2343	1757	1406	1125
K	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish	≤ 0.02	≤ 2	81 (65-97)	RPM	8563	4282	3211	2569	2141	1606	1284	1028
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish	≤ 0.02	≤ 2	184 (148-221)	RPM	19550	9775	7331	5865	4887	3666	2932	2346
S	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish	≤ 0.02	≤ 2	142 (113-170)	RPM	15026	7513	5635	4508	3756	2817	2254	1803
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish	≤ 0.02	≤ 2	24 (20-29)	RPM	2585	1293	969	776	646	485	388	310
H	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish	≤ 0.02	≤ 2	20 (16-24)	RPM	2100	1050	788	630	525	394	315	252
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish	≤ 0.02	≤ 2	91 (73-110)	RPM	9694	4847	3635	2908	2424	1818	1454	1163
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al16V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Finish	≤ 0.02	≤ 2	32 (26-38)	RPM	3393	1696	1272	1018	848	636	509	407
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish	≤ 0.02	≤ 2	70 (56-84)	RPM	7432	3716	2787	2230	1858	1394	1115	892

Bhn (Brinell) HRc (Rockwell C)



rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

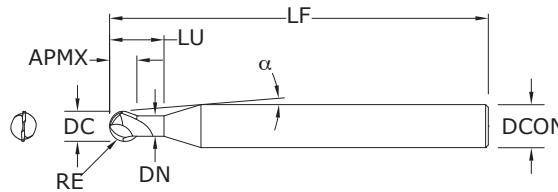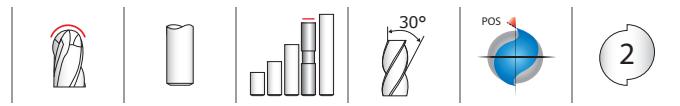
56B

FRACTIONAL SERIES

TOLERANCES (inch)
1/32-3/32 DIAMETER

DC = +0.0000/-0.0010

 DCON = h₆

RE = +0.0000/-0.0005

>3/32-1/4 DIAMETER

DC = +0.0000/-0.0012

 DCON = h₆

RE = +0.0000/-0.0006

>1/4-3/8 DIAMETER

DC = +0.0000/-0.0016

 DCON = h₆

RE = +0.0000/-0.0008

>3/8-3/4 DIAMETER

DC = +0.0000/-0.0020

 DCON = h₆


RE = +0.0000/-0.0010

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	inch		EDP NO.
							Ti-NAMITE-X		
1/32	1/32	3	1/4	8°20'	1/16	.025		93272	
1/16	1/16	3	1/4	7°40'	1/8	.055		93273	
3/32	3/32	3	1/4	6°50'	3/16	.085		93274	
1/8	1/8	3	1/4	6°	1/4	.114		93275	
3/16	3/16	3	1/4	3°35'	3/8	.171		93276	
1/4	1/4	3-1/2	1/4	—	1/2	.230		93277	
5/16	5/16	4	5/16	—	5/8	.292		93278	
3/8	3/8	4	3/8	—	3/4	.355		93279	
1/2	1/2	4-1/2	1/2	—	1	.480		93280	
5/8	5/8	5-1/2	5/8	—	1-1/4	.610		93281	
3/4	3/4	6-1/2	3/4	—	1-1/2	.735		93282	

Neck Option Available

RE = 1/2 Cutting Diameter (DC)

HARDENED STEELS

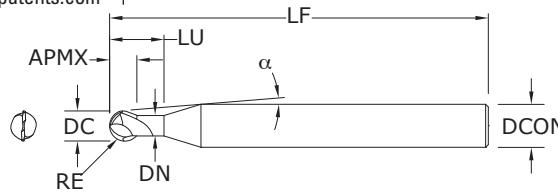 For patent information visit www.ksptpatents.com

56MB

METRIC SERIES

TOLERANCES (mm)
1-2,5 DIAMETER

DC = +0.000/-0.025

 DCON = h₆

RE = +0.000/-0.0013

>2,5-6 DIAMETER

DC = +0.000/-0.030

 DCON = h₆

RE = +0.000/-0.0013

>6-10 DIAMETER

DC = +0.000/-0.040

 DCON = h₆

RE = +0.000/-0.0020

>10-20 DIAMETER

DC = +0.000/-0.050

 DCON = h₆

RE = +0.000/-0.0025

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CENTER LINE ANGLE α	REACH LU	NECK DIAMETER DN	mm		EDP NO.
							Ti-NAMITE-X		
1,0	1,0	76,0	6,0	8°10'	2,0	0,91		91349	
1,5	1,5	76,0	6,0	7°45'	3,0	1,37		91350	
2,0	2,0	76,0	6,0	7°10'	4,0	1,83		91351	
2,5	2,5	76,0	6,0	6°35'	5,0	2,29		91352	
3,0	3,0	76,0	6,0	6°	6,0	2,72		91353	
4,0	4,0	76,0	6,0	4°30'	8,0	3,63		91354	
5,0	5,0	89,0	6,0	2°30'	10,0	4,55		91355	
6,0	6,0	89,0	6,0	—	12,0	5,49		91356	
8,0	8,0	102,0	8,0	—	16,0	7,49		91357	
10,0	10,0	102,0	10,0	—	20,0	9,47		91358	
12,0	12,0	114,0	12,0	—	24,0	11,48		91359	
16,0	16,0	140,0	16,0	—	32,0	15,62		91360	
20,0	20,0	165,0	20,0	—	40,0	19,61		91361	


Neck Option Available

RE = 1/2 Cutting Diameter (DC)

HARDENED STEELS

 For patent information visit www.ksptpatents.com

FRACTIONAL

Turbo-Carb

Series 56B Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
					1/32	1/16	1/8	3/16	1/4	3/8	1/2	3/4	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Rough	625 (500-750)	RPM	76400	38200	19100	12733	9550	6367	4775	3183
			HSM	950 (760-1140)	RPM	116128	58064	29032	19355	14516	9677	7258	4839
					Fz	0.0006	0.0015	0.0030	0.0040	0.0050	0.0080	0.0100	0.0120
		≤ 475 Bhn or ≤ 50 HRc	Rough	750 (600-900)	RPM	91680	45840	22920	15280	11460	7640	5730	3820
			HSM	1150 (920-1380)	RPM	140576	70288	35144	23429	17572	11715	8786	5857
					Fz	0.0005	0.0011	0.0023	0.0030	0.0038	0.0060	0.0075	0.0085
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRc	Rough	500 (400-600)	RPM	61120	30560	15280	10187	7640	5093	3820	2547
			HSM	1000 (800-1200)	RPM	122240	61120	30560	20373	15280	10187	7640	5093
					Fz	0.0004	0.0008	0.0017	0.0023	0.0029	0.0045	0.0057	0.0063
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	HSM			Feed (ipm)	49	49	52	47	44	46	44	32
					Feed (ipm)	122	110	116	102	98	102	96	72

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)


rpm = $V_c \times 3.82 / DC$ ipm = $F_z \times 2 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series 56MB Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm										
					1	1.5	3	5	6	10	12	20			
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Rough	≤ 0.4	≤ 0.1	191 (153-229)	RPM	60748	40498	20249	12150	10125	6075	5062	3037
			HSM	≤ 0.4	≤ 0.03	290 (232-348)	RPM	92235	61490	46117	18447	15372	9223	7686	4612
			Rough	≤ 0.4	≤ 0.05	229 (183-275)	Fz	0.015	0.038	0.076	0.102	0.127	0.203	0.254	0.305
			HSM	≤ 0.4	≤ 0.02	351 (281-421)	RPM	111636	74424	37212	22327	18606	11164	9303	5582
		$\leq 475 \text{ Bhn}$ or $\leq 50 \text{ HRc}$	Rough	≤ 0.4	≤ 0.04	152 (122-182)	RPM	48344	32229	16115	9669	8057	4834	4029	2417
			HSM	≤ 0.4	≤ 0.01	305 (244-366)	Fz	0.010	0.020	0.043	0.058	0.074	0.114	0.145	0.160
						Feed (mm/min)	967	1289	1386	1122	1192	1102	1168	773	
						Feed (mm/min)	2522	2975	3104	2483	2619	2464	2587	1746	

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$


mm/min = $F_z \times 2 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




6

57

FRACTIONAL SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

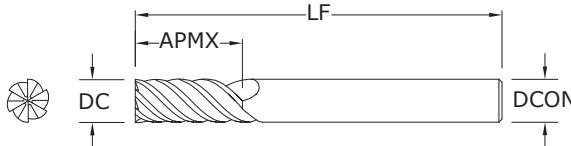

Neck Option Available

inch

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
1/4	17/32	3-1/2	1/4	36140
5/16	11/16	4	5/16	36141
3/8	13/16	4	3/8	36142
1/2	1-3/32	4-1/2	1/2	36143

TOLERANCES (inch)

1/4 DIAMETER

DC = +0.0000/-0.0012
DCON = h₆

5/16 DIAMETER

DC = +0.0000/-0.0016
DCON = h₆

3/8 DIAMETER

DC = +0.0000/-0.0016
DCON = h₆

1/2 DIAMETER


DC = +0.0000/-0.0020
DCON = h₆

HARDENED STEELS

For patent information visit www.ksptpatents.com

57M
METRIC SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

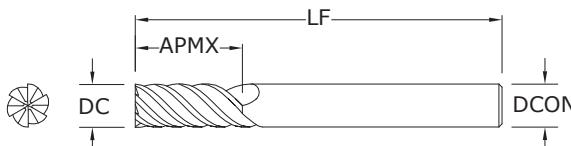

Neck Option Available

mm

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.
6,0	13,0	89,0	6,0	46140
8,0	18,0	102,0	8,0	46141
10,0	22,0	102,0	10,0	46142
12,0	26,0	114,0	12,0	46143
16,0	32,0	140,0	16,0	46145
20,0	38,0	165,0	20,0	46147

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,030
DCON = h₆

8 DIAMETER

DC = +0,000/-0,040
DCON = h₆

10 DIAMETER


DC = +0,000/-0,040
DCON = h₆

12-20 DIAMETER

DC = +0,000/-0,050
DCON = h₆

HARDENED STEELS

For patent information visit www.ksptpatents.com



Series 57 Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in				
					1/4	5/16	3/8	1/2	
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 420 \text{ Bhn}$ or $\leq 45 \text{ HRc}$	Slot 	1 ≤ 0.3	215 $(172-258)$	RPM	3285	2628	2190	1643
				Fz $(172-258)$	0.0013	0.0019	0.0025	0.0031	
				Feed (ipm)	26	30	33	31	
	$\leq 560 \text{ Bhn}$ or $\leq 55 \text{ HRc}$	Profile 	≤ 0.1 ≤ 1.5	265 $(212-318)$	RPM	4049	3239	2699	2025
				Fz $(212-318)$	0.0018	0.0026	0.0035	0.0044	
				Feed (ipm)	44	51	57	53	
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	HSM 	≤ 0.04 ≤ 1.5	560 $(448-672)$	RPM	8557	6845	5705	4278
				Fz $(448-672)$	0.0022	0.0033	0.0044	0.0055	
				Feed (ipm)	113	136	151	141	
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 560 \text{ Bhn}$ or $\leq 55 \text{ HRc}$	Slot 	1 ≤ 0.3	120 $(96-144)$	RPM	1834	1467	1222	917
				Fz $(96-144)$	0.0010	0.0015	0.0020	0.0025	
				Feed (ipm)	11	13	15	14	
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	Profile 	≤ 0.1 ≤ 1.5	150 $(120-180)$	RPM	2292	1834	1528	1146
				Fz $(120-180)$	0.0014	0.0021	0.0028	0.0035	
				Feed (ipm)	19	23	26	24	
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	HSM 	≤ 0.04 ≤ 1.5	490 $(392-588)$	RPM	7487	5990	4991	3744
				Fz $(392-588)$	0.0018	0.0026	0.0035	0.0044	
				Feed (ipm)	81	93	105	99	
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	Slot 	1 ≤ 0.3	65 $(52-78)$	RPM	993	795	662	497
				Fz $(52-78)$	0.0008	0.0011	0.0015	0.0019	
				Feed (ipm)	5	5	6	6	
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	Profile 	≤ 0.1 ≤ 1.5	80 $(64-96)$	RPM	1222	978	815	611
				Fz $(64-96)$	0.0011	0.0016	0.0021	0.0026	
				Feed (ipm)	8	9	10	10	
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	HSM 	≤ 0.04 ≤ 1.5	250 $(200-300)$	RPM	3820	3056	2547	1910
				Fz $(200-300)$	0.0013	0.0019	0.0025	0.0031	
				Feed (ipm)	30	35	38	36	

Bhn (Brinell) HRc (Rockwell C)

HSM (High Speed Machining)

rpm = $V_c \times 3.82 / DC$


ipm = $F_z \times 6 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Power-Carb®

Series 57M Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm						
					6	8	10	12	16	20	
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 420 \text{ Bhn}$ or $\leq 45 \text{ HRc}$	Slot 	1 ≤ 0.3	66	RPM	3499	2624	2099	1749	1312	1050
				(53-79)	Fz	0.032	0.048	0.064	0.079	0.094	0.109
					Feed (mm/min)	672	756	806	829	740	686
	$\leq 560 \text{ Bhn}$ or $\leq 55 \text{ HRc}$	Profile 	≤ 0.1 ≤ 1.5	81	RPM	4294	3220	2576	2147	1610	1288
				(65-97)	Fz	0.046	0.066	0.089	0.112	0.132	0.152
					Feed (mm/min)	1185	1275	1376	1443	1275	1175
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	HSM 	≤ 0.04 ≤ 1.5	171	RPM	9064	6798	5439	4532	3399	2719
				(137-205)	Fz	0.056	0.084	0.112	0.140	0.170	0.200
					Feed (mm/min)	3046	3426	3655	3807	3467	3263
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 560 \text{ Bhn}$ or $\leq 55 \text{ HRc}$	Slot 	1 ≤ 0.3	37	RPM	1961	1471	1177	981	735	588
				(30-44)	Fz	0.025	0.038	0.051	0.064	0.077	0.090
					Feed (mm/min)	294	335	360	377	340	318
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	Profile 	≤ 0.1 ≤ 1.5	46	RPM	2438	1829	1463	1219	914	732
				(37-55)	Fz	0.036	0.053	0.071	0.089	0.107	0.125
					Feed (mm/min)	527	582	623	651	587	549
	$\leq 740 \text{ Bhn}$ or $\leq 65 \text{ HRc}$	HSM 	≤ 0.04 ≤ 1.5	149	RPM	7898	5924	4739	3949	2962	2369
				(119-179)	Fz	0.046	0.066	0.089	0.112	0.135	0.158
					Feed (mm/min)	2180	2346	2531	2654	2399	2246

Bhn (Brinell) HRc (Rockwell C)

HSM (High Speed Machining)



rpm = $(V_c \times 1000) / (DC \times 3.14)$ mm/min = $F_z \times 6 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

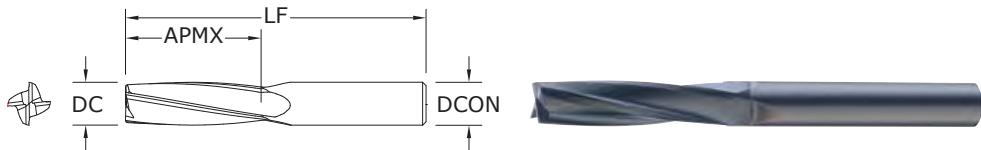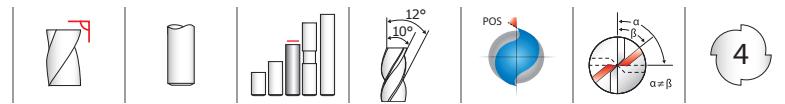
27

FRACTIONAL SERIES


TOLERANCES (inch)

 DC = +0.0000/-0.0030
 DCON = h₆
 PLASTICS/COMPOSITES

 For patent information visit
www.ksptpatents.com

	inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)	
1/4	1	2-1/2	1/4	72978	72979	
3/8	1-1/8	2-1/2	3/8	72980	72981	
1/2	1-1/2	3-1/2	1/2	72982	72983	
3/4	1-3/8	4	3/4	72984	72985	

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites

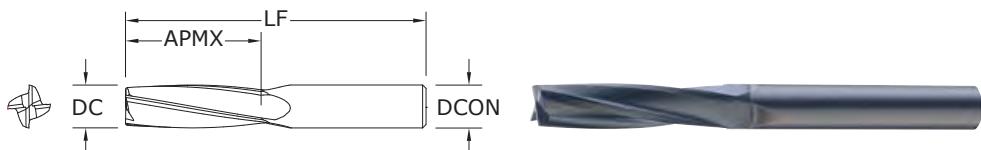
27M

METRIC SERIES

TOLERANCES (mm)


 DC = +0,000/-0,080
 DCON = h₆
 PLASTICS/COMPOSITES

 For patent information visit
www.ksptpatents.com

	mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Di-NAMITE® (Diamond)	
6,0	25,0	63,0	6,0	83056	83057	
8,0	25,0	63,0	8,0	83058	83059	
10,0	28,0	63,0	10,0	83060	83061	
12,0	38,0	89,0	12,0	83062	83063	
16,0	48,0	115,0	16,0	83064	83065	

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites


FRACTIONAL Series 27



Series 27 Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • in				
				1/4	3/8	1/2	3/4	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	400 (320-480)	RPM	6112	4075	3056	2037
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	Profile 	≤ 0.5 ≤ 1.5	500 (400-600)	RPM	7640	5093	3820	2547
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	49	61	61	49
	HSM 	≤ 0.5 ≤ 2	825 (660-990)	RPM	12606	8404	6303	4202
				Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	187	232	232	185
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	320 (256-384)	RPM	4890	3260	2445	1630
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	31	39	39	31
	Profile 	≤ 0.5 ≤ 1.5	400 (320-480)	RPM	6112	4075	3056	2037
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	HSM 	≤ 0.5 ≤ 2	660 (528-792)	RPM	10085	6723	5042	3362
				Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	149	186	186	148
N CARBON, GRAPHITE	Slot 	1 ≤ 1	480 (384-576)	RPM	7334	4890	3667	2445
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	59	74	73	59
	Profile 	≤ 0.5 ≤ 1.5	600 (480-720)	RPM	9168	6112	4584	3056
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	73	93	92	73
	HSM 	≤ 0.5 ≤ 2	990 (792-1188)	RPM	15127	10085	7564	5042
				Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	278	347	348	278
PLASTICS	Slot 	1 ≤ 1	800 (640-690)	RPM	12224	8149	6112	4075
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	98	124	122	98
	Profile 	≤ 0.5 ≤ 1.5	1000 (800-1200)	RPM	15280	10187	7640	5093
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	122	155	153	122
	HSM 	≤ 0.5 ≤ 2	1650 (1320-1980)	RPM	25212	16808	12606	8404
				Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	464	578	580	464
MACHINABLE CERAMICS MACHINABLE GLASS	Slot 	1 ≤ 1	40 (32-48)	RPM	611	407	306	204
				Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.0	2.4	2.4	2.0
	Profile 	≤ 0.5 ≤ 1.5	50 (40-60)	RPM	764	509	382	255
				Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.4	3.1	3.1	2.4
	HSM 	≤ 0.5 ≤ 2	85 (68-102)	RPM	1299	866	649	433
				Fz	0.0018	0.0034	0.0046	0.0055
				Feed (ipm)	9.4	11.8	11.9	9.5

HSM (High Speed Machining)
 $\text{rpm} = V_c \times 3.82 / DC$
 $\text{ipm} = F_z \times 4 \times \text{rpm}$
adjust parameters based on resin type and fiber structure
reduce speed when overheating causes melting or damage to resin
reduce feed if delamination or fraying occur
finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant
dust collection is vital when machining dry
diamond coating will increase tool life in graphite and composite materials
feed rates listed have chip thinning adjustments included where applicable
refer to the SGS Tool Wizard® for complete technical information
(www.kyocera-sgstool.com)



Series
27M
Metric

	Series 27M Metric	Ae x DC	Ap x DC	Vc (m/min)	DC • mm					
					6	8	10	12	16	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot	1	≤ 1	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
				150	RPM	7951	5963	4771	3976	2982
	Profile	≤ 0.5	≤ 1.5	(120-180)	Fz	0.040	0.065	0.075	0.100	0.120
				250	RPM	13252	9939	7951	6626	4970
				(200-300)	Fz	0.095	0.145	0.175	0.235	0.280
	HSM	≤ 0.5	≤ 2	(200-300)	Feed (mm/min)	5036	5765	5566	6228	5566
				100	RPM	5301	3976	3181	2650	1988
				(80-120)	Fz	0.040	0.065	0.075	0.100	0.120
GFRP (FIBERGLASS)	Slot	1	≤ 1	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
				200	RPM	10602	7951	6361	5301	3976
	Profile	≤ 0.5	≤ 1.5	(160-240)	Fz	0.095	0.145	0.175	0.235	0.280
				(160-240)	Feed (mm/min)	4029	4612	4453	4983	4453
				100	RPM	5301	3976	3181	2650	1988
	HSM	≤ 0.5	≤ 2	(116-174)	Fz	0.050	0.080	0.095	0.125	0.150
				(148-222)	Feed (mm/min)	1537	1845	1752	1922	1729
				300	RPM	15903	11927	9542	7951	5963
N CARBON, GRAPHITE	Slot	1	≤ 1	(240-360)	Fz	0.115	0.185	0.220	0.290	0.350
				(240-360)	Feed (mm/min)	7315	8826	8397	9223	8349
				185	RPM	9807	7355	5884	4903	3677
	Profile	≤ 0.5	≤ 1.5	(196-294)	Fz	0.050	0.080	0.095	0.125	0.150
				(244-366)	Feed (mm/min)	1961	2354	2236	2452	2206
				245	RPM	12987	9740	7792	6494	4870
	HSM	≤ 0.5	≤ 2	(196-294)	Fz	0.050	0.080	0.095	0.125	0.150
				(244-366)	Feed (mm/min)	2597	3117	2961	3247	2922
				305	RPM	16168	12126	9701	8084	6063
PLASTICS	Slot	1	≤ 1	(404-606)	Fz	0.050	0.080	0.095	0.125	0.150
				(404-606)	Feed (mm/min)	3234	3880	3686	4042	3638
				505	RPM	26769	20077	16062	13385	10038
	Profile	≤ 0.5	≤ 1.5	(20-30)	Fz	0.115	0.185	0.220	0.290	0.350
				(20-30)	Feed (mm/min)	12314	14857	14134	15526	14054
				10	RPM	530	398	318	265	199
	HSM	1	≤ 1	(8-12)	Fz	0.020	0.035	0.045	0.050	0.060
				(8-12)	Feed (mm/min)	42	56	57	53	48
				15	RPM	795	596	477	398	298
MACHINABLE CERAMICS MACHINABLE GLASS	Profile	≤ 0.5	≤ 1.5	(12-18)	Fz	0.020	0.035	0.045	0.050	0.060
				(12-18)	Feed (mm/min)	64	83	86	80	72
				25	RPM	1325	994	795	663	497
	HSM	≤ 0.5	≤ 2	(20-30)	Fz	0.045	0.075	0.085	0.115	0.140
				(20-30)	Feed (mm/min)	239	298	270	305	278

HSM (High Speed Machining)

rpm = $V_c \times 3.82 / DC$

mm/min = $F_z \times 4 \times rpm$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry


diamond coating will increase tool life in graphite and composite materials

feed rates listed have chip thinning adjustments included where applicable

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Picatinny Rail Tools



Non-Ferrous Recoil Groove Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates.
- Circular land improves surface finish and chatter suppression.
- Symmetrical end gashing improves balance in high speed operations.
- 45 degree chamfer enables slot and deburr in one operation.
- Meets MIL-STD 1913.

inch				EDP NO.	
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE-B (TiB ₂)
0.2100	1/4	0.118	1-3/4	34760	34761

TOLERANCES (inch)



DC = +0.0080/-0.0000

APMX = +0.0060/-0.0000

DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com

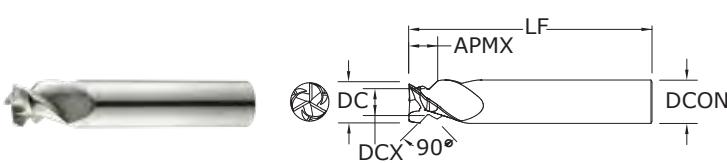

Non-Ferrous Dovetail Form Tool

FRACTIONAL SERIES

- Open Flute design improves chip removal at high feed rates.
- Specially engineered flute shape for improved chip control.
- Circular land improves surface finish and chatter suppression.
- Symmetrical end gashing improves balance in high speed operations.
- Meets MIL-STD 1913.

inch						EDP NO.	
CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE-B (TiB ₂)	
0.6050	0.384	5/8	0.410	3-1/2	34762	34763	

TOLERANCES (inch)

DC = +0.0010/-0.0010



DCON = h₆

NON-FERROUS

For patent information visit
www.ksptpatents.com



FRACTIONAL
Picatinny Rail Tools

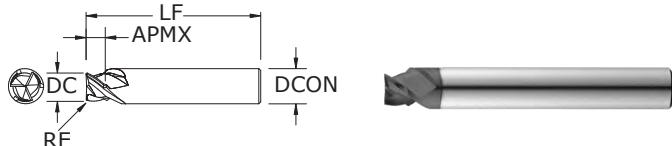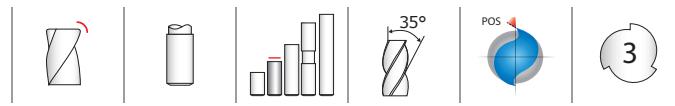

TOLERANCES (inch)

DC = +0.0080/-0.0000

APMX = +0.0060/-0.0000

DCON = h₆

RE = +0.0000/-0.0005

STEELS

STAINLESS STEELS

TITANIUM


HARDENED STEELS

For patent information visit www.ksptpatents.com

Ferrous Recoil Groove Tool
FRACTIONAL SERIES

inch						EDP NO.
CUTTING DIAMETER DC	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	Ti-NAMITE-A (TA)	Ti-NAMITE-M (TM)
0.2100	1/4	0.118	1-3/4	.010	33360	33361

- Heavy core design adds rigidity for cutting difficult to machine materials.
- Tight corner radius tangency tolerance for quality recoil grooves.
- Specially engineered flute design adds strength and improves chip flow.
- Meets MIL-STD 1913.

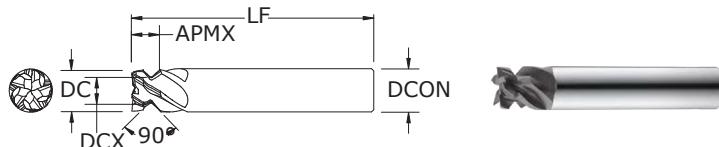

TOLERANCES (inch)

DC = +0.0010/-0.0010

DCON = h₆

STEELS

STAINLESS STEELS

TITANIUM

HARDENED STEELS


For patent information visit www.ksptpatents.com

Ferrous Dovetail Form Tool
FRACTIONAL SERIES

inch						EDP NO.
CUTTING DIAMETER DC	INNER CUTTING DIAMETER DCX	SHANK DIAMETER DCON	LENGTH OF CUT APMX	OVERALL LENGTH LF	Ti-NAMITE-A (TA)	Ti-NAMITE-M (TM)
0.6050	0.384	5/8	0.410	3-1/2	37391	37390

- Five-flute design allows for higher machining parameters.
- Open end work design allows for increased chip space.
- Square end configuration with enhanced corner strength to improve corner durability.
- Meets MIL-STD 1913.

Picatinny Rail Ferrous Recoil Groove Tool



Picatinny Rail Ferrous Recoil Groove Tool 3 Flute Made to MIL-STD-1913		Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Slot	0.210	0.118 440 (352-528)	RPM 8004 Fz 0.0009 Feed (ipm) 22.99
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Slot	0.210	0.118 250 (200-300)	RPM 4548 Fz 0.0006 Feed (ipm) 9.79
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Slot	0.210	0.118 390 (312-468)	RPM 7094 Fz 0.0007 Feed (ipm) 17.01
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Slot	0.210	0.118 270 (216-324)	RPM 4911 Fz 0.0006 Feed (ipm) 9.41
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Slot	0.210	0.118 250 (200-300)	RPM 4548 Fz 0.0006 Feed (ipm) 8.74
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Slot	0.210	0.118 270 (216-324)	RPM 4911 Fz 0.0006 Feed (ipm) 9.41
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075		Tool not recommended for this material group				
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390		Tool not recommended for this material group				
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	Tool not recommended for this material group				
	PLASTICS Polycarbonate, PVC, Polypropylene	Tool not recommended for this material group				
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Slot	0.210	0.118 65 (52-78)	RPM 1182 Fz 0.0005 Feed (ipm) 2.00
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Slot	0.210	0.118 49 (39-59)	RPM 891 Fz 0.0004 Feed (ipm) 1.05
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Slot	0.210	0.118 170 (136-204)	RPM 3092 Fz 0.0006 Feed (ipm) 5.89
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Slot	0.210	0.118 60 (48-72)	RPM 1091 Fz 0.0006 Feed (ipm) 2.09
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Slot	0.210	0.118 145 (116-174)	RPM 2638 Fz 0.0005 Feed (ipm) 4.47

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC

ipm = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Picatinny Rail Non-Ferrous Recoil Groove Tool

Picatinny Rail Non-Ferrous Recoil Groove Tool 3 Flute Made to MIL-STD-1913		Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in	0.2100		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		Tool not recommended for this material group							
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100		Tool not recommended for this material group							
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F		Tool not recommended for this material group							
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		Tool not recommended for this material group							
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450		Tool not recommended for this material group							
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		Tool not recommended for this material group							
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot 	0.210	0.118	1600 (1280-1920)	RPM 29105		
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Slot 	0.210	0.118	600 (480-720)	Fz 0.0026		
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 	0.210	0.118	345 (276-414)	Feed (ipm) 227.89		
	PLASTICS Polycarbonate, PVC, Polypropylene		Slot 	0.210	0.118	1600 (1280-1920)	RPM 85.46		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400			Tool not recommended for this material group					
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene			Tool not recommended for this material group					
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si			Tool not recommended for this material group					
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al			Tool not recommended for this material group					
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			Tool not recommended for this material group					

Bhn (Brinell) HRc (Rockwell C)


when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC


ipm = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Picatinny Rail Ferrous Dovetail Form Tool

Picatinny Rail Ferrous Dovetail Form Tool 5 Flute Made to MIL-STD-1913		Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in
						0.6050
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX 450 (360-540)	RPM 2841
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX 260 (208-312)	Fz 0.0032 Feed (ipm) 46.03
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX 400 (320-480)	RPM 1642 Fz 0.0024 Feed (ipm) 19.68
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ .50	APMX 280 (224-336)	RPM 2526 Fz 0.0024 Feed (ipm) 30.28
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ .50	APMX 260 (208-312)	RPM 1768 Fz 0.0019 Feed (ipm) 15.42
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ .50	APMX 280 (224-336)	RPM 1768 Fz 0.0029 Feed (ipm) 25.78
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075		Tool not recommended for this material group				
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390		Tool not recommended for this material group				
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	Tool not recommended for this material group				
	PLASTICS Polycarbonate, PVC, Polypropylene	Tool not recommended for this material group				
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ .50	APMX 75 (60-90)	RPM 474 Fz 0.0018 Feed (ipm) 4.22
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ .50	APMX 60 (48-72)	RPM 379 Fz 0.0013 Feed (ipm) 2.39
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ .50	APMX 180 (144-216)	RPM 1137 Fz 0.0021 Feed (ipm) 11.97
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ .50	APMX 70 (56-84)	RPM 442 Fz 0.0021 Feed (ipm) 4.65
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ .50	APMX 145 (116-174)	RPM 916 Fz 0.0019 Feed (ipm) 8.60

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC


ipm = Fz x 5 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Picatinny Rail Non-Ferrous Dovetail Form Tool



Picatinny Rail
Non-Ferrous Dovetail
Form Tool
3 Flute
Made to MIL-STD-1913

Hardness

Ae x DC

Ap x DC

Vc
(sfm)DC • in
0.6050

P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	Tool not recommended for this material group				
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	Tool not recommended for this material group				
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	Tool not recommended for this material group				
K	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	Tool not recommended for this material group				
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	Tool not recommended for this material group				
N	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	Tool not recommended for this material group				
	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 7 HRc	Profile 	≤ .50	APMX 2000 (1600-2400)	RPM 12628 Fz 0.0056 Feed (ipm) 211.39
S	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Profile 	≤ .50	APMX 750 (600-900)	RPM 4736 Fz 0.0056 Feed (ipm) 79.27
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	Profile 	≤ .50	APMX 430 (344-516)	RPM 2715 Fz 0.0046 Feed (ipm) 37.72
H	PLASTICS Polycarbonate, PVC, Polypropylene	Profile 	≤ .50	APMX 2000 (1600-2400)	RPM 12628 Fz 0.0093 Feed (ipm) 353.03	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	Tool not recommended for this material group				
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	Tool not recommended for this material group				
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Tool not recommended for this material group				
H	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Tool not recommended for this material group				
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	Tool not recommended for this material group				

Bhn (Brinell) HRc (Rockwell C)

when recommended speed exceeds your capability, use maximum available and recalculate ipm

rpm = Vc x 3.82 / DC

ipm = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



VALUE AT THE SPINDLE®

High Performance Aluminum End Mills



 **Milling**

HIGH PERFORMANCE ALUMINUM END MILLS	SERIES	DESCRIPTION	PAGE	
S-Carb APR® & APP®	43APR-3	3 Flute Advanced Productivity Rougher Fractional	127	
	43APR-3	3 Flute Advanced Productivity Rougher Metric	129	
	43APR-4	4 Flute Advanced Productivity Rougher Metric	130	
	43APF	4 Flute Advanced Productivity Finisher Fractional	132	
	43MAPF	4 Flute Advanced Productivity Finisher Metric	134	
	S-Carb® (3 Flute)	43	3 Flute Non-Ferrous Square End Fractional	136
		43CR	3 Flute Non-Ferrous Corner Radius Fractional	136
		43L	3 Flute Non-Ferrous Square End Long Reach Fractional	140
		43LC	3 Flute Non-Ferrous Corner Radius End Long Reach Fractional	140
		43EC	3 Flute Non-Ferrous Square End Extra Long Reach Fractional	143
43B		3 Flute Non-Ferrous Ball End Fractional	144	
43LB		3 Flute Non-Ferrous Ball End Long Reach Fractional	145	
43EB		3 Flute Non-Ferrous Ball End Extra Long Reach Fractional	145	
43M		3 Flute Non-Ferrous Square End Metric (Unpolished Flutes)	149	
43M		3 Flute Non-Ferrous Square End Metric (Polished Flutes)	149	
43MCR		3 Flute Non-Ferrous Corner Radius Metric (Unpolished Flutes)	149	
43MCR		3 Flute Non-Ferrous Corner Radius Metric (Polished Flutes)	149	
43MCR		3 Flute Non-Ferrous Corner Radius 4xD Metric (Polished Flutes)	149	
43ML		3 Flute Non-Ferrous Square End Long Reach Metric	152	
43MLC		3 Flute Non-Ferrous Long Reach Corner Radius Metric (Unpolished Flutes)	152	
43MLC	3 Flute Non-Ferrous Long Reach Corner Radius Metric (Polished Flutes)	152		
43MB	3 Flute Non-Ferrous Ball End Metric (Polished Flutes)	154		
S-Carb® Rougher (3 Flute)	43CB	3 Flute Rougher Non-Ferrous Chip Breaker Fractional	146	
	43LCB	3 Flute Rougher Non-Ferrous Chip Breaker Long Reach Fractional	147	
	43MCB	3 Flute Rougher Non-Ferrous Chip Breaker Metric	155	
S-Carb® (2 Flute)	47	2 Flute Non-Ferrous Square End Fractional	157	
	47L	2 Flute Non-Ferrous Square End Long Reach Fractional	157	
	47B	2 Flute Non-Ferrous Ball End Fractional	158	
	47LB	2 Flute Non-Ferrous Ball End Long Reach Fractional	158	
	47M	2 Flute Non-Ferrous Square End Metric	160	
	47ML	2 Flute Non-Ferrous Square End Long Reach Metric	160	
	47MB	2 Flute Non-Ferrous Ball End Metric	161	
	47MLB	2 Flute Non-Ferrous Ball End Long Reach Metric	161	
Ski-Carb	44	2 Flute Non-Ferrous Materials Square End Fractional	163	
	44M	2 Flute Non-Ferrous Materials Square End Metric	163	
	45	2 Flute Non-Ferrous Materials Long Reach Corner Radius Fractional	166	

Speed & Feed Recommendations listed after each series



Fresado

FRESAS DE ALTO RENDIMIENTO PARA ALUMINIO	SERIE	DESCRIPCIÓN	PÁGINA
S-Carb APR® y APF®	43APR-3	3 filos, productividad avanzada, desbastador, fraccional	127
	43APR-3	3 filos, productividad avanzada, desbastador, métrico	129
	43APR-4	4 filos, productividad avanzada, desbastador, métrico	130
	43APF	4 filos, productividad avanzada, acabador, fraccional	132
	43MAPF	4 filos, productividad avanzada, acabador, métrico	134
S-Carb® (3 filos)	43	3 filos, no férrico, punta cuadrada, fraccional	136
	43CR	3 filos, no férrico, radio angulado, fraccional	136
	43L	3 filos, no férrico, punta cuadrada, largo alcance, fraccional	140
	43LC	3 filos, no férricos, largo alcance, radio angulado, fraccional	140
	43EC	3 filos, no férrico, punta cuadrada, alcance extralargo, fraccional	143
	43B	3 filos, no férrico, punta esférica, fraccional	144
	43LB	3 filos, no férrico, punta esférica, largo alcance, fraccional	145
	43EB	3 filos, no férrico, punta esférica, alcance extralargo, fraccional	145
	43M	3 filos, no férrico, punta cuadrada, métrico (filos no pulidos)	149
	43M	3 filos, no férrico, punta cuadrada, métrico (filos pulidos)	149
	43MCR	3 filos, no férrico, radio angulado, métrico (filos no pulidos)	149
	43MCR	3 filos, no férrico, radio angulado, métrico (filos pulidos)	149
	43MCR	3 filos, no férrico, radio angulado 4xD, métrico (filos pulidos)	149
	43ML	3 filos, no férrico, punta cuadrada, largo alcance, métrico	152
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos no pulidos)	152
	43MLC	3 filos, no férrico, largo alcance, radio angulado, métrico (filos pulidos)	152
	43MB	3 filos, no férrico, punta esférica, métrico (filos pulidos)	154
Desbastador S-Carb® (3 filos)	43CB	3 filos, desbastador, no férrico, rompevirutas, fraccional	146
	43LCB	3 filos, desbastador, no férrico, rompevirutas, largo alcance, fraccional	147
	43MCB	3 filos, desbastador, no férrico, rompevirutas, métrico	155
S-Carb® (2 filos)	47	2 filos, no férrico, punta cuadrada, fraccional	157
	47L	2 filos, no férrico, punta cuadrada, largo alcance, fraccional	157
	47B	2 filos, no férrico, punta esférica, fraccional	158
	47LB	2 filos, no férrico, punta esférica, largo alcance, fraccional	158
	47M	2 filos, no férrico, punta cuadrada, métrico	160
	47ML	2 filos, no férrico, punta cuadrada, largo alcance, métrico	160
	47MB	2 filos, no férrico, punta esférica, métrico	161
	47MLB	2 filos, no férrico, punta esférica, largo alcance, métrico	161
Ski-Carb	44	2 filos, materiales no férricos, punta cuadrada, fraccional	163
	44M	2 filos, materiales no férricos, punta cuadrada, métrico	163
	45	2 filos, materiales no férricos, largo alcance, radio angulado, fraccional	166

Recomendaciones de velocidades y avances mostradas tras cada serie

FRAISE HAUTE PERFORMANCE POUR ALUMINIUM	SÉRIES	DESCRIPTION	PAGE
S-Carb APR®/APF®	43APR-3	3 dents productivité avancée d'ébauche (fractionnel)	127
	43APR-3	3 dents productivité avancée d'ébauche (métrique)	129
	43APR-4	4 dents productivité avancée d'ébauche (métrique)	130
	43APF	4 dents productivité avancée de finition (fractionnel)	132
	43MAPF	4 dents productivité avancée de finition (métrique)	134
S-Carb® (3 dents)	43	3 dents non-ferreux non rayonné (fractionnel)	136
	43CR	3 dents non-ferreux rayonné (fractionnel)	136
	43L	3 dents non-ferreux non rayonné longue portée (fractionnel)	140
	43LC	3 dents non-ferreux longue portée rayonné (fractionnel)	140
	43EC	3 dents non-ferreux non rayonné portée extra-longue (fractionnel)	143
	43B	3 dents non-ferreux à bout hémisphérique (fractionnel)	144
	43LB	3 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	145
	43EB	3 dents non-ferreux à bout hémisphérique portée extra-longue (fractionnel)	145
	43M	3 dents non-ferreux non rayonné (métrique) (goujures non polies)	149
	43M	3 dents non-ferreux non rayonné (métrique) (goujures polies)	149
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures non polies)	149
	43MCR	3 dents matériaux non-ferreux rayonné (métrique) (goujures polies)	149
	43MCR	3 dents matériaux non-ferreux rayonné 4xD (métrique) (goujures polies)	149
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures non polies)	152
	43MLC	3 dents non-ferreux longue portée rayonné (métrique) (goujures polies)	152
	43ML	3 dents non-ferreux non rayonné longue portée (métrique)	152
	43MB	3 dents non-ferreux à bout hémisphérique (métrique) (goujures polies)	154
S-Carb® d'ébauche (3 dents)	43CB	3 dents d'ébauche non-ferreux brise-copeaux (fractionnel)	146
	43LCB	3 dents d'ébauche non-ferreux brise-copeaux longue portée (fractionnel)	147
	43MCB	3 dents d'ébauche non-ferreux brise-copeaux (métrique)	155
S-Carb® (2 dents)	47	2 dents non-ferreux non rayonné (fractionnel)	157
	47L	2 dents non-ferreux non rayonné longue portée (fractionnel)	157
	47B	2 dents non-ferreux à bout hémisphérique (fractionnel)	158
	47LB	2 dents non-ferreux à bout hémisphérique longue portée (fractionnel)	158
	47M	2 dents non-ferreux non rayonné (métrique)	160
	47ML	2 dents non-ferreux non rayonné longue portée (métrique)	160
	47MB	2 dents non-ferreux à bout hémisphérique (métrique)	161
	47MLB	2 dents non-ferreux à bout hémisphérique longue portée (métrique)	161
Ski-Carb	44	2 dents matériaux non-ferreux non rayonné (fractionnel)	163
	44M	2 dents matériaux non-ferreux non rayonné (métrique)	163
	45	2 dents matériaux non-ferreux longue portée rayonné (fractionnel)	166

Recommandations de vitesse et avance indiquées après chaque série



Fräsen

HOCHLEISTUNGSSCHAFTFRÄSER FÜR ALUMINIUM	SERIE	BESCHREIBUNG	SEITE
S-Carb® & APF®	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden	127
	43APR-3	Hochleistungs-Schruppfräser mit 3 Schneiden (Erweiterung)	129
	43APR-4	Hochleistungs-Schruppfräser mit 4 Schneiden	130
	43APF	Zölliger Hochleistungs-Schlifffräser mit 4 Schneiden	132
	43MAPF	Hochleistungs-Schlifffräser mit 4 Schneiden	134
	43	Zölliger NE-Schaftfräser mit 3 Schneiden ohne Eckenradien	136
	43CR	Zölliger NE-Fräser mit 3 Schneiden und Eckenradien	136
	43L	Zölliger NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	140
	43LC	Zölliger Langlochfräser mit 3 Schneiden und Eckenradien	140
	43EC	Zölliger NE-Superlangloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	143
S-Carb® (3 Schneiden)	43B	Zölliger NE-Radiusschaftfräser mit 3 Schneiden	144
	43LB	Zölliger NE-Langloch-Radiusschaftfräser mit 3 Schneiden	145
	43EB	Zölliger NE-Superlangloch-Radiusschaftfräser mit 3 Schneiden	145
	43M	NE-Schaftfräser mit 3 unpolierten Schneiden ohne Eckenradien	149
	43M	NE-Schaftfräser mit 3 polierten Schneiden ohne Eckenradien	149
	43MCR	NE-Fräser mit 3 unpolierten Schneiden und Eckenradien	149
	43MCR	NE-Fräser mit 3 polierten Schneiden und Eckenradien	149
	43MCR	NE-Fräser 4xD mit 3 polierten Schneiden und Eckenradien	149
	43ML	NE-Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	152
	43MLC	NE-Langlochfräser mit 3 unpolierten Schneiden und Eckenradien	152
	43MLC	NE-Langlochfräser mit 3 polierten Schneiden und Eckenradien	152
	43MB	NE-Radiusschaftfräser mit 3 polierten Schneiden	154
	43CB	Zölliger NE-Schruppfräser mit 3 Schneiden und Spanbrechern	146
	43LCB	Zölliger NE-Langloch-Schruppfräser mit 3 Spanteilernuten	147
S-Carb® Schruppfräser (3 Schneiden)	43MCB	NE-Schruppfräser mit 3 Schneiden und Spanbrechern	155
	47	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	157
	47L	Zölliger NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	157
	47B	Zölliger NE-Radiusschaftfräser mit 2 Schneiden	158
	47LB	Zölliger NE-Langloch-Radiusschaftfräser mit 2 Schneiden	158
	47M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	160
	47ML	NE-Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	160
S-Carb® (2 Schneiden)	47MB	NE-Radiusschaftfräser mit 2 Schneiden	161
	47MLB	NE-Langloch-Radiusschaftfräser mit 2 Schneiden	161
	44	Zölliger NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	163
	44M	NE-Schaftfräser mit 2 Schneiden ohne Eckenradien	163
	45	Zölliger Langlochfräser mit 2 Schneidenn und Eckenradien für Nichteisenmetalle	166
<i>Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie</i>			



ADVANCED PRODUCTIVITY ROUGHER

FRACTIONAL S-Carb APR®

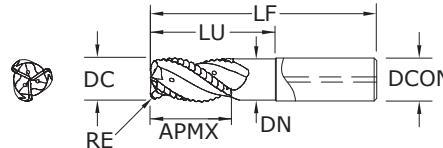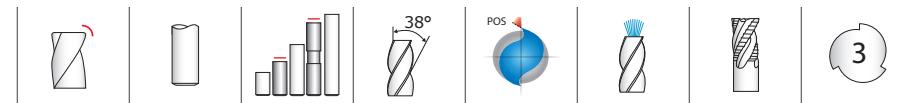

43APR-3
FRACTIONAL SERIES

TOLERANCES (inch)

1/2-1 DIAMETER
DC = -0.0004/-0.004
DCON = h₆
RE = +/−0.002

NON-FERROUS


For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	mm			EDP NO.
				REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	
1/2	1	3-1/4	1/2	1-1/2	.474	.030	34100
1/2	1	3-1/4	1/2	1-1/2	.474	.060	34101
1/2	1	3-1/4	1/2	1-1/2	.474	.090	34102
1/2	1	3-1/4	1/2	1-1/2	.474	.120	34103
5/8	1-3/8	3-5/8	5/8	2	.594	.030	34104*
5/8	1-3/8	3-5/8	5/8	2	.594	.060	34105*
5/8	1-3/8	3-5/8	5/8	2	.594	.090	34106*
5/8	1-3/8	3-5/8	5/8	2	.594	.120	34107*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.030	34108*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.060	34109*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.090	34110*
5/8	1-3/8	4-1/4	5/8	2-5/8	.594	.120	34111*
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.030	34112
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.060	34113
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.090	34114
3/4	1-3/8	3-5/8	3/4	1-3/4	.713	.120	34115
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.030	34116*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.060	34117*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.090	34118*
3/4	1-3/8	4-3/8	3/4	2-1/2	.713	.120	34119*
3/4	1-3/8	5-1/4	3/4	3-1/4	.713	.030	34120*
3/4	1-3/8	5-1/4	3/4	3-1/4	.713	.060	34121*
3/4	1-3/8	5-1/4	3/4	3-1/4	.713	.090	34122*
3/4	1-3/8	5-1/4	3/4	3-1/4	.713	.120	34123*
1	1-3/4	4-1/2	1	2-1/2	.949	.030	34124
1	1-3/4	4-1/2	1	2-1/2	.949	.060	34125
1	1-3/4	4-1/2	1	2-1/2	.949	.090	34126
1	1-3/4	4-1/2	1	2-1/2	.949	.120	34127
1	1-3/4	5-1/4	1	3-1/4	.949	.030	34128*
1	1-3/4	5-1/4	1	3-1/4	.949	.060	34129*
1	1-3/4	5-1/4	1	3-1/4	.949	.090	34130*
1	1-3/4	5-1/4	1	3-1/4	.949	.120	34131*
1	1-3/4	6-1/4	1	4-1/4	.949	.030	34132*
1	1-3/4	6-1/4	1	4-1/4	.949	.060	34133*
1	1-3/4	6-1/4	1	4-1/4	.949	.090	34134*
1	1-3/4	6-1/4	1	4-1/4	.949	.120	34135*

*Variable Helix

FRACTIONAL

S-Carb APR®



Series 43APR-3 Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • inch			
				APR-3	0.75	1	
N ALUMINIUM ALLOYS 6068, 7075	Slot	1	≤ 1	5250	RPM	26740	20055
				(980-6900)	Fz	0.0055	0.0059
					Feed (ipm)	441	355
	Profile	≤ 0.5	≤ 1.5	5900	RPM	30051	22538
				(980-6900)	Fz	0.0063	0.0067
					Feed (ipm)	568	453
	HSM	≤ 0.1	≤ 2	6900	RPM	35144	26358
				(980-6900)	Fz	0.0075	0.0079
					Feed (ipm)	791	625

Series 43APR-3L Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • inch					
				APR-3 LONG	0.5	0.625	0.75	1	
N ALUMINIUM ALLOYS 6068, 7075	Slot	1	≤ 1	3280	RPM	25059	20047	16706	12530
				(980-6900)	Fz	0.0039	0.0043	0.0047	0.0051
					Feed (ipm)	293	259	236	192
	Profile	≤ 0.5	≤ 1.5	3950	RPM	30178	24142	20119	15089
				(980-6900)	Fz	0.0047	0.0051	0.0055	0.0059
					Feed (ipm)	426	369	332	267
	HSM	≤ 0.1	≤ 2	4600	RPM	35144	28115	23429	17572
				(980-6900)	Fz	0.0055	0.0059	0.0063	0.0067
					Feed (ipm)	580	498	443	353

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz. For best results use the peak power of the specific machine torque chart.

Typically 10hp is required to remove 45 cubic inches of material (MRR).

Eg. >> (Ae x Ap x Feed) >> Therefore Full slotting 1" dia: $1 \times 1 \times 355 = 355$ cubic inches, so it needs a min of 78hp.

Larger cuts and chip load consume more power.


Review the power chart of each machine to determine MAX power for ultimate performance.

Example below shows peak power @ 10,000 rpm.

The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.



Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com).

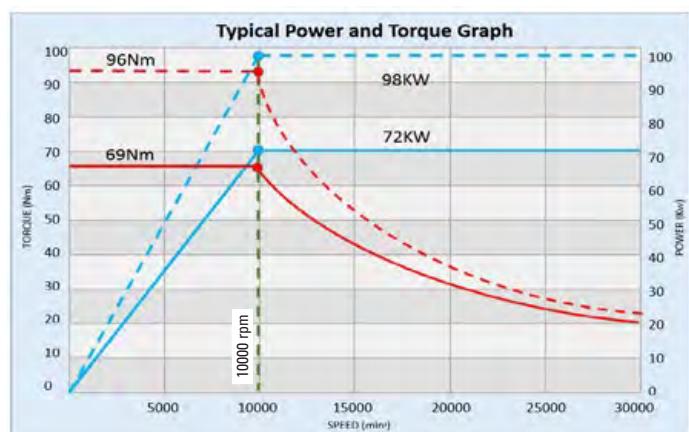



ADVANCED PRODUCTIVITY ROUGHER

METRIC S-Carb APR®

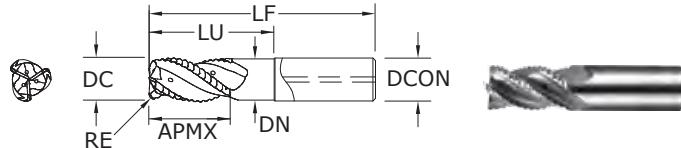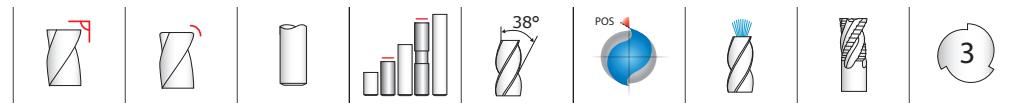

43APR-3
METRIC SERIES

TOLERANCES (mm)

12–25 DIAMETER
DC = -0,010/-0,100
DCON = h₆
RE = +/−0,05

NON-FERROUS

For patent information visit www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	mm			EDP NO.
				REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	
12,0	26,0	83,0	12,0	39,0	11,4	1,0	44976*
12,0	26,0	83,0	12,0	39,0	11,4	2,0	44977*
12,0	26,0	83,0	12,0	39,0	11,4	3,0	44978*
12,0	26,0	83,0	12,0	39,0	11,4	4,0	44979*
12,0	26,0	95,0	12,0	—	—	—	44975*
16,0	35,0	92,0	16,0	—	—	—	44980
16,0	35,0	92,0	16,0	51,0	15,2	2,0	44981*
16,0	35,0	92,0	16,0	51,0	15,2	3,0	44982*
16,0	35,0	92,0	16,0	51,0	15,2	4,0	44983*
16,0	35,0	108,0	16,0	67,0	15,2	2,0	44985*
16,0	35,0	108,0	16,0	67,0	15,2	3,0	44986*
16,0	35,0	108,0	16,0	67,0	15,2	4,0	44987*
16,0	35,0	124,0	16,0	—	—	—	44984
20,0	35,0	86,0	20,0	—	—	—	44990
20,0	35,0	86,0	20,0	45,0	19,4	3,0	44991
20,0	35,0	86,0	20,0	45,0	19,4	4,0	44992
20,0	35,0	106,0	20,0	—	—	—	44993
20,0	35,0	106,0	20,0	65,0	19,4	2,0	44994*
20,0	35,0	106,0	20,0	65,0	19,4	3,0	44995*
20,0	35,0	106,0	20,0	65,0	19,4	4,0	44996*
20,0	35,0	106,0	20,0	65,0	19,4	5,0	44997*
20,0	35,0	125,0	20,0	84,0	19,0	2,0	45021*
20,0	35,0	125,0	20,0	84,0	19,0	3,0	45022*
20,0	35,0	125,0	20,0	84,0	19,0	4,0	45023*
20,0	35,0	145,0	20,0	—	—	—	45020
25,0	43,0	108,0	25,0	—	—	—	44998
25,0	43,0	108,0	25,0	60,0	24,4	2,0	44999
25,0	43,0	108,0	25,0	60,0	24,4	3,0	45000
25,0	43,0	108,0	25,0	60,0	24,4	4,0	45001
25,0	35,0	140,0	25,0	—	—	—	45002
25,0	35,0	140,0	25,0	80,0	24,4	3,0	45003*
25,0	35,0	140,0	25,0	90,0	24,4	3,0	45004*
25,0	35,0	151,0	25,0	—	—	—	45024
25,0	35,0	151,0	25,0	105,0	23,7	3,0	45025*

*Variable Helix

METRIC

S-Carb APR®




ADVANCED PRODUCTIVITY ROUGHER



43APR-4

METRIC SERIES

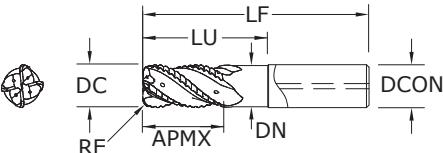

- Ultra high-productivity rougher for Aluminum alloys, specifically for aircraft components
- Designed for machine tools with capability of 12 l³ per minute material removal rates
- 4 flute variable geometry with side exit coolant holes
- Open fluting for deep slotting and profiling
- Recommended for materials < 150 Bhn (≤ 7 HRc)

mm								EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE-B (TiB ₂)	
20,0	35,0	86,0	20,0	—	18,97	—	45005	
20,0	35,0	86,0	20,0	45,0	19,00	3,0	45006	
20,0	35,0	86,0	20,0	45,0	19,00	4,0	45007	
20,0	35,0	106,0	20,0	—	19,00	—	45008	
20,0	35,0	106,0	20,0	65,0	19,00	2,0	45009	
20,0	35,0	106,0	20,0	65,0	19,00	3,0	45010	
20,0	35,0	106,0	20,0	65,0	19,00	4,0	45011	
20,0	35,0	106,0	20,0	65,0	19,00	5,0	45012	
25,0	43,0	108,0	25,0	—	23,75	—	45013	
25,0	43,0	108,0	25,0	60,0	23,75	2,0	45014	
25,0	43,0	108,0	25,0	60,0	23,75	3,0	45015	
25,0	43,0	108,0	25,0	60,0	23,75	4,0	45016	
25,0	35,0	140,0	25,0	—	23,75	—	45017	
25,0	35,0	140,0	25,0	80,0	23,75	3,0	45018	
25,0	35,0	140,0	25,0	90,0	23,75	3,0	45019	


TOLERANCES (mm)

20–25 DIAMETER

DC = $-0,010/-0,100$ DCON = h₆RE = $\pm 0,050$

NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 43APR-3 43APR-4 Metric	Ae x DC	Ap x DC	Vc (m/min)	DC • mm			
				APR-3		APR-4	
				20	25	20	25
N ALUMINIUM ALLOYS 6068, 7075	Slot 	1	≤ 1	1600	RPM	25461	20369
				(300-2100)	Fz	0.14	0.15
					Feed (mm/min)	10694	9166
	Profile 	≤ 0.5	≤ 1.5	1800	RPM	28644	22915
				(300-2100)	Fz	0.16	0.17
					Feed (mm/min)	13749	11687
	HSM 	≤ 0.1	≤ 2	2100	RPM	33418	26735
				(300-2100)	Fz	0.19	0.20
					Feed (mm/min)	19048	16041

Series 43APR-3 43APR-4 Metric	Ae x DC	Ap x DC	Vc (m/min)	DC • mm			
				APR-3 LONG			
				12	16	20	25
N ALUMINIUM ALLOYS 6068, 7075	Slot 	1	≤ 1	1600	RPM	26522	19892
				(300-2100)	Fz	0.10	0.11
					Feed (mm/min)	7957	6564
	Profile 	≤ 0.5	≤ 1.5	1800	RPM	31827	23870
				(300-2100)	Fz	0.12	0.13
					Feed (mm/min)	11458	9309
	HSM 	≤ 0.1	≤ 2	2100	RPM	37131	27849
				(300-2100)	Fz	0.14	0.15
					Feed (mm/min)	15595	12532

RPM stated may be outside of most machine tools in the smaller sizes, adjust the surface speed but maintain the Fz
For best results use the peak power of the specific machine torque chart.

Typically 10kw is required to remove 1 litre of material (MMR).

Eg. >> $(Ae \times Ap \times Fz) / 1000000 >>$ Therefore Full slotting Ø25: $25 \times 25 \times 7333 = 4.58$ Litres so it needs a min of 46Kw.

Larger cuts and chip load consume more power.

Review the power chart of each machine to determine MAX power for ultimate performance.


Example below shows peak power @ 10,000 rpm.

The APR-4 design is for ultimate metal removal but typically requires more power, and is also better suited to horizontal machines.


The new coolant supply is designed for MQL as well as normal emulsion coolant on the same data.

Ensure max MQL flow prior to cutting.

Refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com).

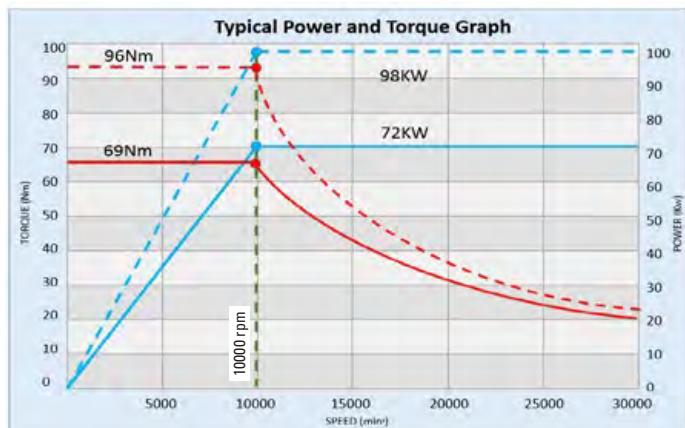


FRACTIONAL

S-Carb APF®**43APF**

FRACTIONAL SERIES

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

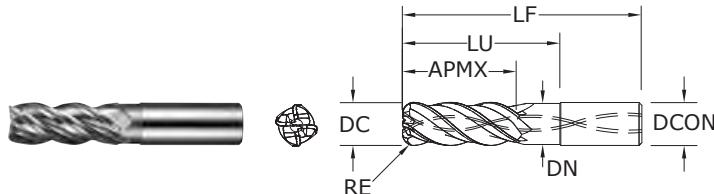

inch							EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	Ti-NAMITE-B (TiB ₂)
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.030	34016
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.060	34017
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.090	34018
1/2	1-1/4	3-1/4	1/2	1-5/8	.478	.120	34019
1/2	2	4	1/2	2-3/8	.478	.030	34020
1/2	2	4	1/2	2-3/8	.478	.060	34021
1/2	2	4	1/2	2-3/8	.478	.090	34022
1/2	2	4	1/2	2-3/8	.478	.120	34023
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.030	34024
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.060	34025
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.090	34026
3/4	1-7/8	4-1/4	3/4	2-3/8	.728	.120	34027
3/4	3	5-3/8	3/4	3-1/2	.728	.030	34028
3/4	3	5-3/8	3/4	3-1/2	.728	.060	34029
3/4	3	5-3/8	3/4	3-1/2	.728	.090	34030
3/4	3	5-3/8	3/4	3-1/2	.728	.120	34031

Available on request: • JetStream Technology

TOLERANCES (inch)**1/2-3/4 DIAMETER**

DC = -0.0004/-0.0020


DCON = h₆

RE = +0.0000/-0.0012

NON-FERROUS

For patent information visit
www.ksptpatents.com

FRACTIONAL
S-Carb APF®



Series 43APF Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in	
					1/2	3/4
N ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Bhn or ≤ 7 HRc	Profile 	≤ 0.1	≤ 2.5 (2100-3150)	2625 RPM Fz Feed (in/min)	20055 0.0030 241 267
			≤ 0.1	≤ 4 (2100-3150)	2625 RPM Fz Feed (in/min)	20055 0.0020 160 214
	≤ 150 Bhn or ≤ 7 HRc	Profile 	≤ 0.1	≤ 2.5 (1576-2364)	1970 RPM Fz Feed (in/min)	15051 0.0030 181 201
			≤ 0.1	≤ 4 (1576-2364)	1970 RPM Fz Feed (in/min)	15051 0.0020 120 161

Bhn (Brinell) HRc (Rockwell C)

surface speed is dependent on machine spindle and fixturing
balancing is recommended at ultra high surface speeds

tool life may be reduced when machining Lithium Alloys

rpm = $V_c \times 3.82 / DC$

ipm = $F_z \times 4 \times rpm$

maximum recommended depths shown


reduce speed and feed for materials harder than listed

finish cuts typically require reduced feed and cutting depths of $0.02 \times DC$ maximum

ramp angle = 6° (feed rate = 50%)


plunging not recommended

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)

**43MAPF**

METRIC SERIES

- Ultra high-productivity finisher for Aluminum alloys, specifically for aircraft components
- Two levels of chatter suppression: variable helix and indexing
- Designed for single axial pass semi-finishing and finishing
- Polished flutes maximize chip evacuation and provides enhanced finish
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

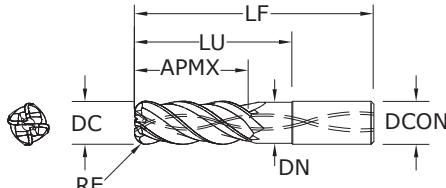

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	EDP NO.	
							Ti-NAMITE-B (TiB ₂)	TOLERANCES (mm)
6,0	24,0	58,0	6,0	30,0	5,66	—	44627	6–25 DIAMETER
8,0	32,0	64,0	8,0	40,0	7,57	—	44628	DC = -0,010/-0,050
10,0	40,0	80,0	10,0	50,0	9,47	—	44629	DCON = h ₆
12,0	30,0	83,0	12,0	40,0	11,38	—	44630	RE = +0,000/-0,030
12,0	30,0	83,0	12,0	40,0	11,38	2,0	44745	
12,0	30,0	83,0	12,0	40,0	11,38	3,0	44746	
12,0	30,0	83,0	12,0	40,0	11,38	4,0	44747	
12,0	30,0	83,0	12,0	50,0	11,38	0,5	44641	
12,0	30,0	83,0	12,0	50,0	11,38	5,0	44642	
12,0	48,0	100,0	12,0	62,0	11,38	—	44631	
12,0	48,0	100,0	12,0	62,0	11,38	2,0	44748	
12,0	48,0	100,0	12,0	62,0	11,38	3,0	44749	
12,0	48,0	100,0	12,0	62,0	11,38	4,0	44750	
16,0	40,0	92,0	16,0	51,0	15,16	—	44634	
16,0	40,0	92,0	16,0	51,0	15,16	2,0	44751	
16,0	40,0	92,0	16,0	51,0	15,16	3,0	44752	
16,0	40,0	92,0	16,0	51,0	15,16	4,0	44753	
16,0	42,0	93,0	16,0	51,0	15,16	5,0	44643	
16,0	64,0	125,0	16,0	82,0	15,16	—	44635	
16,0	64,0	125,0	16,0	82,0	15,16	2,0	44754	
16,0	64,0	125,0	16,0	82,0	15,16	3,0	44755	
16,0	64,0	125,0	16,0	82,0	15,16	4,0	44756	
20,0	50,0	108,0	20,0	63,0	18,97	—	44636	
20,0	50,0	108,0	20,0	63,0	18,97	3,0	44757	
20,0	50,0	108,0	20,0	63,0	18,97	4,0	44758	
20,0	50,0	108,0	20,0	63,0	18,97	5,0	44759	
20,0	80,0	150,0	20,0	102,0	18,97	—	44637	
20,0	80,0	150,0	20,0	102,0	18,97	3,0	44760	
20,0	80,0	150,0	20,0	102,0	18,97	4,0	44761	
20,0	80,0	150,0	20,0	102,0	18,97	5,0	44762	
25,0	63,0	130,0	25,0	79,0	23,75	—	44638	
25,0	63,0	130,0	25,0	79,0	23,75	3,0	44763	
25,0	63,0	130,0	25,0	79,0	23,75	4,0	44764	
25,0	63,0	130,0	25,0	79,0	23,75	5,0	44765	
25,0	100,0	175,0	25,0	120,0	23,75	—	44639	
25,0	100,0	175,0	25,0	120,0	23,75	3,0	44766	
25,0	100,0	175,0	25,0	120,0	23,75	4,0	44767	
25,0	100,0	175,0	25,0	120,0	23,75	5,0	44768	

Available on request: • JetStream Technology

TOLERANCES (mm)

6–25 DIAMETER


DC = -0,010/-0,050

DCON = h₆

RE = +0,000/-0,030

NON-FERROUS

For patent information visit
www.ksptpatents.com



Series 43MAPF Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					6	8	10	12	16	20	25		
N ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	$\leq 150 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	Profile 	≤ 0.1	≤ 2.5 (640-960)	800	RPM	42440	31830	25464	21220	15915	12732	10186
					Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170	
		Profile 	≤ 0.1	≤ 4 (640-960)	800	RPM	42440	31830	25464	21220	15915	12732	10186
					Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120	
ALUMINUM ALLOYS (LITHIUM)* 2090, 2091, 2099, 2195, 2199, 2297, 8090	$\leq 150 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	Profile 	≤ 0.1	≤ 2.5 (480-720)	600	RPM	31830	23873	19098	15915	11936	9549	7639
					Fz	0.050	0.055	0.060	0.070	0.100	0.140	0.170	
		Profile 	≤ 0.1	≤ 4 (480-720)	600	RPM	31830	23873	19098	15915	11936	9549	7639
					Fz	0.040	0.045	0.050	0.050	0.070	0.100	0.120	

Bhn (Brinell) HRc (Rockwell C)

surface speed is dependent on machine spindle and fixturing
balancing is recommended at ultra high surface speeds

*tool life may be reduced when machining Lithium Alloys

rpm = $(V_c \times 1000) / (DC \times 3.14)$

mm/min = $F_z \times 4 \times rpm$

maximum recommended depths shown


reduce speed and feed for materials harder than listed

finish cuts typically require reduced feed and cutting depths of 0.02 X DC maximum


ramp angle = 6° (feed rate = 50%)

plunging not recommended

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



**43 •
43CR**
FRACTIONAL SERIES

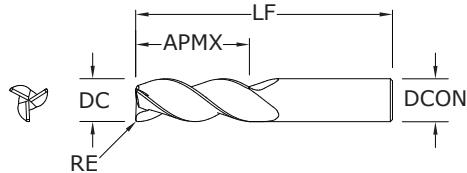

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					UNCOATED	Ti-NAMITE-B (TiB ₂)
1/8	3/8	1-1/2	1/8	—	34701	34728
1/8	3/8	1-1/2	1/8	.010	34771	34793
3/16	5/16	2-1/2	3/16	—	34822	34857
3/16	9/16	2	3/16	—	34702	34729
3/16	9/16	2	3/16	.010	34772	34794
3/16	3/4	2-1/2	3/16	—	34823	34858
1/4	3/8	2	1/4	—	34703	34730
1/4	3/8	2-1/2	1/4	.010	35575	35665
1/4	3/8	2-1/2	1/4	.015	35576	35666
1/4	3/8	2-1/2	1/4	.030	35577	35667
1/4	3/8	2-1/2	1/4	.060	35578	35668
1/4	1/2	2-1/2	1/4	—	34824	34859
1/4	3/4	2-1/2	1/4	—	34704	34731
1/4	3/4	2-1/2	1/4	.010	34773	34795
1/4	3/4	2-1/2	1/4	.015	35579	35669
1/4	3/4	2-1/2	1/4	.030	34774	34796
1/4	3/4	2-1/2	1/4	.060	35580	35670
1/4	1	3	1/4	—	34825	34860
1/4	1	3	1/4	.010	35581	35671
1/4	1	3	1/4	.015	35582	35672
1/4	1	3	1/4	.030	35583	35673
1/4	1	3	1/4	.060	35584	35674
1/4	1-1/4	3-1/2	1/4	—	34705	34732
1/4	1-3/4	4	1/4	—	34826	34861
5/16	7/16	2	5/16	—	34706	34733
5/16	5/8	2-1/2	5/16	—	34707	34734
5/16	5/8	2-1/2	5/16	.030	34775	34797
5/16	1-1/4	4	5/16	—	34708	34735
3/8	1/2	2	3/8	—	34709	34736
3/8	1/2	3	3/8	.010	35585	35675
3/8	1/2	3	3/8	.015	35586	35676
3/8	1/2	3	3/8	.030	35587	35677
3/8	1/2	3	3/8	.060	35588	35678
3/8	1/2	3	3/8	.090	35589	35679
3/8	1	2-1/2	3/8	—	34710	34737
3/8	1	2-1/2	3/8	.010	34776	34798

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/-0.00032
DCON = h₆
RE = +0.0000/-0.0020

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆
RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆
RE = +0.0000/-0.0020



3/4–1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆
RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

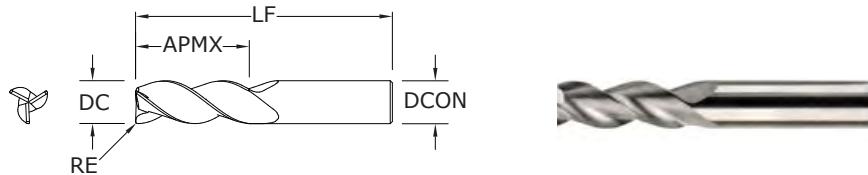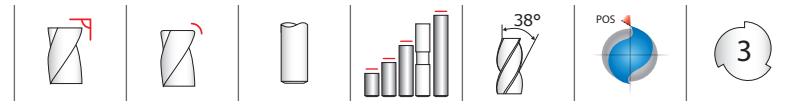

43 •
43CR

FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/-0.00032
DCON = h₆
RE = +0.0000/-0.0020

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆
RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆
RE = +0.0000/-0.0020

3/4–1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆
RE = +0.0000/-0.0020


NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					UNCOATED	Ti-NAMITE-B (TiB ₂)
3/8	1	2-1/2	3/8	.030	34777	34799
3/8	1	2-1/2	3/8	.060	32761	32825
3/8	1	3	3/8	.015	35590	35680
3/8	1	3	3/8	.090	35591	35681
3/8	1-1/4	3-1/2	3/8	—	34827	34862
3/8	1-1/2	3-1/2	3/8	—	34711	34738
3/8	1-1/2	4	3/8	.010	35592	35682
3/8	1-1/2	4	3/8	.015	35593	35683
3/8	1-1/2	4	3/8	.030	35594	35684
3/8	1-1/2	4	3/8	.060	35595	35685
3/8	1-1/2	4	3/8	.090	35596	35686
3/8	2	4	3/8	—	34828	34863
1/2	5/8	2-1/2	1/2	—	34712	34739
1/2	5/8	3	1/2	.010	35597	35687
1/2	5/8	3	1/2	.015	35598	35688
1/2	5/8	3	1/2	.030	35599	35689
1/2	5/8	3	1/2	.060	35600	35690
1/2	5/8	3	1/2	.090	35601	35691
1/2	5/8	3	1/2	.120	35602	35692
1/2	1	3	1/2	—	34830	34865
1/2	1	3	1/2	.010	35603	35693
1/2	1	3	1/2	.015	35604	35694
1/2	1	3	1/2	.030	35605	35695
1/2	1	3	1/2	.060	35606	35696
1/2	1	3	1/2	.090	35607	35697
1/2	1	3	1/2	.120	35608	35698
1/2	1-1/4	3	1/2	.015	35609	35699
1/2	1-1/4	3-1/4	1/2	—	34713	34740
1/2	1-1/4	3-1/4	1/2	.010	34778	34800
1/2	1-1/4	3-1/4	1/2	.030	34779	34801
1/2	1-1/4	3-1/4	1/2	.060	34780	34802
1/2	1-1/4	3-1/4	1/2	.090	34781	34803
1/2	1-1/4	3-1/4	1/2	.120	32766	32830
1/2	1-5/8	4	1/2	—	34831	34866
1/2	1-5/8	4	1/2	.010	35610	35700
1/2	1-5/8	4	1/2	.015	35611	35701


continued on next page

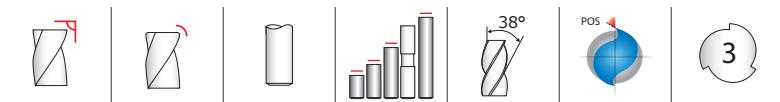

43 • 43CR

FRACTIONAL SERIES

CONTINUED

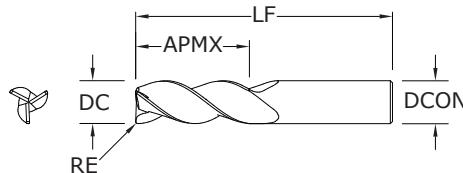

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					UNCOATED	Ti-NAMITE-B (TiB ₂)
1/2	1-5/8	4	1/2	.030	35612	35702
1/2	1-5/8	4	1/2	.060	35613	35703
1/2	1-5/8	4	1/2	.090	35614	35704
1/2	1-5/8	4	1/2	.120	35615	35705
1/2	2	4	1/2	.010	35616	35706
1/2	2	4	1/2	.015	35617	35707
1/2	2	4	1/2	.030	35618	35708
1/2	2	4	1/2	.060	35619	35709
1/2	2	4	1/2	.090	35620	35710
1/2	2	4	1/2	.120	35621	35711
1/2	2	4	1/2	—	34714	34741
1/2	2-1/2	5	1/2	—	34832	34867
1/2	3-1/8	6	1/2	—	34715	34742
5/8	3/4	3	5/8	—	34716	34743
5/8	3/4	3-1/2	5/8	.030	35622	35712
5/8	3/4	3-1/2	5/8	.060	35623	35713
5/8	3/4	3-1/2	5/8	.090	35624	35714
5/8	3/4	3-1/2	5/8	.120	35625	35715
5/8	1-5/8	3-3/4	5/8	—	34717	34744
5/8	1-5/8	3-3/4	5/8	.030	34782	34804
5/8	1-5/8	3-3/4	5/8	.060	34783	34805
5/8	1-5/8	3-3/4	5/8	.090	34784	34806
5/8	1-5/8	3-3/4	5/8	.120	35626	35716
5/8	2-1/8	4	5/8	—	34833	34868
5/8	2-1/2	5	5/8	—	34718	34745
5/8	3-1/4	6	5/8	—	34834	34869
5/8	3-3/4	6	5/8	—	34719	34746
3/4	1	3	3/4	—	34720	34747
3/4	1	4	3/4	.030	35627	35717
3/4	1	4	3/4	.060	35628	35718
3/4	1	4	3/4	.090	35629	35719
3/4	1	4	3/4	.120	35630	35720
3/4	1	4	3/4	.190	35631	35721
3/4	1	4	3/4	.250	35632	35722
3/4	1-5/8	4	3/4	—	34721	34748
3/4	1-5/8	4	3/4	.030	34785	34807

continued on next page

TOLERANCES (inch)

1/8-3/16 DIAMETER

DC = +0.0000/-0.00032

DCON = h₆

RE = +0.0000/-0.0020

1/4-3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0000/-0.0020

1/2-5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0000/-0.0020

3/4-1 DIAMETER

DC = +0.0000/-0.00051



DCON = h₆

RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

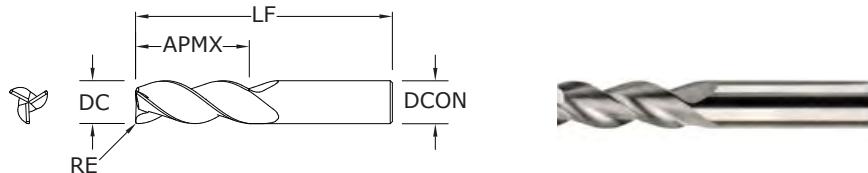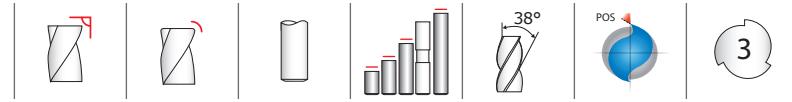

43 •
43CR

FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/-0.00032

DCON = h₆

RE = +0.0000/-0.0020

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0000/-0.0020

3/4–1 DIAMETER

DC = +0.0000/-0.00051

DCON = h₆


RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					UNCOATED	Ti-NAMITE-B (TiB ₂)
3/4	1-5/8	4	3/4	.060	34786	34808
3/4	1-5/8	4	3/4	.090	34787	34809
3/4	1-5/8	4	3/4	.120	34815	34817
3/4	1-5/8	4	3/4	.190	35633	35723
3/4	1-5/8	4	3/4	.250	35634	35724
3/4	2-1/4	5	3/4	—	34722	34749
3/4	2-1/4	5	3/4	.030	35635	35725
3/4	2-1/4	5	3/4	.060	35636	35726
3/4	2-1/4	5	3/4	.090	35637	35727
3/4	2-1/4	5	3/4	.120	35638	35728
3/4	2-1/4	5	3/4	.190	35639	35729
3/4	2-1/4	5	3/4	.250	35640	35730
3/4	2-1/2	5	3/4	—	34758	34765
3/4	3-1/4	6	3/4	—	34723	34750
1	1-1/4	4	1	—	34724	34751
1	1-1/4	5	1	.030	35641	35731
1	1-1/4	5	1	.060	35642	35732
1	1-1/4	5	1	.090	35643	35733
1	1-1/4	5	1	.120	35644	35734
1	1-1/4	5	1	.190	35645	35735
1	1-1/4	5	1	.250	35646	35736
1	2	4-1/2	1	—	34725	34752
1	2	4-1/2	1	.030	34789	34811
1	2	4-1/2	1	.060	34790	34812
1	2	4-1/2	1	.090	34791	34813
1	2	4-1/2	1	.120	34816	34818
1	2	5	1	.190	35647	35737
1	2	5	1	.250	35648	35738
1	2-5/8	6	1	—	34726	34753
1	3-1/4	6	1	—	34727	34754
1	3-1/4	6	1	.030	35649	35739
1	3-1/4	6	1	.060	35650	35740
1	3-1/4	6	1	.090	35651	35741
1	3-1/4	6	1	.120	35652	35742
1	3-1/4	6	1	.190	35653	35743
1	3-1/4	6	1	.250	35654	35744
1	4-1/8	7	1	—	34835	34870

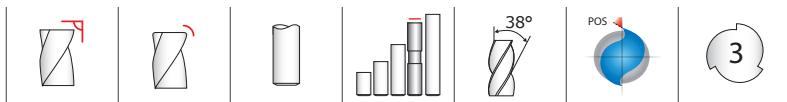

43L • 43LC

FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

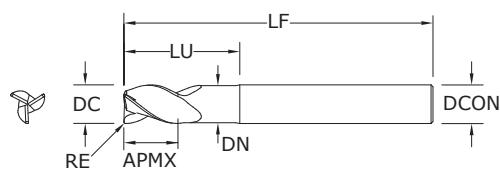

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	inch				UNCOATED	Ti-NAMITE-B (TiB ₂)	EDP NO.
			SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE			
1/8	5/32	3	1/8	1/2	.105	—	32700	32725	
1/8	5/32	3	1/8	1/2	.105	.010	32751	32815	
1/8	5/32	3	1/8	3/4	.105	—	32691	34888	
3/16	7/32	3	3/16	1/2	.105	—	32701	32726	
3/16	7/32	3	3/16	1/2	.167	.010	32752	32816	
3/16	7/32	3	3/16	3/4	.167	—	32692	34889	
1/4	3/8	2-1/2	1/4	3/4	.230	.015	35787	36235	
1/4	3/8	2-1/2	1/4	3/4	.230	.060	35788	36236	
1/4	3/8	4	1/4	3/4	.230	—	32702	32727	
1/4	3/8	4	1/4	3/4	.230	.010	32753	32817	
1/4	3/8	4	1/4	3/4	.230	.030	32754	32818	
1/4	3/8	4	1/4	1-1/2	.230	—	32703	32728	
1/4	3/8	4	1/4	1-1/2	.230	.010	32755	32819	
1/4	3/8	4	1/4	1-1/2	.230	.030	32756	32820	
1/4	3/8	4	1/4	2-1/8	.230	—	32704	32729	
1/4	3/8	4	1/4	2-1/8	.230	.010	32757	32821	
1/4	3/8	4	1/4	2-1/8	.230	.030	32758	32822	
5/16	7/16	4	5/16	1-1/8	.292	—	32705	32730	
5/16	7/16	4	5/16	1-1/8	.292	.030	32759	32823	
5/16	7/16	4	5/16	2-1/8	.292	—	32706	32731	
5/16	7/16	4	5/16	2-1/8	.292	.030	32760	32824	
3/8	1/2	3	3/8	1-1/8	.355	.015	35791	36239	
3/8	1/2	3	3/8	1-1/8	.355	.090	35792	36240	
3/8	1/2	4	3/8	1-1/8	.355	—	32707	32732	
3/8	1/2	4	3/8	1-1/8	.355	.030	32762	32826	
3/8	1/2	4	3/8	1-1/8	.355	.060	32763	32827	
3/8	1/2	4	3/8	2-1/8	.355	—	32708	32733	
3/8	1/2	4	3/8	2-1/8	.355	.030	32764	32828	
3/8	1/2	4	3/8	2-1/8	.355	.060	32765	32829	
1/2	5/8	3	1/2	1-3/8	.480	.015	35795	36243	
1/2	5/8	4	1/2	1-3/8	.480	—	32709	32734	
1/2	5/8	4	1/2	1-3/8	.480	.030	32767	32831	
1/2	5/8	4	1/2	1-3/8	.480	.060	32768	32832	
1/2	5/8	4	1/2	1-3/8	.480	.090	32769	32833	
1/2	5/8	4	1/2	1-3/8	.480	.120	32770	32834	
1/2	5/8	4	1/2	2-1/4	.480	.015	35796	36244	

continued on next page

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/-0.00032
DCON = h₆
RE = +0.0000/-0.0020

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆
RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆
RE = +0.0000/-0.0020



3/4–1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆
RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

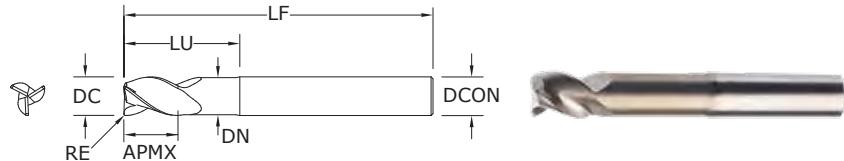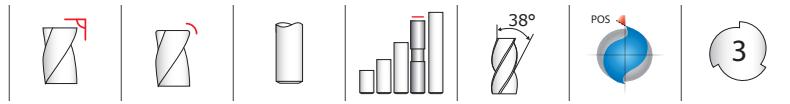

43L •
43LC

FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

1/8–3/16 DIAMETER
DC = +0.0000/-0.00032
DCON = h₆

RE = +0.0000/-0.0020

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆

RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆

RE = +0.0000/-0.0020

3/4–1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆

RE = +0.0000/-0.0020


NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	inch			EDP NO.	
				REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/2	5/8	6	1/2	2-1/8	.480	—	32710	32735
1/2	5/8	6	1/2	2-1/8	.480	.030	32771	32835
1/2	5/8	6	1/2	2-1/8	.480	.060	32772	32836
1/2	5/8	6	1/2	2-1/8	.480	.090	32773	32837
1/2	5/8	6	1/2	2-1/8	.480	.120	32774	32838
1/2	5/8	6	1/2	3-3/8	.480	—	32711	32736
1/2	5/8	6	1/2	3-3/8	.480	.030	32775	32839
1/2	5/8	6	1/2	3-3/8	.480	.060	32776	32840
1/2	5/8	6	1/2	3-3/8	.480	.090	32777	32841
1/2	5/8	6	1/2	3-3/8	.480	.120	32778	32842
1/2	5/8	6	1/2	4-1/4	.480	—	32697	34894
5/8	3/4	4	5/8	1-3/4	.605	—	32712	32737
5/8	3/4	4	5/8	1-3/4	.605	.030	32779	32843
5/8	3/4	4	5/8	1-3/4	.605	.060	32780	32844
5/8	3/4	4	5/8	1-3/4	.605	.090	32781	32845
5/8	3/4	4	5/8	1-3/4	.605	.120	32782	32846
5/8	3/4	4	5/8	2-3/8	.605	—	32713	32738
5/8	3/4	4	5/8	2-3/8	.605	.030	32783	32847
5/8	3/4	4	5/8	2-3/8	.605	.060	32784	32848
5/8	3/4	4	5/8	2-3/8	.605	.090	32785	32849
5/8	3/4	4	5/8	2-3/8	.605	.120	32786	32850
5/8	3/4	6	5/8	3-3/8	.605	—	32714	32739
5/8	3/4	6	5/8	3-3/8	.605	.030	32787	32851
5/8	3/4	6	5/8	3-3/8	.605	.060	32788	32852
5/8	3/4	6	5/8	3-3/8	.605	.090	32789	32853
5/8	3/4	6	5/8	3-3/8	.605	.120	32790	32854
5/8	3/4	6	5/8	4-3/8	.605	—	32698	34895
3/4	1	4	3/4	1-3/4	.730	—	32715	32740
3/4	1	4	3/4	1-3/4	.730	.030	32791	32855
3/4	1	4	3/4	1-3/4	.730	.060	32792	32856
3/4	1	4	3/4	1-3/4	.730	.090	32793	32857
3/4	1	4	3/4	1-3/4	.730	.120	32794	32858
3/4	1	4	3/4	2	.730	.190	35803	36251
3/4	1	4	3/4	2	.730	.250	35804	36252
3/4	1	6	3/4	2-3/8	.730	—	32716	32741
3/4	1	6	3/4	2-3/8	.730	.030	32795	32859


continued on next page

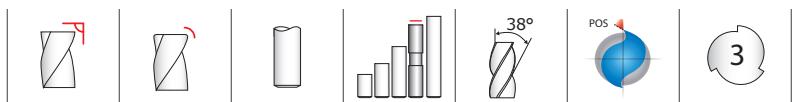

43L • 43LC

FRACTIONAL SERIES

CONTINUED

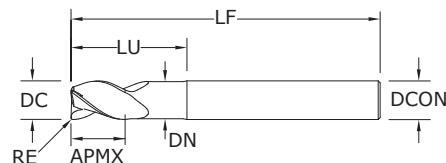

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	inch			EDP NO.	
				REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE-B (TiB ₂)
3/4	1	6	3/4	2-3/8	.730	.060	32796	32860
3/4	1	6	3/4	2-3/8	.730	.090	32797	32861
3/4	1	6	3/4	2-3/8	.730	.120	32798	32862
3/4	1	6	3/4	3-3/8	.730	—	32717	32742
3/4	1	6	3/4	3-3/8	.730	.030	32799	32863
3/4	1	6	3/4	3-3/8	.730	.060	32800	32864
3/4	1	6	3/4	3-3/8	.730	.090	32801	32865
3/4	1	6	3/4	3-3/8	.730	.120	32802	32866
3/4	1	6	3/4	4-3/8	.730	—	32699	34896
1	1-1/4	5	1	2-5/8	.980	.190	35809	36257
1	1-1/4	5	1	2-5/8	.980	.250	35810	36258
1	1-1/4	6	1	2-3/8	.980	—	32718	32743
1	1-1/4	6	1	2-3/8	.980	.030	32803	32867
1	1-1/4	6	1	2-3/8	.980	.060	32804	32868
1	1-1/4	6	1	2-3/8	.980	.090	32805	32869
1	1-1/4	6	1	2-3/8	.980	.120	32806	32870
1	1-1/4	6	1	3-3/8	.980	—	32719	32744
1	1-1/4	6	1	3-3/8	.980	.030	32807	32871
1	1-1/4	6	1	3-3/8	.980	.060	32808	32872
1	1-1/4	6	1	3-3/8	.980	.090	32809	32873
1	1-1/4	6	1	3-3/8	.980	.120	32810	32874
1	1-1/4	6	1	3-3/8	.980	.190	35811	36259
1	1-1/4	6	1	3-3/8	.980	.250	35812	36260
1	1-1/4	7	1	4-3/8	.980	—	32720	32745

TOLERANCES (inch)

1/8-3/16 DIAMETER

DC = +0.0000/-0.00032
DCON = h₆
RE = +0.0000/-0.0020

1/4-3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆
RE = +0.0000/-0.0020

1/2-5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆
RE = +0.0000/-0.0020



3/4-1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆
RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

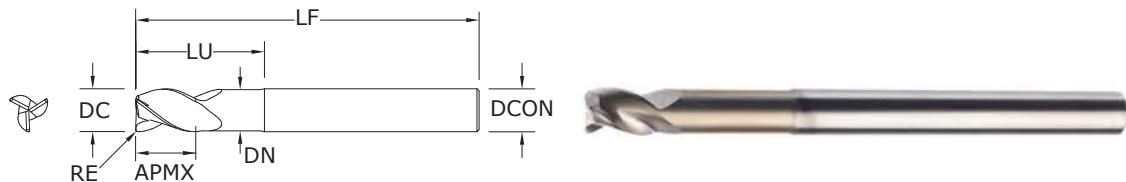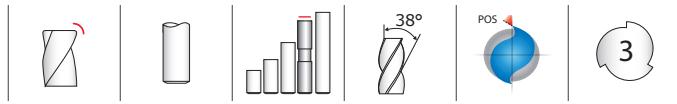

43EC

FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0000/-0.0020

3/4–1 DIAMETER

DC = +0.0000/-0.00051

DCON = h₆

RE = +0.0000/-0.0020


NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com


inch							EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	.015	35789	36237
1/4	3/8	3	1/4	1-1/8	.230	.060	35790	36238
3/8	1/2	4	3/8	2-1/8	.355	.015	35793	36241
3/8	1/2	4	3/8	2-1/8	.355	.090	35794	36242
1/2	5/8	5	1/2	3-3/8	.480	.015	35797	36245
1/2	5/8	6	1/2	4-1/4	.480	.015	35798	36246
1/2	5/8	6	1/2	4-1/4	.480	.030	35799	36247
1/2	5/8	6	1/2	4-1/4	.480	.060	35800	36248
1/2	5/8	6	1/2	4-1/4	.480	.090	35801	36249
1/2	5/8	6	1/2	4-1/4	.480	.120	35802	36250
3/4	1	6	3/4	3-3/8	.730	.190	35805	36253
3/4	1	6	3/4	3-3/8	.730	.250	35806	36254
1	1-1/4	7	1	4-3/8	.980	.030	35813	36261
1	1-1/4	7	1	4-3/8	.980	.060	35814	36262
1	1-1/4	7	1	4-3/8	.980	.090	35815	36263
1	1-1/4	7	1	4-3/8	.980	.120	35816	36264
1	1-1/4	7	1	4-3/8	.980	.190	35817	36265
1	1-1/4	7	1	4-3/8	.980	.250	35818	36266

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)



43B
FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

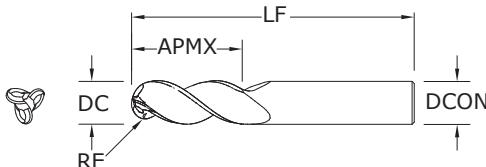

inch				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/4	3/8	2	1/4	34916	34972
1/4	3/4	2-1/2	1/4	34917	34973
1/4	1	3	1/4	34918	34974
3/8	1/2	2	3/8	34919	34975
3/8	1	2-1/2	3/8	34920	34976
3/8	1-1/2	3-1/2	3/8	34921	34977
1/2	5/8	2-1/2	1/2	34922	34978
1/2	1	3	1/2	34923	34979
1/2	1-1/4	3	1/2	34924	34980
1/2	1-5/8	4	1/2	34925	34981
1/2	2	4	1/2	34926	34982
5/8	3/4	3	5/8	34927	34983
5/8	1-5/8	4	5/8	34928	34984
3/4	1	3	3/4	34929	34985
3/4	1-5/8	4	3/4	34930	34986
3/4	2-1/4	5	3/4	34931	34987
1	1-1/4	4	1	34932	34988
1	2	5	1	34933	34989
1	3-1/4	6	1	34934	34990

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/4–3/8 DIAMETER
DC = +0.0000/-0.00035
DCON = h₆
RE = +0.0005/-0.0005

1/2–5/8 DIAMETER
DC = +0.0000/-0.00043
DCON = h₆
RE = +0.0005/-0.0005



3/4–1 DIAMETER
DC = +0.0000/-0.00051
DCON = h₆
RE = +0.0005/-0.0005

NON-FERROUS
PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



FRACTIONAL S-Carb®

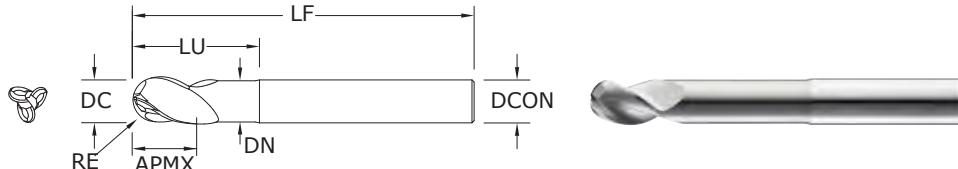

43LB FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0005/-0.0005

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0005/-0.0005

3/4–1 DIAMETER

DC = +0.0000/-0.00051

DCON = h₆

RE = +0.0005/-0.0005

CUTTING DIAMETER DC	inch					EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE-B (TiB ₂)
1/4	3/8	2-1/2	1/4	3/4	.230	34941	35005
3/8	1/2	3	3/8	1-1/8	.355	34943	35007
1/2	5/8	3	1/2	1-3/8	.480	34945	35009
1/2	5/8	4	1/2	2-1/4	.480	34946	35010
5/8	3/4	4	5/8	1-5/8	.605	34949	35013
3/4	1	4	3/4	2	.730	34951	35015
1	1-1/4	5	1	2-5/8	.980	34954	35018
1	1-1/4	6	1	3-3/8	.980	34955	35019


RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

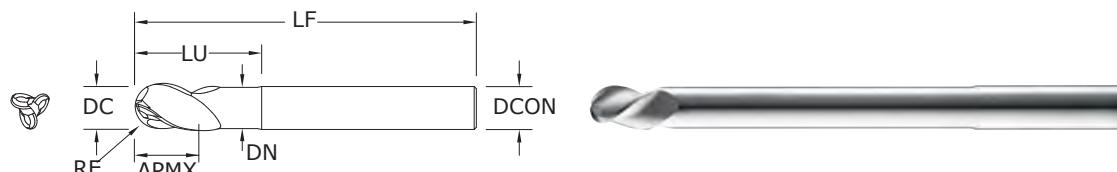

43EB FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0005/-0.0005

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0005/-0.0005

3/4–1 DIAMETER

DC = +0.0000/-0.00051

DCON = h₆

RE = +0.0005/-0.0005

CUTTING DIAMETER DC	inch					EDP NO.	
	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	UNCOATED	TI-NAMITE-B (TiB ₂)
1/4	3/8	3	1/4	1-1/8	.230	34942	35006
3/8	1/2	4	3/8	2-1/8	.355	34944	35008
1/2	5/8	5	1/2	3-3/8	.480	34947	35011
1/2	5/8	6	1/2	4-1/4	.480	34948	35012
5/8	3/4	6	5/8	3-3/8	.605	34950	35014
3/4	1	6	3/4	3-3/8	.730	34952	35016
1	1-1/4	7	1	4-3/8	.980	34956	35020

RE = 1/2 Cutting Diameter (DC)

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

NON-FERROUS

PLASTICS/COMPOSITES


For patent information visit www.ksptpatents.com



43CB

FRACTIONAL SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

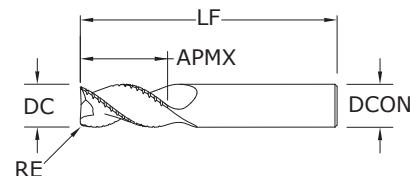

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE-B (TiB ₂)	
1/4	3/8	2-1/2	1/4	.020	33390	33450	
1/4	1/2	2-1/2	1/4	.020	33391	33451	
1/4	3/4	2-1/2	1/4	.020	33392	33452	
1/4	1	3	1/4	.020	33393	33453	
1/4	1-1/4	3-1/2	1/4	.020	33394	33454	
1/4	1-3/4	4	1/4	.020	33395	33455	
5/16	7/16	2-1/2	5/16	.020	33396	33456	
5/16	11/16	2-1/2	5/16	.020	33397	33457	
5/16	1	3	5/16	.020	33398	33458	
5/16	2-1/8	4	5/16	.020	33400	33460	
3/8	1/2	3	3/8	.020	33401	33461	
3/8	1	2-1/2	3/8	.020	34300	34305	
3/8	1-1/4	3-1/2	3/8	.020	33402	33462	
3/8	1-1/2	4	3/8	.020	33403	33463	
3/8	2	4	3/8	.020	33404	33464	
1/2	5/8	3	1/2	.030	33406	33466	
1/2	1	3	1/2	.030	33407	33467	
1/2	1-1/4	3-1/4	1/2	.030	34301	34306	
1/2	1-5/8	4	1/2	.030	33408	33468	
1/2	2	4	1/2	.030	33409	33469	
1/2	2-1/2	5	1/2	.030	33410	33470	
1/2	3-1/8	6	1/2	.030	33411	33471	
5/8	3/4	3-1/2	5/8	.030	33412	33472	
5/8	1-5/8	3-3/4	5/8	.030	34302	34307	
5/8	2-1/8	4	5/8	.030	33413	33473	
5/8	3-1/4	6	5/8	.030	33415	33475	
5/8	3-3/4	6	5/8	.030	33416	33476	
3/4	1	4	3/4	.030	33417	33477	
3/4	1-5/8	4	3/4	.030	34303	34308	
3/4	2-1/4	4	3/4	.030	33418	33478	
3/4	3-1/4	6	3/4	.030	33419	33479	
3/4	4	6	3/4	.030	33420	33480	
1	1-1/4	5	1	.030	33421	33481	
1	2	4-1/2	1	.030	34304	34309	
1	2-5/8	6	1	.030	33422	33482	
1	3-1/4	6	1	.030	33423	33483	
1	4-1/8	7	1	.030	33424	33484	

TOLERANCES (inch)



1/4–3/8 DIAMETER
DC = +0.0000/-0.00035
DCON = h₆
RE = +0.0000/-0.0020

1/2–5/8 DIAMETER
DC = +0.0000/-0.00043
DCON = h₆
RE = +0.0000/-0.0020

3/4–1 DIAMETER
DC = +0.0000/-0.00051
DCON = h₆
RE = +0.0000/-0.0020

NON-FERROUS
PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

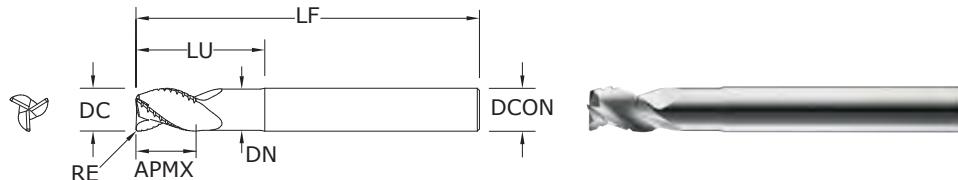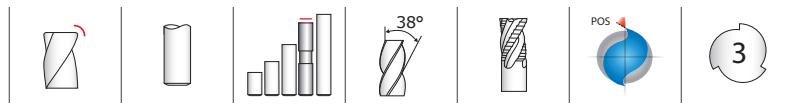

43LCB
FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0000/-0.0020

3/4–1 DIAMETER

DC = +0.0000/-0.00051

DCON = h₆

RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

inch							EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/4	3/8	4	1/4	3/4	.230	.020	33500	33540
1/4	3/8	4	1/4	1-1/8	.230	.020	33501	33541
1/4	3/8	4	1/4	2-1/8	.230	.020	33502	33542
5/16	7/16	4	5/16	1-1/8	.292	.020	33503	33543
5/16	7/16	4	5/16	2-1/8	.292	.020	33504	33544
3/8	1/2	4	3/8	1-1/8	.355	.020	33507	33547
3/8	1/2	4	3/8	2-1/8	.355	.020	33508	33548
1/2	5/8	4	1/2	1-3/8	.480	.030	33511	33551
1/2	5/8	4	1/2	2-1/4	.480	.030	–	33552
1/2	5/8	6	1/2	3-3/8	.480	.030	33513	33553
1/2	5/8	6	1/2	4-1/4	.480	.030	33514	33554
5/8	3/4	4	5/8	1-5/8	.605	.030	33515	33555
5/8	3/4	6	5/8	2-3/8	.605	.030	33516	33556
5/8	3/4	6	5/8	3-3/8	.605	.030	33517	33557
5/8	3/4	6	5/8	4-3/8	.605	.030	33518	33558
3/4	1	4	3/4	2	.730	.030	33519	33559
3/4	1	6	3/4	2-1/2	.730	.030	33520	33560
3/4	1	6	3/4	3-3/8	.730	.030	33521	33561
3/4	1	6	3/4	4-3/8	.730	.030	33522	33562
1	1-1/4	6	1	2-5/8	.980	.030	33523	33563
1	1-1/4	6	1	3-3/8	.980	.030	33524	33564
1	1-1/4	7	1	4-3/8	.980	.030	33525	33565

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

FRACTIONAL
S-Carb®

Series 43CR, 43CB, 43LC, 43, 43L, 43LCB, 43B, 43LB, 43ELB, 43EC Fractional		Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot 	1	≤ 1 (1280-1920)	1600	RPM	48896	24448	16299	12224	9779	8149	6112
			Profile 	≤ 0.5	≤ 1.5 (1600-2400)	2000	RPM	61120	30560	20373	15280	12224	10187	7640
			HSM 	≤ 0.05	≤ 2 (2640-3960)	3300	RPM	100848	50424	33616	25212	20170	16808	12606
		≤ 125 Bhn or ≤ 77 HRb	Slot 	1	≤ 1 (480-720)	600	RPM	18336	9168	6112	4584	3667	3056	2292
			Profile 	≤ 0.5	≤ 1.5 (600-900)	750	RPM	22920	11460	7640	5730	4584	3820	2865
			HSM 	≤ 0.05	≤ 2 (992-1488)	1240	RPM	37894	18947	12631	9474	7579	6316	4737
			Slot 	1	≤ 1 (692-1038)	865	RPM	26434	13217	8811	6609	5287	4406	3304
			Profile 	≤ 0.5	≤ 1.5 (864-1296)	1080	RPM	33005	16502	11002	8251	6601	5501	4126
			HSM 	≤ 0.05	≤ 2 (1424-2136)	1780	RPM	54397	27198	18132	13599	10879	9066	6800
	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 	1	≤ 1 (276-414)	345	RPM	10543	5272	3514	2636	2109	1757	1318
			Profile 	≤ 0.5	≤ 1.5 (344-516)	430	RPM	13141	6570	4380	3285	2628	2190	1643
			HSM 	≤ 0.05	≤ 2 (568-852)	710	RPM	21698	10849	7233	5424	4340	3616	2712
		≤ 200 Bhn or ≤ 23 HRc	Slot 	1	≤ 1 (1280-1920)	1600	RPM	48896	24448	16299	12224	9779	8149	6112
			Profile 	≤ 0.5	≤ 1.5 (1600-2400)	2000	RPM	61120	30560	20373	15280	12224	10187	7640
			HSM 	≤ 0.05	≤ 2 (2640-3960)	3300	RPM	100848	50424	33616	25212	20170	16808	12606
			Slot 	1	≤ 1 (480-720)	1600	RPM	48896	24448	16299	12224	9779	8149	6112
			Profile 	≤ 0.5	≤ 1.5 (600-900)	2000	RPM	61120	30560	20373	15280	12224	10187	7640
			HSM 	≤ 0.05	≤ 2 (992-1488)	3300	RPM	100848	50424	33616	25212	20170	16808	12606
	PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 200 Bhn or ≤ 23 HRc	Slot 	1	≤ 1 (276-414)	345	RPM	10543	5272	3514	2636	2109	1757	1318
			Profile 	≤ 0.5	≤ 1.5 (344-516)	430	RPM	13141	6570	4380	3285	2628	2190	1643
			HSM 	≤ 0.05	≤ 2 (568-852)	710	RPM	21698	10849	7233	5424	4340	3616	2712

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)

rpm = $V_c \times 3.82 / DC$



ipm = $F_z \times 3 \times rpm$

reduce speed and feed for materials harder than listed

reduce cut depth and feed by 50% for long flute and long reach tools

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

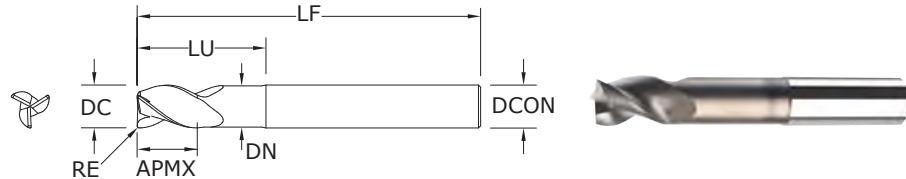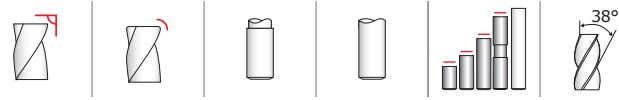

43M • 43MCR METRIC SERIES

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER

DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050

NON-FERROUS


PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	REACH LU	NECK DIAMETER DN	POLISHED FLUTE DN	EDP NO.	
								UNCOATED Ti-NAMITE-B (TiB ₂)	EDP NO.
3,0	8,0	52,0	6,0	—	—	—	•	—	44890
4,0	11,0	55,0	6,0	—	—	—	•	—	44891
5,0	13,0	57,0	6,0	—	—	—	•	—	44892
6,0	13,0	57,0	6,0	—	—	—	—	44701	44715
6,0	13,0	57,0	6,0	1,5	—	—	—	—	44732
6,0	13,0	57,0	6,0	0,5	—	—	•	—	44902
6,0	13,0	57,0	6,0	1,0	—	—	•	—	44894
6,0	13,0	72,0	6,0	—	—	—	—	44702	44716
6,0	13,0	72,0	6,0	0,8	—	—	•	—	44842
6,0	13,0	72,0	6,0	1,2	—	—	•	—	44843
6,0	24,0	75,0	6,0	—	—	—	•	—	44893
6,0	24,0	75,0	6,0	0,5	—	—	•	—	44844
6,0	24,0	75,0	6,0	1,0	—	—	•	—	44845
8,0	19,0	63,0	8,0	—	—	—	—	44703	44717
8,0	19,0	63,0	8,0	0,3	—	—	•	—	44846
8,0	19,0	63,0	8,0	0,5	—	—	•	—	44847
8,0	19,0	63,0	8,0	1,0	—	—	•	—	44848
8,0	19,0	63,0	8,0	1,5	—	—	•	—	44849
8,0	32,0	75,0	8,0	—	—	—	•	—	44895
8,0	32,0	75,0	8,0	0,5	—	—	•	—	44850
8,0	32,0	75,0	8,0	1,0	—	—	•	—	44851
8,0	32,0	75,0	8,0	1,5	—	—	•	—	44852
8,0	32,0	75,0	8,0	2,0	—	—	•	—	44853
10,0	22,0	72,0	10,0	—	—	—	—	44705	44719
10,0	22,0	72,0	10,0	0,3	—	—	•	—	44854
10,0	22,0	72,0	10,0	0,5	—	—	•	—	44855
10,0	22,0	72,0	10,0	1,0	—	—	•	—	44856
10,0	22,0	72,0	10,0	1,5	—	—	•	—	44857
10,0	40,0	100,0	10,0	—	—	—	•	—	44896
10,0	40,0	100,0	10,0	0,5	—	—	•	—	44858

continued on next page


- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Polished flutes maximize chip evacuation and provides enhanced finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

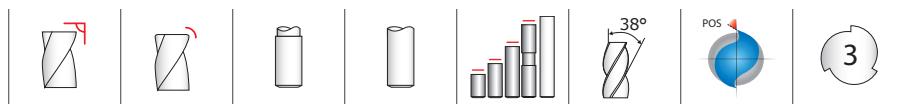

43M • 43MCR

METRIC SERIES

CONTINUED

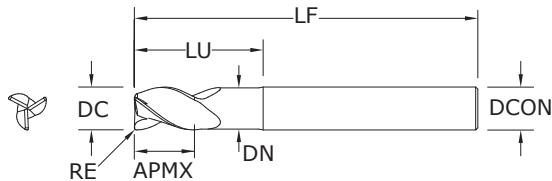

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	REACH LU	NECK DIAMETER DN	POLISHED FLUTE DN	EDP NO.
10,0	40,0	100,0	10,0	1,0	—	—	•	— 44859
10,0	40,0	100,0	10,0	1,5	—	—	•	— 44860
10,0	40,0	100,0	10,0	2,0	—	—	•	— 44861
12,0	26,0	83,0	12,0	—	—	—	—	44708 44722
12,0	26,0	83,0	12,0	1,5	—	—	—	44814 44733
12,0	26,0	83,0	12,0	2,0	—	—	—	44815 44826
12,0	26,0	83,0	12,0	2,5	—	—	—	44816 44827
12,0	26,0	83,0	12,0	3,0	—	—	—	44817 44734
12,0	48,0	100,0	12,0	—	—	—	•	— 44897
12,0	48,0	100,0	12,0	0,5	—	—	•	— 44862
12,0	48,0	100,0	12,0	1,0	—	—	•	— 44863
12,0	48,0	100,0	12,0	1,5	—	—	•	— 44864
12,0	48,0	100,0	12,0	2,0	—	—	•	— 44865
12,0	48,0	100,0	12,0	2,5	—	—	•	— 44866
12,0	48,0	100,0	12,0	3,0	—	—	•	— 44867
14,0	30,0	89,0	14,0	—	—	—	•	— 44898
14,0	30,0	89,0	14,0	1,0	—	—	•	— 44868
14,0	30,0	89,0	14,0	2,0	—	—	•	— 44869
14,0	30,0	89,0	14,0	3,0	—	—	•	— 44870
14,0	18,0	125,0	14,0	—	45,0	13,49	•	— 44899
16,0	32,0	92,0	16,0	—	—	—	—	44711 44725
16,0	32,0	92,0	16,0	1,5	—	—	—	44818 44735
16,0	32,0	92,0	16,0	2,0	—	—	—	44819 44828
16,0	32,0	92,0	16,0	2,5	—	—	—	44820 44829
16,0	32,0	92,0	16,0	3,0	—	—	—	44821 44736
16,0	32,0	92,0	16,0	4,0	—	—	•	— 44871
16,0	64,0	125,0	16,0	—	—	—	•	— 44900
16,0	64,0	125,0	16,0	0,5	—	—	•	— 44872
16,0	64,0	125,0	16,0	1,0	—	—	•	— 44873
16,0	64,0	125,0	16,0	1,5	—	—	•	— 44874
16,0	64,0	125,0	16,0	2,0	—	—	•	— 44875
16,0	64,0	125,0	16,0	2,5	—	—	•	— 44876

continued on next page

TOLERANCES (mm)

6 DIAMETER

DC = +0,000/-0,008

DCON = h₆

RE = +0,000/-0,050

>6-10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10-18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18-20 DIAMETER

DC = +0,000/-0,013



DCON = h₆

RE = +0,000/-0,050

NON-FERROUS

PLASTICS/COMPOSITES


For patent information visit www.ksptpatents.com

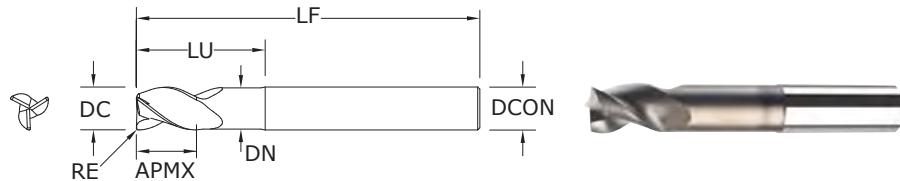

**43M •
43MCR**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	REACH LU	NECK DIAMETER DN	POLISHED FLUTE	EDP NO.	UNCOATED Ti-NAMITE-B (TiB ₂)
16,0	64,0	125,0	16,0	3,0	—	—	•	—	44877
16,0	64,0	125,0	16,0	4,0	—	—	•	—	44878
20,0	38,0	104,0	20,0	—	—	—		44714	44728
20,0	38,0	104,0	20,0	2,0	—	—		44822	44830
20,0	38,0	104,0	20,0	2,5	—	—		44823	44831
20,0	38,0	104,0	20,0	3,0	—	—		44824	44737
20,0	38,0	104,0	20,0	4,0	—	—	•	—	44879
20,0	80,0	150,0	20,0	—	—	—	•	—	44901
20,0	80,0	150,0	20,0	0,5	—	—	•	—	44880
20,0	80,0	150,0	20,0	1,0	—	—	•	—	44881
20,0	80,0	150,0	20,0	1,5	—	—	•	—	44882
20,0	80,0	150,0	20,0	2,0	—	—	•	—	44883
20,0	80,0	150,0	20,0	2,5	—	—	•	—	44884
20,0	80,0	150,0	20,0	3,0	—	—	•	—	44885
20,0	80,0	150,0	20,0	4,0	—	—	•	—	44886
25,0	50,0	125,0	25,0	—	—	—		—	44731

CONTINUED





43ML • 43MLC METRIC SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Open fluting for deep slotting and profiling
- Polished flutes maximize chip evacuation and provides enhanced finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

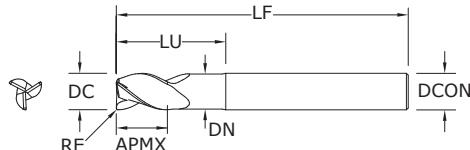

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	POLISHED FLUTE	EDP NO.		TOLERANCES (mm)
								UNCOATED	Ti-NAMITE-B (TiB ₂)	
6,0	10,0	63,0	6,0	20,0	5,49	0,5		44769	44789	>6-10 DIAMETER
6,0	10,0	63,0	6,0	20,0	5,49	1,0		44770	44790	>6-10 DIAMETER
6,0	10,0	75,0	6,0	20,0	5,49	—		—	42706	>10-18 DIAMETER
6,0	13,0	72,0	6,0	30,0	5,49	0,5		44771	44791	>10-18 DIAMETER
6,0	13,0	72,0	6,0	30,0	5,49	1,0		44772	44792	>10-18 DIAMETER
8,0	12,0	75,0	8,0	25,0	7,49	—		—	44792	>18-20 DIAMETER
8,0	12,0	75,0	8,0	25,0	7,49	—		—	42707	>18-20 DIAMETER
8,0	12,0	75,0	8,0	25,0	7,49	0,3		44773	44793	>18-20 DIAMETER
8,0	12,0	75,0	8,0	25,0	7,49	0,5		44774	44794	>18-20 DIAMETER
8,0	12,0	75,0	8,0	25,0	7,49	0,8	•	—	44950	NON-FERROUS
8,0	12,0	75,0	8,0	25,0	7,49	1,0		44775	44795	NON-FERROUS
8,0	12,0	75,0	8,0	25,0	7,49	1,2	•	—	44951	PLASTICS/COMPOSITES
8,0	12,0	75,0	8,0	25,0	7,49	1,5		44776	44796	PLASTICS/COMPOSITES
8,0	12,0	75,0	8,0	25,0	7,49	1,6	•	—	44952	PLASTICS/COMPOSITES
10,0	14,0	100,0	10,0	35,0	9,48	—		—	42708	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,48	0,3		44777	44797	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,48	0,5		44778	44798	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,48	1,0		44779	44799	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,48	1,5		44780	44800	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,50	0,8	•	—	44953	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,50	1,2	•	—	44954	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,50	1,6	•	—	44955	For patent information visit www.ksptpatents.com
10,0	14,0	100,0	10,0	35,0	9,50	2,4	•	—	44956	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	—		—	42709	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	0,5		44781	44801	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	0,8	•	—	44957	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	1,0		44782	44802	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	1,2	•	—	44958	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	1,5		44783	44803	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	1,6	•	—	44959	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	2,0		44784	44804	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	2,4	•	—	44960	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	2,5		44832	44839	For patent information visit www.ksptpatents.com
12,0	16,0	100,0	12,0	40,0	11,48	3,0		44833	44738	For patent information visit www.ksptpatents.com


continued on next page

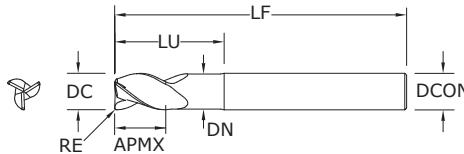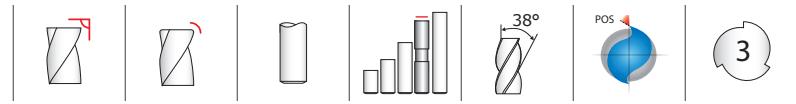

**43ML •
43MLC**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	CORNER RADIUS RE	POLISHED FLUTE	EDP NO.	
								UNCOATED	Ti-NAMITE-B (TiB ₂)
12,0	16,0	100,0	12,0	40,0	11,48	4,0	•	44834	44741
14,0	18,0	125,0	14,0	45,0	13,49	1,0	—	—	44961
14,0	18,0	125,0	14,0	45,0	13,49	2,0	•	—	44962
14,0	18,0	125,0	14,0	45,0	13,49	3,0	•	—	44963
14,0	18,0	125,0	14,0	45,0	13,49	4,0	•	—	44964
16,0	20,0	125,0	16,0	50,0	15,47	—	—	—	42710
16,0	20,0	125,0	16,0	50,0	15,47	2,0	—	44785	44805
16,0	20,0	125,0	16,0	50,0	15,47	2,5	—	44835	44840
16,0	20,0	125,0	16,0	50,0	15,47	3,0	—	44836	44739
16,0	20,0	125,0	16,0	50,0	15,47	4,0	—	44786	44806
16,0	20,0	125,0	16,0	50,0	15,49	0,8	•	—	44965
16,0	20,0	125,0	16,0	50,0	15,49	1,2	•	—	44966
16,0	20,0	125,0	16,0	50,0	15,49	1,6	•	—	44967
16,0	20,0	125,0	16,0	50,0	15,49	2,4	•	—	44968
16,0	20,0	125,0	16,0	50,0	15,49	3,2	•	—	44969
20,0	25,0	150,0	20,0	65,0	19,46	—	—	—	42711
20,0	25,0	150,0	20,0	65,0	19,46	2,0	—	44787	44807
20,0	25,0	150,0	20,0	65,0	19,46	2,4	•	—	44973
20,0	25,0	150,0	20,0	65,0	19,46	2,5	—	44837	44841
20,0	25,0	150,0	20,0	65,0	19,46	3,0	—	44838	44740
20,0	25,0	150,0	20,0	65,0	19,46	4,0	—	44788	44808
20,0	25,0	150,0	20,0	65,0	19,48	0,8	•	—	44970
20,0	25,0	150,0	20,0	65,0	19,48	1,2	•	—	44971
20,0	25,0	150,0	20,0	65,0	19,48	1,6	•	—	44972
20,0	25,0	150,0	20,0	65,0	19,48	3,2	•	—	44974

CONTINUED



43MB
METRIC SERIES

- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Open fluting for deep slotting and profiling
- Polished flutes maximize chip evacuation and provides enhanced finish
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

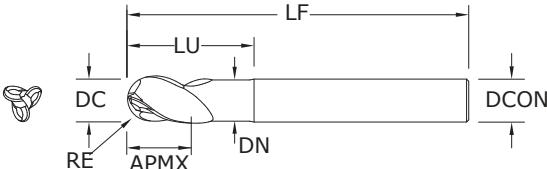

mm							E.D.P. NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	POLISHED FLUTE	Ti-NAMITE-B (TiB ₂)
3,0	4,5	57,0	6,0	—	—	•	44916
3,0	6,0	57,0	6,0	10,0	2,74	•	44917
3,0	9,0	57,0	6,0	16,0	2,74	•	44918
4,0	6,0	57,0	6,0	—	—	•	44919
4,0	8,0	57,0	6,0	13,0	3,73	•	44920
4,0	12,0	57,0	6,0	21,0	3,73	•	44921
5,0	7,5	57,0	6,0	—	—	•	44922
5,0	10,0	63,0	6,0	16,0	4,50	•	44923
5,0	15,0	63,0	6,0	26,0	4,50	•	44924
6,0	9,0	57,0	6,0	—	—	•	44925
6,0	12,0	63,0	6,0	19,0	5,49	•	44926
6,0	18,0	75,0	6,0	31,0	5,49	•	44927
8,0	12,0	63,0	8,0	—	—	•	44928
8,0	16,0	75,0	8,0	25,0	7,49	•	44929
8,0	24,0	83,0	8,0	41,0	7,49	•	44930
10,0	15,0	75,0	10,0	—	—	•	44931
10,0	20,0	83,0	10,0	31,0	9,50	•	44932
10,0	30,0	100,0	10,0	51,0	9,50	•	44933
12,0	18,0	83,0	12,0	—	—	•	44934
12,0	24,0	100,0	12,0	37,0	11,48	•	44935
12,0	36,0	130,0	12,0	61,0	11,48	•	44936
16,0	24,0	100,0	16,0	—	—	•	44937
16,0	32,0	130,0	16,0	49,0	15,49	•	44938
16,0	48,0	150,0	16,0	81,0	15,49	•	44939
20,0	30,0	108,0	20,0	—	—	•	44940
20,0	40,0	130,0	20,0	61,0	19,48	•	44941
20,0	60,0	150,0	20,0	101,0	19,48	•	44942
25,0	37,5	127,0	25,0	—	—	•	44943
25,0	50,0	152,0	25,0	76,0	24,49	•	44944
25,0	75,0	170,0	25,0	126,0	24,49	•	44945

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (mm)

3 DIAMETER

DC = +0,000/-0,006
DCON = h₆
RE = +0,0127/-0,0127

>3-6 DIAMETER

DC = +0,000/-0,008
DCON = h₆
RE = +0,0127/-0,0127

>6-10 DIAMETER

DC = +0,000/-0,009
DCON = h₆
RE = +0,0127/-0,0127

>10-18 DIAMETER

DC = +0,000/-0,011
DCON = h₆
RE = +0,0127/-0,0127


>18-25 DIAMETER

DC = +0,000/-0,013
DCON = h₆
RE = +0,0127/-0,0127

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

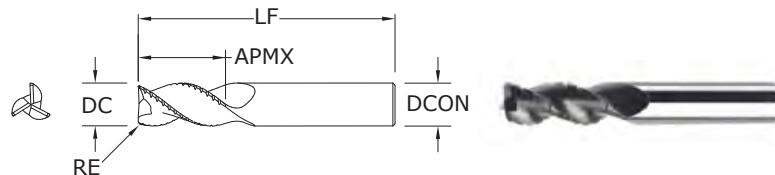

43MCB
METRIC SERIES

TOLERANCES (mm)

>6–10 DIAMETER

DC = +0,000/-0,009

DCON = h₆

RE = +0,000/-0,050

>10–18 DIAMETER

DC = +0,000/-0,011

DCON = h₆

RE = +0,000/-0,050

>18–20 DIAMETER

DC = +0,000/-0,013

DCON = h₆

RE = +0,000/-0,050


NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.	
					UNCOATED	Ti-NAMITE-B (TiB ₂)
6,0	19,0	63,0	6,0	0,5	44298	44299
8,0	19,0	63,0	8,0	0,3	44300	44305
10,0	22,0	72,0	10,0	0,3	44301	44306
12,0	26,0	83,0	12,0	1,0	44302	44307
16,0	32,0	92,0	16,0	1,0	44303	44308
20,0	38,0	104,0	20,0	1,0	44304	44309



- Circular land allows for increased control at various speed and feed rates and reduces chatter
- Symmetrical end gashing for excellent balance at high speeds and aggressive plunging capability
- Chip breakers reduce machine loads up to 15% for increased roughing feed rate capability
- Open fluting for deep slotting and profiling
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)



Series 43M, 43MB, 43MCR, 43ML, 43MLC, 43MCB Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm							
					3	6	10	12	16	20	25	
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot 	1 ≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243
				(392-588)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	3371	4682	5618	5618	4869	4370	3980
	Profile 	≤ 0.5 ≤ 1.5	(488-732)	610	RPM	64762	32381	19429	16190	12143	9714	7771
					Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	4196	5828	6994	6994	6061	5440	4955
	HSM 	≤ 0.05 ≤ 2	(804-1206)	1005	RPM	106698	53349	32009	26674	20006	16005	12804
					Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
					Feed (mm/min)	16131	21124	26888	26885	23046	21126	18726
ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb	Slot 	1 ≤ 1	185	RPM	19641	9820	5892	4910	3683	2946	2357
				(148-222)	Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	1273	1768	2121	2121	1838	1650	1503
	Profile 	≤ 0.5 ≤ 1.5	(184-276)	230	RPM	24418	12209	7326	6105	4578	3663	2930
					Fz	0.022	0.060	0.120	0.144	0.166	0.187	0.213
					Feed (mm/min)	1582	2197	2637	2637	2285	2051	1868
	HSM 	≤ 0.05 ≤ 2	(304-456)	380	RPM	40343	20172	12103	10086	7564	6052	4841
					Fz	0.050	0.132	0.280	0.336	0.384	0.440	0.488
					Feed (mm/min)	6099	7987	10166	10166	8714	7988	7081
N COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 	1 ≤ 1	265	RPM	28134	14067	8440	7034	5275	4220	3376
				(212-318)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	1620	2025	2701	2532	2228	2026	1773
	Profile 	≤ 0.5 ≤ 1.5	(264-396)	330	RPM	35035	17518	10511	8759	6569	5255	4204
					Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	2018	2522	3363	3153	2775	2523	2207
	HSM 	≤ 0.05 ≤ 2	(436-654)	545	RPM	57861	28930	17358	14465	10849	8679	6943
					Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
					Feed (mm/min)	7082	9373	11804	11976	10415	9721	8332
COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	≤ 200 Bhn or ≤ 23 HRc	Slot 	1 ≤ 1	105	RPM	11148	5574	3344	2787	2090	1672	1338
				(84-126)	Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	642	803	1070	1003	883	803	702
	Profile 	≤ 0.5 ≤ 1.5	(104-156)	130	RPM	13802	6901	4141	3450	2588	2070	1656
					Fz	0.019	0.048	0.107	0.120	0.141	0.160	0.175
					Feed (mm/min)	795	994	1325	1242	1093	994	870
	HSM 	≤ 0.05 ≤ 2	(172-258)	215	RPM	22826	11413	6848	5706	4280	3424	2739
					Fz	0.041	0.108	0.227	0.276	0.320	0.373	0.400
					Feed (mm/min)	2794	3697	4656	4725	4109	3835	3287
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining) rpm = $(V_c \times 1000) / (DC \times 3.14)$ mm/min = $F_z \times 3 \times rpm$ reduce speed and feed for materials harder than listed reduce cut depth and feed by 50% for long flute and long reach tools reduce feed and Ae when finish milling (.02 x DC maximum) refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)	Slot 	1 ≤ 1	490	RPM	52022	26011	15607	13005	9754	7803	6243
				(392-588)	Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
					Feed (mm/min)	5618	7490	9364	9363	8240	7491	6555
	Profile 	≤ 0.5 ≤ 1.5	(488-732)	610	RPM	64762	32381	19429	16190	12143	9714	7771
					Fz	0.036	0.096	0.200	0.240	0.282	0.320	0.350
					Feed (mm/min)	6994	9325	11657	11656	10258	9326	8160
	HSM 	≤ 0.05 ≤ 2	(804-1206)	1005	RPM	106698	53349	32009	26674	20006	16005	12804
					Fz	0.082	0.216	0.453	0.552	0.640	0.733	0.800
					Feed (mm/min)	26117	34567	43532	44169	38410	35210	30730



FRACTIONAL S-Carb®

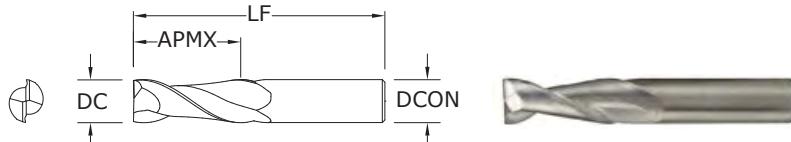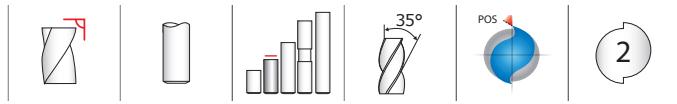

47

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = +0.0000/-0.00032
DCON = h₆

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆

3/4–1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.	
				UNCOATED	Ti-NAMITE-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34620	34660
3/16	9/16	2	3/16	34621	34661
1/4	3/4	2-1/2	1/4	34622	34662
5/16	13/16	2-1/2	5/16	34623	34663
3/8	1	2-1/2	3/8	34624	34664
1/2	1-1/4	3-1/4	1/2	34625	34665
5/8	1-5/8	3-3/4	5/8	34626	34666
3/4	1-5/8	4	3/4	34627	34667
1	2	4-1/2	1	34628	34668

- Circular land reduces edge aggressiveness for varied speed and feed rates

- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process



- Excellent balance at high speeds and aggressive plunging capability

- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

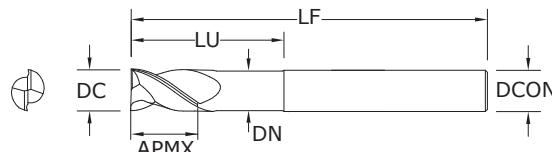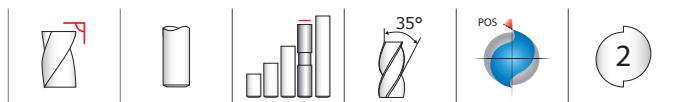

47L

FRACTIONAL SERIES

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035
DCON = h₆

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043
DCON = h₆

3/4–1 DIAMETER

DC = +0.0000/-0.00051
DCON = h₆

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	EDP NO.	
						UNCOATED	Ti-NAMITE-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	.235	34640	34678
3/8	1/2	4	3/8	2-1/8	.360	34641	34679
1/2	5/8	6	1/2	2-1/8	.485	34642	34680
1/2	5/8	6	1/2	3-3/8	.485	34643	34681
5/8	3/4	6	5/8	2-3/8	.610	34644	34682
5/8	3/4	6	5/8	3-3/8	.610	34645	34683
3/4	1	6	3/4	2-1/2	.735	34646	34684
3/4	1	6	3/4	3-3/8	.735	34647	34685

- Circular land reduces edge aggressiveness for varied speed and feed rates

- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process

- Excellent balance at high speeds and aggressive plunging capability

- Necked design with blended diameter transitions provide clearance to reach

- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

For patent information visit www.ksptpatents.com


FRACTIONAL S-Carb®




2

47B FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

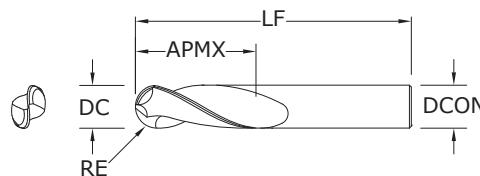


RE = 1/2 Cutting Diameter (DC)



2

47LB FRACTIONAL SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

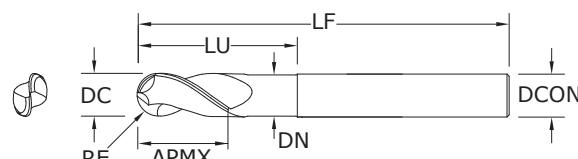

RE = 1/2 Cutting Diameter (DC)

TOLERANCES (inch)

1/8–3/16 DIAMETER

DC = $+0.0000/-0.00032$
DCON = h_6
RE = $.0005/-0.0005$

1/4–3/8 DIAMETER

DC = $+0.0000/-0.00035$
DCON = h_6
RE = $.0005/-0.0005$

1/2–5/8 DIAMETER

DC = $+0.0000/-0.00043$
DCON = h_6
RE = $.0005/-0.0005$

3/4–1 DIAMETER

DC = $+0.0000/-0.00051$
DCON = h_6
RE = $.0005/-0.0005$

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = $+0.0000/-0.00035$
DCON = h_6
RE = $.0005/-0.0005$

1/2–5/8 DIAMETER

DC = $+0.0000/-0.00043$
DCON = h_6
RE = $.0005/-0.0005$


3/4–1 DIAMETER

DC = $+0.0000/-0.00051$
DCON = h_6
RE = $.0005/-0.0005$

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



Series
47, 47B, 47L, 47LB
Fractional

Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
				1/8	1/4	3/8	1/2	5/8	3/4	1	
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot	1600	RPM	48896	24448	16299	12224	9779	8149	6112
			(1280-1920)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
		Profile	2000	RPM	61120	30560	20373	15280	12224	10187	7640
	≤ 125 Bhn or ≤ 77 HRb		(1600-2400)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
		HSM	3300	RPM	100848	50424	33616	25212	20170	16808	12606
			(2640-3960)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
	≤ 125 Bhn or ≤ 77 HRb	Slot	600	RPM	18336	9168	6112	4584	3667	3056	2292
			(480-720)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
		Profile	750	RPM	22920	11460	7640	5730	4584	3820	2865
N ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	≤ 125 Bhn or ≤ 77 HRb		(600-900)	Fz	0.0009	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085
		HSM	1240	RPM	37894	18947	12631	9474	7579	6316	4737
			(992-1488)	Fz	0.0021	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195
	≤ 140 Bhn or ≤ 3 HRc	Slot	865	RPM	26434	13217	8811	6609	5287	4406	3304
			(692-1038)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
		Profile	1080	RPM	33005	16502	11002	8251	6601	5501	4126
	≤ 140 Bhn or ≤ 3 HRc		(864-1296)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
		HSM	1780	RPM	54397	27198	18132	13599	10879	9066	6800
			(1424-2136)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot	345	RPM	10543	5272	3514	2636	2109	1757	1318
			(276-414)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
		Profile	430	RPM	13141	6570	4380	3285	2628	2190	1643
	≤ 200 Bhn or ≤ 23 HRc		(344-516)	Fz	0.0008	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070
		HSM	710	RPM	21698	10849	7233	5424	4340	3616	2712
			(568-852)	Fz	0.0017	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160
	≤ 200 Bhn or ≤ 23 HRc	Slot	1600	RPM	48896	24448	16299	12224	9779	8149	6112
			(1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
		Profile	2000	RPM	61120	30560	20373	15280	12224	10187	7640
N PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 0.5		(1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
		HSM	3300	RPM	100848	50424	33616	25212	20170	16808	12606
	≤ 0.5		(2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320
		HSM		Feed (ipm)	686	908	1143	1160	1008	924	807

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC


ipm = Fz x 2 x rpm

reduce speed and feed for materials harder than listed

reduce cut depth and feed by 50% for long flute and long reach tools


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



47M
METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

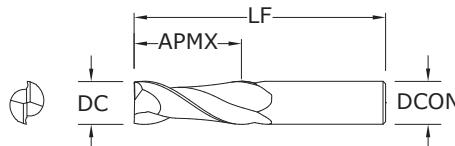

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.	
				UNCOATED	Ti-NAMITE-B (TiB ₂)
3,0	8,0	38,0	3,0	44550	44587
4,0	11,0	50,0	4,0	44551	44588
5,0	13,0	50,0	5,0	44552	44589
6,0	13,0	57,0	6,0	44553	44590
8,0	19,0	63,0	8,0	44554	44591
10,0	22,0	72,0	10,0	44555	44592
12,0	26,0	83,0	12,0	44556	44593
14,0	26,0	83,0	14,0	44557	44594
16,0	32,0	92,0	16,0	44558	44595
20,0	38,0	104,0	20,0	44559	44596
25,0	38,0	104,0	25,0	44560	44597

TOLERANCES (mm)

3 DIAMETER
DC = +0,000/-0,006
DCON = h₆

>3–6 DIAMETER
DC = +0,000/-0,008
DCON = h₆

>6–10 DIAMETER
DC = +0,000/-0,009
DCON = h₆


>10–18 DIAMETER
DC = +0,000/-0,012
DCON = h₆

>18–25 DIAMETER
DC = +0,000/-0,013
DCON = h₆

NON-FERROUS


PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



47ML
METRIC SERIES

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

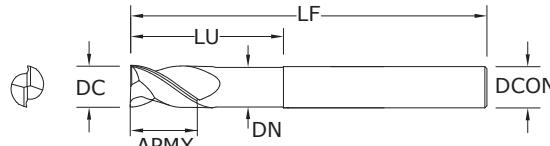

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	EDP NO.	
						UNCOATED	Ti-NAMITE-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	5,62	44561	44609
8,0	12,0	100,0	8,0	54,0	7,62	44562	44610
10,0	12,0	100,0	10,0	54,0	9,62	44563	44611
12,0	16,0	150,0	12,0	80,0	11,62	44564	44612
16,0	20,0	150,0	16,0	80,0	15,62	44565	44613
20,0	25,0	150,0	20,0	80,0	19,62	44566	44614

TOLERANCES (mm)

6 DIAMETER
DC = +0,000/-0,008
DCON = h₆

>6–10 DIAMETER
DC = +0,000/-0,009
DCON = h₆


>10–18 DIAMETER
DC = +0,000/-0,011
DCON = h₆

>18–20 DIAMETER
DC = +0,000/-0,013
DCON = h₆

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

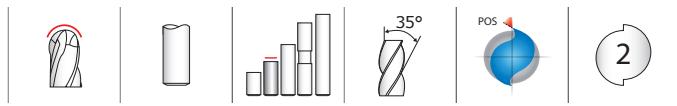

47MB
METRIC SERIES

TOLERANCES (mm)

3 DIAMETER
DC = +0,000/-0,006
DCON = h₆
RE = +0,0127/-0,0127

>3–6 DIAMETER
DC = +0,000/-0,008
DCON = h₆
RE = +0,0127/-0,0127

>6–10 DIAMETER
DC = +0,000/-0,009
DCON = h₆
RE = +0,0127/-0,0127

>10–18 DIAMETER
DC = +0,000/-0,012
DCON = h₆
RE = +0,0127/-0,0127

>18–25 DIAMETER
DC = +0,000/-0,013
DCON = h₆
RE = +0,0127/-0,0127

mm				EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE-B (TiB ₂)
3,0	8,0	38,0	3,0	44570	44598
4,0	11,0	50,0	4,0	44571	44599
5,0	13,0	50,0	5,0	44572	44600
6,0	13,0	57,0	6,0	44573	44601
8,0	19,0	63,0	8,0	44574	44602
10,0	22,0	72,0	10,0	44575	44603
12,0	26,0	83,0	12,0	44576	44604
14,0	26,0	83,0	14,0	44577	44605
16,0	32,0	92,0	16,0	44578	44606
20,0	37,3	104,0	20,0	44579	44607
25,0	38,0	104,0	25,0	44580	44608


RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

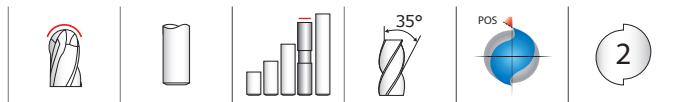

47MLB
METRIC SERIES

TOLERANCES (mm)

6 DIAMETER
DC = +0,000/-0,008
DCON = h₆
RE = +0,0127/-0,0127

>6–10 DIAMETER
DC = +0,000/-0,009
DCON = h₆
RE = +0,0127/-0,0127

>10–18 DIAMETER
DC = +0,000/-0,011
DCON = h₆
RE = +0,0127/-0,0127

>18–20 DIAMETER
DC = +0,000/-0,013
DCON = h₆
RE = +0,0127/-0,0127

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	REACH LU	NECK DIAMETER DN	EDP NO.
UNCOATED	Ti-NAMITE-B (TiB ₂)					
6,0	10,0	100,0	6,0	54,0	5,62	44581 44615
8,0	12,0	100,0	8,0	54,0	7,62	44582 44616
10,0	12,0	100,0	10,0	54,0	9,62	44583 44617
12,0	16,0	150,0	12,0	80,0	11,62	44584 44618
16,0	20,0	150,0	16,0	80,0	15,62	44585 44619
20,0	25,0	150,0	20,0	80,0	19,62	44586 44620

RE = 1/2 Cutting Diameter (DC)

- Circular land reduces edge aggressiveness for varied speed and feed rates
- 2 Flutes effectively manage the large size and volume of chips produced during the aggressive machining process
- Excellent balance at high speeds and aggressive plunging capability
- Necked design with blended diameter transitions provide clearance to reach
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

www.kyocera-sgstool.com

METRIC
S-Carb®

Series 47M, 47MB, 47ML, 47MLB Metric		Hardness	Ae x DC Ap x DC	Vc (m/min)	DC • mm									
					3	6	10	12	16	20	25			
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Brhn or ≤ 7 HRc	Slot 	1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243	
			Profile 	≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
			HSM 	≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
	≤ 125 Brhn or ≤ 77 HRb	Slot 	1	≤ 1	185 (148-222)	RPM	19641	9820	5892	4910	3683	2946	2357	
			Profile 	≤ 0.5	≤ 1.5	230 (184-276)	RPM	24418	12209	7326	6105	4578	3663	2930
			HSM 	≤ 0.05	≤ 2	380 (304-456)	RPM	40343	20172	12103	10086	7564	6052	4841
N ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390	≤ 125 Brhn or ≤ 77 HRb	Slot 	1	≤ 1	265 (212-318)	RPM	28134	14067	8440	7034	5275	4220	3376	
			Profile 	≤ 0.5	≤ 1.5	330 (264-396)	RPM	35035	17518	10511	8759	6569	5255	4204
			HSM 	≤ 0.05	≤ 2	545 (436-654)	RPM	57861	28930	17358	14465	10849	8679	6943
	≤ 140 Brhn or ≤ 3 HRc	Slot 	1	≤ 1	105 (84-126)	RPM	11148	5574	3344	2787	2090	1672	1338	
			Profile 	≤ 0.5	≤ 1.5	130 (104-156)	RPM	13802	6901	4141	3450	2588	2070	1656
			HSM 	≤ 0.05	≤ 2	215 (172-258)	RPM	22826	11413	6848	5706	4280	3424	2739
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 200 Brhn or ≤ 23 HRc	Slot 	1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243	
			Profile 	≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
			HSM 	≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
	Beryllium Copper C110, Manganese Bronze, Tin Bronze	Slot 	1	≤ 1	490 (392-588)	RPM	0.036	0.096	0.200	0.240	0.282	0.320	0.350	
			Profile 	≤ 0.5	≤ 1.5	610 (488-732)	RPM	0.036	0.096	0.200	0.240	0.282	0.320	0.350
			HSM 	≤ 0.05	≤ 2	1005 (804-1206)	RPM	0.082	0.216	0.453	0.552	0.640	0.733	0.800

Brhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)

rpm = $(V_c \times 1000) / (DC \times 3.14)$


mm/min = $F_z \times 2 \times rpm$

reduce speed and feed for materials harder than listed

reduce cut depth and feed by 50% for long flute and long reach tools

reduce feed and Ae when finish milling ($.02 \times DC$ maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

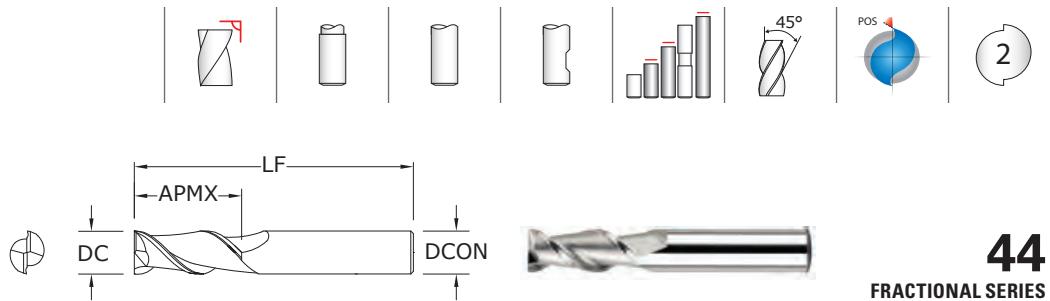
44

FRACTIONAL SERIES

TOLERANCES (inch)
1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

 DCON = h₆
1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

 DCON = h₆
3/4–1 DIAMETER

DC = +0.0000/-0.00051

 DCON = h₆
NON-FERROUS
PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	Ti-NAMITE-B (TiB ₂) W/FLAT	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/4	3/4	2-7/16	3/8	34501	34502	32033	32053
1/4	1-1/4	3-1/16	3/8	34503	34504	32034	32054
1/4	1-3/4	3-9/16	3/8	34505	34506	32035	32055
5/16	1-3/8	3-1/8	3/8	34507	34508	32036	32056
3/8	3/4	2-1/2	3/8	34509	34510	32037	32057
3/8	1-1/2	3-1/4	3/8	34511	34512	32038	32058
3/8	2-1/2	4-1/4	3/8	34513	34514	32039	32059
1/2	1-1/4	3-1/4	1/2	34515	34516	32040	32060
1/2	2	4	1/2	34517	34518	32041	32061
1/2	3	5	1/2	34519	34520	32042	32062
5/8	1-5/8	3-3/4	5/8	34521	34522	32043	32063
5/8	2-1/2	4-5/8	5/8	34523	34524	32044	32064
3/4	1-5/8	3-7/8	3/4	34525	34526	32045	32065
3/4	3	5-1/4	3/4	34527	34528	32046	32066
3/4	4	6-1/4	3/4	34529	34530	32047	32067
1	2	4-1/2	1	34531	34532	32048	32068
1	4	6-1/2	1	34533	34534	32049	32069

Contact your KSPT Sales Representative for more information on Corner Radius options.

44M

METRIC SERIES

TOLERANCES (mm)
≤3 DIAMETER

DC = +0.000/-0.006

 DCON = h₆
>3–6 DIAMETER

DC = +0.000/-0.008

 DCON = h₆
>6–10 DIAMETER

DC = +0.000/-0.009

 DCON = h₆
>10–18 DIAMETER

DC = +0.000/-0.011

 DCON = h₆
>18–20 DIAMETER

DC = +0.000/-0.013


 DCON = h₆
NON-FERROUS
PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED W/FLAT	UNCOATED	Ti-NAMITE-B (TiB ₂) W/FLAT	Ti-NAMITE-B (TiB ₂)
3,0	8,0	52,0	6,0	44505	49663	44506	49674
4,0	11,0	55,0	6,0	44509	49664	44510	49675
5,0	13,0	57,0	6,0	44513	49665	44514	49676
6,0	13,0	57,0	6,0	44517	49666	44518	49677
8,0	19,0	69,0	10,0	44521	49667	44522	49678
10,0	22,0	72,0	10,0	44525	49668	44526	49679
12,0	26,0	83,0	12,0	44529	49669	44530	49680
14,0	26,0	83,0	14,0	44533	49670	44534	49681
16,0	32,0	92,0	16,0	44537	49671	44538	49682
18,0	32,0	92,0	18,0	44541	49672	44542	49683
20,0	38,0	104,0	20,0	44545	49673	44546	49684

Contact your KSPT Sales Representative for more information on Corner Radius options.

FRACTIONAL Ski-Carb



Series 44 Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/8	1/4	3/8	1/2	5/8	3/4	1	
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot	1	≤ 1 1600 (1280-1920)	RPM	48896	24448	16299	12224	9779	8149	6112
		Profile	≤ 0.5	≤ 1.5 2000 (1600-2400)	RPM	61120	30560	20373	15280	12224	10187	7640
		HSM	≤ 0.05	≤ 2 3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606
	≤ 125 Bhn or ≤ 77 HRb	Slot	1	≤ 1 600 (480-720)	RPM	18336	9168	6112	4584	3667	3056	2292
		Profile	≤ 0.5	≤ 1.5 750 (600-900)	RPM	22920	11460	7640	5730	4584	3820	2865
		HSM	≤ 0.05	≤ 2 1240 (992-1488)	RPM	37894	18947	12631	9474	7579	6316	4737
		Slot	1	≤ 1 865 (692-1038)	RPM	26434	13217	8811	6609	5287	4406	3304
		Profile	≤ 0.5	≤ 1.5 1080 (864-1296)	RPM	33005	16502	11002	8251	6601	5501	4126
		HSM	≤ 0.05	≤ 2 1780 (1424-2136)	RPM	54397	27198	18132	13599	10879	9066	6800
N COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot	1	≤ 1 345 (276-414)	RPM	10543	5272	3514	2636	2109	1757	1318
		Profile	≤ 0.5	≤ 1.5 430 (344-516)	RPM	13141	6570	4380	3285	2628	2190	1643
		HSM	≤ 0.05	≤ 2 710 (568-852)	RPM	21698	10849	7233	5424	4340	3616	2712
	≤ 200 Bhn or ≤ 23 HRc	Slot	1	≤ 1 1600 (1280-1920)	RPM	48896	24448	16299	12224	9779	8149	6112
		Profile	≤ 0.5	≤ 1.5 2000 (1600-2400)	RPM	61120	30560	20373	15280	12224	10187	7640
		HSM	≤ 0.05	≤ 2 3300 (2640-3960)	RPM	100848	50424	33616	25212	20170	16808	12606
		Slot	1	≤ 1 1600 (1280-1920)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
		Profile	≤ 0.5	≤ 1.5 2000 (1600-2400)	Fz	0.0015	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140
		HSM	≤ 0.05	≤ 2 3300 (2640-3960)	Fz	0.0034	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)

rpm = $V_c \times 3.82 / DC$


ipm = $F_z \times 2 \times rpm$

reduce speed and feed for materials harder than listed

reduce cut depth and feed by 50% for long flute and long reach tools


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Series 44M Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm								
					3	6	10	12	16	20	25		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot 	1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
		Profile 	≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
		HSM 	≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804
	≤ 125 Bhn or ≤ 77 HRb	Slot 	1	≤ 1	185 (148-222)	RPM	19641	9820	5892	4910	3683	2946	2357
		Profile 	≤ 0.5	≤ 1.5	230 (184-276)	RPM	24418	12209	7326	6105	4578	3663	2930
		HSM 	≤ 0.05	≤ 2	380 (304-456)	RPM	40343	20172	12103	10086	7564	6052	4841
N COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 	1	≤ 1	265 (212-318)	RPM	28134	14067	8440	7034	5275	4220	3376
		Profile 	≤ 0.5	≤ 1.5	330 (264-396)	RPM	35035	17518	10511	8759	6569	5255	4204
		HSM 	≤ 0.05	≤ 2	545 (436-654)	RPM	57861	28930	17358	14465	10849	8679	6943
	≤ 200 Bhn or ≤ 23 HRc	Slot 	1	≤ 1	105 (84-126)	RPM	11148	5574	3344	2787	2090	1672	1338
		Profile 	≤ 0.5	≤ 1.5	130 (104-156)	RPM	13802	6901	4141	3450	2588	2070	1656
		HSM 	≤ 0.05	≤ 2	215 (172-258)	RPM	22826	11413	6848	5706	4280	3424	2739
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining) rpm = $(Vc \times 1000) / (DC \times 3.14)$ mm/min = $Fz \times 2 \times rpm$ reduce speed and feed for materials harder than listed reduce cut depth and feed by 50% for long flute and long reach tools reduce feed and Ae when finish milling (.02 x DC maximum) refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)	Slot 	1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	9754	7803	6243
		Profile 	≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	12143	9714	7771
		HSM 	≤ 0.05	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	20006	16005	12804


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)
rpm = $(Vc \times 1000) / (DC \times 3.14)$
mm/min = $Fz \times 2 \times rpm$
reduce speed and feed for materials harder than listed
reduce cut depth and feed by 50% for long flute and long reach tools
reduce feed and Ae when finish milling (.02 x DC maximum)
refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

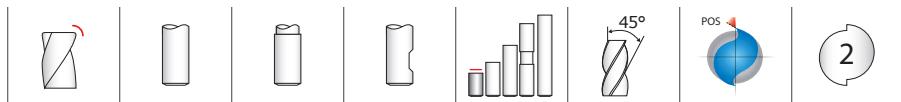

45

FRACTIONAL SERIES

- Polished ski land with primary and secondary flute wall design minimizes chip interference by directing chips away from secondary flute
- Circular land allows for increased control at various speed and feed rates ultimately reducing chatter
- Recommended for materials ≤ 150 Bhn (≤ 7 HRc)

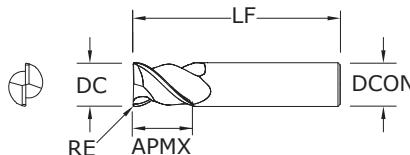

Contact your KSPT representative for reach options.

inch					EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED W/FLAT	UNCOATED	Ti-NAMITE-B (TiB ₂) W/FLAT	Ti-NAMITE-B (TiB ₂)
1/4	3/8	2-1/2	3/8	.010	91257	91250	91242	91235
5/16	7/16	2-1/2	3/8	.012	91258	91251	91243	91236
3/8	9/16	2-1/2	3/8	.015	91259	91252	91244	91237
1/2	3/4	3	1/2	.020	91260	91253	91245	91238
5/8	7/8	3-1/2	5/8	.025	91261	91254	91246	91239
3/4	1	4	3/4	.030	91262	91255	91247	91240
1	1-1/4	4	1	.040	91263	91256	91248	91241

TOLERANCES (inch)

1/4–3/8 DIAMETER

DC = +0.0000/-0.00035

DCON = h₆

RE = +0.0000/-0.0020

1/2–5/8 DIAMETER

DC = +0.0000/-0.00043

DCON = h₆

RE = +0.0000/-0.0020

3/4–1 DIAMETER

DC = +0.0000/-0.00051

DCON = h₆


RE = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

FRACTIONAL
Ski-Carb



Series 45 Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/4	3/8	1/2	5/8	3/4	1		
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7075	≤ 150 Bhn or ≤ 7 HRc	Slot 	1	≤ 1	1600 (1280-1920)	RPM	24448	16299	12224	9779	8149	6112
					Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
					Feed (ipm)	122	147	147	127	114	104	
	≤ 125 Bhn or ≤ 77 HRb	Profile 	≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	30560	20373	15280	12224	10187	7640
					Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
					Feed (ipm)	153	183	183	159	143	130	
	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B-390	HSM 	≤ 0.05	≤ 2	3300 (2640-3960)	RPM	50424	33616	25212	20170	16808	12606
					Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195	
					Feed (ipm)	555	706	706	605	555	492	
COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass	≤ 140 Bhn or ≤ 3 HRc	Slot 	1	≤ 1	600 (480-720)	RPM	9168	6112	4584	3667	3056	2292
					Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
					Feed (ipm)	46	55	55	48	43	39	
	≤ 125 Bhn or ≤ 77 HRb	Profile 	≤ 0.5	≤ 1.5	750 (600-900)	RPM	11460	7640	5730	4584	3820	2865
					Fz	0.0025	0.0045	0.0060	0.0065	0.0070	0.0085	
					Feed (ipm)	57	69	69	60	53	49	
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	HSM 	≤ 0.05	≤ 2	1240 (992-1488)	RPM	18947	12631	9474	7579	6316	4737
					Fz	0.0055	0.0105	0.0140	0.0150	0.0165	0.0195	
					Feed (ipm)	208	265	265	227	208	185	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 140 Bhn or ≤ 3 HRc	Slot 	1	≤ 1	865 (692-1038)	RPM	13217	8811	6609	5287	4406	3304
					Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
					Feed (ipm)	53	70	66	58	53	46	
	≤ 200 Bhn or ≤ 23 HRc	Profile 	≤ 0.5	≤ 1.5	1080 (864-1296)	RPM	16502	11002	8251	6601	5501	4126
					Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
					Feed (ipm)	66	88	83	73	66	58	
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	HSM 	≤ 0.05	≤ 2	1780 (1424-2136)	RPM	27198	18132	13599	10879	9066	6800
					Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160	
					Feed (ipm)	245	308	313	272	254	218	
N	≤ 200 Bhn or ≤ 23 HRc	Slot 	1	≤ 1	345 (276-414)	RPM	5272	3514	2636	2109	1757	1318
					Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
					Feed (ipm)	21	28	26	23	21	18	
	≤ 140 Bhn or ≤ 3 HRc	Profile 	≤ 0.5	≤ 1.5	430 (344-516)	RPM	6570	4380	3285	2628	2190	1643
					Fz	0.0020	0.0040	0.0050	0.0055	0.0060	0.0070	
					Feed (ipm)	26	35	33	29	26	23	
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	HSM 	≤ 0.05	≤ 2	710 (568-852)	RPM	10849	7233	5424	4340	3616	2712
					Fz	0.0045	0.0085	0.0115	0.0125	0.0140	0.0160	
					Feed (ipm)	98	123	125	108	101	87	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 140 Bhn or ≤ 3 HRc	Slot 	1	≤ 1	1600 (1280-1920)	RPM	24448	16299	12224	9779	8149	6112
					Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
					Feed (ipm)	196	244	244	215	196	171	
	≤ 200 Bhn or ≤ 23 HRc	Profile 	≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	30560	20373	15280	12224	10187	7640
					Fz	0.0040	0.0075	0.0100	0.0110	0.0120	0.0140	
					Feed (ipm)	244	306	306	269	244	214	
	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze	HSM 	≤ 0.05	≤ 2	3300 (2640-3960)	RPM	50424	33616	25212	20170	16808	12606
					Fz	0.0090	0.0170	0.0230	0.0250	0.0275	0.0320	
					Feed (ipm)	908	1143	1160	1008	924	807	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B) HSM (High Speed Machining)

rpm = Vc x 3.82 / DC

ipm = Fz x 2 x rpm

reduce speed and feed for materials harder than listed

reduce cut depth and feed by 50% for long flute and long reach tools

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



VALUE AT THE SPINDLE®

General Purpose End Mills



 **Milling**

SERIES	GENERAL PURPOSE END MILLS DESCRIPTION	PAGE
3	2 Flute Square End Standard Length Fractional	176
3L	2 Flute Square End Long Reach Fractional	176
3EL	2 Flute Square End Extended Length Fractional	176
3CR	2 Flute Corner Radius Standard Length Fractional	176
3M	2 Flute Square End Standard Length Metric	179
3XLM	2 Flute Square End Extra Long Reach Metric	179
3B	2 Flute Ball End Standard Length Fractional	180
3LB	2 Flute Ball End Long Reach Fractional	180
3ELB	2 Flute Ball End Extended Length Fractional	180
3MB	2 Flute Ball End Standard Length Metric	182
3XLMB	2 Flute Ball End Extra Long Reach Metric	182
15	2 Flute Double End Square Stub Fractional	183
15M	2 Flute Double End Square Stub Metric	183
15B	2 Flute Double End Ball Stub Fractional	184
15MB	2 Flute Double End Ball Stub Metric	184
17	2 Flute Square End Stub Fractional	185
17M	2 Flute Square End Stub Metric	185
52	2 Flute High Shear Square End Standard Length Fractional	186
52M	2 Flute High Shear Square End Standard Length Metric	186
59	2 Flute Square End Long Reach Fractional	187
59M	2 Flute Square End Long Reach Metric	187
59B	2 Flute Ball End Long Reach Fractional	188
59MB	2 Flute Ball End Long Reach Metric	188
5	3 Flute Square End Standard Length Fractional	189
5M	3 Flute Square End Standard Length Metric	190
5XLM	3 Flute Square End Extra Long Reach Metric	190
5B	3 Flute Ball End Standard Length Fractional	191
5MB	3 Flute Ball End Standard Length Metric	192
5XLMB	3 Flute Ball End Extra Long Reach Metric	192
23	3 Flute Tapered Square End Standard Length Fractional	193
24	3 Flute Tapered Corner Radius Standard Length Fractional	194
1	4 Flute Square End Standard Length Fractional	195
1L	4 Flute Square End Long Reach Fractional	195
1EL	4 Flute Square End Extended Length Fractional	195
1CR	4 Flute Corner Radius Standard Length Fractional	195
1M	4 Flute Square End Standard Length Metric	199
1XLM	4 Flute Square End Extra Long Reach Metric	199
1MCR	4 Flute Corner Radius Standard Length Metric	199

Speed & Feed Recommendations listed at the end of this section

SERIES	GENERAL PURPOSE END MILLS DESCRIPTION	PAGE
1B	4 Flute Ball End Standard Length Fractional	201
1LB	4 Flute Ball End Long Reach Fractional	201
1ELB	4 Flute Ball End Extended Length Fractional	201
1MB	4 Flute Ball End Standard Length Metric	202
1XLMB	4 Flute Ball End Extra Long Reach Metric	202
14	4 Flute Double End Square Stub Fractional	203
14M	4 Flute Double End Square Stub Metric	203
14B	4 Flute Double End Ball Stub Fractional	204
14MB	4 Flute Double End Ball Stub Metric	204
16	4 Flute Square End Stub Fractional	205
16M	4 Flute Square End Stub Metric	205
54	4 Flute High Shear Square End Standard Length Fractional	206
54M	4 Flute High Shear Square End Standard Length Metric	206
61	Multi-Flute Coarse Pitch Rougher Fractional	207
61M	Multi-Flute Coarse Pitch Rougher Metric	207
62	Multi-Flute Fine Pitch Rougher Fractional	208
62M	Multi-Flute Fine Pitch Rougher Metric	209
End Mill Sets	2, 3, & 4 Flute Square End Series 1, 3, 5, 14, 15 2, 3, & 4 Flute Ball End Series 1B, 3B, 5B, 14B ,15B	210 211

Speed & Feed Recommendations listed at the end of this section

Fresado

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA
3	2 filos, punta cuadrada, longitud estándar, fraccional	176
3L	2 filos, punta cuadrada, largo alcance, fraccional	176
3EL	2 filos, punta cuadrada, longitud extendida, fraccional	176
3CR	2 filos, radio angulado, longitud estándar, fraccional	176
3M	2 filos, punta cuadrada, longitud estándar, métrico	179
3XLM	2 filos, punta cuadrada, alcance extralargo, métrico	179
3B	2 filos, punta esférica, longitud estándar, fraccional	180
3LB	2 filos, punta esférica, largo alcance, fraccional	180
3ELB	2 filos, punta esférica, longitud extendida, fraccional	180
3MB	2 filos, punta esférica, longitud estándar, métrico	182
3XLMB	2 filos, punta esférica, alcance extralargo, métrico	182
15	2 filos, pieza doble de punta cuadrada, fraccional	183
15M	2 filos, pieza doble de punta cuadrada, métrico	183
15B	2 filos, pieza doble de punta esférica, fraccional	184
15MB	2 filos, pieza doble de punta esférica, métrico	184
17	2 filos, pieza de punta cuadrada, fraccional	185

SERIE	DESCRIPCIÓN DE FRESAS DE USO GENERAL	PÁGINA
17M	2 filos, pieza de punta cuadrada, métrico	185
52	2 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	186
52M	2 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	186
59	2 filos, punta cuadrada, largo alcance, fraccional	187
59M	2 filos, punta cuadrada, largo alcance, métrico	187
59B	2 filos, punta esférica, largo alcance, fraccional	188
59MB	2 filos, punta esférica, largo alcance, métrico	188
5	3 filos, punta cuadrada, longitud estándar, fraccional	189
5M	3 filos, punta cuadrada, longitud estándar, métrico	190
5XLM	3 filos, punta cuadrada, alcance extralargo, métrico	190
5B	3 filos, punta esférica, longitud estándar, fraccional	191
5MB	3 filos, punta esférica, longitud estándar, métrico	192
5XLMB	3 filos, punta esférica, alcance extralargo, métrico	192
23	3 filos, cónico, punta cuadrada, longitud estándar, fraccional	193
24	3 filos, cónico, radio angulado, longitud estándar, fraccional	194
1	4 filos, punta cuadrada, longitud estándar, fraccional	195
1L	4 filos, punta cuadrada, largo alcance, fraccional	195
1EL	4 filos, punta cuadrada, longitud extendida, fraccional	195
1CR	4 filos, radio angulado, longitud estándar, fraccional	195
1M	4 filos, punta cuadrada, longitud estándar, métrico	199
1XLM	4 filos, punta cuadrada, alcance extralargo, métrico	199
1MCR	4 filos, radio angulado, longitud estándar, métrico	199
1B	4 filos, punta esférica, longitud estándar, fraccional	201
1LB	4 filos, punta esférica, largo alcance, fraccional	201
1ELB	4 filos, punta esférica, longitud extendida, fraccional	201
1MB	4 filos, punta esférica, longitud estándar, métrico	202
1XLMB	4 filos, punta esférica, alcance extralargo, métrico	202
14	4 filos, pieza doble de punta cuadrada, fraccional	203
14M	4 filos, pieza doble de punta cuadrada, métrico	203
14B	4 filos, pieza doble de punta esférica, fraccional	204
14MB	4 filos, pieza doble de punta esférica, métrico	204
16	4 filos, pieza de punta cuadrada, fraccional	205
16M	4 filos, pieza de punta cuadrada, métrico	205
54	4 filos, alto rendimiento, punta cuadrada, longitud estándar, fraccional	206
54M	4 filos, alto rendimiento, punta cuadrada, longitud estándar, métrico	206
61	Filo múltiple, paso grueso, desbastador, fraccional	207
61M	Filo múltiple, paso grueso, desbastador, métrico	207
62	Filo múltiple, paso fino, desbastador, fraccional	208
62M	Filo múltiple, paso fino, desbastador, métrico	209
Juegos de fresas	2, 3 y 4 filos, punta cuadrada, series 1, 3, 5, 14, 15 2, 3 y 4 filos, punta esférica, series 1B, 3B, 5B, 14B ,15B	210 211

Recomendaciones de Velocidad y Avance mostrados al final de esta sección.

Fraisage

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE
3	2 dents non rayonné longueur standard (fractionnel)	176
3L	2 dents non rayonné longue portée (fractionnel)	176
3EL	2 dents non rayonné extra-long (fractionnel)	176
3CR	2 dents rayonné longueur standard (fractionnel)	176
3M	2 dents non rayonné longueur standard (métrique)	179
3XLM	2 dents non rayonné portée extra-longue (métrique)	179
3B	2 dents à bout hémisphérique longueur standard (fractionnel)	180
3LB	2 dents à bout hémisphérique longue portée (fractionnel)	180
3ELB	2 dents à bout hémisphérique extra-long (fractionnel)	180
3MB	2 dents à bout hémisphérique longueur standard (métrique)	182
3XLMB	2 dents à bout hémisphérique portée extra-longue (métrique)	182
15	2 dents à double bouts plats court (fractionnel)	183
15M	2 dents à double bouts plats court (métrique)	183
15B	2 dents à double bouts hémisphériques court (fractionnel)	184
15MB	2 dents à double bouts hémisphériques court (métrique)	184
17	2 dents non rayonné court (fractionnel)	185
17M	2 dents non rayonné court (métrique)	185
52	2 dents cisaillement élevé non rayonné longueur standard (fractionnel)	186
52M	2 dents cisaillement élevé non rayonné longueur standard (métrique)	186
59	2 dents non rayonné longue portée (fractionnel)	187
59M	2 dents non rayonné longue portée (métrique)	187
59B	2 dents à bout hémisphérique longue portée (fractionnel)	188
59MB	2 dents à bout hémisphérique longue portée (métrique)	188
5	3 dents non rayonné longueur standard (fractionnel)	189
5M	3 dents non rayonné longueur standard (métrique)	190
5XLM	3 dents non rayonné portée extra-longue (métrique)	190
5B	3 dents à bout hémisphérique longueur standard (fractionnel)	191
5MB	3 dents à bout hémisphérique longueur standard (métrique)	192
5XLMB	3 dents à bout hémisphérique portée extra-longue (métrique)	192
23	3 dents conique non rayonné longueur standard (fractionnel)	193
24	3 dents conique rayonné longueur standard (fractionnel)	194
1	4 dents non rayonné longueur standard (fractionnel)	195
1L	4 dents non rayonné longue portée (fractionnel)	195
1EL	4 dents non rayonné extra-long (fractionnel)	195
1CR	4 dents rayonné longueur standard (fractionnel)	195
1M	4 dents non rayonné longueur standard (métrique)	199
1XLM	4 dents non rayonné portée extra-longue (métrique)	199
1MCR	4 dents rayonné longueur standard (métrique)	199
1B	4 dents à bout hémisphérique longueur standard (fractionnel)	201
1LB	4 dents à bout hémisphérique longue portée (fractionnel)	201

SÉRIES	DESCRIPTION DE FRAISES À USAGE GÉNÉRAL	PAGE
1ELB	4 dents à bout hémisphérique extra-long (fractionnel)	201
1MB	4 dents à bout hémisphérique longueur standard (métrique)	202
1XLMB	4 dents à bout hémisphérique portée extra-longue (métrique)	202
14	4 dents à double bouts plats court (fractionnel)	203
14M	4 dents à double bouts plats court (métrique)	203
14B	4 dents à double bouts hémisphériques court (fractionnel)	204
14MB	4 dents à double bouts hémisphériques court (métrique)	204
16	4 dents non rayonné court (fractionnel)	205
16M	4 dents non rayonné court (métrique)	205
54	4 dents cisaillement élevé non rayonné longueur standard (fractionnel)	206
54M	4 dents cisaillement élevé non rayonné longueur standard (métrique)	206
61	Multi-dents à pas gros d'ébauche (fractionnel)	207
61M	Multi-dents à pas gros d'ébauche (métrique)	207
62	Multi-dents à pas fin d'ébauche (fractionnel)	208
62M	Multi-dents à pas fin d'ébauche (métrique)	209
Jeux de fraises	2, 3, & 4 Série goujure non rayonné 1,3,5,14,15 2, 3, & 4 Série goujure à bout hémisphérique 15B, 15MB, 15B, 15MB ,15B, 15MB	210 211

Les avances et les vitesses recommandées se trouvent à la fin du chapitre.



Fräsen


SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE
3	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	176
3L	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	176
3EL	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, extra lang	176
3CR	Zölliger Schaftfräser mit 2 Schneiden mit Eckenradien, Standardlänge	176
3M	Schaftfräser mit 2 Schneiden ohne Eckenradien, Standardlänge	179
3XLM	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	179
3B	Zölliger Radiusschaftfräser mit 2 Schneiden, Standardlänge	180
3LB	Zölliger Langloch-Radiusschaftfräser mit 2 Schneiden	180
3ELB	Zölliger Schaftfräser mit 2 Schneiden, Extra lang	180
3MB	Schaftfräser mit 2 Schneiden, Standardlänge	182
3XLMB	Superlangloch-Schaftfräser mit 2 Schneiden	182
15	Zölliger Schaftfräser mit 2 Schneiden, kurze Ausführung	183
15M	Schaftfräser mit 2 Schneiden, kurze Ausführung	183
15B	Zölliger Doppelend-Radiusschaftfräser mit 2 Schneiden, kurze Ausführung	184
15MB	Doppelend-Radiusschaftfräser mit 2 Schneiden, kurze Ausführung	184
17	Zölliger Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	185
17M	Schaftfräser mit 2 Schneiden ohne Eckenradien, kurze Ausführung	185
52	Zölliger Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	186
52M	Schaftfräser hoher Scherfestigkeit mit 2 Schneiden ohne Eckenradien, Standardlänge	186
59	Zölliger Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	187
59M	Langloch-Schaftfräser mit 2 Schneiden ohne Eckenradien	187
59B	Zölliger Langloch-Radiusschaftfräser mit 2 Schneiden	188
59MB	Langloch-Radiusschaftfräser mit 2 Schneiden	188
5	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	189
5M	Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	190
5XLM	Langloch-Schaftfräser mit 3 Schneiden ohne Eckenradien	190
5B	Zölliger Schaftfräser mit 3 Schneiden, Standardlänge	191
5MB	Schaftfräser mit 3 Schneiden, Standardlänge	192
5XLMB	Langloch-Schaftfräser mit 3 Schneiden	192
23	Zölliger Schaftfräser mit 3 Schneiden ohne Eckenradien, Standardlänge	193
24	Zölliger Schaftfräser mit 3 Schneiden mit Eckenradien, Standardlänge	194
1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	195
1L	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	195
1EL	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, extra lang	195
1CR	Zölliger Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	195
1M	Schaftfräser mit 4 Schneiden ohne Eckenradien, Standardlänge	199
1XLM	Superlangloch-Schaftfräser mit 4 Schneiden ohne Eckenradien	199
1MCR	Schaftfräser mit 4 Schneiden mit Eckenradien, Standardlänge	199
1B	Zölliger Schaftfräser mit 4 Schneiden, Standardlänge	201
1LB	Zölliger Langloch-Radiusschaftfräser mit 4 Schneiden	201

SERIE	BESCHREIBUNG DER STANDARD-SCHAFTFRÄSER	SEITE
1ELB	Zölliger Schaftfräser mit 4 Schneiden, Extra lang	201
1MB	Schaftfräser mit 4 Schneiden, Standardlänge	202
1XLMB	Langloch-Radiusschaftfräser mit 4 Schneiden	202
14	Zölliger Schafträser mit 4 Schneiden, kurze Ausführung	203
14M	Schaftfräser mit 4 Schneiden, kurze Ausführung	203
14B	Zölliger Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	204
14MB	Doppelend-Radiusschaftfräser mit 4 Schneiden, kurze Ausführung	204
16	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	205
16M	Schaftfräser mit 4 Schneiden ohne Eckenradien, kurze Ausführung	205
54	Zölliger Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	206
54M	Schaftfräser hoher Scherfestigkeit mit 4 Schneiden ohne Eckenradien, Standardlänge	206
61	Zölliger mehrschneidiger fein verzahnter Schrappfräser	207
61M	Mehrschneidiger fein verzahnter Schrappfräser	207
62	Zölliger mehrschneidiger fein verzahnter Schrappfräser	208
62M	Mehrschneidiger fein verzahnter Schrappfräser	209
Richtwerte zum Fräsen	Schaftfräser mit 2, 3 und 4 Schneiden ohne Eckenradien, Serien 1, 3, 5, 14, 15 Radiusschaftfräser mit 2, 3 und 4 Schneiden, Serien 1B, 3B, 5B, 14B ,15B	210 211


Schnittwertempfehlungen finden Sie am Ende dieses Abschnitts

FRACTIONAL

2 Flute Square End • 2 Flute Corner Radius

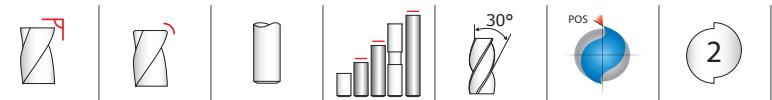

**3•3L•
3EL•3CR**
FRACTIONAL SERIES

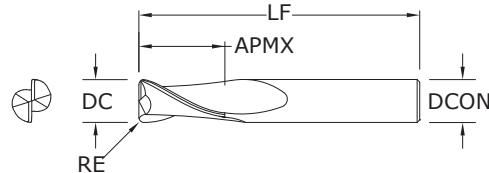

TOLERANCES (inch)

DC	= -0.001/-0.002
DCON	= h ₆
RE	= +0.0000/-0.0020


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			EDP NO.					SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Di-NAMITE® (Diamond)	
1/64	1/32	1-1/2	1/8	—	30301	39301	39501	30397	—	3
1/32	5/64	1-1/2	1/8	—	30303	39303	39503	30398	—	3
3/64	7/64	1-1/2	1/8	—	30305	39305	39505	30399	—	3
1/16	3/16	1-1/2	1/8	—	30307	39307	39507	30400	91266	3
5/64	3/16	1-1/2	1/8	—	30309	39309	39509	30435	—	3
3/32	9/32	1-1/2	1/8	—	30311	39311	39511	30436	—	3
7/64	3/8	1-1/2	1/8	—	30313	39313	39513	30437	—	3
1/8	3/8	1-1/2	1/8	—	30377	39377	39577	30469	—	3
*1/8	1/2	1-1/2	1/8	—	30315	39315	39515	30438	91270	3
**1/8	1/2	1-1/2	1/8	.015	38201	38202	38315	38357	—	3CR
**1/8	1/2	1-1/2	1/8	.020	38203	38204	38316	38358	—	3CR
1/8	3/4	2-1/4	1/8	—	33341	31800	31810	31850	—	3L
1/8	1	3	1/8	—	33343	31938	31948	31958	—	3EL
9/64	1/2	2	3/16	—	30317	39317	39517	30439	—	3
5/32	1/2	2	3/16	—	30319	39319	39519	30440	—	3
11/64	5/8	2	3/16	—	30321	39321	39521	30441	—	3
*3/16	5/8	2	3/16	—	30323	39323	39523	30442	91274	3
**3/16	5/8	2	3/16	.015	38209	38210	38317	38359	—	3CR
**3/16	5/8	2	3/16	.020	38211	38212	38318	38360	—	3CR
**3/16	5/8	2	3/16	.030	38213	38214	38319	38361	—	3CR
3/16	3/4	2-1/2	3/16	—	33301	31820	31825	31851	—	3L
3/16	1-1/8	3	3/16	—	33321	31939	31949	31959	—	3EL
13/64	5/8	2-1/2	1/4	—	30325	39325	39525	30443	—	3
7/32	5/8	2-1/2	1/4	—	30327	39327	39527	30444	—	3
15/64	3/4	2-1/2	1/4	—	30329	39329	39529	30445	—	3
*1/4	3/4	2-1/2	1/4	—	30331	39331	39531	30446	91278	3
**1/4	3/4	2-1/2	1/4	.015	38219	38220	38320	38362	—	3CR
**1/4	3/4	2-1/2	1/4	.020	38221	38222	38321	38363	—	3CR
**1/4	3/4	2-1/2	1/4	.030	38223	38224	38322	38364	—	3CR
**1/4	3/4	2-1/2	1/4	.045	38225	38226	38323	38365	—	3CR
1/4	1-1/8	3	1/4	—	33303	31802	31812	31852	—	3L
1/4	1-1/2	4	1/4	—	33323	31940	31950	31960	—	3EL
17/64	3/4	2-1/2	5/16	—	30333	39333	39533	30447	—	3
9/32	3/4	2-1/2	5/16	—	30335	39335	39535	30448	—	3


continued on next page

2 Flute Square End • 2 Flute Corner Radius

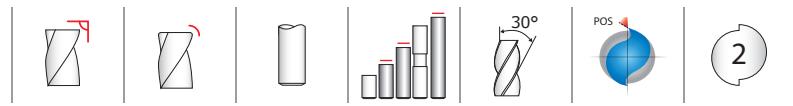

TOLERANCES (inch)

DC = -0.001/-0.002
DCON = h₆
RE = +0.0000/-0.0020

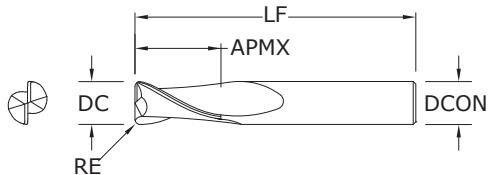

**3•3L•
3EL•3CR**
FRACTIONAL SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Di-NAMITE® (Diamond)	SERIES	CONTINUED
19/64	13/16	2-1/2	5/16	—	30337	39337	39537	30449	—	3	STEELS
*5/16	13/16	2-1/2	5/16	—	30339	39339	39539	30450	91282	3	STAINLESS STEELS
**5/16	13/16	2-1/2	5/16	.015	38231	38232	38324	38366	—	3CR	CAST IRON
**5/16	13/16	2-1/2	5/16	.020	38233	38234	38325	38367	—	3CR	HIGH TEMP ALLOYS
**5/16	13/16	2-1/2	5/16	.030	38235	38236	38326	38368	—	3CR	TITANIUM
**5/16	13/16	2-1/2	5/16	.045	38237	38238	38327	38369	—	3CR	HARDENED STEELS
5/16	1-1/8	3	5/16	—	33305	31821	31826	31853	—	3L	NON-FERROUS
5/16	1-5/8	4	5/16	—	33325	31941	31951	31961	—	3EL	PLASTICS/COMPOSITES
21/64	1	2-1/2	3/8	—	30341	39341	39541	30451	—	3	
11/32	1	2-1/2	3/8	—	30343	39343	39543	30452	—	3	
23/64	1	2-1/2	3/8	—	30345	39345	39545	30453	—	3	
*3/8	1	2-1/2	3/8	—	30347	39347	39547	30454	91286	3	
3/8	1	2-1/2	3/8	.015	38245	38246	38328	38370	—	3CR	
3/8	1	2-1/2	3/8	.020	38247	38248	38329	38371	—	3CR	
3/8	1	2-1/2	3/8	.030	38249	38250	38330	38372	—	3CR	
3/8	1	2-1/2	3/8	.045	38251	38252	38331	38373	—	3CR	
3/8	1-1/8	3	3/8	—	33307	31804	31814	31854	—	3L	
3/8	1-3/4	4	3/8	—	33327	31942	31952	31962	—	3EL	
25/64	1	2-3/4	7/16	—	30349	39349	39549	30455	—	3	
13/32	1	2-3/4	7/16	—	30351	39351	39551	30456	—	3	
27/64	1	2-3/4	7/16	—	30353	39353	39553	30457	—	3	
7/16	1	2-3/4	7/16	—	30355	39355	39555	30458	—	3	
7/16	2	4-1/2	7/16	—	33309	31822	31827	31855	—	3L	
7/16	3	6	7/16	—	33329	31943	31953	31963	—	3EL	
29/64	1	3	1/2	—	30357	39357	39557	30459	—	3	
15/32	1	3	1/2	—	30359	39359	39559	30460	—	3	
31/64	1	3	1/2	—	30361	39361	39561	30461	—	3	
*1/2	1	3	1/2	—	30363	39363	39563	30462	91290	3	
1/2	1	3	1/2	.015	38259	38260	38332	38374	—	3CR	
1/2	1	3	1/2	.020	38261	38262	38333	38375	—	3CR	
1/2	1	3	1/2	.030	38263	38264	38334	38376	—	3CR	
1/2	1	3	1/2	.045	38265	38266	38335	38377	—	3CR	
1/2	1	3	1/2	.060	38267	38268	38336	38378	—	3CR	
1/2	2	4-1/2	1/2	—	33311	31806	31816	31856	—	3L	

continued on next page


For patent information visit www.ksptpatents.com

FRACTIONAL

2 Flute Square End • 2 Flute Corner Radius

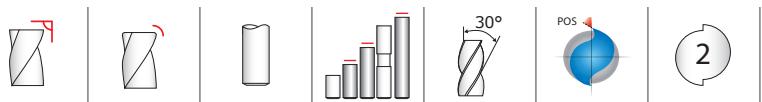

**3•3L•
3EL•3CR**
FRACTIONAL SERIES

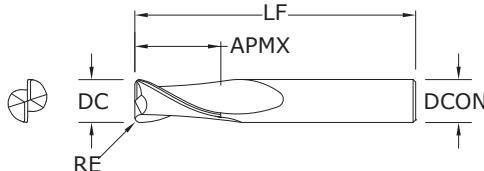

TOLERANCES (inch)			
DC	= -0.001/-0.002		
DCON	= h ₆		
RE	= +0.0000/-0.0020		

CONTINUED

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES


For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch			UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Di-NAMITE® (Diamond)	SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE						
1/2	3	6	1/2	—	33331	31944	31954	31964	—	3EL
9/16	1-1/8	3-1/2	9/16	—	30365	39365	39565	30463	—	3
5/8	1-1/4	3-1/2	5/8	—	30367	39367	39567	30464	—	3
5/8	1-1/4	3-1/2	5/8	.015	38273	38274	38337	38379	—	3CR
5/8	1-1/4	3-1/2	5/8	.020	38275	38276	38338	38380	—	3CR
5/8	1-1/4	3-1/2	5/8	.030	38277	38278	38339	38381	—	3CR
5/8	1-1/4	3-1/2	5/8	.045	38279	38280	38340	38382	—	3CR
5/8	1-1/4	3-1/2	5/8	.060	38281	38282	38341	38383	—	3CR
5/8	1-1/4	3-1/2	5/8	.090	38283	38284	38342	38384	—	3CR
5/8	2-1/4	5	5/8	—	33313	31823	31817	31857	—	3L
5/8	3	6	5/8	—	33333	31945	31955	31965	—	3EL
11/16	1-3/8	4	3/4	—	30369	39369	39569	30465	—	3
3/4	1-1/2	4	3/4	—	30371	39371	39571	30466	—	3
3/4	1-1/2	4	3/4	.015	38287	38288	38343	38385	—	3CR
3/4	1-1/2	4	3/4	.020	38289	38290	38344	38386	—	3CR
3/4	1-1/2	4	3/4	.030	38291	38292	38345	38387	—	3CR
3/4	1-1/2	4	3/4	.045	38293	38294	38346	38388	—	3CR
3/4	1-1/2	4	3/4	.060	38295	38296	38347	38389	—	3CR
3/4	1-1/2	4	3/4	.090	38297	38298	38348	38390	—	3CR
3/4	1-1/2	4	3/4	.125	38299	38300	38349	38391	—	3L
3/4	3	6	3/4	—	33335	31946	31956	31966	—	3EL
7/8	1-1/2	4	7/8	—	30373	39373	39573	30467	—	3
1	1-1/2	4	1	—	30375	39375	39575	30468	—	3
1	1-1/2	4	1	.015	38301	38302	38350	38392	—	3CR
1	1-1/2	4	1	.020	38303	38304	38351	38393	—	3CR
1	1-1/2	4	1	.030	38305	38306	38352	38394	—	3CR
1	1-1/2	4	1	.045	38307	38308	38353	38395	—	3CR
1	1-1/2	4	1	.060	38309	38310	38354	38396	—	3CR
1	1-1/2	4	1	.090	38311	38312	38355	38397	—	3CR
1	1-1/2	4	1	.125	38313	38314	38356	38398	—	
1	2-1/4	5	1	—	33317	31824	31819	31859	—	3L
1	3	6	1	—	33337	31947	31957	31967	—	3EL


*Series 3 Set

**Without Flat

2 Flute Square End

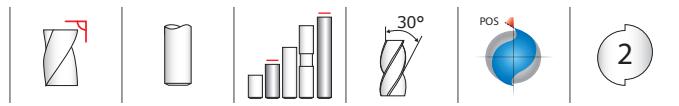


TOLERANCES (mm)
DC = +0,000/-0,050
DCON = h6

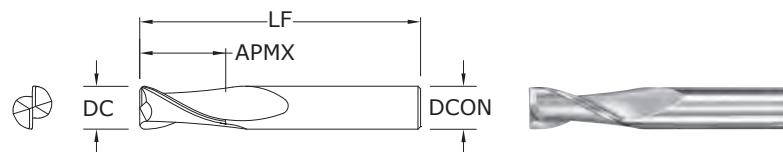

**3M •
3XLM**
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.			SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	
1,0	4,0	38,0	3,0	40305	48628	48650	48671 3M
1,5	4,5	38,0	3,0	40309	48629	48651	48672 3M
2,0	6,3	38,0	3,0	40313	48630	48652	48673 3M
2,5	9,5	38,0	3,0	40317	48631	48653	48674 3M
3,0	12,0	38,0	3,0	40321	48632	48654	48675 3M
3,0	25,0	75,0	3,0	43301	49427	49440	49453 3XLM
3,5	12,0	50,0	4,0	40325	48633	48655	48676 3M
4,0	14,0	50,0	4,0	40329	48634	48656	48677 3M
4,0	25,0	75,0	4,0	43303	49428	49441	49454 3XLM
4,5	16,0	50,0	6,0	40333	48635	48657	48678 3M
5,0	16,0	50,0	6,0	40337	48636	48658	48679 3M
5,0	25,0	75,0	5,0	43307	49430	49443	49456 3XLM
6,0	19,0	50,0	6,0	40341	48637	48659	48680 3M
6,0	25,0	75,0	6,0	43305	49429	49442	49455 3XLM
7,0	19,0	63,0	8,0	40345	48638	48660	48681 3M
8,0	20,0	63,0	8,0	40349	48639	48661	48682 3M
8,0	25,0	75,0	8,0	43315	49431	49444	49457 3XLM
9,0	22,0	75,0	10,0	40353	48640	48662	48683 3M
10,0	22,0	75,0	10,0	40357	48641	48663	48684 3M
10,0	38,0	100,0	10,0	43325	49432	49445	49458 3XLM
11,0	25,0	75,0	12,0	40361	48642	48664	48685 3M
12,0	25,0	75,0	12,0	40365	48643	48665	48686 3M
12,0	50,0	100,0	12,0	43335	49433	49446	49459 3XLM
12,0	75,0	150,0	12,0	43345	49434	49447	49460 3XLM
14,0	32,0	89,0	14,0	40369	48644	48666	48687 3M
14,0	75,0	150,0	14,0	43355	49435	49448	49461 3XLM
16,0	32,0	89,0	16,0	40373	48645	48667	48688 3M
16,0	75,0	150,0	16,0	43365	49436	49449	49462 3XLM
18,0	38,0	100,0	18,0	40377	48646	48668	48689 3M
18,0	75,0	150,0	18,0	43375	49437	49450	49463 3XLM
20,0	38,0	100,0	20,0	40381	48647	48669	48690 3M
20,0	75,0	150,0	20,0	43385	49438	49451	49464 3XLM
25,0	38,0	100,0	25,0	40385	48648	48670	48691 3M
25,0	75,0	150,0	25,0	43395	49439	49452	49465 3XLM

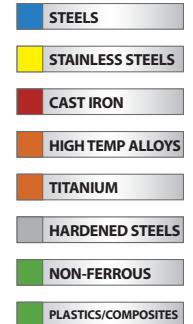

For patent information visit www.ksptpatents.com


FRACTIONAL

2 Flute Ball End



**3B•3LB•
3ELB**

FRACTIONAL SERIES

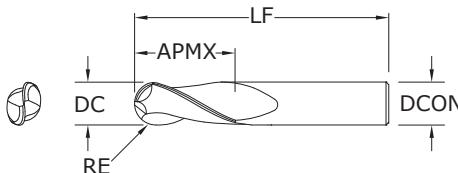

TOLERANCES (inch)

DC = -0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0010


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

	inch				EDP NO.				SERIES
	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
	1/64	1/32	1-1/2	1/8	30302	39302	39502	30471	3B
	1/32	5/64	1-1/2	1/8	30304	39304	39504	30472	3B
	3/64	7/64	1-1/2	1/8	30306	39306	39506	30473	3B
	1/16	3/16	1-1/2	1/8	30308	39308	39508	30474	3B
	5/64	3/16	1-1/2	1/8	30310	39310	39510	30475	3B
	3/32	9/32	1-1/2	1/8	30312	39312	39512	30476	3B
	7/64	3/8	1-1/2	1/8	30314	39314	39514	30477	3B
	1/8	3/8	1-1/2	1/8	30378	39378	39578	30599	3B
	*1/8	1/2	1-1/2	1/8	30316	39316	39516	30478	3B
	1/8	3/4	2-1/4	1/8	33342	31830	31840	31890	3LB
	1/8	1	3	1/8	33344	31968	31978	31988	3ELB
	9/64	1/2	2	3/16	30318	39318	39518	30479	3B
	5/32	1/2	2	3/16	30320	39320	39520	30480	3B
	11/64	5/8	2	3/16	30322	39322	39522	30481	3B
	*3/16	5/8	2	3/16	30324	39324	39524	30482	3B
	3/16	3/4	2-1/2	3/16	33302	31831	31841	31891	3LB
	3/16	1-1/8	3	3/16	33322	31969	31979	31989	3ELB
	13/64	5/8	2-1/2	1/4	30326	39326	39526	30483	3B
	7/32	5/8	2-1/2	1/4	30328	39328	39528	30484	3B
	15/64	3/4	2-1/2	1/4	30330	39330	39530	30485	3B
	*1/4	3/4	2-1/2	1/4	30332	39332	39532	30486	3B
	1/4	1-1/8	3	1/4	33304	31832	31842	31892	3LB
	1/4	1-1/2	4	1/4	33324	31970	31980	31990	3ELB
	17/64	3/4	2-1/2	5/16	30334	39334	39534	30487	3B
	9/32	3/4	2-1/2	5/16	30336	39336	39536	30488	3B
	19/64	13/16	2-1/2	5/16	30338	39338	39538	30489	3B
	*5/16	13/16	2-1/2	5/16	30340	39340	39540	30490	3B
	5/16	1-1/8	3	5/16	33306	31833	31843	31893	3LB
	5/16	1-5/8	4	5/16	33326	31971	31981	31991	3ELB
	21/64	1	2-1/2	3/8	30342	39342	39542	30491	3B

continued on next page

FRACTIONAL
2 Flute Ball End

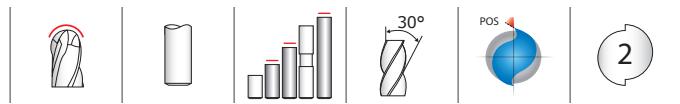


TOLERANCES (inch)

DC = -0.0000/-0.0020

DCON = h₆

RE = +0.0000/-0.0010

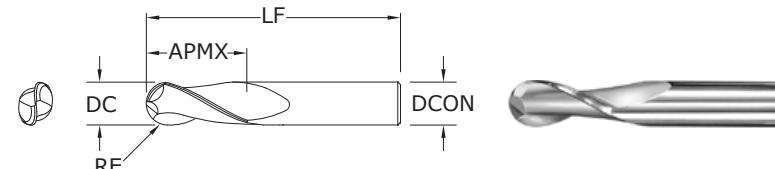

**3B•3LB•
3ELB**
FRACTIONAL SERIES

inch				UNCOATED	EDP NO.	SERIES	CONTINUED
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN) Ti-NAMITE-C (TiCN) Ti-NAMITE-A (AlTiN)	SERIES	
11/32	1	2-1/2	3/8	30344	39344	30492	3B
23/64	1	2-1/2	3/8	30346	39346	30493	3B
*3/8	1	2-1/2	3/8	30348	39348	30494	3B
3/8	1-1/8	3	3/8	33308	31834	31844	3LB
3/8	1-3/4	4	3/8	33328	31972	31982	3ELB
25/64	1	2-3/4	7/16	30350	39350	30495	3B
13/32	1	2-3/4	7/16	30352	39352	30496	3B
27/64	1	2-3/4	7/16	30354	39354	30497	3B
7/16	1	2-3/4	7/16	30356	39356	30498	3B
7/16	2	4-1/2	7/16	33310	31835	31845	3LB
7/16	3	6	7/16	33330	31973	31983	3ELB
29/64	1	3	1/2	30358	39358	30499	3B
15/32	1	3	1/2	30360	39360	30500	3B
31/64	1	3	1/2	30362	39362	30591	3B
*1/2	1	3	1/2	30364	39364	30592	3B
1/2	2	4-1/2	1/2	33312	31836	31846	3LB
1/2	3	6	1/2	33332	31974	31984	3ELB
9/16	1-1/8	3-1/2	9/16	30366	39366	30593	3B
5/8	1-1/4	3-1/2	5/8	30368	39368	30594	3B
5/8	2-1/4	5	5/8	33314	31837	31847	3LB
5/8	3	6	5/8	33334	31975	31985	3ELB
11/16	1-3/8	4	3/4	30370	39370	30595	3B
3/4	1-1/2	4	3/4	30372	39372	30596	3B
3/4	2-1/4	5	3/4	33316	31838	31848	3LB
3/4	3	6	3/4	33336	31976	31986	3ELB
7/8	1-1/2	4	7/8	30374	39374	30597	3B
1	1-1/2	4	1	30376	39376	30598	3B
1	2-1/4	5	1	33318	31839	31849	3LB
1	3	6	1	33338	31977	31987	3ELB


*Series 3B Set

RE = 1/2 Cutting Diameter (DC)




For patent information visit www.ksptpatents.com

2 Flute Ball End



**3MB•
3XLMB**
METRIC SERIES

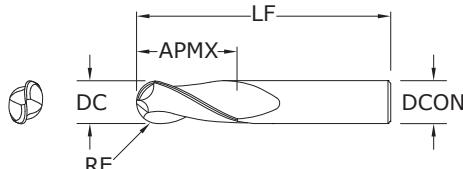

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h6
RE = +0,000/-0,025

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40306	48692	48714	48735	3MB
1,5	4,5	38,0	3,0	40310	48693	48715	48736	3MB
2,0	6,3	38,0	3,0	40314	48694	48716	48737	3MB
2,5	9,5	38,0	3,0	40318	48695	48717	48738	3MB
3,0	12,0	38,0	3,0	40322	48696	48718	48739	3MB
3,0	25,0	75,0	3,0	43302	49544	49557	49570	3XLMB
3,5	12,0	50,0	4,0	40326	48697	48719	48740	3MB
4,0	14,0	50,0	4,0	40330	48698	48720	48741	3MB
4,0	25,0	75,0	4,0	43304	49545	49558	49571	3XLMB
4,5	16,0	50,0	6,0	40334	48699	48721	48742	3MB
5,0	16,0	50,0	6,0	40338	48700	48722	48743	3MB
5,0	25,0	75,0	5,0	43308	49547	49560	49573	3XLMB
6,0	19,0	50,0	6,0	40342	48701	48723	48744	3MB
6,0	25,0	75,0	6,0	43306	49546	49559	49572	3XLMB
7,0	19,0	63,0	8,0	40346	48702	48724	48745	3MB
8,0	20,0	63,0	8,0	40350	48703	48725	48746	3MB
8,0	25,0	75,0	8,0	43316	49548	49561	49574	3XLMB
9,0	22,0	75,0	10,0	40354	48704	48726	48747	3MB
10,0	22,0	75,0	10,0	40358	48705	48727	48748	3MB
10,0	38,0	100,0	10,0	43326	49549	49562	49575	3XLMB
11,0	25,0	75,0	12,0	40362	48706	48728	48749	3MB
12,0	25,0	75,0	12,0	40366	48707	48729	48750	3MB
12,0	50,0	100,0	12,0	43336	49550	49563	49576	3XLMB
12,0	75,0	150,0	12,0	43346	49551	49564	49577	3XLMB
14,0	32,0	89,0	14,0	40370	48708	48730	48751	3MB
14,0	75,0	150,0	14,0	43356	49552	49565	49578	3XLMB
16,0	32,0	89,0	16,0	40374	48709	48731	48752	3MB
16,0	75,0	150,0	16,0	43366	49553	49566	49579	3XLMB
18,0	38,0	100,0	18,0	40378	48710	48732	48753	3MB
18,0	75,0	150,0	18,0	43376	49554	49567	49580	3XLMB
20,0	38,0	100,0	20,0	40382	48711	48733	48754	3MB
20,0	75,0	150,0	20,0	43386	49555	49568	49581	3XLMB
25,0	38,0	100,0	25,0	40386	48712	48734	48755	3MB
25,0	75,0	150,0	25,0	43396	49556	49569	49582	3XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC
2 Flute Double End

TOLERANCES (inch)

DC = +0.0000/-0.0020
DCON = h₆

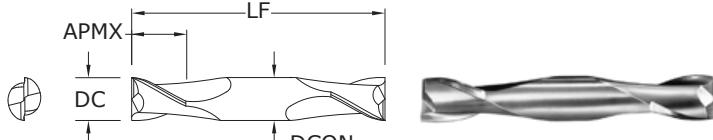

15

FRACTIONAL SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.			
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/32	1/16	1-1/2	1/8	31501	31541	39651	31316
3/64	3/32	1-1/2	1/8	31503	31543	39653	31317
1/16	1/8	1-1/2	1/8	31505	31545	39655	31318
5/64	1/8	1-1/2	1/8	31507	31547	39657	31319
3/32	3/16	1-1/2	1/8	31509	31549	39659	31320
7/64	3/16	1-1/2	1/8	31511	31551	39661	31321
*1/8	1/4	1-1/2	1/8	31513	31553	39663	31322
9/64	5/16	2	3/16	31515	31555	39665	31323
5/32	5/16	2	3/16	31517	31557	39667	31324
11/64	5/16	2	3/16	31519	31559	39669	31325
*3/16	3/8	2	3/16	31521	31561	39671	31326
13/64	1/2	2-1/2	1/4	31523	31563	39673	31327
7/32	1/2	2-1/2	1/4	31525	31565	39675	31328
15/64	1/2	2-1/2	1/4	31527	31567	39677	31329
*1/4	1/2	2-1/2	1/4	31529	31569	39679	31330
9/32	1/2	2-1/2	5/16	31531	31571	39681	31331
*5/16	1/2	2-1/2	5/16	31533	31573	39683	31332
*3/8	9/16	2-1/2	3/8	31535	31575	39685	31333
7/16	9/16	2-3/4	7/16	31537	31577	39687	31334
*1/2	5/8	3	1/2	31539	31579	39689	31335
*Series 15 Set				31589	31581	39691	31336

For patent information visit www.ksptpatents.com

TOLERANCES (mm)



DC = +0,000/-0,050
DCON = h₆

15M
METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.			
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41505	49010	49031	49052
1,5	3,0	38,0	3,0	41509	49011	49032	49053
2,0	4,0	38,0	3,0	41513	49012	49033	49054
2,5	5,0	38,0	3,0	41517	49013	49034	49055
3,0	6,0	38,0	3,0	41521	49014	49035	49056
3,5	7,0	50,0	4,0	41525	49015	49036	49057
4,0	8,0	50,0	4,0	41529	49016	49037	49058
4,5	9,5	63,0	4,5	41533	49017	49038	49059
5,0	10,0	63,0	5,0	41537	49018	49039	49060
6,0	12,0	63,0	6,0	41541	49019	49040	49061
7,0	12,0	63,0	8,0	41545	49020	49041	49062
8,0	12,0	63,0	8,0	41549	49021	49042	49063
9,0	14,0	75,0	9,0	41553	49022	49043	49064
10,0	14,0	75,0	10,0	41557	49023	49044	49065
11,0	14,0	75,0	12,0	41561	49024	49045	49066
12,0	16,0	75,0	12,0	41565	49025	49046	49067

For patent information visit www.ksptpatents.com

2 Flute Double End Ball End



15B FRACTIONAL SERIES

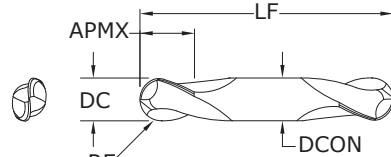**TOLERANCES (inch)**

DC = $-0.0000/-0.0020$
 DCON = h_6
 RE = $+0.0000/-0.0010$

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.		
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)
1/32	1/16	1-1/2	1/8	31502	31542	39652
3/64	3/32	1-1/2	1/8	31504	31544	39654
1/16	1/8	1-1/2	1/8	31506	31546	39656
5/64	1/8	1-1/2	1/8	31508	31548	39658
3/32	3/16	1-1/2	1/8	31510	31550	39660
7/64	3/16	1-1/2	1/8	31512	31552	39662
*1/8	1/4	1-1/2	1/8	31514	31554	39664
9/64	5/16	2	3/16	31516	31556	39666
5/32	5/16	2	3/16	31518	31558	39668
11/64	5/16	2	3/16	31520	31560	39670
*3/16	3/8	2	3/16	31522	31562	39672
13/64	1/2	2-1/2	1/4	31524	31564	39674
7/32	1/2	2-1/2	1/4	31526	31566	39676
15/64	1/2	2-1/2	1/4	31528	31568	39678
*1/4	1/2	2-1/2	1/4	31530	31570	39680
9/32	1/2	2-1/2	5/16	31532	31572	39682
*5/16	1/2	2-1/2	5/16	31534	31574	39684
*3/8	9/16	2-1/2	3/8	31536	31576	39686
7/16	9/16	2-3/4	7/16	31538	31578	39688
*1/2	5/8	3	1/2	31540	31580	39690
*Series 15B Set				31590	31582	39692
RE = 1/2 Cutting Diameter (DC)						31357

15MB METRIC SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.		
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)
1,0	2,0	38,0	3,0	41506	49073	49094
1,5	3,0	38,0	3,0	41510	49074	49095
2,0	4,0	38,0	3,0	41514	49075	49096
2,5	5,0	38,0	3,0	41518	49076	49097
3,0	6,0	38,0	3,0	41522	49077	49098
3,5	7,0	50,0	4,0	41526	49078	49099
4,0	8,0	50,0	4,0	41530	49079	49100
4,5	9,5	63,0	4,5	41534	49080	49101
5,0	10,0	63,0	5,0	41538	49081	49102
6,0	12,0	63,0	6,0	41542	49082	49103
7,0	12,0	63,0	8,0	41546	49083	49104
8,0	12,0	63,0	8,0	41550	49084	49105
9,0	14,0	75,0	9,0	41554	49085	49106
10,0	14,0	75,0	10,0	41558	49086	49107
11,0	14,0	75,0	12,0	41562	49087	49108
12,0	16,0	75,0	12,0	41566	49088	49109
RE = 1/2 Cutting Diameter (DC)						49130

For patent information visit
www.ksptpatents.com


TOLERANCES (mm)

DC = $+0,000/-0,050$
 DCON = h_6
 RE = $+0,000/0,025$

2 Flute Square End Stub

TOLERANCES (inch)

DC = +0.0000/-0.0020
DCON = h₆

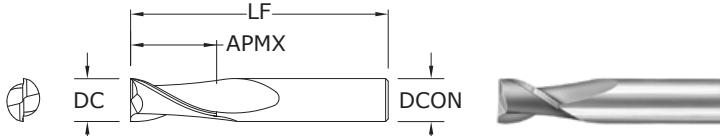

17


FRACTIONAL SERIES

inch				EDP NO.				STEELS
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1/16	1/8	1-1/2	1/8	31701	31750	31303	31358	
3/32	3/16	1-1/2	1/8	31703	31751	31304	31359	
1/8	1/4	1-1/2	1/8	31705	31752	31305	31360	
5/32	5/16	2	3/16	31707	31753	31306	31361	
3/16	3/8	2	3/16	31709	31754	31307	31362	
7/32	7/16	2	1/4	31711	31755	31308	31363	
1/4	1/2	2	1/4	31713	31756	31309	31364	
5/16	1/2	2	5/16	31715	31757	31310	31365	
3/8	5/8	2	3/8	31717	31758	31311	31366	
7/16	5/8	2-1/2	7/16	31719	31759	31312	31367	
1/2	5/8	2-1/2	1/2	31721	31760	31313	31368	
5/8	3/4	3	5/8	31723	31761	31314	31369	
3/4	1	3	3/4	31725	31762	31315	31370	

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h₆

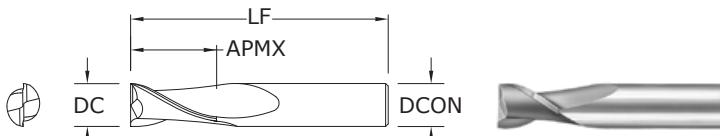


17M

METRIC SERIES


mm				EDP NO.				STEELS
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	2,0	38,0	3,0	41705	49262	49283	49304	
1,5	3,0	38,0	3,0	41709	49263	49284	49305	
2,0	4,0	38,0	3,0	41713	49264	49285	49306	
2,5	5,0	38,0	3,0	41717	49265	49286	49307	
3,0	6,0	38,0	3,0	41721	49266	49287	49308	
3,5	7,0	50,0	4,0	41725	49267	49288	49309	
4,0	8,0	50,0	4,0	41729	49268	49289	49310	
4,5	9,5	50,0	4,5	41733	49269	49290	49311	
5,0	10,0	50,0	5,0	41737	49270	49291	49312	
6,0	12,0	50,0	6,0	41741	49271	49292	49313	
7,0	12,0	50,0	8,0	41745	49272	49293	49314	
8,0	12,0	50,0	8,0	41749	49273	49294	49315	
9,0	14,0	50,0	9,0	41753	49274	49295	49316	
10,0	16,0	50,0	10,0	41757	49275	49296	49317	
11,0	19,0	63,0	12,0	41761	49276	49297	49318	
12,0	19,0	63,0	12,0	41765	49277	49298	49319	

For patent information visit
www.ksptpatents.com

2 Flute High Shear

**52**

FRACTIONAL SERIES

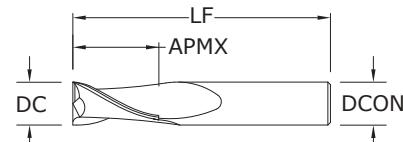**TOLERANCES (inch)**


DC = +0.0000/-0.0020
DCON = h_6

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.	
				UNCOATED	Ti-NAMITE-C (TiCN)
1/16	3/16	1-1/2	1/8	35273	35300
3/32	3/8	1-1/2	1/8	35275	35301
1/8	7/16	1-1/2	1/8	35277	35302
5/32	9/16	2	3/16	35278	35303
3/16	9/16	2	3/16	35279	35304
7/32	5/8	2-1/2	1/4	35280	35305
1/4	3/4	2-1/2	1/4	35281	35306
9/32	3/4	2-1/2	5/16	35282	35307
5/16	13/16	2-1/2	5/16	35283	35308
3/8	7/8	2-1/2	3/8	35285	35309
7/16	1	2-3/4	7/16	35287	35310
1/2	1	3	1/2	35289	35311
9/16	1-1/8	3-1/2	9/16	35291	35312
5/8	1-1/4	3-1/2	5/8	35293	35313
3/4	1-1/2	4	3/4	35295	35314
1	1-1/2	4	1	35297	35315

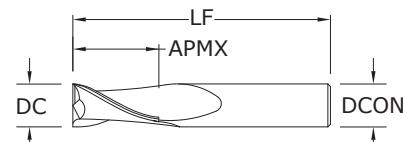52M
METRIC SERIES**TOLERANCES (mm)**

DC = +0,000/-0,050
DCON = h_6



NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.	
				UNCOATED	Ti-NAMITE-C (TiCN)
3,0	7,0	38,0	3,0	45277	49829
3,5	7,0	57,0	6,0	45279	49830
4,0	8,0	57,0	6,0	45281	49831
4,5	8,0	57,0	6,0	45283	49832
5,0	10,0	57,0	6,0	45285	49833
6,0	10,0	57,0	6,0	45287	49834
8,0	16,0	63,0	8,0	45289	49835
10,0	19,0	72,0	10,0	45291	49836
12,0	22,0	83,0	12,0	45293	49837
14,0	22,0	83,0	14,0	45295	49838
16,0	26,0	92,0	16,0	45297	49839
20,0	32,0	104,0	20,0	45299	49840

2 Flute Square End Long Reach

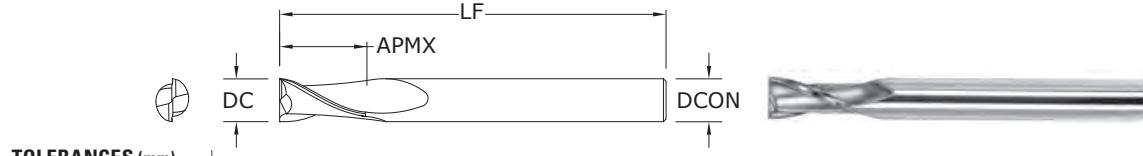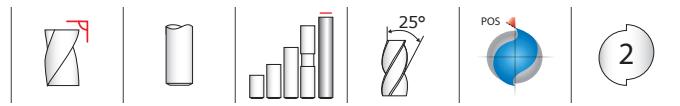

TOLERANCES (mm)
DC = +0,000/-0,050
DCON = h₆


59

FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1/8	3/8	2-1/2	1/4	32280	32260	32270	
3/16	9/16	3	1/4	32281	32261	32271	
1/4	5/8	3-1/2	1/4	32282	32262	32272	
5/16	11/16	4	5/16	32283	32263	32273	
3/8	7/8	4	3/8	32284	32264	32274	
1/2	1	4-1/2	1/2	32285	32265	32275	
5/8	1-1/8	5	5/8	32286	32266	32276	
3/4	1-3/8	5-1/4	3/4	32287	32267	32277	

Neck Option Available

For patent information visit www.ksptpatents.com

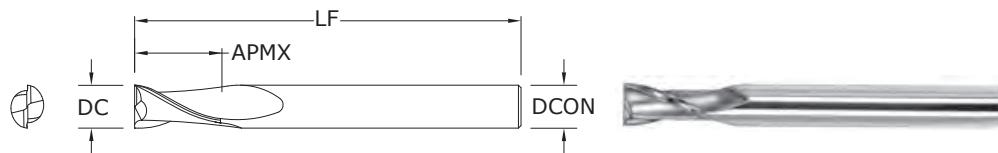

TOLERANCES (mm)
DC = +0,000/-0,050
DCON = h₆

59M

METRIC SERIES

mm				EDP NO.				
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
3,0	9,0	60,0	6,0	43910	43920	43930	43950	
4,0	12,0	70,0	6,0	43911	43921	43931	43951	
6,0	15,0	80,0	6,0	43912	43922	43932	43952	
8,0	20,0	89,0	8,0	43913	43923	43933	43953	
10,0	25,0	100,0	10,0	43914	43924	43934	43954	
12,0	30,0	110,0	12,0	43915	43925	43935	43955	
14,0	35,0	120,0	16,0	43916	43926	43936	43956	
16,0	40,0	120,0	16,0	43917	43927	43937	43957	
18,0	40,0	130,0	20,0	43918	43928	43938	43958	
20,0	45,0	130,0	20,0	43919	43929	43939	43959	


Neck Option Available

For patent information visit www.ksptpatents.com

2 Flute Ball End Long Reach

**59B**

FRACTIONAL SERIES

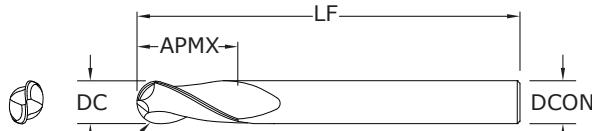

TOLERANCES (inch)

DC = -0.0000/-0.0020


DCON = h₆

RE = +0.0000/-0.0010

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS
NON-FERROUS
PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

Neck Option Available
RE = 1/2 Cutting Diameter (DC)

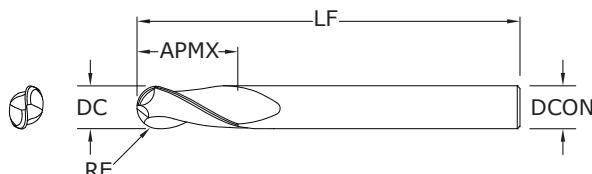59MB
METRIC SERIES


TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h₆

RE = +0,000/-0,025

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS
NON-FERROUS
PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

Neck Option Available
RE = 1/2 Cutting Diameter (DC)

FRACTIONAL
3 Flute Square End




3

TOLERANCES (inch)

DC = -0.0000/-0.0020

DCON = h_6

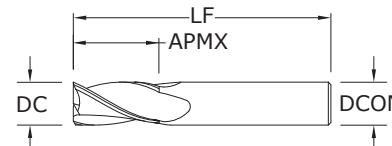

5

FRACTIONAL SERIES


inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/64	1/32	1-1/2	1/8	30501	39701	30771	30811
1/32	5/64	1-1/2	1/8	30503	39703	30772	30812
3/64	7/64	1-1/2	1/8	30505	39705	30773	30813
1/16	3/16	1-1/2	1/8	30507	39707	30774	30814
5/64	3/16	1-1/2	1/8	30509	39709	30775	30815
3/32	9/32	1-1/2	1/8	30511	39711	30776	30816
7/64	3/8	1-1/2	1/8	30513	39713	30777	30817
1/8	3/8	1-1/2	1/8	30577	39777	30809	30849
*1/8	1/2	1-1/2	1/8	30515	39715	30778	30818
9/64	1/2	2	3/16	30517	39717	30779	30819
5/32	1/2	2	3/16	30519	39719	30780	30820
11/64	5/8	2	3/16	30521	39721	30781	30821
*3/16	5/8	2	3/16	30523	39723	30782	30822
13/64	5/8	2-1/2	1/4	30525	39725	30783	30823
7/32	5/8	2-1/2	1/4	30527	39727	30784	30824
15/64	3/4	2-1/2	1/4	30529	39729	30785	30825
*1/4	3/4	2-1/2	1/4	30531	39731	30786	30826
17/64	3/4	2-1/2	5/16	30533	39733	30787	30827
9/32	3/4	2-1/2	5/16	30535	39735	30788	30828
19/64	13/16	2-1/2	5/16	30537	39737	30789	30829
*5/16	13/16	2-1/2	5/16	30539	39739	30790	30830
21/64	1	2-1/2	3/8	30541	39741	30791	30831
11/32	1	2-1/2	3/8	30543	39743	30792	30832
23/64	1	2-1/2	3/8	30545	39745	30793	30833
*3/8	1	2-1/2	3/8	30547	39747	30794	30834
25/64	1	2-3/4	7/16	30549	39749	30795	30835
13/32	1	2-3/4	7/16	30551	39751	30796	30836
27/64	1	2-3/4	7/16	30553	39753	30797	30837
7/16	1	2-3/4	7/16	30555	39755	30798	30838
29/64	1	3	1/2	30557	39757	30799	30839
15/32	1	3	1/2	30559	39759	30800	30840
31/64	1	3	1/2	30561	39761	30801	30841
*1/2	1	3	1/2	30563	39763	30802	30842
9/16	1-1/8	3-1/2	9/16	30565	39765	30803	30843
5/8	1-1/4	3-1/2	5/8	30567	39767	30804	30844
11/16	1-3/8	4	3/4	30569	39769	30805	30845
3/4	1-1/2	4	3/4	30571	39771	30806	30846
7/8	1-1/2	4	7/8	30573	39773	30807	30847
1	1-1/2	4	1	30575	39775	30808	30848

*Series 5 Set


For patent information visit www.ksptpatents.com

METRIC

3 Flute Square End



**5M•
5XLM**
METRIC SERIES

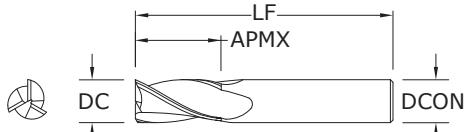

TOLERANCES (mm)
DC = +0,000/-0,050
DCON = h6

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES


For patent information visit www.ksptpatents.com

	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
					UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
	1,0	4,0	38,0	3,0	40505	48756	48778	48799	5M
	1,5	4,5	38,0	3,0	40509	48757	48779	48800	5M
	2,0	6,3	38,0	3,0	40513	48758	48780	48801	5M
	2,5	9,5	38,0	3,0	40517	48759	48781	48802	5M
	3,0	12,0	38,0	3,0	40521	48760	48782	48803	5M
	3,0	25,0	75,0	3,0	43501	49466	49479	49492	5XLM
	3,5	12,0	50,0	4,0	40525	48761	48783	48804	5M
	4,0	14,0	50,0	4,0	40529	48762	48784	48805	5M
	4,0	25,0	75,0	4,0	43503	49467	49480	49493	5XLM
	4,5	16,0	50,0	6,0	40533	48763	48785	48806	5M
	5,0	16,0	50,0	6,0	40537	48764	48786	48807	5M
	5,0	25,0	75,0	5,0	43507	49469	49482	49495	5XLM
	6,0	19,0	50,0	6,0	40541	48765	48787	48808	5M
	6,0	25,0	75,0	6,0	43505	49468	49481	49494	5XLM
	7,0	19,0	63,0	8,0	40545	48766	48788	48809	5M
	8,0	20,0	63,0	8,0	40549	48767	48789	48810	5M
	8,0	25,0	75,0	8,0	43515	49470	49483	49496	5XLM
	9,0	22,0	75,0	10,0	40553	48768	48790	48811	5M
	10,0	22,0	75,0	10,0	40557	48769	48791	48812	5M
	10,0	38,0	100,0	10,0	43525	49471	49484	49497	5XLM
	11,0	25,0	75,0	12,0	40561	48770	48792	48813	5M
	12,0	25,0	75,0	12,0	40565	48771	48793	48814	5M
	12,0	50,0	100,0	12,0	43535	49472	49485	49498	5XLM
	12,0	75,0	150,0	12,0	43545	49473	49486	49499	5XLM
	14,0	32,0	89,0	14,0	40569	48772	48794	48815	5M
	14,0	75,0	150,0	14,0	43555	49474	49487	49500	5XLM
	16,0	32,0	89,0	16,0	40573	48773	48795	48816	5M
	16,0	75,0	150,0	16,0	43565	49475	49488	49501	5XLM
	18,0	38,0	100,0	18,0	40577	48774	48796	48817	5M
	18,0	75,0	150,0	18,0	43575	49476	49489	49502	5XLM
	20,0	38,0	100,0	20,0	40581	48775	48797	48818	5M
	20,0	75,0	150,0	20,0	43585	49477	49490	49503	5XLM
	25,0	38,0	100,0	25,0	40585	48776	48798	48819	5M
	25,0	75,0	150,0	25,0	43595	49478	49491	49504	5XLM

FRACTIONAL
3 Flute Ball End

TOLERANCES (inch)

DC = -0.0000/-0.0020
DCON = h₆
RE = +0.0000/-0.0010

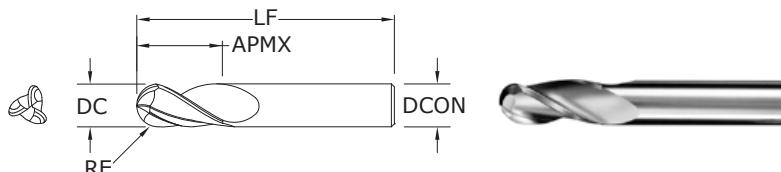

5B


FRACTIONAL SERIES

inch				EDP NO.				
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1/64	1/32	1-1/2	1/8	30502	30851	30602	31130	STEELS
1/32	5/64	1-1/2	1/8	30504	30852	30604	31131	STAINLESS STEELS
3/64	7/64	1-1/2	1/8	30506	30853	30606	31132	CAST IRON
1/16	3/16	1-1/2	1/8	30508	30854	30608	31133	HIGH TEMP ALLOYS
5/64	3/16	1-1/2	1/8	30510	30855	30610	31134	TITANIUM
3/32	9/32	1-1/2	1/8	30512	30856	30612	31135	HARDENED STEELS
7/64	3/8	1-1/2	1/8	30514	30857	30902	31136	NON-FERROUS
1/8	3/8	1-1/2	1/8	30578	30889	30943	31168	PLASTICS/COMPOSITES
*1/8	1/2	1-1/2	1/8	30516	30858	30904	31137	
9/64	1/2	2	3/16	30518	30859	30906	31138	
5/32	1/2	2	3/16	30520	30860	30908	31139	
11/64	5/8	2	3/16	30522	30861	30910	31140	
*3/16	5/8	2	3/16	30524	30862	30912	31141	
13/64	5/8	2-1/2	1/4	30526	30863	30914	31142	
7/32	5/8	2-1/2	1/4	30528	30864	30916	31143	
15/64	3/4	2-1/2	1/4	30530	30865	30918	31144	
*1/4	3/4	2-1/2	1/4	30532	30866	30920	31145	
17/64	3/4	2-1/2	5/16	30534	30867	30921	31146	
9/32	3/4	2-1/2	5/16	30536	30868	30922	31147	
19/64	13/16	2-1/2	5/16	30538	30869	30923	31148	
*5/16	13/16	2-1/2	5/16	30540	30870	30924	31149	
21/64	1	2-1/2	3/8	30542	30871	30925	31150	
11/32	1	2-1/2	3/8	30544	30872	30926	31151	
23/64	1	2-1/2	3/8	30546	30873	30927	31152	
*3/8	1	2-1/2	3/8	30548	30874	30928	31153	
25/64	1	2-3/4	7/16	30550	30875	30929	31154	
13/32	1	2-3/4	7/16	30552	30876	30930	31155	
27/64	1	2-3/4	7/16	30554	30877	30931	31156	
7/16	1	2-3/4	7/16	30556	30878	30932	31157	
29/64	1	3	1/2	30558	30879	30933	31158	
15/32	1	3	1/2	30560	30880	30934	31159	
31/64	1	3	1/2	30562	30881	30935	31160	
*1/2	1	3	1/2	30564	30882	30936	31161	
9/16	1-1/8	3-1/2	9/16	30566	30883	30937	31162	
5/8	1-1/4	3-1/2	5/8	30568	30884	30938	31163	
11/16	1-3/8	4	3/4	30570	30885	30939	31164	
3/4	1-1/2	4	3/4	30572	30886	30940	31165	
7/8	1-1/2	4	7/8	30574	30887	30941	31166	
1	1-1/2	4	1	30576	30888	30942	31167	
*Series 5B Set				30590	30900	30944	31169	

RE = 1/2 Cutting Diameter (DC)


For patent information visit www.ksptpatents.com

3 Flute Ball End



5MB • 5XLMB

METRIC SERIES

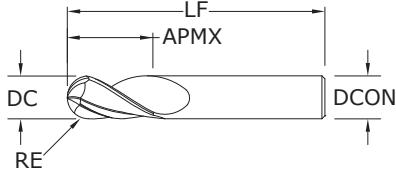

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h6

RE = +0,000/-0,025



- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40506	48820	48842	48863	5MB
1,5	4,5	38,0	3,0	40510	48821	48843	48864	5MB
2,0	6,3	38,0	3,0	40514	48822	48844	48865	5MB
2,5	9,5	38,0	3,0	40518	48823	48845	48866	5MB
3,0	12,0	38,0	3,0	40522	48824	48846	48867	5MB
3,0	25,0	75,0	3,0	43502	49583	49596	49609	5XLMB
3,5	12,0	50,0	4,0	40526	48825	48847	48868	5MB
4,0	14,0	50,0	4,0	40530	48826	48848	48869	5MB
4,0	25,0	75,0	4,0	43504	49584	49597	49610	5XLMB
4,5	16,0	50,0	6,0	40534	48827	48849	48870	5MB
5,0	16,0	50,0	6,0	40538	48828	48850	48871	5MB
5,0	25,0	75,0	5,0	43508	49586	49599	49612	5XLMB
6,0	19,0	50,0	6,0	40542	48829	48851	48872	5MB
6,0	25,0	75,0	6,0	43506	49585	49598	49611	5XLMB
7,0	19,0	63,0	8,0	40546	48830	48852	48873	5MB
8,0	20,0	63,0	8,0	40550	48831	48853	48874	5MB
8,0	25,0	75,0	8,0	43516	49587	49600	49613	5XLMB
9,0	22,0	75,0	10,0	40554	48832	48854	48875	5MB
10,0	22,0	75,0	10,0	40558	48833	48855	48876	5MB
10,0	38,0	100,0	10,0	43526	49588	49601	49614	5XLMB
11,0	25,0	75,0	12,0	40562	48834	48856	48877	5MB
12,0	25,0	75,0	12,0	40566	48835	48857	48878	5MB
12,0	50,0	100,0	12,0	43536	49589	49602	49615	5XLMB
12,0	75,0	150,0	12,0	43546	49590	49603	49616	5XLMB
14,0	32,0	89,0	14,0	40570	48836	48858	48879	5MB
14,0	75,0	150,0	14,0	43556	49591	49604	49617	5XLMB
16,0	32,0	89,0	16,0	40574	48837	48859	48880	5MB
16,0	75,0	150,0	16,0	43566	49592	49605	49618	5XLMB
18,0	38,0	100,0	18,0	40578	48838	48860	48881	5MB
18,0	75,0	150,0	18,0	43576	49593	49606	49619	5XLMB
20,0	38,0	100,0	20,0	40582	48839	48861	48882	5MB
20,0	75,0	150,0	20,0	43586	49594	49607	49620	5XLMB
25,0	38,0	100,0	25,0	40586	48840	48862	48883	5MB
25,0	75,0	150,0	25,0	43596	49595	49608	49621	5XLMB

RE = 1/2 Cutting Diameter (DC)

FRACTIONAL
Tapered Square End

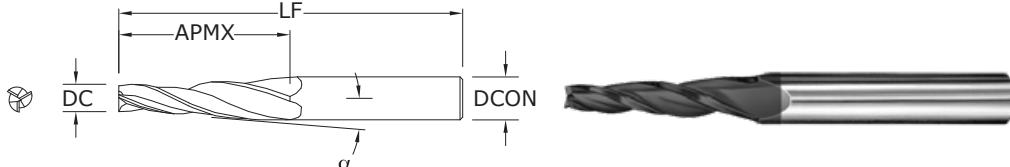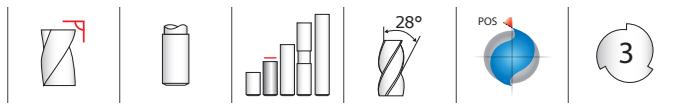

TOLERANCES (inch)


DC = -0.0000/-0.0020

DCON = h₆

23

FRACTIONAL SERIES


SHANK DIAMETER DCON	CENTER LINE ANGLE α	SMALL DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	EDP NO.			
					UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/4	1°	1/8	1-1/2	3	32301	32370	32302	32345
1/4	1°30'	1/8	1-1/2	3	32303	32371	32304	32346
1/4	2°	1/8	1-1/4	3	32305	32372	32306	32347
1/4	3°	1/8	1	3	32307	32373	32308	32348
1/4	5°	1/8	3/4	3	32309	32374	32310	32349
1/4	7°	1/8	1/2	3	32311	32375	32312	32350
1/4	10°	3/32	1/2	3	32313	32376	32314	32351
3/8	1°	3/16	1-3/4	3-1/2	32315	32377	32316	32352
3/8	1°30'	3/16	1-3/4	3-1/2	32317	32378	32318	32353
3/8	2°	3/16	1-3/4	3-1/2	32319	32379	32320	32354
3/8	3°	5/32	1-3/4	3-1/2	32321	32380	32322	32355
3/8	5°	1/8	1-1/2	3-1/2	32323	32381	32324	32356
3/8	7°	1/8	1	3-1/2	32325	32382	32326	32357
3/8	10°	1/8	3/4	3-1/2	32327	32383	32328	32358
1/2	1°	1/4	2	4	32329	32384	32330	32359
1/2	2°	1/4	2	4	32333	32385	32334	32360
1/2	3°	1/4	2	4	32335	32386	32336	32361
1/2	5°	1/4	1-1/4	4	32337	32387	32338	32362
1/2	7°	3/16	1-1/4	4	32339	32388	32340	32363
1/2	10°	1/8	1	4	32341	32389	32342	32364

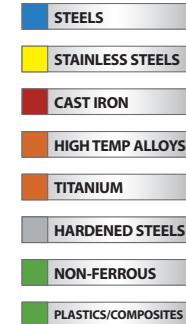

For patent
information visit
www.ksptpatents.com

FRACTIONAL

Tapered Ball End



24

FRACTIONAL SERIES

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


TITANIUM

HARDENED STEELS

NON-FERROUS


PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

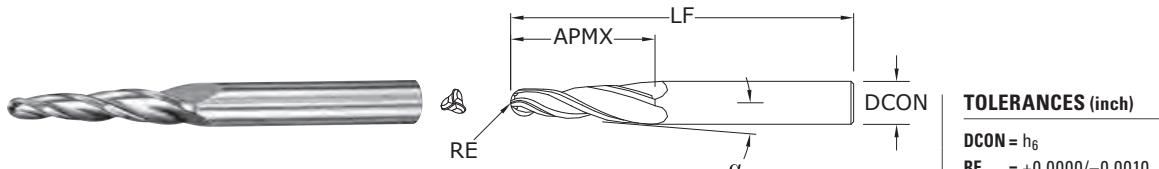


SHANK DIAMETER DCON	CENTER LINE ANGLE α	inch			EDP NO.			
		RADIUS RE	LENGTH OF CUT APMX	OVERALL LENGTH LF	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/4	1°	.062	1-1/2	3	32402	32403	32445	32470
1/4	1°30'	.062	1-1/2	3	32404	32405	32446	32471
1/4	2°	.062	1-1/4	3	32406	32407	32447	32472
1/4	3°	.062	1	3	32408	32409	32448	32473
1/4	5°	.062	3/4	3	32410	32411	32449	32474
1/4	7°	.062	1/2	3	32412	32413	32450	32475
1/4	10°	.047	1/2	3	32414	32415	32451	32476
3/8	1°	.093	1-3/4	3-1/2	32416	32417	32452	32477
3/8	1°30'	.093	1-3/4	3-1/2	32418	32419	32453	32478
3/8	2°	.093	1-3/4	3-1/2	32420	32421	32454	32479
3/8	3°	.078	1-3/4	3-1/2	32422	32423	32455	32480
3/8	5°	.062	1-1/2	3-1/2	32424	32425	32456	32481
3/8	7°	.062	1	3-1/2	32426	32427	32457	32482
3/8	10°	.062	3/4	3-1/2	32428	32429	32458	32483
1/2	1°	.125	2	4	32430	32431	32459	32484
1/2	2°	.125	2	4	32434	32435	32460	32485
1/2	3°	.125	2	4	32436	32437	32461	32486
1/2	5°	.125	1-1/4	4	32438	32439	32462	32487
1/2	7°	.093	1-1/4	4	32440	32441	32463	32488
1/2	10°	.062	1	4	32442	32443	32464	32489

4 Flute Square End • 4 Flute Corner Radius

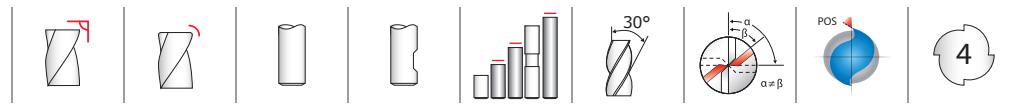**TOLERANCES (inch)**

DC = +0.0000/-0.0020
1CR DC = -0.0010/-0.0020
DCON = h_6
RE = +0.000/-0.002

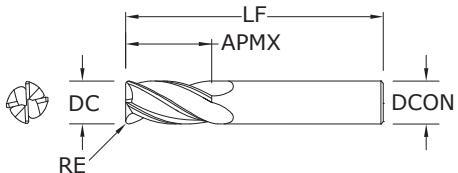

**1•1L•
1EL•1CR**
FRACTIONAL SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		CORNER RADIUS RE	EDP NO.							SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON		UNCOATED	UNCOATED W/ FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Ti-NAMITE® (Diamond)	
1/64	1/32	1-1/2	1/8	—	30101	—	39101	39001	30191	—	—	1
1/32	5/64	1-1/2	1/8	—	30103	—	39103	39003	30192	—	—	1
3/64	7/64	1-1/2	1/8	—	30105	—	39105	39005	30193	—	—	1
1/16	3/16	1-1/2	1/8	—	30107	—	39107	39007	30194	—	91268	1
5/64	3/16	1-1/2	1/8	—	30109	—	39109	39009	30195	—	—	1
3/32	9/32	1-1/2	1/8	—	30111	—	39111	39011	30196	—	—	1
7/64	3/8	1-1/2	1/8	—	30113	—	39113	39013	30197	—	—	1
1/8	3/8	1-1/2	1/8	—	30177	—	39177	39077	30029	—	—	1
*1/8	1/2	1-1/2	1/8	—	30115	—	39115	39015	30198	—	91272	1
**1/8	1/2	1-1/2	1/8	.015	38001	38002	38115	38157	—	—	—	1CR
**1/8	1/2	1-1/2	1/8	.020	38003	38004	38116	38158	—	—	—	1CR
1/8	3/4	2-1/4	1/8	—	33141	—	31727	31737	31747	—	—	1L
1/8	1	3	1/8	—	33143	—	31860	31870	31880	—	—	1EL
9/64	1/2	2	3/16	—	30117	—	39117	39017	30199	—	—	1
5/32	1/2	2	3/16	—	30119	—	39119	39019	30000	—	—	1
11/64	5/8	2	3/16	—	30121	—	39121	39021	30001	—	—	1
*3/16	5/8	2	3/16	—	30123	—	39123	39023	30002	—	91276	1
**3/16	5/8	2	3/16	.015	38009	38010	38117	38159	—	—	—	1CR
**3/16	5/8	2	3/16	.020	38011	38012	38118	38160	—	—	—	1CR
**3/16	5/8	2	3/16	.030	38013	38014	38119	38161	—	—	—	1CR
3/16	3/4	2-1/2	3/16	—	33101	—	31728	31738	31748	—	—	1L
3/16	1-1/8	3	3/16	—	33121	—	31861	31871	31881	—	—	1EL
13/64	5/8	2-1/2	1/4	—	30125	—	39125	39025	30003	—	—	1
7/32	5/8	2-1/2	1/4	—	30127	—	39127	39027	30004	—	—	1
15/64	3/4	2-1/2	1/4	—	30129	—	39129	39029	30005	—	—	1
*1/4	3/4	2-1/2	1/4	—	30131	30300	39131	39031	30006	—	91280	1
**1/4	3/4	2-1/2	1/4	.015	38019	38020	38120	38162	—	—	—	1CR
**1/4	3/4	2-1/2	1/4	.020	38021	38022	38121	38163	—	—	—	1CR
**1/4	3/4	2-1/2	1/4	.030	38023	38024	38122	38164	—	—	—	1CR
**1/4	3/4	2-1/2	1/4	.045	38025	38026	38123	38165	—	—	—	1CR

For patent information visit
www.ksptpatents.com


continued on next page

FRACTIONAL

4 Flute Square End • 4 Flute Corner Radius

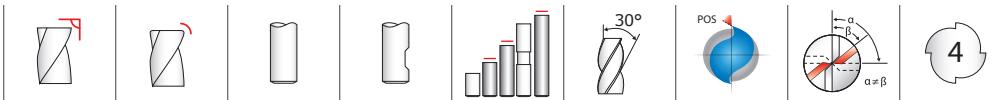

**1•1L•
1EL•1CR**
FRACTIONAL SERIES

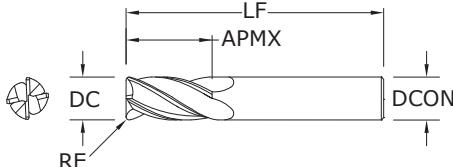

TOLERANCES (inch)	
DC	= +0.0000/-0.0020
1CR DC	= -0.0010/-0.0020
DCON	= h ₆
RE	= +0.000/-0.002

CONTINUED


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	EDP NO.							SERIES
					UNCOATED	UNCOATED W/ FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Di-NAMITE® (Diamond)	
1/4	1-1/8	3	1/4	—	33103	—	31729	31739	31749	—	—	1L
1/4	1-1/2	4	1/4	—	33123	—	31862	31872	31882	—	—	1EL
17/64	3/4	2-1/2	5/16	—	30133	—	39133	39033	30007	—	—	1
9/32	3/4	2-1/2	5/16	—	30135	—	39135	39035	30008	—	—	1
19/64	13/16	2-1/2	5/16	—	30137	—	39137	39037	30009	—	—	1
*5/16	13/16	2-1/2	5/16	—	30139	—	39139	39039	30010	—	91284	1
**5/16	13/16	2-1/2	5/16	.015	38031	38032	38124	38166	—	—	—	1CR
**5/16	13/16	2-1/2	5/16	.020	38033	38034	38125	38167	—	—	—	1CR
**5/16	13/16	2-1/2	5/16	.030	38035	38036	38126	38168	—	—	—	1CR
**5/16	13/16	2-1/2	5/16	.045	38037	38038	38127	38169	—	—	—	1CR
5/16	1-1/8	3	5/16	—	33105	—	31730	31740	31763	—	—	1L
5/16	1-5/8	4	5/16	—	33125	—	31863	31873	31883	—	—	1EL
21/64	1	2-1/2	3/8	—	30141	—	39141	39041	30011	—	—	1
11/32	1	2-1/2	3/8	—	30143	—	39143	39043	30012	—	—	1
23/64	1	2-1/2	3/8	—	30145	—	39145	39045	30013	—	—	1
*3/8	1	2-1/2	3/8	—	30147	30179	39147	39047	30014	30379	91288	1
3/8	1	2-1/2	3/8	.015	38045	38046	38128	38170	—	—	—	1CR
3/8	1	2-1/2	3/8	.020	38047	38048	38129	38171	—	—	—	1CR
3/8	1	2-1/2	3/8	.030	38049	38050	38130	38172	—	—	—	1CR
3/8	1	2-1/2	3/8	.045	38051	38052	38131	38173	—	—	—	1CR
3/8	1-1/8	3	3/8	—	33107	—	31731	31741	31764	—	—	1L
3/8	1-3/4	4	3/8	—	33127	—	31864	31874	31884	—	—	1EL
25/64	1	2-3/4	7/16	—	30149	—	39149	39049	30015	—	—	1
13/32	1	2-3/4	7/16	—	30151	—	39151	39051	30016	—	—	1
27/64	1	2-3/4	7/16	—	30153	—	39153	39053	30017	—	—	1
7/16	1	2-3/4	7/16	—	30155	—	39155	39055	30018	—	—	1
7/16	2	4-1/2	7/16	—	33109	—	31732	31742	31765	—	—	1L
7/16	3	6	7/16	—	33129	—	31865	31875	31885	—	—	1EL
29/64	1	3	1/2	—	30157	—	39157	39057	30019	—	—	1
15/32	1	3	1/2	—	30159	—	39159	39059	30020	—	—	1

continued on next page

4 Flute Square End • 4 Flute Corner Radius

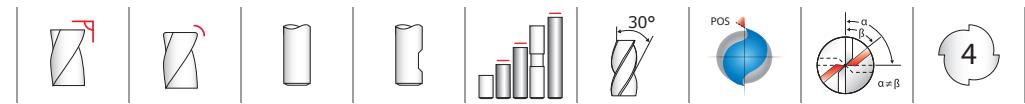**TOLERANCES (inch)**

DC = +0.0000/-0.0020
1CR DC = -0.0010/-0.0020
DCON = h_6
RE = +0.000/-0.002

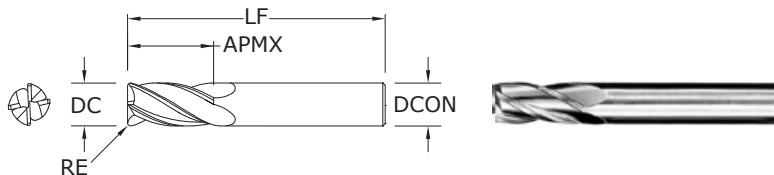

**1•1L•
1EL•1CR**
FRACTIONAL SERIES

CONTINUED


CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		CORNER RADIUS RE	EDP NO.							SERIES
		OVERALL LENGTH LF	SHANK DIAMETER DCON		UNCOATED	UNCOATED W/ FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Di-NAMITE® (Diamond)	
31/64	1	3	1/2	—	30161	—	39161	39061	30021	—	—	1
*1/2	1	3	1/2	—	30163	30180	39163	39063	30022	30380	91292	1
1/2	1	3	1/2	.015	38059	38060	38132	38174	—	—	—	1CR
1/2	1	3	1/2	.020	38061	38062	38133	38175	—	—	—	1CR
1/2	1	3	1/2	.030	38063	38064	38134	38176	—	—	—	1CR
1/2	1	3	1/2	.045	38065	38066	38135	38177	—	—	—	1CR
1/2	1	3	1/2	.060	38067	38068	38136	38178	—	—	—	1CR
1/2	2	4-1/2	1/2	—	33111	—	31733	31743	31766	—	—	1L
1/2	3	6	1/2	—	33131	—	31866	31876	31886	—	—	1EL
9/16	1-1/8	3-1/2	9/16	—	30165	—	39165	39065	30023	—	—	1
5/8	1-1/4	3-1/2	5/8	—	30167	30181	39167	39067	30024	30381	—	1
5/8	1-1/4	3-1/2	5/8	.015	38073	38074	38137	38179	—	—	—	1CR
5/8	1-1/4	3-1/2	5/8	.020	38075	38076	38138	38180	—	—	—	1CR
5/8	1-1/4	3-1/2	5/8	.030	38077	38078	38139	38181	—	—	—	1CR
5/8	1-1/4	3-1/2	5/8	.045	38079	38080	38140	38182	—	—	—	1CR
5/8	1-1/4	3-1/2	5/8	.060	38081	38082	38141	38183	—	—	—	1CR
5/8	1-1/4	3-1/2	5/8	.090	38083	38084	38142	38184	31767	—	—	1L
5/8	3	6	5/8	—	33133	—	31867	31877	31887	—	—	1EL
11/16	1-3/8	4	3/4	—	30169	—	39169	39069	30025	—	—	1
3/4	1-1/2	4	3/4	—	30171	30182	39171	39071	30026	30382	—	1
3/4	1-1/2	4	3/4	.015	38087	38088	38143	38185	—	—	—	1CR
3/4	1-1/2	4	3/4	.020	38089	38090	38144	38186	—	—	—	1CR
3/4	1-1/2	4	3/4	.030	38091	38092	38145	38187	—	—	—	1CR
3/4	1-1/2	4	3/4	.045	38093	38094	38146	38188	—	—	—	1CR
3/4	1-1/2	4	3/4	.060	38095	38096	38147	38189	—	—	—	1CR
3/4	1-1/2	4	3/4	.090	38097	38098	38148	38190	—	—	—	1CR
3/4	1-1/2	4	3/4	.125	38099	38100	38149	38191	—	—	—	1CR
3/4	2-1/4	5	3/4	—	33115	—	31735	31745	31768	—	—	1L
3/4	3	6	3/4	—	33135	—	31868	31878	31888	—	—	1EL
7/8	1-1/2	4	7/8	—	30173	—	39173	39073	30027	—	—	1

continued on next page


For patent information visit
www.ksptpatents.com

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

FRACTIONAL

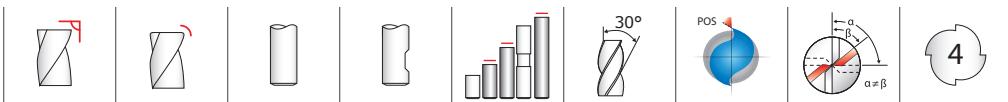4 Flute Square End • 4 Flute Corner Radius

**1•1L•
1EL•1CR**
FRACTIONAL SERIES

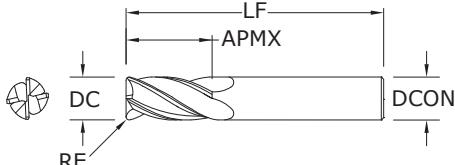

TOLERANCES (inch)	
DC	= +0.0000/-0.0020
1CR DC	= -0.0010/-0.0020
DCON	= h ₆
RE	= +0.000/-0.002


CONTINUED

	inch					EDP NO.							SERIES
	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	UNCOATED	UNCOATED W/ FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Di-NAMITE® (Diamond)	
	1	1-1/2	4	1	—	30175	30183	39175	39075	30028	30383	—	1
	1	1-1/2	4	1	.015	38101	38102	38150	38192	—	—	—	1CR
	1	1-1/2	4	1	.020	38103	38104	38151	38193	—	—	—	1CR
	1	1-1/2	4	1	.030	38105	38106	38152	38194	—	—	—	1CR
	1	1-1/2	4	1	.045	38107	38108	38153	38195	—	—	—	1CR
	1	1-1/2	4	1	.060	38109	38110	38154	38196	—	—	—	1CR
	1	1-1/2	4	1	.090	38111	38112	38155	38197	—	—	—	1CR
	1	1-1/2	4	1	.125	38113	38114	38156	38198	—	—	—	1CR
	1	2-1/4	5	1	—	33117	—	31736	31746	31769	—	—	1L
	1	3	6	1	—	33137	—	31869	31879	31889	—	—	1EL
	*Series 1 Set					30189	—	39189	39089	30030	—	—	1
	**Without Flat												

For patent information visit
www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius


TOLERANCES (mm)
 DC = +0,000/-0,050
 DCON = h₆
 RE = +0,000/-0,050

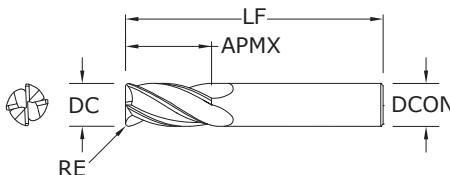

1M • 1XLM • 1MCR
 METRIC SERIES


CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	EDP NO.				SERIES
					UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	—	3,0	40105	48500	48522	48543	1M
1,5	4,5	38,0	—	3,0	40109	48501	48523	48544	1M
2,0	6,3	38,0	—	3,0	40113	48502	48524	48545	1M
2,5	9,5	38,0	—	3,0	40117	48503	48525	48546	1M
3,0	12,0	38,0	—	3,0	40121	48504	48526	48547	1M
3,0	25,0	75,0	—	3,0	43101	49388	49401	49414	1XLM
3,5	12,0	50,0	—	4,0	40125	48505	48527	48548	1M
4,0	14,0	50,0	—	4,0	40129	48506	48528	48549	1M
4,0	25,0	75,0	—	4,0	43103	49389	49402	49415	1XLM
4,0	14,0	50,0	0,25	4,0	—	—	—	40000	1MCR
4,0	14,0	50,0	0,50	4,0	—	—	—	40001	1MCR
4,0	14,0	50,0	1,00	4,0	—	—	—	40003	1MCR
4,5	16,0	50,0	—	6,0	40133	48507	48529	48550	1M
5,0	16,0	50,0	0,25	6,0	—	—	—	40004	1MCR
5,0	16,0	50,0	0,50	6,0	—	—	—	40005	1MCR
5,0	16,0	50,0	1,00	6,0	—	—	—	40007	1MCR
5,0	16,0	50,0	—	6,0	40137	48508	48530	48551	1M
5,0	25,0	75,0	—	5,0	43107	49391	49404	49417	1XLM
6,0	19,0	50,0	—	6,0	40141	48509	48531	48552	1M
6,0	25,0	75,0	—	6,0	43105	49390	49403	49416	1XLM
6,0	19,0	50,0	0,25	6,0	—	—	—	40009	1MCR
6,0	19,0	50,0	0,50	6,0	—	—	—	40010	1MCR
6,0	19,0	50,0	0,75	6,0	—	—	—	40011	1MCR
6,0	19,0	50,0	1,00	6,0	—	—	—	40012	1MCR
7,0	19,0	63,0	—	8,0	40145	48510	48532	48553	1M
8,0	20,0	63,0	—	8,0	40149	48511	48533	48554	1M
8,0	25,0	75,0	—	8,0	43115	49392	49405	49418	1XLM
8,0	20,0	63,0	0,50	8,0	—	—	—	40015	1MCR
8,0	20,0	63,0	0,75	8,0	—	—	—	40016	1MCR
8,0	20,0	63,0	1,00	8,0	—	—	—	40017	1MCR
8,0	20,0	63,0	1,50	8,0	—	—	—	40019	1MCR
8,0	20,0	63,0	2,00	8,0	—	—	—	40020	1MCR
9,0	22,0	75,0	—	10,0	40153	48512	48534	48555	1M
10,0	22,0	75,0	—	10,0	40157	48513	48535	48556	1M

continued on next page

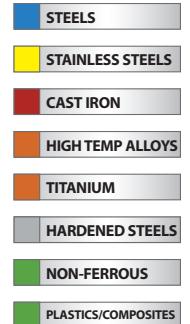


For patent information visit www.ksptpatents.com

4 Flute Square End • 4 Flute Corner Radius

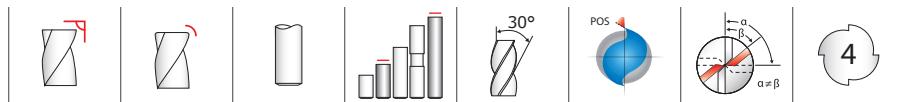

**1M • 1XLM •
1MCR**

METRIC SERIES

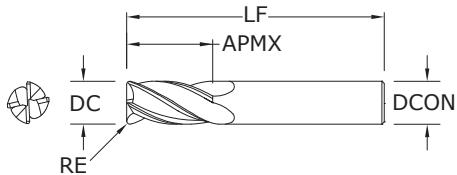

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h ₆
RE = +0,000/-0,050


CONTINUED

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	CORNER RADIUS RE	SHANK DIAMETER DCON	EDP NO.				SERIES
						UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
	10,0	38,0	100,0	—	10,0	43125	49393	49406	49419	1XLM
	10,0	22,0	75,0	0,50	10,0	—	—	—	40021	1MCR
	10,0	22,0	75,0	1,00	10,0	—	—	—	40023	1MCR
	10,0	22,0	75,0	1,50	10,0	—	—	—	40024	1MCR
	10,0	22,0	75,0	2,00	10,0	—	—	—	40025	1MCR
	11,0	25,0	75,0	—	12,0	40161	48514	48536	48557	1M
	12,0	25,0	75,0	—	12,0	41665	48515	48537	48558	1M
	12,0	50,0	100,0	—	12,0	43135	49394	49407	49420	1XLM
	12,0	75,0	150,0	—	12,0	43145	49395	49408	49421	1XLM
	12,0	25,0	75,0	0,50	12,0	—	—	—	40028	1MCR
	12,0	25,0	75,0	1,00	12,0	—	—	—	40030	1MCR
	12,0	25,0	75,0	1,50	12,0	—	—	—	40031	1MCR
	12,0	25,0	75,0	2,00	12,0	—	—	—	40032	1MCR
	14,0	32,0	89,0	—	14,0	40169	48516	48538	48559	1M
	14,0	75,0	150,0	—	14,0	43155	49396	49409	49422	1XLM
	16,0	32,0	89,0	—	16,0	40173	48517	48539	48560	1M
	16,0	75,0	150,0	—	16,0	43165	49397	49410	49423	1XLM
	16,0	32,0	89,0	0,50	16,0	—	—	—	40035	1MCR
	16,0	32,0	89,0	1,00	16,0	—	—	—	40037	1MCR
	16,0	32,0	89,0	1,50	16,0	—	—	—	40038	1MCR
	16,0	32,0	89,0	2,00	16,0	—	—	—	40039	1MCR
	18,0	38,0	100,0	—	18,0	40177	48518	48540	48561	1M
	18,0	75,0	150,0	—	18,0	43175	49398	49411	49424	1XLM
	20,0	38,0	100,0	—	20,0	40181	48519	48541	48562	1M
	20,0	75,0	150,0	—	20,0	43185	49399	49412	49425	1XLM
	25,0	38,0	100,0	—	25,0	40185	48520	48542	48563	1M
	25,0	75,0	150,0	—	25,0	43195	49400	49413	49426	1XLM

4 Flute Ball End

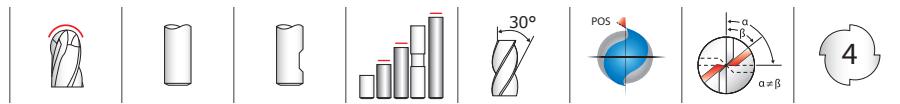


TOLERANCES (inch)

DC = +0.0000/-0.0020

DCON = h6

RE = +0.0000/-0.0010

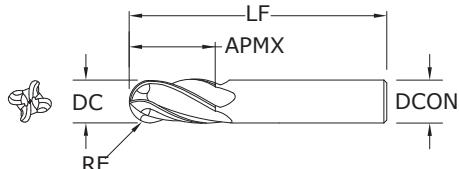

**1B • 1LB •
1ELB**
FRACTIONAL SERIES



inch				EDP NO.						SERIES
CUTTING DIAMETER	LENGTH OF CUT	OVERALL LENGTH	SHANK DIAMETER	UNCOATED	UNCOATED W/FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	
1/64	1/32	1-1/2	1/8	30102	—	39102	39002	30031	—	—
1/32	5/64	1-1/2	1/8	30104	—	39104	39004	30032	—	—
3/64	7/64	1-1/2	1/8	30106	—	39106	39006	30033	—	—
1/16	3/16	1-1/2	1/8	30108	—	39108	39008	30034	—	91269
5/64	3/16	1-1/2	1/8	30110	—	39110	39010	30035	—	—
3/32	9/32	1-1/2	1/8	30112	—	39112	39012	30036	—	—
7/64	3/8	1-1/2	1/8	30114	—	39114	39014	30037	—	—
*1/8	3/8	1-1/2	1/8	30178	—	39178	39078	30069	—	—
1/8	1/2	1-1/2	1/8	30116	—	39116	39016	30038	—	91273
1/8	3/4	2-1/4	1/8	33142	—	31770	31780	31790	—	—
1/8	1	3	1/8	33144	—	31900	31918	31928	—	—
9/64	1/2	2	3/16	30118	—	39118	39018	30039	—	—
5/32	1/2	2	3/16	30120	—	39120	39020	30040	—	—
11/64	5/8	2	3/16	30122	—	39122	39022	30041	—	—
*3/16	5/8	2	3/16	30124	—	39124	39024	30042	—	91277
3/16	3/4	2-1/2	3/16	33102	—	31771	31781	31791	—	—
3/16	1-1/8	3	3/16	33122	—	31902	31919	31929	—	—
13/64	5/8	2-1/2	1/4	30126	—	39126	39026	30043	—	—
7/32	5/8	2-1/2	1/4	30128	—	39128	39028	30044	—	—
15/64	3/4	2-1/2	1/4	30130	—	39130	39030	30045	—	—
*1/4	3/4	2-1/2	1/4	30132	—	39132	39032	30046	—	91281
1/4	1-1/8	3	1/4	33104	—	31772	31782	31792	—	—
1/4	1-1/2	4	1/4	33124	—	31904	31920	31930	—	—
17/64	3/4	2-1/2	5/16	30134	—	39134	39034	30047	—	—
9/32	3/4	2-1/2	5/16	30136	—	39136	39036	30048	—	—
19/64	13/16	2-1/2	5/16	30138	—	39138	39038	30049	—	—
*5/16	13/16	2-1/2	5/16	30140	—	39140	39040	30050	—	91285
5/16	1-1/8	3	5/16	33106	—	31773	31783	31793	—	—
5/16	1-5/8	4	5/16	33126	—	31906	31921	31931	—	—
21/64	1	2-1/2	3/8	30142	—	39142	39042	30051	—	—

RE = 1/2 Cutting Diameter (DC)

For patent
information visit
www.ksptpatents.com


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

4 Flute Ball End



4

1MB • 1XLMB METRIC SERIES

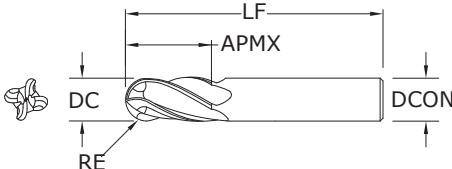

TOLERANCES (mm)

DC = +0,000/-0,050

DCON = h6

RE = +0,000/-0,025


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40106	48564	48586	48607	1MB
1,5	4,5	38,0	3,0	40110	48565	48587	48608	1MB
2,0	6,3	38,0	3,0	40114	48566	48588	48609	1MB
2,5	9,5	38,0	3,0	40118	48567	48589	48610	1MB
3,0	12,0	38,0	3,0	40122	48568	48590	48611	1MB
3,0	25,0	75,0	3,0	43102	49505	49518	49531	1XLMB
3,5	12,0	50,0	4,0	40126	48569	48591	48612	1MB
4,0	14,0	50,0	4,0	40130	48570	48592	48613	1MB
4,0	25,0	75,0	4,0	43104	49506	49519	49532	1XLMB
4,5	16,0	50,0	6,0	40134	48571	48593	48614	1MB
5,0	16,0	50,0	6,0	40138	48572	48594	48615	1MB
5,0	25,0	75,0	5,0	43108	49508	49521	49534	1XLMB
6,0	19,0	50,0	6,0	40142	48573	48595	48616	1MB
6,0	25,0	75,0	6,0	43106	49507	49520	49533	1XLMB
7,0	19,0	63,0	8,0	40146	48574	48596	48617	1MB
8,0	20,0	63,0	8,0	40150	48575	48597	48618	1MB
8,0	25,0	75,0	8,0	43116	49509	49522	49535	1XLMB
9,0	22,0	75,0	10,0	40154	48576	48598	48619	1MB
10,0	22,0	75,0	10,0	40158	48577	48599	48620	1MB
10,0	38,0	100,0	10,0	43126	49510	49523	49536	1XLMB
11,0	25,0	75,0	12,0	40162	48578	48600	48621	1MB
12,0	25,0	75,0	12,0	40166	48579	48601	48622	1MB
12,0	50,0	100,0	12,0	43136	49511	49524	49537	1XLMB
12,0	75,0	150,0	12,0	43146	49512	49525	49538	1XLMB
14,0	32,0	89,0	14,0	40170	48580	48602	48623	1MB
14,0	75,0	150,0	14,0	43156	49513	49526	49539	1XLMB
16,0	32,0	89,0	16,0	40174	48581	48603	48624	1MB
16,0	75,0	150,0	16,0	43166	49514	49527	49540	1XLMB
18,0	38,0	100,0	18,0	40178	48582	48604	48625	1MB
18,0	75,0	150,0	18,0	43176	49515	49528	49541	1XLMB
20,0	38,0	100,0	20,0	40182	48583	48605	48626	1MB
20,0	75,0	150,0	20,0	43186	49516	49529	49542	1XLMB
25,0	38,0	100,0	25,0	40186	48584	48606	48627	1MB
25,0	75,0	150,0	25,0	43196	49517	49530	49543	1XLMB


RE = 1/2 Cutting Diameter (DC)

FRACTIONAL & METRIC
4 Flute Double End

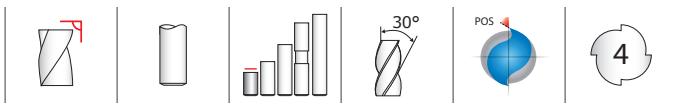

TOLERANCES (inch)

DC = +0.0000/-0.0020
DCON = h6

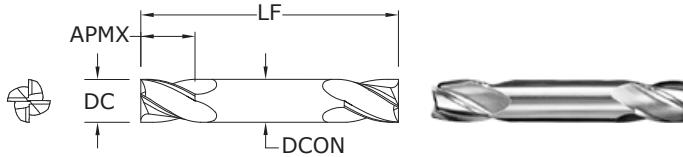

14

FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/32	1/16	1-1/2	1/8	31401	31441	39601	31170
3/64	3/32	1-1/2	1/8	31403	31443	39603	31171
1/16	1/8	1-1/2	1/8	31405	31445	39605	31172
5/64	1/8	1-1/2	1/8	31407	31447	39607	31173
3/32	3/16	1-1/2	1/8	31409	31449	39609	31174
7/64	3/16	1-1/2	1/8	31411	31451	39611	31175
*1/8	1/4	1-1/2	1/8	31413	31453	39613	31176
9/64	5/16	2	3/16	31415	31455	39615	31177
5/32	5/16	2	3/16	31417	31457	39617	31178
11/64	5/16	2	3/16	31419	31459	39619	31179
*3/16	3/8	2	3/16	31421	31461	39621	31180
13/64	1/2	2-1/2	1/4	31423	31463	39623	31181
7/32	1/2	2-1/2	1/4	31425	31465	39625	31182
15/64	1/2	2-1/2	1/4	31427	31467	39627	31183
*1/4	1/2	2-1/2	1/4	31429	31469	39629	31184
9/32	1/2	2-1/2	5/16	31431	31471	39631	31185
*5/16	1/2	2-1/2	5/16	31433	31473	39633	31186
*3/8	9/16	2-1/2	3/8	31435	31475	39635	31187
7/16	9/16	2-3/4	7/16	31437	31477	39637	31188
*1/2	5/8	3	1/2	31439	31479	39639	31189
*Series 14 Set				31489	31481	39641	31190



For patent information visit www.ksptpatents.com

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h6


mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41405	48884	48905	48926
1,5	3,0	38,0	3,0	41409	48885	48906	48927
2,0	4,0	38,0	3,0	41413	48886	48907	48928
2,5	5,0	38,0	3,0	41417	48887	48908	48929
3,0	6,0	38,0	3,0	41421	48888	48909	48930
3,5	7,0	50,0	4,0	41425	48889	48910	48931
4,0	8,0	50,0	4,0	41429	48890	48911	48932
4,5	9,5	63,0	4,5	41433	48891	48912	48933
5,0	10,0	63,0	5,0	41437	48892	48913	48934
6,0	12,0	63,0	6,0	41441	48893	48914	48935
7,0	12,0	63,0	8,0	41445	48894	48915	48936
8,0	12,0	63,0	8,0	41449	48895	48916	48937
9,0	14,0	75,0	9,0	41453	48896	48917	48938
10,0	14,0	75,0	10,0	41457	48897	48918	48939
11,0	14,0	75,0	12,0	41461	48898	48919	48940
12,0	16,0	75,0	12,0	41465	48899	48920	48941




For patent information visit www.ksptpatents.com

FRACTIONAL & METRIC

4 Flute Double End Ball End



14B
FRACTIONAL SERIES

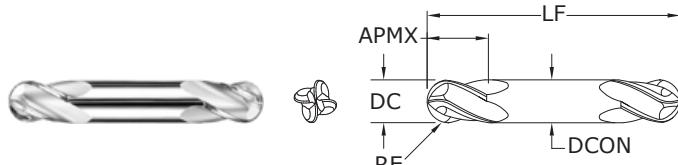

TOLERANCES (inch)

DC = +0.0000/-0.0020
DCON = h₆
RE = +0.0000/-0.0010

	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	EDP NO.	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
STEELS	1/32	1/16	1-1/2	1/8	31402	31442	39602	31218	
STAINLESS STEELS	3/64	3/32	1-1/2	1/8	31404	31444	39604	31219	
CAST IRON	1/16	1/8	1-1/2	1/8	31406	31446	39606	31220	
HIGH TEMP ALLOYS	5/64	1/8	1-1/2	1/8	31408	31448	39608	31221	
TITANIUM	3/32	3/16	1-1/2	1/8	31410	31450	39610	31222	
HARDENED STEELS	7/64	3/16	1-1/2	1/8	31412	31452	39612	31223	
NON-FERROUS	*1/8	1/4	1-1/2	1/8	31414	31454	39614	31224	
PLASTICS/COMPOSITES	9/64	5/16	2	3/16	31416	31456	39616	31225	
	5/32	5/16	2	3/16	31418	31458	39618	31226	
	11/64	5/16	2	3/16	31420	31460	39620	31227	
	*3/16	3/8	2	3/16	31422	31462	39622	31228	
	13/64	1/2	2-1/2	1/4	31424	31464	39624	31229	
	7/32	1/2	2-1/2	1/4	31426	31466	39626	31230	
	15/64	1/2	2-1/2	1/4	31428	31468	39628	31231	
	*1/4	1/2	2-1/2	1/4	31430	31470	39630	31232	
	9/32	1/2	2-1/2	5/16	31432	31472	39632	31233	
	*5/16	1/2	2-1/2	5/16	31434	31474	39634	31234	
	*3/8	9/16	2-1/2	3/8	31436	31476	39636	31235	
	7/16	9/16	2-3/4	7/16	31438	31478	39638	31236	
	*1/2	5/8	3	1/2	31440	31480	39640	31237	
	*Series 14B Set				31490	31482	39642	31217	
	RE = 1/2 Cutting Diameter (DC)								

For patent information visit www.ksptpatents.com


TOLERANCES (mm)

DC = +0.000/-0.050
DCON = h₆
RE = +0.000/-0.025

	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	EDP NO.	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
STEELS	1,0	2,0	38,0	3,0	41406	48947	48968	48989	
STAINLESS STEELS	1,5	3,0	38,0	3,0	41410	48948	48969	48990	
CAST IRON	2,0	4,0	38,0	3,0	41414	48949	48970	48991	
HIGH TEMP ALLOYS	2,5	5,0	38,0	3,0	41418	48950	48971	48992	
TITANIUM	3,0	6,0	38,0	3,0	41422	48951	48972	48993	
HARDENED STEELS	3,5	7,0	50,0	4,0	41426	48952	48973	48994	
NON-FERROUS	4,0	8,0	50,0	4,0	41430	48953	48974	48995	
PLASTICS/COMPOSITES	4,5	9,5	63,0	4,5	41434	48954	48975	48996	
	5,0	10,0	63,0	5,0	41438	48955	48976	48997	
	6,0	12,0	63,0	6,0	41442	48956	48977	48998	
	7,0	12,0	63,0	8,0	41446	48957	48978	48999	
	8,0	12,0	63,0	8,0	41450	48958	48979	49000	
	9,0	14,0	75,0	9,0	41454	48959	48980	49001	
	10,0	14,0	75,0	10,0	41458	48960	48981	49002	
	11,0	14,0	75,0	12,0	41462	48961	48982	49003	
	12,0	16,0	75,0	12,0	41466	48962	48983	49004	
	RE = 1/2 Cutting Diameter (DC)								


For patent information visit www.ksptpatents.com

4 Flute Square End Stub

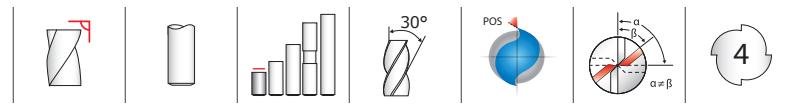

TOLERANCES (inch)

DC = -0.000/-0.0020
DCON = h₆

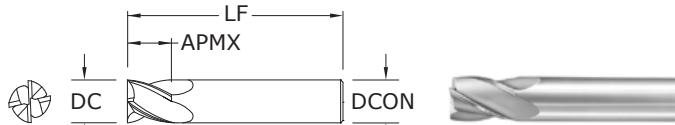

16

FRACTIONAL SERIES

inch				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/16	1/8	1-1/2	1/8	31601	31650	31238	31251
3/32	3/16	1-1/2	1/8	31603	31651	31239	31252
1/8	1/4	1-1/2	1/8	31605	31652	31240	31253
5/32	5/16	2	3/16	31607	31653	31241	31254
3/16	3/8	2	3/16	31609	31654	31242	31255
7/32	7/16	2	1/4	31611	31655	31243	31256
1/4	1/2	2	1/4	31613	31656	31244	31257
5/16	1/2	2	5/16	31615	31657	31245	31258
3/8	5/8	2	3/8	31617	31658	31246	31259
7/16	5/8	2-1/2	7/16	31619	31659	31247	31260
1/2	5/8	2-1/2	1/2	31621	31660	31248	31261
5/8	3/4	3	5/8	31623	31661	31249	31262
3/4	1	3	3/4	31625	31662	31250	31263

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS


NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

TOLERANCES (mm)

DC = +0,000/-0,050
DCON = h₆

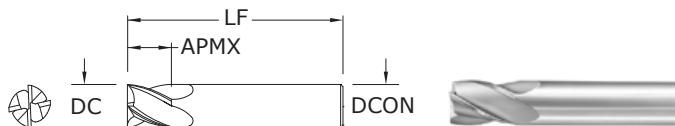

16M

METRIC SERIES

mm				EDP NO.			
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41605	49136	49157	49178
1,5	3,0	38,0	3,0	41609	49137	49158	49179
2,0	4,0	38,0	3,0	41613	49138	49159	49180
2,5	5,0	38,0	3,0	41617	49139	49160	49181
3,0	6,0	38,0	3,0	41621	49140	49161	49182
3,5	7,0	50,0	4,0	41625	49141	49162	49183
4,0	8,0	50,0	4,0	41629	49142	49163	49184
4,5	9,5	50,0	4,5	41633	49143	49164	49185
5,0	10,0	50,0	5,0	41637	49144	49165	49186
6,0	12,0	50,0	6,0	41641	49145	49166	49187
7,0	12,0	50,0	8,0	41645	49146	49167	49188
8,0	12,0	50,0	8,0	41649	49147	49168	49189
9,0	14,0	50,0	9,0	41653	49148	49169	49190
10,0	16,0	50,0	10,0	41657	49149	49170	49191
11,0	19,0	63,0	12,0	41661	49150	49171	49192
12,0	19,0	63,0	12,0	40165	49151	49172	49193

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS


NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com


FRACTIONAL & METRIC

4 Flute High Shear



54

FRACTIONAL SERIES

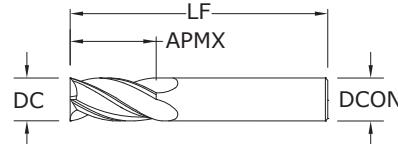

TOLERANCES (inch)

DC = +0.0000/-0.0020
 DCON = h₆

NON-FERROUS


PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	EDP NO.
	1/16	3/16	1-1/2	1/8	35473	35500
	3/32	3/8	1-1/2	1/8	35475	35501
	1/8	7/16	1-1/2	1/8	35477	35502
	5/32	9/16	2	3/16	35478	35503
	3/16	9/16	2	3/16	35479	35504
	7/32	5/8	2-1/2	1/4	35480	35505
	1/4	3/4	2-1/2	1/4	35481	35506
	9/32	3/4	2-1/2	5/16	35482	35507
	5/16	13/16	2-1/2	5/16	35483	35508
	3/8	7/8	2-1/2	3/8	35485	35509
	7/16	1	2-3/4	7/16	35487	35510
	1/2	1	3	1/2	35489	35511
	9/16	1-1/8	3-1/2	9/16	35491	35512
	5/8	1-1/4	3-1/2	5/8	35493	35513
	3/4	1-1/2	4	3/4	35495	35514
	1	1-1/2	4	1	35497	35515

54M

METRIC SERIES

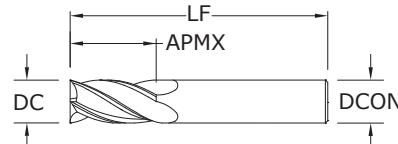

TOLERANCES (mm)

DC = +0,000/-0,050
 DCON = h₆
 RE = +0,000/-0,025

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com


	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED	EDP NO.
	3,0	8,0	38,0	3,0	45477	45478
	3,5	10,0	57,0	6,0	45479	45480
	4,0	11,0	57,0	6,0	45481	45482
	4,5	11,0	57,0	6,0	45483	45484
	5,0	13,0	57,0	6,0	45485	45486
	6,0	13,0	57,0	6,0	45487	45488
	8,0	19,0	63,0	8,0	45489	45490
	10,0	22,0	72,0	10,0	45491	45492
	12,0	26,0	83,0	12,0	45493	45494
	14,0	26,0	83,0	14,0	45495	45496
	16,0	32,0	92,0	16,0	45497	45498
	20,0	38,0	104,0	20,0	45499	45500

Single End Roughers (Coarse Pitch)



TOLERANCES (inch)

DC = +0.0000/-0.0040
DCON = h₆
RE = +0.0050/-0.0050

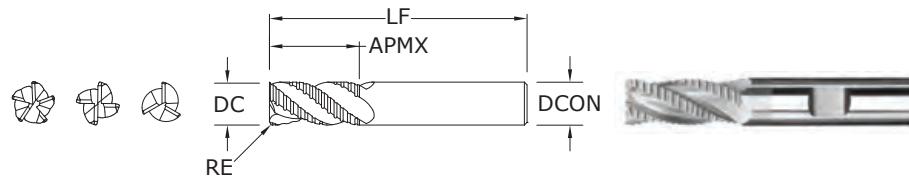

61

FRACTIONAL SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	EDP NO.		
						Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
*1/4	3/4	2-1/2	1/4	.045	3	36107	36106	36110
*5/16	3/4	2-1/2	5/16	.045	3	36109	36108	36111
3/8	7/8	2-1/2	3/8	.060	3	36113	36112	36114
1/2	1	3	1/2	.060	4	36117	36116	36118
5/8	1-1/4	3-1/2	5/8	.060	4	36121	36120	36122
3/4	1-5/8	4	3/4	.060	4	36125	36124	36126
1	1-3/4	4	1	.060	5	36129	36128	36130


*Without Flat



For patent information visit
www.ksptpatents.com

TOLERANCES h10 (mm)

DC = +0,000 / -0,100
DCON = h₆
RE = +0,127/-0,127

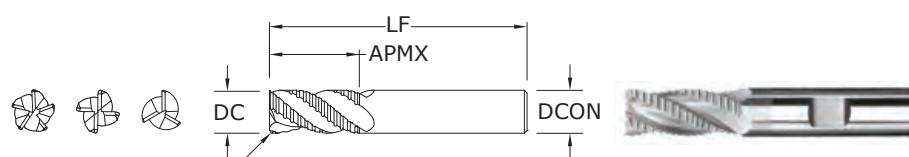


61M

METRIC SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	EDP NO.		
						Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46107	46106	46110
8,0	19,0	63,0	8,0	1,14	3	46109	46108	46111
10,0	22,0	72,0	10,0	1,52	3	46113	46112	46114
12,0	26,0	83,0	12,0	1,52	4	46117	46116	46118
16,0	32,0	92,0	16,0	1,52	4	46121	46120	46122
20,0	38,0	104,0	20,0	1,52	4	46129	46128	46132
25,0	44,0	104,0	25,0	1,52	5	46131	46130	46133

For patent information visit
www.ksptpatents.com

FRACTIONAL

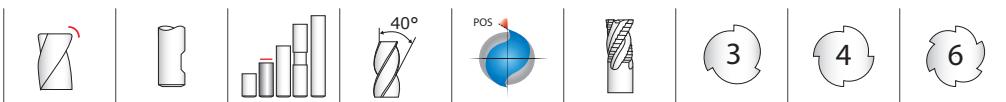Single End Roughers (Fine Pitch)**62**


FRACTIONAL SERIES

STAINLESS STEELS

HIGH TEMP ALLOYS

TITANIUM


For patent
information visit
www.ksptpatents.com

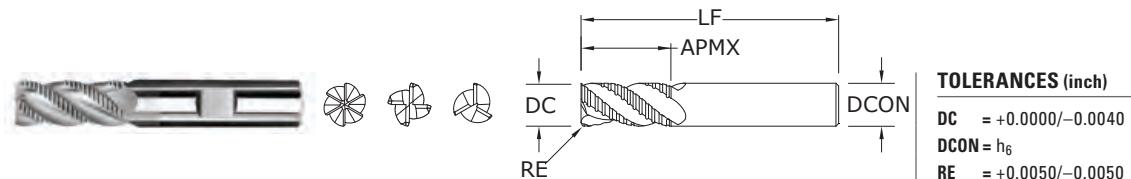

	inch						EDP NO.		
	CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
	*1/4	3/4	2-1/2	1/4	.045	3	36207	36206	36210
	*5/16	3/4	2-1/2	5/16	.045	3	36209	36208	36211
	3/8	7/8	2-1/2	3/8	.060	3	36213	36212	36214
	1/2	1	3	1/2	.060	4	36217	36216	36218
	5/8	1-1/4	3-1/2	5/8	.060	4	36221	36220	36222
	3/4	1-5/8	4	3/4	.060	4	36225	36224	36226
	1	1-3/4	4	1	.060	6	36229	36228	36230

*Without Flat

Single End Roughers (Fine Pitch)

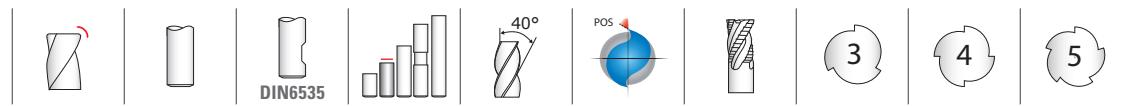


TOLERANCES h10 (mm)

DC = +0,000 / -0,100

DCON = h6

RE = +0,127 / -0,127

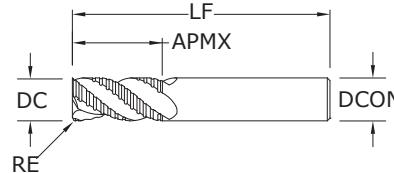**62M**

METRIC SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	CORNER RADIUS RE	NO. OF FLUTES	EDP NO.		
						Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46207	46206	46210
8,0	19,0	63,0	8,0	1,14	3	46209	46208	46211
10,0	22,0	72,0	10,0	1,52	3	46213	46212	46214
12,0	26,0	83,0	12,0	1,52	4	46217	46216	46218
16,0	32,0	92,0	16,0	1,52	4	46221	46220	46222
20,0	38,0	104,0	20,0	1,52	4	46229	46228	46232
25,0	44,0	104,0	25,0	1,52	5	46231	46230	46233


STAINLESS STEELS

HIGH TEMP ALLOYS

TITANIUM

For patent information visit
www.ksptpatents.com

FRACTIONAL

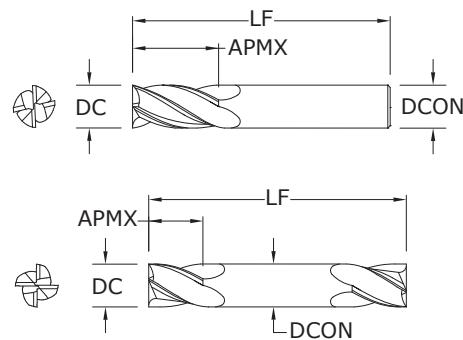End Mill Sets

Pictured:
Series 1 4 Flute
Single End Square
Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

Square End


FRACTIONAL SERIES



For patent
information visit
www.ksptpatents.com

DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
Series 1 – 4 Flute, Single End	30189	39189	39089	30030
Series 3 – 2 Flute, Single End	30389	39389	39589	30470
Series 5 – 3 Flute, Single End	30589	39789	30810	30850
Series 14 – 4 Flute, Double End	31489	31481	39641	31190
Series 15 – 2 Flute, Double End	31589	31581	39691	31336

FRACTIONAL End Mill Sets

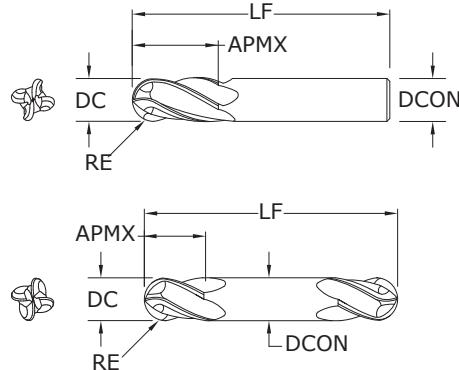

Pictured:
Series 1 4 Flute Single
End Ball Endmill Set

CUTTING DIAMETER DC	SINGLE END LENGTH OF CUT APMX	DOUBLE END LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

RE = 1/2 Cutting Diameter (DC)

Ball End FRACTIONAL SERIES

DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AITiN)
Series 1B – 4 Flute, Single End	30190	39190	39090	30070
Series 3B – 2 Flute, Single End	30390	39390	39590	30600
Series 5B – 3 Flute, Single End	30590	30900	30944	31169
Series 14B – 4 Flute, Double End	31490	31482	39642	31217
Series 15B – 2 Flute, Double End	31590	31582	39692	31357




For patent
information visit
www.ksptpatents.com

FRACTIONAL

2 Flute: Square & Ball End

4 Flute: Square & Ball End



Diamond 1, 1B, 3, 3B Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • in						
				1/8	1/4	5/16	3/8	1/2		
GRAPHITE Ultrafine, Superfine	Profile 	≤ 0.25	≤ 1.5	720	RPM	22003	11002	8801	7334	5501
					Fz	0.0009	0.0023	0.0036	0.0043	0.0058
				(576-864)	Feed 2 flutes (ipm)	38.3	50.6	63.4	63.1	63.8
	Slot 	≤ 1	≤ 1		Feed 4 flutes (ipm)	76.6	101.2	126.7	126.2	127.6
				580	RPM	17725	8862	7090	5908	4431
				(464-696)	Fz	0.0075	0.0020	0.0031	0.0038	0.0050
COMPOSITES FRP, CFRP, GRP	Profile 	≤ 0.25	≤ 1.5	385	Feed 2 flutes (ipm)	12.2	16.5	20.7	20.4	20.6
					Feed 4 flutes (ipm)	24.5	32.9	41.4	40.8	41.2
					RPM	11766	5883	4706	3922	2941
	Slot 	≤ 1	≤ 1	350	Fz	0.0005	0.0014	0.0022	0.0026	0.0035
					Feed 2 flutes (ipm)	9.6	12.8	16.3	16.4	16.0
					Feed 3 flutes (ipm)	19.3	25.7	32.5	32.8	32.1
PLASTICS Polycarbonate, PVC, Polypropylene	Profile 	≤ 0.25	≤ 1.5	1200	RPM	36672	18336	14669	12224	9168
					Fz	0.0009	0.0023	0.0036	0.0043	0.0058
					Feed 2 flutes (ipm)	63.8	84.3	105.6	105.1	106.3
	Slot 	≤ 1	≤ 1	960	Feed 4 flutes (ipm)	127.6	168.7	211.2	210.3	212.7
					RPM	29338	14669	11735	9779	7334
					Fz	0.0008	0.0020	0.0031	0.0038	0.0050

rpm = $(V_c \times 3.82) / DC$

ipm = Fz x number of flutes x rpm

finish cuts typically require reduced feed and cut depths (.02 x D maximum)


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius

3 Flute: Square, Ball, Tapered

4 Flute: Square, Double, Stub, Ball, Corner Radius

Tapered: Square, Radius



Series
1, 3, 5, 14, 15, 16,
17, 23, 24, 59
Fractional

P

M

K

N

CARBON STEELS
1018, 1040, 1080,
1090, 10L50, 1140,
1212, 12L15, 1525,
1536

ALLOY STEELS
4140, 4150, 4320,
5120, 5150, 8630,
86L20, 50100

**STAINLESS STEELS
(FREE MACHINING)**
303, 416, 420F, 430F
440F

**STAINLESS STEELS
(DIFFICULT)**
304, 304L, 316, 316L,
17-4 PH, 15-5, 13-4,
Custom 450

CAST IRONS
Gray, Malleable,
Ductile

**ALUMINUM
ALLOYS**
2017, 2024, 356,
6061, 7075

COPPER ALLOYS
Alum Bronze, C110,
Muntz Brass

	Hardness	Flutes	Ae x DC	Ap x DC	Vc (sfm)	DC • in										
						1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1		
P	$\leq 175 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	460	RPM	112461	56230	28115	14058	7029	4686	3514	2343	1757
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
						Feed (ipm)	6.7	6.7	7.3	8.4	11.2	14.1	14.1	11.2	9.8	
		Slot	2 3 4	1 ≤ 0.5 ≤ 0.4	≤ 1 ≤ 0.5 ≤ 0.4	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280
						Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
						Feed (ipm)	3.3	4.1	3.7	4.1	6.1	7.5	7.7	6.1	5.4	
		Slot	2 3 4	1 ≤ 0.5 ≤ 0.4	≤ 1 ≤ 0.5 ≤ 0.4	245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936
						Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
M	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	370	RPM	90458	45229	22614	11307	5654	3769	2827	1885	1413
						Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
						Feed (ipm)	3.6	4.5	4.1	4.5	6.8	8.3	8.5	6.8	5.9	
		Slot	2 3 4	1 ≤ 0.5 ≤ 0.4	≤ 1 ≤ 0.5 ≤ 0.4	270	RPM	66010	33005	16502	8251	4126	2750	2063	1375	1031
						Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	255	RPM	62342	31171	15586	7793	3896	2598	1948	1299	974
						Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
						Feed (ipm)	2.5	2.5	2.5	2.6	3.9	4.7	4.7	3.6	3.3	
		Slot	2 3 4	1 ≤ 0.5 ≤ 0.4	≤ 1 ≤ 0.5 ≤ 0.4	185	RPM	45229	22614	11307	5654	2827	1885	1413	942	707
						Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
K	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
						Feed (ipm)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2	
		Slot	2 3 4	1 ≤ 0.5 ≤ 0.4	≤ 1 ≤ 0.5 ≤ 0.4	245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362
						Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
						Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6	
		Slot	2 3	1 ≤ 0.5 ≤ 0.5	≤ 1 ≤ 0.5	640	RPM	156467	78234	39117	19558	9779	6519	4890	3260	2445
						Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
N	$\leq 150 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	Profile	2 3	≤ 0.50 ≤ 0.25	≤ 1.5 ≤ 1.5	485	RPM	118573	59286	29643	14822	7411	4941	3705	2470	1853
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
						Feed (ipm)	7.1	7.1	7.7	8.9	11.9	14.8	14.8	11.9	10.4	
		Slot	2 3	1 ≤ 0.5 ≤ 0.5	≤ 1 ≤ 0.5	350	RPM	85568	42784	21392	10696	5348	3565	2674	1783	1337
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
	$\leq 140 \text{ Bhn}$ or $\leq 3 \text{ HRc}$	Profile	2 3 4	≤ 0.50 ≤ 0.25 ≤ 0.25	≤ 1.5 ≤ 1.5 ≤ 1.5	350	RPM	21392	10696	5348	3565	2674	1783	1337	1080	
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
						Feed (ipm)	5.1	5.1	5.6	6.4	8.6	10.7	10.7	8.6	7.5	
		Slot	2 3 4	1 ≤ 0.5 ≤ 0.4	≤ 1 ≤ 0.5 ≤ 0.4	350	RPM	10.3	10.3	11.1	12.8	17.1	21.4	21.4	17.1	15.0
						Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	

continued on next page


FRACTIONAL

2 Flute: Square, Double, Stub, Long, Ball, Corner Radius

3 Flute: Square, Ball, Tapered

4 Flute: Square, Double, Stub, Ball, Corner Radius

Tapered: Square, Radius



Series 1, 3, 5, 14, 15, 16, 17, 23, 24, 59	Fractional Hardness	Flutes	Ae x DC	Ap x DC	Vc (sfm)	DC • in									
						1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1	
N	PLASTICS Polycarbonate, PVC, Polypropylene	Profile	2 ≤ 0.50	≤ 1.5	880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
					Feed (ipm)	25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6	
		Slot	2 1	≤ 1	(704-1056)	RPM	156467	78234	39117	19558	9779	6519	4890	3260	2445
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
					Feed (ipm)	38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5	
	GRAPHITE	Profile	3 ≤ 0.25	≤ 1.5	640	RPM	156467	78234	39117	19558	9779	6519	4890	3260	2445
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
					Feed (ipm)	51.6	55.9	53.8	64.5	86.1	107.6	107.6	86.1	75.3	
		Slot	2 1	≤ 0.5	(512-768)	RPM	161357	80678	40339	20170	10085	6723	5042	3362	2521
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
					Feed (ipm)	18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400, Rene, Waspalloy	Profile	2 ≤ 0.50	≤ 1.5	(528-792)	RPM	19.4	21.0	20.2	24.2	32.3	40.3	40.3	32.3	28.2
					Fz	29.0	31.5	30.3	36.3	48.4	60.5	60.5	48.4	42.4	
					Feed (ipm)	38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5	
					660	RPM	117350	58675	29338	14669	7334	4890	3667	2445	1834
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
					Feed (ipm)	14.1	15.3	14.7	17.6	23.5	29.3	29.3	23.5	20.5	
		Slot	2 1	≤ 1	(384-576)	RPM	21.1	22.9	22.0	26.4	35.2	44.0	44.0	35.2	30.8
					Fz	28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1	
					Feed (ipm)	38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5	
					65	RPM	15891	7946	3973	1986	993	662	497	331	248
					Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014	
					Feed (ipm)	0.6	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7	
H	TITANIUM ALLOYS Ti6Al4V, Ti6Al25n4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	Profile	2 ≤ 0.50	≤ 1.5	(52-78)	RPM	1.0	0.7	0.7	1.1	1.0	1.6	1.5	1.2	1.0
					Fz	1.3	1.0	1.0	1.4	1.4	2.1	2.0	1.6	1.4	
					45	RPM	11002	5501	2750	1375	688	458	344	229	172
					Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014	
					Feed (ipm)	0.7	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7	
					45	RPM	31782	15891	7946	3973	1986	1324	993	662	497
		Slot	2 1	≤ 1	(36-54)	RPM	0.4	0.3	0.3	0.5	0.5	0.7	0.7	0.6	0.5
					Fz	0.7	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7	
					Feed (ipm)	0.9	0.7	0.7	1.0	1.0	1.5	1.4	1.1	1.0	
					180	RPM	44006	22003	11002	5501	2750	1834	1375	917	688
					Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
					Feed (ipm)	1.8	1.8	1.8	2.2	2.8	3.3	3.3	2.6	2.3	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	Profile	2 ≤ 0.25	≤ 1.5	(144-216)	RPM	2.6	2.6	2.6	3.3	4.1	5.0	5.0	3.9	3.5
					Fz	3.5	3.5	3.5	4.4	5.5	6.6	6.6	5.1	4.7	
					130	RPM	31782	15891	7946	3973	1986	1324	993	662	497
					Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
					Feed (ipm)	1.3	1.3	1.3	1.6	2.0	2.4	2.4	1.9	1.7	
					230	RPM	1.9	1.9	1.9	2.4	3.0	3.6	3.6	2.8	2.5
		Slot	2 1	≤ 0.5	(104-156)	RPM	2.5	2.5	2.5	3.2	4.0	4.8	4.8	3.7	3.4
					Fz	3.4	4.2	3.8	4.2	6.3	7.7	7.7	6.3	5.5	
					Feed (ipm)	4.5	5.6	5.1	5.6	8.4	10.3	10.5	8.4	7.4	
					315	RPM	77011	38506	19253	9626	4813	3209	2407	1604	1203
					Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
					Feed (ipm)	3.1	3.9	3.5	3.9	5.8	7.1	7.2	5.8	5.1	

Bhn (Brinell) HRc (Rockwell C)

rpm = $(Vc \times 3.82) / DC$

ipm = $Fz \times \text{number of flutes} \times rpm$

reduce speed and feed for materials harder than listed

for tapered end mills, base the speed on the largest diameter contacting

the workpiece and the feed on the smallest diameter

limit cut depths of long and extra long flute mills to .05 x DC when slotting

or profiling


reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

2 Flute: High Shear

4 Flute: High Shear



Series 52, 54 Fractional	Hardness	Flutes	Ae x DC	Ap x DC	Vc (sfm)	DC • in					
						1/8	1/4	3/8	1/2	3/4	1
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	≤ 150 Brhn or ≤ 7 HRc	Profile	2	≤ 0.3	≤ 1.5	1360	RPM	41562	20781	13854	10390
						(1088-1632)	Fz	0.00069	0.0018	0.0034	0.0046
		Slot	4	≤ 0.3	≤ 1.5		Feed (ipm)	57.4	74.8	94.2	95.6
							114.7	149.6	188.4	191.2	152.4
	≤ 125 Brhn or ≤ 77 HRb	Profile	2	1	≤ 1	1090	RPM	33310	16655	11103	8328
						(872-1308)	Fz	0.00063	0.0017	0.0032	0.0042
		Slot	4	1	≤ 0.25		Feed (ipm)	42.0	56.6	71.1	70.0
							83.9	113.3	142.1	139.9	111.0
ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	≤ 125 Brhn or ≤ 77 HRb	Profile	2	≤ 0.3	≤ 1.5	510	RPM	15586	7793	5195	3896
						(408-612)	Fz	0.00069	0.0018	0.0034	0.0046
		Slot	4	≤ 0.3	≤ 1.5		Feed (ipm)	21.5	28.1	35.3	35.8
							43.0	56.1	70.7	71.7	57.1
	≤ 140 Brhn or ≤ 3 HRc	Profile	2	1	≤ 1	410	RPM	12530	6265	4177	3132
						(328-492)	Fz	0.00063	0.0017	0.0032	0.0042
		Slot	4	1	≤ 0.25		Feed (ipm)	15.8	21.3	26.7	26.3
							31.6	42.6	53.5	52.6	41.8
COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass	≤ 140 Brhn or ≤ 3 HRc	Profile	2	≤ 0.3	≤ 1.5	590	RPM	18030	9015	6010	4508
						(472-708)	Fz	0.00039	0.0010	0.0020	0.0026
		Slot	4	≤ 0.3	≤ 1.5		Feed (ipm)	14.1	18.0	24.0	23.4
							28.1	36.1	48.1	46.9	37.3
	≤ 200 Brhn or ≤ 23 HRc	Profile	2	1	≤ 1	475	RPM	14516	7258	4839	3629
						(380-570)	Fz	0.00036	0.0010	0.0018	0.0024
		Slot	4	1	≤ 0.25		Feed (ipm)	10.5	14.5	17.4	17.4
							20.9	29.0	34.8	34.8	28.1
COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze	≤ 200 Brhn or ≤ 23 HRc	Profile	2	≤ 0.3	≤ 1.5	235	RPM	7182	3591	2394	1795
						(188-282)	Fz	0.00039	0.0010	0.0020	0.0026
		Slot	4	≤ 0.3	≤ 1.5		Feed (ipm)	5.6	7.2	9.6	9.3
							11.2	14.4	19.2	18.7	14.8
	≤ 140 Brhn or ≤ 3 HRc	Profile	2	1	≤ 1	190	RPM	5806	2903	1935	1452
						(152-228)	Fz	0.00036	0.0010	0.0018	0.0024
		Slot	4	1	≤ 0.25		Feed (ipm)	4.2	5.8	7.0	7.0
							8.4	11.6	13.9	13.9	11.2
PLASTICS ABS, Polycarbonate, PVC, Polypropylene	≤ 140 Brhn or ≤ 3 HRc	Profile	2	≤ 0.3	≤ 1.5	1600	RPM	48896	24448	16299	12224
						(1280-1920)	Fz	0.00110	0.0030	0.0056	0.0074
		Slot	4	≤ 0.3	≤ 1.5		Feed (ipm)	107.6	146.7	182.5	180.9
							215.1	293.4	365.1	361.8	290.1
	≤ 200 Brhn or ≤ 23 HRc	Profile	2	1	≤ 1	1280	RPM	39117	19558	13039	9779
						(1024-1536)	Fz	0.00100	0.0027	0.0051	0.0068
		Slot	4	1	≤ 0.25		Feed (ipm)	78.2	105.6	133.0	133.0
							156.5	211.2	266.0	266.0	213.8
PLASTICS Fiberglass, Glass Filled	≤ 140 Brhn or ≤ 3 HRc	Profile	2	≤ 0.3	≤ 1.5	720	RPM	22003	11002	7334	5501
						(576-864)	Fz	0.00082	0.0022	0.0041	0.0055
		Slot	4	≤ 0.3	≤ 1.5		Feed (ipm)	36.1	48.4	60.1	60.5
							72.2	96.8	120.3	121.0	95.3
	≤ 200 Brhn or ≤ 23 HRc	Profile	2	1	≤ 1	575	RPM	17572	8786	5857	4393
						(460-690)	Fz	0.00075	0.0020	0.0037	0.0050
		Slot	4	1	≤ 0.25		Feed (ipm)	26.4	35.1	43.3	43.9
							52.7	70.3	86.7	87.9	70.3

Bhn (Brinell) HRc (Rockwell C)


rpm = $(V_c \times 3.82) / DC$ ipm = $F_z \times \text{number of flutes} \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling ($.02 \times DC$ maximum)refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Single End Roughers (Coarse Pitch)



Series 61 Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/4	3/8	1/2	3/4	1			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 175 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	500 (400-600)	RPM	7640	5093	3820	2547	1910
			Slot 	1	≤ 1	400 (320-480)	RPM	6112	4075	3056	2037	1528
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HR}$	Profile 	≤ 0.5	≤ 1.5	365 (292-438)	RPM	5577	3718	2789	1859	1394
			Slot 	1	≤ 1	295 (236-354)	RPM	4508	3005	2254	1503	1127
K	CAST IRONS Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	365 (292-438)	RPM	5577	3718	2789	1859	1394
			Slot 	1	≤ 1	295 (236-354)	RPM	4508	3005	2254	1503	1127
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 250 \text{ Bhn}$ or $\leq 24 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	345 (276-414)	RPM	5272	3514	2636	1757	1318
			Slot 	1	≤ 1	275 (220-330)	RPM	4202	2801	2101	1401	1051


Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 3.82) / DC$ ipm = $F_z \times \text{number of flutes} \times \text{rpm}$

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series 62 Fractional	Hardness	Ae x DC	Ap x DC	Vc (sfm)	DC • in							
					1/4	3/8	1/2	3/4	1			
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	405 (324-486)	RPM	6188	4126	3094	2063	1547
						Fz (ipm)	0.0006	0.0011	0.0015	0.0019	0.0021	
	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	325 (260-390)	RPM	4966	3311	2483	1655	1242
						Fz (ipm)	0.0006	0.0011	0.0015	0.0019	0.0021	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	280 (224-336)	RPM	4278	2852	2139	1426	1070
						Fz (ipm)	0.0005	0.0009	0.0012	0.0015	0.0017	
	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc	Slot 	1	≤ 1	56 (45-67)	RPM	3438	2292	1719	1146	860
						Fz (ipm)	0.0005	0.0009	0.0012	0.0015	0.0017	

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 3.82) / DC$ ipm = $F_z \times \text{number of flutes} \times rpm$

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)

METRIC


2 Flute: Square, Double, Stub, Long Reach, Ball

3 Flute: Square, Long Reach, Ball

4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius



continued on next page

2 Flute: Square, Double, Stub, Long Reach, Ball**3 Flute: Square, Long Reach, Ball****4 Flute: Square, Double, Stub, Long Reach, Ball, Corner Radius**

Series
1M, 3M, 5M,
14M, 15M, 16M,
17M, 59M
Metric

COPPER ALLOYS
Alum Bronze, C110,
Muntz Brass

N PLASTICS
Polycarbonate,
PVC, Polypropylene

GRAPHITE

SUPER ALLOYS
(NICKEL, COBALT,
IRON BASE)
Inconel 601,
617, 625, 718,
Incoloy 800,
Monel 400, Rene,
Waspalloy

TITANIUM ALLOYS
Ti6Al4V,
Ti6Al2Sn4Zr2Mo,
Ti4Al4Mo2Sn0.5Si,
Ti10Al2Fe3Al,
Ti5Al5Mo3Cr,
Ti7Al4Mo,
Ti3Al8V6Cr4Zr4Mo,
Ti6Al6V6Sn,
Ti152 Cr3Sn3Al

H TOOL STEELS
A2, D2, H13, L2, M2,
P20, S7, T15, W2

		Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)	DC • mm									
							0.4	0.75	1.5	3	6	10	12	20	25	
COPPER ALLOYS	≤ 140 Bhn or ≤ 3 HRc	Profile	2	≤ 0.50	≤ 1.5	148	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881
			3	≤ 0.25	≤ 1.5	(118-177)	Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	188	188	194	219	298	376	376	301	263
			2	1	≤ 1		RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357
			3	1	≤ 0.5		Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
			4	1	≤ 0.4		Feed (mm/min)	136	136	140	158	215	271	271	217	190
		Slot	2	1	≤ 1	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412
			3	1	≤ 0.5	(215-322)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
			4	1	≤ 0.4		Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955
			2	1	≤ 1		RPM	960	1092	1024	1194	1621	2047	2047	1638	1433
			3	1	≤ 0.5		Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
			4	1	≤ 0.4		Feed (mm/min)	1280	1456	1365	1592	2161	2730	2730	2184	1911
		Graphite	2	≤ 0.50	≤ 1.5	195	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482
			3	≤ 0.25	≤ 1.5	(156-234)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	465	529	496	579	786	993	993	794	695
			2	1	≤ 1		RPM	698	794	745	869	1179	1489	1489	1191	1042
			3	1	≤ 0.5		Fz	931	1059	993	1158	1572	1985	1985	1588	1390
			4	1	≤ 0.4		Feed (mm/min)	159954	85309	42654	21327	10664	6398	5332	3199	2559
		Super Alloys	2	≤ 0.50	≤ 1.5	201	RPM	116330	62043	31021	15511	7755	4653	3878	2327	1861
			3	≤ 0.25	≤ 1.5	(161-241)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	480	546	512	597	810	1024	1024	819	717
			2	1	≤ 1		RPM	720	819	768	896	1216	1536	1536	1228	1075
			3	1	≤ 0.5		Fz	960	1092	1024	1194	1621	2047	2047	1638	1433
			4	1	≤ 0.4		Feed (mm/min)	117	176	143	234	342	53	50	40	35
		Titanium Alloys	2	1	≤ 1	146	RPM	349	397	372	434	589	745	745	596	521
			3	1	≤ 0.5	(117-176)	Fz	698	794	745	869	1179	1489	1489	1191	1042
			4	1	≤ 0.4		Feed (mm/min)	116330	62043	31021	15511	7755	4653	3878	2327	1861
			2	≤ 0.50	≤ 1.5	20	RPM	15753	8402	4201	2100	1050	630	525	315	252
			3	≤ 0.25	≤ 1.5	(16-24)	Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	16	12	12	17	21	26	25	20	18
		Tool Steels	2	1	≤ 1	14	RPM	24	18	18	25	32	40	38	30	26
			3	1	≤ 0.5	(11-16)	Fz	32	24	24	34	42	53	50	40	35
			4	1	≤ 0.4		Feed (mm/min)	10906	5816	2908	1454	727	436	364	218	174
			2	1	≤ 1		RPM	16	8	8	12	15	18	17	14	12
			3	1	≤ 0.5		Fz	16	12	12	17	22	27	26	21	18
			4	1	≤ 0.4		Feed (mm/min)	22	16	16	23	29	37	35	28	24
		H Tool Steels	2	≤ 0.50	≤ 1.5	55	RPM	32	34	32	34	50	60	61	47	42
			3	≤ 0.25	≤ 1.5	(44-66)	Fz	65	70	66	70	105	126	127	97	88
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	87	93	88	93	140	168	169	129	117
			2	1	≤ 1		RPM	47	50	48	50	76	91	91	70	64
			3	1	≤ 0.5		Fz	63	67	64	67	101	121	122	93	85
			4	1	≤ 0.4		Feed (mm/min)	31506	16803	8402	4201	2100	1260	1050	630	504
		Profile	2	≤ 0.50	≤ 1.5	40	RPM	32	34	32	34	50	60	61	47	42
			3	≤ 0.25	≤ 1.5	(32-48)	Fz	47	50	48	50	76	91	91	70	64
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	87	93	88	93	140	168	169	129	117
			2	1	≤ 1		RPM	63	67	64	67	101	121	122	93	85
			3	1	≤ 0.5		Fz	111	143	131	178	208	259	268	214	186
			4	1	≤ 0.4		Feed (mm/min)	76342	40715	20358	10179	5089	3054	2545	1527	1221
		Slot	2	≤ 0.50	≤ 1.5	96	RPM	76	98	90	122	143	177	183	147	127
			3	≤ 0.25	≤ 1.5	(77-115)	Fz	115	147	134	183	214	266	275	220	191
			4	≤ 0.25	≤ 1.5		Feed (mm/min)	153	195	179	244	285	354	366	293	254
			2	1	≤ 1		RPM	84	107	98	134	156	194	201	161	139
			3	1	≤ 0.5		Fz	111	143	131	178	208	259	268	214	186
			4	1	≤ 0.4		Feed (mm/min)	55741	29729	14864	7432	3716	2230	1858	1115	892

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed


limit cut depths of long and extra long flute mills to .05 x DC when slotting or profiling

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

2 Flute: High Shear

4 Flute: High Shear




Series 52M, 54M Metric	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)	DC • mm					
						3	6	10	12	20	25
ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	$\leq 150 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	Profile	2	≤ 0.3	≤ 1.5	415	RPM	43947	21973	13184	10987
						(332-497)	Fz	0.0166	0.043	0.091	0.110
		Slot	4	≤ 0.3	≤ 1.5	332	RPM	35222	17611	10567	8806
						(266-399)	Fz	0.0151	0.041	0.085	0.101
	$\leq 125 \text{ Bhn}$ or $\leq 77 \text{ HRb}$	Profile	2	≤ 0.3	≤ 1.5	155	RPM	16480	8240	4944	4120
						(124-187)	Fz	0.0166	0.043	0.091	0.110
		Slot	4	≤ 0.3	≤ 1.5	125	RPM	13249	6624	3975	3312
						(100-150)	Fz	0.0151	0.041	0.085	0.101
ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	$\leq 125 \text{ Bhn}$ or $\leq 77 \text{ HRb}$	Profile	2	≤ 0.3	≤ 1.5	180	RPM	19065	9533	5720	4766
						(144-216)	Fz	0.0094	0.024	0.053	0.062
		Slot	4	≤ 0.3	≤ 1.5	145	RPM	15349	7675	4605	3837
						(116-174)	Fz	0.0086	0.024	0.048	0.058
	$\leq 140 \text{ Bhn}$ or $\leq 3 \text{ HRc}$	Profile	2	≤ 0.3	≤ 1.5	72	RPM	7594	3797	2278	1898
						(57-86)	Fz	0.0094	0.024	0.053	0.062
		Slot	4	≤ 0.3	≤ 1.5	58	RPM	6140	3070	1842	1535
						(46-69)	Fz	0.0086	0.024	0.048	0.058
COPPER ALLOYS Aluminum Bronze, Muntz Brass, Naval, Brass, Red Brass	$\leq 140 \text{ Bhn}$ or $\leq 3 \text{ HRc}$	Profile	2	≤ 0.3	≤ 1.5	72	RPM	7594	3797	2278	1898
						(57-86)	Fz	0.0094	0.024	0.053	0.062
		Slot	4	≤ 0.3	≤ 1.5	58	RPM	6140	3070	1842	1535
						(46-69)	Fz	0.0086	0.024	0.048	0.058
	$\leq 200 \text{ Bhn}$ or $\leq 23 \text{ HRc}$	Profile	2	≤ 0.3	≤ 1.5	72	RPM	7594	3797	2278	1898
						(57-86)	Fz	0.0094	0.024	0.053	0.062
		Slot	4	≤ 0.3	≤ 1.5	58	RPM	6140	3070	1842	1535
						(46-69)	Fz	0.0086	0.024	0.048	0.058

continued on next page

2 Flute: High Shear

4 Flute: High Shear



Series 52M, 54M Metric	Hardness	Flutes	Ae x DC	Ap x DC	Vc (m/min)	DC • mm						
						3	6	10	12	20	25	
N	PLASTICS ABS, Polycarbonate, PVC, Polypropylene	Profile		2 ≤ 0.3 ≤ 1.5	488 (390-585)	RPM	51702	25851	15511	12926	7755	6204
						Fz	0.0264	0.072	0.149	0.178	0.237	0.250
		Slot		4 ≤ 0.3 ≤ 1.5	390 (312-468)	Feed (mm/min)	2730	3723	4622	4601	3676	3102
						Fz	0.0240	0.065	0.136	0.163	0.210	0.238
	PLASTICS Fiberglass, Glass Filled	Profile		2 1 ≤ 1	219 (176-263)	RPM	41362	20681	12409	10340	6204	4963
						Fz	0.0197	0.053	0.109	0.132	0.173	0.190
		Slot		4 ≤ 0.3 ≤ 1.5	175 (140-210)	Feed (mm/min)	917	1233	1522	1536	1208	1061
						Fz	0.0180	0.048	0.101	0.120	0.160	0.175

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)


rpm = $(Vc \times 1000) / (DC \times 3.14)$ mm/min = $Fz \times \text{number of flutes} \times \text{rpm}$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x DC maximum)

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Coarse Pitch)



Series 61M Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm					
					6	10	12	20	25	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	Profile 	152	RPM	8078	4847	4039	2424	1939
				(122-183)	Fz	0.014	0.029	0.034	0.045	0.050
		≤ 275 Bhn or ≤ 28 HR	Slot 	122	RPM	6463	3878	3231	1939	1551
				(98-146)	Fz	0.014	0.029	0.034	0.045	0.050
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HR	Profile 	111	RPM	5897	3538	2949	1769	1415
				(89-134)	Fz	0.010	0.021	0.026	0.035	0.038
		≤ 220 Bhn or ≤ 19 HRc	Slot 	90	RPM	4766	2860	2383	1430	1144
				(72-108)	Fz	0.010	0.021	0.026	0.035	0.038
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	111	RPM	5897	3538	2949	1769	1415
				(89-134)	Fz	0.019	0.040	0.048	0.064	0.070
		≤ 220 Bhn or ≤ 19 HRc	Slot 	90	RPM	4766	2860	2383	1430	1144
				(72-108)	Fz	0.019	0.040	0.048	0.064	0.070
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	Profile 	105	RPM	5574	3344	2787	1672	1338
				(84-126)	Fz	0.014	0.024	0.036	0.048	0.053
		≤ 250 Bhn or ≤ 24 HRc	Slot 	84	RPM	4443	2666	2222	1333	1066
				(67-101)	Fz	0.014	0.024	0.036	0.048	0.053

Bhn (Brinell) HRc (Rockwell C)


rpm = $(V_c \times 1000) / (DC \times 3.14)$

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Single End Roughers (Fine Pitch)



Series 62M Metric	Hardness	Ae x DC	Ap x DC	Vc (m/min)	DC • mm						
					6	10	12	20	25		
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	123 (99-148)	RPM	6544	3926	3272	1963	1570
					Fz (99-148)	0.014	0.029	0.036	0.051	0.053	
	≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	99 (79-119)	RPM	5251	3151	2626	1575	1260
					Fz (79-119)	0.014	0.029	0.036	0.051	0.053	
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	85 (68-102)	RPM	4524	2714	2262	1357	1086
					Fz (68-102)	0.012	0.024	0.029	0.040	0.043	
	≤ 275 Bhn or ≤ 28 HRc	Slot 	1	≤ 1	69 (55-82)	RPM	3635	2181	1818	1091	872
					Fz (55-82)	0.012	0.024	0.029	0.040	0.043	
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspalloy	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	21 (17-26)	RPM	1131	679	565	339	271
					Fz (17-26)	0.010	0.021	0.024	0.035	0.035	
	≤ 300 Bhn or ≤ 32 HRc	Slot 	1	≤ 1	17 (14-20)	RPM	905	543	452	271	217
					Fz (14-20)	0.010	0.021	0.024	0.035	0.035	
TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	47 (38-57)	RPM	2504	1503	1252	751	601
					Fz (38-57)	0.012	0.024	0.029	0.040	0.043	
	≤ 350 Bhn or ≤ 38 HRc	Slot 	1	≤ 1	59 (48-71)	RPM	3151	1890	1575	945	756
					Fz (48-71)	0.012	0.024	0.029	0.040	0.043	

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (DC \times 3.14)$

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)



VALUE AT THE SPINDLE®

High Performance Drills



Hole Making

HIGH PERFORMANCE DRILLS	SERIES	DESCRIPTION	APPLICATION ● PREFERRED ○ ALTERNATE	PAGE
Hi-PerCarb®	135 (3xD)	2 Flute External Coolant Double Margin 3xD		231
	135 (5xD)	2 Flute External Coolant Double Margin 5xD		240
	131N (3xD)	3 Flute External Coolant Triple Margin 3xD		250
	131N (5xD)	3 Flute External Coolant Triple Margin 5xD		254
	141K (5xD)	3 Flute Internal Coolant Triple Margin 5xD		260
Ice-Carb®	140 (5xD)	2 Flute Internal Coolant 5xD		266
	140 (8xD)	2 Flute Internal Coolant 8xD		274
CFRP 8 Facet	120	2 Flute External Coolant Double Margin CFRP		282

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	APPLICATION ● PREFERRED ○ ALTERNATE	PÁGINA
Hi-PerCarb®	135 (3xD)	2 filos, refrigeración externa, doble margen, 3xD		231
	135 (5xD)	2 filos, refrigeración externa, doble margen, 5xD		240
	131N (3xD)	3 filos, refrigeración externa, triple margen, 3xD		250
	131N (5xD)	3 filos, refrigeración externa, triple margen, 5xD		254
	141K (5xD)	3 filos, refrigeración interna, triple margen, 5xD		260
Ice-Carb®	140 (5xD)	2 filos, refrigeración interna, 5xD		266
	140 (8xD)	2 filos, refrigeración interna, 8xD		274
De 8 caras CFRP	120	2 filos, refrigeración externa, doble margen, CFRP		282


Recomendaciones de velocidades y avances mostradas tras cada serie

🇫🇷 Outils de perçage

FORETS HAUTE PERFORMANCE	SÉRIES	DESCRIPTION	APPLICATION	PAGE
			● PREFERRED ○ ALTERNATE	
Hi-PerCarb®	135 (3xD)	2 dents refroidissement externe à double listel 3xD		231
	135 (5xD)	2 dents refroidissement externe à double listel 5xD		240
	131N (3xD)	3 dents refroidissement externe à triple listel 3xD		250
	131N (5xD)	3 dents refroidissement externe à triple listel 5xD		254
	141K (5xD)	3 dents refroidissement interne à triple listel 5xD		260
Ice-Carb®	140 (5xD)	2 dents refroidissement interne 5xD		266
	140 (8xD)	2 dents refroidissement interne 8xD		274
CFRP à 8 facettes	120	2 dents refroidissement externe à double listel CFRP		282

Recommandations de vitesse et avance indiquées après chaque série

🇩🇪 Bohren




HOCHLEISTUNGS-BOHRER	SERIE	BESCHREIBUNG	APPLICATION	SEITE
			● PREFERRED ○ ALTERNATE	
Hi-PerCarb®	135 (3xD)	Doppelfasenbohrer 3xD mit 2 Schneiden und Außenkühlung		231
	135 (5xD)	Doppelfasenbohrer 5xD mit 2 Schneiden und Außenkühlung		240
	131N (3xD)	Dreifasenbohrer 3xD mit 3 Schneiden und Außenkühlung		250
	131N (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Außenkühlung		254
	141K (5xD)	Dreifasenbohrer 5xD mit 3 Schneiden und Innenkühlung		260
Ice-Carb®	140 (5xD)	Bohrer 5xD mit 2 Schneiden und Innenkühlung		266
	140 (8xD)	Bohrer 8xD mit 2 Schneiden und Innenkühlung		274
CFRP 8 Facet	120	Doppelfasenbohrer CFRP mit 2 Schneiden und Außenkühlung		282

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie


Drilling Operations

Coolant Recommendations

- Coolant works to mobilize chips away from the cut zone, reduce the heat created during the cutting process and minimize friction.
- It is important to optimize the coolant pressure and position in order to gain the full benefits coolant offers the cutting process.
- Proper coolant application promotes greater operating parameters, greater material removal rates, improved surface finishes, predictable tool life, reduced power consumption and reduced cycle times.
- Pressure is important, but more importantly is consistency of the pressure and application onto the tool; intermittent cooling of carbide leads to thermal stressing of the material and the formation of "microcracks."
- Proper cleanliness and filtration of coolants is important in order for the coolant to maintain its beneficial properties, and also to avoid a reduction in coolant pressure or the possibility of clogging the coolant channels in coolant through drills.

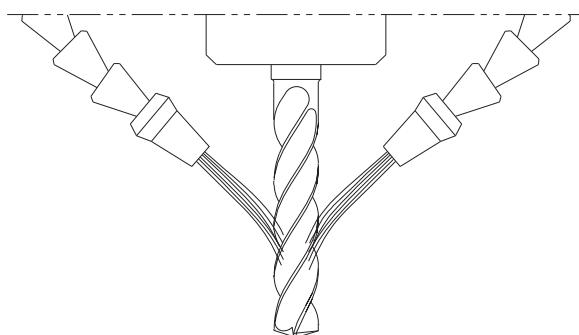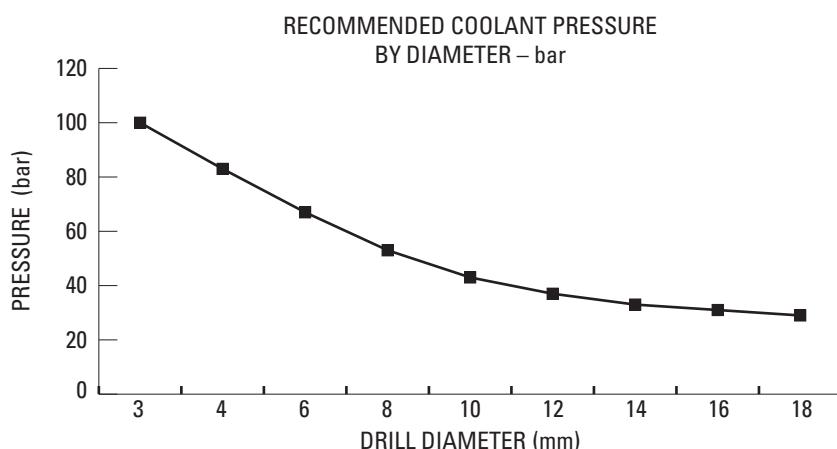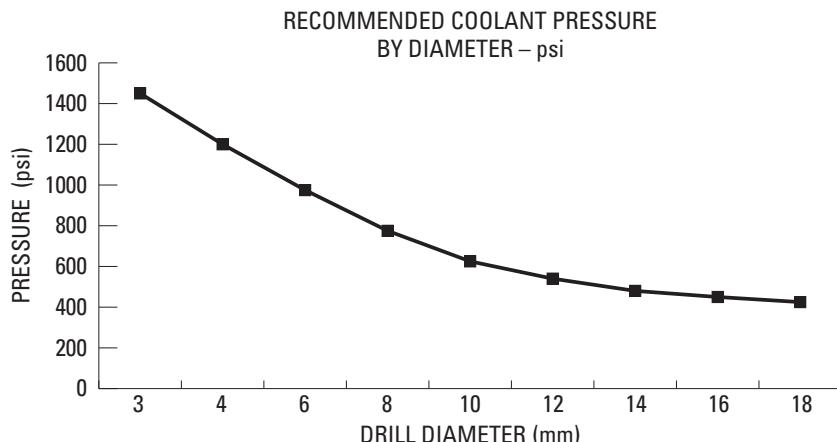

LARGE TIP – LOW VELOCITY
NO COVERAGE AT MAXIMUM DEPTH



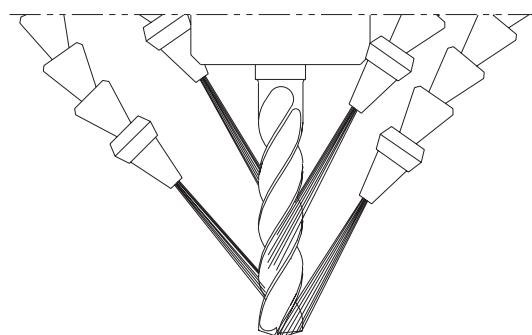


SMALL TIP – HIGH VELOCITY
COMPLETE COVERAGE


- Reducing the nozzle size helps maximize the cooling benefits of the unique double margin design on the Hi-PerCarb drill by increasing velocity. Aim the nozzles in line with the secondary flute located between the two margins as well as the flute for best results.

Recomendaciones en operación de taladrado

- El líquido de refrigeración actúa movilizando las virutas fuera de la zona de corte, disminuyendo el calor generado durante el proceso de corte y minimizando la fricción.
- Es importante optimizar la presión de la refrigeración y la posición para poder obtener todos los beneficios del refrigerante durante el proceso de corte.
- Una aplicación apropiada de la refrigeración fomenta mayores parámetros de operación, mayores índices de eliminación de material, acabados de superficie mejorados, una duración de la herramienta más predecible, bajo consumo de energía y un tiempo de ciclo reducido.
- La presión del refrigerante es importante, pero lo es más el flujo continuo aplicado a la herramienta; una refrigeración intermitente en el carburo puede ocasionar un estrés térmico en el material y la formación de "micro-fisuras".
- Una limpieza y filtración adecuadas son importantes para que el refrigerante mantenga sus propiedades y beneficios; por otra parte, se evita la reducción de la presión o la posibilidad de obstruir los canales de refrigeración de la broca.

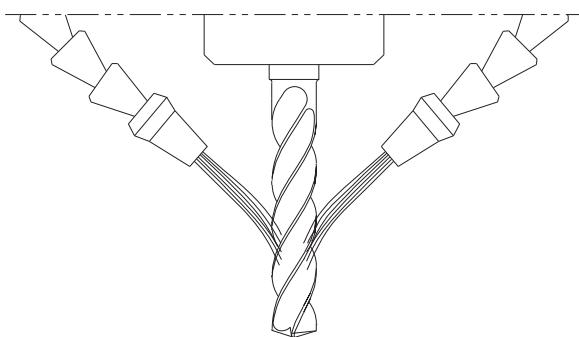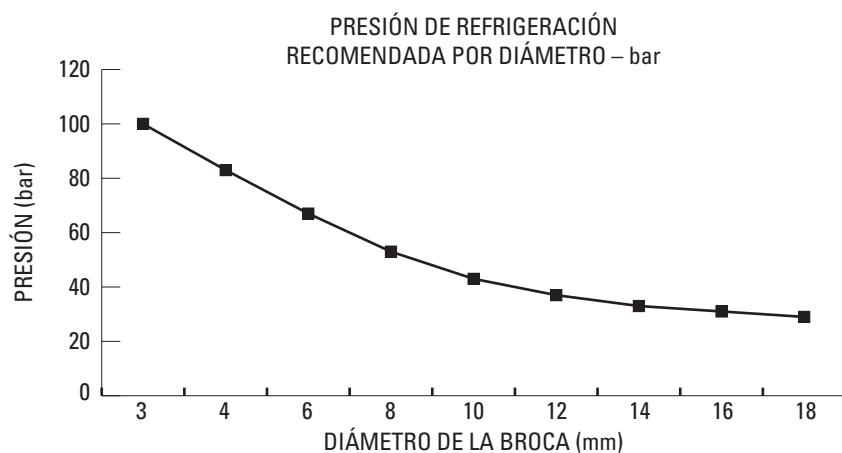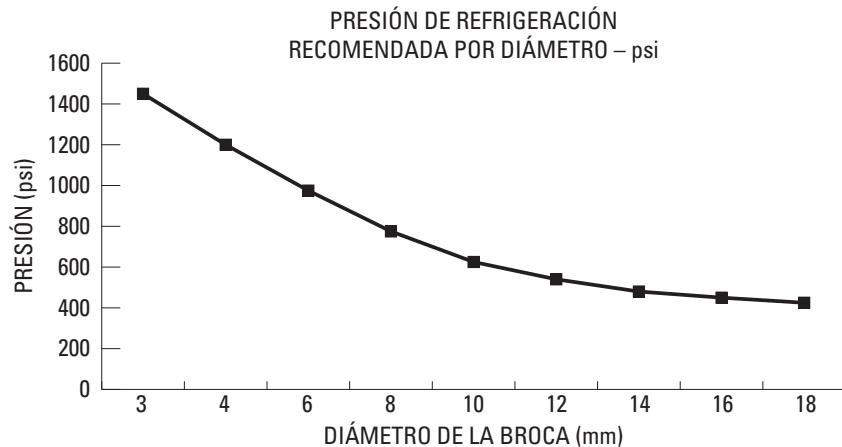

PUNTA GRANDE – BAJA VELOCIDAD
SIN ALCANCE A PROFUNDIDAD MÁXIMA

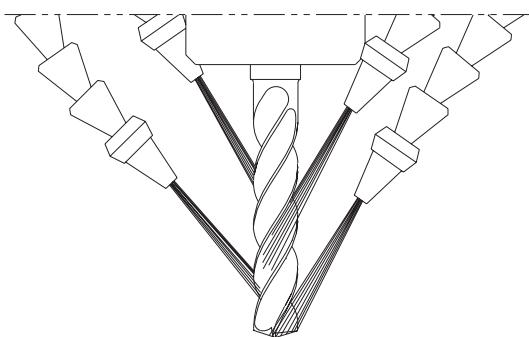




PUNTA PEQUEÑA – ALTA VELOCIDAD
COMPLETO ALCANCE

- Reducir el tamaño de la boquilla ayuda a maximizar los beneficios de refrigeración del exclusivo diseño de doble margen de la broca. Hi-PerCarb aumentando la velocidad. Coloque las boquillas en línea con el segundo filo que se encuentra entre los dos márgenes y también el filo para obtener mejores resultados.


Opérations de perçage

Recommandations en matière de refroidissement

- Le liquide de refroidissement sert à éloigner les copeaux de la zone de coupe, à réduire la chaleur dégagée durant la coupe et à minimiser la friction.
- Il est important d'optimiser la pression et la position du réfrigérant pour en retirer les bénéfices maximums durant la coupe.
- L'application adéquate de réfrigérant se traduit par des paramètres opératoires supérieurs, des taux d'élimination supérieurs des matériaux, de plus belles finitions des surfaces, une durée de vie des outils prévisible, moins de consommation d'énergie et des temps de cycle réduits.
- La pression est importante, mais une pression régulière et l'application sur l'outil sont des facteurs encore plus importants ; le refroidissement intermittent du carbure se traduit par des contraintes thermiques pour le matériau et la formation de microfissures.
- La propreté et le filtrage adéquats des réfrigérants sont importants pour qu'ils conservent leur propriétés, mais aussi pour éviter la réduction de pression du réfrigérant ou le risque d'obturation des conduits à réfrigérant dans les perceuses à réfrigérant intégré.

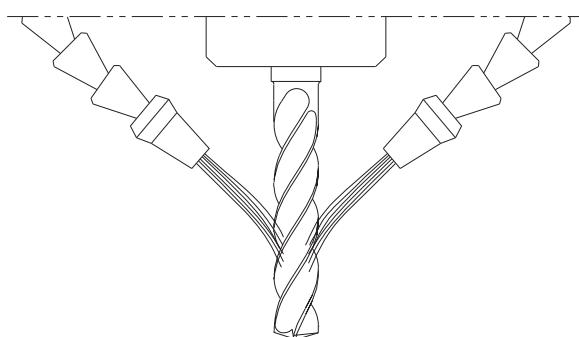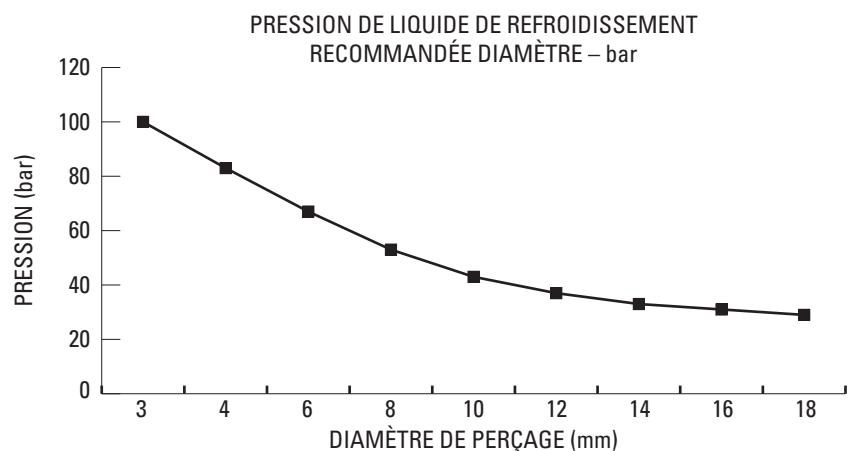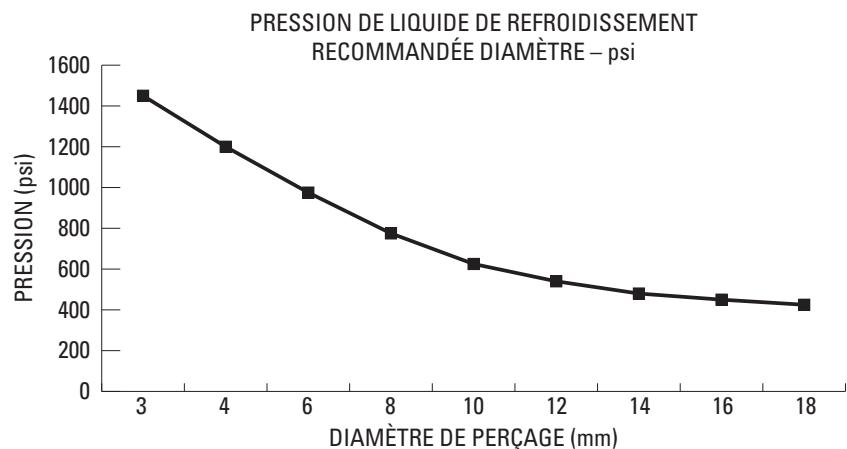

POINTE LARGE – BASSE VITESSE
PAS DE COUVERTURE À LA PROFONDEUR MAXIMUM



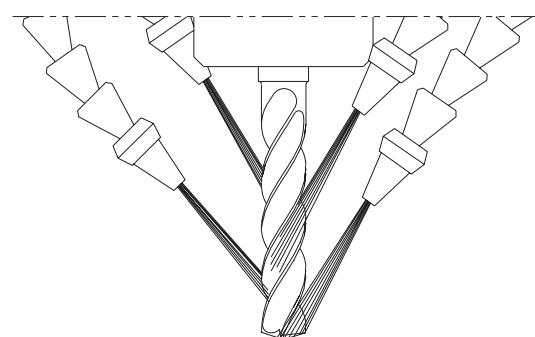


POINTE FINE – GRANDE VITESSE
COUVERTURE COMPLÈTE


- La réduction de la taille de l'embout permet de maximiser les bienfaits du refroidissement du concept à double listel original de la perceuse Hi-PerCarb en augmentant la vitesse. Pour les meilleurs résultats, orientez les embouts dans l'axe de la goujure secondaire située entre les deux listels, de même que la goujure primaire.

Bohrarbeiten Kühlmittelempfehlungen

- Kühlmittel dienen dazu, die Späne aus dem Schneidenbereich zu entfernen, die beim Schneiden erzeugte Wärme abzutransportieren und die Reibung zu verringern.
- Es kommt darauf an, den Külschmiermitteldruck und die Zufuhr zu optimieren, um alle Vorteile beim Bohren nutzen zu können.
- Der richtige Külschmiermitteleinsatz ermöglicht höhere Schnittparameter, höheren Materialabtrag, bessere Oberflächengüte, vorhersehbare Standzeiten und geringere Leistungsaufnahme und Laufzeiten.
- Der Druck ist wichtig, aber wichtiger ist dessen Konstanz und die Zufuhr zum Werkzeug. Unterbrochene Kühlung des Hartmetalls führt zur thermischen Belastung und Bildung von "Mikrorissen".
- Kühlmitte sind sauber zu halten und zu filtern, damit die Qualität des Kühlmittels erhalten bleibt und der Kühlmitteldruck durch Verstopfung der Kühlmittelkanäle im Bohrer nicht absinkt.

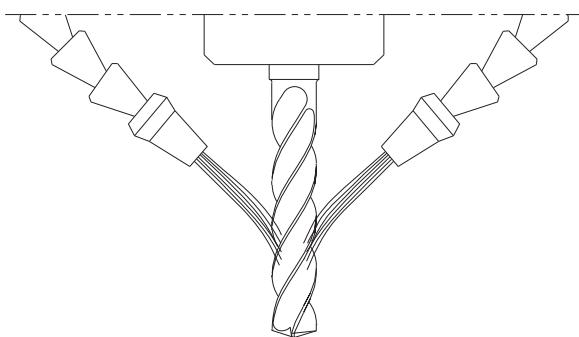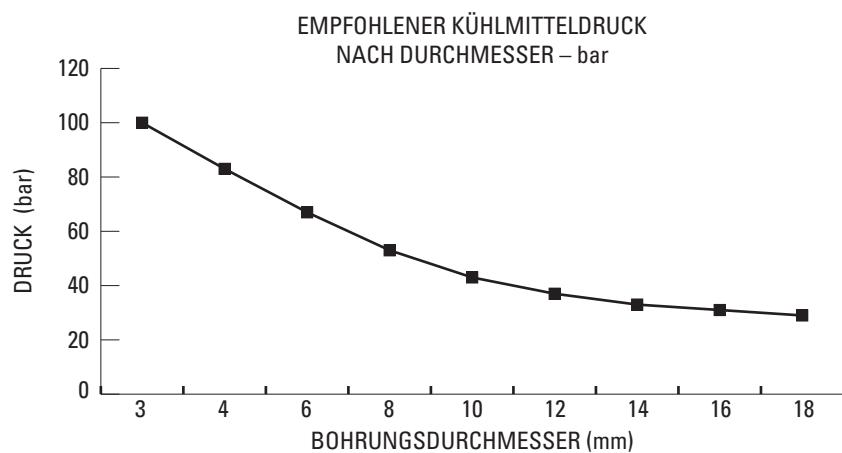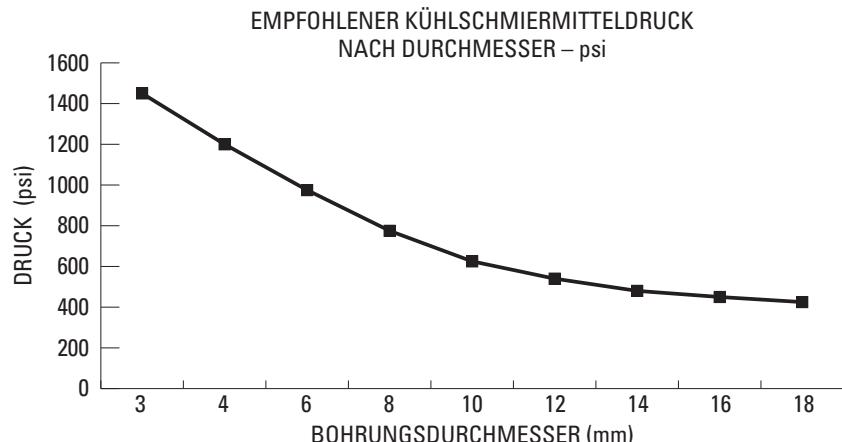


BREITE QUERSCHNEIDE – GERINGE DREHZAHL
KEINE VOLLSTÄNDIGE BENETZUNG BEI MAX. BOHRUNGSTIEFE

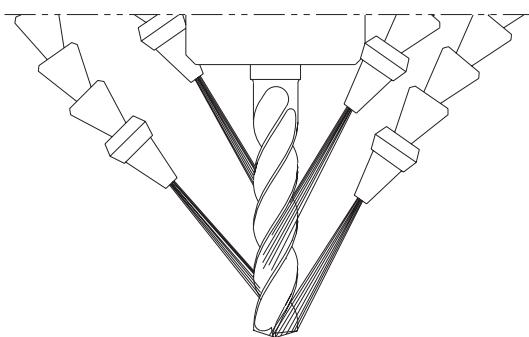

SCHMALE QUERSCHNEIDE – HOHE DREHZAHL
VOLLSTÄNDIGE BENETZUNG

- Durch Verringern der Düsengröße können die vorteilhaften Eigenschaften der Doppelfase genutzt werden, um die Drehzahl des Hi-PerCarb-Bohrers zu steigern. Richten Sie die Düsen auf die Nebennut zwischen beiden Fasen sowie auf die Schneiden aus, um beste Ergebnisse zu erzielen.

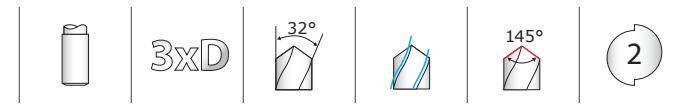

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +0,004/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +0,006/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +0,007/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +0,008/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

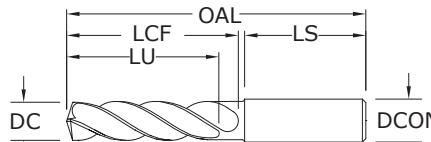

135 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO. Ti-NAMITE-A (AITIN)
1/64	0.0156	0.40		1/8	1-1/2	1/8	5/64	1	51752*
1/32	0.0312	0.79		1/8	1-1/2	1/4	3/16	1	51269*
3/64	0.0469	1.19	1/16-64	1/8	1-1/2	3/8	5/16	1	51270*
1,25 mm	0.0492			3,0	38,0	9,5	8,0	25,0	64500*
1,45 mm	0.0571			3,0	38,0	9,5	8,0	25,0	64501*
#53	0.0595	1.51		1/8	1-1/2	3/8	5/16	1	64502*
1/16	0.0625	1.59	5/64-60	1/8	2	7/16	3/8	1-1/4	51271*
1,6 mm	0.0630			3,0	50,0	11,0	9,0	32,0	64503*
1,75 mm	0.0689			3,0	50,0	11,0	9,0	32,0	64504*
#50	0.0700	1.78		1/8	2	7/16	3/8	1-1/4	64505*
5/64	0.0781	1.98		1/8	2	1/2	7/16	1-1/4	51272*
#47	0.0785	1.99		1/8	2	1/2	7/16	1-1/4	64506*
2,05 mm	0.0807			3,0	50,0	12,0	11,0	32,0	64507*
#46	0.0810	2.06		1/8	2	1/2	7/16	1-1/4	64508*
#43	0.0890	2.26		1/8	2	1/2	7/16	1-1/4	64509*
#42	0.0935	2.37		1/8	2	1/2	7/16	1-1/4	64510*
3/32	0.0938	2.38	1/8-32	1/8	2	1/2	7/16	1-1/4	51273
#40	0.0980	2.49		1/8	2	9/16	1/2	1-1/4	51274
2,5 mm	0.0984			3,0	50,0	14,0	12,0	32,0	64511
#39	0.0995	2.53		1/8	2	9/16	1/2	1-1/4	51753
#38	0.1015	2.58	5-40	1/8	2	9/16	1/2	1-1/4	51754
#37	0.1040	2.64	5-44	1/8	2	9/16	1/2	1-1/4	51755
#36	0.1065	2.71	6-32	1/8	2	9/16	1/2	1-1/4	51756
7/64	0.1094	2.78		1/8	2	5/8	9/16	1-1/4	51275
#35	0.1100	2.79		1/8	2	5/8	9/16	1-1/4	51276
#34	0.1110	2.82		1/8	2	5/8	9/16	1-1/4	51277
#33	0.1130	2.87	6-40	1/8	2	5/8	9/16	1-1/4	51757
2,9 mm	0.1142			3,0	50,0	16,0	14,0	32,0	64512
#32	0.1160	2.95		1/8	2	5/8	9/16	1-1/4	51758
3,0 mm	0.1181			6,0	62,0	20,0	17,0	36,0	63155
#31	0.1200	3.05		1/8	2	5/8	9/16	1-1/4	51759
3,1 mm	0.1220			6,0	62,0	20,0	17,0	36,0	63741
1/8	0.1250	3.18		1/4	2-1/2	3/4	21/32	1-7/16	51330
3,2 mm	0.1260		M3,5 X 0,35	6,0	62,0	20,0	17,0	36,0	63156
#30	0.1285	3.26		1/4	2-1/2	3/4	21/32	1-7/16	51278
3,3 mm	0.1299		M4 X 0,7	6,0	62,0	20,0	17,0	36,0	63157
3,4 mm	0.1339			6,0	62,0	20,0	17,0	36,0	63158
#29	0.1360	3.45	8-32,8-36	1/4	2-1/2	3/4	21/32	1-7/16	51331
3,5 mm	0.1378		M4 X 0,5	6,0	62,0	20,0	17,0	36,0	63159
#28	0.1405	3.57	8-40	1/4	2-1/2	3/4	21/32	1-7/16	51760
9/64	0.1406	3.57		1/4	2-1/2	3/4	21/32	1-7/16	51332
3,6 mm	0.1417		M4 X 0,35	6,0	62,0	20,0	17,0	36,0	63160
#27	0.1440	3.66		1/4	2-1/2	3/4	21/32	1-7/16	51761
3,7 mm	0.1457		M4,5 X 0,75	6,0	62,0	20,0	17,0	36,0	63161
#26	0.1470	3.73	3/16-24	1/4	2-1/2	3/4	21/32	1-7/16	51762
#25	0.1495	3.80	10-24	1/4	2-5/8	7/8	23/32	1-7/16	51333

*Single Margin

continued on next page

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 57 Bhn)




3xD



135 3xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

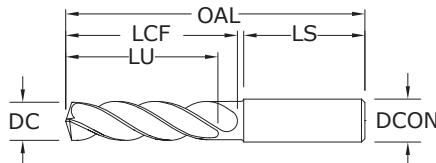

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO. Ti-NAMITE-A (AITIN)
3,8 mm	0.1496			6,0	66,0	24,0	21,0	36,0	63742
#24	0.1520	3.86	10-28	1/4	2-5/8	7/8	23/32	1-7/16	51763
3,9 mm	0.1535			6,0	66,0	24,0	21,0	36,0	63743
#23	0.1540	3.91		1/4	2-5/8	7/8	23/32	1-7/16	51764
5/32	0.1562	3.97		1/4	2-5/8	7/8	23/32	1-7/16	51334
#22	0.1570	3.99	10-30	1/4	2-5/8	7/8	23/32	1-7/16	51765
4,0 mm	0.1575		M4,5 X 0,5	6,0	66,0	24,0	21,0	36,0	63162
#21	0.1590	4.04	10-32	1/4	2-5/8	7/8	23/32	1-7/16	51335
#20	0.1610	4.09	13/64-24	1/4	2-5/8	7/8	23/32	1-7/16	51279
4,1 mm	0.1614			6,0	66,0	24,0	21,0	36,0	63744
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	66,0	24,0	21,0	36,0	63163
#19	0.1660	4.22		1/4	2-5/8	7/8	23/32	1-7/16	51766
4,3 mm	0.1693			6,0	66,0	24,0	21,0	36,0	63164
#18	0.1695	4.31		1/4	2-5/8	7/8	23/32	1-7/16	51767
11/64	0.1719	4.37		1/4	2-5/8	7/8	23/32	1-7/16	51336
#17	0.1730	4.39		1/4	2-5/8	7/8	23/32	1-7/16	51768
4,4 mm	0.1732			6,0	66,0	24,0	21,0	36,0	63745
#16	0.1770	4.50	12-24	1/4	2-5/8	7/8	23/32	1-7/16	51769
4,5 mm	0.1772		M5 X 0,5	6,0	66,0	24,0	21,0	36,0	63165
#15	0.1800	4.57		1/4	2-5/8	7/8	23/32	1-7/16	51770
4,6 mm	0.1811		12-28	6,0	66,0	24,0	21,0	36,0	63166
#14	0.1820	4.62		1/4	2-5/8	7/8	23/32	1-7/16	51771
#13	0.1850	4.70	12-32	1/4	2-5/8	7/8	23/32	1-7/16	51772
4,7 mm	0.1850			6,0	66,0	24,0	21,0	36,0	63746
3/16	0.1875	4.76		1/4	2-5/8	1	53/64	1-7/16	51337
#12	0.1890	4.80	7/32-32	1/4	2-5/8	1	53/64	1-7/16	51773
4,8 mm	0.1890			6,0	66,0	28,0	24,0	36,0	63167
#11	0.1910	4.85		1/4	2-5/8	1	53/64	1-7/16	51774
4,9 mm	0.1929			6,0	66,0	28,0	24,0	36,0	63747
#10	0.1935	4.91	14-20	1/4	2-5/8	1	53/64	1-7/16	51775
#9	0.1960	4.98		1/4	2-5/8	1	53/64	1-7/16	51776
5,0 mm	0.1969		M6 X 1	6,0	66,0	28,0	24,0	36,0	63168
#8	0.1990	5.05		1/4	2-5/8	1	53/64	1-7/16	51777
5,1 mm	0.2008			6,0	66,0	28,0	24,0	36,0	63748
#7	0.2010	5.11	1/4-20	1/4	2-5/8	1	53/64	1-7/16	51338
13/64	0.2031	5.16		1/4	2-5/8	1	53/64	1-7/16	51339
#6	0.2040	5.18		1/4	2-5/8	1	53/64	1-7/16	51778
5,2 mm	0.2047		M6 X 0,75	6,0	66,0	28,0	24,0	36,0	63749
#5	0.2055	5.22		1/4	2-5/8	1	53/64	1-7/16	51779
5,25 mm	0.2067			6,0	66,0	28,0	24,0	36,0	63169
5,3 mm	0.2087			6,0	66,0	28,0	24,0	36,0	63170
#4	0.2090	5.31	1/4-24	1/4	2-5/8	1	53/64	1-7/16	51780
5,4 mm	0.2126			6,0	66,0	28,0	24,0	36,0	63750
#3	0.2130	5.41	1/4-28	1/4	2-5/8	1	53/64	1-7/16	51340
5,5 mm	0.2165		M6 X 0,5	6,0	66,0	28,0	24,0	36,0	63171
7/32	0.2188	5.56	1/4-32	1/4	2-5/8	1	53/64	1-7/16	51341

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+.00098
DCON = h₆

>.7087-.11811 DIAMETER

DC = +.00031/+.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0022/+.0012
DCON = h₆

>3-6 DIAMETER

DC = +.0044/+.0016
DCON = h₆

>6-10 DIAMETER

DC = +.0066/+.0021
DCON = h₆

>10-18 DIAMETER

DC = +.0077/+.0025
DCON = h₆

>18-30 DIAMETER

DC = +.0088/+.0029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit
www.ksptpatents.com



FRACTIONAL & METRIC

Hi-PerCarb®

135 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITIN)	CONTINUED
				SHANK DICON	OVERALL OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
5,6 mm	0.2205			6,0	66,0	28,0	24,0	36,0	63751	
#2	0.2210	5.61		1/4	2-5/8	1	53/64	1-7/16	51781	
5,7 mm	0.2244			6,0	66,0	28,0	24,0	36,0	63752	
#1	0.2280	5.79		1/4	2-5/8	1	53/64	1-7/16	51782	
5,8 mm	0.2283			6,0	66,0	28,0	24,0	36,0	63172	
5,9 mm	0.2323			6,0	66,0	28,0	24,0	36,0	63753	
A	0.2340	5.94		1/4	2-5/8	1	53/64	1-7/16	51601	
15/64	0.2344	5.95		1/4	2-5/8	1	53/64	1-7/16	51342	
6,0 mm	0.2362	6.00	M7 X 1	6,0	66,0	28,0	24,0	36,0	63173	
B	0.2380	6.05		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51602	
6,1 mm	0.2402			8,0	79,0	34,0	28,0	36,0	63754	
C	0.2420	6.15		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51603	
6,2 mm	0.2441			8,0	79,0	34,0	28,0	36,0	63755	
D	0.2460	6.25		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51604	
6,25 mm	0.2461		M7 X 0,75	8,0	79,0	34,0	28,0	36,0	63174	
6,3 mm	0.2480			8,0	79,0	34,0	28,0	36,0	63756	
1/4	0.2500	6.35		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51343	
6,4 mm	0.2520			8,0	79,0	34,0	28,0	36,0	63175	
6,5 mm	0.2559			8,0	79,0	34,0	28,0	36,0	63213	
F	0.2570	6.53	5/16-18	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51344	
6,6 mm	0.2598			8,0	79,0	34,0	28,0	36,0	63757	
G	0.2610	6.63		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51606	
6,7 mm	0.2638			8,0	79,0	34,0	28,0	36,0	63758	
17/64	0.2656	6.75	5/16-20	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51345	
H	0.2660	6.76		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51607	
6,8 mm	0.2677		M8 X 1,25	8,0	79,0	34,0	28,0	36,0	63176	
6,9 mm	0.2717			8,0	79,0	34,0	28,0	36,0	63759	
I	0.2720	6.91	5/16-24	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51346	
7,0 mm	0.2756		M8 X 1	8,0	79,0	34,0	28,0	36,0	63177	
J	0.2770	7.04		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51608	
7,1 mm	0.2795			8,0	79,0	41,0	34,0	36,0	63760	
K	0.2810	7.14		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51609	
9/32	0.2812	7.14	5/16-32	5/16	3-1/8	1-9/16	1-3/16	1-7/16	51347	
7,2 mm	0.2835			8,0	79,0	41,0	34,0	36,0	63761	
7,25 mm	0.2854		M8 X 0,75	8,0	79,0	41,0	34,0	36,0	63178	
7,3 mm	0.2874			8,0	79,0	41,0	34,0	36,0	63762	
L	0.2900	7.37		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51610	
7,4 mm	0.2913			8,0	79,0	41,0	34,0	36,0	63763	
M	0.2950	7.49		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51611	
7,5 mm	0.2953		M8 X 0,5	8,0	79,0	41,0	34,0	36,0	63179	
19/64	0.2969	7.54		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51348	
7,6 mm	0.2992			8,0	79,0	41,0	34,0	36,0	63764	
N	0.3020	7.67		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51612	
7,7 mm	0.3031			8,0	79,0	41,0	34,0	36,0	63765	
7,8 mm	0.3071		M9 X 1,25	8,0	79,0	41,0	34,0	36,0	63180	
7,9 mm	0.3110			8,0	79,0	41,0	34,0	36,0	63766	
5/16	0.3125	7.94	3/8-16	5/16	3-1/8	1-9/16	1-3/16	1-7/16	51349	
8,0 mm	0.3150		M9 x 1	8,0	79,0	41,0	34,0	36,0	63181	
O	0.3160	8.03		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51613	
8,1 mm	0.3189			10,0	89,0	47,0	40,0	40,0	63767	
8,2 mm	0.3228			10,0	89,0	47,0	40,0	40,0	63768	
P	0.3230	8.20		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51614	
8,3 mm	0.3268			10,0	89,0	47,0	40,0	40,0	63769	
21/64	0.3281	8.33	3/8-20	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51350	
8,4 mm	0.3307			10,0	89,0	47,0	40,0	40,0	63182	
Q	0.3320	8.43	3/8-24	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51351	
8,5 mm	0.3346		M10 X 1,5	10,0	89,0	47,0	40,0	40,0	63183	
8,6 mm	0.3386			10,0	89,0	47,0	40,0	40,0	63770	

continued on next page




3xD



135 3xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

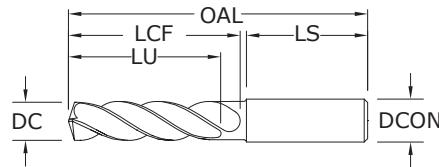

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	Cleared Length LU	SHANK LENGTH LS	EDP NO.
									Ti-NAMITE-A (AITIN)
R	0.3390	8.61		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51615
8,7 mm	0.3425			10,0	89,0	47,0	40,0	40,0	63771
11/32	0.3438	8.73	3/8-32	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51352
8,8 mm	0.3465		M10 X 1,25	10,0	89,0	47,0	40,0	40,0	63184
S	0.3480	8.84		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51616
8,9 mm	0.3504			10,0	89,0	47,0	40,0	40,0	63772
9,0 mm	0.3543		M10 X 1	10,0	89,0	47,0	40,0	40,0	63185
T	0.3580	9.09		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51617
9,1 mm	0.3583			10,0	89,0	47,0	40,0	40,0	63773
23/64	0.3594	9.13		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51353
9,2 mm	0.3622		M10 X 0,75	10,0	89,0	47,0	40,0	40,0	63774
9,25 mm	0.3642	9.25		10,0	89,0	47,0	40,0	40,0	63186
9,3 mm	0.3661			10,0	89,0	47,0	40,0	40,0	63775
U	0.3680	9.35	7/16-14	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51354
9,4 mm	0.3701			10,0	89,0	47,0	40,0	40,0	63776
9,5 mm	0.3740		M10 X 0,5	10,0	89,0	47,0	40,0	40,0	63187
3/8	0.3750	9.53		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51355
V	0.3770	9.58		1/2	3-1/2	1-27/32	1-37/64	1-9/16	51618
9,6 mm	0.3780			10,0	89,0	47,0	40,0	40,0	63777
9,7 mm	0.3819			10,0	89,0	47,0	40,0	40,0	63778
9,8 mm	0.3858			10,0	89,0	47,0	40,0	40,0	63779
W	0.3860			1/2	3-1/2	1-27/32	1-37/64	1-9/16	51619
9,9 mm	0.3898			10,0	89,0	47,0	40,0	40,0	63780
25/64	0.3906	9.92	7/16-20	1/2	3-1/2	1-27/32	1-37/64	1-9/16	51356
10,0 mm	0.3937			10,0	89,0	47,0	40,0	40,0	63188
X	0.3970	10.08	7/16-24	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51620
10,1 mm	0.3976			12,0	102,0	55,0	45,0	45,0	63781
10,2 mm	0.4016		M12 X 1,75	12,0	102,0	55,0	45,0	45,0	63189
Y	0.4040	10.26	7/16-28	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51621
10,3 mm	0.4055			12,0	102,0	55,0	45,0	45,0	63782
13/32	0.4062	10.32		1/2	4-1/16	2-3/16	1-51/64	1-49/64	51357
10,4 mm	0.4094			12,0	102,0	55,0	45,0	45,0	63783
Z	0.4130	10.49		1/2	4-1/16	2-3/16	1-51/64	1-49/64	51622
10,5 mm	0.4134		M12 X 1,5	12,0	102,0	55,0	45,0	45,0	63190
10,6 mm	0.4173			12,0	102,0	55,0	45,0	45,0	63784
10,7 mm	0.4213			12,0	102,0	55,0	45,0	45,0	63785
27/64	0.4219	10.72	1/2-13	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51358
10,8 mm	0.4252		M12 X 1,25	12,0	102,0	55,0	45,0	45,0	63191
10,9 mm	0.4291			12,0	102,0	55,0	45,0	45,0	63786
11,0 mm	0.4331		M12 X 1	12,0	102,0	55,0	45,0	45,0	63192
11,1 mm	0.4370			12,0	102,0	55,0	45,0	45,0	63787
7/16	0.4375	11.11	1/4-18 NPT	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51359
11,2 mm	0.4409			12,0	102,0	55,0	45,0	45,0	63788
11,25 mm	0.4429			12,0	102,0	55,0	45,0	45,0	63193
11,3 mm	0.4449			12,0	102,0	55,0	45,0	45,0	63789

continued on next page

For patent information visit www.ksptpatents.com

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- NON-FERROUS
- HARDENED STEELS



FRACTIONAL & METRIC

Hi-PerCarb®

135 3xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITIN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
11,4 mm	0.4488			12,0	102,0	55,0	45,0	45,0	63790	
11,5 mm	0.4528		M12 X 0,5	12,0	102,0	55,0	45,0	45,0	63194	
29/64	0.4531	11.51	1/2-20	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51360	
11,6 mm	0.4567			12,0	102,0	55,0	45,0	45,0	63791	
11,7 mm	0.4606			12,0	102,0	55,0	45,0	45,0	63792	
11,8 mm	0.4646			12,0	102,0	55,0	45,0	45,0	63793	
11,9 mm	0.4685			12,0	102,0	55,0	45,0	45,0	63794	
15/32	0.4688	11.91	1/2-28	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51361	
12,0 mm	0.4724		M14 X 2	12,0	102,0	55,0	45,0	45,0	63195	
31/64	0.4844	12.30	9/16-12	1/2	4-1/4	2-5/16	1-7/8	1-49/64	51362	
12,5 mm	0.4921		M14 X 1,5	14,0	107,0	60,0	49,0	45,0	63196	
1/2	0.5000	12.70		1/2	4-1/4	2-5/16	1-7/8	1-49/64	51363	
12,8 mm	0.5039		M14 X 1,25	14,0	107,0	60,0	49,0	45,0	63197	
13,0 mm	0.5118		M14 X 1	14,0	107,0	60,0	49,0	45,0	63198	
33/64	0.5156	13.10	9/16-18	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51364	
17/32	0.5312	13.49	5/8-11	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51365	
13,5 mm	0.5315			14,0	107,0	60,0	49,0	45,0	63199	
35/64	0.5469	13.89	5/8-12	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51783	
14,0 mm	0.5512		M16 X 2	14,0	107,0	60,0	49,0	45,0	63200	
9/16	0.5625	14.29		5/8	4-9/16	2-1/2	2	1-57/64	51366	
14,5 mm	0.5709		M16 X 1,5	16,0	115,0	65,0	51,0	48,0	63201	
37/64	0.5781	14.68	5/8-18	5/8	4-9/16	2-1/2	2	1-57/64	51367	
15,0 mm	0.5906		M16 X 1	16,0	115,0	65,0	51,0	48,0	63202	
19/32	0.5938	15.08	11/16-11	5/8	4-9/16	2-1/2	2	1-57/64	51784	
39/64	0.6094	15.48	11/16-12	5/8	4-9/16	2-1/2	2	1-57/64	51785	
15,5 mm	0.6102		M18 X 2,5	16,0	115,0	65,0	51,0	48,0	63203	
5/8	0.6250	15.88	11/16-16	5/8	4-9/16	2-1/2	2	1-57/64	51368	
16,0 mm	0.6299			16,0	115,0	65,0	51,0	48,0	63204	
41/64	0.6406	16.27	11/16-24	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51786	
16,5 mm	0.6496		M18 X 1,5	18,0	123,0	73,0	58,0	48,0	63205	
21/32	0.6562	16.67	3/4-10	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51369	
17,0 mm	0.6693			18,0	123,0	73,0	58,0	48,0	63206	
43/64	0.6719	17.07	3/4-12	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51787	
11/16	0.6875	17.46	3/4-16	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51370	
17,5 mm	0.6890		M20 X 2,5	18,0	123,0	73,0	58,0	48,0	63207	
45/64	0.7031	17.86	3/4-20, 1/2-14 NPT	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51788	
18,0 mm	0.7087			18,0	123,0	73,0	58,0	48,0	63208	
23/32	0.7188	18.26		3/4	4-7/8	2-3/4	2-5/16	1-57/64	51789	
18,5 mm	0.7283		M20 X 1,5	20,0	131,0	79,0	63,0	50,0	63209	
47/64	0.7344	18.65	13/16-12	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51790	
19,0 mm	0.7480			20,0	131,0	79,0	63,0	50,0	63210	
3/4	0.7500	19.05	13/16-16	3/4	5-1/4	3-1/16	2-7/16	1-31/32	51371	
49/64	0.7656	19.45	7/8-9	7/8	5-1/4	3-1/16	2-7/16	1-31/32	51372	
19,5 mm	0.7677		M22 X 2,5	20,0	131,0	79,0	63,0	50,0	63211	
25/32	0.7812	19.84		7/8	6	3-11/16	2-11/16	2-1/8	51791	
20,0 mm	0.7874			20,0	131,0	79,0	63,0	50,0	63212	
51/64	0.7969	20.24	7/8-12	7/8	6	3-11/16	2-11/16	2-1/8	51792	
20,5 mm	0.8071			22,0	150,0	93,0	73,0	53,0	64513	
13/16	0.8125	20.64	7/8-14	7/8	6	3-11/16	2-11/16	2-1/8	51373	
21,0 mm	0.8268			22,0	150,0	93,0	73,0	53,0	64514	
22,0 mm	0.8661			22,0	150,0	93,0	73,0	53,0	64515	
7/8	0.8750	22.23	15/16-16, 1-8	7/8	6	3-11/16	2-11/16	2-1/8	51374	
59/64	0.9219	23.42	1-12	1	6	3-11/16	2-11/16	2-1/8	51375	

FRACTIONAL

Hi-PerCarb®

Series 135 3D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/32	1/8	1/4	3/8	1/2	5/8	7/8	
	≤ 175 Bhn or ≤ 7 HRc	385 (308-462)	RPM	47062	11766	5883	3922	2941	2353	1681	
			Fr	0.0010	0.0038	0.0076	0.0115	0.0153	0.0191	0.0268	
			Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0	
	≤ 275 Bhn or ≤ 28 HRc	350 (280-420)	RPM	42784	10696	5348	3565	2674	2139	1528	
			Fr	0.0009	0.0036	0.0071	0.0107	0.0142	0.0178	0.0249	
			Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0	
	≤ 425 Bhn or ≤ 45 HRc	200 (160-240)	RPM	24448	6112	3056	2037	1528	1222	873	
			Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
			Feed (ipm)	18.0	18.0	18.0	18.0	18.0	18.0	18.0	
	≤ 275 Bhn or ≤ 28 HRc	300 (240-360)	RPM	36672	9168	4584	3056	2292	1834	1310	
			Fr	0.0007	0.0029	0.0059	0.0088	0.0118	0.0147	0.0206	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100			Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0
		≤ 375 Bhn or ≤ 40 HRc	185 (148-222)	RPM	22614	5654	2827	1885	1413	1131	808
				Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0180
				Feed (ipm)	14.5	14.5	14.5	14.5	14.5	14.5	14.5
		≤ 450 Bhn or ≤ 48 HRc	130 (104-156)	RPM	15891	3973	1986	1324	993	795	568
				Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
		≤ 185 Bhn or ≤ 9 HRc	275 (220-330)	RPM	33616	8404	4202	2801	2101	1681	1201
				Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179
				Feed (ipm)	21.5	21.5	21.5	21.5	21.5	21.5	21.5
		≤ 275 Bhn or ≤ 28 HRc	170 (136-204)	RPM	20781	5195	2598	1732	1299	1039	742
				Fr	0.0005	0.0020	0.0040	0.0061	0.0081	0.0101	0.0141
				Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
K	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	90 (72-108)	RPM	11002	2750	1375	917	688	550	393
				Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	5.5	5.5	5.5	5.5	5.5	5.5	5.5
		≤ 375 Bhn or ≤ 40 HRc	65 (52-78)	RPM	7946	1986	993	662	497	397	284
				Fr	0.0004	0.0018	0.0035	0.0053	0.0070	0.0088	0.0123
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5
		≤ 220 Bhn or ≤ 19 HRc	320 (256-384)	RPM	39117	9779	4890	3260	2445	1956	1397
				Fr	0.0012	0.0046	0.0092	0.0138	0.0184	0.0230	0.0322
				Feed (ipm)	45.0	45.0	45.0	45.0	45.0	45.0	45.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	285 (228-342)	RPM	34838	8710	4355	2903	2177	1742	1244
				Fr	0.0011	0.0046	0.0092	0.0138	0.0184	0.0230	0.0321
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0

continued on next page

Series 135 3D Fractional		Hardness	Vc (sfm)	DC • in							
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075			1/32	1/8	1/4	3/8	1/2	5/8	7/8	
	≤ 80 Bhn or ≤ 47 HRb (560-840)	700	RPM	85568	21392	10696	7131	5348	4278	3056	
			Fr	0.0012	0.0049	0.0098	0.0147	0.0196	0.0245	0.0344	
			Feed (ipm)	105.0	105.0	105.0	105.0	105.0	105.0	105.0	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 150 Bhn or ≤ 7 HRc (480-720)	600	RPM	73344	18336	9168	6112	4584	3667	2619
				Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0347
				Feed (ipm)	91.0	91.0	91.0	91.0	91.0	91.0	91.0
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 140 Bhn or ≤ 3 HRc (400-600)	500	RPM	61120	15280	7640	5093	3820	3056	2183
				Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	30.0	30.0	30.0	30.0	30.0	30.0	30.0
		≤ 200 Bhn or ≤ 23 HRc (320-480)	400	RPM	48896	12224	6112	4075	3056	2445	1746
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V			Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	24.5	24.5	24.5	24.5	24.5	24.5	24.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 300 Bhn or ≤ 32 HRc (44-66)	55	RPM	6723	1681	840	560	420	336	240
				Fr	0.0002	0.0008	0.0015	0.0023	0.0031	0.0039	0.0054
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
		≤ 400 Bhn or ≤ 43 HRc (24-36)	30	RPM	3667	917	458	306	229	183	131
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V			Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 275 Bhn or ≤ 28 HRc (108-162)	135	RPM	16502	4126	2063	1375	1031	825	589
				Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0124
				Feed (ipm)	7.3	7.3	7.3	7.3	7.3	7.3	7.3
		≤ 350 Bhn or ≤ 38 HRc (80-120)	100	RPM	12224	3056	1528	1019	764	611	437
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V			Fr	0.0004	0.0016	0.0033	0.0049	0.0065	0.0082	0.0115
				Feed (ipm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 440 Bhn or ≤ 47 HRc (44-66)	55	RPM	6723	1681	840	560	420	336	240
				Fr	0.0003	0.0012	0.0024	0.0036	0.0048	0.0059	0.0083
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc (104-156)	130	RPM	15891	3973	1986	1324	993	795	568
				Fr	0.0007	0.0026	0.0053	0.0079	0.0106	0.0132	0.0185
				Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc (72-108)	90	RPM	11002	2750	1375	917	688	550	393
				Fr	0.0003	0.0012	0.0023	0.0035	0.0047	0.0058	0.0081
				Feed (ipm)	3.2	3.2	3.2	3.2	3.2	3.2	3.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc (60-90)	75	RPM	9168	2292	1146	764	573	458	327
				Fr	0.0002	0.0008	0.0016	0.0024	0.0031	0.0039	0.0055
				Feed (ipm)	1.8	1.8	1.8	1.8	1.8	1.8	1.8

Bhn (Brinell) HRc (Rockwell C) HRB (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Hi-PerCarb®

Series 135 3D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (94-141)	117	RPM	24882	12441	6220	4665	3732	3110	2333	1866
				Fr	0.047	0.094	0.189	0.252	0.315	0.378	0.504	0.630
				Feed (mm/min)	1175	1175	1175	1175	1175	1175	1175	1175
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc (85-128)	107	RPM	22620	11310	5655	4241	3393	2827	2121	1696
				Fr	0.043	0.086	0.172	0.229	0.286	0.343	0.457	0.572
				Feed (mm/min)	970	970	970	970	970	970	970	970
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 475 Bhn or ≤ 45 HRc (49-73)	61	RPM	12926	6463	3231	2424	1939	1616	1212	969
				Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	460	460	460	460	460	460	460	460
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (73-110)	91	RPM	19388	9694	4847	3635	2908	2424	1818	1454
				Fr	0.036	0.071	0.142	0.190	0.237	0.285	0.380	0.475
				Feed (mm/min)	690	690	690	690	690	690	690	690
	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc (45-68)	56	RPM	11956	5978	2989	2242	1793	1495	1121	897
				Fr	0.031	0.061	0.122	0.163	0.204	0.244	0.326	0.407
				Feed (mm/min)	365	365	365	365	365	365	365	365
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 450 Bhn or ≤ 48 HRc (32-48)	40	RPM	8402	4201	2100	1575	1260	1050	788	630
				Fr	0.021	0.042	0.083	0.111	0.139	0.167	0.222	0.278
				Feed (mm/min)	175	175	175	175	175	175	175	175
K	CAST IRONS Gray, Malleable, Ductile	≤ 185 Bhn or ≤ 9 HRc (67-101)	84	RPM	17773	8886	4443	3332	2666	2222	1666	1333
				Fr	0.031	0.061	0.123	0.164	0.204	0.245	0.327	0.409
				Feed (mm/min)	545	545	545	545	545	545	545	545
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (41-62)	52	RPM	10987	5493	2747	2060	1648	1373	1030	824
				Fr	0.024	0.047	0.095	0.126	0.158	0.189	0.252	0.316
				Feed (mm/min)	260	260	260	260	260	260	260	260
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc (22-33)	27	RPM	5816	2908	1454	1091	872	727	545	436
				Fr	0.023	0.046	0.093	0.124	0.155	0.186	0.248	0.309
				Feed (mm/min)	135	135	135	135	135	135	135	135
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 375 Bhn or ≤ 40 HRc (16-24)	20	RPM	4201	2100	1050	788	630	525	394	315
				Fr	0.020	0.040	0.081	0.108	0.135	0.162	0.216	0.270
				Feed (mm/min)	85	85	85	85	85	85	85	85
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc (78-117)	98	RPM	20681	10340	5170	3878	3102	2585	1939	1551
				Fr	0.055	0.110	0.220	0.293	0.366	0.439	0.585	0.732
	CAST IRONS Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc (69-104)	87	RPM	18419	9209	4605	3454	2763	2302	1727	1381
				Fr	0.055	0.110	0.219	0.292	0.366	0.439	0.585	0.731
				Feed (mm/min)	1010	1010	1010	1010	1010	1010	1010	1010

continued on next page

Series 135 3D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	213 (171-256)	RPM Fr Feed (mm/min)	45239 0.059 2690	22620 0.119 2690	11310 0.238 2690	8482 0.317 2690	6786 0.396 2690	5655 0.476 2690	4241 0.634 2690	3393 0.793 2690
		≤ 150 Bhn or ≤ 7 HRc	183 (146-219)	RPM Fr Feed (mm/min)	38777 0.060 2325	19388 0.120 2325	9694 0.240 2325	7271 0.320 2325	5816 0.400 2325	4847 0.480 2325	3635 0.640 2325	2908 0.799 2325
		≤ 140 Bhn or ≤ 3 HRc	152 (122-183)	RPM Fr Feed (mm/min)	32314 0.024 776	16157 0.048 776	8078 0.096 776	6059 0.128 776	4847 0.160 776	4039 0.192 776	3029 0.256 776	2424 0.320 776
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 200 Bhn or ≤ 23 HRc	122 (98-146)	RPM Fr Feed (mm/min)	25851 0.024 630	12926 0.049 630	6463 0.097 630	4847 0.130 630	3878 0.162 630	3231 0.195 630	2424 0.260 630	1939 0.325 630
		≤ 300 Bhn or ≤ 32 HRc	17 (13-20)	RPM Fr Feed (mm/min)	3555 0.010 35	1777 0.020 35	889 0.039 35	666 0.053 35	533 0.066 35	444 0.079 35	333 0.105 35	267 0.131 35
		≤ 400 Bhn or ≤ 43 HRc	9 (7-11)	RPM Fr Feed (mm/min)	1939 0.008 15	969 0.015 15	485 0.031 15	364 0.041 15	291 0.052 15	242 0.062 15	182 0.083 15	145 0.103 15
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 275 Bhn or ≤ 28 HRc	41 (33-49)	RPM Fr Feed (mm/min)	8725 0.021 185	4362 0.042 185	2181 0.085 185	1636 0.113 185	1309 0.141 185	1091 0.170 185	818 0.226 185	654 0.283 185
		≤ 350 Bhn or ≤ 38 HRc	30 (24-37)	RPM Fr Feed (mm/min)	6463 0.019 125	3231 0.039 125	1616 0.077 125	1212 0.103 125	969 0.129 125	808 0.155 125	606 0.206 125	485 0.258 125
		≤ 440 Bhn or ≤ 47 HRc	17 (13-20)	RPM Fr Feed (mm/min)	3555 0.014 50	1777 0.028 50	889 0.056 50	666 0.075 50	533 0.094 50	444 0.113 50	333 0.150 50	267 0.188 50
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 200 Bhn or ≤ 13 HRc	40 (32-48)	RPM Fr Feed (mm/min)	8402 0.032 265	4201 0.063 265	2100 0.126 265	1575 0.168 265	1260 0.210 265	1050 0.252 265	788 0.336 265	630 0.421 265
		≤ 375 Bhn or ≤ 40 HRc	27 (22-33)	RPM Fr Feed (mm/min)	5816 0.014 80	2908 0.028 80	1454 0.055 80	1091 0.073 80	872 0.092 80	727 0.110 80	545 0.147 80	436 0.183 80
		≤ 475 Bhn or ≤ 50 HRc	23 (18-27)	RPM Fr Feed (mm/min)	4847 0.009 45	2424 0.019 45	1212 0.037 45	909 0.050 45	727 0.062 45	606 0.074 45	454 0.099 45	364 0.124 45

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



5xD

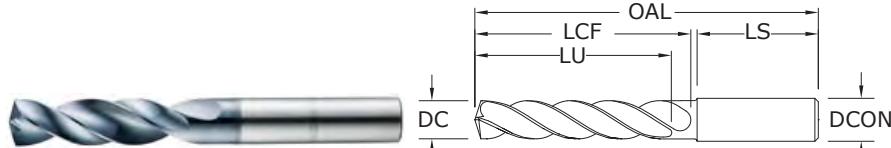

135 5xD

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRc (≤ 577 Bhn)

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
1/64	0.0156	0.40		1/8	1 1/2	5/32	7/64	1	52300*
1/32	0.0312	0.79		1/8	1 1/2	5/16	7/32	1	52301*
3/64	0.0469	1.19	1/16-64	1/8	1 1/2	25/64	19/64	1	52302*
1,25 mm	0.0492			3,0	38,0	10,0	7,5	25,0	64520*
1,45 mm	0.0571			3,0	38,0	10,0	7,5	25,0	64521*
#53	0.0595	1.51		1/8	1-1/2	25/64	19/64	1	64522*
1/16	0.0625	1.59	5/64-60	1/8	2	15/32	23/64	1-1/4	52303*
1,6 mm	0.0630			3,0	50,0	12,0	9,0	32,0	64523*
1,75 mm	0.0689			3,0	50,0	12,0	9,0	32,0	64524*
#50	0.0700	1.78		1/8	2	15/32	23/64	1-1/4	64525*
5/64	0.0781	1.98		1/8	2	35/64	27/64	1-1/4	52304*
#47	0.0785	1.99		1/8	2	35/64	27/64	1-1/4	64526*
2,05 mm	0.0807			3,0	50,0	14,0	11,0	32,0	64527*
#46	0.0810	2.06		1/8	2	35/64	27/64	1-1/4	64528*
#43	0.0890	2.26		1/8	2	19/32	15/32	1-1/4	64529*
#42	0.0935	2.37		1/8	2	5/8	1/2	1-1/4	64530*
3/32	0.0938	2.38	1/8-32	1/8	2	5/8	1/2	1-1/4	52305
#40	0.0980	2.49		1/8	2	43/64	17/32	1-1/4	52306
2,5 mm	0.0984			3,0	50,0	17,0	13,0	32,0	64531
#39	0.0995	2.53		1/8	2	43/64	17/32	1-1/4	52307
#38	0.1015	2.58	5-40	1/8	2	43/64	17/32	1-1/4	52308
#37	0.1040	2.64	5-44	1/8	2	45/64	9/16	1-1/4	52309
#36	0.1065	2.71	6-32	1/8	2	45/64	9/16	1-1/4	52310
7/64	0.1094	2.78		1/8	2	3/4	19/32	1-1/4	52311
#35	0.1100	2.79		1/8	2	3/4	19/32	1-1/4	52312
#34	0.1110	2.82		1/8	2	3/4	19/32	1-1/4	52313
#33	0.1130	2.87	6-40	1/8	2	3/4	19/32	1-1/4	52314
2,9 mm	0.1142			3,0	50,0	19,0	15,0	32,0	64532
#32	0.1160	2.95		1/8	2	3/4	39/64	1-1/4	52315
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	64100
#31	0.1200	3.05		1/8	2	3/4	39/64	1-1/4	52316
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	64101
1/8	0.1250	3.18		1/4	3	1	53/64	1-7/16	51580
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	64102
#30	0.1285	3.26		1/4	3	1	53/64	1-7/16	51581
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0	64103
3,4 mm	0.1339		8-32,8-36	6,0	66,0	28,0	23,0	36,0	64104
#29	0.1360	3.45		1/4	3	1	53/64	1-7/16	51582

*Single Margin

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-.1181 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0022/+0,012
DCON = h₆

>3-6 DIAMETER

DC = +.0044/+0,016
DCON = h₆

>6-10 DIAMETER

DC = +.0066/+0,021
DCON = h₆

>10-18 DIAMETER

DC = +.0077/+0,025
DCON = h₆

>18-30 DIAMETER

DC = +.0088/+0,029
DCON = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit www.ksptpatents.com



135 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO.	Ti-NAMITE-A (AITIN)	CONTINUED
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS			
3,5 mm	0.1378			6,0	66,0	28,0	23,0	36,0	64105		
#28	0.1405	3.57	8-40	1/4	3	1	53/64	1-7/16	52317		
9/64	0.1406	3.57		1/4	3	1	53/64	1-7/16	51583		
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	64106		
#27	0.1440	3.66		1/4	3	1	53/64	1-7/16	52318		
3,7 mm	0.1457		M4.5 X 0,75	6,0	66,0	28,0	23,0	36,0	64107		
#26	0.1470	3.73	3/16-24	1/4	3	1	53/64	1-7/16	52319		
#25	0.1495	3.80	10-24	1/4	3-1/4	1-1/4	1-5/64	1-7/16	51584		
3,8 mm	0.1496			6,0	74,0	36,0	29,0	36,0	64108		
#24	0.1520	3.86	10-28	1/4	3-1/4	1-1/4	1-5/64	1-7/16	52321		
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	64109		
#23	0.1540	3.91		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52322		
5/32	0.1562	3.97		1/4	3-1/4	1-1/4	1-5/64	1-7/16	51585		
#22	0.1570	3.99	10-30	1/4	3-1/4	1-1/4	1-5/64	1-7/16	52323		
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	64110		
#21	0.1590	4.04	10-32	1/4	3-1/4	1-1/4	1-5/64	1-7/16	51586		
#20	0.1610	4.09	13/64-24	1/4	3-1/4	1-1/4	1-5/64	1-7/16	51587		
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	64111		
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	74,0	36,0	29,0	36,0	64112		
#19	0.1660	4.22		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52324		
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	64113		
#18	0.1695	4.31		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52325		
11/64	0.1719	4.37		1/4	3-1/4	1-1/4	1-5/64	1-7/16	51588		
#17	0.1730	4.39		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52326		
4,4 mm	0.1732			6,0	74,0	36,0	29,0	36,0	64114		
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	64115		
#15	0.1800	4.57		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52327		
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	64116		
#14	0.1820	4.62		1/4	3-1/4	1-1/4	1-5/64	1-7/16	52328		
#13	0.1850	4.70	12-32	1/4	3-1/4	1-1/4	1-5/64	1-7/16	52329		
4,7 mm	0.1850			6,0	74,0	36,0	29,0	36,0	64117		
3/16	0.1875	4.76		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51589		
#12	0.1890	4.80	7/32-32	1/4	3-1/4	1-3/4	1-37/64	1-7/16	52330		
4,8 mm	0.1890			6,0	82,0	44,0	35,0	36,0	64118		
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	64119		
#10	0.1935	4.91	14-20	1/4	3-1/4	1-3/4	1-37/64	1-7/16	52331		
#9	0.1960	4.98		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52332		
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	64120		
#8	0.1990	5.05		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52333		
5,1 mm	0.2008			6,0	82,0	44,0	35,0	36,0	64121		
#7	0.2010	5.11	1/4-20	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51506		
13/64	0.2031	5.16		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51507		
#6	0.2040	5.18		1/4	3 1/4	1 3/4	1 37/64	1 7/16	52334		
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	64122		
#5	0.2055	5.22		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51590		
5,25 mm	0.2067			6,0	82,0	44,0	35,0	36,0	64123		
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	64124		
#4	0.2090	5.31	1/4-24	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51508		

continued on next page




5xD

**135 5xD**

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

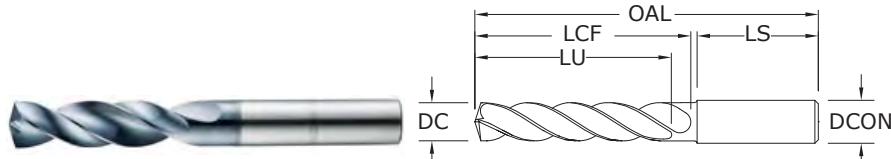

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	64125
#3	0.2130	5.41	1/4-28	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51509
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	64126
7/32	0.2188	5.56	1/4-32	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51510
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0	64127
#2	0.2210	5.61		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52335
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	64128
#1	0.2280	5.79		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52336
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	64129
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	64130
A	0.2340	5.94		1/4	3-1/4	1-3/4	1-37/64	1-7/16	52337
15/64	0.2344	5.95		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51591
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	64131
B	0.2380	6.05		1/4	3 5/8	2-5/64	1-51/64	1-7/16	52338
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	64132
C	0.2420	6.15		1/4	3 5/8	2-5/64	1-51/64	1-7/16	52339
6,2 mm	0.2441			8,0	91,0	53,0	43,0	36,0	64133
D	0.2460	6.25		1/4	3 5/8	2-5/64	1-51/64	1-7/16	52340
6,25 mm	0.2461		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	64134
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	64135
1/4	0.2500	6.35		1/4	3-5/8	2-5/64	1-51/64	1-7/16	51511
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	64136
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	64137
F	0.2570	6.53	5/16-18	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51512
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	64138
G	0.2610	6.63		5/16	3 5/8	2 5/64	1 51/64	1 7/16	52341
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	64139
17/64	0.2656	6.75	5/16-20	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51513
H	0.2660	6.76		5/16	3-5/8	2-5/64	1-51/64	1-7/16	52342
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	64140
6,9 mm	0.2717			8,0	91,0	53,0	43,0	36,0	64141
I	0.2720	6.91	5/16-24	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51514
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	64142
J	0.2770	7.04		5/16	3 5/8	2-5/64	1-51/64	1-7/16	52343
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	64143
K	0.2810	7.14		5/16	3 5/8	2-5/64	1-51/64	1-7/16	52344
9/32	0.2812	7.14	5/16-32	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51515
7,2 mm	0.2835			8,0	91,0	53,0	43,0	36,0	64144

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**DC = +.00008/+,.00047
DCON = h₆**>.1181-.2362 DIAMETER**DC = +.00016/+,.00063
DCON = h₆**>.2362-.3937 DIAMETER**DC = +.00024/+,.00083
DCON = h₆**>.3937-.7087 DIAMETER**DC = +.00028/+,.00098
DCON = h₆**>.7087-.11811 DIAMETER**DC = +.00031/+,.00114
DCON = h₆**TOLERANCES (mm)****≤3 DIAMETER**DC = +.00224/+,.0012
DCON = h₆**>3-6 DIAMETER**DC = +.00444/+,.0016
DCON = h₆**>6-10 DIAMETER**DC = +.00664/+,.0021
DCON = h₆**>10-18 DIAMETER**DC = +.00774/+,.0025
DCON = h₆**>18-30 DIAMETER**DC = +.00884/+,.0029
DCON = h₆**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**For patent information visit
www.ksptpatents.com



135 5xD


FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO. Ti-NAMITE-A (AITIN)	CONTINUED
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
7,25 mm	0.2854	M8 X 0,75	8,0	91,0	53,0	43,0	36,0	64145		
7,3 mm	0.2874		8,0	91,0	53,0	43,0	36,0	64146		
L	0.2900	7.37	5/16	3-5/8	2-5/64	1-51/64	1-7/16	52345		
7,4 mm	0.2913		8,0	91,0	53,0	43,0	36,0	64147		
M	0.2950	7.49	5/16	3-5/8	2-5/64	1-51/64	1-7/16	52346		
7,5 mm	0.2953	M8 X 0,5	8,0	91,0	53,0	43,0	36,0	64148		
19/64	0.2969	7.54	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51516		
7,6 mm	0.2992		8,0	91,0	53,0	43,0	36,0	64149		
N	0.3020	7.67	5/16	3-5/8	2-5/64	1-51/64	1-7/16	52347		
7,7 mm	0.3031		8,0	91,0	53,0	43,0	36,0	64150		
7,8 mm	0.3071	M9 X 1,25	8,0	91,0	53,0	43,0	36,0	64151		
7,9 mm	0.3110		8,0	91,0	53,0	43,0	36,0	64152		
5/16	0.3125	7.94	3/8-16	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51517	
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	64153	
O	0.3160	8.03		3/8	4	2-13/32	2-1/8	1-9/16	52348	
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	64154	
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	64155	
P	0.3230	8.20		3/8	4	2-13/32	2-1/8	1-9/16	51518	
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	64156	
21/64	0.3281	8.33	3/8-20	3/8	4	2-13/32	2-1/8	1-9/16	51519	
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	64157	
Q	0.3320	8.43	3/8-24	3/8	4	2-13/32	2-1/8	1-9/16	51520	
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	64158	
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	64159	
R	0.3390	8.61	3/8-32	3/8	4	2-13/32	2-1/8	1-9/16	52349	
8,7 mm	0.3425		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	64160	
11/32	0.3438	8.73		3/8	4	2-13/32	2-1/8	1-9/16	51521	
8,8 mm	0.3465			10,0	103,0	61,0	49,0	40,0	64161	
S	0.3480	8.84		3/8	4	2-13/32	2-1/8	1-9/16	51522	
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	64162	
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	64163	
T	0.3580	9.09		3/8	4	2-13/32	2-1/8	1-9/16	52350	
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	64164	
23/64	0.3594	9.13		3/8	4	2-13/32	2-1/8	1-9/16	51523	
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	64165	
9,25 mm	0.3642			10,0	103,0	61,0	49,0	40,0	64166	
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	64167	
U	0.3680	9.35	7/16-14	3/8	4	2-13/32	2-1/8	1-9/16	51524	
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	64168	
9,5 mm	0.3740		M10 X 0,5	10,0	103,0	61,0	49,0	40,0	64169	
3/8	0.3750	9.53		3/8	4	2-13/32	2-1/8	1-9/16	51525	
V	0.3770	9.58		1/2	4	2-13/32	2-1/8	1-9/16	52351	
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	64170	
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	64171	
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	64172	
W	0.3860	9.80		1/2	4	2-13/32	2-1/8	1-9/16	51526	
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	64173	
25/64	0.3906	9.92	7/16-20	1/2	4	2-13/32	2-1/8	1-9/16	51527	

continued on next page



5xD

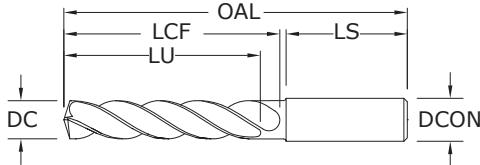**135 5xD**

FRACTIONAL & METRIC SERIES

- Double margin design improves accuracy and surface finish along with increased strength for aggressive drilling
- Specialized self-centering notched point eliminates the need for spot drilling decreasing thrust and deflection
- Engineered edge protection improves edge strength and reduces edge fatigue allowing for increased feed rates
- Recommended for materials ≤ 56 HRC (≤ 577 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITIN)
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	64174
X	0.3970	10.08	7/16-24	1/2	4-11/16	2-3/4	2-23/64	1-49/64	52352
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	64175
10,2 mm	0.4016			12,0	118,0	71,0	56,0	45,0	64176
Y	0.4040	10.26	7/16-28	1/2	4-11/16	2-3/4	2-23/64	1-49/64	52353
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	64177
13/32	0.4062	10.32		1/2	4-11/16	2-3/4	2-23/64	1-49/64	51528
10,4 mm	0.4095			12,0	118,0	71,0	56,0	45,0	64178
Z	0.4130	10.49		1/2	4-11/16	2-3/4	2-23/64	1-49/64	52354
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	64179
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	64180
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	64181
27/64	0.4219	10.72	1/2-13	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51529
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	64182
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	64183
11,0 mm	0.4331			12,0	118,0	71,0	56,0	45,0	64184
11,1 mm	0.4370		M12 X 1	12,0	118,0	71,0	56,0	45,0	64185
7/16	0.4375	11.11	1/4-18 NPT	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51530
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	64186
11,25 mm	0.4429			12,0	118,0	71,0	56,0	45,0	64187
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	64188
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	64189
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	64190
29/64	0.4531	11.51	1/2-20	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51531
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	64191
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	64192
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	64193
11,9 mm	0.4685			12,0	118,0	71,0	56,0	45,0	64194
15/32	0.4688	11.91	1/2-28	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51532
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	64195
31/64	0.4844	12.30	9/16-12	1/2	4-7/8	3-1/32	2-19/32	1-49/64	51533
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	64196
1/2	0.5000	12.70		1/2	4-7/8	3-1/32	2-19/32	1-49/64	51534
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	64197
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	64198
33/64	0.5156	13.10	9/16-18	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51535
17/32	0.5312	13.49	5/8-11	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51536
13,5 mm	0.5315			14,0	124,0	77,0	60,0	45,0	64199

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047
DCON = h₆

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063
DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083
DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098
DCON = h₆

>.7087-.11811 DIAMETER

DC = +.00031/+,.00114
DCON = h₆

TOLERANCES (mm)**≤3 DIAMETER**

DC = +.0022/+,.0012
DCON = h₆

>3-6 DIAMETER

DC = +.0044/+,.0016
DCON = h₆

>6-10 DIAMETER

DC = +.0066/+,.0021
DCON = h₆

>10-18 DIAMETER

DC = +.0077/+,.0025
DCON = h₆

>18-30 DIAMETER

DC = +.0088/+,.0029
DCON = h₆

STEELS**STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**

For patent information visit
www.ksptpatents.com



135 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO. Ti-NAMITE-A (AITIN)
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	
35/64	0.5469	13.89	5/8-12	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51537
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	64200
9/16	0.5625	14.29		5/8	5-1/4	3-1/4	2-3/4	1-57/64	51538
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	64201
37/64	0.5781	14.68	5/8-18	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51539
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	64202
19/32	0.5938	15.08	11/16-11	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51592
39/64	0.6094	15.48	11/16-12	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51593
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	64203
5/8	0.6250	15.88	11/16-16	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51540
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	64204
41/64	0.6406	16.27	11/16-24	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51594
16,5 mm	0.6496		M18 X 1,5	18,0	143,0	93,0	71,0	48,0	64205
21/32	0.6562	16.67	3/4-10	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51541
17,0 mm	0.6693			18,0	143,0	93,0	71,0	48,0	64206
43/64	0.6719	17.07	3/4-12	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51595
11/16	0.6875	17.46	3/4-16	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51542
17,5 mm	0.6890		M20 X 2,5	18,0	143,0	93,0	71,0	48,0	64207
45/64	0.7031	17.86	3/4-20, 1/2-14 NPT	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51543
18,0 mm	0.7087			18,0	143,0	93,0	71,0	48,0	64208
23/32	0.7188	18.26		3/4	6	4	3-3/8	1-31/32	51596
18,5 mm	0.7283		M20 X 1,5	20,0	153,0	101,0	77,0	50,0	64209
47/64	0.7344	18.65	13/16-12	3/4	6	4	3-3/8	1-31/32	51544
19,0 mm	0.7480			20,0	153,0	101,0	77,0	50,0	64210
3/4	0.7500	19.05	13/16-16	3/4	6	4	3-3/8	1-31/32	51545
49/64	0.7656	19.45	7/8-9	7/8	6	4	3-3/8	1-31/32	52355
19,5 mm	0.7677		M22 X 2,5	20,0	153,0	101,0	77,0	50,0	64211
25/32	0.7812	19.84		7/8	6	4	3-3/8	1-31/32	52356
20,0 mm	0.7874			20,0	153,0	101,0	77,0	50,0	64212
51/64	0.7969	20.24	7/8-12	7/8	6	4	3-3/8	1-31/32	52357
20,5 mm	0.8071			22,0	153,0	101,0	77,0	50,0	64533
13/16	0.8125	20.64	7/8-14	7/8	6-1/2	4-1/2	3-7/8	1-31/32	52358
21,0 mm	0.8268			22,0	153,0	101,0	77,0	50,0	64534
22,0 mm	0.8661			22,0	178,0	127,0	108,0	50,0	64535
7/8	0.8750	22.23	15/16-16, 1-8	7/8	6-1/2	4-1/2	3-7/8	1-31/32	52359
59/64	0.9219	23.42	1-12	1	7	5	4-3/8	2-1/8	52360

CONTINUED

FRACTIONAL

Hi-PerCarb®

Series 135 5D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/32	1/8	1/4	3/8	1/2	5/8	7/8	
	≤ 175 Bhn or ≤ 7 HRc	345 (276-414)	RPM	42173	10543	5272	3514	2636	2109	1506	
			Fr	0.0010	0.0040	0.0080	0.0120	0.0159	0.0199	0.0279	
			Feed (ipm)	42.0	42.0	42.0	42.0	42.0	42.0	42.0	
	≤ 275 Bhn or ≤ 28 HRc	310 (248-372)	RPM	37894	9474	4737	3158	2368	1895	1353	
			Fr	0.0009	0.0036	0.0072	0.0108	0.0144	0.0179	0.0251	
			Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0	
	≤ 425 Bhn or ≤ 45 HRc	180 (144-216)	RPM	22003	5501	2750	1834	1375	1100	786	
			Fr	0.0007	0.0030	0.0060	0.0090	0.0120	0.0150	0.0210	
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	270 (216-324)	RPM	33005	8251	4126	2750	2063	1650	1179
				Fr	0.0008	0.0030	0.0061	0.0091	0.0121	0.0151	0.0212
				Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0
		≤ 375 Bhn or ≤ 40 HRc	165 (132-198)	RPM	20170	5042	2521	1681	1261	1008	720
				Fr	0.0006	0.0026	0.0052	0.0077	0.0103	0.0129	0.0180
				Feed (ipm)	13.0	13.0	13.0	13.0	13.0	13.0	13.0
		≤ 450 Bhn or ≤ 48 HRc	115 (92-138)	RPM	14058	3514	1757	1171	879	703	502
				Fr	0.0004	0.0018	0.0035	0.0053	0.0071	0.0088	0.0123
				Feed (ipm)	6.2	6.2	6.2	6.2	6.2	6.2	6.2
K	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 185 Bhn or ≤ 9 HRc	250 (200-300)	RPM	30560	7640	3820	2547	1910	1528	1091
				Fr	0.0006	0.0026	0.0051	0.0077	0.0102	0.0128	0.0179
				Feed (ipm)	19.5	19.5	19.5	19.5	19.5	19.5	19.5
		≤ 275 Bhn or ≤ 28 HRc	150 (120-180)	RPM	18336	4584	2292	1528	1146	917	655
				Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	9.0	9.0	9.0	9.0	9.0	9.0	9.0
		≤ 275 Bhn or ≤ 28 HRc	80 (64-96)	RPM	9779	2445	1222	815	611	489	349
				Fr	0.0005	0.0020	0.0039	0.0059	0.0079	0.0098	0.0137
				Feed (ipm)	4.8	4.8	4.8	4.8	4.8	4.8	4.8
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 375 Bhn or ≤ 40 HRc	55 (44-66)	RPM	6723	1681	840	560	420	336	240
				Fr	0.0004	0.0018	0.0036	0.0054	0.0071	0.0089	0.0125
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
		≤ 220 Bhn or ≤ 19 HRc	300 (240-360)	RPM	36672	9168	4584	3056	2292	1834	1310
				Fr	0.0011	0.0045	0.0089	0.0134	0.0179	0.0224	0.0313
				Feed (ipm)	41.0	41.0	41.0	41.0	41.0	41.0	41.0
		≤ 260 Bhn or ≤ 26 HRc	265 (212-318)	RPM	32394	8098	4049	2699	2025	1620	1157
				Fr	0.0011	0.0046	0.0091	0.0137	0.0183	0.0228	0.0320
				Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0

continued on next page

FRACTIONAL
Hi-PerCarb®

Series 135 5D Fractional		Hardness	Vc (sfm)	DC • in							
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075			1/32	1/8	1/4	3/8	1/2	5/8	7/8	
	≤ 80 Bhn or ≤ 47 HRb	635 (508-762)	RPM	77622	19406	9703	6469	4851	3881	2772	
			Fr	0.0012	0.0049	0.0099	0.0148	0.0198	0.0247	0.0346	
			Feed (ipm)	96.0	96.0	96.0	96.0	96.0	96.0	96.0	
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 150 Bhn or ≤ 7 HRc	540 (432-648)	RPM	66010	16502	8251	5501	4126	3300	2357
				Fr	0.0012	0.0050	0.0099	0.0149	0.0199	0.0248	0.0348
				Feed (ipm)	82.0	82.0	82.0	82.0	82.0	82.0	82.0
		≤ 140 Bhn or ≤ 3 HRc	450 (360-540)	RPM	55008	13752	6876	4584	3438	2750	1965
S	SUPER ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 200 Bhn or ≤ 23 HRc	360 (288-432)	RPM	44006	11002	5501	3667	2750	2200	1572
				Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (ipm)	22.0	22.0	22.0	22.0	22.0	22.0	22.0
		≤ 300 Bhn or ≤ 32 HRc	40 (32-48)	RPM	4890	1222	611	407	306	244	175
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 400 Bhn or ≤ 43 HRc	20 (16-24)	RPM	2445	611	306	204	153	122	87
				Fr	0.0002	0.0007	0.0013	0.0020	0.0026	0.0033	0.0046
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
		≤ 275 Bhn or ≤ 28 HRc	105 (84-126)	RPM	12835	3209	1604	1070	802	642	458
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 350 Bhn or ≤ 38 HRc	80 (64-96)	RPM	9779	2445	1222	815	611	489	349
				Fr	0.0004	0.0016	0.0032	0.0048	0.0064	0.0080	0.0112
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		≤ 440 Bhn or ≤ 47 HRc	42 (34-50)	RPM	5134	1284	642	428	321	257	183
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			Fr	0.0003	0.0012	0.0025	0.0037	0.0050	0.0062	0.0087
				Feed (ipm)	1.6	1.6	1.6	1.6	1.6	1.6	1.6
		≤ 200 Bhn or ≤ 13 HRc	120 (96-144)	RPM	14669	3667	1834	1222	917	733	524
				Fr	0.0006	0.0026	0.0051	0.0077	0.0103	0.0128	0.0179
				Feed (ipm)	9.4	9.4	9.4	9.4	9.4	9.4	9.4
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	80 (64-96)	RPM	9779	2445	1222	815	611	489	349
				Fr	0.0003	0.0012	0.0024	0.0036	0.0047	0.0059	0.0083
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
		≤ 475 Bhn or ≤ 50 HRc	70 (56-84)	RPM	8557	2139	1070	713	535	428	306
				Fr	0.0002	0.0008	0.0016	0.0024	0.0032	0.0040	0.0056
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Hi-PerCarb®

Series 135M 5D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	105 (84-126)	RPM Fr Feed (mm/min)	22297 0.048 1060	11148 0.095 1060	5574 0.190 1060	4181 0.254 1060	3344 0.317 1060	2787 0.380 1060	2090 0.507 1060	1672 0.634 1060
		≤ 275 Bhn or ≤ 28 HRc	94 (76-113)	RPM Fr Feed (mm/min)	20035 0.043 855	10017 0.085 855	5009 0.171 855	3756 0.228 855	3005 0.285 855	2504 0.341 855	1878 0.455 855	1503 0.569 855
		≤ 425 Bhn or ≤ 45 HRc	55 (44-66)	RPM Fr Feed (mm/min)	11633 0.036 415	5816 0.071 415	2908 0.143 415	2181 0.190 415	1745 0.238 415	1454 0.285 415	1091 0.381 415	872 0.476 415
		≤ 275 Bhn or ≤ 28 HRc	82 (66-99)	RPM Fr Feed (mm/min)	17449 0.036 625	8725 0.072 625	4362 0.143 625	3272 0.191 625	2617 0.239 625	2181 0.287 625	1636 0.382 625	1309 0.478 625
		≤ 375 Bhn or ≤ 40 HRc	50 (40-60)	RPM Fr Feed (mm/min)	10664 0.031 330	5332 0.062 330	2666 0.124 330	1999 0.165 330	1600 0.206 330	1333 0.248 330	1000 0.330 330	800 0.413 330
		≤ 450 Bhn or ≤ 48 HRc	35 (28-42)	RPM Fr Feed (mm/min)	7432 0.022 160	3716 0.043 160	1858 0.086 160	1394 0.115 160	1115 0.144 160	929 0.172 160	697 0.230 160	557 0.287 160
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 185 Bhn or ≤ 9 HRc	76 (61-91)	RPM Fr Feed (mm/min)	16157 0.031 495	8078 0.061 495	4039 0.123 495	3029 0.163 495	2424 0.204 495	2020 0.245 495	1515 0.327 495	1212 0.408 495
		≤ 275 Bhn or ≤ 28 HRc	46 (37-55)	RPM Fr Feed (mm/min)	9694 0.024 230	4847 0.047 230	2424 0.095 230	1818 0.127 230	1454 0.158 230	1212 0.190 230	909 0.253 230	727 0.316 230
		≤ 275 Bhn or ≤ 28 HRc	24 (20-29)	RPM Fr Feed (mm/min)	5170 0.023 120	2585 0.046 120	1293 0.093 120	969 0.124 120	776 0.155 120	646 0.186 120	485 0.248 120	388 0.309 120
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 375 Bhn or ≤ 40 HRc	17 (13-20)	RPM Fr Feed (mm/min)	3555 0.021 75	1777 0.042 75	889 0.084 75	666 0.113 75	533 0.141 75	444 0.169 75	333 0.225 75	267 0.281 75
		≤ 220 Bhn or ≤ 19 HRc	91 (73-110)	RPM Fr Feed (mm/min)	19388 0.054 1050	9694 0.108 1050	4847 0.217 1050	3635 0.289 1050	2908 0.361 1050	2424 0.433 1050	1818 0.578 1050	1454 0.722 1050
		≤ 260 Bhn or ≤ 26 HRc	81 (65-97)	RPM Fr Feed (mm/min)	17126 0.055 935	8563 0.109 935	4282 0.218 935	3211 0.291 935	2569 0.364 935	2141 0.437 935	1606 0.582 935	1284 0.728 935
K	CAST IRONS Gray, Malleable, Ductile											

continued on next page

Series 135M 5D Metric		Hardness	Vc (m/min)	DC • mm								
				1.5	3	6	8	10	12	16	20	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	194 (155-232)	RPM Fr	41039 0.059	20519 0.118	10260 0.237	7695 0.316	6156 0.395	5130 0.474	3847 0.632	3078 0.790
		≤ 150 Bhn or ≤ 7 HRc	165 (132-198)	RPM Fr	34899 0.059	17449 0.118	8725 0.237	6544 0.316	5235 0.394	4362 0.473	3272 0.631	2617 0.789
		≤ 140 Bhn or ≤ 3 HRc	137 (110-165)	RPM Fr	29082 0.027	14541 0.053	7271 0.107	5453 0.142	4362 0.178	3635 0.213	2726 0.284	2181 0.355
		Copper Alloys Alum Bronze, C110, Muntz Brass	110 (88-132)	RPM Fr	23266 0.027	11633 0.054	5816 0.108	4362 0.144	3490 0.181	2908 0.217	2181 0.289	1745 0.361
S	SUPER ALLOYS (Nickel, Cobalt, Iron Base) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	12 (10-15)	RPM Fr	2585 0.010	1293 0.019	646 0.039	485 0.052	388 0.064	323 0.077	242 0.103	194 0.129
		≤ 400 Bhn or ≤ 43 HRc	6 (5-7)	RPM Fr	1293 0.007	646 0.014	323 0.028	242 0.037	194 0.046	162 0.056	121 0.074	97 0.093
		≤ 275 Bhn or ≤ 28 HRc	32 (26-38)	RPM Fr	6786 0.021	3393 0.043	1696 0.085	1272 0.114	1018 0.142	848 0.171	636 0.228	509 0.285
		TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	24 (20-29)	RPM Fr	5170 0.019	2585 0.039	1293 0.077	969 0.103	776 0.129	646 0.155	485 0.206	388 0.258
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 440 Bhn or ≤ 47 HRc	13 (10-15)	RPM Fr	2714 0.015	1357 0.029	679 0.059	509 0.079	407 0.098	339 0.118	254 0.157	204 0.196
		≤ 200 Bhn or ≤ 13 HRc	37 (29-44)	RPM Fr	7755 0.031	3878 0.062	1939 0.124	1454 0.165	1163 0.206	969 0.248	727 0.330	582 0.413
		≤ 375 Bhn or ≤ 40 HRc	24 (20-29)	RPM Fr	5170 0.015	2585 0.029	1293 0.058	969 0.077	776 0.097	646 0.116	485 0.155	388 0.193
		≤ 475 Bhn or ≤ 50 HRc	21 (17-26)	RPM Fr	4524 0.010	2262 0.020	1131 0.040	848 0.053	679 0.066	565 0.080	424 0.106	339 0.133

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)


mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



3xD

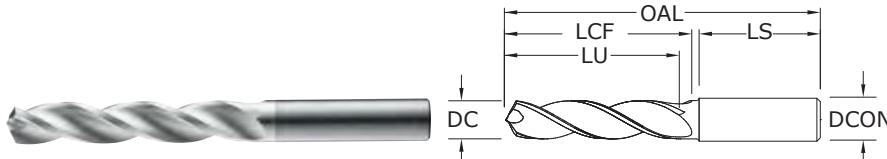**131N 3xD**

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials \leq 175 Bhn (\leq 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.1181	METRIC EQUIV. 0.1220	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL OAL	FLUTE LENGTH LCF	CLEARED SHANK LENGTH LU	SHANK LENGTH LS	EDP NO.	
									UNCOATED	Ti-NAMITE-B (TiB ₂)
3,0 mm	0.1181			6,0	62,0	20,0	14,0	36,0	64600	67600
3,1 mm	0.1220			6,0	62,0	20,0	14,0	36,0	64601	67601
1/8	0.1250	3.18		6,0	62,0	20,0	14,0	36,0	54600	54700
3,2 mm	0.1260	M3,5 X 0,35		6,0	62,0	20,0	14,0	36,0	64602	67602
3,3 mm	0.1299	M4 X 0,7		6,0	62,0	20,0	14,0	36,0	64603	67603
3,4 mm	0.1339			6,0	62,0	20,0	14,0	36,0	64604	67604
#29	0.1360	3.45	8-32,8-36	6,0	62,0	20,0	14,0	36,0	54601	54701
3,5 mm	0.1378		M4 X 0,5	6,0	62,0	20,0	14,0	36,0	64605	67605
9/64	0.1406	3.57		6,0	62,0	20,0	14,0	36,0	54602	54702
3,6 mm	0.1417		M4 X 0,35	6,0	62,0	20,0	14,0	36,0	64606	67606
3,7 mm	0.1457		M4,5 X 0,75	6,0	62,0	20,0	14,0	36,0	64607	67607
3,8 mm	0.1496		10-24	6,0	66,0	24,0	17,0	36,0	64608	67608
3,9 mm	0.1535			6,0	66,0	24,0	17,0	36,0	64609	67609
5/32	0.1562	3.97		6,0	66,0	24,0	17,0	36,0	54603	54703
4,0 mm	0.1575		M4,5 X 0,5	6,0	66,0	24,0	17,0	36,0	64610	67610
#21	0.1590	4.04	10-32	6,0	66,0	24,0	17,0	36,0	54604	54704
4,1 mm	0.1614			6,0	66,0	24,0	17,0	36,0	64611	67611
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	66,0	24,0	17,0	36,0	64612	67612
4,3 mm	0.1693			6,0	66,0	24,0	17,0	36,0	64613	67613
11/64	0.1719	4.37		6,0	66,0	24,0	17,0	36,0	54605	54705
4,4 mm	0.1732		12-24	6,0	66,0	24,0	17,0	36,0	64614	67614
4,5 mm	0.1772		M5 X 0,5	6,0	66,0	24,0	17,0	36,0	64615	67615
4,6 mm	0.1811		12-28	6,0	66,0	24,0	17,0	36,0	64616	67616
4,7 mm	0.1850		12-32	6,0	66,0	24,0	17,0	36,0	64617	67617
3/16	0.1875	4.76		6,0	66,0	28,0	20,0	36,0	54606	54706
4,8 mm	0.1890		7/32-32	6,0	66,0	28,0	20,0	36,0	64618	67618
4,9 mm	0.1929			6,0	66,0	28,0	20,0	36,0	64619	67619
5,0 mm	0.1969		M6 X 1	6,0	66,0	28,0	20,0	36,0	64620	67620
5,1 mm	0.2008		1/4-20	6,0	66,0	28,0	20,0	36,0	64621	67621
13/64	0.2031	5.16		6,0	66,0	28,0	20,0	36,0	54607	54707
5,2 mm	0.2047		M6 X 0,75	6,0	66,0	28,0	20,0	36,0	64622	67622
5,3 mm	0.2087			6,0	66,0	28,0	20,0	36,0	64623	67623
5,4 mm	0.2126			6,0	66,0	28,0	20,0	36,0	64624	67624
5,5 mm	0.2165		M6 X 0,5	6,0	66,0	28,0	20,0	36,0	64625	67625
7/32	0.2188	5.56	1/4-32	6,0	66,0	28,0	20,0	36,0	54608	54708
5,6 mm	0.2205			6,0	66,0	28,0	20,0	36,0	64626	67626

continued on next page

TOLERANCES (inch)

 \leq 1181 DIAMETER

DC = +.00008/+.00047

DCON = h₆

>1181–2362 DIAMETER

DC = +.00016/+.00063

DCON = h₆

>.2362-.3937 DIAMETER

DC = +.00024/+.00083

DCON = h₆

>.3937-.7087 DIAMETER

DC = +.00028/+.00098

DCON = h₆

>.7087-1.1811 DIAMETER

DC = +.00031/+.00114

DCON = h₆

TOLERANCES (mm)

 \leq 3 DIAMETER

DC = +0,002/+0,012

DCON = h₆

>3–6 DIAMETER

DC = +0,004/+0,016

DCON = h₆

>6–10 DIAMETER

DC = +0,006/+0,021

DCON = h₆

>10–18 DIAMETER

DC = +0,007/+0,025

DCON = h₆

NON-FERROUS

PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com



131N 3xD


FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.2244	METRIC EQUIV. 5.7 mm	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	CONTINUED
				DCON	OAL	FLUTE LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
5,8 mm	0.2283			6,0	66,0	28,0	20,0	36,0	64628	67628
5,9 mm	0.2323			6,0	66,0	28,0	20,0	36,0	64629	67629
15/64	0.2344	5.95		6,0	66,0	28,0	20,0	36,0	54609	54709
6,0 mm	0.2362		M7 X 1	6,0	66,0	28,0	20,0	36,0	64630	67630
6,1 mm	0.2402			8,0	79,0	34,0	24,0	36,0	64631	67631
6,2 mm	0.2441		M7 X 0,75	8,0	79,0	34,0	24,0	36,0	64632	67632
6,3 mm	0.2480			8,0	79,0	34,0	24,0	36,0	64633	67633
1/4	0.2500	6.35		8,0	79,0	34,0	24,0	36,0	54610	54710
6,4 mm	0.2520			8,0	79,0	34,0	24,0	36,0	64634	67634
6,5 mm	0.2559			8,0	79,0	34,0	24,0	36,0	64635	67635
F	0.2570	6.53	5/16-18	8,0	79,0	34,0	24,0	36,0	54611	54711
6,6 mm	0.2598			8,0	79,0	34,0	24,0	36,0	64636	67636
6,7 mm	0.2638			8,0	79,0	34,0	24,0	36,0	64637	67637
17/64	0.2656	6.75	5/16-20	8,0	79,0	34,0	24,0	36,0	54612	54712
6,8 mm	0.2677		M8 X 1,25	8,0	79,0	34,0	24,0	36,0	64638	67638
6,9 mm	0.2717		5/16-24	8,0	79,0	34,0	24,0	36,0	64639	67639
7,0 mm	0.2756		M8 X 1	8,0	79,0	34,0	24,0	36,0	64640	67640
7,1 mm	0.2795			8,0	79,0	41,0	29,0	36,0	64641	67641
9/32	0.2812	7.14	5/16-32	8,0	79,0	41,0	29,0	36,0	54613	54713
7,2 mm	0.2835		M8 X 0,75	8,0	79,0	41,0	29,0	36,0	64642	67642
7,3 mm	0.2874			8,0	79,0	41,0	29,0	36,0	64643	67643
7,4 mm	0.2913			8,0	79,0	41,0	29,0	36,0	64644	67644
7,5 mm	0.2953		M8 X 0,5	8,0	79,0	41,0	29,0	36,0	64645	67645
19/64	0.2969	7.54		8,0	79,0	41,0	29,0	36,0	54614	54714
7,6 mm	0.2992			8,0	79,0	41,0	29,0	36,0	64646	67646
7,7 mm	0.3031			8,0	79,0	41,0	29,0	36,0	64647	67647
7,8 mm	0.3071		M9 X 1,25	8,0	79,0	41,0	29,0	36,0	64648	67648
7,9 mm	0.3110			8,0	79,0	41,0	29,0	36,0	64649	67649
5/16	0.3125	7.94	3/8-16	8,0	79,0	41,0	29,0	36,0	54615	54715
8,0 mm	0.3150		M9 X 1	8,0	79,0	41,0	29,0	36,0	64650	67650
8,1 mm	0.3189			10,0	89,0	47,0	35,0	40,0	64651	67651
8,2 mm	0.3228			10,0	89,0	47,0	35,0	40,0	64652	67652
8,3 mm	0.3268			10,0	89,0	47,0	35,0	40,0	64653	67653
21/64	0.3281	8.33	3/8-20	10,0	89,0	47,0	35,0	40,0	54616	54716
8,4 mm	0.3307			10,0	89,0	47,0	35,0	40,0	64654	67654
Q	0.3320	8.43	3/8-24	10,0	89,0	47,0	35,0	40,0	54617	54717
8,5 mm	0.3346		M10 X 1,5	10,0	89,0	47,0	35,0	40,0	64655	67655
8,6 mm	0.3386			10,0	89,0	47,0	35,0	40,0	64656	67656
8,7 mm	0.3425			10,0	89,0	47,0	35,0	40,0	64657	67657
11/32	0.3438	8.73	3/8-32	10,0	89,0	47,0	35,0	40,0	54618	54718
8,8 mm	0.3465		M10 X 1,25	10,0	89,0	47,0	35,0	40,0	64658	67658
8,9 mm	0.3504			10,0	89,0	47,0	35,0	40,0	64659	67659
9,0 mm	0.3543		M10 X 1	10,0	89,0	47,0	35,0	40,0	64660	67660
9,1 mm	0.3583			10,0	89,0	47,0	35,0	40,0	64661	67661
23/64	0.3594	9.13		10,0	89,0	47,0	35,0	40,0	54619	54719

continued on next page



3xD

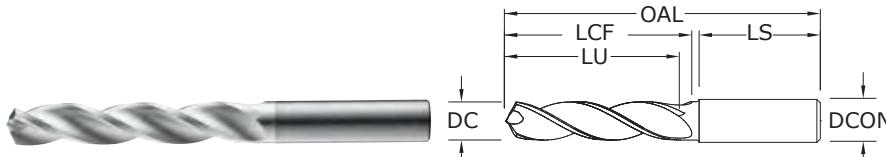**131N 3xD**

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.3622	METRIC EQUIV. 0.3661	TAP SIZE M10 X 0,75	REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO.	
										UNCOATED	Ti-NAMITE-B (TiB ₂)
9,2 mm	0.3622		M10 X 0,75		10,0	89,0	47,0	35,0	40,0	64662	67662
9,3 mm	0.3661				10,0	89,0	47,0	35,0	40,0	64663	67663
U	0.3680	9.35	7/16-14		10,0	89,0	47,0	35,0	40,0	54620	54720
9,4 mm	0.3701				10,0	89,0	47,0	35,0	40,0	64664	67664
9,5 mm	0.3740		M11 / M10 X 0,5		10,0	89,0	47,0	35,0	40,0	64665	67665
	3/8	0.3750	9.53		10,0	89,0	47,0	35,0	40,0	54621	54721
9,6 mm	0.3780				10,0	89,0	47,0	35,0	40,0	64666	67666
9,7 mm	0.3819				10,0	89,0	47,0	35,0	40,0	64667	67667
9,8 mm	0.3858				10,0	89,0	47,0	35,0	40,0	64668	67668
9,9 mm	0.3898				10,0	89,0	47,0	35,0	40,0	64669	67669
25/64	0.3906	9.92	7/16-20		10,0	89,0	47,0	35,0	40,0	54622	54722
10,0 mm	0.3937				10,0	89,0	47,0	35,0	40,0	64670	67670
10,1 mm	0.3976				12,0	102,0	55,0	40,0	45,0	64671	67671
10,2 mm	0.4016		M12 X 1,75		12,0	102,0	55,0	40,0	45,0	64672	67672
10,3 mm	0.4055				12,0	102,0	55,0	40,0	45,0	64673	67673
13/32	0.4062	10.32			12,0	102,0	55,0	40,0	45,0	54623	54723
10,4 mm	0.4094				12,0	102,0	55,0	40,0	45,0	64674	67674
10,5 mm	0.4134		M12 X 1,5		12,0	102,0	55,0	40,0	45,0	64675	67675
10,6 mm	0.4173				12,0	102,0	55,0	40,0	45,0	64676	67676
10,7 mm	0.4213				12,0	102,0	55,0	40,0	45,0	64677	67677
27/64	0.4219	10.72	1/2-13		12,0	102,0	55,0	40,0	45,0	54624	54724
10,8 mm	0.4252		M12 X 1,25		12,0	102,0	55,0	40,0	45,0	64678	67678
10,9 mm	0.4291				12,0	102,0	55,0	40,0	45,0	64679	67679
11,0 mm	0.4331		M12 X 1		12,0	102,0	55,0	40,0	45,0	64680	67680
11,1 mm	0.4370				12,0	102,0	55,0	40,0	45,0	64681	67681
7/16	0.4375	11.11	1/4-18NPT		12,0	102,0	55,0	40,0	45,0	54625	54725
11,2 mm	0.4409				12,0	102,0	55,0	40,0	45,0	64682	67682
11,3 mm	0.4449				12,0	102,0	55,0	40,0	45,0	64683	67683
11,4 mm	0.4488				12,0	102,0	55,0	40,0	45,0	64684	67684
11,5 mm	0.4528		M12 X 0,5		12,0	102,0	55,0	40,0	45,0	64685	67685
11,6 mm	0.4567				12,0	102,0	55,0	40,0	45,0	64686	67686
11,7 mm	0.4606				12,0	102,0	55,0	40,0	45,0	64687	67687
11,8 mm	0.4646				12,0	102,0	55,0	40,0	45,0	64688	67688
11,9 mm	0.4685				12,0	102,0	55,0	40,0	45,0	64689	67689
15/32	0.4688	11.91	1/2-28		12,0	102,0	55,0	40,0	45,0	54626	54726
12,0 mm	0.4724		M14 X 2		12,0	102,0	55,0	40,0	45,0	64690	67690

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h₆

>.1181–.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h₆

>.2362–.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h₆

>.3937–.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h₆

>.7087–1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h₆

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0002/+,.0012

DCON = h₆

>3–6 DIAMETER

DC = +.0004/+,.0016

DCON = h₆

>6–10 DIAMETER

DC = +.0006/+,.0021

DCON = h₆

>10–18 DIAMETER

DC = +.0007/+,.0025

DCON = h₆

NON-FERROUS

PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com





131N 3xD

FRACTIONAL & METRIC SERIES

inch & mm								EDP NO.	
CUTTING DIAMETER	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	UNCOATED Ti-NAMITE-B (TiB ₂)
31/64	0.4844	12.30	9/16-12	14,0	107,0	60,0	43,0	45,0	54627 54727
12,5 mm	0.4921		M14 X 1,5	14,0	107,0	60,0	43,0	45,0	64691 67691
1/2	0.5000	12.70		14,0	107,0	60,0	43,0	45,0	54628 54728
12,8 mm	0.5039		M14 X 1,25	14,0	107,0	60,0	43,0	45,0	64692 67692
13,0 mm	0.5118		M14 X 1	14,0	107,0	60,0	43,0	45,0	64693 67693
33/64	0.5156	13.10	9/16-18	14,0	107,0	60,0	43,0	45,0	54629 54729
13,5 mm	0.5315			5/8-11	14,0	107,0	60,0	43,0	64694 67694
13,8 mm	0.5433				14,0	107,0	60,0	43,0	64695 67695
14,0 mm	0.5512		M16 X 2	14,0	107,0	60,0	43,0	45,0	64696 67696
9/16	0.5625	14.29			16,0	115,0	65,0	45,0	54630 54730
14,5 mm	0.5709		M16 X 1,5	16,0	115,0	65,0	45,0	48,0	64697 67697
37/64	0.5781	14.68	5/8-18	16,0	115,0	65,0	45,0	48,0	54631 54731
14,8 mm	0.5827				16,0	115,0	65,0	45,0	64698 67698
15,0 mm	0.5906		M16 X 1	16,0	115,0	65,0	45,0	48,0	64699 67699
15,5 mm	0.6102		M18 X 2,5	16,0	115,0	65,0	45,0	48,0	64700 67700
15,8 mm	0.6220				16,0	115,0	65,0	45,0	64701 67701
5/8	0.6250	15.88	11/16-16	16,0	115,0	65,0	45,0	48,0	54632 54732
16,0 mm	0.6299				16,0	115,0	65,0	45,0	64702 67702
21/32	0.6562	16.67	3/4-10	18,0	123,0	73,0	51,0	48,0	54633 54733
11/16	0.6875	17.46	3/4-16	18,0	123,0	73,0	51,0	48,0	54634 54734
3/4	0.7500	19.05	13/16-16	20,0	131,0	79,0	55,0	50,0	54635 54735

CONTINUED

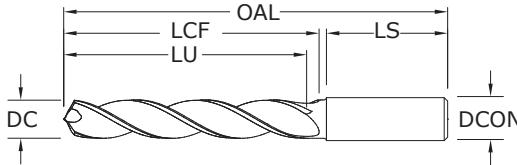

131N 5xD

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.1181	METRIC EQUIV. 0.1220	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	
				SHANK DIAMETER DCON	OVERALL OAL	FLUTE LENGTH LCF	CLEARED SHANK LENGTH LU	SHANK LENGTH LS		
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	65000	64800
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	65001	64801
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0	55000	54800
3,2 mm	0.1260	M3,5 X 0,35		6,0	66,0	28,0	23,0	36,0	65002	64802
3,3 mm	0.1299	M4 X 0,7		6,0	66,0	28,0	23,0	36,0	65003	64803
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0	65004	64804
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0	55001	54801
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0	65005	64805
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0	55002	54802
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	65006	64806
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	65007	64807
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0	65008	64808
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	65009	64809
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0	55003	54803
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	65010	64810
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0	55004	54804
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	65011	64811
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	74,0	36,0	29,0	36,0	65012	64812
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	65013	64813
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0	55005	54805
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0	65014	64814
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	65015	64815
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	65016	64816
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0	65017	64817
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0	55006	54806
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0	65018	64818
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	65019	64819
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	65020	64820
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0	65021	64821
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0	55007	54807
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	65022	64822
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	65023	64823
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	65024	64824
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	65025	64825
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0	55008	54808

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h6

>.1181–.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h6

>.2362–.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h6

>.3937–.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h6

>.7087–1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h6

TOLERANCES (mm)

≤3 DIAMETER

DC = +.0002/+,.0012

DCON = h6

>3–6 DIAMETER

DC = +.0004/+,.0016

DCON = h6

>6–10 DIAMETER

DC = +.0006/+,.0021

DCON = h6

>10–18 DIAMETER

DC = +.0007/+,.0025

DCON = h6

NON-FERROUS

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



131N 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DECIMAL DC	CUTTING EQUIV. METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	CONTINUED	
			SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS			
5,6 mm	0.2205		6,0	82,0	44,0	35,0	36,0	65026	64826	
5,7 mm	0.2244		6,0	82,0	44,0	35,0	36,0	65027	64827	
5,8 mm	0.2283		6,0	82,0	44,0	35,0	36,0	65028	64828	
5,9 mm	0.2323		6,0	82,0	44,0	35,0	36,0	65029	64829	
15/64	0.2344	5.95	6,0	82,0	44,0	35,0	36,0	55009	54809	
6,0 mm	0.2362	M7 X 1	6,0	82,0	44,0	35,0	36,0	65030	64830	
6,1 mm	0.2402		8,0	91,0	53,0	43,0	36,0	65031	64831	
6,2 mm	0.2441	M7 X 0,75	8,0	91,0	53,0	43,0	36,0	65032	64832	
6,3 mm	0.2480		8,0	91,0	53,0	43,0	36,0	65033	64833	
1/4	0.2500	6.35	8,0	91,0	53,0	43,0	36,0	55010	54810	
6,4 mm	0.2520		8,0	91,0	53,0	43,0	36,0	65034	64834	
6,5 mm	0.2559		8,0	91,0	53,0	43,0	36,0	65035	64835	
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	55011	54811
6,6 mm	0.2598		8,0	91,0	53,0	43,0	36,0	65036	64836	
6,7 mm	0.2638		8,0	91,0	53,0	43,0	36,0	65037	64837	
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	55012	54812
6,8 mm	0.2677	M8 X 1,25	8,0	91,0	53,0	43,0	36,0	65038	64838	
6,9 mm	0.2717	5/16-24	8,0	91,0	53,0	43,0	36,0	65039	64839	
7,0 mm	0.2756	M8 X 1	8,0	91,0	53,0	43,0	36,0	65040	64840	
7,1 mm	0.2795		8,0	91,0	53,0	43,0	36,0	65041	64841	
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	55013	54813
7,2 mm	0.2835	M8 X 0,75	8,0	91,0	53,0	43,0	36,0	65042	64842	
7,3 mm	0.2874		8,0	91,0	53,0	43,0	36,0	65043	64843	
7,4 mm	0.2913		8,0	91,0	53,0	43,0	36,0	65044	64844	
7,5 mm	0.2953	M8 X 0,5	8,0	91,0	53,0	43,0	36,0	65045	64845	
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	55014	54814
7,6 mm	0.2992		8,0	91,0	53,0	43,0	36,0	65046	64846	
7,7 mm	0.3031		8,0	91,0	53,0	43,0	36,0	65047	64847	
7,8 mm	0.3071	M9 X 1,25	8,0	91,0	53,0	43,0	36,0	65048	64848	
7,9 mm	0.3110		8,0	91,0	53,0	43,0	36,0	65049	64849	
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	55015	54815
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	65050	64850
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	65051	64851
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	65052	64852
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	65053	64853
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	55016	54816
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	65054	64854
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	55017	54817
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	65055	64855
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	65056	64856
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	65057	64857
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	55018	54818
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	65058	64858
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	65059	64859
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	65060	64860
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	65061	64861

continued on next page




5xD



124°

3

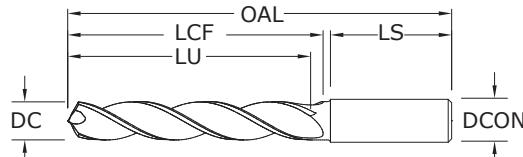**131N 5xD**

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 175 Bhn (≤ 16 HRc)

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.3594	METRIC EQUIV. 9.13	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	
				SHANK DIAMETER DCON	OVERALL OAL	FLUTE LENGTH LCF	CLEARED SHANK LENGTH LU	SHANK LENGTH LS		
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	55019	54819
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	65062	64862
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	65063	64863
U	0.3680	9.35	7/16-14	10,0	103,0	61,0	49,0	40,0	55020	54820
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	65064	64864
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	65065	64865
3/8	0.3750	9.53		10,0	103,0	61,0	49,0	40,0	55021	54821
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	65066	64866
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	65067	64867
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	65068	64868
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	65069	64869
25/64	0.3906	9.92	7/16-20	10,0	103,0	61,0	49,0	40,0	55022	54822
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	65070	64870
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	65071	64871
10,2 mm	0.4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	65072	64872
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	65073	64873
13/32	0.4062	10.32		12,0	118,0	71,0	56,0	45,0	55023	54823
10,4 mm	0.4094			12,0	118,0	71,0	56,0	45,0	65074	64874
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	65075	64875
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	65076	64876
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	65077	64877
27/64	0.4219	10.72	1/2-13	12,0	118,0	71,0	56,0	45,0	55024	54824
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	65078	64878
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	65079	64879
11,0 mm	0.4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	65080	64880
11,1 mm	0.4370			12,0	118,0	71,0	56,0	45,0	65081	64881
7/16	0.4375	11.11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	55025	54825
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	65082	64882
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	65083	64883
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	65084	64884
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	65085	64885
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	65086	64886
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	65087	64887
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	65088	64888

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h6

>.1181–.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h6

>.2362–.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h6

>.3937–.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h6

>.7087–1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h6

TOLERANCES (mm)**≤3 DIAMETER**

DC = +.0002/+0,012

DCON = h6

>3–6 DIAMETER

DC = +.0004/+0,016

DCON = h6

>6–10 DIAMETER

DC = +.0006/+0,021

DCON = h6

>10–18 DIAMETER

DC = +.0007/+0,025

DCON = h6

NON-FERROUS**PLASTICS/COMPOSITES**

For patent information visit
www.ksptpatents.com



131N 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV. 0.4685	METRIC EQUIV. 11.9 mm	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	CONTINUED
				DCON	OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
15/32	0.4688	11.91	1/2-28	12,0	118,0	71,0	56,0	45,0	65089	64889
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	55026	54826
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	55027	54827
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	65091	64891
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	55028	54828
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	65092	64892
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	65093	64893
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	55029	54829
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	65094	64894
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	65095	64895
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	65096	64896
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	55030	54830
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	65097	64897
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	55031	54831
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	65098	64898
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	65099	64899
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	65100	64900
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	65101	64901
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	55032	54832
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	65102	64902
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	55033	54833
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	55034	54834
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	55035	54835

FRACTIONAL

Hi-PerCarb®

Series 131N 3D & 5D Fractional		Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
N	ALUMINUM ALLOYS < 12% Si 6061, 2024, 7075	≤ 150 Bhn or ≤ 7 HRc	800 (640-960)	RPM	24448	16299	12224	8149	6112	4890	4075
				Fr	0.0055	0.0083	0.0110	0.0166	0.0221	0.0276	0.0331
				Feed (ipm)	135	135	135	135	135	135	135
N	ALUMINUM ALLOYS > 12% Si A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	600 (480-720)	RPM	18336	12224	9168	6112	4584	3667	3056
				Fr	0.0055	0.0082	0.0109	0.0164	0.0218	0.0273	0.0327
				Feed (ipm)	100	100	100	100	100	100	100
N	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	550 (440-660)	RPM	16808	11205	8404	5603	4202	3362	2801
				Fr	0.0020	0.0030	0.0040	0.0061	0.0081	0.0101	0.0121
				Feed (ipm)	34	34	34	34	34	34	34
N	PLASTICS Acrylic, PVC, Polypropylene		450 (360-540)	RPM	13752	9168	6876	4584	3438	2750	2292
				Fr	0.0025	0.0037	0.0049	0.0074	0.0099	0.0124	0.0148
				Feed (ipm)	34	34	34	34	34	34	34

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 131N 3D & 5D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
N	ALUMINUM ALLOYS <12% Si 6061, 2024, 7075	≤ 150 Bhn or ≤ 7 HRc	244 (195-293)	RPM	25851	12926	9694	7755	6463	5540	4847
				Fr	0.133	0.265	0.354	0.442	0.531	0.619	0.708
				Feed (mm/min)	3430	3430	3430	3430	3430	3430	3430
N	ALUMINUM ALLOYS >12% Si A356.0, 390.0, 319.0	≤ 125 Bhn or ≤ 77 HRb	183 (146-219)	RPM	19388	9694	7271	5816	4847	4155	3635
				Fr	0.131	0.262	0.349	0.437	0.524	0.611	0.699
				Feed (mm/min)	2540	2540	2540	2540	2540	2540	2540
N	COPPER ALLOYS Alum Bronze, Muntz Brass, Navel Brass	≤ 175 Bhn or ≤ 16 HRc	168 (134-201)	RPM	17773	8886	6665	5332	4443	3808	3332
				Fr	0.049	0.097	0.130	0.162	0.194	0.227	0.259
				Feed (mm/min)	864	864	864	864	864	864	864
N	PLASTICS Acrylic, PVC, Polypropylene		137 (110-165)	RPM	14541	7271	5453	4362	3635	3116	2726
				Fr	0.059	0.119	0.158	0.198	0.238	0.277	0.317
				Feed (mm/min)	864	864	864	864	864	864	864

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




5xD



124°

3

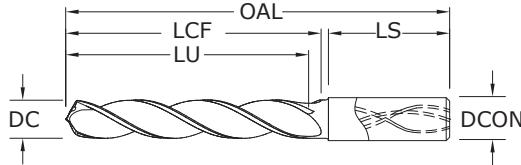**141K 5xD**

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 400 Bhn (≤ 43 HRc)

inch & mm										EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-M (TM)	
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	65160	
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	65161	
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0	55160	
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	65162	
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0	65163	
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0	65164	
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0	55161	
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0	65165	
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0	55162	
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	65166	
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	65167	
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0	65168	
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	65169	
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0	55163	
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	65170	
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0	55164	
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	65171	
4,2 mm	0.1654		M5 / M5 x 0,75	6,0	74,0	36,0	29,0	36,0	65172	
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	65173	
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0	55165	
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0	65174	
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	65175	
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	65176	
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0	65177	
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0	55166	
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0	65178	
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	65179	
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	65180	
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0	65181	
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0	55167	
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	65182	
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	65183	
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	65184	
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	65185	
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0	55168	
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0	65186	

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

DC = +.00008/+,.00047

DCON = h6

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h6

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h6

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h6

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h6

TOLERANCES (mm)

≤3 DIAMETER

DC = +0,002/+0,012

DCON = h6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h6

CAST IRON

For patent information visit
www.ksptpatents.com



141K 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-M (TM)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	65187	
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	65188	
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	65189	
15/64	0.2344	5.95		6,0	82,0	44,0	35,0	36,0	55169	
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	65190	
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	65191	
6,2 mm	0.2441		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	65192	
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	65193	
1/4	0.2500	6.35		8,0	91,0	53,0	43,0	36,0	55170	
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	65194	
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	65195	
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	55171	
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	65196	
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	65197	
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	55172	
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	65198	
6,9 mm	0.2717		5/16-24	8,0	91,0	53,0	43,0	36,0	65199	
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	65200	
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	65201	
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	55173	
7,2 mm	0.2835		M8 X 0,75	8,0	91,0	53,0	43,0	36,0	65202	
7,3 mm	0.2874			8,0	91,0	53,0	43,0	36,0	65203	
7,4 mm	0.2913			8,0	91,0	53,0	43,0	36,0	65204	
7,5 mm	0.2953		M8 X 0,5	8,0	91,0	53,0	43,0	36,0	65205	
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	55174	
7,6 mm	0.2992			8,0	91,0	53,0	43,0	36,0	65206	
7,7 mm	0.3031			8,0	91,0	53,0	43,0	36,0	65207	
7,8 mm	0.3071		M9 X 1,25	8,0	91,0	53,0	43,0	36,0	65208	
7,9 mm	0.3110			8,0	91,0	53,0	43,0	36,0	65209	
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	55175	
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	65210	
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	65211	
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	65212	
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	65213	
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	55176	
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	65214	
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	55177	
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	65215	
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	65216	
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	65217	
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	55178	
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	65218	
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	65219	
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	65220	
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	65221	
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	55179	

continued on next page




5xD



124°



3

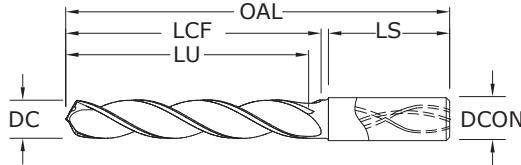**141K 5xD**

FRACTIONAL & METRIC SERIES

- Triple margin design improves hole stability and size control while providing superior finish, roundness and cylindricity
- Self-stabilizing pyramid point design stabilizes the drill on contact with the workpiece
- Open flute structure efficiently transports chips while maintaining strength at high feed rates
- Sculpted gash allows chips to easily flow away from the drill center
- Recommended for materials ≤ 400 Bhn (≤ 43 HRc)

inch & mm										EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-M (TM)	
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	65222	
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	65223	
U	0.3680	9.35	7/16-14	10,0	103,0	61,0	49,0	40,0	55180	
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	65224	
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	65225	
3/8	0.3750	9.53		10,0	103,0	61,0	49,0	40,0	55181	
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	65226	
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	65227	
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	65228	
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	65229	
25/64	0.3906	9.92	7/16-20	10,0	103,0	61,0	49,0	40,0	55182	
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	65230	
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	65231	
10,2 mm	0.4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	65232	
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	65233	
13/32	0.4062	10.32		12,0	118,0	71,0	56,0	45,0	55183	
10,4 mm	0.4094			12,0	118,0	71,0	56,0	45,0	65234	
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	65235	
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	65236	
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	65237	
27/64	0.4219	10.72	1/2-13	12,0	118,0	71,0	56,0	45,0	55184	
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	65238	
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	65239	
11,0 mm	0.4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	65240	
11,1 mm	0.4370			12,0	118,0	71,0	56,0	45,0	65241	
7/16	0.4375	11.11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	55185	
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	65242	
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	65243	
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	65244	
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	65245	
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	65246	
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	65247	
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	65248	
11,9 mm	0.4685			12,0	118,0	71,0	56,0	45,0	65249	
15/32	0.4688	11.91	1/2-28	12,0	118,0	71,0	56,0	45,0	55186	
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	65250	

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h6

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h6

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h6

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h6

>.7087-.11811 DIAMETER

DC = +.00031/+,.00114

DCON = h6

TOLERANCES (mm)**≤3 DIAMETER**

DC = +0,002/+0,012

DCON = h6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h6

CAST IRON

For patent information visit
www.ksptpatents.com



FRACTIONAL & METRIC
Hi-PerCarb®

141K 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	inch & mm						EDP NO. Ti-NAMITE-M (TM)	CONTINUED
			TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	55187	
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	65251	
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	55188	
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	65252	
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	65253	
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	55189	
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	65254	
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	65255	
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	65256	
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	55190	
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	65257	
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	55191	
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	65258	
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	65259	
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	65260	
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	65261	
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	55192	
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	65262	
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	55193	
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	55194	
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	55195	

FRACTIONAL

Hi-PerCarb®

Series 141K 5D Fractional	Hardness	Vc (sfm)	DC • in							
			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 80 HRb	450 (360-540)	RPM	13752	9168	6876	4584	3438	2750	2292
			Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297
			Feed (ipm)	68	68	68	68	68	68	68
GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc	375 (300-450)	RPM	11460	7640	5730	3820	2865	2292	1910
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
			Feed (ipm)	45	45	45	45	45	45	45
COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc	325 (260-390)	RPM	9932	6621	4966	3311	2483	1986	1655
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236
			Feed (ipm)	39	39	39	39	39	39	39
MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc	450 (360-540)	RPM	13752	9168	6876	4584	3438	2750	2292
			Fr	0.0049	0.0074	0.0099	0.0148	0.0198	0.0247	0.0297
			Feed (ipm)	68	68	68	68	68	68	68
MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc	250 (200-300)	RPM	7640	5093	3820	2547	1910	1528	1273
			Fr	0.0031	0.0047	0.0063	0.0094	0.0126	0.0157	0.0188
			Feed (ipm)	24	24	24	24	24	24	24

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 141K 5D Metric	Hardness	Vc (m/min)	DC • mm							
			3	6	8	10	12	14	16	
K	GRAY CAST IRON FERRITIC ASTM A48: CLASS 20 SAE J431C: GRADE 1800	≤ 150 Bhn or ≤ 80 HRb	137 (110-165)	RPM Fr Feed (mm/min)	14541 0.119 1725	7271 0.237 1725	5453 0.316 1725	4362 0.395 1725	3635 0.475 1725	3116 0.554 1725
	GRAY CAST IRON PEARLITIC ASTM A48: CLASS 30, 35, 40 SAE J431C: GRADE 3000	≤ 220 Bhn or ≤ 19 HRc	114 (91-137)	RPM Fr Feed (mm/min)	12118 0.094 1145	6059 0.189 1145	4544 0.252 1145	3635 0.315 1145	3029 0.378 1145	2597 0.441 1145
	COMPACTED GRAPHITE IRON	≤ 250 Bhn or ≤ 25 HRc	99 (79-119)	RPM Fr Feed (mm/min)	10502 0.094 990	5251 0.189 990	3938 0.251 990	3151 0.314 990	2626 0.377 990	2250 0.440 990
	MALLEABLE CAST IRON FERRITIC ASTM A220: GRADE 40010 SAE J158: GRADE M4504	≤ 160 Bhn or ≤ 3 HRc	137 (110-165)	RPM Fr Feed (mm/min)	14541 0.119 1725	7271 0.237 1725	5453 0.316 1725	4362 0.395 1725	3635 0.475 1725	3116 0.554 1725
	MALLEABLE CAST IRON MARTENSITE ASTM A220: GRADE 90001 SAE J158: GRADE M8501	≤ 320 Bhn or ≤ 34 HRc	76 (61-91)	RPM Fr Feed (mm/min)	8078 0.076 610	4039 0.151 610	3029 0.201 610	2424 0.252 610	2020 0.302 610	1731 0.352 610

(Brinell) HRc (Rockwell C) HRB (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



5xD

**140 5xD**

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)
3,0 mm	0.1181			6,0	66,0	28,0	23,0	36,0	63901
3,1 mm	0.1220			6,0	66,0	28,0	23,0	36,0	63902
1/8	0.1250	3.18		6,0	66,0	28,0	23,0	36,0	51901
3,2 mm	0.1260		M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	63903
3,3 mm	0.1299		M4 X 0,7	6,0	66,0	28,0	23,0	36,0	63904
3,4 mm	0.1339			6,0	66,0	28,0	23,0	36,0	63905
#29	0.1360	3.45	8-32,8-36	6,0	66,0	28,0	23,0	36,0	51902
3,5 mm	0.1378		M4 X 0,5	6,0	66,0	28,0	23,0	36,0	63906
9/64	0.1406	3.57		6,0	66,0	28,0	23,0	36,0	51903
3,6 mm	0.1417		M4 X 0,35	6,0	66,0	28,0	23,0	36,0	63907
3,7 mm	0.1457		M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	63908
3,8 mm	0.1496		10-24	6,0	74,0	36,0	29,0	36,0	51904
3,9 mm	0.1535			6,0	74,0	36,0	29,0	36,0	63909
5/32	0.1562	3.97		6,0	74,0	36,0	29,0	36,0	51905
4,0 mm	0.1575		M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	63910
#21	0.1590	4.04	10-32	6,0	74,0	36,0	29,0	36,0	51906
4,1 mm	0.1614			6,0	74,0	36,0	29,0	36,0	63911
4,2 mm	0.1654		M5 / M5 x 0,75	6,0	74,0	36,0	29,0	36,0	63912
4,3 mm	0.1693			6,0	74,0	36,0	29,0	36,0	63913
11/64	0.1719	4.37		6,0	74,0	36,0	29,0	36,0	51907
4,4 mm	0.1732		12-24	6,0	74,0	36,0	29,0	36,0	63914
4,5 mm	0.1772		M5 X 0,5	6,0	74,0	36,0	29,0	36,0	63915
4,6 mm	0.1811		12-28	6,0	74,0	36,0	29,0	36,0	63916
4,7 mm	0.1850		12-32	6,0	74,0	36,0	29,0	36,0	63917
3/16	0.1875	4.76		6,0	82,0	44,0	35,0	36,0	51908
4,8 mm	0.1890		7/32-32	6,0	82,0	44,0	35,0	36,0	63918
4,9 mm	0.1929			6,0	82,0	44,0	35,0	36,0	63919
5,0 mm	0.1969		M6 X 1	6,0	82,0	44,0	35,0	36,0	63920
5,1 mm	0.2008		1/4-20	6,0	82,0	44,0	35,0	36,0	63900
13/64	0.2031	5.16		6,0	82,0	44,0	35,0	36,0	51910
5,2 mm	0.2047		M6 X 0,75	6,0	82,0	44,0	35,0	36,0	63921
5,3 mm	0.2087			6,0	82,0	44,0	35,0	36,0	63922
5,4 mm	0.2126			6,0	82,0	44,0	35,0	36,0	63998
5,5 mm	0.2165		M6 X 0,5	6,0	82,0	44,0	35,0	36,0	63923

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h₆**>.1181–.2362 DIAMETER**

DC = +.00016/+,.00063

DCON = h₆**>.2362–.3937 DIAMETER**

DC = +.00024/+,.00083

DCON = h₆**>.3937–.7087 DIAMETER**

DC = +.00028/+,.00098

DCON = h₆**>.7087–1.1811 DIAMETER**

DC = +.00031/+,.00114

DCON = h₆**TOLERANCES (mm)****≤3 DIAMETER**

DC = +0,002/+0,012

DCON = h₆**>3–6 DIAMETER**

DC = +0,004/+0,016

DCON = h₆**>6–10 DIAMETER**

DC = +0,006/+0,021

DCON = h₆**>10–18 DIAMETER**

DC = +0,007/+0,025

DCON = h₆**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**For patent information visit www.ksptpatents.com

140 5xD


FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITiN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
7/32	0.2188	5.56	1/4-32	6,0	82,0	44,0	35,0	36,0	51912	
5,6 mm	0.2205			6,0	82,0	44,0	35,0	36,0	63924	
5,7 mm	0.2244			6,0	82,0	44,0	35,0	36,0	63925	
5,8 mm	0.2283			6,0	82,0	44,0	35,0	36,0	63926	
5,9 mm	0.2323			6,0	82,0	44,0	35,0	36,0	63927	
15/64	0.2344	5.95		6,0	82,0	44,0	35,0	36,0	51913	
6,0 mm	0.2362		M7 X 1	6,0	82,0	44,0	35,0	36,0	63928	
6,1 mm	0.2402			8,0	91,0	53,0	43,0	36,0	63929	
6,2 mm	0.2441		M7 X 0,75	8,0	91,0	53,0	43,0	36,0	63930	
6,3 mm	0.2480			8,0	91,0	53,0	43,0	36,0	63931	
1/4	0.2500	6.35		8,0	91,0	53,0	43,0	36,0	51914	
6,4 mm	0.2520			8,0	91,0	53,0	43,0	36,0	63932	
6,5 mm	0.2559			8,0	91,0	53,0	43,0	36,0	63933	
F	0.2570	6.53	5/16-18	8,0	91,0	53,0	43,0	36,0	51915	
6,6 mm	0.2598			8,0	91,0	53,0	43,0	36,0	63934	
6,7 mm	0.2638			8,0	91,0	53,0	43,0	36,0	63935	
17/64	0.2656	6.75	5/16-20	8,0	91,0	53,0	43,0	36,0	51916	
6,8 mm	0.2677		M8 X 1,25	8,0	91,0	53,0	43,0	36,0	63936	
6,9 mm	0.2717		5/16-24	8,0	91,0	53,0	43,0	36,0	63999	
7,0 mm	0.2756		M8 X 1	8,0	91,0	53,0	43,0	36,0	63937	
7,1 mm	0.2795			8,0	91,0	53,0	43,0	36,0	63938	
9/32	0.2812	7.14	5/16-32	8,0	91,0	53,0	43,0	36,0	51918	
7,2 mm	0.2835		M8 X 0,75	8,0	91,0	53,0	43,0	36,0	63939	
7,3 mm	0.2874			8,0	91,0	53,0	43,0	36,0	63940	
7,4 mm	0.2913			8,0	91,0	53,0	43,0	36,0	63941	
7,5 mm	0.2953		M8 X 0,5	8,0	91,0	53,0	43,0	36,0	63942	
19/64	0.2969	7.54		8,0	91,0	53,0	43,0	36,0	51919	
7,6 mm	0.2992			8,0	91,0	53,0	43,0	36,0	63943	
7,7 mm	0.3031			8,0	91,0	53,0	43,0	36,0	63944	
7,8 mm	0.3071		M9 X 1,25	8,0	91,0	53,0	43,0	36,0	63945	
7,9 mm	0.3110			8,0	91,0	53,0	43,0	36,0	63946	
5/16	0.3125	7.94	3/8-16	8,0	91,0	53,0	43,0	36,0	51920	
8,0 mm	0.3150		M9 X 1	8,0	91,0	53,0	43,0	36,0	63947	
8,1 mm	0.3189			10,0	103,0	61,0	49,0	40,0	63948	
8,2 mm	0.3228			10,0	103,0	61,0	49,0	40,0	63949	
8,3 mm	0.3268			10,0	103,0	61,0	49,0	40,0	63950	
21/64	0.3281	8.33	3/8-20	10,0	103,0	61,0	49,0	40,0	51921	
8,4 mm	0.3307			10,0	103,0	61,0	49,0	40,0	63951	
Q	0.3320	8.43	3/8-24	10,0	103,0	61,0	49,0	40,0	51922	
8,5 mm	0.3346		M10 X 1,5	10,0	103,0	61,0	49,0	40,0	63952	
8,6 mm	0.3386			10,0	103,0	61,0	49,0	40,0	63953	
8,7 mm	0.3425			10,0	103,0	61,0	49,0	40,0	63954	

continued on next page



5xD

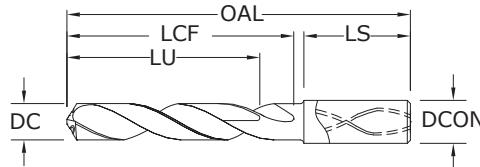**140 5xD**

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

inch & mm									EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	TI-NAMITE-A (AITIN)
11/32	0.3438	8.73	3/8-32	10,0	103,0	61,0	49,0	40,0	51923
8,8 mm	0.3465		M10 X 1,25	10,0	103,0	61,0	49,0	40,0	63955
8,9 mm	0.3504			10,0	103,0	61,0	49,0	40,0	63956
9,0 mm	0.3543		M10 X 1	10,0	103,0	61,0	49,0	40,0	63957
9,1 mm	0.3583			10,0	103,0	61,0	49,0	40,0	63958
23/64	0.3594	9.13		10,0	103,0	61,0	49,0	40,0	51924
9,2 mm	0.3622		M10 X 0,75	10,0	103,0	61,0	49,0	40,0	63959
9,3 mm	0.3661			10,0	103,0	61,0	49,0	40,0	63960
U	0.3680	9.35	7/16-14	10,0	103,0	61,0	49,0	40,0	51925
9,4 mm	0.3701			10,0	103,0	61,0	49,0	40,0	63961
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	63962
3/8	0.3750	9.53		10,0	103,0	61,0	49,0	40,0	51926
9,6 mm	0.3780			10,0	103,0	61,0	49,0	40,0	63963
9,7 mm	0.3819			10,0	103,0	61,0	49,0	40,0	63964
9,8 mm	0.3858			10,0	103,0	61,0	49,0	40,0	63965
9,9 mm	0.3898			10,0	103,0	61,0	49,0	40,0	63966
25/64	0.3906	9.92	7/16-20	10,0	103,0	61,0	49,0	40,0	51927
10,0 mm	0.3937			10,0	103,0	61,0	49,0	40,0	63967
10,1 mm	0.3976			12,0	118,0	71,0	56,0	45,0	63968
10,2 mm	0.4016		M12 X 1,75	12,0	118,0	71,0	56,0	45,0	63969
10,3 mm	0.4055			12,0	118,0	71,0	56,0	45,0	63970
13/32	0.4062	10.32		12,0	118,0	71,0	56,0	45,0	51928
10,4 mm	0.4094			12,0	118,0	71,0	56,0	45,0	63971
10,5 mm	0.4134		M12 X 1,5	12,0	118,0	71,0	56,0	45,0	63972
10,6 mm	0.4173			12,0	118,0	71,0	56,0	45,0	63973
10,7 mm	0.4213			12,0	118,0	71,0	56,0	45,0	63974
27/64	0.4219	10.72	1/2-13	12,0	118,0	71,0	56,0	45,0	51929
10,8 mm	0.4252		M12 X 1,25	12,0	118,0	71,0	56,0	45,0	63975
10,9 mm	0.4291			12,0	118,0	71,0	56,0	45,0	63976
11,0 mm	0.4331		M12 X 1	12,0	118,0	71,0	56,0	45,0	63977
11,1 mm	0.4370			12,0	118,0	71,0	56,0	45,0	63978
7/16	0.4375	11.11	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	51930
11,2 mm	0.4409			12,0	118,0	71,0	56,0	45,0	63979
11,3 mm	0.4449			12,0	118,0	71,0	56,0	45,0	63980

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h₆**>.1181-.2362 DIAMETER**

DC = +.00016/+,.00063

DCON = h₆**>.2362-.3937 DIAMETER**

DC = +.00024/+,.00083

DCON = h₆**>.3937-.7087 DIAMETER**

DC = +.00028/+,.00098

DCON = h₆**>.7087-1.1811 DIAMETER**

DC = +.00031/+,.00114

DCON = h₆**TOLERANCES (mm)****≤3 DIAMETER**

DC = +0,002/+0,012

DCON = h₆**>3-6 DIAMETER**

DC = +0,004/+0,016

DCON = h₆**>6-10 DIAMETER**

DC = +0,006/+0,021

DCON = h₆**>10-18 DIAMETER**

DC = +0,007/+0,025

DCON = h₆**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**For patent information visit www.ksptpatents.com

140 5xD

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO. Ti-NAMITE-A (AITiN)	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
11,4 mm	0.4488			12,0	118,0	71,0	56,0	45,0	63981	
11,5 mm	0.4528		M12 X 0,5	12,0	118,0	71,0	56,0	45,0	64000	
11,6 mm	0.4567			12,0	118,0	71,0	56,0	45,0	63982	
11,7 mm	0.4606			12,0	118,0	71,0	56,0	45,0	63983	
11,8 mm	0.4646			12,0	118,0	71,0	56,0	45,0	63984	
11,9 mm	0.4685			12,0	118,0	71,0	56,0	45,0	63985	
15/32	0.4688	11.91	1/2-28	12,0	118,0	71,0	56,0	45,0	51932	
12,0 mm	0.4724		M14 X 2	12,0	118,0	71,0	56,0	45,0	63986	
31/64	0.4844	12.30	9/16-12	14,0	124,0	77,0	60,0	45,0	51933	
12,5 mm	0.4921		M14 X 1,5	14,0	124,0	77,0	60,0	45,0	63987	
1/2	0.5000	12.70		14,0	124,0	77,0	60,0	45,0	51934	
12,8 mm	0.5039		M14 X 1,25	14,0	124,0	77,0	60,0	45,0	63988	
13,0 mm	0.5118		M14 X 1	14,0	124,0	77,0	60,0	45,0	63989	
33/64	0.5156	13.10	9/16-18	14,0	124,0	77,0	60,0	45,0	51935	
13,5 mm	0.5315		5/8-11	14,0	124,0	77,0	60,0	45,0	64001	
13,8 mm	0.5433			14,0	124,0	77,0	60,0	45,0	63990	
14,0 mm	0.5512		M16 X 2	14,0	124,0	77,0	60,0	45,0	63991	
9/16	0.5625	14.29		16,0	133,0	83,0	63,0	48,0	51937	
14,5 mm	0.5709		M16 X 1,5	16,0	133,0	83,0	63,0	48,0	63992	
37/64	0.5781	14.68	5/8-18	16,0	133,0	83,0	63,0	48,0	51938	
14,8 mm	0.5827			16,0	133,0	83,0	63,0	48,0	63993	
15,0 mm	0.5906		M16 X 1	16,0	133,0	83,0	63,0	48,0	63994	
15,5 mm	0.6102		M18 X 2,5	16,0	133,0	83,0	63,0	48,0	63995	
15,8 mm	0.6220			16,0	133,0	83,0	63,0	48,0	63996	
5/8	0.6250	15.88	11/16-16	16,0	133,0	83,0	63,0	48,0	51939	
16,0 mm	0.6299			16,0	133,0	83,0	63,0	48,0	63997	
21/32	0.6562	16.67	3/4-10	18,0	143,0	93,0	71,0	48,0	51940	
11/16	0.6875	17.46	3/4-16	18,0	143,0	93,0	71,0	48,0	51941	
3/4	0.7500	19.05	13/16-16	20,0	153,0	101,0	77,0	50,0	51942	

FRACTIONAL
ICe-Carb®

Series 140 5D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
	≤ 175 Bhn or ≤ 7 HRc (340-510)	425	RPM	12988	8659	6494	4329	3247	2598	2165	
			Fr	0.0039	0.0059	0.0079	0.0118	0.0157	0.0196	0.0236	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc (304-456)	380	RPM	11613	7742	5806	3871	2903	2323	1935
				Fr	0.0035	0.0053	0.0071	0.0106	0.0141	0.0177	0.0212
		≤ 425 Bhn or ≤ 45 HRc (176-264)	220	RPM	6723	4482	3362	2241	1681	1345	1121
				Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
		≤ 275 Bhn or ≤ 28 HRc (264-396)	330	RPM	10085	6723	5042	3362	2521	2017	1681
				Fr	0.0030	0.0045	0.0059	0.0089	0.0119	0.0149	0.0178
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 375 Bhn or ≤ 40 HRc (160-240)	200	RPM	6112	4075	3056	2037	1528	1222	1019
				Fr	0.0025	0.0038	0.0051	0.0076	0.0101	0.0127	0.0152
		≤ 450 Bhn or ≤ 48 HRc (112-168)	140	RPM	4278	2852	2139	1426	1070	856	713
				Fr	0.0018	0.0027	0.0036	0.0054	0.0072	0.0090	0.0108
				Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
		≤ 185 Bhn or ≤ 9 HRc (244-366)	305	RPM	9321	6214	4660	3107	2330	1864	1553
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450			Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154
		≤ 275 Bhn or ≤ 28 HRc (156-234)	195	RPM	5959	3973	2980	1986	1490	1192	993
				Fr	0.0020	0.0030	0.0040	0.0060	0.0081	0.0101	0.0121
				Feed (ipm)	12.0	12.0	12.0	12.0	12.0	12.0	12.0
		≤ 275 Bhn or ≤ 28 HRc (120-180)	150	RPM	4584	3056	2292	1528	1146	917	764
				Fr	0.0020	0.0030	0.0040	0.0060	0.0079	0.0099	0.0119
K	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc (88-132)	110	RPM	3362	2241	1681	1121	840	672	560
				Fr	0.0018	0.0027	0.0036	0.0054	0.0071	0.0089	0.0107
				Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
		≤ 220 Bhn or ≤ 19 HRc (288-432)	360	RPM	11002	7334	5501	3667	2750	2200	1834
K	CAST IRONS Gray, Malleable, Ductile			Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
				Feed (ipm)	50.0	50.0	50.0	50.0	50.0	50.0	50.0
		≤ 260 Bhn or ≤ 26 HRc (268-402)	335	RPM	10238	6825	5119	3413	2559	2048	1706
				Fr	0.0045	0.0068	0.0091	0.0136	0.0182	0.0227	0.0273
K	CAST IRONS Gray, Malleable, Ductile			Feed (ipm)	46.5	46.5	46.5	46.5	46.5	46.5	46.5

continued on next page

Series 140 5D Fractional		Hardness	Vc (sfm)	DC • in							
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
	≤ 80 Bhn or ≤ 47 HRb	770 (616-924)	RPM	23531	15687	11766	7844	5883	4706	3922	
			Fr	0.0049	0.0073	0.0098	0.0147	0.0195	0.0244	0.0293	
	≤ 150 Bhn or ≤ 7 HRc	660 (528-792)	RPM	20170	13446	10085	6723	5042	4034	3362	
			Fr	0.0050	0.0074	0.0099	0.0149	0.0198	0.0248	0.0297	
			Feed (ipm)	100.0	100.0	100.0	100.0	100.0	100.0	100.0	
	≤ 140 Bhn or ≤ 3 HRc	550 (440-660)	RPM	16808	11205	8404	5603	4202	3362	2801	
			Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120	
	≤ 200 Bhn or ≤ 23 HRc	440 (352-528)	RPM	13446	8964	6723	4482	3362	2689	2241	
			Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120	
			Feed (ipm)	27.0	27.0	27.0	27.0	27.0	27.0	27.0	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	581	484
				Fr	0.0008	0.0012	0.0016	0.0024	0.0032	0.0040	0.0048
				Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
		≤ 400 Bhn or ≤ 43 HRc	50 (40-60)	RPM	1528	1019	764	509	382	306	255
				Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0033	0.0039
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 275 Bhn or ≤ 28 HRc	215 (172-258)	RPM	6570	4380	3285	2190	1643	1314	1095
				Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0105
		≤ 350 Bhn or ≤ 38 HRc	160 (128-192)	RPM	4890	3260	2445	1630	1222	978	815
				Fr	0.0016	0.0024	0.0032	0.0048	0.0064	0.0080	0.0096
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 440 Bhn or ≤ 47 HRc	85 (68-102)	RPM	2598	1732	1299	866	649	520	433
				Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.1	3.1	3.1	3.1	3.1	3.1	3.1
		≤ 200 Bhn or ≤ 13 HRc	145 (116-174)	RPM	4431	2954	2216	1477	1108	886	739
				Fr	0.0026	0.0039	0.0052	0.0078	0.0104	0.0130	0.0156
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	581	484
				Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0060	0.0072
				Feed (ipm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5
		≤ 475 Bhn or ≤ 50 HRc	85 (68-102)	RPM	2598	1732	1299	866	649	520	433
				Fr	0.0008	0.0012	0.0015	0.0023	0.0031	0.0038	0.0046
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 140M 5D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	130 (104-155)	RPM Fr Feed (mm/min)	13733 0.095 1300	6867 0.189 1300	5150 0.252 1300	4120 0.316 1300	3433 0.379 1300	2943 0.442 1300	2575 0.505 1300
		≤ 275 Bhn or ≤ 28 HRc	116 (93-139)	RPM Fr Feed (mm/min)	12279 0.086 1050	6140 0.171 1050	4605 0.228 1050	3684 0.285 1050	3070 0.342 1050	2631 0.399 1050	2302 0.456 1050
		≤ 425 Bhn or ≤ 45 HRc	67 (54-80)	RPM Fr Feed (mm/min)	7109 0.071 505	3555 0.142 505	2666 0.189 505	2133 0.237 505	1777 0.284 505	1523 0.332 505	1333 0.379 505
		≤ 275 Bhn or ≤ 28 HRc	101 (80-121)	RPM Fr Feed (mm/min)	10664 0.071 760	5332 0.143 760	3999 0.190 760	3199 0.238 760	2666 0.285 760	2285 0.333 760	1999 0.380 760
		≤ 375 Bhn or ≤ 40 HRc	61 (49-73)	RPM Fr Feed (mm/min)	6463 0.062 400	3231 0.124 400	2424 0.165 400	1939 0.206 400	1616 0.248 400	1385 0.289 400	1212 0.330 400
		≤ 450 Bhn or ≤ 48 HRc	43 (34-51)	RPM Fr Feed (mm/min)	4524 0.043 195	2262 0.086 195	1696 0.115 195	1357 0.144 195	1131 0.172 195	969 0.201 195	848 0.230 195
		≤ 185 Bhn or ≤ 9 HRc	93 (74-112)	RPM Fr Feed (mm/min)	9856 0.061 605	4928 0.123 605	3696 0.164 605	2957 0.205 605	2464 0.246 605	2112 0.286 605	1848 0.327 605
		≤ 275 Bhn or ≤ 28 HRc	59 (48-71)	RPM Fr Feed (mm/min)	6301 0.048 300	3151 0.095 300	2363 0.127 300	1890 0.159 300	1575 0.190 300	1350 0.222 300	1181 0.254 300
		≤ 275 Bhn or ≤ 28 HRc	46 (37-55)	RPM Fr Feed (mm/min)	4847 0.047 230	2424 0.095 230	1818 0.127 230	1454 0.158 230	1212 0.190 230	1039 0.221 230	909 0.253 230
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 375 Bhn or ≤ 40 HRc	34 (27-40)	RPM Fr Feed (mm/min)	3555 0.042 150	1777 0.084 150	1333 0.113 150	1066 0.141 150	889 0.169 150	762 0.197 150	666 0.225 150
		≤ 220 Bhn or ≤ 19 HRc	110 (88-132)	RPM Fr Feed (mm/min)	11633 0.109 1270	5816 0.218 1270	4362 0.291 1270	3490 0.364 1270	2908 0.437 1270	2493 0.509 1270	2181 0.582 1270
		≤ 260 Bhn or ≤ 26 HRc	102 (82-123)	RPM Fr Feed (mm/min)	10825 0.109 1180	5413 0.218 1180	4059 0.291 1180	3248 0.363 1180	2706 0.436 1180	2320 0.509 1180	2030 0.581 1180
		≤ 80 Bhn or ≤ 47 HRb	235 (188-282)	RPM Fr Feed (mm/min)	24882 0.118 2945	12441 0.237 2945	9331 0.316 2945	7465 0.395 2945	6220 0.473 2945	5332 0.552 2945	4665 0.631 2945
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 7 HRc	201 (161-241)	RPM Fr Feed (mm/min)	21327 0.119 2540	10664 0.238 2540	7998 0.318 2540	6398 0.397 2540	5332 0.476 2540	4570 0.556 2540	3999 0.635 2540
		≤ 140 Bhn or ≤ 3 HRc	168 (134-201)	RPM Fr Feed (mm/min)	17773 0.048 850	8886 0.096 850	6665 0.128 850	5332 0.159 850	4443 0.191 850	3808 0.223 850	3332 0.255 850
		≤ 200 Bhn or ≤ 23 HRc	134 (107-161)	RPM Fr Feed (mm/min)	14218 0.048 685	7109 0.096 685	5332 0.128 685	4265 0.161 685	3555 0.193 685	3047 0.225 685	2666 0.257 685
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	168 (134-201)	RPM Fr Feed (mm/min)	17773 0.048 850	8886 0.096 850	6665 0.128 850	5332 0.159 850	4443 0.191 850	3808 0.223 850	3332 0.255 850
		≤ 200 Bhn or ≤ 23 HRc	134 (107-161)	RPM Fr Feed (mm/min)	14218 0.048 685	7109 0.096 685	5332 0.128 685	4265 0.161 685	3555 0.193 685	3047 0.225 685	2666 0.257 685

continued on next page

Series 140M 5D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 300 Bhn or ≤ 32 HRc	29 (23-35)	RPM Fr Feed (mm/min)	3070 0.020 60	1535 0.039 60	1151 0.052 60	921 0.065 60	767 0.078 60	658 0.091 60	576 0.104 60
		≤ 400 Bhn or ≤ 43 HRc	15 (12-18)	RPM Fr Feed (mm/min)	1616 0.015 25	808 0.031 25	606 0.041 25	485 0.052 25	404 0.062 25	346 0.072 25	303 0.083 25
		≤ 275 Bhn or ≤ 28 HRc	66 (52-79)	RPM Fr Feed (mm/min)	6947 0.040 275	3474 0.079 275	2605 0.106 275	2084 0.132 275	1737 0.158 275	1489 0.185 275	1303 0.211 275
		≤ 350 Bhn or ≤ 38 HRc	49 (39-59)	RPM Fr Feed (mm/min)	5170 0.039 200	2585 0.077 200	1939 0.103 200	1551 0.129 200	1293 0.155 200	1108 0.181 200	969 0.206 200
		≤ 440 Bhn or ≤ 47 HRc	26 (21-31)	RPM Fr Feed (mm/min)	2747 0.029 80	1373 0.058 80	1030 0.078 80	824 0.097 80	687 0.117 80	589 0.136 80	515 0.155 80
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 200 Bhn or ≤ 13 HRc	44 (35-53)	RPM Fr Feed (mm/min)	4686 0.061 285	2343 0.122 285	1757 0.162 285	1406 0.203 285	1171 0.243 285	1004 0.284 285	879 0.324 285
		≤ 375 Bhn or ≤ 40 HRc	29 (23-35)	RPM Fr Feed (mm/min)	3070 0.029 90	1535 0.059 90	1151 0.078 90	921 0.098 90	767 0.117 90	658 0.137 90	576 0.156 90
		≤ 475 Bhn or ≤ 50 HRc	26 (21-31)	RPM Fr Feed (mm/min)	2747 0.018 50	1373 0.036 50	1030 0.049 50	824 0.061 50	687 0.073 50	589 0.085 50	515 0.097 50


Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

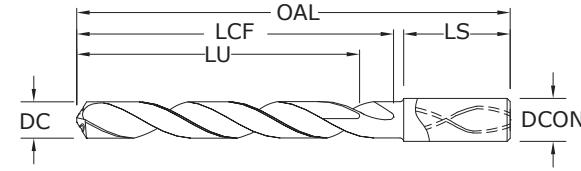**140 8xD**

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRC ($\leq 654 \text{ Bhn}$)

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	EDP NO.
									Ti-NAMITE-A (AlTiN)
3,0 mm	0.1181			6,0	72,0	34,0	29,0	36,0	63575
3,1 mm	0.1220			6,0	72,0	34,0	29,0	36,0	63576
1/8	0.1250	3.18		6,0	72,0	34,0	29,0	36,0	51801
3,2 mm	0.1260		M3,5 X 0,35	6,0	72,0	34,0	29,0	36,0	63577
3,3 mm	0.1299		M4 X 0,7	6,0	72,0	34,0	29,0	36,0	63578
3,4 mm	0.1339			6,0	72,0	34,0	29,0	36,0	63579
#29	0.1360	3.45	8-32,8-36	6,0	72,0	34,0	29,0	36,0	51802
3,5 mm	0.1378		M4 X 0,5	6,0	72,0	34,0	29,0	36,0	63580
9/64	0.1406	3.57		6,0	72,0	34,0	29,0	36,0	51803
3,6 mm	0.1417		M4 X 0,35	6,0	72,0	34,0	29,0	36,0	63581
3,7 mm	0.1457		M4,5 X 0,75	6,0	72,0	34,0	29,0	36,0	63582
3,8 mm	0.1496		10-24	6,0	81,0	43,0	36,0	36,0	63583
3,9 mm	0.1535			6,0	81,0	43,0	36,0	36,0	63584
5/32	0.1562	3.97		6,0	81,0	43,0	36,0	36,0	51804
4,0 mm	0.1575		M4,5 X 0,5	6,0	81,0	43,0	36,0	36,0	63585
#21	0.1590	4.04	10-32	6,0	81,0	43,0	36,0	36,0	51805
4,1 mm	0.1614			6,0	81,0	43,0	36,0	36,0	63586
4,2 mm	0.1654		M5 / M5 X 0,75	6,0	81,0	43,0	36,0	36,0	63587
4,3 mm	0.1693			6,0	81,0	43,0	36,0	36,0	63588
11/64	0.1719	4.37		6,0	81,0	43,0	36,0	36,0	51806
4,4 mm	0.1732		12-24	6,0	81,0	43,0	36,0	36,0	63589
4,5 mm	0.1772		M5 X 0,5	6,0	81,0	43,0	36,0	36,0	63590
4,6 mm	0.1811		12-28	6,0	81,0	43,0	36,0	36,0	63591
4,7 mm	0.1850		12-32	6,0	81,0	43,0	36,0	36,0	63592
3/16	0.1875	4.76		6,0	95,0	57,0	48,0	36,0	51807
4,8 mm	0.1890		7/32-32	6,0	95,0	57,0	48,0	36,0	63593
4,9 mm	0.1929			6,0	95,0	57,0	48,0	36,0	63594
5,0 mm	0.1969		M6 X 1	6,0	95,0	57,0	48,0	36,0	63595
5,1 mm	0.2008		1/4-20	6,0	95,0	57,0	48,0	36,0	63596
13/64	0.2031	5.16		6,0	95,0	57,0	48,0	36,0	51808
5,2 mm	0.2047		M6 X 0,75	6,0	95,0	57,0	48,0	36,0	63597
5,3 mm	0.2087			6,0	95,0	57,0	48,0	36,0	63598
5,4 mm	0.2126			6,0	95,0	57,0	48,0	36,0	63599
5,5 mm	0.2165		M6 X 0,5	6,0	95,0	57,0	48,0	36,0	63600

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h₆**>.1181–.2362 DIAMETER**

DC = +.00016/+,.00063

DCON = h₆**>.2362–.3937 DIAMETER**

DC = +.00024/+,.00083

DCON = h₆**>.3937–.7087 DIAMETER**

DC = +.00028/+,.00098

DCON = h₆**>.7087–1.1811 DIAMETER**

DC = +.00031/+,.00114

DCON = h₆**TOLERANCES (mm)****≤3 DIAMETER**

DC = +0,002/+0,012

DCON = h₆**>3–6 DIAMETER**

DC = +0,004/+0,016

DCON = h₆**>6–10 DIAMETER**

DC = +0,006/+0,021

DCON = h₆**>10–18 DIAMETER**

DC = +0,007/+0,025

DCON = h₆**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**

For patent information visit
www.ksptpatents.com

140 8xD

FRACTIONAL & METRIC SERIES

inch & mm									EDP NO.	CONTINUED
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AlTiN)	
7/32	0.2188	5.56	1/4-32	6,0	95,0	57,0	48,0	36,0	51809	
5,6 mm	0.2205			6,0	95,0	57,0	48,0	36,0	63601	
5,7 mm	0.2244			6,0	95,0	57,0	48,0	36,0	63602	
5,8 mm	0.2283			6,0	95,0	57,0	48,0	36,0	63603	
5,9 mm	0.2323			6,0	95,0	57,0	48,0	36,0	63604	
15/64	0.2344	5.95		6,0	95,0	57,0	48,0	36,0	51810	
6,0 mm	0.2362		M7 X 1	6,0	95,0	57,0	48,0	36,0	63605	
6,1 mm	0.2402			8,0	114,0	76,0	64,0	36,0	63606	
6,2 mm	0.2441		M7 X 0,75	8,0	114,0	76,0	64,0	36,0	63607	
6,3 mm	0.2480			8,0	114,0	76,0	64,0	36,0	63608	
1/4	0.2500	6.35		8,0	114,0	76,0	64,0	36,0	51811	
6,4 mm	0.2520			8,0	114,0	76,0	64,0	36,0	63609	
6,5 mm	0.2559			8,0	114,0	76,0	64,0	36,0	63610	
F	0.2570	6.53	5/16-18	8,0	114,0	76,0	64,0	36,0	51812	
6,6 mm	0.2598			8,0	114,0	76,0	64,0	36,0	63611	
6,7 mm	0.2638			8,0	114,0	76,0	64,0	36,0	63612	
17/64	0.2656	6.75	5/16-20	8,0	114,0	76,0	64,0	36,0	51813	
6,8 mm	0.2677		M8 X 1,25	8,0	114,0	76,0	64,0	36,0	63613	
6,9 mm	0.2717			8,0	114,0	76,0	64,0	36,0	63614	
7,0 mm	0.2756		M8 X 1	8,0	114,0	76,0	64,0	36,0	63615	
7,1 mm	0.2795			8,0	114,0	76,0	64,0	36,0	63616	
9/32	0.2812	7.14	5/16-32	8,0	114,0	76,0	64,0	36,0	51814	
7,2 mm	0.2835		M8 X 0,75	8,0	114,0	76,0	64,0	36,0	63617	
7,3 mm	0.2874			8,0	114,0	76,0	64,0	36,0	63618	
7,4 mm	0.2913			8,0	114,0	76,0	64,0	36,0	63619	
7,5 mm	0.2953		M8 X 0,5	8,0	114,0	76,0	64,0	36,0	63620	
19/64	0.2969	7.54		8,0	114,0	76,0	64,0	36,0	51815	
7,6 mm	0.2992			8,0	114,0	76,0	64,0	36,0	63621	
7,7 mm	0.3031			8,0	114,0	76,0	64,0	36,0	63622	
7,8 mm	0.3071		M9 X 1,25	8,0	114,0	76,0	64,0	36,0	63623	
7,9 mm	0.3110			8,0	114,0	76,0	64,0	36,0	63624	
5/16	0.3125	7.94	3/8-16	8,0	114,0	76,0	64,0	36,0	51816	
8,0 mm	0.3150		M9 X 1	8,0	114,0	76,0	64,0	36,0	63625	
8,1 mm	0.3189			10,0	142,0	95,0	80,0	40,0	63626	
8,2 mm	0.3228			10,0	142,0	95,0	80,0	40,0	63627	
8,3 mm	0.3268			10,0	142,0	95,0	80,0	40,0	63628	
21/64	0.3281	8.33	3/8-20	10,0	142,0	95,0	80,0	40,0	51817	
8,4 mm	0.3307			10,0	142,0	95,0	80,0	40,0	63629	
Q	0.3320	8.43	3/8-24	10,0	142,0	95,0	80,0	40,0	51818	
8,5 mm	0.3346		M10 X 1,5	10,0	142,0	95,0	80,0	40,0	63630	
8,6 mm	0.3386			10,0	142,0	95,0	80,0	40,0	63631	
8,7 mm	0.3425			10,0	142,0	95,0	80,0	40,0	63632	

continued on next page




8xD



140 8x D

FRACTIONAL & METRIC SERIES

- Coolant through design promotes controlled and consistent operating temperatures improving coolant flow to the cut while maintaining strength
- Split point geometry for improved drill penetration and accuracy
- Controlled edge honing for longevity
- Negative corner position strengthens and protects
- Recommended for materials ≤ 60 HRc (≤ 654 Bhn)

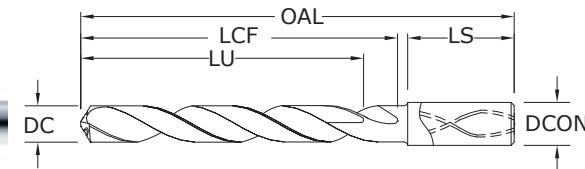

inch & mm										EDP NO.
CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS	Ti-NAMITE-A (AITIN)	EDP NO.
11/32	0.3438	8.73	3/8-32	10,0	142,0	95,0	80,0	40,0	51819	
8,8 mm	0.3465		M10 X 1,25	10,0	142,0	95,0	80,0	40,0	63633	
8,9 mm	0.3504			10,0	142,0	95,0	80,0	40,0	63634	
9,0 mm	0.3543		M10 X 1	10,0	142,0	95,0	80,0	40,0	63635	
9,1 mm	0.3583			10,0	142,0	95,0	80,0	40,0	63636	
23/64	0.3594	9.13		10,0	142,0	95,0	80,0	40,0	51820	
9,2 mm	0.3622		M10 X 0,75	10,0	142,0	95,0	80,0	40,0	63637	
9,3 mm	0.3661			10,0	142,0	95,0	80,0	40,0	63638	
U	0.3680	9.35	7/16-14	10,0	142,0	95,0	80,0	40,0	51821	
9,4 mm	0.3701			10,0	142,0	95,0	80,0	40,0	63639	
9,5 mm	0.3740		M11 / M10 X 0,5	10,0	142,0	95,0	80,0	40,0	63640	
3/8	0.3750	9.53		10,0	142,0	95,0	80,0	40,0	51822	
9,6 mm	0.3780			10,0	142,0	95,0	80,0	40,0	63641	
9,7 mm	0.3819			10,0	142,0	95,0	80,0	40,0	63642	
9,8 mm	0.3858			10,0	142,0	95,0	80,0	40,0	63643	
9,9 mm	0.3898			10,0	142,0	95,0	80,0	40,0	63644	
25/64	0.3906	9.92	7/16-20	10,0	142,0	95,0	80,0	40,0	51823	
10,0 mm	0.3937			10,0	142,0	95,0	80,0	40,0	63645	
10,1 mm	0.3976			12,0	162,0	114,0	96,0	45,0	63646	
10,2 mm	0.4016		M12 X 1,75	12,0	162,0	114,0	96,0	45,0	63647	
10,3 mm	0.4055			12,0	162,0	114,0	96,0	45,0	63648	
13/32	0.4062	10.32		12,0	162,0	114,0	96,0	45,0	51824	
10,4 mm	0.4094			12,0	162,0	114,0	96,0	45,0	63649	
10,5 mm	0.4134		M12 X 1,5	12,0	162,0	114,0	96,0	45,0	63650	
10,6 mm	0.4173			12,0	162,0	114,0	96,0	45,0	63651	
10,7 mm	0.4213			12,0	162,0	114,0	96,0	45,0	63652	
27/64	0.4219	10.72	1/2-13	12,0	162,0	114,0	96,0	45,0	51825	
10,8 mm	0.4252		M12 X 1,25	12,0	162,0	114,0	96,0	45,0	63653	
10,9 mm	0.4291			12,0	162,0	114,0	96,0	45,0	63654	
11,0 mm	0.4331		M12 X 1	12,0	162,0	114,0	96,0	45,0	63655	
11,1 mm	0.4370			12,0	162,0	114,0	96,0	45,0	63656	
7/16	0.4375	11.11	1/4-18NPT	12,0	162,0	114,0	96,0	45,0	51826	

continued on next page

TOLERANCES (inch)**≤.1181 DIAMETER**

DC = +.00008/+,.00047

DCON = h6

>.1181-.2362 DIAMETER

DC = +.00016/+,.00063

DCON = h6

>.2362-.3937 DIAMETER

DC = +.00024/+,.00083

DCON = h6

>.3937-.7087 DIAMETER

DC = +.00028/+,.00098

DCON = h6

>.7087-1.1811 DIAMETER

DC = +.00031/+,.00114

DCON = h6

TOLERANCES (mm)**≤3 DIAMETER**

DC = +0,002/+0,012

DCON = h6

>3-6 DIAMETER

DC = +0,004/+0,016

DCON = h6

>6-10 DIAMETER

DC = +0,006/+0,021

DCON = h6

>10-18 DIAMETER

DC = +0,007/+0,025

DCON = h6

STEELS**STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****NON-FERROUS****HARDENED STEELS**

For patent information visit
www.ksptpatents.com

140 8xD
FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	TAP SIZE REFERENCE ONLY	inch & mm					EDP NO.	CONTINUED
				SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	SHANK LENGTH LS		
11,2 mm	0.4409			12,0	162,0	114,0	96,0	45,0	63657	
11,3 mm	0.4449			12,0	162,0	114,0	96,0	45,0	63658	
11,4 mm	0.4488			12,0	162,0	114,0	96,0	45,0	63659	
11,5 mm	0.4528	M12 X 0,5		12,0	162,0	114,0	96,0	45,0	63660	
11,6 mm	0.4567			12,0	162,0	114,0	96,0	45,0	63661	
11,7 mm	0.4606			12,0	162,0	114,0	96,0	45,0	63662	
11,8 mm	0.4646			12,0	162,0	114,0	96,0	45,0	63663	
11,9 mm	0.4685			12,0	162,0	114,0	96,0	45,0	63664	
15/32	0.4688	11.91	1/2-28	12,0	162,0	114,0	96,0	45,0	51827	
12,0 mm	0.4724		M14 X 2	12,0	162,0	114,0	96,0	45,0	63665	
31/64	0.4844	12.30	9/16-12	14,0	178,0	133,0	112,0	45,0	51828	
12,5 mm	0.4921		M14 X 1,5	14,0	178,0	133,0	112,0	45,0	63666	
1/2	0.5000	12.70		14,0	178,0	133,0	112,0	45,0	51829	
12,8 mm	0.5039		M14 X 1,25	14,0	178,0	133,0	112,0	45,0	63667	
13,0 mm	0.5118		M14 X 1	14,0	178,0	133,0	112,0	45,0	63668	
33/64	0.5156	13.10	9/16-18	14,0	178,0	133,0	112,0	45,0	51830	
13,5 mm	0.5315		5/8-11	14,0	178,0	133,0	112,0	45,0	63669	
13,8 mm	0.5433			14,0	178,0	133,0	112,0	45,0	63670	
14,0 mm	0.5512		M16 X 2	14,0	178,0	133,0	112,0	45,0	63671	
9/16	0.5625	14.29		16,0	203,0	152,0	128,0	48,0	51831	
14,5 mm	0.5709		M16 X 1,5	16,0	203,0	152,0	128,0	48,0	63672	
37/64	0.5781	14.68	5/8-18	16,0	203,0	152,0	128,0	48,0	51832	
14,8 mm	0.5827			16,0	203,0	152,0	128,0	48,0	63673	
15,0 mm	0.5906		M16 X 1	16,0	203,0	152,0	128,0	48,0	63674	
15,5 mm	0.6102		M18 X 2,5	16,0	203,0	152,0	128,0	48,0	63675	
15,8 mm	0.6220			16,0	203,0	152,0	128,0	48,0	63676	
5/8	0.6250	15.88	11/16-16	16,0	203,0	152,0	128,0	48,0	51833	
16,0 mm	0.6299			16,0	203,0	152,0	128,0	48,0	63677	
21/32	0.6562	16.67	3/4-10	18,0	222,0	171,0	144,0	48,0	51834	
11/16	0.6875	17.46	3/4-16	18,0	222,0	171,0	144,0	48,0	51835	
3/4	0.7500	19.05	13/16-16	20,0	243,0	190,0	160,0	50,0	51836	

FRACTIONAL
ICe-Carb®

Series 140 8D Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/8	3/16	1/4	3/8	1/2	5/8	3/4	
	≤ 175 Bhn or ≤ 7 HRc	405 (324-486)	RPM	12377	8251	6188	4126	3094	2475	2063	
			Fr	0.0036	0.0053	0.0071	0.0107	0.0142	0.0178	0.0213	
			Feed (ipm)	44.0	44.0	44.0	44.0	44.0	44.0	44.0	
	≤ 275 Bhn or ≤ 28 HRc	370 (296-444)	RPM	11307	7538	5654	3769	2827	2261	1885	
			Fr	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0180	
			Feed (ipm)	34.0	34.0	34.0	34.0	34.0	34.0	34.0	
	≤ 425 Bhn or ≤ 45 HRc	210 (168-252)	RPM	6418	4278	3209	2139	1604	1284	1070	
			Fr	0.0026	0.0039	0.0051	0.0077	0.0103	0.0129	0.0154	
			Feed (ipm)	16.5	16.5	16.5	16.5	16.5	16.5	16.5	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc	320 (256-384)	RPM	9779	6519	4890	3260	2445	1956	1630
				Fr	0.0026	0.0038	0.0051	0.0077	0.0102	0.0128	0.0153
				Feed (ipm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0
		≤ 375 Bhn or ≤ 40 HRc	190 (152-228)	RPM	5806	3871	2903	1935	1452	1161	968
				Fr	0.0020	0.0030	0.0040	0.0059	0.0079	0.0099	0.0119
				Feed (ipm)	11.5	11.5	11.5	11.5	11.5	11.5	11.5
		≤ 450 Bhn or ≤ 48 HRc	135 (108-162)	RPM	4126	2750	2063	1375	1031	825	688
				Fr	0.0016	0.0024	0.0032	0.0047	0.0063	0.0079	0.0095
				Feed (ipm)	6.5	6.5	6.5	6.5	6.5	6.5	6.5
		≤ 185 Bhn or ≤ 9 HRc	290 (232-348)	RPM	8862	5908	4431	2954	2216	1772	1477
				Fr	0.0020	0.0030	0.0039	0.0059	0.0079	0.0099	0.0118
				Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5
K	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	180 (144-216)	RPM	5501	3667	2750	1834	1375	1100	917
				Fr	0.0018	0.0027	0.0036	0.0055	0.0073	0.0091	0.0109
				Feed (ipm)	10.0	10.0	10.0	10.0	10.0	10.0	10.0
		≤ 275 Bhn or ≤ 28 HRc	130 (104-156)	RPM	3973	2649	1986	1324	993	795	662
				Fr	0.0018	0.0026	0.0035	0.0053	0.0070	0.0088	0.0106
				Feed (ipm)	7.0	7.0	7.0	7.0	7.0	7.0	7.0
		≤ 375 Bhn or ≤ 40 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	581	484
				Fr	0.0016	0.0023	0.0031	0.0047	0.0062	0.0078	0.0093
				Feed (ipm)	4.5	4.5	4.5	4.5	4.5	4.5	4.5
		≤ 220 Bhn or ≤ 19 HRc	350 (280-420)	RPM	10696	7131	5348	3565	2674	2139	1783
				Fr	0.0037	0.0056	0.0075	0.0112	0.0150	0.0187	0.0224
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0
		≤ 260 Bhn or ≤ 26 HRc	310 (248-372)	RPM	9474	6316	4737	3158	2368	1895	1579
				Fr	0.0039	0.0059	0.0078	0.0117	0.0156	0.0195	0.0234
				Feed (ipm)	37.0	37.0	37.0	37.0	37.0	37.0	37.0

continued on next page

Series 140 8D Fractional		Hardness	Vc (sfm)	DC • in						
				1/8	3/16	1/4	3/8	1/2	5/8	3/4
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	730 (584-876)	RPM Fr Feed (ipm)	22309 0.0045 100.0	14873 0.0067 100.0	11154 0.0090 100.0	7436 0.0134 100.0	5577 0.0179 100.0	4462 0.0224 100.0
		≤ 150 Bhn or ≤ 7 HRc	635 (508-762)	RPM Fr Feed (ipm)	19406 0.0046 90.0	12937 0.0070 90.0	9703 0.0093 90.0	6469 0.0139 90.0	4851 0.0186 90.0	3881 0.0232 90.0
		≤ 140 Bhn or ≤ 3 HRc	255 (204-306)	RPM Fr Feed (ipm)	7793 0.0018 14.0	5195 0.0027 14.0	3896 0.0036 14.0	2598 0.0054 14.0	1948 0.0072 14.0	1559 0.0090 14.0
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 200 Bhn or ≤ 23 HRc	235 (188-282)	RPM Fr Feed (ipm)	7182 0.0018 13.0	4788 0.0027 13.0	3591 0.0036 13.0	2394 0.0054 13.0	1795 0.0072 13.0	1436 0.0091 13.0
		≤ 300 Bhn or ≤ 32 HRc	65 (52-78)	RPM Fr Feed (ipm)	1986 0.0009 1.7	1324 0.0013 1.7	993 0.0017 1.7	662 0.0026 1.7	497 0.0034 1.7	331 0.0043 1.7
		≤ 400 Bhn or ≤ 43 HRc	35 (28-42)	RPM Fr Feed (ipm)	1070 0.0006 0.6	713 0.0008 0.6	535 0.0011 0.6	357 0.0017 0.6	267 0.0022 0.6	214 0.0028 0.6
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400, Rene, Waspaloy	≤ 275 Bhn or ≤ 28 HRc	185 (148-222)	RPM Fr Feed (ipm)	5654 0.0016 9.0	3769 0.0024 9.0	2827 0.0032 9.0	1885 0.0048 9.0	1413 0.0064 9.0	1131 0.0080 9.0
		≤ 350 Bhn or ≤ 38 HRc	140 (112-168)	RPM Fr Feed (ipm)	4278 0.0012 5.0	2852 0.0018 5.0	2139 0.0023 5.0	1426 0.0035 5.0	1070 0.0047 5.0	856 0.0058 5.0
		≤ 440 Bhn or ≤ 47 HRc	75 (60-90)	RPM Fr Feed (ipm)	2292 0.0010 2.3	1528 0.0015 2.3	1146 0.0020 2.3	764 0.0030 2.3	573 0.0040 2.3	458 0.0050 2.3
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 200 Bhn or ≤ 13 HRc	140 (112-168)	RPM Fr Feed (ipm)	4278 0.0020 8.5	2852 0.0030 8.5	2139 0.0040 8.5	1426 0.0060 8.5	1070 0.0079 8.5	856 0.0099 8.5
		≤ 375 Bhn or ≤ 40 HRc	90 (72-108)	RPM Fr Feed (ipm)	2750 0.0011 3.0	1834 0.0016 3.0	1375 0.0022 3.0	917 0.0033 3.0	688 0.0044 3.0	550 0.0055 3.0
		≤ 475 Bhn or ≤ 50 HRc	80 (64-96)	RPM Fr Feed (ipm)	2445 0.0006 1.5	1630 0.0009 1.5	1222 0.0012 1.5	815 0.0018 1.5	611 0.0025 1.5	489 0.0031 1.5
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2									

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 140M 8D Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (100-170)	123	RPM	13087	6544	4908	3926	3272	2804	2454
				Fr	0.085	0.171	0.228	0.285	0.342	0.399	0.455
				Feed (mm/min)	1118	1118	1118	1118	1118	1118	1118
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275 Bhn or ≤ 28 HRc (90-135)	113	RPM	11956	5978	4484	3587	2989	2562	2242
				Fr	0.072	0.144	0.193	0.241	0.289	0.337	0.385
				Feed (mm/min)	864	864	864	864	864	864	864
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 425 Bhn or ≤ 45 HRc (51-77)	64	RPM	6786	3393	2545	2036	1696	1454	1272
				Fr	0.062	0.124	0.165	0.206	0.247	0.288	0.329
				Feed (mm/min)	419	419	419	419	419	419	419
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (78-117)	98	RPM	10340	5170	3878	3102	2585	2216	1939
				Fr	0.061	0.123	0.164	0.205	0.246	0.287	0.328
				Feed (mm/min)	635	635	635	635	635	635	635
	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc (46-69)	58	RPM	6140	3070	2302	1842	1535	1316	1151
				Fr	0.048	0.095	0.127	0.159	0.190	0.222	0.254
				Feed (mm/min)	292	292	292	292	292	292	292
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 450 Bhn or ≤ 48 HRc (33-49)	41	RPM	4362	2181	1636	1309	1091	935	818
				Fr	0.038	0.076	0.101	0.126	0.151	0.177	0.202
				Feed (mm/min)	165	165	165	165	165	165	165
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 185 Bhn or ≤ 9 HRc (71-106)	88	RPM	9371	4686	3514	2811	2343	2008	1757
				Fr	0.047	0.095	0.126	0.158	0.190	0.221	0.253
				Feed (mm/min)	445	445	445	445	445	445	445
	CAST IRONS Gray, Malleable, Ductile	≤ 275 Bhn or ≤ 28 HRc (44-66)	55	RPM	5816	2908	2181	1745	1454	1246	1091
				Fr	0.044	0.087	0.116	0.146	0.175	0.204	0.233
				Feed (mm/min)	254	254	254	254	254	254	254
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (32-48)	40	RPM	4201	2100	1575	1260	1050	900	788
				Fr	0.042	0.085	0.113	0.141	0.169	0.198	0.226
				Feed (mm/min)	178	178	178	178	178	178	178
K	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc (23-35)	29	RPM	3070	1535	1151	921	767	658	576
				Fr	0.037	0.074	0.099	0.124	0.149	0.174	0.199
				Feed (mm/min)	114	114	114	114	114	114	114
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 220 Bhn or ≤ 19 HRc (85-128)	107	RPM	11310	5655	4241	3393	2827	2424	2121
				Fr	0.090	0.180	0.240	0.299	0.359	0.419	0.479
				Feed (mm/min)	1016	1016	1016	1016	1016	1016	1016
	CAST IRONS Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc (76-113)	94	RPM	10017	5009	3756	3005	2504	2147	1878
				Fr	0.094	0.188	0.250	0.313	0.375	0.438	0.500
				Feed (mm/min)	940	940	940	940	940	940	940

continued on next page

Series 140M 8D Metric		Hardness	Vc (m/min)	DC • mm						
				3	6	8	10	12	14	16
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	223 (178-267)	RPM Fr Feed (mm/min)	23589 0.108 2540	11795 0.215 2540	8846 0.287 2540	7077 0.359 2540	5897 0.431 2540	5055 0.502 2540
		≤ 150 Bhn or ≤ 7 HRc	194 (155-232)	RPM Fr Feed (mm/min)	20519 0.111 2286	10260 0.223 2286	7695 0.297 2286	6156 0.371 2286	5130 0.446 2286	4397 0.520 2286
		≤ 140 Bhn or ≤ 3 HRc	78 (62-93)	RPM Fr Feed (mm/min)	8240 0.043 356	4120 0.086 356	3090 0.115 356	2472 0.144 356	2060 0.173 356	1766 0.201 356
		≤ 200 Bhn or ≤ 23 HRc	72 (57-86)	RPM Fr Feed (mm/min)	7594 0.043 330	3797 0.087 330	2848 0.116 330	2278 0.145 330	1898 0.174 330	1627 0.203 330
S	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 300 Bhn or ≤ 32 HRc	20 (16-24)	RPM Fr Feed (mm/min)	2100 0.021 43	1050 0.041 43	788 0.055 43	630 0.069 43	525 0.082 43	450 0.096 43
		≤ 400 Bhn or ≤ 43 HRc	11 (9-13)	RPM Fr Feed (mm/min)	1131 0.013 15	565 0.027 15	424 0.036 15	339 0.045 15	283 0.054 15	242 0.063 15
		≤ 275 Bhn or ≤ 28 HRc	56 (45-68)	RPM Fr Feed (mm/min)	5978 0.038 229	2989 0.076 229	2242 0.102 229	1793 0.127 229	1495 0.153 229	1281 0.178 229
		≤ 350 Bhn or ≤ 38 HRc	43 (34-51)	RPM Fr Feed (mm/min)	4524 0.028 127	2262 0.056 127	1696 0.075 127	1357 0.094 127	1131 0.112 127	969 0.131 127
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 440 Bhn or ≤ 47 HRc	23 (18-27)	RPM Fr Feed (mm/min)	2424 0.024 58	1212 0.048 58	909 0.064 58	727 0.080 58	606 0.096 58	519 0.112 58
		≤ 200 Bhn or ≤ 13 HRc	43 (34-51)	RPM Fr Feed (mm/min)	4524 0.048 216	2262 0.095 216	1696 0.127 216	1357 0.159 216	1131 0.191 216	969 0.223 216
		≤ 375 Bhn or ≤ 40 HRc	27 (22-33)	RPM Fr Feed (mm/min)	2908 0.026 76	1454 0.052 76	1091 0.070 76	872 0.087 76	727 0.105 76	623 0.122 76
		≤ 475 Bhn or ≤ 50 HRc	24 (20-29)	RPM Fr Feed (mm/min)	2585 0.015 38	1293 0.029 38	969 0.039 38	776 0.049 38	646 0.059 38	554 0.069 38

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL & METRIC

Series 120



3xD

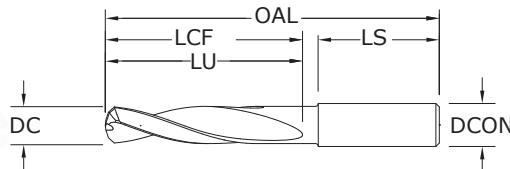

120

FRACTIONAL & METRIC SERIES

- Double margin design stabilizes the drill for greater hole accuracy and improved surface finish
- Notched point reduces thrust force over conventional designs
- 8 facet point reduces fiber breakout and delamination on exit
- 90 degree secondary chamfer angle improves hole entrance and exit quality

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	SHANK DIAMETER DCON	inch & mm			EDP NO.
				OVERALL LENGTH OAL	FLUTE LENGTH LCF/LU	SHANK LENGTH LS	
#40	0.0980	2.49	1/8	2	9/16	1-1/4	50000
2,7 mm	0.1063		6,0	63,0	20,0	32,0	50001
3,0 mm	0.1181		6,0	63,0	20,0	36,0	50002
1/8	0.1250	3.18	1/4	2-1/2	3/4	1-7/16	50003
3,2 mm	0.1260		6,0	63,0	20,0	36,0	50004
#30	0.1285	3.26	1/4	2-1/2	3/4	1-7/16	50005
#28	0.1405	3.57	1/4	2-1/2	3/4	1-7/16	50006
#22	0.1570	3.99	1/4	2-5/8	7/8	1-7/16	50007
#21	0.1590	4.04	1/4	2-5/8	7/8	1-7/16	50008
4,1 mm	0.1614		6,0	66,0	24,0	36,0	50009
#19	0.1660	4.22	1/4	2-5/8	7/8	1-7/16	50010
11/64	0.1719	4.37	1/4	2-5/8	7/8	1-7/16	50011
3/16	0.1875	4.76	1/4	2-5/8	1	1-7/16	50012
#11	0.1910	4.85	1/4	2-5/8	1	1-7/16	50013
#8	0.1990	5.05	1/4	2-5/8	1	1-7/16	50014
#7	0.2010	5.11	1/4	2-5/8	1	1-7/16	50015
#2	0.2210	5.61	1/4	2-5/8	1	1-7/16	50016
6,0 mm	0.2362		6,0	66,0	28,0	36,0	50017
1/4	0.2500	6.35	1/4	3-1/8	1-5/16	1-7/16	50018
.2510	0.2510	6.38	5/16	3-1/8	1-5/16	1-7/16	50019
F	0.2570	6.53	5/16	3-1/8	1-5/16	1-7/16	50020
I	0.2720	6.91	5/16	3-1/8	1-5/16	1-7/16	50021
J	0.2770	7.04	5/16	3-1/8	1-5/16	1-7/16	50022
K	0.2810	7.14	5/16	3-1/8	1-9/16	1-7/16	50023
5/16	0.3125	7.94	5/16	3-1/8	1-9/16	1-7/16	50024
8,0 mm	0.3150		8,0	79,0	41,0	36,0	50025
3/8	0.3750	9.53	3/8	3-1/2	1-27/32	1-9/16	50026
V	0.3770	9.58	1/2	3-1/2	1-27/32	1-9/16	50027
10,0 mm	0.3937		10,0	89,0	47,0	40,0	50028
7/16	0.4375	11.11	1/2	4-1/16	2-3/16	1-9/16	50029
12,0 mm	0.4724		12,0	102,0	55,0	45,0	50030
1/2	0.5000	12.70	1/2	4-1/4	2-5/16	1-3/4	50031

TOLERANCES (inch)

DC = +0.0000/-0.0005
DCON = h₆

TOLERANCES (mm)

DC = +0,000/-0,013
DCON = h₆

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

Series 120

Series 120 Fractional		Vc (sfm)	DC • in							
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	320	RPM	1/8	3/16	1/4	5/16	3/8	7/16	1/2
		(256-384)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	5.9	5.9	5.9	5.9	5.9	5.9	5.9
N	GFRP (Fiberglass)	240	RPM	7334	4890	3667	2934	2445	2096	1834
		(192-288)	Fr	0.0006	0.0009	0.0012	0.0015	0.0018	0.0021	0.0024
			Feed (ipm)	4.4	4.4	4.4	4.4	4.4	4.4	4.4
N	CARBON, GRAPHITE	400	RPM	12224	8149	6112	4890	4075	3493	3056
		(320-480)	Fr	0.0008	0.0012	0.0016	0.0020	0.0024	0.0028	0.0032
			Feed (ipm)	9.8	9.8	9.8	9.8	9.8	9.8	9.8

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 120 Metric		Vc (m/min)	DC • mm							
N	CFRP, AFRP (Carbon Fiber, Aramid Fiber)	100	RPM	2.5	3	4	6	8	10	12
		(80-120)	Fr	0.012	0.014	0.019	0.028	0.038	0.047	0.057
			Feed (mm/min)	150	150	150	150	150	150	150
N	GFRP (Fiberglass)	75	RPM	9542	7951	5963	3976	2982	2385	1988
		(65-90)	Fr	0.012	0.014	0.019	0.029	0.039	0.048	0.058
			Feed (mm/min)	115	115	115	115	115	115	115
N	CARBON, GRAPHITE	120	RPM	15266	12722	9542	6361	4771	3817	3181
		(96-144)	Fr	0.015	0.018	0.025	0.037	0.049	0.062	0.074
			Feed (mm/min)	235	235	235	235	235	235	235

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



VALUE AT THE SPINDLE®

General Purpose Drills



Hole Making

GENERAL PURPOSE DRILLS	SERIES	DESCRIPTION	PAGE
2 Flute	101	2 Flute Slow Spiral	288
Short Length Self Centering (DIN6539)	108M Plus	2 Flute Short Length DIN 6539	293
Straight Flute	106	Straight Flute 140 Point Geometry	300
3 Flute with 150 Point Geometry	103	3 Flute 150 Point Geometry	304

GENERAL PURPOSE COUNTERSINKS	SERIES	DESCRIPTION	PAGE
Combined Drill & Countersink	301	2 Flute Straight Flute Combined Drill and Countersink Fractional	310
	301M	2 Flute Straight Flute Combined Drill and Countersink Metric	311
Single Flute Countersink	601	Single Flute Fractional	316
3 Flute Countersink	603	3 Flute Fractional	319
6 Flute Countersink	606	6 Flute Fractional	322

GENERAL PURPOSE REAMERS	SERIES	DESCRIPTION	PAGE
Straight Flute Accu-Reamer	200	Accu-Reamer	326
Straight Flute Reamer	201M	Metric Reamer	330

Speed & Feed Recommendations listed after each series

Taladrado

BROCAS DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA
2 filos	101	2 filos, espiral de avance lento	288
Autocentrante de longitud corta (DIN6539)	108M Plus	2 filos, longitud corta, DIN 6539	293
Filo recto	106	Filo recto, geometría de 140 puntos	300
3 filos con geometría de 150 puntos	103	3 filos, geometría de 150 puntos	304

BROCAS DE USO AVELLANADORES	SERIE	DESCRIPCIÓN	PÁGINA
Broca y avellanador combinados	301	2 filos, filo recto, broca y avellanador combinados, fraccional	310
	301M	2 filos, filo recto, broca y avellanador combinados, métrico	311
Avellanador de filo único	601	Filo único, fraccional	316
Avellanador de 3 filos	603	3 filos, fraccional	319
Avellanador de 6 filos	606	6 filos, fraccional	322

BROCAS DE USO ESCARIADORES	SERIE	DESCRIPCIÓN	PÁGINA
Escariador Accu de filo recto	200	Escariador Accu	326
Escariador de filo recto	201M	Escariador métrico	330

Recomendaciones de velocidades y avances mostradas tras cada serie

Outils de perçage

FORETS UNIVERSEL	SÈRIES	DESCRIPTION	PAGE
2 dents	101	2 dents à spirale lente	288
Court autocentrant (DIN 6539)	108M Plus	2 dents court DIN 6539	293
Denture droite	106	Denture droite à angle de pointe 140°	300
3 dents à angle de pointe 150°	103	3 dents à angle de pointe 150°	304

FORETS À FRAISER	SÈRIES	DESCRIPTION	PAGE
Foret et foret à fraiser combinés	301	2 dents denture droite foret et foret à fraiser combinés (fractionnel)	310
	301M	2 dents denture droite foret et foret à fraiser combinés (métrique)	311
Foret à fraiser à dent simple	601	Foret à dent simple (fractionnel)	316
Foret à fraiser 3 dents	603	3 dents (fractionnel)	319
Foret à fraiser 6 dents	606	6 dents (fractionnel)	322

FORETS À ALÉSOIRS	SÈRIES	DESCRIPTION	PAGE
Alésoir denture droite Accu-Reamer	200	Alésoir Accu-Reamer	326
Alésoir denture droite	201M	Alésoir (métrique)	330

Recommandations de vitesse et avance indiquées après chaque série



STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE
2 Schneiden	101	2 Schneiden mit kleinem Spanwinkel	288
Kurze Bauform Selbstzentrierung (DIN 6539)	108M Plus	2 Schneiden Kurze Bauform DIN 6539	293
Gerade Schneiden	106	Gerade Schneiden Spitzengeometrie 140	300
3 Schneiden mit Spitzengeometrie 150	103	3 Schneiden Spitzengeometrie 150	304
STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE
Senkbohrer	301	Zölliger Senkbohrer mit 2 geraden Schneiden	310
	301M	Metrischer Senkbohrer mit 2 geraden Schneiden	311
Senker mit 1 Schneide	601	Zölliger Bohrer mit 1 Schneide	316
Senkbohrer mit 1 Schneide	603	Zölliger Bohrer mit 3 Schneiden	319
Senkbohrer mit 6 Schneiden	606	Zölliger Bohrer mit 6 Schneiden	322
STANDARD-BOHRER	SERIE	BESCHREIBUNG	SEITE
Reibahlen mit gerader Schneide	200	Accu-Reamer	326
Reibahle mit gerader Schneide	201M	Metrische Reibahle	330

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

2 Flute Drills • Metric: DIN 338



5xD




20°



118°

2

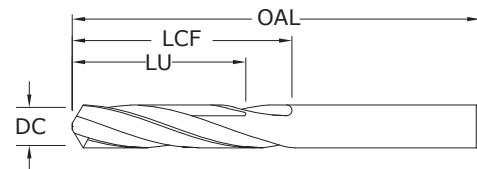**101**

FRACTIONAL & METRIC SERIES



Pictured:
Series 101 Drill Set



CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		TOLERANCES (inch) DC = +0.0000/-0.0005
						UNCOATED	Ti-NAMITE-A (AlTiN)	
#80	0.0135	0.34	3/4	3/16	—	51080	57076	
#79	0.0145	0.37	3/4	3/16	—	51079	57077	
1/64	0.0156	0.40	3/4	3/16	—	51101	57078	
#78	0.0160	0.41	3/4	3/16	—	51078	57079	
#77	0.0180	0.46	3/4	3/16	—	51077	57080	
#76	0.0200	0.51	7/8	1/4	—	51076	57081	
#75	0.0210	0.53	7/8	1/4	—	51075	57082	
#74	0.0225	0.57	7/8	1/4	—	51074	57083	
#73	0.0240	0.61	7/8	1/4	—	51073	57084	
#72	0.0250	0.64	1	5/16	—	51072	57085	
#71	0.0260	0.66	1	5/16	—	51071	57086	
0,7 mm	0.0276		28,0	9,0	—	61001	68268	
#70	0.0280	0.71	1-1/4	1/2	—	51070	57087	
#69	0.0292	0.74	1-1/4	1/2	—	51069	57088	
#68	0.0310	0.79	1-1/4	1/2	—	51068	57089	
1/32	0.0312	0.79	1-1/4	1/2	—	51102	57090	
0,8 mm	0.0315		30,0	10,0	—	61003	68269	
#67	0.0320	0.81	1-1/4	1/2	—	51067	57091	
#66	0.0330	0.84	1-1/4	1/2	—	51066	57092	
#65	0.0350	0.89	1-3/8	5/8	1/2	51065	57093	
0,9 mm	0.0354		32,0	11,0	8,0	61005	68270	
#64	0.0360	0.91	1-3/8	5/8	1/2	51064	57094	
#63	0.0370	0.94	1-3/8	5/8	1/2	51063	57095	
#62	0.0380	0.97	1-3/8	5/8	1/2	51062	57096	
#61	0.0390	0.99	1-3/8	5/8	1/2	51061	57097	
1,0 mm	0.0394		34,0	12,0	9,0	61007	68271	
#60	0.0400	1.02	1-1/2	3/4	39/64	51060	57098	
#59	0.0410	1.04	1-1/2	3/4	39/64	51059	57099	
#58	0.0420	1.07	1-1/2	3/4	39/64	51058	57100	
#57	0.0430	1.09	1-1/2	3/4	39/64	51057	57101	
1,1 mm	0.0433		36,0	14,0	11,0	61052	68294	
#56	0.0465	1.18	1-1/2	3/4	39/64	51056	57102	
3/64	0.0469	1.19	1-1/2	3/4	39/64	51103	57103	
1,2 mm	0.0472		38,0	16,0	12,0	61053	68295	
1,3 mm	0.0512		38,0	16,0	12,0	61054	68296	
#55	0.0520	1.32	1-1/2	3/4	39/64	51055	57104	
#54	0.0550	1.40	1-1/2	3/4	39/64	51054	57105	
1,4 mm	0.0551		40,0	18,0	14,0	61055	68297	
1,5 mm	0.0591		40,0	18,0	14,0	61009	68272	
#53	0.0595	1.51	1-1/2	3/4	39/64	51053	57106	
*1/16	0.0625	1.59	1-1/2	3/4	39/64	51104	57107	
1,6 mm	0.0630		43,0	20,0	16,0	61056	68298	
#52	0.0635	1.61	1-1/2	3/4	39/64	51052	57108	
1,7 mm	0.0669		43,0	20,0	17,0	61057	68299	

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0,0000/-0,0127

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

NON-FERROUS

PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338


101

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		CONTINUED
						UNCOATED	Ti-NAMITE-A (AITIN)	
#51	0.0670	1.70	1-1/2	3/4	39/64	51051	57109	
#50	0.0700	1.78	1-3/4	7/8	45/64	51050	57110	
1,8 mm	0.0709		46,0	22,0	17,0	61058	68300	
#49	0.0730	1.85	1-3/4	7/8	45/64	51049	57111	
1,9 mm	0.0748		46,0	22,0	17,0	61059	68301	
#48	0.0760	1.93	1-3/4	7/8	45/64	51048	57112	
5/64	0.0781	1.98	1-3/4	7/8	45/64	51105	57113	
#47	0.0785	1.99	1-3/4	7/8	45/64	51047	57114	
2,0 mm	0.0787		49,0	24,0	19,0	61011	68273	
#46	0.0810	2.06	1-3/4	7/8	45/64	51046	57115	
#45	0.0820	2.08	1-3/4	7/8	45/64	51045	57116	
2,1 mm	0.0827		49,0	24,0	19,0	61060	68302	
#44	0.0860	2.18	2	1	51/64	51044	57117	
2,2 mm	0.0866		53,0	27,0	21,0	61061	68303	
#43	0.0890	2.26	2	1	51/64	51043	57118	
2,3 mm	0.0906		53,0	27,0	21,0	61062	68304	
#42	0.0935	2.37	2	1	51/64	51042	57119	
3/32	0.0938	2.38	2	1	51/64	51106	57120	
2,4 mm	0.0945		57,0	30,0	24,0	61063	68305	
#41	0.0960	2.44	2	1	51/64	51041	57121	
#40	0.0980	2.49	2	1	51/64	51040	57122	
2,5 mm	0.0984		57,0	30,0	24,0	61013	68274	
#39	0.0995	2.53	2-1/4	1-1/4	1	51039	57123	
#38	0.1015	2.58	2-1/4	1-1/4	1	51038	57124	
2,6 mm	0.1024		57,0	30,0	24,0	61064	68306	
#37	0.1040	2.64	2-1/4	1-1/4	1	51037	57125	
2,7 mm	0.1063		61,0	33,0	26,0	61065	68307	
#36	0.1065	2.71	2-1/4	1-1/4	1	51036	57126	
7/64	0.1094	2.78	2-1/4	1-1/4	1	51107	57127	
#35	0.1100	2.79	2-1/4	1-1/4	1	51035	57128	
2,8 mm	0.1102		61,0	33,0	26,0	61066	68308	
#34	0.1110	2.82	2-1/4	1-1/4	1	51034	57129	
#33	0.1130	2.87	2-1/4	1-1/4	1	51033	57130	
2,9 mm	0.1142		61,0	33,0	26,0	61067	68309	
#32	0.1160	2.95	2-1/4	1-1/4	1	51032	57131	
3,0 mm	0.1181		61,0	33,0	26,0	61015	68275	
#31	0.1200	3.05	2-1/4	1-1/4	1	51031	57132	
3,1 mm	0.1220		65,0	36,0	28,0	61068	68310	
*1/8	0.1250	3.18	2-1/4	1-1/4	1	51108	57133	
3,2 mm	0.1260		65,0	36,0	28,0	61069	68311	
#30	0.1285	3.26	2-1/4	1-1/4	1	51030	57134	
3,3 mm	0.1299		65,0	36,0	28,0	61070	68312	
3,4 mm	0.1339		70,0	39,0	31,0	61071	68313	
#29	0.1360	3.45	2-1/2	1-3/8	1-7/64	51029	57135	
3,5 mm	0.1378		70,0	39,0	31,0	61017	68276	
#28	0.1405	3.57	2-1/2	1-3/8	1-7/64	51028	57136	
9/64	0.1406	3.57	2-1/2	1-3/8	1-7/64	51109	57137	
3,6 mm	0.1417		70,0	39,0	31,0	61072	68314	
#27	0.1440	3.66	2-1/2	1-3/8	1-7/64	51027	57138	
3,7 mm	0.1457		70,0	39,0	31,0	61073	68315	
#26	0.1470	3.73	2-1/2	1-3/8	1-7/64	51026	57139	
#25	0.1495	3.80	2-1/2	1-3/8	1-7/64	51025	57140	
3,8 mm	0.1496		75,0	43,0	34,0	61074	68316	
#24	0.1520	3.86	2-1/2	1-3/8	1-7/64	51024	57141	

continued on next page

2 Flute Drills • Metric: DIN 338

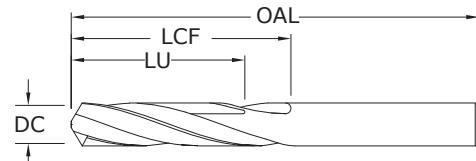**101**

FRACTIONAL & METRIC SERIES

CONTINUED

Pictured:
Series 101 Drill Set

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		TOLERANCES (inch) DC = +0.0000–0.0005
						UNCOATED	Ti-NAMITE-A (AlTiN)	
3,9 mm	0.1535		75,0	43,0	34,0	61075	68317	
#23	0.1540	3.91	2-1/2	1-3/8	1-7/64	51023	57142	
5/32	0.1562	3.97	2-1/2	1-3/8	1-7/64	51110	57143	
#22	0.1570	3.99	2-1/2	1-3/8	1-7/64	51022	57144	
4,0 mm	0.1575		75,0	43,0	34,0	61019	68277	
#21	0.1590	4.04	2-1/2	1-3/8	1-7/64	51021	57145	
#20	0.1610	4.09	2-1/2	1-3/8	1-7/64	51020	57146	
4,1 mm	0.1614		75,0	43,0	34,0	61076	68318	
4,2 mm	0.1654		75,0	43,0	34,0	61077	68319	
#19	0.1660	4.22	2-1/2	1-5/8	1-19/64	51019	57147	
4,3 mm	0.1693		80,0	47,0	37,0	61078	68320	
#18	0.1695	4.31	2-3/4	1-5/8	1-19/64	51018	57148	
11/64	0.1719	4.37	2-3/4	1-5/8	1-19/64	51111	57149	
#17	0.1730	4.39	2-3/4	1-5/8	1-19/64	51017	57150	
4,4 mm	0.1732		80,0	47,0	37,0	61079	68321	
#16	0.1770	4.50	2-3/4	1-5/8	1-19/64	51016	57151	
4,5 mm	0.1772		80,0	47,0	37,0	61021	68278	
#15	0.1800	4.57	2-3/4	1-5/8	1-19/64	51015	57152	
4,6 mm	0.1811		80,0	47,0	37,0	61080	68322	
#14	0.1820	4.62	2-3/4	1-5/8	1-19/64	51014	57153	
4,7 mm	0.1850		80,0	47,0	37,0	61081	68323	
#13	0.1850	4.70	2-3/4	1-5/8	1-19/64	51013	57154	
*3/16	0.1875	4.76	2-3/4	1-5/8	1-19/64	51112	57155	
4,8 mm	0.1890		86,0	52,0	41,0	61082	68324	
#12	0.1890	4.80	2-3/4	1-5/8	1-19/64	51012	57156	
#11	0.1910	4.85	2-3/4	1-5/8	1-19/64	51011	57157	
4,9 mm	0.1929		86,0	52,0	41,0	61083	68325	
#10	0.1935	4.91	2-3/4	1-5/8	1-19/64	51010	57158	
#9	0.1960	4.98	3	1-3/4	1-13/32	51009	57159	
5,0 mm	0.1969		86,0	52,0	41,0	61023	68279	
#8	0.1990	5.05	3	1-3/4	1-13/32	51008	57160	
5,1 mm	0.2008		86,0	52,0	41,0	61084	68326	
#7	0.2010	5.11	3	1-3/4	1-13/32	51007	57161	
13/64	0.2031	5.16	3	1-3/4	1-13/32	51113	57162	
#6	0.2040	5.18	3	1-3/4	1-13/32	51006	57163	
5,2 mm	0.2047		86,0	52,0	41,0	61085	68327	
#5	0.2055	5.22	3	1-3/4	1-13/32	51005	57164	
5,3 mm	0.2087		86,0	52,0	41,0	61086	68328	
#4	0.2090	5.31	3	1-3/4	1-13/32	51004	57165	
5,4 mm	0.2126		93,0	57,0	45,0	61087	68329	
#3	0.2130	5.41	3	1-3/4	1-13/32	51003	57166	
5,5 mm	0.2165		93,0	57,0	1-13/32	61025	68280	
7/32	0.2188	5.56	3	1-3/4	1-13/32	51114	57167	
5,6 mm	0.2205		93,0	57,0	45,0	61088	68330	

continued on next page

- TOLERANCES (inch)**
DC = +0.0000–0.0005
- TOLERANCES (mm)**
DC = +0,0000–0,0127
- STEELS
 - STAINLESS STEELS
 - CAST IRON
 - HIGH TEMP ALLOYS
 - TITANIUM
 - HARDENED STEELS
 - NON-FERROUS
 - PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

2 Flute Drills • Metric: DIN 338



101

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		CONTINUED
						UNCOATED	Ti-NAMITE-A (AITIN)	
#2	0.2210	5.61	3	1-3/4	1-13/32	51002	57168	
5,7 mm	0.2244	93,0	57,0	45,0	61089	68331		
#1	0.2280	5.79	3	1-3/4	1-13/32	51001	57169	
5,8 mm	0.2283	93,0	57,0	45,0	61090	68332		
5,9 mm	0.2323	93,0	57,0	45,0	61091	68333		
A	0.2340	5.94	3-1/4	2	1-39/64	51201	57170	
15/64	0.2344	5.95	3-1/4	2	1-39/64	51115	57171	
6,0 mm	0.2362	93,0	57,0	45,0	61027	68281		
B	0.2380	6.05	3-1/4	2	1-39/64	51202	57172	
6,1 mm	0.2402	101,0	63,0	50,0	61092	68334		
C	0.2420	6.15	3-1/4	2	1-39/64	51203	57173	
6,2 mm	0.2441	101,0	63,0	50,0	61093	68335		
D	0.2460	6.25	3-1/4	2	1-39/64	51204	57174	
6,3 mm	0.2480	101,0	63,0	50,0	61094	68336		
*1/4	0.2500	6.35	3-1/4	2	1-39/64	51116	57176	
6,4 mm	0.2520	101,0	63,0	50,0	61095	68337		
6,5 mm	0.2559	101,0	63,0	50,0	61029	68282		
F	0.2570	6.53	3-1/4	2	1-39/64	51206	57177	
6,6 mm	0.2598	101,0	63,0	50,0	61096	68338		
G	0.2610	6.63	3-1/2	2-1/8	1-45/64	51207	57178	
6,7 mm	0.2638	101,0	63,0	50,0	61097	68339		
17/64	0.2656	6.75	3-1/2	2-1/8	1-45/64	51117	57179	
H	0.2660	6.76	3-1/2	2-1/8	1-45/64	51208	57180	
6,8 mm	0.2677	109,0	69,0	55,0	61098	68340		
6,9 mm	0.2717	109,0	69,0	55,0	61099	68341		
I	0.2720	6.91	3-1/2	2-1/8	1-45/64	51209	57181	
7,0 mm	0.2756	109,0	69,0	55,0	61031	68283		
J	0.2770	7.04	3-1/2	2-1/8	1-45/64	51210	57182	
7,1 mm	0.2795	109,0	69,0	55,0	61100	68342		
K	0.2810	7.14	3-1/2	2-1/8	1-45/64	51211	57183	
9/32	0.2812	7.14	3-1/2	2-1/8	1-45/64	51118	57184	
7,2 mm	0.2835	109,0	69,0	55,0	61101	68343		
7,3 mm	0.2874	109,0	69,0	55,0	61102	68344		
L	0.2900	7.37	3-1/2	2-1/8	1-45/64	51212	57185	
7,4 mm	0.2913	109,0	69,0	55,0	61103	68345		
M	0.2950	7.49	3-3/4	2-3/8	1-29/32	51213	57186	
7,5 mm	0.2953	109,0	69,0	55,0	61033	68284		
19/64	0.2969	7.54	3-3/4	2-3/8	1-29/32	51119	57187	
7,6 mm	0.2992	117,0	75,0	60,0	61104	68346		
N	0.3020	7.67	3-3/4	2-3/8	1-29/32	51214	57188	
7,7 mm	0.3031	117,0	75,0	60,0	61105	68347		
7,8 mm	0.3071	117,0	75,0	60,0	61106	68348		
7,9 mm	0.3110	117,0	75,0	60,0	61107	68349		
*5/16	0.3125	7.94	3-3/4	2-3/8	1-29/32	51120	57189	
8,0 mm	0.3150	117,0	75,0	60,0	61035	68285		
O	0.3160	8.03	3-3/4	2-3/8	1-29/32	51215	57190	
8,1 mm	0.3189	117,0	75,0	60,0	61108	68350		
8,2 mm	0.3228	117,0	75,0	60,0	61109	68351		
P	0.3230	8.20	3-3/4	2-3/8	1-29/32	51216	57191	
8,3 mm	0.3268	117,0	75,0	60,0	61110	68352		
21/64	0.3281	8.33	4	2-1/2	2	51121	57192	
8,4 mm	0.3307	117,0	75,0	60,0	61111	68353		
Q	0.3320	8.43	4	2-1/2	2	51217	57193	
8,5 mm	0.3346	117,0	75,0	60,0	61037	68286		

continued on next page

2 Flute Drills • Metric: DIN 338

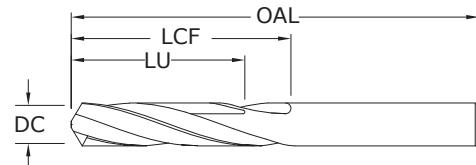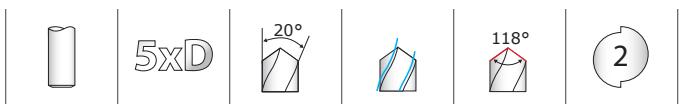

101

FRACTIONAL & METRIC SERIES



Pictured:
Series 101 Drill Set



CONTINUED

CUTTING DIAMETER DC	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.	
						UNCOATED	Ti-NAMITE-A (AITIN)
8.6 mm	0.3386		125,0	81,0	64,0	61112	68354
R	0.3390	8.61	4	2-1/2	2	51218	57194
8,7 mm	0.3425		125,0	81,0	64,0	61113	68355
11/32	0.3438	8.73	4	2-1/2	2	51122	57195
8,8 mm	0.3465		125,0	81,0	64,0	61114	68356
S	0.3480	8.84	4	2-1/2	2	51219	57196
8,9 mm	0.3504		125,0	81,0	64,0	61115	68357
9,0 mm	0.3543		125,0	81,0	64,0	61039	68287
T	0.3580	9.09	4-1/4	2-3/4	2-13/64	51220	57197
9,1 mm	0.3583		125,0	81,0	64,0	61116	68358
23/64	0.3594	9.13	4-1/4	2-3/4	2-13/64	51123	57198
9,2 mm	0.3622		125,0	81,0	64,0	61117	68359
9,3 mm	0.3661		125,0	81,0	64,0	61118	68360
U	0.3680	9.35	4-1/4	2-3/4	2-13/64	51221	57199
9,4 mm	0.3701		125,0	81,0	64,0	61119	68361
9,5 mm	0.3740		125,0	81,0	64,0	61041	68288
*3/8	0.3750	9.53	4-1/4	2-3/4	2-13/64	51124	57200
V	0.3770	9.58	4-1/4	2-3/4	2-13/64	51222	57201
9,6 mm	0.3780		133,0	87,0	69,0	61120	68362
9,7 mm	0.3819		133,0	87,0	69,0	61121	68363
9,8 mm	0.3858		133,0	87,0	69,0	61122	68364
W	0.3860	9.80	4-1/2	2-7/8	2-19/64	51223	57202
9,9 mm	0.3898		133,0	87,0	69,0	61123	68365
25/64	0.3906	9.92	4-1/2	2-7/8	2-19/64	51125	57203
10,0 mm	0.3937		133,0	87,0	69,0	61043	68289
X	0.3970	10.08	4-1/2	2-7/8	2-19/64	51224	57204
10,2 mm	0.4016		133,0	87,0	69,0	61124	68366
Y	0.4040	10.26	4-1/2	2-7/8	2-19/64	51225	57205
13/32	0.4062	10.32	4-1/2	2-7/8	2-19/64	51126	57206
Z	0.4130	10.49	4-1/2	2-7/8	2-19/64	51226	57207
10,5 mm	0.4134		133,0	87,0	69,0	61045	68290
27/64	0.4219	10.72	4-1/2	2-7/8	2-19/64	51127	57208
11,0 mm	0.4331		142,0	94,0	75,0	61047	68291
7/16	0.4375	11.11	4-1/2	2-7/8	2-19/64	51128	57209
11,5 mm	0.4528		142,0	94,0	75,0	61049	68292
29/64	0.4531	11.51	4-3/4	3	2-13/32	51129	57210
15/32	0.4688	11.91	4-3/4	3	2-13/32	51130	57211
12,0 mm	0.4724		151,0	101,0	80,0	61051	68293
31/64	0.4844	12.30	4-3/4	3	2-13/32	51131	57212
1/2	0.5000	12.70	4-3/4	3	2-13/32	51132	57213

*Series 101 Set

TOLERANCES (inch)

DC = +0.0000/-0.0005

TOLERANCES (mm)

DC = +0,0000/-0,0127

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM



HARDENED STEELS

NON-FERROUS

PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

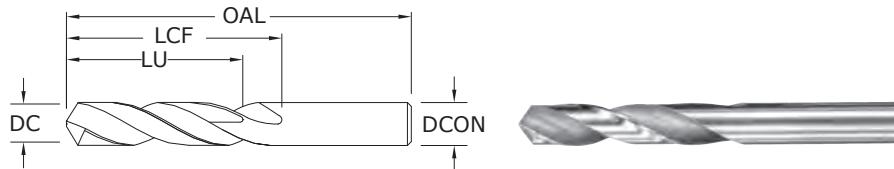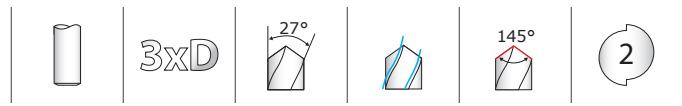

108M Plus
METRIC SERIES

TOLERANCES (mm)	CUTTING DIAMETER mm	OVERALL LENGTH OAL mm	FLUTE LENGTH LCF mm	CLEARED LENGTH LU mm	UNCOATED EDP NO.	Ti-NAMITE-A (AlTiN) EDP NO.
≤3 DIAMETER DC = +0,000/-0,010 DCON = h ₆	0,5	20,0	3,0	—	62001	68643
>3–6 DIAMETER DC = +0,000/-0,012 DCON = h ₆	0,55	21,0	3,5	—	62003	68644
	0,6	21,0	3,5	—	62005	68645
	0,65	22,0	4,0	—	62007	68646
>6–10 DIAMETER DC = +0,000/-0,015 DCON = h ₆	0,7	23,0	4,5	—	62009	68647
	0,75	23,0	4,5	—	62011	68648
	0,8	24,0	5,0	—	62013	68649
>10–18 DIAMETER DC = +0,000/-0,018 DCON = h ₆	0,85	24,0	5,0	—	62015	68650
	0,9	25,0	5,5	4,0	62017	68651
	0,95	25,0	5,5	4,0	62019	68652
	1,0	26,0	6,0	4,7	62021	68653
STEELS	1,05	26,0	6,0	4,7	62023	68654
STAINLESS STEELS	1,1	28,0	7,0	5,4	62025	68655
CAST IRON	1,15	28,0	7,0	5,4	62027	68656
HIGH TEMP ALLOYS	1,2	30,0	8,0	6,0	62029	68657
TITANIUM	1,25	30,0	8,0	6,0	62031	68658
HARDENED STEELS	1,3	30,0	8,0	6,0	62033	68659
NON-FERROUS	1,35	32,0	9,0	7,0	62035	68660
PLASTICS/COMPOSITES	1,4	32,0	9,0	7,0	62037	68661
	1,45	32,0	9,0	7,0	62039	68662
	1,5	32,0	9,0	7,0	62041	68663
	1,6	34,0	10,0	7,0	62043	68664
For patent information visit www.ksptpatents.com	1,7	34,0	10,0	7,0	62045	68665
	1,8	36,0	11,0	8,0	62047	68666
	1,9	36,0	11,0	8,0	62049	68667
	2,0	38,0	12,0	9,0	62051	68668
	2,1	38,0	12,0	9,0	62053	68669
	2,2	40,0	13,0	10,0	62055	68670
	2,3	40,0	13,0	10,0	62057	68671
	2,4	43,0	14,0	11,0	62059	68672
	2,5	43,0	14,0	11,0	62061	68673
	2,6	43,0	14,0	11,0	62063	68674
	2,7	46,0	16,0	12,0	62065	68675
	2,8	46,0	16,0	12,0	62067	68676

continued on next page

METRIC

Short Length Self Centering Drills • DIN 6539




3xD



108M Plus

METRIC SERIES

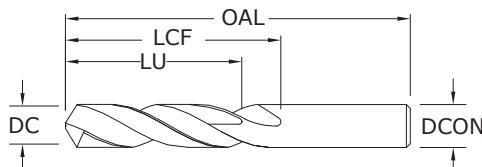

CONTINUED

CUTTING DIAMETER DC/DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO, UNCOATED	EDP NO, Ti-NAMITE-A (AITIN)
2,9	46,0	16,0	12,0	62069	68677
3,0	46,0	16,0	12,0	62071	68678
3,1	49,0	18,0	14,0	62073	68679
3,2	49,0	18,0	14,0	62075	68680
3,3	49,0	18,0	14,0	62077	68681
3,4	52,0	20,0	15,0	62079	68682
3,5	52,0	20,0	15,0	62081	68683
3,6	52,0	20,0	15,0	62083	68684
3,7	52,0	20,0	15,0	62085	68685
3,8	55,0	22,0	17,0	62087	68686
3,9	55,0	22,0	17,0	62089	68687
4,0	55,0	22,0	17,0	62091	68688
4,1	55,0	22,0	17,0	62093	68689
4,2	55,0	22,0	17,0	62095	68690
4,3	58,0	24,0	18,0	62097	68691
4,4	58,0	24,0	18,0	62099	68692
4,5	58,0	24,0	18,0	62101	68693
4,6	58,0	24,0	18,0	62103	68694
4,7	58,0	24,0	18,0	62105	68695
4,8	62,0	26,0	20,0	62107	68696
4,9	62,0	26,0	20,0	62109	68697
5,0	62,0	26,0	20,0	62111	68698
5,1	62,0	26,0	20,0	62113	68699
5,2	62,0	26,0	20,0	62115	68700
5,3	62,0	26,0	20,0	62117	68701
5,4	66,0	28,0	21,0	62119	68702
5,5	66,0	28,0	21,0	62121	68703
5,6	66,0	28,0	21,0	62123	68704
5,7	66,0	28,0	21,0	62125	68705
5,8	66,0	28,0	21,0	62127	68706
5,9	66,0	28,0	21,0	62129	68707
6,0	66,0	28,0	21,0	62131	68708

continued on next page

TOLERANCES (mm)

≤3 DIAMETER
DC = +0,000/-0,010
DCON = h₆

>3–6 DIAMETER
DC = +0,000/-0,012
DCON = h₆



>6–10 DIAMETER
DC = +0,000/-0,015
DCON = h₆

>10–16 DIAMETER
DC = +0,000/-0,018
DCON = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

Short Length Self Centering Drills • DIN 6539

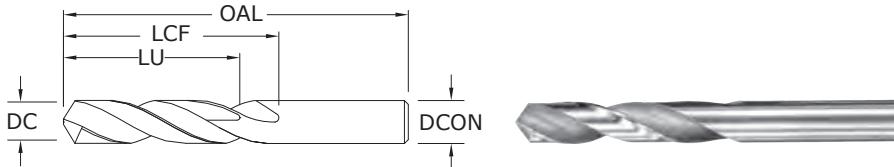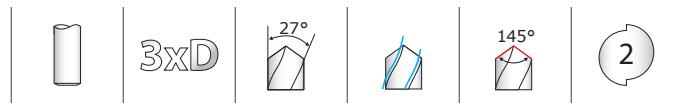

108M Plus
METRIC SERIES

TOLERANCES (mm)

≤3 DIAMETER
DC = +0,000/-0,010
DCON = h₆

>3–6 DIAMETER
DC = +0,000/-0,012
DCON = h₆

>6–10 DIAMETER
DC = +0,000/-0,015
DCON = h₆

>10–16 DIAMETER
DC = +0,000/-0,018
DCON = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC/DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	UNCOATED	EDP NO, Ti-NAMITE-A (AITiN)
6,1	70,0	31,0	23,0	62133	68709
6,2	70,0	31,0	23,0	62135	68710
6,3	70,0	31,0	23,0	62137	68711
6,4	70,0	31,0	23,0	62139	68712
6,5	70,0	31,0	23,0	62141	68713
6,8	70,0	31,0	23,0	62142	68603
7,0	74,0	34,0	25,0	62143	68718
7,5	74,0	34,0	25,0	62145	68723
7,8	79,0	37,0	27,0	62146	68604
8,0	79,0	37,0	27,0	62147	68728
8,5	79,0	37,0	27,0	62149	68733
9,0	84,0	40,0	29,0	62151	68738
9,5	84,0	40,0	29,0	62153	68743
9,8	89,0	43,0	31,0	62154	68606
10,0	89,0	43,0	31,0	62155	68748
10,2	89,0	43,0	31,0	62156	68607
10,5	89,0	43,0	31,0	62066	68753
11,0	95,0	47,0	33,0	62157	68758
11,5	95,0	47,0	33,0	62084	68763
11,8	102,0	51,0	35,0	62158	68608
12,0	102,0	51,0	35,0	62159	68768
12,5	102,0	51,0	35,0	62102	68773
13,0	102,0	51,0	35,0	62112	68778
13,8	107,0	54,0	37,0	62164	68609
14,0	107,0	54,0	37,0	62116	68780
14,5	111,0	56,0	38,0	62166	68611
14,8	111,0	56,0	38,0	62167	68612
15,0	111,0	56,0	38,0	62168	68613
15,8	115,0	58,0	38,0	62170	68614
16,0	115,0	58,0	38,0	62171	68616

CONTINUED

FRACTIONAL

2 Flute Drills

Series 101 Fractional	Hardness	Vc (sfm)	DC • in							
			1/64	1/32	1/16	1/8	1/4	3/8	1/2	
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 175 \text{ Bhn}$ or $\leq 7 \text{ HRc}$	265	RPM	64787	32394	16197	8098	4049	2699	2025
		(212-318)	Fr	0.00021	0.0004	0.0008	0.0017	0.0033	0.0050	0.0067
			Feed (ipm)	13.5	13.5	13.5	13.5	13.5	13.5	13.5
	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	125	RPM	30560	15280	7640	3820	1910	1273	955
		(100-150)	Fr	0.00020	0.0004	0.0008	0.0016	0.0031	0.0047	0.0063
			Feed (ipm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0
	$\leq 425 \text{ Bhn}$ or $\leq 45 \text{ HRc}$	85	RPM	20781	10390	5195	2598	1299	866	649
		(68-102)	Fr	0.00011	0.0002	0.0004	0.0008	0.0017	0.0025	0.0034
			Feed (ipm)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	230	RPM	56230	28115	14058	7029	3514	2343	1757
		(184-276)	Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
			Feed (ipm)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	145	RPM	35450	17725	8862	4431	2216	1477	1108
		(116-174)	Fr	0.00019	0.0004	0.0007	0.0015	0.0030	0.0045	0.0060
			Feed (ipm)	6.6	6.6	6.6	6.6	6.6	6.6	6.6
	$\leq 450 \text{ Bhn}$ or $\leq 48 \text{ HRc}$	60	RPM	14669	7334	3667	1834	917	611	458
		(48-72)	Fr	0.00008	0.0002	0.0003	0.0007	0.0013	0.0020	0.0026
			Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	$\leq 250 \text{ Bhn}$ or $\leq 24 \text{ HRc}$	210	RPM	51341	25670	12835	6418	3209	2139	1604
		(168-252)	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
			Feed (ipm)	7.7	7.7	7.7	7.7	7.7	7.7	7.7
	$\leq 330 \text{ Bhn}$ or $\leq 36 \text{ HRc}$	110	RPM	26893	13446	6723	3362	1681	1121	840
		(88-132)	Fr	0.00009	0.0002	0.0004	0.0007	0.0015	0.0022	0.0030
			Feed (ipm)	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	65	RPM	15891	7946	3973	1986	993	662	497
		(52-78)	Fr	0.00010	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	55	RPM	13446	6723	3362	1681	840	560	420
		(44-66)	Fr	0.00010	0.0002	0.0004	0.0008	0.0015	0.0023	0.0031
			Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	280	RPM	68454	34227	17114	8557	4278	2852	2139
		(224-336)	Fr	0.00026	0.0005	0.0010	0.0020	0.0041	0.0061	0.0082
			Feed (ipm)	17.5	17.5	17.5	17.5	17.5	17.5	17.5
	$\leq 330 \text{ Bhn}$ or $\leq 36 \text{ HRc}$	250	RPM	61120	30560	15280	7640	3820	2547	1910
		(200-300)	Fr	0.00025	0.0005	0.0010	0.0020	0.0041	0.0061	0.0081
			Feed (ipm)	15.5	15.5	15.5	15.5	15.5	15.5	15.5

continued on next page

FRACTIONAL 2 Flute Drills

Series 101 Fractional		Hardness	Vc (sfm)	DC • in							
				1/64	1/32	1/16	1/8	1/4	3/8	1/2	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb (432-648)	540	RPM	132019	66010	33005	16502	8251	5501	4126
				Fr	0.00030	0.0006	0.0012	0.0024	0.0048	0.0073	0.0097
		≤ 150 Bhn or ≤ 7 HRc (364-546)	455	RPM	111238	55619	27810	13905	6952	4635	3476
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass			Fr	0.00031	0.0006	0.0013	0.0025	0.0050	0.0076	0.0101
		≤ 140 Bhn or ≤ 3 HRc (152-228)	190	RPM	46451	23226	11613	5806	2903	1935	1452
				Feed (ipm)	40.0	40.0	40.0	40.0	40.0	40.0	40.0
S	PLASTICS Polycarbonate, PVC	≤ 200 Bhn or ≤ 23 HRc (140-210)	175	RPM	42784	21392	10696	5348	2674	1783	1337
				Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0036	0.0048
				Feed (ipm)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	500	RPM	122240	61120	30560	15280	7640	5093	3820	
				Fr	0.00031	0.0006	0.0012	0.0025	0.0050	0.0075	0.0099
				Feed (ipm)	38.0	38.0	38.0	38.0	38.0	38.0	38.0
H	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 220 Bhn or ≤ 19 HRc (32-48)	40	RPM	9779	4890	2445	1222	611	407	306
				Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0025	0.0033
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 320 Bhn or ≤ 34 HRc (20-30)	25	RPM	6112	3056	1528	764	382	255	191
				Fr	0.00010	0.0002	0.0004	0.0008	0.0016	0.0024	0.0031
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 425 Bhn or ≤ 45 HRc (16-24)	20	RPM	4890	2445	1222	611	306	204	153
				Fr	0.00004	0.0001	0.0002	0.0003	0.0007	0.0010	0.0013
				Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc (68-102)	85	RPM	20781	10390	5195	2598	1299	866	649
				Fr	0.00020	0.0004	0.0008	0.0016	0.0032	0.0049	0.0065
				Feed (ipm)	4.2	4.2	4.2	4.2	4.2	4.2	4.2
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 350 Bhn or ≤ 38 HRc (52-78)	65	RPM	15891	7946	3973	1986	993	662	497
				Fr	0.00011	0.0002	0.0004	0.0009	0.0017	0.0026	0.0034
				Feed (ipm)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 440 Bhn or ≤ 47 HRc (44-66)	55	RPM	13446	6723	3362	1681	840	560	420
				Fr	0.00010	0.0002	0.0004	0.0008	0.0015	0.0023	0.0031
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 250 Bhn or ≤ 24 HRc (68-102)	85	RPM	20781	10390	5195	2598	1299	866	649
				Fr	0.00011	0.0002	0.0004	0.0009	0.0018	0.0027	0.0035
				Feed (ipm)	2.3	2.3	2.3	2.3	2.3	2.3	2.3
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc (44-66)	55	RPM	13446	6723	3362	1681	840	560	420
				Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0017
				Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc (32-48)	40	RPM	9779	4890	2445	1222	611	407	306
				Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0012	0.0016
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric		Hardness	Vc (m/min)	DC • mm							
				1	3	6	8	10	12	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc (65-97)	81	RPM	25690	8563	4282	3211	2569	2141	1606
				Fr	0.014	0.041	0.082	0.109	0.136	0.163	0.218
				Feed (mm/min)	350	350	350	350	350	350	350
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 300 Bhn or ≤ 32 HRc (30-46)	38	RPM	12118	4039	2020	1515	1212	1010	757
				Fr	0.012	0.036	0.072	0.096	0.120	0.144	0.191
				Feed (mm/min)	145	145	145	145	145	145	145
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 425 Bhn or ≤ 45 HRc (21-31)	26	RPM	8240	2747	1373	1030	824	687	515
				Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
				Feed (mm/min)	55	55	55	55	55	55	55
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (56-84)	70	RPM	22297	7432	3716	2787	2230	1858	1394
				Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
				Feed (mm/min)	270	270	270	270	270	270	270
	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc (35-53)	44	RPM	14057	4686	2343	1757	1406	1171	879
				Fr	0.012	0.036	0.073	0.097	0.121	0.145	0.194
				Feed (mm/min)	170	170	170	170	170	170	170
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 450 Bhn or ≤ 48 HRc (15-22)	18	RPM	5816	1939	969	727	582	485	364
				Fr	0.005	0.015	0.030	0.040	0.050	0.060	0.080
				Feed (mm/min)	29	29	29	29	29	29	29
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 250 Bhn or ≤ 24 HRc (51-77)	64	RPM	20358	6786	3393	2545	2036	1696	1272
				Fr	0.010	0.029	0.059	0.079	0.098	0.118	0.157
				Feed (mm/min)	200	200	200	200	200	200	200
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 330 Bhn or ≤ 36 HRc (27-40)	34	RPM	10664	3555	1777	1333	1066	889	666
				Fr	0.006	0.017	0.034	0.045	0.056	0.068	0.090
				Feed (mm/min)	60	60	60	60	60	60	60
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc (16-24)	20	RPM	6301	2100	1050	788	630	525	394
				Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
				Feed (mm/min)	45	45	45	45	45	45	45
	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc (13-20)	17	RPM	5332	1777	889	666	533	444	333
				Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
				Feed (mm/min)	35	35	35	35	35	35	35
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc (68-102)	85	RPM	27144	9048	4524	3393	2714	2262	1696
				Fr	0.016	0.049	0.097	0.130	0.162	0.195	0.259
				Feed (mm/min)	440	440	440	440	440	440	440
		≤ 330 Bhn or ≤ 36 HRc (61-91)	76	RPM	24235	8078	4039	3029	2424	2020	1515
				Fr	0.017	0.050	0.099	0.132	0.165	0.198	0.264
				Feed (mm/min)	400	400	400	400	400	400	400

continued on next page

2 Flute Drills

Short Length Self Centering Drills • DIN 6539

Series 101M, 108M Metric	Vc (m/min)	Hardness	DC • mm							
			1	3	6	8	10	12	16	
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb (132-198)	165	RPM	52348	17449	8725	6544	5235	4362	3272
			Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.319
			Feed (mm/min)	1045	1045	1045	1045	1045	1045	1045
	≤ 150 Bhn or ≤ 7 HRc (111-166)	139	RPM	44108	14703	7351	5514	4411	3676	2757
			Fr	0.020	0.060	0.120	0.160	0.200	0.239	0.319
			Feed (mm/min)	880	880	880	880	880	880	880
COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc (46-69)	58	RPM	18419	6140	3070	2302	1842	1535	1151
			Fr	0.010	0.030	0.060	0.080	0.100	0.121	0.161
			Feed (mm/min)	185	185	185	185	185	185	185
	≤ 200 Bhn or ≤ 23 HRc (43-64)	53	RPM	16965	5655	2827	2121	1696	1414	1060
			Fr	0.010	0.030	0.060	0.080	0.100	0.120	0.160
			Feed (mm/min)	170	170	170	170	170	170	170
PLASTICS Polycarbonate, PVC	152 (122-183)	RPM	48471	16157	8078	6059	4847	4039	3029	
		Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320	
		Feed (mm/min)	970	970	970	970	970	970	970	
	≤ 220 Bhn or ≤ 19 HRc (10-15)	12	RPM	3878	1293	646	485	388	323	242
			Fr	0.006	0.019	0.039	0.052	0.064	0.077	0.103
			Feed (mm/min)	25	25	25	25	25	25	25
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 320 Bhn or ≤ 34 HRc (6-9)	8	RPM	2424	808	404	303	242	202	151
			Fr	0.006	0.019	0.037	0.050	0.062	0.074	0.099
			Feed (mm/min)	15	15	15	15	15	15	15
	≤ 425 Bhn or ≤ 45 HRc (5-7)	6	RPM	1939	646	323	242	194	162	121
			Fr	0.005	0.015	0.031	0.041	0.052	0.062	0.083
			Feed (mm/min)	10	10	10	10	10	10	10
TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 275 Bhn or ≤ 28 HRc (21-31)	26	RPM	8240	2747	1373	1030	824	687	515
			Fr	0.013	0.040	0.080	0.107	0.133	0.160	0.214
			Feed (mm/min)	110	110	110	110	110	110	110
	≤ 350 Bhn or ≤ 38 HRc (16-24)	20	RPM	6301	2100	1050	788	630	525	394
			Fr	0.007	0.021	0.043	0.057	0.071	0.086	0.114
			Feed (mm/min)	45	45	45	45	45	45	45
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 440 Bhn or ≤ 47 HRc (13-20)	17	RPM	5332	1777	889	666	533	444	333
			Fr	0.007	0.020	0.039	0.053	0.066	0.079	0.105
			Feed (mm/min)	35	35	35	35	35	35	35
	≤ 250 Bhn or ≤ 24 HRc (21-31)	26	RPM	8240	2747	1373	1030	824	687	515
			Fr	0.007	0.020	0.040	0.053	0.067	0.080	0.107
			Feed (mm/min)	55	55	55	55	55	55	55
H	≤ 375 Bhn or ≤ 40 HRc (13-20)	17	RPM	5332	1777	889	666	533	444	333
			Fr	0.003	0.010	0.020	0.027	0.034	0.041	0.054
			Feed (mm/min)	18	18	18	18	18	18	18
	≤ 475 Bhn or ≤ 50 HRc (10-15)	12	RPM	3878	1293	646	485	388	323	242
			Fr	0.003	0.009	0.019	0.025	0.031	0.037	0.050
			Feed (mm/min)	12	12	12	12	12	12	12

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


Straight Flute Drills • Metric: DIN 6539



3xD

**106**

FRACTIONAL & METRIC SERIES

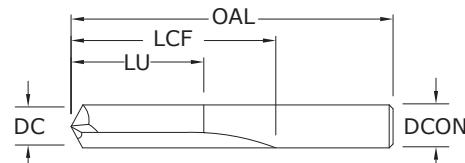

CUTTING DIAMETER DC / DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		TOLERANCES (inch)
						UNCOATED	TI-NAMITE-A (AlTiN)	
1,0 mm	0.0394		26,0	6,0	4,5	66001	66002	DC = +0,0000/-0,0005 DCON = h ₆
#60	0.0400	1.02	1-1/2	1/2	13/32	56060	56269	
#59	0.0410	1.04	1-1/2	1/2	13/32	56059	56268	
#58	0.0420	1.07	1-1/2	1/2	13/32	56058	56267	
#57	0.0430	1.09	1-1/2	1/2	13/32	56057	56266	
#56	0.0465	1.18	1-1/2	1/2	13/32	56056	56265	
3/64	0.0469	1.19	1-1/2	1/2	13/32	56103	56135	
#55	0.0520	1.32	1-1/2	1/2	13/32	56055	56264	
#54	0.0550	1.40	1-1/2	1/2	13/32	56054	56263	
1,5 mm	0.0591		32,0	9,0	7,0	66003	66004	
#53	0.0595	1.51	1-1/2	1/2	13/32	56053	56262	
1/16	0.0625	1.59	1-1/2	5/8	1/2	56104	56136	
#52	0.0635	1.61	1-11/16	11/16	35/64	56052	56261	
#51	0.0670	1.70	1-11/16	11/16	35/64	56051	56260	
#50	0.0700	1.78	1-11/16	11/16	35/64	56050	56259	
#49	0.0730	1.85	1-11/16	11/16	35/64	56049	56258	
#48	0.0760	1.93	1-11/16	11/16	35/64	56048	56257	
5/64	0.0781	1.98	1-11/16	11/16	35/64	56105	56137	
#47	0.0785	1.99	1-3/4	3/4	39/64	56047	56256	
2,0 mm	0.0787		38,0	12,0	9,0	66005	66006	
#46	0.0810	2.06	1-3/4	3/4	39/64	56046	56255	
#45	0.0820	2.08	1-3/4	3/4	39/64	56045	56254	
#44	0.0860	2.18	1-3/4	3/4	39/64	56044	56253	
#43	0.0890	2.26	1-3/4	3/4	39/64	56043	56252	
#42	0.0935	2.37	1-3/4	3/4	39/64	56042	56251	
3/32	0.0938	2.38	1-3/4	3/4	39/64	56106	56138	
#41	0.0960	2.44	1-13/16	13/16	21/32	56041	56250	
#40	0.0980	2.49	1-13/16	13/16	21/32	56040	56249	
2,5 mm	0.0984		43,0	14,0	11,0	66007	66008	
#39	0.0995	2.53	1-13/16	13/16	21/32	56039	56248	
#38	0.1015	2.58	1-13/16	13/16	21/32	56038	56247	
#37	0.1040	2.64	1-13/16	13/16	21/32	56037	56246	
#36	0.1065	2.71	1-13/16	13/16	21/32	56036	56245	
7/64	0.1094	2.78	1-13/16	13/16	21/32	56107	56139	
#35	0.1100	2.79	1-7/8	7/8	45/64	56035	56244	
#34	0.1110	2.82	1-7/8	7/8	45/64	56034	56243	

continued on next page

TOLERANCES (inch)

DC = +0,0000/-0,0005
DCON = h₆

TOLERANCES (mm)

DC = +0,0000/-0,0127
DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent information visit www.ksptpatents.com

Straight Flute Drills • Metric: DIN 6539

106

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC/DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		CONTINUED
						UNCOATED	Ti-NAMITE-A (AITiN)	
#33	0.1130	2.87	1-7/8	7/8	45/64	56033	56242	
#32	0.1160	2.95	1-7/8	7/8	45/64	56032	56241	
3,0 mm	0.1181		46,0	16,0	12,0	66009	66010	
#31	0.1200	3.05	1-7/8	7/8	45/64	56031	56240	
1/8	0.1250	3.18	1-7/8	7/8	45/64	56108	56140	
#30	0.1285	3.26	1-15/16	15/16	3/4	56030	56239	
#29	0.1360	3.45	1-15/16	15/16	3/4	56029	56238	
3,5 mm	0.1378		52,0	20,0	15,0	66011	66012	
#28	0.1405	3.57	1-15/16	15/16	3/4	56028	56237	
9/64	0.1406	3.57	1-15/16	15/16	3/4	56109	56141	
#27	0.1440	3.66	2-1/16	1	51/64	56027	56236	
#26	0.1470	3.73	2-1/16	1	51/64	56026	56235	
#25	0.1495	3.80	2-1/16	1	51/64	56025	56234	
#24	0.1520	3.86	2-1/16	1	51/64	56024	56233	
#23	0.1540	3.91	2-1/16	1	51/64	56023	56232	
5/32	0.1562	3.97	2-1/16	1	51/64	56110	56142	
#22	0.1570	3.99	2-1/8	1-1/16	55/64	56022	56231	
4,0 mm	0.1575		55,0	22,0	17,0	66013	66014	
#21	0.1590	4.04	2-1/8	1-1/16	55/64	56021	56230	
#20	0.1610	4.09	2-1/8	1-1/16	55/64	56020	56229	
#19	0.1660	4.22	2-1/8	1-1/16	55/64	56019	56228	
#18	0.1695	4.31	2-1/8	1-1/16	55/64	56018	56227	
11/64	0.1719	4.37	2-1/8	1-1/16	55/64	56111	56143	
#17	0.1730	4.39	2-3/16	1-1/8	29/32	56017	56226	
#16	0.1770	4.50	2-3/16	1-1/8	29/32	56016	56225	
4,5 mm	0.1772		58,0	24,0	18,0	66015	66016	
#15	0.1800	4.57	2-3/16	1-1/8	29/32	56015	56224	
#14	0.1820	4.62	2-3/16	1-1/8	29/32	56014	56223	
#13	0.1850	4.70	2-3/16	1-1/8	29/32	56013	56222	
3/16	0.1875	4.76	2-3/16	1-1/8	29/32	56112	56144	
#12	0.1890	4.80	2-3/16	1-1/8	29/32	56012	56221	
#11	0.1910	4.85	2-3/16	1-1/8	29/32	56011	56220	
#10	0.1935	4.91	2-3/16	1-1/8	29/32	56010	56219	
#9	0.1960	4.98	2-1/4	1-3/16	61/64	56009	56218	
5,0 mm	0.1969		62,0	26,0	20,0	66017	66018	
#8	0.1990	5.05	2-1/4	1-3/16	61/64	56008	56217	
#7	0.2010	5.11	2-1/4	1-3/16	61/64	56007	56216	
13/64	0.2031	5.16	2-1/4	1-3/16	61/64	56113	56145	
#6	0.2040	5.18	2-3/8	1-1/4	1	56006	56215	
#5	0.2055	5.22	2-3/8	1-1/4	1	56005	56214	
#4	0.2090	5.31	2-3/8	1-1/4	1	56004	56213	
#3	0.2130	5.41	2-3/8	1-1/4	1	56003	56212	
5,5 mm	0.2165		66,0	28,0	21,0	66019	66020	
7/32	0.2188	5.56	2-3/8	1-1/4	1	56114	56146	
#2	0.2210	5.61	2-7/16	1-5/16	1-3/64	56002	56211	
#1	0.2280	5.79	2-7/16	1-5/16	1-3/64	56001	56210	

continued on next page


Straight Flute Drills • Metric: DIN 6539



3xD

**106**

FRACTIONAL & METRIC SERIES

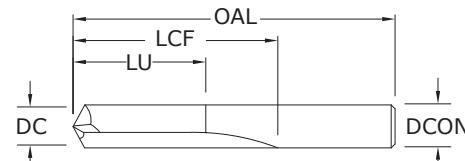

CUTTING DIAMETER DC/DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		TOLERANCES (inch)
						UNCOATED	Ti-NAMITE-A (AITIN)	
15/64	0.2344	5.95	2-7/16	1-5/16	1-3/64	56115	56147	DC = +0.0000/-0.0005 DCON = h ₆
6,0 mm	0.2362		66,0	28,0	21,0	66021	66045	
1/4	0.2500	6.35	2-1/2	1-3/8	1-7/64	56116	56148	
6,5 mm	0.2559		70,0	31,0	23,0	66022	66046	
17/64	0.2656	6.75	2-5/8	1-7/16	1-7/64	56117	56149	
7,0 mm	0.2756		74,0	34,0	25,0	66023	66024	
9/32	0.2812	7.14	2-11/16	1-1/2	1-13/64	56118	56150	
7,5 mm	0.2953		74,0	34,0	25,0	66025	66026	
19/64	0.2969	7.54	2-3/4	1-9/16	1-1/4	56119	56151	
5/16	0.3125	7.94	2-13/16	1-5/8	1-19/64	56120	56152	
8,0 mm	0.3150		79,0	37,0	27,0	66027	66028	
21/64	0.3281	8.33	2-15/16	1-11/16	1-23/64	56121	56153	
8,5 mm	0.3346		79,0	37,0	27,0	66029	66030	
11/32	0.3438	8.73	3	1-11/16	1-23/64	56122	56154	
9,0 mm	0.3543		84,0	40,0	29,0	66031	66032	
23/64	0.3594	9.13	3-1/16	1-3/4	1-13/32	56123	56155	
9,5 mm	0.3740		84,0	40,0	29,0	66033	66034	
3/8	0.3750	9.53	3-1/8	1-13/16	1-29/64	56124	56156	
25/64	0.3906	9.92	3-1/4	1-7/8	1-1/2	56125	56157	
10,0 mm	0.3937		89,0	43,0	31,0	66035	66036	
13/32	0.4062	10.32	3-5/16	1-15/16	1-35/64	56126	56158	
10,5 mm	0.4134		89,0	43,0	31,0	66037	66038	
27/64	0.4219	10.72	3-3/8	2	1-39/64	56127	56159	
11,0 mm	0.4331		95,0	47,0	33,0	66039	66040	
7/16	0.4375	11.11	3-7/16	2-1/16	1-21/32	56128	56160	
11,5 mm	0.4528		95,0	47,0	33,0	66041	66042	
29/64	0.4531	11.51	3-9/16	2-1/8	1-45/64	56129	56161	
15/32	0.4688	11.91	3-5/8	2-1/8	1-45/64	56130	56162	
12,0 mm	0.4724		102,0	51,0	35,0	66043	66044	
31/64	0.4844	12.30	3-11/16	2-3/16	1-3/4	56131	56163	
1/2	0.5000	12.70	3-3/4	2-1/4	1-51/64	56132	56164	

TOLERANCES (inch)

DC = +0.0000/-0.0005
DCON = h₆

TOLERANCES (mm)

DC = +0.0000/-0.0127
DCON = h₆

STEELS

CAST IRON

HARDENED STEELS

For patent information visit
www.ksptpatents.com

FRACTIONAL & METRIC
Straight Flute Drills

Series 106 Fractional		Hardness	Vc (sfm)	DC • in						
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100			1/16	1/8	3/16	1/4	3/8	1/2	
	≤ 500 Bhn or ≤ 52 HRc	60 (48-72)	RPM Fr Feed (ipm)	3667 0.0004 1.3	1834 0.0007 1.3	1222 0.0011 1.3	917 0.0014 1.3	611 0.0021 1.3	458 0.0028 1.3	
K	CAST IRONS Gray, Malleable, Ductile	≤ 615 Bhn or ≤ 58 HRc	50 (40-60)	RPM Fr Feed (ipm)	3056 0.0004 1.2	1528 0.0008 1.2	1019 0.0012 1.2	764 0.0016 1.2	509 0.0024 1.2	382 0.0031 1.2
		≤ 220 Bhn or ≤ 19 HRc	250 (200-300)	RPM Fr Feed (ipm)	15280 0.0010 15.5	7640 0.0020 15.5	5093 0.0030 15.5	3820 0.0041 15.5	2547 0.0061 15.5	1910 0.0081 15.5
		≤ 330 Bhn or ≤ 36 HRc	195 (156-234)	RPM Fr Feed (ipm)	11918 0.0010 12.0	5959 0.0020 12.0	3973 0.0030 12.0	2980 0.0040 12.0	1986 0.0060 12.0	1490 0.0081 12.0
		≤ 500 Bhn or ≤ 52 HRc	60 (48-72)	RPM Fr Feed (ipm)	3667 0.0004 1.3	1834 0.0007 1.3	1222 0.0011 1.3	917 0.0014 1.3	611 0.0021 1.3	458 0.0028 1.3
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 615 Bhn or ≤ 58 HRc	50 (40-60)	RPM Fr Feed (ipm)	3056 0.0004 1.2	1528 0.0008 1.2	1019 0.0012 1.2	764 0.0016 1.2	509 0.0024 1.2	382 0.0031 1.2

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Series 106M Metric		Hardness	Vc (m/min)	DC • mm						
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100			1	3	6	8	10	12	
	≤ 500 Bhn or ≤ 52 HRc	18 (15-22)	RPM Fr Feed (mm/min)	5816 0.006 34	1939 0.018 34	969 0.035 34	727 0.047 34	582 0.058 34	485 0.070 34	
K	CAST IRONS Gray, Malleable, Ductile	≤ 615 Bhn or ≤ 58 HRc	15 (12-18)	RPM Fr Feed (mm/min)	4847 0.006 27	1616 0.017 27	808 0.033 27	606 0.045 27	485 0.056 27	404 0.067 27
		≤ 220 Bhn or ≤ 19 HRc	76 (61-91)	RPM Fr Feed (mm/min)	24235 0.016 395	8078 0.048 395	4039 0.096 395	3029 0.128 395	2424 0.160 395	2020 0.192 395
		≤ 330 Bhn or ≤ 36 HRc	59 (48-71)	RPM Fr Feed (mm/min)	18904 0.016 305	6301 0.048 305	3151 0.096 305	2363 0.128 305	1890 0.160 305	1575 0.192 305
		≤ 500 Bhn or ≤ 52 HRc	18 (15-22)	RPM Fr Feed (mm/min)	5816 0.006 34	1939 0.018 34	969 0.035 34	727 0.047 34	582 0.058 34	485 0.070 34
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 615 Bhn or ≤ 58 HRc	15 (12-18)	RPM Fr Feed (mm/min)	4847 0.006 27	1616 0.017 27	808 0.033 27	606 0.045 27	485 0.056 27	404 0.067 27

Bhn (Brinell) HRc (Rockwell C)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

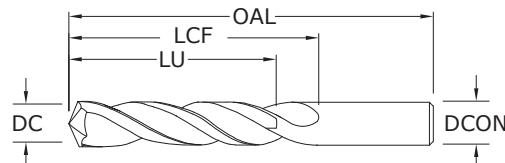

CUTTING DIAMETER DC/DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		TOLERANCES (inch)
						UNCOATED	Ti-NAMITE-A (AlTiN)	
#36	0.1065	2.71	2-1/4	1-1/4	1	53036	58011	DC = +0,0000/-0,0005
7/64	0.1094	2.78	2-1/4	1-1/4	1	53107	58012	DCON = h ₆
#35	0.1100	2.79	2-1/4	1-1/4	1	53035	58013	
#34	0.1110	2.82	2-1/4	1-1/4	1	53034	58014	
#33	0.1130	2.87	2-1/4	1-1/4	1	53033	58015	
#32	0.1160	2.95	2-1/4	1-1/4	1	53032	58016	
3,0 mm	0.1181		46,0	16,0	12,0	63000	68965	
#31	0.1200	3.05	2-1/4	1-1/4	1	53031	58017	
3,1 mm	0.1220		49,0	18,0	14,0	63044	68966	
1/8	0.1250	3.18	2-1/4	1-1/4	1	53108	58018	
3,2 mm	0.1260		49,0	18,0	14,0	63045	68967	
#30	0.1285	3.26	2-1/4	1-1/4	1	53030	58019	
3,3 mm	0.1299		49,0	18,0	14,0	63001	68968	
3,4 mm	0.1339		52,0	20,0	15,0	63046	68969	
#29	0.1360	3.45	2-1/2	1-3/8	1-7/64	53029	58020	
3,5 mm	0.1378		52,0	20,0	15,0	63002	68970	
#28	0.1405	3.57	2-1/2	1-3/8	1-7/64	53028	58021	
9/64	0.1406	3.57	2-1/2	1-3/8	1-7/64	53109	58022	
3,6 mm	0.1417		52,0	20,0	15,0	63047	68971	
#27	0.1440	3.66	2-1/2	1-3/8	1-7/64	53027	58023	
3,7 mm	0.1457		52,0	20,0	15,0	63003	68972	
#26	0.1470	3.73	2-1/2	1-3/8	1-7/64	53026	58024	
#25	0.1495	3.80	2-1/2	1-3/8	1-7/64	53025	58025	
3,8 mm	0.1496		55,0	22,0	17,0	63048	68973	
#24	0.1520	3.86	2-1/2	1-3/8	1-7/64	53024	58026	
3,9 mm	0.1535		55,0	22,0	17,0	63049	68974	
#23	0.1540	3.91	2-1/2	1-3/8	1-7/64	53023	58027	
5/32	0.1562	3.97	2-1/2	1-3/8	1-7/64	53110	58028	
#22	0.1570	3.99	2-1/2	1-3/8	1-7/64	53022	58029	
4,0 mm	0.1575		55,0	22,0	17,0	63004	68975	
#21	0.1590	4.04	2-1/2	1-3/8	1-7/64	53021	58030	
#20	0.1610	4.09	2-1/2	1-3/8	1-7/64	53020	58031	
4,1 mm	0.1614		55,0	22,0	17,0	63050	68976	
4,2 mm	0.1654		55,0	22,0	17,0	63005	68977	
#19	0.1660	4.22	2-3/4	1-5/8	1-19/64	53019	58032	
4,3 mm	0.1693		58,0	24,0	18,0	63051	68978	
#18	0.1695	4.31	2-3/4	1-5/8	1-19/64	53018	58033	
11/64	0.1719	4.37	2-3/4	1-5/8	1-19/64	53111	58034	
#17	0.1730	4.39	2-3/4	1-5/8	1-19/64	53017	58035	
4,4 mm	0.1732		58,0	24,0	18,0	63052	68979	

continued on next page

TOLERANCES (mm)

DC = +0,0000/-0,0012
DCON = h₆

TOLERANCES (inch)

DC = +0,0000/-0,0012
DCON = h₆

- STEELS
- CAST IRON
- HARDENED STEELS
- NON-FERROUS

For patent information visit
www.ksptpatents.com

3 Flute Drills • Metric: DIN 6539**103**

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC/DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		CONTINUED
						UNCOATED	Ti-NAMITE-A (AITiN)	
#16	0.1770	4.50	2-3/4	1-5/8	1-19/64	53016	58036	
4,5 mm	0.1772		58,0	24,0	18,0	63006	68980	
#15	0.1800	4.57	2-3/4	1-5/18	1-19/64	53015	58037	
4,6 mm	0.1811		58,0	24,0	18,0	63053	68981	
#14	0.1820	4.62	2-3/4	1-5/8	1-19/64	53014	58038	
#13	0.1850	4.70	2-3/4	1-5/8	1-19/64	53013	58039	
4,7 mm	0.1850		58,0	24,0	18,0	63054	68982	
3/16	0.1875	4.76	2-3/4	1-5/8	1-19/64	53112	58040	
#12	0.1890	4.80	2-3/4	1-5/8	1-19/64	53012	58041	
4,8 mm	0.1890		62,0	26,0	20,0	63055	68983	
#11	0.1910	4.85	2-3/4	1-5/8	1-19/64	53011	58042	
4,9 mm	0.1929		62,0	26,0	20,0	63056	68984	
#10	0.1935	4.91	2-3/4	1-5/8	1-19/64	53010	58043	
#9	0.1960	4.98	3	1-3/4	1-13/32	53009	58044	
5,0 mm	0.1969		62,0	26,0	20,0	63007	68985	
#8	0.1990	5.05	3	1-3/4	1-13/32	53008	58045	
5,1 mm	0.2008		62,0	26,0	20,0	63057	68986	
#7	0.2010	5.11	3	1-3/4	1-13/32	53007	58046	
13/64	0.2031	5.16	3	1-3/4	1-13/32	53113	58047	
#6	0.2040	5.18	3	1-3/4	1-13/32	53006	58048	
5,2 mm	0.2047		62,0	26,0	20,0	63008	68987	
#5	0.2055	5.22	3	1-3/4	1-13/32	53005	58049	
5,3 mm	0.2087		62,0	26,0	20,0	63058	68988	
#4	0.2090	5.31	3	1-3/4	1-13/32	53004	58050	
5,4 mm	0.2126		66,0	28,0	21,0	63059	68989	
#3	0.2130	5.41	3	1-3/4	1-13/32	53003	58051	
5,5 mm	0.2165		66,0	28,0	21,0	63009	68990	
7/32	0.2188	5.56	3	1-3/4	1-13/32	53114	58052	
5,6 mm	0.2205		66,0	28,0	21,0	63060	68991	
#2	0.2210	5.61	3	1-3/4	1-13/32	53002	58053	
5,7 mm	0.2244		66,0	28,0	21,0	63061	68992	
#1	0.2280	5.79	3	1-3/4	1-13/32	53001	58054	
5,8 mm	0.2283		66,0	28,0	21,0	63062	68993	
5,9 mm	0.2323		66,0	28,0	21,0	63063	68994	
A	0.2340	5.94	3-1/4	2	1-39/64	53201	58055	
15/64	0.2344	5.95	3-1/4	2	1-39/64	53115	58056	
6,0 mm	0.2362		66,0	28,0	21,0	63010	68995	
B	0.2380	6.05	3-1/4	2	1-39/64	53202	58057	
6,1 mm	0.2402		70,0	31,0	23,0	63064	68996	
C	0.2420	6.15	3-1/4	2	1-39/64	53203	58058	
6,2 mm	0.2441		70,0	31,0	23,0	63011	68997	
D	0.2460	6.25	3-1/4	2	1-39/64	53204	58059	
6,3 mm	0.2480		70,0	31,0	23,0	63065	68998	
1/4	0.2500	6.35	3-1/4	2	1-39/64	53116	58061	
6,4 mm	0.2520		70,0	31,0	23,0	63066	68999	
6,5 mm	0.2559		70,0	31,0	23,0	63012	69000	
F	0.2570	6.53	3-1/4	2	1-39/64	53206	58062	
6,6 mm	0.2598		70,0	31,0	23,0	63067	69001	
G	0.2610	6.63	3-1/2	2-1/8	1-45/64	53207	58063	
6,7 mm	0.2638		70,0	31,0	23,0	63068	69002	


continued on next page

3 Flute Drills • Metric: DIN 6539

3xD
(mm)5xD
(inch)

103

FRACTIONAL & METRIC SERIES

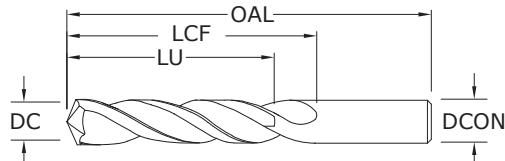

CUTTING DIAMETER DC/DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		TOLERANCES (inch)
						UNCOATED	Ti-NAMITE-A (AlTiN)	
17/64	0.2656	6.75	3-1/2	2-1/8	1-45/64	53117	58064	DC = +0.0000/-0.0005
H	0.2660	6.76	3-1/2	2-1/8	1-45/64	53208	58065	DCON = h ₆
6,8 mm	0.2677		74,0	34,0	25,0	63013	69003	
6,9 mm	0.2717		74,0	34,0	25,0	63069	69004	
I	0.2720	6.91	3-1/2	2-1/8	1-45/64	53209	58066	
7,0 mm	0.2756		74,0	34,0	25,0	63014	69005	
J	0.2770	7.04	3-1/2	2-1/8	1-45/64	53210	58067	
7,1 mm	0.2795		74,0	34,0	25,0	63070	69006	
K	0.2810	7.14	3-1/2	2-1/8	1-45/64	53211	58068	
9/32	0.2812	7.14	3-1/2	2-1/8	1-45/64	53118	58069	
7,2 mm	0.2835		74,0	34,0	25,0	63015	69007	
7,3 mm	0.2874		74,0	34,0	25,0	63071	69008	
L	0.2900	7.37	3-1/2	2-1/8	1-45/64	53212	58070	
7,4 mm	0.2913		74,0	34,0	25,0	63072	69009	
M	0.2950	7.49	3-3/4	2-3/8	1-29/32	53213	58071	
7,5 mm	0.2953		74,0	34,0	25,0	63016	69010	
19/64	0.2969	7.54	3-3/4	2-3/8	1-29/32	53119	58072	
7,6 mm	0.2992		79,0	37,0	27,0	63073	69011	
N	0.3020	7.67	2-3/8	2-3/8	1-29/32	53214	58073	
7,7 mm	0.3031		79,0	37,0	27,0	63074	69012	
7,8 mm	0.3071		79,0	37,0	27,0	63075	69013	
7,9 mm	0.3110		79,0	37,0	27,0	63076	69014	
5/16	0.3125	7.94	3-3/4	2-3/8	1-29/32	53120	58074	
8,0 mm	0.3150		79,0	37,0	27,0	63017	69015	
O	0.3160	8.03	3-3/4	2-3/8	1-29/32	53215	58075	
8,1 mm	0.3189		79,0	37,0	27,0	63077	69016	
8,2 mm	0.3228		79,0	37,0	27,0	63018	69017	
P	0.3230	8.20	3-3/4	2-3/8	1-29/32	53216	58076	
8,3 mm	0.3268		79,0	37,0	27,0	63078	69018	
21/64	0.3281	8.33	4	2-1/2	2	53121	58077	
8,4 mm	0.3307		79,0	37,0	27,0	63019	69019	
Q	0.3320	8.43	4	2-1/2	2	53217	58078	
8,5 mm	0.3346		79,0	37,0	27,0	63020	69020	
8,6 mm	0.3386		84,0	40,0	29,0	63021	69021	
R	0.3390	8.61	4	2-1/2	2	53218	58079	
8,7 mm	0.3425		84,0	40,0	29,0	63079	69022	
11/32	0.3438	8.73	4	2-1/2	2	53122	58080	
8,8 mm	0.3465		84,0	40,0	29,0	63022	69023	
S	0.3480	8.84	4	2-1/2	2	53219	58081	
8,9 mm	0.3504		84,0	40,0	29,0	63080	69024	
9,0 mm	0.3543		84,0	40,0	29,0	63023	69025	
T	0.3580	9.09	4-1/4	2-3/4	2-13/64	53220	58082	

continued on next page

TOLERANCES (inch)

DC = +0.0000/-0.0005
DCON = h₆

TOLERANCES (mm)

DC = +0,0000/-0,0127
DCON = h₆

- STEELS
- CAST IRON
- HARDENED STEELS
- NON-FERROUS

For patent information visit
www.ksptpatents.com

3 Flute Drills • Metric: DIN 6539

103

FRACTIONAL & METRIC SERIES

CUTTING DIAMETER DC/DCON	DECIMAL EQUIV.	METRIC EQUIV.	OVERALL LENGTH OAL	FLUTE LENGTH LCF	CLEARED LENGTH LU	EDP NO.		CONTINUED
						UNCOATED	Ti-NAMITE-A (AITiN)	
9,1 mm	0.3583		84,0	40,0	29,0	63081	69026	
23/64	0.3594	9.13	4-1/4	2-3/4	2-13/64	53123	58083	
9,2 mm	0.3622		84,0	40,0	29,0	63024	69027	
9,3 mm	0.3661		84,0	40,0	29,0	63082	69028	
U	0.3680	9.35	4-1/4	2-3/4	2-13/64	53221	58084	
9,4 mm	0.3701		84,0	40,0	29,0	63083	69029	
9,5 mm	0.3740		84,0	40,0	29,0	63025	69030	
3/8	0.3750	9.53	4-1/4	2-3/4	2-13/64	53124	58085	
V	0.3770	9.58	4-1/4	2-3/4	2-13/64	53222	58086	
9,6 mm	0.3780		89,0	43,0	31,0	63084	69031	
9,7 mm	0.3819		89,0	43,0	31,0	63085	69032	
9,8 mm	0.3858		89,0	43,0	31,0	63086	69033	
W	0.3860	9.80	4-1/2	2-7/8	2-19/64	53223	58087	
9,9 mm	0.3898		89,0	43,0	31,0	63087	69034	
25/64	0.3906	9.92	4-1/2	2-7/8	2-19/64	53125	58088	
10,0 mm	0.3937		89,0	43,0	31,0	63026	69035	
X	0.3970	10.08	4-1/2	2-7/8	2-19/64	53224	58089	
10,1 mm	0.3976		89,0	43,0	31,0	63088	69036	
10,2 mm	0.4016		89,0	43,0	31,0	63027	69037	
Y	0.4040	10.26	4-1/2	2-7/8	2-19/64	53225	58090	
13/32	0.4062	10.32	4-1/2	2-7/8	2-19/64	53126	58091	
10,4 mm	0.4094		89,0	43,0	31,0	63028	69038	
Z	0.4130	10.49	4-1/2	2-7/8	2-19/64	53226	58092	
10,5 mm	0.4134		89,0	43,0	31,0	63029	69039	
10,7 mm	0.4213		95,0	47,0	33,0	63030	69040	
27/64	0.4219	10.72	4-1/2	2-7/8	2-19/64	53127	58093	
10,8 mm	0.4252		95,0	47,0	33,0	63031	69041	
11,0 mm	0.4331		95,0	47,0	33,0	63032	69042	
7/16	0.4375	11.11	4-1/2	2-7/8	2-19/64	53128	58094	
11,5 mm	0.4528		95,0	47,0	33,0	63033	69043	
29/64	0.4531	11.51	4-3/4	3	2-13/32	53129	58095	
15/32	0.4688	11.91	4-3/4	3	2-13/32	53130	58096	
12,0 mm	0.4724		102,0	51,0	35,0	63034	69044	
31/64	0.4844	12.30	4-3/4	3	2-13/32	53131	58097	
12,5 mm	0.4921		102,0	51,0	35,0	63035	69045	
1/2	0.5000	12.70	4-3/4	3	2-13/32	53132	58098	
12,8 mm	0.5039		102,0	51,0	35,0	63036	69046	
13,0 mm	0.5118		102,0	51,0	35,0	63089	69047	
33/64	0.5156	13.10	4-3/4	3	2-13/32	53135	58099	
13,1 mm	0.5157		102,0	51,0	35,0	63037	69048	
13,5 mm	0.5315		107,0	54,0	37,0	63090	69049	
14,0 mm	0.5512		107,0	54,0	37,0	63038	69050	
9/16	0.5625	14.29	4-3/4	3	2-13/32	53136	58100	
14,3 mm	0.5630		111,0	56,0	38,0	63039	69051	
14,5 mm	0.5709		111,0	56,0	38,0	63040	69052	
15,0 mm	0.5906		111,0	56,0	38,0	63091	69053	
5/8	0.6250	15.88	5-3/4	3-1/2	2-51/64	53133	58101	
11/16	0.6875	17.46	5-3/4	3-1/2	2-51/64	53137	58102	
17,5 mm	0.6890		123,0	62,0	40,0	63041	69054	
3/4	0.7500	19.05	5-3/4	4-1/4	3 13/32	53134	58103	
19,5 mm	0.7677		131,0	66,0	42,0	63042	69055	
20,0 mm	0.7874		131,0	66,0	42,0	63043	69056	

FRACTIONAL

3 Flute Drills

Series 103 Fractional	Hardness	Vc (sfm)	DC • in						
			1/8	1/4	3/8	1/2	5/8	3/4	
P	≤ 175 Bhn or ≤ 7 HRc	295 (236-354)	RPM Fr Feed (ipm)	9015 0.0026 23.0	4508 0.0051 23.0	3005 0.0077 23.0	2254 0.0102 23.0	1803 0.0128 23.0	1503 0.0153 23.0
	≤ 300 Bhn or ≤ 32 HRc	260 (208-312)	RPM Fr Feed (ipm)	7946 0.0023 18.0	3973 0.0045 18.0	2649 0.0068 18.0	1986 0.0091 18.0	1589 0.0113 18.0	1324 0.0136 18.0
	≤ 425 Bhn or ≤ 45 HRc	150 (120-180)	RPM Fr Feed (ipm)	4584 0.0013 6.0	2292 0.0026 6.0	1528 0.0039 6.0	1146 0.0052 6.0	917 0.0065 6.0	764 0.0079 6.0
	≤ 275 Bhn or ≤ 28 HRc	230 (184-276)	RPM Fr Feed (ipm)	7029 0.0019 13.5	3514 0.0038 13.5	2343 0.0058 13.5	1757 0.0077 13.5	1406 0.0096 13.5	1171 0.0115 13.5
	≤ 375 Bhn or ≤ 40 HRc	145 (116-174)	RPM Fr Feed (ipm)	4431 0.0019 8.5	2216 0.0038 8.5	1477 0.0058 8.5	1108 0.0077 8.5	886 0.0096 8.5	739 0.0115 8.5
	≤ 450 Bhn or ≤ 48 HRc	115 (92-138)	RPM Fr Feed (ipm)	3514 0.0005 1.8	1757 0.0010 1.8	1171 0.0015 1.8	879 0.0020 1.8	703 0.0026 1.8	586 0.0031 1.8
	≤ 220 Bhn or ≤ 19 HRc	250 (200-300)	RPM Fr Feed (ipm)	7640 0.0026 20.0	3820 0.0052 20.0	2547 0.0079 20.0	1910 0.0105 20.0	1528 0.0131 20.0	1273 0.0157 20.0
	≤ 330 Bhn or ≤ 36 HRc	195 (156-234)	RPM Fr Feed (ipm)	5959 0.0026 15.5	2980 0.0052 15.5	1986 0.0078 15.5	1490 0.0104 15.5	1192 0.0130 15.5	993 0.0156 15.5
K	CAST IRONS Gray, Malleable, Ductile	540 (432-648)	RPM Fr Feed (ipm)	16502 0.0032 53.0	8251 0.0064 53.0	5501 0.0096 53.0	4126 0.0128 53.0	3300 0.0161 53.0	2750 0.0193 53.0
	≤ 80 Bhn or ≤ 47 HRb	455 (364-546)	RPM Fr Feed (ipm)	13905 0.0032 45.0	6952 0.0065 45.0	4635 0.0097 45.0	3476 0.0129 45.0	2781 0.0162 45.0	2317 0.0194 45.0
	≤ 150 Bhn or ≤ 7 HRc	305 (244-366)	RPM Fr Feed (ipm)	9321 0.0019 18.0	4660 0.0039 18.0	3107 0.0058 18.0	2330 0.0077 18.0	1864 0.0097 18.0	1553 0.0116 18.0
	≤ 200 Bhn or ≤ 23 HRc	160 (128-192)	RPM Fr Feed (ipm)	4890 0.0016 8.0	2445 0.0033 8.0	1630 0.0049 8.0	1222 0.0065 8.0	978 0.0082 8.0	815 0.0098 8.0
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	85 (68-102)	RPM Fr Feed (ipm)	2598 0.0013 3.4	1299 0.0026 3.4	866 0.0039 3.4	649 0.0052 3.4	520 0.0065 3.4	433 0.0079 3.4
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	65 (52-78)	RPM Fr Feed (ipm)	1986 0.0007 1.3	993 0.0013 1.3	662 0.0020 1.3	497 0.0026 1.3	397 0.0033 1.3	331 0.0039 1.3
	≤ 475 Bhn or ≤ 50 HRc	50 (40-60)	RPM Fr Feed (ipm)	1528 0.0007 1.0	764 0.0013 1.0	509 0.0020 1.0	382 0.0026 1.0	306 0.0033 1.0	255 0.0039 1.0

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

3 Flute Drills

Series 103M Metric		Hardness	Vc (m/min)	DC • mm							
				3	6	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	90 (72-108)	RPM Fr Feed (mm/min)	9533 0.062 590	4766 0.124 590	2860 0.206 590	2383 0.248 590	1787 0.330 590	1430 0.413 590	
			≤ 300 Bhn or ≤ 32 HRc	79 (63-95)	RPM Fr Feed (mm/min)	8402 0.055 460	4201 0.110 460	2520 0.183 460	2100 0.219 460	1575 0.292 460	1260 0.365 460
			≤ 425 Bhn or ≤ 45 HRc	46 (37-55)	RPM Fr Feed (mm/min)	4847 0.032 155	2424 0.064 155	1454 0.107 155	1212 0.128 155	909 0.171 155	727 0.213 155
		≤ 275 Bhn or ≤ 28 HRc	70 (56-84)	RPM Fr Feed (mm/min)	7432 0.046 345	3716 0.093 345	2230 0.155 345	1858 0.186 345	1394 0.248 345	1115 0.309 345	
			≤ 375 Bhn or ≤ 40 HRc	44 (35-53)	RPM Fr Feed (mm/min)	4686 0.046 215	2343 0.092 215	1406 0.153 215	1171 0.184 215	879 0.245 215	703 0.306 215
				35 (28-42)	RPM Fr Feed (mm/min)	3716 0.012 45	1858 0.024 45	1115 0.040 45	929 0.048 45	697 0.065 45	557 0.081 45
	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	76 (61-91)	RPM Fr Feed (mm/min)	8078 0.063 510	4039 0.126 510	2424 0.210 510	2020 0.253 510	1515 0.337 510	1212 0.421 510	
			≤ 330 Bhn or ≤ 36 HRc	59 (48-71)	RPM Fr Feed (mm/min)	6301 0.052 330	3151 0.105 330	1890 0.175 330	1575 0.209 330	1181 0.279 330	945 0.349 330
		ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	165 (132-198)	RPM Fr Feed (mm/min)	17449 0.078 1360	8725 0.156 1360	5235 0.260 1360	4362 0.312 1360	3272 0.416 1360	2617 0.520 1360
				139 (111-166)	RPM Fr Feed (mm/min)	14703 0.078 1150	7351 0.156 1150	4411 0.261 1150	3676 0.313 1150	2757 0.417 1150	2205 0.521 1150
			≤ 140 Bhn or ≤ 3 HRc	93 (74-112)	RPM Fr Feed (mm/min)	9856 0.047 465	4928 0.094 465	2957 0.157 465	2464 0.189 465	1848 0.252 465	1478 0.315 465
				49 (39-59)	RPM Fr Feed (mm/min)	5170 0.039 200	2585 0.077 200	1551 0.129 200	1293 0.155 200	969 0.206 200	776 0.258 200
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250 Bhn or ≤ 24 HRc	26 (21-31)	RPM Fr Feed (mm/min)	2747 0.031 85	1373 0.062 85	824 0.103 85	687 0.124 85	515 0.165 85	412 0.206 85	
			≤ 375 Bhn or ≤ 40 HRc	20 (16-24)	RPM Fr Feed (mm/min)	2100 0.017 35	1050 0.033 35	630 0.056 35	525 0.067 35	394 0.089 35	315 0.111 35
		≤ 475 Bhn or ≤ 50 HRc	15 (12-18)	RPM Fr Feed (mm/min)	1616 0.015 25	808 0.031 25	485 0.052 25	404 0.062 25	303 0.083 25	242 0.103 25	

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = $(V_c \times 1000) / (DC \times 3.14)$ mm/min = $Fr \times rpm$

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed


refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Combined Drill & Countersink

**301**

FRACTIONAL SERIES

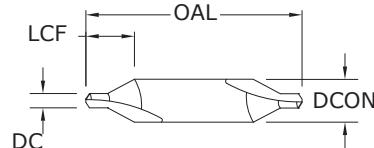Pictured:
Series 301 Set

SIZE	inch				EDP NO.	
	DRILL DIAMETER DC	BODY DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE-A (AlTiN)
*00	.025	1/8	1-1/2	.125	57005	57015
*0	1/32	1/8	1-1/2	.130	57006	57016
*1	3/64	1/8	1-1/2	.135	57007	57017
*2	5/64	3/16	1-7/8	.200	57008	57018
*3	7/64	1/4	2	.280	57009	57019
*4	1/8	5/16	2-1/8	.340	57010	57020
*5	3/16	7/16	2-3/4	.475	57011	57021
*6	7/32	1/2	3	.540	57012	57022
*Series 301 Set	—	—	—	—	57075	—

TOLERANCES (inch)

DC = +0.003/-0.000
DCON = -0.0001/-0.0005

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM



HARDENED STEELS

NON-FERROUS

PLASTICS/COMPOSITES

For patent
information visit
www.ksptpatents.com

Combined Drill & Countersink

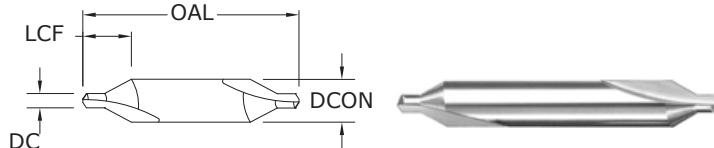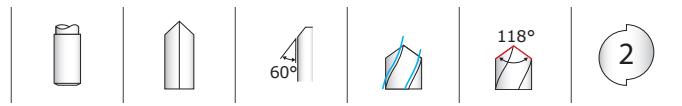

301M
METRIC SERIES

TOLERANCES (mm)

DC = +0,076/-0,000
DCON = -0,0025/-0,0127

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS
- PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

DRILL DIAMETER DC	BODY DIAMETER DCON	mm		EDP NO.	
		OVERALL LENGTH OAL	FLUTE LENGTH LCF	UNCOATED	Ti-NAMITE-A (AITIN)
0,5	3,15	20,0	3,0	67005	67035
0,8	3,15	20,0	3,5	67007	67037
1	3,15	31,5	3,5	67009	67039
1,25	3,15	31,5	4,0	67011	67041
1,6	4,0	35,5	5,0	67013	67043
2	5,0	40,0	6,0	67015	67045
2,5	6,3	45,0	7,0	67017	67047
3,15	8,0	50,0	9,0	67019	67049
4	10,0	56,0	11,0	67021	67051
5	12,5	63,0	14,0	67023	67053

FRACTIONAL

Combined Drill & Countersink

Series 301 Fractional		Hardness	Vc (sfm)	DC • in				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/32	5/64	1/8	3/16	7/32
	≤ 175 Bhn or ≤ 7 HRc	265 (212-318)	RPM Fr Feed (ipm)	8098 0.00068 5.5	5399 0.0010 5.5	3239 0.0017 5.5	2314 0.0024 5.5	
	≤ 300 Bhn or ≤ 32 HRc	125 (100-150)	RPM Fr Feed (ipm)	3820 0.00065 2.5	2547 0.0010 2.5	1528 0.0016 2.5	1091 0.0023 2.5	
	≤ 425 Bhn or ≤ 45 HRc	85 (68-102)	RPM Fr Feed (ipm)	2598 0.00038 1.0	1732 0.0006 1.0	1039 0.0010 1.0	742 0.0013 1.0	
	≤ 275 Bhn or ≤ 28 HRc	230 (184-276)	RPM Fr Feed (ipm)	7029 0.00064 4.5	4686 0.0010 4.5	2812 0.0016 4.5	2008 0.0022 4.5	
	≤ 375 Bhn or ≤ 40 HRc	145 (116-174)	RPM Fr Feed (ipm)	4431 0.00059 2.6	2954 0.0009 2.6	1772 0.0015 2.6	1266 0.0021 2.6	
M	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 450 Bhn or ≤ 48 HRc	60 (48-72)	RPM Fr Feed (ipm)	1834 0.00027 0.5	1222 0.0004 0.5	733 0.0007 0.5	524 0.0010 0.5
		≤ 250 Bhn or ≤ 24 HRc0	210 (168-252)	RPM Fr Feed (ipm)	6418 0.00048 3.1	4278 0.0007 3.1	2567 0.0012 3.1	1834 0.0017 3.1
		≤ 330 Bhn or ≤ 36 HRc	110 (88-132)	RPM Fr Feed (ipm)	3362 0.00028 0.9	2241 0.0004 0.9	1345 0.0007 0.9	960 0.0010 0.9
		≤ 275 Bhn or ≤ 28 HRc	65 (52-78)	RPM Fr Feed (ipm)	1986 0.00036 0.7	1324 0.0005 0.7	795 0.0009 0.7	568 0.0013 0.7
		≤ 375 Bhn or ≤ 40 HRc	55 (44-66)	RPM Fr Feed (ipm)	1681 0.00032 0.5	1121 0.0005 0.5	672 0.0008 0.5	480 0.0011 0.5
		≤ 220 Bhn or ≤ 19 HRc	280 (224-336)	RPM Fr Feed (ipm)	8557 0.00084 7.2	5705 0.0013 7.2	3423 0.0021 7.2	2445 0.0029 7.2
K	CAST IRONS Gray, Malleable, Ductile	≤ 330 Bhn or ≤ 36 HRc	250 (200-300)	RPM Fr Feed (ipm)	7640 0.00084 6.4	5093 0.0013 6.4	3056 0.0021 6.4	2183 0.0029 6.4

continued on next page

Combined Drill & Countersink

Series 301 Fractional	Hardness	Vc (sfm)	DC • in					
			1/32	5/64	1/8	3/16	7/32	
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	540 (432-648)	RPM	16502	11002	6601	4715	4126
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
	≤ 150 Bhn or ≤ 7 HRc	455 (364-546)	RPM	13905	9270	5562	3973	3476
			Fr	0.00100	0.0015	0.0025	0.0035	0.0040
COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	190 (152-228)	RPM	5806	3871	2323	1659	1452
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
	≤ 200 Bhn or ≤ 23 HRc	175 (140-210)	RPM	5348	3565	2139	1528	1337
			Fr	0.00048	0.0007	0.0012	0.0017	0.0019
PLASTICS Polycarbonate, PVC	500	RPM	15280	10187	6112	4366	3820	
		Fr	0.00100	0.0015	0.0025	0.0035	0.0040	
		Feed (ipm)	15.3	15.3	15.3	15.3	15.3	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
	≤ 320 Bhn or ≤ 34 HRc	25 (20-30)	RPM	764	509	306	218	191
			Fr	0.00033	0.0005	0.0008	0.0011	0.0013
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 425 Bhn or ≤ 45 HRc	20 (16-24)	RPM	611	407	244	175	153
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 275 Bhn or ≤ 28 HRc	85 (68-102)	RPM	2598	1732	1039	742	649
			Fr	0.00064	0.0010	0.0016	0.0022	0.0026
			Feed (ipm)	1.7	1.7	1.7	1.7	1.7
H	≤ 350 Bhn or ≤ 38 HRc	65 (52-78)	RPM	1986	1324	795	568	497
			Fr	0.00036	0.0005	0.0009	0.0013	0.0014
	≤ 440 Bhn or ≤ 47 HRc	55 (44-66)	RPM	1681	1121	672	480	420
			Fr	0.00032	0.0005	0.0008	0.0011	0.0013
	≤ 250 Bhn or ≤ 24 HRc	85 (68-102)	RPM	2598	1732	1039	742	649
			Fr	0.00035	0.0005	0.0009	0.0012	0.0014
	≤ 375 Bhn or ≤ 40 HRc	55 (44-66)	RPM	1681	1121	672	480	420
			Fr	0.00016	0.0002	0.0004	0.0006	0.0006
	≤ 475 Bhn or ≤ 50 HRc	40 (32-48)	RPM	1222	815	489	349	306
			Fr	0.00016	0.0002	0.0004	0.0006	0.0007
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DCOn

ipm = Fr x rpm

reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Combined Drill & Countersink

	Series 301M Metric	Hardness	Vc (m/min)	DC • mm					
				1	1.6	2.5	4	5	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	81 (65-97)	RPM Fr Feed (mm/min)	8155 0.017 139	6422 0.022 139	4078 0.034 139	2569 0.054 139	2055 0.068 139
		≤ 300 Bhn or ≤ 32 HRc	38 (30-46)	RPM Fr Feed (mm/min)	3847 0.016 62	3029 0.020 62	1923 0.032 62	1212 0.051 62	969 0.064 62
		≤ 425 Bhn or ≤ 45 HRc	26 (21-31)	RPM Fr Feed (mm/min)	2616 0.010 26	2060 0.013 26	1308 0.020 26	824 0.032 26	659 0.039 26
		≤ 275 Bhn or ≤ 28 HRc	70 (56-84)	RPM Fr Feed (mm/min)	7078 0.016 113	5574 0.020 113	3539 0.032 113	2230 0.051 113	1784 0.063 113
		≤ 375 Bhn or ≤ 40 HRc	44 (35-53)	RPM Fr Feed (mm/min)	4462 0.015 67	3514 0.019 67	2231 0.030 67	1406 0.048 67	1125 0.060 67
		≤ 450 Bhn or ≤ 48 HRc	18 (15-22)	RPM Fr Feed (mm/min)	1847 0.007 13	1454 0.009 13	923 0.014 13	582 0.022 13	465 0.028 13
		≤ 250 Bhn or ≤ 24 HRc	64 (51-77)	RPM Fr Feed (mm/min)	6463 0.012 78	5089 0.015 78	3231 0.024 78	2036 0.038 78	1629 0.048 78
		≤ 330 Bhn or ≤ 36 HRc	34 (27-40)	RPM Fr Feed (mm/min)	3385 0.007 24	2666 0.009 24	1693 0.014 24	1066 0.023 24	853 0.028 24
		≤ 275 Bhn or ≤ 28 HRc	20 (16-24)	RPM Fr Feed (mm/min)	2000 0.009 18	1575 0.011 18	1000 0.018 18	630 0.029 18	504 0.036 18
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 375 Bhn or ≤ 40 HRc	17 (13-20)	RPM Fr Feed (mm/min)	1693 0.008 14	1333 0.011 14	846 0.017 14	533 0.026 14	427 0.033 14
		≤ 220 Bhn or ≤ 19 HRc	85 (68-102)	RPM Fr Feed (mm/min)	8617 0.021 181	6786 0.027 181	4309 0.042 181	2714 0.067 181	2171 0.083 181
		≤ 330 Bhn or ≤ 36 HRc	76 (61-91)	RPM Fr Feed (mm/min)	7694 0.021 162	6059 0.027 162	3847 0.042 162	2424 0.067 162	1939 0.084 162
K	CAST IRONS Gray, Malleable, Ductile								

continued on next page

Combined Drill & Countersink

Series 301M Metric	Hardness	Vc (m/min)	DC • mm					
			1	1.6	2.5	4	5	
ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	165 (132-198)	RPM	16619	13087	8309	5235	4188
			Fr	0.025	0.032	0.050	0.079	0.099
			Feed (mm/min)	415	415	415	415	415
	≤ 150 Bhn or ≤ 7 HRc	139 (111-166)	RPM	14003	11027	7001	4411	3529
COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	58 (46-69)	RPM	5847	4605	2924	1842	1474
			Fr	0.012	0.015	0.024	0.038	0.048
			Feed (mm/min)	70	70	70	70	70
	≤ 200 Bhn or ≤ 23 HRc	53 (43-64)	RPM	5386	4241	2693	1696	1357
PLASTICS Polycarbonate, PVC			Fr	0.012	0.015	0.024	0.038	0.048
			Feed (mm/min)	65	65	65	65	65
		152 (122-183)	RPM	15388	12118	7694	4847	3878
			Fr	0.025	0.032	0.050	0.079	0.099
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	12 (10-15)	RPM	1231	969	616	388	310
			Fr	0.009	0.011	0.018	0.028	0.035
			Feed (mm/min)	11	11	11	11	11
	≤ 320 Bhn or ≤ 34 HRc	8 (6-9)	RPM	769	606	385	242	194
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 425 Bhn or ≤ 45 HRc	6 (5-7)	RPM	616	485	308	194	155
			Fr	0.003	0.004	0.006	0.010	0.013
			Feed (mm/min)	2	2	2	2	2
	≤ 275 Bhn or ≤ 28 HRc	26 (21-31)	RPM	2616	2060	1308	824	659
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			Fr	0.016	0.020	0.032	0.051	0.064
			Feed (mm/min)	42	42	42	42	42
	≤ 350 Bhn or ≤ 38 HRc	20 (16-24)	RPM	2000	1575	1000	630	504
			Fr	0.009	0.011	0.018	0.029	0.036
	≤ 440 Bhn or ≤ 47 HRc	17 (13-20)	RPM	1693	1333	846	533	427
			Fr	0.008	0.011	0.017	0.026	0.033
			Feed (mm/min)	14	14	14	14	14
	≤ 250 Bhn or ≤ 24 HRc	26 (21-31)	RPM	2616	2060	1308	824	659
			Fr	0.009	0.012	0.018	0.029	0.036
			Feed (mm/min)	24	24	24	24	24
	≤ 375 Bhn or ≤ 40 HRc	17 (13-20)	RPM	1693	1333	846	533	427
			Fr	0.004	0.005	0.008	0.013	0.016
	≤ 475 Bhn or ≤ 50 HRc	12 (10-15)	RPM	1231	969	616	388	310
			Fr	0.004	0.005	0.008	0.013	0.016
			Feed (mm/min)	5	5	5	5	5

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = $(V_c \times 1000) / (DCON \times 3.14)$

mm/min = Fr × rpm


reduce speed and feed 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


FRACTIONAL

Single Flute Countersink



601

FRACTIONAL SERIES

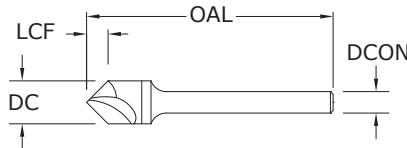

CUTTING DIAMETER DC	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	EDP NO.		
				UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.062	—	—	74201
1/8	1/8	1-1/2	.072	—	74101	—
1/8	1/8	1-1/2	.108	74001	—	—
3/16	3/16	2	.094	—	—	74204
3/16	3/16	2	.108	—	74104	—
3/16	3/16	2	.163	74004	—	—
1/4	1/4	2	.125	—	—	74207
1/4	1/4	2	.144	—	74107	—
1/4	1/4	2	.217	74007	—	—
*3/8	1/4	2-13/16	.188	—	—	74210
*3/8	1/4	2-13/16	.216	—	74110	—
*3/8	1/4	2-13/16	.325	74010	—	—
*1/2	1/4	2-7/8	.250	—	—	74213
*1/2	1/4	2-7/8	.288	—	74113	—
*1/2	1/4	2-7/8	.433	74013	—	—
*5/8	3/8	3	.313	—	—	74216
*5/8	3/8	3	.360	—	74116	—
*5/8	3/8	3	.541	74016	—	—
*3/4	1/2	3	.375	—	—	74219
*3/4	1/2	3	.431	—	74119	—
*3/4	1/2	3	.650	74019	—	—
*1	1/2	3-1/4	.500	—	—	74222
*1	1/2	3-1/4	.575	—	74122	—
*1	1/2	3-1/4	.866	74022	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

TOLERANCES (inch)

1/8-1/4 DIAMETER
DC = +0.0000/-0.0005**3/8-1 DIAMETER**
DC = +0.003/-0.000

Included Angle +1°/-1°

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS

For patent
information visit
www.ksptpatents.com

FRACTIONAL
Single Flute Countersink

Series 601 Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/8	3/16	1/4	3/8	1/2	3/4	1	
	≤ 175 Bhn or ≤ 7 HRc	125 (100-150)	RPM Fr Feed (ipm)	3820 0.0005 2.0	2547 0.0008 2.0	1910 0.0010 2.0	1273 0.0016 2.0	955 0.0021 2.0	637 0.0031 2.0	478 0.0042 2.0	
	≤ 300 Bhn or ≤ 32 HRc	60 (48-72)	RPM Fr Feed (ipm)	1834 0.0005 0.9	1222 0.0007 0.9	917 0.0010 0.9	611 0.0015 0.9	458 0.0020 0.9	306 0.0029 0.9	229 0.0039 0.9	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 425 Bhn or ≤ 45 HRc	45 (36-54)	RPM Fr Feed (ipm)	1375 0.0003 0.4	917 0.0004 0.4	688 0.0006 0.4	458 0.0009 0.4	344 0.0012 0.4	229 0.0017 0.4	172 0.0023 0.4
		≤ 275 Bhn or ≤ 28 HRc	95 (76-114)	RPM Fr Feed (ipm)	2903 0.0004 1.3	1935 0.0007 1.3	1452 0.0009 1.3	968 0.0013 1.3	726 0.0018 1.3	484 0.0027 1.3	363 0.0036 1.3
		≤ 375 Bhn or ≤ 40 HRc	60 (48-72)	RPM Fr Feed (ipm)	1834 0.0004 0.8	1222 0.0007 0.8	917 0.0009 0.8	611 0.0013 0.8	458 0.0017 0.8	306 0.0026 0.8	229 0.0035 0.8
		≤ 450 Bhn or ≤ 48 HRc	35 (28-42)	RPM Fr Feed (ipm)	1070 0.0003 0.3	713 0.0004 0.3	535 0.0006 0.3	357 0.0008 0.3	267 0.0011 0.3	178 0.0017 0.3	134 0.0022 0.3
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250 Bhn or ≤ 24 HRc	53 (42-64)	RPM Fr Feed (ipm)	1620 0.0003 0.5	1080 0.0005 0.5	810 0.0006 0.5	540 0.0009 0.5	405 0.0012 0.5	270 0.0019 0.5	202 0.0025 0.5
		≤ 330 Bhn or ≤ 36 HRc	46 (37-55)	RPM Fr Feed (ipm)	1406 0.0002 0.3	937 0.0003 0.3	703 0.0004 0.3	469 0.0006 0.3	351 0.0009 0.3	234 0.0013 0.3	176 0.0017 0.3
		≤ 275 Bhn or ≤ 28 HRc	28 (22-34)	RPM Fr Feed (ipm)	856 0.0004 0.3	570 0.0005 0.3	428 0.0007 0.3	285 0.0011 0.3	214 0.0014 0.3	143 0.0021 0.3	107 0.0028 0.3
		≤ 375 Bhn or ≤ 40 HRc	21 (17-25)	RPM Fr Feed (ipm)	642 0.0002 0.1	428 0.0002 0.1	321 0.0003 0.1	214 0.0005 0.1	160 0.0006 0.1	107 0.0009 0.1	80 0.0012 0.1
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105 (84-126)	RPM Fr Feed (ipm)	3209 0.0006 1.9	2139 0.0009 1.9	1604 0.0012 1.9	1070 0.0018 1.9	802 0.0024 1.9	535 0.0036 1.9	401 0.0047 1.9
		≤ 330 Bhn or ≤ 36 HRc	75 (60-90)	RPM Fr Feed (ipm)	2292 0.0006 1.4	1528 0.0009 1.4	1146 0.0012 1.4	764 0.0018 1.4	573 0.0024 1.4	382 0.0037 1.4	287 0.0049 1.4

continued on next page

FRACTIONAL

Single Flute Countersink

Series 601 Fractional	Hardness	Vc (sfm)	DC • in							
			1/8	3/16	1/4	3/8	1/2	3/4	1	
N ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225 (180-270)	RPM	6876	4584	3438	2292	1719	1146	860
			Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
	≤ 150 Bhn or ≤ 7 HRc	190 (152-228)	RPM	5806	3871	2903	1935	1452	968	726
			Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0061
COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140 Bhn or ≤ 3 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	484	363
			Fr	0.0004	0.0006	0.0008	0.0011	0.0015	0.0023	0.0030
	≤ 200 Bhn or ≤ 23 HRc	80 (64-96)	RPM	2445	1630	1222	815	611	407	306
			Fr	0.0004	0.0006	0.0008	0.0012	0.0016	0.0025	0.0033
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	18 (14-22)	RPM	550	367	275	183	138	92	69
			Fr	0.0002	0.0003	0.0004	0.0005	0.0007	0.0011	0.0015
	≤ 320 Bhn or ≤ 34 HRc	14 (11-17)	RPM	428	285	214	143	107	71	53
			Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 425 Bhn or ≤ 45 HRc	12 (10-14)	RPM	367	244	183	122	92	61	46
			Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	≤ 275 Bhn or ≤ 28 HRc	36 (29-43)	RPM	1100	733	550	367	275	183	138
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
			Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	≤ 350 Bhn or ≤ 38 HRc	28 (22-34)	RPM	856	570	428	285	214	143	107
			Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
	≤ 440 Bhn or ≤ 47 HRc	21 (17-25)	RPM	642	428	321	214	160	107	80
			Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	≤ 250 Bhn or ≤ 24 HRc	35 (28-42)	RPM	1070	713	535	357	267	178	134
			Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
			Feed (ipm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
	≤ 375 Bhn or ≤ 40 HRc	25 (20-30)	RPM	764	509	382	255	191	127	96
			Fr	0.0001	0.0002	0.0003	0.0004	0.0005	0.0008	0.0010
	≤ 475 Bhn or ≤ 50 HRc	20 (16-24)	RPM	611	407	306	204	153	102	76
			Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013
			Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)



rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL
3 Flute Countersink

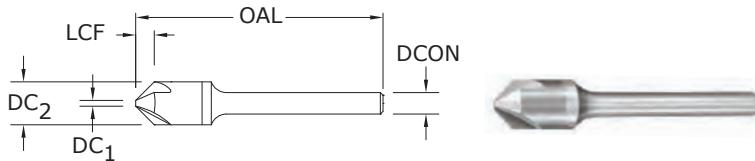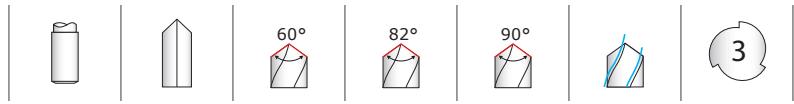

603

FRACTIONAL SERIES

TOLERANCES (inch)

1/8–1/4 DIAMETER
DC = +0.0000/-0.0005

3/8–1 DIAMETER
DC = +0.003/-0.000

Included Angle +1°–1°

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS
- NON-FERROUS

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	EDP NO.		
					UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.040	–	–	74225
1/8	1/8	1-1/2	.049	.040	–	74125	–
1/8	1/8	1-1/2	.078	.035	74025	–	–
3/16	3/16	2	.071	.060	–	–	74228
3/16	3/16	2	.073	.060	–	74128	–
3/16	3/16	2	.123	.045	74028	–	–
1/4	1/4	2	.090	.100	–	–	74231
1/4	1/4	2	.086	.100	–	74131	–
1/4	1/4	2	.156	.070	74031	–	–
*3/8	1/4	2-13/16	.138	.108	–	–	74234
*3/8	1/4	2-13/16	.154	.108	–	74134	–
*3/8	1/4	2-13/16	.238	.100	74034	–	–
*1/2	1/4	2-7/8	.194	.122	–	–	74237
*1/2	1/4	2-7/8	.217	.122	–	74137	–
*1/2	1/4	2-7/8	.335	.113	74037	–	–
*5/8	3/8	3	.249	.138	–	–	74240
*5/8	3/8	3	.280	.138	–	74140	–
*5/8	3/8	3	.430	.128	74040	–	–
*3/4	1/2	3	.304	.153	–	–	74243
*3/4	1/2	3	.343	.153	–	74143	–
*3/4	1/2	3	.526	.143	74043	–	–
*1	1/2	3-1/4	.421	.168	–	–	74246
*1	1/2	3-1/4	.479	.168	–	74146	–
*1	1/2	3-1/4	.729	.158	74046	–	–

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

FRACTIONAL

3 Flute Countersink

Series 603 Fractional		Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	125 (100-150)	RPM	3820	2547	1910	1273	955	637	478
				Fr	0.0008	0.0012	0.0016	0.0024	0.0031	0.0047	0.0063
				Feed (ipm)	3.0	3.0	3.0	3.0	3.0	3.0	3.0
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 300 Bhn or ≤ 32 HRc	60 (48-72)	RPM	1834	1222	917	611	458	306	229
				Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0043	0.0057
				Feed (ipm)	1.3	1.3	1.3	1.3	1.3	1.3	1.3
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 425 Bhn or ≤ 45 HRc	45 (36-54)	RPM	1375	917	688	458	344	229	172
				Fr	0.0004	0.0007	0.0009	0.0013	0.0017	0.0026	0.0035
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	484	363
				Fr	0.0007	0.0010	0.0014	0.0021	0.0028	0.0041	0.0055
				Feed (ipm)	2.0	2.0	2.0	2.0	2.0	2.0	2.0
	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc	60 (48-72)	RPM	1834	1222	917	611	458	306	229
				Fr	0.0007	0.0010	0.0013	0.0020	0.0026	0.0039	0.0052
				Feed (ipm)	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 450 Bhn or ≤ 48 HRc	35 (28-42)	RPM	1070	713	535	357	267	178	134
				Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 250 Bhn or ≤ 24 HRc	53 (42-64)	RPM	1620	1080	810	540	405	270	202
				Fr	0.0004	0.0006	0.0009	0.0013	0.0017	0.0026	0.0035
				Feed (ipm)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 330 Bhn or ≤ 36 HRc	46 (37-55)	RPM	1406	937	703	469	351	234	176
				Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028
				Feed (ipm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	28 (22-34)	RPM	856	570	428	285	214	143	107
				Fr	0.0005	0.0007	0.0009	0.0014	0.0019	0.0028	0.0037
				Feed (ipm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4
K	CAST IRONS Gray, Malleable, Ductile	≤ 375 Bhn or ≤ 40 HRc	21 (17-25)	RPM	642	428	321	214	160	107	80
				Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 220 Bhn or ≤ 19 HRc	105 (84-126)	RPM	3209	2139	1604	1070	802	535	401
				Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (ipm)	2.9	2.9	2.9	2.9	2.9	2.9	2.9
K	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 330 Bhn or ≤ 36 HRc	75 (60-90)	RPM	2292	1528	1146	764	573	382	287
				Fr	0.0009	0.0014	0.0018	0.0027	0.0037	0.0055	0.0073
				Feed (ipm)	2.1	2.1	2.1	2.1	2.1	2.1	2.1

continued on next page

FRACTIONAL
3 Flute Countersink

Series 603 Fractional		Hardness	Vc (sfm)	DC • in							
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075			1/8	3/16	1/4	3/8	1/2	3/4	1	
	≤ 80 Bhn or ≤ 47 HRb	225 (180-270)	RPM	6876	4584	3438	2292	1719	1146	860	
			Fr	0.0011	0.0017	0.0023	0.0034	0.0045	0.0068	0.0091	
	≤ 150 Bhn or ≤ 7 HRc	190 (152-228)	RPM	5806	3871	2903	1935	1452	968	726	
			Fr	0.0011	0.0017	0.0022	0.0034	0.0045	0.0067	0.0090	
	≤ 140 Bhn or ≤ 3 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	484	363	
			Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047	
	≤ 200 Bhn or ≤ 23 HRc	80 (64-96)	RPM	2445	1630	1222	815	611	407	306	
			Fr	0.0006	0.0009	0.0011	0.0017	0.0023	0.0034	0.0046	
			Feed (ipm)	1.4	1.4	1.4	1.4	1.4	1.4	1.4	
S	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 220 Bhn or ≤ 19 HRc	18 (14-22)	RPM	550	367	275	183	138	92	69
				Fr	0.0004	0.0005	0.0007	0.0011	0.0015	0.0022	0.0029
		≤ 320 Bhn or ≤ 34 HRc	14 (11-17)	RPM	428	285	214	143	107	71	53
				Fr	0.0002	0.0004	0.0005	0.0007	0.0009	0.0014	0.0019
		≤ 425 Bhn or ≤ 45 HRc	12 (10-14)	RPM	367	244	183	122	92	61	46
				Fr	0.0003	0.0004	0.0005	0.0008	0.0011	0.0016	0.0022
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		≤ 275 Bhn or ≤ 28 HRc	36 (29-43)	RPM	1100	733	550	367	275	183	138
				Fr	0.0007	0.0011	0.0015	0.0022	0.0029	0.0044	0.0058
				Feed (ipm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
H	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 350 Bhn or ≤ 38 HRc	28 (22-34)	RPM	856	570	428	285	214	143	107
				Fr	0.0006	0.0009	0.0012	0.0018	0.0023	0.0035	0.0047
		≤ 440 Bhn or ≤ 47 HRc	21 (17-25)	RPM	642	428	321	214	160	107	80
				Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		≤ 250 Bhn or ≤ 24 HRc	35 (28-42)	RPM	1070	713	535	357	267	178	134
				Fr	0.0004	0.0006	0.0007	0.0011	0.0015	0.0022	0.0030
		≤ 375 Bhn or ≤ 40 HRc	25 (20-30)	RPM	764	509	382	255	191	127	96
				Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021
		≤ 475 Bhn or ≤ 50 HRc	20 (16-24)	RPM	611	407	306	204	153	102	76
				Fr	0.0002	0.0002	0.0003	0.0005	0.0007	0.0010	0.0013
				Feed (ipm)	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

6 Flute Countersink



60°


82°

90°

6

606

FRACTIONAL SERIES

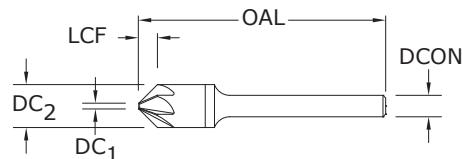

CUTTING DIAMETER DC ₂	SHANK DIAMETER DCON	OVERALL LENGTH OAL	FLUTE LENGTH LCF	TIP DIAMETER DC ₁	EDP NO.		
					UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	.045	.035	—	—	74249
1/8	1/8	1-1/2	.052	.035	—	74149	—
1/8	1/8	1-1/2	.078	.035	74049	—	—
3/16	3/16	2	.071	.045	—	—	74252
3/16	3/16	2	.082	.045	—	74152	—
3/16	3/16	2	.123	.045	74052	—	—
1/4	1/4	2	.090	.070	—	—	74255
1/4	1/4	2	.104	.070	—	74155	—
1/4	1/4	2	.156	.070	74055	—	—
*3/8	1/4	2-13/16	.138	.100	—	—	74258
*3/8	1/4	2-13/16	.158	.100	—	74158	—
*3/8	1/4	2-13/16	.238	.100	74058	—	—
*1/2	1/4	2-7/8	.170	.160	—	—	74261
*1/2	1/4	2-7/8	.196	.160	—	74161	—
*1/2	1/4	2-7/8	.294	.160	74061	—	—
*5/8	3/8	3	.218	.190	—	—	74264
*5/8	3/8	3	.250	.190	—	74164	—
*5/8	3/8	3	.377	.190	74064	—	—
*3/4	1/2	3	.265	.220	—	—	74267
*3/4	1/2	3	.305	.220	—	74167	—
*3/4	1/2	3	.459	.220	74067	—	—
*1	1/2	3-1/4	.370	.260	—	—	74270
*1	1/2	3-1/4	.426	.260	—	74170	—
*1	1/2	3-1/4	.641	.260	74070	—	—

*Steel Shank / Con mango de acero / Avec queue en acier / Mit Stahlschaft

NOTE: DC₁ dimension varies based on angle. Contact your KSPT representative or consult SGS Tool Wizard® for dimension information.

TOLERANCES (inch)

1/8-1/4 DIAMETER

DC = +0.0000/-0.0005

3/8-1 DIAMETER

DC = +0.003/-0.000

Included Angle +1°/-1°

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

FRACTIONAL
6 Flute Countersink

Series 606 Fractional		Hardness	Vc (sfm)	DC • in							
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536			1/8	3/16	1/4	3/8	1/2	3/4	1	
	≤ 175 Bhn or ≤ 7 HRc	125 (100-150)	RPM	3820	2547	1910	1273	955	637	478	
			Fr	0.0010	0.0016	0.0021	0.0031	0.0042	0.0063	0.0084	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 300 Bhn or ≤ 32 HRc	60 (48-72)	RPM	1834	1222	917	611	458	306	229
				Fr	0.0010	0.0015	0.0020	0.0029	0.0039	0.0059	0.0079
		≤ 425 Bhn or ≤ 45 HRc	45 (36-54)	RPM	1375	917	688	458	344	229	172
	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 275 Bhn or ≤ 28 HRc	95 (76-114)	RPM	2903	1935	1452	968	726	484	363
				Fr	0.0009	0.0013	0.0018	0.0027	0.0036	0.0054	0.0072
		≤ 375 Bhn or ≤ 40 HRc	60 (48-72)	RPM	1834	1222	917	611	458	306	229
M	CAST IRONS Gray, Malleable, Ductile	≤ 450 Bhn or ≤ 48 HRc	35 (28-42)	RPM	1070	713	535	357	267	178	134
				Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
				Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
K	CAST IRONS Gray, Malleable, Ductile		(42-64)	Fr	0.0006	0.0009	0.0012	0.0019	0.0025	0.0037	0.0049
				Feed (ipm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		≤ 330 Bhn or ≤ 36 HRc	46 (37-55)	RPM	1406	937	703	469	351	234	176
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450			Fr	0.0005	0.0007	0.0010	0.0015	0.0020	0.0030	0.0040
		≤ 375 Bhn or ≤ 40 HRc	21 (17-25)	RPM	642	428	321	214	160	107	80
				Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0019	0.0025
K	CAST IRONS Gray, Malleable, Ductile	≤ 275 Bhn or ≤ 28 HRc	28 (22-34)	RPM	856	570	428	285	214	143	107
				Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
K	CAST IRONS Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	105 (84-126)	RPM	3209	2139	1604	1070	802	535	401
				Fr	0.0012	0.0018	0.0024	0.0036	0.0049	0.0073	0.0097
				Feed (ipm)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
K	CAST IRONS Gray, Malleable, Ductile	≤ 330 Bhn or ≤ 36 HRc	75 (60-90)	RPM	2292	1528	1146	764	573	382	287
				Fr	0.0012	0.0018	0.0024	0.0037	0.0049	0.0073	0.0098
				Feed (ipm)	2.8	2.8	2.8	2.8	2.8	2.8	2.8

continued on next page

6 Flute Countersink

	Series 606 Fractional	Hardness	Vc (sfm)	DC • in							
				1/8	3/16	1/4	3/8	1/2	3/4	1	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	225 (180-270)	RPM Fr Feed (ipm)	6876 0.0015 10.3	4584 0.0022 10.3	3438 0.0030 10.3	2292 0.0045 10.3	1719 0.0060 10.3	1146 0.0090 10.3	860 0.0120 10.3
		≤ 150 Bhn or ≤ 7 HRc	190 (152-228)	RPM Fr Feed (ipm)	5806 0.0015 8.7	3871 0.0022 8.7	2903 0.0030 8.7	1935 0.0045 8.7	1452 0.0060 8.7	968 0.0090 8.7	726 0.0120 8.7
		≤ 140 Bhn or ≤ 3 HRc	95 (76-114)	RPM Fr Feed (ipm)	2903 0.0008 2.2	1935 0.0011 2.2	1452 0.0015 2.2	968 0.0023 2.2	726 0.0030 2.2	484 0.0045 2.2	363 0.0061 2.2
		≤ 200 Bhn or ≤ 23 HRc	80 (64-96)	RPM Fr Feed (ipm)	2445 0.0008 1.9	1630 0.0012 1.9	1222 0.0016 1.9	815 0.0023 1.9	611 0.0031 1.9	407 0.0047 1.9	306 0.0062 1.9
S	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 220 Bhn or ≤ 19 HRc	18 (14-22)	RPM Fr Feed (ipm)	550 0.0005 0.3	367 0.0008 0.3	275 0.0011 0.3	183 0.0016 0.3	138 0.0022 0.3	92 0.0033 0.3	69 0.0044 0.3
		≤ 320 Bhn or ≤ 34 HRc	14 (11-17)	RPM Fr Feed (ipm)	428 0.0005 0.2	285 0.0007 0.2	214 0.0009 0.2	143 0.0014 0.2	107 0.0019 0.2	71 0.0028 0.2	53 0.0037 0.2
		≤ 425 Bhn or ≤ 45 HRc	12 (10-14)	RPM Fr Feed (ipm)	367 0.0003 0.1	244 0.0004 0.1	183 0.0005 0.1	122 0.0008 0.1	92 0.0011 0.1	61 0.0016 0.1	46 0.0022 0.1
		≤ 275 Bhn or ≤ 28 HRc	36 (29-43)	RPM Fr Feed (ipm)	1100 0.0009 1.0	733 0.0014 1.0	550 0.0018 1.0	367 0.0027 1.0	275 0.0036 1.0	183 0.0055 1.0	138 0.0073 1.0
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 350 Bhn or ≤ 38 HRc	28 (22-34)	RPM Fr Feed (ipm)	856 0.0007 0.6	570 0.0011 0.6	428 0.0014 0.6	285 0.0021 0.6	214 0.0028 0.6	143 0.0042 0.6	107 0.0056 0.6
		≤ 440 Bhn or ≤ 47 HRc	21 (17-25)	RPM Fr Feed (ipm)	642 0.0003 0.2	428 0.0005 0.2	321 0.0006 0.2	214 0.0009 0.2	160 0.0012 0.2	107 0.0019 0.2	80 0.0025 0.2

continued on next page

FRACTIONAL
6 Flute Countersink

Series 606 Fractional	Hardness	Vc (sfm)	DC • in							
			1/8	3/16	1/4	3/8	1/2	3/4	1	
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 250 \text{ Bhn}$ or $\leq 24 \text{ HRc}$	35 (28-42)	RPM	1070	713	535	357	267	178	134
			Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0034	0.0045
			Feed (ipm)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	25 (20-30)	RPM	764	509	382	255	191	127	96
			Fr	0.0003	0.0004	0.0005	0.0008	0.0010	0.0016	0.0021
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	$\leq 475 \text{ Bhn}$ or $\leq 50 \text{ HRc}$	20 (16-24)	RPM	611	407	306	204	153	102	76
			Fr	0.0003	0.0005	0.0007	0.0010	0.0013	0.0020	0.0026
			Feed (ipm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = Vc x 3.82 / DC

ipm = Fr x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

FRACTIONAL

Straight Flute Accu-Reamer




5xD



200

FRACTIONAL SERIES

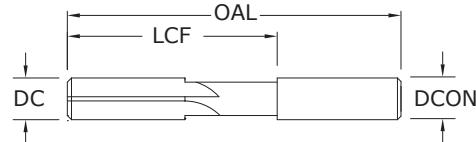

CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	NO. OF FLUTES	EDP NO.	UNCOATED
3/64	3/64	3/4	1-1/2	4	70003	
1/16	1/16	3/4	1-1/2	4	70004	
5/64	5/64	1	2	4	70005	
3/32	3/32	1-1/4	2-1/4	4	70006	
7/64	7/64	1-1/4	2-1/4	4	70007	
1/8	1/8	1-1/4	2-1/4	4	70008	
9/64	9/64	1-1/2	2-1/2	4	70009	
5/32	5/32	1-1/2	2-1/2	4	70010	
11/64	11/64	1-3/4	2-3/4	4	70011	
3/16	3/16	1-3/4	2-3/4	4	70012	
13/64	13/64	2	3	4	70013	
7/32	7/32	2	3	4	70014	
15/64	15/64	2	3	4	70015	
1/4	1/4	2	3	4	70016	
17/64	17/64	2-1/4	3-1/4	6	70017	
9/32	9/32	2-1/4	3-1/4	6	70018	
19/64	19/64	2-1/4	3-1/4	6	70019	
5/16	5/16	2-1/4	3-1/4	6	70020	
21/64	21/64	2-3/8	3-1/2	6	70021	
11/32	11/32	2-3/8	3-1/2	6	70022	
23/64	23/64	2-3/8	3-1/2	6	70023	
3/8	3/8	2-3/8	3-1/2	6	70024	
25/64	25/64	2-7/8	4	6	70025	
13/32	13/32	2-7/8	4	6	70026	
27/64	27/64	2-7/8	4	6	70027	
7/16	7/16	2-7/8	4	6	70028	
29/64	29/64	2-7/8	4	6	70029	
15/32	15/32	2-7/8	4	6	70030	
31/64	31/64	2-7/8	4	6	70031	
1/2	1/2	2-7/8	4	6	70032	

continued on next page


TOLERANCES (inch)

DC = +0.0002/-0.0000
DCON = +0.0002/-0.0000

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- NON-FERROUS
- HARDEDEN STEELS

For patent information visit www.ksptpatents.com

Straight Flute Accu-Reamer

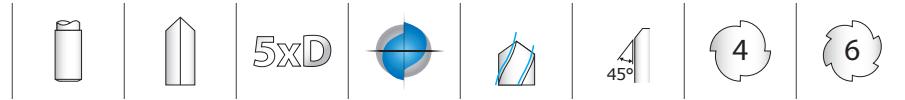

200

FRACTIONAL SERIES

CONTINUED

TOLERANCES (inch)

DC = +0.0002/-0.0000
DCON = +0.0002/-0.0000

inch				
CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	NO. OF FLUTES
.0470 – .0625	1/16	3/4	1-1/2	4
.0626 – .0781	5/64	1	2	4
.0782 – .0938	3/32	1-1/4	2-1/4	4
.0939 – .1094	7/64	1-1/4	2-1/4	4
.1095 – .1250	1/8	1-1/4	2-1/4	4
.1251 – .1406	9/64	1-1/2	2-1/2	4
.1407 – .1562	5/32	1-1/2	2-1/2	4
.1563 – .1719	11/64	1-3/4	2-3/4	4
.1720 – .1875	3/16	1-3/4	2-3/4	4
.1876 – .2031	13/64	2	3	4
.2032 – .2188	7/32	2	3	4
.2189 – .2344	15/64	2	3	4
.2345 – .2500	1/4	2	3	4
.2501 – .2656	17/64	2-1/4	3-1/4	6
.2657 – .2812	9/32	2-1/4	3-1/4	6
.2813 – .2969	19/64	2-1/4	3-1/4	6
.2970 – .3125	5/16	2-1/4	3-1/4	6
.3126 – .3281	21/64	2-3/8	3-1/2	6
.3282 – .3438	11/32	2-3/8	3-1/2	6
.3439 – .3594	23/64	2-3/8	3-1/2	6
.3595 – .3750	3/8	2-3/8	3-1/2	6
.3751 – .3906	25/64	2-7/8	4	6
.3907 – .4062	13/32	2-7/8	4	6
.4063 – .4219	27/64	2-7/8	4	6
.4220 – .4375	7/16	2-7/8	4	6
.4376 – .4531	29/64	2-7/8	4	6
.4532 – .4688	15/32	2-7/8	4	6
.4689 – .4844	31/64	2-7/8	4	6
.4845 – .5000	1/2	2-7/8	4	6

SER 200 Fractional reamers can be ordered to specific diameters according to the size range of Cutting Diameter DC. Please order as:

- 200. Then the size of the cut diameter in fractional format.
 - i.e. 200.0492
 - Description: Series 200 size 0.0492
 - For Metric sizes convert to fractional inches (i.e. $\div 25.4$)
 - The above sample would be a 1.25mm size ($1.25 \div 25.4 = 0.0492"$)
- All other dimensions are fractional as per table including the Shank

Straight Flute Accu-Reamer

Series 200 Fractional		Hardness	Vc (sfm)	DC • in							
				1/16	1/8	3/16	1/4	5/16	3/8	1/2	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175 Bhn or ≤ 7 HRc	150 (120-180)	RPM Fr Feed (ipm)	9168 0.0018 16.5	4584 0.0035 16.0	3056 0.0053 16.2	2292 0.0071 16.3	1834 0.0088 16.1	1528 0.0106 16.2	1146 0.0141 16.2
		≤ 300 Bhn or ≤ 32 HRc	75 (60-90)	RPM Fr Feed (ipm)	4584 0.0016 7.3	2292 0.0031 7.1	1528 0.0047 7.2	1146 0.0062 7.1	917 0.0078 7.2	764 0.0093 7.1	573 0.0124 7.1
		≤ 425 Bhn or ≤ 45 HRc	55 (44-66)	RPM Fr Feed (ipm)	3362 0.0009 3.0	1681 0.0019 3.2	1121 0.0028 3.1	840 0.0037 3.1	672 0.0046 3.1	560 0.0056 3.1	420 0.0074 3.1
		≤ 275 Bhn or ≤ 28 HRc	115 (92-138)	RPM Fr Feed (ipm)	7029 0.0015 10.5	3514 0.0030 10.5	2343 0.0045 10.5	1757 0.0060 10.5	1406 0.0075 10.5	1171 0.0090 10.5	879 0.0120 10.5
		≤ 375 Bhn or ≤ 40 HRc	70 (56-84)	RPM Fr Feed (ipm)	4278 0.0015 6.4	2139 0.0030 6.4	1426 0.0045 6.4	1070 0.0060 6.4	856 0.0075 6.4	713 0.0090 6.4	535 0.0120 6.4
		≤ 450 Bhn or ≤ 48 HRc	45 (36-54)	RPM Fr Feed (ipm)	2750 0.0009 2.5	1375 0.0019 2.6	917 0.0028 2.6	688 0.0037 2.5	550 0.0046 2.5	458 0.0056 2.6	344 0.0074 2.5
		≤ 250 Bhn or ≤ 24 HRc	75 (60-90)	RPM Fr Feed (ipm)	4584 0.0010 4.6	2292 0.0020 4.6	1528 0.0029 4.4	1146 0.0039 4.5	917 0.0049 4.5	764 0.0059 4.5	573 0.0078 4.5
		≤ 330 Bhn or ≤ 36 HRc	55 (44-66)	RPM Fr Feed (ipm)	3362 0.0008 2.7	1681 0.0015 2.5	1121 0.0023 2.6	840 0.0030 2.5	672 0.0038 2.6	560 0.0045 2.5	420 0.0060 2.5
		≤ 275 Bhn or ≤ 28 HRc	35 (28-42)	RPM Fr Feed (ipm)	2139 0.0010 2.1	1070 0.0020 2.1	713 0.0029 2.1	535 0.0039 2.1	428 0.0049 2.1	357 0.0059 2.1	267 0.0078 2.1
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 375 Bhn or ≤ 40 HRc	25 (20-30)	RPM Fr Feed (ipm)	1528 0.0006 0.9	764 0.0013 1.0	509 0.0019 1.0	382 0.0025 1.0	306 0.0031 0.9	255 0.0038 1.0	191 0.0050 1.0
		≤ 40 HRc	125 (100-150)	RPM Fr Feed (ipm)	7640 0.0020 15.3	3820 0.0040 15.3	2547 0.0060 15.3	1910 0.0081 15.5	1528 0.0101 15.4	1273 0.0121 15.4	955 0.0161 15.4
		≤ 330 Bhn or ≤ 36 HRc	95 (76-114)	RPM Fr Feed (ipm)	5806 0.0020 11.6	2903 0.0040 11.6	1935 0.0060 11.6	1452 0.0081 11.8	1161 0.0101 11.7	968 0.0121 11.7	726 0.0161 11.7
		≤ 80 Bhn or ≤ 47 HRb	270 (216-324)	RPM Fr Feed (ipm)	16502 0.0025 41.3	8251 0.0050 41.3	5501 0.0075 41.3	4126 0.0100 41.3	3300 0.0125 41.3	2750 0.0150 41.3	2063 0.0200 41.3
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150 Bhn or ≤ 7 HRc	230 (184-276)	RPM Fr Feed (ipm)	14058 0.0025 35.1	7029 0.0050 35.1	4686 0.0075 35.1	3514 0.0100 35.1	2812 0.0125 35.1	2343 0.0150 35.1	1757 0.0200 35.1
		≤ 140 Bhn or ≤ 3 HRc	115 (92-138)	RPM Fr Feed (ipm)	7029 0.0013 9.1	3514 0.0026 9.1	2343 0.0038 8.9	1757 0.0051 9.0	1406 0.0064 9.0	1171 0.0077 9.0	879 0.0102 9.0
		≤ 200 Bhn or ≤ 23 HRc	95 (76-114)	RPM Fr Feed (ipm)	5806 0.0013 7.5	2903 0.0026 7.5	1935 0.0038 7.4	1452 0.0051 7.4	1161 0.0064 7.4	968 0.0077 7.5	726 0.0102 7.4
		≤ 250 Bhn or ≤ 25 HRc	125 (100-150)	RPM Fr Feed (ipm)	16502 0.0020 15.3	8251 0.0040 15.3	5501 0.0060 15.3	4126 0.0081 15.5	3300 0.0101 15.4	2750 0.0121 15.4	2063 0.0161 15.4
COPPER ALLOYS Alum Bronze, C110, Muntz Brass	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 250 Bhn or ≤ 25 HRc	95 (76-114)	RPM Fr Feed (ipm)	16502 0.0020 15.3	8251 0.0040 15.3	5501 0.0060 15.3	4126 0.0081 15.5	3300 0.0101 15.4	2750 0.0121 15.4	2063 0.0161 15.4
		≤ 300 Bhn or ≤ 30 HRc	125 (100-150)	RPM Fr Feed (ipm)	16502 0.0020 15.3	8251 0.0040 15.3	5501 0.0060 15.3	4126 0.0081 15.5	3300 0.0101 15.4	2750 0.0121 15.4	2063 0.0161 15.4
		≤ 350 Bhn or ≤ 35 HRc	150 (120-180)	RPM Fr Feed (ipm)	16502 0.0020 15.3	8251 0.0040 15.3	5501 0.0060 15.3	4126 0.0081 15.5	3300 0.0101 15.4	2750 0.0121 15.4	2063 0.0161 15.4

continued on next page

Straight Flute Accu-Reamer

Series 200 Fractional		Hardness	Vc (sfm)	DC • in							
				1/16	1/8	3/16	1/4	5/16	3/8	1/2	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 220 Bhn or ≤ 19 HRc	20 (16-24)	RPM Fr Feed (ipm)	1222 0.0008 1.0	611 0.0015 0.9	407 0.0023 0.9	306 0.0030 0.9	244 0.0038 0.9	204 0.0045 0.9	153 0.0060 0.9
		≤ 320 Bhn or ≤ 34 HRc	15 (12-18)	RPM Fr Feed (ipm)	917 0.0006 0.6	458 0.0013 0.6	306 0.0019 0.6	229 0.0025 0.6	183 0.0031 0.6	153 0.0038 0.6	115 0.0050 0.6
		≤ 425 Bhn or ≤ 45 HRc	10 (8-12)	RPM Fr Feed (ipm)	611 0.0004 0.2	306 0.0007 0.2	204 0.0011 0.2	153 0.0015 0.2	122 0.0018 0.2	102 0.0022 0.2	76 0.0029 0.2
		≤ 275 Bhn or ≤ 28 HRc	45 (36-54)	RPM Fr Feed (ipm)	2750 0.0015 4.1	1375 0.0030 4.1	917 0.0045 4.1	688 0.0060 4.1	550 0.0075 4.1	458 0.0090 4.1	344 0.0120 4.1
		≤ 350 Bhn or ≤ 38 HRc	35 (28-42)	RPM Fr Feed (ipm)	2139 0.0010 2.1	1070 0.0020 2.1	713 0.0029 2.1	535 0.0039 2.1	428 0.0049 2.1	357 0.0059 2.1	267 0.0078 2.1
		≤ 440 Bhn or ≤ 47 HRc	25 (20-30)	RPM Fr Feed (ipm)	1528 0.0006 0.9	764 0.0013 1.0	509 0.0019 1.0	382 0.0025 1.0	306 0.0031 0.9	255 0.0038 1.0	191 0.0050 1.0
		≤ 250 Bhn or ≤ 24 HRc	40 (32-48)	RPM Fr Feed (ipm)	2445 0.0010 2.4	1222 0.0020 2.4	815 0.0029 2.4	611 0.0039 2.4	489 0.0049 2.4	407 0.0059 2.4	306 0.0078 2.4
		≤ 375 Bhn or ≤ 40 HRc	25 (20-30)	RPM Fr Feed (ipm)	1528 0.0006 0.9	764 0.0013 1.0	509 0.0019 1.0	382 0.0025 1.0	306 0.0031 0.9	255 0.0038 1.0	191 0.0050 1.0
		≤ 475 Bhn or ≤ 50 HRc	20 (16-24)	RPM Fr Feed (ipm)	1222 0.0004 0.5	611 0.0008 0.5	407 0.0012 0.5	306 0.0016 0.5	244 0.0019 0.5	204 0.0023 0.5	153 0.0031 0.5
		≤ 655 Bhn or ≤ 60 HRc	14 (11-17)	RPM Fr Feed (ipm)	856 0.0003 0.3	428 0.0007 0.3	285 0.0011 0.3	214 0.0014 0.3	171 0.0018 0.3	143 0.0021 0.3	107 0.0028 0.3

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)
 rpm = Vc x 3.82 / DC
 ipm = Fr x rpm

increase speed and feed 30 percent when using coated reamers
 reduce speed and feed for materials harder than listed
 refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

METRIC


Straight Flute Reamer



3-6xD

**201M**

METRIC SERIES

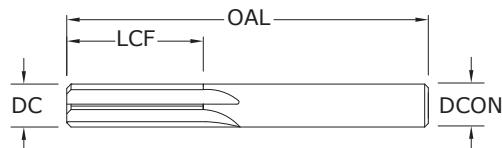

CUTTING DIAMETER DC	SHANK DIAMETER DCON	MAXIMUM REAM LENGTH LCF	OVERALL LENGTH OAL	NO. OF FLUTES	EDP NO.
1,0	1,0	6,0	32,0	4	81001
1,5	1,5	9,5	38,0	4	81003
2,0	2,0	12,7	44,0	4	81005
2,5	2,5	12,7	50,0	4	81007
3,0	3,0	16,0	57,0	4	81009
3,5	3,5	19,0	63,0	4	81011
4,0	4,0	19,0	63,0	4	81013
4,5	4,5	22,0	70,0	4	81015
5,0	5,0	25,0	75,0	4	81017
5,5	5,5	25,0	75,0	4	81019
6,0	6,0	25,0	75,0	4	81021
7,0	7,0	28,0	82,0	6	81023
8,0	8,0	28,0	82,0	6	81025
9,0	9,0	31,0	89,0	6	81027
10,0	10,0	31,0	89,0	6	81029

TOLERANCES (mm)**1–6 DIAMETER**

DC = +0,008/-0,000

>6–10 DIAMETER

DC = +0,010/-0,000

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

HARDENED STEELS

For patent information visit
www.ksptpatents.com

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
			1	2	3	4	6	8	10	
P	≤ 175 Bhn or ≤ 7 HRc	46 (37-55)	RPM	14541	7271	4847	3635	2424	1818	1454
			Fr	0.028	0.056	0.085	0.113	0.169	0.226	0.282
	≤ 300 Bhn or ≤ 32 HRc	23 (18-27)	RPM	7271	3635	2424	1818	1212	909	727
			Fr	0.025	0.050	0.074	0.099	0.149	0.198	0.248
	≤ 425 Bhn or ≤ 45 HRc	17 (13-20)	RPM	5332	2666	1777	1333	889	666	533
			Fr	0.015	0.030	0.044	0.059	0.089	0.119	0.148
			Feed (mm/min)	79	79	79	79	79	79	79
	≤ 275 Bhn or ≤ 28 HRc	35 (28-42)	RPM	11148	5574	3716	2787	1858	1394	1115
			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
M	≤ 375 Bhn or ≤ 40 HRc	21 (17-26)	RPM	6786	3393	2262	1696	1131	848	679
			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
	≤ 450 Bhn or ≤ 48 HRc	14 (11-16)	RPM	4362	2181	1454	1091	727	545	436
			Fr	0.015	0.030	0.045	0.060	0.089	0.119	0.149
			Feed (mm/min)	65	65	65	65	65	65	65
	≤ 250 Bhn or ≤ 24 HRc	23 (18-27)	RPM	7271	3635	2424	1818	1212	909	727
			Fr	0.015	0.030	0.045	0.059	0.089	0.119	0.149
			Feed (mm/min)	108	108	108	108	108	108	108
	≤ 330 Bhn or ≤ 36 HRc	17 (13-20)	RPM	5332	2666	1777	1333	889	666	533
K	≤ 275 Bhn or ≤ 28 HRc	11 (9-13)	RPM	3393	1696	1131	848	565	424	339
			Fr	0.015	0.029	0.044	0.059	0.088	0.118	0.147
	≤ 375 Bhn or ≤ 40 HRc	8 (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
			Feed (mm/min)	24	24	24	24	24	24	24
	≤ 220 Bhn or ≤ 19 HRc	38 (30-46)	RPM	12118	6059	4039	3029	2020	1515	1212
			Fr	0.032	0.064	0.097	0.129	0.193	0.257	0.322
	≤ 330 Bhn or ≤ 36 HRc	29 (23-35)	RPM	9209	4605	3070	2302	1535	1151	921
			Fr	0.032	0.064	0.096	0.128	0.192	0.256	0.320
			Feed (mm/min)	295	295	295	295	295	295	295

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
			1	2	3	4	6	8	10	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80 Bhn or ≤ 47 HRb	82 (66-99)	RPM Fr Feed (mm/min)	26174 0.040 1047	13087 0.080 1047	8725 0.120 1047	6544 0.160 1047	4362 0.240 1047	3272 0.320 1047
		≤ 150 Bhn or ≤ 7 HRc	70 (56-84)	RPM Fr Feed (mm/min)	22297 0.040 892	11148 0.080 892	7432 0.120 892	5574 0.160 892	3716 0.240 892	2787 0.320 892
		≤ 140 Bhn or ≤ 3 HRc	35 (28-42)	RPM Fr Feed (mm/min)	11148 0.020 227	5574 0.041 227	3716 0.061 227	2787 0.081 227	1858 0.122 227	1394 0.163 227
	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 200 Bhn or ≤ 23 HRc	29 (23-35)	RPM Fr Feed (mm/min)	9209 0.020 188	4605 0.041 188	3070 0.061 188	2302 0.082 188	1535 0.122 188	1151 0.163 188
		≤ 220 Bhn or ≤ 19 HRc	6 (5-7)	RPM Fr Feed (mm/min)	1939 0.012 23	969 0.024 23	646 0.036 23	485 0.047 23	323 0.071 23	242 0.095 23
		≤ 320 Bhn or ≤ 34 HRc	5 (4-5)	RPM Fr Feed (mm/min)	1454 0.010 15	727 0.021 15	485 0.031 15	364 0.041 15	242 0.062 15	182 0.083 15
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy 800, Monel 400, Rene, Waspaloy	≤ 425 Bhn or ≤ 45 HRc	3 (2-4)	RPM Fr Feed (mm/min)	969 0.006 6	485 0.012 6	323 0.019 6	242 0.025 6	162 0.037 6	121 0.050 6
		≤ 275 Bhn or ≤ 28 HRc	14 (11-16)	RPM Fr Feed (mm/min)	4362 0.024 105	2181 0.048 105	1454 0.072 105	1091 0.096 105	727 0.144 105	545 0.193 105
		≤ 350 Bhn or ≤ 38 HRc	11 (9-13)	RPM Fr Feed (mm/min)	3393 0.015 50	1696 0.029 50	1131 0.044 50	848 0.059 50	565 0.088 50	424 0.118 50
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 440 Bhn or ≤ 47 HRc	8 (6-9)	RPM Fr Feed (mm/min)	2424 0.010 24	1212 0.020 24	808 0.030 24	606 0.040 24	404 0.059 24	303 0.079 24
		≤ 440 Bhn or ≤ 47 HRc	8 (6-9)	RPM Fr Feed (mm/min)	2424 0.010 24	1212 0.020 24	808 0.030 24	606 0.040 24	404 0.059 24	303 0.079 24
		≤ 440 Bhn or ≤ 47 HRc	8 (6-9)	RPM Fr Feed (mm/min)	2424 0.010 24	1212 0.020 24	808 0.030 24	606 0.040 24	404 0.059 24	303 0.079 24

continued on next page

Straight Flute Reamer

Series 201M Metric	Hardness	Vc (m/min)	DC • mm							
			1	2	3	4	6	8	10	
H TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 250 \text{ Bhn}$ or $\leq 24 \text{ HRc}$	12 (10-15)	RPM	3878	1939	1293	969	646	485	388
			Fr	0.015	0.031	0.046	0.062	0.093	0.124	0.155
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	8 (6-9)	RPM	2424	1212	808	606	404	303	242
			Fr	0.010	0.020	0.030	0.040	0.059	0.079	0.099
	$\leq 475 \text{ Bhn}$ or $\leq 50 \text{ HRc}$	6 (5-7)	RPM	1939	969	646	485	323	242	194
			Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062
	$\leq 655 \text{ Bhn}$ or $\leq 60 \text{ HRc}$	4 (3-5)	RPM	1272	636	424	318	212	159	127
			Fr	0.006	0.013	0.019	0.025	0.038	0.050	0.063
			Feed (mm/min)	8	8	8	8	8	8	8

Bhn (Brinell) HRc (Rockwell C) HRb (Rockwell B)

rpm = (Vc x 1000) / (DC x 3.14)

mm/min = Fr x rpm

increase speed and feed 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



VALUE AT THE SPINDLE®

Routers



Routing

HIGH PERFORMANCE ROUTERS	SERIES	DESCRIPTION	PAGE
Carbon Composite	20-CCR	Multi-Flute Carbon Composite Fractional	338
	20M-CCR	Multi-Flute Carbon Composite Metric	338
	20-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Fractional	339
	20M-CCR-LHC	Multi-Flute Carbon Composite Left Hand Cut Metric	339
Coarse Cut Carbon Composite	31-CCR	Multi-Flute Coarse Composite Fractional	342
	31M-CCR	Multi-Flute Coarse Composite Metric	342
Compression	25	Multi-Flute Compression Fractional	345
	25M	Multi-Flute Compression Metric	345
GENERAL PURPOSE ROUTERS	SERIES	DESCRIPTION	PAGE
Up Cut	21	2 Flute Up Cut Fractional	348
	21M	2 Flute Up Cut Metric	348
Down Cut	22	2 Flute Down Cut Fractional	349
	22M	2 Flute Down Cut Metric	349

Speed & Feed Recommendations listed after each series

Ranurado

RANURADORES DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA
Compuesto de carbono	20-CCR	Filo múltiple, compuesto de carbono, fraccional	338
	20M-CCR	Filo múltiple, compuesto de carbono, métrico	338
	20-CCR-LHC	Filo múltiple, carbon composite corte hélice izquierda fraccional	339
	20M-CCR-LHC	Filo múltiple, carbo composite corte hélice izquierda métrico	339
Compuesto de carbono de corte grueso	31-CCR	Filo múltiple, compuesto grueso, fraccional	342
	31M-CCR	Filo múltiple, compuesto grueso, métrico	342
Compresión	25	Filo múltiple, compresión, fraccional	345
	25M	Filo múltiple, compresión, métrico	345

RANURADORES DE USO GENERAL	SERIE	DESCRIPCIÓN	PÁGINA
Corte ascendente	21	2 filos, corte ascendente, fraccional	348
	21M	2 filos, corte ascendente, métrico	348
Corte descendente	22	2 filos, corte descendente, fraccional	349
	22M	2 filos, corte descendente, métrico	349

Recomendaciones de velocidades y avances mostradas tras cada serie

Détourage

FRAISES A DETOURER HAUTE PERFORMANCE	SÈRIES	DESCRIPTION	PAGE
Composites carbone	20-CCR	Multi-dents pour composites carbone (fractionnel)	338
	20M-CCR	Multi-dents pour composites carbone (métrique)	338
	20-CCR-LHC	Multi-dents carbon composite coupe à gauche (fractionnel)	339
	20M-CCR-LHC	Multi-dents carbon composite coupe à gauche (métrique)	339
	31-CCR	Multi-dents pour composites grossiers (fractionnel)	342
Pour composites carbone coupe grossière	31M-CCR	Multi-dents pour composites grossiers (métrique)	342
	25	Multi-dents de compression (fractionnel)	345
Compression	25M	Multi-dents de compression (métrique)	345

FRAISES À DÉTOURER UNIVERSELLES	SÈRIES	DESCRIPTION	PAGE
Coupe ascendante	21	2 dents coupe ascendante (fractionnel)	348
	21M	2 dents coupe ascendante (métrique)	348
Coupe descendante	22	2 dents coupe descendante (fractionnel)	349
	22M	2 dents coupe descendante (métrique)	349

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE
Kohlefaserbundwerkstoff	20-CCR	Zölliger Konturenfräser für Kohlefaserbundwerkstoff	338
	20M-CCR	Konturenfräser für Kohlefaserbundwerkstoff	338
	20-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene zöllig	339
	20M-CCR-LHC	Mehrschneider Carbon Composite Links geschnittene metrisch	339
Grobschnitt Kohlefaserbundwerkstoff	31-CCR	Zölliger Konturenfräser für Verbundkunststoff	342
	31M-CCR	Konturenfräser für Verbundkunststoff	342
Gegenläufiger Drall	25	Zölliger Gegenläufiger Konturenfräser	345
	25M	Gegenläufiger Konturenfräser	345
STANDARD-KONTURENFRÄSER	SERIE	BESCHREIBUNG	SEITE
Rechtsspirale	21	Zölliger VHM-Fräser mit 2 Schneiden (ziehend)	348
	21M	VHM-Fräser mit 2 Schneiden (ziehend)	348
Linksspirale	22	Zölliger VHM-Fräser mit 2 Schneiden (drückend)	349
	22M	VHM-Fräser mit 2 Schneiden (drückend)	349


Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

Carbon Composite



20-CCR FRACTIONAL SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

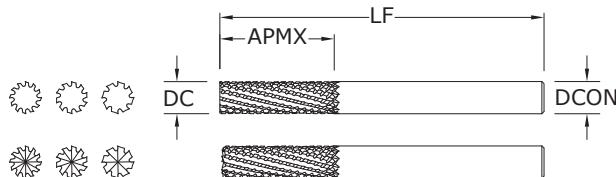

CUTTING DIAMETER DC	LENGTH OF CUT APMX	inch		NO. OF FLUTES	END STYLE	EDP NO.	
		OVERALL LENGTH LF	SHANK DIAMETER DCON			UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	72930	73013
1/4	1	2-1/2	1/4	8	End Cutting	72947	73012
5/16	1	2-1/2	5/16	10	No End Cutting	72948	73026
5/16	1	2-1/2	5/16	10	End Cutting	72949	73014
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	72950	73028
3/8	1-1/8	2-1/2	3/8	12	End Cutting	72951	73027
1/2	1-1/2	3-1/2	1/2	12	No End Cutting	72952	73041
1/2	1-1/2	3-1/2	1/2	12	End Cutting	72953	73029

TOLERANCES (inch)

DC = +.000/-0.005
DCON = h₆

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

20M-CCR METRIC SERIES

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

CUTTING DIAMETER DC	LENGTH OF CUT APMX	mm		NO. OF FLUTES	END STYLE	EDP NO.		
		OVERALL LENGTH LF	SHANK DIAMETER DCON			UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)
2,0	6,0	38,0	3,0	5	End Cutting	82930	83100	83070
3,0	10,0	38,0	3,0	5	End Cutting	82931	83101	83071
4,0	12,0	50,0	4,0	5	End Cutting	82932	83102	83072
5,0	15,0	50,0	6,0	5	End Cutting	82933	83103	83073
6,0	25,0	63,0	6,0	8	No End Cutting	82966	83104	83027
6,0	25,0	63,0	6,0	8	End Cutting	82967	83105	83026
8,0	25,0	63,0	8,0	10	No End Cutting	82968	83106	83029
8,0	25,0	63,0	8,0	10	End Cutting	82969	83107	83028
10,0	28,0	63,0	10,0	12	No End Cutting	82970	83108	83042
10,0	28,0	63,0	10,0	12	End Cutting	82971	83109	83041
12,0	38,0	89,0	12,0	12	No End Cutting	82972	83110	83044
12,0	38,0	89,0	12,0	12	End Cutting	82973	83111	83043

TOLERANCES (mm)

DC = +0,000/-0,130
DCON = h₆


PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



FRACTIONAL & METRIC

Carbon Composite




LHC



8

10

12

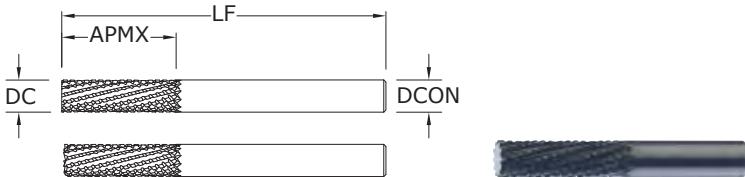

20-CCR-LHC FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/-0.005
DCON = h6

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	73070	73078
1/4	1	2-1/2	1/4	8	End Cutting	73071	73079
5/16	1	2-1/2	5/16	10	No End Cutting	73072	73080
5/16	1	2-1/2	5/16	10	End Cutting	73073	73081
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	73074	73082
3/8	1-1/8	2-1/2	3/8	12	End Cutting	73075	73083

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

TOLERANCES (mm)

DC = +0,000/-0,130
DCON = h6


PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	8	No End Cutting	83220	83230
6,0	25,0	63,0	6,0	8	End Cutting	83221	83231
8,0	25,0	63,0	8,0	10	No End Cutting	83222	83232
8,0	25,0	63,0	8,0	10	End Cutting	83223	83233
10,0	28,0	63,0	10,0	12	No End Cutting	83224	83234
10,0	28,0	63,0	10,0	12	End Cutting	83225	83235

- Multi-flute design and positive geometry to shear with minimal pressure and delamination
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

Carbon Composite



Series 20 Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • in				
				1/4	5/16	3/8	1/2	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	400 (320-480)	RPM	6112	4890	4075	3056
				Fr	0.0049	0.0094	0.0135	0.0180
				Feed (ipm)	30	46	55	55
	Profile 	≤ 0.5 ≤ 1.5	500 (400-600)	RPM	7640	6112	5093	3820
				Fr	0.0049	0.0094	0.0135	0.0180
				Feed (ipm)	38	58	69	69
	HSM 	≤ 0.05 ≤ 2	825 (660-990)	RPM	12606	10085	8404	6303
				Fr	0.0111	0.0215	0.0309	0.0413
				Feed (ipm)	140	217	260	260
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	320 (256-384)	RPM	4890	3912	3260	2445
				Fr	0.0049	0.0095	0.0135	0.0180
				Feed (ipm)	24	37	44	44
	Profile 	≤ 0.5 ≤ 1.5	400 (320-480)	RPM	6112	4890	4075	3056
				Fr	0.0049	0.0095	0.0135	0.0180
				Feed (ipm)	30	46	55	55
	HSM 	≤ 0.05 ≤ 2	660 (528-792)	RPM	10085	8068	6723	5042
				Fr	0.0110	0.0214	0.0311	0.0414
				Feed (ipm)	111	173	209	209
CARBON, GRAPHITE	Slot 	1 ≤ 1	480 (384-576)	RPM	7334	5868	4890	3667
				Fr	0.0064	0.0124	0.0180	0.0240
				Feed (ipm)	47	73	88	88
	Profile 	≤ 0.5 ≤ 1.5	600 (480-720)	RPM	9168	7334	6112	4584
				Fr	0.0064	0.0124	0.0180	0.0240
				Feed (ipm)	59	91	110	110
	HSM 	≤ 0.05 ≤ 2	990 (792-1188)	RPM	15127	12102	10085	7564
				Fr	0.0147	0.0287	0.0412	0.0549
				Feed (ipm)	223	347	415	415
PLASTICS	Slot 	1 ≤ 1	665 (640-690)	RPM	10161	8129	6774	5081
				Fr	0.0077	0.0150	0.0217	0.0241
				Feed (ipm)	78	122	147	147
	Profile 	≤ 0.5 ≤ 1.5	1000 (800-1200)	RPM	15280	12224	10187	7640
				Fr	0.0077	0.0150	0.0217	0.0241
				Feed (ipm)	118	183	221	184
	HSM 	≤ 0.05 ≤ 2	1650 (1320-1980)	RPM	25212	20170	16808	12606
				Fr	0.0147	0.0287	0.0413	0.0551
				Feed (ipm)	370	579	694	694

HSM (high speed machining)

rpm = $V_c \times 3.82 / DC$ ipm = $Fr \times rpm$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

METRIC
Carbon Composite

Series 20M Metric					Vc (m/min)	DC • mm					
	Ae x DC	Ap x DC				3	6	8	10	12	
N	CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1	≤ 1	120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	700	720	1160	1395	1395
	GFRP (FIBERGLASS)	Profile 	≤ 0.5	≤ 1.5	150 (120-180)	RPM	15903	7951	5963	4771	3976
						Fr	0.055	0.113	0.243	0.366	0.439
						Feed (mm/min)	875	900	1450	1744	1744
	CARBON, GRAPHITE	HSM 	≤ 0.05	≤ 2	250 (200-300)	RPM	26504	13252	9939	7951	6626
						Fr	0.126	0.260	0.556	0.833	1.000
						Feed (mm/min)	3350	3450	5527	6625	6625
PLASTICS	Slot 	1	≤ 1		100 (80-120)	RPM	10602	5301	3976	3181	2650
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	570	587	940	1135	1135
	Profile 	≤ 0.5	≤ 1.5		120 (96-164)	RPM	12722	6361	4771	3817	3181
						Fr	0.054	0.111	0.236	0.357	0.428
						Feed (mm/min)	684	704	1128	1362	1362
	HSM 	≤ 0.05	≤ 2		200 (160-240)	RPM	21203	10602	7951	6361	5301
						Fr	0.124	0.261	0.557	1.011	1.213
						Feed (mm/min)	2629	2765	4430	6430	6430
	Slot 	1	≤ 1		145 (116-174)	RPM	15372	7686	5765	4612	3843
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1061	1165	1860	2224	2224
	Profile 	≤ 0.5	≤ 1.5		185 (148-222)	RPM	19613	9807	7355	5884	4903
						Fr	0.069	0.152	0.323	0.482	0.579
						Feed (mm/min)	1353	1486	2373	2838	2838
	HSM 	≤ 0.05	≤ 2		300 (240-360)	RPM	31805	15903	11927	9542	7951
						Fr	0.159	0.348	0.740	1.109	1.331
						Feed (mm/min)	5057	5535	8820	10580	10580
	Slot 	1	≤ 1		245 (196-294)	RPM	25974	12987	9740	7792	6494
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	1792	1945	3107	3717	3717
	Profile 	≤ 0.5	≤ 1.5		305 (244-366)	RPM	32335	16168	12126	9701	8084
						Fr	0.069	0.150	0.319	0.477	0.572
						Feed (mm/min)	2231	2421	3868	4627	4627
	HSM 	≤ 0.05	≤ 2		505 (404-606)	RPM	53538	26769	20077	16062	13385
						Fr	0.159	0.344	0.732	1.097	1.316
						Feed (mm/min)	8513	9220	14690	17617	17617

HSM (high speed machining)

rpm = $(Vc \times 1000) / (DC \times 3.14)$

mm/min = Fr x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry


diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

FRACTIONAL

Coarse Cut Carbon Composite



(RHC)



5


7

8

10

31-CCR
FRACTIONAL SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

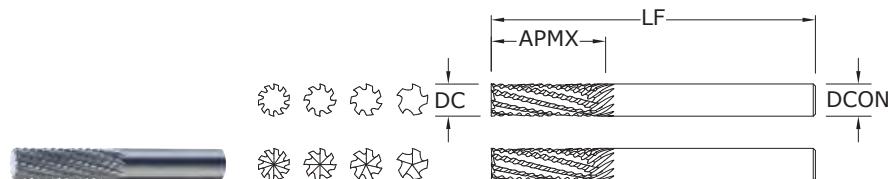

inch							EDP NO.		TOLERANCES (inch)	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE		UNCOATED	Di-NAMITE® (Diamond)	DC = +.000/-0.005	DCON = h6
1/4	1	2-1/2	1/4	5	End Cutting	72954	72955			
1/4	1	2-1/2	1/4	5	No End Cutting	72956	72957			
5/16	1	2-1/2	5/16	7	End Cutting	72958	72959			
5/16	1	2-1/2	5/16	7	No End Cutting	72960	72961			
3/8	1-1/8	2-1/2	3/8	8	End Cutting	72962	72963			
3/8	1-1/8	2-1/2	3/8	8	No End Cutting	72964	72965			
1/2	1-1/2	3-1/2	1/2	10	End Cutting	72966	72967			
1/2	1-1/2	3-1/2	1/2	10	No End Cutting	72968	72969			

TOLERANCES (inch)

DC = +.000/-0.005

DCON = h6

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

31M-CCR
METRIC SERIES

- Fewer, deeper flutes to prevent clogging in heavy routing
- Unique clearance grind minimizes contact between tool diameter and workpiece eliminating friction
- Left hand flutes engineered to control the fibers within CFRP, preventing excessive fiber breakout
- Excels at trimming and profiling difficult and abrasive fiber filled plastics

mm							EDP NO.			TOLERANCES (mm)	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	NO. OF FLUTES	END STYLE		UNCOATED	Ti-NAMITE-B (TiB ₂)	Di-NAMITE® (Diamond)	DC = +0,000/-0,130	DCON = h6
6,0	25,0	63,0	6,0	5	End Cutting	82974	83200	82982			
6,0	25,0	63,0	6,0	5	No End Cutting	82975	83201	82983			
8,0	25,0	63,0	8,0	7	End Cutting	82976	83202	82984			
8,0	25,0	63,0	8,0	7	No End Cutting	82977	83203	82985			
10,0	28,0	63,0	10,0	8	End Cutting	82978	83204	82986			
10,0	28,0	63,0	10,0	8	No End Cutting	82979	83205	82987			
12,0	38,0	89,0	12,0	10	End Cutting	82980	83206	82988			
12,0	38,0	89,0	12,0	10	No End Cutting	82981	83207	82989			

TOLERANCES (mm)

DC = +0,000/-0,130

DCON = h6

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

FRACTIONAL
Coarse Cut Carbon Composite

Series 31 Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • in				
				1/4	5/16	3/8	1/2	
N CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	≤ 1	400	RPM	6112	4890	4075	3056
			(320-480)	Fr	0.0029	0.0065	0.0088	0.0147
				Feed (ipm)	18	32	36	45
	Profile 	≤ 0.5	500	RPM	7640	6112	5093	3820
			(400-600)	Fr	0.0029	0.0065	0.0088	0.0147
				Feed (ipm)	23	40	45	56
	HSM 	≤ 0.05	825	RPM	12606	10085	8404	6303
			(660-990)	Fr	0.0069	0.0151	0.0206	0.0344
				Feed (ipm)	87	152	173	217
GFRP (FIBERGLASS)	Slot 	≤ 1	320	RPM	4890	3912	3260	2445
			(256-384)	Fr	0.0031	0.0066	0.0089	0.0147
				Feed (ipm)	15	26	29	36
	Profile 	≤ 0.5	400	RPM	6112	4890	4075	3056
			(320-480)	Fr	0.0031	0.0066	0.0089	0.0147
				Feed (ipm)	19	33	36	45
	HSM 	≤ 0.05	660	RPM	10085	8068	6723	5042
			(528-792)	Fr	0.0069	0.0150	0.0205	0.0343
				Feed (ipm)	70	121	138	173
CARBON, GRAPHITE	Slot 	≤ 1	480	RPM	7334	5868	4890	3667
			(384-576)	Fr	0.0040	0.0087	0.0119	0.0199
				Feed (ipm)	29	51	58	73
	Profile 	≤ 0.5	600	RPM	9168	7334	6112	4584
			(480-720)	Fr	0.0040	0.0087	0.0119	0.0199
				Feed (ipm)	36	64	73	91
	HSM 	≤ 0.05	990	RPM	15127	12102	10085	7564
			(792-1188)	Fr	0.0092	0.0201	0.0275	0.0459
				Feed (ipm)	139	243	277	347
PLASTICS	Slot 	≤ 1	800	RPM	12224	9779	8149	6112
			(640-690)	Fr	0.0040	0.0087	0.0119	0.0200
				Feed (ipm)	49	85	97	122
	Profile 	≤ 0.5	1000	RPM	15280	12224	10187	7640
			(800-1200)	Fr	0.0040	0.0087	0.0119	0.0200
				Feed (ipm)	61	106	121	153
	HSM 	≤ 0.05	1650	RPM	25212	20170	16808	12606
			(1320-1980)	Fr	0.0092	0.0201	0.0275	0.0459
				Feed (ipm)	232	405	462	578

HSM (high speed machining)

rpm = $V_c \times 3.82 / DC$

ipm = $Fr \times rpm$

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

Coarse Cut Carbon Composite





Series 31M Metric	Ae x DC	Ap x DC	Vc (m/min)	DC • mm				
				6	8	10	12	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	120 (96-164)	RPM	6361	4771	3817	3181
				Fr	0.071	0.170	0.244	0.366
				Feed (mm/min)	450	810	930	1165
	Profile 	≤ 0.5 ≤ 1.5	150 (120-180)	RPM	7951	5963	4771	3976
				Fr	0.071	0.170	0.244	0.366
				Feed (mm/min)	563	1013	1163	1456
	HSM 	≤ 0.05 ≤ 2	250 (200-300)	RPM	13252	9939	7951	6626
				Fr	0.162	0.388	0.555	0.832
				Feed (mm/min)	2150	3860	4415	5515
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	100 (80-120)	RPM	5301	3976	3181	2650
				Fr	0.069	0.165	0.237	0.357
				Feed (mm/min)	365	655	755	945
	Profile 	≤ 0.5 ≤ 1.5	120 (96-164)	RPM	6361	4771	3817	3181
				Fr	0.069	0.165	0.237	0.357
				Feed (mm/min)	438	786	906	1134
	HSM 	≤ 0.05 ≤ 2	200 (160-240)	RPM	10602	7951	6361	5301
				Fr	0.163	0.390	0.557	0.834
				Feed (mm/min)	1725	3100	3540	4420
CARBON, GRAPHITE	Slot 	1 ≤ 1	145 (116-174)	RPM	7686	5765	4612	3843
				Fr	0.095	0.226	0.321	0.483
				Feed (mm/min)	728	1300	1480	1855
	Profile 	≤ 0.5 ≤ 1.5	185 (148-222)	RPM	9807	7355	5884	4903
				Fr	0.095	0.226	0.321	0.483
				Feed (mm/min)	929	1659	1888	2367
	HSM 	≤ 0.05 ≤ 2	300 (240-360)	RPM	15903	11927	9542	7951
				Fr	0.217	0.517	0.739	1.111
				Feed (mm/min)	3450	6170	7050	8830
PLASTICS	Slot 	1 ≤ 1	245 (196-294)	RPM	12987	9740	7792	6494
				Fr	0.094	0.223	0.318	0.477
				Feed (mm/min)	1215	2175	2475	3100
	Profile 	≤ 0.5 ≤ 1.5	305 (244-366)	RPM	16168	12126	9701	8084
				Fr	0.094	0.223	0.318	0.477
				Feed (mm/min)	1513	2708	3081	3859
	HSM 	≤ 0.05 ≤ 2	505 (404-606)	RPM	26769	20077	16062	13385
				Fr	0.215	0.512	0.731	1.098
				Feed (mm/min)	5760	10280	11745	14700

HSM (high speed machining)
 $\text{rpm} = (\text{Vc} \times 1000) / (\text{DC} \times 3.14)$
 mm/min = Fr x rpm
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard® for complete technical information
 (www.kyocera-sgstool.com)



FRACTIONAL & METRIC Compression

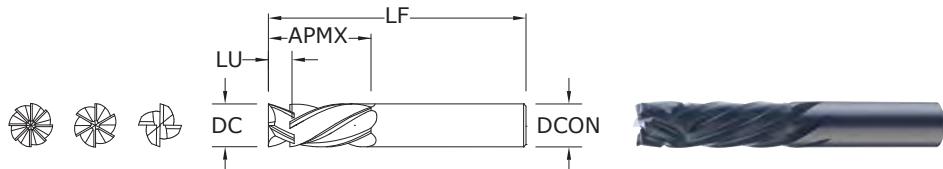

25

FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/-0.003
DCON = h₆

PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com

inch						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	INTERSECT LENGTH LU	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	11/64	4	72970	72971
5/16	1	2-1/2	5/16	7/32	4	72972	72973
3/8	1-1/8	2-1/2	3/8	17/64	6	72974	72975
1/2	1-1/2	3-1/2	1/2	23/64	8	72976	72977

- Compression-style helices direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

TOLERANCES (mm)

DC = +0,000/-0,080
DCON = h₆

PLASTICS/COMPOSITES


For patent information visit www.ksptpatents.com

mm						EDP NO.	
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	INTERSECT LENGTH LU	NO. OF FLUTES	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	4,10	4	82990	82991
8,0	25,0	63,0	8,0	5,58	4	82992	82993
10,0	28,0	63,0	10,0	7,05	6	82994	82995
12,0	38,0	89,0	12,0	8,60	8	82996	82997

- Compression-style helices direct cutting forces inward, eliminating fiber breakout and delamination
- Primary/secondary relief grind for reduced friction and pressure
- Rigid, heavy core

FRACTIONAL

Compression



Series 25 Fractional	Ae x DC	Ap x DC	Vc (sfm)	DC • in					
				1/4	5/16	3/8	1/2		
CFRP, AFRP, (CARBON FIBER, ARAMID FIBER)	Profile 	≤ 0.5	≤ 1.5	500 (400-600)	RPM	7640	6112	5093	3820
				Fz	0.0016	0.0030	0.0040	0.0048	
	HSM 	≤ 0.05	≤ 2	825 (660-990)	RPM	12606	10085	8404	6303
				Fz	0.0037	0.0069	0.0092	0.0110	
GFRP (FIBERGLASS)	Profile 	≤ 0.5	≤ 1.5	400 (320-480)	RPM	6112	4890	4075	3056
				Fz	0.0016	0.0030	0.0040	0.0048	
	HSM 	≤ 0.05	≤ 2	660 (528-792)	RPM	10085	8068	6723	5042
				Fz	0.0037	0.0069	0.0092	0.0110	
N CARBON, GRAPHITE	Profile 	≤ 0.5	≤ 1.5	600 (480-720)	RPM	9168	7334	6112	4584
				Fz	0.0020	0.0038	0.0050	0.0060	
	HSM 	≤ 0.05	≤ 2	990 (792-1188)	RPM	15127	12102	10085	7564
				Fz	0.0046	0.0086	0.0115	0.0138	
PLASTICS	Profile 	≤ 0.5	≤ 1.5	1000 (800-1200)	RPM	15280	12224	10187	7640
				Fz	0.0020	0.0038	0.0050	0.0060	
	HSM 	≤ 0.05	≤ 2	1650 (1320-1980)	RPM	25212	20170	16808	12606
				Fz	0.0046	0.0086	0.0115	0.0138	
MACHINABLE CERAMICS MACHINABLE GLASS	Profile 	≤ 0.5	≤ 1.5	50 (40-60)	RPM	764	611	509	382
				Fz	0.0008	0.0015	0.0020	0.0024	
	HSM 	≤ 0.05	≤ 2	85 (68-102)	RPM	1299	1039	866	649
				Fz	0.0018	0.0034	0.0046	0.0055	
				Feed (ipm)	9.4	14.1	23.9	28.6	

HSM (high speed machining)

rpm = Vc x 3.82 / DC

ipm = Fz x number of flutes x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant


dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)

METRIC
Compression



Series 25M Metric	Ae x DC	Ap x DC	Vc (m/min)	DC • mm					
				6	8	10	12		
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Profile 	≤ 0.5	≤ 1.5	150 (96-164)	RPM	7951	5963	4771	3976
					Fz	0.040	0.065	0.075	0.100
	HSM 	≤ 0.05	≤ 2	250 (200-300)	RPM	13252	9939	7951	6626
					Fz	0.095	0.145	0.175	0.235
GFRP (FIBERGLASS)	Profile 	≤ 0.5	≤ 1.5	120 (96-164)	RPM	6361	4771	3817	3181
					Fz	0.040	0.065	0.075	0.100
	HSM 	≤ 0.05	≤ 2	200 (160-240)	RPM	10602	7951	6361	5301
					Fz	0.095	0.145	0.175	0.235
N CARBON, GRAPHITE	Profile 	≤ 0.5	≤ 1.5	185 (148-222)	RPM	9807	7355	5884	4903
					Fz	0.050	0.080	0.095	0.125
	HSM 	≤ 0.05	≤ 2	300 (240-360)	RPM	15903	11927	9542	7951
					Fz	0.115	0.185	0.220	0.290
PLASTICS	Profile 	≤ 0.5	≤ 1.5	305 (244-366)	RPM	16168	12126	9701	8084
					Fz	0.050	0.080	0.095	0.125
	HSM 	≤ 0.05	≤ 2	505 (404-606)	RPM	26769	20077	16062	13385
					Fz	0.115	0.185	0.220	0.290
MACHINABLE CERAMICS MACHINABLE GLASS	Profile 	≤ 0.5	≤ 1.5	15 (12-18)	RPM	795	596	477	398
					Fz	0.020	0.035	0.045	0.050
	HSM 	≤ 0.05	≤ 2	25 (20-30)	RPM	1325	994	795	663
					Fz	0.045	0.075	0.085	0.115
					Feed (mm/min)	239	298	406	610

HSM (high speed machining)

rpm = $(V_c \times 1000) / (DC \times 3.14)$


mm/min = $F_z \times \text{number of flutes} \times \text{rpm}$

adjust parameters based on resin type and fiber structure


reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
rates shown are for use without coolant; rates may be increased with coolant
dust collection is vital when machining dry
diamond coating will increase tool life in graphite and composite materials
refer to the SGS Tool Wizard® for complete technical information
(www.kyocera-sgstool.com)

Up Cut**21**

FRACTIONAL SERIES

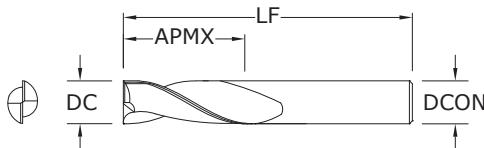

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO. UNCOATED
1/8	1/2	2	1/4	90001
5/32	5/8	2-1/2	1/4	90005
3/16	3/4	2-1/2	1/4	90009
1/4	3/4	2-1/2	1/4	90013
1/4	1	2-1/2	1/4	90017
5/16	1	2-1/2	5/16	90021
5/16	1	3	1/2	90025
3/8	1	2-1/2	3/8	90029
3/8	1-1/4	3	1/2	90033
1/2	1-1/4	3	1/2	90037
1/2	1-1/2	3-1/2	1/2	90041
1/2	2	4	1/2	90045
5/8	2	4-1/2	5/8	90049
3/4	2	4-1/2	3/4	90053

TOLERANCES (inch)

DC = +.000/-0.003

DCON = h₆

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

21M
METRIC SERIES

CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	EDP NO. UNCOATED
3,0	13,0	50,0	6,0	90101
4,0	16,0	63,0	6,0	90107
5,0	19,0	63,0	6,0	90109
6,0	25,0	63,0	6,0	90113
8,0	25,0	63,0	8,0	90121
10,0	31,0	75,0	10,0	90129
12,0	31,0	75,0	12,0	90137



TOLERANCES (mm)

DC = +0,000/-0,080

DCON = h₆

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

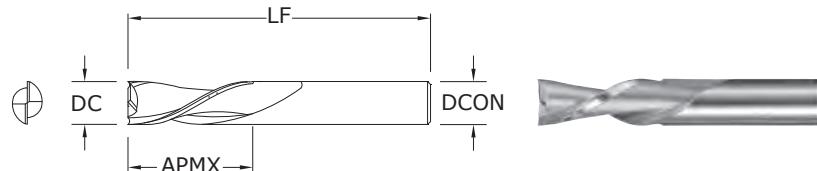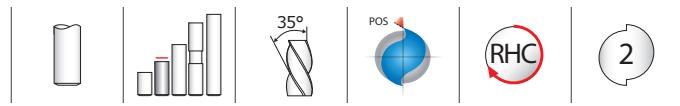

22

FRACTIONAL SERIES

TOLERANCES (inch)

DC = +.000/-0.003
DCON = h₆

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

inch				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
1/8	1/2	2	1/4	91001
5/32	5/8	2-1/2	1/4	91005
3/16	3/4	2-1/2	1/4	91009
1/4	3/4	2-1/2	1/4	91013
1/4	1	2-1/2	1/4	91017
5/16	1	2-1/2	5/16	91021
5/16	1	3	1/2	91025
3/8	1	2-1/2	3/8	91029
3/8	1-1/4	3	1/2	91033
1/2	1-1/4	3	1/2	91037
1/2	1-1/2	3-1/2	1/2	91041
1/2	2	4	1/2	91045
5/8	2	4-1/2	5/8	91049
3/4	2	4-1/2	3/4	91053

22M
METRIC SERIES**TOLERANCES (mm)**


DC = +0,000/-0,080
DCON = h₆

PLASTICS/COMPOSITES

For patent information visit
www.ksptpatents.com

mm				EDP NO.
CUTTING DIAMETER DC	LENGTH OF CUT APMX	OVERALL LENGTH LF	SHANK DIAMETER DCON	UNCOATED
3,0	13,0	50,0	6,0	91101
4,0	16,0	63,0	6,0	91107
5,0	19,0	63,0	6,0	91109
6,0	25,0	63,0	6,0	91113
8,0	25,0	63,0	8,0	91121
10,0	31,0	75,0	10,0	91129
12,0	31,0	75,0	12,0	91137


FRACTIONAL Up Cut Down Cut



Series 21, 22 Fractional	Vc (sfm)	DC • in								
		Ae x DC	Ap x DC	1/8	1/4	3/8	1/2	3/4		
HARDWOODS	Slot 	1	≤ 1	1550 (1240-1860)	RPM	47368	23684	15789	11842	7895
					Fz	0.0008	0.0015	0.0025	0.0030	0.0045
	Profile 	≤ 0.5	≤ 1.5	1550 (1240-1860)	RPM	47368	23684	15789	11842	7895
					Fz	0.0008	0.0015	0.0025	0.0030	0.0045
SOFTWOODS	Slot 	1	≤ 1	1950 (1560-2340)	RPM	59592	29796	19864	14898	9932
					Fz	0.0010	0.0020	0.0030	0.0035	0.0055
	Profile 	≤ 0.5	≤ 1.5	1950 (1560-2340)	RPM	59592	29796	19864	14898	9932
					Fz	0.0010	0.0020	0.0030	0.0035	0.0055
PLYWOODS	Slot 	1	≤ 1	1950 (1560-2340)	RPM	59592	29796	19864	14898	9932
					Fz	0.0013	0.0025	0.0040	0.0050	0.0075
	Profile 	≤ 0.5	≤ 1.5	1950 (1560-2340)	RPM	59592	29796	19864	14898	9932
					Fz	0.0013	0.0025	0.0040	0.0050	0.0075
N PLASTICS	Slot 	1	≤ 1	1950 (1560-2340)	RPM	59592	29796	19864	14898	9932
					Fz	0.0008	0.0017	0.0025	0.0035	0.0050
	Profile 	≤ 0.5	≤ 1.5	1950 (1560-2340)	RPM	59592	29796	19864	14898	9932
					Fz	0.0008	0.0017	0.0025	0.0035	0.0050

rpm = $V_c \times 3.82 / DC$
ipm = $F_z \times 2 \times rpm$

Up Cut Down Cut



Series
21M, 22M
Metric

			Vc (m/min)	DC • mm				
		Ae x DC	Ap x DC	3	6	10	12	20
HARDWOODS	Slot	1	≤ 1	470	RPM	49828	24914	14948
				(376-564)	Fz	0.020	0.040	0.065
	Profile	≤ 0.5	≤ 1.5	470	RPM	49828	24914	8155
				(376-564)	Fz	0.020	0.040	0.065
SOFTWOODS	Slot	1	≤ 1	600	RPM	63610	31805	19083
				(480-720)	Fz	0.025	0.050	0.075
	Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083
				(480-720)	Fz	0.025	0.050	0.075
PLYWOODS	Slot	1	≤ 1	600	RPM	63610	31805	19083
				(480-720)	Fz	0.030	0.065	0.100
	Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083
				(480-720)	Fz	0.030	0.065	0.100
N PLASTICS	Slot	1	≤ 1	600	RPM	63610	31805	19083
				(480-720)	Fz	0.020	0.040	0.065
	Profile	≤ 0.5	≤ 1.5	600	RPM	63610	31805	19083
				(480-720)	Fz	0.020	0.040	0.065

rpm = $(Vc \times 1000) / (DC \times 3.14)$

mm/min = $Fz \times 2 \times rpm$

EDP Number Index

EDP Number Index

EDP NO.	PAGE										
31220.....	204	31346.....	184	31463.....	203	31563.....	183	31752.....	185	31871.....	195
31221.....	204	31347.....	184	31464.....	204	31564.....	184	31753.....	185	31872.....	196
31222.....	204	31348.....	184	31465.....	203	31565.....	183	31754.....	185	31873.....	196
31223.....	204	31349.....	184	31466.....	204	31566.....	184	31755.....	185	31874.....	196
31224.....	204	31350.....	184	31467.....	203	31567.....	183	31756.....	185	31875.....	196
31225.....	204	31351.....	184	31468.....	204	31568.....	184	31757.....	185	31876.....	197
31226.....	204	31352.....	184	31469.....	203	31569.....	183	31758.....	185	31877.....	197
31227.....	204	31353.....	184	31470.....	204	31570.....	184	31759.....	185	31878.....	197
31228.....	204	31354.....	184	31471.....	203	31571.....	183	31760.....	185	31879.....	198
31229.....	204	31355.....	184	31472.....	204	31572.....	184	31761.....	185	31880.....	195
31230.....	204	31356.....	184	31473.....	203	31573.....	183	31762.....	185	31881.....	195
31231.....	204	31357.....	184	31474.....	204	31574.....	184	31763.....	196	31882.....	196
31232.....	204	31357.....	211	31475.....	203	31575.....	183	31764.....	196	31883.....	196
31233.....	204	31358.....	185	31476.....	204	31576.....	184	31765.....	196	31884.....	196
31234.....	204	31359.....	185	31477.....	203	31577.....	183	31766.....	197	31885.....	196
31235.....	204	31360.....	185	31478.....	204	31578.....	184	31767.....	197	31886.....	197
31236.....	204	31361.....	185	31479.....	203	31579.....	183	31768.....	197	31887.....	197
31237.....	204	31362.....	185	31480.....	204	31580.....	184	31769.....	198	31888.....	197
31238.....	205	31363.....	185	31481.....	203	31581.....	183	31770.....	201	31889.....	198
31239.....	205	31364.....	185	31481.....	210	31581.....	210	31771.....	201	31890.....	180
31240.....	205	31365.....	185	31482.....	204	31582.....	184	31772.....	201	31891.....	180
31241.....	205	31366.....	185	31482.....	211	31582.....	211	31773.....	201	31892.....	180
31242.....	205	31367.....	185	31489.....	203	31589.....	183	31780.....	201	31893.....	180
31243.....	205	31368.....	185	31489.....	210	31589.....	210	31781.....	201	31894.....	181
31244.....	205	31369.....	185	31490.....	204	31590.....	184	31782.....	201	31895.....	181
31245.....	205	31370.....	185	31490.....	211	31590.....	211	31783.....	201	31896.....	181
31246.....	205	31401.....	203	31501.....	183	31601.....	205	31790.....	201	31897.....	181
31247.....	205	31402.....	204	31502.....	184	31603.....	205	31791.....	201	31898.....	181
31248.....	205	31403.....	203	31503.....	183	31605.....	205	31792.....	201	31899.....	181
31249.....	205	31404.....	204	31504.....	184	31607.....	205	31793.....	201	31900.....	201
31250.....	205	31405.....	203	31505.....	183	31609.....	205	31800.....	176	31902.....	201
31251.....	205	31406.....	204	31506.....	184	31611.....	205	31802.....	176	31904.....	201
31252.....	205	31407.....	203	31507.....	183	31613.....	205	31804.....	177	31906.....	201
31253.....	205	31408.....	204	31508.....	184	31615.....	205	31806.....	177	31918.....	201
31254.....	205	31409.....	203	31509.....	183	31617.....	205	31810.....	176	31919.....	201
31255.....	205	31410.....	204	31510.....	184	31619.....	205	31812.....	176	31920.....	201
31256.....	205	31411.....	203	31511.....	183	31621.....	205	31814.....	177	31921.....	201
31257.....	205	31412.....	204	31512.....	184	31623.....	205	31816.....	177	31928.....	201
31258.....	205	31413.....	203	31513.....	183	31625.....	205	31817.....	178	31929.....	201
31259.....	205	31414.....	204	31514.....	184	31650.....	205	31819.....	178	31930.....	201
31260.....	205	31415.....	203	31515.....	183	31651.....	205	31820.....	176	31931.....	201
31261.....	205	31416.....	204	31516.....	184	31652.....	205	31821.....	177	31938.....	176
31262.....	205	31417.....	203	31517.....	183	31653.....	205	31822.....	177	31939.....	176
31263.....	205	31418.....	204	31518.....	184	31654.....	205	31823.....	178	31940.....	176
31303.....	185	31419.....	203	31519.....	183	31655.....	205	31824.....	178	31941.....	177
31304.....	185	31420.....	204	31520.....	184	31656.....	205	31825.....	176	31942.....	177
31305.....	185	31421.....	203	31521.....	183	31657.....	205	31826.....	177	31943.....	177
31306.....	185	31422.....	204	31522.....	184	31658.....	205	31827.....	177	31944.....	178
31307.....	185	31423.....	203	31523.....	183	31659.....	205	31830.....	180	31945.....	178
31308.....	185	31424.....	204	31524.....	184	31660.....	205	31831.....	180	31946.....	178
31309.....	185	31425.....	203	31525.....	183	31661.....	205	31832.....	180	31947.....	178
31310.....	185	31426.....	204	31526.....	184	31662.....	205	31833.....	180	31948.....	176
31311.....	185	31427.....	203	31527.....	183	31701.....	185	31834.....	181	31949.....	176
31312.....	185	31428.....	204	31528.....	184	31703.....	185	31835.....	181	31950.....	176
31313.....	185	31429.....	203	31529.....	183	31705.....	185	31836.....	181	31951.....	177
31314.....	185	31430.....	204	31530.....	184	31707.....	185	31837.....	181	31952.....	177
31315.....	185	31431.....	203	31531.....	183	31709.....	185	31838.....	181	31953.....	177
31316.....	183	31432.....	204	31532.....	184	31711.....	185	31839.....	181	31954.....	178
31317.....	183	31433.....	203	31533.....	183	31713.....	185	31840.....	180	31955.....	178
31318.....	183	31434.....	204	31534.....	184	31715.....	185	31841.....	180	31956.....	178
31319.....	183	31435.....	203	31535.....	183	31717.....	185	31842.....	180	31957.....	178
31320.....	183	31436.....	204	31536.....	184	31719.....	185	31843.....	180	31958.....	176
31321.....	183	31437.....	203	31537.....	183	31721.....	185	31844.....	181	31959.....	176
31322.....	183	31438.....	204	31538.....	184	31723.....	185	31845.....	181	31960.....	176
31323.....	183	31439.....	203	31539.....	183	31725.....	185	31846.....	181	31961.....	177
31324.....	183	31440.....	204	31540.....	184	31727.....	195	31847.....	181	31962.....	177
31325.....	183	31441.....	203	31541.....	183	31728.....	195	31848.....	181	31963.....	177
31326.....	183	31442.....	204	31542.....	184	31729.....	196	31849.....	181	31964.....	178
31327.....	183	31443.....	203	31543.....	183	31730.....	196	31850.....	176	31965.....	178
31328.....	183	31444.....	204	31544.....	184	31731.....	196	31851.....	176	31966.....	178
31329.....	183	31445.....	203	31545.....	183	31732.....	196	31852.....	176	31967.....	178
31330.....	183	31446.....	204	31546.....	184	31733.....	197	31853.....	177	31968.....	180
31331.....	183	31447.....	203	31547.....	183	31735.....	197	31854.....	177	31969.....	180
31332.....	183	31448.....	204	31548.....	184	31736.....	198	31855.....	177	31970.....	180
31333.....	183	31449.....	203	31549.....	183	31737.....	195	31856.....	177	31971.....	180
31334.....	183	31450.....	204	31550.....	184	31738.....	195	31857.....	178	31972.....	181
31335.....	183	31451.....	203	31551.....	183	31739.....	196	31859.....	178	31973.....	181
31336.....	183	31452.....	204	31552.....	184	31740.....	196	31860.....	195	31974.....	181
31337.....	210	31453.....	203	31553.....	183	31741.....	196	31861.....	195	31975.....	181
31338.....	184	31454.....	204	31554.....	184	31742.....	196	31862.....	196	31976.....	181
31339.....	184	31455.....	203	31555.....	183	31743.....	197	31863.....	196	31977.....	181
31340.....	184	31456.....	204	31556.....	184	31745.....	197	31864.....	196	31978.....	180
31341.....	184	31457.....	203	31557.....	183	31746.....	198	31865.....	196	31979.....	180
31342.....	184	31458.....	204	31558.....	184	31747.....	195	31866.....	197	31980.....	180
31343.....	184	31459.....	203	31559.....	183	31748.....	195	31867.....	197	31981.....	180
31344.....	184	31460.....	204	31560.....	184	31749.....	196	31868.....	197	31982.....	181
31345.....	184	31461.....	203	31561.....	183	31750.....	185	31869.....	198	31983.....	181
31346.....	184	31462.....	204	31562.....	184	31751.....	185	31870.....	195	31984.....	187

EDP Number Index

EDP NO.	PAGE										
32291.....	188	32403.....	194	32571.....	64	32692.....	140	32793.....	141	33117.....	198
32292.....	188	32404.....	194	32572.....	64	32697.....	141	32794.....	141	33121.....	195
32293.....	188	32405.....	194	32573.....	63	32698.....	141	32795.....	141	33122.....	201
32294.....	188	32406.....	194	32574.....	63	32699.....	142	32796.....	142	33123.....	196
32295.....	188	32407.....	194	32575.....	64	32700.....	140	32797.....	142	33124.....	201
32296.....	188	32408.....	194	32576.....	64	32701.....	140	32798.....	142	33125.....	196
32297.....	188	32409.....	194	32577.....	64	32702.....	140	32799.....	142	33126.....	201
32301.....	193	32410.....	194	32578.....	64	32703.....	140	32800.....	142	33127.....	196
32302.....	193	32411.....	194	32579.....	64	32704.....	140	32801.....	142	33129.....	196
32303.....	193	32412.....	194	32580.....	64	32705.....	140	32802.....	142	33131.....	197
32304.....	193	32413.....	194	32581.....	64	32706.....	140	32803.....	142	33133.....	197
32305.....	193	32414.....	194	32582.....	64	32707.....	140	32804.....	142	33135.....	197
32306.....	193	32415.....	194	32583.....	64	32708.....	140	32805.....	142	33137.....	198
32307.....	193	32416.....	194	32584.....	64	32709.....	140	32806.....	142	33141.....	195
32308.....	193	32417.....	194	32585.....	64	32710.....	141	32807.....	142	33142.....	201
32309.....	193	32418.....	194	32586.....	64	32711.....	141	32808.....	142	33143.....	195
32310.....	193	32419.....	194	32587.....	64	32712.....	141	32809.....	142	33144.....	201
32311.....	193	32420.....	194	32588.....	64	32713.....	141	32810.....	142	33301.....	176
32312.....	193	32421.....	194	32589.....	64	32714.....	141	32815.....	140	33302.....	180
32313.....	193	32422.....	194	32590.....	64	32715.....	141	32816.....	140	33303.....	176
32314.....	193	32423.....	194	32591.....	63	32716.....	141	32817.....	140	33304.....	180
32315.....	193	32424.....	194	32592.....	63	32717.....	142	32818.....	140	33305.....	177
32316.....	193	32425.....	194	32593.....	63	32718.....	142	32819.....	140	33306.....	180
32317.....	193	32426.....	194	32594.....	64	32719.....	142	32820.....	140	33307.....	177
32318.....	193	32427.....	194	32595.....	64	32720.....	142	32821.....	140	33308.....	181
32319.....	193	32428.....	194	32596.....	64	32725.....	140	32822.....	140	33309.....	177
32320.....	193	32429.....	194	32597.....	64	32726.....	140	32823.....	140	33310.....	181
32321.....	193	32430.....	194	32598.....	64	32727.....	140	32824.....	140	33311.....	177
32322.....	193	32431.....	194	32599.....	64	32728.....	140	32825.....	137	33312.....	181
32323.....	193	32434.....	194	32600.....	64	32729.....	140	32826.....	140	33313.....	178
32324.....	193	32435.....	194	32601.....	64	32730.....	140	32827.....	140	33314.....	181
32325.....	193	32436.....	194	32602.....	64	32731.....	140	32828.....	140	33316.....	181
32326.....	193	32437.....	194	32603.....	64	32732.....	140	32829.....	140	33317.....	178
32327.....	193	32438.....	194	32604.....	64	32733.....	140	32830.....	137	33318.....	181
32328.....	193	32439.....	194	32605.....	64	32734.....	140	32831.....	140	33321.....	176
32329.....	193	32440.....	194	32606.....	63	32735.....	141	32832.....	140	33322.....	180
32330.....	193	32441.....	194	32607.....	63	32736.....	141	32833.....	140	33323.....	176
32333.....	193	32442.....	194	32608.....	63	32737.....	141	32834.....	140	33324.....	180
32334.....	193	32443.....	194	32609.....	63	32738.....	141	32835.....	141	33325.....	177
32335.....	193	32445.....	194	32610.....	63	32739.....	141	32836.....	141	33326.....	180
32336.....	193	32446.....	194	32611.....	63	32740.....	141	32837.....	141	33327.....	177
32337.....	193	32447.....	194	32612.....	63	32741.....	141	32838.....	141	33328.....	181
32338.....	193	32448.....	194	32613.....	63	32742.....	142	32839.....	141	33329.....	177
32339.....	193	32449.....	194	32614.....	63	32743.....	142	32840.....	141	33330.....	181
32340.....	193	32450.....	194	32615.....	63	32744.....	142	32841.....	141	33331.....	178
32341.....	193	32451.....	194	32616.....	63	32745.....	142	32842.....	141	33332.....	181
32342.....	193	32452.....	194	32619.....	63	32751.....	140	32843.....	141	33333.....	178
32345.....	193	32453.....	194	32620.....	63	32752.....	140	32844.....	141	33334.....	181
32346.....	193	32454.....	194	32621.....	63	32753.....	140	32845.....	141	33335.....	178
32347.....	193	32455.....	194	32625.....	63	32754.....	140	32846.....	141	33336.....	181
32348.....	193	32456.....	194	32626.....	63	32755.....	140	32847.....	141	33337.....	178
32349.....	193	32457.....	194	32627.....	63	32756.....	140	32848.....	141	33338.....	181
32350.....	193	32458.....	194	32628.....	63	32757.....	140	32849.....	141	33341.....	176
32351.....	193	32459.....	194	32632.....	64	32758.....	140	32850.....	141	33342.....	180
32352.....	193	32460.....	194	32633.....	64	32759.....	140	32851.....	141	33343.....	176
32353.....	193	32461.....	194	32655.....	63	32760.....	140	32852.....	141	33344.....	180
32354.....	193	32462.....	194	32656.....	63	32761.....	137	32853.....	141	33345.....	97
32355.....	193	32463.....	194	32657.....	63	32762.....	140	32843.....	141	33333.....	178
32356.....	193	32464.....	194	32658.....	63	32763.....	140	32844.....	141	33334.....	181
32357.....	193	32470.....	194	32659.....	63	32764.....	140	32845.....	141	33335.....	178
32358.....	193	32471.....	194	32660.....	63	32765.....	140	32846.....	141	33336.....	181
32359.....	193	32472.....	194	32661.....	63	32766.....	137	32847.....	141	33337.....	178
32360.....	193	32473.....	194	32662.....	63	32767.....	140	32848.....	141	33338.....	181
32361.....	193	32474.....	194	32663.....	64	32768.....	140	32849.....	141	33341.....	176
32362.....	193	32475.....	194	32664.....	64	32769.....	140	32861.....	142	33353.....	97
32363.....	193	32476.....	194	32665.....	64	32770.....	140	32862.....	142	33354.....	97
32364.....	193	32477.....	194	32666.....	64	32771.....	141	32863.....	142	33360.....	117
32370.....	193	32478.....	194	32667.....	64	32772.....	141	32864.....	142	33361.....	117
32371.....	193	32479.....	194	32668.....	64	32773.....	141	32865.....	142	33390.....	146
32372.....	193	32480.....	194	32669.....	64	32774.....	141	32866.....	142	33391.....	146
32373.....	193	32481.....	194	32670.....	64	32775.....	141	32867.....	142	33392.....	146
32374.....	193	32482.....	194	32671.....	64	32776.....	141	32868.....	142	33393.....	146
32375.....	193	32483.....	194	32672.....	63	32777.....	141	32869.....	142	33394.....	146
32376.....	193	32484.....	194	32673.....	63	32778.....	141	32870.....	142	33395.....	146
32377.....	193	32485.....	194	32674.....	63	32779.....	141	32871.....	142	33396.....	146
32378.....	193	32486.....	194	32675.....	63	32780.....	141	32872.....	142	33397.....	146
32379.....	193	32487.....	194	32676.....	63	32781.....	141	32873.....	142	33398.....	146
32380.....	193	32488.....	194	32677.....	63	32782.....	141	32874.....	142	33400.....	146
32381.....	193	32489.....	194	32678.....	64	32783.....	141	33101.....	195	33401.....	146
32382.....	193	32500.....	68	32679.....	64	32784.....	141	33102.....	201	33402.....	146
32383.....	193	32501.....	68	32680.....	64	32785.....	141	33103.....	196	33403.....	146
32384.....	193	32502.....	68	32681.....	64	32786.....	141	33104.....	201	33404.....	146
32385.....	193	32503.....	68	32685.....	64	32787.....	141	33105.....	196	33406.....	146
32386.....	193	32504.....	68	32686.....	64	32788.....	141	33106.....	201	33407.....	146
32387.....	193	32505.....	68	32687.....	64	32789.....	141	33107.....	196	33408.....	146
32388.....	193	32506.....	68	32688.....	64	32790.....	141	33109.....	196	33409.....	146
32389.....	193	32569.....	63	32689.....	64	32791.....	141	33111.....	197	33410.....	146
32402.....	194	32570.....	64	32691.....	140	32792.....	141	33115.....	197	33411.....	146

EDP Number Index

EDP Number Index

EDP NO.	PAGE										
35704.....	138	36126.....	207	36385.....	40	36570.....	57	36786.....	61	37020.....	29
35705.....	138	36128.....	207	36386.....	40	36571.....	57	36787.....	61	37021.....	29
35706.....	138	36129.....	207	36387.....	40	36572.....	57	36788.....	61	37022.....	29
35707.....	138	36130.....	207	36388.....	40	36573.....	57	36789.....	61	37023.....	29
35708.....	138	36140.....	110	36389.....	40	36574.....	57	36790.....	61	37024.....	30
35709.....	138	36141.....	110	36390.....	40	36575.....	57	36791.....	61	37025.....	30
35710.....	138	36142.....	110	36391.....	40	36576.....	57	36792.....	61	37026.....	30
35711.....	138	36143.....	110	36392.....	40	36577.....	57	36793.....	61	37027.....	30
35712.....	138	36206.....	208	36393.....	40	36578.....	57	36804.....	39	37028.....	30
35713.....	138	36207.....	208	36404.....	49	36590.....	50	36805.....	39	37029.....	30
35714.....	138	36208.....	208	36406.....	49	36591.....	50	36806.....	40	37030.....	30
35715.....	138	36209.....	208	36408.....	49	36592.....	50	36807.....	40	37031.....	30
35716.....	138	36210.....	208	36416.....	49	36596.....	49	36808.....	40	37032.....	30
35717.....	138	36211.....	208	36418.....	49	36597.....	49	36809.....	40	37033.....	30
35718.....	138	36212.....	208	36420.....	49	36598.....	49	36810.....	39	37034.....	30
35719.....	138	36213.....	208	36422.....	49	36599.....	39	36811.....	39	37035.....	30
35720.....	138	36214.....	208	36424.....	49	36600.....	39	36812.....	39	37036.....	30
35721.....	138	36216.....	208	36426.....	49	36601.....	39	36813.....	40	37037.....	30
35722.....	138	36217.....	208	36428.....	49	36602.....	40	36814.....	40	37038.....	30
35723.....	139	36218.....	208	36430.....	49	36603.....	40	36815.....	40	37039.....	30
35724.....	139	36220.....	208	36432.....	49	36604.....	40	36816.....	40	37040.....	30
35725.....	139	36221.....	208	36436.....	49	36605.....	40	36817.....	40	37041.....	30
35726.....	139	36222.....	208	36440.....	49	36610.....	40	36818.....	40	37042.....	30
35727.....	139	36224.....	208	36442.....	49	36611.....	40	36819.....	40	37043.....	30
35728.....	139	36225.....	208	36444.....	49	36612.....	40	36820.....	40	37044.....	30
35729.....	139	36226.....	208	36447.....	41	36613.....	40	36821.....	40	37045.....	30
35730.....	139	36228.....	208	36448.....	41	36614.....	40	36822.....	40	37046.....	30
35731.....	139	36229.....	208	36449.....	41	36615.....	40	36823.....	40	37047.....	30
35732.....	139	36230.....	208	36450.....	41	36616.....	57	36824.....	40	37048.....	30
35733.....	139	36235.....	140	36452.....	41	36617.....	57	36825.....	40	37049.....	30
35734.....	139	36236.....	140	36453.....	41	36618.....	57	36826.....	49	37050.....	30
35735.....	139	36237.....	143	36454.....	41	36620.....	90	36827.....	49	37051.....	30
35736.....	139	36238.....	143	36456.....	41	36621.....	90	36828.....	49	37052.....	30
35737.....	139	36239.....	140	36457.....	41	36622.....	90	36829.....	49	37053.....	30
35738.....	139	36240.....	140	36458.....	41	36623.....	90	36830.....	49	37054.....	30
35739.....	139	36241.....	143	36460.....	41	36624.....	90	36846.....	50	37055.....	30
35740.....	139	36242.....	143	36462.....	41	36625.....	90	36847.....	50	37056.....	30
35741.....	139	36243.....	140	36463.....	41	36626.....	90	36848.....	50	37057.....	30
35742.....	139	36244.....	140	36464.....	41	36627.....	90	36849.....	50	37058.....	30
35743.....	139	36245.....	143	36466.....	41	36628.....	90	36850.....	50	37059.....	30
35744.....	139	36246.....	143	36468.....	41	36629.....	90	36851.....	39	37060.....	30
35787.....	140	36247.....	143	36469.....	41	36630.....	90	36852.....	39	37061.....	30
35788.....	140	36248.....	143	36470.....	41	36631.....	90	36853.....	39	37062.....	30
35789.....	143	36249.....	143	36472.....	41	36632.....	90	36854.....	39	37063.....	30
35790.....	143	36250.....	143	36474.....	41	36633.....	90	36855.....	39	37064.....	30
35791.....	140	36251.....	141	36475.....	41	36634.....	90	36856.....	39	37065.....	30
35792.....	140	36252.....	141	36480.....	42	36635.....	90	36857.....	39	37066.....	30
35793.....	143	36253.....	143	36482.....	42	36636.....	90	36858.....	39	37067.....	30
35794.....	143	36254.....	143	36486.....	42	36637.....	90	36859.....	40	37068.....	30
35795.....	140	36257.....	142	36500.....	42	36638.....	90	36860.....	40	37069.....	30
35796.....	140	36258.....	142	36502.....	42	36639.....	90	36861.....	40	37070.....	30
35797.....	143	36259.....	142	36504.....	42	36640.....	90	36862.....	40	37071.....	30
35798.....	143	36260.....	142	36505.....	49	36641.....	90	36863.....	40	37072.....	30
35799.....	143	36261.....	143	36506.....	49	36701.....	39	36864.....	39	37073.....	30
35800.....	143	36262.....	143	36507.....	49	36702.....	39	36865.....	39	37074.....	30
35801.....	143	36263.....	143	36508.....	49	36704.....	39	36866.....	39	37075.....	31
35802.....	143	36264.....	143	36509.....	49	36706.....	39	36867.....	40	37076.....	31
35803.....	141	36265.....	143	36511.....	49	36707.....	39	36868.....	40	37077.....	31
35804.....	141	36266.....	143	36513.....	49	36709.....	40	36869.....	40	37078.....	31
35805.....	143	36344.....	50	36515.....	49	36710.....	40	36870.....	40	37079.....	31
35806.....	143	36345.....	50	36517.....	49	36711.....	40	36871.....	40	37080.....	31
35809.....	142	36346.....	50	36519.....	49	36712.....	40	36872.....	39	37081.....	30
35810.....	142	36347.....	50	36520.....	49	36713.....	40	36873.....	39	37082.....	28
35811.....	142	36348.....	50	36530.....	49	36714.....	40	36874.....	39	37083.....	31
35812.....	142	36349.....	50	36531.....	49	36715.....	40	36875.....	39	37084.....	31
35813.....	143	36350.....	50	36532.....	49	36716.....	40	36876.....	39	37085.....	31
35814.....	143	36351.....	50	36533.....	49	36717.....	40	36877.....	39	37086.....	31
35815.....	143	36352.....	50	36534.....	49	36718.....	40	36878.....	39	37087.....	31
35816.....	143	36353.....	50	36535.....	49	36719.....	40	37000.....	28	37088.....	31
35817.....	143	36354.....	50	36536.....	49	36722.....	39	37001.....	28	37089.....	31
35818.....	143	36355.....	50	36537.....	49	36723.....	39	37002.....	28	37090.....	31
36106.....	207	36356.....	50	36538.....	49	36724.....	39	37003.....	28	37091.....	31
36107.....	207	36357.....	50	36539.....	50	36725.....	39	37004.....	28	37092.....	31
36108.....	207	36358.....	50	36540.....	50	36727.....	39	37005.....	28	37093.....	31
36109.....	207	36359.....	50	36541.....	50	36729.....	39	37006.....	28	37094.....	31
36110.....	207	36361.....	50	36542.....	50	36731.....	40	37007.....	28	37095.....	31
36111.....	207	36370.....	39	36543.....	50	36733.....	40	37008.....	28	37096.....	31
36112.....	207	36371.....	39	36544.....	50	36736.....	39	37009.....	28	37097.....	31
36113.....	207	36372.....	39	36545.....	50	36738.....	39	37010.....	28	37098.....	31
36114.....	207	36373.....	39	36546.....	50	36740.....	39	37011.....	28	37099.....	31
36116.....	207	36374.....	39	36547.....	50	36742.....	40	37012.....	28	37100.....	31
36117.....	207	36375.....	39	36555.....	57	36744.....	40	37013.....	28	37101.....	31
36118.....	207	36376.....	39	36556.....	57	36780.....	61	37014.....	29	37102.....	31
36120.....	207	36378.....	39	36557.....	57	36781.....	61	37015.....	29	37103.....	31
36121.....	207	36380.....	39	36558.....	57	36782.....	61	37016.....	29	37104.....	31
36122.....	207	36381.....	39	36559.....	57	36783.....	61	37017.....	29	37105.....	31
36124.....	207	36383.....	40	36560.....	57	36784.....	61	37018.....	29	37106.....	31
36125.....	207	36384.....	40	36561.....	57	36785.....	61	37019.....	29	37107.....	31

EDP Number Index

EDP Number Index

EDP NO.	PAGE										
38661.....	32	38854.....	31	39071.....	197	39317.....	176	39523.....	176	39629.....	203
38662.....	32	38855.....	31	39073.....	197	39318.....	180	39524.....	180	39630.....	204
38663.....	32	38856.....	31	39075.....	198	39319.....	176	39525.....	176	39631.....	203
38664.....	32	38857.....	31	39077.....	195	39320.....	180	39526.....	180	39632.....	204
38770.....	28	38858.....	31	39078.....	201	39321.....	176	39527.....	176	39633.....	203
38771.....	28	38859.....	31	39089.....	198	39322.....	180	39528.....	180	39634.....	204
38772.....	28	38860.....	31	39089.....	210	39323.....	176	39529.....	176	39635.....	203
38773.....	28	38861.....	31	39090.....	211	39324.....	180	39530.....	180	39636.....	204
38774.....	28	38862.....	31	39101.....	195	39325.....	176	39531.....	176	39637.....	203
38775.....	28	38863.....	31	39102.....	201	39326.....	180	39532.....	180	39638.....	204
38776.....	28	38864.....	31	39103.....	195	39327.....	176	39533.....	176	39639.....	203
38777.....	28	38865.....	31	39104.....	201	39328.....	180	39534.....	180	39640.....	204
38778.....	28	38866.....	31	39105.....	195	39329.....	176	39535.....	176	39641.....	203
38779.....	28	38867.....	31	39106.....	201	39330.....	180	39536.....	180	39641.....	210
38780.....	28	38868.....	32	39107.....	195	39331.....	176	39537.....	177	39642.....	204
38781.....	28	38869.....	32	39108.....	201	39332.....	180	39538.....	180	39642.....	211
38782.....	28	38870.....	32	39109.....	195	39333.....	176	39539.....	177	39651.....	183
38783.....	28	38871.....	32	39110.....	201	39334.....	180	39540.....	180	39652.....	184
38784.....	28	38872.....	32	39111.....	195	39335.....	176	39541.....	177	39653.....	183
38785.....	28	38873.....	32	39112.....	201	39336.....	180	39542.....	180	39654.....	184
38786.....	28	38874.....	32	39113.....	195	39337.....	177	39543.....	177	39655.....	183
38787.....	28	38875.....	32	39114.....	201	39338.....	180	39544.....	181	39656.....	184
38788.....	28	38876.....	32	39115.....	195	39339.....	177	39545.....	177	39657.....	183
38789.....	28	38877.....	32	39116.....	201	39340.....	180	39546.....	181	39658.....	184
38790.....	28	38878.....	32	39117.....	195	39341.....	177	39547.....	177	39659.....	183
38791.....	28	38879.....	32	39118.....	201	39342.....	180	39548.....	181	39660.....	184
38792.....	28	38880.....	32	39119.....	195	39343.....	177	39549.....	177	39661.....	183
38793.....	28	38881.....	32	39120.....	201	39344.....	181	39550.....	181	39662.....	184
38794.....	28	38882.....	32	39121.....	195	39345.....	177	39551.....	177	39663.....	183
38795.....	28	38883.....	32	39122.....	201	39346.....	181	39552.....	181	39664.....	184
38796.....	28	38884.....	32	39123.....	195	39347.....	177	39553.....	177	39665.....	183
38797.....	28	38885.....	32	39124.....	201	39348.....	181	39554.....	181	39666.....	184
38798.....	29	39001.....	195	39125.....	195	39349.....	177	39555.....	177	39667.....	183
38799.....	29	39002.....	201	39126.....	201	39350.....	181	39556.....	181	39668.....	184
38800.....	29	39003.....	195	39127.....	195	39351.....	177	39557.....	177	39669.....	183
38801.....	29	39004.....	201	39128.....	201	39352.....	181	39558.....	181	39670.....	184
38802.....	29	39005.....	195	39129.....	195	39353.....	177	39559.....	177	39671.....	183
38803.....	29	39006.....	201	39130.....	201	39354.....	181	39560.....	181	39672.....	184
38804.....	29	39007.....	195	39131.....	195	39355.....	177	39561.....	177	39673.....	183
38805.....	29	39008.....	201	39132.....	201	39356.....	181	39562.....	181	39674.....	184
38806.....	29	39009.....	195	39133.....	196	39357.....	177	39563.....	177	39675.....	183
38807.....	29	39010.....	201	39134.....	201	39358.....	181	39564.....	181	39676.....	184
38808.....	29	39011.....	195	39135.....	196	39359.....	177	39565.....	178	39677.....	183
38809.....	29	39012.....	201	39136.....	201	39360.....	181	39566.....	181	39678.....	184
38810.....	29	39013.....	195	39137.....	196	39361.....	177	39567.....	178	39679.....	183
38811.....	29	39014.....	201	39138.....	201	39362.....	181	39568.....	181	39680.....	184
38812.....	29	39015.....	195	39139.....	196	39363.....	177	39569.....	178	39681.....	183
38813.....	29	39016.....	201	39140.....	201	39364.....	181	39570.....	181	39682.....	184
38814.....	29	39017.....	195	39141.....	196	39365.....	178	39571.....	178	39683.....	183
38815.....	29	39018.....	201	39142.....	201	39366.....	181	39572.....	181	39684.....	184
38816.....	29	39019.....	195	39143.....	196	39367.....	178	39573.....	178	39685.....	183
38817.....	29	39020.....	201	39145.....	196	39368.....	181	39574.....	181	39686.....	184
38818.....	29	39021.....	195	39147.....	196	39369.....	178	39575.....	178	39687.....	183
38819.....	29	39022.....	201	39149.....	196	39370.....	181	39576.....	181	39688.....	184
38820.....	29	39023.....	195	39151.....	196	39371.....	178	39577.....	176	39689.....	183
38821.....	29	39024.....	201	39153.....	196	39372.....	181	39578.....	180	39690.....	184
38822.....	29	39025.....	195	39155.....	196	39373.....	178	39589.....	178	39691.....	183
38823.....	29	39026.....	201	39157.....	196	39374.....	181	39589.....	210	39691.....	210
38824.....	29	39027.....	195	39159.....	196	39375.....	178	39590.....	181	39692.....	184
38825.....	29	39028.....	201	39161.....	197	39376.....	181	39590.....	211	39692.....	211
38826.....	30	39029.....	195	39163.....	197	39377.....	176	39601.....	203	39701.....	189
38827.....	30	39030.....	201	39165.....	197	39378.....	180	39602.....	204	39703.....	189
38828.....	30	39031.....	195	39167.....	197	39389.....	178	39603.....	203	39705.....	189
38829.....	30	39032.....	201	39169.....	197	39389.....	210	39604.....	204	39707.....	189
38830.....	30	39033.....	196	39171.....	197	39390.....	181	39605.....	203	39709.....	189
38831.....	30	39034.....	201	39173.....	197	39390.....	211	39606.....	204	39711.....	189
38832.....	30	39035.....	196	39175.....	198	39501.....	176	39607.....	203	39713.....	189
38833.....	30	39036.....	201	39177.....	195	39502.....	180	39608.....	204	39715.....	189
38834.....	30	39037.....	196	39178.....	201	39503.....	176	39609.....	203	39717.....	189
38835.....	30	39038.....	201	39189.....	198	39504.....	180	39610.....	204	39719.....	189
38836.....	30	39039.....	196	39189.....	210	39505.....	176	39611.....	203	39721.....	189
38837.....	30	39040.....	201	39190.....	211	39506.....	180	39612.....	204	39723.....	189
38838.....	30	39041.....	196	39301.....	176	39507.....	176	39613.....	203	39725.....	189
38839.....	30	39042.....	201	39302.....	180	39508.....	180	39614.....	204	39727.....	189
38840.....	30	39043.....	196	39303.....	176	39509.....	176	39615.....	203	39729.....	189
38841.....	30	39045.....	196	39304.....	180	39510.....	180	39616.....	204	39731.....	189
38842.....	30	39047.....	196	39305.....	176	39511.....	176	39617.....	203	39733.....	189
38843.....	30	39049.....	196	39306.....	180	39512.....	180	39618.....	204	39735.....	189
38844.....	30	39051.....	196	39307.....	176	39513.....	176	39619.....	203	39737.....	189
38845.....	30	39053.....	196	39308.....	180	39514.....	180	39620.....	204	39739.....	189
38846.....	30	39055.....	196	39309.....	176	39515.....	176	39621.....	203	39741.....	189
38847.....	30	39057.....	196	39310.....	180	39516.....	180	39622.....	204	39743.....	189
38848.....	30	39059.....	196	39311.....	176	39517.....	176	39623.....	203	39745.....	189
38849.....	30	39061.....	197	39312.....	180	39518.....	180	39624.....	204	39747.....	189
38850.....	31	39063.....	197	39313.....	176	39519.....	176	39625.....	203	39749.....	189
38851.....	31	39065.....	197	39314.....	180	39520.....	180	39626.....	204	39751.....	189
38852.....	31	39067.....	197	39315.....	176	39521.....	176	39627.....	203	39753.....	189
38853.....	31	39069.....	197	39316.....	180	39522.....	180	39628.....	204	39755.....	189

EDP Number Index

EDP NO.	PAGE										
40317.....	179	41425.....	203	42608.....	65	42711.....	153	43470.....	100	43934.....	187
40318.....	182	41426.....	204	42609.....	65	42712.....	59	43471.....	100	43935.....	187
40321.....	179	41429.....	203	42610.....	65	42713.....	59	43472.....	100	43936.....	187
40322.....	182	41430.....	204	42611.....	65	42714.....	59	43473.....	100	43937.....	187
40325.....	179	41433.....	203	42612.....	65	42715.....	59	43474.....	100	43938.....	187
40326.....	182	41434.....	204	42613.....	65	42716.....	59	43475.....	100	43939.....	187
40329.....	179	41437.....	203	42614.....	65	42717.....	59	43476.....	100	43950.....	187
40330.....	182	41438.....	204	42615.....	65	42718.....	45	43477.....	100	43951.....	187
40333.....	179	41441.....	203	42616.....	65	42719.....	45	43478.....	100	43952.....	187
40334.....	182	41442.....	204	42617.....	66	42721.....	45	43479.....	100	43953.....	187
40337.....	179	41445.....	203	42618.....	66	42722.....	45	43480.....	100	43954.....	187
40338.....	182	41446.....	204	42619.....	66	42723.....	45	43481.....	100	43955.....	187
40341.....	179	41449.....	203	42620.....	66	42731.....	46	43482.....	100	43956.....	187
40342.....	182	41450.....	204	42621.....	67	42732.....	46	43483.....	100	43957.....	187
40345.....	179	41453.....	203	42622.....	65	42733.....	46	43484.....	100	43958.....	187
40346.....	182	41454.....	204	42623.....	65	42734.....	46	43485.....	100	43959.....	187
40349.....	179	41457.....	203	42624.....	66	42735.....	46	43486.....	100	44298.....	155
40350.....	182	41458.....	204	42625.....	66	42736.....	46	43487.....	100	44299.....	155
40353.....	179	41461.....	203	42626.....	66	42737.....	46	43488.....	100	44300.....	155
40354.....	182	41462.....	204	42627.....	67	42738.....	46	43489.....	100	44301.....	155
40357.....	179	41465.....	203	42628.....	66	42739.....	46	43490.....	100	44302.....	155
40358.....	182	41466.....	204	42630.....	66	42750.....	68	43491.....	100	44303.....	155
40361.....	179	41505.....	183	42631.....	66	42751.....	68	43492.....	100	44304.....	155
40362.....	182	41506.....	184	42632.....	66	42752.....	68	43493.....	100	44305.....	155
40365.....	179	41509.....	183	42633.....	66	42753.....	68	43494.....	100	44306.....	155
40366.....	182	41510.....	184	42648.....	67	42754.....	68	43495.....	100	44307.....	155
40369.....	179	41513.....	183	42649.....	67	42755.....	68	43496.....	100	44308.....	155
40370.....	182	41514.....	184	42650.....	67	43101.....	199	43497.....	100	44309.....	155
40373.....	179	41517.....	183	42651.....	67	43102.....	202	43501.....	190	44505.....	163
40374.....	182	41518.....	184	42652.....	67	43103.....	199	43502.....	192	44506.....	163
40377.....	179	41521.....	183	42653.....	67	43104.....	202	43503.....	190	44509.....	163
40378.....	182	41522.....	184	42654.....	67	43105.....	199	43504.....	192	44510.....	163
40381.....	179	41525.....	183	42655.....	67	43106.....	202	43505.....	190	44513.....	163
40382.....	182	41526.....	184	42656.....	66	43107.....	199	43506.....	192	44514.....	163
40385.....	179	41529.....	183	42657.....	66	43108.....	202	43507.....	190	44517.....	163
40386.....	182	41530.....	184	42658.....	66	43115.....	199	43508.....	192	44518.....	163
40505.....	190	41533.....	183	42659.....	66	43116.....	202	43515.....	190	44521.....	163
40506.....	192	41534.....	184	42660.....	65	43125.....	200	43516.....	192	44522.....	163
40509.....	190	41537.....	183	42661.....	65	43126.....	202	43525.....	190	44525.....	163
40510.....	192	41538.....	184	42662.....	65	43135.....	200	43526.....	192	44526.....	163
40513.....	190	41541.....	183	42663.....	65	43136.....	202	43535.....	190	44529.....	163
40514.....	192	41542.....	184	42664.....	65	43145.....	200	43536.....	192	44530.....	163
40517.....	190	41545.....	183	42665.....	65	43146.....	202	43545.....	190	44533.....	163
40518.....	192	41546.....	184	42666.....	65	43155.....	200	43546.....	192	44534.....	163
40521.....	190	41549.....	183	42667.....	65	43156.....	202	43555.....	190	44537.....	163
40522.....	192	41550.....	184	42668.....	65	43165.....	200	43556.....	192	44538.....	163
40525.....	190	41553.....	183	42669.....	65	43166.....	202	43565.....	190	44541.....	163
40526.....	192	41554.....	184	42670.....	65	43175.....	200	43566.....	192	44542.....	163
40529.....	190	41557.....	183	42671.....	65	43176.....	202	43575.....	190	44545.....	163
40530.....	192	41558.....	184	42672.....	65	43185.....	200	43576.....	192	44546.....	163
40533.....	190	41561.....	183	42673.....	65	43186.....	202	43585.....	190	44550.....	160
40534.....	192	41562.....	184	42674.....	65	43195.....	200	43586.....	192	44551.....	160
40537.....	190	41565.....	183	42675.....	65	43196.....	202	43595.....	190	44552.....	160
40538.....	192	41566.....	184	42676.....	65	43301.....	179	43596.....	192	44553.....	160
40541.....	190	41605.....	205	42677.....	65	43302.....	182	43900.....	188	44554.....	160
40542.....	192	41609.....	205	42678.....	65	43303.....	179	43901.....	188	44555.....	160
40545.....	190	41613.....	205	42679.....	65	43304.....	182	43902.....	188	44556.....	160
40546.....	192	41617.....	205	42680.....	65	43305.....	179	43903.....	188	44557.....	160
40549.....	190	41621.....	205	42681.....	66	43306.....	182	43904.....	188	44558.....	160
40550.....	192	41625.....	205	42682.....	66	43307.....	179	43905.....	188	44559.....	160
40553.....	190	41629.....	205	42683.....	66	43308.....	182	43906.....	188	44560.....	160
40554.....	192	41633.....	205	42684.....	66	43315.....	179	43907.....	188	44561.....	160
40557.....	190	41637.....	205	42685.....	66	43316.....	182	43908.....	188	44562.....	160
40558.....	192	41641.....	205	42686.....	66	43325.....	179	43909.....	188	44563.....	160
40561.....	190	41645.....	205	42687.....	66	43326.....	182	43910.....	187	44564.....	160
40562.....	192	41649.....	205	42688.....	66	43335.....	179	43911.....	187	44565.....	160
40565.....	190	41653.....	205	42689.....	66	43336.....	182	43912.....	187	44566.....	160
40566.....	192	41657.....	205	42690.....	66	43345.....	179	43913.....	187	44570.....	161
40569.....	190	41661.....	205	42691.....	66	43346.....	182	43914.....	187	44571.....	161
40570.....	192	41665.....	200	42692.....	66	43355.....	179	43915.....	187	44572.....	161
40573.....	190	41705.....	185	42693.....	66	43356.....	182	43916.....	187	44573.....	161
40574.....	192	41709.....	185	42694.....	66	43365.....	179	43917.....	187	44574.....	161
40577.....	190	41713.....	185	42695.....	66	43366.....	182	43918.....	187	44575.....	161
40578.....	192	41717.....	185	42696.....	66	43375.....	179	43919.....	187	44576.....	161
40581.....	190	41721.....	185	42697.....	66	43376.....	182	43920.....	187	44577.....	161
40582.....	192	41725.....	185	42698.....	66	43385.....	179	43921.....	187	44578.....	161
40585.....	190	41729.....	185	42699.....	66	43386.....	182	43922.....	187	44579.....	161
40586.....	192	41733.....	185	42700.....	66	43395.....	179	43923.....	187	44580.....	161
41405.....	203	41737.....	185	42701.....	67	43396.....	182	43924.....	187	44581.....	161
41406.....	204	41741.....	185	42702.....	67	43445.....	100	43925.....	187	44582.....	161
41409.....	203	41745.....	185	42703.....	67	43446.....	100	43926.....	187	44583.....	161
41410.....	204	41749.....	185	42704.....	67	43447.....	100	43927.....	187	44584.....	161
41413.....	203	41753.....	185	42705.....	67	43448.....	100	43928.....	187	44585.....	161
41414.....	204	41757.....	185	42706.....	152	43449.....	100	43929.....	187	44586.....	161
41417.....	203	41761.....	185	42707.....	152	43450.....	100	43930.....	187	44587.....	160
41418.....	204	41765.....	185	42708.....	152	43451.....	100	43931.....	187	44588.....	160
41421.....	203	42606.....	65	42709.....	152	43452.....	100	43932.....	187	44589.....	160
41422.....	204	42607.....	65	42710.....	153	43453.....	100	43933.....	187	44590.....	160

EDP Number Index

EDP Number Index

EDP Number Index

EDP Number Index

KSPT Reference Information

ISO H6 SPECIFICATIONS					
DIAMETER	+	-	DIAMETER	+	-
≥ 1/8 - 3/16	0.00000	-0.00032	≤ 3	0,000	0,006
> 3/16 - 7/16	0.00000	-0.00035	> 3 - 6	0,000	0,008
> 7/16 - 5/8	0.00000	-0.00043	> 6 - 10	0,000	0,009
> 5/8 - 1	0.00000	-0.00051	> 10 - 18	0,000	0,011
> 1 - 1-1/4	0.00000	-0.00063	> 18 - 25	0,000	0,013

MACHINING FORMULAS	
INCH FORMULAS	METRIC FORMULAS
sfm = rpm x .262 x cutting diameter	m/min = (3.14 x cutting diameter x rpm) / 1000
rpm = sfm x 3.82 / cutting diameter	rpm = (1000 x m / min) / (3.14 x cutting diameter)
feed (inches per tooth) = ipm / (number of teeth x rpm)	feed (mm per tooth) = millimeters per minute / (number of teeth x rpm)
feed (inches / minute) = inches per tooth x number of teeth x rpm	feed (mm/minute) = feed per tooth x number of teeth x rpm
feed (inches / minute) = ipr x rpm	feed (mm/minute) = mmr x rpm
feed (inches / revolution) = ipm / rpm	feed (mm per revolution) = mmr / rpm
cusp height* = (tool diameter / 2) – $\sqrt{(tool\ diameter^2 - pitch^2)} / 4$	cusp height* = (tool diameter / 2) – $\sqrt{(tool\ diameter^2 - pitch^2)} / 4$
pitch = $\sqrt{4} \times (cusp\ height \times tool\ diameter) - 4 \times (cusp\ height^2)$	pitch = $\sqrt{4} \times (cusp\ height \times tool\ diameter) - 4 \times (cusp\ height^2)$
mrr – milling – (in ³ /min) = width of cut x depth of cut x ipm	mrr – milling – (cm ³ /min) = (width of cut x depth of cut x mm/min) / 1000
cutting time – drilling – (minutes) = length / ipm	cutting time – drilling – (minutes) = length / mm/min

sfm	surface feet per minute
rpm	revolutions per minute
ipm	feed rate in inches per minutes
ipr	inches per revolution
mmr	millimeters per revolution
mm/min	feed rate in millimeters per minute
mrr	material removal rate
*	on flat surface

GENERAL FORMULAS

coolant pressure: 1 Bar = 14.5 Pounds per Square Inch (PSI)

calculation of coolant pressure: Pounds Per Square Inch (PSI) = (Horsepower of Pump x 1.460) / Gallons per Minute (GPM)

1 Liter = 0.254 Gallons

inch = millimeters / 25.4

millimeters = inch x 25.4

inch tap drill sizes = major diameter – ((1.299 x % of thread) / threads per inch)

metric tap drill sizes = major diameter – (1.082 x pitch x % of thread)

inch thread forming drill size: maximum diameter = basic major diameter – (3/8 x number of threads per inch)

inch thread forming drill size: minimum diameter = basic major diameter – (1/2 x number of threads per inch)

metric thread forming drill size: maximum diameter = basic major diameter – (.375 x pitch)

metric thread forming drill size: minimum diameter = basic major diameter – (.500 x pitch)

Decimal Equivalents

Fraction • Number • Letter • Metric Sizes

INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT
–	0,10	0.0039	–	1,60	0.0630	9/64	3,57	0.1406	#1	5,79	0.2280	R	8,61	0.3390	–	13,00	0.5118
–	0,20	0.0079	#52	1,61	0.0635	–	3,60	0.1417	–	5,80	0.2283	–	8,70	0.3425	33/64	13,10	0.5156
–	0,25	0.0098	–	1,65	0.0650	#27	3,66	0.1440	–	5,90	0.2323	11/32	8,73	0.3438	17/32	13,49	0.5312
–	0,30	0.0118	#51	1,70	0.0669	–	3,70	0.1457	A	5,94	0.2340	–	8,75	0.3445	–	13,50	0.5315
#80	0,34	0.0135	–	1,75	0.0689	#26	3,73	0.1470	15/64	5,95	0.2344	–	8,80	0.3465	35/64	13,89	0.5469
–	0,35	0.0138	#50	1,78	0.0700	–	3,75	0.1476	B	6,05	0.2380	–	8,90	0.3504	9/16	14,29	0.5625
#79	0,37	0.0145	–	1,80	0.0709	#25	3,80	0.1495	–	6,10	0.2402	–	9,00	0.3543	–	14,50	0.5709
1/64	0,40	0.0156	#49	1,85	0.0728	–	3,80	0.1496	C	6,15	0.2420	T	9,09	0.3580	37/64	14,68	0.5781
#78	0,41	0.0160	–	1,90	0.0748	#24	3,86	0.1520	–	6,20	0.2441	–	9,10	0.3583	–	15,00	0.5906
–	0,45	0.0177	#48	1,93	0.0760	–	3,90	0.1535	D	6,25	0.2461	23/64	9,13	0.3594	19/32	15,08	0.5938
#77	0,46	0.0180	–	1,95	0.0768	#23	3,91	0.1540	E	6,35	0.2500	–	9,25	0.3642	–	15,50	0.6102
–	0,50	0.0197	5/64	1,98	0.0781	5/32	3,97	0.1562	–	6,30	0.2480	–	9,20	0.3622	39/64	15,48	0.6094
#76	0,51	0.0200	#47	1,99	0.0785	#22	3,99	0.1570	G	6,63	0.2610	–	9,30	0.3661	5/8	15,88	0.6250
#75	0,53	0.0210	–	2,00	0.0787	–	4,00	0.1575	1/4	6,35	0.2500	U	9,35	0.3680	–	16,00	0.6299
–	0,55	0.0217	–	2,05	0.0807	#21	4,04	0.1590	–	6,40	0.2520	–	9,40	0.3701	41/64	16,27	0.6406
#74	0,57	0.0225	#46	2,06	0.0810	#20	4,09	0.1610	–	6,50	0.2559	–	9,50	0.3740	–	16,50	0.6496
–	0,60	0.0236	#45	2,08	0.0820	–	4,10	0.1614	F	6,53	0.2570	–	9,50	0.3750	21/32	16,67	0.6562
#73	0,61	0.0240	–	2,10	0.0827	–	4,20	0.1654	–	6,60	0.2598	3/8	9,53	0.3750	43/64	17,07	0.6719
#72	0,64	0.0250	–	2,15	0.0846	#19	4,22	0.1660	G	6,63	0.2610	V	9,56	0.3770	–	17,00	0.6693
–	0,65	0.0256	#44	2,18	0.0860	–	4,25	0.1673	–	6,70	0.2638	–	9,60	0.3780	11/16	17,46	0.6875
#71	0,66	0.0260	–	2,20	0.0866	–	4,30	0.1693	17/64	6,75	0.2656	–	9,70	0.3819	–	17,50	0.6890
–	0,70	0.0276	–	2,25	0.0886	#18	4,31	0.1695	H	6,76	0.2660	–	9,75	0.3839	–	17,50	0.6890
#70	0,71	0.0280	#43	2,26	0.0890	11/64	4,37	0.1719	–	6,80	0.2677	W	9,80	0.3858	45/64	17,86	0.7031
#69	0,74	0.0292	–	2,30	0.0906	#17	4,39	0.1730	–	6,90	0.2717	–	9,90	0.3898	–	18,00	0.7087
–	0,75	0.0295	–	2,35	0.0925	–	4,40	0.1732	I	6,91	0.2720	25/64	9,92	0.3906	23/32	18,26	0.7188
#68	0,79	0.0310	#42	2,37	0.0935	#16	4,50	0.1770	–	7,00	0.2756	–	10,00	0.3937	–	18,50	0.7283
1/32	0,79	0.0313	3/32	2,38	0.0938	–	4,50	0.1772	J	7,04	0.2770	X	10,08	0.3970	47/64	18,65	0.7344
–	0,80	0.0315	–	2,40	0.0945	#15	4,57	0.1800	–	7,10	0.2795	–	10,10	0.3976	–	19,00	0.7480
#67	0,81	0.0320	#41	2,44	0.0960	–	4,60	0.1811	K	7,14	0.2810	–	10,20	0.4016	3/4	19,05	0.7500
#66	0,84	0.0330	–	2,45	0.0965	#14	4,62	0.1820	9/32	7,14	0.2812	Y	10,26	0.4040	49/64	19,45	0.7656
–	0,85	0.0335	#40	2,50	0.0984	#13	4,70	0.1850	–	7,20	0.2835	–	10,30	0.4055	–	19,50	0.7677
#65	0,89	0.0350	#39	2,53	0.0995	–	4,75	0.1870	–	7,25	0.2854	13/32	10,32	0.4062	25/32	19,84	0.7812
–	0,90	0.0354	#38	2,58	0.1015	3/16	4,76	0.1875	–	7,30	0.2874	–	10,40	0.4094	–	20,00	0.7874
#64	0,91	0.0360	–	2,60	0.1024	#12	4,80	0.1890	L	7,37	0.2900	Z	10,49	0.4130	51/64	20,24	0.7969
#63	0,94	0.0370	#37	2,64	0.1040	#11	4,85	0.1910	–	7,40	0.2913	–	10,50	0.4134	–	20,50	0.8071
–	0,95	0.0374	–	2,70	0.1063	–	4,90	0.1929	M	7,49	0.2950	–	10,60	0.4173	13/16	20,64	0.8125
#62	0,97	0.0380	#36	2,71	0.1065	#10	4,91	0.1935	–	7,50	0.2953	–	10,70	0.4213	–	21,00	0.8268
#61	0,99	0.0390	–	2,75	0.1083	#9	4,98	0.1960	19/64	7,54	0.2969	27/64	10,72	0.4219	53/64	21,03	0.8281
–	1,00	0.0394	7/64	2,78	0.1094	–	5,00	0.1969	–	7,60	0.2992	–	10,80	0.4252	27/32	21,43	0.8438
#60	1,02	0.0400	#35	2,79	0.1100	#8	5,05	0.1990	N	7,67	0.3020	–	10,90	0.4291	–	21,50	0.8465
#59	1,04	0.0410	–	2,80	0.1102	–	5,10	0.2008	–	7,70	0.3031	–	11,00	0.4331	55/64	21,84	0.8594
–	1,05	0.0413	#34	2,82	0.1110	#7	5,11	0.2010	–	7,75	0.3051	–	11,10	0.4370	–	22,00	0.8661
#58	1,07	0.0420	#33	2,87	0.1130	13/64	5,16	0.2031	–	7,80	0.3071	7/16	11,11	0.4375	7/8	22,23	0.8750
#57	1,09	0.0430	–	2,90	0.1142	#6	5,18	0.2040	–	7,90	0.3110	–	11,20	0.4409	–	22,50	0.8858
–	1,10	0.0433	#32	2,95	0.1160	–	5,20	0.2047	5/16	7,94	0.3125	–	11,30	0.4449	57/64	22,62	0.8906
–	1,15	0.0453	–	3,00	0.1181	#5	5,22	0.2055	–	8,00	0.3150	–	11,40	0.4488	–	23,00	0.9055
#56	1,18	0.0465	#31	3,05	0.1200	–	5,25	0.2067	O	8,03	0.3160	–	11,50	0.4528	29/32	23,02	0.9062
3/64	1,19	0.0469	–	3,10	0.1220	–	5,3	0.2087	–	8,10	0.3189	29/64	11,51	0.4531	59/64	23,42	0.9219
–	1,20	0.0472	1/8	3,18	0.1250	#4	5,31	0.2090	–	8,20	0.3228	–	11,60	0.4567	–	23,50	0.9252
–	1,25	0.0492	–	3,20	0.1260	–	5,40	0.2126	P	8,20	0.3230	–	11,70	0.4606	15/16	23,81	0.9375
–	1,30	0.0512	–	3,25	0.1280	#3	5,41	0.2130	–	8,25	0.3248	–	11,80	0.4646	–	24,00	0.9449
#55	1,32	0.0520	#30	3,26	0.1285	–	5,50	0.2165	–	8,30	0.3268	–	11,90	0.4685	61/64	24,21	0.9531
–	1,35	0.0531	–	3,30	0.1299	7/32	5,56	0.2188	21/64	8,33	0.3281	15/32	11,91	0.4688	–	24,50	0.9646
#54	1,40	0.0550	–	3,40	0.1339	–	5,60	0.2205	–	8,40	0.3307	–	12,00	0.4724	31/32	24,61	0.9688
#53	1,51	0.0595	#29	3,45	0.1360	#2	5,61	0.2210	Q	8,43	0.3320	31/64	12,30	0.4844	–	25,00	0.9843
–	1,55	0.0610	–	3,50	0.1378	–	5,70	0.2244	–	8,50	0.3346	–	12,50	0.4921	63/64	25,00	0.9844
1/16	1,59	0.0625	#28	3,57	0.1405	–	5,75	0.2264	–	8,60	0.3386	1/2	12,70	0.5000	1	25,40	1.0000

Hardness Conversion Chart

ROCKWELL HARDNESS (HRb)	ROCKWELL HARDNESS (HRc)	BRINELL HARDNESS (HB)	VICKERS HARDNESS (HV)	TENSILE STRENGTH (N/mm ²)	PSI (1000lb/in ²)
67	—	121	122	401	58
70	—	126	127	432	63
73	—	132	132	448	65
75	—	136	137	455	66
77	—	140	143	463	67
80	—	147	150	479	69
82	—	153	156	494	72
84	—	159	163	525	76
86	—	165	171	540	78
89	—	177	178	556	81
91	—	186	188	602	88
93	—	197	196	632	92
96	—	216	212	664	97
97	—	223	218	695	101
98	21	230	234	756	110
—	22	236	241	772	112
—	23	242	247	787	114
—	24	248	255	818	118
—	25	254	261	849	123
—	27	266	269	865	125
—	28	272	275	895	130
—	29	278	284	911	132
—	30	284	292	942	136
—	31	293	300	973	141
—	32	302	308	988	143
—	33	310	318	1019	147
—	34	319	327	1050	152
—	35	328	337	1096	159
—	37	345	349	1127	163
—	38	353	359	1158	168
—	39	362	370	1189	172
—	40	370	381	1235	179
—	41	381	395	1266	183
—	42	391	408	1312	190
—	44	411	422	1359	197
—	45	422	437	1420	206
—	46	433	452	1467	212
—	48	455	470	1513	219
—	50	479	497	1559	226
—	51	485	517	1621	235
—	52	497	532	1668	241
—	54	—	573	1729	250
—	56	—	609	1807	262
—	57	—	630	1884	273
—	59	—	670	1961	284
—	60	—	698	2039	295
—	61	—	725	—	—
—	62	—	740	—	—
—	63	—	780	—	—
—	64	—	812	—	—
—	65	—	847	—	—
—	66	—	885	—	—
—	67	—	926	—	—
—	68	—	971	—	—

Conversions from each scale are approximate

SOLUTIONS AROUND THE GLOBE

KYOCERA SGS Precision Tools is an ISO 9001:2015 Certified leader of round solid carbide cutting tool technology for the aerospace, metalworking, and automotive industries with manufacturing sites in the United States and United Kingdom. Our global network of Sales Representatives, Industrial Distributors, and Agents blanket the world selling into more than 60 countries.

LEADERS IN SOLID CARBIDE TOOL TECHNOLOGY

Brand names such as Z-Carb, S-Carb®, V-Carb, Hi-PerCarb®, Multi-Carb have become synonymous with high performance tooling in the machining and metalworking industry.

We're proud to have pioneered some of the world's most advanced cutting technology right here on our Northeast Ohio manufacturing campus. KSPT high performance end mills, drills and routers are increasing productivity and reducing cost around the world.

EXCEEDING CUSTOMER EXPECTATIONS

As the world's manufacturing needs change, so does KSPT. It's all about the science, starting with our lab inspected substrate materials to our tool designs and coatings. Our exceptional team of researchers, engineers, and machinists are dedicated to developing the absolute best and delivering the ultimate Value at the spindle®.

- Incredible batch-to-batch consistency
- Metallurgical lab dedicated to testing and rigorous quality control
- ISO 9001:2015 Certified quality procedures
- Patented geometries that extend tool life, reduce chatter, cut cycle times, and improve part quality—even at extreme parameters
- Specialists in extreme and demanding product applications
- Comprehensive tooling services
- Experienced Field Sales Engineers who work to optimize a tool for your particular application
- Dedicated multi-lingual customer service representatives

SGS PRODUCTS ARE DISTRIBUTED BY:



VALUE AT THE SPINDLE®

UNITED STATES OF AMERICA

KYOCERA SGS Precision Tools
150 Marc Drive
Cuyahoga Falls, Ohio 44223 U.S.A.
customer service -
US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146
orders: sales@kyocera-sgstool.com
web: www.kyocera-sgstool.com

UNITED KINGDOM

KYOCERA SGS Precision Tools Europe Ltd.
10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: SalesEU@kyocera-sgstool.com
web: www.kyocera-sgstool.co.uk

JAPAN

KYOCERA Corporation
International Sales Dept.
6 Takeda Tobadono-cho,
Fushimi-ku, Kyoto 612-8501, Japan
phone: +81-75-604-3473
fax: +81-75-604-3472
web: global.kyocera.com/prdct/tool/index.html

COMMERCIAL OFFICES

EASTERN EUROPE

SINTCOM
Sintcom Tools
95 Arsenalski Blvd.
1421 Sofia, Bulgaria
phone: (359) 283-64421
fax: (359) 286-52493
e-mail: sintcom@sintcomtools.com

POLAND

KYOCERA SGS Precision Tools
phone: +48 530 432 002
e-mail: SalesEU@kyocera-sgstool.com

RUSSIA

HALTEC
phone: (7) 495-252-05-00
e-mail: info@haltec.ru
web: www.haltec.ru

SPAIN

KYOCERA SGS Precision Tools IBERICA
e-mail: SalesEU@kyocera-sgstool.com

THAILAND

KYOCERA Asia Pacific (Thailand) Co., Ltd.
1 Capital Work Place Building
7th Floor, Soi Chamchan, Sukhumvit
55 Road, Klongton Nua, Wattana,
Bangkok 10110, Thailand
phone: +66-2-030-6688
fax: +66-2-030-6600

SINGAPORE

KYOCERA Asia Pacific Pte. Ltd.
298 Tiong Bahru Road, #13-03/05 Central Plaza,
Singapore 168730
phone: +65-6373-6700
fax: +65-6271-0600
web: asia.kyocera.com/products/cuttingtools/index.html

CHINA

KYOCERA (China) Sales & Trading Corporation
Room 140, Building A3, Daning Central Square,
No. 700 Wanrong Road,
Zhabei District, Shanghai, 200072,
P.R. China
phone: +86-21-3660-7711
fax: +86-21-568-6200
web: www.kyocera.com.cn/prdct/cuttingtool

