



High Performance End Mills



 **Milling**

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE
Z-Carb-HPR	Z5	5 Flute Rougher Square End Fractional	28
	Z5CR	5 Flute Rougher Corner Radius Fractional	29
	Z5MCR	5 Flute Rougher Corner Radius Metric	33
Z-Carb-AP	Z1PCR	4 Flute Variable Rake Corner Radius Fractional	36
	Z1MPCR	4 Flute Variable Rake Corner Radius Metric	42
	Z1PLC	4 Flute Variable Rake Long Reach Corner Radius Fractional	38
	Z1MPIC	4 Flute Variable Rake Intermediate Reach Corner Radius Metric	43
	Z1MPLC	4 Flute Variable Rake Long Reach Corner Radius Metric	44
	Z1PLB	4 Flute Variable Rake Ball End Long Reach Fractional	39
Z-Carb	Z1	4 Flute Variable Geometry Square End Fractional	47
	Z1M	4 Flute Variable Geometry Square End Metric	52
	Z1B	4 Flute Variable Geometry Ball End Fractional	49
	Z1MB	4 Flute Variable Geometry Ball End Metric	53
	Z16CR	4 Flute Variable Geometry Corner Radius Fractional	48
Z-Carb-HTA	ZH1CR	4 Flute Variable Geometry High Temp Alloys Corner Radius Fractional	56
	ZH1MCR	4 Flute Variable Geometry High Temp Alloys Corner Radius Metric	58
	ZH1MCRS	4 Flute Variable Geometry High Temp Alloys Stub Corner Radius Metric	58
Z-Carb-MD	ZD1CR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Fractional	60
	ZD1MCR	4 Flute Variable Geometry Hard Materials Long Reach Corner Radius Metric	61
Series 7	7	4 Flute Variable Geometry Long Length Square End Fractional	100
	7M	4 Flute Variable Geometry Long Length Square End Metric	103
	7B	4 Flute Variable Geometry Long Length Ball End Fractional	101
	7MB	4 Flute Variable Geometry Long Length Ball End Metric	104
V-Carb	55	5 Flute Finisher & Semi-Finisher Square End Fractional	63
	55CR	5 Flute Finisher & Semi-Finisher Corner Radius Fractional	64
	55B	5 Flute Finisher & Semi-Finisher Ball End Fractional	65
	55M	5 Flute Finisher & Semi-Finisher Square End Metric	68
	55MCR	5 Flute Finisher & Semi-Finisher Corner Radius Metric	69
	55MB	5 Flute Finisher & Semi-Finisher Ball End Metric	71

Speed & Feed Recommendations listed after each series

HIGH PERFORMANCE END MILLS	SERIES	DESCRIPTION	PAGE
T-Carb®	51	6 Flute High Speed Machining Square End Fractional	75
	51M	6 Flute High Speed Machining Square End Metric	80
	51L	6 Flute High Speed Machining Square End Long Reach Fractional	76
	51ML	6 Flute High Speed Machining Square End Long Reach Metric	82
	51CR	6 Flute High Speed Machining Corner Radius Fractional	75
	51MCR	6 Flute High Speed Machining Corner Radius Metric	81
	51LC	6 Flute High Speed Machining Long Reach Corner Radius Fractional	77
	51MLC	6 Flute High Speed Machining Long Reach Corner Radius Metric	83
Multi-Carb	66	Multi-Flute Finisher Square End Fractional	86
	66M	Multi-Flute Finisher Square End Metric	89
	66CR	Multi-Flute Finisher Corner Radius Fractional	86
	66MCR	Multi-Flute Finisher Corner Radius Metric	90
Turbo-Carb	56B	2 Flute Contouring Long Reach Ball End Fractional	106
	56MB	2 Flute Contouring Long Reach Ball End Metric	108
Power-Carb	57	6 Flute Finisher Square End Fractional	110
	57M	6 Flute Finisher Square End Metric	112
Series 33	33CR	3 Flute Difficult to Machine Materials Corner Radius Fractional	94
	33MCR	3 Flute Difficult to Machine Materials Corner Radius Metric	97
CFRP Slow Helix	27	4 Flute Slow Helix Square End Fractional	114
	27M	4 Flute Slow Helix Square End Metric	116

Speed & Feed Recommendations listed after each series

FRESAS DE ALTO RENDIMIENTO	SERIE	DESCRIPCIÓN	PÁGINA
Z-Carb-HPR	Z5	5 filos, desbastador, punta cuadrada, fraccional	28
	Z5CR	5 filos, desbastador, radio angulado, fraccional	29
	Z5MCR	5 filos, desbastador, radio angulado, métrico	33
Z-Carb-AP	Z1PCR	4 filos, inclinación variable, radio angulado, fraccional	36
	Z1MPCR	4 filos, inclinación variable, radio angulado, métrico	42
	Z1PLC	4 filos, inclinación variable, largo alcance, radio angulado, fraccional	38
	Z1MPIC	4 filos, inclinación variable, medio alcance, radio angulado, métrico	43
	Z1MPLC	4 filos, inclinación variable, largo alcance, radio angulado, métrico	44
	Z1PLB	4 filos, inclinación variable, punta esférica, largo alcance, fraccional	39
Z-Carb	Z1	4 filos, geometría variable, punta cuadrada, fraccional	47
	Z1M	4 filos, geometría variable, punta cuadrada, métrico	52
	Z1B	4 filos, geometría variable, punta esférica, fraccional	49
	Z1MB	4 filos, geometría variable, punta esférica, métrico	53
	Z16CR	4 filos, geometría variable, radio angulado, fraccional	48
Z-Carb-HTA	ZH1CR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, fraccional	56
	ZH1MCR	4 filos, geometría variable, aleaciones termorresistentes, radio angulado, métrico	58
	ZH1MCRS	4 filos, geometría variable, aleaciones termorresistentes, versión corta, radio angulado, métrico	58
Z-Carb-MD	ZD1CR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, fraccional	60
	ZD1MCR	4 filos, geometría variable, materiales duros, largo alcance, radio angulado, métrico	61
Serie 7	7	4 filos, geometría variable, longitud larga, punta cuadrada, fraccional	100
	7M	4 filos, geometría variable, longitud larga, punta cuadrada, métrico	103
	7B	4 filos, geometría variable, longitud larga, punta esférica, fraccional	101
	7MB	4 filos, geometría variable, longitud larga, punta esférica, métrico	104
V-Carb	55	5 filos, acabador y semiacabador, punta cuadrada, fraccional	63
	55CR	5 filos, acabador y semiacabador, radio angulado, fraccional	64
	55B	5 filos, acabador y semiacabador, punta esférica, fraccional	65
	55M	5 filos, acabador y semiacabador, punta cuadrada, métrico	68
	55MCR	5 filos, acabador y semiacabador, radio angulado, métrico	69
	55MB	5 filos, acabador y semiacabador, punta esférica, métrico	71
T-Carb®	51	6 filos, mecanizado de alta velocidad, punta cuadrada, fraccional	75
	51M	6 filos, mecanizado de alta velocidad, punta cuadrada, métrico	80
	51L	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, fraccional	76
	51ML	6 filos, mecanizado de alta velocidad, punta cuadrada, largo alcance, métrico	82
	51CR	6 filos mecanizado de alta velocidad, radio angulado, fraccional	75
	51MCR	6 filos mecanizado de alta velocidad, radio angulado, métrico	81
	51LC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, fraccional	77
	51MLC	6 filos mecanizado de alta velocidad, largo alcance, radio angulado, métrico	83
Multi-Carb	66	Filo múltiple, acabador, punta cuadrada, fraccional	86
	66M	Filo múltiple, acabador, punta cuadrada, métrico	89
	66CR	Filo múltiple, acabador, radio angulado, fraccional	86
	66MCR	Filo múltiple, acabador, radio angulado, métrico	90
Turbo-Carb	56B	2 filos, contorneado, largo alcance, punta esférica, fraccional	106
	56MB	2 filos, contorneado, largo alcance, punta esférica, métrico	108
Power-Carb	57	6 filos, acabador, punta cuadrada, fraccional	110
	57M	6 filos, acabador, punta cuadrada, métrico	112
Serie 33	33CR	3 filos, materiales difíciles de mecanizar, radio angulado, fraccional	94
	33MCR	3 filos, materiales difíciles de mecanizar, radio angulado, métrico	97
Helicoidal de avance lento CFRP	27	4 filos, helicoidal de avance lento, punta cuadrada, fraccional	114
	27M	4 filos, helicoidal de avance lento, punta cuadrada, métrico	116

Recomendaciones de velocidades y avances mostradas tras cada serie

Fraisage

FRAISES A DETOURER UNIVERSELLES	SÉRIES	DESCRIPTION	PAGE
Z-Carb-HPR	Z5	5 dents non rayonné pour l'ébauche (fractionnel)	28
	Z5CR	5 dents rayonnée pour l'ébauche (fractionnel)	29
	Z5MCR	5 dents rayonnée pour l'ébauche (métrique)	33
Z-Carb-AP	Z1PCR	4 dents pas décalé et hélice variable rayonnés (fractionnel)	36
	Z1MPCR	4 dents pas décalé et hélice variable rayonnés (métrique)	42
	Z1PLC	4 dents pas décalé et hélice variable rayonnés (fractionnel)	38
	Z1MPIC	4 dents pas décalé, hélice variable, détalonné, rayonnés (métrique)	43
	Z1MPLC	4 dents pas décalé et hélice variable rayonnés (métrique)	44
	Z1PLB	4 dents à vague de coupe variable longue portée à bout hémisphérique (fractionnel)	39
Z-Carb	Z1	4 dents géométrie variable non rayonné (fractionnel)	47
	Z1M	4 dents géométrie variable non rayonné (métrique)	52
	Z1B	4 dents géométrie variable à bout hémisphérique (fractionnel)	49
	Z1MB	4 dents géométrie variable à bout hémisphérique (métrique)	53
	Z16CR	4 dents géométrie variable rayonné (fractionnel)	48
Z-Carb-HTA	ZH1CR	4 dents géométrie variable alliages haute température rayonné (fractionnel)	56
	ZH1MCR	4 dents géométrie variable alliages haute température rayonné (métrique)	58
	ZH1MCRS	4 dents géométrie variable, alliages haute température, longueur de l'outil court, rayonné (métrique)	58
Z-Carb-MD	ZD1CR	4 dents géométrie variable matériaux durs longue portée rayonné (fractionnel)	60
	ZD1MCR	4 dents géométrie variable matériaux durs longue portée rayonné (métrique)	61
Série 7	7	4 dents géométrie variable à queue longue non rayonné (fractionnel)	100
	7M	4 dents géométrie variable à queue longue non rayonné (métrique)	103
	7B	4 dents géométrie variable à queue longue à bout hémisphérique (fractionnel)	101
	7MB	4 dents géométrie variable à queue longue à bout hémisphérique (métrique)	104
V-Carb	55	5 dents en bout de finition et semi-finition plat (fractionnel)	63
	55CR	5 dents en bout finition et semi-finition rayonné (fractionnel)	64
	55B	5 dents en bout de finition et semi-finition hémisphérique (fractionnel)	65
	55M	5 dents en bout de finition et semi-finition plat (métrique)	68
	55MCR	5 dents en bout finition et semi-finition rayonné (métrique)	69
	55MB	5 dents en bout de finition et semi-finition hémisphérique (métrique)	71
T-Carb®	51	6 dents pour usinage grande vitesse non rayonné (fractionnel)	75
	51M	6 dents pour usinage grande vitesse non rayonné (métrique)	80
	51L	6 dents pour usinage grande vitesse non rayonné extra longue (fractionnel)	76
	51ML	6 dents pour usinage grande vitesse non rayonné extra longue (métrique)	82
	51CR	6 dents pour usinage grande vitesse rayonné (fractionnel)	75
	51MCR	6 dents pour usinage grande vitesse rayonné (métrique)	81
	51LC	6 dents pour usinage grande vitesse extra longue rayonné (fractionnel)	77
	51MLC	6 dents pour usinage grande vitesse extra longue rayonné (métrique)	83
Multi-Carb	66	Multi-dents non rayonné pour finition (fractionnel)	86
	66M	Multi-dents non rayonné pour finition (métrique)	89
	66CR	Multi-dents rayonné pour finition (fractionnel)	86
	66MCR	Multi-dents rayonné pour finition (métrique)	90
Turbo-Carb	56B	2 dents contournage longue portée à bout hémisphérique (fractionnel)	106
	56MB	2 dents contournage longue portée à bout hémisphérique (métrique)	108
Power-Carb	57	6 dents en bout de finition plat (fractionnel)	110
	57M	6 dents en bout de finition plat (métrique)	112
Série 33	33CR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (fractionnel)	94
	33MCR	3 dents rayonné pour l'ébauche dans tous les matériaux sauf non-ferreux (métrique)	97
CFRP hélice lente	27	4 dents hélice lente non rayonné (fractionnel)	114
	27M	4 dents hélice lente non rayonné (métrique)	116

Recommandations de vitesse et avance indiquées après chaque série

HOCHLEISTUNGS-SCHAFTFRÄSER	SERIE	BESCHREIBUNG	SEITE
Z-Carb-HPR	Z5	Zölliger Schrupfräser mit 5 Schneiden ohne Eckenradien	28
	Z5CR	Zölliger Schrupfräser mit 5 Schneiden und Eckenradien	29
	Z5MCR	Schrupfräser mit 5 Schneiden und Eckenradien	33
Z-Carb-AP	Z1PCR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	36
	Z1MPCR	Fräser mit 4 Schneiden und variablen Spanwinkel	42
	Z1PLC	Zölliger Langlochfräser mit 4 variablen Schneiden und Eckenradien	38
	Z1MPIC	Fräser mittlerer Länge mit 4 variablen Schneiden und Eckenradien	43
	Z1MPLC	Langlochfräser mit 4 variablen Schneiden und Eckenradien	44
	Z1PLB	Zölliger Radiusschaftfräser mit 4 Schneiden und variablem Spanwinkel	39
Z-Carb	Z1	Zölliger Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	47
	Z1M	Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	52
	Z1B	Zölliger Radiusschaftfräser mit 4 Schneiden und variabler Form	49
	Z1MB	Radiusschaftfräser mit 4 Schneiden und variabler Form	53
	Z16CR	Zölliger Fräser mit 4 variablen Schneiden und Eckenradien	48
Z-Carb-HTA	ZH1CR	Hochwarmfester zölliger Fräser mit 4 variablen Schneiden und Eckenradien	56
	ZH1MCR	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	58
	ZH1MCRS	Hochwarmfester Fräser mit 4 variablen Schneiden und Eckenradien	58
Z-Carb-MD	ZD1CR	Zölliger Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	60
	ZD1MCR	Langlochfräser mit 4 variablen Schneiden, Eckenradien und Form aus Hartmetall	61
Serie 7	7	Zölliger Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	100
	7M	Langloch-Schaftfräser mit 4 Schneiden ohne Eckenradien und variabler Form	103
	7B	Zölliger Langloch-Radiusschaftfräser mit 4 Schneiden und variabler Form	101
	7MB	Langloch-Radiusschaftfräser mit 4 Schneiden und variabler Form	104
V-Carb	55	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	63
	55CR	Zölliger Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien	64
	55B	Schlicht- und Halbschlicht-Radiusschaftfräser mit 5 Schneiden ohne Eckenradien	65
	55M	Schlicht- und Halbschlichtfräser mit 5 Schneiden ohne Eckenradien und variabler Form	68
	55MCR	Schlicht- und Halbschlichtfräser mit 5 Schneiden und Eckenradien	69
	55MB	Schlicht- und Halbschlicht-Radiusschaftfräser mit 5 Schneiden und variabler Form	71
T-Carb®	51	Zölliger Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	75
	51M	Schaftfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden ohne Eckenradien	80
	51L	Zölliger Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	76
	51ML	Langloch-Schaftfräser aus Schnellstahl mit 6 Schneiden ohne Eckenradien	82
	51CR	Zölliger Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	75
	51MCR	Fräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien aus Schnellstahl	81
	51LC	Zölliger Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	77
	51MLC	Langlochfräser für die Hochgeschwindigkeitsbearbeitung mit 6 Schneiden und Eckenradien	83
Multi-Carb	66	Zölliger mehrschneidiger Schlichtfräser ohne Eckenradien	86
	66M	mehrschneidiger Schlichtfräser ohne Eckenradien	89
	66CR	Zölliger mehrschneidiger Schlichtfräser mit Eckenradien	86
	66MCR	mehrschneidiger Schlichtfräser mit Eckenradien	90
Turbo-Carb	56B	Zölliger Langloch-Profil-Radiusschaftfräser mit 2 Schneiden	106
	56MB	Langloch-Profil-Radiusschaftfräser mit 2 Schneiden	108
Power-Carb	57	Zölliger Schlichtfräser mit 6 Schneiden ohne Eckenradien	110
	57M	Schlichtfräser mit 6 Schneiden ohne Eckenradien	112
Serie 33	33CR	Zölliger Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	94
	33MCR	Fräser mit 3 Schneiden und Eckenradien für schwerspanbare Werkstoffe	97
CFRP Slow Helix	27	Zölliger Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	114
	27M	Schaftfräser mit 4 steilen Schneiden ohne Eckenradien	116

Empfehlungen für Drehzahl & Vorschub im Anhang zu jeder Serie

End Mill Matrix

Name	Series	Page No.	Material							No. Flutes	Helix °	Flute Index	Rake	Relief	Center Cutting	
			Steel	Ss	Cast Iron	Ht Alloys	Ti Alloys	N Ferrous	Plastics Composites							
Z-Carb HPR	Z5	28	★	★	★	★	★	★		☆	5	37	≠	+	E	N
Z-Carb	Z1 / Z16 / Z1B	47	★	★	★	★	★	★		☆	4	35 / 38	≠	+	E	Y
Z-Carb-AP	Z1P	36	★	★	★	★	★	★		☆	4	35 / 38	≠	+	E	Y
Z-Carb-HTA	ZH1	56	★	★	★	★	★	★		☆	4	38 / 41	≠	+	E	Y
Z-Carb-MD	ZD1	60	★							★	4	42 / 45	≠	-	E	Y
Series 33	33	94	★	★	★	★	★	★		☆	3	32 / 48	≠	+	E	Y
T-Carb®	51	75	★	★	★	★	★	★		☆	6	41	≠	+	E	Y
Series 7	7	100	★	★	★	★	★	★		☆	4	38	≠	+	P-S	Y
V-Carb	55	63	★	★	★	★	★	★		☆	5	45	≠	+	P-S	Y
Multi-Carb	66	86	★	★	★	★	★	★		☆	7, 9, 11	35	=	+	E	N
Turbo-Carb	56B	106	★							★	2	30	=	+	E	Y
Power-Carb	57	110								★	6	45	=	-	E	Y
Ski-Carb	44, 45	164							★ ★		2	45	=	+	P-S	Y
S-Carb® 3 Flute	43	134							★ ★		3	38	=	+	E	Y
S-Carb® Chipbreaker	43CB	144							★ ★		3	38	=	+	E	Y
S-Carb® 2 Flute	47	157							★ ★		2	35	=	+	E	Y
S-Carb APR®	43APR	123							★		3	38	=	+	E	Y
S-Carb APR-3®	APR3	129							★		3	38	≠	+	E	Y
S-Carb APR-4®	APR4	130							★		4	38 / 41	≠	+	E	Y
S-Carb APF®	43APF	125							★		4	38 / 41	≠	+	E	Y
Slow Helix	27	114							★		4	10 / 12	≠	+	P-S	Y
CCR *	20-CCR	356							★		8, 10, 12	15	=	+	C	EM or DR
CCR *	31-CCR	362							★		5, 7, 10	15	=	+	C	EM or DR
PCR *	29-PCR	352							★		8, 9, 12	15	=	0	E	EM or DR
Compression Router	25	366							★		4, 6, 8	30	=	+	P-S	Y
Up Cut Router	21	370							★ ★		2	35	=	+	P-S	Y
Down Cut Router	22	371							★ ★		2	35	=	+	P-S	Y

Main Key

- ★ Primary Function
- ☆ Secondary Function
- ⌚ Coolant Required
- 🚫 Plunging NOT Recommended

Coating Key

- Ti-Namite-A (TA) = AlTiN
- Ti-Namite-X (TX) = Proprietary nanocomposite
- Ti-Namite-M (TM) = AlTiSiN nanocomposite
- Ti-Namite-B (TB) = TiB2
- Di-Namite® = polycrystalline diamond

Rake Key

- + = Positive
- = Negative
- 0 = Neutral

Center Cutting Key

- Y = Yes
- N = No
- EM = End Mill End
- DR = Drill End

Relief Key

- E = Eccentric
- P-S = Primary - Secondary
- C = Concave

End Mill Matrix

		Finishing					HSM				Profiling					Slotting					Ramping			Plunging				
Coating	Ae %	2	2	5	5	5	5	5	10	10	25	50	25	50	25	50	100	100	100	100	100	100	100	Ap	Ap			
	Ap %	100	200	100	200	300	100	200	100	200	100	100	150	150	200	200	25	50	75	100	150	200	1°	3°	6°	50%	100%	
TM / TA		☆	☆	☆	☆		★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TA / TX		☆	☆	☆	☆		☆	☆	☆	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆		
TX		☆	☆	☆	☆		☆	☆	☆	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆	
TA		☆	☆	☆	☆		☆	☆	☆	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆	
TX		☆	☆	☆	☆		☆	☆	☆	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆	
TA		☆	☆	☆	☆		☆	☆	☆	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆	
TX		☆	☆	☆	☆		★	★	★	★	★	☆		☆											★	☆		
TX		★	★	★	★	★																				★		
TA		★	★	★	★		☆	☆			☆	☆					☆	☆	☆	☆					★	☆		
TX		★	★	★	★																					★		
TX		★	★	★	★		★	★	☆		☆	☆					☆								★	☆		
TX		★	★	★	★		★	★	★		★	☆					★	☆							★			
TB		★	★	★	★		★	★	★	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆	
TB		★	★	★	★		★	★	★	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TB							★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TB		☆	☆	☆	☆		☆	☆	☆	☆	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TB							★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TB							★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TB							★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
TB							★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Di-Namite® (opt.)		☆	☆	☆	☆	☆					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	☆	
Di-Namite® (opt.)		☆	☆	☆	☆	☆					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Di-Namite® (opt.)		☆	☆	☆	☆	☆					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Di-Namite® (opt.)		☆	☆	☆	☆	☆					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
Di-Namite® (opt.)		★	★	★	★	★					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
various (opt.)		☆	☆	☆	☆	☆					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	
various (opt.)		☆	☆	☆	☆	☆					★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	★	

Ramping Basics

Use 100% of slotting feed rates for 1° ramp
Use 50% of slotting feed rates for 3° ramp
Use 25% of slotting feed rates for 6° ramp

Notes

Reduce speed, feed, and cut depths as material hardness increases—see KYOCERA SGS Tool Wizard® for recommendations
Long flute or long reach tools also require reduced rates and cut depths
Machine, tool holding, work holding, and coolant also affect rates and cut depths

Plunging Basics

Use 50% of slotting feed rates in Non-Ferrous materials
Use 20% of slotting feed rates for all other plungable materials

*For Ramping and Plunging:

Non-end cut version not intended for ramping or plunging
End cut version intended for ramping only
Drill end intended for plunging only

Application Tips

Tool	<ul style="list-style-type: none">Whenever possible, select an end mill with the largest diameter, shortest flute length, and shortest overall length for the best rigidityLong flute tools are not intended for pocketing, slotting, or heavy profiling – limit Ae to .02DHigh Performance tools minimize cycle time and extend tool life
Tool Holders	<ul style="list-style-type: none">Holders with adequate gripping pressure and TIR are requiredStub holders or zero length collet style holders are recommended for heavy stock removalWhen using solid holders, hand ground screw flats are not recommended
Workpiece	<ul style="list-style-type: none">Secure clamping of the workpiece will reduce chatter and deflection
Machine	<ul style="list-style-type: none">Spindle must be in optimum condition for precise TIR and maximum tool lifeSufficient horsepower is required to perform at recommended speeds and feedsReduce rates for low power machines to prevent workpiece and / or tool damage
Coolant	<ul style="list-style-type: none">Avoid re-milling chips through use of air blast or liquid coolant as necessaryMaintain clean coolant with appropriate concentrationGeneral recommendations:<ul style="list-style-type: none">—Water Soluble Oil or Air Blast: Tool Steels, Mold & Die Steels, Carbon or Alloy Steels—Water Soluble Oil: Stainless Steels, Titanium, High Temperature Alloys, Non-Ferrous Alloys
Methods	<ul style="list-style-type: none">Climb milling is generally preferredAttention to programming details, tool holders, TIR, balance, fixturing, etc. improve cutting tool performance and extend tool life

END MILLING GUIDELINE

D_1 = cutting diameter L_2 = flute length

Speeds and Feeds for Cut Types are based on Radial Width ($|Ae|$) and Axial Depth ($\frac{Ap}{\downarrow}$)

Reductions to Speeds and Feeds may be necessary when:

- Ae and Ap exceed recommendations
- Using long flute or extended reach tools
- Using long tool holders
- Machining materials harder than listed

ENTRY METHODS

Pre-Drilled Hole




Pre-drilling is the preferred entry method for most applications.

Helical Ramp



Straight Ramp



Alternative methods are helical and straight ramping. High ramp angles require reduced feed. Lower ramp angles will allow higher feed rates and extend tool life. Use slotting speeds and feeds for ramp angles of 1° to 2°. Reduce feed to 25% when ramp angles approach 6°. General purpose tools and/or difficult to machine materials will require lower ramp angles and reduced feed.

Plunge



Plunge only in non-ferrous and short-chipping materials using slotting speeds and 25% slotting feeds.



Herramientas	<ul style="list-style-type: none"> Siempre que sea posible, seleccione la herramienta de mayor diámetro y menor longitud total y de filo para obtener una mayor rigidez. Las herramientas con filos largos no son recomendadas para operaciones de apertura de cajas en el maquinado, operación de ranurado o perfilado pesado – limitar la profundidad radial (A_e) a .02D Las herramientas de alto desempeño minimizan el tiempo de ciclo del maquinado y extienden la vida útil de la herramienta
Portaherramientas	<ul style="list-style-type: none"> Los Portaherramientas deberán tener buena presión de amarre para la sujeción de la herramienta y una concentricidad máxima indicada (TIR) Se recomienda usar portaherramientas de amarre directo cortos, o de boquilla con longitud cero para lograr un máximo arranque de viruta Cuando se utilicen portaherramientas de amarre directo, no se recomienda hacer manualmente el plano para la sujeción del tornillo en el zanco de la herramienta
Pieza a maquinar	<ul style="list-style-type: none"> La buena sujeción de la pieza a maquinar reducirá la vibración y la desviación de la herramienta
Máquina	<ul style="list-style-type: none"> El husillo de la maquina debe estar en condiciones optimas, para asegurar la concentración de giro (TIR) y asegurar el máximo rendimiento de la herramienta Para lograr los avances y velocidades recomendados, se necesita suficiente potencia (HP) en la maquina Reducir los parámetros de corte en maquinas de baja potencia (HP) para prevenir el daño en la herramienta o pieza de trabajo
Refrigeración	<ul style="list-style-type: none"> Evite el re-maquinado de virutas usando aire a presión o líquido refrigeración según sea necesario Mantener limpio la refrigeración con su concentración adecuada Recomendaciones generales: <ul style="list-style-type: none"> –Para el maquinado de aceros de herramienta, para Moldes y Dados o Aleaciones de Bajo Carbón, utilice Aceite Soluble en Agua o aire a presión –Para el maquinado de Aleaciones Inoxidables, Aleaciones Termorresistentes, Titanio y Aleaciones No Ferrosas, utilice solamente Aceite Soluble en Agua
Métodos	<ul style="list-style-type: none"> Se recomienda el maquinado en sentido ascendente o trepado El cuidado en los detalles de la programación, la concentración de giro (TIR) el balance de los portaherramientas, la sujeción de la pieza a maquinar, etc. son factores que contribuyen a prolongar la vida de la herramienta

GUÍAS DE FRESADO

D_1 = diámetro de corte L_2 = largo de filo

Las velocidades y avances para cortes están basados en la profundidad radial ($-|A_e|-$), y profundidad axial ($\frac{Ap}{\downarrow}$)

Reducciones en velocidades y avances serán necesarias cuando:

- A_e y Ap excede las recomendaciones
- Se utilicen filos largos o herramientas de largo alcance
- Se utilicen portaherramientas largos
- Se maquinan materiales más duros que los recomendados

MÉTODOS DE ENTRADA

Barreno previo




Preferentemente usar un barreno previo como método de entrada para la mayor parte de las aplicaciones.

Rampa helicoidal



Los métodos alternativos son las rampas helicoidales y rectas. Un ángulo elevado de rampa necesita un avance reducido. Un ángulo de rampa inferior permitirá tasas de avance más elevadas y una mayor duración de la herramienta. Usar velocidades y alcances de ranurado para ángulos de rampa de 1° a 2°. Disminuir el avance un 25% cuando los ángulos de rampa se aproximan a 6°. Las herramientas de uso general y/o materiales difíciles de mecanizar precisarán ángulos de rampa inferiores y un avance reducido.

Rampa recta



Agujero o Barrenado



Este método se puede utilizar únicamente en materiales no ferrosos y materiales de formación de virutas cortas, usando la velocidad de ranurado y el 25% de su avance.

Conseils relatifs à l'application

Outil	<ul style="list-style-type: none"> • Chaque fois que possible, choisissez une fraise de plus grand diamètre possible, la plus courte possible, elle garantira la meilleure rigidité • Les outils longs ne sont pas optimum pour l'ébauche, le pocketing, le rainurage – Ae limité à 0,02 D • Les outils Haute performance optimisent les temps de cycle et de augmentent la durée de vie
Porte-outils	<ul style="list-style-type: none"> • Des attaches à serrage puissant et à faux rond précis sont recommandés • Attachements à méplats ou pinces à serrage nominale sont recommandées pour les ébauches • Lorsque vous utilisez des attachement rigides, les serrage de l'outil par vis ne sont pas recommandés
Pièce	<ul style="list-style-type: none"> • Le système de fixation et de bridage de la pièce devra permettre de réduire les vibrations et la déformation
Machine	<ul style="list-style-type: none"> • Broche doit être en bon état optimal au niveau de son faux rond • Suffisamment puissance est nécessaire pour effectuer à des vitesses recommandées et se nourrit • Réduire les efforts pour les machines de faible puissance pour éviter l'endommagement de la pièce et / ou de l'outil
Liquide de refroidissement	<ul style="list-style-type: none"> • Évitez les recyclage de copeaux par l'utilisation de soufflage d'air comprimé ou de liquide de refroidissement. • Maintenir le lubrifiant propre à la concentration appropriée • Recommandations générales – <ul style="list-style-type: none"> -Huile soluble ou Air comprimé: aciers à outils, aciers pour moules, aciers au carbone ou alliés -Huile soluble: aciers inoxydables, titane, alliages à haute température, alliages non ferreux
Méthodes	<ul style="list-style-type: none"> • L'usinage en avalant est généralement préconisé • Attention à la programmation, porte-outils, faux rond, équilibrage, fixation, etc améliorent les performances de l'outil en coupe et prolonge la durée de vie

GUIDE DU FRAISAGE


D₁ = diamètre de coupe L₂ = longueur de coupe

Vitesses & avances pour ces cas d'usinage sont basées sur l'engagement radial ($\leftarrow |Ae| \rightarrow$), et axial ($\uparrow |Ap| \downarrow$)

La réduction de la vitesse et de l'avance doit être nécessaire quand:

- Les engagements Ae et Ap sont importants
- Des dentures longues ou des séries longues sont utilisées
- Des attachement longs sont utilisés
- Lors d'usinage de matériaux durs

TYPES D'ENTREE MATERIE

Preperçage 	Ramping hélicoïdal  Ramping droit 	Plongée 
<p>Le préperçage est la méthode préférable dans la plupart de applications.</p>		<p>Les autres méthodes sont un ramping hélicoïdal et un ramping droit. Les angles de ramping élevés exigent une avance inférieure. Les angles de ramping inférieurs permettent les taux d'avance supérieurs et prolongeront la vie de l'outil. Utilisez des avances et vitesses de mortaisage pour les angles de ramping de 1° à 2°. Réduisez l'avance à 25 % lorsque les angles de ramping avoisinent 6°. Les outils tout usage et/ou les matériaux difficiles à usiner exigeront des angles de ramping inférieurs et une charge réduite.</p>

Werkzeug	<ul style="list-style-type: none"> • Wählen Sie möglichst immer den Schaftfräser mit dem größten Durchmesser, der kürzesten Schneide und Gesamtlänge, um eine hohe Steifigkeit zu erhalten • Langlochschaftfräser sind nicht zum Taschen-, Schlitz- oder Profilfräsen bestimmt – die Dehnung auf Ae 0,2 der Streckgrenze nicht überschreiten • Hochleistungswerkzeuge minimieren die Bearbeitungszeit und verlängern die Werkzeugstandzeit
Werkzeughalter	<ul style="list-style-type: none"> • Es werden Spannzangen mit genauem Rundlauf benötigt • Steile Kegel oder bündige Spannfutter werden bei hohem Materialabtrag empfohlen • Von der Verwendung fester handverschraubter Halterungen wird abgeraten
Werkstück	<ul style="list-style-type: none"> • Sicheres Werkzeugspannen verringert Vibrationen und das Auswandern aus der Spannvorrichtung
Werkzeugmaschine	<ul style="list-style-type: none"> • Die Spindel muss in optimalem Zustand sein, um einen genauen Rundlauf und maximale Standzeit zu erzielen • Für die empfohlenen Drehzahlen und Vorschubgeschwindigkeiten ist genügend Leistung bereitzustellen • Bei leistungsschwachen Antrieben sind die Werte zu verringern, um Beschädigungen am Werkstück und/oder Werkzeug zu vermeiden
Kühlmittel	<ul style="list-style-type: none"> • Das Stauen der Späne durch Luftstrahl oder flüssige Kühlmittel möglichst verhindern • Kühlmittel in geeigneter Konzentration verwenden • Allgemeine Empfehlungen: <ul style="list-style-type: none"> – Wasser-Öl-Emulsionen oder Luftstrahl: Werkzeugstähle, Form- und Schneidstähle, unlegierte oder legierte Stähle – Wasser-Öl-Emulsion: Nichtrostender Stahl, Titan, Warmfeste Legierungen, Nichteisenlegierungen
Verfahren	<ul style="list-style-type: none"> • Vorzugsweise Gleichlauffräsen anwenden • Das Beachten der Fräsparameter, Werkzeughalter, Rundlauf, Auswuchten, Einspannen, usw. verbessert die Schnittleistung und verlängert die Standzeit

RICHTWERTE ZUM FRÄSEN

D₁ = Fräsdurchmesser L₂ = Schnittlänge

Drehzahl und Vorschub für Fräsaufgaben hängen von Radialbreite (—|Ae|—) und Frästiefe ($\frac{Ap}{\downarrow}$) ab

Drehzahl und Vorschub müssen ggfs. verringert werden wenn:

- die empfohlenen Werte für Ae und Ap überschritten werden
- lange Schneiden oder Langschaftfräser verwendet werden
- lange Werkzeughalter verwendet werden
- die Werkstoffe härter als vorgesehen sind

VORBEREITUNGEN

Vorbohrung



Vorbohren ist in den meisten Fällen ratsam.



Zirkulareintauchfräsen
Alternative Verfahren sind Zirkulareintauchen und Schrägeintauchen. Starke Tauchwinkel erfordern verringerte Vorschubgeschwindigkeiten. Geringe Tauchwinkel ermöglichen höhere Vorschubgeschwindigkeiten und verlängern die Standzeit. Verwenden Sie die Drehzahlen und Vorschübe zum Schlitzfräsen für Tauchwinkel von 1° bis 2°. Den Vorschub auf 25 % verringern, wenn der Tauchwinkel 6° erreicht. Standardwerkzeuge und / oder schwer zu bearbeitende Werkstoffe verlangen kleine Tauchwinkel und verringerte Vorschubgeschwindigkeiten.




Stechen




Stechen Sie in Nichteisenmetalle und kurzspanende Werkstoffe nur mit Schlitzfräsdrehzahl und 25 % der Schlitzvorschubgeschwindigkeit ein.

FRACTIONAL

Z-Carb-HPR
Z5
FRACTIONAL SERIES

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and proprietary edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

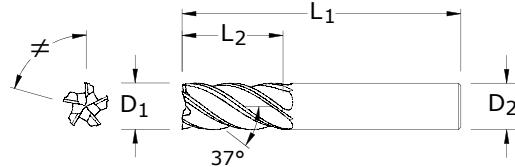

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	EDP NO.				
				TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-A (TA) W/INTERNAL COOLANT	TI-NAMITE-M (TM) W/FLAT	TI-NAMITE-M (TM) W/INTERNAL COOLANT
1/8	1/4	1-1/2	1/8	—	—	—	37000	—
1/8	3/8	1-1/2	1/8	37180	—	—	37002	—
3/16	5/16	2	3/16	—	—	—	37004	—
3/16	1/2	2	3/16	37182	—	—	37006	—
1/4	3/8	2-1/2	1/4	38502	—	—	37008	—
1/4	1/2	2-1/2	1/4	37184	—	—	37011	—
5/16	7/16	2-1/2	5/16	—	—	—	37014	—
5/16	5/8	2-1/2	5/16	38504	—	—	37016	—
3/8	1/2	2-1/2	3/8	—	—	—	37018	—
3/8	3/4	2-1/2	3/8	37187	—	—	37021	—
7/16	5/8	2-1/2	7/16	37168	—	—	37159	—
7/16	7/8	2-3/4	7/16	37170	—	—	37169	—
1/2	5/8	3	1/2	38506	38512	37320	37024	37030
1/2	1	3	1/2	38507	38513	37322	37036	37042
1/2	1-1/4	3-1/4	1/2	37190	37194	37324	37048	37054
5/8	3/4	3-1/2	5/8	38508	38514	—	37060	37067
5/8	1-1/4	3-1/2	5/8	37198	37202	—	37074	37081
3/4	7/8	4	3/4	—	38515	—	37088	37095
3/4	1-1/2	4	3/4	37206	37210	—	37102	37109
1	1-1/8	4	1	—	—	—	37116	37123
1	1-1/2	4	1	37214	37218	—	37130	37137
1	2	4-1/2	1	—	38517	—	37144	37151
						37302		

TOLERANCES (inch)

1/8–1/4 DIAMETER

D₁ = +0.0000/-0.0012**D₂** = h₆

>1/4–3/8 DIAMETER

D₁ = +0.0000/-0.0016**D₂** = h₆

>3/8–1 DIAMETER

D₁ = +0.0000/-0.0020**D₂** = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS



TITANIUM

HARDENED STEELS

For patent information visit
www.ksptpatents.com



FRACTIONAL Z-Carb-HPR

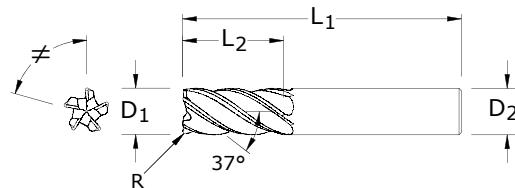

TOLERANCES (inch)

1/8–1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

$R = +0.0000/-0.0020$

>1/4–3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

$R = +0.0000/-0.0020$

>3/8–1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

$R = +0.0000/-0.0020$

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS


For patent information visit www.ksptpatents.com

CUTTING LENGTH DIAMETER OF CUT	OVERALL LENGTH	SHANK DIAMETER	CORNER RADIUS R	EDP NO.			
				TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-M (TM) W/INTERNAL COOLANT	TI-NAMITE-M (TM) W/FLAT
1/8	1/4	1-1/2	.015	38525	—	—	37001
1/8	3/8	1-1/2	.015	37181	—	—	37003
3/16	5/16	2	.015	—	—	—	37005
3/16	1/2	2	.015	37183	—	—	37007
1/4	3/8	2-1/2	.015	—	—	—	37009
1/4	3/8	2-1/2	.030	38528	—	—	37010
1/4	1/2	2-1/2	.015	37185	—	—	37012
1/4	1/2	2-1/2	.030	37186	—	—	37013
5/16	7/16	2-1/2	.015	38529	—	—	37015
5/16	5/8	2-1/2	.015	38530	—	—	37017
3/8	1/2	2-1/2	.015	—	—	—	37019
3/8	1/2	2-1/2	.030	38532	—	—	37020
3/8	3/4	2-1/2	.015	37188	—	—	37022
3/8	3/4	2-1/2	.030	37189	—	—	37023
7/16	5/8	2-1/2	.015	37164	—	—	37160
7/16	5/8	2-1/2	.030	37165	—	—	37161
7/16	7/8	2-3/4	.015	37166	—	—	37162
7/16	7/8	2-3/4	.030	37167	—	—	37163
1/2	5/8	3	.015	—	38578	37330	37025
1/2	5/8	3	.030	—	38579	37332	37026
1/2	5/8	3	.060	—	38580	37334	37027
1/2	5/8	3	.090	—	38581	37337	37028
1/2	5/8	3	.120	—	—	37339	37029
1/2	1	3	.015	—	38583	37341	37037
1/2	1	3	.030	38539	38584	37343	37038
1/2	1	3	.060	—	38585	37345	37039
1/2	1	3	.090	—	—	37348	37040
1/2	1	3	.120	—	—	37350	37041
1/2	1-1/4	3-1/4	.015	37191	37195	37352	37049
1/2	1-1/4	3-1/4	.030	37192	37196	37354	37050
1/2	1-1/4	3-1/4	.060	37193	37197	37356	37051
1/2	1-1/4	3-1/4	.090	—	—	37359	37052
1/2	1-1/4	3-1/4	.120	—	—	37361	37053
5/8	3/4	3-1/2	.015	—	—	—	37061
5/8	3/4	3-1/2	.030	—	38591	—	37062
5/8	3/4	3-1/2	.060	—	—	—	37063
5/8	3/4	3-1/2	.090	—	—	—	37064
5/8	3/4	3-1/2	.120	38549	—	37065	37072

continued on next page

Z5CR FRACTIONAL SERIES


- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and proprietary edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



Z5CR

FRACTIONAL SERIES

CONTINUED

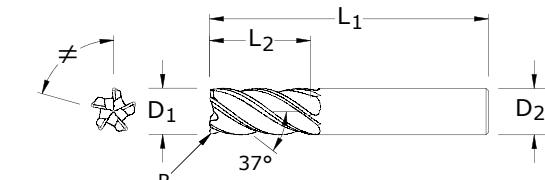


CUTTING DIAMETER OF CUT	OVERALL LENGTH L ₂	SHANK LENGTH L ₁	CORNER RADIUS R	EDP NO.			
				TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-M (TM) W/INTERNAL COOLANT	TI-NAMITE-M (TM) W/FLAT
5/8	3/4	3-1/2	.5/8 .190	—	—	—	37066 37073 37266
5/8	1-1/4	3-1/2	.5/8 .015	37199	37203	—	37075 37082 37268
5/8	1-1/4	3-1/2	.5/8 .030	37200	37204	—	37076 37083 37269
5/8	1-1/4	3-1/2	.5/8 .060	37201	37205	—	37077 37084 37270
5/8	1-1/4	3-1/2	.5/8 .090	—	—	—	37078 37085 37271
5/8	1-1/4	3-1/2	.5/8 .120	—	—	—	37079 37086 37272
5/8	1-1/4	3-1/2	.5/8 .190	—	—	—	37080 37087 37273
3/4	7/8	4	.3/4 .030	—	38599	—	37089 37096 37275
3/4	7/8	4	.3/4 .060	—	—	—	37090 37097 37276
3/4	7/8	4	.3/4 .090	—	—	—	37091 37098 37277
3/4	7/8	4	.3/4 .120	—	—	—	37092 37099 37278
3/4	7/8	4	.3/4 .190	—	—	—	37093 37100 37279
3/4	7/8	4	.3/4 .250	—	—	—	37094 37101 37280
3/4	1-1/2	4	.3/4 .030	37207	37211	—	37103 37110 37282
3/4	1-1/2	4	.3/4 .060	37208	37212	—	37104 37111 37283
3/4	1-1/2	4	.3/4 .090	—	—	—	37105 37112 37284
3/4	1-1/2	4	.3/4 .120	37209	37213	—	37106 37113 37285
3/4	1-1/2	4	.3/4 .190	—	—	—	37107 37114 37286
3/4	1-1/2	4	.3/4 .250	—	—	—	37108 37115 37287
1	1-1/8	4	1 .030	—	38608	—	37117 37124 37289
1	1-1/8	4	1 .060	—	—	—	37118 37125 37290
1	1-1/8	4	1 .090	—	—	—	37119 37126 37291
1	1-1/8	4	1 .120	—	—	—	37120 37127 37292
1	1-1/8	4	1 .190	—	—	—	37121 37128 37293
1	1-1/8	4	1 .250	—	—	—	37122 37129 37294
1	1-1/2	4	1 .030	37215	37219	—	37131 37138 37296
1	1-1/2	4	1 .060	37216	37220	—	37132 37139 37297
1	1-1/2	4	1 .090	—	—	—	37133 37140 37298
1	1-1/2	4	1 .120	37217	37221	—	37134 37141 37299
1	1-1/2	4	1 .190	—	—	—	37135 37142 37300
1	1-1/2	4	1 .250	—	—	—	37136 37143 37301
1	2	4-1/2	1 .030	—	38617	—	37145 37152 37303
1	2	4-1/2	1 .060	—	—	—	37146 37153 37304
1	2	4-1/2	1 .090	—	—	—	37147 37154 37305
1	2	4-1/2	1 .120	—	—	—	37148 37155 37306
1	2	4-1/2	1 .190	—	—	—	37149 37156 37307
1	2	4-1/2	1 .250	—	—	—	37150 37157 37308

TOLERANCES (inch)**1/8-1/4 DIAMETER** $D_1 = +0.0000/-0.0012$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **>1/4-3/8 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **>3/8-1 DIAMETER** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com


FRACTIONAL
Z-Carb-HPR



Series Z5, Z5CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)									
					1/8	1/4	3/8	1/2	5/8	3/4	1			
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	555 (444-666)	RPM	16961	8480	5654	4240	3392	2827	2120
		Slot		1	≤ 1	440 (352-528)	RPM	13446	6723	4482	3362	2689	2241	1681
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	315 (252-378)	RPM	9626	4813	3209	2407	1925	1604	1203
		Slot		1	≤ 1	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707
		Slot		1	≤ 1	145 (116-174)	RPM	4431	2216	1477	1108	886	739	554
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	445 (356-534)	RPM	13599	6800	4533	3400	2720	2267	1700
		Slot		1	≤ 1	355 (284-426)	RPM	10849	5424	3616	2712	2170	1808	1356
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
		Slot		1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
		Slot		1	≤ 1	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
		Slot		1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
		Slot		1	≤ 1	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
		Slot		1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile		≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
		Slot		1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031

continued on next page

FRACTIONAL

Z-Carb-HPR

Series Z5, Z5CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
M STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ $\leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (248-372)	310	RPM	9474	4737	3158	2368	1895	1579	1184
					Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
	$\leq 300 \text{ Bhn}$ $\leq 32 \text{ HRc}$	Slot 	1	≤ 1 (200-300)	250	RPM	7640	3820	2547	1910	1528	1273	955
					Fz	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ $\leq 32 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (64-96)	80	RPM	2445	1222	815	611	489	407	306
					Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238	
	$\leq 400 \text{ Bhn}$ $\leq 43 \text{ HRc}$	Slot 	1	≤ 1 (52-78)	65	RPM	1986	993	662	497	397	331	248
					Fz	0.00025	0.00068	0.00128	0.00170	0.00187	0.00204	0.00238	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (50-74)	62	RPM	1895	947	632	474	379	316	237
					Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170	
	$\leq 350 \text{ Bhn}$ $\leq 38 \text{ HRc}$	Slot 	1	≤ 1 (40-60)	50	RPM	1528	764	509	382	306	255	191
					Fz	0.00018	0.00048	0.00090	0.00120	0.00130	0.00140	0.00170	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (172-258)	215	RPM	6570	3285	2190	1643	1314	1095	821
					Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
	$\leq 440 \text{ Bhn}$ $\leq 47 \text{ HRc}$	Slot 	1	≤ 1 (136-204)	170	RPM	5195	2598	1732	1299	1039	866	649
					Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5 (60-90)	75	RPM	2292	1146	764	573	458	382	287
					Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
	$\leq 440 \text{ Bhn}$ $\leq 47 \text{ HRc}$	Slot 	1	≤ 1 (48-72)	60	RPM	1834	917	611	458	367	306	229
					Fz	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	

Bhn (Brinell) HRc (Rockwell C)

rpm = V_c x 3.82 / D₁

ipm = Fz x 5 x rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



METRIC

Z-Carb-HPR

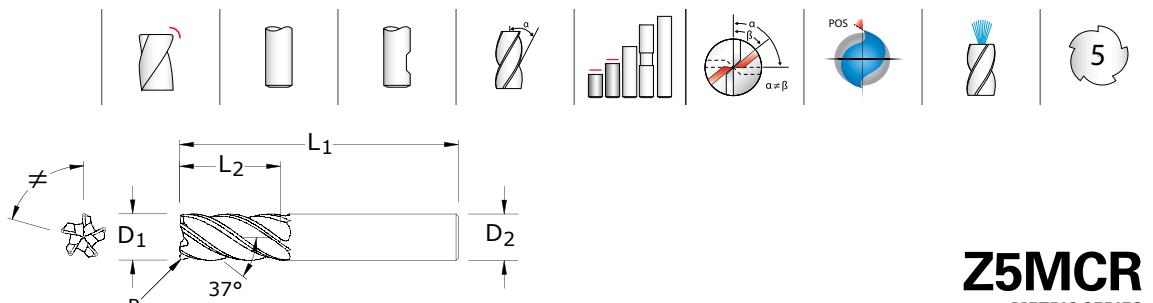

TOLERANCES (mm)

6 DIAMETER

 $D_1 = +0,000/-0,030$ $D_2 = h_6$ $R = +0,000/-0,050$

>6-10 DIAMETER

 $D_1 = +0,000/-0,040$ $D_2 = h_6$ $R = +0,000/-0,050$

>10-25 DIAMETER

 $D_1 = +0,000/-0,050$ $D_2 = h_6$ $R = +0,000/-0,050$

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


HARDENED STEELS

For patent
information visit
www.ksptpatents.com

CUTTING LENGTH DIAMETER OF CUT D_1	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	EDP NO.			
				TI-NAMITE-A (TA)	TI-NAMITE-A (TA) W/FLAT	TI-NAMITE-M (TM) EDP NO. W/INTERNAL COOLANT	TI-NAMITE-M (TM) EDP NO. W/FLAT
6,0	9,0	54,0	6,0	0,5	—	—	—
6,0	13,0	57,0	6,0	0,3	—	—	47001
6,0	13,0	57,0	6,0	0,5	47120	48002	—
6,0	13,0	57,0	6,0	1,0	—	—	47003
6,0	13,0	57,0	6,0	1,5	48003	—	—
8,0	11,0	58,0	8,0	0,5	—	—	47005
8,0	18,0	63,0	8,0	0,5	47121	—	—
8,0	18,0	63,0	8,0	1,0	47122	—	47007
8,0	18,0	63,0	8,0	1,5	—	—	47008
8,0	18,0	63,0	8,0	2,0	—	—	47009
10,0	13,0	66,0	10,0	1,0	—	—	47010
10,0	22,0	72,0	10,0	0,5	47123	—	47011
10,0	22,0	72,0	10,0	1,0	47124	—	47012
10,0	22,0	72,0	10,0	1,5	—	—	47013
10,0	22,0	72,0	10,0	2,0	—	—	47014
10,0	22,0	72,0	10,0	2,5	—	—	47015
12,0	15,0	73,0	12,0	1,0	—	—	47016
12,0	26,0	83,0	12,0	0,5	47125	47128	47160
12,0	26,0	83,0	12,0	0,76	47126	47129	47162
12,0	26,0	83,0	12,0	1,0	47127	47130	47164
12,0	26,0	83,0	12,0	1,5	48012	—	47166
12,0	26,0	83,0	12,0	2,0	—	47168	47021
12,0	26,0	83,0	12,0	2,5	—	47170	47022
12,0	26,0	83,0	12,0	3,0	—	47172	47023
16,0	19,0	82,0	16,0	1,0	—	—	47032
16,0	19,0	82,0	16,0	1,5	48070	—	—
16,0	35,0	92,0	16,0	1,0	47131	—	47034
16,0	35,0	92,0	16,0	1,5	—	—	47034
16,0	35,0	92,0	16,0	2,0	47132	—	47135
16,0	35,0	92,0	16,0	2,5	—	—	47036
16,0	35,0	92,0	16,0	3,0	47133	—	47136
16,0	35,0	92,0	16,0	4,0	—	—	47038
20,0	23,0	92,0	20,0	1,0	48020	—	47053
20,0	43,0	104,0	20,0	1,0	47137	—	47140
20,0	43,0	104,0	20,0	1,5	—	—	47055
20,0	43,0	104,0	20,0	2,0	47138	—	47141
20,0	43,0	104,0	20,0	2,5	—	—	47057
20,0	43,0	104,0	20,0	3,0	47139	—	47142
20,0	43,0	104,0	20,0	4,0	—	—	47059
20,0	43,0	104,0	20,0	5,0	—	—	47060
25,0	28,0	100,0	25,0	1,0	—	—	47077
25,0	53,0	121,0	25,0	1,0	47143	—	47146
25,0	53,0	121,0	25,0	2,0	47144	—	47147
25,0	53,0	121,0	25,0	2,5	—	—	47080
25,0	53,0	121,0	25,0	3,0	47145	—	47148
25,0	53,0	121,0	25,0	4,0	—	—	47082
25,0	53,0	121,0	25,0	5,0	—	—	47083

- An ideal balance of helix, indexing, flute depth, rake and relief
- Variable indexing for chatter suppression and proprietary edge geometry for shearing and strength
- Chatter-free geometry allows deep cutting and high speed machining
- Central coolant hole delivers coolant effectively to the cutting zone enhancing chip removal when pocketing or slotting
- Enhanced corner geometry with tight tolerance corner radii
- Excels at roughing, ramping, high speed machining and finishing in a variety of materials
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


Z5MCR
METRIC SERIES

Z-Carb-HPR

Series Z5MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)							
					6	8	10	12	16	20	25	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile	169 (135-203)	RPM	8967	6725	5380	4484	3363	2690	2152
			Slot	134 (107-161)	RPM	7109	5332	4265	3555	2666	2133	1706
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile	96 (77-115)	RPM	5089	3817	3054	2545	1909	1527	1221
			Slot	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	56 (45-68)	RPM	2989	2242	1793	1495	1121	897	717
			Slot	44 (35-53)	RPM	2343	1757	1406	1171	879	703	562
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile	136 (109-163)	RPM	7190	5392	4314	3595	2696	2157	1726
			Slot	108 (87-130)	RPM	5736	4302	3441	2868	2151	1721	1377
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
			Slot	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	149 (119-179)	RPM	7917	5938	4750	3958	2969	2375	1900
			Slot	119 (95-143)	RPM	6301	4726	3781	3151	2363	1890	1512
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile	104 (83-124)	RPM	5493	4120	3296	2747	2060	1648	1318
			Slot	82 (66-99)	RPM	4362	3272	2617	2181	1636	1309	1047

continued on next page

METRIC
Z-Carb-HPR



Series Z5MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)								
					6	8	10	12	16	20	25		
M STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	94 (76-113)	RPM	5009	3756	3005	2504	1878	1503	1202
		Slot 	1	≤ 1	76 (61-91)	RPM	4039	3029	2424	2020	1515	1212	969
	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	1293	969	776	646	485	388	310
		Slot 	1	≤ 1	20 (16-24)	RPM	1050	788	630	525	394	315	252
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	1002	751	601	501	376	301	240
		Slot 	1	≤ 1	15 (12-18)	RPM	808	606	485	404	303	242	194
	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	3474	2605	2084	1737	1303	1042	834
		Slot 	1	≤ 1	52 (41-62)	RPM	2747	2060	1648	1373	1030	824	659
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	RPM	1212	909	727	606	454	364	291
		Slot 	1	≤ 1	18 (15-22)	RPM	969	727	582	485	364	291	233
		Profile 	≤ 0.5	≤ 1.5	Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071	
		Slot 	1	≤ 1	Fz	0.019	0.032	0.040	0.048	0.056	0.064	0.071	

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (D_1 \times 3.14)$


mm/min = Fz $\times 5 \times$ rpm

ramp up to 5 degrees using slotting speed and feed rates. Do not plunge.

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)


refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Z1PCR

FRACTIONAL SERIES

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

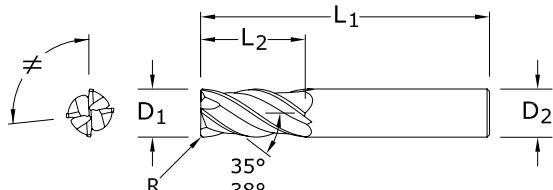

inch					Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R			
1/64	1/32	1-1/2	1/8	.002	36874	—	—
1/32	5/64	1-1/2	1/8	.005	36875	—	—
3/64	7/64	1-1/2	1/8	.005	36876	—	—
1/16	3/16	1-1/2	1/8	.005	36872	—	—
5/64	3/16	1-1/2	1/8	.005	36877	—	—
3/32	9/32	1-1/2	1/8	.010	36873	—	—
7/64	3/8	1-1/2	1/8	.010	36878	—	—
1/8	3/8	1-1/2	1/8	.010	36370	—	—
1/8	3/8	1-1/2	1/8	.015	36851	—	—
3/16	7/16	2	3/16	.010	36371	—	—
3/16	7/16	2	3/16	.015	36852	—	—
3/16	7/16	2	3/16	.030	36722	—	—
1/4	1/2	2-1/2	1/4	.010	36372	—	—
1/4	1/2	2-1/2	1/4	.015	36723	—	—
1/4	1/2	2-1/2	1/4	.020	36853	—	—
1/4	1/2	2-1/2	1/4	.030	36373	—	—
1/4	3/4	2-1/2	1/4	.010	36599	—	—
1/4	3/4	2-1/2	1/4	.015	36600	—	—
1/4	3/4	2-1/2	1/4	.020	36854	—	—
1/4	3/4	2-1/2	1/4	.030	36601	—	—
5/16	13/16	2-1/2	5/16	.015	36724	—	—
5/16	13/16	2-1/2	5/16	.020	36855	—	—
5/16	13/16	2-1/2	5/16	.030	36374	—	—
3/8	7/8	2-1/2	3/8	.010	36375	36701	—
3/8	7/8	2-1/2	3/8	.015	36725	36736	—
3/8	7/8	2-1/2	3/8	.020	36856	36864	—
3/8	7/8	2-1/2	3/8	.030	36376	36702	—
3/8	7/8	2-1/2	3/8	.060	36727	36738	—

continued on next page

TOLERANCES (inch)

<1/8 DIAMETER

D₁ = +0.0005/-0.0005

D₂ = h₆

R = +0.000/-0.0010

1/8-1/4 DIAMETER

D₁ = +0.000/-0.0012

D₂ = h₆

R = +0.000/-0.0020

>1/4-3/8 DIAMETER

D₁ = +0.000/-0.0016

D₂ = h₆

R = +0.000/-0.0020

>3/8-1 DIAMETER

D₁ = +0.000/-0.0020

D₂ = h₆

R = +0.000/-0.0020

 STEELS

 STAINLESS STEELS

 CAST IRON

 HIGH TEMP ALLOYS

 TITANIUM

 HARDENED STEELS


For patent information visit www.ksptpatents.com



FRACTIONAL
Z-Carb-AP


Z1PCR
FRACTIONAL SERIES

inch					EDP NO.			CONTINUED
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream	
7/16	1	2-3/4	7/16	.020	36857	36865	—	
1/2	1	3	1/2	.010	36378	36704	36804	
1/2	1	3	1/2	.015	36729	36740	36810	
1/2	1	3	1/2	.030	36858	36866	36805	
1/2	1	3	1/2	.060	36380	36706	36811	
1/2	1	3	1/2	.090	36381	36707	36812	
1/2	1	3	1/2	.125	36731	36742	36813	
1/2	1-1/4	3-1/4	1/2	.010	36602	36603	—	
1/2	1-1/4	3-1/4	1/2	.015	36604	36605	—	
1/2	1-1/4	3-1/4	1/2	.030	36859	36867	—	
1/2	1-1/4	3-1/4	1/2	.060	36610	36611	—	
1/2	1-1/4	3-1/4	1/2	.090	36612	36613	—	
1/2	1-1/4	3-1/4	1/2	.125	36614	36615	—	
9/16	1-1/8	3-1/2	9/16	.030	36860	36868	36806	
5/8	1-1/4	3-1/2	5/8	.030	36383	36709	36814	
5/8	1-1/4	3-1/2	5/8	.040	36861	36869	36807	
5/8	1-1/4	3-1/2	5/8	.060	36384	36710	36815	
5/8	1-1/4	3-1/2	5/8	.090	36385	36711	36816	
5/8	1-1/4	3-1/2	5/8	.125	36733	36744	36817	
3/4	1-1/2	4	3/4	.030	36386	36712	36818	
3/4	1-1/2	4	3/4	.040	36862	36870	36808	
3/4	1-1/2	4	3/4	.060	36387	36713	36819	
3/4	1-1/2	4	3/4	.090	36388	36714	36820	
3/4	1-1/2	4	3/4	.125	36389	36715	36821	
1	1-1/2	4	1	.030	36390	36716	36822	
1	1-1/2	4	1	.040	36863	36871	36809	
1	1-1/2	4	1	.060	36391	36717	36823	
1	1-1/2	4	1	.090	36392	36718	36824	
1	1-1/2	4	1	.125	36393	36719	36825	



Z1PLC FRACTIONAL SERIES

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

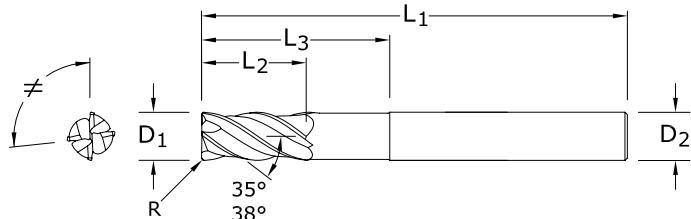


inch						EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	CORNER RADIUS R	Ti-NAMITE-X
1/4	1/2	2-1/2	1/4	1-1/8	.020	36447
1/4	1/2	3-1/2	1/4	1-5/8	.020	36448
1/4	1/2	4	1/4	1-1/4	.020	36450
1/4	1/2	4	1/4	2-1/8	.020	36449
5/16	13/16	3	5/16	1-3/8	.020	36453
5/16	13/16	4	5/16	2	.020	36454
5/16	13/16	4	5/16	1-5/8	.020	36452
3/8	7/8	3	3/8	1-5/8	.020	36457
3/8	7/8	5	3/8	1-7/8	.020	36456
3/8	7/8	4	3/8	2-3/8	.020	36458
7/16	1	6	7/16	2	.020	36460
1/2	1	4	1/2	2	.030	36463
1/2	1	5	1/2	3	.030	36464
1/2	1	6	1/2	2-1/4	.030	36462
9/16	1-1/8	6	9/16	2-1/2	.030	36466
5/8	1-1/4	5	5/8	2-1/2	.040	36468
5/8	1-1/4	6	5/8	3-3/4	.040	36469
5/8	1-1/4	6	5/8	3	.040	36470
3/4	1-1/2	6	3/4	3-1/2	.040	36472
1	1-1/2	6	1	3	.040	36475
1	1-1/2	6	1	4	.040	36474

TOLERANCES (inch)**1/4 DIAMETER** $D_1 = +0.0000/-0.0012$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **>1/4-3/8 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **>3/8-1 DIAMETER** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com



FRACTIONAL Z-Carb-AP



TOLERANCES (inch)

1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

BALL RADIUS

$+0.0000/-0.0006$

>1/4-3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

BALL RADIUS

$+0.0000/-0.0008$


>3/8-1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

BALL RADIUS

$+0.0000/-0.0010$

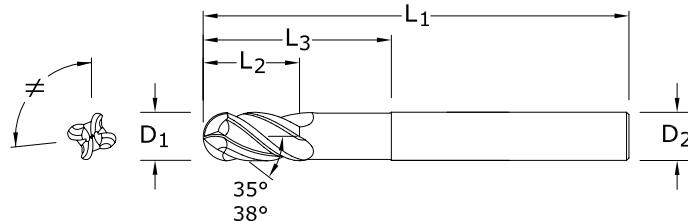

Z1PLB FRACTIONAL SERIES


CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	EDP NO. Ti-NAMITE-X
1/4	1/2	4	1/4	1-1/4	36480
5/16	13/16	4	5/16	1-5/8	36482
3/8	7/8	5	3/8	1-7/8	36486
7/16	1	6	7/16	2	38490
1/2	1	6	1/2	2-1/4	38492
9/16	1-1/8	6	9/16	2-1/2	38496
5/8	1-1/4	6	5/8	3	36500
3/4	1-1/2	6	3/4	3-1/2	36502
1	1-1/2	6	1	4	36504

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Long reach design allows for deeper and faster cuts
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Brn)



For patent information visit
www.ksptpatents.com


FRACTIONAL Z-Carb-AP



Series Z1PCR, Z1PLC, Z1PLB Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)									
					1/64	1/8	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	555 (444-666)	RPM	135904	16961	8480	5654	4240	3392	2827	2120
					Fz (444-666)	Feed (ipm)	27.2	31.2	40.7	52.0	52.6	46.1	41.8	36.5
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	440 (352-528)	RPM	107744	13446	6723	4482	3362	2689	2241	1681
					Fz (352-528)	Feed (ipm)	21.5	24.7	32.3	41.2	41.7	36.6	33.2	28.9
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	315 (252-378)	RPM	77135	9626	4813	3209	2407	1925	1604	1203
					Fz (252-378)	Feed (ipm)	12.3	13.1	17.3	21.8	22.1	20.0	18.0	15.4
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	250 (200-300)	RPM	61218	7640	3820	2547	1910	1528	1273	955
					Fz (200-300)	Feed (ipm)	9.8	10.4	13.8	17.3	17.6	15.9	14.3	12.2
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	185 (148-222)	RPM	45301	5654	2827	1885	1413	1131	942	707
					Fz (148-222)	Feed (ipm)	5.4	6.3	7.9	10.6	10.2	9.0	8.3	7.3
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	145 (116-174)	RPM	35506	4431	2216	1477	1108	886	739	554
					Fz (116-174)	Feed (ipm)	4.3	5.0	6.2	8.3	8.0	7.1	6.5	5.8
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	445 (356-534)	RPM	108968	13599	6800	4533	3400	2720	2267	1700
					Fz (356-534)	Feed (ipm)	21.8	22.8	29.9	38.1	38.1	33.7	30.8	26.5
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Slot 	1	≤ 1	355 (284-426)	RPM	86929	10849	5424	3616	2712	2170	1808	1356
					Fz (284-426)	Feed (ipm)	17.4	18.2	23.9	30.4	30.4	26.9	24.6	21.2
CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	83256	10390	5195	3463	2598	2078	1732	1299
					Fz (272-408)	Feed (ipm)	13.3	12.9	17.5	22.2	21.8	19.1	17.3	15.1
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Slot 	1	≤ 1	270 (216-324)	RPM	66115	8251	4126	2750	2063	1650	1375	1031
					Fz (216-324)	Feed (ipm)	10.6	10.2	13.9	17.6	17.3	15.2	13.8	12.0
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	490 (392-588)	RPM	119987	14974	7487	4991	3744	2995	2496	1872
					Fz (392-588)	Feed (ipm)	19.2	20.4	27.0	33.9	34.4	31.1	28.0	24.0
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1	390 (312-468)	RPM	95500	11918	5959	3973	2980	2384	1986	1490
					Fz (312-468)	Feed (ipm)	15.3	16.2	21.5	27.0	27.4	24.8	22.2	19.1

continued on next page

**FRACTIONAL
Z-Carb-AP**

Series Z1PCR, Z1PLC, Z1PLB Fractional								Diameter (D ₁) (inch)							
Hardness	Ae x D ₁	Ap x D ₁	1/64	1/8	1/4	3/8	1/2	5/8	3/4	1					
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	83256	10390	5195	3463	2598	2078	1732	1299
						Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
		≤ 325 Bhn or ≤ 35 HRc	Slot 	1	≤ 1	270 (216-324)	RPM	66115	8251	4126	2750	2063	1650	1375	1031
						Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	310 (248-372)	RPM	75910	9474	4737	3158	2368	1895	1579	1184
						Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
		≤ 300 Bhn or ≤ 32 HRc	Slot 	1	≤ 1	250 (200-300)	RPM	61218	7640	3820	2547	1910	1528	1273	955
						Fz	0.00003	0.00027	0.0007	0.0014	0.0018	0.0020	0.0022	0.0025	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	80 (64-96)	RPM	19590	2445	1222	815	611	489	407	306
						Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024	
		≤ 400 Bhn or ≤ 43 HRc	Slot 	1	≤ 1	65 (52-78)	RPM	15917	1986	993	662	497	397	331	248
						Fz	0.00003	0.00025	0.0007	0.0013	0.0017	0.0019	0.0020	0.0024	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	62 (50-74)	RPM	15182	1895	947	632	474	379	316	237
						Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017	
		≤ 350 Bhn or ≤ 38 HRc	Slot 	1	≤ 1	50 (40-60)	RPM	12244	1528	764	509	382	306	255	191
						Fz	0.00002	0.00018	0.0005	0.0009	0.0012	0.0013	0.0014	0.0017	
TITANIUM ALLOYS	Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	215 (172-258)	RPM	52647	6570	3285	2190	1643	1314	1095	821
						Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
		≤ 440 Bhn or ≤ 47 HRc	Slot 	1	≤ 1	170 (136-204)	RPM	41628	5195	2598	1732	1299	1039	866	649
						Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5	75 (60-90)	RPM	18365	2292	1146	764	573	458	382	287
						Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	
		≤ 440 Bhn or ≤ 47 HRc	Slot 	1	≤ 1	60 (48-72)	RPM	14692	1834	917	611	458	367	306	229
						Fz	0.00003	0.0003	0.0008	0.0015	0.0020	0.0022	0.0024	0.0028	

Bhn (Brinell) HRc (Rockwell C)

rpm = Vc x 3.82 / D₁

ipm = Fz x 4 x rpm

maximum Slotted Ap for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .25 x D₁

maximum Profile Ae for Z1PCR <1/8 diameter and all Z1PLC / Z1PLB is .20 x D₁

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)


refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Z1MPCR

METRIC SERIES

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

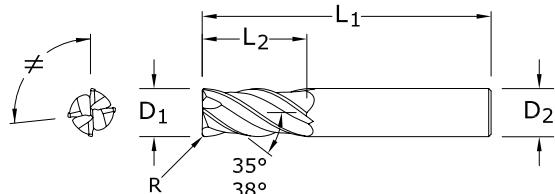

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	EDP NO. Ti-NAMITE-X	EDP NO. Ti-NAMITE-X W/FLAT	JetStream
1,0	3,0	57,0	6,0	0,1	46873	—	—
1,5	4,5	57,0	6,0	0,1	46849	—	—
2,0	6,0	57,0	6,0	0,2	46850	—	—
2,5	7,0	57,0	6,0	0,2	46874	—	—
3,0	8,0	57,0	6,0	0,3	46851	—	—
3,0	8,0	57,0	6,0	0,5	46880	—	—
4,0	11,0	57,0	6,0	0,3	46852	—	—
4,0	11,0	57,0	6,0	0,5	46881	—	—
5,0	13,0	57,0	6,0	0,3	46853	—	—
6,0	13,0	57,0	6,0	0,25	46882	—	—
6,0	13,0	57,0	6,0	0,5	46854	—	—
6,0	13,0	57,0	6,0	1,0	46855	—	—
6,0	13,0	57,0	6,0	1,5	46884	—	—
8,0	19,0	63,0	8,0	0,5	46856	—	—
8,0	19,0	63,0	8,0	1,0	46857	—	—
8,0	19,0	63,0	8,0	1,5	46886	—	—
8,0	19,0	63,0	8,0	2,0	46887	—	—
10,0	22,0	72,0	10,0	0,5	46858	—	—
10,0	22,0	72,0	10,0	1,0	46859	—	—
10,0	22,0	72,0	10,0	1,5	46889	—	—
10,0	22,0	72,0	10,0	2,0	46890	—	—
10,0	22,0	72,0	10,0	2,5	46891	—	—
12,0	26,0	83,0	12,0	0,5	46860	46909	—
12,0	26,0	83,0	12,0	0,75	46861	46910	46493
12,0	26,0	83,0	12,0	1,0	46893	46911	—
12,0	26,0	83,0	12,0	1,5	46894	46912	—
12,0	26,0	83,0	12,0	2,0	46895	46913	—
12,0	26,0	83,0	12,0	2,5	46896	46914	—
12,0	26,0	83,0	12,0	3,0	42718	46915	42719
14,0	26,0	83,0	14,0	1,0	46862	46916	46494
16,0	32,0	92,0	16,0	1,0	46863	46917	46495
16,0	32,0	92,0	16,0	1,5	46898	46918	—
16,0	32,0	92,0	16,0	2,0	46899	46919	—
16,0	32,0	92,0	16,0	2,5	46900	46920	—
16,0	32,0	92,0	16,0	3,0	46864	46921	42721
16,0	32,0	92,0	16,0	4,0	46867	46944	—
20,0	38,0	104,0	20,0	1,0	46865	46922	46497
20,0	38,0	104,0	20,0	1,5	46903	46923	—
20,0	38,0	104,0	20,0	2,0	46904	46924	—
20,0	38,0	104,0	20,0	2,5	46905	46925	—
20,0	38,0	104,0	20,0	3,0	42722	46926	42723
20,0	38,0	104,0	20,0	4,0	46868	46945	—
20,0	38,0	104,0	20,0	5,0	46869	46946	—
25,0	38,0	104,0	25,0	1,0	46866	46927	46498

TOLERANCES (mm)**<3 DIAMETER**

$D_1 = +0,012/-0,012$
 $D_2 = h_6$
 $R = +0,000/-0,025$

3–6 DIAMETER

$D_1 = +0,000/-0,030$
 $D_2 = h_6$
 $R = +0,000/-0,050$

>6–10 DIAMETER

$D_1 = +0,000/-0,040$
 $D_2 = h_6$
 $R = +0,000/-0,050$

>10–25 DIAMETER


$D_1 = +0,000/-0,050$
 $D_2 = h_6$
 $R = +0,000/-0,050$

STEELS**STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com



METRIC

Z-Carb-AP**TOLERANCES (mm)****>12-20 DIAMETER**

$$D_1 = +0,000/-0,050$$

$$D_2 = h_6$$

$$R = +0,000/-0,050$$

STEELS


STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

For patent information visit
www.ksptpatents.com

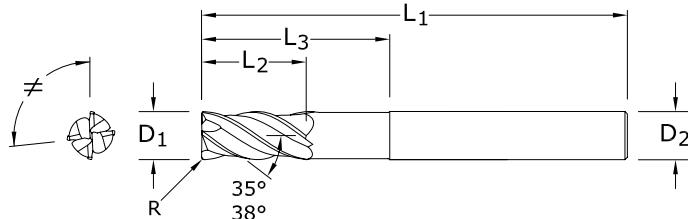
**Z1MPIC**
METRIC SERIES

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	EDP NO. Ti-NAMITE-X W/FLAT
12,0	26,0	83,0	12,0	36,0	2,5	42731
12,0	26,0	83,0	12,0	36,0	3,0	42732
12,0	26,0	83,0	12,0	36,0	4,0	42733
16,0	32,0	92,0	16,0	42,0	2,5	42734
16,0	32,0	92,0	16,0	42,0	4,0	42735
16,0	32,0	92,0	16,0	42,0	6,0	42736
20,0	38,0	104,0	20,0	52,0	2,5	42737
20,0	38,0	104,0	20,0	52,0	4,0	42738
20,0	38,0	104,0	20,0	52,0	6,0	42739

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

METRIC


Z-Carb-AP



Z1MPLC

METRIC SERIES

- Variable rake geometry alters and controls the cutting dynamic taking chatter suppression to an unprecedented level
- Unequal helix design changes the cutting angle to improve harmonics
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Long reach design allows for deeper and faster cuts
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

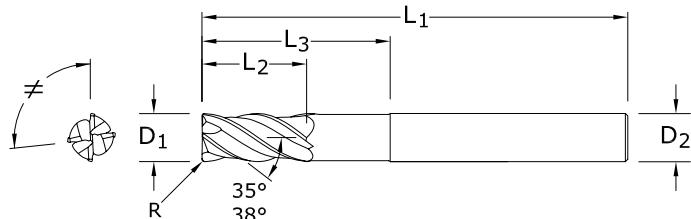

TOLERANCES (mm)

6 DIAMETER

 $D_1 = +0,000/-0,030$ $D_2 = h_6$ $R = +0,000/-0,050$

>6-10 DIAMETER

 $D_1 = +0,000/-0,040$ $D_2 = h_6$ $R = +0,000/-0,050$

>10-20 DIAMETER

 $D_1 = +0,000/-0,050$ $D_2 = h_6$ $R = +0,000/-0,050$

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM


For patent information visit
www.ksptpatents.com

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	EDP NO.	
						Ti-NAMITE-X	Ti-NAMITE-X W/FLAT
6,0	8,0	75,0	6,0	24,0	0,5	46821	—
8,0	10,0	75,0	8,0	32,0	1,0	46822	—
8,0	10,0	75,0	8,0	32,0	2,0	46823	—
10,0	12,0	100,0	10,0	40,0	1,0	46824	—
10,0	12,0	100,0	10,0	40,0	2,0	46825	—
12,0	15,0	100,0	12,0	48,0	1,0	46826	46928
12,0	15,0	100,0	12,0	48,0	1,5	46827	46929
12,0	15,0	100,0	12,0	48,0	2,0	46828	46930
12,0	15,0	100,0	12,0	48,0	3,0	46829	46931
16,0	20,0	115,0	16,0	65,0	1,0	46830	46932
16,0	20,0	115,0	16,0	65,0	1,5	46831	46933
16,0	20,0	115,0	16,0	65,0	2,0	46832	46934
16,0	20,0	115,0	16,0	65,0	3,0	46833	46935
16,0	20,0	115,0	16,0	65,0	4,0	46834	46936
16,0	20,0	115,0	16,0	65,0	5,0	46835	46937
20,0	24,0	140,0	20,0	80,0	1,0	46836	46938
20,0	24,0	140,0	20,0	80,0	1,5	46837	46939
20,0	24,0	140,0	20,0	80,0	2,0	46838	46940
20,0	24,0	140,0	20,0	80,0	3,0	46839	46941
20,0	24,0	140,0	20,0	80,0	4,0	46840	46942
20,0	24,0	140,0	20,0	80,0	5,0	46841	46943

Z-Carb-AP

Series Z1MPCR, Z1MPIC, Z1MPLC Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)											
					1	3	6	8	10	12	16	20	25			
					RPM	Fz	Feed (mm/min)	RPM	Fz	Feed (mm/min)	RPM	Fz	Feed (mm/min)			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	169 (135-203)	RPM	53803	17934	8967	6725	5380	4484	3363	2690	2152
						Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	134 (107-161)	RPM	42654	14218	7109	5332	4265	3555	2666	2133	1706
						Fz	0.0030	0.0109	0.029	0.049	0.061	0.074	0.087	0.099	0.108	
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	96 (77-115)	RPM	30537	10179	5089	3817	3054	2545	1909	1527	1221
						Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Slot 	1	≤ 1	76 (61-91)	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
						Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	56 (45-68)	RPM	17934	5978	2989	2242	1793	1495	1121	897	717
						Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065	
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1	44 (35-53)	RPM	14057	4686	2343	1757	1406	1171	879	703	562
						Fz	0.0018	0.0066	0.017	0.030	0.037	0.043	0.051	0.059	0.065	
M	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	136 (109-163)	RPM	43139	14380	7190	5392	4314	3595	2696	2157	1726
						Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Slot 	1	≤ 1	108 (87-130)	RPM	34414	11471	5736	4302	3441	2868	2151	1721	1377
						Fz	0.0028	0.0099	0.026	0.045	0.056	0.067	0.079	0.091	0.098	
S	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
						Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074	
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Slot 	1	≤ 1	82 (66-99)	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
						Fz	0.0020	0.0074	0.020	0.034	0.043	0.050	0.059	0.067	0.074	
T	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	149 (119-179)	RPM	47501	15834	7917	5938	4750	3958	2969	2375	1900
						Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Slot 	1	≤ 1	119 (95-143)	RPM	37807	12602	6301	4726	3781	3151	2363	1890	1512
						Fz	0.0023	0.0081	0.022	0.036	0.045	0.055	0.067	0.075	0.080	

continued on next page

Z-Carb-AP

Metric	Series Z1MPCR, Z1MPIC, Z1MPLC	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)									
						1	3	6	8	10	12	16	20	25	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	104 (83-124)	RPM	32960	10987	5493	4120	3296	2747	2060	1648	1318
						Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
		≤ 325 Bhn or ≤ 35 HRc	Slot 	1	82 (66-99)	RPM	26174	8725	4362	3272	2617	2181	1636	1309	1047
						Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	94 (76-113)	RPM	30052	10017	5009	3756	3005	2504	1878	1503	1202
						Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
		≤ 300 Bhn or ≤ 32 HRc	Slot 	1	76 (61-91)	RPM	24235	8078	4039	3029	2424	2020	1515	1212	969
						Fz	0.0018	0.0064	0.017	0.030	0.037	0.043	0.051	0.059	0.063
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	24 (20-29)	RPM	7755	2585	1293	969	776	646	485	388	310
						Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
		≤ 400 Bhn or ≤ 43 HRc	Slot 	1	20 (16-24)	RPM	6301	2100	1050	788	630	525	394	315	252
						Fz	0.0018	0.0061	0.016	0.027	0.034	0.041	0.048	0.053	0.060
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	19 (15-23)	RPM	6010	2003	1002	751	601	501	376	301	240
						Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
		≤ 350 Bhn or ≤ 38 HRc	Slot 	1	15 (12-18)	RPM	4847	1616	808	606	485	404	303	242	194
						Fz	0.0013	0.0043	0.011	0.019	0.024	0.028	0.033	0.037	0.042
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	66 (52-79)	RPM	20842	6947	3474	2605	2084	1737	1303	1042	834
						Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
		≤ 440 Bhn or ≤ 47 HRc	Slot 	1	52 (41-62)	RPM	16480	5493	2747	2060	1648	1373	1030	824	659
						Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	23 (18-27)	RPM	7271	2424	1212	909	727	606	454	364	291
						Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070
		≤ 440 Bhn or ≤ 47 HRc	Slot 	1	18 (15-22)	RPM	5816	1939	969	727	582	485	364	291	233
						Fz	0.0020	0.0071	0.019	0.032	0.040	0.048	0.056	0.064	0.070

Bhn (Brinell) HRc (Rockwell C)

rpm = (V_c x 1000) / (D₁ x 3.14)

mm/min = Fz x 4 x rpm


maximum Slotting Ap for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .25 x D₁maximum Profile Ae for Z1PCR <3mm diameter and all Z1MPLC / Z1MPLB is .20 x D₁

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



FRACTIONAL Z-Carb



TOLERANCES (inch)

1/8–1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

>1/4–3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

>3/8–1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com

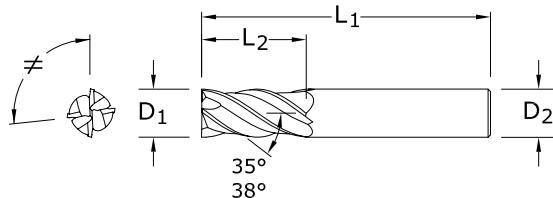

inch				EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	JetStream
1/8	3/8	1-1/2	1/8	36404	—	—
5/32	7/16	2	3/16	36406	—	—
3/16	7/16	2	3/16	36408	—	—
7/32	7/16	2-1/2	1/4	36410	—	—
1/4	1/2	2-1/2	1/4	36416	—	—
1/4	3/4	2-1/2	1/4	36596	—	—
9/32	5/8	2-1/2	5/16	36418	—	—
5/16	13/16	2-1/2	5/16	36420	—	—
11/32	13/16	2-1/2	3/8	36422	—	—
3/8	7/8	2-1/2	3/8	36424	36530	—
13/32	15/16	2-3/4	7/16	36426	36531	—
7/16	1	2-3/4	7/16	36428	36532	—
15/32	1	3	1/2	36430	36533	—
1/2	1	3	1/2	36432	36534	36826
1/2	1-1/4	3-1/4	1/2	36597	36598	—
9/16	1-1/8	3-1/2	9/16	36436	36535	36827
5/8	1-1/4	3-1/2	5/8	36440	36536	36828
3/4	1-1/2	4	3/4	36442	36537	36829
1	1-1/2	4	1	36444	36538	36830

Z1

FRACTIONAL SERIES


- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



Z16CR

FRACTIONAL SERIES

- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

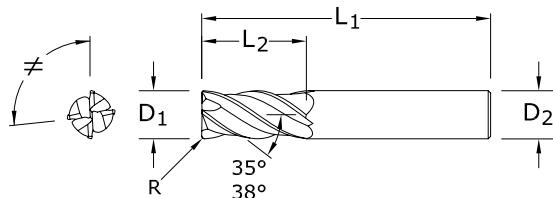


inch					EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	TI-NAMITE-X
1/8	1/4	1-1/2	1/8	.015	36505
5/32	5/16	2	3/16	.015	36506
3/16	3/8	2	3/16	.015	36507
7/32	3/8	2	1/4	.020	36508
1/4	7/16	2	1/4	.020	36509
5/16	1/2	2	5/16	.020	36511
3/8	5/8	2	3/8	.020	36513
7/16	5/8	2-1/2	7/16	.020	36515
1/2	5/8	2-1/2	1/2	.030	36517
5/8	3/4	3	5/8	.040	36519
3/4	1	3	3/4	.040	36520

TOLERANCES (inch)**1/8–1/4 DIAMETER** $D_1 = +0.0000/-0.0012$ $D_2 = h_6$ $R = +0.0000/-0.005$ **>1/4–3/8 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ $R = +0.0000/-0.005$ **>3/8–3/4 DIAMETER** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ $R = +0.0000/-0.005$ **STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com



FRACTIONAL Z-Carb



TOLERANCES (inch)

1/8–1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

BALL RADIUS

+0.0000/-0.0006

>1/4–3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

BALL RADIUS

+0.0000/-0.0008

>3/8–1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

BALL RADIUS

+0.0000/-0.0010

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit
www.ksptpatents.com

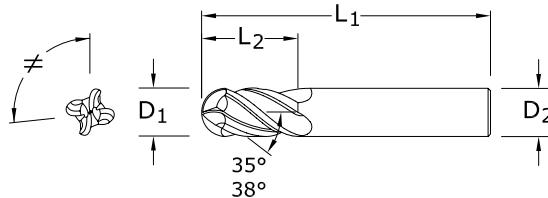


Z1B

FRACTIONAL SERIES

CUTTING DIAMETER D_1	inch			EDP NO.		
	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-X (TX)	Ti-NAMITE-X (TX) W/FLAT	JetStream
1/8	3/8	1-1/2	1/8	36358	—	—
5/32	7/16	2	3/16	36357	—	—
3/16	7/16	2	3/16	36359	—	—
7/32	7/16	2-1/2	1/4	36361	—	—
1/4	1/2	2-1/2	1/4	36344	—	—
1/4	3/4	2-1/2	1/4	36590	—	—
9/32	5/8	2-1/2	5/16	36353	—	—
5/16	13/16	2-1/2	5/16	36345	—	—
11/32	13/16	2-1/2	3/8	36354	—	—
3/8	7/8	2-1/2	3/8	36346	36539	—
13/32	15/16	2-3/4	7/16	36355	36540	—
7/16	1	2-3/4	7/16	36347	36541	—
15/32	1	3	1/2	36356	36542	—
1/2	1	3	1/2	36348	36543	36846
1/2	1-1/4	3-1/4	1/2	36591	36592	—
9/16	1-1/8	3-1/2	9/16	36349	36544	36847
5/8	1-1/4	3-1/2	5/8	36350	36545	36848
3/4	1-1/2	4	3/4	36351	36546	36849
1	1-1/2	4	1	36352	36547	36850


- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

FRACTIONAL Z-Carb



Series Z1, Z1B, Z16CR Fractional			Diameter (D ₁) (inch)									
	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	1/8	1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	555 (444-666)	RPM	16961	8480	5654	4240	3392	2827	2120
			Slot	440 (352-528)	RPM	13446	6723	4482	3362	2689	2241	1681
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile	315 (252-378)	RPM	9626	4813	3209	2407	1925	1604	1203
			Slot	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707
			Slot	145 (116-174)	RPM	4431	2216	1477	1108	886	739	554
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile	445 (356-534)	RPM	13599	6800	4533	3400	2720	2267	1700
			Slot	355 (284-426)	RPM	10849	5424	3616	2712	2170	1808	1356
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
			Slot	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
			Slot	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490

continued on next page



Series Z1, Z1B, Z16CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)							
					1/8	1/4	3/8	1/2	5/8	3/4	1	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
				Fz (272-408)	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
		≤ 325 Bhn or ≤ 35 HRc	Slot 	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
				Fz (216-324)	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	310 (248-372)	RPM	9474	4737	3158	2368	1895	1579	1184
				Fz (248-372)	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
		≤ 300 Bhn or ≤ 32 HRc	Slot 	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955
				Fz (200-300)	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	80 (64-96)	RPM	2445	1222	815	611	489	407	306
				Fz (64-96)	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015	
		≤ 400 Bhn or ≤ 43 HRc	Slot 	65 (52-78)	RPM	1986	993	662	497	397	331	248
				Fz (52-78)	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750-X, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	62 (50-74)	RPM	1895	947	632	474	379	316	237
				Fz (50-74)	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010	
		≤ 350 Bhn or ≤ 38 HRc	Slot 	49 (39-59)	RPM	1497	749	499	374	299	250	187
				Fz (39-59)	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	215 (172-258)	RPM	6570	3285	2190	1643	1314	1095	821
				Fz (172-258)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
		≤ 440 Bhn or ≤ 47 HRc	Slot 	170 (136-204)	RPM	5195	2598	1732	1299	1039	866	649
				Fz (136-204)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	75 (60-90)	RPM	2292	1146	764	573	458	382	287
				Fz (60-90)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	
		≤ 440 Bhn or ≤ 47 HRc	Slot 	60 (48-72)	RPM	1834	917	611	458	367	306	229
				Fz (48-72)	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018	


Bhn (Brinell) HRc (Rockwell C)

rpm = V_c x 3.82 / D₁


ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



Z1M
 METRIC SERIES

- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Recommended for materials < 45 HRc (≤ 420 Bhn)

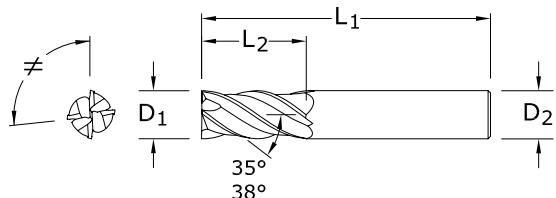

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	EDP NO.	
				Ti-NAMITE-A (AlTiN)	JetStream
3,0	8,0	57,0	6,0	46357	—
4,0	11,0	57,0	6,0	46358	—
5,0	13,0	57,0	6,0	46359	—
6,0	13,0	57,0	6,0	46360	—
8,0	19,0	63,0	8,0	46362	—
10,0	22,0	72,0	10,0	46364	—
12,0	26,0	83,0	12,0	46366	—
14,0	26,0	83,0	14,0	46368	46506
16,0	32,0	92,0	16,0	46370	46507
18,0	32,0	92,0	18,0	46372	46508
20,0	38,0	104,0	20,0	46374	46509
25,0	38,0	104,0	25,0	46376	46510

TOLERANCES (mm)**3–6 DIAMETER** $D_1 = +0,000/-0,030$ $D_2 = h_6$ **>6–10 DIAMETER** $D_1 = +0,000/-0,040$ $D_2 = h_6$ **>10–25 DIAMETER** $D_1 = +0,000/-0,050$ $D_2 = h_6$  STEELS STAINLESS STEELS CAST IRON HIGH TEMP ALLOYS TITANIUM HARDENED STEELS
 For patent information visit
www.ksptpatents.com



Z1MB
METRIC SERIES

TOLERANCES (mm)

3–6 DIAMETER

$D_1 = +0,000/-0,030$

$D_2 = h_6$

BALL RADIUS

$+0,000/-0,015$

>6–10 DIAMETER

$D_1 = +0,000/-0,040$

$D_2 = h_6$

BALL RADIUS

$+0,000/-0,020$

>10–25 DIAMETER

$D_1 = +0,000/-0,050$

$D_2 = h_6$

BALL RADIUS

$+0,000/-0,025$

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS


For patent information visit
www.ksptpatents.com

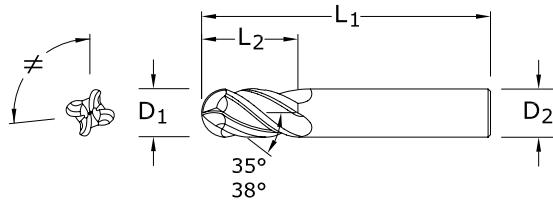

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO. Ti-NAMITE-X (TX)	JetStream
3,0	8,0	57,0	6,0	46354	—
4,0	11,0	57,0	6,0	46355	—
5,0	13,0	57,0	6,0	46356	—
6,0	13,0	57,0	6,0	46343	—
8,0	19,0	63,0	8,0	46344	—
10,0	22,0	72,0	10,0	46345	—
12,0	26,0	83,0	12,0	46346	—
14,0	26,0	83,0	14,0	46347	46518
16,0	32,0	92,0	16,0	46348	46519
18,0	32,0	92,0	18,0	46349	46520
20,0	38,0	104,0	20,0	46350	46521
25,0	38,0	104,0	25,0	46351	46522

- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

METRIC
Z-Carb



Series Z1M, Z1MB Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)									
					3	6	8	10	12	16	20	25		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
					(135-203)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
		Slot 	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706
					(107-161)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
					(77-115)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
		Slot 	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
					(45-68)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
		Slot 	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562
					(35-53)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
		Slot 	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
		Slot 	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
					(119-179)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
		Slot 	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063

continued on next page

Series Z1M, Z1MB Metric		Hardness			Vc (m/min)	Diameter (D ₁) (mm)									
Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25					
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Brn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
		≤ 325 Brn or ≤ 35 HRc	Slot 	1	≤ 1	82 (66-99)	RPM	8725	4362	3272	2617	2181	1636	1309	1047
						Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Brn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5	94 (76-113)	RPM	10017	5009	3756	3005	2504	1878	1503	1202
						Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
		≤ 300 Brn or ≤ 32 HRc	Slot 	1	≤ 1	76 (61-91)	RPM	8078	4039	3029	2424	2020	1515	1212	969
						Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Brn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	2585	1293	969	776	646	485	388	310
						Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038	
		≤ 400 Brn or ≤ 43 HRc	Slot 	1	≤ 1	20 (16-24)	RPM	2100	1050	788	630	525	394	315	252
						Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Brn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	2003	1002	751	601	501	376	301	240
						Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025	
		≤ 350 Brn or ≤ 38 HRc	Slot 	1	≤ 1	15 (12-18)	RPM	1583	792	594	475	396	297	238	190
						Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Brn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	6947	3474	2605	2084	1737	1303	1042	834
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
		≤ 400 Brn or ≤ 43 HRc	Slot 	1	≤ 1	52 (41-62)	RPM	5493	2747	2060	1648	1373	1030	824	659
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Brn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	RPM	2424	1212	909	727	606	454	364	291
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	
		≤ 440 Brn or ≤ 47 HRc	Slot 	1	≤ 1	18 (15-22)	RPM	1939	969	727	582	485	364	291	233
						Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045	

Brn (Brinell) HRc (Rockwell C)


rpm = (Vc x 1000) / (D₁ x 3.14)

mm/min = Fz x 4 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

Z-Carb-HTA**ZH1CR**
FRACTIONAL SERIES

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

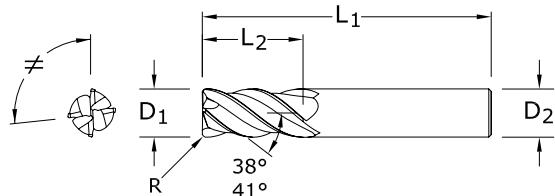


CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	CORNER RADIUS R	EDP NO. Ti-NAMITE-A (AlTiN)	EDP NO. Ti-NAMITE-A W/FLAT (AlTiN)
1/4	1/2	2-1/2	1/4	.020	36570	—
1/4	3/4	2-1/2	1/4	.020	36616	—
5/16	13/16	2-1/2	5/16	.020	36571	—
3/8	7/8	2-1/2	3/8	.020	36572	36555
7/16	1	2-3/4	7/16	.020	36573	36556
1/2	1	3	1/2	.030	36574	36557
1/2	1-1/4	3-1/4	1/2	.030	36618	36617
9/16	1-1/8	3-1/2	9/16	.030	36575	36558
5/8	1-1/4	3-1/2	5/8	.040	36576	36559
3/4	1-1/2	4	3/4	.040	36577	36560
1	1-1/2	4	1	.040	36578	36561

TOLERANCES (inch)**1/4 DIAMETER****D₁** = +0.0000/-0.0012**D₂** = h₆**R** = +0.0000/-0.0020**>1/4-3/8 DIAMETER****D₁** = +0.0000/-0.0016**D₂** = h₆**R** = +0.0000/-0.0020**>3/8-1 DIAMETER****D₁** = +0.0000/-0.0020**D₂** = h₆**R** = +0.0000/-0.0020**HIGH TEMP ALLOYS****TITANIUM**

For patent information visit
www.ksptpatents.com

FRACTIONAL
Z-Carb-HTA



Series ZH1CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)					
					1/4	3/8	1/2	3/4	1	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5	85 (68-102)	RPM Fz Feed (ipm)	1299 0.0007 3.6	866 0.0012 4.2	649 0.0017 4.4	433 0.0020 3.5
		Slot 	1	≤ 1	70 (56-84)	RPM Fz Feed (ipm)	1070 0.0007 3.0	713 0.0012 3.4	535 0.0017 3.6	357 0.0020 2.9
	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	70 (56-84)	RPM Fz Feed (ipm)	1070 0.0005 2.1	713 0.0009 2.6	535 0.0012 2.6	357 0.0014 2.0
		Slot 	1	≤ 1	55 (44-66)	RPM Fz Feed (ipm)	840 0.0005 1.7	560 0.0009 2.0	420 0.0012 2.0	280 0.0014 1.6
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5	215 (172-258)	RPM Fz Feed (ipm)	3285 0.0008 10.5	2190 0.0015 13.1	1643 0.0020 13.1	1095 0.0024 10.5
		Slot 	1	≤ 1	170 (136-204)	RPM Fz Feed (ipm)	2598 0.0008 8.3	1732 0.0015 10.4	1299 0.0020 10.4	866 0.0024 8.3
	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	75 (60-90)	RPM Fz Feed (ipm)	1146 0.0008 3.7	764 0.0015 4.6	573 0.0020 4.6	382 0.0024 3.7
		Slot 	1	≤ 1	60 (48-72)	RPM Fz Feed (ipm)	917 0.0008 2.9	611 0.0015 3.7	458 0.0020 3.7	306 0.0024 2.9
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5	215 (172-258)	RPM Fz Feed (ipm)	3285 0.0008 10.5	2190 0.0015 13.1	1643 0.0020 13.1	1095 0.0024 10.5
		Slot 	1	≤ 1	170 (136-204)	RPM Fz Feed (ipm)	2598 0.0008 8.3	1732 0.0015 10.4	1299 0.0020 10.4	866 0.0024 8.3
	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5	75 (60-90)	RPM Fz Feed (ipm)	1146 0.0008 3.7	764 0.0015 4.6	573 0.0020 4.6	382 0.0024 3.7
		Slot 	1	≤ 1	60 (48-72)	RPM Fz Feed (ipm)	917 0.0008 2.9	611 0.0015 3.7	458 0.0020 3.7	306 0.0024 2.9

Bhn (Brinell) HRc (Rockwell C)


rpm = V_c x 3.82 / D₁

ipm = Fz x 4 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)

Z-Carb-HTA**ZH1MCRS**
METRIC SERIES

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

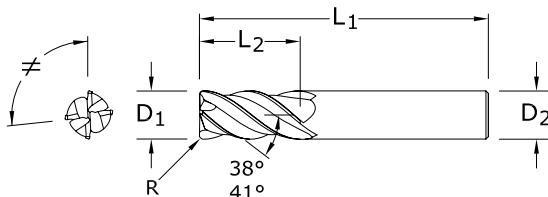

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	CORNER RADIUS R	EDP NO. Ti-NAMITE-A (AITiN)
6,0	10,0	54,0	6,0	0,50	42712
8,0	12,0	58,0	8,0	0,50	42713
10,0	14,0	66,0	10,0	0,50	42714
12,0	16,0	73,0	12,0	0,75	42715
16,0	22,0	82,0	16,0	1,00	42716
20,0	26,0	92,0	20,0	1,00	42717

TOLERANCES (mm)**6 DIAMETER****D₁** = +0,000/-0,030**D₂** = h₆**R** = +0,000/-0,050**>6-10 DIAMETER****D₁** = +0,000/-0,040**D₂** = h₆**R** = +0,000/-0,050**>10-20 DIAMETER****D₁** = +0,000/-0,050**D₂** = h₆**R** = +0,000/-0,050**HIGH TEMP ALLOYS****TITANIUM**

For patent information visit www.ksptpatents.com

ZH1MCR
METRIC SERIES

- The original Z-Carb design with an enhanced core and higher helix suited for the demands of high temperature alloys
- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Optimal material removal rates through increased feed and depths of cut for difficult to machine materials
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	CORNER RADIUS R	EDP NO. Ti-NAMITE-A (AITiN)	EDP NO. Ti-NAMITE-A W/FLAT
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
16,0	32,0	92,0	16,0	4,0	46482	46483
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

TOLERANCES (mm)**6 DIAMETER****D₁** = +0,000/-0,030**D₂** = h₆**R** = +0,000/-0,050**>6-10 DIAMETER****D₁** = +0,000/-0,040**D₂** = h₆**R** = +0,000/-0,050**>10-20 DIAMETER****D₁** = +0,000/-0,050**D₂** = h₆**R** = +0,000/-0,050**HIGH TEMP ALLOYS****TITANIUM**

For patent information visit www.ksptpatents.com

Z-Carb-HTA

Series ZH1MCRS, ZH1MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)			
					6	10	12	20
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile	26 (21-31)	RPM Fz Feed (mm/min)	1373 0.017 93	824 0.032 105	687 0.041 113
			Slot	21 (17-26)	RPM Fz Feed (mm/min)	1131 0.017 77	679 0.032 87	565 0.041 93
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile	21 (17-26)	RPM Fz Feed (mm/min)	1131 0.012 54	679 0.024 65	565 0.029 66
			Slot	17 (13-20)	RPM Fz Feed (mm/min)	889 0.012 43	533 0.024 51	444 0.029 52
	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile	66 (52-79)	RPM Fz Feed (mm/min)	3474 0.019 264	2084 0.041 342	1737 0.049 340
			Slot	52 (41-62)	RPM Fz Feed (mm/min)	2747 0.019 209	1648 0.041 270	1373 0.049 269
D	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile	23 (18-27)	RPM Fz Feed (mm/min)	1212 0.019 92	727 0.041 119	606 0.049 119
			Slot	18 (15-22)	RPM Fz Feed (mm/min)	969 0.019 74	582 0.041 95	485 0.049 95

Bhn (Brinell) HRc (Rockwell C)

rpm = (V_c x 1000) / (D₁ x 3.14)

ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)



ZD1CR

FRACTIONAL SERIES


- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRc (327 to 654 Bhn)

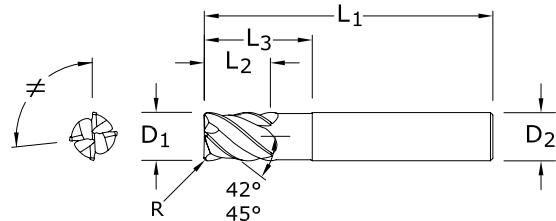

inch							EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	Ti-NAMITE-X	
1/8	5/32	2-1/2	1/4	1/2	.010	36780	
3/16	7/32	2-1/2	1/4	3/4	.020	36781	
1/4	9/32	2-1/2	1/4	3/4	.020	36782	
5/16	13/32	2-1/2	5/16	1	.040	36783	
3/8	15/32	2-1/2	3/8	1	.040	36784	
7/16	9/16	2-3/4	7/16	1	.040	36785	
1/2	5/8	3	1/2	1-1/4	.040	36786	
1/2	5/8	4-1/2	1/2	2-1/4	.040	36787	
5/8	3/4	3-1/2	5/8	1-1/2	.040	36788	
5/8	3/4	4-1/2	5/8	2-1/4	.040	36789	
5/8	3/4	5-1/2	5/8	3-1/4	.040	36790	
3/4	15/16	4	3/4	1-3/4	.060	36791	
3/4	15/16	4-1/2	3/4	2-1/4	.060	36792	
3/4	15/16	5-1/2	3/4	3-1/4	.060	36793	

TOLERANCES (inch)**1/8-1/4 DIAMETER** $D_1 = +0.0000/-0.0012$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **>1/4-3/8 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **>3/8-3/4 DIAMETER** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **HARDENED STEELS**

For patent information visit
www.ksptpatents.com



TOLERANCES (mm)

3–6 DIAMETER

D₁ = +0,000/-0,030

D₂ = h₆

R = +0,000/-0,050

>6–10 DIAMETER

D₁ = +0,000/-0,040

D₂ = h₆

R = +0,000/-0,050

>10–20 DIAMETER


D₁ = +0,000/-0,050

D₂ = h₆

R = +0,000/-0,050

HARDENED STEELS

For patent
information visit
www.ksptpatents.com

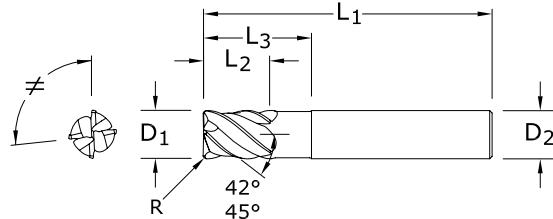


CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	CORNER RADIUS R	EDP NO. Ti-NAMITE-X
3,0	4,0	57,0	6,0	15,0	0,2	46560
4,0	5,0	57,0	6,0	15,0	0,3	46561
5,0	6,0	57,0	6,0	15,0	0,5	46562
6,0	7,0	57,0	6,0	15,0	1,0	46563
8,0	10,0	63,0	8,0	25,0	1,0	46564
10,0	12,0	72,0	10,0	30,0	1,0	46565
12,0	15,0	83,0	12,0	35,0	1,0	46566
16,0	20,0	92,0	16,0	45,0	1,5	46567
20,0	24,0	104,0	20,0	55,0	2,0	46568

ZD1MCR

METRIC SERIES

- The original Z-Carb design with negative rake, heavy core, and higher helix for strength and shearing of hard mold & die materials
- Unequal helix design aids in damaging harmonics by changing the angle at which each cutting edge enters and exits the material
- Unequal flute spacing helps to disrupt the rhythmic pattern created by the cutting edge helping to suppress damaging harmonics
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials 35-60HRC (327 to 654 Bhn)

FRACTIONAL & METRIC
Z-Carb-MD


Series ZD1CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)							
					1/8	1/4	3/8	1/2	5/8	3/4		
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ $\leq 40 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	405 (324-486)	RPM	12377	6188	4126	3094	2475	2063
		Slot 	1	≤ 0.4	320 (256-384)	RPM	9779	4890	3260	2445	1956	1630
	$\leq 475 \text{ Bhn}$ $\leq 50 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	210 (168-252)	RPM	6418	3209	2139	1604	1284	1070
		Slot 	1	≤ 0.4	170 (136-204)	RPM	5195	2598	1732	1299	1039	866
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 655 \text{ Bhn}$ $\leq 60 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	90 (72-108)	RPM	2750	1375	917	688	550	458
		Slot 	1	≤ 0.4	70 (56-84)	RPM	2139	1070	713	535	428	357
	$\leq 655 \text{ Bhn}$ $\leq 60 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	Fz Feed (ipm)	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018	
		Slot 	1	≤ 0.4	Fz Feed (ipm)	2.2	2.8	3.7	3.6	3.7	3.3	


Bhn (Brinell) HRc (Rockwell C)

 rpm = $V_c \times 3.82 / D_1$

 ipm = $F_z \times 4 \times \text{rpm}$

reduce speed and feed for materials harder than listed

 reduce feed and Ae when finish milling (.02 x D₁ maximum)

 refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


Series ZD1MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)								
					3	6	8	10	12	16	20		
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ $\leq 40 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	123 (99-148)	RPM	13087	6544	4908	3926	3272	2454	1963
		Slot 	1	≤ 0.4	98 (78-117)	RPM	10340	5170	3878	3102	2585	1939	1551
	$\leq 475 \text{ Bhn}$ $\leq 50 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	64 (51-77)	RPM	6786	3393	2545	2036	1696	1272	1018
		Slot 	1	≤ 0.4	52 (41-62)	RPM	5493	2747	2060	1648	1373	1030	824
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 655 \text{ Bhn}$ $\leq 60 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	27 (22-33)	RPM	2908	1454	1091	872	727	545	436
		Slot 	1	≤ 0.4	21 (17-26)	RPM	2262	1131	848	679	565	424	339
	$\leq 655 \text{ Bhn}$ $\leq 60 \text{ HRc}$	Profile 	≤ 0.4	≤ 1	Fz Feed (mm/min)	0.005	0.012	0.021	0.027	0.031	0.036	0.048	
		Slot 	1	≤ 0.4	Fz Feed (mm/min)	56	70	93	93	91	79	84	

Bhn (Brinell) HRc (Rockwell C)


 rpm = $(V_c \times 1000) / (D_1 \times 3.14)$

 ipm = $F_z \times 4 \times \text{rpm}$

reduce speed and feed for materials harder than listed

 reduce feed and Ae when finish milling (.02 x D₁ maximum)

 refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




TOLERANCES (inch)

D₁ = +0.0000/-0.0020

D₂ = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS

For patent information visit
www.ksptpatents.com

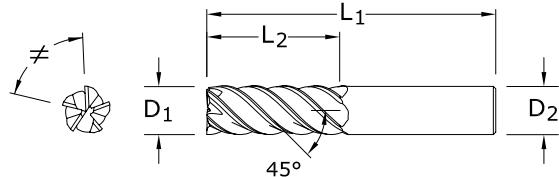


CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	EDP NO.	
				inch	EDP NO. Ti-NAMITE-A (AlTiN) W/FLAT
1/8	1/4	1-1/2	1/8	32672	—
1/8	1/2	1-1/2	1/8	32655	—
5/32	9/16	2	3/16	32656	—
3/16	5/16	2	3/16	32673	—
3/16	5/8	2	3/16	32657	—
7/32	3/4	2-1/2	1/4	32658	—
1/4	3/8	2	1/4	32674	—
1/4	3/4	2-1/2	1/4	32659	—
5/16	7/16	2	5/16	32675	—
5/16	13/16	2-1/2	5/16	32660	—
3/8	1/2	2	3/8	32676	32677
3/8	1	2-1/2	3/8	32661	32662
7/16	1	2-3/4	7/16	32663	—
1/2	5/8	2-1/2	1/2	32678	32679
1/2	1-1/4	3	1/2	32664	32665
5/8	3/4	3	5/8	32680	32681
5/8	1-5/8	3-1/2	5/8	32666	32667
3/4	1	3	3/4	32682	32683
3/4	1-5/8	4	3/4	32668	32669
1	1-1/2	4	1	32670	32671

55

FRACTIONAL SERIES


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)



55CR

FRACTIONAL SERIES

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

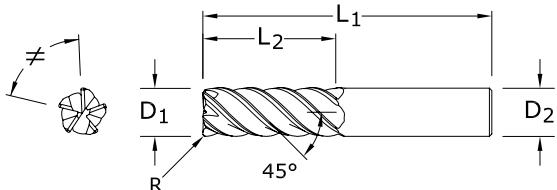

inch						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	Ti-NAMITE-A (AITiN)	Ti-NAMITE-A (AITiN) W/FLAT	
1/8	1/4	1-1/2	1/8	.010	32606	—	
1/8	1/2	1-1/2	1/8	.010	32607	—	
5/32	5/16	2	3/16	.010	32608	—	
5/32	9/16	2	3/16	.010	32609	—	
3/16	5/16	2	3/16	.010	32610	—	
3/16	5/8	2	3/16	.010	32611	—	
7/32	3/8	2	1/4	.015	32612	—	
7/32	3/4	2-1/2	1/4	.015	32613	—	
1/4	3/8	2	1/4	.015	32614	—	
1/4	3/4	2-1/2	1/4	.015	32615	—	
1/4	1-1/4	4	1/4	.015	32616	—	
5/16	7/16	2	5/16	.015	32619	—	
5/16	13/16	2-1/2	5/16	.015	32620	—	
5/16	1-1/4	4	5/16	.015	32621	—	
3/8	1/2	2	3/8	.015	32625	32591	
3/8	1/2	2	3/8	.030	32592	32593	
3/8	1	2-1/2	3/8	.015	32626	32628	
3/8	1	2-1/2	3/8	.030	32573	32574	
3/8	1-1/2	4	3/8	.015	32627	—	
3/8	1-1/2	4	3/8	.030	32569	—	
7/16	1	2-3/4	7/16	.015	32632	—	
7/16	2	4	7/16	.015	32633	—	
1/2	5/8	2-1/2	1/2	.030	32594	32595	
1/2	5/8	2-1/2	1/2	.060	32596	32597	
1/2	1-1/4	3	1/2	.030	32575	32576	
1/2	1-1/4	3	1/2	.060	32577	32578	
1/2	2	4	1/2	.030	32685	—	
1/2	2	4	1/2	.060	32686	—	
5/8	3/4	3	5/8	.030	32598	32599	
5/8	3/4	3	5/8	.060	32600	32601	
5/8	1-5/8	3-1/2	5/8	.030	32579	32580	
5/8	1-5/8	3-1/2	5/8	.060	32581	32582	
5/8	2-1/2	5	5/8	.030	32570	—	
5/8	2-1/2	5	5/8	.060	32687	—	
3/4	1	3	3/4	.030	32602	32603	
3/4	1	3	3/4	.060	32604	32605	
3/4	1-5/8	4	3/4	.030	32583	32584	
3/4	1-5/8	4	3/4	.060	32585	32586	
3/4	3-1/4	6	3/4	.030	32571	—	
3/4	3-1/4	6	3/4	.060	32688	—	
1	1-1/2	4	1	.030	32587	32588	
1	1-1/2	4	1	.060	32589	32590	
1	2-5/8	6	1	.030	32572	—	
1	2-5/8	6	1	.060	32689	—	

TOLERANCES (inch)

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

$R = +0.0000/-0.0020$

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit
www.ksptpatents.com



TOLERANCES (inch)

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

BALL RADIUS

+0.0005/-0.0010

 STEELS


 STAINLESS STEELS

 CAST IRON

 HIGH TEMP ALLOYS

 TITANIUM

 HARDENED STEELS

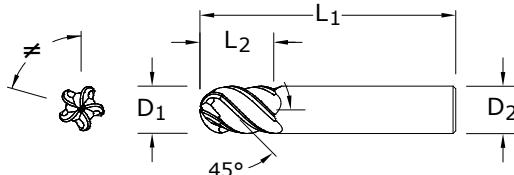

55B


FRACTIONAL SERIES

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO. Ti-NAMITE-A (AITIN)
1/4	3/4	2-1/2	1/4	32500
5/16	13/16	2-1/2	5/16	32501
3/8	1	2-1/2	3/8	32502
1/2	1-1/4	3	1/2	32503
5/8	1-5/8	3-1/2	5/8	32504
3/4	1-5/8	4	3/4	32505
1	1-1/2	4	1	32506

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

For patent information visit www.ksptpatents.com


FRACTIONAL V-Carb



Series 55, 55CR, 55B Fractional		Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	385	RPM	11766	5883	3922	2941	2353	1961	1471
						(308-462)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0028	0.0032
		$\leq 375 \text{ Bhn}$ $\text{or} \leq 40 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	630	RPM	19253	9626	6418	4813	3851	3209	2407
						(504-756)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0055	0.0064
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ $\text{or} \leq 40 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	325	RPM	9932	4966	3311	2483	1986	1655	1242
						(260-390)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0021	0.0024
		$\leq 375 \text{ Bhn}$ $\text{or} \leq 40 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	530	RPM	16197	8098	5399	4049	3239	2699	2025
						(424-636)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0041	0.0048
K	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ $\text{or} \leq 40 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	175	RPM	5348	2674	1783	1337	1070	891	669
						(140-210)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
		$\leq 220 \text{ Bhn}$ $\text{or} \leq 19 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108
						(232-348)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
M	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ $\text{or} \leq 19 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	470	RPM	14363	7182	4788	3591	2873	2394	1795
						(376-564)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
		$\leq 260 \text{ Bhn}$ $\text{or} \leq 26 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	705	RPM	21545	10772	7182	5386	4309	3591	2693
						(564-846)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0059	0.0064
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ $\text{or} \leq 26 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	360	RPM	11002	5501	3667	2750	2200	1834	1375
						(288-432)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
		$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	540	RPM	16502	8251	5501	4126	3300	2750	2063
						(432-648)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	370	RPM	11307	5654	3769	2827	2261	1885	1413
						(296-444)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
		$\leq 275 \text{ Bhn}$ $\text{or} \leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	560	RPM	17114	8557	5705	4278	3423	2852	2139
						(448-672)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048

continued on next page

FRACTIONAL V-Carb



Series 55, 55CR, 55B Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)							
					1/8	1/4	3/8	1/2	5/8	3/4	1	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile ≤ 0.25	255 (204-306)	RPM	7793	3896	2598	1948	1559	1299	974
					Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
		≤ 325 Bhn or ≤ 35 HRc	HSM ≤ 0.05	385 (308-462)	RPM	11766	5883	3922	2941	2353	1961	1471
					Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile ≤ 0.25	235 (188-282)	RPM	7182	3591	2394	1795	1436	1197	898
					Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
		≤ 325 Bhn or ≤ 35 HRc	HSM ≤ 0.05	355 (284-426)	RPM	10849	5424	3616	2712	2170	1808	1356
					Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile ≤ 0.25	70 (56-84)	RPM	2139	1070	713	535	428	357	267
					Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
		≤ 400 Bhn or ≤ 43 HRc	HSM ≤ 0.05	107 (86-128)	RPM	3270	1635	1090	817	654	545	409
					Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile ≤ 0.25	55 (44-66)	RPM	1681	840	560	420	336	280	210
					Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
		≤ 400 Bhn or ≤ 43 HRc	HSM ≤ 0.05	85 (68-102)	RPM	2598	1299	866	649	520	433	325
					Fz	0.0003	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile ≤ 0.25	235 (188-282)	RPM	7182	3591	2394	1795	1436	1197	898
					Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
		≤ 440 Bhn or ≤ 47 HRc	HSM ≤ 0.05	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490
					Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al15V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile ≤ 0.25	85 (68-102)	RPM	2598	1299	866	649	520	433	325
					Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
		≤ 440 Bhn or ≤ 47 HRc	HSM ≤ 0.05	140 (112-168)	RPM	4278	2139	1426	1070	856	713	535
					Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0042	0.0045

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)


rpm = $V_c \times 3.82 / D_1$

ipm = $F_z \times 5 \times rpm$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)


reduce Ap to 1 x D₁ (maximum) when profile milling with long or extra long flute length tools
refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



55M

METRIC SERIES

- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

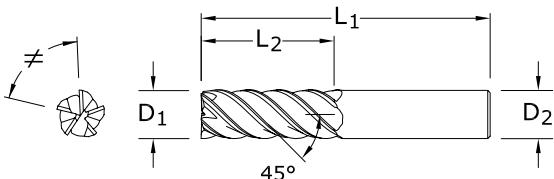


CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO. Ti-NAMITE-A (AlTiN)	EDP NO. Ti-NAMITE-A (AlTiN) W/FLAT
6,0	12,0	50,0	6,0	42606	—
6,0	19,0	63,0	6,0	42607	—
6,0	25,0	75,0	6,0	42608	—
8,0	12,0	50,0	8,0	42609	—
8,0	20,0	63,0	8,0	42610	—
8,0	25,0	75,0	8,0	42611	—
10,0	16,0	50,0	10,0	42612	—
10,0	22,0	75,0	10,0	42622	42613
10,0	38,0	100,0	10,0	42614	—
12,0	19,0	63,0	12,0	42615	—
12,0	25,0	75,0	12,0	42616	42623
12,0	50,0	100,0	12,0	42617	—
16,0	32,0	89,0	16,0	42618	42624
16,0	50,0	100,0	16,0	42626	—
16,0	75,0	150,0	16,0	42619	—
20,0	38,0	100,0	20,0	42620	42625
20,0	50,0	100,0	20,0	42627	—
20,0	75,0	150,0	20,0	42621	—

TOLERANCES (mm)

 $D_1 = +0,000/-0,050$ $D_2 = h_6$ 

For patent information visit
www.ksptpatents.com



TOLERANCES (mm)

D₁ = +0,000/-0,050

D₂ = h₆

R = +0,000/-0,050

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS


For patent information visit
www.ksptpatents.com

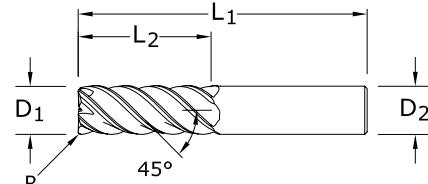

55MCR
METRIC SERIES

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	EDP NO.
6,0	12,0	50,0	6,0	0,5	42660
6,0	19,0	63,0	6,0	0,25	42661
6,0	19,0	63,0	6,0	0,5	42662
6,0	19,0	63,0	6,0	1,0	42663
6,0	19,0	63,0	6,0	1,5	42664
6,0	25,0	75,0	6,0	0,5	42665
8,0	12,0	50,0	8,0	0,5	42666
8,0	20,0	63,0	8,0	0,5	42667
8,0	20,0	63,0	8,0	1,0	42668
8,0	20,0	63,0	8,0	1,5	42669
8,0	20,0	63,0	8,0	2,0	42670
8,0	25,0	75,0	8,0	0,5	42671
10,0	16,0	50,0	10,0	0,5	42672
10,0	22,0	75,0	10,0	0,5	42673
10,0	22,0	75,0	10,0	1,0	42674
10,0	22,0	75,0	10,0	1,5	42675
10,0	22,0	75,0	10,0	2,0	42676
10,0	22,0	75,0	10,0	2,5	42677
10,0	38,0	100,0	10,0	0,5	42678
12,0	19,0	63,0	12,0	0,5	42679
12,0	25,0	75,0	12,0	0,5	42680
12,0	25,0	75,0	12,0	1,0	42681
12,0	25,0	75,0	12,0	1,5	42682
12,0	25,0	75,0	12,0	2,0	42683
12,0	25,0	75,0	12,0	2,5	42684
12,0	25,0	75,0	12,0	3,0	42685
12,0	50,0	100,0	12,0	0,5	42686
12,0	50,0	100,0	12,0	3,0	42630
12,0	50,0	100,0	12,0	4,0	42631
16,0	32,0	89,0	16,0	1,0	42687
16,0	32,0	89,0	16,0	1,5	42688
16,0	32,0	89,0	16,0	2,0	42689

continued on next page



55MCR
METRIC SERIES

CONTINUED

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	EDP NO. Ti-NAMITE-A (AITIN)
16,0	32,0	89,0	16,0	2,5	42690
16,0	32,0	89,0	16,0	3,0	42691
16,0	32,0	89,0	16,0	4,0	42692
16,0	50,0	100,0	16,0	2,0	42656
16,0	50,0	100,0	16,0	2,5	42657
16,0	50,0	100,0	16,0	3,0	42658
16,0	50,0	100,0	16,0	4,0	42659
16,0	50,0	100,0	16,0	5,0	42628
16,0	75,0	150,0	16,0	1,0	42693
16,0	75,0	150,0	16,0	3,0	42632
16,0	75,0	150,0	16,0	4,0	42633
20,0	38,0	100,0	20,0	1,0	42694
20,0	38,0	100,0	20,0	1,5	42695
20,0	38,0	100,0	20,0	2,0	42696
20,0	38,0	100,0	20,0	2,5	42697
20,0	38,0	100,0	20,0	3,0	42698
20,0	38,0	100,0	20,0	4,0	42699
20,0	38,0	100,0	20,0	5,0	42700
20,0	38,0	100,0	20,0	6,0	42648
20,0	50,0	100,0	20,0	2,0	42649
20,0	50,0	100,0	20,0	2,5	42650
20,0	50,0	100,0	20,0	3,0	42651
20,0	50,0	100,0	20,0	4,0	42652
20,0	50,0	100,0	20,0	5,0	42653
20,0	50,0	100,0	20,0	6,0	42654
20,0	75,0	150,0	20,0	1,0	42701
20,0	75,0	150,0	20,0	2,0	42702
20,0	75,0	150,0	20,0	3,0	42703
20,0	75,0	150,0	20,0	4,0	42704
20,0	75,0	150,0	20,0	5,0	42705
20,0	75,0	150,0	20,0	6,0	42655

TOLERANCES (mm)

$D_1 = +0,000/-0,050$

$D_2 = h_6$

$R = +0,000/-0,050$

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com


TOLERANCES (mm)
 $D_1 = +0,000/-0,050$
 $D_2 = h_6$
BALL RADIUS
 $+0,000/-0,025$

STEELS


STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


HARDENED STEELS

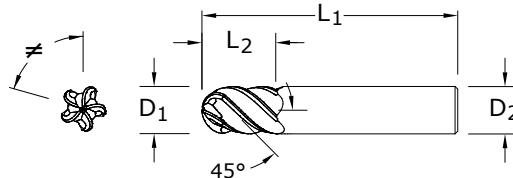
55MB
 METRIC SERIES

mm				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
6,0	13,0	57,0	6,0	42750
8,0	19,0	63,0	8,0	42751
10,0	22,0	72,0	10,0	42752
12,0	26,0	83,0	12,0	42753
16,0	32,0	92,0	16,0	42754
20,0	38,0	104,0	20,0	42755


- Unequal indexing, high helix and an ideal rake and relief combination for unmatched finishing capability
- The choice when peak finish quality is the requirement
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

For patent information visit
www.ksptpatents.com

V-Carb


Series 55M, 55MCR, 55MB Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)								
					6	8	10	12	16	20			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.25	≤ 1.5	117	RPM	6220	4665	3732	3110	2333	1866
						(94-141)	Fz	0.022	0.036	0.061	0.070	0.072	0.085
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	192	RPM	10179	7634	6107	5089	3817	3054
						(154-230)	Fz	0.043	0.073	0.123	0.137	0.141	0.154
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.25	≤ 1.5	99	RPM	5251	3938	3151	2626	1969	1575
						(79-119)	Fz	0.017	0.028	0.045	0.053	0.054	0.064
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	162	RPM	8563	6422	5138	4282	3211	2569
						(129-194)	Fz	0.034	0.055	0.091	0.103	0.105	0.128
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.25	≤ 1.5	53	RPM	2827	2121	1696	1414	1060	848
						(43-64)	Fz	0.012	0.021	0.035	0.038	0.044	0.048
		≤ 375 Bhn or ≤ 40 HRc	HSM 	≤ 0.05	≤ 2	88	RPM	4686	3514	2811	2343	1757	1406
						(71-106)	Fz	0.024	0.041	0.067	0.077	0.084	0.093
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Profile 	≤ 0.25	≤ 1.5	143	RPM	7594	5695	4556	3797	2848	2278
						(115-172)	Fz	0.022	0.036	0.061	0.070	0.077	0.085
		≤ 220 Bhn or ≤ 19 HRc	HSM 	≤ 0.05	≤ 2	215	RPM	11391	8543	6834	5695	4271	3417
						(172-258)	Fz	0.043	0.073	0.123	0.137	0.151	0.171
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile 	≤ 0.25	≤ 1.5	110	RPM	5816	4362	3490	2908	2181	1745
						(88-132)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
		≤ 260 Bhn or ≤ 26 HRc	HSM 	≤ 0.05	≤ 2	165	RPM	8725	6544	5235	4362	3272	2617
						(132-198)	Fz	0.034	0.055	0.091	0.103	0.113	0.128

continued on next page



Series 55M, 55MCR, 55MB Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)							
					6	8	10	12	16	20		
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	113	RPM	5978	4484	3587	2989	2242	1793
					(90-135)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	171	RPM	9048	6786	5429	4524	3393	2714
					(137-205)	Fz	0.034	0.055	0.091	0.103	0.113	0.128
M STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	78	RPM	4120	3090	2472	2060	1545	1236
					(62-93)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	117	RPM	6220	4665	3732	3110	2333	1866
					(94-141)	Fz	0.031	0.051	0.085	0.096	0.105	0.120
M STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
					(57-86)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.026	0.045	0.075	0.082	0.092	0.104
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	21	RPM	1131	848	679	565	424	339
					(17-26)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	33	RPM	1729	1297	1037	864	648	519
					(26-39)	Fz	0.026	0.045	0.075	0.082	0.092	0.104
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.25	≤ 1.5	17	RPM	889	666	533	444	333	267
					(13-20)	Fz	0.010	0.017	0.027	0.031	0.036	0.040
	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	HSM 	≤ 0.05	≤ 2	26	RPM	1373	1030	824	687	515	412
					(21-31)	Fz	0.019	0.032	0.056	0.062	0.069	0.077

continued on next page

V-Carb

Series 55M, 55MCR, 55MB Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)						
					6	8	10	12	16	20	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.25	72 (57-86)	RPM	3797	2848	2278	1898	1424	1139
					Fz	0.014	0.026	0.043	0.048	0.054	0.061
		HSM 	≤ 0.05	119 (95-143)	RPM	6301	4726	3781	3151	2363	1890
					Fz	0.031	0.051	0.085	0.096	0.105	0.120
	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.25	26 (21-31)	RPM	1373	1030	824	687	515	412
					Fz	0.014	0.026	0.043	0.048	0.054	0.061
		HSM 	≤ 0.05	43 (34-51)	RPM	2262	1696	1357	1131	848	679
					Fz	0.031	0.051	0.085	0.096	0.108	0.120


Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = (V_c x 1000) / (D₁ x 3.14)

mm/min = Fz x 5 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)reduce Ap to 1 x D₁ (maximum) when profile milling with long or extra long flute length toolsrefer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



TOLERANCES (inch)
 $D_1 = +0.0000/-0.0020$
 $D_2 = h6$

	STEELS
	STAINLESS STEELS
	HIGH TEMP ALLOYS
	TITANIUM
	HARDENED STEELS

For patent information visit www.ksptpatents.com

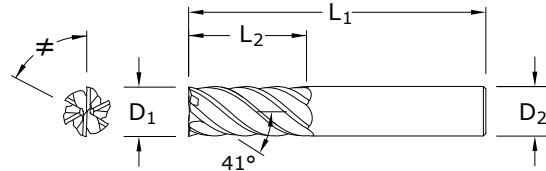


inch					EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	TI-NAMITE-X (TX)	
1/4	3/4	2-1/2	1/4	35100	
3/8	1	2-1/2	3/8	35101	
1/2	1-1/4	3	1/2	35102	
5/8	1-5/8	3-1/2	5/8	35103	
3/4	1-5/8	4	3/4	35104	
1	2-5/8	6	1	35105	

TOLERANCES (inch)
 $D_1 = +0.0000/-0.0020$
 $D_2 = h6$
 $R = +0.0000/-0.0020$

	STEELS
	STAINLESS STEELS
	HIGH TEMP ALLOYS
	TITANIUM
	HARDENED STEELS


For patent information visit www.ksptpatents.com

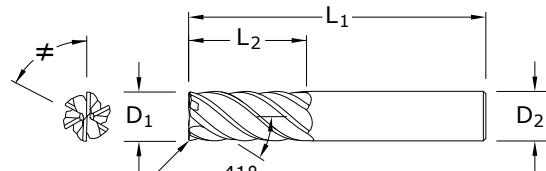

inch					EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	TI-NAMITE-X (TX)
1/4	3/4	2-1/2	1/4	.015	35112
1/4	3/4	2-1/2	1/4	.030	35150
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	.015	35151
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.060	35152
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	.015	35153
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.060	35154
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
5/8	1-5/8	3-1/2	5/8	.190	35155
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.060	35156
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
3/4	1-5/8	4	3/4	.190	35157
3/4	1-5/8	4	3/4	.250	35158
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.060	35159
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126
1	2-5/8	6	1	.190	35160
1	2-5/8	6	1	.250	35161


51
FRACTIONAL SERIES
51CR
FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51L
FRACTIONAL SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials \leq 45 HRC (\leq 420 Bhn)

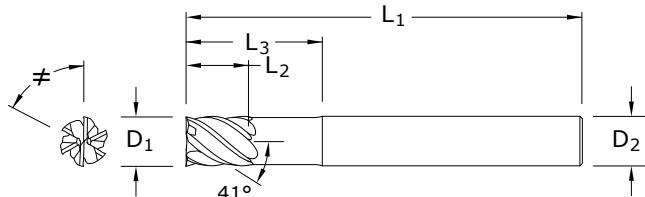

TOLERANCES (inch)



D₁ = +0.0000/-0.0020

D₂ = h6



For patent information visit www.ksptpatents.com

CUTTING DIAMETER D ₁	inch				EDP NO. TI-NAMITE-X (TX)
	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	
1/4	3/8	4	1/4	1-1/8	35106
3/8	1/2	4	3/8	2-1/8	35107
1/2	5/8	4	1/2	2-1/4	35108
5/8	3/4	5	5/8	2-1/2	35109
3/4	1	6	3/4	3-3/8	35110
1	1-1/4	6	1	3-3/8	35111

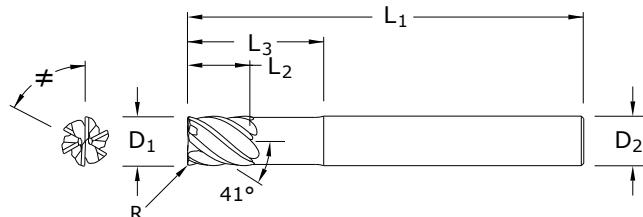
TOLERANCES (inch)
D₁ = +0.0000/-0.0020

D₂ = h6

R = +0.0000/-0.0020

STEELS
STAINLESS STEELS
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS


For patent information visit
www.ksptpatents.com

51LC
FRACTIONAL SERIES

inch						EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	CORNER RADIUS R	TI-NAMITE-X (TX)
1/4	3/8	4	1/4	1-1/8	.015	35127
1/4	3/8	4	1/4	1-1/8	.030	35180
3/8	1/2	4	3/8	2-1/8	.015	35128
3/8	1/2	4	3/8	2-1/8	.030	35129
1/2	5/8	4	1/2	2-1/4	.015	35181
1/2	5/8	4	1/2	2-1/4	.030	35130
1/2	5/8	4	1/2	2-1/4	.060	35182
1/2	5/8	4	1/2	2-1/4	.090	35131
1/2	5/8	4	1/2	2-1/4	.120	35132
5/8	3/4	5	5/8	2-1/2	.015	35183
5/8	3/4	5	5/8	2-1/2	.030	35133
5/8	3/4	5	5/8	2-1/2	.060	35184
5/8	3/4	5	5/8	2-1/2	.090	35134
5/8	3/4	5	5/8	2-1/2	.120	35135
5/8	3/4	5	5/8	2-1/2	.190	35185
3/4	1	6	3/4	3-3/8	.030	35136
3/4	1	6	3/4	3-3/8	.060	35186
3/4	1	6	3/4	3-3/8	.090	35137
3/4	1	6	3/4	3-3/8	.120	35138
3/4	1	6	3/4	3-3/8	.190	35187
3/4	1	6	3/4	3-3/8	.250	35188
1	1-1/4	6	1	3-3/8	.030	35139
1	1-1/4	6	1	3-3/8	.060	35189
1	1-1/4	6	1	3-3/8	.090	35140
1	1-1/4	6	1	3-3/8	.120	35141
1	1-1/4	6	1	3-3/8	.190	35190
1	1-1/4	6	1	3-3/8	.250	35191


- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (< 420 Bhn)

FRACTIONAL T-Carb®



Series 51, 51CR, 51L, 51LC Fractional		Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)						
						1/4	3/8	1/2	5/8	3/4	1	
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.1	≤ 1	720 (576-864)	RPM	11002	7334	5501	4401	3667	2750
		HSM	≤ 0.05	≤ 2	915 (732-1098)	RPM	13981	9321	6991	5592	4660	3495
	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.1	≤ 1	490 (392-588)	RPM	7487	4991	3744	2995	2496	1872
		HSM	≤ 0.05	≤ 2	620 (496-744)	RPM	9474	6316	4737	3789	3158	2368
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.1	≤ 1	490 (392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054
		HSM	≤ 0.05	≤ 2	620 (496-744)	Feed (ipm)	67	87	85	75	69	61
	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.1	≤ 1	240 (192-288)	RPM	3667	2445	1834	1467	1222	917
		HSM	≤ 0.05	≤ 2	305 (244-366)	Fz	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	≤ 0.1	≤ 1	240 (192-288)	Feed (ipm)	26	34	33	30	27	24
		HSM	≤ 0.05	≤ 2	305 (244-366)	RPM	4660	3107	2330	1864	1553	1165
	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.1	≤ 1	510 (459-561)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
		HSM	≤ 0.05	≤ 2	650 (585-715)	Feed (ipm)	48	60	59	51	47	41
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.1	≤ 1	510 (459-561)	RPM	7793	5195	3896	3117	2598	1948
		HSM	≤ 0.05	≤ 2	650 (585-715)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.1	≤ 1	350 (315-385)	Feed (ipm)	70	87	89	77	70	62
		HSM	≤ 0.05	≤ 2	350 (315-385)	RPM	9932	6621	4966	3973	3311	2483
STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile	≤ 0.1	≤ 1	350 (315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
		HSM	≤ 0.05	≤ 2	450 (405-495)	Feed (ipm)	39	49	48	42	39	34
	≤ 325 Bhn or ≤ 35 HRc	Profile	≤ 0.1	≤ 1	450 (405-495)	RPM	6876	4584	3438	2750	2292	1719
		HSM	≤ 0.05	≤ 2	325 (293-358)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile	≤ 0.1	≤ 1	325 (293-358)	Feed (ipm)	70	88	87	76	69	61
		HSM	≤ 0.05	≤ 2	410 (369-451)	RPM	6265	4177	3132	2506	2088	1566
	≤ 325 Bhn or ≤ 35 HRc	Profile	≤ 0.1	≤ 1	410 (369-451)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
		HSM	≤ 0.05	≤ 2	325 (293-358)	Feed (ipm)	36	46	45	39	36	31

continued on next page



Series 51, 51CR, 51L, 51LC Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)							
					1/4	3/8	1/2	5/8	3/4	1		
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.1	≤ 1	105 (84-126)	RPM	1604	1070	802	642	535	401
					Fz (Feed ipm)	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050	
	≤ 400 Bhn or ≤ 43 HRc	HSM 	≤ 0.05	≤ 2	130 (104-156)	RPM	1986	1324	993	795	662	497
					Fz (Feed ipm)	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067	
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.1	≤ 1	80 (64-96)	RPM	1222	815	611	489	407	306
					Fz (Feed ipm)	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
	≤ 350 Bhn or ≤ 38 HRc	HSM 	≤ 0.05	≤ 2	100 (80-120)	RPM	1528	1019	764	611	509	382
					Fz (Feed ipm)	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.1	≤ 1	280 (224-336)	RPM	4278	2852	2139	1711	1426	1070
					Fz (Feed ipm)	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
	≤ 440 Bhn or ≤ 47 HRc	HSM 	≤ 0.05	≤ 2	355 (284-426)	RPM	5424	3616	2712	2170	1808	1356
					Fz (Feed ipm)	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.1	≤ 1	155 (124-186)	RPM	2368	1579	1184	947	789	592
					Fz (Feed ipm)	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034	
	≤ 440 Bhn or ≤ 47 HRc	HSM 	≤ 0.05	≤ 2	200 (160-240)	RPM	3056	2037	1528	1222	1019	764
					Fz (Feed ipm)	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047	


Bhn (Brinell) HRc (Rockwell C)

rpm = V_c x 3.82 / D₁

ipm = Fz x 6 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)



51M
METRIC SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

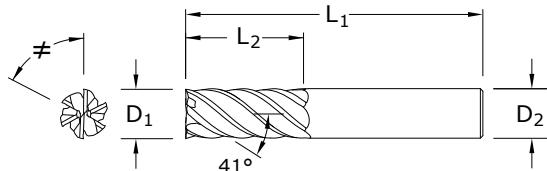


CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	EDP NO. TI-NAMITE-X (TX)
6,0	19,0	63,0	6,0	45100
8,0	20,0	63,0	8,0	45101
10,0	22,0	75,0	10,0	45102
12,0	26,0	83,0	12,0	45103
16,0	32,0	92,0	16,0	45104
20,0	38,0	104,0	20,0	45105



TOLERANCES (mm)

D₁ = +0,000/-0,050

D₂ = h6



For patent information visit www.ksptpatents.com

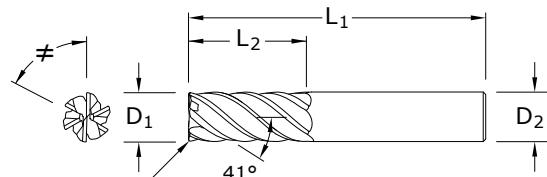
TOLERANCES (mm)
D₁ = +0,000/-0,050

D₂ = h6

R = +0,000/-0,050


STEELS
STAINLESS STEELS
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS

For patent information visit
www.ksptpatents.com

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	EDP NO.
6,0	19,0	63,0	6,0	0,5	45112
6,0	19,0	63,0	6,0	1,0	45170
6,0	19,0	63,0	6,0	1,5	45171
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
8,0	20,0	63,0	8,0	1,2	45150
8,0	20,0	63,0	8,0	1,5	45172
8,0	20,0	63,0	8,0	2,0	45173
10,0	22,0	75,0	10,0	0,5	45174
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
10,0	22,0	75,0	10,0	2,5	45175
12,0	26,0	83,0	12,0	0,5	45176
12,0	26,0	83,0	12,0	0,76	45177
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
12,0	26,0	83,0	12,0	2,5	45178
12,0	26,0	83,0	12,0	3,0	45179
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
16,0	32,0	92,0	16,0	2,5	45180
16,0	32,0	92,0	16,0	3,0	45181
16,0	32,0	92,0	16,0	4,0	45182
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126
20,0	38,0	104,0	20,0	2,5	45183
20,0	38,0	104,0	20,0	3,0	45184
20,0	38,0	104,0	20,0	4,0	45185
20,0	38,0	104,0	20,0	5,0	45186


51MCR
METRIC SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



51ML METRIC SERIES

- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Recommended for materials < 45 HRC (≤ 420 Bhn)

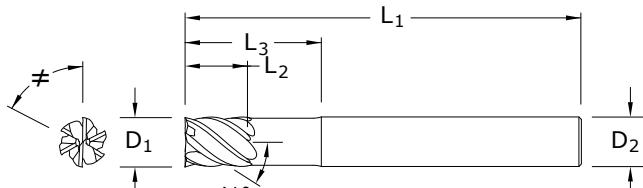

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	REACH L₃	EDP NO.
6,0	8,0	75,0	6,0	32,0	45106
8,0	10,0	75,0	8,0	32,0	45107
10,0	12,0	100,0	10,0	40,0	45108
12,0	15,0	100,0	12,0	48,0	45109
16,0	20,0	115,0	16,0	65,0	45110
20,0	24,0	150,0	20,0	80,0	45111


TOLERANCES (mm)

D₁ = +0,000/-0,050


D₂ = h6



For patent information visit www.ksptpatents.com


TOLERANCES (mm)
 $D_1 = +0,000/-0,050$
 $D_2 = h6$
 $R = +0,000/-0,050$
STEELS
STAINLESS STEELS
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS


For patent information visit
www.ksptpatents.com

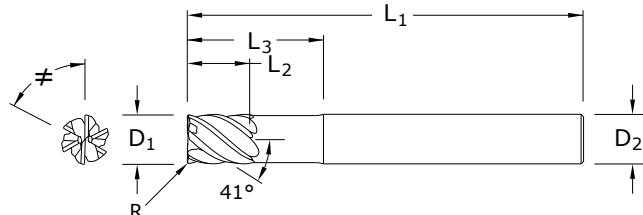

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	REACH L₃	CORNER RADIUS R	EDP NO.	
						TI-NAMITE-X (TX)	
6,0	8,0	75,0	6,0	32,0	0,5	45127	
6,0	8,0	75,0	6,0	32,0	1,0	45187	
6,0	8,0	75,0	6,0	32,0	1,5	45188	
8,0	10,0	75,0	8,0	32,0	0,5	45128	
8,0	10,0	75,0	8,0	32,0	1,0	45129	
8,0	10,0	75,0	8,0	32,0	1,5	45189	
8,0	10,0	75,0	8,0	32,0	2,0	45190	
10,0	12,0	100,0	10,0	40,0	0,5	45191	
10,0	12,0	100,0	10,0	40,0	1,0	45130	
10,0	12,0	100,0	10,0	40,0	1,5	45131	
10,0	12,0	100,0	10,0	40,0	2,0	45132	
10,0	12,0	100,0	10,0	40,0	2,5	45192	
12,0	15,0	100,0	12,0	48,0	0,5	45193	
12,0	15,0	100,0	12,0	48,0	0,76	45194	
12,0	15,0	100,0	12,0	48,0	1,0	45133	
12,0	15,0	100,0	12,0	48,0	1,5	45134	
12,0	15,0	100,0	12,0	48,0	2,0	45135	
12,0	15,0	100,0	12,0	48,0	2,5	45195	
12,0	15,0	100,0	12,0	48,0	3,0	45196	
16,0	20,0	115,0	16,0	65,0	1,0	45136	
16,0	20,0	115,0	16,0	65,0	1,5	45137	
16,0	20,0	115,0	16,0	65,0	2,0	45138	
16,0	20,0	115,0	16,0	65,0	2,5	45197	
16,0	20,0	115,0	16,0	65,0	3,0	45198	
16,0	20,0	115,0	16,0	65,0	4,0	45199	
20,0	24,0	150,0	20,0	80,0	1,0	45139	
20,0	24,0	150,0	20,0	80,0	1,5	45140	
20,0	24,0	150,0	20,0	80,0	2,0	45141	
20,0	24,0	150,0	20,0	80,0	2,5	45200	
20,0	24,0	150,0	20,0	80,0	3,0	45201	
20,0	24,0	150,0	20,0	80,0	4,0	45202	
20,0	24,0	150,0	20,0	80,0	5,0	45203	








- Engineered for High Speed Milling using Trochoidal and Peel Milling techniques
- Eccentric relief provides superior strength and smoother surface finish
- Necked design with blended diameter transitions provide clearance to reach
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

METRIC
T-Carb®



Series 51M, 51MCR, 51ML, 51MLC Metric		Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)						
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536					6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	219 (176-263)	RPM	11633	8725	6980	5816	4362	3490
			HSM 	≤ 0.05	279 (223-335)	RPM	14784	11088	8870	7392	5544	4435
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	149 (119-179)	RPM	7917	5938	4750	3958	2969	2375
			HSM 	≤ 0.05	189 (151-227)	RPM	10017	7513	6010	5009	3756	3005
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile 	≤ 0.1	73 (59-88)	RPM	3878	2908	2327	1939	1454	1163
			HSM 	≤ 0.05	93 (74-112)	RPM	4928	3696	2957	2464	1848	1478
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	155 (140-171)	RPM	8240	6180	4944	4120	3090	2472
			HSM 	≤ 0.05	198 (178-218)	RPM	10502	7877	6301	5251	3938	3151
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.1	107 (96-117)	RPM	5655	4241	3393	2827	2121	1696
			HSM 	≤ 0.05	137 (123-151)	RPM	7271	5453	4362	3635	2726	2181
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.1	99 (89-109)	RPM	5251	3938	3151	2626	1969	1575
			HSM 	≤ 0.05	125 (112-137)	RPM	6624	4968	3975	3312	2484	1987

continued on next page

Series 51M, 51MCR, 51ML, 51MLC Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)							
					6	8	10	12	16	20		
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.1	≤ 1	32 (26-38)	RPM	1696	1272	1018	848	636	509
					Fz	0.034	0.057	0.071	0.085	0.100	0.110	
		HSM 	≤ 0.05	≤ 2	40 (32-48)	RPM	2100	1575	1260	1050	788	630
					Fz	0.046	0.077	0.097	0.120	0.140	0.150	
	≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.1	≤ 1	24 (20-29)	RPM	1293	969	776	646	485	388
					Fz	0.023	0.039	0.049	0.059	0.068	0.077	
		HSM 	≤ 0.05	≤ 2	30 (24-37)	RPM	1616	1212	969	808	606	485
					Fz	0.032	0.054	0.068	0.081	0.095	0.110	
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.1	≤ 1	85 (68-102)	RPM	4524	3393	2714	2262	1696	1357
					Fz	0.023	0.039	0.049	0.059	0.068	0.077	
		HSM 	≤ 0.05	≤ 2	108 (87-130)	RPM	5736	4302	3441	2868	2151	1721
					Fz	0.032	0.054	0.068	0.081	0.095	0.110	
	≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.1	≤ 1	47 (38-57)	RPM	2504	1878	1503	1252	939	751
					Fz	0.023	0.039	0.049	0.059	0.068	0.077	
		HSM 	≤ 0.05	≤ 2	61 (49-73)	RPM	3231	2424	1939	1616	1212	969
					Fz	0.032	0.054	0.068	0.081	0.095	0.110	

Bhn (Brinell) HRc (Rockwell C)

rpm = $(V_c \times 1000) / (D_1 \times 3.14)$

mm/min = $F_z \times 6 \times rpm$


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


FRACTIONAL Multi-Carb

MULTICarb
HIGH PERFORMANCE FINISHING END MILLS



66 FRACTIONAL SERIES

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

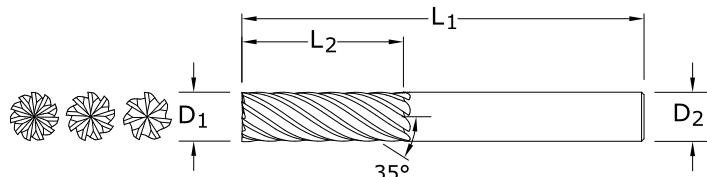

Neck Option Available

TOLERANCES (inch)

D₁ = +0.0000/-0.0020

D₂ = h₆

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS


TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com

66CR FRACTIONAL SERIES

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

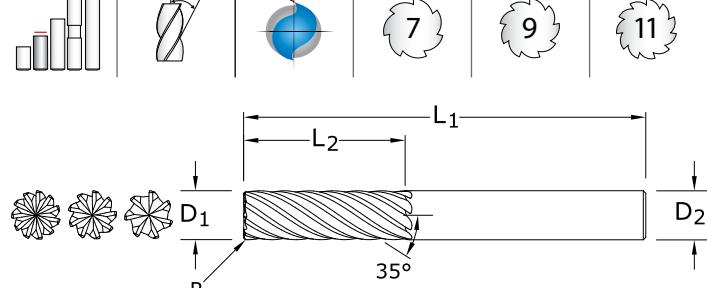

TOLERANCES (inch)

D₁ = +0.0000/-0.0020

D₂ = h₆

R = +0.0000/-0.0020

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit www.ksptpatents.com


Neck Option Available

FRACTIONAL
Multi-Carb

Series 66, 66CR Fractional	Hardness	$A_e \times D_1$	$A_p \times D_1$	V_c (sfm)	Diameter (D_1) (inch)							
					3/16	1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile	635 (508-762)	RPM	12937	9703	6469	4851	3881	3234	2426
				≤ 0.05	≤ 1	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish	762 (610-914)	RPM	15524	11643	7762	5822	4657	3881	2911
				≤ 0.02	≤ 2	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	360 (288-432)	RPM	7334	5501	3667	2750	2200	1834	1375
				≤ 0.05	≤ 1	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish	432 (346-518)	RPM	8801	6601	4401	3300	2640	2200	1650
				≤ 0.02	≤ 2	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile	705 (564-846)	RPM	14363	10772	7182	5386	4309	3591	2693
				≤ 0.05	≤ 1	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish	846 (677-1015)	RPM	17236	12927	8618	6463	5171	4309	3232
				≤ 0.02	≤ 2	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030
M	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	540 (432-648)	RPM	11002	8251	5501	4126	3300	2750	2063
				≤ 0.05	≤ 1	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish	648 (518-778)	RPM	13202	9901	6601	4951	3961	3300	2475
				≤ 0.02	≤ 2	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024
S	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	560 (448-672)	RPM	11409	8557	5705	4278	3423	2852	2139
				≤ 0.05	≤ 1	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish	448 (358-538)	RPM	9127	6845	4564	3423	2738	2282	1711
				≤ 0.02	≤ 2	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024

continued on next page

FRACTIONAL Multi-Carb



Series 66, 66CR Fractional	Hardness	$Ae \times D_1$	$Ap \times D_1$	V_c (sfm)	Diameter (D_1) (inch)									
					3/16	1/4	3/8	1/2	5/8	3/4	1			
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.05	≤ 1	385 (308-462)	RPM	7844	5883	3922	2941	2353	1961	1471
						Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	462 (370-554)	RPM	9412	7059	4706	3530	2824	2353	1765
						Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.05	≤ 1	355 (284-426)	RPM	7233	5424	3616	2712	2170	1808	1356
						Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	426 (341-511)	RPM	8679	6509	4340	3255	2604	2170	1627
						Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.05	≤ 1	105 (84-126)	RPM	2139	1604	1070	802	642	535	401
						Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Finish 	≤ 0.02	≤ 2	126 (101-151)	RPM	2567	1925	1284	963	770	642	481
						Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021	

Bhn (Brinell) HRc (Rockwell C)

rpm = $V_c \times 3.82 / D_1$

ipm = $F_z \times \text{number of flutes} \times \text{rpm}$

reduce speed and feed for materials harder than listed


refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



TOLERANCES (mm)

D₁ = +0,000/-0,050

D₂ = h₆

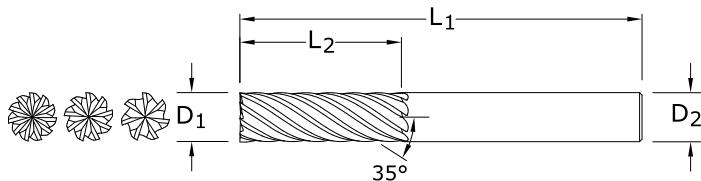


66M
METRIC SERIES

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	NO. OF FLUTES	EDP NO.
					TI-NAMITE-X
6,0	19,0	63,0	6,0	7	46620
8,0	20,0	63,0	8,0	7	46621
10,0	22,0	75,0	10,0	7	46622
12,0	26,0	83,0	12,0	9	46623
16,0	32,0	92,0	16,0	9	46624
20,0	38,0	104,0	20,0	11	46625
25,0	38,0	104,0	25,0	11	46626

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

For patent information visit
www.ksptpatents.com


Neck Option Available



66MCR

METRIC SERIES

- Heavy core and rigid design allow for straight walls
- High flute count design results in smoother cutting performance and enhanced tool life in precise finishing applications
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRc (≤ 420 Bhn)

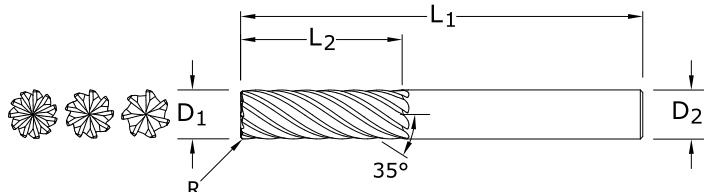

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	NO. OF FLUTES	EDP NO. TI-NAMITE-X
6,0	19,0	63,0	6,0	0,5	7	46627
6,0	19,0	63,0	6,0	1,0	7	46628
8,0	20,0	63,0	8,0	0,5	7	46629
8,0	20,0	63,0	8,0	1,0	7	46630
8,0	20,0	63,0	8,0	1,5	7	46631
10,0	22,0	75,0	10,0	0,5	7	46632
10,0	22,0	75,0	10,0	1,0	7	46633
10,0	22,0	75,0	10,0	1,5	7	46634
10,0	22,0	75,0	10,0	2,0	7	46635
12,0	26,0	83,0	12,0	1,0	9	46636
12,0	26,0	83,0	12,0	1,5	9	46637
12,0	26,0	83,0	12,0	2,0	9	46638
12,0	26,0	83,0	12,0	2,5	9	46639
12,0	26,0	83,0	12,0	3,0	9	46640
16,0	32,0	92,0	16,0	1,0	9	46641
16,0	32,0	92,0	16,0	1,5	9	46642
16,0	32,0	92,0	16,0	2,0	9	46643
16,0	32,0	92,0	16,0	2,5	9	46644
16,0	32,0	92,0	16,0	3,0	9	46645
16,0	32,0	92,0	16,0	4,0	9	46646

continued on next page

Neck Option Available

TOLERANCES (mm)

$D_1 = +0,000/-0,050$

$D_2 = h_6$

$R = +0,000/-0,050$

 STEELS

 STAINLESS STEELS

 CAST IRON

 HIGH TEMP ALLOYS

 TITANIUM

 HARDENED STEELS


For patent information visit
www.ksptpatents.com

66MCR
METRIC SERIES

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	CORNER RADIUS R	NO. OF FLUTES	EDP NO.	CONTINUED
						TI-NAMITE-X	
20,0	38,0	104,0	20,0	1,0	11	46647	
20,0	38,0	104,0	20,0	1,5	11	46648	
20,0	38,0	104,0	20,0	2,0	11	46649	
20,0	38,0	104,0	20,0	2,5	11	46650	
20,0	38,0	104,0	20,0	3,0	11	46651	
20,0	38,0	104,0	20,0	4,0	11	46652	
20,0	38,0	104,0	20,0	5,0	11	46653	
25,0	38,0	104,0	25,0	1,0	11	46654	
25,0	38,0	104,0	25,0	1,5	11	46655	
25,0	38,0	104,0	25,0	2,0	11	46656	
25,0	38,0	104,0	25,0	2,5	11	46657	
25,0	38,0	104,0	25,0	3,0	11	46658	
25,0	38,0	104,0	25,0	4,0	11	46659	
25,0	38,0	104,0	25,0	5,0	11	46660	


Neck Option Available

Multi-Carb



Series 66M, 66MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)								
					6	8	10	12	16	20	25		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	194	RPM	10260	7695	6156	5130	3847	3078	2462
					(155-232)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	232	RPM	12312	9234	7387	6156	4617	3693	2955
					(186-279)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	110	RPM	5816	4362	3490	2908	2181	1745	1396
					(88-132)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	132	RPM	6980	5235	4188	3490	2617	2094	1675
					(105-158)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	88	RPM	4686	3514	2811	2343	1757	1406	1125
					(71-106)	Fz	0.014	0.026	0.032	0.038	0.051	0.056	0.055
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	106	RPM	5623	4217	3374	2811	2108	1687	1349
					(85-127)	Fz	0.012	0.020	0.026	0.031	0.041	0.045	0.044
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	215	RPM	11391	8543	6834	5695	4271	3417	2734
					(172-258)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	258	RPM	13669	10252	8201	6834	5126	4101	3281
					(206-309)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084
CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	165	RPM	8725	6544	5235	4362	3272	2617	2094
					(132-198)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	198	RPM	10470	7852	6282	5235	3926	3141	2513
					(158-237)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.05	≤ 1	171	RPM	9048	6786	5429	4524	3393	2714	2171
					(137-205)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Finish 	≤ 0.02	≤ 2	137	RPM	7238	5429	4343	3619	2714	2171	1737
					(109-164)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064

continued on next page



Series 66M, 66MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)								
					6	8	10	12	16	20	25		
M STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Brn or ≤ 28 HRc	Profile 	≤ 0.05	≤ 1	117	RPM	6220	4665	3732	3110	2333	1866	1493
					(94-141)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
	≤ 325 Brn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	141	RPM	7465	5598	4479	3732	2799	2239	1791
					(113-169)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Brn or ≤ 35 HRc	Profile 	≤ 0.05	≤ 1	108	RPM	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
	≤ 325 Brn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2	130	RPM	6883	5162	4130	3441	2581	2065	1652
					(104-156)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Brn or ≤ 32 HRc	Profile 	≤ 0.05	≤ 1	32	RPM	1696	1272	1018	848	636	509	407
					(26-38)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
	≤ 400 Brn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	38	RPM	2036	1527	1221	1018	763	611	489
					(31-46)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Brn or ≤ 43 HRc	Profile 	≤ 0.05	≤ 1	26	RPM	1373	1030	824	687	515	412	330
					(21-31)	Fz	0.012	0.019	0.024	0.026	0.036	0.040	0.040
	≤ 400 Brn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2	31	RPM	1648	1236	989	824	618	494	396
					(25-37)	Fz	0.010	0.015	0.019	0.021	0.029	0.032	0.032
TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Brn or ≤ 38 HRc	Profile 	≤ 0.05	≤ 1	119	RPM	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
	≤ 440 Brn or ≤ 47 HRc	Finish 	≤ 0.02	≤ 2	143	RPM	7561	5671	4537	3781	2836	2268	1815
					(114-171)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Brn or ≤ 47 HRc	Profile 	≤ 0.05	≤ 1	43	RPM	2262	1696	1357	1131	848	679	543
					(34-51)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
	≤ 440 Brn or ≤ 47 HRc	Finish 	≤ 0.02	≤ 2	51	RPM	2714	2036	1629	1357	1018	814	651
					(41-61)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058

Brn (Brinell) HRc (Rockwell C)

rpm = (V_c x 1000) / (D₁ x 3.14)

mm/min = Fz x number of flutes x rpm

reduce speed and feed for materials harder than listed


refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



33CR

FRACTIONAL SERIES

- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

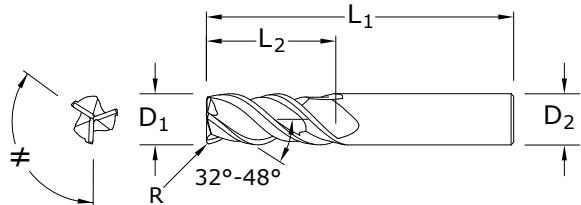


inch					EDP NO.
CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	CORNER RADIUS R	TI-NAMITE-A (AlTiN)
1/8	3/8	2-1/2	1/4	.015	33345
3/16	9/16	2-1/2	1/4	.015	33346
1/4	3/4	2-1/2	1/4	.020	33347
5/16	13/16	2-1/2	5/16	.020	33348
3/8	1	2-1/2	3/8	.020	33349
7/16	1-1/8	2-3/4	7/16	.020	33350
1/2	1-1/4	3-1/4	1/2	.030	33351
5/8	1-1/2	3-1/2	5/8	.040	33352
3/4	1-3/4	4	3/4	.040	33353
1	2-1/4	5	1	.040	33354

TOLERANCES (inch)**1/8-1/4 DIAMETER****D₁** = +0.0000/-0.0012**D₂** = h6**R** = +0.0000/-0.0020**>1/4-3/8 DIAMETER****D₁** = +0.0000/-0.0016**D₂** = h6**R** = +0.0000/-0.0020**>3/8-1 DIAMETER****D₁** = +0.0000/-0.0020**D₂** = h6**R** = +0.0000/-0.0020**STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent information visit
www.ksptpatents.com

FRACTIONAL
Series 33




Series 33CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	550 (440-660)	RPM	16808	8404	5603	4202	3362	2801	2101
					Fz (440-660)	Feed (ipm)	25.2	30.3	38.7	39.1	39.3	33.6	27.1
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	440 (352-528)	RPM	13446	6723	4482	3362	2689	2241	1681
					Fz (352-528)	Feed (ipm)	20.2	24.2	30.9	31.3	31.5	26.9	21.7
ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	315 (252-378)	RPM	9626	4813	3209	2407	1925	1604	1203
					Fz (252-378)	Feed (ipm)	11.6	13.0	16.4	16.6	16.7	14.4	11.6
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	250 (200-300)	RPM	7640	3820	2547	1910	1528	1273	955
					Fz (200-300)	Feed (ipm)	9.2	10.3	13.0	13.2	13.3	11.5	9.2
TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	185 (148-222)	RPM	5654	2827	1885	1413	1131	942	707
					Fz (148-222)	Feed (ipm)	5.1	5.9	7.9	7.6	7.8	6.8	5.3
	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Slot 	1	≤ 1	145 (116-174)	RPM	4431	2216	1477	1108	886	739	554
					Fz (116-174)	Feed (ipm)	4.0	4.7	6.2	6.0	6.1	5.3	4.2
CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	445 (356-534)	RPM	13599	6800	4533	3400	2720	2267	1700
					Fz (356-534)	Feed (ipm)	14.3	22.4	28.6	28.6	28.6	24.5	19.9
	$\leq 220 \text{ Bhn}$ or $\leq 19 \text{ HRc}$	Slot 	1	≤ 1	355 (284-426)	RPM	10849	5424	3616	2712	2170	1808	1356
					Fz (284-426)	Feed (ipm)	11.4	17.9	22.8	22.8	22.8	19.5	15.9
CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	340 (272-408)	RPM	10390	5195	3463	2598	2078	1732	1299
					Fz (272-408)	Feed (ipm)	9.4	12.5	16.6	16.4	16.2	14.0	11.3
	$\leq 260 \text{ Bhn}$ or $\leq 26 \text{ HRc}$	Slot 	1	≤ 1	270 (216-324)	RPM	8251	4126	2750	2063	1650	1375	1031
					Fz (216-324)	Feed (ipm)	7.4	9.9	13.2	13.0	12.9	11.1	9.0
STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	490 (392-588)	RPM	14974	7487	4991	3744	2995	2496	1872
					Fz (392-588)	Feed (ipm)	17.1	22.5	28.5	28.1	27.9	24.0	19.7
	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Slot 	1	≤ 1	390 (312-468)	RPM	11918	5959	3973	2980	2384	1986	1490
					Fz (312-468)	Feed (ipm)	13.6	17.9	22.6	22.3	22.2	19.1	15.6

continued on next page

FRACTIONAL

Series 33



Series 33CR Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)								
					1/8	1/4	3/8	1/2	5/8	3/4	1		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L ≤ 275 Bhn or ≤ 28 HRc	Profile 	≤ 0.5	≤ 1.5 (272-408)	340	RPM	10390	5195	3463	2598	2078	1732	1299
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
		Slot 	1	≤ 1 (216-324)	270	RPM	8251	4126	2750	2063	1650	1375	1031
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450 ≤ 325 Bhn or ≤ 35 HRc	Profile 	≤ 0.5	≤ 1.5 (248-372)	310	RPM	9474	4737	3158	2368	1895	1579	1184
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
		Slot 	1	≤ 1 (200-300)	250	RPM	7640	3820	2547	1910	1528	1273	955
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400 ≤ 300 Bhn or ≤ 32 HRc	Profile 	≤ 0.5	≤ 1.5 (64-96)	80	RPM	2445	1222	815	611	489	407	306
					Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024	
		Slot 	1	≤ 1 (52-78)	65	RPM	1986	993	662	497	397	331	248
					Fz	0.0003	0.0007	0.0013	0.0017	0.0021	0.0022	0.0024	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene ≤ 400 Bhn or ≤ 43 HRc	Profile 	≤ 0.5	≤ 1.5 (50-74)	62	RPM	1895	947	632	474	379	316	237
					Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017	
		Slot 	1	≤ 1 (39-59)	49	RPM	1497	749	499	374	299	250	187
					Fz	0.0002	0.0005	0.0009	0.0012	0.0015	0.0016	0.0017	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si ≤ 350 Bhn or ≤ 38 HRc	Profile 	≤ 0.5	≤ 1.5 (172-258)	215	RPM	6570	3285	2190	1643	1314	1095	821
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
		Slot 	1	≤ 1 (136-204)	170	RPM	5195	2598	1732	1299	1039	866	649
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al ≤ 440 Bhn or ≤ 47 HRc	Profile 	≤ 0.5	≤ 1.5 (60-90)	75	RPM	2292	1146	764	573	458	382	287
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	
		Slot 	1	≤ 1 (48-72)	60	RPM	1834	917	611	458	367	306	229
					Fz	0.0003	0.0008	0.0015	0.0020	0.0025	0.0026	0.0028	


Bhn (Brinell) HRc (Rockwell C)

rpm = V_c x 3.82 / D₁


ipm = Fz x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)

**TOLERANCES (mm)****3–6 DIAMETER** $D_1 = +0,000/-0,030$ $D_2 = h_6$ $R = +0,000/-0,050$ **>6–10 DIAMETER** $D_1 = +0,000/-0,040$ $D_2 = h_6$ $R = +0,000/-0,050$ **>10–20 DIAMETER** $D_1 = +0,000/-0,050$ $D_2 = h_6$ $R = +0,000/-0,050$ **STEELS****STAINLESS STEELS****CAST IRON****HIGH TEMP ALLOYS****TITANIUM****HARDENED STEELS**

For patent
information visit
www.ksptpatents.com

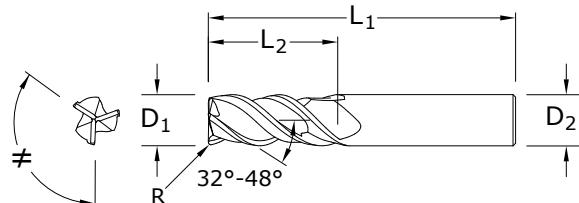


CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	EDP NO. TI-NAMITE-A (AITIN)
3,0	9,0	57,0	6,0	0,3	43445
3,0	9,0	57,0	6,0	0,5	43470
4,0	12,0	57,0	6,0	0,3	43446
4,0	12,0	57,0	6,0	0,5	43471
5,0	15,0	57,0	6,0	0,3	43447
5,0	15,0	57,0	6,0	0,5	43472
6,0	18,0	57,0	6,0	0,5	43448
6,0	18,0	57,0	6,0	1,0	43473
6,0	18,0	57,0	6,0	1,5	43474
6,0	18,0	57,0	6,0	2,0	43475
8,0	20,0	63,0	8,0	0,5	43449
8,0	20,0	63,0	8,0	1,0	43476
8,0	20,0	63,0	8,0	1,5	43477
8,0	20,0	63,0	8,0	2,0	43478
10,0	27,0	72,0	10,0	0,5	43450
10,0	27,0	72,0	10,0	1,0	43479
10,0	27,0	72,0	10,0	1,5	43480
10,0	27,0	72,0	10,0	2,0	43481
10,0	27,0	72,0	10,0	2,5	43482
12,0	30,0	83,0	12,0	0,5	43451
12,0	30,0	83,0	12,0	1,0	43483
12,0	30,0	83,0	12,0	1,5	43484
12,0	30,0	83,0	12,0	2,0	43485
12,0	30,0	83,0	12,0	2,5	43486
12,0	30,0	83,0	12,0	3,0	43487
12,0	30,0	83,0	12,0	4,0	43488
16,0	38,0	92,0	16,0	1,0	43452
16,0	38,0	92,0	16,0	1,5	43489
16,0	38,0	92,0	16,0	2,0	43490
16,0	38,0	92,0	16,0	2,5	43491
16,0	38,0	92,0	16,0	3,0	43492
16,0	38,0	92,0	16,0	4,0	43493
20,0	46,0	104,0	20,0	1,0	43453
20,0	46,0	104,0	20,0	2,0	43494
20,0	46,0	104,0	20,0	2,5	43495
20,0	46,0	104,0	20,0	3,0	43496
20,0	46,0	104,0	20,0	4,0	43497

33MCR
METRIC SERIES

- Specially engineered step core design provides stability for aggressive ramping and rigidity when flutes are completely engaged
- Open design at axial end accommodates material flow and load reduction during machining operations
- Enhanced corner geometry with tight tolerance corner radii
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)


Series 33



Series 33MCR Metric	Hardness	$Ae \times D_1$	$Ap \times D_1$	V_c (m/min)	Diameter (D_1) (mm)							
					3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Profile	168	RPM	17773	8886	6665	5332	4443	3332	2666
				≤ 0.5	≤ 1.5	(134-201)	Fz	0.012	0.029	0.049	0.061	0.074
	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Slot	134	RPM	14218	7109	5332	4265	3555	2666	2133
				1	≤ 1	(107-161)	Fz	0.012	0.029	0.049	0.061	0.074
H	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	96	RPM	10179	5089	3817	3054	2545	1909	1527
				≤ 0.5	≤ 1.5	(77-115)	Fz	0.010	0.022	0.036	0.045	0.055
	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Slot	76	RPM	8078	4039	3029	2424	2020	1515	1212
				1	≤ 1	(61-91)	Fz	0.010	0.022	0.036	0.045	0.055
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Profile	136	RPM	14380	7190	5392	4314	3595	2696	2157
				≤ 0.5	≤ 1.5	(109-163)	Fz	0.008	0.026	0.045	0.056	0.067
	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Slot	108	RPM	11471	5736	4302	3441	2868	2151	1721
				1	≤ 1	(87-130)	Fz	0.008	0.026	0.045	0.056	0.067
M	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Profile	104	RPM	10987	5493	4120	3296	2747	2060	1648
				≤ 0.5	≤ 1.5	(83-124)	Fz	0.007	0.019	0.034	0.043	0.050
	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Slot	82	RPM	8725	4362	3272	2617	2181	1636	1309
				1	≤ 1	(66-99)	Fz	0.007	0.019	0.034	0.043	0.050
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Profile	149	RPM	15834	7917	5938	4750	3958	2969	2375
				≤ 0.5	≤ 1.5	(119-179)	Fz	0.009	0.024	0.041	0.051	0.060
	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Slot	119	RPM	12602	6301	4726	3781	3151	2363	1890
				1	≤ 1	(95-143)	Fz	0.009	0.024	0.041	0.051	0.060

continued on next page

METRIC
Series 33



Series 33MCR Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)									
					3	6	8	10	12	16	20			
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	$\leq 275 \text{ Bhn}$ or $\leq 28 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	104 (83-124)	RPM	10987	5493	4120	3296	2747	2060	1648
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
		$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Slot 	1	≤ 1	82 (66-99)	RPM	8725	4362	3272	2617	2181	1636	1309
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	$\leq 325 \text{ Bhn}$ or $\leq 35 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	94 (76-113)	RPM	10017	5009	3756	3005	2504	1878	1503
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
		$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Slot 	1	≤ 1	76 (61-91)	RPM	8078	4039	3029	2424	2020	1515	1212
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	$\leq 300 \text{ Bhn}$ or $\leq 32 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	24 (20-29)	RPM	2585	1293	969	776	646	485	388
						Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059	
		$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Slot 	1	≤ 1	20 (16-24)	RPM	2100	1050	788	630	525	394	315
						Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059	
	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	$\leq 400 \text{ Bhn}$ or $\leq 43 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	19 (15-23)	RPM	2003	1002	751	601	501	376	301
						Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043	
		$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Slot 	1	≤ 1	15 (12-18)	RPM	1583	792	594	475	396	297	238
						Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043	
T	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	$\leq 350 \text{ Bhn}$ or $\leq 38 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	66 (52-79)	RPM	6947	3474	2605	2084	1737	1303	1042
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
		$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	52 (41-62)	RPM	5493	2747	2060	1648	1373	1030	824
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Profile 	≤ 0.5	≤ 1.5	23 (18-27)	RPM	2424	1212	909	727	606	454	364
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	
		$\leq 440 \text{ Bhn}$ or $\leq 47 \text{ HRc}$	Slot 	1	≤ 1	18 (15-22)	RPM	1939	969	727	582	485	364	291
						Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	

Bhn (Brinell) HRc (Rockwell C)


rpm = $(V_c \times 1000) / (D_1 \times 3.14)$

mm/min = $F_z \times 3 \times \text{rpm}$

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling ($.02 \times D_1$ maximum)


refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)



7


FRACTIONAL SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

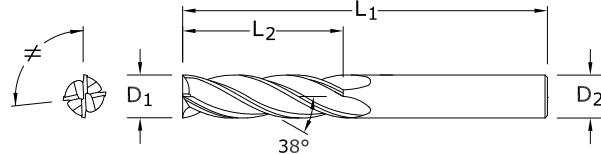


inch				EDP NO.
CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	Ti-NAMITE-X
1/8	3/4	2-1/4	1/8	70470
1/8	1	3	1/8	70471
3/16	3/4	2-1/2	3/16	70472
3/16	1-1/8	3	3/16	70473
1/4	1-1/8	3	1/4	70474
1/4	1-1/2	4	1/4	70475
5/16	1-1/8	3	5/16	70476
5/16	1-5/8	4	5/16	70477
3/8	1-1/8	3	3/8	70478
3/8	1-3/4	4	3/8	70479
7/16	2	4-1/2	7/16	70480
7/16	3	6	7/16	70481
1/2	2	4-1/2	1/2	70482
1/2	3	6	1/2	70483
5/8	2-1/4	5	5/8	70484
5/8	3	6	5/8	70485
3/4	2-1/4	5	3/4	70486
3/4	3	6	3/4	70487
1	2-1/4	5	1	70488
1	3	6	1	70489

TOLERANCES (inch)

 $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ 

For patent information visit
www.ksptpatents.com



TOLERANCES (inch)

D₁ = +0.0000/-0.0020

D₂ = h₆

BALL RADIUS

+0.0000/-0.0010

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

HARDENED STEELS

For patent information visit
www.ksptpatents.com

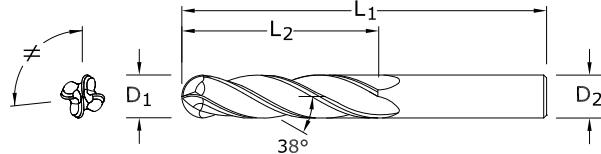

inch				EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	Ti-NAMITE-X
1/8	3/4	2-1/4	1/8	70441
1/8	1	3	1/8	70442
3/16	3/4	2-1/2	3/16	70444
3/16	1-1/8	3	3/16	70445
1/4	1-1/8	3	1/4	70447
1/4	1-1/2	4	1/4	70448
5/16	1-1/8	3	5/16	70450
5/16	1-5/8	4	5/16	70451
3/8	1-1/8	3	3/8	70453
3/8	1-3/4	4	3/8	70454
7/16	2	4-1/2	7/16	70456
7/16	3	6	7/16	70457
1/2	2	4-1/2	1/2	70459
1/2	3	6	1/2	70460
5/8	2-1/4	5	5/8	70462
5/8	3	6	5/8	70463
3/4	2-1/4	5	3/4	70465
3/4	3	6	3/4	70466
1	2-1/4	5	1	70468
1	3	6	1	70469


7B

FRACTIONAL SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

FRACTIONAL

Series 7



Series 7,7B Fractional		Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	480 (384-576)	RPM	14669	7334	4890	3667	2934	2445	1834
						Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish	≤ 0.02	≤ 2	275 (220-330)	RPM	8404	4202	2801	2101	1681	1401	1051
						Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
K	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish	≤ 0.02	≤ 2	230 (184-276)	RPM	7029	3514	2343	1757	1406	1171	879
						Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish	≤ 0.02	≤ 2	605 (484-726)	RPM	18489	9244	6163	4622	3698	3081	2311
						Fz	0.0006	0.0015	0.0028	0.0037	0.0046	0.0047	0.0051	
M	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish	≤ 0.02	≤ 2	465 (372-558)	RPM	14210	7105	4737	3553	2842	2368	1776
						Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
S	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	420 (336-504)	RPM	12835	6418	4278	3209	2567	2139	1604
						Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish	≤ 0.02	≤ 2	290 (232-348)	RPM	8862	4431	2954	2216	1772	1477	1108
						Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
S	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish	≤ 0.02	≤ 2	265 (212-318)	RPM	8098	4049	2699	2025	1620	1350	1012
						Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish	≤ 0.02	≤ 2	80 (64-96)	RPM	2445	1222	815	611	489	407	306
						Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish	≤ 0.02	≤ 2	65 (52-78)	RPM	1986	993	662	497	397	331	248
						Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al25Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish	≤ 0.02	≤ 2	300 (240-360)	RPM	9168	4584	3056	2292	1834	1528	1146
						Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Finish	≤ 0.02	≤ 2	105 (84-126)	RPM	3209	1604	1070	802	642	535	401
						Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039	


Bhn (Brinell) HRc (Rockwell C)

rpm = V_c x 3.82 / D₁

ipm = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)




TOLERANCES (mm)

D₁ = +0,000/+0,050

D₂ = h₆

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS


For patent information visit
www.ksptpatents.com

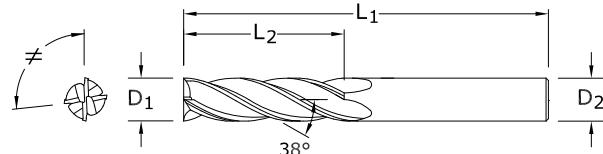

mm				EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	Ti-NAMITE-X
3,0	25,0	75,0	3,0	70551
4,0	25,0	75,0	4,0	70552
5,0	25,0	75,0	5,0	70553
6,0	25,0	75,0	6,0	70554
8,0	25,0	75,0	8,0	70555
10,0	38,0	100,0	10,0	70556
12,0	50,0	100,0	12,0	70557
12,0	75,0	150,0	12,0	70558
14,0	75,0	150,0	14,0	70559
16,0	75,0	150,0	16,0	70560
18,0	75,0	150,0	18,0	70561
20,0	75,0	150,0	20,0	70562
25,0	75,0	150,0	25,0	70563

7M
METRIC SERIES


- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)



7MB

METRIC SERIES

- Variable pitch allows for improved chatter suppression along with improved surface finish and enhanced tool life
- Raised land and increased core diameter designed to enhance tool life and decrease tool deflection
- Ball nose design ideal for finishing operations in complex workpieces
- Recommended for materials ≤ 45 HRC (≤ 420 Bhn)

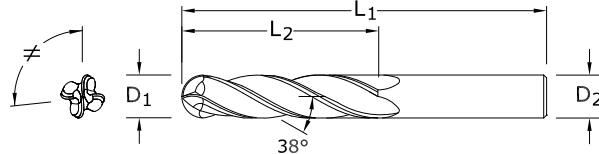

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	EDP NO. Ti-NAMITE-X
3,0	25,0	75,0	3,0	70527
4,0	25,0	75,0	4,0	70529
5,0	25,0	75,0	5,0	70531
6,0	25,0	75,0	6,0	70533
8,0	25,0	75,0	8,0	70535
10,0	38,0	100,0	10,0	70537
12,0	50,0	100,0	12,0	70539
12,0	75,0	150,0	12,0	70540
14,0	75,0	150,0	14,0	70542
16,0	75,0	150,0	16,0	70544
18,0	75,0	150,0	18,0	70546
20,0	75,0	150,0	20,0	70548
25,0	75,0	150,0	25,0	70550


TOLERANCES (mm)

D₁ = +0,000/+0,050


D₂ = h₆

BALL RADIUS

+0,000/-0,025



For patent information visit
www.ksptpatents.com



Series 7M, 7MB Metric	Hardness	Ae x D ₁	Ap x D ₁	V _c (m/min)	Diameter (D ₁) (mm)										
					3	6	8	10	12	16	20	25			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2 (117-176)	146	RPM	15511	7755	5816	4653	3878	2908	2327	1861
						Fz	0.0166	0.043	0.075	0.093	0.110	0.125	0.147	0.160	
H	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2 (67-101)	84	RPM	8886	4443	3332	2666	2222	1666	1333	1066
						Fz	0.0122	0.034	0.051	0.069	0.082	0.091	0.109	0.120	
K	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Finish 	≤ 0.02	≤ 2 (56-84)	70	RPM	7432	3716	2787	2230	1858	1394	1115	892
						Fz	0.0070	0.019	0.040	0.043	0.048	0.057	0.064	0.070	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220 Bhn or ≤ 19 HRc	Finish 	≤ 0.02	≤ 2 (148-221)	184	RPM	19550	9775	7331	5865	4887	3666	2932	2346
						Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	≤ 260 Bhn or ≤ 26 HRc	Finish 	≤ 0.02	≤ 2 (113-170)	142	RPM	15026	7513	5635	4508	3756	2817	2254	1803
						Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2 (102-154)	128	RPM	13572	6786	5089	4072	3393	2545	2036	1629
						Fz	0.0086	0.024	0.040	0.048	0.058	0.065	0.077	0.087	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275 Bhn or ≤ 28 HRc	Finish 	≤ 0.02	≤ 2 (71-106)	88	RPM	9371	4686	3514	2811	2343	1757	1406	1125
						Fz	0.0082	0.022	0.037	0.045	0.048	0.060	0.072	0.078	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5 PH, 17-4 PH, Custom 450	≤ 325 Bhn or ≤ 35 HRc	Finish 	≤ 0.02	≤ 2 (65-97)	81	RPM	8563	4282	3211	2569	2141	1606	1284	1028
						Fz	0.0070	0.019	0.029	0.040	0.048	0.055	0.064	0.070	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoloy, Monel 400	≤ 300 Bhn or ≤ 32 HRc	Finish 	≤ 0.02	≤ 2 (20-29)	24	RPM	2585	1293	969	776	646	485	388	310
						Fz	0.0072	0.019	0.029	0.037	0.046	0.053	0.061	0.085	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, X-750, Incoloy, Waspaloy, Hastelloy, Rene	≤ 400 Bhn or ≤ 43 HRc	Finish 	≤ 0.02	≤ 2 (16-24)	20	RPM	2100	1050	788	630	525	394	315	252
						Fz	0.0075	0.016	0.021	0.030	0.038	0.044	0.051	0.070	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350 Bhn or ≤ 38 HRc	Finish 	≤ 0.02	≤ 2 (73-110)	91	RPM	9694	4847	3635	2908	2424	1818	1454	1163
						Fz	0.0091	0.024	0.004	0.005	0.060	0.070	0.080	0.088	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3Cr3Sn3Al	≤ 440 Bhn or ≤ 47 HRc	Finish 	≤ 0.02	≤ 2 (26-38)	32	RPM	3393	1696	1272	1018	848	636	509	407
						Fz	0.0082	0.019	0.029	0.037	0.046	0.053	0.061	0.085	


Bhn (Brinell) HRc (Rockwell C)

rpm = (V_c x 1000) / (D₁ x 3.14)


mm/min = Fz x 4 x rpm

reduce speed and feed for materials harder than listed

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)


56B
FRACTIONAL SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRC (327 to 654 Bhn)

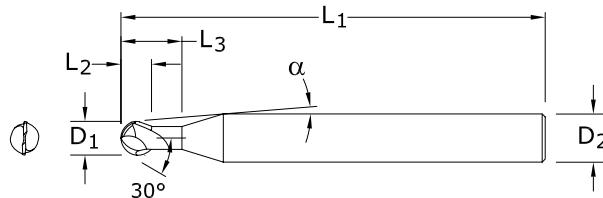


inch							EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	α	REACH L_3	Ti-NAMITE-X	
1/32	1/32	3	1/4	8°20'	1/16	93272	
1/16	1/16	3	1/4	7°40'	1/8	93273	
3/32	3/32	3	1/4	6°50'	3/16	93274	
1/8	1/8	3	1/4	6°	1/4	93275	
3/16	3/16	3	1/4	3°35'	3/8	93276	
1/4	1/4	3-1/2	1/4	—	1/2	93277	
5/16	5/16	4	5/16	—	5/8	93278	
3/8	3/8	4	3/8	—	3/4	93279	
1/2	1/2	4-1/2	1/2	—	1	93280	
5/8	5/8	5-1/2	5/8	—	1-1/4	93281	
3/4	3/4	6-1/2	3/4	—	1-1/2	93282	

Neck Option Available

TOLERANCES (inch)**1/32–3/32 DIAMETER** $D_1 = +0.0000/-0.0010$ $D_2 = h_6$ **BALL RADIUS**
 $+0.0000/-0.0005$ **>3/32–1/4 DIAMETER** $D_1 = +0.0000/-0.0012$ $D_2 = h_6$ **BALL RADIUS**
 $+0.0000/-0.0006$ **>1/4–3/8 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ **BALL RADIUS**
 $+0.0000/-0.0008$ **>3/8–3/4 DIAMETER** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ **BALL RADIUS**
 $+0.0000/-0.0010$ **HARDENED STEELS**

For patent information visit
www.ksptpatents.com

FRACTIONAL
Turbo-Carb




Series 56B Fractional	Hardness	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)									
					1/32	1/16	1/8	3/16	1/4	3/8	1/2	3/4		
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 375 \text{ Bhn}$ or $\leq 40 \text{ HRc}$	Rough	≤ 0.4	≤ 0.1	625 (500-750)	RPM	76400	38200	19100	12733	9550	6367	4775	3183
		HSM	≤ 0.4	≤ 0.03	950 (760-1140)	RPM	116128	58064	29032	19355	14516	9677	7258	4839
	$\leq 475 \text{ Bhn}$ or $\leq 50 \text{ HRc}$	Rough	≤ 0.4	≤ 0.05	750 (600-900)	RPM	91680	45840	22920	15280	11460	7640	5730	3820
		HSM	≤ 0.4	≤ 0.02	1150 (920-1380)	RPM	140576	70288	35144	23429	17572	11715	8786	5857
TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	$\leq 655 \text{ Bhn}$ or $\leq 60 \text{ HRc}$	Rough	≤ 0.4	≤ 0.04	500 (400-600)	RPM	61120	30560	15280	10187	7640	5093	3820	2547
		HSM	≤ 0.4	≤ 0.01	1000 (800-1200)	RPM	122240	61120	30560	20373	15280	10187	7640	5093
		Rough	≤ 0.4	≤ 0.04	Fz	0.0004	0.0008	0.0017	0.0023	0.0029	0.0045	0.0057	0.0063	
		HSM	≤ 0.4	≤ 0.01	Fz	0.0005	0.0009	0.0019	0.0025	0.0032	0.0050	0.0063	0.0071	
Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)														
rpm = $V_c \times 3.82 / D_1$														
ipm = $F_z \times 2 \times rpm$														
reduce speed and feed for materials harder than listed														
reduce feed and Ae when finish milling ($.02 \times D_1$ maximum)														
refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstool.com)														



56MB

METRIC SERIES

- Short flute length and rigid design to reduce deflection
- S-Gash Ball geometry minimizes load and heat produced during the cutting process, ultimately enhancing tool life
- Ideal for machining complex contoured shapes in hardened steels
- Recommended for materials 35 to 60 HRc (327 to 654 Bhn)

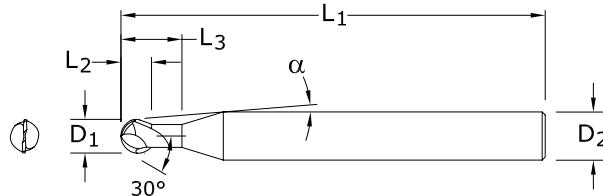


CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	α	REACH L_3	EDP NO. Ti-NAMITE-X
1,0	1,0	76,0	6,0	8°10'	2,0	91349
1,5	1,5	76,0	6,0	7°45'	3,0	91350
2,0	2,0	76,0	6,0	7°10'	4,0	91351
2,5	2,5	76,0	6,0	6°35'	5,0	91352
3,0	3,0	76,0	6,0	6°	6,0	91353
4,0	4,0	76,0	6,0	4°30'	8,0	91354
5,0	5,0	89,0	6,0	2°30'	10,0	91355
6,0	6,0	89,0	6,0	—	12,0	91356
8,0	8,0	102,0	8,0	—	16,0	91357
10,0	10,0	102,0	10,0	—	20,0	91358
12,0	12,0	114,0	12,0	—	24,0	91359
16,0	16,0	140,0	16,0	—	32,0	91360
20,0	20,0	165,0	20,0	—	40,0	91361

Neck Option Available

TOLERANCES (mm)**1–2,5 DIAMETER** $D_1 = +0,000/-0,025$ $D_2 = h_6$ **BALL RADIUS** $+0.0000/-0.0013$ **>2,5–6 DIAMETER** $D_1 = +0,000/-0,030$ $D_2 = h_6$ **BALL RADIUS** $+0.0000/-0.0015$ **>6–10 DIAMETER** $D_1 = +0,000/-0,040$ $D_2 = h_6$ **BALL RADIUS** $+0.0000/-0.0020$ **>10–20 DIAMETER** $D_1 = +0,000/-0,050$ $D_2 = h_6$ **BALL RADIUS** $+0.0000/-0.0025$ **HARDENED STEELS**

For patent information visit
www.ksptpatents.com



Series 56MB Metric	Hardness	$Ae \times D_1$	$Ap \times D_1$	V_c (m/min)	Diameter (D_1) (mm)										
					1	1.5	3	5	6	10	12	20			
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375 Bhn or ≤ 40 HRc	Rough	≤ 0.4	≤ 0.1	191 (153-229)	RPM	60748	40498	20249	12150	10125	6075	5062	3037
			HSM	≤ 0.4	≤ 0.03	290 (232-348)	RPM	92235	61490	46117	18447	15372	9223	7686	4612
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 475 Bhn or ≤ 50 HRc	Rough	≤ 0.4	≤ 0.05	229 (183-275)	Fz	0.015	0.028	0.058	0.076	0.097	0.152	0.191	0.216
			HSM	≤ 0.4	≤ 0.02	351 (281-421)	RPM	111636	74424	37212	22327	18606	11164	9303	5582
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 655 Bhn or ≤ 60 HRc	Rough	≤ 0.4	≤ 0.04	152 (122-182)	RPM	48344	32229	16115	9669	8057	4834	4029	2417
			HSM	≤ 0.4	≤ 0.01	305 (244-366)	RPM	97005	64670	32335	19401	16168	9701	8084	4850
						Fz	0.010	0.020	0.043	0.058	0.074	0.114	0.145	0.160	
						Feed (mm/min)	967	1289	1386	1122	1192	1102	1168	773	

Bhn (Brinell) HRc (Rockwell C)


rpm = $(V_c \times 1000) / (D_1 \times 3.14)$

mm/min = $F_z \times 2 \times \text{rpm}$

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D_1 maximum)

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)

**57**

FRACTIONAL SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

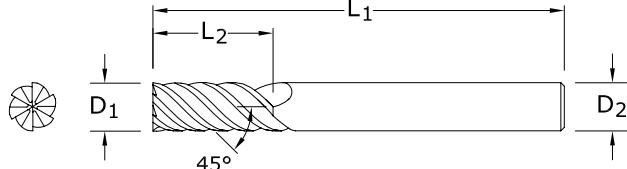


Neck Option Available

inch

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO.
1/4	17/32	3-1/2	1/4	36140
5/16	11/16	4	5/16	36141
3/8	13/16	4	3/8	36142
1/2	1-3/32	4-1/2	1/2	36143

TOLERANCES (inch)**1/4 DIAMETER** $D_1 = +0.0000/-0.0012$ $D_2 = h_6$ **5/16 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ **3/8 DIAMETER** $D_1 = +0.0000/-0.0016$ $D_2 = h_6$ **1/2 DIAMETER** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ **HARDENED STEELS**

For patent information visit
www.ksptpatents.com



Series 57 Fractional	Hardness	$A_e \times D_1$	$A_p \times D_1$	V_c (sfm)	Diameter (D_1) (inch)						
					1/4	5/16	3/8	1/2			
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc	Slot	1	≤ 0.3	215 (172-258)	RPM	3285	2628	2190	1643
			Profile	≤ 0.1	≤ 1.5	265 (212-318)	Fz	0.0013	0.0019	0.0025	0.0031
						Feed (ipm)	26	30	33	31	
		≤ 560 Bhn or ≤ 55 HRc	HSM	≤ 0.04	≤ 1.5	560 (448-672)	RPM	8557	6845	5705	4278
						Fz	0.0022	0.0033	0.0044	0.0055	
						Feed (ipm)	113	136	151	141	
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc	Slot	1	≤ 0.3	120 (96-144)	RPM	1834	1467	1222	917
			Profile	≤ 0.1	≤ 1.5	150 (120-180)	RPM	2292	1834	1528	1146
						Fz	0.0014	0.0021	0.0028	0.0035	
		≤ 740 Bhn or ≤ 65 HRc	HSM	≤ 0.04	≤ 1.5	490 (392-588)	RPM	7487	5990	4991	3744
						Fz	0.0018	0.0026	0.0035	0.0044	
						Feed (ipm)	81	93	105	99	
	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 740 Bhn or ≤ 65 HRc	Slot	1	≤ 0.3	65 (52-78)	RPM	993	795	662	497
			Profile	≤ 0.1	≤ 1.5	80 (64-96)	RPM	1222	978	815	611
						Fz	0.0011	0.0016	0.0021	0.0026	
		≤ 740 Bhn or ≤ 65 HRc	HSM	≤ 0.04	≤ 1.5	250 (200-300)	RPM	3820	3056	2547	1910
						Fz	0.0013	0.0019	0.0025	0.0031	
						Feed (ipm)	30	35	38	36	

Bhn (Brinell) HRc (Rockwell C)

HSM (High Speed Machining)


rpm = $V_c \times 3.82 / D_1$

ipm = $F_z \times 6 \times rpm$


reduce speed and feed for materials harder than listed

reduce feed and A_e when finish milling ($.02 \times D_1$ maximum)

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)


57M
 METRIC SERIES

- Ideal in Trochoidal milling applications in hardened steels and dry machining
- Short flute length and large core design to reduce deflection
- Unsurpassed edge strength with extreme negative rake and eccentric relief
- Recommended for materials 45 to 65 HRc (421 to 739 Bhn)

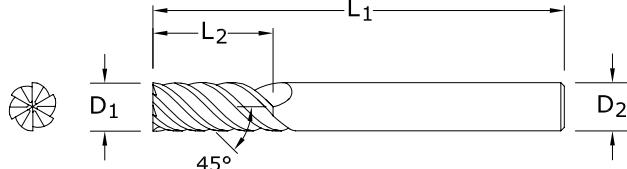


CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	EDP NO.
6,0	13,0	89,0	6,0	46140
8,0	18,0	102,0	8,0	46141
10,0	22,0	102,0	10,0	46142
12,0	26,0	114,0	12,0	46143
16,0	32,0	140,0	16,0	46145
20,0	38,0	165,0	20,0	46147

Neck Option Available

TOLERANCES (mm)**6 DIAMETER** $D_1 = +0,000/-0,030$ $D_2 = h_6$ **8 DIAMETER** $D_1 = +0,000/-0,040$ $D_2 = h_6$ **10 DIAMETER** $D_1 = +0,000/-0,040$ $D_2 = h_6$ **12–20 DIAMETER** $D_1 = +0,000/-0,050$ $D_2 = h_6$ **HARDENED STEELS**

For patent information visit
www.ksptpatents.com



Series 57M Metric	Hardness	$A_e \times D_1$	$A_p \times D_1$	V_c (m/min)	Diameter (D_1) (mm)								
					6	8	10	12	16	20			
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 420 Bhn or ≤ 45 HRc	Slot 	1	≤ 0.3	66 (53-79)	RPM	3499	2624	2099	1749	1312	1050
						Fz	0.032	0.048	0.064	0.079	0.094	0.109	
						Feed (mm/min)	672	756	806	829	740	686	
		≤ 560 Bhn or ≤ 55 HRc	Profile 	≤ 0.1	≤ 1.5	81 (65-97)	RPM	4294	3220	2576	2147	1610	1288
						Fz	0.046	0.066	0.089	0.112	0.132	0.152	
						Feed (mm/min)	1185	1275	1376	1443	1275	1175	
		≤ 740 Bhn or ≤ 65 HRc	HSM 	≤ 0.04	≤ 1.5	171 (137-205)	RPM	9064	6798	5439	4532	3399	2719
						Fz	0.056	0.084	0.112	0.140	0.170	0.200	
						Feed (mm/min)	3046	3426	3655	3807	3467	3263	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 560 Bhn or ≤ 55 HRc	Slot 	1	≤ 0.3	37 (30-44)	RPM	1961	1471	1177	981	735	588
						Fz	0.025	0.038	0.051	0.064	0.077	0.090	
						Feed (mm/min)	294	335	360	377	340	318	
		≤ 740 Bhn or ≤ 65 HRc	Profile 	≤ 0.1	≤ 1.5	46 (37-55)	RPM	2438	1829	1463	1219	914	732
						Fz	0.036	0.053	0.071	0.089	0.107	0.125	
						Feed (mm/min)	527	582	623	651	587	549	
		≤ 740 Bhn or ≤ 65 HRc	HSM 	≤ 0.04	≤ 1.5	149 (119-179)	RPM	7898	5924	4739	3949	2962	2369
						Fz	0.046	0.066	0.089	0.112	0.135	0.158	
						Feed (mm/min)	2180	2346	2531	2654	2399	2246	
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 740 Bhn or ≤ 65 HRc	Slot 	1	≤ 0.3	20 (16-24)	RPM	1060	795	636	530	398	318
						Fz	0.020	0.028	0.038	0.048	0.058	0.068	
						Feed (mm/min)	127	134	145	153	138	130	
		≤ 740 Bhn or ≤ 65 HRc	Profile 	≤ 0.1	≤ 1.5	24 (19-29)	RPM	1272	954	763	636	477	382
						Fz	0.028	0.041	0.053	0.066	0.078	0.090	
						Feed (mm/min)	214	235	243	252	223	206	
		≤ 740 Bhn or ≤ 65 HRc	HSM 	≤ 0.04	≤ 1.5	76 (61-91)	RPM	4029	3021	2417	2014	1511	1209
						Fz	0.033	0.048	0.064	0.079	0.094	0.109	
						Feed (mm/min)	798	870	928	955	852	790	

Bhn (Brinell) HRc (Rockwell C) HSM (High Speed Machining)

rpm = $(V_c \times 1000) / (D_1 \times 3.14)$

mm/min = $F_z \times 6 \times rpm$

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling ($.02 \times D_1$ maximum)

refer to the KYOCERA SGS Tool Wizard® for complete technical information (www.kyocera-sgstoold.com)



27
FRACTIONAL SERIES

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites

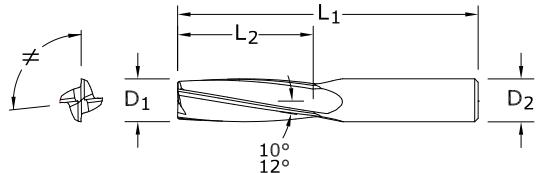

inch

CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	UNCOATED	Di-NAMITE® (Diamond)
1/4	1	2-1/2	1/4	72978	72979
3/8	1-1/8	2-1/2	3/8	72980	72981
1/2	1-1/2	3-1/2	1/2	72982	72983
3/4	1-3/8	4	3/4	72984	72985


TOLERANCES (inch)

D₁ = +0.0000/-0.0030

D₂ = h₆

 PLASTICS/COMPOSITES

For patent information visit www.ksptpatents.com



Series 27 Fractional	Ae x D ₁	Ap x D ₁	V _c (sfm)	Diameter (D ₁) (inch)				
				1/4	3/8	1/2	3/4	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	400 (320-480)	RPM	6112	4075	3056	2037
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	Profile 	≤ 0.5 ≤ 1.5	500 (400-600)	RPM	7640	5093	3820	2547
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	49	61	61	49
	HSM 	≤ 0.5 ≤ 2	825 (660-990)	RPM	12606	8404	6303	4202
				Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	187	232	232	185
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	320 (256-384)	RPM	4890	3260	2445	1630
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	31	39	39	31
	Profile 	≤ 0.5 ≤ 1.5	400 (320-480)	RPM	6112	4075	3056	2037
				Fz	0.0016	0.0030	0.0040	0.0048
				Feed (ipm)	39	49	49	39
	HSM 	≤ 0.5 ≤ 2	660 (528-792)	RPM	10085	6723	5042	3362
				Fz	0.0037	0.0069	0.0092	0.0110
				Feed (ipm)	149	186	186	148
N CARBON, GRAPHITE	Slot 	1 ≤ 1	480 (384-576)	RPM	7334	4890	3667	2445
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	59	74	73	59
	Profile 	≤ 0.5 ≤ 1.5	600 (480-720)	RPM	9168	6112	4584	3056
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	73	93	92	73
	HSM 	≤ 0.5 ≤ 2	990 (792-1188)	RPM	15127	10085	7564	5042
				Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	278	347	348	278
PLASTICS	Slot 	1 ≤ 1	800 (640-690)	RPM	12224	8149	6112	4075
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	98	124	122	98
	Profile 	≤ 0.5 ≤ 1.5	1000 (800-1200)	RPM	15280	10187	7640	5093
				Fz	0.0020	0.0038	0.0050	0.0060
				Feed (ipm)	122	155	153	122
	HSM 	≤ 0.5 ≤ 2	1650 (1320-1980)	RPM	25212	16808	12606	8404
				Fz	0.0046	0.0086	0.0115	0.0138
				Feed (ipm)	464	578	580	464
MACHINABLE CERAMICS MACHINABLE GLASS	Slot 	1 ≤ 1	40 (32-48)	RPM	611	407	306	204
				Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.0	2.4	2.4	2.0
	Profile 	≤ 0.5 ≤ 1.5	50 (40-60)	RPM	764	509	382	255
				Fz	0.0008	0.0015	0.0020	0.0024
				Feed (ipm)	2.4	3.1	3.1	2.4
	HSM 	≤ 0.5 ≤ 2	85 (68-102)	RPM	1299	866	649	433
				Fz	0.0018	0.0034	0.0046	0.0055
				Feed (ipm)	9.4	11.8	11.9	9.5

HSM (High Speed Machining)

rpm = V_c x 3.82 / D₁

ipm = Fz x 4 x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths


rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the KYOCERA SGS Tool Wizard® for complete technical information


(www.kyocera-sgstool.com)



27M

METRIC SERIES

- Slow helix design adds strength to the edge allowing ease for milling highly abrasive materials
- Two levels of chatter suppression: variable helix and indexing
- Excels at roughing (slotting, profiling) and finishing in a variety of plastics and composites

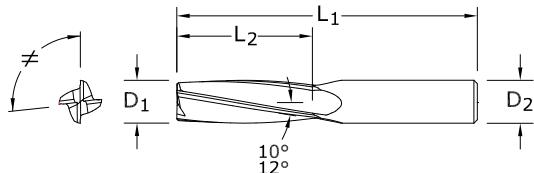

mm				EDP NO.	
CUTTING DIAMETER D₁	LENGTH OF CUT L₂	OVERALL LENGTH L₁	SHANK DIAMETER D₂	UNCOATED	Di-NAMITE® (Diamond)
6,0	25,0	63,0	6,0	83056	83057
8,0	25,0	63,0	8,0	83058	83059
10,0	28,0	63,0	10,0	83060	83061
12,0	38,0	89,0	12,0	83062	83063
16,0	48,0	115,0	16,0	83064	83065

TOLERANCES (mm)**D₁** = +0,000/-0,080**D₂** = h₆

For patent information visit
www.ksptpatents.com

Series 27M Metric	Vc (m/min)			Diameter (D ₁) (mm)					
	Ae x D ₁	Ap x D ₁		6	8	10	12	16	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1 ≤ 1	120 (96-164)	RPM	6361	4771	3817	3181	2385
				Fz	0.040	0.065	0.075	0.100	0.120
				Feed (mm/min)	1018	1240	1145	1272	1145
	Profile 	≤ 0.5 ≤ 1.5	150 (120-180)	RPM	7951	5963	4771	3976	2982
				Fz	0.040	0.065	0.075	0.100	0.120
				Feed (mm/min)	1272	1550	1431	1590	1431
	HSM 	≤ 0.5 ≤ 2	250 (200-300)	RPM	13252	9939	7951	6626	4970
				Fz	0.095	0.145	0.175	0.235	0.280
				Feed (mm/min)	5036	5765	5566	6228	5566
GFRP (FIBERGLASS)	Slot 	1 ≤ 1	100 (80-120)	RPM	5301	3976	3181	2650	1988
				Fz	0.040	0.065	0.075	0.100	0.120
				Feed (mm/min)	848	1034	954	1060	954
	Profile 	≤ 0.5 ≤ 1.5	120 (96-164)	RPM	6361	4771	3817	3181	2385
				Fz	0.040	0.065	0.075	0.100	0.120
				Feed (mm/min)	1018	1240	1145	1272	1145
	HSM 	≤ 0.5 ≤ 2	200 (160-240)	RPM	10602	7951	6361	5301	3976
				Fz	0.095	0.145	0.175	0.235	0.280
				Feed (mm/min)	4029	4612	4453	4983	4453
N CARBON, GRAPHITE	Slot 	1 ≤ 1	145 (116-174)	RPM	7686	5765	4612	3843	2882
				Fz	0.050	0.080	0.095	0.125	0.150
				Feed (mm/min)	1537	1845	1752	1922	1729
	Profile 	≤ 0.5 ≤ 1.5	185 (148-222)	RPM	9807	7355	5884	4903	3677
				Fz	0.050	0.080	0.095	0.125	0.150
				Feed (mm/min)	1961	2354	2236	2452	2206
	HSM 	≤ 0.5 ≤ 2	300 (240-360)	RPM	15903	11927	9542	7951	5963
				Fz	0.115	0.185	0.220	0.290	0.350
				Feed (mm/min)	7315	8826	8397	9223	8349
PLASTICS	Slot 	1 ≤ 1	245 (196-294)	RPM	12987	9740	7792	6494	4870
				Fz	0.050	0.080	0.095	0.125	0.150
				Feed (mm/min)	2597	3117	2961	3247	2922
	Profile 	≤ 0.5 ≤ 1.5	305 (244-366)	RPM	16168	12126	9701	8084	6063
				Fz	0.050	0.080	0.095	0.125	0.150
				Feed (mm/min)	3234	3880	3686	4042	3638
	HSM 	≤ 0.5 ≤ 2	505 (404-606)	RPM	26769	20077	16062	13385	10038
				Fz	0.115	0.185	0.220	0.290	0.350
				Feed (mm/min)	12314	14857	14134	15526	14054
MACHINABLE CERAMICS MACHINABLE GLASS	Slot 	1 ≤ 1	10 (8-12)	RPM	530	398	318	265	199
				Fz	0.020	0.035	0.045	0.050	0.060
				Feed (mm/min)	42	56	57	53	48
	Profile 	≤ 0.5 ≤ 1.5	15 (12-18)	RPM	795	596	477	398	298
				Fz	0.020	0.035	0.045	0.050	0.060
				Feed (mm/min)	64	83	86	80	72
	HSM 	≤ 0.5 ≤ 2	25 (20-30)	RPM	1325	994	795	663	497
				Fz	0.045	0.075	0.085	0.115	0.140
				Feed (mm/min)	239	298	270	305	278

HSM (High Speed Machining)

rpm = Vc x 3.82 / D₁

mm/min = Fz x 4 x rpm

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the KYOCERA SGS Tool Wizard® for complete technical information

(www.kyocera-sgstool.com)