







**GET CONNECTED  
WITH LNA SOLUTIONS**

## TABLE OF CONTENTS

- 4 Marketing & Applications
- 6 Introduction to BoxBolt®
- 10 BoxBolt® Applications
- 12 Introduction to BeamClamp®
- 24 Specifying the Correct BeamClamp®
- 31 BeamClamp® Applications
- 34 Introduction to Pre-Engineered Solutions



## WE MAKE ANY STEEL CONNECTION

Based in Buffalo, New York, LNA Solutions is North America's leading steelwork connection company. We manufacture, engineer and specify steel-to-steel connection solutions for all structural steel applications. We are more than a components supplier, we provide technical design solutions for any steel connection challenge. Our sales team and qualified engineers offer first class, personalized service and ensure you receive customized designs to meet your needs. Our engineering services are provided at no additional cost to you. Every job is designed and quality reviewed to guarantee full compliance to your specifications. Before shipping, every order is double checked to certify that your project order is complete and exceeds expectation when it arrives on-site.

## QUALITY SERVICE

We are more than a distributor. We own our supply chain from foundry to warehouse. We manage the entire manufacturing process to consistently ensure the quality of our products. We systematically monitor our inventory to confirm product availability for each and every project. We control our pricing to provide great value for your investment. And, we are able to customize solutions to best suit your application and promote efficiency.

## SOLUTIONS

Our BeamClamp® range is extensive, and we continue to add new products through development and engineering to provide solutions that meet our customer's growing needs. If you have a question about any steel connection challenge or an application project, call us, and we'll deliver the solution.



## MARKETS & APPLICATIONS

BEAMCLAMP and BOXBOLT products are engineered for joining steel together in all industries and in every market. The examples below are some of our applications where steel-to-steel connections are most common.



### INFRASTRUCTURE

BeamClamp attaches secondary steelwork to the existing infrastructure in a variety of applications within the civil sector including rail, road, water treatment facilities and in power generation plants. In bridge applications, BeamClamp is integrated to strengthen steelwork, walkway platforms and for suspension systems to the bridge structure. Water treatment plants depend on BeamClamp to secure guardrail to protect filtration tanks, secure walkways and provide corrosion resistant connections in these harsh environments.



### STEEL CONSTRUCTION

The steel construction industry depend on our products when connecting structural steel in the field. BeamClamp and BoxBolt products are used extensively for secondary steel or temporary applications when damage to the existing structure is prohibited and surface integrity must be maintained. Our steel connection systems are also used when flexibility of installation is important; where drilling or welding are not acceptable, when access to power sources are limited, or when heavy machinery is not practical. Typical applications include the connection of runway beams for walkways, connecting cladding, securing steel flooring, and for strengthening open steel joist frames.



### SOLAR & WIND ENERGY

BeamClamp and BoxBolt products are the trusted steel connector solution in the solar energy sector. Our clamps are often specified for securing solar panels to supporting frames and for affixing brackets to existing structures that support the solar panels. Within the wind energy market a variety of our products are utilized on powerful wind turbines. Typical applications would integrate our Floorfix and Gratefix clamping systems for securing steel flooring and grating on the inside of the energy platforms.





## BUILDING SERVICES

A wide range of BeamClamp products are suitable for connecting steel members to steel structures within the building services industry. BeamClamp solutions do not require drilling or welding - they protect the structural integrity and design by connecting directly to the building structure with basic hand tools. Applications include the connection of mechanical services (pipe work), Heating Ventilation, Air-Conditioning systems, electrical services and fire protection services.



## FACADES AND CURTAIN WALLING

BoxBolt and BeamClamp are high performance solutions used in the facade and curtain walling industries. BoxBolt provides the connection of curtain walling brackets to hollow structural steel sections. BeamClamp offers a strong clamping solution for securing curtain walling or cladding supports to the existing structure without the need for drilling or welding.



## OIL, GAS, & PROCESSING PLANTS

BeamClamp products are used in the construction and expansion of offshore oil rigs, gas drilling platforms, and their helideck pads. The majority of these applications connect new steel to existing structures. No drilling or welding is required to fasten BeamClamp on site, as most hot work is forbidden in these offshore applications. The full range of BeamClamp products are also used in manufacturing facilities and processing plants for pipe supports, monorail systems, conveyor rails, flooring sections, and for blast walls.



## MATERIAL HANDLING & CONVEYORS

BeamClamp products are extensively used for material handling applications due to their flexibility and their unique capacity to be removed and reinstalled without damaging existing steel. BeamClamp can be affixed for temporary installations such as lifting points or utilized in more permanent solutions connecting conveyor supports. BeamClamp is also used in crane applications. Common uses include the installation of runway beams for connecting cranes to existing steel and free-standing frames for gantry cranes.



## STADIUMS & AMPHITHEATERS

Many of our steel connection products are used within steel structured stadiums and amphitheaters. BeamClamp is used for attaching secondary brackets to the existing structural steel for floodlights, display screens, and general building service equipment. BoxBolt steel connectors are also used for connecting guard railing, securing steel flooring and connecting of arena seating to the supporting structure.



## INTRODUCTION TO BOXBOLT®

BoxBolt® is a high-strength clamping solution for blind connection applications and Hollow Structural Steel (HSS) members. The clamps provide solutions for joining steel without the need for on-site drilling or welding, giving much more flexibility than traditional methods. The system provides a guaranteed connection every time without the need for on-site verification, providing the installation guidelines are correctly followed.

BoxBolt is a fully tested and approved blind connection solution for connecting to hollow section steel or where access is restricted to one side only. The BoxBolt is suitable for use with rectangular, square and even circular hollow sections. The features a hexagon head design to aid installation with a standard wrench. It allows it to be installed with our unique BoxSok™ installation tool for when installation time needs to be kept to an absolute minimum.


The BoxBolt is available in three finishes; Zinc Plated for the less aggressive environments, Hot Dip Galvanized for the more aggressive environments, and Stainless Steel for the most demanding of applications. These finishes combined with three lengths of BoxBolt make it extremely flexible to suit its environment and application. The BoxBolt is approved for use by Lloyds Register (LR) type approval and the Deutsches Institut für Bautechnik (DIBt) to give the specifier and user total confidence.

### FEATURES

- Hot-Dip Galvanized Steel
- Installation requires only basic hand tools
- 5 to 1 Factor of Safety
- High tensile and shear values
- ICC Seismic Approved

### BENEFITS

- Long lasting, corrosion-resistant finish
- Ideal for steel applications where access is limited to one side only
- Eliminates need for drilling/tapping, welding, strapping, through-bolting
- Approved for slip-critical connections
- Suitable for rectangular, circular or square tube

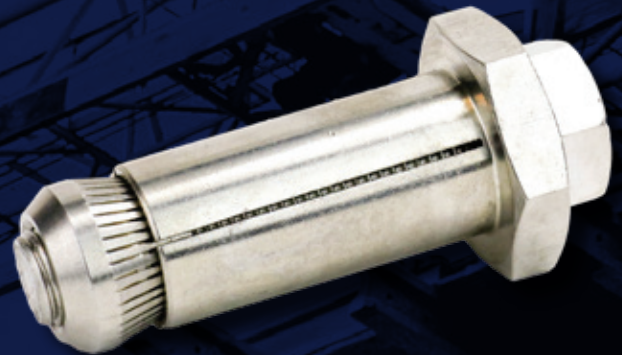

# BOXBOLT®



# BOXBOLT® SIZES & SPECS

\* BQ1Z06 is tested at an external test house but is not approved by LR type or DIBt.


Part Number & Description				Dimensional Information							Load Information		
Finish	Product Code	Bolt Dia	Description	Setscrew Length	Clamping Range (X)		Across Flats of Shoulder	"Shoulder Thick-ness	Sleeve Dia	Hole Size Dia	Available Strength (lbs)		Torque (ft lb)
					Min	Max					Tensile	Shear	
Zinc	BQ1Z06*	1/4"	1/4" BoxBolt Size 1	1-3/4"	1/8"	7/8"	11/16"	3/16"	3/8"	7/16"	2,872	4,793	14
	BQ1Z08	5/16"	5/16" BoxBolt Size 1	2"	3/16"	1"	7/8"	1/4"	1/2"	9/16"	5,071	5,917	18
	BQ2Z08	5/16"	5/16" BoxBolt Size 2	2-3/4"	11/16"	1-13/16"	7/8"	1/4"	1/2"	9/16"	5,071	5,917	18
	BQ3Z08	5/16"	5/16" BoxBolt Size 3	3-9/16"	1-3/16"	2-5/8"	7/8"	1/4"	1/2"	9/16"	5,071	5,917	18
	BQ1Z10	3/8"	3/8" BoxBolt Size 1	2"	3/16"	7/8"	15/16"	1/4"	11/16"	3/4"	9,718	10,985	33
	BQ2Z10	3/8"	3/8" BoxBolt Size 2	2-3/4"	11/16"	1-11/16"	15/16"	1/4"	11/16"	3/4"	9,718	10,985	33
	BQ3Z10	3/8"	3/8" BoxBolt Size 3	3-9/16"	1-3/8"	2-1/2"	15/16"	1/4"	11/16"	3/4"	9,718	10,985	33
	BQ1Z12	1/2"	1/2" BoxBolt Size 1	2-3/16"	3/16"	1"	1"	5/16"	3/4"	13/16"	13,015	12,676	59
	BQ2Z12	1/2"	1/2" BoxBolt Size 2	3-1/8"	3/4"	2'	1"	5/16"	3/4"	13/16"	13,015	12,676	59
	BQ3Z12	1/2"	1/2" BoxBolt Size 3	4"	1-9/16"	2-3/4"	1"	5/16"	3/4"	13/16"	13,015	12,676	59
	BQ1Z16	5/8"	5/8" BoxBolt Size 1	3"	3/16"	1-3/8"	1-7/16"	3/8"	1"	1-1/16"	26,199	29,578	140
	BQ2Z16	5/8"	5/8" BoxBolt Size 2	4"	1-3/16"	2-3/8"	1-7/16"	3/8"	1"	1-1/16"	26,199	29,578	140
	BQ3Z16	5/8"	5/8" BoxBolt Size 3	4-3/4"	2-3/16"	3-1/8"	1-7/16"	3/8"	1"	1-1/16"	26,199	29,578	140
	BQ1Z20	3/4"	3/4" BoxBolt Size 1	4"	5/16"	1-5/8"	1-13/16"	7/16"	1-1/4"	1-5/16"	36,932	33,804	221
	BQ2Z20	3/4"	3/4" BoxBolt Size 2	4-3/4"	1-3/8"	2-13/16"	1-13/16"	7/16"	1-1/4"	1-5/16"	36,932	33,804	221
	BQ3Z20	3/4"	3/4" BoxBolt Size 3	6"	2-9/16"	4"	1-13/16"	7/16"	1-1/4"	1-5/16"	36,932	33,804	221
HDG	BQ1G08	5/16"	5/16" BoxBolt Size 1	2"	3/16"	1"	7/8"	1/4"	1/2"	9/16"	5,071	5,917	18
	BQ2G08	5/16"	5/16" BoxBolt Size 2	2-3/4"	11/16"	1-13/16"	7/8"	1/4"	1/2"	9/16"	5,071	5,917	18
	BQ3G08	5/16"	5/16" BoxBolt Size 3	3-9/16"	1-3/16"	2-5/8"	7/8"	1/4"	1/2"	9/16"	5,071	5,917	18
	BQ1G10	3/8"	3/8" BoxBolt Size 1	2"	3/16"	7/8"	15/16"	1/4"	11/16"	3/4"	9,718	10,985	33
	BQ2G10	3/8"	3/8" BoxBolt Size 2	2-3/4"	11/16"	1-11/16"	15/16"	1/4"	11/16"	3/4"	9,718	10,985	33
	BQ3G10	3/8"	3/8" BoxBolt Size 3	3-9/16"	1-3/8"	2-1/2"	15/16"	1/4"	11/16"	3/4"	9,718	10,985	33
	BQ1G12	1/2"	1/2" BoxBolt Size 1	2-3/16"	3/16"	1"	1"	5/16"	3/4"	13/16"	13,015	12,676	59
	BQ2G12	1/2"	1/2" BoxBolt Size 2	3-1/8"	3/4"	2'	1"	5/16"	3/4"	13/16"	13,015	12,676	59
	BQ3G12	1/2"	1/2" BoxBolt Size 3	4"	1-9/16"	2-3/4"	1"	5/16"	3/4"	13/16"	13,015	12,676	59
	BQ1G16	5/8"	5/8" BoxBolt Size 1	3"	3/16"	1-3/8"	1-7/16"	3/8"	1"	1-1/16"	26,199	29,578	140
	BQ2G16	5/8"	5/8" BoxBolt Size 2	4"	1-3/16"	2-3/8"	1-7/16"	3/8"	1"	1-1/16"	26,199	29,578	140
	BQ3G16	5/8"	5/8" BoxBolt Size 3	4-3/4"	2-3/16"	3-1/8"	1-7/16"	3/8"	1"	1-1/16"	26,199	29,578	140
	BQ1G20	3/4"	3/4" BoxBolt Size 1	4"	5/16"	1-5/8"	1-13/16"	7/16"	1-1/4"	1-5/16"	36,932	33,804	221
	BQ2G20	3/4"	3/4" BoxBolt Size 2	4-3/4"	1-3/8"	2-13/16"	1-13/16"	7/16"	1-1/4"	1-5/16"	36,932	33,804	221
	BQ3G20	3/4"	3/4" BoxBolt Size 3	6"	2-9/16"	4"	1-13/16"	7/16"	1-1/4"	1-5/16"	36,932	33,804	221
	SS	BQ1S08	5/16"	5/16" BoxBolt Size 1	2"	3/16"	1"	7/8"	1/4"	1/2"	9/16"	4,314	6,787
BQ2S08		5/16"	5/16" BoxBolt Size 2	2-3/4"	11/16"	1-13/16"	7/8"	1/4"	1/2"	9/16"	4,314	6,787	18
BQ3S08		5/16"	5/16" BoxBolt Size 3	3-9/16"	1-3/16"	2-5/8"	7/8"	1/4"	1/2"	9/16"	4,314	6,787	18
BQ1S10		3/8"	3/8" BoxBolt Size 1	2"	3/16"	7/8"	15/16"	1/4"	11/16"	3/4"	6,839	12,222	33
BQ2S10		3/8"	3/8" BoxBolt Size 2	2-3/4"	11/16"	1-11/16"	15/16"	1/4"	11/16"	3/4"	6,839	12,222	33
BQ3S10		3/8"	3/8" BoxBolt Size 3	3-9/16"	1-3/8"	2-1/2"	15/16"	1/4"	11/16"	3/4"	6,839	12,222	33
BQ1S12		1/2"	1/2" BoxBolt Size 1	2-3/16"	3/16"	1"	1"	5/16"	3/4"	13/16"	9,945	15,543	59
BQ2S12		1/2"	1/2" BoxBolt Size 2	3-1/8"	3/4"	2'	1"	5/16"	3/4"	13/16"	9,945	15,543	59
BQ3S12		1/2"	1/2" BoxBolt Size 3	4"	1-9/16"	2-3/4"	1"	5/16"	3/4"	13/16"	9,945	15,543	59
BQ1S16		5/8"	5/8" BoxBolt Size 1	3"	3/16"	1-3/8"	1-7/16"	3/8"	1"	1-1/16"	18,523	28,191	140
BQ2S16		5/8"	5/8" BoxBolt Size 2	4"	1-3/16"	2-3/8"	1-7/16"	3/8"	1"	1-1/16"	18,523	28,191	140
BQ3S16		5/8"	5/8" BoxBolt Size 3	4-3/4"	2-3/16"	3-1/8"	1-7/16"	3/8"	1"	1-1/16"	18,523	28,191	140
BQ1S20		3/4"	3/4" BoxBolt Size 1	4"	5/16"	1-5/8"	1-13/16"	7/16"	1-1/4"	1-5/16"	28,909	47,203	221
BQ2S20		3/4"	3/4" BoxBolt Size 2	4-3/4"	1-3/8"	2-13/16"	1-13/16"	7/16"	1-1/4"	1-5/16"	28,909	47,203	221
BQ3S20		3/4"	3/4" BoxBolt Size 3	6"	2-9/16"	4"	1-13/16"	7/16"	1-1/4"	1-5/16"	28,909	47,203	221



## ICC APPROVED BOXBOLT (TYPE C)

The Type C BoxBolt is engineered for Hollow Structural Section (HSS) to Structural Steel connections with static dominant lateral loads in slip-critical conditions, and where static dominant loads are combined and assigned with any Seismic Design Category (A-F).

The Type C BoxBolt has a slightly modified design in order to resist seismic loads and are assembled with four components: a core bolt, body, shoulder, and cone. Type C BoxBolt is available in Hot Dip Galvanized finish.

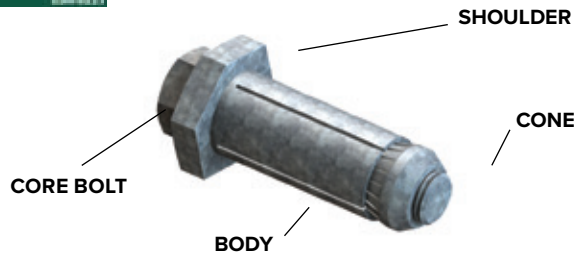

### FEATURES & BENEFITS

- Mild steel to BS EN 10083 Grade 1.1151
- Hot Dip Galvanized to BS EN ISO 1461
- ICC ESR-3217
- Acceptance Criteria - AC437
- ICC approved

BoxBolt® TypeC Blind Fastener Dimensional and Install Information

Product Code	Part Number & Description		Dimensional Information							Install Info.	
	BoxBolt® (Core Bolt Diameter)	Description	Core Bolt Length	Clamping Range (X)		Across Flats of Shoulder	Collar Thickness	Dim A	Dim B	Dim C Drill Data	Torque (ft lb)
				min	max						
BQ1GAL12C	5/16" (12mm)	1/2" BoxBolt Size 1	2-3 16" (55mm)	1/2"	5/16	1" (26mm)	5/16" (8.4mm)	2-1/16" (52mm)	1-1/8"	13/16"	60
BQ2GAL12C	5/16" (12mm)	1/2" BoxBolt Size 2	3-1/8" (80mm)	3/4"	1-7/8"	1" (26mm)	5/16" (8.4mm)	2-1/16" (52mm)	1-1/8"	13/16"	60
BQ3GAL12C	5/16" (12mm)	1/2" BoxBolt Size 3	4" (100mm)	1-1/2"	2-11/18"	1" (26mm)	5/16" (8.4mm)	2-1/16" (52mm)	1-1/8"	13/16"	60
BQ1GAL16C	3/8" (16mm)	5/8" BoxBolt Size 1	3" (75mm)	5/8"	1-3/8"	1-7/16" (36mm)	3/8" (9.4mm)	2-11/16" (68mm)	1-3/8"	1-1/16"	140
BQ2GAL16C	3/8" (16mm)	5/8" BoxBolt Size 2	4" (91mm)	1"	2-5/16"	1-7/16" (36mm)	3/8" (9.4mm)	2-11/16" (68mm)	1-3/8"	1-1/16"	140
BQ3GAL16C	3/8" (16mm)	5/8" BoxBolt Size 3	4-3/4" (100mm)	2"	3-1/16"	1-7/16" (36mm)	3/8" (9.4mm)	2-11/16" (68mm)	1-3/8"	1-1/16"	140
BQ1GAL20C	1/2" (20mm)	3/4" BoxBolt Size 1	4" (100mm)	3/4"	1-13/16"	1-13/16" (46mm)	7/16" (11.4mm)	3-7/16" (87mm)	1-3/4"	1-3/8"	220
BQ2GAL20C	1/2" (20mm)	3/4" BoxBolt Size 2	5-1/8" (130mm)	1-5/16"	3"	1-13/16" (46mm)	7/16" (11.4mm)	3-7/16" (87mm)	1-3/4"	1-3/8"	220
BQ3GAL20C	1/2" (20mm)	3/4" BoxBolt Size 3	6" (150mm)	2-9/16"	4"	1-13/16" (46mm)	7/16" (11.4mm)	3-7/16" (87mm)	1-3/4"	1-3/8"	220

BoxBolt® TypeC Blind Fastener Strength Information

Part Code	LRFD Strengths (lbf)						ASD Strengths (lbf)					
	Static Dominant Loads			Seismic SDC D, E, or F			Static Dominant Loads			Seismic SDC D, E, or F		
	Shear-Bearing	Shear-Slip Resistance	Tension	Shear-Bearing	Shear-Slip Resistance	Tension	Shear-Bearing	Shear-Slip Resistance	Tension	Shear-Bearing	Shear-Slip Resistance	Tension
BQ1GAL12C	7,680	150	5,250	6,900	150	4,730	4,800	90	3,280	4,320	100	2,960
BQ2GAL12C	7,680	150	5,250	6,900	150	4,730	4,800	90	3,280	4,320	100	2,960
BQ3GAL12C	7,680	150	5,250	6,900	150	4,730	4,800	90	3,280	4,320	100	2,960
BQ1GAL16C	12,200	150	13,100	11,000	170	11,400	7,650	110	8,230	6,870	110	7,120
BQ2GAL16C	12,200	170	13,100	11,000	170	11,400	7,650	110	8,230	6,870	110	7,120
BQ3GAL16C	12,200	170	13,100	11,000	170	11,400	7,650	110	8,230	6,870	110	7,120
BQ1GAL20C	17,600	170	15,000	11,800	790	13,500	11,000	490	9,400	7,380	500	8,470
BQ2GAL20C	17,600	790	15,000	11,800	790	13,500	11,000	490	9,400	7,380	500	8,470
BQ3GAL20C	17,600	790	15,000	11,800	790	13,500	11,000	490	9,400	7,380	500	8,470



## BOXSOK™ RAPID ASSEMBLY TOOL

The BoxSok™ Installation Tool is a rapid, unique assembly tool for the BoxBolt. This specially designed socket holds the hexagon shoulder on the body to stop rotating while allowing the inner socket to tighten up the core bolt. The core bolt draws the cone up inside the slotted body of the sleeve and expands the individual fins inside the connection.

The BoxSok™ eliminates the need for two tools to install the BoxBolt; this considerably speeds up the installation process and also reduces the risk of trapping hands between two tools. The BoxSok™ device is available to suit all BoxBolt diameters.





Size	Overall Length	Body Length	Body Diameter	Drive Size
M06	4-5/16"	3-3/8"	1-3/16"	1/4"
M08	4-7/16"	3-3/8"	1-5/16"	3/8"
M10	4-7/16"	3-3/8"	1-1/2"	3/8"
M12	4-1/2"	3-7/16"	1-5/8"	3/8"
M16	4-1/2"	3-7/16"	1-15/16"	1/2"
M20	4-9/16"	3-1/2"	2-5/16"	1/2"



## BOXSOK™ BOXBOLT INSTALLATION CONSIDERATIONS


BoxBolts must be installed in pre-drilled holes in the sections to be connected. The holes must have the correct diameter, spacing, and edge distance according to the chart below. The pre-drilled holes must be standard diameter holes conforming to AISI 360, where the bolt hole diameter is no greater than the Body diameter plus 1/16th of an inch. Burrs in the holes must be removed prior to installation.

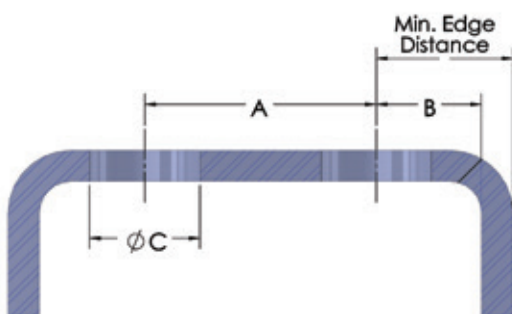


Hole Dimensions & Positioning			
Box Bolt Size	Dim A	Dim B	Dim C
1/4"	1-3/16"	7/16"	7/16"
5/16"	1-3/8"	1/2"	9/16"
3/8"	1-9/16"	9/16"	3/4"
1/2"	2"	13/16"	13/16"
5/8"	2-3/16"	13/16"	1-1/16"
3/4"	2-3/4"	1"	1-5/16"

Minimum edge distance = Dim B + the thickness of hollow section

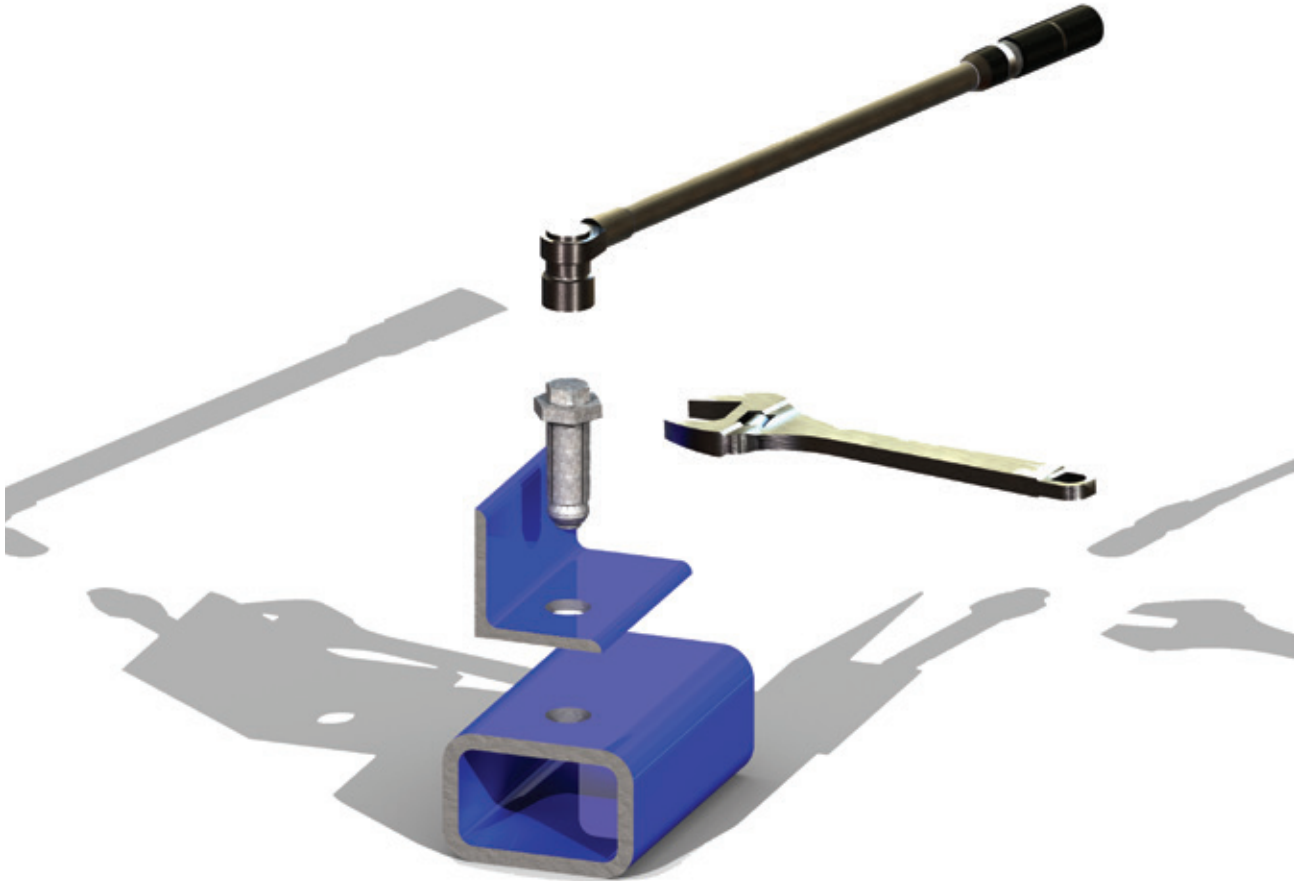


**BOXBOLT® INSTALLATION INSTRUCTIONS**

**STEP 1:** Align the holes in the bracket to be secured with the pre-drilled hole in the structural tube. Insert the BoxBolt through both pieces of steel until the underside of the shoulder is flush with the outside of the steel.

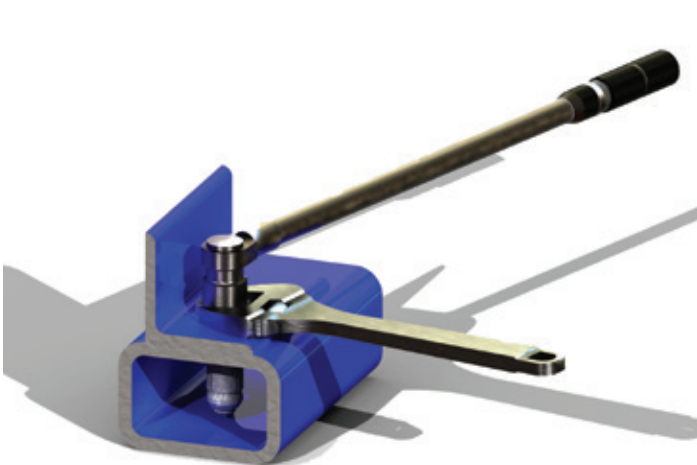

**STEP 2:** Hold the hexagon shoulder of the BoxBolt with an open ended wrench. Use an impact wrench or ratchet to tighten the core bolt.

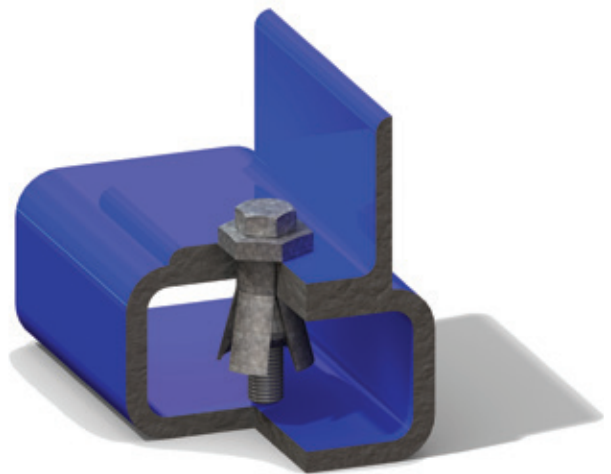

**STEP 3:** Remove the open ended wrench and check to ensure that the core bolt is tightened to the recommended torque.

## BOXBOLT® APPLICATION EXAMPLES



1




2




3



4

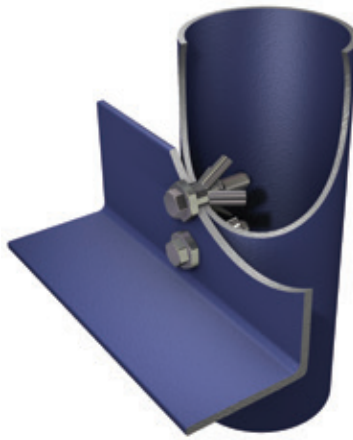

5

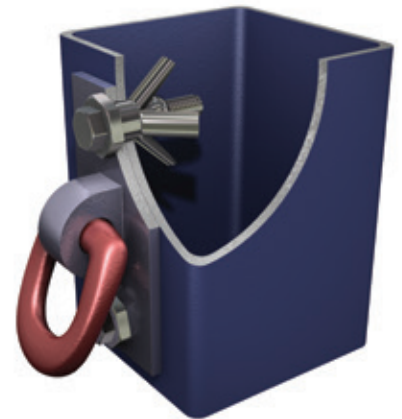


6



7



8

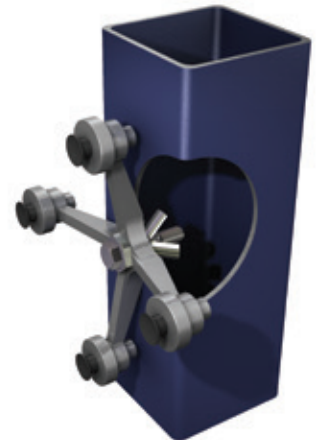

9



## INTRODUCTION TO BEAMCLAMP®

BeamClamp is an extensive range of clamping products designed for making steel to steel connections without the need for drilling or welding. The clamping system provides specifiers the peace of mind that once the steel connection is made it has a guaranteed safe working load. BeamClamp also provides flexibility for the installer as minor adjustments to accommodate common imperfections in steel construction are easily implemented with simple hand tools. This reduces the overall cost in areas where drilling or welding are not permitted or access to power sources are restricted.

### FEATURES

- Third party approvals (Lloyds & DIBt)
- Guaranteed 5 to 1 Factor of Safety
- No special tools or skilled labor required
- Hot Dip Galvanized as standard
- Easy to adjust on-site
- No weakening of existing steel
- No damage to protective coating of the steel

### BENEFITS

- Peace of mind when specifying or installing
- Provides safe connections
- Savings in installation time and cost on-site
- Excellent long term corrosion resistance for external applications
- Provides flexibility to allow for site tolerances
- Structural integrity of steel remains unchanged
- Integrity of existing steel coating remains unchanged

### TECHNICAL SUPPORT

We offer a full engineering service to support our products which includes recommendation of an individual product through to a full design capability for a large project. Our technical team has 2D/3D Computer Aided Design (CAD) capabilities and can supply design engineers with specific application solutions. Our Technical Sales Engineers perform regular Continuous Professional Development (CPD) seminars to educate the design engineers on how to specify our clamping products.

### APPROVAL

All the loads stated in our catalog have been derived from physical testing and where you see an approval symbol, they have also been approved by that particular body. The majority of the range is Lloyds Register Type Approved and the Types BA, BB, BF1, BG1, BH1 have the additional approval of the Deutsches Institut für Bautechnik (DIBt)



**BeamClamp®**




**BEAMCLAMP®**

## FLAT FLANGES (TYPE BA + BB)

The types BA and BB are commonly used in pairs to clamp two steel sections together. The type BA has a recessed top to grip the head of a grade 5 setscrew or bolt. This allows a nut and washer to be tightened down on to the flat top of the BB using one tool only. Both clamps are available with three tail lengths, (dim E). This should be as near to the thickness of steel it is clamping on or slightly less if an exact match is not possible.

Packing pieces BF1, BG1 and BH1 can be used in combination with the tail length to achieve a match to the steel flange. Please see page 20 for these items. BA and BB types are suitable for parallel flanges and flanges up to 8 degrees taper. They can also be used on their own if one piece of the steelwork has been pre-drilled. To simplify the selection of tail lengths and packing pieces, please see the tables on pages 20 and 21.

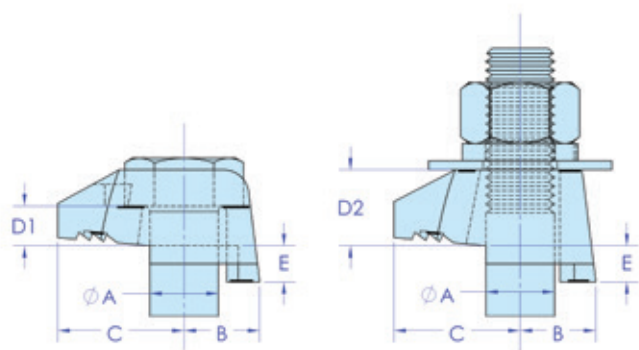

### FEATURES & BENEFITS

- Hot Dip Galvanized to BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563
- 5 to 1 Factor of Safety
- Lloyd's Register approved
- DIBt approved

The Safe Working Loads are based on assemblies tested in typical conditions

Tail Length	Product Code	Product Code	A Bolt Dia	B	C	D1	D2	E	Width	Torque (ft lb)	Tensile SWL (lbs) (per bolt)	Friction SWL (lbs) (per 4 bolts)
Short	BA1G10	BB1G10	3/8"	1/2"	13/16"	1/4"	7/16"	1/8"	1"	14	562	X
	BA1G12	BB1G12	1/2"	5/8"	1"	5/16"	1/2"	3/16"	1-1/8"	51	1,293	292
	BA1G16	BB1G16	5/8"	11/16"	1-1/4"	3/8"	11/16"	1/4"	1-7/16"	109	2,219	877
	BA1G20	BB1G20	3/4"	13/16"	1-3/8"	7/16"	13/16"	5/16"	1-3/4"	210	3,703	2,473
	BA1G24	BB1G24	1"	1"	1-15/16"	1/2"	1"	3/8"	2-1/8"	355	4,743	4,047
Medium	BA2G08	BB2G08	5/16"	3/8"	5/8"	3/16"	3/8"	1/8"	13/16"	4	281	X
	BA2G10	BB2G10	3/8"	1/2"	13/16"	1/4"	7/16"	3/16"	1"	14	562	X
	BA2G12	BB2G12	1/2"	5/8"	1"	5/16"	1/2"	1/4"	1-1/8"	51	1,293	292
	BA2G16	BB2G16	5/8"	11/16"	1-1/4"	3/8"	11/16"	5/16"	1-7/16"	109	2,219	877
	BA2G20	BB2G20	3/4"	13/16"	1-3/8"	7/16"	13/16"	3/8"	1-3/4"	210	3,703	2,473
	BA2G24	BB2G24	1"	1"	1-15/16"	1/2"	1"	1/2"	2-1/8"	355	4,743	4,047
Long	BA3G10	BB3G10	3/8"	1/2"	13/16"	1/4"	7/16"	5/16"	1"	14	562	X
	BA3G12	BB3G12	1/2"	5/8"	1"	5/16"	1/2"	3/8"	1-1/8"	51	1,293	292
	BA3G16	BB3G16	5/8"	11/16"	1-1/4"	3/8"	11/16"	7/16"	1-7/16"	109	2,219	877
	BA3G20	BB3G20	3/4"	13/16"	1-3/8"	7/16"	13/16"	1/2"	1-3/4"	210	3,703	2,473
	BA3G24	BB3G24	1"	1"	1-15/16"	1/2"	1"	5/8"	2-1/8"	355	4,743	4,047

Do Not Exceed the Safe Working Load (SWL) Specified



## SLOPED FLANGES (TYPE BT + BW)

The types BT and BW are specifically designed with a 10 degrees sloping nose. This sloping nose makes them ideal for clamping on to tapered steel such as S beams or crane rail sections. The type BT has a recessed top to captivate the head of a grade 5 setscrew or bolt. The type BW has a flat top to allow a nut and washer to be tightened down on it.


Both clamps are available with two tail lengths, (Dim E). This should be as near to the thickness of steel it is clamping to or slightly less if an exact match is not possible. Packing pieces BF1, BG1 and BH1 can be used in combination with the tail length to achieve a match to the steel flange. Please see page 20 for these items. The types BT and BW can also be used on their own if one piece of the steel has been pre-drilled.

To simplify the selection of tail lengths and packing pieces, please see tables on pages 20 and 21.



### FEATURES & BENEFITS


- Hot Dip Galvanized to BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563
- 5 to 1 Factor of Safety
- 10 degree nose

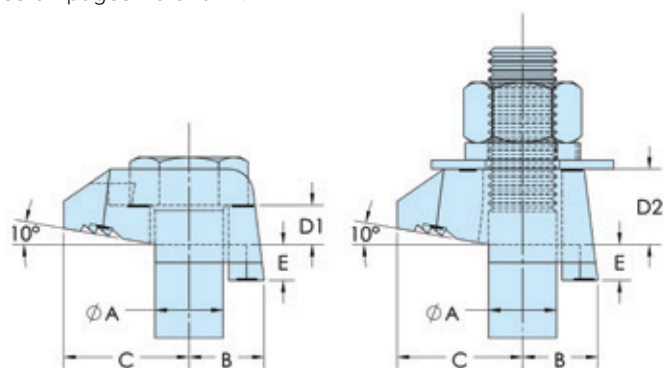

The Safe Working Loads are based on assemblies tested in typical conditions

Tail Length	Product Code	Product Code	A Bolt Dia	B	C	D1	D2	E	Width	Torque (ft lb)	Tensile SWL (lbs) (per bolt)	Friction SWL (lbs) (per 4 bolts)
Short	BT1G12	BW1G12	1/2"	5/8"	1"	5/16"	1/2"	3/16"	1-1/8"	51	1,293	292
	BT1G16	BW1G16	5/8"	11/16"	1-1/4"	3/8"	11/16"	1/4"	1-7/16"	109	2,219	877
	BT1G20	BW1G20	3/4"	13/16"	1-3/8"	7/16"	13/16"	1/4"	1-3/4"	210	3,703	2,473
Medium	BT2G12	BW2G12	1/2"	5/8"	1"	5/16"	1/2"	1/4"	1-1/8"	51	1,293	292
	BT2G16	BW2G16	5/8"	11/16"	1-1/4"	3/8"	11/16"	5/16"	1-7/16"	109	2,219	877
	BT2G20	BW2G20	3/4"	13/16"	1-3/8"	7/16"	13/16"	3/8"	1-3/4"	210	3,703	2,473


Do Not Exceed the Safe Working Load (SWL) Specified

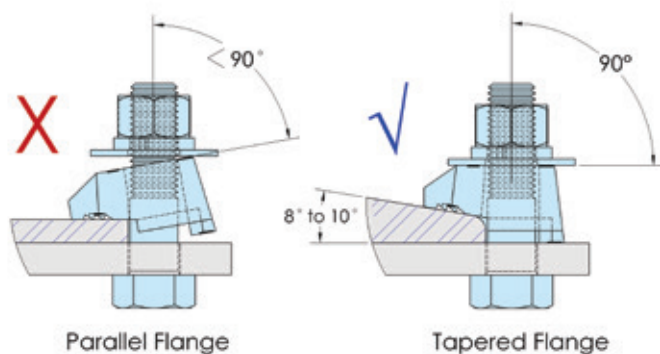

## FLAT AND SLOPED (TYPE BK)

The BK1 is a self adjusting clamp that consists of two parts. The main body provides a recess to allow a hemispherical washer to be seated. This allows the body to adjust between a specified clamping range and as the washer rotates it provides a flat surface for a nut. This mechanism makes the product suitable for clamping to tapered steel of up to 15 degrees.

It is also extremely useful for projects where the thickness of steel may vary. The 5/16", 3/8" and 1/2" versions feature a tab at the back edge that can be located in the open ends of strut products, both aiding installation and preventing rotation once installed. Should the maximum clamping range be exceeded, our BF2 and BG2 packers can be used to increase it. Please see page 20 for details.

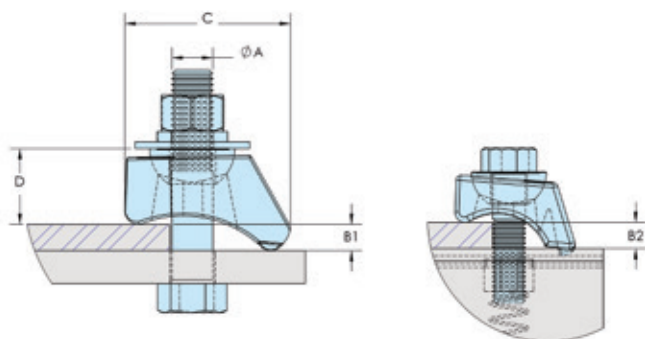



### FEATURES & BENEFITS

- Hot Dip Galvanized BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563
- 5 to 1 Factor of Safety
- Lloyds Register approved
- Self adjusting body style

The Safe Working Loads are based on assemblies tested in typical conditions

Product Code	A Bolt Dia	B1	B2	C	D	Width	Torque (ft lb)	Tensile SWL (lbs) (per bolt)	Friction SWL (lbs) (per 4 bolts)
BK1G08	5/16"	1/8 to 1/2"	1/8 to 3/8"	1-5/8"	11/16"	1-5/8"	4	281	X
BK1G10	3/8"	1/8 to 5/8"	1/8 to 1/2"	1-7/8"	3/4"	1-5/8"	14	562	X
BK1G12	1/2"	1/8 to 11/16"	1/8 to 5/8"	1-7/8"	7/8"	1-5/8"	51	1,619	456
BK1G16	5/8"	1/8 to 15/16"	N/A	2-1/2"	1-5/16"	2"	109	2,713	962
BK1G20	3/4"	1/8 to 1-3/16"	N/A	2-7/8"	1-1/4"	2-1/4"	210	5,836	1,522


Do Not Exceed the Safe Working Load (SWL) Specified

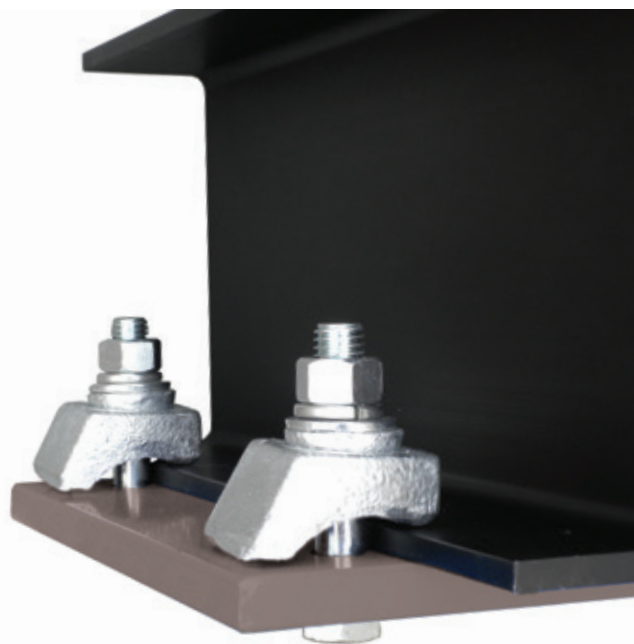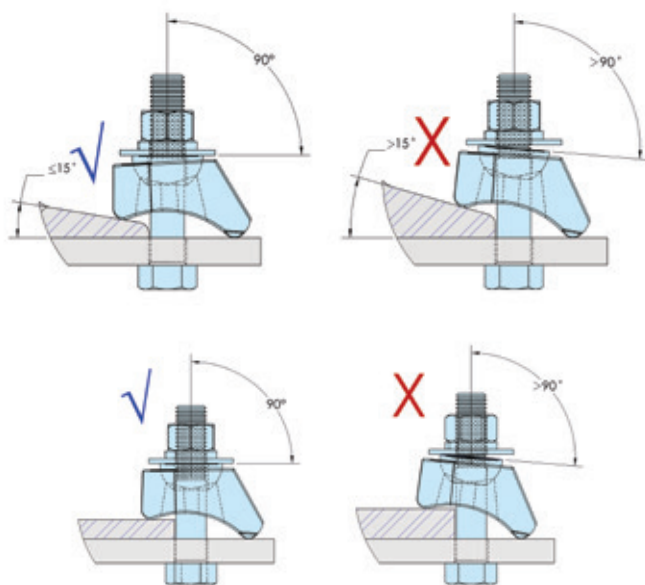



## FLAT AND SLOPED FLANGES (TYPE BE1 + BE2)

The BE1 and BE2 feature a socket screw at the back to provide adjustment for varying steel thicknesses. They are the ideal choice when flange thicknesses are unknown or change on a project. Our BF2 and BG2 packers can be used to increase the clamping range, please see page 20.

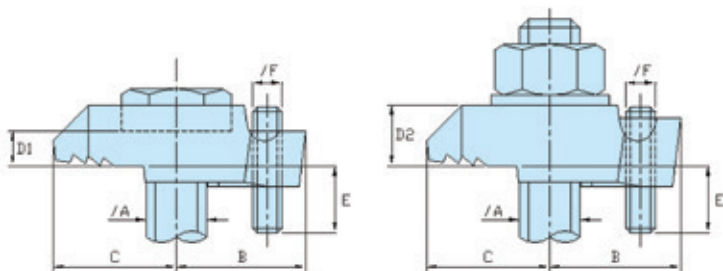

### FEATURES & BENEFITS

- Hot Dip Galvanized BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563
- 5 to 1 Factor of Safety
- LR Type Approved
- Adjustable to suit any thickness of steel

The Safe Working Loads are based on assemblies tested in typical conditions


Product Code	Product Code	Bolt Dia A	B	C	D	E	Screw Dia F	Width	Torque (ft lb)	Tensile SWL (lbs) (per bolt)	Friction SWL (lbs) (per 4 bolts)
BE1G10	X	3/8"	13/16"	13/16"	1/4"	1/8 to 13/16"	1/4"	1"	14	562	X
BE1G12	BE2G12	1/2"	1"	1"	5/16"	3/16 to 7/8"	1/4"	1-1/8"	51	836	292
BE1G16	BE2G16	5/8"	1-3/16"	1-1/4"	3/8"	3/16 to 15/16"	5/16"	1-7/16"	109	1,855	877
BE1G20	X	3/4"	1-3/8"	1-3/8"	7/16"	3/16 to 1"	3/8"	1-3/4"	210	3,624	2,473
BE1G24	X	1"	1-15/16"	1-15/16"	1/2"	1/4 to 1-3/16"	1/2"	2-1/8"	355	4,743	4,047

Do Not Exceed the Safe Working Load (SWL) Specified



## BEAMCLAMP® COMPONENTS TYPE BM

The BM is a one piece, self adjusting clamp. This clamp adjusts between a specified clamping range and is suitable for both parallel and tapered flanges. The BM is ideal in applications where flange thicknesses vary or are unknown as well as in seismic conditions (the 5/8" RF version of the clamp is seismically rated). Should the maximum clamping range be exceeded our BF2 and BG2 packers can be used to increase it, please see page 20 for details.

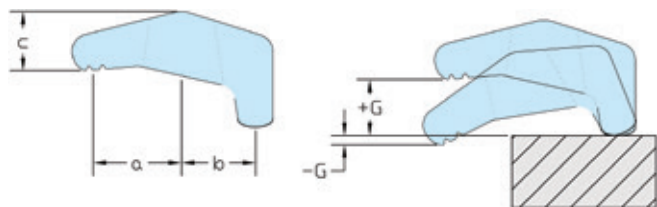

### FEATURES & BENEFITS

- Electro-Galvanized Tempered Steel
- 5 to 1 Factor of Safety
- Self Adjusting Body Style
- Accommodates Negative Grip Values

The Safe Working Loads are based on assemblies tested in typical conditions

Product Code	Bolt Dia	Grip Range (-G to +G)	A	B	C	Width	Torque (ft lb)	Tensile SWL (lbs) (per bolt)	Friction SWL (lbs) (per 4 bolts)
BM1G10	3/8"	-1/4 - 3/8"	13/16"	5/8"	1/2"	1-1/4"	44	512	410
BM1G12	1/2"	-1/4 - 9/16"	13/16"	7/8"	1/2"	1-1/2"	62	566	452
BM1G16	5/8"	-1/4 - 11/16"	1-1/4"	1"	11/16"	1-15/16"	118	1,267	1,012
BM1G16_RF	5/8"	-1/4 - 11/16"	1-13/16"	1"	7/8"	1-15/16"	43	640	X
BM1G20	3/4"	-7/16 - 7/8"	1-9/16"	1-1/4"	7/8"	2-1/2"	258	1,608	1,288

Do Not Exceed the Safe Working Load (SWL) Specified



## ANGLES OR CHANNELS (TYPE BC + BD)

The types BC1 and BD1 are designed to hook over the upstanding flanges of angles or channels. They can be used together for channel to channel connections or in conjunction with our other clamping products for making angle/channel connections to other types of steel.

The BC1 features a recessed top to grip a bolt head and the BD1 has a flat top to allow a nut and washer to be tightened on to it. It is suitable for use with bolts, threaded rod or other threaded items but we always recommend the use of grade 5 or B7 high tensile threaded items.





### FEATURES & BENEFITS

- Hot Dip Galvanized to BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563
- 5 to 1 Factor of Safety
- Lloyds Register approved

The Safe Working Loads are based on assemblies tested in typical conditions

Product Code	Product Code	A Bolt Dia	B	C	D	E1	E2	Width	Torque (ft lb)	Tensile SWL (lbs) (per bolt)
BC1G08	BD1G08	5/16"	3/8"	3/16"	1/4"	3/16"	3/8"	7/8"	2	281
BC1G10	BD1G10	3/8"	1/2"	3/16"	5/16"	1/4"	7/16"	1-3/16"	7	562
BC1G12	BD1G12	1/2"	5/8"	1/4"	3/8"	5/16"	1/2"	1-1/4"	25	971
BC1G16	BD1G16	5/8"	11/16"	5/16"	7/16"	3/8"	11/16"	1-5/8"	54	1686
BC1G20	BD1G20	3/4"	13/16"	3/8"	9/16"	7/16"	13/16"	1-15/16"	105	2473
BC1G24	BD1G24	1"	1"	1/2"	11/16"	1/2"	1"	2-3/8"	178	3860

Do Not Exceed the Safe Working Load (SWL) Specified

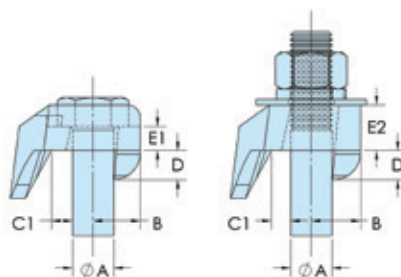

## C STYLE BEAMCLAMP (TYPE BL)



The BL is used for clamping steel directly together without the need for a location plate. Typical applications would be clamping two steel sections of the same width running parallel or for clamping down pressure vessel lids. It can also be used with clips and brackets underneath the nut and washer side for connecting conduit or even pipe work.

The clamp is tested for tensile and lateral loads, please see data sheet below. The BL part is specifically designed to grip the head of a bolt or nut which means the clamp can always be connected by using a single wrench. The central bolt can be replaced with other threaded items such as threaded rod, eyebolts or J-bolts to provide a suspension element.



### FEATURES & BENEFITS

- Hot Dip Galvanized to BS EN ISO 1461
- Extensive clamping range
- Can accommodate clips/brackets
- Tested for Tensile and Lateral Loading

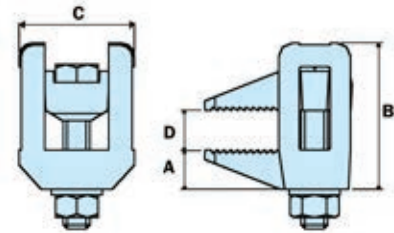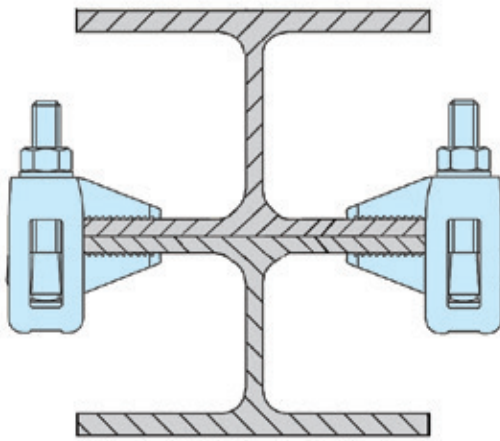


The Safe Working Loads are based on assemblies tested in typical conditions


Product Code	A	B	C	D	Tightening Torque (ft lb)	3 to 1 Factor of safety applied		
						Tensile load in line with rod (lbs)	Tensile load at nose (lbs) (per pair)	Lateral Load (lbs)
BL1G08A	1/2"	1-3/4"	1-9/16"	0 to 13/16"	7	225	1664	56
BL1G10A	9/16"	2-5/16"	1-7/8"	0 to 1-3/16"	14	562	2098	90
BL1G12A	5/8"	2-9/16"	2"	0 to 1-3/8"	29	1124	2473	135
BL1G16A	13/16"	3-3/4"	2-5/16"	0 to 2-3/16"	66	1686	4571	157
BL1G20A	7/8"	4-9/16"	2-5/8"	0 to 2-3/4"	132	2023	5246	169
BL1G24A	1"	5-3/4"	2-15/16"	0 to 3-3/4"	147	2360	7718	180

Do Not Exceed the Safe Working Load (SWL) Specified

### Loading



Tensile load in line with threaded element



Lateral Load




Tensile load acting at the nose of the clamps



## BEAMCLAMP® PACKING PIECES

Our range of packing pieces is designed to provide support to the underside of clamps to ensure they clamp on to the steel at the correct angle. We have a series of short packers designed for the BA, BB, BT and BW clamps and a long series for the BK1 clamps that reach further back on to the supporting steel. The packers can be used in combination with the clamping range of the clamp to ensure a correct connection.

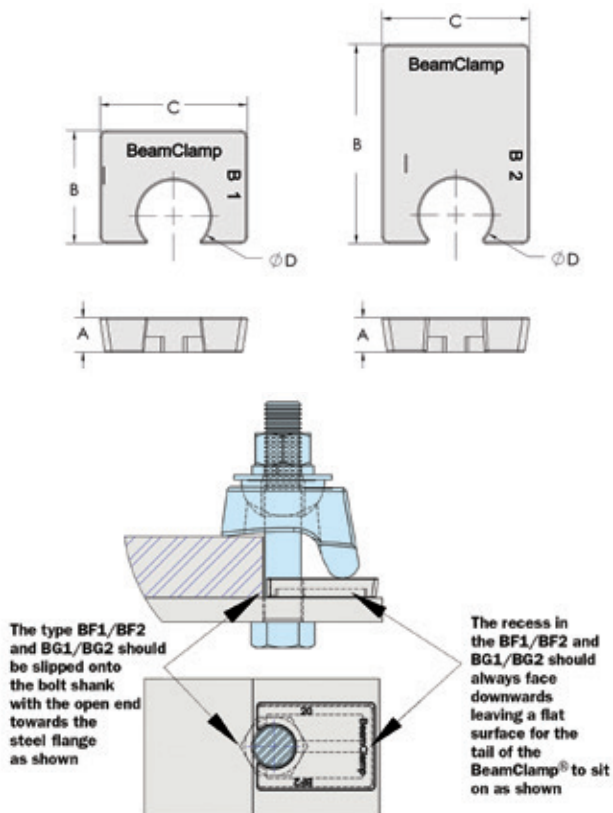

### BF1

Product Code	Bolt Dia.	A	B	C	D Dia.
BF1G08	5/16"	1/8"	9/16"	7/8"	3/8"
BF1G10	3/8"	3/16"	11/16"	1-1/8"	7/16"
BF1G12	1/2"	1/4"	7/8"	1-3/16"	9/16"
BF1G16	5/8"	5/16"	1-1/8"	1-3/8"	11/16"
BF1G20	3/4"	3/8"	1-5/16"	1-11/16"	13/16"
BF1G24	1"	1/2"	1-3/4"	2-3/16"	1-1/16"

### BG1

Product Code	Bolt Dia.	A	B	C	D Dia.
BG1G08	5/16"	5/16"	9/16"	7/8"	3/8"
BG1G10	3/8"	3/8"	11/16"	1-1/8"	7/16"
BG1G12	1/2"	1/2"	7/8"	1-3/16"	9/16"
BG1G16	5/8"	5/8"	1-1/8"	1-3/8"	11/16"
BG1G20	3/4"	3/4"	1-5/16"	1-11/16"	13/16"
BG1G24	1"	1"	1-3/4"	2-3/16"	1-1/16"

### BH1

Product Code	Bolt Dia.	A	B	C	D Dia.
BH1Z08	5/16"	1/16"	5/8"	7/8"	3/8"
BH1Z10	3/8"	1/16"	13/16"	1-1/8"	7/16"
BH1Z12	1/2"	1/8"	15/16"	1-3/16"	9/16"
BH1Z16	5/8"	1/8"	1-1/8"	1-3/8"	11/16"
BH1Z20	3/4"	3/16"	1-5/16"	1-11/16"	13/16"
BH1Z24	1"	3/16"	1-3/4"	2-3/16"	1-1/16"

## LONG PACKERS FOR TYPE BE1, BE2, BK1 AND BM

### BF2

Product Code	Bolt Dia.	A	B	C	D Dia.
BF2G08	5/16"	1/8"	1"	7/8"	3/8"
BF2G10	3/8"	3/16"	1-3/16"	1-1/8"	7/16"
BF2G12	1/2"	1/4"	1-1/2"	1-3/16"	9/16"
BF2G16	5/8"	5/16"	1-15/16"	1-3/8"	11/16"
BF2G20	3/4"	3/8"	2-1/4"	1-11/16"	13/16"
BF2G24	1"	1/2"	3"	2-3/16"	1-1/16"


### BG2

Product Code	Bolt Dia.	A	B	C	D Dia.
BG2G08	5/16"	5/16"	1"	7/8"	3/8"
BG2G10	3/8"	3/8"	1-3/16"	1-1/8"	7/16"
BG2G12	1/2"	1/2"	1-1/2"	1-3/16"	9/16"
BG2G16	5/8"	5/8"	1-15/16"	1-3/8"	11/16"
BG2G20	3/4"	3/4"	2-1/4"	1-11/16"	13/16"
BG2G24	1"	1"	3"	2-3/16"	1-1/16"


## BEAMCLAMP® LOCATION PLATES & BOLT LENGTHS

The location plate is an important part of a BeamClamp assembly. It provides support for the rear of the BeamClamp to react against while the front of the product clamps down on to the steel. The hole centers are designed to suit the widths of both the upper and lower members and to ensure that the clamps are located as close to the edge of the steel as possible.

Location plate for Types BA, BB, BBLN, BT & BW



Location plate for Type BE1, BE2, BK1 & BM

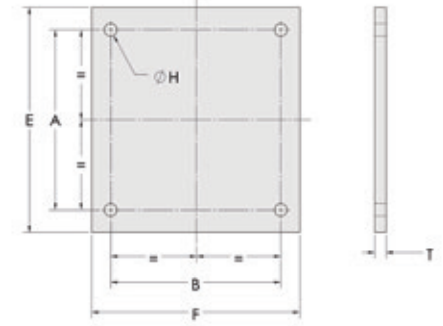


Dimension Table for BeamClamp® Location Plates

Bolt Dia	A Upper Beam Width +	B Lower Beam Width +	C Upper Beam Width +	D Lower Beam Width +	E Upper Beam Width +	F Lower Beam Width +	H Dia	T
5/16"	3/8"	3/8"	1-1/2"	1-1/2"	2-1/4"	2-1/4"	3/8"	5/16"
3/8"	7/16"	7/16"	1-3/4"	1-3/4"	2-5/8"	2-5/8"	7/16"	5/16"
1/2"	9/16"	9/16"	2-1/4"	2-1/4"	3-3/8"	3-3/8"	9/16"	3/8"
5/8"	11/16"	11/16"	2-3/4"	2-3/4"	4-1/8"	4-1/8"	11/16"	3/8"
3/4"	13/16"	13/16"	3-1/4"	3-1/4"	4-7/8"	4-7/8"	13/16"	1/2"
1"	1-1/8"	1-1/8"	4-1/2"	4-1/2"	6-3/4"	6-3/4"	1-1/8"	5/8"


Thickness of Clamps (Dim X)

Bolt Dia	Type BA & BT (X)	Type BB & BW (X)	Type BK1 (X)
5/16"	3/16"	3/8"	11/16"
3/8"	1/4"	7/16"	7/8"
1/2"	5/16"	1/2"	1"
5/8"	3/8"	11/16"	1-1/8"
3/4"	7/16"	13/16"	1-3/8"
1"	1/2"	1"	1-13/16"

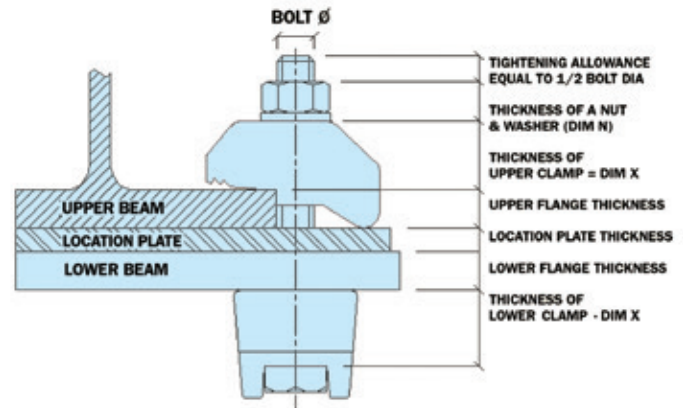


Thickness of Nut/Washer (Dim N)

Bolt Dia	N
5/16"	7/16"
3/8"	1/2"
1/2"	5/8"
5/8"	13/16"
3/4"	15/16"
1"	1-1/16"



LOCATION SPACERS

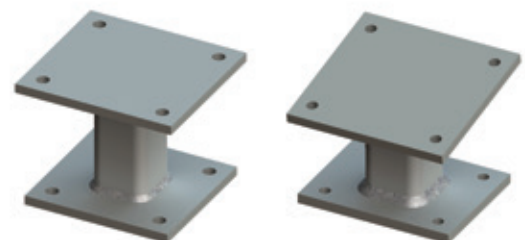

Location plates can be fabricated to suit a variety of applications with different angles of cross over and gaps between sections. We will be happy to assist, free of charge, with detailing these plates for your individual applications.

## BEAMCLAMP® HIGH FRICTION COMPONENTS (TYPE BY + BYP)

The Type BY clamp is designed for High Friction and Tensile applications that exceed the capacities of the standard BeamClamp products. It features a recessed top that prevents the head of the bolt from rotating during installation therefore requires the use of only one wrench.

The Type BYP washer can be used to fill in the recess of the Type BY to provide a flat surface for a washer and nut. This also allows the Type BY clamps to be used together in beam to beam connections. The full width tail of the BY allows for use with slotted holes for greater diversity in applications. Please see pages 20 and 21 for beam packing combinations.



LNA always recommends using the values for frictional loading from the painted steel column for design purposes as the thickness of galvanizing can vary between applications.



### FEATURES & BENEFITS

- Hot Dip Galvanized to BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563

Tail Length	Product Code	Bolt Grade	A Bolt Dia.	B	C	D1	D2	E	Width	Torque (ft lb)	Tensile SWL (lbs) per bolt (5:1 Factor of Safety)	Frictional SWL (lbs) per two bolts Painted Steel (2:1 Factor of Safety)	Frictional SWL (lbs) per two bolts Galvanized Steel (2:1 Factor of Safety)
Small	BY1G12	A325/Grd.5	1/2"	1-1/16"	1-1/8"	1/2"	15/16"	3/16"	1-9/16"	66	2,423	1,165	3,105
	BY1G16	A325/Grd.5	5/8"	1-5/16"	1-5/16"	11/16"	1-3/16"	5/16"	1-15/16"	177	4,145	2,088	5,892
	BY1G20	A325/Grd.5	3/4"	1-9/16"	1-1/2"	7/8"	1-7/16"	3/8"	2-3/16"	346	7,087	2,974	6,362
	BY1G12	A490	1/2"	1-1/16"	1-1/8"	1/2"	15/16"	3/16"	1-9/16"	95	2,769	2,536	3,876
	BY1G16	A490	5/8"	1-5/16"	1-5/16"	11/16"	1-3/16"	5/16"	1-15/16"	221	4,658	3,606	6,171
	BY1G20	A490	3/4"	1-9/16"	1-1/2"	7/8"	1-7/16"	3/8"	2-3/16"	477	7,524	5,649	7,733
Medium	BY2G12	A325/Grd.5	1/2"	1-1/16"	1-1/8"	1/2"	15/16"	1/2"	1-9/16"	66	2,423	1,165	3,105
	BY2G16	A325/Grd.5	5/8"	1-5/16"	1-5/16"	11/16"	1-3/16"	9/16"	1-15/16"	177	4,145	2,088	5,892
	BY2G20	A325/Grd.5	3/4"	1-9/16"	1-1/2"	7/8"	1-7/16"	11/16"	2-3/16"	346	7,087	2,974	6,362
	BY2G12	A490	1/2"	1-1/16"	1-1/8"	1/2"	15/16"	1/2"	1-9/16"	95	2,769	2,536	3,876
	BY2G16	A490	5/8"	1-5/16"	1-5/16"	11/16"	1-3/16"	9/16"	1-15/16"	221	4,658	3,606	6,171
	BY2G20	A490	3/4"	1-9/16"	1-1/2"	7/8"	1-7/16"	11/16"	2-3/16"	477	7,524	5,649	7,733

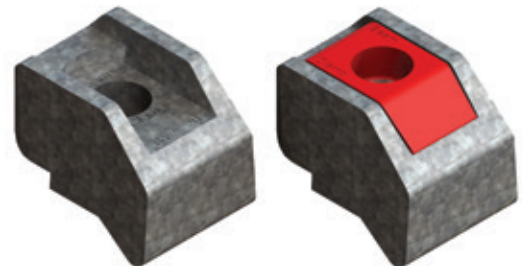


The BY recess is suitable for the hexagonal head of 1/2" Grade 5 bolts, 5/8" A325/A490 bolts and 3/4" A325/A490 bolts. The Type BYP may be used to fill in the recess allowing for any grade bolt or nut to be tightened down to its surface.




## BEAMCLAMP® PACKING PIECES FOR TYPE BY


The range of packing pieces below are designed to provide support to the underside of type BY clamps to ensure they clamp at 90 degrees to the steel and provide a flat surface for the bolt head or nut to be tightened down on to. These can be used in various combinations with the two tail lengths of BY clamps to achieve the best clamping position.

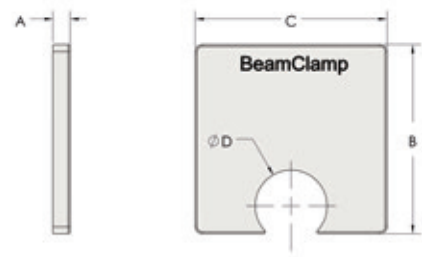

TYPE BF3

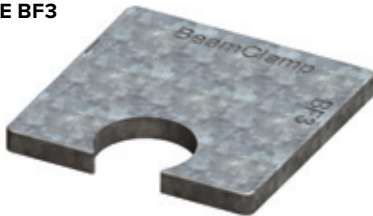

TYPE BF4

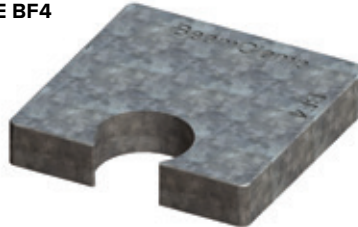

TYPE BH2



Product Code	A	B	C	D
BF3G12	3/16"	1-9/16"	1-9/16"	9/16"
BF3G16	3/16"	2"	2-1/16"	11/16"
BF3G20	3/16"	2-3/16"	2-3/16"	13/16"


Product Code	A	B	C	D
BF4G12	3/8"	1-9/16"	1-9/16"	9/16"
BF4G16	3/8"	2"	2-1/16"	11/16"
BF4G20	3/8"	2-3/16"	2-3/16"	13/16"

Product Code	A	B	C	D
BH2G12	1/16"	1-9/16"	1-9/16"	9/16"
BH2G16	1/16"	1-7/8"	1-7/8"	11/16"
BH2G20	1/16"	2"	2"	13/16"

The Type BY can be used in a variety of applications and our design team will be pleased to configure a connection specific to your requirements. A cut sheet is available for manually working out of the tail length and packing piece combinations along with the bolt lengths and location plate dimensions and is available upon request.

## BEAMCLAMP® TYPE BB LONG NOSE (BBLN)

The BB Long Nose is very similar to our standard type BB but with an extended nose. This distributes more contact on the flanges of parallel beams providing, contact closer to the web. Packing pieces BH1, BF1 and BG1 can be used with this product to make it fit to various thickness's of steel at 90 degrees, see page 18 for details.

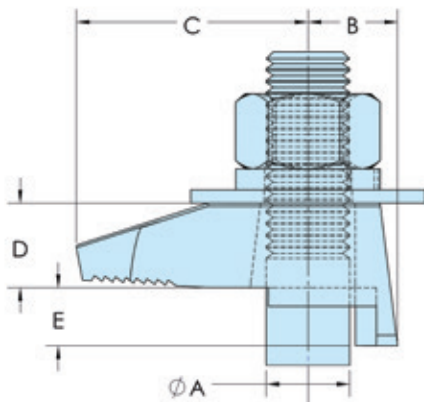

### FEATURES & BENEFITS

- Hot Dip Galvanized to BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563

Product Code	Bolt Grade	A Bolt Dia.	B	C	D	E	Width	Torque (ft lb)	Tensile SWL (lbs) per bolt (5:1 Factor of Safety)	Frictional SWL (lbs) per four bolts Galvanized Steel (5:1 Factor of Safety)
BB1LNG12	Grd 5	1/2"	9/16"	1-13/16"	11/16"	1/4"	1-1/8"	51	1,292	287
BB1LNG16	Grd 5	5/8"	11/16"	1-3/4"	5/8"	7/16"	1-7/16"	109	2,218	872

## SPECIFYING THE CORRECT BEAMCLAMP®

### SPECIFYING THE CORRECT BEAMCLAMP® PRODUCT

It is important to select the correct Product Type, tail length, and packing shim requirement to suit your application. Unless using an adjustable tail Type BK1 the combined tail length plus the thickness of the shim(s) must be equal to the thickness of steel being clamped.

The following tables are designed to assist you in selecting the appropriate combination.

For Wide Flange Beams and Parallel Steel - Table 1

For Structural I-Beams - Table 2

For C-Channels - Table 3

Tables are located on pages 26-29

### NOTES

A plus sign (+) between any of the above designations means that there is a packing required in addition to the clamp. Combinations of BH1, BF1, BG1, BF2, BG2, BH2, BF3 and BF4 packings are used. Where "2 x" or "3 x" is indicated, use 2 or 3 as the multiplier to get the number of packings needed to suit the given thickness.

### TABLE 1: WIDE FLANGE AND PARALLEL STEEL


If you wish to use a 3/8" diameter Type BB Clamp to secure a W10 x 45 wide flange beam, you would

- 1) Referring to steel guides, look up the thickness of the flange.  
For a W10 x 45 the thickness is 5/8".
- 2) Read down the 3/8" BA & BB Column and read across the 5/8" thickness row until they intersect.
- 3) The correct tail length is a Size 2 complete with a Type BG1 Packing.

Flange Thickness	5/16" Bolt dia		3/8" Bolt dia	
	BA & BB	BK1	BA & BB	BK1
1/8"	X	OK	X	OK
3/16"	2	OK	2	OK
1/4"	2 + BH1	OK	1 + BH1	OK
5/16"	2 + BF1	OK	3	OK
3/8"	2 + BH1 + BF1	OK	1 + BF1	OK
7/16"	2 + BH1 + BF1	OK	3 + [2 x BH1]	OK
1/2"	2 + BG1	+ BF2	3 + [3 x BH1]	OK
9/16"	2 + BH1 + BG1	+ BF2	1 + BG1	OK
5/8"	2 + BF1 + BG1	+ BF2	1 + BH1 + BG1	+ BF2
11/16"	2 + BH1 + BF1 + BG1	+ BG2	3 + BG1	+ BF2
3/4"	2 + BH1 + BF1 + BG1	+ BG2	1 + BF1 + BG1	+ BF2
13/16"	2 + [2 x BG1]	+ BF2 + BG2	2 + BF1 + BG1	+ BG2
7/8"	2 + BH1 + [2 x BG1]	+ BF2 + BG2	3 + BF1 + BG1	+ BG2
15/16"	2 + BF1 + [2 x BG1]	+ BF2 + BG2	1 + [2 x BG1]	+ BG2
1"	2 + BF1 + [2 x BG1]	+ [2 x BG2]	2 + [2 x BG1]	+ BG2



## SPECIFYING THE CORRECT BEAMCLAMP®

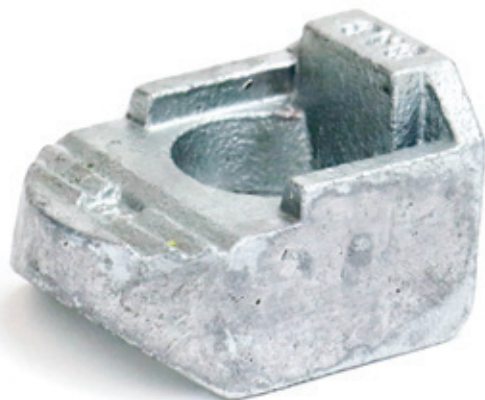

### THE FOLLOWING STEPS WILL HELP IN USING THE TABLES

- 1) Select the type of clamp you wish to use: BA, BB, BT, BW, BK1 or BY.
- 2) Select the bolt size you wish to use. The load capacity for each product is stated on the individual product pages. LNA SOLUTIONS recommends that SAE Grade 5 Bolts are used.
- 3) When connecting to wide flange beams or parallel flanges, refer to steel guides to find the flange thickness.
- 4) Using the Tables 1, 2, or 3, select the appropriate tail length and packing.

### TABLE 2: STRUCTURAL I-BEAMS AND C-CHANNELS

If you wish to use a 1/2" diameter Type BT Clamp to secure an S12 x 50, you would:

- 1) Read down the 1/2" Type BT & BW column and read across the S12 x 50 row until they intersect.
- 2) The correct tail length is a Size 2 complete with two Type BH1 Packings.

S-beam size	1/2" Bolt dia BT & BW	5/8" Bolt dia BT & BW
S18 x 70	2 + [2 x BH1]	2 + BH1
S18 x 54.7	2 + [2 x BH1]	2 + BH1
S15 x 50	1 + BF1	1 + BH1
S15 x 42.9	1 + BF1	1 + BH1
S12 x 50	2 + [2 x BH1]	2 + BH1
S12 x 40.8	2 + [2 x BH1]	2 + BH1
S12 x 35	2 + BH1	2
S12 x 31.8	2 + BH1	2

### KEY

- 1** = Short Tail Type BA, BB, BT, BW or BY
- 2** = Medium Tail BA, BB, BT, BW or BY
- 3** = Long Tail BA or BB
- BF1** = Type BF1 packing must be used
- BG1** = Type BG1 packing must be used
- BH1** = Type BH1 packing must be used
- BF2** = Type BF2 packing must be used
- BG2** = Type BG2 packing must be used
- BH2** = Type BH2 packing must be used
- BF3** = Type BF3 packing must be used
- BF4** = Type BF4 packing must be used
- OK** = Product is suitable without any additional packings
- X** = Not recommended



**TABLE 1 - TO SUIT WIDE FLANGE BEAMS**

Flange Thickness	5/16" Bolt dia		3/8" Bolt dia		1/2" Bolt dia		
	BA & BB	BK1	BA & BB	BK1	BA & BB	BK1	BY
1/8"	X	OK	X	OK	X	OK	X
3/16"	2	OK	2	OK	1	OK	1
1/4"	2 + BH1	OK	1 + BH1	OK	2	OK	1
5/16"	2 + BF1	OK	3	OK	2 + BH1	OK	1 + BH2
3/8"	2 + BH1 + BF1	OK	1 + BF1	OK	3	OK	1 + BF3
7/16"	2 + BH1 + BF1	OK	3 + [2 x BH1]	OK	2 + [2 x BH1]	OK	1 + BF3
1/2"	2 + BG1	+ BF2	3 + [3 x BH1]	OK	1 + BH1 + BF1	OK	2
9/16"	2 + BH1 + BG1	+ BF2	1 + BG1	OK	3 + [2 x BH1]	OK	2 + BH2
5/8"	2 + BF1 + BG1	+ BF2	1 + BH1 + BG1	+ BF2	3 + BF1	OK	1 + BF4
11/16"	2 + BH1 + BF1 + BG1	+ BG2	3 + BG1	+ BF2	2 + [2 x BH1] + BF1	OK	2 + BF3
3/4"	2 + BH1 + BF1 + BG1	+ BG2	1 + BF1 + BG1	+ BF2	1 + BH1 + BG1	+ BF2	1 + [2 x BH] + BF4
13/16"	2 + [2 x BG1]	+ BF2 + BG2	2 + BF1 + BG1	+ BG2	2 + BH1 + BG1	+ BF2	2 + BH2 + BF3
7/8"	2 + BH1 + [2 x BG1]	+ BF2 + BG2	3 + BF1 + BG1	+ BG2	1 + BF1 + BG1	+ BF2	2 + BF4
15/16"	2 + BF1 + [2 x BG1]	+ BF2 + BG2	1 + [2 x BG1]	+ BG2	2 + BF1 + BG1	+ BF2	2 + BH2 + BF4
1"	2 + BF1 + [2 x BG1]	+ [2 x BG2]	2 + [2 x BG1]	+ BG2	1 + BH1 + BG1 + BF1	+ BG2	1 + [2 x BF4]
1-1/16"	2 + BH1 + BF1 + [2 x BG1]	+ [2 x BG2]	3 + [2 x BG1]	+ BF2 + BG2	2 + BH1 + BG1 + BF1	+ BG2	1 + BH2 + [2 x BF4]
1-1/8"	2 + [3 x BG1]	+ BF2 + [2 x BG2]	1 + BF1 + [2 x BG1]	+ BF2 + BG2	1 + [2 x BG1]	+ BG2	2 + [3 x BH2] + BF4
1-3/16"	2 + BH1 + [3 x BG1]	+ BF2 + [2 x BG2]	2 + BF1 + [2 x BG1]	+ BF2 + BG2	2 + [2 x BG1]	+ BG2	1 + BF3 + [2 x BF4]
1-1/4"	X	X	X	X	1 + BH1 + [2 x BG1]	+ BF2 + BG2	1 + BH3 + BF3 + [2 x BF4]
1-5/16"	X	X	X	X	3 + [2 x BG1]	+ BF2 + BG2	2 + [2 x BF4]
1-3/8"	X	X	X	X	1 + BF1 + [2 x BG1]	+ BF2 + BG2	1 + [3 x BF4]
1-7/16"	X	X	X	X	2 + BF1 + [2 x BG1]	+ [2 x BG2]	2 + [2 x BH2] + [2 x BF4]
1-1/2"	X	X	X	X	X	+ [2 x BG2]	2 + BF3 + [2 x BF4]

**TABLE 1 - TO SUIT WIDE FLANGE BEAMS (CONTINUED)**

Flange Thickness	5/8" Bolt dia			3/4" Bolt dia			1" Bolt dia	
	BA & BB	BK1	BY	BA & BB	BK1	BY	BA & BB	BK1
1/8"	X	OK	X	X	OK	X	X	OK
3/16"	X	OK	X	X	OK	X	X	OK
1/4"	1	OK	X	1	OK	X	X	OK
5/16"	2	OK	1	1	OK	X	1	OK
3/8"	1 + BH1	OK	1 + BH2	2	OK	1	1	OK
7/16"	3	OK	1 + BH2	1 + BH1	OK	1	2	OK
1/2"	1 + [2 x BH1]	OK	1 + BF3	3	OK	1 + BH2	2	OK
9/16"	3 + BH1	OK	2	2 + BH1	OK	1 + [2 x BH2]	1 + BH1	OK
5/8"	2 + BF1	OK	2	3 + BH1	OK	1 + BF3	3	OK
11/16"	3 + [2 x BH1]	OK	2 + BH2	1 + BF1	OK	2	1 + [2 x BH1]	OK
3/4"	3 + BF1	OK	2 + [2 x BH2]	1 + [3 x BH1]	OK	2	3 + BH1	OK
13/16"	3 + [3 x BH1]	OK	2 + BF3	2 + BF1	OK	2 + BH2	3 + BH1	OK
7/8"	2 + [2 x BH1] + BF1	OK	2 + BH2 + BF3	2 + [3 x BH1]	OK	2 + [2 x BH2]	1 + BF1	OK
15/16"	2 + BG1	OK	2 + [2 x BH2] + BF3	2 + BH1 + BF1	OK	2 + BF3	2 + BF1	OK
1"	3 + [2 x BH1] + BF1	+ BF2	2 + BF4	1 + [2 x BH1] + BF1	OK	2 + BH2 + BF3	1 + BH1 + BF1	OK
1-1/16"	3 + BG1	+ BF2	2 + BH2 + BF4	1 + BG1	OK	2 + 2BH2 + BF3	3 + BF1	OK
1-1/8"	1 + [2 x BH1] + BG1	+ BF2	1 + [2 x BF4]	2 + [2 x BH1] + BF1	OK	2 + BF4	3 + BF1	OK
1-3/16"	3 + BH1 + BG1	+ BF2	2 + BF3 + BF4	2 + BG1	OK	2 + BH2 + BF4	1 + [2 x BH1] + BF1	OK
1-1/4"	2 + BF1 + BG1	+ BF2	2 + BH2 + BF3 + BF4	1 + BH1 + BG1	+ BF2	2 + [2 x BH2] + BF4	3 + BH1 + BF1	OK
1-5/16"	2 + BF1 + BG1	+ BG2	1 + BF3 + [2 x BF4]	2 + BH1 + BG1	+ BF2	2 + BF3 + BF4	1 + BG1	OK
1-3/8"	3 + BF1 + BG1	+ BG2	2 + [2 x BF4]	2 + BH1 + BG1	+ BF2	2 + BH2 + BF3 + BF4	1 + BG1	OK
1-7/16"	3 + BF1 + BG1	+ BG2	2 + [2 x BH2] + [2 x BF4]	3 + BH1 + BG1	+ BF2	2 + [2 x BH2] + BF3 + BF4	2 + BG1	+ BF2
1-1/2"	3 + BH1 + BF1 + BG1	+ BG2	1 + [3 x BF4]	2 + [2 x BH1] + BG1	+ BF2	2 + [2 x BF4]	1 + BH1 + BG1	+ BF2

**TABLE 2 - TO SUIT S-BEAMS**

S-beam size	1/2" Bolt dia BT & BW	5/8" Bolt dia BT & BW	3/4" Bolt dia BT & BW	1/2" Bolt dia BY	5/8" Bolt dia BY	3/4" Bolt dia BY
S24 x 121	1 + BH1 + BG1	2 + BH1 + BF1	1 + [3 x BH1]	2 + BH2 + BF3	2 + BF3	2 + BH2
S24 x 106	1 + BH1 + BG1	2 + BH1 + BF1	1 + [3 x BH1]	2 + BH2 + BF3	2 + BF3	2 + BH2
S24 x 100	2 + BH1 + BF1	1 + BF1	1 + [2 x BH1]	2 + BH2	2	1 + BF3
S24 x 90	2 + BH1 + BF1	1 + BF1	1 + [2 x BH1]	2 + BH2	2	1 + BF3
S24 x 80	2 + BH1 + BF1	1 + BF1	1 + [2 x BH1]	2 + BH2	2	1 + BF3
S20 x 96	1 + BG1	1 + [3 x BH1]	1 + [2 x BH1]	1 + BF4	2	1 + BF3
S20 x 86	1 + BG1	1 + [3 x BH1]	1 + [2 x BH1]	1 + BF4	2	1 + BF3
S20 x 75	2 + [3 x BH1]	1 + BF1	2 + BH1	2 + BH2	1 + BF3	1 + [2 x BH2]
S20 x 66	2 + [3 x BH1]	1 + BF1	2 + BH1	2 + BH2	1 + BF3	1 + [2 x BH2]
S18 x 70	2 + [2 x BH1]	2 + BH1	1 + BH1	1 + BF3	1 + BH2	1
S18 x 54.7	2 + [2 x BH1]	2 + BH1	1 + BH1	2	1 + [2 x BH2]	1 + BH2
S15 x 50	1 + BF1	1 + BH1	2	1 + BF3	1 + BH2	1
S15 x 42.9	1 + BF1	1 + BH1	2	1 + BF3	1 + BH2	1
S12 x 50	2 + [2 x BH1]	2 + BH1	1 + BH1	1 + [3 x BH2]	1 + BH2	1
S12 x 40.8	2 + [2 x BH1]	2 + BH1	1 + BH1	1 + [3 x BH2]	1 + [2 x BH2]	1 + BH2
S12 x 35	2 + BH1	2	1	1 + [2 x BH2]	1	1
S12 x 31.8	2 + BH1	2	1	1 + [2 x BH2]	1	1
S10 x 35	1 + BH1	2	1	1 + BH2	1	X
S10 x 25.4	1 + BH1	2	1	1 + BH2	1	X
S8 x 23	2	1	1	1 + BH2	1	X
S8 x 18.4	2	1	1	1 + BH2	1	X
S7 x 20	2	1	1	1 + BH2	X	X
S7 x 15.3	2	1	1	1 + BH2	X	X
S6 x 17.25	1	1	X	1	X	X
S6 x 12.5	2	1	X	1	X	X
S5 x 14.75	1	1	X	1	X	X
S5 x 10	1	1	X	1	X	X
S4 x 9.5	1	X	X	1	X	X
S4 x 7.7	1	X	X	1	X	X
S3 x 7.5	1	X	X	1	X	X
S3 x 5.7	1	X	X	1	X	X



**TABLE 3 - TO SUIT C-CHANNELS**

Channel Size	1/2" Bolt dia BT & BW	5/8" Bolt dia BT & BW	3/4" Bolt dia BT & BW	1/2" Bolt dia BY	5/8" Bolt dia BY	3/4" Bolt dia BY
C15 x 50	1 + [2 x BH1]	1 + BH1	2	1 + BF3	1 + BH2	1
C15 x 40	1 + [2 x BH1]	1 + BH1	2	1 + BF3	1 + BH2	1
C15 x 33.9	1 + [2 x BH1]	1 + BH1	2	1 + BF3	1 + BF3	1
C12 x 30	2	1	1	1 + BH2	1	X
C12 x 25	2	1	1	1 + BH2	1	X
C12 x 20.7	2	1	1	1 + BH2	1	X
C10 x 30	2	1	1	1	X	X
C10 x 25	2	1	1	1	X	X
C10 x 20	2	1	1	1	X	X
C10 x 15.3	2	1	1	1	X	X
C9 x 20	2	1	1	1	X	X
C9 x 15	2	1	1	1	X	X
C9 x 13.4	2	1	1	1	X	X
C8 x 18.75	2	1	1	1	X	X
C8 x 13.75	2	1	1	1	X	X
C8 x 11.5	2	1	1	1	X	X
C7 x 14.75	1	1	X	1	X	X
C7 x 12.25	1	1	X	1	X	X
C7 x 9.8	1	1	X	1	X	X
C6 x 13	1	1	X	1	X	X
C6 x 10.5	1	1	X	1	X	X
C6 x 8.2	1	1	X	1	X	X
C5 x 9	1	1	X	1	X	X
C5 x 6.7	1	1	X	1	X	X
C4 x 7.25	1	X	X	1	X	X
C4 x 5.4	1	X	X	1	X	X
C3 x 6	1	X	X	1	X	X
C3 x 5	1	X	X	1	X	X
C3 x 4.1	1	X	X	1	X	X


# HOW LNA SOLUTIONS CUSTOM DESIGNS CONNECTIONS FOR YOU

## CONNECTION DESIGNER AT LNASOLUTIONS.COM

The engineering staff at LNA Solutions specialize in structural steel connections. They will quickly and efficiently take your connection information and create assembly specific drawings to suit your project specifications. A full flange bending analysis is available upon request. We also provide PE sign-off stamps for installations where Engineer approval is required. This free service saves you valuable billing hours and provides cost-effective peace of mind.

## QUICK REFERENCE

When designing a steel connection using our clamps, it is very useful to have a block of them so they can be incorporated into your drawings. Please visit our website [LNASolutions.com](http://LNASolutions.com) and click on: **Engr./Arch. Resources Tab** then choose the **BeamClamp CAD library**. This link will take you directly to all our 2D CAD blocks and provide files in both .dwg and .dxf format.

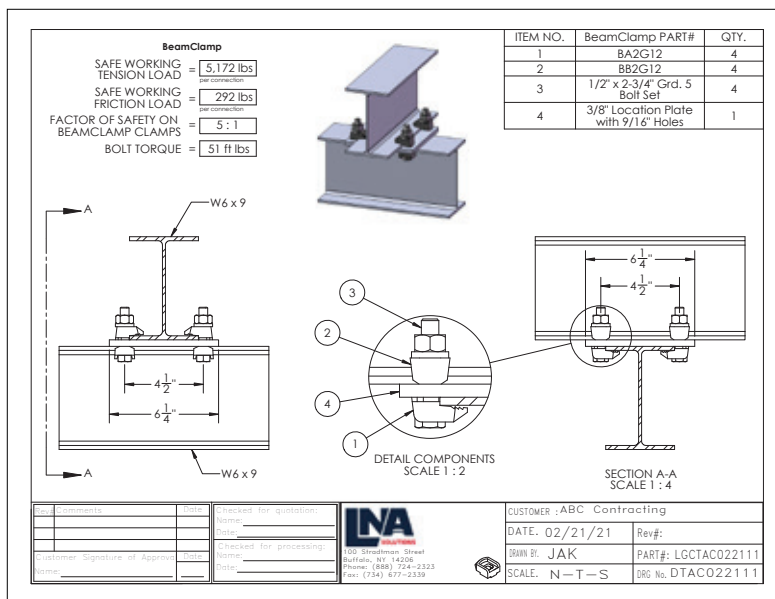

## FEATURES & BENEFITS



- AutoCAD or SolidWorks Output
- Full Flange Bending Analysis
- PE sign off available
- Fast & Friendly Replies
- Free service with no obligation
- 24 hour or less response
- Terrific Service & Support
- Expert design team

## TYPICAL BEAMCLAMP® ASSEMBLY


The diagram to the left is an example of a typical BEAMCLAMP assembly used to connect two steel sections together. The assembly consists of a pre-drilled location plate inserted between the two steel sections.

An upper set of BEAMCLAMP components clamp down on the lower flange of the upper beam while a lower set of components work in the opposite direction, clamping the underside of the upper flange of the lower member. Additional packing shims may be used to adjust the clamp to the thickness of the flange being connected. The connection is secured by inserting a bolt through each of the lower clamps, the location plate, the upper clamps and then tightening a nut to the recommended torque.


LNA SOLUTIONS is pleased to offer free design services to advise on the appropriate components for your particular assembly. In addition, we are pleased to include a quotation for your supply of bolts, nuts, washers and pre-drilled location plates.

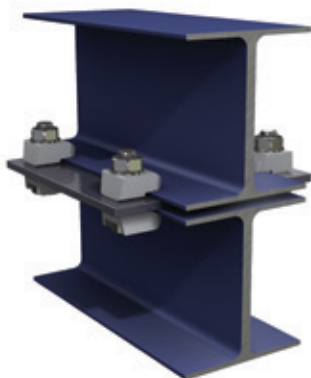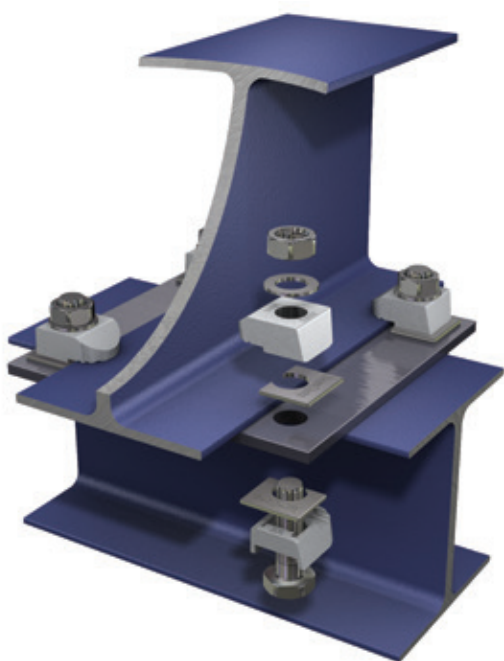


10

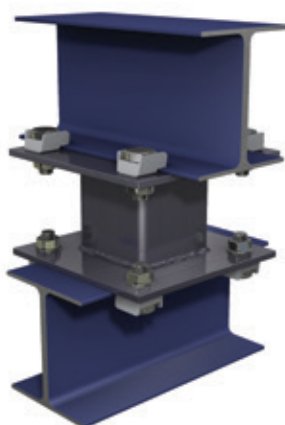

11

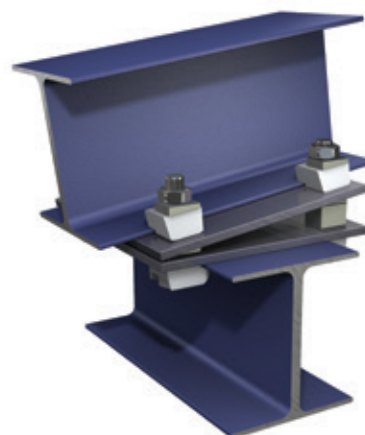


12

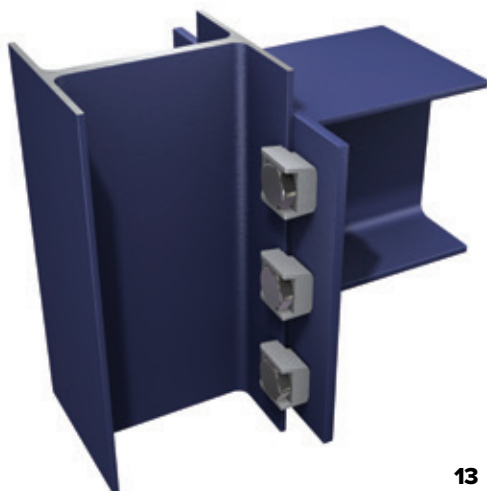

13




14

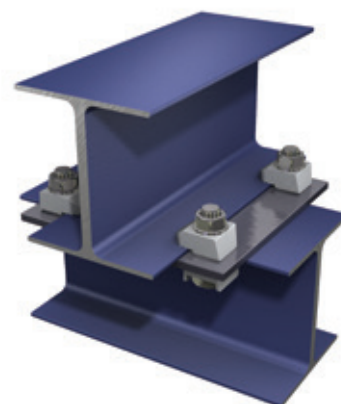


15



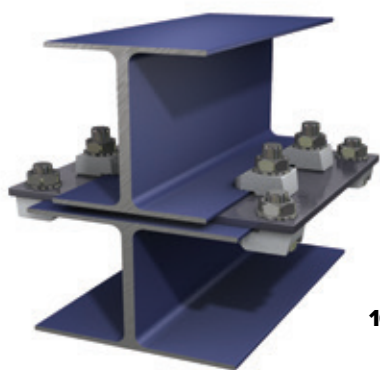


16

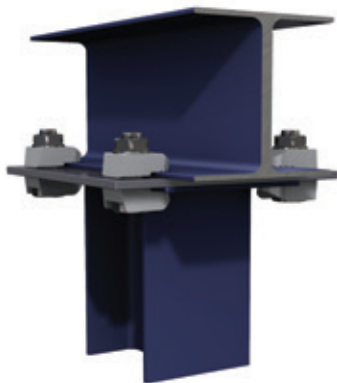


17



18

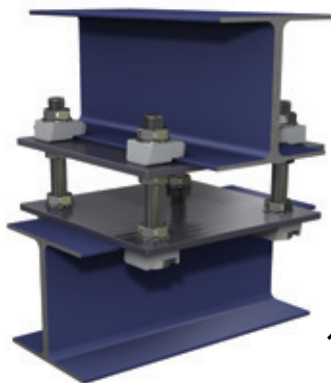


19

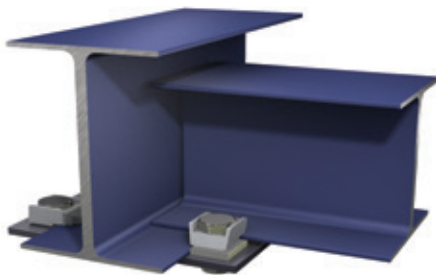


20




21

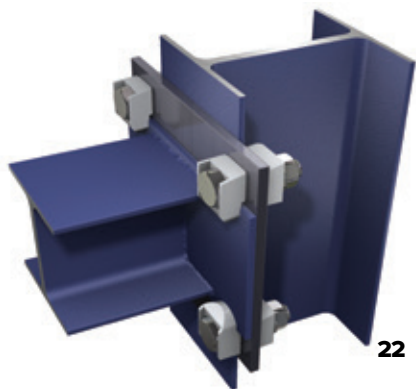


22

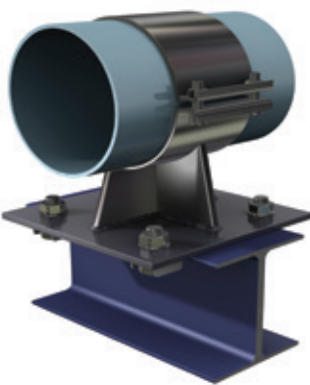

23

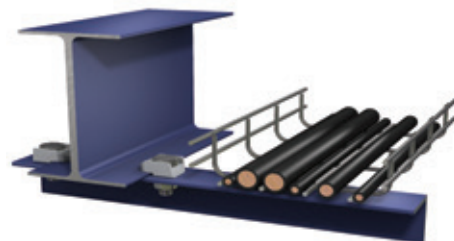

24

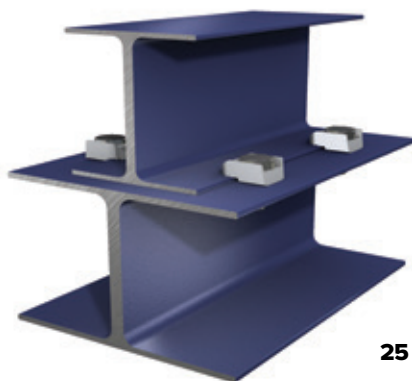

25



26




27




28



29

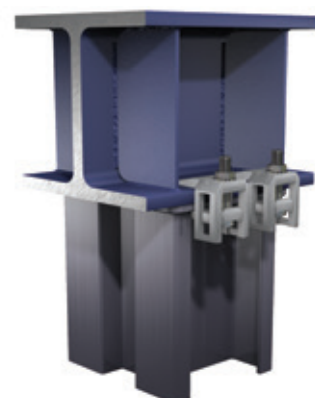


30

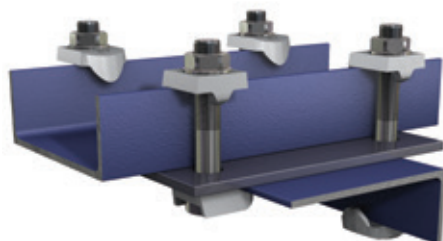


31




32

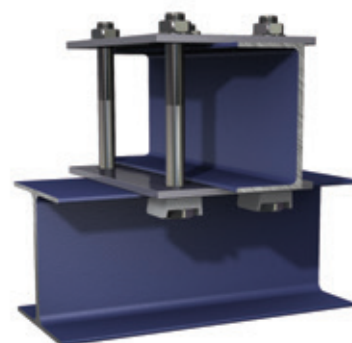


33

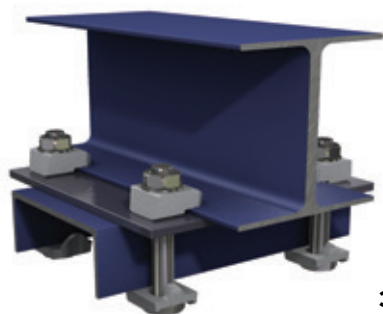

34




35

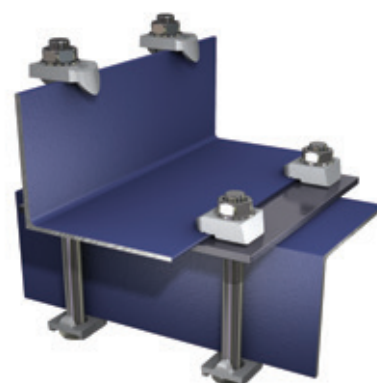


36



37

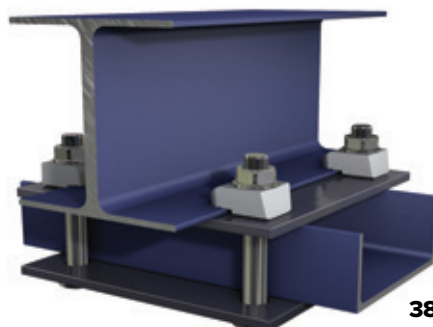

38

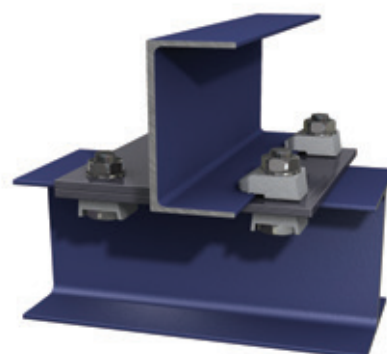

39

## INTRODUCTION TO PRE-ENGINEERED SOLUTIONS

Pre-Engineered Solutions focuses on steel-to-steel clamping systems that customers can buy off-the-shelf with very little customization required. These ready-made connectors are in-stock items that can be used in tandem with other products. Together, they create dependable, industry tested connection solutions to fit the specific needs of an application or project.

Pre-Engineered Solutions are ideal for projects where installation requires working at height or other unique environments and you need a quick connection solution for a permanent or temporary application.

Most of our Pre-Engineered products can be connected securely with single side access and there is never a need to drill or weld to the supporting steel.

### FEATURES

- Quick turn-around time for most applications
- Turnkey solution for a trusted, single source provider
- Allows for varying crossover angles
- Available in different finishes

### BENEFITS

- Pre-integrated products saves time and cost compared with implementing custom designed solutions
- Peace of mind utilizing tested and trusted products
- Faster installation times
- Reduced labor costs

### TECHNICAL SUPPORT

- Guaranteed safe working loads
- Free technical support
- Alterations easily implemented to fit any project
- Design changes requires minimal engineering

### APPROVAL

- Independently load tested
- TÜV tested for vibration conditions
- Lloyd's Register approved
- DIBt approved



# PRE-ENGINEERED SOLUTIONS



## BEAMCLAMP® RIGGING CLAMPS

The Adjustable Rigging Clamp is a self adjusting, ready to install rigging clamp capable of safe working loads of up to 5,000 lbs. The shackle connection allows loads to be applied up to 45°. The Adjustable Rigging Clamp can accommodate a variety of flange widths and thickness and is installed without the need for any drilling or welding to the support beam.



The Adjustable Rigging Clamp is available in five (5) standard sizes to accommodate any flange width from 4" to 24". The Adjustable Rigging Clamp is designed to be self adjusting to the flange thickness from as little as 1/8" to as thick as 2-1/2".

The Adjustable Rigging Clamp is designed to accommodate the safe working load not to exceed 5,000 lbs.

**Note:** The structural integrity of the existing steelwork should be verified by a licensed structural Engineer



Product Code	Flange Width	Bolt Torque (ft lbs)	Number of bolts	Safe Working Load (lbs. Do not exceed)
KRC062-A	4" to 8"	109	4	5,000 lbs.
KRC062-B	8" to 12"	109	4	5,000 lbs.
KRC062-C	12" to 16"	109	4	5,000 lbs.
KRC062-D	16" to 20"	109	4	5,000 lbs.
KRC062-E	20" to 24"	109	4	5,000 lbs.

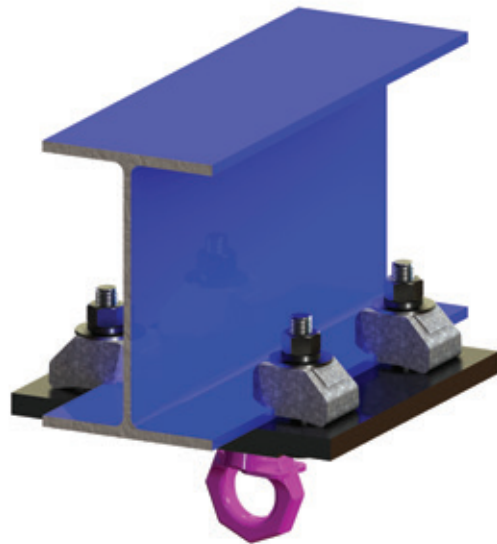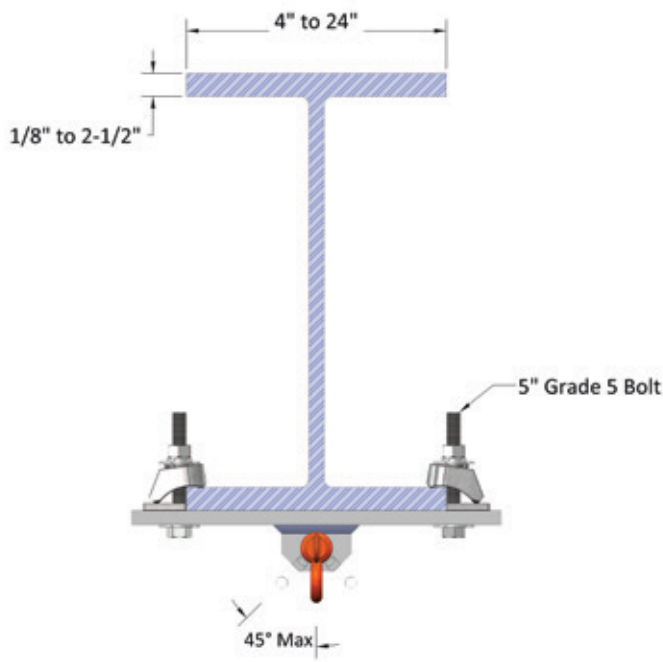

**NOTE:** Custom designed rigging and lifting points are available. Please contact LNA Solutions for more information.


## BOXBOLT® RIGGING CLAMPS

The LNA Solutions BoxBolt® Rigging Clamp is a means of attaching an anchor point to Hollow Structural Sections (HSS) and other structural members when access is available from only one side.

The standard BoxBolt® Rigging Clamp utilizes Hot Dip Galvanized M12 size 1 BoxBolts® and a load ring welded to a custom fabricated anchor plate that allows for Safe Working Loads up to 5000 lbs.

The BoxBolt® Rigging Clamp is easily installed by Drilling a pre-determined set of 13/16" holes into existing steelwork, lining up the anchor plate with the newly drilled holes, inserting and tightening the LNA Solutions BoxBolts® to the specified torque values. There is no more need for site welding, tapping, or strapping.


**BQRC-V**

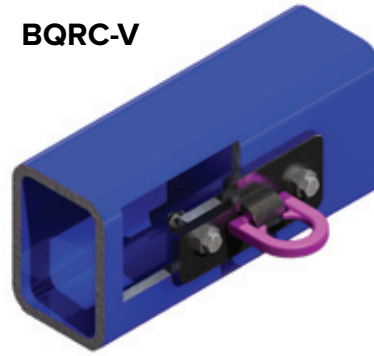

**BQRC-H**



Product Code	Outer Ply Thickness	Hole Size	Safe Working Loads (lbs)	Torque (ft lbs)	Dimensions			Thickness
					W	A	B	
BQRC050-V	1/8" - 1/2"	13/16"	5,000	59	3-1/2"	7-3/4"	5-1/4"	1/2"
BQRC050-H	1/8" - 1/2"	13/16"	5,000	59	3-1/2"	7"	4-1/2"	1/2"

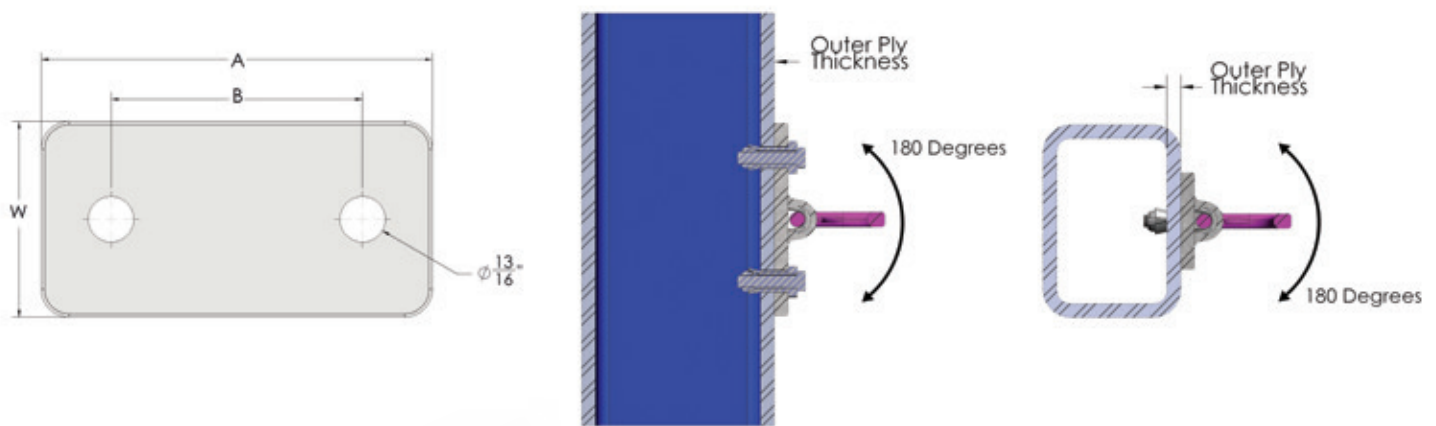

### NOTES:

Blind Connection rigging and lifting points can be individually designed for each application and carry a wide range of load capacities (Up to 30 kips) Although LNA Solutions guarantees the Safe Working Load of the BoxBolt® Connection, we are not responsible for the structural integrity of the existing steelwork.

We recommend that a Licensed Structural Engineer be consulted to establish the capacity of the existing structural member.

## FASTFIT

Fast Fit is an off the shelf engineered clamping solution to connect two steel sections together without the need for on-site drilling or welding. All you need to secure two sections together comes in one box. The system comprises a frame which wraps around the edges of the sections and slides into place to provide a position for the clamps to be secured. The system allows for varying angles that can be easily achieved by sliding the beams relative to each other.

The Fast Fit system delivers a guaranteed connection every time without the need for on-site testing or relying on the skills of the installer. No removal of the protective coatings on the existing steel or holes is required to make a connection. All that is required to complete a connection are simple hand tools and semi-skilled labor.



Product Code	Bolt Diameter	Bolt Grade	Bolt Length	Overall Size	Flange Thickness	Flange Width	Tightening Torque (ft/lb)	Tensile Load (4 bolts) (lbs)	Frictional Load (4 bolts) (lbs)
BCFF16	M16 (5/8)	8.8	5"	13 3/4" x 13 3/4"	1/8 to 1"	2 1/2" to 7 1/2"	110	4,763	1,142

### FACTOR OF SAFETY

The above loading data has a 5 to 1 Factor of Safety

### ACHIEVABLE ANGLES

The Fast Fit system is designed to allow sections of different widths to be connected at varying angles. The table below provides information on what angles can be achieved.

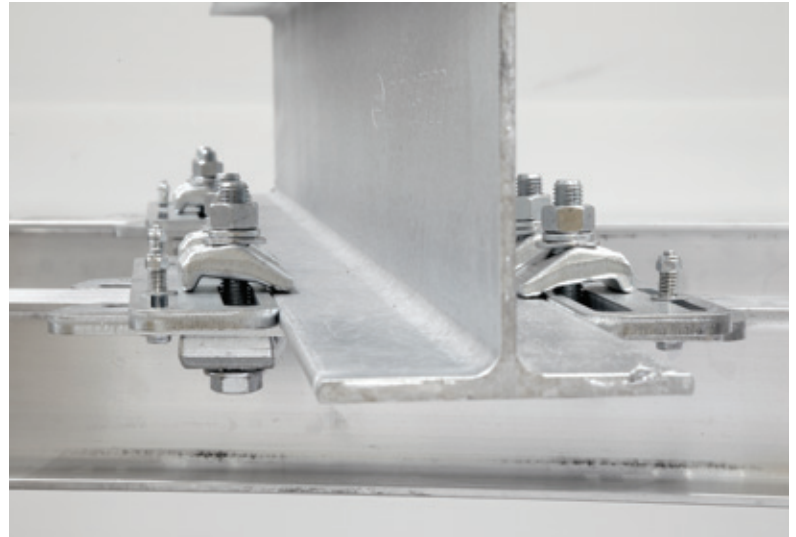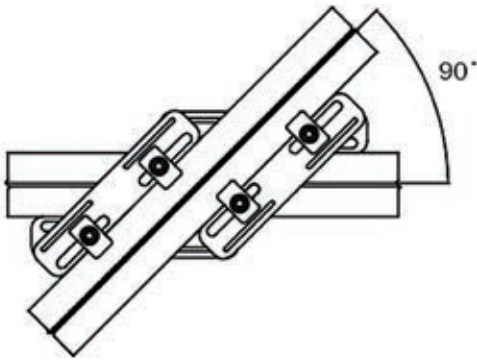

### INSTALLATION INSTRUCTIONS

The Fast Fit system can be fully installed in under 5 minutes which saves time compared to traditional welding or drilling methods.

Flange Width		Top Section										
		2.5"	3.0"	3.5"	4.0"	4.5"	5.0"	5.5"	6.0"	6.5"	7.0"	7.5"
Bottom Section	2.5"	45	45	50	50	50	55	55	60	65	70	75
	3.0"	45	45	50	50	50	55	55	60	65	70	75
	3.5"	50	50	50	50	55	55	55	55	65	70	75
	4.0"	50	50	50	50	55	55	55	55	65	70	75
	4.5"	50	50	50	50	50	55	55	55	65	70	75
	5.0"	55	55	55	55	55	55	55	55	65	70	75
	5.5"	55	55	55	55	55	55	55	60	65	70	75
	6.0"	60	60	60	60	60	60	60	65	65	70	75
	6.5"	65	65	65	65	65	65	65	65	65	70	75
	7.0"	70	70	70	70	70	70	70	70	70	75	75
	7.5"	75	75	75	75	75	75	75	75	75	75	80



## FLOORFIX HT



FloorFix HT has been developed following customer feedback to provide a clamp with increased functionality to suit a wider range of applications. Floorfix HT is designed to clamp flooring plate to supporting steel from the topside only without the need for time consuming on-site drilling, tapping, bolting or welding.


It works on a cam mechanism that can be operated using a basic hexagon key drive. Floorfix HT is so named because it allows steel erectors a high degree of tolerance. It retains all the benefits of our widely renowned original design but is far more user friendly. Floorfix HT allows for floor plates to be connected to new steel that is erected within  $\pm 1/4"$  of its intended position. It is capable of connecting to steel flanges from  $1/8"$  -  $1"$  without the need for additional packing pieces.



### FEATURES & BENEFITS

- Allows for  $\pm 1/4"$  construction tolerance
- Can clamp up to  $1"$  thick steel as standard
- Hot Dip Galvanized finish as standard
- Easily installed from the top side only
- No drilling, tapping or welding required
- Allows easy repositioning or lifting of floor plate
- No special tools or skilled labor required
- No access to the underside required
- Tested for vibration conditions at TÜV


### PLATE PREPARATION

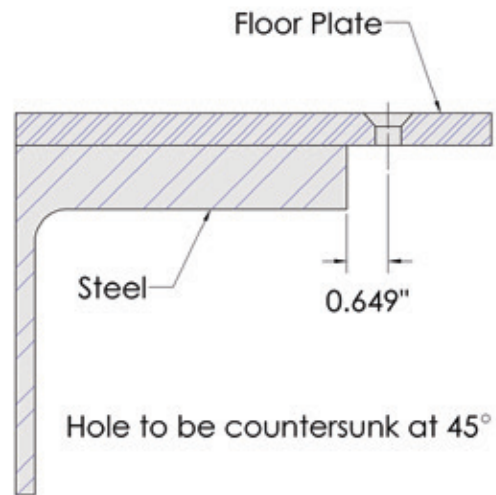


Floorfix HT has been tested for vibration conditions to simulate the most common applications where the clamps would be used, e.g. walkways, machine shops and press shops. Please ask our technical department for a copy of the certificate, should you require this.

Product Code	Screw Diameter	Floor Plate Thickness		Steel Flange Thickness		Tightening Torque (ft lb)
		min	max	min	max	
FLOORFIXM08HT	5/16"	1/8"	1/2"	1/8"	1"	15
FLOORFIXM10HT	3/8"	3/16"	1/2"	1/8"	1"	18
FLOORFIXM12HT	1/2"	1/4"	1/2"	1/8"	1"	22


## FLOORFIX HT INSTALLATION INSTRUCTIONS



**STEP 1** Assemble the Floorfix HT to the underside of the floor plate making sure the markings “THIS WAY UP” are facing the underside. Loosely tighten the bolt making sure the flat edge of the clamp is in line with the edge of the steel it is going to connect to.

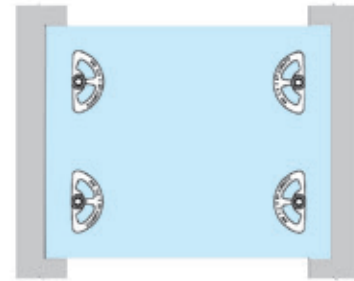


**STEP 2** Lower the plate in to position over the supporting steelwork.



**STEP 3** Once the floor plate is in the desired position, rotate the countersunk bolt one full turn counter-clockwise.

**NOTE 1** We recommend using the 1/2" version when vibration conditions are incurred as this can be tightened to a higher torque.

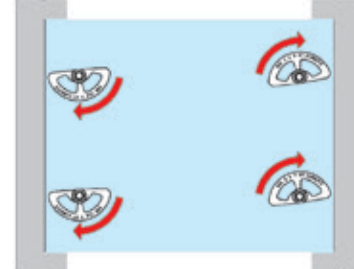

**STEP 4** Tighten the countersunk screw until the plate is secured. For guaranteed performance, use the recommended tightening torques given in the table on page 34.

**NOTE 2** If the steel being connected to is thicker than 1" then we can supply packers and a longer bolt to increase the clamping range.

## FLOORFIX

### FEATURES & BENEFITS

- Installation from one side only
- Manufactured from Ductile Iron
- Hot Dip Galvanized
- Allows for easy maintenance



Product Code	Screw Diameter	Floor Plate Thickness		Steel Flange Thickness		Tightening Torque (ft lb)
		min	max	min	max	
FLOORFIXMO8	5/16"	1/8"	1/2"	1/8"	5/8"	15
FLOORFIXM10	3/8"	3/16"	1/2"	1/8"	5/8"	18
FLOORFIXM12	1/2"	1/4"	1/2"	1/8"	5/8"	22

## GRATEFIX



### FEATURES & BENEFITS

- Mechanical Galvanized Malleable Iron
- Stainless Steel Grade 304 and 316
- Easily installed from the top side only
- No drilling, tapping or welding required
- Allows easy repositioning or lifting of grating
- No special tools or skilled labor required
- No access to the underside required
- Tested for vibration conditions at TÜV

Gratefix is a heavy-duty clamp that allows open floor grating to be clamped to the supporting steel from the topside only. The Gratefix features a cast bottom piece that provides additional strength to clamp on to the steel flange. The Gratefix is available in several different styles to suit the grating dimensions and the application.

### GF3S08

Pressed Top Bracket – Stainless Steel to EN 10088 Grade 1.4301 (AISI 304)

Cast Bottom Bracket – Stainless Steel to ASTM A743 Grade CF-8 (S30400)

### GF1S08

Pressed Top Bracket – Stainless Steel to EN 10088 Grade 1.4401 (AISI 316)

Cast Bottom Bracket – Stainless Steel to ASTM A743 Grade CF-8M (S31600)

### GF1G10 (All Lengths)

Pressed Top bracket – Material: Mild steel to EN 10025 grade S275

Cast Bottom Bracket – Material: Malleable iron to BS 1562: Grade EN GJMB-300-06


Both finished in: Mechanical Galv to ASTM B695

Product Code	Material/Finish	Screw Dia.	Flange Thickness, T	Grating Bar Depth		Grating Bar Width	Grating Bar Spacing	Body Width	Tightening Torque (ft lb)
				Min.	Max.				
GF3S08	304 Stainless Steel	5/16"	1/8 - 3/4"	7/8"	1-1/2"	5/16" - 3/8"	3/4" - 1-7/8"	5/8"	4
GF1S08	316 Stainless Steel	5/16"	1/8 - 3/4"	7/8"	1-1/2"	5/16" - 3/8"	3/4" - 1-7/8"	5/8"	4
GF1G10	Galvanized Malleable Iron	3/8"	1/8 - 3/4"	3/4"	*2" minus T	1/8" - 1/4"	1-3/16"	3/4"	8
GF1G10-75	Galvanized Malleable Iron	3/8"	1/8 - 3/4"	1-5/8"	*2-5/8" minus T	1/8" - 1/4"	1-3/16"	3/4"	8
GF1G10-90	Galvanized Malleable Iron	3/8"	1/8 - 3/4"	2-1/8"	*3-1/8" minus T	1/8" - 1/4"	1-3/16"	3/4"	8
GF1G10-100	Galvanized Malleable Iron	3/8"	1/8 - 3/4"	2-5/8"	*3-5/8" minus T	1/8" - 1/4"	1-3/16"	3/4"	8
GF1G10-110	Galvanized Malleable Iron	3/8"	1/8 - 3/4"	3-1/8"	*4-1/4" minus T	1/8" - 1/4"	1-3/16"	3/4"	8

\* Grating Bar Depth is variable dependent on thickness of the flange.


Custom solutions also available. Please contact LNA Solutions for more information.

## INSTALLATION




### STEP 1

Lower the **GRATEFIX** through the open part of the grating, ensure the bracket is seated over the adjacent bearing bars.



### STEP 2

Slide the **GRATEFIX** towards the supporting steelwork flange as far as it will go to ensure maximum clamping force.




### STEP 3

Tighten the screw and ensure that the lower casting rotates until one of the steps locates on the bearing bar.



## GRATING CLIPS

The Grating Clip is the most common style of clip used for clamping down open steel flooring. It provides a quick and cost effective method of clamping. It is Hot Dip Galvanized and comes standard with a top bracket to suit 1-3/16" - 1-5/8" ctrs grating bars.

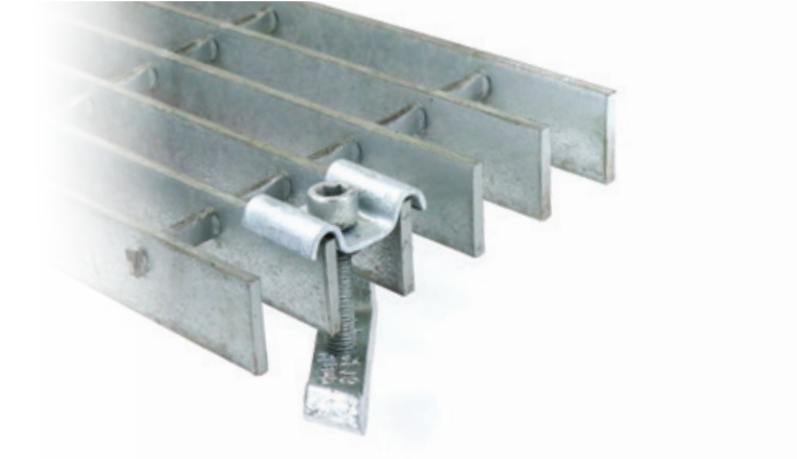

Product Code	Screw Dia.	Flange Thickness, T	Grating Bar Spacing		Grating Bar Depth
			Min.	Max.	Max.
GRAT 1G08	5/16"	1/8" – 3/4"	1-3/16"	1-5/8"	2-1/4" minus T

### FEATURES & BENEFITS

- Hot Dip Galvanized BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563

## G-CLIP GG

### FASTENS BAR GRATING TO STRUCTURAL MEMBERS

The G-Clip GG fastener is a galvanized, carbon steel grating fastener for securing steel grating to existing steel. Hand tools can be used for ease of installation. To install, simply drop the clip in place above the grating, slide the clip toward the beam flange, and tighten the G-Clip fastener using a 7/16" nut driver. Clips are also available in stainless steel for more corrosive environments.



Product Code	Bolt Diameter	Grating Thickness	Tightening Torque (ft. lb.)
KSGG-1A	1/4"	1"	5
KSGG-1B	1/4"	1 1/4"	5
KSGG-1C	1/4"	1 1/2"	5

### FEATURES & BENEFITS

- Hot Dip Galvanized BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563

G-CLIP GM


MOUNTS DEVICE ONTO FLOOR GRATING

The G-Clip GM fastener is a galvanized steel fastener used to mount devices onto the grating surface. The G-Clip GM fastener consists of three parts; the stamped top, threaded stud, and the lower body assembly.

The lower body assembly holds in place a 1/2" nut, making installation hassle-free. Install using a spanner wrench or an adjustable open end wrench to tighten in place. This clip eliminates the need for J-bolts. The G-Clip GM fastener can withstand 1,000 pounds of direct upward pull force with no distortions.


Product Code	Stud Diameter	Stud Length	Body Width
KSGM-12	1/2"	3"	7/8"

The lower body assembly is constructed with a specially designed stamped wing component that keeps a 1/2" nut from turning.

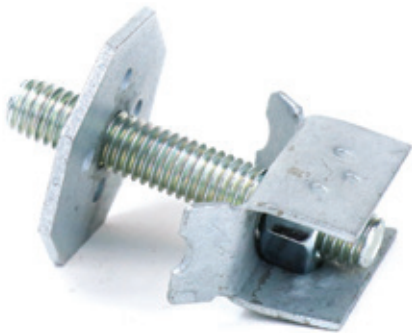

FEATURES & BENEFITS

- Hot Dip Galvanized BS EN ISO 1461
- Manufactured from Ductile Iron to BS EN 1563

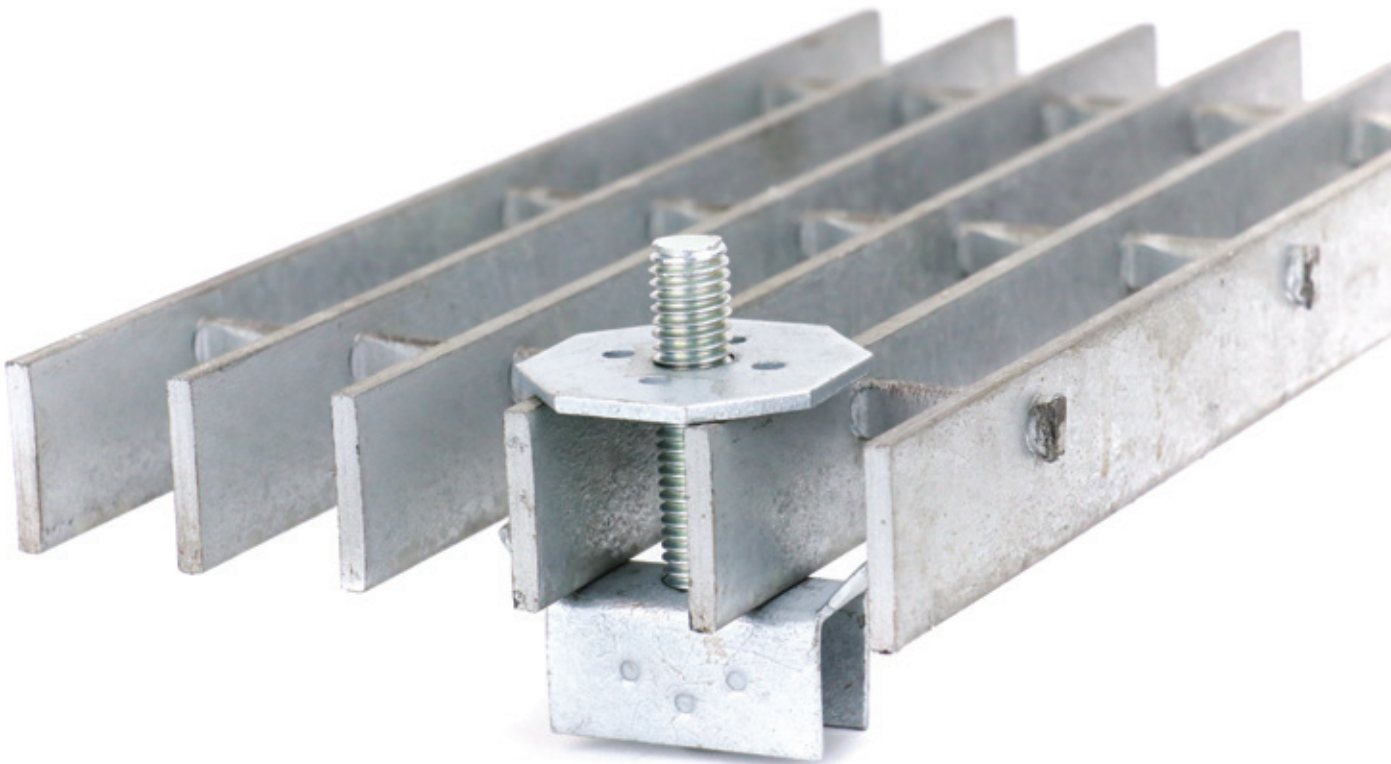

## HEMISPHERICAL CUPS AND WASHERS - BV1 + BU1

The hemispherical washers (BU1) and cups (BV1) provide a pivotable action when used with threaded rod. They allow a 10 degree swing in all directions from vertical and when used in pairs can provide a locked connection. Typical applications would be connecting to a roof rafter where the threaded rod needs to be hanging perpendicular to the floor or for making a ball socket on the legs of air conditioning support frames to allow adjustability for sloping roofs.




### FEATURES & BENEFITS

- Allows a swing of 10° in all directions
- Prevents the need to bend threaded rod
- Provides pivotable element for adjustment

Washer Product Code	Cup Product Code	A Bolt Dia	B	C	D	E	F	Tensile Load (lbs)
BU1G08	X	5/16"	7/8"	5/16"	X	X	X	281
BU1G10	BV1G10	3/8"	1"	3/8"	1/2"	1-1/4"	9/16"	562
BU1G12	BV1G12	1/2"	1-1/8"	1/2"	1/2"	1-3/8"	9/16"	926
BU1G16	BV1G16	5/8"	1-5/16"	9/16"	5/8"	1-5/8"	3/4"	1,484
BU1G20	BV1G20	3/4"	1-3/4"	3/4"	3/4"	2-1/8"	15/16"	2,151
BU1G24	BV1G24	1"	2-1/4"	1"	1"	2-5/8"	1-1/8"	2,866

All of the above loads have been subject to a 5:1 Factor of Safety.

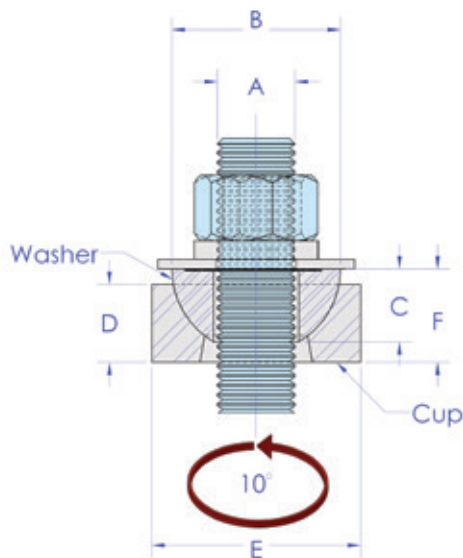





LNA Solutions, Inc.

100 Stradtman St.  
Buffalo, NY 14206

Tel: (888) 724 2323

Fax: (734) 677 2339

Email: [inquires@LNAsolutions.com](mailto:inquires@LNAsolutions.com)

[LNAsolutions.com](http://LNAsolutions.com)

LNA Solutions are authorized users of BEAMCLAMP and BOXBOLT, registered trademarks of Access Technologies Limited, a subsidiary of Kee Safety International Ltd. While every effort has been made to ensure the accuracy of the information contained in this leaflet Access Technologies Limited cannot be held responsible for any errors or omissions. Access Technologies Limited reserve the right to alter or withdraw products without prior notice. Access Technologies Limited accept no responsibility for any loss or damage arising from improper use of their products.

© 2021 LNA Solutions Inc. All Rights Reserved