

# Insulation Displacement Connectors (IDC) Telecommunications Splicing

- IDC connectors create fast splice and tap
- Corrosion resistant gel sealant protects connection
- Low voltage telecommunication cable applications
- Quick, easy one-step splicing
- Use with solid copper single-conductor wire
- UB - 2 Wire Tap Splice - permits tapping onto conductors without service interruption
- UR - 3 Wire Butt Splice - Tap onto Telecomm lines in ready-access cases for pedestal mounts, pigtail joints etc.
- UR2 - Telecomm or AC Power (220V) rated to tap onto load coils such as toll cable splicing
- UY - 2 Wire Butt Splice - designed for straight butt style splicing for Telecomm
- UY2 - Telecomm or AC Power (220V) Rated
- UCC - 2 Wire Butt Splice - designed as a butt type wire end cap without mechanical termination
- Complies with REA PE-52
- Complies with TIA/EIA 568-A Par 10.4.4 CAT-5 Std



UB 2 PORT



UR & UR2 3 PORT



UY & UY2 2 PORT




UCC

CAT. NO.	TYPE	DESCRIPTION	COLOR	WIRE RANGE	INSULATION MAX O.D.	W	L	H	BAG QTY	MASTER BAG QTY
<b>25 PACK</b>										
10752	UB	2-PORT TAP SPLICE IDC	BLUE	22-26	.050"	.346"	.492"	.24"	25	100
10754	UR	3-PORT BUTT SPLICE IDC	RED	22-26	.066"	.492"	.768"	.23"	25	100
10755	UR2	3-PORT BUTT SPLICE IDC	RED	19-26	.082"	.492"	.768"	.23"	25	100
10756	UY	2-PORT BUTT SPLICE IDC	YELLOW	22-26	.060"	.346"	.492"	.23"	25	100
10757	UY2	2-PORT BUTT SPLICE IDC	YELLOW	19-26	.082"	.346"	.492"	.23"	25	100
10760	UCC	2-PORT BUTT SPLICE IDC	RED	22-26	.060"	.346"	.492"	.23"	25	100
<b>100 PACK</b>										
10762	UB	2-PORT TAP SPLICE IDC	BLUE	22-26	.050"	.346"	.492"	.24"	100	1000
10764	UR	3-PORT BUTT SPLICE IDC	RED	22-26	.066"	.492"	.768"	.23"	100	1000
10765	UR2	3-PORT BUTT SPLICE IDC	RED	19-26	.082"	.492"	.768"	.23"	100	1000
10766	UY	2-PORT BUTT SPLICE IDC	YELLOW	22-26	.060"	.346"	.492"	.23"	100	1000
10767	UY2	2-PORT BUTT SPLICE IDC	YELLOW	19-26	.082"	.346"	.492"	.23"	100	1000
10770	UCC	2-PORT BUTT SPLICE IDC	RED	22-26	.060"	.346"	.492"	.23"	100	1000

## Phone Junction Box

- Split 1 Line Into 2 Separate Lines
- With Mounting Block
- 4 Conductor
- Ivory

CAT. NO.	BAG QTY
40070	50

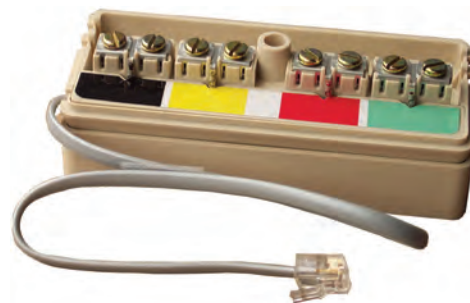

## 25-Pair 66 Phone Block

- Hooked contacts for smooth wire placement
- Nickel plating gives secure connection
- Clear plastic cover fits over entire block, protects contacts & allows a clear view of all connections without removing cover
- High-Impact PVC construction
- 22-26 Awg Wire
- 10" L x 2"W x 1-1/4" H

CAT. NO.	DESCRIPTION	CASE QTY
40130	WIRING BLOCK AND COVER	10
40132	MOUNTING BRACKET	-



WIRING BLOCK



COVER



MOUNTING BRACKET

