




MORRIS CAT#: 94750-94761

Copper Flex Cable Short Barrel Compression Splices

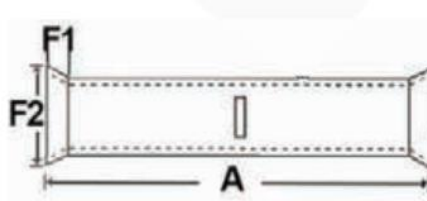

Features:

- High Conductivity Seamless Copper
- Electro-Tin Plating Resists Corrosion, Reduces Contact Resistance for Maximum Conductivity
- Flared/Belled Entry for Easy Insertion of Fine Strand Flexible Cable - Class G, H, I, K (Battery), M (Welding), DLO
- Color Coded Die Index and Crimp Marks Printed on Barrel
- UL 486A Listed for Applications Thru 35KV

DIMENSIONS = INCHES

CAT. NO.	CONDUCTOR RANGE	COLOR CODE	COMM	ASTM CLASS H	WELDING CLASS M	DLO	LENGTH (A)	F1	F2	BOX QTY
94750	8	RED	8	10	10	-	.90	.12	.32	50
94751	6	BLUE	6	8	8	(61)	1.00	.16	.34	50
94752	4	GRAY	4	6	6	(105)	1.00	.16	.42	50
94753	2	BROWN	2	4	4	(125)	1.25	.18	.49	25
94754	1	GREEN	1	2	2	(150)	1.80	.18	.53	25
94755	1/0	PINK	1/0	1	1	(225)	1.60	.18	.56	10
94756	2/0	BLACK	2/0	1/0	1/0	1/0(275)	1.75	.24	.64	10
94757	3/0	ORANGE	3/0	2/0	-	2/0(325)	1.75	.24	.72	10
94758	4/0	PURPLE	4/0	3/0	2/0	3/0(450)	1.90	.26	.77	10
94759	250	YELLOW	250	-	3/0	4/0(550)	2.00	.26	.84	10
94760	300	WHITE	300	4/0	4/0	262.6	2.10	.31	.94	10
94761	350	RED	350	250	250	313.1	2.10	.33	1.02	10