














VISUAL  
INDEX

# Seal-Lok™ O-Ring Face Seal Tube Fittings































A








ENGINEERING YOUR SUCCESS.

<b>Nuts, Sleeves, Locknuts</b>	<b>BL</b> Tube Nut	<b>BML</b> Tube Nut - mm Hex	<b>TPLS (Metric)</b> Parflange Sleeve	<b>TPL (Inch)</b> Parflange Sleeve	<b>TL (Inch)</b> Braze Reducer Sleeve
					
	A9	A9	A9	A9	A10
<b>TLS (Metric)</b> Braze Reducer Sleeve	<b>SBR (Inch and Metric)</b> Braze Ring	<b>WLNL</b> Bulkhead Locknut	<b>WLNML</b> Blkhd Locknut - mm Hex	<b>Straights</b>	<b>HLO</b> Union
					
A10	A11	A11	A11		A12
<b>HMLO</b> Union - mm Hex	<b>WLO</b> Bulkhead Union	<b>WMLO</b> Bulkhead Union - mm Hex	<b>WF5OLO</b> ORFS Blkhd / SAE-ORB	<b>F5OLO</b> ORFS / SAE-ORB	<b>FF5OLO</b> ORFS - Long / SAE-ORB
					
A12	A12	A13	A13	A14	A14
<b>FLO</b> ORFS / NPTF	<b>GLO</b> ORFS / NPTF	<b>F87OMLO</b> ORFS / ISO 6149	<b>F82EDMLO</b> ORFS / Metric-ED	<b>F42EDMLO</b> ORFS / BSPP-ED	<b>LOHB3</b> ORFS / Braze Socket
					
A14	A15	A15	A15	A15	A16
<b>MMLOHB3</b> ORFS / Braze - mm Hex	<b>LOHT3</b> ORFS / Tube Weld	<b>TLW1</b> Butt Weld / Sleeve	<b>Straight Swivels</b>	<b>TRLON</b> Tube End Reducer	<b>LOHL6</b> Extender and Expander
					
A16	A16	A17		A17	A18
<b>HL6</b> ORFS Swivel Union	<b>F65OL</b> ORFS Swivel / SAE-ORB	<b>G65L</b> ORFS Swivel / SAE-ORB	<b>F6L</b> ORFS Swivel / NPTF	<b>G6L</b> ORFS Swivel / NPTF	<b>F687OML</b> ORFS Swivel / ISO 6149
					
A18	A18	A18	A18	A18	A19
<b>F682EDML</b> ORFS Swivel / Metric-ED	<b>F642EDML</b> ORFS Swivel / BSPP-ED	<b>45° Elbows</b>	<b>WNLO</b> Bulkhead Union	<b>WNMLO</b> Bulkhead Union - mm Hex	<b>V6LO</b> ORFS Swivel Elbow
					
A19	A19		A19	A20	A20
<b>V5OLO</b> ORFS / SAE-ORB	<b>V87OMLO</b> ORFS / ISO 6149	<b>VLO</b> ORFS / NPTF	<b>V4OMLO</b> ORFS / BSPP-ORR	<b>90° Elbows</b>	<b>ELO</b> Union Elbow
					
A20	A20	A21	A21		A21



A

<b>EMLO</b> Union Elbow - mm Hex	<b>WELO</b> Bulkhead Union	<b>WEMLO</b> Bulkhead Union - mm Hex	<b>C6LO</b> ORFS Swivel Elbow	<b>C6MLO</b> Swivel Elbow - mm Hex	<b>AOEL6</b> ORFS Swivel / SAE-ORB
					
A21	A22	A22	A23	A23	A23
<b>C5OLO</b> ORFS / SAE-ORB	<b>CC5OLO</b> ORFS / SAE-ORB - Long	<b>CLO</b> ORFS / NPTF	<b>C87OMLO</b> ORFS / ISO 6149	<b>CC87OMLO</b> ORFS / ISO 6149 - Long	<b>C8OMLO</b> ORFS / Metric-ORR
					
A23	A24	A24	A24	A25	A25
<b>C4OMLO</b> ORFS / BSPP-ORR	<b>Tees</b>		<b>JLO</b> Union Tee	<b>JMLO</b> Union Tee - mm Hex	<b>WJLO</b> Bulkhead Branch
					
A26	A26		A26	A26	A26
<b>WJJLO</b> Bulkhead Run	<b>WJJMLO</b> Bulkhead Run - mm Hex	<b>S6LO</b> ORFS Swivel Branch	<b>S6MLO</b> Swivel Branch - mm Hex	<b>R6LO</b> ORFS Swivel Run	<b>R6MLO</b> Swivel Run - mm Hex
					
A27	A28	A28	A28	A29	A29
<b>S5OLO</b> SAE-ORB Branch Tee	<b>R5OLO</b> SAE-ORB Run Tee	<b>SLO</b> NPTF Branch Tee	<b>S87OMLO</b> ISO 6149 Branch Tee	<b>R87OMLO</b> ISO 6149 Run Tee	<b>S4OMLO</b> BSPP-ORR Branch Tee
					
A29	A30	A30	A30	A31	A31
<b>R4OMLO</b> BSPP-ORR Run Tee	<b>Crosses</b>		<b>KLO</b> Union Cross	<b>Plugs, Caps and Bleed Adapters</b>	
					
A32	A32		A32	A33	
<b>FNL</b> ORFS Cap	<b>FNML</b> ORFS Cap - mm Hex	<b>UPTC Nut Assembly</b>		<b>PNLO</b> ORFS Plug	<b>PNMLO</b> ORFS Plug - mm Hex
					
A33	A33	A33		A34	

## Conversion Adapters (Shown in Section K)

<b>Conversion Adapters</b>	XHLO 37° Flare / ORFS  K3	XHL6 37° Flare / ORFS Swivel  K3	LOHX6 ORFS / 37° Swivel  K3	BUHLO ORFS / Flareless (inch)  K4	LOHU86 Metric Swivel (EO)/ORFS  K4
<b>LOEX6</b> ORFS / 37° Swivel  K3					


## Flange Adapters (Shown in Section L)

<b>SAE Flange Adapters</b>	LOHQ1 Code 61 / ORFS  L12	LOHQ2 Code 62 / ORFS  L12	LOVQ1 Code 61 / ORFS  L30	LOVQ2 Code 62 / ORFS  L30	LOEQ1 Code 61 / ORFS  L31
<b>LOEQ2</b> Code 62 / ORFS  L31					

## Diagnostic, Bleed Adapters & Screen Fittings (Shown in Section M)

<b>Diagnostic, Bleed Adapters &amp; Screen Fittings</b>	LOHL6 Orifice Orifice Swivel with Orifice / ORFS  M9	LOHL6G5TP Orifice Swivel / ORFS / SAE-ORB  M5	PNLOBA Bleed Screw / ORFS  M10	FNLBA Bleed Screw / SAE-ORB  M10	Screen Fittings  M12
---	--	---	--	--	---

## O-Rings and Seals (Shown in Section N)

<b>O-Rings and Seals</b>	ORFS O-Ring  N4	SAE O-Ring  N4	ISO 6149 O-Ring  N5	Metric O-Ring  N5	Metric Retaining Ring  N5
BSPP O-Ring  N6	BSPP Retaining O-Ring  N6	Elastic Seal Ring  N6			

## Seal-Lok Introduction

The Seal-Lok fitting meets or exceeds the strict requirements of SAE J1453 and ISO 8434-3. It is an O-ring face seal type fitting that consists of a nut, a body, an O-ring and a sleeve. As shown in Fig. A2, the tube is flanged to 90° (or the tube may be brazed instead to a braze-type sleeve). When the fitting is assembled, it compresses an O-ring in the precision machined groove of the fitting body to form a leak tight seal.

Seal-Lok fittings are suitable for a wide range of tube wall thicknesses and are readily adaptable to inch or metric tubing and hose. (Please refer to Tables U3 and U4 located in the Appendix section for min./max. tube wall thickness for inch and metric tubing, respectively). Seal-Lok's leak-free design and rugged construction make it suitable for a wide range of applications where higher pressures, vibration and impulse are prevalent.

## How Seal-Lok Fittings Work

The Seal-Lok fitting body face contains a high durometer trap seal to maximize retention in a precision machined groove also known as a Captive O-Ring Groove (CORG) referenced in Fig. A1. As the nut is tightened onto the fitting body, the trap seal is compressed between the body and flat face of the tube flange or braze sleeve to form a tight, positive seal (see Fig. A2).

As the two faces come in contact, further tightening of the nut produces a sharp rise in assembly torque. A solid pull of the wrench at this point, to recommended assembly torque, completes the assembly. The sharp torque rise gives a "solid feel" at assembly, minimizing the possibility of over tightening.

Because the sealing surfaces are flat and perpendicular to the assembly pull, they remain virtually free of distortion during assembly, giving Seal-Lok fittings practically unlimited remakability. The O-ring should be inspected at each disassembly and replaced when necessary. **See the O-Rings and Seals section for information on replacement ORFS O-rings.**

Because the tubing is a sealing surface, it must be smooth, free of any nicks, scratches, spiral tool marks, splits or weld beads. Seamless tube is recommended for Seal-Lok fittings for ease in flanging and bending. Certain types of harder tubes that are not fully annealed may not be suitable for flanging due to the potential for immediate or long-term cracking of the tube flange. For specific tube type and wall thickness recommendations, please see Table U3 in the Appendix Section.

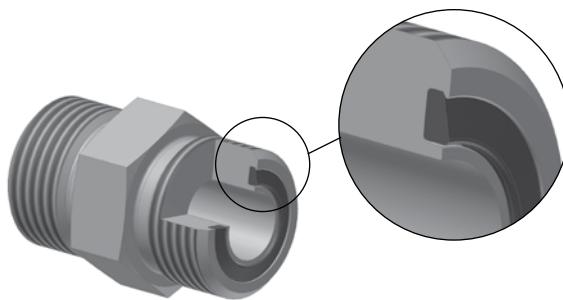
## Reference locations

**Dynamic Pressure Ratings:** Please refer to the last column of the part number tables located on the following pages of this section for the appropriate dynamic pressure ratings.

**Recommended Tube Wall Thickness:** Please refer to Table U3 located in the Appendix section.

**Assembly and Installation:** Please refer to Seal-Lok Assembly located within the Assembly/Installation section of this catalog.

**Standard material specifications:** Please refer to Table U1 located in the Appendix section.



VISUAL INDEX

Fig. A1 — Captive O-ring Groove (CORG) Cutaway with Parker's trap seal

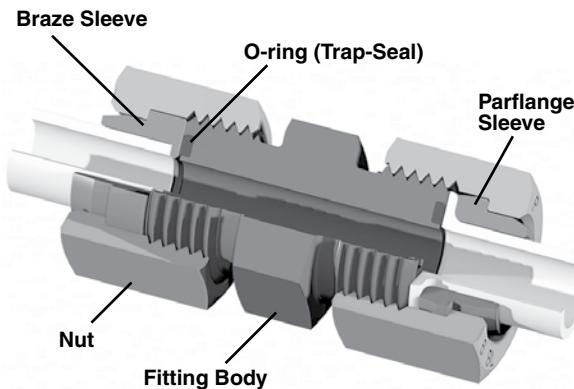


Fig. A2 — Seal-Lok Union cutaway with flanged and brazed assemblies

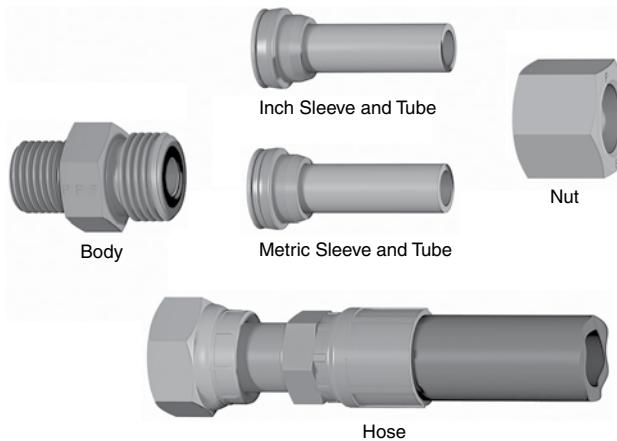


Fig. A3 — Seal-Lok Works with Inch or Metric Tube and Hose

Dimensions and pressures for reference only, subject to change.

**Seal Material Selection:** Please refer to Table T8 in the General Technical section of this catalog.

**Tube Wall Thickness:** Recommended min/max tube wall thicknesses for inch and metric Seal-Lok are provided in Tables U3 and U4 in the Appendix section, respectively. When using the braze method, all tube wall thicknesses can be used. For Parflange min/max tube wall thickness range, please refer to page R24 for tooling availability.



**Fig. A4 — UPTC Seal-Lok is adaptable to a UPTC hydraulic or thermoplastic hose assembly. To be used with ET, EN, or EU hose ends.**

VISUAL INDEX

## International Acceptance

The tube/hose end connection for metric Seal-Lok is the same as standard (inch) Seal-Lok. It consists of a body, a flange or braze sleeve, an O-ring and a nut. The difference is at the port end of the fitting. Instead of the SAE straight thread connection for example, it features a similar connection with metric threads per ISO 6149-2 or ISO 9974-1. Additionally, the fitting body, tube nut and locknut are manufactured with metric hexes or wrench flats for shaped fittings. The metric Seal-Lok fittings meet or exceed all requirements of ISO 8434-3.

To identify the metric sleeves used for metric tubing, there is a groove machined into the TPLS & TLS sleeves.

### UPTC Pressure Ratings

Size	Pressure (psi)	Pressure (Bar)
-4	5800	400
-6	5000	345
-8	4250	293
-10	4000	276
-12	3125	216
-16	3125	216

**Table A1 — UPTC Seal-Lok pressure ratings.**

## Universal Push-to-Connect (UPTC) Introduction

Traditionally, the fluid power industry has utilized threaded connectors to make a leak free connection. The speed of making connections is slow and the reliability of the connection is dependent on proper assembly procedures. Parker's UPTC connectors, on the other hand, rely on a mechanical retaining mechanism (other than threads) for holding power. No tools are required to assemble, and the reliability and speed of making connections with the UPTC design is greatly improved.

## Design and Construction

UPTC Seal-Lok consists of a base Seal-Lok ORFS fitting, a UPTC nut (including internal sealing and retaining elements) and a UPTC hose assembly, as shown in figure A4. The base ORFS fitting is a highly reliable and widely available off-the-shelf standard SAE J1453 adapter. The sealing O-Ring is supported by a pressure energized anti-extrusion ring that prevents O-Ring extrusion and ensures tight sealing even under high pressure. Once fully engaged, the retaining element is positively trapped between the male and UPTC nut. The dust seal keeps contamination out as well as giving a visual indication that the male stud has been inserted all the way. There is also a clear tactile indicator at the end of the push indicating a proper connection. Once a proper connection is made, the dust seal is covered by the UPTC nut. Proof of full engagement for easy inspection and quality control.

Once connected, the UPTC nut is permanently attached to the UPTC hose end similar to a traditional swivel nut. To disconnect, just use a wrench to unscrew the UPTC nut from the base adapter. Re-connect is possible by tightening the UPTC nut back to the base adapter, if the connection is not damaged. If the hose is damaged, it can be replaced by installing a readily available standard Seal-Lok ORFS hose assembly, or a new UPTC assembly.



### Features

- Available in sizes 1/4", 3/8", 1/2", 5/8", 3/4", and 1"
- Utilizes all Seal-Lok adapters for a wide variety of configurations, as well as excellent field serviceability
- Meets or exceeds SAE 100R2 pressure ratings (see Table A1)
- Includes visual and tactile installation indicators
- Self-aligning nipple eliminates hose twist during assembly
- No special tooling required for disassembly
- Utilizes elastomeric seals, including Parker's patented Trap-Seal

## How to order examples

A

VISUAL  
INDEX

Base Seal-Lok Part	UPTC Part #	Explanation
	8 C5OLO-S	Uniform size, UPTC subassembly on 1st end only
	8-10 C5OLO-S	Jump size, UPTC subassembly on 1st end only
	8 R5OLO-S	Uniform size, UPTC subassembly on 1st and 3rd end
	8-10-8 R5OLO-S	Jump size, UPTC subassembly on 3rd end only
	8-10-8 R5OLO-S	Jump size, UPTC subassembly on 1st end only
	8M14F87OMLOS	Compressed nomenclature, UPTC subassembly on 1st end only

## The Parker Advantage

**Trap Seal™:** The patented trapezoidal seal of the Seal-Lok tube end allows for maximum o-ring retention in the CORG groove. This advantage over the competition increases the productivity of assembly as well as offers the maximum assurance for a leak free connection. Ultimately, operational and maintenance costs can be avoided.

**Resistance to over-torque:** The minimum requirement for a Seal-Lok connection is to withstand 200% torque above the rated value. This reduces the frequency of metal distortion and the potential of leaks. Seal-Lok reduces production assembly and maintenance costs by its resistance to over-torque.

**Zero clearance:** The flat face of Seal-Lok allows for easy and fast drop-in installation. This reduces rework costs from a design and assembly perspective. Maintenance cost can be avoided due to the time savings of disassembly and assembly.

**High pressure rating:** Seal-Lok offers a high pressure rating which can be used in a wide range of applications. This provides the opportunity to standardize across multiple product lines, saving procurement and inventory costs.

**Superior Plating:** Superior plating gives Parker steel tube fittings unmatched protection against red rust. In neutral salt spray test per ASTM B117, Parker Triple-Lok fittings substantially exceeded the SAE requirement of 96 hours to red rust.

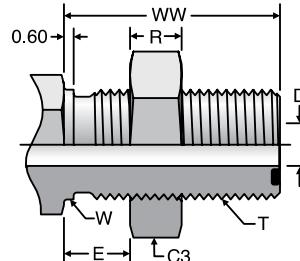
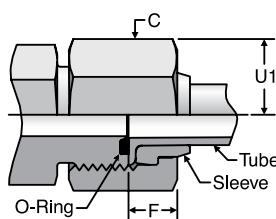
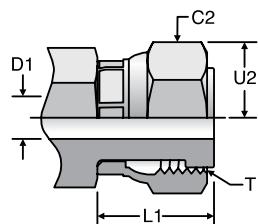

**Robust Port Stud:** The adjustable port stud is manufactured with a longer locknut designed to cover the uppermost threads completely. Since the backup washer is never exposed to the upper threads, it cannot be damaged during assembly. During assembly, exposed upper threads, as common with fittings from other fitting manufacturers, can lead to a deformed backup washer that can pinch the o-ring and create an o-ring extrusion gap that has the potential to leak. The longer locknut also provides a greater grip area for the wrench.

**Unlimited reusability:** When a Seal-Lok connection is completely assembled and disassembled, very little metal is distorting in the connection. So, Seal-Lok allows for unlimited reusability in the field, reducing the component replacement and maintenance costs of the connection.

**Universal Push to Connect (UPTC):** Parker's UPTC offers a quick and easy way to assemble Seal-Lok configurations. UPTC is ideal for hard to reach applications or to speed up the process of assembly. The tangible operational and maintenance costs associated with each connection made will be reduced when using UPTC.

Dimensions and pressures for reference only, subject to change.

## Seal-Lok O-Ring Face Seal Tube Ends



Seal-Lok Male  
Tube End

Seal-Lok Female  
Swivel

Seal-Lok Tube End  
Assembly

Seal-Lok Bulkhead

VISUAL  
INDEX

	SAE Dash Size	Tube O.D. (in.)	T UN/UNF	Thread	Tube Nut Hex	Swivel Nut Hex	Bulthead Locknut Hex	Nominal Drill Tube End	Nominal Drill Swivel End	Max Bulthead Thickness	Tube Nut Assembled Allowance	Swivel Turn Back	Male Turn Back	Bulkhead		Across Corners								
														C (in.)	C2 (mm)	C3 (in.)	D <sup>1)</sup> (in.)	D1 <sup>1)</sup> (in.)	E (in.)	F (in.)	L1 (in.)	L4 (in.)	R (in.)	W <sup>2)</sup> (in.)
4	1/4	6	9/16-18	11/16	17	11/16	17	13/16	22	0.177	0.157	0.55	0.270	0.642	0.394	0.27	0.563	1.24	0.80	0.80				
6	3/8	8 10	11/16-16	13/16	22	13/16	22	1	27	0.256	0.256	0.55	0.340	0.715	0.441	0.32	0.688	1.34	0.94	0.94				
8	1/2	12	13/16-16	15/16	24	15/16	24	1 1/8	30	0.374	0.354	0.55	0.400	0.865	0.512	0.35	0.813	1.44	1.08	1.08				
10	5/8	14 15 16	1-14	1 1/8	30	1 1/8	30	1 5/16	36	0.492	0.453	0.55	0.455	0.980	0.618	0.41	1.000	1.60	1.30	1.30				
12	3/4	18 20	1 3/16-12	1 3/8	36	1 3/8	36	1 1/2	41	0.610	0.551	0.55	0.510	1.110	0.677	0.41	1.188	1.64	1.58	1.58				
14	7/8	—	1 5/16-12	1 1/2		1 1/2		1 5/8		0.709	0.709	0.55	0.512	1.145	0.697	0.41	1.313	1.66	1.74	1.74				
16	1	22 25	1 7/16-12	1 5/8	41	1 5/8	41	1 3/4	46	0.807	0.787	0.55	0.596	1.190	0.697	0.41	1.438	1.66	1.88	1.88				
20	1 1/4	28 30 32	1 11/16-12	1 7/8	50	1 7/8	50	2	50	1.024	1.024	0.55	0.566	1.251	0.697	0.41	1.688	1.66	2.16	2.16				
24	1 1/2	35 38	2-12	2 1/4	60	2 1/4	60	2 3/8	60	1.260	1.260	0.55	0.545	1.330	0.697	0.41	2.000	1.66	2.60	2.60				
32	2	42 50	2 1/2-12	2 7/8		2 7/8		2 3/4		1.772	1.732	0.50	0.606	1.690	0.874	0.54	2.500	1.83	3.32	3.32				

1) D and D1 nominal may vary from the values shown in the chart by 0.004 to 0.008. Also, D for -4 metric based Seal-Lok may be D.197 (5 mm) to satisfy ISO 8434-3 (1994 edition). Contact the Tube Fittings Division if there are any questions.

2) Recommended clearance hole = W + 0.015.

3) See page N4 for ORFS O-rings.

4) Note: For port and stud end dimensions reference section F: Pipe Fittings and Port Adapters.


Dimensions and pressures for reference only, subject to change.



## TL (Inch)


Braze Sleeve for Inch Tubing  
ORFS Silver Braze Sleeve Reducer

SAE 520115



## TLS (Metric)

Braze Sleeve for Metric Tubing  
ORFS Silver Braze Sleeve



ISO 8434-3 BRSL  
SAE 5201M15

TUBE FITTING PART #	END SIZE		A (in.)	D* (in.)	E (in.)	F (in.)	Material	
	1 (in.)	2 (in.)					-S	-SS
4 TL	1/4		0.50	0.26	0.04	0.37	•	•
6 TL	3/8		0.62	0.38	0.04	0.37	•	•
6-4 TL	3/8	1/4	0.62	0.26	0.08	0.41	•	•
8 TL	1/2		0.75	0.51	0.04	0.37	•	•
8-4 TL	1/2	1/4	0.75	0.26	0.14	0.47	•	•
8-6 TL	1/2	3/8	0.75	0.38	0.14	0.47	•	•
10 TL	5/8		0.92	0.63	0.06	0.41	•	•
10-4 TL	5/8	1/4	0.92	0.26	0.20	0.53	•	•
10-6 TL	5/8	3/8	0.92	0.38	0.20	0.53	•	•
10-8 TL	5/8	1/2	0.92	0.51	0.20	0.53	•	•
12 TL	3/4		1.10	0.76	0.06	0.55	•	•
12-4 TL	3/4	1/4	1.10	0.26	0.24	0.57	•	•
12-6 TL	3/4	3/8	1.10	0.38	0.24	0.57	•	•
12-8 TL	3/4	1/2	1.10	0.51	0.24	0.57	•	•
12-10 TL	3/4	5/8	1.10	0.63	0.22	0.57	•	•
12-14 TL**	3/4	7/8	1.10	0.88	0.06	0.65	•	•
14 TL***	7/8		1.22	0.88	0.06	0.55	•	•
16 TL	1		1.35	1.01	0.06	0.61	•	•
16-8 TL	1	1/2	1.35	0.51	0.28	0.61	•	•
16-10 TL	1	5/8	1.35	0.63	0.26	0.61	•	•
16-12 TL	1	3/4	1.35	0.76	0.18	0.67	•	•
16-14 TL	1	7/8	1.35	0.88	0.18	0.67	•	•
20 TL	1 1/4		1.60	1.26	0.06	0.61	•	•
20-12 TL	1 1/4	3/4	1.60	0.76	0.28	0.77	•	•
20-16 TL	1 1/4	1	1.60	1.01	0.28	0.83	•	•
24 TL	1 1/2		1.91	1.51	0.06	0.61	•	•
24-16 TL	1 1/2	1	1.91	1.01	0.28	0.83	•	•
24-20 TL	1 1/2	1 1/4	1.91	1.26	0.28	0.83	•	•
32 TL***	2		2.41	2.01	0.06	0.65	•	•

Unplated part, oil dipped for corrosion protection.

\* D is for silver brazing.

\*\* 12-14 TL must be assembled with 12-14 BL.

\*\*\* Sizes 14 and 32 are not included in SAE J1453.

• Uses SBR silver braze rings

TUBE FITTING PART #	USED WITH FITTING SIZE	D* END SIZE (mm)	D8 DIA (mm)	L (mm)	L2 (mm)	Material	
						S	SS
TLS6	-4	6	12.8	9.5	1.0	•	•
TLS8	-6	8	15.8	9.5	1.0	•	•
TLS10	-6	10	15.8	9.5	1.0	•	•
TLS12	-8	12	18.9	9.5	1.0	•	•
TLS16	-10	16	23.5	10.5	1.5	•	•
TLS20	-12	20	27.9	14.0	1.5	•	•
TLS25	-16	25	34.2	15.5	1.5	•	•
TLS30	-20	30	40.6	15.5	1.5	•	•
TLS38	-24	38	48.5	15.5	1.5	•	•

Unplated part, oil dipped for corrosion protection.

\* D is for silver brazing.

• Uses SBR (metric) silver braze rings

• Stainless steel part number example: TLSS10

VISUAL  
INDEX

Dimensions and pressures for reference only, subject to change.


## SBR (Inch)

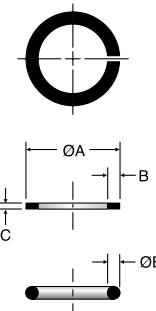Silver Braze Ring for Inch Tubing

TUBE FITTING PART #	END SIZE (in.)	A DIA (in.)	B (in.)	C (in.)	E (in.)
4 SBR	1/4	0.260	—	—	0.05
6 SBR	3/8	0.390	0.07	0.03	—
8 SBR	1/2	0.515	0.07	0.03	—
10 SBR	5/8	0.640	0.07	0.03	—
12 SBR	3/4	0.765	0.08	0.04	—
14 SBR	7/8	0.890	—	—	0.06
16 SBR	1	1.015	0.08	0.04	—
20 SBR	1 1/4	1.265	0.08	0.04	—
24 SBR	1 1/2	1.515	0.08	0.04	—
32 SBR	2	2.015	—	—	0.09

SBR recommended for steel or copper tubing. -S not required.

SBR-SS recommended for stainless tubing, but can be used on steel tubing.  
Contact the Tube Fittings Division for braze rings used in marine or special applications.



## SBR (Metric)

Silver Braze Ring for Metric Tubing

TUBE FITTING PART #	END SIZE (mm)	A DIA (mm)	E (mm)
SBR 6mm	6	6.4	1.2
SBR 8mm	8	8.4	1.2
SBR 10mm	10	10.4	1.2
SBR 12mm	12	12.4	1.2
SBR 16mm	16	16.4	1.2
SBR 20mm	20	20.4	1.6
SBR 25mm	25	25.4	1.6
SBR 30mm	30	30.4	1.6
SBR 38mm	38	38.4	1.6




A

VISUAL INDEX

## WLNL

Bulkhead Locknut

SAE 520118




TUBE FITTING PART #	END SIZE (in.)	T TUBE END UN/UNF-2A	B HEX (in.)	TT (in.)	Material
4 WLNL	1/4	9/16 - 18	13/16	0.27	•
6 WLNL	3/8	11/16 - 16	1	0.31	•
8 WLNL	1/2	13/16 - 16	1 1/8	0.35	•
10 WLNL	5/8	1 - 14	1 5/16	0.41	•
12 WLNL	3/4	1 3/16 - 12	1 1/2	0.41	•
14 WLNL*	7/8	1 5/16 - 12	1 5/8	0.41	•
16 WLNL	1	1 7/16 - 12	1 3/4	0.41	•
20 WLNL	1 1/4	1 11/16 - 12	2	0.41	•
24 WLNL	1 1/2	2 - 12	2 3/8	0.41	•

\* Size 14 is not included in SAE J1453.

## WLNML

Bulkhead Locknut – mm Hex

ISO 8434-3 BHLN  
SAE 52M0118




TUBE FITTING PART #	END SIZE		D TUBE END UN/UNF-2B	H2 (mm)	S4 HEX (mm)	Material
	(mm)	(in.)				
4WLNML	6	1/4	9/16 - 18	7.0	22	•
6WLNML	8,10	3/8	11/16 - 16	8.0	27	•
8WLNML	12	1/2	13/16 - 16	9.0	30	•
10WLNML	14,15,16	5/8	1 - 14	10.5	36	•
12WLNML	18,20	3/4	1 3/16 - 12	10.5	41	•
16WLNML	22,25	1	1 7/16 - 12	10.5	46	•
20WLNML	28,30,32	1 1/4	1 11/16 - 12	10.5	50	•
24WLNML	35,38	1 1/2	2 - 12	10.5	60	•

Dimensions and pressures for reference only, subject to change.

## HLO

Union  
ORFS / ORFS


SAE 520101



## HMLO

Union – mm Hex  
ORFS / ORFS

ISO 8434-3 S  
SAE 52M0101




TUBE FITTING PART #	END SIZE		FF (in.)	H HEX (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)			-S	-SS
4 HLO	1/4	1/4	1.08	5/8	9.2	9.2
6 HLO	3/8	3/8	1.22	3/4	9.2	9.2
6-4 HLO	3/8	1/4	1.18	3/4	9.2	9.2
8 HLO	1/2	1/2	1.40	7/8	9.2	9.2
8-6 HLO	1/2	3/8	1.32	7/8	9.2	9.2
10 HLO	5/8	5/8	1.67	1 1/16	6.0	6.0
10-8 HLO	5/8	1/2	1.57	1 1/16	6.0	6.0
12 HLO	3/4	3/4	1.85	1 1/4	6.0	6.0
12-8 HLO	3/4	1/2	1.69	1 1/4	6.0	6.0
12-10 HLO	3/4	5/8	1.79	1 1/4	6.0	6.0
16 HLO	1	1	1.95	1 1/2	6.0	6.0
16-12 HLO	1	3/4	1.93	1 1/2	6.0	6.0
20 HLO	1 1/4	1 1/4	2.03	1 3/4	6.0	6.0
20-16 HLO	1 1/4	1	2.03	1 3/4	6.0	6.0
24 HLO	1 1/2	1 1/2	2.09	2 1/8	5.0	5.0
32 HLO*	2	2	2.48	2 3/4	3.0	3.0

\* Size 32 is not included in SAE J1453.

## WLO

Bulkhead Union  
ORFS / ORFS

SAE 520601  
WLO-WLNL Body with Locknut  
(See page A11 for WLNL)



TUBE FITTING PART #	END SIZE (in.)	B HEX (in.)	E MAX (in.)	GG (in.)	SS	W DIA (in.)	WW (in.)	Dynamic Pressure (x 1,000 PSI)	
								-S	-SS
4 WLO	1/4	13/16	0.55	1.90	0.06	0.56	1.24	9.2	9.2
6 WLO	3/8	1	0.55	2.09	0.06	0.69	1.34	9.2	9.2
8 WLO	1/2	1 1/8	0.55	2.30	0.06	0.81	1.44	9.2	9.2
10 WLO	5/8	1 5/16	0.55	2.62	0.06	1.00	1.59	6.0	6.0
12 WLO	3/4	1 1/2	0.55	2.72	0.06	1.19	1.63	6.0	6.0
16 WLO	1	1 3/4	0.55	2.76	0.06	1.44	1.65	6.0	6.0
20 WLO	1 1/4	2	0.55	2.76	0.06	1.69	1.65	6.0	6.0
24 WLO	1 1/2	2 3/8	0.55	2.76	0.06	2.00	1.65	5.0	5.0

\*\* W – Bulkhead pilot diameter. Recommended clearance hole is  
W + 0.015".

VISUAL  
INDEX

Dimensions and pressures for reference only, subject to change.


## WMLO

Bulkhead Union – mm Hex  
ORFS / ORFS

ISO 8434-3 BHS

SAE 52M0601

WMLO-WLNML - Body with Locknut  
(See page A11 for WLNML)



A

VISUAL INDEX

TUBE FITTING PART #	END SIZE		d27** (mm)	E (mm)	I4 (mm)	I2 (mm)	L15 (mm)	S4 HEX (mm)	Dynamic Pressure (x 1,000 PSI)							
	1 & 2								S	SS						
	(mm)	(in.)														
4WMLO	6	1/4	14.3	14	31.5	1.5	48.0	22	9.2	9.2						
6WMLO	8,10	3/8	17.5	14	34.0	1.5	53.0	27	9.2	9.2						
8WMLO	12	1/2	20.6	14	36.5	1.5	58.5	30	9.2	9.2						
10WMLO	14,15,16	5/8	25.4	14	40.5	1.5	66.5	36	6.0	6.0						
12WMLO	18,20	3/4	30.2	14	41.5	1.5	69.0	41	6.0	6.0						
16WMLO	22,25	1	36.5	14	42.0	1.5	70.0	46	6.0	6.0						
20WMLO	28,30,32	1 1/4	42.9	14	42.0	1.5	70.0	50	6.0	6.0						
24WMLO	35,38	1 1/2	50.8	14	42.0	1.5	70.0	60	5.0	5.0						

\* E – Maximum bulkhead thickness.

\*\*d27 – Bulkhead pilot diameter. Recommended clearance hole is d27 + 0.4 mm


## WF5OLO

Straight Thread Bulkhead

Connector

ORFS / SAE-ORB

WF5OLO-WLNL - Body with Locknut  
(See page A11 for WLNL)



TUBE FITTING PART #	END SIZE		B HEX (in.)	E MAX (in.)	H HEX (in.)	L (in.)	SS (in.)	W DIA (in.)	WW (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 UN/UNF-2A								-S	-SS
4WF5OLO	1/4	7/16 - 20	13/16	0.55	13/16	2.14	0.06	0.56	1.24	9.2	9.2
6WF5OLO	3/8	9/16 - 18	1	0.55	1	2.31	0.06	0.69	1.34	9.2	9.2
8WF5OLO	1/2	3/4 - 16	1 1/8	0.55	1 1/8	2.60	0.06	0.81	1.44	9.2	9.2
10WF5OLO	5/8	7/8 - 14	1 5/16	0.55	1 5/16	2.69	0.06	1.00	1.60	6.0	6.0
12WF5OLO	3/4	1 1/16 - 12	1 1/2	0.55	1 1/2	2.89	0.06	1.19	1.64	6.0	6.0
16WF5OLO	1	1 5/16 - 12	1 3/4	0.55	1 3/4	2.95	0.20	1.58	1.66	6.0	6.0

\* E – Maximum bulkhead thickness.

\*\* W – Bulkhead pilot diameter. Recommended clearance hole is W + 0.015".

Dimensions and pressures for reference only, subject to change.






## MMLOHB3

Braze Connector  
ORFS / Braze Socket

ISO 8434-3 BRS  
SAE 52M0104



TUBE FITTING PART #	END SIZE			D5* DIA TUBE SOCKET	L22 (mm)	L26 (mm)	S1 HEX	Dynamic Pressure (x 1,000 PSI)	
	1 (mm)	1 (in.)	2 (mm)					S	SS
4-6MMLOHB3	6	1/4	6	6.15	13.5	22.0	17	9.2	9.2
4-8MMLOHB3	6	1/4	8	8.15	13.5	22.0	17	9.2	9.2
6-10MMLOHB3	8, 10	3/8	10	10.15	14.5	23.0	19	9.2	9.2
8-12MMLOHB3	12	1/2	12	12.15	16.0	24.5	22	9.2	9.2
10-16MMLOHB3	14, 15, 16	5/8	16	16.15	19.0	27.5	27	6.0	6.0
12-20MMLOHB3	18, 20	3/4	20	20.18	21.0	33.5	32	6.0	6.0
16-25MMLOHB3	22, 25	1	25	25.18	24.5	38.5	41	6.0	6.0
20-30MMLOHB3	28, 30, 32	1 1/4	30	30.20	24.5	38.5	46	6.0	6.0
24-38MMLOHB3	35, 38	1 1/2	38	38.20	24.5	38.5	55	5.0	5.0


VISUAL  
INDEX

\* D5 is for silver brazing. Standard steel parts are not recommended for welding.

## LOHB3


Braze Connector  
ORFS / Braze Socket

SAE 520104



## LOHT3

Tube Stub Connector  
ORFS / Tube Weld



TUBE FITTING PART #	END SIZE		DD (in.)	E* DIA (in.)	H HEX (in.)	L1 (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)					-S	-SS
4 LOHB3	1/4	1/4	0.53	0.26	5/8	0.86	9.2	9.2
4-6 LOHB3	1/4	3/8	0.53	0.38	5/8	0.86	9.2	9.2
6 LOHB3	3/8	3/8	0.57	0.38	3/4	0.90	9.2	9.2
6-4 LOHB3	3/8	1/4	0.57	0.26	3/4	0.90	9.2	9.2
6-8 LOHB3	3/8	1/2	0.57	0.51	3/4	0.90	9.2	9.2
8 LOHB3	1/2	1/2	0.63	0.51	7/8	0.97	9.2	9.2
8-4 LOHB3**	1/2	1/4	0.64	0.26	7/8	0.97	9.2	9.2
8-6 LOHB3	1/2	3/8	0.63	0.38	7/8	0.97	9.2	9.2
8-10 LOHB3	1/2	5/8	0.63	0.63	7/8	0.97	6.0	6.0
8-12 LOHB3**	1/2	3/4	0.67	0.76	1 1/16	1.16	6.0	6.0
10 LOHB3	5/8	5/8	0.74	0.63	1 1/16	1.07	6.0	6.0
10-6 LOHB3	5/8	3/8	0.74	0.38	1 1/16	1.07	6.0	6.0
10-8 LOHB3	5/8	1/2	0.74	0.51	1 1/16	1.07	6.0	6.0
10-12 LOHB3	5/8	3/4	0.74	0.76	1 1/16	1.23	6.0	6.0
12 LOHB3	3/4	3/4	0.83	0.76	1 1/4	1.32	6.0	6.0
12-8 LOHB3	3/4	1/2	0.83	0.51	1 1/4	1.16	6.0	6.0
12-10 LOHB3	3/4	5/8	0.83	0.63	1 1/4	1.16	6.0	6.0
12-16 LOHB3	3/4	1	0.83	1.01	1 1/2	1.38	6.0	6.0
16 LOHB3	1	1	0.97	1.01	1 1/2	1.52	6.0	6.0
16-8 LOHB3**	1	1/2	0.97	0.51	1 1/2	1.30	6.0	6.0
16-12 LOHB3	1	3/4	0.97	0.76	1 1/2	1.46	6.0	6.0
16-20 LOHB3	1	1 1/4	0.96	1.26	1 3/4	1.52	6.0	6.0
20 LOHB3	1 1/4	1 1/4	0.97	1.26	1 3/4	1.52	6.0	6.0
20-16 LOHB3	1 1/4	1	0.97	1.01	1 3/4	1.52	6.0	6.0
20-24 LOHB3	1 1/4	1 1/2	0.97	1.51	2 1/8	1.52	5.0	5.0
24 LOHB3	1 1/2	1 1/2	0.97	1.51	2 1/8	1.52	5.0	5.0
24-20 LOHB3	1 1/2	1 1/4	0.97	1.26	2 1/8	1.52	5.0	5.0


\* E is for silver brazing. Standard steel parts are not recommended for welding.

\*\* Size 14 is not included in SAE J1453.

Dimensions and pressures for reference only, subject to change.

## TLW1

Butt Weld  
Sleeve



A


TUBE FITTING PART #	END SIZE		F (in.)	L (in.)	T (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)				-SS	-SS
4-4X035 TLW1	1/4	1/4	1.20	0.75	0.035	5950	
6-4X035 TLW1	3/8	1/4	1.26	0.75	0.035	5950	
6-4X049 TLW1	3/8	1/4	1.26	0.75	0.049	8650	
6-6X035 TLW1	3/8	3/8	1.20	0.75	0.035	3850	
6-6X049 TLW1	3/8	3/8	1.20	0.75	0.049	5550	
6-6X065 TLW1	3/8	3/8	1.20	0.75	0.065	7550	
8-8X049 TLW1	1/2	1/2	1.20	0.75	0.049	4050	
8-8X065 TLW1	1/2	1/2	1.20	0.75	0.065	5500	
12-12X065 TLW1	3/4	3/4	1.39	0.75	0.065	3500	
12-12X083 TLW1	3/4	3/4	1.39	0.75	0.083	4600	
12-12X095 TLW1	3/4	3/4	1.39	0.75	0.095	5350	
12-8X049 TLW1	3/4	1/2	1.52	0.75	0.049	4050	
16-16X083 TLW1	1	1	1.43	0.75	0.083	3400	
16-16X095 TLW1	1	1	1.43	0.75	0.095	3900	

VISUAL  
INDEX

## TRLON

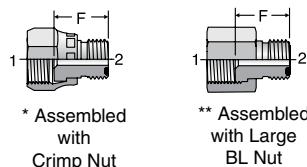Tube End Reducer  
ORFS Swivel / ORFS Tube End

SAE 520123 (body only)  
SAE 520123A (body with large nut)



TRLON	TUBE FITTING PART #			END SIZE		Dynamic Pressure (x 1,000 PSI)		
	TRLON	TRLON	TRLO					
	*One Piece Design (With Crimp Nut)	**Two Piece Design (With Large Nut)	***Body Only (For Two-Piece Design Only)	1 (in.)	2 (in.)	F (in.)	-S	-SS
6-4 TRLON	—	—	—	3/8	1/4	0.77	9.2	9.2
—	8-4 TRLON	—	8-4 TRLO	1/2	1/4	0.87	9.2	9.2
8-6 TRLON	—	—	—	1/2	3/8	0.89	9.2	9.2
—	10-4 TRLON	—	10-4 TRLO	5/8	1/4	0.91	6.0	6.0
—	10-6 TRLON	—	10-6 TRLO	5/8	3/8	0.94	6.0	6.0
—	10-8 TRLON	—	10-8 TRLO	5/8	1/2	1.00	6.0	6.0
—	12-4 TRLON	—	12-4 TRLO	3/4	1/4	0.98	6.0	6.0
—	12-6 TRLON	—	12-6 TRLO	3/4	3/8	1.02	6.0	6.0
—	12-8 TRLON	—	12-8 TRLO	3/4	1/2	1.08	6.0	6.0
12-10 TRLON	—	—	—	3/4	5/8	1.16	6.0	6.0
—	16-8 TRLON	—	16-8 TRLO	1	1/2	1.14	6.0	6.0
—	16-10 TRLON	—	16-10 TRLO	1	5/8	1.26	6.0	6.0
16-12 TRLON	—	—	—	1	3/4	1.30	6.0	6.0
—	20-12 TRLON	—	20-12 TRLO	1 1/4	3/4	1.32	5.0	5.0
20-16 TRLON	—	—	—	1 1/4	1	1.34	5.0	5.0
—	24-12 TRLON-S	—	—	1 1/2	3/4	1.32	4.0	4.0
—	24-16 TRLON	—	24-16 TRLO	1 1/2	1	1.34	4.0	4.0
—	24-20 TRLON	—	24-20 TRLO	1 1/2	1 1/4	1.34	4.0	4.0
—	32-20 TRLON**	32-20 TRLO**	—	2	1 1/4	1.42	3.0	3.0
—	32-24 TRLON**	32-24 TRLO**	—	2	1 1/2	1.42	3.0	3.0

\* Assembled with crimp nut.

\*\* Assembled with large BL nut.


\*\*\*To order reducer without large nut (body only) remove the "N" from the part number (i.e., TRLO).

Dimensions and pressures for reference only, subject to change.




## F687OML

Swivel ISO 6149 Connector  
ORFS Swivel / ISO 6149



## F682EDML

Swivel Metric Connector  
ORFS Swivel / Metric-ED




**A**

TUBE FITTING PART #	END SIZE			L8 (mm)	S3 HEX (mm)	Dynamic Pressure (x 1,000 PSI)	
	1		2			S	SS
	(mm)	(in.)	ISO 261				
4M12F687OML	6	1/4	M12x1.5	37.0	17	9.2	9.2
6M12F687OML	8, 10	3/8	M12x1.5	39.0	17	9.2	9.2
6M14F687OML	8, 10	3/8	M14x1.5	38.0	19	9.2	9.2
6M16F687OML	8, 10	3/8	M16x1.5	43.5	22	9.2	9.2
8M16F687OML	12	1/2	M16x1.5	48.0	22	9.2	9.2
10M22F687OML	14, 15, 16	5/8	M22x1.5	53.0	27	6.0	6.0
10M27F687OML	14, 15, 16	5/8	M27x2	57.0	32	6.0	6.0
12M27F687OML	18, 20	3/4	M27x2	59.5	32	6.0	6.0
16M33F687OML	22, 25	1	M33x2	67.5	41	6.0	6.0

TUBE FITTING PART #	END SIZE			L8 (mm)	S1 HEX (mm)	Dynamic Pressure (x 1,000 PSI)	
	1		2			Metric	S
	(mm)	(in.)					SS
4M12F682EDML	6	1/4	M12x1.5	38.2	17	9.2	9.2
6M14F682EDML	8, 10	3/8	M14x1.5	40.2	19	9.2	9.2
8M16F682EDML	12	1/2	M16x1.5	47.3	22	9.2	9.2
10M22F682EDML	14, 15, 16	5/8	M22x1.5	51.8	27	6.0	6.0
12M27F682EDML	18, 20	3/4	M27x2	57.2	32	6.0	6.0
16M33F682EDML	22, 25	1	M33x2	67.0	41	6.0	6.0

## F642EDML

Swivel BSPP Connector  
ORFS Swivel / BSPP-ED




TUBE FITTING PART #	END SIZE			L8 (mm)	S1 HEX (mm)	Dynamic Pressure (x 1,000 PSI)	
	1		2			S	SS
	(mm)	(in.)	BSPP				
4F642EDML	6	1/4	1/8	34.0	14	7.2	7.2
6F642EDML	8, 10	3/8	1/4	40.2	19	9.2	9.2
8F642EDML	12	1/2	3/8	47.3	22	9.2	9.2
10F642EDML	14, 15, 16	5/8	1/2	51.8	27	6.0	6.0
12F642EDML	18, 20	3/4	3/4	57.2	32	6.0	6.0
16F642EDML	22, 25	1	1	67.0	46	6.0	6.0

## WNLO

45° Bulkhead Union Elbow  
ORFS / ORFS

SAE 520801

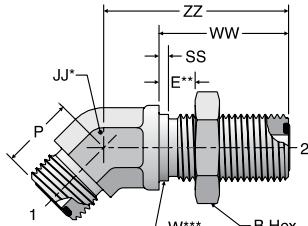WNLO-WNLN - Body with Locknut  
(See page A11 for WNLN)



TUBE FITTING PART #	END SIZE		B HEX (in.)	E MAX (in.)	JJ (in.)	P (in.)	SS (in.)	W DIA (in.)	WW (in.)	ZZ (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)									-S	-SS
4 WNLO	1/4	1/4	13/16	0.55	9/16	0.63	0.06	0.56	1.24	1.73	9.2	9.2
6 WNLO	3/8	3/8	1	0.55	3/4	0.75	0.06	0.69	1.34	1.91	9.2	9.2
8 WNLO	1/2	1 1/8	0.55	3/4	0.81	0.06	0.81	1.44	2.01	9.2	9.2	9.2
10 WNLO	5/8	5/8	1 5/16	0.55	1 1/16	0.93	0.06	1.00	1.59	2.22	6.0	6.0
12 WNLO	3/4	3/4	1 1/2	0.55	1 3/16	1.02	0.06	1.19	1.63	2.38	6.0	6.0
16 WNLO	1	1	1 3/4	0.55	1 7/16	1.18	0.06	1.44	1.65	2.56	6.0	6.0
20 WNLO	1 1/4	1 1/4	2	0.55	1 5/8	1.26	0.06	1.69	1.65	2.64	5.0	5.0
24 WNLO	1 1/2	1 1/2	2 3/8	0.55	1 7/8	1.46	0.06	2.00	1.65	2.64	4.0	4.0

\* JJ – Across wrench flats.

\*\* E – Maximum bulkhead thickness.

\*\*\* W – Bulkhead pilot diameter. Recommended clearnace hole is W + 0.015".


Dimensions and pressures for reference only, subject to change.

**VISUAL INDEX**



## VLO

45° Male Elbow  
ORFS / NPTF




\* JJ – Across Wrench Flats

TUBE FITTING PART #	END SIZE		JJ (in.)	N1 (in.)	P (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 NPTF				-S	-SS
4 VLO	1/4	1/8 - 27	9/16	0.64	0.63	6.0	6.0
4-4 VLO	1/4	1/4 - 18	9/16	0.86	0.68	6.0	6.0
6 VLO	3/8	1/4 - 18	3/4	0.87	0.74	6.0	6.0
6-6 VLO	3/8	3/8 - 18	3/4	0.87	0.74	6.0	6.0
8 VLO	1/2	3/8 - 18	3/4	0.95	0.80	6.0	6.0
8-8 VLO	1/2	1/2 - 14	7/8	1.17	0.86	6.0	6.0
10 VLO	5/8	1/2 - 14	1 1/16	1.17	0.92	6.0	6.0
12 VLO	3/4	3/4 - 14	1 5/16	1.30	1.02	4.0	4.0
16 VLO	1	1 - 11 1/2	1 7/16	1.48	1.18	3.0	3.0
20 VLO	1 1/4	1 1/4 - 11 1/2	1 5/8	1.67	1.26	2.5	2.5

## V4OMLO

Male 45° Elbow – BSPP  
(for ISO 1179-1 Port)  
ORFS / BSPP-ORR



\* Y – Across Hex  
Flats


A

VISUAL  
INDEX

## ELO

Union Elbow  
ORFS / ORFS

SAE 520201




\* JJ – Across  
Wrench Flats

## EMLO

Union Elbow – mm Hex  
ORFS / ORFS

ISO 8434-3 E  
SAE 52M0201



TUBE FITTING PART #	END SIZE		JJ (in.)	M (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)			-S	-SS
	4 ELO	1/4	9/16	0.85	9.2	9.2
6 ELO	3/8	3/4	0.98	9.2	9.2	9.2
8 ELO	1/2	1/2	1.10	9.2	9.2	9.2
10 ELO	5/8	5/8	1 1/16	1.32	6.0	6.0
12 ELO	3/4	3/4	1 3/16	1.48	6.0	6.0
16 ELO	1	1	1 7/16	1.63	6.0	6.0
20 ELO	1 1/4	1 1/4	1 5/8	1.75	5.0	5.0
24 ELO	1 1/2	1 1/2	1 7/8	1.93	4.0	4.0
32 ELO*	2	2	2 1/2	2.76	3.0	3.0

\*\* Size 32 is not included in SAE J1453.

TUBE FITTING PART #	END SIZE		L7 (mm)	S2 (mm)	Dynamic Pressure (x 1,000 PSI)	
	1 & 2 (mm)	(in.)			S	SS
	(mm)	(in.)				
4EMLO	6	1/4	21.5	14	9.2	9.2
6EMLO	8,10	3/8	25.0	19	9.2	9.2
8EMLO	12	1/2	28.0	19	9.2	9.2
10EMLO	14,15,16	5/8	33.5	27	6.0	6.0
12EMLO	18,20	3/4	37.5	30	6.0	6.0
16EMLO	22,25	1	41.5	36	6.0	6.0
20EMLO	28,30,32	1 1/4	44.5	41	5.0	5.0
24EMLO	35,38	1 1/2	49.0	50	4.0	4.0


Dimensions and pressures for reference only, subject to change.

## WELO

Bulkhead Union Elbow  
ORFS / ORFS

SAE 520701

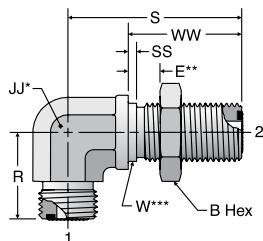WELO-WLNL - Body with Locknut  
(See page A11 for WLNL)



VISUAL INDEX

TUBE FITTING PART #	END SIZE		B HEX (in.)	E MAX (in.)	JJ (in.)	R (in.)	S (in.)	SS (in.)	W (in.)	WW (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)									-S	-SS
4 WELO	1/4	1/4	13/16	0.55	9/16	0.89	1.85	0.06	0.56	1.24	9.2	9.2
6 WELO	3/8	3/8	1	0.55	3/4	1.02	2.05	0.06	0.69	1.34	9.2	9.2
8 WELO	1/2	1/2	1 1/8	0.55	3/4	1.14	2.19	0.06	0.81	1.44	9.2	9.2
10 WELO	5/8	5/8	1 5/16	0.55	1 1/16	1.36	2.48	0.06	1.00	1.59	6.0	6.0
12 WELO	3/4	3/4	1 1/2	0.55	1 3/16	1.52	2.64	0.06	1.19	1.63	6.0	6.0
16 WELO	1	1	1 3/4	0.55	1 7/16	1.67	2.80	0.06	1.44	1.65	6.0	6.0
20 WELO	1 1/4	1 1/4	2	0.55	1 5/8	1.79	2.97	0.06	1.69	1.65	5.0	5.0
24 WELO	1 1/2	1 1/2	2 3/8	0.55	1 7/8	1.95	3.13	0.06	2.00	1.65	4.0	4.0

\* JJ – Across wrench flats.

\*\* E – Maximum bulkhead thickness.

\*\*\* W – Bulkhead pilot diameter. Recommended clearance hole is W + 0.015".

## WEMLO


Bulkhead Union Elbow – mm Hex  
ORFS / ORFS

ISO 8434-3 BHE

SAE 52M0701

WEMLOWLNML - Body with Locknut

(See page A11 for WLNLML)



TUBE FITTING PART #	END SIZE		d27***	E (mm)	I2 (mm)	I4 (mm)	L16 (mm)	L17 (mm)	S2 (mm)	Dynamic Pressure (x 1,000 PSI)								
	1 & 2									S	SS							
	(mm)	(in.)																
4WEMLO	6	1/4	14.3	14	31.5	1.5	22.5	47.0	14	9.2	9.2							
6WEMLO	8,10	3/8	17.5	14	34.0	1.5	26.0	52.0	19	9.2	9.2							
8WEMLO	12	1/2	20.6	14	36.5	2.5	29.0	55.5	19	9.2	9.2							
10WEMLO	14,15,16	5/8	25.4	14	40.5	2.5	34.5	63.0	27	6.0	6.0							
12WEMLO	18,20	3/4	30.2	14	41.5	3.0	38.5	67.0	30	6.0	6.0							
16WEMLO	22,25	1	36.5	14	42.0	3.0	42.5	71.0	36	6.0	6.0							
20WEMLO	28,30,32	1 1/4	42.9	14	42.0	3.0	45.5	75.5	41	5.0	5.0							
24WEMLO	35,38	1 1/2	50.8	14	42.0	3.0	49.5	79.5	50	4.0	4.0							

\* S2 – Across wrench flats.

\*\* E – Maximum bulkhead thickness.


\*\*\*d27 - Bulkhead pilot diameter. Recommended clearance is d27 + 0.4 mm.

Dimensions and pressures for reference only, subject to change.

## C6LO

Swivel Nut Elbow  
ORFS / ORFS Swivel

SAE 520221




TUBE FITTING PART #	END SIZE		AAA (in.)	JJ (in.)	M (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 (in.)				-S	-SS
4 C6LO	1/4	1/4	1.07	9/16	0.85	9.2	9.2
6 C6LO	3/8	3/8	1.17	3/4	0.98	9.2	9.2
8 C6LO	1/2	1/2	1.50	3/4	1.10	9.2	9.2
10 C6LO	5/8	5/8	1.61	1 1/16	1.32	6.0	6.0
12 C6LO	3/4	3/4	1.83	1 3/16	1.48	6.0	6.0
16 C6LO	1	1	2.11	1 7/16	1.64	6.0	6.0
20 C6LO	1 1/4	1 1/4	2.28	1 5/8	1.75	5.0	5.0
24 C6LO	1 1/2	1 1/2	2.41	1 7/8	1.92	4.0	4.0

## C6MLO

Swivel Nut Elbow – mm Hex  
ORFS / ORFS Swivel

ISO 8434-3 SWE  
SAE 52M0221




A

VISUAL  
INDEX

## AOEL6

Straight Thread Swivel Elbow  
ORFS Swivel / SAE-ORB

SAE 520281




TUBE FITTING PART #	END SIZE		AAA (in.)	JJ (in.)	N (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 UN/UNF-2A				-S	-SS
4 AOEL6	1/4	7/16 - 20	1.04	9/16	1.30	6.0	6.0
6 AOEL6	3/8	9/16 - 18	1.17	3/4	1.46	6.0	6.0
8 AOEL6	1/2	3/4 - 16	1.50	3/4	1.59	6.0	6.0
10 AOEL6	5/8	7/8 - 14	1.65	1 1/16	1.97	6.0	6.0
12 AOEL6	3/4	1 1/16 - 12	1.79	1 1/16	2.17	6.0	6.0
16 AOEL6	1	1 5/16 - 12	2.07	1 5/16	2.34	5.5	5.5
20 AOEL6	1 1/4	1 5/8 - 12	2.28	1 5/8	2.44	4.0	4.0
24 AOEL6	1 1/2	1 7/8 - 12	2.40	1 7/8	2.60	4.0	4.0

## C5OLO

Straight Thread Elbow  
ORFS / SAE-ORB

SAE 520220



TUBE FITTING PART #	END SIZE		JJ (in.)	M (in.)	N (in.)	Dynamic Pressure (x 1,000 PSI)	
	1 (in.)	2 UN/UNF-2A				-S	-SS
4 C5OLO	1/4	7/16 - 20	9/16	0.85	1.30	6.0	6.0
4-6 C5OLO***	1/4	9/16 - 18	9/16	0.93	1.46	6.0	6.0
4-8 C5OLO	1/4	3/4 - 16	3/4	0.98	1.59	6.0	6.0
6 C5OLO	3/8	9/16 - 18	3/4	0.98	1.46	6.0	6.0
6-4 C5OLO	3/8	7/16 - 20	3/4	0.98	1.38	6.0	6.0
6-5 C5OLO	3/8	1 1/2 - 20	3/4	0.98	1.38	6.0	6.0
6-8 C5OLO	3/8	3/4 - 16	3/4	1.04	1.59	6.0	6.0
6-10 C5OLO***	3/8	7/8 - 14	7/8	1.15	1.97	6.0	6.0
6-12 C5OLO	3/8	1 1/16 - 12	1 1/16	1.28	2.17	6.0	6.0
8 C5OLO	1/2	3/4 - 16	3/4	1.10	1.59	6.0	6.0
8-6 C5OLO	1/2	9/16 - 18	3/4	1.10	1.44	6.0	6.0
8-10 C5OLO***	1/2	7/8 - 14	7/8	1.21	1.97	6.0	6.0
8-12 C5OLO	1/2	1 1/16 - 12	1 3/16	1.32	2.17	6.0	6.0
10 C5OLO	5/8	7/8 - 14	1 1/16	1.32	1.97	6.0	6.0
10-8 C5OLO	5/8	3/4 - 16	1 1/16	1.32	1.81	6.0	6.0
10-12 C5OLO	5/8	1 1/16 - 12	1 3/16	1.42	2.17	6.0	6.0
12 C5OLO	3/4	1 1/16 - 12	1 3/16	1.48	2.17	6.0	6.0
12-8 C5OLO	3/4	3/4 - 16	1 3/16	1.48	1.83	6.0	6.0
12-10 C5OLO	3/4	7/8 - 14	1 3/16	1.48	2.01	6.0	6.0
12-16 C5OLO	3/4	1 5/16 - 12	1 7/16	1.61	2.34	5.5	5.5
16 C5OLO	1	1 5/16 - 12	1 7/16	1.63	2.34	5.5	5.5
16-12 C5OLO	1	1 1/16 - 12	1 7/16	1.63	2.30	6.0	6.0
16-20 C5OLO	1	1 5/8 - 12	1 5/8	1.75	2.44	4.0	4.0
20 C5OLO	1 1/4	1 5/8 - 12	1 5/8	1.75	2.44	4.0	4.0
20-16 C5OLO	1 1/4	1 5/16 - 12	1 5/8	1.75	2.44	4.0	4.0
20-24 C5OLO	1 1/4	1 7/8 - 12	1 7/8	1.93	2.60	4.0	4.0
24 C5OLO	1 1/2	1 7/8 - 12	1 7/8	1.93	2.60	4.0	4.0
24-20 C5OLO	1 1/2	1 5/8 - 12	1 7/8	1.93	2.60	4.0	4.0
32 C5OLO**	2	2 1/2 - 12	2 1/2	2.76	3.07	2.5	2.5

\*\* Size 32 is not included in SAE J1453.

\*\*\* JJ for these parts does not conform to SAE.


Dimensions and pressures for reference only, subject to change.



## CC87OMLO

Long 90° Metric Straight Thread Elbow  
ORFS-Long / ISO 6149

ISO 8434-3 SDEL  
SAE 52M1587




A

VISUAL INDEX

TUBE FITTING PART #	END SIZE			L7 (mm)	L29 (mm)	S2 (mm)	Dynamic Pressure (x 1,000 PSI)	
	1		2				S	SS
	(mm)	(in.)	ISO 261					
4M12CC87OMLO	6	1/4	M12X1.5	21.5	56.5	14	6.0	6.0
6M14CC87OMLO	8, 10	3/8	M14X1.5	25.0	56.5	17	6.0	6.0
6M16CC87OMLO	8, 10	3/8	M16X1.5	25.0	66.5	17	6.0	6.0
8M18CC87OMLO	12	1/2	M18X1.5	28.0	75.0	19	6.0	6.0
8M22CC87OMLO	12	1/2	M22X1.5	31.5	88.0	27	6.0	6.0
10M22CC87OMLO	14, 15, 16	5/8	M22X1.5	33.5	88.0	27	6.0	6.0
12M27CC87OMLO	18, 20	3/4	M27X2	37.5	100.5	27	6.0	6.0
16M33CC87OMLO	22, 25	1	M33X2	41.5	114.5	36	5.0	5.0
20M42CC87OMLO	28, 30, 32	1 1/4	M42X2	44.5	126.5	41	4.0	4.0

## C80MLO

Metric Straight Thread Elbow  
ORFS / Metric-ORR



\* S2 - Across  
Hex Flats

TUBE FITTING PART #	END SIZE			L7 (mm)	L10 (mm)	S2 (mm)	Dynamic Pressure (x 1,000 PSI)	
	1		2				S	SS
	(mm)	(in.)	ISO 261					
4M12C80MLO	6	1/4	M12X1.5	21.5	33.0	14	3.6	3.6
6M12C80MLO	8, 10	3/8	M12X1.5	25.0	35.5	19	3.6	3.6
6M14C80MLO	8, 10	3/8	M14X1.5	25.0	35.5	19	3.6	3.6
6M16C80MLO	8, 10	3/8	M16X1.5	25.0	37.5	19	3.6	3.6
8M14C80MLO	12	1/2	M14X1.5	28.0	36.0	19	3.6	3.6
8M18C80MLO	12	1/2	M18X1.5	28.0	41.0	19	3.6	3.6
8M22C80MLO	12	1/2	M22X1.5	31.5	49.0	27	3.6	3.6
10M22C80MLO	14, 15, 16	5/8	M22X1.5	33.5	49.0	27	3.6	3.6
12M27C80MLO	18, 20	3/4	M27X2	37.5	55.5	30	3.6	3.6
16M33C80MLO	22, 25	1	M33X2	41.5	59.5	36	2.5	2.5
20M38C80MLO	28, 30, 32	1 1/4	M38X2	44.5	62.0	41	2.5	2.5
20M42C80MLO	28, 30, 32	1 1/4	M42X2	44.5	63.0	41	2.5	2.5

Dimensions and pressures for reference only, subject to change.












## R87OMLO

Metric Straight Thread Run Tee  
ORFS / ISO 6149 / ORFS

ISO 8434-3 SDRT  
SAE 52M0488




**A**

TUBE FITTING PART #	END SIZE			L7 (mm)	L10 (mm)	S2 (mm)	Dynamic Pressure (x 1,000 PSI)	
	1 & 3		2				S	SS
	(mm)	(in.)	ISO 261					
4M12R87OMLO	6	1/4	M12X1.5	21.5	33.0	14	6.0	6.0
4M14R87OMLO	6	1/4	M14X1.5	23.5	35.5	19	6.0	6.0
6M14R87OMLO	8,10	3/8	M14X1.5	25.0	35.5	19	6.0	6.0
6M16R87OMLO	8,10	3/8	M16X1.5	25.0	37.5	19	6.0	6.0
8M14R87OMLO	12	1/2	M14X1.5	28.0	36.0	19	6.0	6.0
8M18R87OMLO	12	1/2	M18X1.5	28.0	41.0	19	6.0	6.0
8M22R87OMLO	12	1/2	M22X1.5	31.0	49.0	27	6.0	6.0
10M22R87OMLO	14,15,16	5/8	M22X1.5	33.5	49.0	27	6.0	6.0
12M27R87OMLO	18,20	3/4	M27X2	37.5	55.5	30	6.0	6.0
16M33R87OMLO	22,25	1	M33X2	41.5	59.5	36	4.0	4.0
20M42R87OMLO	28,30,32	1 1/4	M42X2	44.5	63.0	41	4.0	4.0
24M48R87OMLO	35,38	1 1/2	M48X2	49.0	71.5	50	4.0	4.0

**VISUAL  
INDEX**

## S4OMLO

Branch Tee – BSPP  
(for ISO 1179-1 Port)  
ORFS / ORFS / BSPP-ORR




\* Y – Across  
Wrench Flats

TUBE FITTING PART #	END SIZE			M (mm)	N (mm)	Y (mm)	Dynamic Pressure (x 1,000 PSI)	
	1 & 2		3				S	SS
	(mm)	(in.)	BSPP					
4S4OMLO	6	1/4	1/8 - 28	21.5	30.0	14	4.0	4.0
4-4-4S4OMLO	6	1/4	1/4 - 19	23.5	36.0	19	4.0	4.0
6S4OMLO	8,10	3/8	1/4 - 19	25.0	36.0	19	4.0	4.0
6-6-6S4OMLO	8,10	3/8	3/8 - 19	26.5	38.0	19	4.0	4.0
8S4OMLO	12	1/2	3/8 - 19	28.0	38.0	19	4.0	4.0
8-8-8S4OMLO	12	1/2	1/2 - 14	31.0	48.5	27	4.0	4.0
10S4OMLO	14,15,16	5/8	1/2 - 14	33.5	48.5	27	4.0	4.0
12S4OMLO	18,20	3/4	3/4 - 14	37.5	51.5	30	4.0	4.0
16S4OMLO	22,25	1	1 - 11	41.5	58.5	36	4.0	4.0

Dimensions and pressures for reference only, subject to change.

## R4OMLO

Run Tee – BSPP  
(for ISO 1179-1 Port)  
ORFS / BSPP-ORR / ORFS



\* Y – Across  
Wrench Flats


VISUAL  
INDEX

TUBE FITTING PART #	END SIZE			M (mm)	N (mm)	Y (mm)	Dynamic Pressure (x 1,000 PSI)	
	1 & 3		2				S	SS
	(mm)	(in.)	BSPP					
4R4OMLO	6	1/4	1/8 - 28	21.5	30.0	14	4.0	4.0
4-4-4R4OMLO	6	1/4	1/4 - 19	23.5	36.0	19	4.0	4.0
6R4OMLO	8,10	3/8	1/4 - 19	25.0	36.0	19	4.0	4.0
6-6-6R4OMLO	8,10	3/8	3/8 - 19	26.5	38.0	19	4.0	4.0
8R4OMLO	12	1/2	3/8 - 19	28.0	38.0	19	4.0	4.0
8-8-8R4OMLO	12	1/2	1/2 - 14	31.0	48.5	27	4.0	4.0
10R4OMLO	14,15,16	5/8	1/2 - 14	33.5	45.2	27	4.0	4.0
12R4OMLO	18,20	3/4	3/4 - 14	37.5	51.5	30	4.0	4.0
16R4OMLO	22,25	1	1 - 11	41.5	58.5	37	4.0	4.0

## KLO

Union Cross  
ORFS (all four ends)

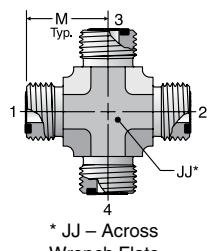SAE 520501




\* JJ – Across  
Wrench Flats

TUBE FITTING PART #	END SIZE 1-4 (in.)	JJ (in.)	M (in.)	Dynamic Pressure (x 1,000 PSI)	
				-S	-SS
4 KLO	1/4	9/16	0.85	9.2	9.2
6 KLO	3/8	3/4	0.98	9.2	9.2
8 KLO	1/2	3/4	1.10	9.2	9.2
10 KLO	5/8	1 1/16	1.32	6.0	6.0
12 KLO	3/4	1 3/16	1.48	6.0	6.0
16 KLO	1	1 5/8	1.63	6.0	6.0
20 KLO	1 1/4	1 5/8	1.75	5.0	5.0
24 KLO					

Dimensions and pressures for reference only, subject to change.



## UPTC Nut Assembly



TUBE FITTING PART #	END SIZE (in.)	T6 UN/UNF-2B	B HEX (in.)	L (in.)	L1 (in.)	C	
						Nominal Nipple Size	
						(in.)	(mm)
4 UPTCL	1/4	9/16-18	11/16	0.97	0.68	0.31	8
6 UPTCL	3/8	11/16-16	13/16	1.06	0.74	0.47	12
8 UPTCL	1/2	13/16-16	15/16	1.19	0.81	0.59	15
10 UPTCL	5/8	1-14	1 1/8	1.34	0.87	0.71	18
12 UPTCL	3/4	1 3/16-12	1 3/8	1.38	0.86	0.87	22
16 UPTCL	1	1 7/16-12	1 5/8	1.48	0.94	0.98	25

To order as pre-torqued assembly on standard Seal-Lok adapters, see page A7.

VISUAL  
INDEX

Dimensions and pressures for reference only, subject to change.