

ROTARY-ONLY REBAR CUTTERS

At last, the answer to drilling through concrete-embedded rebar! No more broken or shattered hammer bits; now you can drill through the rebar and not have to relocate the hole to avoid the rebar!

DIA	OVERALL LENGTH	Straight-Shank		SDS+ Shank		WT. (lbs)	SUGGESTED RPM'S	PIECES
		PART NO.	LIST PRICE	PART NO.	LIST PRICE			
3/8"	8"	RB-6	\$ 59.00	SRB-6	\$61.00	0.3	850-1200	This is a one-piece system (shanks are non-removable).
3/8"	12"	RB-6-12	78.00	SRB-6-12	79.00	0.3	850-1200	
3/8"	18"	RB-6-18	90.00	SRB-6-18	93.00	0.5	850-1200	
7/16"	12"	RB-7	71.00	SRB-7	73.00	0.5	850-1200	
1/2"	12"	RB-8	61.00	SRB-8	64.00	0.6	850-1200	
1/2"	18"	RB-8-18	92.00	SRB-8-18	95.00	1.0	850-1200	
9/16"	12"	RB-9	71.00	SRB-9	73.00	0.7	850-1200	
9/16"	18"	RB-9-18	97.00	SRB-9-18	99.00	1.1	850-1200	
5/8"	12"	RB-10	74.00	SRB-10	76.00	0.8	750-1000	
5/8"	18"	RB-10-18	99.00	SRB-10-18	101.00	1.3	750-1000	
11/16"	12"	RB-11	84.00	SRB-11	86.00	0.9	750-1000	
3/4"	12"	RB-12	85.00	SRB-12	87.00	1.1	600-850	
3/4"	18"	RB-12-18	109.00	SRB-12-18	111.00	1.6	600-850	
3/4"	24"	RB-12-24	125.00	SRB-12-24	127.00	1.8	600-850	
13/16"	12"	RB-13	92.00	SRB-13	95.00	1.1	600-850	
7/8"	12"	RB-14	118.00	SRB-14	121.00	0.9	600-850	
1"	12"	RB-16	123.00	SRB-16	126.00	1.1	500-750	
1 1/8"	12"	RB-18	145.00	SRB-18	148.00	1.2	500-750	
1 1/4"	12"	RB-20	152.00	SRB-20	155.00	1.3	450-600	
1 3/8"	12"	RB-22	154.00	SRB-22	157.00	1.4	450-600	
1 1/2"	12"	RB-24	169.00	SRB-24	172.00	1.6	350-500	
1 5/8"	12"	RB-26	206.00	SRB-26	209.00	1.7	350-500	
1 3/4"	12"	RB-28	213.00	SRB-28	216.00	1.8	350-500	
2"	12"	RB-32	240.00	SRB-32	244.00	2.5	350-500	
2 1/2"	12"	RB-40	260.00	SRB-40	264.00	3.1	350-500	



REPLACEMENT SHANKS 7/8" & LARGER



STRAIGHT SHANK

SDS+ SHANK

PART NO.	LIST PRICE	SHANK	LENGTH	WT. (lbs)	THREAD SIZE	DIA
TDS-2-9	\$18.00	1/2"	5"	0.4	1/2-13 MALE	7/8"
TDS-2-12*	20.00	1/2"	8"	0.5		1"
TDS-2-18	28.00	1/2"	14"	0.9		1 1/8"
TDS-2-24	38.00	1/2"	20"	1.2		1 1/4"
STDS-2-9	21.00	SDS+	5"	0.4		1 3/8"
STDS-2-12*	23.00	SDS+	8"	0.5	1 1/2"	
STDS-2-18	31.00	SDS+	14"	0.9	1 5/8"	
STDS-2-24	41.00	SDS+	20"	1.2	1 3/4"	
TDS-3-9	24.00	1/2"	5"	0.4	3/4-10 MALE	2"
TDS-3-12*	26.00	1/2"	8"	0.5		
TDS-3-18	36.00	1/2"	14"	0.9		
TDS-3-24	50.00	1/2"	20"	1.2		
STDS-3-9	27.00	SDS+	5"	0.4		2 1/2"
STDS-3-12*	30.00	SDS+	8"	0.5		
STDS-3-18	40.00	SDS+	14"	0.9		
STDS-3-24	55.00	SDS+	20"	1.2		

REPLACEMENT CUTTER HEAD 7/8" & LARGER



PART NO.	LIST PRICE	WT. (lbs)	SUGGESTED RPM'S	THREAD SIZE
RB-14HO	\$ 98.00	0.4	600-850	1/2-13 FEMALE
RB-16HO	103.00	0.6	500-750	
RB-18HO	125.00	0.7	500-750	
RB-20HO	132.00	0.8	450-600	
RB-22HO	134.00	0.9	450-600	
RB-24HO	149.00	1.1	350-500	
RB-26HO	186.00	1.2	350-500	
RB-28HO	193.00	1.3	350-500	
RB-32HO	214.00	1.8	350-500	3/4-10 FEMALE
RB-40HO	234.00	2.4	350-500	


Follow power tool manufacturers' recommendations for bit capacity.

*Supplied with complete bit.

SAFETY NOTE: The operator of this tool assumes sole responsibility for any adverse structural effects of cutting rebar. Consult structural engineers if you have any concerns

EASY AS...

1. When rebar is encountered while drilling with a rotary hammer and a carbide hammer bit, immediately stop the hammer and remove the bit from the hole (failure to stop could severely damage a carbide hammer bit - regardless of manufacturer's claim).
2. Mount a rotary rebar cutter in a standard 1/2" chuck/drill motor or SDS+ rotary hammer-motor (with the selector in the **rotary-only** position); insert the rotary rebar cutter into the hole and drill through the embedded rebar.
3. Remove the rotary rebar cutter after the rebar has been drilled completely through and finish drilling the hole with the rotary hammer and hammer bit.

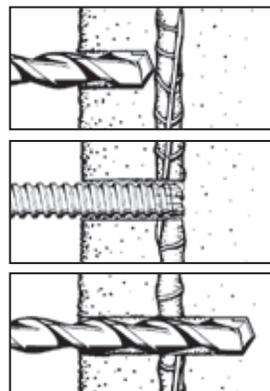

NOTICE:

The Relton carbide-tipped rotary rebar cutter is designed for use in a standard 1/2" chuck/drill motor or SDS+ hammer motor provided the selector mechanism is kept in the **rotary-only** position. The Relton carbide-tipped rotary rebar cutter is intended for **rotary** drilling only; percussion (hammering action) will damage the tool.