

UPDATED
October 2015

Steel


410 Stainless

18-8 Stainless

Table of Contents

Self Drilling Screws

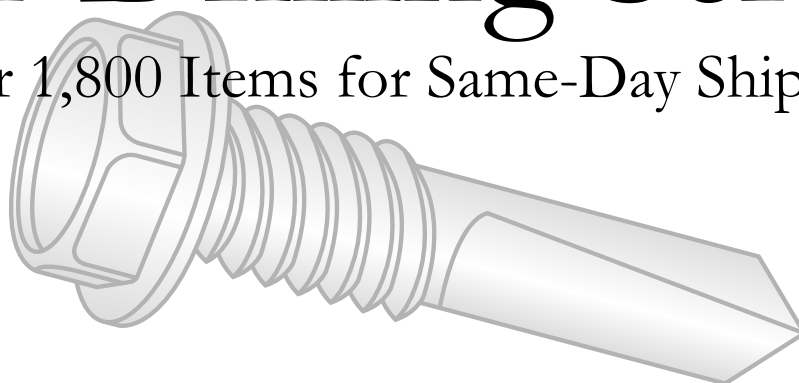
#2, #3, #4 and #5
Drill Points Available



KANEBRIDGE
CORPORATION

Self-Drilling Screws

Over 1,800 Items for Same-Day Shipment



New in This Catalog

New Stainless Categories:

Machine Screw Thread

- Flat Undercut Phillips, 18-8
- Hex Washer Unslot, #2 & #3 Pt., 18-8
- Hex Washer Unslot #4 Pt., 410
- Hex Washer Unslot #5 Pt., 410

Spaced Thread

- Serrated Hex Washer, 18-8
- H/W Sealing Screws w/Neo-EPDM Wshrs, 410
- Flat Square Recess, 18-8

New Steel Categories:

Steel Zinc—Spaced Thread

- Special Pan Phillips
- Round Washer Square Recess

Steel Black Zinc—Spaced Thread

- Flat Phillips

Our Specialty

Over **99%** of the items we sell are available from our shelves **today!** That includes steel and stainless fasteners. All orders placed by 5 PM can ship the same day!

Best Pricing

You receive our **discounted prices** when your purchase order totals **5 or more cartons** of any combination of items.

For **deeper savings**, check our **surplus lists**--updated weekly--at www.kanebridge.com/fasnet/surplus.asp.

Same-Day Shipping

UPS and **Fed-Ex** pick up from each of our branches daily. For larger shipments, we can arrange for your preferred common carrier to pick up your order—usually the same day.

T: (888) 222-9221 • F: (201) 337-2301 • E-Mail: sales@kanebridge.com • www.kanebridge.com

Elgin IL • Bell CA • Oakland NJ

Table of Contents

STAINLESS STEEL

Phillips

Bugle, 410	2
Flat, Spaced Thread, 410	2
Flat Undercut, Spaced Thread, 410	2
Flat, Spaced Thread, 18-8	2
Flat Undercut, Spaced Thread, 18-8	2
Flat w/#4 point w/wings, Machine Screw Thread, 18-8	3
Flat Undercut, Machine Screw Thread, 18-8 **NEW**	3
Hex Washer, 18-8	3
Modified Truss, 410	3
Modified Truss, 18-8	3
Oval, 410	4
Oval, 18-8	4
Oval Undercut, 18-8	4
Pan, 18-8	4
Pan, Black Oxide over 18-8	4
Pan, 410	5
Wafer, Spaced Thread, 18-8	5
Wafer, Machine Screw Thread, 410	5
Wafer, Machine Screw Thread, 18-8	5

Slotted

Hex Washer, 410	5
Hex Washer, 18-8	5

Unslotted

Spaced Thread—#2 & 3 Pt.

Hex Washer, 18-8	6
Hex Washer, Black Ox over 410	6
Hex Washer, 410	6

Machine Screw Thread

Hex Washer, #2 & 3 Pt., 18-8 **NEW**	6
Hex Washer, #2 Pt., 410	6
Hex Washer #4 Pt., 410 **NEW**	7
Hex Washer, #4 Pt. w/Wings, 410	7
Hex Washer #5 Pt., 410 **NEW**	7

Spaced Thread—#4 & 5 Pt.

Hex Washer #4 Pt., 410	7
Hex Washer #5 Pt., 410	7

Serrated Hex Washer, 18-8 **NEW**	7
Hex Washer w/Neo-EPDM Wshr, 18-8	7
Hex Washer w/Neo-EPDM Wshr, 410 **NEW**	7

Six-Lobe

Flat, 18-8	8
Pan, 18-8	8
Wafer 18-8	8

Square Recess

Flat, 18-8 **NEW**	8
Flat, 410	8
Pan, 410	9
Pan, 18-8	9

STEEL—Zinc & Ceramic

Combination, Zinc Plate

Hex Washer, <u>Spaced Thread</u>	9
Pan, <u>Spaced Thread</u>	9

Phillips, Zinc & Ceramic Green

Bugle, <u>Spaced Thread</u> , Zinc	9
Flat, <u>Spaced Thread</u> , Zinc	10
Flat Undercut, Zinc	
<u>Spaced Thread</u>	10
<u>Machine Screw Thread</u>	10
Flat, <u>Machine Screw Thread</u> w/Wings, #4 Point, Zinc	11
Flat U-Cut, <u>Machine Screw Thread</u> w/Wings, #3 Point, Znc	11
Flat, <u>Spaced Thread</u> , Green Ceramic	11
Hex Washer, Zinc	11
Modified Truss, Zinc	11
Oval, Zinc	12
Oval Undercut, Zinc	12
Pan <u>Spaced Thread</u> , Zinc	12
Pan <u>Machine Screw Thread</u> , Zinc	12
Serrated Pan, <u>Spaced Thread</u> , Zinc	13
Special Pan Framing Screw, Zinc **NEW**	13
Special Pan Framing Screw (Black Phos)	13
Round Washer, Zinc	13
Trim Head, Zinc	13
Wafer <u>Spaced Thread</u> , Zinc	13
Wafer <u>Machine Screw Thread</u> , Zinc	14
Wafer <u>Spaced Thread</u> w/Drill Pt., Ceramic Green	14
Wafer <u>High-Low Thread</u> w/Spade Pt., Ceramic Green	14
Wafer <u>High-Low Thread</u> w/Sharp Pt., Ceramic Green	14

Six-Lobe, Zinc Plate

Flat	14
Pan	14
Truss	15
Wafer <u>Spaced Thread</u>	15
Wafer, <u>Machine Screw Thread</u>	15

Square Recess, Zinc Plate

Flat	15
Modified Truss	15
Pan	16
Trim Head	16
Round Washer **NEW**	16
Wafer, <u>Machine Screw Thread</u> , #4 Point w/Wings	16

Slotted, Zinc & Zinc Green

Hex Washer, Zinc	16
Hex Washer, Zinc <u>Green</u>	17
Serrated Hex Washer, Zinc	
<u>Spaced Thread</u> —Standard Head	17
<u>Spaced Thread</u> —7/16" Across Flats	17
<u>Machine Screw Thread</u>	17
Hex Washer w/Neo-EPDM washers, Zinc	17

STEEL—Zinc (continued)

Unslotted

Hex, <u>Spaced Thread</u>	17
Hex Washer, <u>Spaced Thread</u>	
Standard Head, #2 & 3 points	18
7/16" Across the Flats, #3 Point	18
#3 points w/Undersized Head	18
#3 points w/High Head	18
#4 point	18
#5 point	19
Hex Washer, <u>Machine Screw Thread</u>	
#2 & 3 points	19
#4 point	19
#4 point with Wings	19
#5 point	19
Serrated Hex Washer, <u>Spaced Thread</u>	
#2 & #3 points	19
#4 point	20
#3 point w/High Head	20
Serrated Hex Washer, <u>Machine Screw Thread</u>	
Standard Head, #2 & 3 points	20
7/16 Across the Flats, #3 point	20
Red Painted Head, 7/16" A.F., #2 point	20
Standard Head, #4 point w/Wings	20
Hex Washer w/Neo-EPDM washers, #2 & #3 Points	21
Hex Washer w/Neo-EPDM washers, #5 Point	21

STAINLESS & STEEL—Black Ox & Black Phos Phillips

Hex Washer (Unslot), <u>Spaced Thread</u> , 410 SS **NEW**	21
Bugle, <u>Spaced Thread</u> , Black Phos	21
Flat, <u>Spaced Thread</u>	21
Hex Washer, <u>Spaced Thread</u>	22
Oval, <u>Spaced Thread</u>	22
Pan, <u>Spaced Thread</u>	22
Truss—Modified, <u>Spaced Thread</u>	22

Slotted

Hex Washer, Spaced Thread	22
---------------------------------	----

Unslotted

Hex Washer, <u>Spaced Thread</u>	22
--	----

Square Recess

Pan, <u>Spaced Thread</u>	23
---------------------------------	----

STEEL—Black Zinc

Flat Phillips, <u>Spaced Thread</u> **NEW**	23
Flat U/Cut Phillips, <u>Spaced Thread</u>	23
Pan Phillips, <u>Spaced Thread</u>	23
Hex Washer Unslotted, <u>Spaced Thread</u>	23
Wafer Phillips, <u>Machine Screw Thread</u>	23

410 Stainless Steel




BUGLE PHILLIPS DRYWALL SCREWS

Fine Thread
Self Drilling Point

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0620KPG410	6-20X1 1/4	4,000	3.88	0626KPG410	6-20X1 5/8	2,500	4.92

410 Stainless Steel



Items marked with “*”
have #2 point; all
others have #3 point

FLAT PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0608KPF410	6-20X1/2	5,000	1.30	1014KPF410	10-16X7/8	3,000	5.00
*0610KPF410	6-20X5/8	5,000	1.83	1016KPF410	10-16X1	3,000	5.19
*0612KPF410	6-20X3/4	5,000	2.38	1020KPF410	10-16X1 1/4	3,000	6.85
*0616KPF410	6-20X1	5,000	2.65	1024KPF410	10-16X1 1/2	2,000	7.71
*0620KPF410	6-20X1 1/4	4,000	3.66	1028KPF410	10-16X1 3/4	1,500	8.90
*0624KPF410	6-20X1 1/2	3,500	3.97	1032KPF410	10-16X2	1,000	12.60
*0628KPF410	6-20X1 3/4	1,500	4.10	1040KPF410	10-16X2 1/2	750	12.63
*0632KPF410	6-20X2	1,000	4.70	1048KPF410	10-16X3	500	15.20
*0808KPF410	8-18X1/2	5,000	2.67	1216KPF410	12-14X1	2,000	9.70
*0810KPF410	8-18X5/8	5,000	3.01	1220KPF410	12-14X1 1/4	2,000	8.83
*0812KPF410	8-18X3/4	5,000	3.50	1224KPF410	12-14X1 1/2	2,000	9.96
*0814KPF410	8-18X7/8	4,000	3.60	1232KPF410	12-14X2	1,000	16.40
*0816KPF410	8-18X1	4,000	3.88	1240KPF410	12-14X2 1/2	500	16.19
*0820KPF410	8-18X1 1/4	5,000	4.90	1248KPF410	12-14X3	500	20.00
*0824KPF410	8-18X1 1/2	2,500	5.83	1412KPF410	1/4-14X3/4	1,500	8.00
*0828KPF410	8-18X1 3/4	2,000	6.00	1416KPF410	1/4-14X1	2,000	11.68
*0832KPF410	8-18X2	2,000	7.58	1420KPF410	1/4-14X1 1/4	1,000	11.50
*0840KPF410	8-18X2 1/2	2,000	9.43	1424KPF410	1/4-14X1 1/2	1,000	14.00
*0848KPF410	8-18X3	800	10.20	1432KPF410	1/4-14X2	1,000	18.15
1010KPF410	10-16X5/8	4,000	4.27	1448KPF410	1/4-14X3	700	26.87
1012KPF410	10-16X3/4	4,000	4.74				

410 Stainless Steel




Items marked with “*”
have #2 point; all
others have #3 point

FLAT UNDERCUT PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0606KPU410	6-20X3/8	5,000	1.08	1212KPU410	12-14X3/4	2,500	5.04
*0608KPU410	6-20X1/2	5,000	1.10	1216KPU410	12-14X1	2,500	6.54
				1224KPU410	12-14X1 1/2	1,500	9.80
*0808KPU410	8-18X1/2	5,000	2.60	1412KPU410	1/4-14X3/4	2,000	7.00
*0812KPU410	8-18X3/4	5,000	4.05	1416KPU410	1/4-14X1	1,500	8.74
*0816KPU410	8-18X1	3,500	5.05				
*1008KPU410	10-16X1/2	4,000	3.66				
1012KPU410	10-16X3/4	7,000	4.74				
1016KPU410	10-16X1	3,000	5.00				
1020KPU410	10-16X1 1/4	2,000	6.26				

18-8 Stainless Steel



Items marked with “*”
have #2 point; all
others have #3 point


FLAT PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0608KPF188	6-20X1/2	5,000	1.77	1216KPF188	12-14X1	3,000	9.70
*0610KPF188	6-20X5/8	5,000	1.81	1220KPF188	12-14X1 1/4	3,000	11.45
*0612KPF188	6-20X3/4	5,000	2.15	1224KPF188	12-14X1 1/2	2,000	13.20
*0614KPF188	6-20X7/8	5,000	2.50	1232KPF188	12-14X2	1,000	16.40
*0616KPF188	6-20X1	5,000	2.81	1240KPF188	12-14X2 1/2	500	17.00
				1248KPF188	12-14X3	400	20.50
*0808KPF188	8-18X1/2	5,000	2.67	1412KPF188	1/4-14X3/4	3,000	7.29
*0810KPF188	8-18X5/8	5,000	2.79	1416KPF188	1/4-14X1	2,000	11.68
*0812KPF188	8-18X3/4	9,000	3.15	1420KPF188	1/4-14X1 1/4	1,000	13.47
*0814KPF188	8-18X7/8	6,000	3.60	1424KPF188	1/4-14X1 1/2	1,000	15.47
*0816KPF188	8-18X1	6,000	3.88	1432KPF188	1/4-14X2	1,000	20.49
*0820KPF188	8-18X1 1/4	5,000	5.01	1436KPF188	1/4-14X2 1/4	1,000	31.40
*0824KPF188	8-18X1 1/2	2,500	6.17	1440KPF188	1/4-14X2 1/2	1,000	25.00
*0832KPF188	8-18X2	2,000	9.22	1448KPF188	1/4-14X3	700	30.00
*0840KPF188	8-18X2 1/2	2,000	11.64	1456KPF188	1/4-14X3 1/2	300	32.50
*0848KPF188	8-18X3	1,000	14.70	1464KPF188	1/4-14X4	250	36.75
1012KPF188	10-16X3/4	4,000	4.74	1472KPF188	1/4-14X4 1/2	250	42.50
1014KPF188	10-16X7/8	4,000	5.30	1480KPF188	1/4-14X5	250	47.60
1016KPF188	10-16X1	5,000	5.96				
1020KPF188	10-16X1 1/4	4,000	6.85				
1024KPF188	10-16X1 1/2	3,000	8.10				
1032KPF188	10-16X2	2,000	12.60				
1040KPF188	10-16X2 1/2	2,000	19.60				
1048KPF188	10-16X3	1,000	17.00				

Stainless Undercut Flat Heads
are now also available with a
Machine Screw Thread—page 3

18-8 Stainless Steel



Item marked with
“*” has #1 point.
Items marked with
“*” have #2 point;
All others have #3 point

FLAT UNDERCUT PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.4 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0608KPU188	6-20X1/2	5,000	1.37	*1208KPU188	12-14X1/2	2,500	3.75
*0612KPU188	6-20X3/4	5,000	2.02	1212KPU188	12-14X3/4	2,500	5.36
				1216KPU188	12-14X1	2,500	6.90
*0808KPU188	8-18X1/2	5,000	2.60	1224KPU188	12-14X1 1/2	1,500	10.00
*0812KPU188	8-18X3/4	5,000	2.95	1412KPU188	1/4-14X3/4	2,000	7.60
*0816KPU188	8-18X1	3,500	5.05	1416KPU188	1/4-14X1	1,500	9.68
*1008KPU188	10-16X1/2	4,000	3.66	1420KPU188	1/4-14X1 1/4	500	11.53
1010KPU188	10-16X5/8	4,000	3.38	1424KPU188	1/4-14X1 1/2	400	13.90
1012KPU188	10-16X3/4	3,500	4.74				
1016KPU188	10-16X1	3,000	5.14				
1020KPU188	10-16X1 1/4	2,000	6.38				
1024KPU188	10-16X1 1/2	2,000	7.65				

NEW!

18-8 Stainless Steel



All items have #3 point


FLAT UNDERCUT PHILLIPS

SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1110KPUMS188	10-32X5/8	1,250	4.40	1210KPUMS188	12-24X5/8	1,000	4.60
				1211KPUMS188	12-24X11/16	1,250	5.25
				1212KPUMS188	12-24X3/4	1,000	5.34
				1216KPUMS188	12-24X1	800	7.26

410 Stainless Steel



All items have #4 Point

#4 POINT FLAT PHILLIPS WITH WINGS

SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to ASME B18.6.3

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1240KPFM441W	12-24X2 1/2	500	17.80				

BRAND NEW: #4 & #5 Drill Point Hex
Washer Head Screws in 410 Stainless—
See page 7

410 Stainless Steel



Items marked with “•” have #2 point; all others have #3 point


FLAT UNDERCUT PHILLIPS

SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1016KPUMS410	10-24X1	3,000	5.30	•1210KPUMS410	12-24X5/8	2,500	4.80
				1211KPUMS410	12-24X11/16	2,500	5.25
				1212KPUMS410	12-24X3/4	2,500	5.65

18-8 Stainless Steel



All items have #2 point


HEX WASHER PHILLIPS

SELF DRILLING SCREWS

Manufactured to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0808KPM188	8-18X1/2	5,000	3.14				

410 Stainless Steel



Items marked with “•” have #2 point; all others have #3 point


MODIFIED TRUSS PHILLIPS

SELF DRILLING SCREWS

Threads and Points Manufactured to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KPM410	8-18X1/2	2,500	3.29	1012KPM410	10-16X3/4	3,000	4.65
•0812KPM410	8-18X3/4	2,500	4.22	1016KPM410	10-16X1	2,500	5.80
•0816KPM410	8-18X1	2,000	5.10	1020KPM410	10-16X1 1/4	2,000	7.38
•0820KPM410	8-18X1 1/4	1,500	6.02	1024KPM410	10-16X1 1/2	1,500	8.50
•0824KPM410	8-18X1 1/2	1,000	6.90				
•0826KPM410	8-18X1 5/8	1,000	7.36				
•0832KPM410	8-18X2	1,000	9.00				
•0840KPM410	8-18X2 1/2	1,000	11.00				
•0848KPM410	8-18X3	750	13.00				
•0856KPM410	8-18X3 1/2	500	14.75				

18-8 Stainless Steel




Items marked with “•” have #2 point; all others have #3 point

MODIFIED TRUSS PHILLIPS

SELF DRILLING SCREWS

Threads and Points Manufactured to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KPM188	6-20X3/8	4,000	2.11	•1008KPM188	10-16X1/2	3,000	3.40
•0608KPM188	6-20X1/2	4,000	1.97	1012KPM188	10-16X3/4	3,000	5.51
				1016KPM188	10-16X1	2,500	6.18
•0808KPM188	8-18X1/2	2,500	4.03	1020KPM188	10-16X1 1/4	2,000	7.43
•0812KPM188	8-18X3/4	2,500	4.75	1024KPM188	10-16X1 1/2	1,500	8.73
•0816KPM188	8-18X1	2,000	5.60	1032KPM188	10-16X2	1,000	11.27
•0820KPM188	8-18X1 1/4	1,500	6.80				
•0824KPM188	8-18X1 1/2	1,000	7.29	•1208KPM188	12-14X1/2	500	7.50
•0826KPM188	8-18X1 5/8	1,000	7.40	1212KPM188	12-14X3/4	500	6.10
				1216KPM188	12-14X1	500	9.70
				1220KPM188	12-14X1 1/4	400	11.45
				1224KPM188	12-14X1 1/2	300	13.20


410 Stainless Steel


Items marked with "•"
have #2 point; all
others have #3 point

**OVAL PHILLIPS
SELF DRILLING SCREWS**

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0816KPO410	8-18X1	3,500	4.39	1020KPO410	10-16X1 1/4	2,000	7.22
•0820KPO410	8-18X1 1/4	2,500	5.36				

18-8 Stainless Steel


Items marked with "•"
have #2 point; all
others have #3 point

**OVAL PHILLIPS
SELF DRILLING SCREWS**

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KPO188	6-20X1/2	5,000	1.70	•0820KPO188	8-18X1 1/4	2,500	5.38
•0610KPO188	6-20X5/8	5,000	2.07	•0824KPO188	8-18X1 1/2	2,000	6.38
•0612KPO188	6-20X3/4	5,000	2.37	•0832KPO188	8-18X2	1,250	8.32
•0616KPO188	6-20X1	4,500	3.03				
•0620KPO188	6-20X1 1/4	4,000	3.75	1012KPO188	10-16X3/4	3,500	4.71
				1016KPO188	10-16X1	2,500	6.00
•0808KPO188	8-18X1/2	5,000	2.60	1020KPO188	10-16X1 1/4	2,000	7.21
•0812KPO188	8-18X3/4	5,000	3.56				
•0816KPO188	8-18X1	3,500	4.66	1416KPO188	1/4-14X1	1,500	11.20

18-8 Stainless Steel


All items have #2 point

**OVAL UNDERCUT PHILLIPS
SELF DRILLING SCREWS**

Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1008KPOU188	10-16X1/2	5,000	3.60				

18-8 Stainless Steel


Items marked with "•"
have #2 point; all
others have #3 point

**PAN PHILLIPS
SELF DRILLING SCREWS**

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0406KPP188	4-24X3/8	10,000	1.06	•1008KPP188	10-16X3/8	9,000	4.00
•0408KPP188	4-24X1/2	10,000	1.26	•1008KPP188	10-16X1/2	8,000	4.40
				1010KPP188	10-16X5/8	8,000	4.96
•0606KPP188	6-20X3/8	10,000	1.70	1012KPP188	10-16X3/4	4,000	5.51
•0608KPP188	6-20X1/2	5,000	2.06	1014KPP188	10-16X7/8	4,000	6.15
•0610KPP188	6-20X5/8	10,000	2.33	1016KPP188	10-16X1	5,000	6.93
•0612KPP188	6-20X3/4	10,000	2.77	1020KPP188	10-16X1 1/4	4,000	7.96
•0616KPP188	6-20X1	10,000	3.61	1024KPP188	10-16X1 1/2	3,000	9.42
•0620KPP188	6-20X1 1/4	4,500	3.97	1028KPP188	10-16X1 3/4	3,000	11.00
•0624KPP188	6-20X1 1/2	4,000	4.62	1032KPP188	10-16X2	2,000	12.56
				1040KPP188	10-16X2 1/2	2,000	14.30
•0805KPP188	8-18X5/16	10,000	2.56	1048KPP188	10-16X3	500	17.13
•0806KPP188	8-18X3/8	10,000	2.96	1064KPP188	10-16X4	500	22.10
•0808KPP188	8-18X1/2	5,000	3.10				
•0810KPP188	8-18X5/8	10,000	3.50	•1208KPP188	12-14X1/2	5,000	7.50
•0812KPP188	8-18X3/4	9,000	4.05	1212KPP188	12-14X3/4	5,000	8.10
•0814KPP188	8-18X7/8	6,000	4.53	1216KPP188	12-14X1	3,000	9.70
•0816KPP188	8-18X1	6,000	5.05	1220KPP188	12-14X1 1/4	3,000	11.45
•0820KPP188	8-18X1 1/4	5,000	5.83	1224KPP188	12-14X1 1/2	2,000	13.20
•0824KPP188	8-18X1 1/2	4,000	7.29	1232KPP188	12-14X2	1,000	16.40
•0828KPP188	8-18X1 3/4	3,000	8.10	1240KPP188	12-14X2 1/2	500	19.20
•0832KPP188	8-18X2	2,000	9.22				
•0840KPP188	8-18X2 1/2	2,000	11.26	•1408KPP188	1/4-14X1/2	3,000	9.00
•0848KPP188	8-18X3	1,000	12.76	1412KPP188	1/4-14X3/4	3,000	11.50
				1416KPP188	1/4-14X1	2,000	14.60
				1420KPP188	1/4-14X1 1/4	1,000	15.32
				1424KPP188	1/4-14X1 1/2	1,000	18.10
				1428KPP188	1/4-14X1 3/4	1,000	19.75
				1432KPP188	1/4-14X2	1,000	21.40
				1440KPP188	1/4-14X2 1/2	400	26.30
				1448KPP188	1/4-14X3	700	31.30

**18-8 Stainless Steel with
Black Oxide finish**


Items marked with "•"
have #2 point; all
others have #3 point

**PAN PHILLIPS
SELF DRILLING SCREWS**

Manufactured to B18.6.3 specifications

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KPP188B	8-18X1/2	5,000	3.10	•0816KPP188B	8-18X1	6,000	5.00

NEW Stainless Hex Washer Drill Screws with *Machine Screw Thread*:

#2 & #3 Drill Point, 18-8 SS: page 6

#4 & #5 Drill Point, 410 SS: page 7

410 Stainless Steel

 Items marked with "•"
have #2 point; all
others have #3 point

**PAN PHILLIPS
SELF DRILLING SCREWS**

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KPP410	6-20X3/8	10,000	1.75	•1008KPP410	10-16X1/2	4,000	4.57
•0608KPP410	6-20X1/2	5,000	2.06	1010KPP410	10-16X5/8	4,000	4.94
•0610KPP410	6-20X5/8	5,000	2.34	1012KPP410	10-16X3/4	4,000	5.51
•0612KPP410	6-20X3/4	10,000	2.77	1016KPP410	10-16X1	5,000	6.93
•0616KPP410	6-20X1	10,000	3.61	1020KPP410	10-16X1 1/4	4,000	7.96
•0620KPP410	6-20X1 1/4	4,500	3.66	1024KPP410	10-16X1 1/2	3,000	9.42
•0624KPP410	6-20X1 1/2	4,000	4.51	1032KPP410	10-16X2	2,000	11.58
				1040KPP410	10-16X2 1/2	2,000	13.85
•0806KPP410	8-18X3/8	10,000	2.64				
•0808KPP410	8-18X1/2	5,000	3.15	1212KPP410	12-14X3/4	3,000	7.50
•0810KPP410	8-18X5/8	5,000	3.61	1216KPP410	12-14X1	3,000	9.04
•0812KPP410	8-18X3/4	5,000	4.00	1220KPP410	12-14X1 1/4	3,000	10.66
•0814KPP410	8-18X7/8	6,000	4.70	1224KPP410	12-14X1 1/2	2,000	12.20
•0816KPP410	8-18X1	6,000	5.05	1232KPP410	12-14X2	1,000	15.40
•0820KPP410	8-18X1 1/4	5,000	5.83	1240KPP410	12-14X2 1/2	500	18.70
•0824KPP410	8-18X1 1/2	4,000	6.75				
•0832KPP410	8-18X2	2,000	8.63	1412KPP410	1/4-14X3/4	1,500	10.94
				1416KPP410	1/4-14X1	1,000	13.06
				1420KPP410	1/4-14X1 1/4	500	15.42
				1424KPP410	1/4-14X1 1/2	500	17.31
				1432KPP410	1/4-14X2	500	21.67
				1440KPP410	1/4-14X2 1/2	400	26.17


18-8 Stainless Steel


All items have #2 point

**WAFFER PHILLIPS
SELF DRILLING SCREWS**

 Spaced Thread with #2 point
Manufactured to ASME B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0812KWAF188	8-18X3/4	2,500	3.74				


410 Stainless Steel


All items have #3 point

**WAFFER PHILLIPS
SELF DRILLING SCREWS**

 Machine Screw Thread
Manufactured to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1016KWAFM410	10-24X1	2,500	6.50	1412KWAFM410	1/4-20X3/4	1,000	10.10
1020KWAFM410	10-24X1 1/4	1,500	7.75				
1024KWAFM410	10-24X1 1/2	1,000	9.28				


18-8 Stainless Steel


All items have #3 point

**WAFFER PHILLIPS
SELF DRILLING SCREWS**

 Machine Screw Thread
Manufactured to SAE J78 dimensions


Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWAFM188	10-24X3/4	2,500	5.30	1416KWAFM188	1/4-20X1	1,000	12.49
1016KWAFM188	10-24X1	2,500	6.63				
1024KWAFM188	10-24X1 1/2	1,000	9.38				

410 Stainless Steel

 Items marked with "•"
have #2 point; all
others have #3 point

**HEX WASHER SLOTTED
SELF DRILLING SCREWS**

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KSW410	6-20X3/8	5,000	2.08	•1008KSW410	10-16X1/2	4,000	4.80
				•1010KSW410	10-16X5/8	3,500	5.52
•0806KSW410	8-18X3/8	5,000	2.70	1012KSW410	10-16X3/4	3,000	5.86
•0808KSW410	8-18X1/2	5,000	3.15	1016KSW410	10-16X1	2,500	7.14
•0810KSW410	8-18X5/8	5,000	3.64	1020KSW410	10-16X1 1/4	2,000	8.28
•0812KSW410	8-18X3/4	5,000	4.09				
•0816KSW410	8-18X1	4,000	5.08	•1408KSW410	1/4-14X1/2	2,000	9.43
				1412KSW410	1/4-14X3/4	1,500	11.34
				1416KSW410	1/4-14X1	1,250	13.50

18-8 Stainless Steel

 Items marked with "•"
have #2 point; all
others have #3 point

**HEX WASHER SLOTTED
SELF DRILLING SCREWS**

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KSW188	8-18X1/2	5,000	3.30	•1008KSW188	10-16X1/2	4,000	4.80
•0812KSW188	8-18X3/4	5,000	3.90	1012KSW188	10-16X3/4	3,000	5.69


18-8 Stainless Steel


Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0412KW188	4-24X3/4	5,000	1.90	•1408KW188	1/4-14X1/2	3,000	10.24
•0606KW188	6-20X3/8	5,000	2.31	•1410KW188	1/4-14X5/8	3,000	11.23
•0608KW188	6-20X1/2	5,000	2.58	1412KW188	1/4-14X3/4	3,000	12.23
•0610KW188	6-20X5/8	5,000	2.93	1416KW188	1/4-14X1	2,000	14.60
•0612KW188	6-20X3/4	5,000	3.31	1420KW188	1/4-14X1 1/4	1,500	16.84
•0616KW188	6-20X1	5,000	4.00	1424KW188	1/4-14X1 1/2	1,250	19.34
•0806KW188	8-18X3/8	5,000	2.80	1428KW188	1/4-14X1 3/4	1,000	21.34
•0808KW188	8-18X1/2	5,000	3.48	1432KW188	1/4-14X2	900	24.18
•0810KW188	8-18X5/8	4,000	3.78	1440KW188	1/4-14X2 1/2	800	27.40
•0812KW188	8-18X3/4	5,000	4.10	1448KW188	1/4-14X3	800	30.00
•0816KW188	8-18X1	4,000	5.01	1456KW188	1/4-14X3 1/2	400	37.60
•0824KW188	8-18X1 1/2	2,500	7.16	1464KW188	1/4-14X4	500	40.08
•0828KW188	8-18X1 3/4	2,000	8.63	1480KW188	1/4-14X5	400	55.00
•0832KW188	8-18X2	2,000	9.22	1496KW188	1/4-14X6	400	67.00
•1008KW188	10-16X1/2	4,000	5.06	3112KW188	5/16-12X3/4	1,000	23.00
1010KW188	10-16X5/8	6,000	5.33	3116KW188	5/16-12X1	1,000	26.00
1012KW188	10-16X3/4	4,000	6.66	3120KW188	5/16-12X1 1/4	350	31.33
1016KW188	10-16X1	3,000	8.05	3124KW188	5/16-12X1 1/2	600	32.20
1020KW188	10-16X1 1/4	2,000	8.37	3132KW188	5/16-12X2	300	43.25
1024KW188	10-16X1 1/2	3,000	10.12	3140KW188	5/16-12X2 1/2	200	44.50
1028KW188	10-16X1 3/4	3,000	10.70	3148KW188	5/16-12X3	200	59.35
1032KW188	10-16X2	1,000	12.72	3164KW188	5/16-12X4	150	74.65
1040KW188	10-16X2 1/2	1,000	14.30	•3712KW188	3/8-12X3/4	750	37.50
1048KW188	10-16X3	500	17.60	3716KW188	3/8-12X1	750	41.40
•1208KW188	12-14X1/2	5,000	6.60	3720KW188	3/8-12X1 1/4	300	49.05
1210KW188	12-14X5/8	5,000	7.30	3724KW188	3/8-12X1 1/2	300	55.85
1212KW188	12-14X3/4	3,000	8.06	3732KW188	3/8-12X2	300	68.45
1216KW188	12-14X1	2,000	9.75	3740KW188	3/8-12X2 1/2	100	53.11
1220KW188	12-14X1 1/4	3,000	11.35	3748KW188	3/8-12X3	100	70.00
1224KW188	12-14X1 1/2	2,000	13.49				
1228KW188	12-14X1 3/4	2,000	14.20				
1232KW188	12-14X2	2,000	16.00				
1240KW188	12-14X2 1/2	500	19.75				
1248KW188	12-14X3	1,000	23.00				
1264KW188	12-14X4	500	31.98				


**410 Stainless Steel with
Black Oxide finish**


Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KW410B	8-18X1/2	5,000	3.20	1412KW410B	1/4-14X3/4	2,000	11.60
•0812KW410B	8-18X3/4	5,000	4.10	1416KW410B	1/4-14X1	2,000	13.60
•1008KW410B	10-16X1/2	4,000	4.70				
1012KW410B	10-16X3/4	4,000	5.80				

410 Stainless Steel



Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KW410	6-20X3/8	5,000	2.15	1212KW410	12-14X3/4	3,000	7.40
•0608KW410	6-20X1/2	5,000	2.56	1214KW410	12-14X7/8	2,000	8.60
•0610KW410	6-20X5/8	5,000	2.90	1216KW410	12-14X1	2,000	9.16
•0612KW410	6-20X3/4	5,000	3.25	1220KW410	12-14X1 1/4	3,000	10.80
•0616KW410	6-20X1	5,000	3.80	1224KW410	12-14X1 1/2	1,000	12.30
•0808KW410	8-18X1/2	5,000	3.55	1232KW410	12-14X2	1,000	15.42
•0810KW410	8-18X5/8	4,000	3.79	1240KW410	12-14X2 1/2	1,000	19.13
•0812KW410	8-18X3/4	5,000	4.00	1248KW410	12-14X3	1,000	22.25
•0816KW410	8-18X1	4,000	5.33	1264KW410	12-14X4	500	28.65
•0820KW410	8-18X1 1/4	3,000	6.19	1412KW410	1/4-14X3/4	2,000	11.92
•0824KW410	8-18X1 1/2	3,000	7.25	1414KW410	1/4-14X7/8	1,000	13.00
•0832KW410	8-18X2	2,000	9.03	1416KW410	1/4-14X1	2,000	14.67
•0840KW410	8-18X2 1/2	1,500	11.00	1420KW410	1/4-14X1 1/4	1,500	16.48
•0848KW410	8-18X3	500	13.00	1424KW410	1/4-14X1 1/2	1,000	18.58
•1008KW410	10-16X1/2	4,000	5.03	1428KW410	1/4-14X1 3/4	1,000	21.23
1010KW410	10-16X5/8	4,000	5.51	1432KW410	1/4-14X2	1,000	23.13
1012KW410	10-16X3/4	4,000	5.86	1440KW410	1/4-14X2 1/2	800	27.47
1016KW410	10-16X1	3,000	7.22	1448KW410	1/4-14X3	800	31.73
1020KW410	10-16X1 1/4	2,000	8.60	1464KW410	1/4-14X4	500	40.65
1024KW410	10-16X1 1/2	3,000	9.65	1480KW410	1/4-14X5	400	50.60
1032KW410	10-16X2	1,000	12.22	1496KW410	1/4-14X6	400	59.50
1040KW410	10-16X2 1/2	1,000	14.42	14112KW410	1/4-14X7	100	66.50
1048KW410	10-16X3	500	16.75	14128KW410	1/4-14X8	75	76.00
1064KW410	10-16X4	150	22.50				
1080KW410	10-16X5	150	27.50				

NEW!


18-8 Stainless Steel


Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 dimensions
Points to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•1008KWMS188	10-24X1/2	1,000	4.66	•1208KWMS188	12-24X1/2	1,000	6.88
1012KWMS188	10-24X3/4	1,000	6.43	1212KWMS188	12-24X3/4	1,000	8.35
1016KWMS188	10-24X1	1,000	7.80	1216KWMS188	12-24X1	1,000	10.20

410 Stainless Steel


All items have #2 point


HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 dimensions
Points to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1220KWMS410	12-24X1 1/4	3,000	11.90	1232KWMS410	12-24X2	2,000	17.50

NEW!

410 Stainless Steel



All items have #4 point


#4 POINT HEX WASHER UNSLOTTED

SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3
410 Hardened Stainless Steel

Part #	Size	Ctn Qty	Wght Lbs/M
1214KWMS4410	12-24X7/8	1,500	8.30

410 Stainless Steel



All items have #4 point

HEX WASHER UNSLOTTED WITH WINGS


SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M
1214KWM4410W	12-24X7/8	2,000	9.00

NEW!

410 Stainless Steel



All items have #5 point

#5 POINT HEX WASHER UNSLOTTED


SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3
410 Hardened Stainless Steel

Part #	Size	Ctn Qty	Wght Lbs/M
1220KWMS5410	12-14X1 1/4	1,000	10.90
1224KWMS5410	12-24X1 1/2	1,000	13.10

1232KWMS5410 12-24X2 900 16.80

410 Stainless



All items have #4 point

#4 POINT HEX WASHER UNSLOTTED


SELF DRILLING SCREWS WITH SELF TAPPING SCREW THREADS

410 Hardened Stainless Steel

Part #	Size	Ctn Qty	Wght Lbs/M
1216KW4410	12-14X1	2,000	9.00
1220KW4410	12-14X1 1/4	1,500	10.50

1224KW4410 12-14X1 1/2 1,000 12.17

410 Stainless Steel



All items have #5 point

#5 POINT HEX WASHER UNSLOTTED

SELF DRILLING SCREWS WITH SELF TAPPING SCREW THREADS

410 Hardened Stainless Steel

Part #	Size	Ctn Qty	Wght Lbs/M
1220KW5410	12-14X1 1/4	1,500	10.43
1224KW5410	12-14X1 1/2	1,000	12.15
1232KW5410	12-14X2	1,000	15.53

1424KW5410 1/4-14X1 1/2 500 18.00

1432KW5410 1/4-14X2 400 22.33

1440KW5410 1/4-14X2 1/2 400 26.50

1448KW5410 1/4-14X3 300 31.00

NEW!

18-8 Stainless Steel



Hex heads have 7/16" A.F. dimensions

SERRATED HEX WASHER UNSLOTTED

SELF DRILLING SCREWS

Heads are 7/16" Across the Flats / Manufactured to SAE J78 dimensions
18-8 Stainless Steel

Part #	Size	Ctn Qty	Wght Lbs/M
•0608KWS188	6-20X1/2	2,000	2.63
•0808KWS188	8-18X1/2	2,000	3.48
•1008KWS188	10-16X1/2	1,500	4.60

1412KWS188 1/4-14X3/4 600 12.67

1416KWS188 1/4-14X1 500 14.83

•141607KWS188 14X1 (7/16 A/F) 1,000 17.17

1420KWS188 1/4-14X1 1/4 500 17.33

1424KWS188 1/4-14X1 1/2 400 24.18

18-8 Stainless Steel



Items marked with "•" have #2 point; all others have #3 point

HEX WASHER UNSLOTTED

SELF DRILLING SCREWS WITH NEO-EPDM WASHER

Used to create a leak-proof seal
Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M
•0808KWN188	8-18X1/2	2,000	5.28
•0816KWN188	8-18X1	1,000	7.28
1012KWN188	10-16X3/4	1,000	7.89
1016KWN188	10-16X1	1,000	9.13

1212KWN188 12-14X3/4 1,000 10.00

1216KWN188 12-14X1 750 11.75

1412KWN188 1/4-14X3/4 500 15.47

1416KWN188 1/4-14X1 500 17.60

NEW!

410 Stainless Steel



Items marked with "•" have #2 point; all others have #3 point

HEX WASHER UNSLOTTED

SELF DRILLING SCREWS WITH NEO-EPDM WASHER

Used to create a leak-proof seal
Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M
1012KWN410	10-16X3/4	1,500	7.58
1016KWN410	10-16X1	1,500	8.75
1212KWN410	12-14X3/4	1,250	10.08
1216KWN410	12-14X1	1,000	11.70

1412KWN410 1/4-14X3/4 1,000 14.25

1416KWN410 1/4-14X1 800 16.83

1420KWN410 1/4-14X1 1/4 750 18.75

18-8 Stainless Steel


Items marked with “*”
have #2 point; all
others have #3 point

FLAT SIX-LOBE SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0608KTF188	6-20X1/2	5,000	1.61	1216KTF188	12-14X1	2,000	7.30
*0610KTF188	6-20X5/8	5,000	1.96	1224KTF188	12-14X1 1/2	1,000	10.50
*0612KTF188	6-20X3/4	5,000	2.24	1232KTF188	12-14X2	500	14.00
*0812KTF188	8-18X3/4	5,000	3.00	1412KTF188	1/4-14X3/4	1,500	8.00
*0816KTF188	8-18X1	4,000	4.20	1416KTF188	1/4-14X1	1,500	9.88
*0824KTF188	8-18X1 1/2	2,500	5.97	1420KTF188	1/4-14X1 1/4	1,000	11.75
*0832KTF188	8-18X2	1,500	7.83	1424KTF188	1/4-14X1 1/2	1,000	14.13
				1432KTF188	1/4-14X2	500	18.67
1012KTF188	10-16X3/4	4,000	4.25	1440KTF188	1/4-14X2 1/2	500	21.88
1016KTF188	10-16X1	2,500	5.43	1448KTF188	1/4-14X3	350	27.75
1020KTF188	10-16X1 1/4	2,000	6.63				
1024KTF188	10-16X1 1/2	2,000	8.00	3116KTF188	5/16-12X1	500	16.33
1032KTF188	10-16X2	1,500	10.75	3124KTF188	5/16-12X1 1/2	300	23.67
1040KTF188	10-16X2 1/2	1,500	13.17	3128KTF188	5/16-12X1 3/4	300	28.00
				3132KTF188	5/16-12X2	300	31.75

18-8 Stainless Steel


Items marked with “*”
have #2 point; all
others have #3 point

PAN SIX-LOBE SELF DRILLING SCREWS

Manufactured to SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0808KTP188	8-18X1/2	5,000	3.15	*1008KTP188	10-16X1/2	4,000	4.50
*0812KTP188	8-18X3/4	4,500	4.20	1010KTP188	10-16X5/8	4,000	5.00
*0816KTP188	8-18X1	2,000	5.00	1012KTP188	10-16X3/4	3,500	5.33
*0820KTP188	8-18X1 1/4	1,500	5.80	1016KTP188	10-16X1	2,500	6.63
*0824KTP188	8-18X1 1/2	1,000	6.70	1020KTP188	10-16X1 1/4	1,000	8.00
*0832KTP188	8-18X2	800	8.50	1024KTP188	10-16X1 1/2	600	9.20
				1032KTP188	10-16X2	400	11.70

18-8 Stainless Steel



All items have #3 point


WAFER SIX-LOBE SELF DRILLING SCREWS WITH SPACED THREADS

Manufactured to SAE J78 dimensions
18-8 Stainless Steel

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWTF188	10-16X3/4	2,500	6.63	1024KWTF188	10-16X1 1/2	500	9.38
1016KWTF188	10-16X1	2,500	6.67				

NEW!

18-8 Stainless Steel



Items marked with “*”
have #2 point; all
others have #3 point

FLAT SQUARE RECESS SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0608KQF188	6-20X1/2	3,000	1.77	1012KQF188	10-16X3/4	2,000	4.08
*0610KQF188	6-20X5/8	3,000	1.81	1016KQF188	10-16X1	2,000	5.38
*0612KQF188	6-20X3/4	2,000	2.19	1020KQF188	10-16X1 1/4	1,000	6.58
				1024KQF188	10-16X1 1/2	1,000	7.98
*0808KQF188	8-18X1/2	2,500	2.67	1028KQF188	10-16X1 3/4	1,000	9.47
*0810KQF188	8-18X5/8	2,000	3.10	1032KQF188	10-16X2	1,000	10.63
*0812KQF188	8-18X3/4	2,000	2.98	1040KQF188	10-16X2 1/2	1,000	13.25
*0816KQF188	8-18X1	2,000	3.85				
*0820KQF188	8-18X1 1/4	2,000	4.82	1216KQF188	12-14X1	1,000	7.20
*0824KQF188	8-18X1 1/2	1,000	5.80	1220KQF188	12-14X1 1/4	1,000	8.65
*0832KQF188	8-18X2	1,000	7.67	1224KQF188	12-14X1 1/2	1,000	10.30
				1420KQF188	1/4-14X1 1/4	500	12.03
				1424KQF188	1/4-14X1 1/2	500	14.17

410 Stainless Steel


Items marked with “*”
have #2 point; all
others have #3 point

FLAT SQUARE RECESS SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0808KQF410	8-18X1/2	5,000	2.28	1012KQF410	10-16X3/4	3,500	3.85
0812KQF410	8-18X3/4	4,500	3.10	1016KQF410	10-16X1	2,500	5.14
0816KQF410	8-18X1	3,000	3.94	1024KQF410	10-16X1 1/2	1,000	7.70
0820KQF410	8-18X1 1/4	2,500	4.80				
0824KQF410	8-18X1 1/2	2,000	5.86	1416KQF410	1/4-14X1	1,000	9.92
0832KQF410	8-18X2	1,000	7.58				

NEW—

Square Recess Flat Heads in
18-8 Stainless—page 8

410 Stainless Steel

Items marked with "•"
have #2 point; all
others have #3 point

PAN SQUARE RECESS SELF DRILLING SCREWS

Manufactured to SAE J78 dimensions
Heads manufactured to ASME B18.6.3

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KQP410	6-20X3/8	3,000	1.66	1016KQP410	10-16X1	1,000	6.76
•0608KQP410	6-20X1/2	3,000	1.94	1020KQP410	10-16X1 1/4	1,000	8.17
•0612KQP410	6-20X3/4	2,500	2.77	1024KQP410	10-16X1 1/2	500	9.06
•0614KQP410	6-20X7/8	2,500	3.00	1032KQP410	10-16X2	1,000	11.75
•0616KQP410	6-20X1	2,500	3.61	1040KQP410	10-16X2 1/2	500	14.17
				1048KQP410	10-16X3	500	16.60
•0806KQP410	8-18X3/8	2,500	2.70	1212KQP410	12-14X3/4	1,000	7.50
•0808KQP410	8-18X1/2	5,000	3.00	1216KQP410	12-14X1	700	9.20
•0810KQP410	8-18X5/8	2,000	3.50	1220KQP410	12-14X1 1/4	600	10.60
•0812KQP410	8-18X3/4	1,500	3.92	1224KQP410	12-14X1 1/2	600	12.38
•0816KQP410	8-18X1	1,000	4.88	1232KQP410	12-14X2	400	15.50
•0820KQP410	8-18X1 1/4	2,500	5.85	1412KQP410	1/4-14X3/4	1,000	11.00
•0824KQP410	8-18X1 1/2	2,000	6.77	1416KQP410	1/4-14X1	1,000	13.28
•0832KQP410	8-18X2	1,000	8.75	1420KQP410	1/4-14X1 1/4	500	13.53
•0840KQP410	8-18X2 1/2	700	10.60	1424KQP410	1/4-14X1 1/2	400	18.00
•1008KQP410	10-16X1/2	2,500	4.50	1432KQP410	1/4-14X2	300	22.00
1012KQP410	10-16X3/4	2,500	5.38				

18-8 Stainless Steel


Items marked with "•"
have #2 point; all
others have #3 point

PAN SQUARE RECESS SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KQP188	6-20X3/8	5,000	1.75	1020KQP188	10-16X1 1/4	900	8.33
•0608KQP188	6-20X1/2	5,000	2.04	1024KQP188	10-16X1 1/2	700	9.50
				1028KQP188	10-16X1 3/4	700	10.75
•0806KQP188	8-18X3/8	5,000	2.67	1032KQP188	10-16X2	600	12.17
•0808KQP188	8-18X1/2	5,000	3.08	1040KQP188	10-16X2 1/2	500	14.67
•0810KQP188	8-18X5/8	1,500	3.56	1048KQP188	10-16X3	400	17.17
•0812KQP188	8-18X3/4	1,500	4.00				
•0816KQP188	8-18X1	1,300	4.88	1212KQP188	12-14X3/4	2,500	7.70
•0820KQP188	8-18X1 1/4	1,250	5.90	1216KQP188	12-14X1	1,500	9.40
•0824KQP188	8-18X1 1/2	1,000	6.88	1220KQP188	12-14X1 1/4	600	11.00
•0832KQP188	8-18X2	800	8.83	1224KQP188	12-14X1 1/2	500	12.67
•0840KQP188	8-18X2 1/2	700	10.67	1232KQP188	12-14X2	400	15.83
•1008KQP188	10-16X1/2	4,000	4.55	1412KQP188	1/4-14X3/4	1,500	11.50
1010KQP188	10-16X5/8	3,000	4.93	1416KQP188	1/4-14X1	1,000	13.75
1012KQP188	10-16X3/4	2,500	5.50	1420KQP188	1/4-14X1 1/4	1,000	16.00
1016KQP188	10-16X1	1,000	6.76	1424KQP188	1/4-14X1 1/2	500	18.07
				1432KQP188	1/4-14X2	500	22.85

Steel Zinc Plated


Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER COMBINATION SELF DRILLING SCREWS

Combination Phillips and Slotted Recess
Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0806KCW	8-18X3/8	10,000	2.63	•1008KCW	10-16X1/2	7,000	4.64
•0808KCW	8-18X1/2	10,000	2.96	1012KCW	10-16X3/4	6,000	5.58

Steel Zinc Plated

Items marked with "•"
have #2 point; all
others have #3 point

PAN COMBINATION SELF DRILLING SCREWS

Combination Phillips and Slotted Recess
Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KCP	6-20X3/8	10,000	1.70	•0812KCP	8-18X3/4	9,000	4.05
•0608KCP	6-20X1/2	10,000	2.00	•0816KCP	8-18X1	6,000	4.81
				•0820KCP	8-18X1 1/4	5,000	5.70
•0806KCP	8-18X3/8	10,000	2.53				
•0808KCP	8-18X1/2	10,000	3.00	1012KCP	10-16X3/4	7,000	5.45
•0810KCP	8-18X5/8	10,000	3.50	1016KCP	10-16X1	5,000	6.64


Steel Zinc Plated

Items marked with "•"
have #2 point; all
others have #3 point

BUGLE PHILLIPS DRYWALL SCREWS

Fine Thread - Self Drilling Point
Case Hardness: Rockwell C44 minimum

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0612KPGZ	6-20X3/4	10,000	2.48	•0826KPGZ	8-18X1 5/8	2,000	6.30
•0616KPGZ	6-20X1	10,000	3.10	•0832KPGZ	8-18X2	2,000	8.00
•0620KPGZ	6-20X1 1/4	8,000	3.90	•0838KPGZ	8-18X2 3/8	2,000	9.20
•0626KPGZ	6-20X1 5/8	5,000	4.80	•0840KPGZ	8-18X2 1/2	2,000	9.83
•0632KPGZ	6-20X2	4,000	5.80	•0848KPGZ	8-18X3	1,400	11.63
•0812KPGZ	8-18X3/4	3,000	3.10	1020KPGZ	10-16X1 1/4	2,000	6.00
•0816KPGZ	8-18X1	3,000	4.10	1032KPGZ	1016X2	1,500	9.60
•0820KPGZ	8-18X1 1/4	2,500	5.00	1040KPGZ	10-16X2 1/2	1,000	12.20
•0824KPGZ	8-18X1 1/2	2,000	5.80	1056KPGZ	10-16X3 1/2	1,000	17.30
				1064KPGZ	10-16X4	500	19.70
				1096KPGZ	10-16X6	300	29.10


Steel Zinc Plated


Items marked with “•”
have #2 point; all
others have #3 point

FLAT PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0406KPF	4-24X3/8	10,000	1.06	•1208KPF	12-14X1/2	5,000	6.76
•0416KPF	4-24X1	10,000	1.92	1210KPF	12-14X5/8	4,000	7.80
•0408KPF	4-24X1/2	10,000	1.26	1212KPF	12-14X3/4	4,000	8.10
•0410KPF	4-24X5/8	10,000	1.15	1214KPF	12-14X7/8	4,000	8.30
•0412KPF	4-24X3/4	10,000	1.37	1216KPF	12-14X1	4,000	9.70
•0606KPF	6-20X3/8	10,000	1.46	1220KPF	12-14X1 1/4	3,000	11.45
•0607KPF	6-20X7/16	10,000	1.50	1224KPF	12-14X1 1/2	2,000	13.20
•0608KPF	6-20X1/2	10,000	1.77	1228KPF	12-14X1 3/4	1,500	12.33
•0610KPF	6-20X5/8	10,000	2.00	1232KPF	12-14X2	1,000	16.40
•0612KPF	6-20X3/4	10,000	2.38	1236KPF	12-14X2 1/4	1,000	15.00
•0614KPF	6-20X7/8	10,000	3.20	1240KPF	12-14X2 1/2	1,000	20.37
•0616KPF	6-20X1	10,000	3.60	1244KPF	12-14X2 3/4	1,000	19.50
•0620KPF	6-20X1 1/4	10,000	3.66	1248KPF	12-14X3	1,000	20.42
•0624KPF	6-20X1 1/2	7,000	5.32	1256KPF	12-14X3 1/2	750	23.00
•0626KPF	6-20X1 5/8	5,000	6.03	1264KPF	12-14X4	600	28.00
•0632KPF	6-20X2	5,000	6.73	1272KPF	12-14X4 1/2	500	30.63
•0636KPF	6-20X2 1/4	3,000	6.08	1280KPF	12-14X5	500	55.00
•0640KPF	6-20X2 1/2	2,000	6.70	1296KPF	12-14X6	400	61.00
•0648KPF	6-20X3	1,500	8.30	1412KPF	1/4-14X3/4	3,000	9.78
•0707KPF	7-19X7/16	10,000	1.55	1416KPF	1/4-14X1	3,000	11.68
•0708KPF	7-19X1/2	10,000	1.71	1420KPF	1/4-14X1 1/4	2,000	13.47
•0712KPF	7-19X3/4	10,000	2.70	1424KPF	1/4-14X1 1/2	2,000	15.47
•0808KPF	8-18X1/2	10,000	2.67	1428KPF	1/4-14X1 3/4	1,500	19.00
•0810KPF	8-18X5/8	10,000	3.01	1432KPF	1/4-14X2	1,000	20.49
•0812KPF	8-18X3/4	10,000	3.50	1436KPF	1/4-14X2 1/4	800	31.40
•0814KPF	8-18X7/8	9,000	3.45	1440KPF	1/4-14X2 1/2	1,000	25.00
•0816KPF	8-18X1	8,000	3.88	1444KPF	1/4-14X2 3/4	800	28.00
•0820KPF	8-18X1 1/4	7,000	5.01	1448KPF	1/4-14X3	700	30.00
•0824KPF	8-18X1 1/2	5,000	7.30	1456KPF	1/4-14X3 1/2	600	41.40
•0826KPF	8-18X1 5/8	4,000	8.26	1464KPF	1/4-14X4	500	38.00
•0828KPF	8-18X1 3/4	4,000	8.30	1472KPF	1/4-14X4 1/2	500	41.00
•0830KPF	8-18X1 7/8	3,000	9.00	1480KPF	1/4-14X5	500	50.00
•0832KPF	8-18X2	3,000	9.22	1496KPF	1/4-14X6	250	54.00
•0836KPF	8-18X2 1/4	2,000	8.90	3112KPF	5/16-12X3/4	1,000	12.55
•0840KPF	8-18X2 1/2	1,500	11.64	3116KPF	5/16-12X1	1,000	15.70
•0844KPF	8-18X2 3/4	1,250	14.00	3120KPF	5/16-12X1 1/4	750	26.00
•0848KPF	8-18X3	1,250	14.70	3124KPF	5/16-12X1 1/2	600	28.00
•0856KPF	8-18X3 1/2	1,000	17.40	3132KPF	5/16-12X2	600	36.00
•0864KPF	8-18X4	1,000	18.90	3140KPF	5/16-12X2 1/2	600	38.00
•1008KPF	10-16X1/2	10,000	3.66	3716KPF	3/8-12X1	750	24.75
1010KPF	10-16X5/8	8,000	4.27	3720KPF	3/8-12X1 1/4	600	30.33
1012KPF	10-16X3/4	8,000	4.74	3724KPF	3/8-12X1 1/2	600	36.00
1016KPF	10-16X1	6,000	5.96	3732KPF	3/8-12X2	600	47.83
1020KPF	10-16X1 1/4	5,000	6.85	3748KPF	3/8-12X3	400	71.75
1024KPF	10-16X1 1/2	4,000	8.10				
1028KPF	10-16X1 3/4	3,000	10.35				
1032KPF	10-16X2	3,000	12.60				
1036KPF	10-16X2 1/4	1,000	14.16				
1040KPF	10-16X2 1/2	1,500	19.60				
1048KPF	10-16X3	1,000	17.00				
1056KPF	10-16X3 1/2	1,000	18.00				
1064KPF	10-16X4	750	21.00				
1072KPF	10-16X4 1/2	750	22.40				
1080KPF	10-16X5	500	30.00				
1096KPF	10-16X6	500	30.25				


Steel Zinc Plated


Item marked “••” has #1
point; Items marked “•”
have #2 point; all
others have #3 point

FLAT PHILLIPS UNDERCUT SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0412KPU	4-24X3/4	9,000	1.37	1020KPU	10-16X1 1/4	4,000	6.85
•0416KPU	4-24X1	9,000	1.82	1024KPU	10-16X1 1/2	1,000	8.10
•0606KPU	6-20X3/8	10,000	1.46	1032KPU	10-16X2	1,000	12.60
•0608KPU	6-20X1/2	10,000	1.77	1040KPU	10-16X2 1/2	1,000	12.40
•0610KPU	6-20X5/8	10,000	2.00	1048KPU	10-16X3	1,000	14.92
•0612KPU	6-20X3/4	10,000	2.38	•1208KPU	12-14X1/2	5,000	6.76
•0620KPU	6-20X1 1/4	10,000	3.66	1210KPU	12-14X5/8	5,000	4.40
•0624KPU	6-20X1 1/2	7,000	4.04	1211KPU	12-14X11/16	5,000	4.70
•0806KPU	8-18X3/8	10,000	1.80	1212KPU	12-14X3/4	5,000	8.10
•0808KPU	8-18X1/2	10,000	2.60	1216KPU	12-14X1	5,000	9.70
•0810KPU	8-18X5/8	10,000	3.01	1220KPU	12-14X1 1/4	3,000	11.45
•0812KPU	8-18X3/4	10,000	4.05	1224KPU	12-14X1 1/2	3,000	13.20
•0816KPU	8-18X1	7,000	5.05	1232KPU	12-14X2	1,000	13.33
•0820KPU	8-18X1 1/4	5,000	5.01	1240KPU	12-14X2 1/2	1,000	16.60
•0824KPU	8-18X1 1/2	5,000	5.58	1248KPU	12-14X3	1,000	20.00
•0828KPU	8-18X1 3/4	4,000	6.50	•1408KPU	1/4-14X1/2	4,000	9.12
•0832KPU	8-18X2	3,000	7.50	1412KPU	1/4-14X3/4	4,000	9.78
•0840KPU	8-18X2 1/2	1,500	9.38	1416KPU	1/4-14X1	3,000	11.60
•0848KPU	8-18X3	1,250	11.38	1420KPU	1/4-14X1 1/4	2,500	13.47
•1006KPU	10-16X3/8	10,000	3.00	1424KPU	1/4-14X1 1/2	2,000	13.50
•1008KPU	10-16X1/2	10,000	3.66	1432KPU	1/4-14X2	1,000	17.88
1010KPU	10-16X5/8	8,000	4.27	1440KPU	1/4-14X2 1/2	1,000	22.50
1012KPU	10-16X3/4	7,000	4.74	1448KPU	1/4-14X3	700	27.00
1016KPU	10-16X1	6,000	5.96	1464KPU	1/4-14X4	500	36.00

Steel Zinc Plated


All items have #3 point


FLAT PHILLIPS UNDERCUT SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1008KPUMS	10-24X1/2	4,000	2.92	1210KPUMS	12-24X5/8	5,000	4.45
1012KPUMS	10-24X3/4	4,000	3.93	1211KPUMS	12-24X11/16	5,000	4.90
1016KPUMS	10-24X1	3,000	5.58	1212KPUMS	12-24X3/4	5,000	5.20
1110KPUMS	10-32X5/8	8,000	3.53	1216KPUMS	12-24X1	5,000	7.06
				1220KPUMS	12-24X1 1/4	3,000	8.92
				1224KPUMS	12-24X1 1/2	3,000	11.17
				1232KPUMS	12-24X2	1,000	15.00
				1412KPUMS	1/4-20X3/4	4,000	7.80
				1416KPUMS	1/4-20X1	3,000	10.00

**Specifications for all Self-Drilling Screws— Check the
Online Kanebridge Fastener Reference Guide**

Steel Zinc Plated



All items have #4 point

4 POINT FLAT PHILLIPS WITH WINGS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

 Heads to ASME B18.6.3 / Screws hardened to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1232KPFMS4W	12-24X2	1,000	14.75	1444KPFMS4W	1/4-20X2 3/4	800	28.00
1236KPFMS4W	12-24X2 1/4	1,000	16.70	1448KPFMS4W	1/4-20X3	700	30.33
1240KPFMS4W	12-24X2 1/2	1,000	18.60	1452KPFMS4W	1/4-20X3 1/4	600	33.00
1244KPFMS4W	12-24X2 3/4	1,000	20.50	1456KPFMS4W	1/4-20X3 1/2	600	35.55
				1460KPFMS4W	1/4-20X3 3/4	500	38.17

Steel Zinc Plated



All items have #3 point

FLAT PHILLIPS UNDERCUT WITH WINGS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

 Heads Manufactured to ASME B18.6.3 dimensions
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1240KPFMSW	12-24X2 1/2	1,000	18.50				


 Steel Green
Ceramic Coated


FLAT PHILLIPS WITH WINGS SELF DRILLING SCREWS

 Heads to ASME B18.6.3 with Nibs / Screws hardened to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0820KPFRC	8-18X1 1/4	1,000	5.00	0836KPFRC	8-18X2 1/4	1,000	8.67
0826KPFRC	8-18X1 5/8	1,000	6.33				

Steel Zinc Plated


 Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER PHILLIPS SELF DRILLING SCREWS

 Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KPW	6-20X1/2	10,000	2.78	•1008KPW	10-16X1/2	7,000	5.06
•0612KPW	6-20X3/4	10,000	3.10	•1010KPW	10-16X5/8	7,000	4.75
•0616KPW	6-20X1	10,000	3.63	1012KPW	10-16X3/4	6,000	6.66
•0620KPW	6-20X1 1/4	8,000	4.25	1016KPW	10-16X1	4,000	8.05
•0624KPW	6-20X1 1/2	7,000	4.90	1024KPW	10-16X1 1/2	3,000	10.12
•0632KPW	6-20X2	4,000	6.25	1032KPW	10-16X2	2,000	11.92
•0806KPW	8-18X3/8	10,000	2.66	1216KPW	12-14X1	4,000	8.90
•0808KPW	8-18X1/2	10,000	3.30	1220KPW	12-14X1 1/4	3,000	10.40
•0810KPW	8-18X5/8	10,000	4.27	1224KPW	12-14X1 1/2	2,000	13.49
•0812KPW	8-18X3/4	8,000	3.90				
•0816KPW	8-18X1	5,000	4.70	1412KPW	1/4-14X3/4	3,000	12.23
•0820KPW	8-18X1 1/4	4,000	5.83	1416KPW	1/4-14X1	2,500	14.60
•0824KPW	8-18X1 1/2	3,000	7.29	1420KPW	1/4-14X1 1/4	1,500	15.75
•0832KPW	8-18X2	2,000	8.63	1424KPW	1/4-14X1 1/2	1,250	19.34
•0840KPW	8-18X2 1/2	2,000	10.63				
•0848KPW	8-18X3	1,500	12.50				

Steel Zinc Plated


 Items marked with "•"
have #2 point; all
others have #3 point


MODIFIED TRUSS PHILLIPS SELF DRILLING SCREWS

 Manufactured to SAE J78 specifications
For attaching metal lath to metal studs between 12-20 gauge thick
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0406KPM	4-24X3/8	7,000	0.85	•1006KPM	10-16X3/8	5,000	3.80
•0408KPM	4-24X1/2	7,000	0.96	•1008KPM	10-16X1/2	6,000	5.00
				1010KPM	10-16X5/8	6,000	4.73
•0606KPM	6-20X3/8	8,000	2.35	1012KPM	10-16X3/4	6,000	5.51
•0608KPM	6-20X1/2	8,000	2.96	1016KPM	10-16X1	5,000	6.50
•0612KPM	6-20X3/4	7,000	3.75	1020KPM	10-16X1 1/4	4,000	9.12
•0616KPM	6-20X1	7,000	3.61	1024KPM	10-16X1 1/2	3,000	10.42
•0620KPM	6-20X1 1/4	5,000	4.81	1028KPM	10-16X1 3/4	3,000	10.38
•0626KPM	6-20X1 5/8	3,000	4.60	1032KPM	10-16X2	2,000	15.05
•0628KPM	6-20X1 3/4	3,000	6.30	1036KPM	10-16X2 1/4	2,000	14.14
•0632KPM	6-20X2	2,500	7.00	1040KPM	10-16X2 1/2	1,500	15.45
•0640KPM	6-20X2 1/2	2,000	8.40	1048KPM	10-16X3	1,000	16.60
•0648KPM	6-20X3	1,500	9.70	1056KPM	10-16X3 1/2	1,000	18.80
				1064KPM	10-16X4	1,000	21.40
•0806KPM	8-18X3/8	6,000	3.45	1072KPM	10-16X4 1/2	750	24.00
•0807KPM	8-18X7/16	6,000	3.64	1080KPM	10-16X5	750	30.00
•0808KPM	8-18X1/2	5,000	4.03				
•0809KPM	8-18X9/16	5,000	4.10	•1208KPM	12-14X1/2	5,000	6.88
•0810KPM	8-18X5/8	5,000	3.94	1210KPM	12-14X5/8	5,000	5.56
•0812KPM	8-18X3/4	5,000	4.75	1212KPM	12-14X3/4	5,000	6.00
•0814KPM	8-18X7/8	5,000	5.22	1216KPM	12-14X1	3,000	10.60
•0816KPM	8-18X1	4,000	5.60	1220KPM	12-14X1 1/4	3,000	9.21
•0820KPM	8-18X1 1/4	3,000	6.80	1224KPM	12-14X1 1/2	2,000	13.86
•0822KPM	8-18X1 3/8	3,000	7.06	1232KPM	12-14X2	1,000	17.12
•0824KPM	8-18X1 1/2	2,000	7.29	1240KPM	12-14X2 1/2	1,000	18.00
•0826KPM	8-18X1 5/8	3,000	7.40	1248KPM	12-14X3	1,000	21.50
•0828KPM	8-18X1 3/4	3,000	8.50	1256KPM	12-14X3 1/2	1,000	23.00
•0830KPM	8-18X1 7/8	2,000	9.00	1264KPM	12-14X4	750	26.70
•0832KPM	8-18X2	2,000	10.47				
•0836KPM	8-18X2 1/4	2,000	12.00	1412KPM	1/4-14X3/4	3,000	10.98
•0840KPM	8-18X2 1/2	2,000	12.55	1416KPM	1/4-14X1	2,000	13.00
•0848KPM	8-18X3	1,500	14.96	1420KPM	1/4-14X1 1/4	1,000	15.00
•0856KPM	8-18X3 1/2	1,000	14.88	1424KPM	1/4-14X1 1/2	1,000	17.33
•0864KPM	8-18X4	900	15.50	1432KPM	1/4-14X2	1,000	22.13
				1440KPM	1/4-14X2 1/2	800	26.32
				1448KPM	1/4-14X3	700	31.00
				1456KPM	1/4-14X3 1/2	600	35.67
				1464KPM	1/4-14X4	500	40.00

The Most Self-Drilling Screws for Same-Day Shipment

Steel Zinc Plated



Items marked with "•" have #2 point; all others have #3 point

OVAL PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KPO	6-20X3/8	10,000	1.55	1010KPO	10-16X5/8	8,000	4.17
•0608KPO	6-20X1/2	10,000	1.80	1012KPO	10-16X3/4	7,000	4.74
•0610KPO	6-20X5/8	10,000	1.91	1016KPO	10-16X1	5,000	7.00
•0612KPO	6-20X3/4	10,000	2.70	1020KPO	10-16X1 1/4	4,000	8.00
•0614KPO	6-20X7/8	9,000	2.70	1022KPO	10-16X1 3/8	4,000	7.80
•0616KPO	6-20X1	9,000	3.61	1024KPO	10-16X1 1/2	4,000	8.10
•0620KPO	6-20X1 1/4	8,000	3.66	1028KPO	10-16X1 3/4	3,000	9.67
•0624KPO	6-20X1 1/2	8,000	4.94	1032KPO	10-16X2	2,000	12.56
•0632KPO	6-20X2	5,000	5.64	1036KPO	10-16X2 1/4	2,000	14.16
				1040KPO	10-16X2 1/2	1,500	19.60
•0808KPO	8-18X1/2	10,000	2.67				
•0808KPO6	8-18X1/2 #6HD	10,000	1.86	1216KPO	12-14X1	4,000	9.70
•0810KPO	8-18X5/8	10,000	3.10	1220KPO	12-14X1 1/4	3,000	11.45
•0812KPO	8-18X3/4	10,000	3.61	1232KPO	12-14X2	1,500	16.40
•0816KPO	8-18X1	7,000	4.73				
•0820KPO	8-18X1 1/4	5,000	5.72	1412KPO	1/4-14X3/4	4,000	9.80
•0824KPO	8-18X1 1/2	4,000	6.60	1416KPO	1/4-14X1	3,000	13.70
•0824KPO6	8-18X1 1/2 #6HD	4,000	5.63	1420KPO	1/4-14X1 1/4	2,000	13.47
•0828KPO	8-18X1 3/4	4,000	7.10	1424KPO	1/4-14X1 1/2	2,000	15.47
•0832KPO	8-18X2	2,500	9.22	1428KPO	1/4-14X1 3/4	1,500	17.38
•0836KPO	8-18X2 1/4	2,000	9.00	1432KPO	1/4-14X2	1,000	19.75
•0840KPO	8-18X2 1/2	2,000	2.47	1440KPO	1/4-14X2 1/2	1,000	24.25
•0848KPO	8-18X3	1,250	11.78				

Steel Zinc Plated




All items have #2 point

OVAL UNDERCUT PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0808KPOU	8-18X1/2	10,000	2.63	1008KPOU	10-16X1/2	10,000	3.60

Steel Zinc Plated




Items marked with "•" have #2 point; all others have #3 point

PAN PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0206KPP	2X3/8	10,000	0.55	•0604KPP	6-20X1/4	10,000	1.43
•0208KPP	2X1/2	10,000	0.68	•0605KPP	6-20X5/16	10,000	1.70
				•0606KPP	6-20X3/8	10,000	1.70
•0404KPP	4-24X1/4	10,000	0.85	•0607KPP	6-20X7/16	10,000	2.05
•0406KPP	4-24X3/8	10,000	1.06	•0608KPP	6-20X1/2	10,000	2.06
•0408KPP	4-24X1/2	10,000	1.26	•0610KPP	6-20X5/8	10,000	2.46
•0410KPP	4-24X5/8	10,000	2.00	•0612KPP	6-20X3/4	10,000	2.77
•0412KPP	4-24X3/4	10,000	1.90	•0614KPP	6-20X7/8	10,000	3.08
•0416KPP	4-24X1	9,000	2.30	•0616KPP	6-20X1	10,000	3.61
				•0620KPP	6-20X1 1/4	9,000	3.66
•0506KPP	5-20X3/8	10,000	1.20	•0624KPP	6-20X1 1/2	8,000	4.51
•0508KPP	5-20X1/2	9,000	1.30	•0628KPP	6-20X1 3/4	5,000	5.00
•0512KPP	5-20X3/4	8,000	2.00	•0632KPP	6-20X2	5,000	5.70
•0516KPP	5-20X1	7,000	2.40	•0648KPP	6-20X3	1,500	7.50

Steel Zinc Plated



Items marked with "•" have #2 point; all others have #3 point

PAN PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0707KPP	7-19X7/16	10,000	2.50	•1208KPP	12-14X1/2	5,000	6.35
•0708KPP	7-19X1/2	10,000	2.50	1210KPP	12-14X5/8	5,000	6.57
•0710KPP	7-19X5/8	10,000	2.86	1212KPP	12-14X3/4	5,000	8.10
•0712KPP	7-19X3/4	10,000	3.27	1214KPP	12-14X7/8	5,000	8.33
				1216KPP	12-14X1	3,000	9.70
•0804KPP	8-18X1/4	10,000	2.47	1220KPP	12-14X1 1/4	3,000	11.45
•0805KPP	8-18X5/16	10,000	2.41	1224KPP	12-14X1 1/2	2,000	13.20
•0806KPP	8-18X3/8	10,000	2.96	1226KPP	12-14X1 5/8	2,000	13.00
•0807KPP	8-18X7/16	10,000	3.30	1228KPP	12-14X1 3/4	1,000	14.70
•0808KPP	8-18X1/2	10,000	3.10	1232KPP	12-14X2	1,000	16.40
•0810KPP	8-18X5/8	10,000	3.50	1240KPP	12-14X2 1/2	1,000	19.80
•0812KPP	8-18X3/4	9,000	4.05	1248KPP	12-14X3	750	23.00
•0814KPP	8-18X7/8	7,000	4.70	1256KPP	12-14X3 1/2	750	26.10
•0816KPP	8-18X1	6,000	5.05	1264KPP	12-14X4	750	29.30
•0820KPP	8-18X1 1/4	5,000	5.83	1280KPP	12-14X5	500	35.58
•0824KPP	8-18X1 1/2	4,000	7.29	1296KPP	12-14X6	400	42.30
•0828KPP	8-18X1 3/4	3,000	8.10				
•0830KPP	8-18X1 7/8	3,000	8.20	•1408KPP	1/4-14X1/2	3,000	9.12
•0832KPP	8-18X2	2,000	9.22	1412KPP	1/4-14X3/4	3,000	11.50
•0836KPP	8-18X2 1/4	2,000	3.88	1414KPP	1/4-14X7/8	3,000	11.80
•0840KPP	8-18X2 1/2	2,000	11.26	1416KPP	1/4-14X1	2,000	13.70
•0848KPP	8-18X3	2,000	12.50	1418KPP	1/4-14X1 1/8	2,000	13.80
•0856KPP	8-18X3 1/2	1,000	17.40	1420KPP	1/4-14X1 1/4	1,000	15.32
•0864KPP	8-18X4	1,000	18.90	1424KPP	1/4-14X1 1/2	1,000	18.10
				1428KPP	1/4-14X1 3/4	1,000	18.80
•1006KPP	10-16X3/8	9,000	4.10	1432KPP	1/4-14X2	1,000	21.40
•1007KPP	10-16X7/16	8,000	4.20	1436KPP	1/4-14X2 1/4	800	24.00
•1008KPP	10-16X1/2	8,000	4.40	1440KPP	1/4-14X2 1/2	800	26.20
1010KPP	10-16X5/8	8,000	4.96	1448KPP	1/4-14X3	600	31.30
1012KPP	10-16X3/4	7,000	5.51	1456KPP	1/4-14X3 1/2	600	35.30
1016KPP	10-16X1	5,000	6.93	1464KPP	1/4-14X4	600	38.00
1020KPP	10-16X1 1/4	4,000	7.96	1480KPP	1/4-14X5	500	50.00
1024KPP	10-16X1 1/2	3,000	9.42	1496KPP	1/4-14X6	400	66.00
1028KPP	10-16X1 3/4	3,000	11.00				
1032KPP	10-16X2	2,000	12.56	•3110KPP	5/16-12X5/8	1,000	18.14
1040KPP	10-16X2 1/2	2,000	14.30	3112KPP	5/16-12X3/4	1,000	23.00
1044KPP	10-16X2 3/4	1,000	15.20				
1048KPP	10-16X3	1,000	16.28				
1056KPP	10-16X3 1/2	1,000	18.10				
1064KPP	10-16X4	1,000	22.30				
1080KPP	10-16X5	500	26.50				
1096KPP	10-16X6	400	31.50				

Steel Zinc Plated



All Items have #2 point

PAN PHILLIPS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KPPMS	6-32X3/8	10,000	1.68	1212KPPMS	12-24X3/4	4,000	8.10
				1216KPPMS	12-24X1	3,500	9.70
•1008KPPMS	10-24X1/2	6,000	4.40	1224KPPMS	12-24X1 1/2	2,500	13.20
1012KPPMS	10-24X3/4	5,000	6.00				
1016KPPMS	10-24X1	5,000	7.38	1412KPPMS	1/4-20X3/4	3,000	11.50
1024KPPMS	10-24X1 1/2	3,500	10.00	1416KPPMS	1/4-20X1	2,500	11.50
				1424KPPMS	1/4-20X1 1/2	2,000	19.00


Steel Zinc Plated

All Items have #2 point

SERRATED PAN PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)


Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0806KPPS	8-18X3/8	10,000	2.54	•1408KPPS	1/4-14X1/2	3,000	8.75
•0808KPPS	8-18X1/2	10,000	3.00	•1410KPPS	1/4-14X5/8	2,000	9.25
•0810KPPS	8-18X5/8	10,000	3.50	1412KPPS	1/4-14X3/4	2,000	10.40
•0812KPPS	8-18X3/4	9,000	3.92	1416KPPS	1/4-14X1	2,000	12.58
•0816KPPS	8-18X1	6,000	4.92	1420KPPS	1/4-14X1 1/4	2,000	14.88
				1424KPPS	1/4-14X1 1/2	2,000	25.45
•1008KPPS	10-16X1/2	8,000	4.35				
1010KPPS	10-16X5/8	8,000	4.82				
1012KPPS	10-16X3/4	7,000	5.38				
1016KPPS	10-16X1	5,000	6.63				

NEW!
Steel Zinc

**Framing Screws
have #2 point**

SPECIAL PAN PHILLIPS FRAMING SCREW SELF DRILLING SCREWS

Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)


Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0607KFZ	6-20X7/16	5,000	2.50				

**Steel Black
Phosphate Finish**

**Framing Screws
have #2 point**

SPECIAL PAN PHILLIPS FRAMING SCREW SELF DRILLING SCREWS

Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0607KF	6-20X7/16	5,000	2.74	0707KF	7-19X7/16	10,000	2.58

Steel Zinc Plated

**Items marked with “•”
have #2 point; all
others have #3 point**

ROUND WASHER PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0806KPRW	8-18X3/8	10,000	2.99	•1006KPRW	10-16X3/8	5,000	3.74
•0808KPRW	8-18X1/2	10,000	3.21	•1008KPRW	10-16X1/2	5,000	4.16
•0812KPRW	8-18X3/4	10,000	4.21	1012KPRW	10-16X3/4	5,000	5.10
•0816KPRW	8-18X1	5,000	5.28	1016KPRW	10-16X1	5,000	6.83
•0820KPRW	8-18X1 1/4	4,000	6.28	1020KPRW	10-16X1 1/4	3,000	8.03
•0824KPRW	8-18X1 1/2	3,000	7.25	1024KPRW	10-16X1 1/2	2,500	9.25
•0828KPRW	8-18X1 3/4	3,000	8.23	1028KPRW	10-16X1 3/4	2,500	10.48
•0832KPRW	8-18X2	3,000	8.70	1032KPRW	10-16X2	2,000	11.77
•0840KPRW	8-18X2 1/2	3,000	12.30				
				1448KPRW	1/4-14X3	1,000	47.40

Steel Zinc Plated

**Items marked with “•”
have #2 point; all
others have #3 point**

PHILLIPS TRIM HEAD SELF DRILLING SCREWS

For attaching base board or trim through drywall into metal studs
Case Hardened to Vickers HV 550-800 (Core Hardness: Vickers HV 270-450)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KPFT	6-20X3/8	10,000	1.70	•0808KPFT	8-18X1/2	9,000	1.94
•0608KPFT	6-20X1/2	10,000	1.50	•0810KPFT	8-18X5/8	10,000	2.50
•0612KPFT	6-20X3/4	10,000	2.10	•0812KPFT	8-18X3/4	8,000	3.20
•0616KPFT	6-20X1	7,500	2.71	•0814KPFT2	8-18X7/8	7,000	3.28
•0624KPFT	6-20X1 1/2	5,000	4.20	•0816KPFT	8-16X1	5,000	3.90
•0626KPFT	6-20X1 5/8	5,000	4.30	•0848KPFT	8-18X3	2,000	11.20
•0636KPFT	6-20X2 1/4	3,000	6.31				
				•1008KPFT	10-16X1/2	8,000	2.90
				1012KPFT	10-16X3/4	7,000	3.90
				1016KPFT	10-16X1	5,000	5.40

Steel Zinc Plated

**Items marked with “•”
have #2 point; all
others have #3 point**

WAFER PHILLIPS SELF DRILLING SCREWS WITH SPACED THREADS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KWAF	8-18X1/2	5,000	2.37	1216KWAF	12-14X1	3,000	9.70
•0812KWAF	8-18X3/4	5,000	3.50	1220KWAF	12-14X1 1/4	3,000	11.45
•0816KWAF	8-18X1	5,000	5.60	1224KWAF	12-14X1 1/2	3,000	13.20
•0820KWAF	8-18X1 1/4	4,000	5.05	1228KWAF	12-14X1 3/4	2,500	13.00
•0824KWAF	8-18X1 1/2	3,000	6.63	1232KWAF	12-14X2	2,000	16.40
•0832KWAF	8-18X2	2,500	8.23	1240KWAF	12-14X2 1/2	1,000	17.83
•0840KWAF	8-18X2 1/2	2,000	10.38				
•0848KWAF	8-18X3	2,000	12.07				

Steel Zinc Plated



All items have #3 point

WAFFER PHILLIPS

SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWFMS	10-24X3/4	5,000	5.70	1412KWFMS	1/4-20X3/4	2,000	9.30
1016KWFMS	10-24X1	5,000	6.57	1416KWFMS	1/4-20X1	2,000	12.90
1020KWFMS	10-24X1 1/4	3,000	7.94	1420KWFMS	1/4-20X1 1/4	1,000	15.37
1023KWFMS	10-24X1 7/16	3,000	9.60	1424KWFMS	1/4-20X1 1/2	1,000	16.75
1024KWFMS	10-24X1 1/2	1,000	9.70	1428KWFMS	1/4-20X1 3/4	1,000	21.34
1032KWFMS	10-24X2	2,000	11.90	1432KWFMS	1/4-20X2	1,000	21.20
1036KWFMS	10-24X2 1/4	2,000	15.00				
1040KWFMS	10-24X2 1/2	2,000	14.80				

** 10 x 1 7/16 size is a Reamer with Wings.

Steel Green
Ceramic Coated


WAFFER PHILLIPS

SELF DRILLING SCREWS WITH SPACED THREADS

For attaching cement board to 14-20 gauge metal studs
Case Hardened to Vickers HV 450-800 (Core Hardness: Vickers HV 290-450)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0820KPFH	8-18X1 1/4	1,000	6.25	0826KPFH	8-18X1 5/8	1,000	10.00

Steel Green
Ceramic Coated


WAFFER PHILLIPS HIGH-LOW

SELF DRILLING SCREWS WITH SPADE POINT

For attaching cement board to plywood
Case Hardened to Vickers HV 450-800 (Core Hardness: Vickers HV 290-450)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0820KPFH	8-18X1 1/4	1,000	5.00	0826KPFH	8-18X1 5/8	1,000	8.00

Steel Green
Ceramic Coated


WAFFER PHILLIPS HIGH-LOW W/NIBS

CEMENT BOARD SCREWS WITH SHARP POINT

For attaching cement board to plywood
Case Hardened

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0820HWFMSRC	8-15X1 1/4	1,000	6.20	0836HWFMSRC	8-15X2 1/4	1,000	10.00
0826HWFMSRC	8-15X1 5/8	1,000	7.50				

Steel Zinc Plated


Items marked with "•"
have #2 point; all
others have #3 point

FLAT SIX-LOBE

SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KTF	6-20X1/2	10,000	1.72	1012KTF	10-16X3/4	8,000	6.03
•0610KTF	6-20X5/8	10,000	2.00	1016KTF	10-16X1	5,000	7.97
•0612KTF	6-20X3/4	10,000	2.33	1020KTF	10-16X1 1/4	4,000	8.20
•0616KTF	6-20X1	10,000	3.00	1024KTF	10-16X1 1/2	4,000	8.00
•0620KTF	6-20X1 1/4	10,000	3.75	1028KTF	10-16X1 3/4	3,000	9.14
•0624KTF	6-20X1 1/2	7,000	4.40	1032KTF	10-16X2	3,000	10.45
•0632KTF	6-20X2	5,000	5.67	1040KTF	10-16X2 1/2	1,500	12.87
				1048KTF	10-16X3	1,000	15.30
•0808KTF	8-18X1/2	10,000	2.63	1412KTF	1/4-14X3/4	3,000	7.28
•0810KTF	8-18X5/8	10,000	3.00	1416KTF	1/4-14X1	3,000	9.22
•0812KTF	8-18X3/4	10,000	3.42	1420KTF	1/4-14X1 1/4	2,000	11.30
•0816KTF	8-18X1	8,000	4.32	1424KTF	1/4-14X1 1/2	1,500	14.33
•0820KTF	8-18X1 1/4	7,000	5.17	1432KTF	1/4-14X2	1,000	18.00
•0824KTF	8-18X1 1/2	5,000	6.07	1436KTF	1/4-14X2 1/4	1,000	14.00
•0828KTF	8-18X1 3/4	4,000	6.90	1440KTF	1/4-14X2 1/2	1,000	23.17
•0832KTF	8-18X2	3,000	7.80	1444KTF	1/4-14X2 3/4	900	25.50
•0840KTF	8-18X2 1/2	1,500	9.83	1448KTF	1/4-14X3	900	28.00
•0848KTF	8-18X3	1,250	11.57	1456KTF	1/4-14X3 1/2	800	32.25
				1464KTF	1/4-14X4	600	37.00
				1472KTF	1/4-14X4 1/2	500	41.00
				1480KTF	1/4-14X5	400	45.50
				1496KTF	1/4-14X6	300	54.75

Steel Zinc Plated


Items marked with "•"
have #2 point; all
others have #3 point

PAN SIX-LOBE

SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KTP	6-20X3/8	10,000	1.75	1212KTP	12-14X3/4	5,000	7.67
•0608KTP	6-20X1/2	10,000	2.06	1216KTP	12-14X1	3,000	9.30
•0612KTP	6-20X3/4	10,000	2.88	1232KTP	12-14X2	1,000	15.78
•0616KTP	6-20X1	10,000	3.43				
•0808KTP	8-18X1/2	10,000	3.10	1412KTP	1/4-14X3/4	3,000	10.88
•0810KTP	8-18X5/8	10,000	3.50	1416KTP	1/4-14X1	2,000	13.00
•0812KTP	8-18X3/4	9,000	4.05	1420KTP	1/4-14X1 1/4	1,500	15.50
•0816KTP	8-18X1	6,000	5.05	1424KTP	1/4-14X1 1/2	1,000	17.00
•0820KTP	8-18X1 1/4	5,000	5.83	1432KTP	1/4-14X2	1,000	21.80
•0824KTP	8-18X1 1/2	4,000	3.10	1436KTP	1/4-14X2 1/4	800	23.80
•0832KTP	8-18X2	2,000	9.22	1440KTP	1/4-14X2 1/2	800	26.10
				1448KTP	1/4-14X3	600	30.63
				1464KTP	1/4-14X4	600	39.50
•1008KTP	10-16X1/2	8,000	4.40				
1010KTP	10-16X5/8	8,000	4.96				
1012KTP	10-16X3/4	7,000	5.51				
1016KTP	10-16X1	5,000	6.93				
1020KTP	10-16X1 1/4	4,000	8.07				
1024KTP	10-16X1 1/2	3,000	9.20				
1032KTP	10-16X2	2,000	11.75				


Steel Zinc Plated


Items marked with "•" have #2 point; all others have #3 point

TRUSS SIX-LOBE SELF DRILLING SCREWS

 Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KTT	6-20X3/8	10,000	1.99	•1008KTT	10-16X1/2	8,000	4.75
•0808KTT	8-18X1/2	10,000	3.62	1012KTT	10-16X3/4	5,000	6.00
•0812KTT	8-18X3/4	8,000	4.33	1016KTT	10-16X1	5,000	6.98
•0816KTT	8-18X1	6,000	5.28	1024KTT	10-16X1 1/2	3,000	9.35
•0820KTT	8-18X1 1/4	6,000	6.10	1412KTT	1/4-14X3/4	3,000	11.05
				1416KTT	1/4-14X1	2,000	13.43
				1432KTT	1/4-14X2	900	22.20

Steel Zinc Plated


All items have #3 point

WAFER SIX-LOBE SELF DRILLING SCREWS WITH SPACED THREADS

 Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWTF	10-16X3/4	5,000	5.14	1024KWTF	10-16X1 1/2	1,000	9.50
1016KWTF	10-16X1	5,000	6.60	1032KWTF	10-16X2	2,000	12.36
1020KWTF	10-16X1 1/4	3,000	8.08				

Steel Zinc Plated



All items have #3 point

WAFER SIX-LOBE SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

 Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWTFMS	10-24X3/4	5,000	5.10	1024KWTFMS	10-24X1 1/2	1,000	9.50
1016KWTFMS	10-24X1	5,000	6.13	1032KWTFMS	10-24X2	2,000	12.30
1020KWTFMS	10-24X1 1/4	3,000	8.00				

**Special #6 Pan Head Framing
Screw now available in Steel
Zinc or Black Phos—page 13**

Steel Zinc Plated


Items marked with "•" have #2 point; all others have #3 point

FLAT SQUARE RECESS SELF DRILLING SCREWS

 Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KQF	6-20X3/8	10,000	1.17	1024KQF	10-16X1 1/2	3,000	8.10
•0608KQF	6-20X1/2	10,000	1.45	1032KQF	10-16X2	2,000	12.60
•0610KQF	6-20X5/8	10,000	1.79	1040KQF	10-16X2 1/2	2,000	19.60
•0612KQF	6-20X3/4	10,000	2.38	1048KQF	10-16X3	1,000	17.00
•0616KQF	6-20X1	10,000	2.75	1056KQF	10-16X3 1/2	1,000	17.70
•0620KQF	6-20X1 1/4	10,000	3.40	1064KQF	10-16X4	750	20.17
•0624KQF	6-20X1 1/2	7,000	5.25				
•0808KQF	8-18X1/2	10,000	2.05	1212KQF	12-14X3/4	5,000	8.10
•0810KQF	8-18X5/8	10,000	2.48	1216KQF	12-14X1	3,000	9.70
•0812KQF	8-18X3/4	9,000	3.50	1220KQF	12-14X1 1/4	3,000	11.45
•0816KQF	8-18X1	6,000	3.88	1224KQF	12-14X1 1/2	2,000	13.20
•0820KQF	8-18X1 1/4	5,000	5.01	1232KQF	12-14X2	1,000	16.40
•0824KQF	8-18X1 1/2	4,000	7.30	1028KQF	10-16X1 3/4	3,000	8.83
•0828KQF	8-18X1 3/4	3,000	8.30	1240KQF	12-14X2 1/2	1,000	20.37
•0832KQF	8-18X2	2,000	9.22	1248KQF	12-14X3	750	20.42
•0840KQF	8-18X2 1/2	2,000	9.43	1264KQF	12-14X4	750	22.00
•0848KQF	8-18X3	2,000	11.25				
•1008KQF	10-16X1/2	10,000	3.05	1412KQF	1/4-14X3/4	3,000	9.78
1012KQF	10-16X3/4	7,000	4.74	1416KQF	1/4-14X1	2,000	11.68
1016KQF	10-16X1	5,000	5.96	1420KQF	1/4-14X1 1/4	1,000	13.47
1020KQF	10-16X1 1/4	4,000	6.85	1424KQF	1/4-14X1 1/2	1,000	15.47
				1432KQF	1/4-14X2	1,000	20.49

Steel Zinc Plated


Items marked with "•" have #2 point; all others have #3 point

MODIFIED TRUSS SQUARE RECESS SELF DRILLING SCREWS

 Manufactured to SAE J78 specifications
For attaching metal lath to metal studs between 12-20 gauge thick
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KQM	6-20X3/8	8,000	2.62	•1008KQM	10-16X1/2	6,000	3.83
•0608KQM	6-20X1/2	8,000	2.92	1012KQM	10-16X3/4	6,000	5.00
•0612KQM	6-20X3/4	7,000	3.68	1016KQM	10-16X1	5,000	6.63
•0616KQM	6-20X1	7,000	4.43	1020KQM	10-16X1 1/4	4,000	7.75
•0806KQM	8-18X3/8	6,000	3.58	1024KQM	10-16X1 1/2	3,000	9.00
•0808KQM	8-18X1/2	5,000	4.00	1032KQM	10-16X2	2,000	11.67
•0810KQM	8-18X5/8	5,000	4.57	1040KQM	10-16X2 1/2	1,500	14.50
•0812KQM	8-18X3/4	5,000	5.00	1048KQM	10-16X3	1,000	16.75
•0816KQM	8-18X1	4,000	5.83	1056KQM	10-16X3 1/2	1,000	19.25
•0820KQM	8-18X1 1/4	3,000	6.78	1064KQM	10-16X4	1,000	21.80
•0824KQM	8-18X1 1/2	2,000	7.78				
•0832KQM	8-18X2	2,000	9.63	1216KQM	12-14X1	3,000	7.93
•0840KQM	8-18X2 1/2	2,000	12.00	1224KQM	12-14X1 1/2	2,000	11.20
•0856KQM	8-18X3 1/2	1,000	15.25	1232KQM	12-14X2	1,000	14.50
				1416KQM	1/4-14X1	2,000	13.25
				1424KQM	1/4-14X1 1/2	1,000	17.00
				1432KQM	1/4-14X2	1,000	22.80
				1440KQM	1/4-14X2 1/2	800	26.10
				1448KQM	1/4-14X3	700	30.75

Steel Zinc Plated


Items marked with "•"
have #2 point; all
others have #3 point

PAN SQUARE RECESS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KQP	6-20X3/8	10,000	1.70	•1208KQP	12-14X1/2	5,000	6.22
•0608KQP	6-20X1/2	10,000	2.06	1210KQP	12-14X5/8	5,000	6.71
•0610KQP	6-20X5/8	10,000	2.46	1212KQP	12-14X3/4	5,000	8.10
•0612KQP	6-20X3/4	10,000	2.77	1216KQP	12-14X1	3,000	9.70
•0616KQP	6-20X1	10,000	3.61	1220KQP	12-14X1 1/4	3,000	11.45
•0620KQP	6-20X1 1/4	9,000	4.06	1224KQP	12-14X1 1/2	2,000	13.20
•0806KQP	8-18X3/8	10,000	2.77	1228KQP	12-14X1 3/4	1,000	14.13
•0808KQP	8-18X1/2	10,000	3.10	1232KQP	12-14X2	1,000	15.60
•0810KQP	8-18X5/8	3,000	3.50	1240KQP	12-14X2 1/2	1,000	19.17
•0812KQP	8-18X3/4	3,000	4.05	1248KQP	12-14X3	750	22.33
•0816KQP	8-18X1	2,000	5.05	1256KQP	12-14X3 1/2	750	25.50
•0820KQP	8-18X1 1/4	5,000	5.83	1264KQP	12-14X4	750	29.00
•0824KQP	8-18X1 1/2	4,000	7.29	•1408KQP	1/4-14X1/2	3,000	9.20
•0832KQP	8-18X2	2,000	9.22	1412KQP	1/4-14X3/4	3,000	11.50
•0840KQP	8-18X2 1/2	2,000	10.40	1416KQP	1/4-14X1	2,000	12.70
•0848KQP	8-18X3	2,000	12.40	1420KQP	1/4-14X1 1/4	1,000	15.32
•1006KQP	10-16X3/8	9,000	4.10	1424KQP	1/4-14X1 1/2	1,000	18.10
•1008KQP	10-16X1/2	8,000	4.40	1428KQP	1/4-14X1 3/4	1,000	19.62
1010KQP	10-16X5/8	6,000	4.96	1432KQP	1/4-14X2	1,000	22.00
1012KQP	10-16X3/4	5,000	5.51	1440KQP	1/4-14X2 1/2	800	26.50
1016KQP	10-16X1	2,000	6.93	1448KQP	1/4-14X3	600	31.17
1020KQP	10-16X1 1/4	1,000	7.96	1456KQP	1/4-14X3 1/2	600	35.60
1024KQP	10-16X1 1/2	1,000	9.42	1464KQP	1/4-14X4	600	40.00
1032KQP	10-16X2	2,000	12.56				
1040KQP	10-16X2 1/2	2,000	14.25				
1048KQP	10-16X3	1,000	16.75				
1056KQP	10-16X3 1/2	1,000	19.20				
1064KQP	10-16X4	1,000	21.70				


Steel Zinc Plated


Items marked with "•"
have #2 point; all
others have #3 point

SQUARE TRIM HEAD SELF DRILLING SCREWS

For attaching base board or trim through drywall into metal studs
Case Hardened to Vickers HV 550-800 (Core Hardness: Vickers HV 270-450)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KQFT	6-20X3/8		1.20	•0840KQFT	8-18X2 1/2	2,000	9.50
•0608KQFT	6-20X1/2	10,000	1.40	•0848KQFT	8-18X3	1,000	11.75
•0612KQFT	6-20X3/4	10,000	2.00	•0856KQFT	8-18X3 1/2	1,000	13.50
•0616KQFT	6-20X1	7,500	2.80	•0864KQFT	8-18X4	900	15.17
•0626KQFT	6-20X1 5/8	5,000	4.43	•1008KQFT	10-16X1/2	8,000	2.50
•0636KQFT	6-20X2 1/4	3,000	6.17	•1010KQFT	10-16X5/8	8,000	3.40
•0808KQFT	8-18X1/2	9,000	2.10	1012KQFT	10-16X3/4	7,000	4.05
•0812KQFT	8-18X3/4	8,000	2.90	1016KQFT	10-16X1	5,000	5.20
•0816KQFT	8-18X1	5,000	3.70	•1408KQFT	1/4-14X1/2	4,000	4.40
•0820KQFT	8-18X1 1/4	3,000	4.75	1412KQFT	1/4-14X3/4	3,000	5.80
•0824KQFT	8-18X1 1/2	3,000	6.00	1416KQFT	1/4-14X1	2,000	7.90
•0832KQFT	8-18X2	2,000	7.38				


Steel Zinc Plated
NEW!


Items marked with "•"
have #2 point; all
others have #3 point

ROUND WASHER SQUARE RECESS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0840KQRW	8-18X2 1/2	3,000	12.30	1040KQRW	10-16X2 1/2	2,000	16.70


Steel Zinc Plated


All items have #4 point

WAFER SQUARE RECESS WITH WINGS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Case Hardened to Rockwell C52 - 58
(Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1216KQWAFM4W	12-24X1	3,000	9.63	1232KQWAFM4W	12-24X2	2,000	10.19

Steel Zinc Plated


Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER SLOTTED SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)
Items marked with "¶" are 7/16" Across the Flats

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0406KSW	4-24X3/8	10,000	1.21	1024KSW	10-16X1 1/2	4,000	9.61
•0408KSW	4-24X1/2	10,000	1.28	1028KSW	10-16X1 3/4	3,000	10.85
•0606KSW	6-20X3/8	10,000	2.35	1032KSW	10-16X2	2,000	12.08
•0608KSW	6-20X1/2	10,000	2.50	1048KSW	10-16X3	1,000	16.53
•0610KSW	6-20X5/8	10,000	2.80	•1208KSW	12-14X1/2	5,000	6.27
•0612KSW	6-20X3/4	10,000	3.31	1212KSW	12-14X3/4	5,000	7.66
•0616KSW	6-20X1	10,000	3.68	1216KSW	12-14X1	4,000	9.26
•0620KSW	6-20X1 1/4	8,000	4.43	1232KSW	12-14X2	1,000	15.20
•0624KSW	6-20X1 1/2	7,000	5.06	•1408KSW	1/4-14X1/2	4,000	9.73
•0708KSW	7-19X1/2	10,000	2.77	1412KSW	1/4-14X3/4	3,000	11.62
•0806KSW	8-18X3/8	10,000	2.66	1416KSW	1/4-14X1	2,500	13.87
•0808KSW	8-18X1/2	10,000	3.30	¶141607KSW	14X1	2,500	13.32
•0810KSW	8-18X5/8	10,000	3.59	1420KSW	1/4-14X1 1/4	2,000	16.00
•0812KSW	8-18X3/4	10,000	3.90	1432KSW	1/4-14X2	1,000	24.18
•0816KSW	8-18X1	8,000	4.70	¶143207KSW	14X2	1,000	22.58
•0820KSW	8-18X1 1/4	3,000	6.21	1440KSW	1/4-14X2 1/2	800	27.40
•0824KSW	8-18X1 1/2	3,000	6.82	1448KSW	1/4-14X3	600	30.00
•0832KSW	8-18X2	2,000	8.60	3112KSW	5/16-12X3/4	1,000	20.60
•0840KSW	8-18X2 1/2	2,000	10.30	3116KSW	5/16-12X1	1,250	24.70
•0848KSW	8-18X3	1,500	12.58	3120KSW	5/16-12X1 1/4	700	28.75
•1006KSW	10-16X3/8	9,000	3.65	3124KSW	5/16-12X1 1/2	600	32.63
•1008KSW	10-16X1/2	8,000	4.80	3132KSW	5/16-12X2	1,000	34.00
•1010KSW	10-16X5/8	7,000	5.06	3148KSW	5/16-12X3	400	56.00
1012KSW	10-16X3/4	6,000	5.69	3716KSW	3/8-12X1	750	39.33
1016KSW	10-16X1	5,000	7.65				


Steel Zinc Green Plated


All items have #2 point

HEX WASHER SLOTTED SELF DRILLING SCREWS

 Manufactured to ASME B18.6.3 & SAE J78 specifications
 Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M
0808KSWG	8-18X1/2	10,000	3.30

Steel Zinc Plated


Items marked with "•" have #2 point; all others have #3 point

HEX WASHER SLOTTED WITH SERRATIONS SELF DRILLING SCREWS

 Manufactured to ASME B18.6.3 & SAE J78 specifications
 Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KSWS	8-18X1/2	10,000	3.30	1212KSWS	12-14X3/4	5,000	7.25
•0810KSWS	8-18X5/8	9,000	3.56	1216KSWS	12-14X1	4,000	8.79
•0812KSWS	8-18X3/4	8,000	4.06				
•1008KSWS	10-16X1/2	8,000	4.80	1412KSWS	1/4-14X3/4	3,000	11.13
1012KSWS	10-16X3/4	6,000	5.69	1416KSWS	1/4-14X1	2,500	13.31
1016KSWS	10-16X1	5,000	7.03				

Steel Zinc Plated


All items have #3 point

HEX WASHER SLOTTED WITH SERRATIONS SELF DRILLING SCREWS

 Heads are 7/16" Across the Flats
 Head Height: 1/4" diam.: .172-.190; 5/16" diam.: .208-.229
 Case Hardened to Rockwell C50 - 56 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
141207KSWS	1/4-14X3/4	3,000	15.06	311207KSWS	5/16-12X3/4	1,000	18.64
141607KSWS	1/4-14X1	2,000	16.22	311607KSWS	5/16-12X1	1,000	22.13
142007KSWS	1/4-14X1 1/4	2,000	18.68	312007KSWS	5/16-12X1 1/4	700	25.75
142407KSWS	1/4-14X1 1/2	1,250	20.72	312407KSWS	5/16-12X1 1/2	600	30.00
				312807KSWS	5/16-12X1 3/4	600	33.63
				313207KSWS	5/16-12X2	600	37.50


Steel Zinc Plated


Items marked with "•" have #2 point; all others have #3 point

HEX WASHER SLOTTED WITH SERRATIONS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

 Heads to ASME B18.6.3 / Screws hardened to SAE J78 specifications
 Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)
 Items marked with "†" are 7/16" Across the Flats

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KSWSMS	8-32X1/2	10,000	3.29	†141207KSWSMS	1/4-20X3/4	3,000	15.12
•0810KSWSMS	8-32X5/8	9,000	3.80	†141607KSWSMS	1/4-20X1	2,000	17.57
•0812KSWSMS	8-32X3/4	8,000	4.35	†142007KSWSMS	1/4-20X1 1/4	2,000	20.24
				†142407KSWSMS	1/4-20X1 1/2	1,250	23.12
•1008KSWSMS	10-24X1/2	8,000	4.42				
1012KSWSMS	10-24X3/4	5,000	6.00	†311207KSWSMS	5/16-18X3/4	1,000	19.32
1016KSWSMS	10-24X1	5,000	7.25	†311607KSWSMS	5/16-18X1	1,000	22.50
				†312407KSWSMS	5/16-18X1 1/2	600	30.88
				†312807KSWSMS	5/16-18X1 3/4	600	35.38
				†313207KSWSMS	5/16-18X2	600	38.85


Steel Zinc Plated


All items have #3 point

HEX WASHER SLOTTED SELF DRILLING SCREWS WITH NEO-EPDM WASHER

 Used in metal roofing to create a leak-proof seal
 Screw is Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KSWN	10-16X3/4	2,000	7.00	1412KSWN	1/4-14X3/4	1,000	13.76
				1416KSWN	1/4-14X1	1,000	16.15
				1420KSWN	1/4-14X1 1/4	1,000	18.20
				1424KSWN	1/4-14X1 1/2	1,000	20.40
				1432KSWN	1/4-14X2	1,000	25.07

Steel Zinc Plated


Items marked with "•" have #2 point; all others have #3 point

HEX UNSLOTTED SELF DRILLING SCREWS

 Manufactured to ASME B18.6.3 & SAE J78 specifications
 Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KH	8-18X1/2	10,000	2.67	•1408KH	1/4-14X1/2	3,000	8.06
•0812KH	8-18X3/4	8,000	3.33	1412KH	1/4-14X3/4	3,000	9.30
•0816KH	8-18X1	6,000	4.20	1416KH	1/4-14X1	2,000	12.00
				1420KH	1/4-14X1 1/4	1,500	14.20
•1008KH	10-16X1/2	8,000	3.85	1424KH	1/4-14X1 1/2	1,250	16.36
1012KH	10-16X3/4	5,000	5.00	1428KH	1/4-14X1 3/4	1,000	18.64
1016KH	10-16X1	5,000	6.19	1432KH	1/4-14X2	900	20.82
1020KH	10-16X1 1/4	4,000	7.30	1440KH	1/4-14X2 1/2	800	25.32
1024KH	10-16X1 1/2	3,000	8.60				
1028KH	10-16X1 3/4	3,000	9.90	3116KH	5/16-12X1	1,000	22.36
1032KH	10-16X2	2,000	11.13	3124KH	5/16-12X1 1/2	600	30.10
1216KH	12-14X1	4,000	8.08				
1224KH	12-14X1 1/2	2,000	11.31				


Steel Zinc Plated


Items marked with “*”
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
*0406KW	4-24X3/8	10,000	1.10	*1208KW	12-14X1/2	5,000	6.60
*0408KW	4-24X1/2	10,000	1.30	1210KW	12-14X5/8	5,000	7.30
*0412KW	4-24X3/4	10,000	1.90	1212KW	12-14X3/4	5,000	8.06
*0416KW	4-24X1	10,000	2.23	1214KW	12-14X7/8	4,000	8.90
				1216KW	12-14X1	4,000	9.75
*0604KW	6-20X1/4	10,000	2.00	1220KW	12-14X1 1/4	3,000	11.35
*0606KW	6-20X3/8	10,000	2.47	1224KW	12-14X1 1/2	2,000	13.49
*0607KW	6-20X7/16	10,000	2.50	1228KW	12-14X1 3/4	2,000	14.20
*0608KW	6-20X1/2	10,000	2.63	1232KW	12-14X2	2,000	16.00
*0610KW	6-20X5/8	10,000	2.80	1240KW	12-14X2 1/2	1,000	19.80
*0612KW	6-20X3/4	10,000	3.31	1248KW	12-14X3	1,000	23.00
*0614KW	6-20X7/8	10,000	3.33	1256KW	12-14X3 1/2	600	26.72
*0616KW	6-20X1	10,000	3.68	1264KW	12-14X4	500	31.98
*0620KW	6-20X1 1/4	8,000	4.54	1272KW	12-14X4 1/2	500	35.27
*0624KW	6-20X1 1/2	7,000	5.07	1280KW	12-14X5	500	36.20
*0632KW	6-20X2	4,000	6.80	1296KW	12-14X6	400	42.50
*0648KW	6-20X3	1,500	9.27				
				*1406KW	1/4-14X3/8	4,000	8.70
*0708KW	7-19X1/2	10,000	2.77	*1408KW	1/4-14X1/2	3,000	10.24
				*1410KW	1/4-14X5/8	3,000	11.23
*0804KW	8-18X1/4	10,000	2.50	1412KW	1/4-14X3/4	3,000	12.23
*0805KW	8-18X5/16	10,000	2.65	1414KW	1/4-14X7/8	2,000	12.60
*0806KW	8-18X3/8	10,000	2.80	1416KW	1/4-14X1	2,000	14.60
*0808KW	8-18X1/2	10,000	3.48	1420KW	1/4-14X1 1/4	1,500	16.84
*0809KW	8-18X9/16	9,000	3.94	1424KW	1/4-14X1 1/2	1,250	19.34
*0810KW	8-18X5/8	9,000	3.78	1428KW	1/4-14X1 3/4	1,000	21.34
*0812KW	8-18X3/4	8,000	4.10	1432KW	1/4-14X2	900	24.18
*0814KW	8-18X7/8	6,000	4.99	1436KW	1/4-14X2 1/4	900	25.79
*0816KW	8-18X1	6,000	5.01	1440KW	1/4-14X2 1/2	800	27.40
*0820KW	8-18X1 1/4	6,000	6.21	1444KW	1/4-14X2 3/4	900	29.11
*0824KW	8-18X1 1/2	5,000	7.26	1448KW	1/4-14X3	800	30.00
*0826KW	8-18X1 5/8	5,000	7.60	1456KW	1/4-14X3 1/2	800	35.00
*0828KW	8-18X1 3/4	4,000	8.63	1464KW	1/4-14X4	500	40.08
*0832KW	8-18X2	3,000	9.22	1472KW	1/4-14X4 1/2	600	45.33
*0836KW	8-18X2 1/4	2,000	9.68	1480KW	1/4-14X5	500	48.41
*0840KW	8-18X2 1/2	2,000	10.30	1496KW	1/4-14X6	400	59.00
*0848KW	8-18X3	800	11.00	14128KW	1/4-14X8	250	78.00
*0856KW	8-18X3 1/2	1,200	11.55				
*0864KW	8-18X4	600	17.33	3112KW	5/16-12X3/4	1,000	23.00
				3116KW	5/16-12X1	1,000	26.00
*1006KW	10-16X3/8	8,000	4.80	3120KW	5/16-12X1 1/4	700	28.80
*1007KW	10-16X7/16	8,000	4.03	3124KW	5/16-12X1 1/2	600	32.20
*1008KW	10-16X1/2	8,000	5.06	3128KW	5/16-12X1 3/4	600	40.70
1010KW	10-16X5/8	6,000	5.33	3132KW	5/16-12X2	600	44.80
1012KW	10-16X3/4	5,000	6.66	3136KW	5/16-12X2 1/4	600	45.11
1016KW	10-16X1	5,000	8.05	3140KW	5/16-12X2 1/2	600	52.00
1020KW	10-16X1 1/4	4,000	8.37	3148KW	5/16-12X3	400	56.00
1024KW	10-16X1 1/2	3,000	10.12	3164KW	5/16-12X4	500	73.00
1028KW	10-16X1 3/4	3,000	10.70	3180KW	5/16-12X5	400	87.60
1032KW	10-16X2	2,000	12.72	3196KW	5/16-12X6	300	103.00
1040KW	10-16X2 1/2	2,000	14.30				
1044KW	10-16X2 3/4	1,000	16.99	3712KW	3/8-12X3/4	750	38.20
1048KW	10-16X3	1,000	17.40	3716KW	3/8-12X1	750	41.40
1056KW	10-16X3 1/2	800	19.80	3720KW	3/8-12X1 1/4	600	49.05
1064KW	10-16X4	500	22.00	3724KW	3/8-12X1 1/2	600	53.00
1072KW	10-16X4 1/2	500	24.50	3728KW	3/8-12X1 3/4	600	55.11
1080KW	10-16X5	500	27.00	3732KW	3/8-12X2	600	65.00
1096KW	10-16X6	400	31.73	3740KW	3/8-12X2 1/2	600	53.11
				3748KW	3/8-12X3	400	89.00
				3764KW	3/8-12X4	300	109.10
				3780KW	3/8-12X5	200	133.00
				3796KW	3/8-12X6	100	161.00

Steel Zinc Plated


All items have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Heads are 7/16" Across the Flats
Head Height: 1/4" diam: .172-.190
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
141207KW	1/4-14X3/4	3,000	14.38	313207KW	5/16-12X2	600	37.85
141607KW	1/4-14X1	2,000	16.50				
142407KW	1/4-14X1 1/2	1,250	21.13				


Steel Zinc Plated


#3 point

1/4" HEX WASHER UNSLOTTED W/#12 HEAD SELF DRILLING SCREWS

Based on ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1414KW12	1/4-14X7/8	2,000	9.70				


Steel Zinc Plated


Items have #3 point

HEX WASHER UNSLOTTED HIGH HEAD SELF DRILLING SCREWS

Head Height: .125 - .130; Width Across Flats: .305 - .312
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWH	10-16X3/4	5,000	5.90				

Steel Zinc Plated



All items have #4 point

#4 POINT HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH SELF TAPPING SCREW THREADS

Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1214KW4	12-14X7/8	5,000	9.50	1432KW4	1/4-14X2	900	22.00
1216KW4	12-14X1	4,000	8.83	1440KW4	1/4-14X2 1/2	800	26.00
1220KW4	12-14X1 1/4	3,000	10.38	1456KW4	1/4-14X3 1/2	800	35.50
1414KW4	1/4-14X7/8	2,000	15.00	3116KW4	5/16-12X1	1,000	25.17
1416KW4	1/4-14X1	2,000	13.14	3120KW4	5/16-12X1 1/4	700	29.00
1424KW4	1/4-14X1 1/2	1,250	20.00				

Steel Zinc Plated




All items have #5 point

#5 POINT HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH SELF TAPPING SCREW THREADS

Heads to ASME B18.6.3 / Screws hardened to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1024KW5	10-16X1 1/2	3,000	9.00	1424KW5	1/4-14X1 1/2	1,250	20.23
1216KW5	12-14X1	4,000	8.60	1432KW5	1/4-14X2	900	21.63
1220KW5	12-14X1 1/4	3,000	10.50	1440KW5	1/4-14X2 1/2	800	27.40
1224KW5	12-14X1 1/2	2,000	14.25	1448KW5	1/4-14X3	800	31.00
1232KW5	12-14X2	2,000	17.10	1456KW5	1/4-14X3 1/2	800	35.75
1240KW5	12-14X2 1/2	1,000	14.56	1464KW5	1/4-14X4	500	41.25
1248KW5	12-14X3	1,000	24.00	1480KW5	1/4-14X5	500	50.00
1256KW5	12-14X3 1/2	600	25.65	1496KW5	1/4-14X6	400	59.20
1264KW5	12-14X4	500	28.75				
				3116KW5	5/16-12X1	1,000	25.33
				3124KW5	5/16-12X1 1/2	600	32.90
				3132KW5	5/16-12X2	600	38.75
				3140KW5	5/16-12X2 1/2	600	46.50
				3148KW5	5/16-12X3	400	54.50

Steel Zinc Plated




Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 / Screws hardened to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•1008KWMS	10-24X1/2	1,000	5.28	•1408KWMS	1/4-20X1/2	2,000	10.25
1012KWMS	10-24X3/4	5,000	6.66	1412KWMS	1/4-20X3/4	2,000	12.33
1016KWMS	10-24X1	5,000	8.05	1416KWMS	1/4-20X1	1,500	15.00
1024KWMS	10-24X1 1/2	3,000	10.00	1424KWMS	1/4-20X1 1/2	1,250	19.83
				1432KWMS	1/4-20X2	1,000	25.00
1108KWMS	10-32X1/2	4,000	4.86	1464KWMS	1/4-20X4	500	45.25
1112KWMS	10-32X3/4	3,500	6.58				
1116KWMS	10-32X1	3,500	7.90	1548KWMS	1/4-28X3	1,000	31.70
				1564KWMS	1/4-28X4	700	40.50
1212KWMS	12-24X3/4	3,000	8.06	1580KWMS	1/4-28X5	500	50.70
1216KWMS	12-24X1	3,000	9.64	1596KWMS	1/4-28X6	350	60.00
1220KWMS	12-24X1 1/4	3,000	11.35	15128KWMS	1/4-28X8	150	78.00
1224KWMS	12-24X1 1/2	2,000	13.49				
				3112KWMS	5/16-18X3/4	700	23.67
				3116KWMS	5/16-18X1	700	27.50
				3120KWMS	5/16-18X1 1/4	500	31.25
				3124KWMS	5/16-18X1 1/2	500	35.70
				3132KWMS	5/16-18X2	400	43.80

Steel Zinc Plated



All items have #4 point

#4 POINT HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 / Screws hardened to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1212KWMS4	12-24X3/4	5,000	8.00	1420KWMS4	1/4-20X1 1/4	1,500	16.63
1214KWMS4	12-24X7/8	4,000	9.50	1424KWMS4	1/4-20X1 1/2	1,000	18.90
1220KWMS4	12-24X1 1/4	3,000	11.06	1428KWMS4	1/4-20X1 3/4	1,000	21.25
				1432KWMS4	1/4-20X2	1,000	23.88

Steel Zinc Plated




All items have #4 point

HEX WASHER UNSLOTTED WITH WINGS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads manufactured to ASME B18.6.3 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1214KWMS4W	12-24X7/8	5,000	8.90	1432KWMS4W	1/4-20X2	900	24.70

Steel Zinc Plated



All items have #5 point

#5 POINT HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 / Screws hardened to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWMS5	10-24X3/4	5,000	5.69	1416KWMS5	1/4-20X1	1,000	14.47
1216KWMS5	12-24X1	3,000	9.36	1424KWMS5	1/4-20X1 1/2	1,000	18.67
1220KWMS5	12-24X1 1/4	3,000	10.50	1432KWMS5	1/4-20X2	1,000	24.00
1224KWMS5	12-24X1 1/2	2,000	13.50	1440KWMS5	1/4-20X2 1/2	500	29.25
1232KWMS5	12-24X2	2,000	16.70	1448KWMS5	1/4-20X3	500	34.50
1240KWMS5	12-24X2 1/2	1,000	20.60				
1248KWMS5	12-24X3	1,000	24.63				

Steel Zinc Plated



Items marked with "¶"
have 7/16" A.F. dimensions
Items marked with "•" have #2
point; all others have #3 point

SERRATED HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0610KWS	6-20X5/8	10,000	2.80	•1410KWS	1/4-14X5/8	3,000	10.86
•0806KWS	8-18X3/8	10,000	2.80	1412KWS	1/4-14X3/4	3,000	11.83
•0808KWS	8-18X1/2	10,000	3.48	¶141207KWS	1/4-14X3/4	2,500	12.23
•081014KWS	8-18X5/8 (1/4 A/F)	5,000	3.78	1416KWS	1/4-14X1	2,000	13.94
•0812KWS	8-18X3/4	6,000	4.11	¶141607KWS	1/4-14X1	2,000	14.60
•081214KWS	8-18X3/4 (1/4 A/F)	5,000	4.10	1420KWS	1/4-14X1 1/4	1,500	16.20
•0816KWS	8-18X1	6,000	5.01	¶142007KWS	1/4-14X1 1/4	2,000	19.66
•0820KWS	8-18X1 1/4	3,000	6.21	1424KWS	1/4-14X1 1/2	1,250	18.40
•0824KWS	8-18X1 1/2	3,000	7.26	¶142407KWS	1/4-14X1 1/2	1,250	21.00
•0832KWS	8-18X2	2,500	9.22	1428KWS	1/4-14X1 3/4	1,000	20.67
				1432KWS	1/4-14X2	1,000	22.75
•1008KWS	10-16X1/2	8,000	4.61	1440KWS	1/4-14X2 1/2	1,000	27.65
1012KWS	10-16X3/4	5,000	5.83	1448KWS	1/4-14X3	1,000	31.75
101231KWS	10-16X3/4 (5/16 A/F)	5,000	6.66	1464KWS	1/4-14X4	500	42.25
101631KWS	10-16X1 (5/16 A/F)	5,000	8.05				
1016KWS	10-16X1	5,000	7.45	3112KWS	5/16-12X3/4	1,000	22.20
1020KWS	10-16X1 1/4	2,500	8.23	¶311207KWS	5/16-12X3/4	1,000	18.66
1024KWS	10-16X1 1/2	2,000	9.48	3116KWS	5/16-12X1	1,000	25.38
1032KWS	10-16X2	2,000	12.00	¶311607KWS	5/16-12X1	1,000	22.30
				3120KWS	5/16-12X1 1/4	700	29.90
				¶312007KWS	5/16-12X1 1/4	700	26.75
•1208KWS	12-14X1/2	5,000	6.15	3124KWS	5/16-12X1 1/2	600	33.50
1210KWS	12-14X5/8	5,000	6.63	¶312407KWS	5/16-12X1 1/2	600	30.75
1212KWS	12-14X3/4	5,000	7.43	¶312807KWS	5/16-12X1 3/4	600	34.50
1214KWS	12-14X7/8	4,000	8.30	3132KWS	5/16-12X2	600	40.90
1216KWS	12-14X1	2,000	9.75	¶313207KWS	5/16-12X2	600	38.25
1264KWS	12-14X4	500	28.60				

Steel Zinc Plated




All items have #4 point

#4 POINT SERRATED HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH SELF TAPPING SCREW THREADS

Heads: 7/16" A.F. & 7/32" Height / Washer Diam.: 19/32"
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
311207KWS4	5/16-12X3/4	1,200	19.45	312407KWS4	5/16-12X1 1/2	800	32.20
311607KWS4	5/16-12X1	1,200	26.00	313207KWS4	5/16-12X2	600	39.50
312007KWS4	5/16-12X1 1/4	1,000	28.80				

Steel Zinc Plated



Items have #3 point

SERRATED HEX WASHER UNSLOTTED HIGH HEAD SELF DRILLING SCREWS

Head Height: .125 - .130; Width Across Flats: .305 - .312
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1012KWHS	10-16X3/4	5,000	7.48				

Steel Zinc Plated



Items marked with "•" have #2 point; all others have #3 point

SERRATED HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads to ASME B18.6.3 / Screws hardened to SAE 178 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KWSMS	8-32X1/2	10,000	3.54	1112KWSMS	10-32X3/4	5,000	6.15
•0810KWSMS	8-32X5/8	9,000	4.13	1210KWSMS	12-24X5/8	5,000	7.14
•0812KWSMS	8-32X3/4	8,000	4.60	1264KWSMS	12-24X4	500	33.00
•1008KWSMS	10-24X1/2	8,000	4.85	1412KWSMS	1/4-20X3/4	3,000	12.08
1010KWSMS	10-24X5/8	6,000	5.22	1414KWSMS	1/4-20X7/8	2,000	13.40
1012KWSMS	10-24X3/4	5,000	6.15	1416KWSMS	1/4-20X1	2,000	14.63
1016KWSMS	10-24X1	5,000	7.50	1424KWSMS	1/4-20X1 1/2	1,250	20.20

Steel Zinc Plated



Items marked with "•" have #2 point; all others have #3 point

SERRATED HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads are 7/16" Across the Flats
Head Height: 1/4" diam: .172-.190; 5/16" diam: .208-.229
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•141007KWSMS	1/4-20X5/8	3,000	14.50	311207KWSMS	5/16-18X3/4	1,000	19.60
•141207KWSMS	1/4-20X3/4	2,500	12.23	311607KWSMS	5/16-18X1	1,000	23.30
•141607KWSMS	1/4-20X1	2,500	14.60	312007KWSMS	5/16-18X1 1/4	700	27.67
•142007KWSMS	1/4-20X1 1/4	2,000	19.63	312407KWSMS	5/16-18X1 1/2	600	31.75
•142407KWSMS	1/4-20X1 1/2	1,250	23.17	312807KWSMS	5/16-18X1 3/4	600	35.78
				313207KWSMS	5/16-18X2	600	39.67

Steel Zinc Plated with
Red Painted Head


All items have #2 point

SERRATED HEX WASHER UNSLOT RED-PAINTED HEAD SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Heads are 7/16" Across the Flats / Head Height: .172-.190
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
141207KWSMSR	1/4-20X3/4	2,500	12.23				

Steel Zinc Plated



All items have #4 point


#4 POINT SERRATED HEX WASH UNSLOT WITH WINGS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Case Hardened to Rockwell C52 - 58
(Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1424KWSMS4W	1/4-20X1 1/2	1,250	20.30				

Hex Washer Head Sealing Screws with Neo-EPDM Washers are also available in 18-8 & 410 Stainless—page 7

Steel Zinc Plated



Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH NEO-EPDM WASHER

Used in metal roofing to create a leak-proof seal
Screw is Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KWN	8-18X1/2	4,000	4.92	1408KWN	1/4-14X1/2	1,000	10.24
•0810KWN	8-18X5/8	3,000	5.33	1412KWN	1/4-14X3/4	1,000	15.00
•0812KWN	8-18X3/4	2,000	7.00	1414KWN	1/4-14X7/8	1,000	15.75
•0816KWN	8-18X1	2,000	8.00	1416KWN	1/4-14X1	1,000	17.60
•0820KWN	8-18X1 1/4	2,000	9.00	1420KWN	1/4-14X1 1/4	1,000	20.00
•0824KWN	8-18X1 1/2	2,000	10.00	1424KWN	1/4-14X1 1/2	1,000	22.50
•0832KWN	8-18X2	2,000	12.00	1428KWN	1/4-14X1 3/4	1,000	23.25
				1432KWN	1/4-14X2	1,000	27.33
•1008KWN	10-16X1/2	2,000	5.06	1440KWN	1/4-14X2 1/2	750	33.00
1010KWN	10-16X5/8	2,000	8.00	1448KWN	1/4-14X3	500	39.00
1012KWN	10-16X3/4	2,000	8.30	1456KWN	1/4-14X3 1/2	500	40.08
1014KWN	10-16X7/8	2,000	7.80	1464KWN	1/4-14X4	300	43.75
1016KWN	10-16X1	2,000	10.67	1480KWN	1/4-14X5	200	53.00
1020KWN	10-16X1 1/4	2,000	12.00	1496KWN	1/4-14X6	100	61.50
1024KWN	10-16X1 1/2	2,000	13.00				
1032KWN	10-16X2	1,500	15.33	3112KWN	5/16-12X3/4	1,000	26.30
1040KWN	10-16X2 1/2	1,250	16.10	3116KWN	5/16-12X1	1,000	26.00
1048KWN	10-16X3	1,000	18.65	3120KWN	5/16-12X1 1/4	700	28.80
				3124KWN	5/16-12X1 1/2	600	37.50
1212KWN	12-14X3/4	2,000	12.33	3132KWN	5/16-12X2	600	45.33
1214KWN	12-24X7/8	1,500	13.00	3140KWN	5/16-12X2 1/2	600	52.83
1216KWN	12-14X1	1,500	14.00	3148KWN	5/16-12X3	300	55.00
1220KWN	12-14X1 1/4	1,500	16.00				
1220KWN	12-24X1 1/4	1,500	16.00	3708KWN	3/8-12X1/2	1,000	28.00
1224KWN	12-14X1 1/2	1,500	17.50	3712KWN	3/8X12-3/4	750	38.20
1232KWN	12-14X2	1,000	22.67	3716KWN	3/8-12X1	750	41.40
1240KWN	12-14X2 1/2	750	33.00	3724KWN	3/8-12X1 1/2	600	59.00
1248KWN	12-14X3	750	25.17				
1264KWN	12-14X4	500	31.75				

Steel Zinc Plated



All items have #5 point


#5 POINT HEX WASHER UNSLOTTED SELF DRILLING SCREWS WITH NEO-EPDM WASHER

Screw is Case Hardened to Rockwell C52 - 58
(Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1220KWN5	12-14X1 1/4	1,500	12.17	1232KWN5	12-14X2	1,000	17.00
1224KWN5	12-14X1 1/2	1,500	13.80	1248KWN5	12-14X3	750	24.15

NEW!

410 Stainless Steel with
Black Oxide finish



Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to B18.6.3 & SAE J78 dimensions

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KW410B	8-18X1/2	5,000	3.20	1412KW410B	1/4-14X3/4	2,000	11.60
•0812KW410B	8-18X3/4	5,000	4.10	1416KW410B	1/4-14X1	2,000	13.60
•1008KW410B	10-16X1/2	4,000	4.70				
1012KW410B	10-16X3/4	4,000	5.80				

Case Hardened Steel
Black Phosphate Finish




BUGLE PHILLIPS DRYWALL SCREWS

Fine Thread - Self Drilling Point
Case Hardness: Rockwell C44 minimum

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KPG	6-20X1/2	10,000	1.77	•0836KPG	8-18X2 1/4	2,000	8.30
•0612KPG	6-20X3/4	10,000	2.90	•0838KPG	8-18X2 3/8	2,000	8.74
•0616KPG	6-20X1	10,000	3.25	•0840KPG	8-18X2 1/2	2,000	9.70
•0618KPG	6-20X1 1/8	10,000	3.61	•0842KPG	8-18X2 5/8	1,600	10.14
•0620KPG	6-20X1 1/4	8,000	3.85	•0848KPG	8-18X3	1,400	11.45
•0622KPG	6-20X1 3/8	7,000	4.15	•0856KPG	8-18X3 1/2	1,000	17.40
•0624KPG	6-20X1 1/2	5,000	4.15	•0864KPG	8-18X4	1,000	15.25
•0626KPG	6-20X1 5/8	5,000	4.46				
•0628KPG	6-20X1 3/4	4,000	5.00	1020KPG	10-16X1 1/4	2,000	8.00
•0630KPG	6-20X1 7/8	4,000	5.50	1022KPG	10-16X1 3/8	2,000	8.20
•0632KPG	6-20X2	4,000	5.51	1024KPG	10-16X1 1/2	2,000	8.50
•0636KPG	6-20X2 1/4	4,000	5.70	1032KPG	10-16X2	1,500	9.00
•0640KPG	6-20X2 1/2	3,000	7.22	1040KPG	10-16X2 1/2	1,000	13.40
•0648KPG	6-20X3	2,000	7.86	1056KPG	10-16X3 1/2	1,000	17.75
				1064KPG	10-16X4	500	21.00
•0716KPG	7-19X1	10,000	3.66	1072KPG	10-16X4 1/2	400	22.30
•0720KPG	7-19X1 1/4	8,000	4.55	1088KPG	10-16X5 1/2	300	27.25
•0726KPG	7-19X1 5/8	5,000	5.13	1096KPG	10-16X6	300	32.02
•0730KPG	7-19X1 7/8	4,000	6.15				
•0732KPG	7-19X2	4,000	7.03	1264KPG	12-14X4	500	26.25
				1280KPG	12-14X5	250	32.87
•0808KPG	8-18X1/2	3,000	2.37				
•0812KPG	8-18X3/4	3,000	4.20	1464KPG	1/4-14X4	300	35.00
•0816KPG	8-18X1	3,000	4.20	1480KPG	1/4-14X5	250	43.75
•0820KPG	8-18X1 1/4	2,500	5.00				
•0824KPG	8-18X1 1/2	2,000	6.01	3120KPG	5/16-12X1 1/4	700	18.33
•0826KPG	8-18X1 5/8	2,000	6.40	3732KPG	3/8-12X2	600	62.00
•0828KPG	8-18X1 3/4	2,000	6.50				
•0832KPG	8-18X2	2,000	7.87				

Steel Black Oxide



Items marked with "•"
have #2 point; all
others have #3 point

FLAT PHILLIPS SELF DRILLING SCREWS

Combination Phillips and Slotted Recess
Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KPFB	6-20X3/8	10,000	1.46	1216KPFB	12-14X1	4,000	9.70
•0608KPFB	6-20X1/2	10,000	1.77				
•0808KPFB	8-18X1/2	10,000	2.67	1412KPFB	1/4-14X3/4	3,000	9.78
•0812KPFB	8-18X3/4	10,000	3.50	1416KPFB	1/4-14X1	3,000	11.68
•0816KPFB	8-18X1	8,000	3.79	1420KPFB	1/4-14X1 1/4	2,000	13.47
				1424KPFB	1/4-14X1 1/2	2,000	15.47
•1008KPFB	10-16X1/2	10,000	3.66	1432KPFB	1/4-14X2	1,000	18.50
1012KPFB	10-16X3/4	8,000	4.13	1440KPFB	1/4-14X2 1/2	1,000	25.00
1016KPFB	10-16X1	6,000	5.96				
1020KPFB	10-16X1 1/4	5,000	6.85				
1024KPFB	10-16X1 1/2	4,000	8.10				


Steel Black Oxide


Items marked with “•”
have #2 point; all
others have #3 point

HEX WASHER PHILLIPS SELF DRILLING SCREWS

Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0810KPWB	8-18X5/8	10,000	3.40	1016KPWB	10-16X1	4,000	6.60

Steel Black Oxide


Items marked with “•”
have #2 point; all
others have #3 point

OVAL PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0812KPOB	8-18X3/4	10,000	3.61	1012KPOB	10-16X3/4	7,000	5.19
•0816KPOB	8-18X1	7,000	4.73	1016KPOB	10-16X1	5,000	6.13
•0820KPOB	8-18X1 1/4	5,000	5.72	1020KPOB	10-16X1 1/4	4,000	8.00
•0824KPOB	8-18X1 1/2	4,000	6.60				


Steel Black Oxide


Items marked with “•”
have #2 point; all
others have #3 point

PAN PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0408KPPB	4-24X1/2	10,000	1.14	•1008KPPB	10-16X1/2	8,000	4.40
•0606KPPB	6-20X3/8	10,000	1.69	•1010KPPB	10-16X5/8	8,000	4.96
•0608KPPB	6-20X1/2	10,000	2.06	1012KPPB	10-16X3/4	7,000	5.51
•0610KPPB	6-20X5/8	10,000	2.28	1016KPPB	10-16X1	5,000	6.93
•0612KPPB	6-20X3/4	10,000	2.77	1020KPPB	10-16X1 1/4	4,000	7.96
•0616KPPB	6-20X1	10,000	3.19	1032KPPB	10-16X2	2,000	12.56
•0620KPPB	6-20X1 1/4	9,000	3.66	1064KPPB	10-16X4	1,000	22.30
•0624KPPB	6-20X1 1/2	8,000	4.54	1212KPPB	12-14X3/4	5,000	8.10
•0707KPPB	7-19X7/16	10,000	2.30	•1408KPPB	1/4-14X1/2	3,000	9.12
•0806KPPB	8-18X3/8	10,000	2.96	1412KPPB	1/4-14X3/4	3,000	11.50
•0808KPPB	8-18X1/2	10,000	3.10	1420KPPB	1/4-14X1 1/4	1,000	15.50
•0810KPPB	8-18X5/8	10,000	3.50				
•0812KPPB	8-18X3/4	8,000	4.05				
•0816KPPB	8-18X1	6,000	5.05				
•0820KPPB	8-18X1 1/4	5,000	5.90				
•0824KPPB	8-18X1 1/2	4,000	7.29				
•0832KPPB	8-18X2	2,000	9.22				
•0840KPPB	8-18X2 1/2	2,000	11.26				
•0848KPPB	8-18X3	2,000	11.97				

Steel Black Phosphate


All Items have #2 point

MODIFIED TRUSS PHILLIPS SELF DRILLING SCREWS

Manufactured to SAE J78 specifications
For attaching metal lath to metal studs between 12-20 gauge thick
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0606KPMB	6-20X3/8	8,000	2.54	•1008KPMB	10-16X1/2	6,000	4.10
•0608KPMB	6-20X1/2	8,000	2.88	1012KPMB	10-16X3/4	6,000	5.25
•0808KPMB	8-18X1/2	5,000	3.80	1016KPMB	10-16X1	5,000	6.67
•0809KPMB	8-18X9/16	5,000	3.90	1020KPMB	10-16X1 1/4	4,000	9.10
•0812KPMB	8-18X3/4	5,000	4.75	1024KPMB	10-16X1 1/2	3,000	10.40
•0816KPMB	8-18X1	4,000	5.60	1032KPMB	10-16X2	2,000	15.00
•0820KPMB	8-18X1 1/4	3,000	6.80				
•0824KPMB	8-18X1 1/2	2,000	7.50				
•0826KPMB	8-18X1 5/8	3,000	7.40				
•0828KPMB	8-18X1 3/4	3,000	8.50				
•0830KPMB	8-18X1 7/8	2,000	9.00				
•0832KPMB	8-18X2	2,000	9.00				
•0840KPMB	8-18X2 1/2	2,000	11.50				
•0848KPMB	8-18X3	1,500	13.50				

Steel Black Oxide


Items marked with “•”
have #2 point; all
others have #3 point

HEX WASHER SLOTTED SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KSWB	8-18X1/2	10,000	3.30	•1008KSWB	10-16X1/2	8,000	4.50
•0816KSWB	8-18X1	8,000	4.65	1012KSWB	10-16X3/4	6,000	5.69

Steel Black Oxide


Items marked with “•”
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KWB	6-20X1/2	10,000	2.63	1210KWB	12-14X5/8	5,000	7.30
•0808KWB	8-18X1/2	10,000	3.32	1212KWB	12-14X3/4	5,000	8.06
•0810KWB	8-18X5/8	9,000	3.79	1216KWB	12-14X1	4,000	9.75
•0812KWB	8-18X3/4	8,000	4.16	1220KWB	12-14X1 1/4	3,000	11.35
•0816KWB	8-18X1	6,000	5.01	1224KWB	12-14X1 1/2	2,000	6.60
•0820KWB	8-18X1 1/4	2,000	6.21	1228KWB	12-14X1 3/4	2,000	14.20
•0824KWB	8-18X1 1/2	2,000	7.26	1232KWB	12-14X2	2,000	16.00
•0828KWB	8-18X1 3/4	2,000	8.63	•1408KWB	1/4-14X1/2	3,000	10.20
•1006KWB	10-16X3/8	8,000	4.80	•1410KWB	1/4-14X5/8	3,000	11.20
•1008KWB	10-16X1/2	8,000	4.78	1412KWB	1/4-14X3/4	3,000	12.23
•1010KWB	10-16X5/8	7,000	5.03	1416KWB	1/4-14X1	2,000	14.60
1012KWB	10-16X3/4	6,000	5.85	1420KWB	1/4-14X1 1/4	1,500	16.84
1016KWB	10-16X1	5,000	8.05	1424KWB	1/4-14X1 1/2	1,250	19.34
1020KWB	10-16X1 1/4	1,000	8.37	1428KWB	1/4-14X1 3/4	1,000	21.34
1024KWB	10-16X1 1/2	1,000	10.12	1432KWB	1/4-14X2	900	24.18
1028KWB	10-16X1 3/4	1,000	10.70				
1032KWB	10-16X2	1,000	12.72				

Steel Black Oxide

Items marked with "•"
have #2 point; all
others have #3 point


PAN SQUARE RECESS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0608KQPB	6-20X1/2	10,000	2.08	•1008KQPB	10-16X1/2	8,000	4.64
•0810KQPB	8-18X5/8	3,000	3.46	1016KQPB	10-16X1	2,000	6.86
•0812KQPB	8-18X3/4	3,000	4.00	1020KQPB	10-16X1 1/4	1,000	7.73
•0816KQPB	8-18X1	2,000	4.85	1024KQPB	10-16X1 1/2	1,000	9.25
•0824KQPB	8-18X1 1/2	4,000	6.60	1224KQPB	12-14X1 1/2	2,000	12.20

NEW!

Steel Black Zinc

Items marked with "•"
have #2 point; all
others have #3 point

FLAT PHILLIPS SELF DRILLING SCREWS

Combination Phillips and Slotted Recess
Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
0848KFPBZ	8-18X3	1,250	11.83				

Steel Black Zinc


Items marked with "•"
have #2 point; all
others have #3 point

FLAT PHILLIPS UNDERCUT SELF DRILLING SCREWS

Combination Phillips and Slotted Recess
Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0808KPUBZ	8-18X1/2	10,000	1.97	•1008KPUBZ	10-16X1/2	10,000	3.60
•0812KPUBZ	8-18X3/4	10,000	2.83	1012KPUBZ	10-16X3/4	7,000	2.86
				1212KPUBZ	12-14X3/4	5,000	4.91

Steel Black Zinc


Items marked with "•"
have #2 point; all
others have #3 point

PAN PHILLIPS SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0406KPPBZ	4-24X3/8	10,000	1.08	•1008KPPBZ	10-16X1/2	8,000	4.58
•0408KPPBZ	4-24X1/2	10,000	1.27	1010KPPBZ	10-16X5/8	8,000	4.80
				1012KPPBZ	10-16X3/4	7,000	5.51
•0606KPPBZ	6-20X3/8	10,000	1.63	1016KPPBZ	10-16X1	5,000	6.93
•0608KPPBZ	6-20X1/2	10,000	2.11	1020KPPBZ	10-16X1 1/4	4,000	8.07
•0612KPPBZ	6-20X3/4	10,000	2.80	1024KPPBZ	10-16X1 1/2	3,000	9.30
•0616KPPBZ	6-20X1	10,000	3.33	1028KPPBZ	10-16X1 3/4	3,000	11.00
•0806KPPBZ	8-18X3/8	10,000	2.78	1212KPPBZ	12-14X3/4	5,000	8.10
•0808KPPBZ	8-18X1/2	10,000	3.10	1216KPPBZ	12-14X1	3,000	9.14
•0810KPPBZ	8-18X5/8	10,000	3.45	1220KPPBZ	12-14X1 1/4	3,000	11.45
•0812KPPBZ	8-18X3/4	9,000	4.05	1224KPPBZ	12-14X1 1/2	2,000	12.43
•0816KPPBZ	8-18X1	6,000	5.05	1232KPPBZ	12-14X2	1,000	15.75
•0820KPPBZ	8-18X1 1/4	5,000	5.90				
•0824KPPBZ	8-18X1 1/2	4,000	6.73	1412KPPBZ	1/4-14X3/4	3,000	11.50
•0828KPPBZ	8-18X1 3/4	3,000	7.75	1416KPPBZ	1/4-14X1	2,000	13.70
				1420KPPBZ	1/4-14X1 1/4	1,000	15.52
				1424KPPBZ	1/4-14X1 1/2	1,000	17.82

Steel Black Zinc


Items marked with "•"
have #2 point; all
others have #3 point

HEX WASHER UNSLOTTED SELF DRILLING SCREWS

Manufactured to ASME B18.6.3 & SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
•0806KWBZ	8-18X3/8	10,000	2.93	1412KWBZ	1/4-14X3/4	3,000	11.71
•0808KWBZ	8-18X1/2	10,000	3.25	1416KWBZ	1/4-14X1	2,000	14.20
•0812KWBZ	8-18X3/4	8,000	4.17	1420KWBZ	1/4-14X1 1/4	1,500	16.25
•0816KWBZ	8-18X1	6,000	5.13	1424KWBZ	1/4-14X1 1/2	1,250	18.67
•0820KWBZ	8-18X1 1/4	6,000	6.05	1428KWBZ	1/4-14X1 3/4	1,000	21.34
•0824KWBZ	8-18X1 1/2	5,000	7.26	1432KWBZ	1/4-14X2	900	24.18
•1008KWBZ	10-16X1/2	8,000	5.06	3112KWBZ	5/16-12X3/4	1,000	22.78
1012KWBZ	10-16X3/4	5,000	5.70	3116KWBZ	5/16-12X1	1,000	26.50
1016KWBZ	10-16X1	5,000	6.90	3120KWBZ	5/16-12X1 1/4	700	30.05
1020KWBZ	10-16X1 1/4	4,000	8.40	3124KWBZ	5/16-12X1 1/2	600	33.88
1024KWBZ	10-16X1 1/2	3,000	9.30				
1212KWBZ	12-14X3/4	5,000	7.50				
1216KWBZ	12-14X1	4,000	9.20				

Steel Black Zinc



All items have #3 point


WAFER PHILLIPS SELF DRILLING SCREWS WITH MACHINE SCREW THREADS

Manufactured to SAE J78 specifications
Case Hardened to Rockwell C52 - 58 (Core Hardness: Rockwell C32-40)

Part #	Size	Ctn Qty	Wght Lbs/M	Part #	Size	Ctn Qty	Wght Lbs/M
1024KWAFFMSBZ	10-24X1 1/2	1,000	9.20				

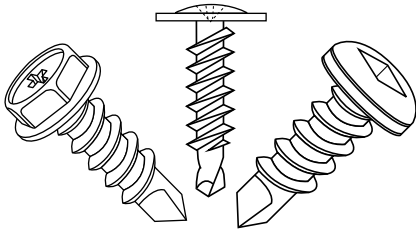
Kanebridge

Same-Day Solutions for Self-Drilling Needs



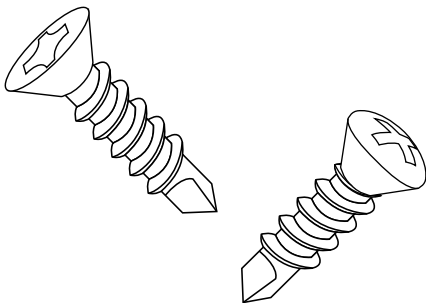
HARD-TO-FIND ITEMS

Including #4 & #5 Long Point sizes



HEAD STYLE & RECESS VARIETY

Such as Square Drive, Modified Truss, Phillips Hex Washer & more



VARIOUS MATERIALS & FINISHES

410 & 18-8 Stainless; Steel Zinc & Steel Black Oxide

888-222-9221 • 800-222-9221 • 201-337-2300
(Fax): 201-337-2301

www.kanebridge.com

Self-Drilling Screws

Over 1,800 Items for Same-Day Shipment



Kanebridge Corporation

Over 1,800 Varieties

This booklet lists our most current selection of Self-Drilling screws. This includes Steel and Stainless items in a variety of finishes, including Black Oxide.

For each item, we list the size, carton quantity and unit weight. That carton quantity is the minimum order amount for each item. There is no dollar minimum requirement to place an order with Kanebridge.

Here to Serve You

Our Customer Service Department can be contacted 7:30 AM - 8:00 PM Eastern, Monday thru Friday. Our e-commerce site, FasNet™, is available 24/7.

MIDWEST Service Center

**1125 Gateway Drive
Elgin, IL 60123**

WESTERN Service Center

**5316 Lindbergh Lane
Bell, CA 90201**

EASTERN Service Center

**153 Bauer Drive
Oakland, NJ 07436**

T: (888) 222-9221 • F: (201) 337-2301 • E-Mail: sales@kanebridge.com • www.kanebridge.com

Elgin IL • Bell CA • Oakland NJ

With **over 1,800 varieties**
available, Kanebridge has the largest
inventory of Drill Screws in the Industry!



(800) 222-9221



sales@kanebridge.com



(201) 337-2301



www.kanebridge.com