

DEWALT®

ANCHORS & FASTENERS

Rod Hanging System for Concrete, Wood & Steel



Hangermate®+

DEWALT®

ANCHORS & FASTENERS



THREAD PROFILE


low torque, fast installation, full concrete engagement

STANDARD 1/4" BIT

no need for specialty bit for installation

HARDENED STEEL

installs in hard concrete and remains ductile

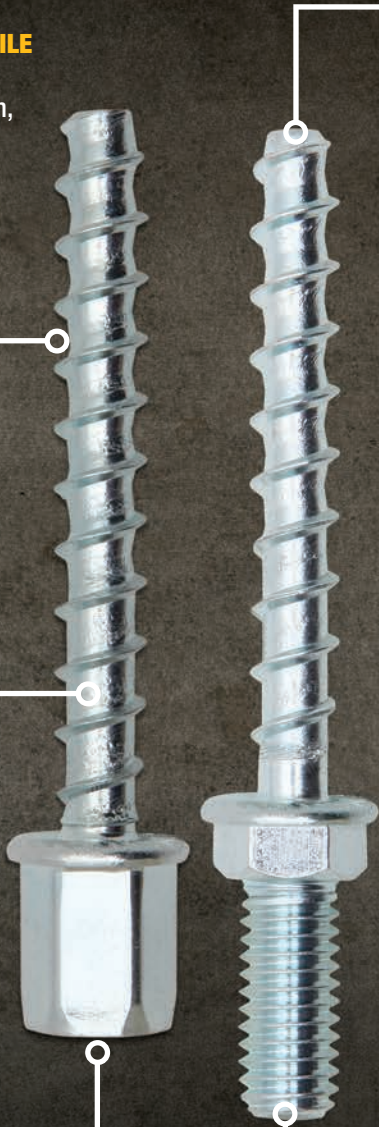

THREADED ROD available in 1/4" or 3/8" rod sizes

EXTERNAL 3/8" THREAD for attaching directly to anchor



	DEWALT Hangermate+	ITW Buildex Sammys®
Approved Embedments	1-5/8" & 2-1/2"	2-1/4"
Bit Size	1/4" ANSI	Specialty
Pullout, N _{p,cr} *	1412 lbs	857 lbs

* for 2-1/2" embedment

Sammys® is a registered trademark of Illinois Tool Works Inc.

Faster Installation

Hangermate+ VS Drop-In Anchor**

25%
Faster Installation

DEWALT Hangermate+ for Concrete

Traditional Drop-in Anchor

** 1/4"x1-5/8" concrete screw (with 3/8" coupler head) versus 3/8" Drop-In anchor

Installation Driver and Bit Reference

CAT #	DESCRIPTION	DRIVER	BIT
Hangermate+ Concrete - Internally Threaded			
PFM2211100	1/4" x 1-5/8"	PFM1491050	DW5517
PFM2211200	1/4" x 1-5/8"	PFM1491100	DW5517
PFM2211250	1/4" x 2-1/2"	PFM1491100	DW5517
Hangermate+ For Concrete - Externally Threaded			
PFM1421000	1/4" x 1-5/8"	DW22862	DW5517
PFM1421050	1/4" x 2-1/2"	DW22862	DW5517
Pivot For Concrete - Angled Applications			
PFM2281300	1/4 x 2"	PFM2201250	02796SD
Suspender For Concrete - Dual-Directional			
PFM2271050	5/16" x 2-1/4"	PFM2201300	DW5517



Hangermate®+

Rod Hanging Anchors for Concrete

	CAT #	DESCRIPTION	SAMMYS® MODEL #	HANG	ROD SIZE	QTY	MSTR
Hangermate+ For Concrete - Internally Threaded							
	PFM2211100	1/4" x 1-5/8"	CST 200	Vertical	1/4"	25	125
	PFM2211200	1/4" x 1-5/8"	CST 20	Vertical	3/8"	25	125
	PFM2211250	1/4" x 2-1/2"	CCST 516	Vertical	3/8"	25	125
Hangermate+ For Concrete - Externally Threaded							
	PFM1421000	1/4" x 1-5/8"	-	Vertical	3/8"	25	125
	PFM1421050	1/4" x 2-1/2"	-	Vertical	3/8"	25	125
Hangermate+ Pivot For Concrete - Angled Applications							
	PFM228130	1/4 x 2"	SH-GST/CST 20	Variable	3/8"	25	125
Hangermate+ Suspender For Concrete - Dual-Directional							
	PFM2271050	5/16" x 2-1/4"	-	Vert. & Hori.	3/8"	25	125

The Complete Anchoring Solution - Installation Accessories and Tools

	CAT #	DESCRIPTION	HANGERMATE+	QTY	MSTR QTY
	PFM1491050	1/4" Socket Driver	Concrete Rod Hanger	1	5
	PFM1491100	3/8" Socket Driver	Concrete Rod Hanger	1	5
	DW22862	1/2" Drive Socket	Externally Threaded Concrete Rod Hanger	1	-
	PFM2201300	Suspender Driver	Suspender	1	5
	PFM2201250	Pivot Driver	Pivot	1	5
	DWMT73934B	1/2" Impact Rated® Deep Socket	External	1	-
	DW2547IR	1/4" Hex to 1/2" Square Adapter			
	DW5517	1/4" X 6" (4" usable length) SDS+ Full Head Carbide Masonry Drill Bit			
	02796SD	Hex Shank SDS-Plus (only for Pivot for Concrete)			
	PFM2201050	Adapter for hanging 1/2" rod (3/8" to 1/2" Adapter)			
	DCH273P2DH	20V MAX* Brushless Rotary Hammer			
	DCF887D2	20V MAX* XR Brushless 3-Speed Impact Driver			
	DCF883M2	20V MAX* Lithium Ion 3/8" Impact Wrench			
	DCS350D1	Cordless Threaded Rod Cutter			

* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.



ANCHORS & FASTENERS



UL & FM FULL LISTING
PAGES 10-11



TYPE 17 GIMLET
easy material
removal, no
pre-drilling
required

**SINGLE PIECE
DESIGN†**
allows removal
and adjustment

† Available on PFM2251000,
PFM2251100 & PFM2261100



WOOD DRIVER
spin off feature helps
reduce over driving



**SIDE MOUNT
OPTION**
for horizontal
applications



	DEWALT Hangermate	ITW Buildex Sammys®
Dual Head	Suspender	No
Point Style	Type 17 Gimlet	Gimlet Only
Single Piece Design	Select Sizes	All 2-piece

Type 17 Gimlet Helps Reduce Splitting*

*Compared to Sammys® drilled 2" into pressure treated lumber with DEWALT DCD790D2

DEWALT
1/4" x 2"



Sammys®
1/4" x 2"








Sammys® is a registered trademark of Illinois Tool Works Inc.

Installation Driver Reference

CAT #	DESCRIPTION	DRIVER
Hangermate Wood - Vertical		
PFM2251000	1/4" x 2"	PFM2201150
PFM2251050	1/4" x 1"	PFM2201150
PFM2251100	1/4" x 2"	PFM2201150
PFM2251150	5/16" x 2-1/2"	PFM2201150
PFM2251200	1/4" x 3"	PFM2201150
PFM2251250	1/4" x 4"	PFM2201150
PFM2251300	5/16" x 2-1/2"	PFM2201150
Hangermate Wood - Horizontal		
PFM2261000	1/4" x 1"	PFM2201150
PFM2261050	1/4" x 1"	PFM2201150
PFM2261100	1/4" x 2"	PFM2201150
PFM2261150	5/16" x 2-1/2"	PFM2201150
Pivot For Wood - Angled Applications		
PFM2281100	1/4" x 2"	PFM2201250
Suspender For Wood - Dual-Directional		
PFM2271000	5/16" x 2-1/4"	PFM2201300
Wood - Acoustical Ceiling Screw Eyelet		
PFM2251500	1/4" x 3"	PFM2201350

Hangermate®

Rod Hanging Anchors for Wood

	CAT #	DESCRIPTION	SAMMYS® MODEL #	HANG	ROD SIZE	QTY	MSTR QTY
Hangermate For Wood - Vertical							
	PFM2251000	1/4" x 2"	GST 200	Vertical	1/4"	25	125
	PFM2251050	1/4" x 1"	GST 10	Vertical	3/8"	25	125
	PFM2251100	1/4" x 2"	GST 20	Vertical	3/8"	25	125
	PFM2251150	5/16" x 2-1/2"	GST 25-380	Vertical	3/8"	25	125
	PFM2251200	1/4" x 3"	GST 30	Vertical	3/8"	25	125
	PFM2251250	1/4" x 4"	-	Vertical	3/8"	25	125
	PFM2251300	5/16" x 2-1/2"	GST 2	Vertical	1/2"	25	125
Hangermate For Wood - Horizontal							
	PFM2261000	1/4" x 1"	SWG 200	Horizontal	1/4"	25	125
	PFM2261050	1/4" x 1"	SWG 10	Horizontal	3/8"	25	125
	PFM2261100	1/4" x 2"	SWG 20	Horizontal	3/8"	25	125
	PFM2261150	5/16" x 2-1/2"	SWG 25-380	Horizontal	3/8"	25	125
Hangermate Pivot For Wood - Angled Applications							
	PFM2281100	1/4" x 2"	SH-GST 20	Variable	3/8"	25	125
Hangermate Suspender For Wood - Dual-Directional							
	PFM2271000	5/16" x 2-1/4"	-	Vertical & Horizontal	3/8"	25	125
Hangermate For Wood - Acoustical Ceiling Screw Eyelet							
	PFM2251500	3/16" x 3"	CWSD 15	Vertical & Horizontal	Eyelet Hole 3/16"	25	125

The Complete Anchoring Solution - Installation Accessories and Tools

	CAT #	DESCRIPTION	HANGERMATE	QTY	MSTR QTY
	PFM2201150	Wood Socket Driver	Rod Hanger	1	5
	PFM2201300	Suspender Driver	Suspender	1	5
	PFM2201250	Pivot Driver	Pivot	1	5
	PFM2201350	Ceiling Screw Eyelet Driver	Acoustical	1	5
	PFM2201100	Pole Tool Kit	Rod Hanger	1	5
	DCF6102S2	12V Max* Lithium Ion 1/4" (13mm) Screwdriver Kit			
	DCD790D2	20V MAX* XR Lithium Ion Brushless Compact Drill/Driver Kit			
	DCD990M2	20V MAX* XR Lithium Ion Premium 3-Speed Drill/Driver Kit			
	DCD995M2	20V MAX* XR Lithium Ion Brushless Premium Hammerdrill Kit			

* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.



ANCHORS & FASTENERS



UL & FM FULL LISTING
PAGES 10-11



SELF-DRILLING POINT
eliminates pre-drilling

ONE PIECE DESIGN
provides solid connection from steel to threaded rod

STEEL DRIVER
spin off feature helps reduce over driving

SELF-TAPPING THREADS
low torque to install

HORIZONTAL MOUNT OPTION








	DEWALT Hangermate	ITW Buildex Sammys®
Dual Head	Suspender	No
Single Piece Design	Yes	All 2-piece
UL Approved Range*	12 SKUs	8 SKUs

*On select sizes with coupling nut
Sammys is a registered trademark of Illinois Tool Works Inc.

Installation Driver Reference		
CAT #	DESCRIPTION	DRIVER
Hangermate Steel - Vertical		
PFM2231000	1/4-20 1" #3	PFM2201200
PFM2231100	1/4-20 x 1" #3	PFM2201200
PFM223110N	1/4-20 x 1" #3 / nut	PFM2201200
PFM2231150	1/4"-20 x 1-1/2" #5	PFM2201200
PFM223115N	1/4-20 x 1-1/2" #5 / nut	PFM2201200
PFM2231200	1/4-20 x 1-1/2" #3	PFM2201200
PFM223120N	1/4-20x1-1/2" #3 / nut	PFM2201200
PFM2231250	1/4-20 x 2" #3	PFM2201200
Hangermate Steel - Horizontal		
PFM2241100	1/4-20 x 1" #3	PFM2201200
PFM224110N	1/4-20 x 1" #3 / nut	PFM2201200
PFM2241150	1/4-20 x 1-1/2" #3	PFM2201200
PFM224115N	1/4-20 x 1-1/2" #3 / nut	PFM2201200
PFM2241200	1/4-20 x 1-1/2" #5	PFM2201200
PFM224120N	1/4-20 x 1-1/2" #5 /nut	PFM2201200
Pivot Steel - Angled Applications		
PFM2281150	1/4-20 x 1" #3	PFM2201250
PFM2281200	12-20 x 1-3/4" #5	PFM2201250
PFM2281250	1/4-14 x 1" #3	PFM2201250
Suspender Steel - Dual-Directional		
PFM227110N	1/4-20 x 1" #3 / nut	PFM2201300
PFM227120N	1/4-20 x 1-1/2" #3 / nut	PFM2201300
PFM227130N	1/4-20 x 1-1/2" #5 / nut	PFM2201300
Steel - Acoustical Ceiling Screw Eyelet		
PFM2231500	1/4" x 3"	PFM2201350
PFM2231550	1/4" x 3-1/4"	PFM2201350

Hangermate® Rod Hanging Anchors for Steel

	CAT #	DESCRIPTION	SAMMYS® MODEL #	HANG	ROD SIZE	QTY	MSTR QTY
Hangermate For Steel - Vertical							
	PFM2231000	1/4-20 x 1" #3	DSTR 100	Vertical	1/4"	25	125
	PFM2231100	1/4-20 x 1" #3	-	Vertical	3/8"	25	125
	PFM223110N	1/4-20 x 1" #3 / nut	DSTR 1	Vertical	3/8"	25	125
	PFM2231150	1/4"-20 x 1-1/2" #5	DSTR 1-1/2	Vertical	3/8"	25	125
	PFM223115N	1/4-20 x 1-1/2" #5 / nut	DSTR 1	Vertical	3/8"	25	125
	PFM2231200	1/4-20 x 1-1/2" #3	-	Vertical	3/8"	25	125
	PFM223120N	1/4-20x1-1/2" #3 / nut	DST15	Vertical	3/8"	25	125
PFM2231250	1/4-20 x 2" #3	DST 20	Vertical	3/8"	25	125	
Hangermate For Steel - Horizontal							
	PFM2241100	1/4-20 x 1" #3	SDW 10	Horizontal	3/8"	25	125
	PFM224110N	1/4-20 x 1" #3 / nut	SDWR 1	Horizontal	3/8"	25	125
	PFM2241150	1/4-20 x 1-1/2" #3	-	Horizontal	3/8"	25	125
	PFM224115N	1/4-20 x 1-1/2" #3 / nut	-	Horizontal	3/8"	25	125
	PFM2241200	1/4-20 x 1-1/2" #5	SWT 15	Horizontal	3/8"	25	125
	PFM224120N	1/4-20 x 1-1/2" #5 /nut	SWDR 1-1/2	Horizontal	3/8"	25	125
Hangermate Pivot For Steel - Angled Applications							
	PFM2281150	1/4-20 x 1" #3	SH-DSTR 1	Variable	3/8"	25	125
	PFM2281200	12-20 x 1-3/4" #5	SH-TEK 50	Variable	3/8"	25	125
	PFM2281250	1/4-14 x 1" #3	-	Variable	3/8"	25	125
Hangermate Suspender For Steel - Dual-Directional							
	PFM227110N	1/4-20 x 1" #3 / nut	-	Vert. & Horz.	3/8"	25	125
	PFM227120N	1/4-20 x 1-1/2" #3 / nut	-	Vert. & Horz.	3/8"	25	125
	PFM227130N	1/4-20 x 1-1/2" #5 / nut	-	Vert. & Horz.	3/8"	25	125
Hangermate For Steel - Acoustical Ceiling Screw Eyelet							
	PFM2231500	3/16" x 2"	CWSD 1	Vert. & Horz.	Eyelet Hole 3/16"	25	125
	PFM2231550	3/16" x 3-1/4"	CWSD 2	Vert. & Horz.		25	125

Recommended 1300 to 2000 rpms for proper installation.

The Complete Anchoring Solution - Installation Accessories and Tools


	CAT #	DESCRIPTION	HANGERMATE	QTY	MSTR QTY
	PFM2201200	Steel Socket (Silver)	Rod Hanger	1	5
	PFM2201300	Suspender Driver	Suspender	1	5
	PFM2201250	Pivot Driver	Pivot	1	5
	PFM2201350	Ceiling Screw Eyelet Driver	Acoustical	1	5
	PFM2201100	Pole Tool Kit	Rod Hanger	1	5
	PFM2201050	Adapter for hanging 1/2" rod (3/8" to 1/2" Adapter)			
	DCD991P2	20 V MAX* XR Lithium Ion Brushless 3-Speed Drill / Driver Kit			
	DCF887D2	20V MAX* XR 1/4" 3-Speed Impact Driver Kit			

* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.



ANCHORS & FASTENERS

Pivot™

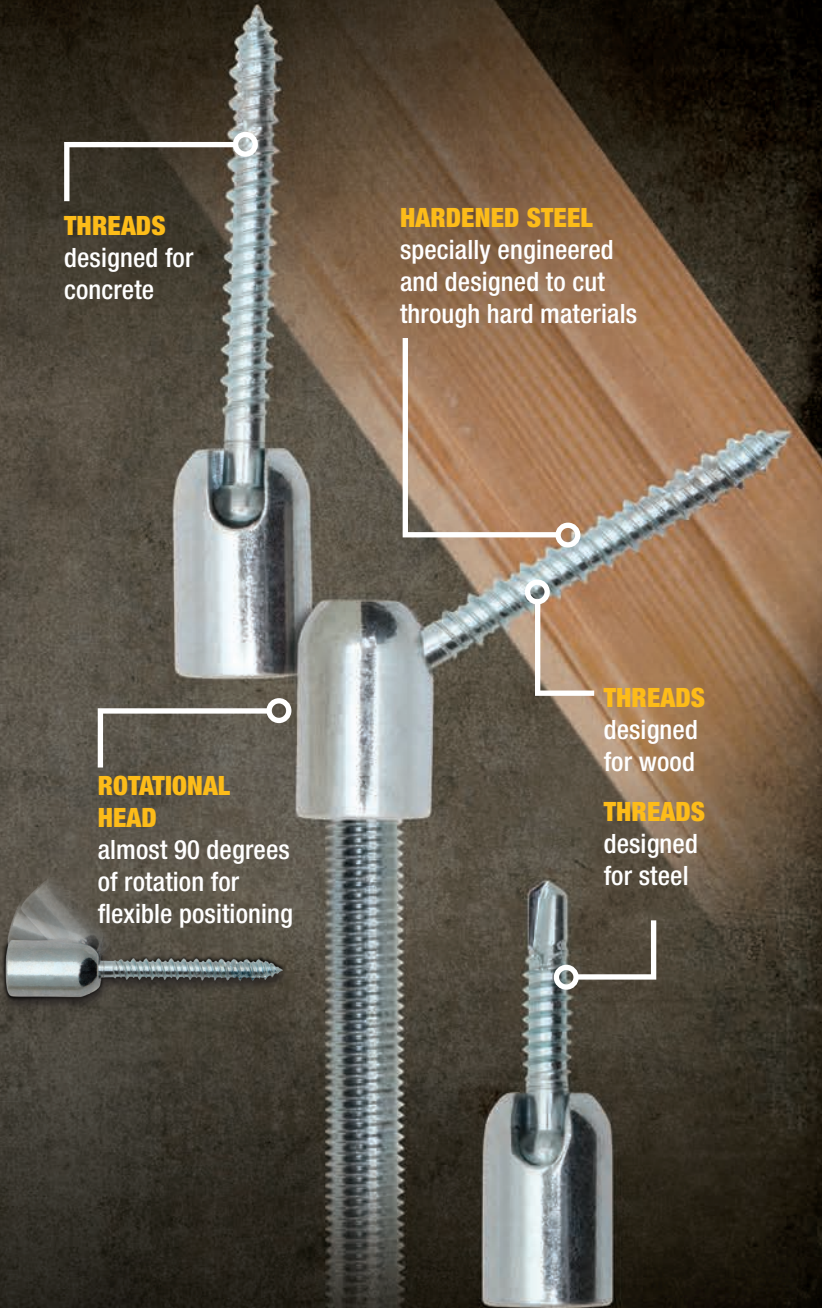

THREADS
designed for concrete

HARDENED STEEL
specially engineered and designed to cut through hard materials

THREADS
designed for wood

ROTATIONAL HEAD
almost 90 degrees of rotation for flexible positioning

THREADS
designed for steel



Pivot Installation Driver & Bit Reference

NUMBER	DESCRIPTION	DRIVER	DRILL BIT
Pivot For Concrete			
PFM2281300	1/4 x 2"	PFM2201250	02796SD
Pivot For Wood			
PFM2281100	1/4" x 2"	PFM2201250	*
Pivot For Steel			
PFM2281150	1/4-20 x 1" #3	PFM2201250	*
PFM2281200	12-20 x 1-3/4" #5	PFM2201250	*
PFM2281250	1/4-14 x 1" #3	PFM2201250	*

* No pre-drilling necessary



◀ **STAR DRIVE T-25**
full engagement driving through tough materials





Hangermate® Specialty Rod Hanging Anchors

Suspender™




UL & FM FULL LISTING
PAGES 10-11
APPROVED

**MULTIPLE
THREADS**
different thread
and point styles

**TWIN LEAD
THREAD**
for thread
engagement
(concrete &
wood)


**DUAL DIRECTIONAL
THREAD**
one part for vertical or
horizontal application

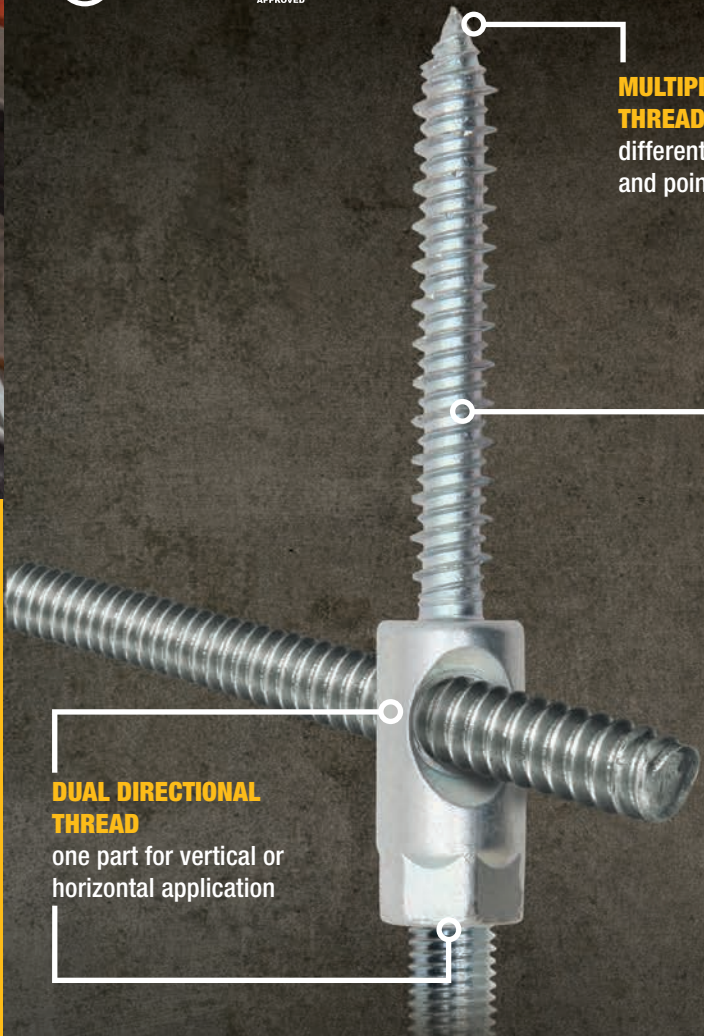

Suspender Installation Driver & Bit Reference

NUMBER	DESCRIPTION	DRIVER	DRILL BIT
Suspender For Concrete			
PFM2271050	5/16" x 2-1/4"	PFM2201300	DW5517
Suspender For Wood			
PFM2271000	5/16" x 2-1/4"	PFM2201300	*
Suspender For Steel			
PFM227110N	1/4-20 x 1" #3/nut	PFM2201300	*
PFM227120N	12-20 x 1-1/2" #3/nut	PFM2201300	*
PFM227130N	1/4-14 x 1" #5/nut	PFM2201300	*

* No pre-drilling necessary

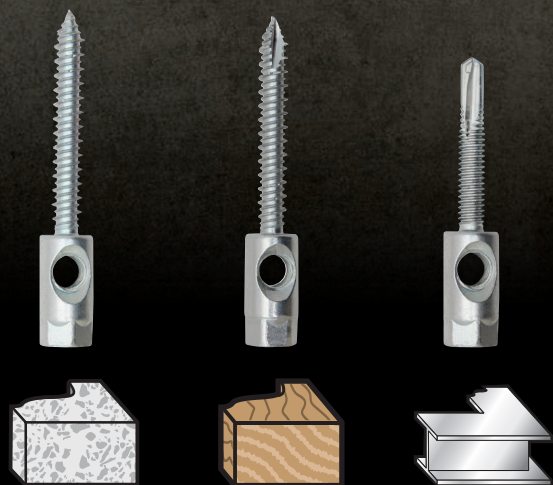



ANCHORS & FASTENERS

APPROVALS



Hangermate+ For Concrete - Internally Threaded

CAT #	DESCRIPTION	HANG	ROD SIZE	DRIVER	ULTIMATE TENSILE LOAD (LBS)*	PIPE SIZE	LOAD	PIPE SIZE	LOAD	ICC-ES
PFM2211100	1/4" x 1-5/8"	Vertical	1/4"	PFM1491050	2,835	-	-	4"	1,475	ESR-3889
PFM2211200	1/4" x 1-5/8"	Vertical	3/8"	PFM1491100	2,835	-	-	4"	1,475	ESR-3889
PFM2211250	1/4" x 2-1/2"	Vertical	3/8"	PFM1491100	3,650	-	-	4"	1,475	ESR-3889

*In 2,500psi uncracked concrete

Hangermate+ For Concrete - Externally Threaded

PFM1421000	1/4" x 1-5/8"	Vertical	3/8"	DW22862	2,835	-	-	4"	1,475	ESR-3889
PFM1421050	1/4" x 2-1/2"	Vertical	3/8"	DW22862	3,650	-	-	4"	1,475	ESR-3889

*In 2,500psi uncracked concrete

Hangermate+ Pivot For Concrete - Angled Applications

PFM2281300	1/4 x 2"	Variable	3/8"	PFM2201250	2,830 (Vert.)	-	-	-	-	-
					990 (45°)	-	-	-	-	-

* In 2,500psi uncracked concrete

Hangermate+ Suspender For Concrete - Dual-Directional

PFM2271050	5/16" x 2-1/4"	Vert. & Hori.	3/8"	PFM2201300	2,188 (Vert.)	-	-	4"	1,475	-
					2,767 (Horz.)	-	-	4"	1,475	-

*In 3,650psi uncracked concrete

Hangermate+ For Wood - Vertical

PFM2251000	1/4" x 2"	Vertical	1/4"	PFM2201150	1,510	-	-	-	-	-
PFM2251050	1/4" x 1"	Vertical	3/8"	PFM2201150	685	-	-	-	-	-
PFM2251100	1/4" x 2"	Vertical	3/8"	PFM2201150	1,510	3"	1,050	-	-	-
PFM2251150	5/16" x 2-1/2"	Vertical	3/8"	PFM2201150	2,670	4"	1,500	4"	1,475	-
PFM2251200	1/4" x 3"	Vertical	3/8"	PFM2201150	2,075	3"	1,050	-	-	-
PFM2251250	1/4" x 4"	Vertical	3/8"	PFM2201150	2,075	3"	1,050	-	-	-
PFM2251300	15/16" x 2-1/2"	Vertical	1/2"	PFM2201150	2,670	-	-	-	-	-

*Ultimate Loads In Douglas Fir

Hangermate+ For Wood - Horizontal

PFM2261000	1/4" x 1"	Horizontal	1/4"	PFM2201150	685	-	-	-	-	-
PFM2261050	1/4" x 1"	Horizontal	3/8"	PFM2201150	685	-	-	-	-	-
PFM2261100	1/4" x 2"	Horizontal	3/8"	PFM2201150	1,800	3"	1,050	-	-	-
PFM2261150	5/16" x 2-1/2"	Horizontal	3/8"	PFM2201150	1,450	3"	1,050	-	-	-

*Ultimate Loads In Douglas Fir

Hangermate+ Pivot For Wood - Angled Applications

PFM2281100	1/4" x 2"	Variable	3/8"	PFM2201250	1,470 (Vert.)	-	-	-	-	-
					1,154 (45°)	-	-	-	-	-

*Ultimate Loads In Douglas Fir

Hangermate+ Suspender For Wood - Dual-Directional

PFM2271000	5/16" x 2-1/4"	Vert. & Horz.	3/8"	PFM2201300	2,487	-	-	4"	1,475	-
------------	----------------	---------------	------	------------	-------	---	---	----	-------	---

*Ultimate Loads In Douglas Fir FM Load applies to vertical only

Hangermate+ For Wood - Acoustical Ceiling Screw Eyelet

PFM2251500	3/16" x 3"	Vert. & Horz.	3/16"	PFM2201350	883	-	-	-	-	-
------------	------------	---------------	-------	------------	-----	---	---	---	---	---

*Ultimate Loads In Douglas Fir

Hangermate®

Rod Hanging Anchor Approvals

APPROVALS



Hangermate+ For Steel - Vertical

CAT #	DESCRIPTION	HANG	ROD SIZE	DRIVER	MIN. THICK.	MAX. THICK.	ULTIMATE TENSILE LOAD (MATERIAL THICKNESS)	LOAD DIRECTION	PIPE SIZE	UL THICK.	PIPE SIZE	FM THICK.
PFM2231000	1/4-20 1" #3	Vert.	1/4"	PFM2201200	0.060	0.250	2,375 (0.125")	-	-	-	-	-
PFM2231100	1/4-20 x 1" #3	Vert.	3/8"	PFM2201200	0.060	0.250	2,375 (0.125")	V	4"	0.060"	-	-
PFM223110N	1/4-20 x 1" #3/nut	Vert.	3/8"	PFM2201200	0.060	0.250	4,690 (0.125")	V	4"	0.125"	4"	12 ga.
PFM2231150	1/4"-20 x 1-1/2" #5	Vert.	3/8"	PFM2201200	0.188	0.250	3,675 (0.188")	V	4"	0.060"	4"	16 ga.
PFM223115N	1/4-20 x 1-1/2" #5/nut	Vert.	3/8"	PFM2201200	0.060	0.250	5,810 (0.188")	V	4"	0.125"	4"	12 ga.
PFM2231200	1/4-20 x 1-1/2" #3	Vert.	3/8"	PFM2201200	0.188	0.250	2,375 (0.125")	V	4"	0.060"	-	-
PFM223120N	1/4-20 x 1-1/2" #3/nut	Vert.	3/8"	PFM2201200	0.060	0.250	4,690 (0.125")	V	4"	0.060"	-	-
PFM2231250	1/4-20 x 2" #3	Vert.	3/8"	PFM2201200	0.060	0.250	2,375 (0.125")	V	4"	0.125"	-	-

Hangermate+ For Steel - Horizontal

PFM2241100	1/4-20 x 1" #3	Horiz.	3/8"	PFM2201200	0.060	0.250	2,570 (0.111")	H	-	-	-	-
PFM224110N	1/4-20 x 1" # /nut	Horiz.	3/8"	PFM2201200	0.060	0.250	2,810 (0.111")	H	4"	0.060"	4"	16 ga.
PFM2241150	1/4-20 x 1-1/2" #3	Horiz.	3/8"	PFM2201200	0.060	0.250	2,570 (0.111")	H	-	-	-	-
PFM224115N	1/4-20 x 1-1/2" #3/nut	Horiz.	3/8"	PFM2201200	0.060	0.250	2,810 (0.111")	H	4"	0.060"	4"	16 ga.
PFM2241200	1/4-20 x 1-1/2" #5	Horiz.	3/8"	PFM2201200	0.060	0.500	3,530 (0.188")	H	-	-	-	-
PFM224120N	1/4-20 x 1-1/2" #5/nut	Horiz.	3/8"	PFM2201200	0.060	0.500	2,810 (0.111")	H	4"	0.060"	4"	16 ga.

Hangermate+ Pivot For Steel - Angled Applications

PFM2281150	1/4-20 x 1" #3	Variable	3/8"	PFM2201250	0.060	0.188	3,210 (0.188")	V	-	-	-	-
							975 (0.188")	45°	-	-	-	-
PFM2281200	12-20 x 1-3/4" #5	Variable	3/8"	PFM2201250	0.11	0.188	3,270 (0.188")	V	-	-	-	-
							975 (0.188")	45°	-	-	-	-
PFM2281250	1/4-14 x 1" #3	Variable	3/8"	PFM2201250	0.188	0.5	2,875 (0.188")	V	-	-	-	-
							875 (0.188")	45°	-	-	-	-

Hangermate+ Suspender For Steel - Dual-Directional

PFM227110N	1/4-20 x 1" #3/nut	Vert. & Horiz.	3/8"	PFM2201300	0.060	0.210	4,690 (0.125")	V	4"	0.060"	4"	16 ga.
								H	4"	0.060"	4"	16 ga.
PFM227120N	1/4-20 x 1-1/2" #3/nut	Vert. & Horiz.	3/8"	PFM2201300	0.060	0.210	4,690 (0.125")	V	4"	0.060"	4"	16 ga.
								H	4"	0.060"	4"	16 ga.
PFM227130N	1/4-20 x 1-1/2" # nut	Vert. & Horiz.	3/8"	PFM2201300	0.188	0.500	4,690 (0.125")	V	4"	0.060"	4"	16 ga.
								H	4"	0.060"	4"	16 ga.

Hangermate+ For Steel - Acoustical Ceiling Screw Eyelet

PFM2251500	3/16" x 2"	3/16"	PFM2201350	-	0.060	590 (0.188")	-	-	-	-	-
PFM2251550	3/16" x 3-1/4"	3/16"	PFM2201350	-	0.060	590 (0.188")	-	-	-	-	-

Loads vary depending on steel thickness.
Contact DEWALT for more information.



ANCHORS & FASTENERS

Hangermate[®]+ Rod Hanging Anchors

DeWALT LOCATIONS		Field Service	DeWALT Tool Service	Anchor Distribution Center
ALABAMA	Birmingham	205-942-0538		
	Mobile	251-602-1000		
ALASKA	Anchorage	907-561-7181		
ARKANSAS	Little Rock	501-372-3040		
ARIZONA	Phoenix	602-437-1200		
	Phoenix	602-431-8024		
CALIFORNIA	San Francisco	510-783-3959		
	Hayward	510-293-1500		
	San Diego	858-279-2011		
	Anaheim	714-414-0369		
	Sacramento	916-344-3520		
	Ontario	909-930-1437		
COLORADO	Denver	303-922-8325		
	Denver	303-922-9202		
CONNECTICUT	Hartford	860-563-5800		
FLORIDA	FL. Lauderdale	954-321-6635		
	Tampa	813-884-0434		
	Orlando	407-657-0474		
	Orlando	813-626-4500		
GEORGIA	Atlanta	770-246-1710		
	Atlanta	678-966-0000		
HAWAII	Honolulu	808-842-9925		
IOWA	Des Moines	515-270-1340		
ILLINOIS	Addison	630-521-1097		
	Addison	630-960-3156		
INDIANA	Indianapolis	317-243-8308		
	Indianapolis	317-773-1668		
KANSAS	Kansas City	913-495-4330		
	Kansas City	816-472-5033		
	Wichita	316-943-1271		
KENTUCKY	Louisville	502-380-3748		
LOUISIANA	New Orleans	504-832-2187		
	Baton Rouge	225-296-3191		
MARYLAND	Baltimore	410-536-0722		
	Capital Heights	301-333-0865		
	Baltimore / DC	301-773-1722		
MASSACHUSETTS	Boston	781-329-3407		
MICHIGAN	Grand Rapids	616-261-0425		
	Detroit	248-597-5000		
	Detroit	248-543-8600		
MINNESOTA	Minneapolis	952-884-9191		
	Minneapolis	612-331-3770		
MISSOURI	St. Louis	314-997-9100		
	Kansas City	816-472-5033		
NEVADA	Las Vegas	702-889-6025		
NEW JERSEY	Elmwood Park	201-475-3524		

DeWALT LOCATIONS		Field Service	DeWALT Tool Service	Anchor Distribution Center
NEW MEXICO	Albuquerque	505-884-1002		
NEW YORK	Buffalo	716-884-6220		
	Queens	718-335-1042		
	Rochester	585-228-2080		
	Long Island	631-952-2008		
	Albany	518-785-1867		
	New York	800-524-3244		
NORTH CAROLINA	Charlotte	704-392-0245		
	Charlotte	704-375-5012		
	Greensboro	336-852-1300		
	Raleigh	919-878-0357		
OHIO	Cleveland	440-842-9100		
	Cincinnati	513-772-3111		
	Columbus	614-895-3112		
OKLAHOMA	Oklahoma City	405-634-8403		
	Tulsa	918-249-8641		
OREGON	Portland	503-255-6556		
PENNSYLVANIA	Philadelphia	215-271-5500		
	Pittsburgh	412-642-0204		
	Allentown	610-435-9544		
	York	717-755-3441		
SOUTH CAROLINA	Charleston	843-745-9197		
	Greenville	864-299-8662		
TENNESSEE	Memphis	901-384-8100		
	Nashville	615-242-1633		
	Nashville	615-248-2667		
	Knoxville	865-688-0921		
TEXAS	Dallas	972-446-2996		
	Dallas	972-446-5985		
	Houston	713-466-1194		
	Houston	281-491-0351		
	San Antonio	210-732-1221		
	Fort Worth	817-831-3828		
	Austin	512-382-3971		
UTAH	Salt Lake City	801-486-5828		
	Salt Lake City	801-466-9428		
VIRGINIA	Virginia Beach	757-363-0091		
WASHINGTON	Seattle	206-763-2010		
	Spokane	509-535-9252		
	Seattle	425-251-0312		
WEST VIRGINIA	Charleston	304-343-0289		
WISCONSIN	Milwaukee	414-645-4285		
	Milwaukee	414-645-8821		

DeWALT, ELCO, & POWERS Anchors and Fasteners Inquiries: 800-524-3244

DeWALT, ELCO, & POWERS Anchors and Fasteners Technical Questions: email: anchors@dewalt.com

Dealer Stamp

1-800-4 DEWALT

www.DEWALT.com