




2021 PRODUCT CATALOG



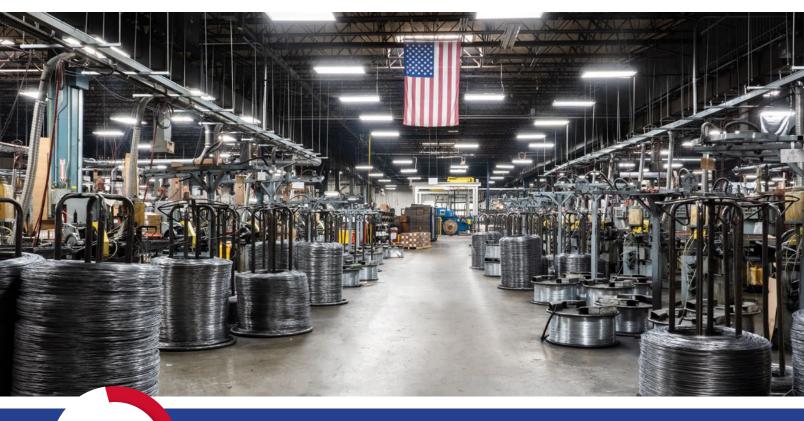

80%

OVER 80% OF THE FASTENERS WE SELL ARE MANUFACTURED IN CINCINNATI

- Steel rod purchased from US manfacturers
- Rod drawn down to exact wire gauge sizes
- ICC Certified Facility
- Clean wire process
- Each box date stamped for Quality Assurance
- All precision forming dies made in house











TABLE OF CONTENTS

See all tools at a glance in the foldout located on pages 88-90



DuraSpin Auto-Feed Screw Systems

DS225-18V, DS222-18V, DS322-18V	3
DS245-AC, DS242-AC, DS342-AC	4
DS230-S1, DS230-M1, DS230-D1, DS230-D2	5
DS320, DS425AC, DS440AC	6
SG2510, SG4100	7
Collated Screws	8-11
Screw System Accessories	12-13



Pallets & Crating

PalletPro57FXP, PalletPro100XP, PalletPro130XP	55
DFPXP, F75LXP, F75SXP	56
Fasteners	57-59



Upholstery & Furniture

SFT10XP Family	61
SFW09, NS20BXP	62
Fasteners	63-65



Finish & Woodworking

· ····································	
F-18XP, F-16XP, F-15XP, F-LXP	15
FinishPro23SXP, FinishPro23LXP	16
FinishPro21LXP, LS1XP, FinishPro18Mg, FinishPro18BMg	17
SLP20XP, FinishPro25XP, FinishPro16XP	18
FinishPro30XP, FinishPro35Mg, FinishPro42XP	19
SLS20XP, SLS25XP, SKSXP	20
SLS150Mg, SLS18Mg	21
SC1XP Senclamp, SC2 Sencor	22
Fasteners	23-29



Flooring

3	
SHF200, SLS20XP-HF	67
Fasteners	68



Air Compressors

PC1131, PC0968.	PC1280 E	201010	PC1010N	PC0947



Framing, Sheathing & Subfloors

F-35XP, F-35FRHXP	31
FramePro325XP, FramePro701XP, FramePro751XP	32
FramePro325FRHXP, FramePro702XP, FramePro752XP	33
SCN60XP, SCN65XP	34
Mini-Hand Nailer, A20 Hand Nailer	35
JN91H1, JN91H2, JN91P1, JN91P2	36
SCP40XP, PS15XP, PS20XP	37
NS20XP, NS20BXP, SNS41, SQS55XP	38
Fasteners	39-47



Air Hoses	73
Plugs & Couplers, Swivel Plugs & Swivel Couplers	74
Air Hose & Compressor Accessories, Regulators & Gauges	75
Oils & Lubricants, Safety Glasses & Tool Belt Hooks	76
Battery & Charger Systems, No-Mar Pads	77
Parts Kits	78



Product Reference

Fastener Finish Types	79
Box, Carton & Pallet Quantities - Fasteners	80-81
Item Code Index	82-85
Fasteners at a Glance	86-87
Tools at a Glance	88-90



•	looning, sluing & renoing	
_	RoofPro445XP, SCN49XP	49
	PS15RXP, BC58, A11	50
	Fasteners	51-53



DURASPIN[™]

PRODUCTIVITY REDEFINED

DuraSpin® screw systems help you get the job done up to four times faster than bulk screwdrivers and loose screws, improving jobsite productivity by more than 30%.

APPLICATIONS

Our full line of integrated tools, attachments, kits, and accessories can tackle almost any job including drywall, sub-flooring, decking, metal framing, and a variety of commercial and industrial applications. For projects with tough requirements, our wide selection of ICC and Miami-Dade certified screws will keep your job on target. Check out our next generation of DuraSpin® auto-feed screw systems with enhanced features that redefine productivity and help you get the job done faster and easier.

KEY FEATURES

- Patented corner-fit feed system for better screw placement in tight spaces and corners
- · Locking depth-of-drive adjustment
- Tool-free adjustable nosepiece
- · Easily load 50 screws in less than a second
- Trigger lock for continuous operation
- Long-lasting drive bits with quick-slide release



3

DS225-18V

2" CORDLESS 18V LI-ION 5000 RPM

ITEM #10A0001N





BRUSHLESS MOTOR

80 **Features**

2 bits included

- · High-speed, efficient brushless motor designed for drywall applications
- Features feed on return the next screw is aligned with the bit for better line of sight and more accurate screw placement
- · Patented corner fit technology
- · Includes 2 bits. 2 extended life batteries, quick charge battery charger and storage bag

PRIMARY APPLICATIONS

High Speed Applications Including Drywall to Wood or Light Steel

SECONDARY APPLICATIONS

Subfloor, Sheathing, Cement Board, Underlayment

DS222-18V

2" CORDLESS 18V LI-ION 2500 RPM





MOTOR

Features

- Selectable 2500/1600 RPM high torque efficient brushless
- · Features feed on return the next screw is aligned with the bit for better line of sight and more accurate screw placement
- · Patented corner fit technology
- Includes 2 bits, 2 extended life batteries, quick charge battery charger and storage bag

PRIMARY APPLICATIONS

High Torque Applications Including Metal Framing/Decking

SECONDARY APPLICATIONS

Crating, Gypsum/Sheathing to Steel, Decking, Subfloor

DS322-18V

3" CORDLESS 18V LI-ION 2500 RPM



Features

heavy steel

- · High torque efficient brushless motor
- · Toe nailing nosepiece Variable speed selector for
- · Features feed on return the next screw is aligned with the bit for better line of sight and more accurate screw placement
- Includes 2 bits. 2 extended life batteries, quick charge battery charger and storage bag

PRIMARY APPLICATIONS

General Applications Including Wood Decking, Tile Roofing, Crating

SECONDARY APPLICATIONS

Decking, Docks, Crating, Gypsum/ Sheathing to Steel, Tile Roofing

DURASPIN Auto-Feed Cordless Screwdrivers

Productivity Redefined

- · Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Universal toe-nailing nosepiece
- Two 3.0Ah Li-lon extended life batteries included

- Quick charge battery charger
- Tool-free screw length adustment
- · Variable speed trigger with lock and reverse
- · Adjustable belt hook



TOOL SPECS	DS225-18V	DS222-18V	DS322-18V
Speed (RPM)	0-5000	0-1600, 0-2500 (Selectable)	0-1600, 0-2500 (Selectable)
Voltage	18V	18V	18V
Weight w/ Battery	5.1 lbs (2.3 kg)	5.3 lbs (2.4 kg)	5.4 lbs (2.5 kg)
Height	9.6" (244 mm)	9.6" (244 mm)	9.6" (244 mm)
Length	13.7" (348 mm)	13.7" (348 mm)	14.5" (368 mm)
Width	3.4" (86.4 mm)	3.4" (86.4 mm)	3.4" (86.4 mm)
Warranty	5 yr	5 yr	5 yr
FASTENER SPECS		Collated screws are located on pages 8-17	
Range	1"-2"*	1"-2"*	1"-3"
Shank Diameter	#6 - #8	#6 - #12	#6 - #12
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes
Trigger	Variable with Lock	Variable with Lock	Variable with Lock
Power Type	18V 3.0 Ah Extended Life Li-Ion	18V 3.0 Ah Extended Life Li-Ion	18V 3.0 Ah Extended Life Li-Ion
Reversible	Yes	Yes	Yes

DS245-AC

2" CORDED 5000 RPM

ITEM #10D0001N





2 bits included Features

- High-speed motor designed for drywall applications
- Corner-fit feed system
- Feed on return
- Includes 2 bits and carrying bag

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Light Steel, Underlayment, Cement Board

SECONDARY APPLICATIONS

Subfloor, Wood Decking

DS242-AC

2" CORDED 2500 RPM

ITEM #10E0001N





2 bits included

00

Features

- High-torque motor for driving into dense material
- · Corner-fit feed system
- Feed on return
- Includes 2 bits and carrying bag

PRIMARY APPLICATIONS

Metal Framing, Cement Board

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Wood Decking, Composite Decking

DS342-AC

3" CORDED 2500 RPM





Features

- High-torque motor for driving into dense material
- Corner-fit feed system
- Feed on return
- Includes 2 bits and carrying bag

PRIMARY APPLICATIONS

Wood Decking, Composite Decking, Sheathing to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Metal Framing, Cement Board

DURASPIN Auto-Feed Corded Screwdrivers

Productivity Redefined

- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- · Quick slide button bit change
- Universal toe-nailing nosepiece
- Tool-free screw length adjustment
- Variable speed trigger with lock and reverse
- Screw-strip guide
- Adjustable belt hook
- Heavy duty 10' power cord

nge piece ustment h lock

TOOL SPECS	DS245-AC	DS242-AC	DS342-AC	
Speed (RPM)	0-5000	0-2500	0-2500	
Current (Amps)	6.0	6.0	6.0	
Voltage	120V/60Hz	120V/60Hz	120V/60Hz	
Weight	5.5 lbs (2.5 kg)	5.7 lbs (2.6 kg)	6.7 lbs (3.0 kg)	
Height	9.7" (246 mm)	9.7" (246 mm)	9.7" (246 mm)	
Length	16.3" (417 mm)	16.4" (417 mm)	17.2" (437 mm)	
Width	3.2" (81 mm)	3.2" (81 mm)	3.2" (81 mm)	
Warranty	5 yr	5 yr	5 yr	
FASTENER SPECS	Collated screws are located on pages 8–11			
Range	1"-2"*	1"-2"*	1"-3"	
Shank Diameter	#6 - #10	#6 - #12	#6 - #12	
TOOL FEATURES				
Depth-of-Drive	Yes	Yes	Yes	
Reversible Belt Hook	Yes	Yes	Yes	
Trigger	Variable with Lock	Variable with Lock	Variable with Lock	
Power Type	Corded	Corded	Corded	
Reversible	Yes	Yes	Yes	

DS230-S1

2" AUTO-FEED SCREWDRIVER ATTACHMENT



For SENCO Models:

•SG2510 • SG4100

PRIMARY APPLICATIONS

Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS

Metal Framing, Sheathing, Cement

DS230-M1

2" AUTO-FEED SCREWDRIVER ATTACHMENT



For MAKITA Models:

- FS2200
- XSF03 • XSF04
- FS2500 • FS4200 • FS6200
- XSF05

PRIMARY APPLICATIONS

Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS

Metal Framing, Sheathing, Cement Board

DS230-D1

2" AUTO-FEED SCREWDRIVER ATTACHMENT*



For DeWALT Models (Corded):

- DW252 DW266
- DW253 DW272
- DW255 DW276
- DW257

PRIMARY APPLICATIONS

Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS

Metal Framing, Sheathing, Cement Board

DS230-D2

2" AUTO-FEED SCREWDRIVER ATTACHMENT



For DeWALT Models (Cordless):

• DCF620

PRIMARY APPLICATIONS

Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS

Metal Framing, Sheathing, Cement Board

DURASPIN 2" Auto-Feed Screwdriver Attachments

Convert a standard screwdriver into an auto-feed screw system in seconds

- Patented corner-fit feed system
- Feed on return functionality to improve speed and reliability of drives
- Universal nosepiece for drywall and wood applications
- Easily remove attachment to access bit
- Tool-free screw length adjustment
- Supports several screwdriver models
- Precise depth of drive adjustment with depth lock



TOOL SPECS	DS230-S1	DS230-M1	DS230-D1	DS230-D2
Weight	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)
Height	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)
Length	11.0" (280 mm)	11.0" (280 mm)	10.8" (274 mm)	10.3" (262 mm)
Width	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)
Warranty	5 yr	5 yr	5 yr	5 yr
FASTENER SPECS		Collated screws are I	ocated on pages 8-11	
Range	1"-2"	1"-2"	1"-2"	1"-2"
Shank Diameter	#6 - #12	#6 - #12	#6 - #12	#6 - #12
TOOL FEATURES				
Depth-of-Drive	Yes	Yes	Yes	Yes



DS320

3" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #6W0003N



Features

- Prevent misfeeds with patented sliding rail system
- Perfect for stand-up applications using extension pole and adjustable handle
- Attaches to your screwdriver with our full line of adapters (sold separately)
- Includes 3" attachment, extension pole, adjustable handle, drywall nosepiece FC0895 and wood nosepiece FB0159

PRIMARY APPLICATIONS

Subfloor, Underlayment, Wood Decking, Composite Decking, Cement Board, Sheathing to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Metal Framing

Bits and adapters sold separately

Product Reference Chart

TOOL SPECS	DS320
Weight	3.3 lbs (1.5 kg)
Height	3.3" (84 mm)
Length	21" (533 mm)
Width	2.5" (64 mm)
Warranty	1 yr
FASTENER SPECS	Collated screws are located on pages 8-11
Range	1"-3"
Shank Diameter	#6 - #12
TOOL FEATURES	
Depth-of-Drive	Yes

Additional screwdrivers, bits and adaptors sold separately — see page 12

DS425AC

3" ATTACHMENT KIT WITH 2500 RPM SCREWDRIVER



Features

- 3 Tools in 1, providing configurations for multiple applications
- for multiple applicationsHigh-torque motor powerful enough for any application
- EZ-Load feature for quick loading
- Prevent misfeeds with patented sliding rail system
- Includes SG2510 screwdriver, DS320 attachment, adaptor, 3 bits (as shown) and storage bag

PRIMARY APPLICATIONS

Wood and Composite Decking, Cement Board, Sheathing to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Metal Framing

DS440AC

3" ATTACHMENT KIT WITH 4000 RPM SCREWDRIVER



Features

- 3 tools in 1, providing configurations for multiple applications
- High-speed motor designed for subfloor applications
- EZ-Load feature for quick loading
- Prevent misfeeds with patented sliding rail system
- Includes SG4100 screwdriver, DS320 attachment, adaptor, 3 bits (as shown) and storage bag

PRIMARY APPLICATIONS

Subfloor, Underlayment, Wood Decking, Cement Board

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel

TOOL SPECS	DS425AC	DS440AC
Speed (RPM)	0-2500	0-4000
Current (Amps)	6.5	6.5
Weight	7 lbs (3.2 kg)	6.8 lbs (3.1 kg)
Height	7.5" (191 mm)	7.5" (191 mm)
Length	20.5" (521 mm) 40" (1016 mm) w/ext. pole	20.5" (521 mm) 39.5" (1003 mm) w/ext. pole
Width	2.5" (64 mm)	2.5" (64 mm)
Warranty	1 yr	1 yr
FASTENER SPECS	Collated screws are l	ocated on pages 8-11
Range	1"-3"	1"-3"
Shank Diameter	#6 - #12	#6 - #12
TOOL FEATURES		
Depth-of-Drive	Yes	Yes
Belt Hook	Yes	Yes
Trigger	Variable with lock	Variable with lock
Power Type	Corded	Corded
Reversible	Yes	Yes

SG2510

HIGH-PERFORMANCE 2500 RPM SCREWDRIVER



- High-torque motor for driving into dense materials
- Industrial-grade metal gear housing designed to sustain heavy usage
- Great for all-day use with ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS

Composite Decking, Wood Decking, Cement Board, Sheathing to Steel, Metal Framing

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment

SG4100

HIGH-PERFORMANCE 4000 RPM SCREWDRIVER

ITEM #6X0004N



- High-speed motor designed for drywall applications
- Industrial-grade metal gear housing designed to sustain heavy usage
- Great for all-day use with ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Cement Board

SECONDARY APPLICATIONS

Wood Decking

Nosepieces and drive bits for every application:

drywall, wood, metal and metal channel.




TOOL SPECS	SG2510	SG4100
Speed (RPM)	0-2500	0-4000
Current (Amps)	6.5	6.5
Weight	3.6 lbs (1.6 kg)	3.4 lbs (1.5 kg)
Height	7.5" (191 mm)	7.5" (191 mm)
Length	12.5" (318 mm)	12" (305 mm)
Width	2.5" (64 mm)	2.5" (64 mm)
Warranty	1 yr	1 yr
TOOL FEATURES		
Depth-of-Drive	Yes	Yes
Belt Hook	Yes	Yes
Trigger	Variable with Lock	Variable with Lock
Power Type	Corded	Corded
Reversible	Yes	Yes

Finish:

COLLATED SCREWS

Drywall to Wood Screws



Drywall to Light Steel Screws

Sharp point, double thread drywall screws for fastening interior drywall to light-gauge metal studs

Gray Phosphate				ES	
		#2 Phillips	Bugle	Sharp	
Gauge	Length	Thread	Quantity	Item Code	
6	11/4"	Double Thread	1000 Tub	06B125P*	
6	11/4"	Double Thread	4000 Box	06B125PB*	
6	15/8"	Double Thread	1000 Tub	06B162P*	
6	15/8"	Double Thread	4000 Box	06B162PB*	
6	2"	Double Thread	4000 Box	06B200PB*	

Gypsum to Heavy Steel Screws

Drywall screws with self-drilling point for fastening drywall or gypsum sheathing to heavy-gauge metal studs

Finish: Clear Zinc			ES	
		#2 Phillips	Drill	
Gauge	Length	Thread	Quantity	Item Code
6	11/4"	Fine	4000 Box	06C125CB*
6	15/8"	Fine	4000 Box	06C162CB*
6	2"	Fine	4000 Box	06C200CB*

8

13/4"


6	2"	Fine	4000 Box	06C200CB*
Finish: Exterior		[]		
Gauge	Length	Thread	Quantity	Item Code
6	11/4"	Fine	1000 Box	06C125WK*
6	15/8"	Fine	1000 Box	06C162WK*
8	3"	⅔ Fine	1000 Box	08C300WK
Finish:			ICC	

Gray Phosphate		<i></i>		ES
Gauge	Length	Thread	Quantity	Item Code
6	11/4"	Fine	4000 Box	06C125PB*
6	15%"	Fine	4000 Box	06C162PB*
6	2"	Fine	4000 Box	06C200PB*



*ICC certified test data available on all highlighted items. Refer to ESR-3558 for details.

Wood to Wood Screws

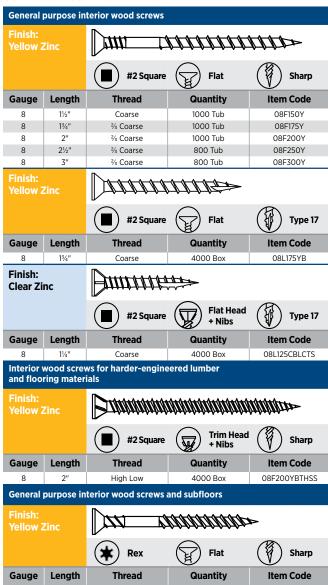

08F175YKX

2/3 Double

Double Thread, Interior Wood Screw


1000 Box

08F175YKX

- Double thread design reduces installation time while improving holding power
- · Our Rex drive provides smooth engagement with high torque transmitting capability
- · Flathead provides strong holding power

COLLATED SCREWS

Wood to Heavy Steel Screws

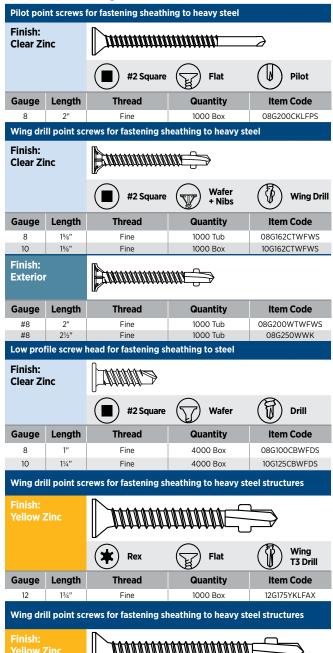

	Finish: Yellow 2	Zinc			
			Rex	Flat	Wing T5 Drill
	Gauge	Length	Thread	Quantity	Item Code
	12	2"	Fine	1000 Box	12G200YKLFCX
	12	2½"	Fine	1000 Box	12G250YKLFCX
			_		


08G250WWK Wing drill point screw

 Finish exceeds 1000 hours salt spray testing per ASTM B117

Wood to Light Steel Screws

Sharp po	Sharp point screws for fastening sheathing to light steel				
Finish: Clear Zi	Finish: Clear Zinc				
	#2 Square Flat Sharp				
Gauge	Length	Thread	Quantity	Item Code	
8	1½"	Double	1000 Tub	08G150CTLDSS	

Cement Board Screws




Decking and Dock Screws

Exterior wood screws for projects such as decks, tile roofing, fencing, siding and docks

Finish: Exterior		Dum trerrerre		
		#2 Square	Flat	Type 17
Gauge	Length	Thread	Quantity	Item Code
8	13/4"	⅔ Coarse	1000 Tub	08D175W
8	2"	⅔ Coarse	1000 Tub	08D200W**
8	21/2"	⅔ Coarse	800 Tub	08D250W**
8	21/2"	⅔ Coarse	1000 Box	08D250WK**
8	3"	⅔ Coarse	800 Tub	08D300W**
Finish:		IN.		

Finish: Stainles	ss 304	m-ammanna		The same of the sa
Gauge	Length	Thread	Quantity	Item Code
8	2½"	⅔ Coarse	800 Tub	08D250S**
9	3"	⅔ Coarse	800 Tub	09D300S**

Underlayment Wood to Wood Screws








^{**} Approved for use in Miami-Dade County FL.


COLLATED SCREWS

Composite Decking Screws

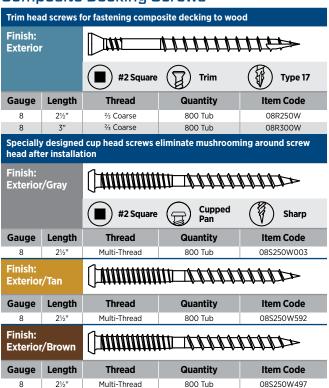




Metal to Metal Screws

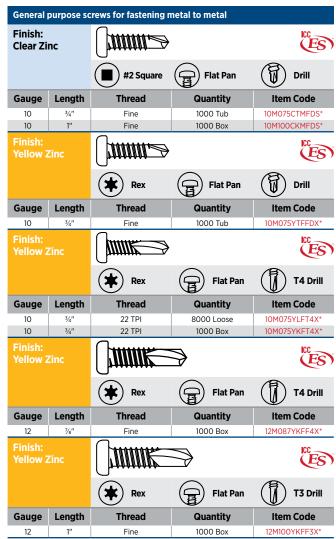



COLLATED SCREWS


Light Metal Framing Screws





- · Low profile head to reduce drywall flexing
- Higher thread count for better fastener engagement


Specialty Screws

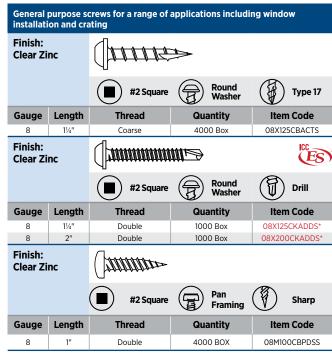



SCREW SYSTEM ACCESSORIES

Bits



Bits

Screwdriver and attachment combinations					
Bits Fit	⊕ ITEM#	☐ ITEM#	ITEM#		
SENCO SG2510 a	SENCO SG2510 and SENCO SG4100 — 2 bits per pack				
+ DS320	EA0314	EA0315	EA0316		
Makita with adap	Makita with adapters ADP019 and MB0174 — 2 bits per pack				
+ DS320	EA0314	EA0315	EA0316		
DeWalt with adapter ADP009 — 2 bits per pack					
+ DS320	EA0320	EA0321	EA0322		
For PAMFast auto-feed screw system — 25 bits per pack					
1"-3" Models	-	EA0396	EA0397		

Bit Tips

Loose screwdriver — 10 bits per pack				
Bits Fit	☼ ITEM#			
SG2510 SG4100	EA0308			

Bits-High Torque

Bits Fit	⊕ ITEM#	OITEM#	TITEM#	000
DS222-18V DS225-18V DS242-AC DS245-AC	EA0297N	EA0298N	EA0299N	
DS230	-	EA0301N	-	Ш
DS220	-	-	EA0313N	1111
DS320	-	EA0315N	EA0316N	1111

^{*}High output impact feature is designed to extend bit life in metal applications

Adapters

For attaching screwdrivers to attachments					
Screwdriver	Fits Tools		Adapter ITEM#	2	
SENCO	SG2510	SG4100	MB0173		
DeWalt	DW252 DW253 DW255 DW257	DW266 DW272 DW276	ADP009		
MAKITA	FS2200 FS2500 FS4200 FS6200	XSF03 XSF04 XSF05	ADP019		
IVIANTA	FS2701	-	MB0174		

SCREW SYSTEM ACCESSORIES

Nosepieces

<u> </u>					
For wood applications					
Fits Tools	Range	ITEM#			
DS222-18V DS225-18V DS220 DS230 DS242-AC DS245-AC	1"-2"	FB0157	184		
DS320 DS322-18V DS342-AC DS425AC DS440AC	1"-3"	FB0159			

For drywall applications				
Fits Tools	Range	ITEM#		
DS220	1"-2"	FC0878		
DS320 DS425AC DS440AC	1"-3"	FC0895		

For metal framing applications				
Fits Tools	Range	ITEM#	اما	
DS222-18V DS225-18V DS220 DS230 DS242-AC DS245-AC	½"-1"	FB0155		
DS220 DS230 DS222-18V DS225-18V DS242-AC DS245-AC	½"-1"	FC0822*		
DS320 DS322-18V DS342-AC DS425AC DS440AC	1/2"-1"	FC0887*		

For general ap	plications		
Fits Tools	Range	ITEM#	la
DS222-18V DS225-18V DS220 DS230 DS242-AC DS245-AC	1"-2"	FC1022	#
DS320 DS322-18V DS342-AC DS425AC DS440AC	1"-3"	FC1023	111111111

Rubber & Sand Paper Replacement Pads

ITEM#	Description	Quantity	Fits Nosepiece
FC0983	Round no-mar pad with adhesive	3	FC0822, FC0887
FA0334	Square non-skid pad with adhesive	3	FA0211, FB0157, FB0159



Li-Ion Batteries

The second service of the second second service of the second second service of the second service of the second second service of the second se

Battery Chargers

eries	
For use with	
VB0155 VB0190**	3 amp quick charger Battery charge indicators display charge status of your battery
For use with	
VB0155 VB0190	5 amp quick charger Upright design is ideal for wall mounting
	VB0155 VB0190** For use with

^{**}The VB0189 charger is recommended for the VB0190 battery; using the VB0156 charger will result in longer charge times.

^{*}Not recommended for screws exceeding 1"

THE DIFFERENCE IS IN THE DETAILS

Experience award-winning cordless convenience in all-day, everyday trim tools. Available in 15, 16 and 18 gauge, cordless pneumatic tools from SENCO feature a patented Fusion cordless air-power technology.

APPLICATIONS

Finish and trim, fine woodworking, cabinet, furniture, decorative trim

KEY FEATURES

- Rugged aluminum magazine
- Selectable drive switch allows for contact or sequential trigger actuation
- Nose-mounted LED light
- Adjustable belt hook
- · Thumbwheel depth-of-drive
- EZ-Clear feature for quickly clearing jams
- Includes storage bag, battery and charger

SENCO has set the industry standard for pneumatic finish and fine woodworking tools, providing compact, ultra-light, easy-to-use tools designed for precision and longevity.

We offer a broader range of tools than anyone else, covering 15–23 gauge nailers and 16–19 gauge staplers, including the industry benchmark FinishPro®42XP.

APPLICATIONS

Cabinetry, furniture, decorative trim, crown molding, custom woodworking applications and all other finish needs

KEY FEATURES

- EZ-Clear™ latch to clear jams fast
- No-mar pads to protect woodwork
- Clear line-of-sight for precision fastening
- Comfort grip
- · Adjustable depth-of-drive



F-18XP

21/8" 18 GA. CORDLESS PNEUMATIC BRAD NAILER

ITEM #10M0001N



Features

- Fusion cordless air-power technology
- Selectable actuation switch
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-15XP

 $2\frac{1}{2}$ " 15 GA.CORDLESS PNEUMATIC FINISH NAILER

ITEM #10L0001N



Features

- Fusion cordless air-power technology
- Selectable actuation switch
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-16XP

21/2" 16 GA. CORDLESS PNEUMATIC FINISH NAILER

ITEM #10N0001N



16₆

Features

- Fusion cordless air-power technology
- Selectable actuation switch
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-LXP

1 ½" 18 GA. ¼" CROWN CORDLESS PNEUMATIC FINISH STAPLER

ITEM #10Y0001N





Features

- Fusion cordless air-power technology
- Selectable actuation switch
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

Product Reference Chart

TOOL SPECS	F-18XP	F-16XP	F-15XP	F-LXP
Weight with Battery	6.6 lbs (3.0 kg)	6.7 lbs (3.1 kg)	6.8 lbs (3.1 kg)	6.8 lbs (3.1 kg)
Height	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)
Length	10.2" (259 mm)	11.6" (295 mm)	12.6" (320 mm)	10.4" (264 mm)
Width	3.9" (99 mm)	3.9" (99 mm)	5.3" (135 mm)	3.9" (99 mm)
Charge Time		80% in 15 minutes,	100% in 45 minutes	
Warranty	2 yrs	2 yrs	2 yrs	2 yrs
FASTENER SPECS		Fasteners are located	d on pages 23-25, 27	
Gauge, Gauge/Crown	18	16	15	18/1⁄4"
Range	5/8"-21/8"	3/4"-21/2"	11/4"-21/2"	3/8"-11/2"
Capacity	110	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	34° Angled Taped Strip	Straight Glued Strip
Series	AY, AX	MO	DA	L
TOOL FEATURES				
Jam Reduction Intelligence	Yes	Yes	Yes	Yes
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
EZ-Clear Jam Clearing	No	No	Yes	No
Trigger Actuation	Sequential or Contact	Sequential or Contact	Sequential or Contact	Sequential or Contact
Nose Mounted LED Light	Yes	Yes	Yes	Yes
Belt Hook	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible

15

13/8" HEADLESS PINNER

ITEM #8F0001N



Features

- Powerful ensures complete drives into hard substrates
- Automatically adjusts for different fastener lengths
- Ergonomic handle for all-day comfort
- Ultra-narrow nose for tight corners
- Includes case, swivel air plug, wrench and tool oil

FinishPro®23LXP

2" HEADLESS PINNER

ITEM #8L0001N



Features

- Most powerful tool in its class ensures complete drives into hard substrates
- · Automatically adjusts for different fastener lengths
- Ergonomic handle for all-day comfort
- Ultra-narrow nose for tight corners
- Includes case, swivel air plug, wrench and tool oil



Product Reference Chart

Todast Historians Smart				
TOOL SPECS	FinishPro®23SXP	FinishPro®23LXP		
Trigger	Sequential	Sequential		
Operating Pressure	70-100 psi (4.8-7 bar)	70-110 psi (4.8-7.6 bar)		
Air Consumption (60 CPM)	1.1 scfm	1.1 scfm		
Air Inlet	½" NPT	¼" NPT		
Weight	2.5 lbs (1.1 kg)	2.7 lbs (1.2 kg)		
Height	7.56" (192 mm)	8.89" (226 mm)		
Length	7.87" (200 mm)	7.87" (200 mm)		
Width	1.85" (44 mm)	1.85" (44 mm)		
Main Body Material Aluminum		Aluminum		
Warranty 5 yrs		5 yrs		
FASTENER SPECS	Fasteners are loc	ated on page 23		
Gauge	23	23		
Range	1/2"-13/8"	1/2"-2"		
Capacity	126	126		
Angle/Collation	Straight Glued Strip	Straight Glued Strip		
Series	A10, CZ	A10, CZ		
TOOL FEATURES				
Depth-of-Drive	No	No		
Belt Hook	Yes	Yes		
Oil-Less	No	No		
Exhaust Rear		Rear		

16

FinishPro®21LXP

2" PINNER

ITEM #8M0001N



Features

- Powerful ensures complete drives into hard substrates
- Automatically adjusts for different fastener lengths
- Ergonomic handle for all-day comfort
- Ultra-narrow nose for tight corners

• Includes case, swivel air plug, wrench and tool oil

FinishPro®18Mg

21/8" BRAD NAILER

ITEM #1U0021N



Features

- · Metal cylinder for increased durability
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- · Narrow nose for tight corners
- Includes case, swivel air plug and wrench

LS1XP

1" HEADLESS BRAD NAILER

ITEM #8N0001N



Features

- Never-Lube® design no lubrication to stain fine woods
- Ergonomic handle for all-day comfort
- · Narrow nose for tight corners

FinishPro®18BMg

21/8" BRAD NAILER

ITEM #9B0001N





Features

- Oil-free design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Nose mounted LED light illuminates dark work spaces
- Includes case, swivel air plug and wrench

TOOL SPECS	FinishPro®21LXP	LS1XP	FinishPro®18Mg	FinishPro®18BMg
Trigger	Sequential	Sequential	Selectable	Selectable
Operating Pressure	70-110 psi (4.8-7.6 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.1 scfm	1.92 scfm	2.4 scfm	1.6 scfm
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT
Weight	3.15 lbs (1.43 kg)	2.9 lbs (1.3 kg)	2.48 lbs (1.12 kg)	2.8 lbs (1.26 kg)
Height	8.89" (226 mm)	8.25" (210 mm)	9.75" (248 mm)	9.8" (248 mm)
Length	7.87" (200 mm)	9" (229 mm)	10.5" (267 mm)	10" (255 mm)
Width	1.85" (44 mm)	2" (51 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)
Main Body Material	Aluminum	Aluminum	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are loca	ted on pages 23-24	
Gauge	21	18	18	18
Range	5/8"-2"	1/2"-1"	5/8"-21/8"	5/8"-21/8"
Capacity	170	100	110	100
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	ZX	AZ	AX	AX
TOOL FEATURES				
Depth-of-Drive	No	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Fixed	Yes	Yes
Oil-Less	No	Yes	Yes	Yes
Exhaust	Rear	Fixed	Rear Adjustable	Rear Adjustable

SLP20XP

15/8" BRAD NAILER

ITEM #430101N



Features

- Never-Lube® design no oil required
- Drives both slight and medium headed brads
- Muffler ensures quieter operation
- Includes case

FinishPro®16XP

21/2" FINISH NAILER

ITEM #9S0001N



Features

- Redesigned EZ-Clear™ latch for quick and easy jam clearing
- Upgraded magazine feed system for consistent, reliable shot
- Selectable single fire and bump fire modes
- Tool free depth of drive adjustment

FinishPro®25XP

21/8" BRAD NAILER

ITEM #760102N



Features

- Never-Lube® design no oil required
- Drives both slight and medium headed brads
- Powerful ensures complete drives into hard substrates
- Includes case

Product Reference Chart

Todact Herereite	Onare		
TOOL SPECS	SLP20XP	FinishPro®25XP	FinishPro®16XP
Trigger	Sequential	Sequential	Selectable
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.22 scfm
Air Inlet	1⁄4" NPT	1/4" NPT	⅓″ NPT
Weight	2.3 lbs (1 kg)	2.7 lbs (1.2 kg)	4.0 lbs (1.8 kg)
Height	8.25" (210 mm)	9.9" (251 mm)	11.4" (290 mm)
Length	9.5" (241 mm)	9.8" (249 mm)	12" (305 mm)
Width	2" (50.8 mm)	2.2" (56 mm)	4" (102 mm)
Main Body Material	Aluminum	Aluminum	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	F	asteners are located on pages 23-2	4
Gauge	18	18	16
Range	5/8"-15/8"	5/8"-21/8"	11/4"-21/2"
Capacity	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	AX, AY	AX, AY	A4, MO
TOOL FEATURES			
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	No	Yes	Yes
Oil-Less	Yes	Yes	No
Exhaust	Fixed	Adjustable	Adjustable

18

FinishPro®30XP

2" ANGLED FINISH NAILER

ITEM #9P0002N



Features

- Never-Lube® design no oil required
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- · Adjustable depth of drive
- · Includes case and belt hook

2½" ANGLED FINISH NAILER ITEM #6G0001N



Features

- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Integrated air blower clears debris from work surface
- · Metal cylinder for increased durability

FinishPro®35Mg

• Includes case, swivel air plug and wrench

FinishPro®42XP

21/2" ANGLED FINISH NAILER

ITEM #4G0001N





Features

- ullet Never-Lube * design no oil required
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- High-strength driver with threaded connection
- · Metal cylinder for increased durability
- Includes case, belt hook and contact trigger kit

i i baabt i loi bi bi bi	o on are		
TOOL SPECS	FinishPro®30XP	FinishPro®35Mg	FinishPro®42XP
Trigger	Sequential	Selectable	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	2.16 scfm	3.2 scfm	3.87 scfm
Air Inlet	1⁄4" NPT	1⁄4" NPT	1⁄4" NPT
Weight	3.8 lbs (1.73 kg)	4.2 lbs (1.9 kg)	4.7 lbs (2.1 kg)
Height	9.63" (244.6 mm)	12.25" (311 mm)	11.25" (286 mm)
Length	12" (305 mm)	13" (330 mm)	13" (330 mm)
Width	3.25" (82.5 mm)	3.5" (89 mm)	3.5" (89 mm)
Main Body Material	Magnesium	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are located on page 25	
Gauge	15	15	15
Range	1"-2"	11/4"-21/2"	11/4"-21/2"
Capacity	104	110	104
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	34° Angled Tape Strip
Series	DA	DA	DA
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Yes	Yes
Oil-Less	Yes	Yes	Yes
Exhaust	Fixed	Adjustable	Adjustable

SLS20XP

 $\frac{3}{6}$ ", $\frac{1}{4}$ ", $\frac{3}{8}$ " CROWNS, $\frac{1}{2}$ " FINE/MEDIUM WIRE STAPLER

SEE ITEM # CHART

Features

- ullet Never-Lube * design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Muffler ensures quieter operation

SLS25XP

1/4", 3/8" CROWNS, 11/2" MEDIUM WIRE STAPLER

SEE ITEM # CHART



Features

- Never-Lube® design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Muffler ensures quieter operation

SKSXP

 $\frac{1}{4}$ ", $\frac{3}{8}$ ", $\frac{7}{16}$ " CROWNS, $\frac{1}{2}$ " MEDIUM/HEAVY WIRE STAPLER



Features

- Never-Lube® design no oil required
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Long 1" lip to get into tight spots

SLS20XP, SLS25XP and SKSXP Item Code Chart							
Model	Crown	Item Code					
SLS20XP-K	1/4"	490101N					
SLS20XP-L	1/4"	490103N					
SLS20XP-L W/CASE	1/4"	490105N					
SLS20XP-L SENCOMATIC	1/4"	490015N					
SLS20XP-M	3/8"	490107N					
SLS20XP-R	³ /16"	490111N					
SLS25XP-L	1/4"	820103N					
SLS25XP-M	3/8"	820107N					
SKSXP-L	1/4"	300120N					
SKSXP-M	3/8"	300152N					
SKSXP-N	⁷ /16"	300184N					

Product Reference Chart

TOOL SPECS	SLS20XP	SLS25XP	SKSXP
Trigger	Sequential	Contact	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.16 scfm
Air Inlet	⅓" NPT	1⁄4" NPT	1/4" NPT
Weight	2.5 lbs (1.13 kg)	2.67 lbs (1.21 kg)	4.2 lbs (1.9 kg)
Height	8.5" (216 mm)	9" (229 mm)	9.25" (238 mm)
Length	12" (305 mm)	12" (305 mm)	12.38" (314 mm)
Width	2" (50.8 mm)	2" (50.8 mm)	3" (76 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	F	asteners are located on pages 26-2	8
Gauge	19, 18	18	18, 16
Crown	³ /16", ¹ / ₄ ", ³ / ₈ "	1/4", 3/8"	1/4", 3/8", 7/16"
Range	³ / ₈ "-1 ¹ / ₂ "	3/8"-11/2"	3/4"-11/2"
Capacity	168	168	145
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	K, L, M, R	L, M	L, M, N
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	No
Belt Hook	No	No	No
Oil-Less	Yes	Yes	Yes

20

SLS150Mg ¼" CROWN, 1%6" MEDIUM WIRE STAPLER

ITEM #8C0001N



Features

- Ultra-lightweight for ease of use and maneuverability
- Nose-mounted LED light illuminates work surface
- Durable composite magazine
- Reload indicator on magazine
- Includes case and wrench

SLS18Mg ¼" CROWN, 1½" MEDIUM WIRE STAPLER

ITEM #1W0021N



Features

- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Reload indicator on magazine
- Includes case, swivel air plug and wrench

TOOL SPECS	SLS150Mg	SLS18Mg			
Trigger	Selectable	Selectable			
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)			
Air Consumption (60 CPM)	2.4 scfm	2.4 scfm			
Air Inlet	1/4" NPT	1/4" NPT			
Weight	2.6 lbs (1.8 kg)	2.6 lbs (1.8 kg)			
Height	9.5" (241 mm)	9.5" (241 mm)			
Length	10.25" (260 mm)	10.25" (260 mm)			
Width	2.5" (63.5 mm)	2.5" (63.5 mm)			
Main Body Material	Magnesium	Magnesium			
Warranty	5 yrs	5 yrs			
FASTENER SPECS	Fasteners are located on page 27				
Gauge	18	18			
Crown	1/4"	1/4"			
Range	½"-1 ⁹ /16"	3/8"-11/2"			
Capacity	110	110			
Angle/Collation	Straight Glued & Taped Strip	Straight Glued & Taped Strip			
Series	L	L			
TOOL FEATURES					
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free			
Belt Hook	Yes	Yes			
Oil-Less	Yes	Yes			

SC1XP Senclamp® %" CROWN, %" SENCLAMP® FASTENER

ITEM #220101N



Features

- Senclamp® fasteners pull the joint together during driving for a tight,
- Eliminates milling, doweling, clamping, screwing and other time-consuming, cost-adding operations
- The Senclamp high-carbon steel fastener derives added strength from its special webbed design

SC2 Sencor® 1" CROWN, ½" CORRUGATED STAPLER

ITEM #470001N




Features

- $\bullet \ {\sf Powerful-ensures} \ {\sf complete} \ {\sf drives} \ {\sf into} \ {\sf hard} \ {\sf substrates} \\$
- Eliminates gluing, milling, doweling, screwing and clamping
- Added strength for larger butt joints

Product Reference	e Chart		
TOOL SPECS	SC1XP Senclamp®	SC2 Sencor®	
Trigger	Sequential	Sequential	
Operating Pressure	80-110 psi (5.5-7.5 bar)	80-110 psi (5.5-7.5 bar)	
Air Consumption (60 CPM)	3.8 scfm	3.7 scfm	
Air Inlet	¾″ NPT	¾″ NPT	
Weight	6.3 lbs (2.8 kg)	6.9 lbs (3.1 kg)	
Height	9.8" (249 mm)	9.44" (240 mm)	
Length	12.7" (322 mm)	12.5" (318 mm)	
Width	2.5" (63.5 mm)	2" (50.8 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are loc	cated on page 29	
Gauge	25	25	
Crown	⁷ ∕16″	1"	
Range	5/16" – 9/16"	1/4"-1/2"	
Capacity	120	80	
Angle/Collation	Straight Glued & Taped Strip	Straight Glued Strip	
Series	Υ	X	
TOOL FEATURES			
Depth-of-Drive	No	No	
Belt Hook	No	No	
Oil-Less	No	No	

23° Headless Straight Strip Pins

Pins fast	Pins fasten the smallest of trim securely leaving a nearly invisible hole								
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
1/2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ08EAAN		
5/8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ10EAA		
5/8"	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ10EAAN		
3/4"	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ11EAA		
3/4"	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ11EAAN		
1"	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ13EAA		
11/4"	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ15EAA		
13/8"	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ16EAA		
1½"	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ17EAA		
2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ21EAA		
1/2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100509		
5/8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100629		
3/4"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100759		
1"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101009		
11/4"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101259		
13/8"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101379		
1½"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101509		
2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A102009		
1/2"-1"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109809*		
1"-2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109909*		



CS-Clamshell, *Variety Pack

Medium Straight Strip Head Pins

21 gauge pins offer significantly more holding power than 23 gauge pins while leaving a much smaller indent than an 18 gauge brad									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
5/8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX10EAA		
1"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX13EAA		
13/8"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX16EAA		
15/8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX18EAA		
2"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX21EAA		


CS-Clamshell

ZX10 ZX13 ZX16 ZX18 ZX21 .0294" .0294

Straight Strip Brad Nails


Cabinet	Cabinets, decorative trim, picture frames and molding									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
5/8"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX10EAA			
3/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX11EAA			
1"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX13EAA			
11/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX15EAA			
11/2"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX17EAA			
15/8"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX18EAA			
13/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX19EAA			
2"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX21EAAN			
21/8"	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX22EAAN			
1"	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201009			
11/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201259			
11/2"	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A201509			
2"	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A202009			
5/8"-11/4"	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209809*			
1-2"	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209909*			

CS-Clamshell, *Variety Pack



Headless and Slight Head Brad Nails


Cabinets, decorative trim, picture frames and molding									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
1/2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ08EAA		
3/4"	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ11EAA		
1"	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ13EAA		
5/8″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY10EAA		
3/4"	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY11EAA		
1"	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY13EAA		



Straight Strip Finish Nails

Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels										
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
3/4"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M	M001000			
1"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001001			
11/4"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001002			
11/2"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001003			
13/4"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001004			
2"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001005			
2½"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001007			
2"	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402009			


CS-Clamshell, PT-Plastic Tub



15_{GA} 34°

Angled Strip Finish Nails

Furnitur	Furniture and cabinets, molding and trim, baseboard, chair rails, doors and window casings							
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code	
1"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA13EPBN	
11/4"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA15EPBN	
1½"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA17EPBN	
13/4"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA19EPBN	
2"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA21EPBN	
21/4"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA23EPBN	
21/2"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	3M	DA25EPB	
1½"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301500	
13/4"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301750	
2"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302000	
21/2"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302500	
11/4"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA15EABN	
1½"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA17EABN	
13/4"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA19EABN	
2"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA21EABN	
21/2"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	3M	DA25EAB	
2"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302009	
21/2"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302509	
2"	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	2M	DA21EGBN	
2½"	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	1.2M	DA25EGB	
11/4"	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA15AIA	
1½"	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA17AIA	
13/4"	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA19AIA	



The Best Finish Nails in the Business.






CS-Clamshell

^{*}Hardened regular galvanized heat treated 15 Gauge for steel stud and trim applications



19° 1/4" Crown Medium Wire Staples


Cabinets	Cabinets, drawers, soffits, lattice, casebacks								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
3/4"	Chisel	Galv	Sencote	Glued	10M	K11BAB			
7/8"	Chisel	Galv	Sencote	Glued	5M	K12BAB			
1"	Chisel	Galv	Sencote	Glued	5M	K13BABN			






19 3/16" Crown Medium Wire Staples


Cabinets	Cabinets, drawers, lattice, laminated hardwood flooring									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1/2"	Blunt	Galv	Sencote	Glued	10M	R08BAB				
5/8"	Blunt	Galv	Sencote	Glued	5M	R10BAB				
3/4"	Blunt	Galv	Sencote	Glued	5M	R11BAB				
1"	Blunt	Galv	Sencote	Glued	5M	R13BAB				



18... 1/4" Crown Medium Wire Staples

Cabinets	s, caseback	cs, drawers, uph	olstery, soff	its, underlayment	, lattice and insu	lation sheathing
Length	Point	Finish	Coating	Collation	Box Count	Item Code
3/4"	Chisel	Bright	Sencote	Glued	5M	L11BRB
1"	Chisel	Bright	Sencote	Glued	5M	L13BRBN
1"	Chisel	Bright	Sencote	Glued	40M	L13BRBP
11/8"	Chisel	Bright	Sencote	Glued	5M	L14BRB
11/4"	Chisel	Bright	Sencote	Glued	5M	L15BRB
3/8"	Chisel	Galv	Sencote	Glued	10M	L06BAB
7/16"	Chisel	Galv	Sencote	Glued	24M	L07BABP
1/2"	Chisel	Galv	Sencote	Glued	10M	L08BAB
5/8"	Chisel	Galv	Sencote	Glued	5M	L10BABN
5/8"	Cross Cut	Galv	Sencote	Glued	5M	L10HABN
3/4"	Chisel	Galv	Sencote	Glued	5M	L11BAB
3/4"	Cross Cut	Galv ¹	Sencote	Glued	5M	L11HBB
3/4"	Cross Cut	Galv	Sencote	Glued	5M	L11HAB
7/8"	Chisel	Galv	Sencote	Glued	5M	L12BAB
7/8"	Chisel	Galv	Sencote	Glued	5M	L12BQB
1"	Chisel	Galv	Sencote	Glued	5M	L13BABN
1"	Cross Cut	Galv	Sencote	Glued	5M	L13HABN
11/8"	Chisel	Galv	Sencote	Glued	5M	L14BAB
11/4"	Chisel	Galv	Sencote	Glued	5M	L15BAB
11/2"	Chisel	Galv	Sencote	Glued	5M	L17BAB
5/8"	Chisel	Galv	Sencote	Glued	1.2M (CS)	A800629
3/4"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A800759
1"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A801009
11/4"	Chisel	Galv	Sencote	Glued	0.7M (CS)	A801259
11/2"	Chisel	Galv	Sencote	Glued	0.6M (CS)	A801509
1/2"-11/2"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A809909*
5/8″	Chisel	Stainless 304 ²	Plain	Glued	5M	L10BHA
3/4"	Chisel	Stainless 304	Plain	Glued	5M	L11BGA
11/8"	Chisel	Stainless 304	Plain	Glued	5M	L14BGA





CS-Clamshell, *Variety Pack


27


Galvanized High Tensile, ² Stainless 304 Steel High Tensile

18_{GA}

3%" Crown Medium Wire Staples


Cabinets	Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
5/8"	Chisel	Bright	Sencote	Glued	5M	M10BRBN				
3/4"	Chisel	Bright	Sencote	Glued	5M	M11BRBN				
1"	Chisel	Bright	Sencote	Glued	5M	M13BRB				
3/8"	Chisel	Galv	Sencote	Glued	10M	M06BABN				
1/2"	Chisel	Galv	Sencote	Glued	10M	M08BAB				
5/8"	Chisel	Galv	Sencote	Glued	5M	M10BABN				
3/4"	Chisel	Galv	Sencote	Glued	5M	M11BABN				
7/8″	Chisel	Galv	Sencote	Glued	5M	M12BAB				
1"	Chisel	Galv	Sencote	Glued	5M	M13BAB				
11/4"	Chisel	Galv	Sencote	Glued	10M	M15BAB				
1½"	Chisel	Galv	Sencote	Glued	10M	M17BAB				






16_{GA} 7/16" Crown Heavy Wire Staples

Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
3/4"	Chisel	Bright	Sencote	Glued	5M	N11BRB	_	
1"	Chisel	Bright	Sencote	Glued	5M	N13BRB		
11/8"	Chisel	Bright	Sencote	Taped	10M	N14BRB		
11/4"	Chisel	Bright	Sencote	Taped	10M	N15BRB		
13/8″	Chisel	Bright	Sencote	Taped	10M	N16BRB		
1½"	Chisel	Bright	Sencote	Taped	10M	N17BRB		
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB		
13/4"	Chisel	Bright	Sencote	Taped	10M	N19BRB	1,	
2"	Chisel	Bright	Sencote	Taped	10M	N21BRB		
1/2"	Chisel	Galv	Sencote	Taped	5M	N08BABN		
1/2"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN		
1/2"	Diverg	Galv*	Sencote	Glued	5M	N08FBB		
5/8″	Chisel	Galv	Sencote	Glued	5M	N10BAB		
3/4"	Chisel	Galv	Sencote	Glued	5M	N11BAB		
3/4"	Diverg	Galv*	Sencote	Glued	5M	N11FBB		
7/8″	Chisel	Galv	Sencote	Glued	5M	N12BABN		
7/8″	Diverg	Galv	Sencote	Glued	5M	N12FABN		
1"	Chisel	Galv	Sencote	Glued	5M	N13BAB		
1"	Diverg	Galv	Sencote	Glued	5M	N13FAB		
11/8"	Chisel	Galv	Sencote	Taped	10M	N14BAB		
11/4"	Chisel	Galv	Sencote	Taped	10M	N15BAB		
11⁄4″	Diverg	Galv	Sencote	Glued	10M	N15FAB		
13/8″	Chisel	Galv	Sencote	Taped	10M	N16BAB		
1½"	Chisel	Galv	Sencote	Taped	10M	N17BAB		
15⁄8″	Chisel	Galv	Sencote	Taped	10M	N18BAB		
13/4"	Chisel	Galv	Sencote	Taped	10M	N19BAB	1	
2"	Chisel	Galv	Sencote	Taped	10M	N21BAB		
11⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB		
1½"	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB		
13/4"	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN		
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN	_	






^{*}Galvanized High Tensile

Sencor® 1" Crown Corrugated Fastener

Butt and r	Butt and miter joints							
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
1/4"	Sharp Chisel	Bright	Plain	Glued	8M	X04NRA		
3/8"	Sharp Chisel	Bright	Plain	Glued	5M	X06NRA		
1/2"	Sharp Chisel	Bright	Plain	Glued	4M	X08NRA		




SENCOR® CORRUGATED FASTENERS

Sencor corrugated fasteners provide twice the joint strength of ordinary fasteners. Available in 1" crown and $\frac{1}{4}$ ", $\frac{3}{8}$ " and $\frac{1}{2}$ " lengths to ensure maximum joint strength. Use this fastener for butt and miter joints, truss construction, wooden boxes, pallet repair, cabinet and furniture frames.



25. Senclamp® 7/16" Crown Joint Fastener

Butt and m	Butt and miter joints							
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5/16"	Chisel	Bright	Plain	Taped	3M	Y05BFA		
⁷ / ₁₆ "	Chisel	Bright	Plain	Taped	3M	Y07BFA		
9/16"	Chisel	Bright	Plain	Taped	3M	Y09BFAN		





SENCLAMP®

JOINT FASTENERS

Senclamp has a special webbed design that draws the material together as it drives through it. Made from carbon steel, fasteners are available in 16 crown and 16 nd 16 and 16 lengths to best suit your requirements. Designed for a wide range of joint fastening applications, Senclamp secures joints better, faster and for less.

NAILING THE RIGHT BALANCE OF SIZE, WEIGHT AND POWER

We offer a large selection of pneumatic and cordless nailers for a wide variety of applications.

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets

KEY FEATURES

- Low profile designs allow for easy access between studs and joists
- Highly efficient internal design for increased durability
- Dry fire lock out prevents dry firing and signals user when to reload
- Claw-like safety for precise toe-nailing



Feat

• Fusi

• Pres

• Brus

• Inclu

batt

F-35XP

CORDLESS PNEUMATIC FRAMING NAILER

ITEM #10G0001N





Features

harge

- 34° straight-line magazine
- Fusion cordless air-power technology
- No hose, compressor or fuel cell
- Pneumatic-like response with no ramp up time
- Jam Reduction Intelligence for fewer nail jams
- Includes 2 extended life batteries, quick charge battery charger and storage bag

F-35FRHXP

CORDLESS PNEUMATIC FRAMING NAILER

ITEM #10H0001N



20

Features

- 20° in-line magazine
- Fusion cordless air-power technology
- No hose, compressor or fuel cell
- Pneumatic-like response with no ramp up time
- Jam Reduction Intelligence for fewer nail jams
- Includes 2 extended life batteries, quick charge battery charger and storage bag

Battery Platform

SENCO'S 18-Volt Li-Ion Battery System

Designed for long running times with quick recharges, the battery operates at full speed until depleted, so there is no gradual drop in power during use. Special LED fuel gauge displays battery life at the touch of a button. See the complete SENCO battery platform in the accessories section on page 77.



18V Li-Ion Battery 3.0 amp hour	Fits
VB0190	F-35XP F-35FRHXP
Battery Charger	For use with
VB0189	VB0190



1 1044011101010101	onar c		
TOOL SPECS	F-35XP	F-35FRHXP	
Trigger	Selectable	Selectable	
Technology	Fusion	Fusion	
Power Type	Cordless	Cordless	
Battery	3.0Ah / 54Wh	3.0Ah / 54Wh	
Weight (with Battery)	11.37 lbs (5.16 kg)	11.38 lbs (5.17 kg)	
Height	14.4" (366 mm)	14.4" (366 mm)	
Length	14.0" (356 mm)	14.6" (371 mm)	
Width	5.5" (140 mm)	4.7" (119 mm)	
Charge Time	80% in 30 minutes,	.00% in 60 minutes.	
Warranty	2 yrs	2 yrs	
FASTENER SPECS	Fasteners are locat	red on pages 39-42	
Range	2"-31/2"	2"-3½"	
Shank	.113"148"	.113"131"	
Capacity	60	35	
Angle/Collation	30-34° Angled Tape Strip	20-21° Angled Plastic Strip	
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GD, GL, HD, HL, KD, MD	
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	
	•		
Rafter Hook	Yes	Yes	

FramePro®325XP

31/4" PAPER TAPE FRAMING NAILER

ITEM #4Z0101N



Features

- Patented TrueDrive magazine reduces jams and misfeeds
- Efficient internal design means less wear and tear on the compressor
- · Claw-like toenail safety
- Fits easily between studs and joists

ITEM #2H0133N

- \bullet Straight-line 34° magazine for better line of sight
- · Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists
- Double length magazine conversion kit (YJ0043) also available

Features

FramePro®701XP 31/2" PAPER TAPE FRAMING NAILER

FramePro®751XP

31/2" PAPER TAPE FRAMING NAILER

ITEM #2J0103N



Features

- Straight-line 34° magazine for better line of sight
- Simple two-step loading
- · Claw-like toenail safety
- Fits easily between studs and joists
- 4" feed system conversion kit (YJ0042) also available

Magazine Retrofit Kit (Sold Separately)

Updated magazine options						
FITS TOOLS	ITEM#					
FramePro701XP	2-Nail Strip Magazine Retrofit Kit	YJ0055				
FramePro701XP	Double Length Magazine Retrofit Kit	YJ0043				
FramePro751XP	4" Nail Feed System Retrofit Kit	YJ0042				

Dry Fire Lockout

Yes

Product Reference	e Chart		
TOOL SPECS	FramePro®325XP	FramePro®701XP	FramePro®751XP
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	3/8" NPT	3/8" NPT	³%″ NPT
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	8.4 lbs (3.8 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	15.13" (384 mm)	15.13" (384 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fas	teners are located on pages 39-40	
Range	2"-31/4"	2"-3½"	2"-3½"
Shank	.113"148"	.113"148"	.113"148"
Capacity	83	70	70
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	34° Angled Tape Strip
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC, LC ProHead G5, G6, H5, H6, K5, K6
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Rafter Hook	Yes	Yes	Yes

FramePro®325FRHXP

31/4" FULL ROUND HEAD FRAMING NAILER



Features

- Patented TrueDrive magazine reduces jams and misfeeds
- Effective internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists

FramePro®752XP

31/2" FULL ROUND HEAD FRAMING NAILER



Features

- \bullet 20° in-line magazine provides excellent maneuverability and line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists

Product Reference Chart

FramePro®702XP

31/2" FULL ROUND HEAD FRAMING NAILER



Features

- 20° in-line magazine provides excellent maneuverability and line of sight
- · Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists

TOOL SPECS	FramePro®325FRHXP	FramePro®702XP	FramePro®752XP
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	¾″ NPT	¾" NPT	3/8" NPT
Weight	7.9 lbs (3.58 kg)	8.4 lbs (3.8 kg)	8.7 lbs (3.97 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	20" (508 mm)	20" (508 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 41-42		
Range	2"-31/4"	2"-3½"	2"-3½"
Shank	.113"148"	.113"148"	.120"162"
Capacity	64	60	60
Angle/Collation	20° Angled Plastic Strip	20° Angled Plastic Glued Strip	20° Angled Plastic Strip
Series	GD, GL, HD, HL, HK, KD, KL, MD	GD, GL, HD, HL, KD, MD	GD, GL, HD, HL, KD, MD
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes- Tool Free	Yes, Tool-Free
Rafter Hook	Yes	Yes	Yes
Dry Fire Lockout	Yes	Yes	Yes

33

34

SCN6OXP

2¾" COIL NAILER

ITEM #520101N



Features

- High load capacity
- EZ-Load design saves time
- Fast cycle time increases productivity
- Lightweight for comfortable all-day use



31/2" COIL NAILER

ITEM #540101N - FLAT SAFETY; 540104N - TOENAIL SAFETY



- Features • High load capacity
- EZ-Load design saves time
- Fast cycle time increases productivity

- Light and fast for greater productivity

Product Reference	e Chart		
TOOL SPECS	SCN60XP	SCN65XP	
Trigger	Contact	Contact	
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	
Air Consumption (60 CPM)	8.29 scfm	9.54 scfm	
Air Inlet	³%″ NPT	³⁄₅" NPT	
Weight	7.5 lbs (3.4 kg)	8 lbs (3.6 kg)	
Height	12.38" (314 mm)	14.1" (359 mm)	
Length	12.88" (327 mm)	12.88" (327 mm)	
Width	5.38" (137 mm)	5.38" (137 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are located on pages 42-44		
Range	2"-23/4"	2"-3½"	
Shank	.099"113"	.099"131"	
Capacity	250–275	225-275	
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	
Series	BK, BL, BT, GD, GL, HR	BJ, BK, BL, BT, GD, GL, HD, HK, HL, KD	
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	
Rafter Hook	No	No	
Dry Fire Lockout	No	No	

Mini Hand Nailer

2"-31/2" BULK NAILER

ITEM #PC1195



Features

- Compact and powerful enough to drive 2"-3½" bulk nails
- Magnetic nose holds nail in place for safe, accurate placement
- Ultra-light at just 1 pound

A20 Hand Nailer

2"-7" BULK NAILER

ITEM #PC0781



Features

- Drives bulk nails from 2"-7"
- Soft rubber palm pad for comfortable grip
- Magnetic nose holds nail in place for safe, accurate placement
- Includes leather strap for comfort

TOOL SPECS	Mini Hand Nailer	A20 Hand Nailer			
Trigger	-	_			
Operating Pressure	60-110 psi (4-7.6 bar)	50-125 psi (3.5-8.4 bar)			
Air Consumption (60 CPM)	2-4 scfm	2-4 scfm			
Air Inlet	¼" NPT	³%″ NPT			
Weight	1 lb (.45 kg)	2.4 lbs (1.1 kg)			
Height	4" (101 mm)	5.8" (122 mm)			
Length	2.75" (70 mm)	4" (101 mm)			
Width	2" (55.6 mm)	3.25" (83 mm)			
Main Body Material	Aluminum	Aluminum			
Warranty	1 yr	1 yr			
FASTENER SPECS	Fasteners are located on page 45				
Range	Bulk nails from 2"-31/2"	Bulk nails from $2''-3\frac{1}{2}''$ up to 7" with opt. guide tips			
Shank	_	.113"148"			
Capacity	1	1			
Angle/Collation	_	_			
Series	_	_			
TOOL FEATURES					
Depth-of-Drive	_	_			
Rafter Hook	_	_			
Dry Fire Lockout	-	-			



- · Lightweight and well-balanced for comfortable all day use
- · Power to drive through engineered lumber
- Leads with the nail to locate metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91P1

11/2"-21/2" METAL CONNECTOR NAILER





Features

- Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Nosepiece probe locates metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91H2

11/2" METAL CONNECTOR NAILER



Features

- Extended magazine holds two racks of nails
- · Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Leads with the nail to locate metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91P2

11/2"-21/2" METAL CONNECTOR NAILER





Features

- Extended magazine holds two racks of nails
- Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Nosepiece probe locates metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners

Product Reference Chart

Product Reference Chart								
TOOL SPECS	JN91H1	JN91H2	JN91P1	JN91P2				
Trigger	Sequential	Sequential	Sequential	Sequential				
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8 - 8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8 - 8.3 bar)				
Air Consumption (60 CPM)	4.4 scfm	4.4 scfm	6.4 scfm	6.4 scfm				
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT				
Weight	5.48 lbs (2.48 kg)	5.8 lbs (2.63 kg)	7.53 lbs (3.41 kg)	7.92 lbs (3.59 kg)				
Height	12.5" (317 mm)	12.5" (317 mm)	14.38" (365 mm)	14.38" (365 mm)				
Length	11.13" (282 mm)	17.86" (453 mm)	14" (355 mm)	19" (482 mm)				
Width	4.38" (111 mm)	4.88" (123 mm)	5.25" (133 mm)	6.13" (155 mm)				
Main Body Material	Magnesium	Magnesium	Magnesium	Magnesium				
Warranty	5 yrs	5 yrs	5 yrs	5 yrs				
FASTENER SPECS		Fasteners are loc	cated on page 45					
Range	1½"	1½"	1½"-2½"	1½"-2½"				
Shank	.131"148"	.131"148"	.131"162"	.131"162"				
Capacity	30	55	35	55				
Angle/Collation	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip				
Series	KJ, MD	KJ, MD	KJ, MD, ND	KJ, MD, ND				
TOOL FEATURES								
Depth-of-Drive	No	No	Yes	Yes				
Rafter Hook	Yes	Yes	Yes	Yes				
Dry Fire Lockout	Yes	Yes	Yes	Yes				

36

37

SCP40XP

11/2" STANDARD PRESSURE PNEUMATIC CONCRETE & STEEL PINNER





Features

- 10 times faster than powder-actuated systems
- · No licensing required to operate
- Works with conventional air compressors, hoses and fittings
- Operates at extreme temperatures and altitudes

PS20XP

1" WIDE CROWN, 2" HEAVY WIRE STAPLER





Features

- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- Updated aggressive locking feature provides superior holding power for complete control of the fastener, offering pinpoint accuracy and unrivaled driveability
- New drive track design eliminates movement of the staple, enhancing overall drive performance and virtually eliminating fastener jams, skipping and

PS15XP

1" WIDE CROWN, 11/2" HEAVY WIRE STAPLER

ITEM #9T0001N



Features

- \bullet Enhanced EZ-Clear $^{\scriptscriptstyle\mathsf{TM}}$ latch allows for quick access to clear fasteners and a new locking feature offers pinpoint accuracy and unrivaled driveability
- Updated drive track eliminates staple movement, virtually eliminating jams
- Robust firing valve design makes the tool fast, powerful and efficient
- Positive-locking adjustable depth-of-drive ensures consistently flush drives

Concrete Pinner

Plaster, stucco & building wrap fastening attachment							
	Fits Tools	Range	ITEM#				
SENCO	SCP40XP	11⁄4″	NPC035	Magnetic washer nosepiece			

Galvanized Metal Washer

ITEM#	Diameter	Box Count	Fits SCP40XP, GT40CP
SWM125B	11/4"	1M	.109" Dia. Concrete Pins
		000	

Feed System Retrofit Kit (Sold Separately)

	
Updated feed system option	
CONVERTS	ITEM#
WC150 to PS15XP	YJ0044

TOOL SPECS	SCP40XP	PS15XP	PS20XP	
Trigger	Selectable	Contact	Contact	
Operating Pressure	80-120 psi (5.5-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	
Air Consumption (60 CPM)	5.2 scfm	3.18 scfm	3.45 scfm	
Air Inlet	3%" NPT	3⁄8″ NPT	3⁄8″ NPT	
Weight	7.1 lbs (3.2 kg)	5.5 lbs (2.5 kg)	5.5 lbs (2.5 kg)	
Height	12.22" (310 mm)	9" (229 mm)	10" (254 mm)	
Length	18.2" (462 mm)	15.25" (387 mm)	15.25" (387 mm)	
Width	4.5" (114.4 mm)	5.5 lbs (2.5 kg)	3.5" (89 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS	F	asteners are located on pages 45-4	7	
Shank/Crown	.109"/.118" Shanks	1" Crown	1" Crown	
Range	1/2"-11/2"	5/8"-11/2"	½″−2″	
Capacity	42	160	160	
Angle/Collation	Straight Plastic Collated Strip	Taped and taped glued	Straight Glued and Taped Strip	
Series	W3	Р	Р	
TOOL FEATURES				
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free	
Belt Hook	No	Yes	Yes	
Dry Fire Lockout	Yes	No	No	

NS20XP

7/16" CROWN, 2" HEAVY WIRE STAPLER

ITEM #9X0001N



Features

- 15% more powerful than all other construction staplers in its class
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- Updated aggressive locking feature
- Drive track design eliminates movement of the staple
- Can also be used for vinyl siding installation (item number HC0788 required, sold separately)

SNS41

7/6" CROWN, 2" HEAVY WIRE STAPLER

ITEM #3L0003N

Features

- Durable construction minimizes downtime and operating costs
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Fast, multidirectional stitching

NS20BXP

7/16" CROWN, HEAVY WIRE STAPLER

ITEM #9Y0001N



Features

- 20% more powerful than the standard NS20XP for the most demanding applications
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- · Updated aggressive locking feature
- Can also be used for vinyl siding installation (item number HC0788 required, sold separately)

SQS55XP

1/16" CROWN, 21/2" HEAVY WIRE STAPLER

ITEM #660101N



15

Features

- Fast up to 15 staples per second
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- · Rugged dependability


Product Reference Chart								
TOOL SPECS	NS20XP	NS20BXP	SNS41	SQS55XP				
Trigger	Contact	Contact	Contact	Contact				
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	80-120 psi (5.5-8.3 bar)	80-120 psi (5.5-8.3 bar)				
Air Consumption (60 CPM)	3.5 scfm	3.98 scfm	5.4 scfm	6.54 scfm				
Air Inlet	3%" NPT	3%" NPT	3%" NPT	3%" NPT				
Weight	5.1 lbs (2.3 kg)	5.8 lbs (2.6 kg)	4.6 lbs (2.1 kg)	5.9 lbs (2.7 kg)				
Height	11" (279 mm)	11" (279 mm)	10.75" (273 mm)	12" (305 mm)				
Length	15" (381 mm)	15" (381 mm)	15" (381 mm)	14.38" (365 mm)				
Width	3.5" (89 mm)	4" (102 mm)	3.4" (86 mm)	3.6" (92 mm)				
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum				
Warranty	5 yrs	5 yrs	5 yrs	5 yrs				
FASTENER SPECS		Fasteners are locate	ed on pages 46-47					
Crown	7/16″	7/16"	7/16"	7/16"				
Range	1"-2"	1"-2"	1"-2"	11/4"-21/2"				
Capacity	160	160	160	130				
Angle/Collation	Straight Glued and Taped Strip							
Series	N, O	N, O	N, O	Q				
TOOL FEATURES								
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Required	Yes, Tool-Required				
Belt Hook	Yes	Yes	No	No				
Dry Fire Lockout	No	No	No	No				

39

FRAMING, SHEATHING & SUBFLOOR FASTENERS


ProHead® Smooth Paper Tape Nails

Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
23/8" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G524APBXN		
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H527APBXN		
31/4" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H528APBXN		
2½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2M	K525APBXN		
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K527APBXN		
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K527APBXR		
31/4" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K528APBXN		
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K528APBXR		
3½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K529APBXN		
2 ³ / ₈ " x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G524ASBXN		
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K527ASBXN		
31/4" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K528ASBXN		

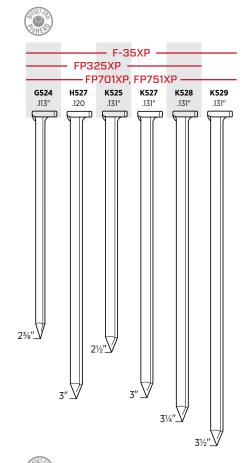

ProHead® Ring Paper Tape Nails


Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G624APBXN		
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H627APBXN		
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K628APBXN		
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G621ASBXN		
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G624ASBXN		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	H627ASBXN		
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K627ASBXN		
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K628ASBXN		
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K629ASBXN		

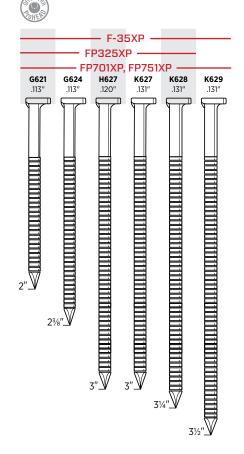

34° Smooth Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
21/4" x .113"	Diamond	Bt. Hardened	Plain	34° Paper Tape Strip	1M	GC23AHAK		
2" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC21APBX		
23/8" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC24APBX		
2½" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC25APBX		
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC27APBX		
3¼" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC28APBX		
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC27APBX		
31/4" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC28APBX		
3½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC29APBX		
3½" x .135"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	LC29APBX		
4" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC31APBX*		
23/8" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GC24ASBX		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HC27ASBX		
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC27ASBX		
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC28ASBX		
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC29ASBX		
3" x .131"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC27AGBK		
31/4" x .131"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC28AGBK		

^{*}FramePro*751XP can drive 4 inch nails when fitted with the YJ0042 kit

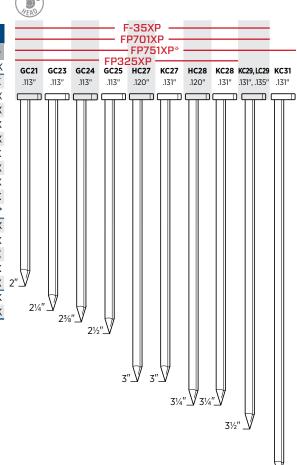


34° Ring Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .113"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	GE21APAX			
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GE24APBX			
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE21ASBX			
23/8" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE24ASBX			
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HE27ASBX			
23/8" x .113"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	GE24AGBK			

Screw Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
3" x .120"	Chisel	Bright	Plain	34° Paper Tape Strip	3.1M	HF27EPAK		
3" x .120"	Chisel	Bright	Sencote	34° Paper Tape Strip	1M	HF27EDB		

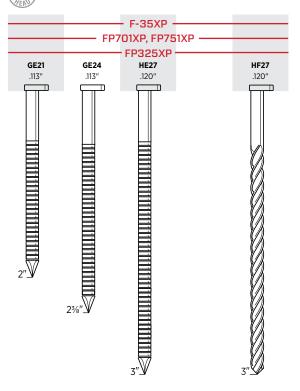


41


FRAMING, SHEATHING & SUBFLOOR FASTENERS

20° Smooth Shank Plastic Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2¾" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD24APBSN		
2½" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD25APBSN		
2½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD25APBSN		
3" x .120"	Diamond	Bright	Sencote	20° Plastic Strip	4M	HD27APBSN		
3" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD27APBSN		
3" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD27APBSN		
3¼" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD28APBSN		
3¼" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD28APBSN		
3½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD29APBSN		
23/8" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GD24ASBS		
2½" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GD25AABSN		
2½" x .120"	Diamond	Exterior	Sencote	20° Plastic Strip	2.3M	HJ25ADBS*		
2½" x .131"	Diamond	Galv	Sencote	20° Plastic Strip	2.5M	KD25AABS		
3" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD27ASBS		
3¼" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD28ASBS		
3½" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD29ASBS		
3¼" x .131"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	KD28AGBS		


Roof tile nails, drive with FramePro 725XP or SN952XP

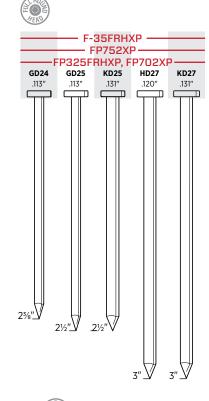

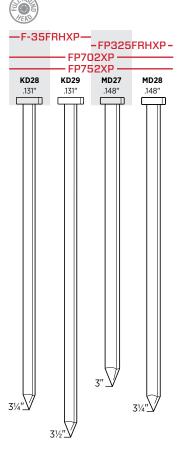

20° Ring Shank Plastic Collated Nails

Framing, sh	Framing, sheathing, subfloor, decks, trusses and pallets										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
2" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL21APBSN					
23/8" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL24APBSN					
2" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL21ASBS					
23/8" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GL24AABSN					
23/8" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL24ASBS					
3" x .120"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	HL27ASBS					
23/8" x .113"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	GL24AGBS					
3" x .120"	c.120" Diamond Sta		Sencote	20° Plastic Strip	1M	HL27AGBS					




15° Ring Shank Subflooring Nails

Superior fa	Superior fastening in subfloor applications										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
2" x .099"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF					
23/8" x .113"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	GT24APBF					
2½" x .131"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	KT25APBF					

Subfloor and Sheathing Coil Nails

- Superior fastening in floor applications
- Tested and proven to reduce squeaky subfloors, uneven surfaces, and raised nail heads
- Unique double rings shank design reduces the potential of nails backing out, one of the most common flooring problems




43

FRAMING, SHEATHING & SUBFLOOR FASTENERS


Smooth Shank Coil Nails

Framing, sheathing, pallets, subfloor, decks and trusses									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF			
2½" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF			
2½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF			
3" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF			
3¼" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF			
3½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF			
5" x .148"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF			
2" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF			
2½" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF			
3" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF			
3¼" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF			

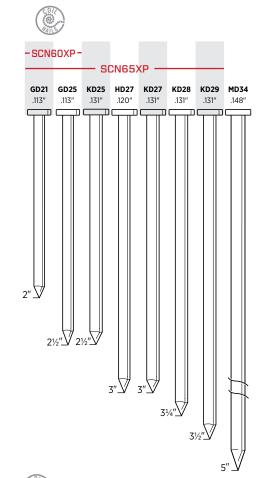


15° Ring Shank Coil Nails

Framing, sheathing, pallets, subfloor, decks and trusses									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF			
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF			
23/8" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF			
21/4" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF			
2¾" x .113"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF			
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF			
2¾" x .113"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF			

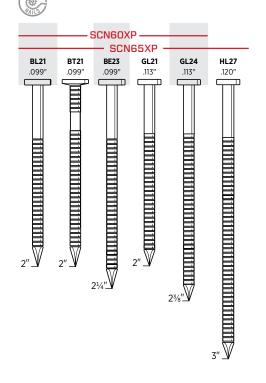

15° Screw Shank Coil Nails

Framing, sheathing, pallets, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN		
21/4" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN		
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN		
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN		



15° Smooth Shank Stiff-Stock Coil Nails

For fastenin	For fastening wood to masonry									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1½" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3M	M003011				


Duplex Smooth Shank Coil Nails*

Framing, trusses, crating and concrete forms								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
21/8" x .120"	Diamond	Bright	Plain	15° Flat Wire Welded Coil	5.4M	HR22APAF		
2 ⁷ / ₈ " x .120"	Diamond	Bright	Plain	15° Flat Wire Welded Coil	3.6M	HR74APAF		

*Requires a special-order modified SCN60XP tool (order XA1739)

Drywall Ring Shank Bugle Head Coil Nails

For fastenin						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .099"	Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG17AAAQ
15/8" x .099"	Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG18AAAQ

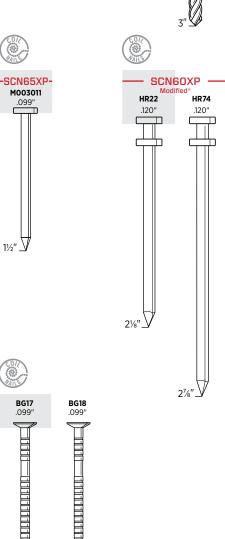


W3150YXC

0°

Collated Concrete and Steel Pins

For fastening drywall track, wood furring, hat channels, metal washers or ceiling grid to concrete, concrete block and steel									
	Length	Point	Finish	Coating	Collation	Box Count	Item Code		
	½" x .109"/.118"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3050YXS		
	3/4" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3075YXC		
	1" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3100YXC		
	1¼" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3125YXC		

Straight Plastic Collated Strip



34°

1½" x .109"

Hardened Metal Connector Nails

Plain


Pinched Zinc Plated

Joist hangers, foundation anchors, seismic and hurricane straps and ties								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	3M	MD17AQBD		
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	MD25AQBDN		
2½" x .162"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	ND25AQBDN		
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	3M	MD17AJBDN		
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2.5M	MD25AJBDN		
2½" x .162"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	ND25AJBDN		

34°

Heat Treated Metal Connector Nails


Joist hangers, foundation anchors, seismic and hurricane straps and ties								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	KJ17AHBD		
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	MD25AHBD		
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	KJ17AEBD		



34°

Non-Heat Treated Metal Connector Nails

Standard tensile, non-hardened nails for use in joist hangers, foundation anchors, seismic and hurricane straps and ties									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002261			
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002263			
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	M002265			
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002262			
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002264			
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.5M	M002266			

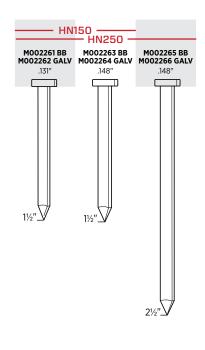


16_{GA}

1" Crown Heavy Wire Staples

Sheathing, house wrap, composite roofing, roofing felt, corrugated containers, foam insulation board, furniture/cabinet frames and butt joints

Length	Point	Finish	Coating	Collation	Box Count	Item Code
3/8"	Chisel	Galv	Plain	Glued	10M	P06BAA*
1/2"	Chisel	Galv	Sencote	Taped	10M	P08BABT*
5/8"	Chisel	Galv	Sencote	Taped	10M	P10BAB*
5/8"	Divergent	Galv	Sencote	Glued	10M	P10FAB*
5/8"	Chisel	Galv	Coated	Glued	10M	P10BPE*
3/4"	Chisel	Galv	Sencote	Taped	10M	P11BAB
3/4"	Chisel	Galv	Coated	Glued	10M	P11BPE
7/8"	Chisel	Galv	Sencote	Taped	10M	P12BAB
1"	Chisel	Galv	Sencote	Taped	10M	P13BAB
1"	Chisel	Galv	Sencote	Glued	10M	P13BPE
11/4"	Chisel	Galv	Sencote	Taped	10M	P15BAB
11/4"	Chisel	Galv	Coated	Glued	10M	P15BPE
1½"	Chisel	Galv	Sencote	Taped	10M	P17BAB
13/4"	Chisel	Galv	Sencote	Taped	5M	P19BAB
2"	Chisel	Galv	Sencote	Taped	5M	P21BAB
1"	Outside Chisel	Stainless 304	Sencote	Taped	5M	P13BGBN

^{*}Use kit #YK0883 with PS15XP for 3%"-5%" staples

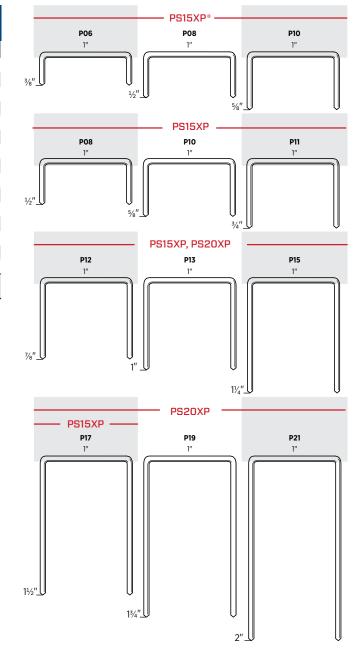




7/16" Crown Heavy Wire Staples*

Sheathing, subfloor, furniture frames and crates										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
11/4"	Chisel	Bright	Sencote	Glued	21.12M	O15BRBBN				
13/8"	Chisel	Bright	Sencote	Glued	17.6M	O16BRBBN				
11/2"	Chisel	Bright	Sencote	Glued	17.6M	O17BRBBN				
15/8"	Chisel	Bright	Sencote	Glued	17.6M	O18BRBBN				
1¾"	Chisel	Bright	Sencote	Glued	14.08M	O19BRBBN				

*Compatible with NS20XP, NS20BXP, SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.

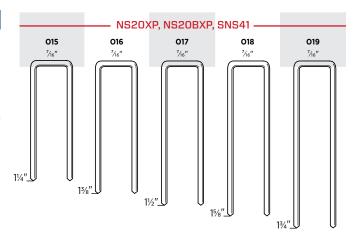

SNS41, NS20XP, NS20BXP —

N14

N12

N11


N10

N08

FRAMING, SHEATHING & SUBFLOOR FASTENERS

16_{ca} _{7/16}" Crown Heavy Wire Staples


Sheathing, soffits, underlayment, lattice, cabinets, casebacks and drawers									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
3/4"	Chisel	Bright	Sencote	Glued	5M	N11BRB			
1"	Chisel	Bright	Sencote	Glued	5M	N13BRB			
11/8"	Chisel	Bright	Sencote	Taped	10M	N14BRB			
11/4"	Chisel	Bright	Sencote	Taped	10M	N15BRB			
13/8″	Chisel	Bright	Sencote	Taped	10M	N16BRB			
11/2"	Chisel	Bright	Sencote	Taped	10M	N17BRB			
15/8″	Chisel	Bright	Sencote	Taped	10M	N18BRB			
13/4"	Chisel	Bright	Sencote	Taped	10M	N19BRB			
2"	Chisel	Bright	Sencote	Taped	10M	N21BRB			
1/2"	Chisel	Galv	Sencote	Glued	5M	N08BABN			
1/2"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN			
1/2"	Diverg	Galv*	Sencote	Glued	5M	N08FBB			
5/8"	Chisel	Galv*	Sencote	Glued	5M	N10BAB			
3/4"	Chisel	Galv	Sencote	Glued	5M	N11BAB			
3/4"	Diverg	Galv*	Sencote	Glued	5M	N11FBB			
7/8"	Chisel	Galv	Sencote	Glued	5M	N12BABN			
7/8"	Diverg	Galv	Sencote	Glued	5M	N12FABN			
1"	Chisel	Galv	Sencote	Glued	5M	N13BAB			
1"	Diverg	Galv	Sencote	Glued	5M	N13FAB			
11/8"	Chisel	Galv	Sencote	Taped	10M	N14BAB			
11/4"	Chisel	Galv	Sencote	Taped	10M	N15BAB			
11/4"	Diverg	Galv	Sencote	Glued	10M	N15FAB			
13/8"	Chisel	Galv	Sencote	Taped	10M	N16BAB			
11/2"	Chisel	Galv	Sencote	Taped	10M	N17BAB			
15/8″	Chisel	Galv	Sencote	Taped	10M	N18BAB			
13/4"	Chisel	Galv	Sencote	Taped	10M	N19BAB			
2"	Chisel	Galv	Sencote	Taped	10M	N21BAB			
11/4"	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB			
11/2"	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB			
13/4"	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN			
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN			



*Galvanized High-Tensile Steel

15_{ca} 7/16" Crown Heavy Wire Staples

	Framing, sheathing, subflooring, decking, lathing, door and window units, fencing, pallets, crate and box assembly, furring and furniture framing										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
1½"	Chisel	Bright	Sencote	Taped	5M	Q17BRB					
13/4"	Chisel	Bright	Sencote	Taped	5M	Q19BRB					
2"	Chisel	Bright	Sencote	Taped	5M	Q21BRB					
21/4"	Chisel	Bright	Sencote	Taped	5M	Q23BRB					
21/2"	Chisel	Bright	Sencote	Taped	5M	Q25BRB					
11/4"	Chisel	Galv	Sencote	Taped	5M	Q15BAB					
1½"	Chisel	Galv	Sencote	Taped	5M	Q17BAB					
1¾"	Chisel	Galv	Sencote	Taped	5M	Q19BAB					
2"	Chisel	Galv	Sencote	Taped	5M	Q21BAB					
21/2"	Chisel	Galv	Sencote	Taped	5M	Q25BAB					
13/4"	Chisel	Stainless 304	Sencote	Taped	2.2M	Q19BGBN					
2½"	Chisel	Stainless 304	Sencote	Taped	1M	Q25BGBN					



WE COVER IT ALL

When it comes to roofing applications or installing siding, uptime is everything. SENCO has designed a full line of tools and fasteners to maximize your productivity.


Our RoofPro[™]445XP with its innovative firing valve uses 5% less air. A bi-metal driver blade increases durability. And our power in, power out feed system is air driven for stability and speed.

APPLICATIONS

SENCO offers a variety of coil nailers and crown staplers with fasteners optimized for different types of shingles, siding, sheathing, and felt underlayment.

KEY FEATURES

- High-strength housings
- Long-lasting wear plates
- Easy, one-handed operation
- Adjustable depth-of-drive

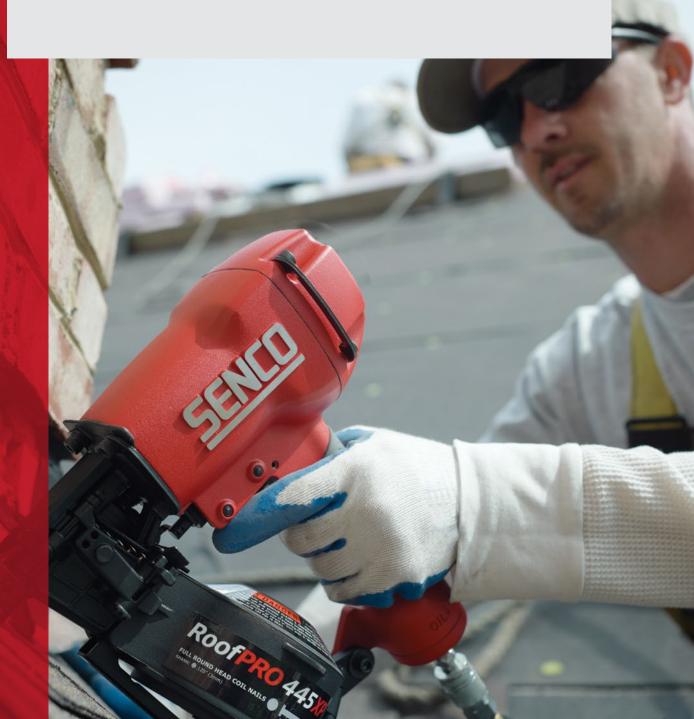

RoofPro™445XP

1¾" COIL NAILER

ITEM #8V0001N





Features

- · Innovative firing valve reduces air consumption without compromising power
- · Bi-metal driver blade reduces wear and improves durability
- Power in, power out feed system improves speed and delivers consistent drives
- Metal wear plate in nail canister reduces wear and helps improve nail feed
- Adjustable and removable shingle guide

SCN49XP

21/2" COIL NAILER

ITEM #5J0001N





Features

- Well balanced and lightweight
- Dual collation allows choice between wire or plastic collation
- · High load capacity



It doesn't cost a bundle to drive the very best.



TOOL SPECS	RoofPro™445XP	SCN49XP		
Trigger	Contact	Selectable		
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	3.86 scfm	3.9 scfm		
Air Inlet	1/4" NPT	3/6" NPT		
Weight	5.2 lbs (2.35 kg)	5.1 lbs (2.31 kg)		
Height	10.9" (276 mm)	12" (304 mm)		
Length	10.6" (269 mm)	12.25" (314 mm)		
Width	4.5" (114 mm)	5.19" (132 mm)		
Main Body Material	Aluminum	Magnesium		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are loca	ted on pages 51–52		
FASTENER SPECS Range	Fasteners are loca	ted on pages 51-52 1¼"-2½"		
Range	3/4"-13/4"	11/4"-21/2"		
Range Shank	3/4"-13/4" .120"	1¼"-2½" .082"092"		
Range Shank Capacity	³ / ₄ "-1 ³ / ₄ " .120" 120	1½"-2½" .082"092" 250-375 15° Flat Wire Welded		
Range Shank Capacity Angle/Collation	3/4"-13/4" .120" 120 15° Flat Wire Welded Coil	1¼"-2½" .082"092" 250-375 15° Flat Wire Welded or Plastic Carrier Coil		
Range Shank Capacity Angle/Collation Series	3/4"-13/4" .120" 120 15° Flat Wire Welded Coil	1¼"-2½" .082"092" 250-375 15° Flat Wire Welded or Plastic Carrier Coil		
Range Shank Capacity Angle/Collation Series TOOL FEATURES	3/4"-13/4" .120" 120 15° Flat Wire Welded Coil HJ, M00	1½"-2½" .082"092" 250-375 15° Flat Wire Welded or Plastic Carrier Coil ED, EL, SE		

PS15RXP

1" CROWN 11/2" ROOFING STAPLER



Features

- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- New aggressive locking feature offers pinpoint accuracy and unrivaled driveability
- accuracy and unrivaled driveabilityUpdated drive track eliminates staple movement,
- Positive-locking adjustable depth-of-drive ensures consistently flush drives
- Hardened wear plates and safety protect tool from shingle damage

BC58

1/2" CROWN 5/8" STAPLE + 1" CAP



Features

- EZ-Load system for staples and caps
- Ultra-lightweight for ease of use and maneuverability
- Balanced and fast for greater productivity
- Side-mounted cap collator holds caps regardless of tool position

A11

7/16" CROWN 3/8" HAMMER STAPLER

ITEM #PC0700





Features

- Rugged all-steel construction
- Easy to service and maintain
- Comfortable fluted handle with grip


Product Reference Chart								
TOOL SPECS	PS15RXP	BC58	A11					
Trigger	Contact	Contact	_					
Operating Pressure	70-120 psi (4.8-8.3 bar)	60-95 psi (4.1-6.5 bar)	_					
Air Consumption (60 CPM)	3.18 scfm	.77 scfm	_					
Air Inlet	¾" NPT	1/4" NPT	_					
Weight	5.5 lbs (2.5 kg)	4.1 lbs (2 kg)	2 lbs (.9 kg)					
Height	9" (229 mm)	8.5" (216 mm)	1.75" (44.4 mm)					
Length	15.25" (387 mm)	12.5" (317 mm)	12.3" (312.4 mm)					
Width	4" (105 mm)	3.5" (89 mm)	_					
Main Body Material	Aluminum	Aluminum	Steel					
Warranty	5 yrs	5 yrs	1 yr					
FASTENER SPECS		Fasteners are located on page 53						
Gauge	16	21	20					
Crown	1"	1/2"	7∕16″					
Range	5/8"-11/2"	5%″ Galv.	3/8"					
Capacity	160	110	168					
Angle/Collation	Taped and taped glued	Glued Staple, Laser Welded Cap	Straight Glued Strip					
Series	Р	M004092, Cap	Н					
TOOL FEATURES								
Depth-of-Drive	Yes, Tool-Free	No	_					
Tool-Free Jam Clearing	Yes	No	Yes					
Adjustable Exhaust	No	Yes	_					

ROOFING, SIDING & FENCING FASTENERS

15° Smooth Shank Coil Nails

Siding, aspl	Siding, asphalt and fiberglass shingles and vapor barriers									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
3/4" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003101				
1" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003103				
1¼" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003104				
1½" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003105				
1¾" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003106				










Vinyl Siding Attachment (Sold Separately)

Convert RoofPro™445XP and RoofPro™455XP into vinyl siding nailer							
Fits Tool Item Code							
RoofPro™445XP	HA0308						
RoofPro™455XP	MA0013						

5 Smooth Shank Coil Nails


Siding, packaging, fencing, pallets and underlayment									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .099"	Diamond	Bright	Sencote	15° Plastic Carrier Coil	6M	BD17APBC			
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH			
21/4" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH			
21/4" x .092"	Diamond	Exterior	Sencote	15° Conical Wire Welded Coil	7.2M	EJ23ADBH			
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EJ23ASBC			




ROOFING, SIDING & FENCING FASTENERS

15° Ring Shank Coil Nails

Siding, pack	Siding, packaging, fencing, wood shingles, crating and pallets									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1¼" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	15M	SE15APB				
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH				
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH				
1¾" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	12M	SE19APB				
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH				
17/8" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH				
17/8" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH				
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH				
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH				
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EL23ASBC				
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH				
1¾" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH				
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH				
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH				







ROOFING, SIDING & FENCING FASTENERS


1" Crown Heavy Wire Staples

Composite roofing, roofing felt, foam insulation board, house wrap, sheathing, corrugated containers, furniture/cabinets and butt joints										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
3/8"	Chisel	Galv	Plain	Glued	10M	P06BAA*				
1/2"	Chisel	Galv	Sencote	Taped	10M	P08BABT*				
5/8"	Chisel	Galv	Sencote	Taped	10M	P10BAB*				
5/8"	Divergent	Galv	Sencote	Glued	10M	P10FAB*				
5/8"	Chisel	Galv	Coated	Glued	10M	P10BPE*				
3/4"	Chisel	Galv	Sencote	Taped	10M	P11BAB				
3/4"	Chisel	Galv	Coated	Glued	10M	P11BPE				
7/8"	Chisel	Galv	Sencote	Taped	10M	P12BAB				
1"	Chisel	Galv	Sencote	Taped	10M	P13BAB				
1"	Chisel	Galv	Sencote	Glued	10M	P13BPE				
11/4"	Chisel	Galv	Sencote	Taped	10M	P15BAB				
11/4"	Chisel	Galv	Coated	Glued	10M	P15BPE				
1½"	Chisel	Galv	Sencote	Taped	10M	P17BAB				
1"	Outside Chisel	Stainless 304	Sencote	Taped	5M	P13BGBN				






*Use kit #YK0883 with PS15RXP for 3%"-5%" staples



20_{GA} 7/16" Crown Fine Wire Staples


Roofing, insulation and vapor barriers								
Length	th Point Finish Coating Collation Box Count Item Code							
3/8"	Chisel	Galv	Plain	Glued	5M	H06BAA		



1" Cap & 1/2" Crown Staples

Roof felt installation and house wrap								
Length	Length Point Finish Coating Collation Box Count Item Co							
5/8"	Chisel	Galv	Plain	Glued	2.2M	M004092		
1"	_	Plastic	_	Laser Weld	2.2M	_		





THE DURABILITY TO DRIVE ALL DAY

SENCO's PalletPro™ heavy-duty coil nailers are built specifically for the challenges of pallets and crating. The PalletPro130 can drive fasteners as long as 5½" and hold up to 225 nails.

APPLICATIONS

Pallets, crates, heavy-duty framing and truss attachment

KEY FEATURES

- Durable drivers and bumpers
- Flexible collation deflectors
- Dust guards for safe operation and extended use

Clinch and sisal anvil staple tools come in 18 and 20 gauge $\frac{1}{2}$ " and $\frac{7}{16}$ " crowns. Great for hand-held or mounted applications.

APPLICATIONS

Packaging, corrugated box fabrication, shoe making and bedding: basically any time two materials must be stapled and clinched together

SENCO

FEATURES

- · High-capacity magazines
- · Extended reach capability
- · Tool-free adjustable anvil opening
- Bottom-load magazines



PalletPro™57FXP

21/4" COIL NAILER

ITEM #4L0001N



Features

- High load capacity
- Utra-durability driver and piston bumper for long life
- Adjustable nail canister accommodates wide range of nails
- Body protection side steel wear plates reduce abrasion of tool

PalletPro™100XP

4" COIL NAILER (SPECIAL ORDER TOOL)



Features

- · High load capacity
- Includes optional heavy-duty threaded T-handle
- Flexible collation deflector and dust guard for improved safety in commercial environments
- Strengthened driver and bumper for extended use and reliable service

PalletPro™130XP

51/8" COIL NAILER (SPECIAL ORDER TOOL)



Features

- High load capacity
- Includes optional heavy-duty threaded T-handle
- Flexible collation deflector and dust guard for improved safety in commercial environments
- Strengthened driver and bumper for extended use and reliable service

TOOL SPECS	PalletPro™57FXP	PalletPro™100XP	PalletPro™130XP	
Trigger	Contact	Contact	Sequential	
Operating Pressure	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)	
Air Consumption (60 CPM)	3.07 scfm	11.4 scfm	11.4 scfm	
Air Inlet	3⁄8" NPT	³%″ NPT	3⁄8″ NPT	
Weight	5.9 lbs (2.67 kg)	11.5 lbs (5.24 kg)	13 lbs (5.9 kg)	
Height	11.25" (286 mm)	16.5" (418 mm)	18" (457 mm)	
Length	11.88" (302 mm)	13.25" (338 mm)	13" (330 mm)	
Width	5.25" (123 mm)	6" (153 mm)	6.6" (168 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS		Fasteners are located on pages 58–5	9	
Range	1"-21/4"	21/4"-4"	3"-5½"	
Shank	.082"092"	.099"148"	.120"148"	
Capacity	300-350	225-300	120-225	
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	
Series	BK, ED, EJ, EL, SE	BE, BK, BL, BT, HK, GD, GL, HD, HL, KD	HD, HK, HL, KD, MD	
TOOL FEATURES				
Tool-Free Jam Clearing	Yes	Yes	Yes	
Depth-of-Drive	No	No	No	
Debris Shield	Yes	Yes	Yes	

20 Ga. $\frac{1}{2}$ " CROWN, $\frac{1}{2}$ " STAPLE CLINCH TOOL

ITEM #8H0001N



Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening
- Rubber comfort grip reduces vibration, slipping and fatigue
- · Bottom-load magazine for quick reloading
- 6.9" throat allows for extended reach into cartons

F75LXP

18 Ga. %6'' CROWN, %8'' STAPLE CLINCH TOOL

ITEM #8J0002N



Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening
- Rubber comfort grip reduces vibration, slipping and fatigue
- Bottom-load magazine for quick reloading
- 6.9" throat allows for extended reach into cartons

F75SXP

18 Ga. 7/6" CROWN, 5/8" STAPLE SISAL ANVIL

ITEM #8J0001N



Features


- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening
- Rubber comfort grip reduces vibration, slipping and fatigue
- · Bottom-load magazine for quick reloading

TOOL SPECS	DFPXP	F75LXP	F75SXP
Trigger	Sequential	Sequential	Sequential
Operating Pressure	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)
Air Consumption (60 CPM)	.7 scfm	.7 scfm	.8 scfm
Air Inlet	1⁄4" NPT	1⁄4" NPT	1⁄4" NPT
Weight	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)
Height	12.9" (327 mm)	12.9" (327 mm)	12.9" (327 mm)
Length	14.9" (380 mm)	14.9" (380 mm)	14.9" (380 mm)
Width	3" (75 mm)	3" (75 mm)	3" (75 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are located on page 59	
Gauge	20	18	18
Crown	1/2"	7/16"	7/16"
Range	5/16"-5/8"	5/16"-5/8"	5/16"-5/8"
Capacity	230	152	152
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	F	J	J
TOOL FEATURES			
Tool-Free Adjustable Anvil Opening	Yes	Yes	Yes
Bottom-Load Magazine	Yes	Yes	Yes
Extended Reach Capability	Yes	Yes	No

PALLETS & CRATING FASTENERS


15° Smooth Shank Coil Nails

Pallets, crates, fencing, siding and underlayment							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH	
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH	



15° Smooth Shank Coil Nails


Pallets, fran	Pallets, framing, sheathing, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF			
2½" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF			
2½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF			
3" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF			
31/4" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF			
3½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF			
5" x .148"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF			
2" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF			
2½" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF			
3" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF			
3¼" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF			

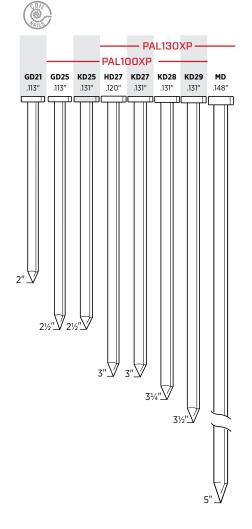

PALLETS & CRATING FASTENERS

15° Ring Shank Coil Nails

Pallets, crat	Pallets, crates, fencing, wood shingles, siding and underlayment									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH				
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH				
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH				
11/8" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH				
11/8" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH				
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH				
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH				
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH				
1¾" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH				
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH				
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH				



15° Ring Shank Coil Nails


Pallets, fran	Pallets, framing, sheathing, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF			
2¾" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF			
21/4" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF			
23/8" x .113"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF			
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF			
2¾" x .113"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF			

15° Step Ring Shank Nails

Superior fastening in subfloor applications								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2" x .099"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF		
23/8" x .113"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	GT24APBF		
2½" x .131"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	KT25APBF		

Step Ring Pallet Coil Nails


- Superior fastening in pallet applications
- Tested and proven to reduce raised nail heads
- Unique double rings shank design reduces the potential of nail backing outs

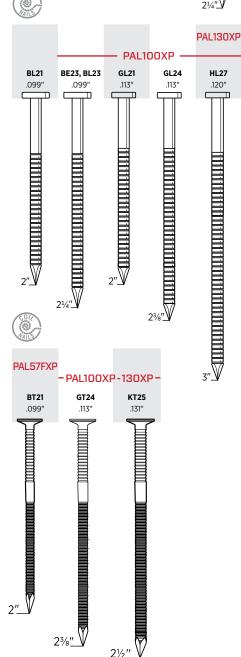

PALLETS & CRATING FASTENERS


Screw Shank Coil Nails

Pallets, fram	Pallets, framing, sheathing, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN			
2¼" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN			
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN			

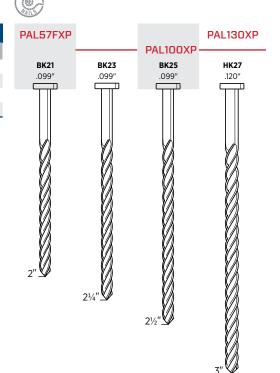


$20_{\scriptscriptstyle{ m GA}}$ ½" Crown Fine Wire Staples

Packaging, set-up boxes and bedding								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5/16"	Chisel	Galv	Sencote	Glued Strip	24M	F05BAAP		
3/8"	Chisel	Galv	Sencote	Glued Strip	10M	F06BAA		
3/8"	Chisel	Galv	Sencote	Glued Strip	24M	F06BAAP		
1/2"	Chisel	Galv	Sencote	Glued Strip	10M	F08BAAN		
1/2"	Chisel	Galv	Sencote	Glued Strip	15M	F08BAAP		
3/8"	Chisel	Stainless 304	Sencote	Glued Strip	10M	F06BGA		



18ca 7/16" Crown Fine Wire Staples

For assembling packaging and joining corrugated materials								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
3/8″	Chisel	Galv	Plain	Glued Strip	5M	J06BAA		
1/2"	Chisel	Galv	Plain	Glued Strip	5M	J08BAAN		
5/8"	Chisel	Galv	Plain	Glued Strip	5M	J10BAAN		



SENCO HAS YOU COVERED

SENCO offers a range of fine and medium wire staplers for upholstery and furniture assembly. Our upholstery staplers are the most customizable in the industry, with long nosepieces, extended magazines and a wide range of fasteners for any project.

APPLICATIONS

Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction

KEY FEATURES

- Lightweight
- Ergonomic
- · Variety of configurations



SFT10XP FAMILY

3/16", 3/8", 7/16", 1/2" CROWN, 5/8" FINE WIRE STAPLERS



Features

- Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Model	Models and Item Codes									
Crown	Ga	Staple	Description	Item Code						
3/16"	22	A/D Wire	Standard	6S0001N						
3/16"	22	A/D Wire	Auto	6S0101N						
1/2"	22	B Wire	Standard	6S0011N						
3/8"	22	C Wire	Standard	6S0021N 6S0121N						
3/8"	22	C Wire	Auto							
³ /16"	20	E Wire	Standard	6S0031N						
1/2"	20	F Wire	Standard	6S0041N						
3/8"	%" 20 G Wire		Standard	6S0051N						

SFT10XP FAMILY

3/6", 3/8", 7/6", 1/2" CROWN, 5/8" FINE WIRE STAPLERS

DOUBLE LENGTH MAGAZINE







Features

- Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Model	s and	Item Cod	des		
Crown	Ga	Staple	Description	Item Code	
1/2"	22	B Wire	Standard	6S0211N	
1/2"	22	B Wire	Auto	6S0311N	
3/8"	22	C Wire	Standard	6S0221N	
3/8"	22	C Wire	Auto	6S0321N	
1/2"	20	F Wire	Auto	6S0341N 6S0251N	
3/8"	20	G Wire	Standard		
7/16"	20	H Wire	Auto	6S0361N	

SFT10XP FAMILY

3/6", 3/8", 7/6", 1/2" CROWN, 5/8" FINE WIRE STAPLERS

LONG NOSE



Features

- · Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Models and Item Codes							
Crown	Ga	Staple	Description	Item Code			
3/8"	22	C Wire	Standard	6S0421N			

Product Reference Chart

TOOL SPECS	SFT10XP	
Trigger	Sequential, Auto	
Operating Pressure	60-95 psi (4.1-6.5 bar)	
Air Consumption (60 CPM)	.77 scfm	
Air Inlet	¼" NPT	
Weight	2.1 lbs (0.955 kg)	
Height	6.57" (167 mm)	
Length	8.58" (218 mm)	
Width	1.65" (42 mm)	
Main Body Material	Aluminum	
Warranty	5 yrs	
FASTENER SPECS	Fasteners are located on pages 63-64	
Gauge	22, 20	
Crown	³ / ₁₆ ", ³ / ₈ ", ⁷ / ₁₆ ", ½"	
Range	1/4"-5/8"	
Capacity	110-92	
Angle/Collation	Straight Glued Strip	
Series	A, B, C, D, E, F, G, H	



SENCO[®] offers 18 configurations of upholstery staplers and over 40 combinations of staple length, crown and gauge.

Over 70 Years

SFW09

3/8" CROWN, 5/8" FINE WIRE STAPLER

ITEM #4C0001N





Features

- · Rear exhaust keeps oil off fabric
- Full 1" lip length
- Rear magazine bumper protects fabric
- Rounded steel cap won't snag fabric

NS20BXP

7/16" CROWN, HEAVY WIRE STAPLER

ITEM #9Y0001N



Features

- 20% more powerful than the standard NS20XP for the most demanding applications
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- Updated aggressive locking feature
- New drive track design eliminates movement of the staple

The NS20BXP is the Benchmark Stapler for the Furniture Industry.

- 20% more powerful than all other staplers in its class to handle even the toughest engineered woods.
- Drives both 16 and 17 gauge, $\frac{7}{16}$ " crown staples (1" to 2" in length).
- The combination of class-leading power, durability and ergonomics make it an unrivaled professional tool.




TOOL SPECS	SFW09	NS20BXP		
Trigger	Dual	Contact		
Operating Pressure	60-95 psi (4.1-6.5 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	.77 scfm	3.98 scfm		
Air Inlet	¼" NPT	³%″ NPT		
Weight	2.1 lbs (0.955 kg)	5.8 lbs (2.6 kg)		
Height	6" (152 mm)	11" (279 mm)		
Length	9.25" (235 mm)	15" (381 mm)		
Width	1.63" (41 mm)	4" (102 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are locat	ed on pages 63, 65		
Gauge	22	17 (O-Wire), 16 (N-Wire)		
Crown	3%"	7/16"		
Range	5/32"-5/8"	1"-2"		
Capacity	110-168	160		
Angle/Collation	Straight Glued Strip	Straight Glued/Taped Strip		
Series	С	N, O		

UPHOLSTERY & FURNITURE FASTENERS


22_{ca} 3/16" Crown Fine Wire Staples

Furniture	Furniture upholstery, felt, insulation, casebacks, screening and shoes									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1/4"	Chisel	Galv	Sencote	Straight Glued Strip	10M	A04BAAN				
3/8"	Chisel	Galv	Sencote	Straight Glued Strip	30M	A06BABN				
3/8"	Chisel	Galv	Sencote	Straight Glued Strip	40M	A06BABP				
1/2"	Chisel	Galv	Sencote	Straight Glued Strip	20M	A08BAB				
1/2"	Chisel	Galv	Sencote	Straight Glued Strip	30M	A08BABP				
5/8"	Chisel	Galv	Sencote	Straight Glued Strip	20M	D10BABN				
5/8"	Chisel	Galv	Sencote	Straight Glued Strip	23M	D10BABPN				




1/2" Crown Fine Wire Staples


Furniture upholstery, felt, insulation, casebacks, screening and shoes									
Length	ength Point Finish		Coating	Coating Collation		Item Code			
1/4"	Chisel	Galv	Plain	Straight Glued Strip	25M	B04BAAPN			
3/8"	Chisel	Galv	Plain	Straight Glued Strip	40M	B06BAAP			
1/2"	Chisel	Galv	Plain	Straight Glued Strip	25M	B08BAAP			



3/8" Crown Fine Wire Staples

Furniture	Furniture upholstery, felt, insulation, casebacks, screening and shoes									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
5/32"	Chisel	Galv	Plain	Straight Glued Strip	60M	C02BAAPN				
³ / ₁₆ "	Chisel	Galv	Plain	Straight Glued Strip	55M	C03BAAPN				
1/4"	Chisel	Galv	Plain	Straight Glued Strip	35M	C04BAAP				
5/16"	Chisel	Galv	Plain	Straight Glued Strip	28M	C05BAAPN				
3/8"	Chisel	Galv	Plain	Straight Glued Strip	50M	C06BAAP				
7/16"	Chisel	Galv	Plain	Straight Glued Strip	40M	C07BAAPN				
1/2"	Chisel	Galv	Plain	Straight Glued Strip	35M	C08BAAP				
5/8"	Chisel	Galv	Plain	Straight Glued Strip	27M	C10BAAP				
3/16"	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C03BGAN				
1/4"	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C04BGAN				
3/8"	Chisel	Stainless 304*	Plain	Straight Glued Strip	10M	C06BHA				
3/8"	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	C06BGA				





^{*} High-Tensile 304 Stainless Steel



21 3/16" Crown Fine Wire Staples


Furniture upholstery, felt, insulation, casebacks, screening and shoes							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
5/8"	Chisel	Galv	Sencote	Straight Glued Strip	10M	W10BAB	



UPHOLSTERY & FURNITURE FASTENERS


20_{ca} _{3/16}" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
3/8"	Chisel	Galv	Plain	Straight Glued Strip	10M	E06BAA			
1/2"	Chisel	Galv	Plain	Straight Glued Strip	10M	E08BAA			
5/8"	Chisel	Galv	Plain	Straight Glued Strip	5M	E10BAA			




20_{cA} ½" Crown Fine Wire Staples

Upholste	Upholstery, felt, insulation and casebacks									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1/4"	Chisel	Galv	Plain	Straight Glued Strip	10M	F04BAAN				
1/4"	Chisel	Galv	Plain	Straight Glued Strip	17M	F04BAAP				
5/16"	Chisel	Galv	Plain	Straight Glued Strip	24M	F05BAAP				
3/8"	Chisel	Galv	Plain	Straight Glued Strip	10M	F06BAA				
3/8"	Chisel	Galv	Plain	Straight Glued Strip	24M	F06BAAP				
1/2"	Chisel	Galv	Plain	Straight Glued Strip	10M	F08BAAN				
1/2"	Chisel	Galv	Plain	Straight Glued Strip	15M	F08BAAP				
3/8"	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	F06BGA				
				•						



20... 3/8" Crown Fine Wire Staples

	Upholstery, felt, insulation and casebacks									
ĺ	Length	Point	Finish	Coating	Collation	Box Count	Item Code			
	1/4"	Chisel	Galv	Plain	Straight Glued Strip	10M	G04BAAN			
	3/8"	Chisel	Galv	Plain	Straight Glued Strip	5M	G06BABN			
	1/2"	Chisel	Galv	Plain	Straight Glued Strip	5M	G08BAB			



20_{ca} 7/16" Crown Fine Wire Staples

Upholstery, felt, insulation and casebacks								
Length	ength Point Finish Coating Collation Box Count Item Co							
3/8"	Chisel	Galv	Plain	Straight Glued Strip	5M	НО6ВАА		




UPHOLSTERY & FURNITURE FASTENERS

17_{GA}

7/16" Crown Heavy Wire Staples*

Furniture frames and crates								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
11/4"	Chisel	Bright	Sencote	Glued	21.12M	O15BRBBN		
13/8"	Chisel	Bright	Sencote	Glued	17.6M	O16BRBBN		
11/2"	Chisel	Bright	Sencote	Glued	17.6M	O17BRBBN		
15/8"	Chisel	Bright	Sencote	Glued	17.6M	O18BRBBN		
1¾″	Chisel	Bright	Sencote	Glued	14.08M	O19BRBBN		


*Compatible with NS20XP, NS20BXP, SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.




16_{GA}

7/16" Crown Heavy Wire Staples

Cabinets, casebacks, drawers and upholstery							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
3/4"	Chisel	Bright	Sencote	Glued	5M	N11BRB	
1"	Chisel	Bright	Sencote	Glued	5M	N13BRB	
11/8"	Chisel	Bright	Sencote	Taped	10M	N14BRB	
11/4"	Chisel	Bright	Sencote	Taped	10M	N15BRB	
13/8"	Chisel	Bright	Sencote	Taped	10M	N16BRB	
1½"	Chisel	Bright	Sencote	Taped	10M	N17BRB	
15/8"	Chisel	Bright	Sencote	Taped	10M	N18BRB	
13/4"	Chisel	Bright	Sencote	Taped	10M	N19BRB	
2"	Chisel	Bright	Sencote	Taped	10M	N21BRB	
1/2"	Chisel	Galv	Sencote	Glued	5M	N08BABN	
1/2"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN	
1/2"	Diverg	Galv*	Sencote	Glued	5M	N08FBB	
5/8"	Chisel	Galv	Sencote	Glued	5M	N10BAB	
3/4"	Chisel	Galv	Sencote	Glued	5M	N11BAB	
3/4"	Diverg	Galv*	Sencote	Glued	5M	N11FBB	
7/8"	Chisel	Galv	Sencote	Glued	5M	N12BABN	
7/8"	Diverg	Galv	Sencote	Glued	5M	N12FABN	
1"	Chisel	Galv	Sencote	Glued	5M	N13BAB	
1"	Diverg	Galv	Sencote	Glued	5M	N13FAB	
11/8"	Chisel	Galv	Sencote	Taped	10M	N14BAB	
11/4"	Chisel	Galv	Sencote	Taped	10M	N15BAB	
11/4"	Diverg	Galv	Sencote	Glued	10M	N15FAB	
13/8"	Chisel	Galv	Sencote	Taped	10M	N16BAB	
11/2"	Chisel	Galv	Sencote	Taped	10M	N17BAB	
15/8″	Chisel	Galv	Sencote	Glued	10M	N18BAB	
1¾″	Chisel	Galv	Sencote	Taped	10M	N19BAB	
2"	Chisel	Galv	Sencote	Taped	10M	N21BAB	
11⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB	
1½"	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB	
1¾″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN	
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN	





^{*}Galvanized High-Tensile Steel

HARDWOOD FLOORING DONE RIGHT

Hardwood floors aren't so hard to install with our SHF200 stand-up flooring tool. With a long, ergonomic handle and a base that easily adjusts to any floor thickness, you will get your job done in no time. SENCO is committed to creating industry-leading flooring tools to make your job easier.



SHF200

2" PNEUMATIC MALLET ACTUATED HARDWOOD FLOORING CLEAT NAILER

ITEM #8D0001N

16_G



Features

- Innovative non-marring base that adjusts between $\frac{1}{2}$ " and $\frac{3}{4}$ " flooring without the use of tools
- Safety trigger prevents accidental ejection of fasteners
- Lightweight and well balanced, yet 5% more powerful than competitive flooring nailers
- Extra-long ergonomic handle reduces user fatigue

SLS20XP-HF

3/6" CROWN, 1" ENGINEERED & HARDWOOD FLOOR STAPLER

ITEM #490021N





Features


- $\bullet \ \text{Never-Lube}^* \ \text{design} \ \text{no oil required}$
- Front block easily adjusts to floor thickness
- Industry-exclusive safety controls staple placement
- Power-adjusted motor drives staples to consistent and controllable depth

TOOL SPECS	SHF200	SLS20XP-HF		
Trigger	Sequential	Sequential		
Operating Pressure	90-110 psi (6.2-7.6 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	2.52 scfm	1.92 scfm		
Air Inlet	1/4" NPT	1/4" NPT		
Weight	10.1 lbs (4.58 kg)	3.2 lbs (1.5 kg)		
Height	21.5" (546 mm)	9" (228 mm)		
Length	17.8" (452 mm)	13" (332 mm)		
Width	3.1" (78 mm)	3" (76 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are located on page 68			
Gauge 16		19		
Crown	L-Head	³/16"		
Range	1 ½"-2"	5/8"-1"		
Capacity	107	168		
Angled/Collation	Straight Glued Strip	Straight Glued Strip		
Series	RW	R		
FLOORING MATERIAL				
Hardwood	Yes	Yes		
Hardwood Laminate	Yes	Yes		
Board Thickness	½", 5%", 3¼", 33/32" (12-26 mm)	½", 5%6", 3%" (6-10 mm)		

FLOORING FASTENERS


L-Head Flooring Cleat Nails

½", ½", ¾", ¾", ³3/32" Solid hardwood flooring								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
11/2"	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW17BPE		
13/4"	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW19BPE		
2"	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW21BPE		
2"	Blunt Diamond	Stainless 304	N/A	Straight Glued Strip	1M	RW21BGE		



19_{6A} 3/16" Crown Flooring Staples

¼", ½", ¾" Engineered and hardwood floors								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5/8"	Chisel	Galv	Sencote	Straight Glued Strip	5M	R10BAB		
3/4"	Chisel	Galv	Sencote	Straight Glued Strip	5M	R11BAB		
1"	Chisel	Galv	Sencote	Straight Glued Strip	5M	R13BAB		



Get the Job Done.

With genuine SENCO compressors & accessories.

SENCO continuously strives to offer a wide selection of compressors, accessories, and parts to complete our full-line of fastening systems. Our commitment is to bring you the highest quality products to help you get the job done right.



COMPRESSORS

SENCO compressors are made to exacting standards. Only the highest quality components are used to provide the reliability expected from a SENCO product.

AIR HOSES

SENCO offers a wide variety of air hoses that allow you to choose the right solution for your job site. Our NEW Premium Hybrid hose provides the ultimate in flexibility and memory resistance, even in extremely cold temperatures. Quick Couple Rubber Hose is the standard for the professional on the job site with its tough flexible neoprene cover. ProFlex Reinforced Polyurethane Hose is the lightest weight non-marring flexible hose. PVC is resistant to lubricating oils, chemicals, and ultraviolet sunlight.







REGULATORS, GAUGES & LUBRICANTS

SENCO's assortments of regulators, gauges, oils and lubricants are chosen to satisfy the demanding requirements of the job site and deliver professional durability and quality. All will accurately replace the damaged component on SENCO units as well as many others.

PLUGS & COUPLERS

SENCO quick connect coupler and plug fittings are available in the most popular Industrial Interchange styles and sizes. Quick connect couplers are also available in the Universal style to work with other style plugs.





TOOL BELT HOOKS

SENCO offers a variety of belt hooks to allow the professional the ability to use both hands without worrying about dropping their pneumatic tool.

THE INNOVATION YOU'VE COME TO EXPECT, THE QUALITY YOU ALREADY KNOW

Whether you need an air compressor for punch-out jobs or for all-day performance, SENCO offers high quality, reliable options to meet your needs.

KEY FEATURES

SENCO has you covered with industry leading compressors that provide plenty of tank storage and air flow for the job site or professional shop. Many feature an oil-free pump design to reduce maintenance and have integrated panels that provide easy access to control knobs. There's even a compressor equipped with

dual couplers so you can run two hoses simultaneously. Count on quickly getting back to work – we offer compressors that have pump up times of less than 40 seconds. You can easily monitor output pressure with individual tank and outlet gauges.

A full line of hoses and accessories is also available.



PC1131

2 HP (RUNNING) 4.3 GALLON TWIN TANK AIR COMPRESSOR



Features

- Cast-iron cylinder for superior pump life
- Compact twin stack tank design
- · Heavy-duty induction motor

PC1010

½ HP (RUNNING) 1 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Ultra-quiet 68 dBA
- Ultra-light 20 lbs
- Heavy-duty induction motor

PC0968

1 HP (RUNNING) 2½ GALLON TWIN TANK FINISH AND TRIM AIR COMPRESSOR



Features

- Compact twin stack tank design
- Lightweight 38 lbs
- · Heavy-duty induction motor

PC1010N

½ HP (RUNNING) 1 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Ultra-quiet 68 dBA
- Ultra-light 21 lbs
- Heavy-duty induction motor

PC1280

1½ HP (RUNNING) 6 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Compact and balanced pancake tank design
- Lightweight 38 lbs
- Dual quick connect couplers

PC0947

2" FINISHPRO®18 BRAD NAILER AND PC1010 COMPRESSOR KIT



- 1 gallon PC1010 compressor
- 2" 18 gauge brad nailer
- Everything you need to get started

Air Compressor Reference Chart

SPECS	PC1131	PC0968	PC1280	PC1010	PC1010N
Motor	Induction	Induction	Universal	Induction	Induction
Amps	14	8	12	4	4
Power Source	115 Volts	115 Volts	115 Volts	115 Volts	115 Volts
SCFM @ 90 PSI	4.4	2.2	2.8	0.7	0.7
Max PSI	125	135	150	135	135
Weight	60 lbs (27 kg)	38 lbs (17.24 kg)	38 lbs (17.24 kg)	20 lbs (9.07 kg)	21 lbs (9.53 kg)
Height	14.5" (368 mm)	13.5" (343 mm)	18" (457 mm)	13" (330 mm)	12.25" (311 mm)
Length	20.5" (521 mm)	16" (406 mm)	17" (432 mm)	14" (356 mm)	11.5" (292 mm)
Width	16.5" (419 mm)	15" (381 mm)	16.3" (414 mm)	10" (254 mm)	14" (356 mm)
Warranty	1 yr	1 yr	1 yr	1 yr	1 yr
FEATURES					
Thermal Over- load Protector	Yes	Yes	Yes	Yes	Yes
Pump	Oil-Lube	Oil-Free	Oil-Free	Oil-Free	Oil-Free
Pump Up/ Recovery Time	67 sec./16 sec.	82 sec./17 sec.	152 sec./33 sec.	125 sec./30 sec.	125 sec./30 sec.
1/4" Quick Connect Coupler	1	1	2 (Dual)	1	1
Regulator	Yes	Yes	Yes	Yes	Yes
Individual Tank & Outlet Gauges	Yes	Yes	Yes	Yes	Yes
Cold Start Valve	Yes	No	No	No	No
CSA Approved	Yes	Yes	Yes	Yes	Yes

Tool Kit Ref. Chart

KIT SPECS	PC0947
Compressor	PC1010
Tool	FinishPro® 18
Trigger	Contact
Tool Operating Pressure	70-95 psi
Tool Air Inlet	1/4" NPT
Tool Weight	3 lbs (1.6 kg)
Tool Height	9.3" (238 mm)
Tool Length	9.75" (248 mm)
Kit Warranty	1 yr
Coil Hose	1⁄4" x 25'
Air Fittings	Yes
Tool Oil & Safety Glasses	Yes
Variety Pack of Fasteners	18 Ga. Brads
FASTENERS	
Gauge	18 Ga. Brads
Range	5/8"-2"

71

Air Hoses

SENCO offers a wide variety of air hoses in various materials, sizes and specifications for your job site.

(FPT) - Female Pipe Thread (MPT) - Male Pipe Thread

Quick Couple Rubber Hose

SENCO's premium air hoses:

- Can handle up to 250 psi working pressure
- · Oil-resistant nitrile tube
- Braided textile reinforcing for max strength and kink resistance
- Remains flexible at temperatures from -40° to 200°F
- · 4-to-1 working pressure to burst safety factor
- · Tough, flexible neoprene cover

	Hose Size	Length	Qty.	ITEM#
Gray with Industrial Interchange Plug and Coupler Fittings	1/4"	50 ft	1	PC0064
Gray with Industrial Interchange Plug and Coupler Fittings	1/4"	100 ft	1	PC1152
Gray with Industrial Interchange Plug and Coupler Fittings	3/8"	50 ft	1	PC0065



GRAY WITH PLUG & COUPLER PC0064, PC1152, PC0065

ProFlex™ Reinforced Polyurethane Red Air Hose

Lightest available non-marring flexible hose

- Flexible in all weather (-48° to 150°F)
- · Working pressure: 250 psi
- Durable oil and fuel resistant
- MPT-threaded ends

Description	Hose Size	Length	Qty.	ITEM#
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC0977
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC0978
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	3/8"	50 ft	1	PC0979

PROFLEX WITH MPT ENDS PC0977, PC0978, PC0979

Premium Hybrid Polymer Air Hose

- Provides the ultimate in flexibility and memory resistance, even in extreme cold
- Offers the best combination of strength and flexibility on the market

Description	Hose Size	Length	Qty.	ITEM#
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC1319
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC1320
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC1321
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC1322
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	3/8"	50 ft	1	PC1339



HYBRID WITH MPT ENDS PC1319, PC1320

Field Repairable End Fitting

• Field repairable hose ends are made with aircraft aluminum for easy on-site repair without hose clamps

Description	Hose Size	Qty.	ITEM#
Hybrid Hose Repair End Fitting	1/4"	1	PC1341
Hybrid Hose Repair End Fitting	3/8"	1	PC1337
Hybrid Hose Splicer	1/4"	1	PC1338
Hybrid Hose Splicer	3/8"	1	PC1340





HYBRID HOSE FIELD REPAIR KITS END FITTING AND HOSE SPLICER KITS

Plugs & Couplers

Quick connect plugs and couplers are available in the most popular Industrial Interchange styles. Couplers are also available in Universal style.

Universal Couplers — push plug into coupler (no need to pull back on sleeve)						
Type Body Size NPT Size Pack Qty. ITEM #						
Female	1/4"	1/4" FPT	1	PC0900		

Plugs — Industrial Interchange							
Туре	Body Size	Size	Pack Qty.	ITEM#			
Male	1/4"	1/4" MPT	2	PC0479			
Male	1/4"	3/8" MPT	2	PC0480			
Female	1/4"	1/4" FPT	2	PC0477			
Female	1/4"	3/8" FPT	2	PC0478			
Push-on Barb	1/4"	¾" LHB	1	PC0576			
Push-on Barb	1/4"	¾" LHB	1	PC0577			

MALE PLUG PC0479, PC0480





PLUG (PUSH-ON LOCKING BARB) PC0576, PC0577

Couplers — Industrial Interchange						
Туре	Body Size	Size	Pack Qty.	ITEM#		
Male	1/4"	1/4" MPT	1	PC0503		
Male	1/4"	3/8" MPT	1	PC0504		
Female	1/4"	1/4" FPT	1	PC0501		
Female	1/4"	3/8" FPT	1	PC0502		
Push-on Barb	1/4"	1/4" LHB	1	PC0505		
Push-on Barb	1/4"	¾" LHB	1	PC0506		





FEMALE COUPLER PC0900



FEMALE COUPLER PC0501, PC0502

COUPLER (PUSH-ON LOCKING BARB) PC0505, PC0506

Swivel Plugs & Couplers

- Allow easier access when working in corners and tight spaces
- Reduce fatigue
- Help prevent kinks and reduce stress on hose
- Provide strong and simple connection for pneumatic tools

Swivel Plugs — Industrial Interchange						
Туре	Body Size	NPT Size	Pack Qty.	ITEM#		
Male	1/4"	1/4" MPT	2	PC1323		
Male	1/4"	3/8" MPT	2	PC1325		

Swivel Couplers — Industrial Interchange						
Туре	Body Size	NPT Size	Pack Qty.	ITEM#		
Female	1/4"	1/4" FPT	1	PC1328		

Swivel Couplers — Universal					
Туре	Body Size	NPT Size	Pack Qty.	ITEM#	
Female	1/4"	1/4" FPT	1	PC1330	

(FPT) - Female Pipe Thread (MPT) - Male Pipe Thread (LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.







FEMALE SWIVEL COUPLER PC1330

Air Hose Accessories

Splicer			
Description	Size	Pack Qty.	ITEM#
Push-On Barbed Hose Splicer	1/4" LHB	2	PC0643



ProFlex Hose Fittings			
Description	Size	Pack Qty.	ITEM#
Brass Hose End	1/4" MPT	1	PC0983
Brass Hose End and Splicer	1/4" MPT	1	PC0987





BRASS HOSE END PC0983

Air Hose and Compressor Accessories

Tripod Manifold				
Description	Inlet Thread	Outlet Thread	Pack Qty.	ITEM#
3-Way Flat Manifold Industrial Interchange	1/4" Plug	1/4" Coupler	1	PC1138

3-WAY FLAT MANIFOLD PC1138

Blow Gun			
Description	Inlet Thread	Pack Qty.	ITEM#
Air Blow Gun	1/4" FPT	1	PC0489

(FPT) - Female Pipe Thread



Teflon® Thread Sealing Tape		
Description	Pack Qty.	ITEM#
½" x 260' Sealing Tape	1	PC0349



Regulators & Gauges

SENCO's assortment of filters and gauges are precision engineered to meet the demanding requirements of professional contractors. Be sure that your compressor is running at peak performance by using SENCO-certified replacement parts and accessories.

Air Regulation Accessories: Regulator with Gauge					
Description	Max PSI	Max Airflow	FPT Size	NPT Gauge	ITEM#
Mini Regulator with Gauge	250	14 SCFM	1/4"	1/8"	PC0656
Regulator with Gauge	300	80 SCFM	3/8"	1/8"	PC0657
Back-Mount Pressure Gauge	160	_	_	1/8"	PC0057
Back-Mount Pressure Gauge	160	-	-	1/4"	PC0051



MINI REGULATOR WITH GAUGE PC0656



REGULATOR WITH GAUGE PC0657



BACK-MOUNT PRESSURE GAUGE PC0057



BACK-MOUNT PRESSURE GAUGE PC0051

Oils & Lubricants

Oils and Lubricants				
Description	Features	Size	Case Qty.	ITEM#
Pneumatic Tool Oil (½ pt)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	8 oz	12	PC0101
Pneumatic Tool Oil (1 qt)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	32 oz	12	PC0102
Pneumatic Tool Oil (1 gal)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	128 oz	4	PC0103
Compressor Pump Oil (1 qt)	Premium-grade oil with high-quality naphthenic distillate stock Recommended for all oil-splash compressors Protects against corrosion Lubricates to extend part life	32 oz	12	PC0344
Moisture Shield Tool Lubricant (1 qt)	For use in cold weather and/or high-moisture areas Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog	32 oz	12	PC1295
Tool Lubricant	Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog	4 oz	12	YB0123









COMPRESSOR PUMP OIL PC0344

MOISTURE SHIELD TOOL LUBRICANT TOOL LUBRICANT

YB0123

Safety Glasses & Tool Belt Hooks

Attaches to 3/8" Air Fitting on Tool

Safety Glasses		
Description	Qty.	ITEM#
Wrap-Around Safety Glasses*	10-Case	PC1166





X-Wide

PC0630





Li-Ion Batteries

For use with 18V Li-lon DuraSpin and SENCO FUSION tools			
18V Li-Ion Battery 1.5 amp hour	For use with		
VB0155	DS222-18V DS225-18V DS322-18V F-15XP	1.5 amp hour High-quality reliable cells Longer storage life Charges to 80% in 15 minutes	
18V Li-Ion Battery 3.0 amp hour	F-16XP F-18XP		
VB0190	F-LXP F-35XP* F-35FRHXP*	3.0 amp hour State of the art 21700 cells Longer storage life Drives more than 2X the fasteners as VB0155 (above)	

^{*}For optimal performance only use the VB0190 battery with the F-35XP and F-35FRHXP

Battery Chargers

For use with SENCO batte	eries	
Battery Charger	For use with	
VB0156	VB0155 VB0190**	3 amp quick charger Battery charge indicators display charge status of your battery
Battery Charger	For use with	
VB0189	VB0155 VB0190	5 amp quick charger Upright design is ideal for wall mounting

^{**}The VB0189 charger is recommended for the VB0190 battery; using the VB0156 charger will result in longer charge times.

Replacement No-Mar Pads



Replacement No-Mar Pads Fit	ITEM#	
AF25, CF25	HF0064	
AF41, CF41	HF0079	
FIP11	HC0463	
FIP15, FIP18	HC0506	
FIP15Mg, FIP18Mg	HC0571	
FIP23SXP, 23LXP, 21LXP	HC0729	
FIP25XP	HF0064	
FIP32*	HC0396	
FIP32*	HC0401	
FIP41XP, FIP42XP	HF0079	
FN55AX	HF0113	
FN65DA	HF0110	
FP600-650 SERIES	HF0046, HC0253	
FP601, FP602, FP651, FP652	HA0170	
FP700 SERIES	HF0046, HC0253	

One pad per pack

Replacement No-Mar Pads Fit	ITEM#
GT65DA	HC0626
GT65RHA	HC0625
GT90CH	HA0200
GT90FRH	HA0201
SCN49	HC0536
SFN30, SFN40, SFNI	HF0079
SLS15, SLS18	HC0507
SLS15Mg, SLS18Mg	HC0572
SLS20, SLS20XP (K, L & R CROWNS)	HF0028
SLS20, SLS20XP (M CROWN)	HF0029
SLS25-L, SLS25XP-L	HF0028
·	

One pad per pack.

^{*}Refer to parts chart to identify desired safety element design.

PARTS KITS

Maintaining Your Tools

SENCO repair kits are designed to provide the parts normally needed to properly maintain and service your SENCO tools.







Tool Model	Description	Item Code
FinishPro15, 18, 2N1	Repair Kit	YK0393
FinishPro15Mg, 18Mg	Repair Kit	YK0780
FinishPro16XP	Repair Kit A	YK0884
FinishPro16XP	Repair Kit B	YK0885
FinishPro18BMg	Repair Kit	YK0868
FinishPro21LXP, 23LXP	Repair Kit	YK0855
FinishPro23SXP	Repair Kit	YK0854
FinishPro25XP	Firing System Kit	YK0281
FinishPro25XP	Piston Stop Kit	YK0282
FinishPro32	Repair Kit	YK0394
FinishPro33Mg	Repair Kit	YK0787
FinishPro35Mg	Repair Kit	YK0788
FinishPro41XP, 42XP	Firing System Kit	YK0361
FinishPro41XP, 42XP	Piston Stop Kit	YK0362
FramePro601, 602, 651, 652	Repair Kit	YK0360
FramePro XP 701, 752, 702, 752	Firing System Kit	YK0243
FramePro XP 701, 752, 702, 752	Piston Stop Kit	YK0244
HN150, HN250	Repair Kit	BA0158
JoistPro150XP	Firing System Kit	YK0823
JoistPro150XP	Piston Stop Kit	YK0824
JoistPro250XP	Firing System Kit	YK0825
JoistPro250XP	Piston Stop Kit	YK0826
JoistPro250XP	Safety Upgrade Kit	YK0869
LS1XP	Repair Kit	YK0858
MW	Repair Kit	YK0371
NS20XP	Firing System Kit	YK0840
NS20XP	Piston Stop Kit	YK0841
NS20XP	Siding Safety Kit	HC0788
NS20BXP	Firing System Kit	YK0838
NS20BXP	Piston Stop Kit	YK0839
PAL57FXP	Repair Kit	YK0446
PS15XP, PS15RXP	Repair Kit	YK0784
PS15XP, PS15RXP	Repair Kit	YK0818
PS15XP, PS15RXP	Block Out Kit	YK883
PS15XP	Retrofit Kit - Solid Safety	YJ0044
PS15RXP	Retrofit Kit - Solid Safety	YJ0049
PS20XP	Repair Kit	YK0783
RoofPro™ 455XP	Firing System Kit	YK0424
RoofPro™ 445XP	Repair Kit	YK0865
RoofPro™ 445XP	Wear Guard Kit	YKO870
RoofPro™ 445XP	Gate Repair Kit	YK0871
RoofPro™ 455XP	Piston Stop Kit	YK0425
RoofPro™ 450XP	Repair Kit	YK0426
SC1	Repair Kit	YK0370
SC 2	Repair Kit	YK0371
SCN48	Repair Kit	YK0769
SCN49	Repair Kit	YK0771
SCN60, SCN65	Seal Kit	YK0366

Tool Model	Description	Item Code
SFN1, SKS, SPS	Repair Kit	YK0376
SFN1, SKS, SPS	Retrofit Kit	YJ0035
SFN30	Repair Kit	YK0368
SFT10XP, SFT10XP D/L, SFT10XP LN	Piston Stop Kit	YK0802
SFT10XP, SFT10XP D/L, SFT10XP LN	Firing System Kit	YK0803
SFT10XP (AUTO)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Piston Stop Kit	YK0802
SFN1, SKSXP, SPS	Firing System Kit	YK0804
SFW09	Repair Kit	YK0775
SFW10XP	Piston Stop Kit	YK0321
SFW10XP	Firing System Kit	YK0322
SLP20	Repair Kit	YK0373
SLS15, SLS18	Repair Kit	YK0393
SLS15Mg, SLS18Mg	Repair Kit	YK0780
SLS20XP	Repair Kit	YK0372
SLS25XP	Piston Stop Kit	YK0291
SLS25XP	Firing System Kit	YK0359
SLS150Mg	Repair Kit	YK0852
SCP40XP	Firing System Kit	YK0444
SCP40XP	Piston Stop Kit	YK0445
SN901/902XP, FP325/325FRHXP	Firing System Kit	YK0444
SN901/902XP, FP325/325FRHXP	Piston Stop Kit	YK0445
SN951XP, SN952XP	Firing System Kit	YK0444
SN951XP, SN952XP	Piston Stop Kit	YK0768
SNS40	Repair Kit	YK0374
SNS41	Repair Kit	YK0423
SNS41 (Retrofit Kit)	Cap/Firing Valve	YJ0034
SNS41	Driver/Back Plate Upgrade	YK0794
SNS44XP	Firing System Kit	YK0421
SNS44XP	Piston Stop Kit	YK0422
SNS44XP	Driver/Back Plate Upgrade	YK0793
SNS45XP	Piston Stop Kit	YK0231
SNS50XP, SQS55XP	Seal Kit	YK0375
SNS200XP-BST	Firing System Kit	YK0838
SNS200XP-BST	Piston Stop Kit	YK0839
SNS200XP-BST	Wider Driver Kit	YK0873
SNS200XP	Firing System Kit	YK0840
SNS200XP	Piston Stop Kit	YK0841
SNS200XP	Block-Out Kit	YK0850
SNS200XP	Wider Driver Kit	YK0872
SNS200XP	Siding Safety Kit	HC0748
WC200XP	Piston Stop Kit	YK0784
WC200XP	Repair Kit	YK0783
WC200XP	Block-Out Kit	YK0786
WC200XP	Retrofit Kit - Solid Safety	YJ0037
Download SENCO tool parts charts at www.senc	co.com to see a complete list of availab	le individual parts.

GUIDE TO CORROSION RESISTANT FASTENERS

BRIGHT BASIC

Bright Basic fasteners are an uncoated steel, which is commonly used in applications where corrosion protection is not required such as interior framing, finish and trim. These fasteners are not recommended for use in treated lumber or exterior applications.





GOOD CORROSION **RESISTANCE**







GOOD

CORROSION RESISTANCE

Electro Galvanized fasteners have a thin layer of zinc coating that helps corrision

ELECTRO GALVANIZED

resistance in mild weather conditions and in areas with lower humidity. Because of its minimal protective properties these fasteners are recommended for interior use in areas such as kitchens and bathrooms.



Hot Dipped Galvanized nails have one ounce per square foot of zinc coating. The zinc coating on the nail acts as a barrier between the base steel and the elements, slowing the corrosion process. Ideal for preservative-treated wood and most exterior applications.



BETTER CORROSION RESISTANCE

304 STAINLESS STEEL

304 Stainless Steel contains 18% chromium and 8% nickel among other elements, making it resist most oxidizing acids and rust. An excellent choice for all types of environments and woods including exotic woods, cedar or redwood.

Recommended use: Exposure to wet conditions regularly and more than 5 miles away from a body of water.



BEST CORROSION **RESISTANCE**

BOX, CARTON & PALLET QUANTITIES - FASTENERS

Nails Boxes Per Boxes Item Code Per Skid Carton A100509 5 900 A100629 900 5 A100759 5 900 A101009 5 900 A101259 5 900 A101379 5 900 A101509 5 900 A102009 5 900 A109809 5 900 A109909 5 900 5 A201009 700 A201259 5 700 A201509 700 5 A202009 5 700 5 A209809 700 A209909 5 700 480 A301750 5 480 A302000 5 480 A302009 5 480 A302500 5 480 A302509 5 480 A402009 5 480 AX10EAA 16 480 AX11EAA 16 480 AX13EAA 10 300 AX15FAA 10 300 AX17EAA 8 240 AX18EAA 8 240 AX19EAA 6 180 AX21EAAN 180 6 AX22EAAN 6 180 AY10EAA 16 480 AY11EAA 16 480 AY13EAA 10 300 AZ08EAA 32 960 AZ11EAA 24 720 AZ13FAA 16 480 BD17APBC N/A* 30 N/A* 45 BE23AABF BG17AAAQ N/A* 40 BG18AAAQ N/A* 40 BK21BPBFN N/A* 35 BK23BPBFN N/A* 35 BK25BPBFN N/A* 35 BL21APBF N/A* 45 BT21APBF N/A 45 CZ08EAAN N/A* 140 CZ10EAA 1440 24 CZ10EAAN N/A* 140 CZ11EAA 1152 24 CZ11EAAN N/A* 140 CZ13EAA 12 720 12 720 CZ15EAA 12 720 CZ16EAA 12 CZ17EAA 720 CZ21EAA 12 576 200 DA13EPBN 5 DA15AIA 5 200 5 200 DA15EABN DA15EPBN 5 200 DA17AIA 5 200 DA17EABN 5 200 DA17EPBN 5 200

Nails (cont.)			
Item Code	Boxes Per Carton	Boxes Per Skid	
DA25EAB	3	120	
DA25EGB	N/A*	80	
DA25EPB	3	120	
ED23AABH	N/A*	60	
EJ21ADBH	N/A*	40	
EJ23ADBH EJ23ASBC	N/A* N/A*	40	
EL19AGBH	N/A*	60	
EL19ASBH	N/A*	60	
EL20AABH	N/A*	60	
EL20ASBH	N/A*	60	
EL21AGBH	N/A*	60	
EL21ASBH	N/A*	60	
EL23AABH EL23AGBH	N/A* N/A*	60 60	
EL23ASBC	N/A*	24	
EL23ASBH	N/A*	60	
G524APBXN	N/A*	72	
G524ASBXN	N/A*	72	
G621ASBXN	N/A*	80	
G624APBXN	N/A*	72	
G624ASBXN GC21APBX	N/A* N/A*	72 80	
GC23AHAK	N/A*	80	
GC24APBX	N/A*	72	
GC24ASBX	N/A*	72	
GC25APBX	N/A*	72	
GD21AABF	N/A*	40	
GD21APBF	N/A*	40	
GD24APBSN GD24ASBS	N/A* N/A*	48 45	
GD25AABF	N/A*	40	
GD25AABSN	N/A*	48	
GD25APBF	N/A*	40	
GD25APBSN	N/A*	48	
GE21APAX	N/A*	80	
GE21ASBX	N/A*	80	
GE24AGBK GE24APBX	N/A* N/A*	80	
GE24ASBX	N/A*	72 72	
GL21APBF	N/A*	40	
GL21APBSN	N/A*	48	
GL21ASBS	N/A*	45	
GL24AABSN	N/A*	48	
GL24AGBF	N/A*	24	
GL24AGBS GL24APBF	N/A* N/A*	72 40	
GL24APBSN	N/A*	48	
GL24ASBF	N/A*	40	
GL24ASBS	N/A*	45	
GT24APBF	N/A*	40	
H527APBXN	N/A*	48	
H528APBXN	N/A*	48	
H627APBXN H627ASBXN	N/A* N/A*	48 48	
HC27APBX	N/A*	48	
HC27ASBX	N/A*	48	
HC28APBX	N/A*	48	
HD27APBF	N/A*	40	
HD27APBSN	N/A*	48	
HE27ASBX	N/A*	48	
HF27EDB	N/A*	80	
HF27EPAK HJ25ADBS	N/A* N/A*	40 45	
HK27APBFN	N/A*	35	
HL27AGBS	N/A*	54	
HL27ASBF	N/A*	40	
LIL 27 A CDC	NI/A*	40	

Nails (cont.)

Item Code

Boxes Per

Carton

Boxes

Per Skid

	Carton	rei skiu
K527APBXN	N/A*	48
K527APBXR	N/A*	80
K527ASBXN	N/A*	48
K528APBXN	N/A*	48
K528APBXR	N/A*	80
K528ASBXN	N/A*	48
K529APBXN	N/A*	48
K627ASBXN	N/A*	48
K628APBXN	N/A*	48
K628ASBXN	N/A*	48
K629ASBXN	N/A*	48
KC27AGBK	N/A*	80
KC27APBX KC27ASBX	N/A* N/A*	48 48
KC27A3BX KC28AGBK	N/A*	80
KC28APBX	N/A*	48
KC28ASBX	N/A*	48
KC29APBX	N/A*	48
KC29ASBX	N/A*	48
KC31APBX	N/A*	40
KD25AABS	N/A*	45
KD25APBF	N/A*	40
KD25APBSN	N/A*	48
KD27APBF	N/A*	40
KD27APBSN	N/A*	48
KD27ASBF	N/A*	24
KD27ASBS	N/A*	40
KD28AGBS	N/A*	54
KD28APBF	N/A*	40
KD28APBSN	N/A*	48
KD28ASBF	N/A*	24
KD28ASBS	N/A*	40
KD29APBF	N/A*	40
KD29APBSN	N/A*	48
KD29ASBS	N/A*	40
KJ17AEBD	N/A*	100
KJ17AHBD KT25APBF	3 N/A*	900
LC29APBX	N/A*	48
M001000	20	960
M001001	16	768
M001002	6	480
M001003	6	480
M001004	6	384
M001005	6	384
M001007	6	288
M002261	N/A*	100
M002262	N/A*	100
M002263	N/A*	100
M002264	N/A*	100
M002265	N/A*	100
M002266	N/A*	100
M003011	N/A*	24
M003101	N/A*	56
M003103	N/A*	56
M003104	N/A*	48
M003105	N/A*	40
M003106	N/A*	40
MD17AJBDN MD17AQBD	N/A*	96 96
MD17AQBD MD25AHBD	N/A* N/A*	100
MD25AHBD MD25AJBDN	N/A*	96
MD25AJBDN MD25AQBDN	N/A*	96
MD27APBSN	N/A*	36
MD28APBSN	N/A*	36
MD34APBF	N/A*	36
ND25AJBDN	N/A*	96
ND25AQBDN	N/A*	96
DW/17DDE	10	E10

Nails (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
RW21BPE	10	510
SE15APB	N/A*	40
SE15APBH	N/A*	40
SE17APBH	N/A*	40
SE19APB	N/A*	40
W3050YXS	5	250
W3075YXC	5	250
W3100YXC	5	250
W3125YXC	5	250
W3150YXC	5	250
ZX10EAA	12	720
ZX13EAA	12	576
ZX16EAA	10	360
ZX18EAA	10	360
ZX21EAA	10	240

Staples

Staples		
Item Code	Boxes Per Carton	Boxes Per Skid
A04BAAN	48	1152
A06BABN	6	216
A06BABP	8	192
A08BAB	12	288
A08BABP	8	192
A800629	5	600
A800759	5	600
A801009	5	600
A801259	5	600
A801509	5	600
A809909	5	600
B04BAAPN	8	192
B06BAAP	4	96
B08BAAP	4	96
C02BAAPN	8	192
C03BAAPN	8	192
C03BGAN	8	272
CO4BAAP	8	192
C04BGAN	8	272
C05BAAPN	8	192
C06BAAP	4	96
C06BGA	20	480
C06BHA	20	640
C07BAAPN	4	96
C08BAAP	4	96
C10BAAP	4	96
D10BABN	6	216
D10BABPN	8	192
E06BAA	20	640
E08BAA	16	512
E10BAA	25	800
F04BAAN	12	384
F04BAAP	8	192
F05BAAP	4	96
F06BAA	10	300
F06BAAP	4	96
F06BGA	10	300
F08BAAN	8	240
F08BAAP	4	96
GO4BAAN	24	480
G06BABN	25	800
G08BAB	20	640
H06BAA	20	480
J06BAA	12	216
JOSBAAN	9	288
J10BAAN	8	160
K11BAB	6	240
K12BAB	10	400
K13BABN	12	384
KINDADIA	IZ	304

160

160

160

160

90

160

120

HL27ASBS

HR22APAF

HR74APAF

K525APBXN

N/A*

N/A*

N/A*

N/A*

40

40

40

72

RW17BPE

RW19BPE

RW21BGE

10

10

10

510

510

510

4

4

4

N/A*

4

DA19AIA

DA19EABN

DA19EPBN

DA21EABN

DA21EGBN

DA21EPBN

DA23EPBN

^{*}Product is shipped in the item box, not in a master shipping carton.

BOX, CARTON & PALLET QUANTITIES - FASTENERS

Staples (cont.)

otapioo (001111.)	
Item Code	Boxes Per Carton	Boxes Per Skid
L06BAB	10	360
L07BABP	N/A*	112
L08BAB	8	288
L10BABN	12	432
L10BHA	12	432
L10HABN	12	432
L11BAB	10	360
L11BGA	10	360
L11BRB L11HAB	10 10	360 360
L11HBB	10	180
L12BAB	10	360
L12BQB	10	360
L13BABN	8	288
L13BRBN	8	288
L13BRBP	N/A*	36
L13HABN	8	288
L14BAB	6	216
L14BGA	6	216
L14BRB	6	216
L15BAB	6	216
L15BRB	6	216
L17BAB	6	216
M06BABN	7	224
M08BAB	6	192
M10BABN	9	288
M10BRBN M11BABN	9	288
M11BRBN	8	256 256
M12BAB	6	192
M13BAB	6	192
M13BRB	6	192
M15BAB	N/A*	60
M17BAB	N/A*	48
M004092	N/A*	180
N08BABN	6	192
N08BBBN	6	192
N08FBB	6	192
N10BAB	6	192
N11BAB	6	192
N11BRB	6	192
N11FBB	6	192
N12BABN	6	192
N12FABN	5	160
N13BAB N13BRB	4	128 128
N13FAB	4	128
N14BAB	N/A*	56
N14BRB	N/A*	56
N15BAB	N/A*	56
N15BGB	N/A*	165
N15BRB	N/A*	56
N15FAB	N/A*	56
N16BAB	N/A*	56
N16BRB	N/A*	56
N17BAB	N/A*	48
N17BGB	N/A*	165
N17BRB	N/A*	48
N18BAB	N/A*	48
N18BRB	N/A*	48
N19BAB	N/A*	40
N19BGBN N19BRB	N/A*	130 40
N21BAB	N/A* N/A*	40
N2IBAB N2IBGBN	N/A*	120
N21BRB	N/A*	40
O15BRBBN	N/A*	56
O16BRBBN	N/A*	70
O17BRBBN	N/A*	56
O18BRBBN	N/A*	56
O19BRBBN	N/A*	56

Staples (cont.)

otapico (00111.)	
Item Code	Boxes Per Carton	Boxes Per Skid
P06BAA	N/A*	60
P08BABT	N/A*	60
P10BAB	N/A*	60
P10BPE	N/A*	60
P10FAB	N/A*	60
P11BAB	N/A*	50
P11BPE	N/A*	50
P12BAB	N/A*	40
P13BAB	N/A*	40
P13BGBN	N/A*	60
P13BPE	N/A*	40
P15BAB	N/A*	30
P15BPE	N/A*	30
P17BAB	N/A*	30
P19BAB	N/A*	40
P21BAB	N/A*	40
Q15BAB	N/A*	64
Q17BAB	N/A*	64
Q17BRB	N/A*	64
Q19BAB	N/A*	64
Q19BGBN	N/A*	130
Q19BRB	N/A*	64
Q21BAB	N/A*	56
Q21BRB	N/A*	56
Q23BRB	N/A*	48
Q25BAB	N/A*	48
Q25BRB	N/A*	48
R08BAB	12	384
R10BAB	12	480
R11BAB	12	480
R13BAB	12	480
W10BAB	10	400

Staples — Specialty

Item Code	Boxes Per Carton	Boxes Per Skid
X04NRA	N/A*	224
X06NRA	N/A*	224
X08NRA	N/A*	224
Y05BFA	10	320
Y07BFA	8	256
Y09BFAN	6	180

Screws

Item Code	Boxes Per Carton	Boxes Per Skid
06A125P	6	144
06A125PB	N/A*	72
06A162P	6	144
06A162PB	N/A*	72
06A162W	6	144
06B125P	6	144
06B125PB	N/A*	72
06B162P	6	144
06B162PB	N/A*	72
06B200PB	N/A*	48
06C125CB	N/A*	72
06C125PB	N/A*	72
06C125WK	6	240
06C162CB	N/A*	72
06C162PB	N/A*	72
06C162WK	6	240
06C200CB	N/A*	48
06C200PB	N/A*	48
07A200P	6	144

Screws (cont.)

Screws (cont.)	
Item Code	Boxes Per Carton	Boxes Per Skid
07Q100PB	N/A*	72
07Q125PB	N/A*	72
07Q125PBQ	N/A*	72
08A250PK	6	192
08C300WK	6	144
08D175W	6	144
08D200W	6	144
08D250S	6	144
08D250W	6	144
08D250WK	6	192
08D300W	6	144
08F150Y	6	144
08F175Y	6	144
08F175YKX	6	240
08F200Y	6	144
08F200YBTHSS	N/A*	48
08F250Y	6	144
08F300Y	6	144
08G100CBWFDS	N/A*	72
08G150CTLDSS	6	144
08G162CTWFWS	6	144
08G200CKLFPS	6	192
08G200CKEFF3	6	144
08G250WWK		192
08L125CBLCTS	6	
08L125CBLC1S	N/A*	72
	N/A*	72
08M050CTRFDP	6	144
08M050CTRFSP	6	144
08M100CBPDSS	N/A*	72
08R250W	6	144
08R300W	6	144
08S250W003	6	144
08S250W497	6	144
08S250W592	6	144
08T125W	6	144
08T150WBWFDS	N/A*	72
08T200W	6	144
08X125CBACTS	N/A*	72
08X125CKADDS	6	240
08X200CKADDS	6	192
09D300S	6	144
10G125CBWFDS	N/A*	72
10G162CTWFWS	6	144
10M075CDK	6	240
10M075CTMFDS	6	144
10M075YKFT4X	6	240
10M075YLFT4X	N/A*	48
10M075YTFFDX	6	144
10M100CKMFDS	6	240
12G175YKLFAX	6	240
12G200YKLFCX	6	192
12G250YKLFCX	6	192
12M087YKFF4X	6	240
12M100YKFF3X	6	240
1100 11(11)	J	240

^{*}Product is shipped in the item box, not in a master shipping carton.

Tools: DuraSpin (Cordless)

Model	Item #	Page
DS222-18V	10B0001N	3
DS225-18V	10A0001N	3
DS322-18V	10C0001N	3

Tools: DuraSpin (Corded)

Model	Item #	Page
DS242-AC	10E0001N	4
DS245-AC	10D0001N	4
DS342-AC	10F0001N	4
SG2510	6X0002N	7
SG4100	6X0004N	7

Tools: DuraSpin (Attachments)

Model	Item #	Page
DS230-D1	9Z0011N	5
DS230-D2	9Z0012N	5
DS230-M1	9Z0021N	5
DS230-S1	9Z0001N	5
DS320	6W0003N	6

Tools: DuraSpin (Attachment Kits)

Model	Item #	Page
DS425AC	6W0012N	6
DS440AC	6W0011N	6

Tools: Pneumatic

Model	Item #	Page
A11 Hammer Stapler	PC0700	50
A20 Hand Nailer	PC0781	35
BC58	4A0001N	50
DFPXP	8H0001N	56
F-15XP	10L0001N	15
F-16XP	10N0001N	15
F-18XP	10M0001N	15
F-35XP	10G0001N	31
F-35FRHXP	10H0001N	31
F-LXP	10Y0001N	15
F75LXP	8J0002N	56
F75SXP	8J0001N	56
FinishPro*16XP	9S0001N	18
FinishPro®18BMg	9B0001N	17
FinishPro*18Mg	1U0021N	17
FinishPro*21LXP	8M0001N	17
FinishPro®23LXP	8L0001N	16
FinishPro®23SXP	8F0001N	16
FinishPro*25XP	760102N	18
FinishPro®30XP	9P0002N	19
FinishPro®35Mg	6G0001N	19
FinishPro*42XP	4G0001N	19
FramePro®325FRHXP	4H0101N	33
FramePro*325XP	4Z0101N	32
FramePro*701XP	2H0133N	32
FramePro®702XP	2K0103N	33
FramePro®751XP	2J0103N	32
FramePro*752XP	2F0103N	33

Tools: Pneumatic (cont.)

Pneumatic (cont.)		
Model	Item #	Page
JN91H1	JN91H1	36
JN91H2	JN91H2	36
JN91P1	JN91P1	36
JN91P2	JN91P2	36
LS1XP	8N0001N	17
Mini Hand Nailer	PC1195	35
NS20BXP	9Y0001N	38, 62
NS20XP	9X0001N	38
PalletPro™100XP	5L0001N	55
PalletPro™130XP	5M0001N	55
PalletPro™57FXP	4L0001N	55
PS15RXP	9U0001N	50
PS15XP	9T0001N	37
PS20XP	9W0001N	37
RoofPro™445XP	8V0001N	49
SC1XP Senclamp®	220101N	22
SC2 Sencor®	470001N	22
SCN49XP	5J0001N	49
SCN60XP	520101N	34
SCN65XP (Toenail Safety)	540104N	34
SCN65XP (Flat Safety)	540101N	34
SCP40XP	7J0001N	37
SFT10XP - 20 Ga. E Wire - Standard	6S0031N	61
SFT10X - 20 Ga. F Wire - Standard	6S0041N	61
SFT10XP - 20 Ga. G Wire - Standard	6S0051N	61
SFT10XP - 22 Ga C Wire - Standard	6S0021N	61
SFT10XP - 22 Ga. A/D Wire - Auto	6S0101N	61
SFT10XP - 22 Ga. A/D Wire - Standard	6S0001N	61
SFT10XP - 22 Ga. B Wire - Standard	6S0011N	61
SFT10XP - 22 Ga. C Wire - Auto	6S0121N	61
SFT10XP - Dbl. Length Mag. 20 Ga. F Wire - Auto	6S0341N	61
SFT10XP - Dbl. Length Mag. 20 Ga. G Wire - Standard	6S0251N	61
SFT10XP - Dbl. Length Mag. 20 Ga. H Wire - Auto	6S0361N	61
SFT10XP - Dbl. Length Mag. 22 Ga. B Wire - Auto	6S0311N	61
SFT10XP - Dbl. Length Mag. 22 Ga. B Wire - Standard	6S0211N	61
SFT10XP - Dbl. Length Mag. 22 Ga. C Wire - Auto	6S0321N	61
SFT10XP - Dbl. Length Mag. 22 Ga. C Wire - Standard	6S0221N	61
SFT10XP - Long Nose 22 Ga. C Wire - Standard	6S0421N	61
SFW09	4C0001N	62
SHF200	8D0001N	67
SKSXP-L	300120N	20
SKSXP-M	300152N	21
SKSXP-N	300184N	21
SLP20XP	430101N	18
SLS150Mg	8C0001N	21
SLS18Mg	1W0021N	21
SLS20XP-HF	490021N	67
SLS20XP-K	490101N	20
SLS20XP-L	490103N	20
SLS20XP-L SENCOMATIC	490015N	20
SLS20XP-L W/CASE	490105N	20
SLS20XP-M	490107N	20
SLS20XP-R	490111N	20
SLS25XP-L	820103N	20
SLS25XP-M	820107N	20
SNS41	3L0003N	38
SQS55XP	660101N	38

Tools: Compressors & Kit

Model	Item #	Page
PC0947	PC0947	71
PC0968	PC0968	71
PC1010	PC1010	71
PC1010N	PC1010N	71
PC1131	PC1131	71
PC1280	PC1280	71

Fasteners: Nails (cont.)

Nails (cont.) Item# Page A100509 23 A100629 23 23 A100759 A101009 23 A101259 23 A101379 23 23 A101509 A102009 23 A109809 23 23 A109909 A201009 23 A201259 23 A201509 23 23 A202009 A209809 23 23 A209909 A301500 25 A301750 25 A302000 25 A302009 25 25 A302500 A302509 25 A402009 24 AX10EAA 23 AX11EAA 23 AX13EAA 23 AX15EAA 23 AX17EAA 23 AX18EAA 23 23 AX19EAA AX21EAAN 23 AX22EAAN 23 AY10EAA 24 24 AY11EAA AY13EAA 24 24 AZ08EAA AZ11EAA 24 AZ13EAA 24 BD17APBC 51 BE23AABF 43, 58 BG17AAAQ 44 BG18AAAQ 44 BK21BPBFN 44, 59 BK23BPBFN 44, 59 BK25BPBFN 44, 59 43, 58 BL21APBF BT21APBF 42, 43, 58 23 CZ08EAAN CZ10EAA 23 23 CZ10EAAN CZ11EAA 23 CZ11EAAN 23 CZ13EAA 23 CZ15EAA 23 CZ16EAA 23 CZ17EAA 23 CZ21EAA 23 DA13EPBN 25 DA15AIA 25 DA15EABN 25 DA15EPBN 25 DA17AIA 25 DA17EABN 25 DA17EPBN 25 DA19AIA 25 DA19EABN 25 DA19EPBN 25 DA21EABN 25 DA21EGBN 25 25 DA21EPBN DA23EPBN 25

DA25EAB

25

Fasteners: Nails (cont.)

Nails (cont.)	
Item#	Page
DA25EGB	25
DA25EPB ED23AABH	25 51, 57
EJ21ADBH	51, 57
EJ23ADBH	51
EJ23ASBC	51
EL19AGBH	52, 58
EL19ASBH EL20AABH	52, 58
EL20ASBH	52, 58 52, 58
EL21AGBH	52, 58
EL21ASBH	52, 58
EL23AABH	52, 58
EL23AGBH	52, 58
EL23ASBC EL23ASBH	52 52, 58
G524APBXN	39
G524ASBXN	39
G621ASBXN	39
G624APBXN	39
G624ASBXN GC21APBX	39 40
GC23AHAK	40
GC24APBX	40
GC24ASBX	40
GC25APBX	40
GD21AABF	43, 57
GD21APBF GD24APBSN	43, 57 41
GD24ASBS	41
GD25AABF	43, 57
GD25AABSN	41
GD25APBF	43, 57
GD25APBSN GE21APAX	41 40
GE21ASBX	40
GE24AGBK	40
GE24APBX	40
GE24ASBX	40
GL21APBF GL21APBSN	43, 58 42
GL21ASBS	42
GL24AABSN	42
GL24AGBF	43, 58
GL24AGBS	42
GL24APBF GL24APBSN	43, 58 42
GL24ASBF	43, 58
GL24ASBS	42
GT24APBF	42, 58
H527APBXN H528APBXN	39
H627APBXN	39 39
H627ASBXN	39
HC27APBX	40
HC27ASBX	40
HC28APBX HD27APBF	40 43, 57
HD27APBF HD27APBSN	43, 57
HE27ASBX	40
HF27EDB	40
HF27EPAK	40
HJ25ADBS	41
HK27APBFN HL27AGBS	44, 59 42
HL27ASBF	43, 58
HL27ASBS	42
HR22APAF	44
HR74APAF	44
K525APBXN K527APBXN	39 39
K5Z/APBAN	39 70

K527APBXR 39

Fasteners: Nails (cont.)

Item#

K527ASBXN

Page

39

K528APBXN	39
K528APBXR	39
K528ASBXN	39
K529APBXN K627ASBXN	39
K628APBXN	39 39
K628ASBXN	39
K629ASBXN	39
KC27AGBK	40
KC27APBX	40
KC27ASBX	40
KC28AGBK	40
KC28APBX KC28ASBX	40 40
KC29APBX	40
KC29ASBX	40
KC31APBX	40
KD25AABS	41
KD25APBF	43, 57
KD25APBSN	41
KD27APBF KD27APBSN	43, 57 41
KD27APBSN KD27ASBF	43, 57
KD27ASBI	41
KD28AGBS	41
KD28APBF	43, 57
KD28APBSN	41
KD28ASBF	43, 57
KD28ASBS	41
KD29APBF	43, 57
KD29APBSN KD29ASBS	41 41
KJ17AEBD	45
KJ17AHBD	45
KT25APBF	42, 58
LC29APBX	40
M001000	24
M001001	24
M001002	24
M001003 M001004	24 24
M001004	24
M001007	24
M002261	45
M002262	45
M002263	45
M002264	45
M002265	45
M002266 M003011	45 44
M003101	51
M003103	51
M003104	51
M003105	51
M003106	51
MD17AJBDN	45
MD17AQBD MD25AHBD	45
MD25AHBD MD25AJBDN	45 45
MD25AJBDN MD25AQBDN	45
MD27APBSN	41
MD28APBSN	41
MD34APBF	43, 57
ND25AJBDN	45
ND25AQBDN	45
P13BGBN	53
RW17BPE RW19BPE	68
RW19BPE RW21BGE	68 68
RW21BGE RW21BPE	68
SE15APB	52

Fasteners: Nails (cont.)

Item #	Page
SE15APBH	52, 58
SE17APBH	52, 58
SE19APB	52
W3050YXS	45
W3075YXC	45
W3100YXC	45
W3125YXC	45
W3150YXC	45
ZX10EAA	23
ZX13EAA	23
ZX16EAA	23
ZX18EAA	23
ZX21EAA	23

Fasteners: Staples

Item #	Page
A04BAAN	63
A06BABN	63
A06BABP	63
A08BAB	63
A08BABP	63
A800629	27
A800759	27
A801009	27
A801259	27
A801509	27
A809909	27
B04BAAPN	63
B06BAAP	63
B08BAAP	63
C02BAAPN	63
C03BAAPN	63
C03BGAN	63
C04BAAP	63
C04BGAN	63
C05BAAPN	63
C06BAAP	63
C06BGA	63
C06BHA	63
C07BAAPN	63
C08BAAP	63
C10BAAP	63
D10BABN	63
D10BABPN	63
E06BAA	64
E08BAA	64
E10BAA	64
F04BAAN	64
F04BAAP	64
F05BAAP	59, 64
F06BAA	59, 64
F06BAAP	59, 64
F06BGA	59, 64
F08BAAN	59, 64
F08BAAP	59, 64
G04BAAN	64
G06BABN	64
G08BAB	64
H06BAA	53, 64
J06BAA	59
J08BAAN	59
J10BAAN	59
K11BAB	26
K12BAB	26
K13BABN	26
L06BAB	27
L07BABP	27
L08BAB	27

Fasteners: Staples (cont.)

Page

Item#

L10BABN	27					
L10BHA	27					
L10HABN L11BAB	27 27					
L11BGA	27					
L11BRB	27					
L11HAB	27					
L11HBB	27					
L12BAB	27 27					
L12BQB L13BABN	27 27					
L13BRBN	27					
L13BRBP	27					
L13HABN	27					
L14BAB	27					
L14BGA	27					
L14BRB L15BAB	27 27					
L15BRB	27					
L17BAB	27					
M06BABN	28					
M08BAB	28					
M10BABN	28					
M10BRBN M11DADN	28					
M11BABN M11BRBN	28 28					
M12BAB	28					
M13BAB	28					
M13BRB	28					
M15BAB	28					
M17BAB	28					
M004092 N08BABN	53 28, 47, 65					
NO8BBBN	28, 47, 65					
N08FBB	28, 47, 65					
N10BAB	28, 47, 65					
N11BAB	28, 47, 65					
N11BRB	28, 47, 65					
N11FBB N12BABN	28, 47, 65 28, 47, 65					
N12FABN	28, 47, 65					
N13BAB	28, 47, 65					
N13BRB	28, 47, 65					
N13FAB	28, 47, 65					
N14BAB	28, 47, 65					
N14BRB N15BAB	28, 47, 65 28, 47, 65					
N15BGB	28, 47, 65					
N15BRB	28, 47, 65					
N15FAB	28, 47, 65					
N16BAB	28, 47, 65					
N16BRB	28, 47, 65					
N17BAB N17BGB	28, 47, 65 28, 47, 65					
N17BGB N17BRB	28, 47, 65					
N18BAB	28, 47, 65					
N18BRB	28, 47, 65					
N19BAB	28, 47, 65					
N19BGBN	28, 47, 65					
N19BRB	28, 47, 65					
N21BAB N21BGBN	28, 47, 65 28, 47, 65					
N21BRB	28, 47, 65					
O15BRBBN	46, 65					
O16BRBBN	46, 65					
O17BRBBN	46, 65					
O18BRBBN	46, 65					
O19BRBBN PO6BAA	46, 65 46, 53					
POSBABT	46, 53					
P10BAB	46, 53					
P10BPE	46, 53					

Fasteners: Staples (cont.)

	,				
ltem #	Page				
P10FAB	46, 53				
P11BAB	46, 53				
P11BPE	46, 53				
P12BAB	46, 53				
P13BAB	46, 53				
P13BGBN	46				
P13BPE	46, 53				
P15BAB	46, 53				
P15BPE	46, 53				
P17BAB	46, 53				
P19BAB	46				
P21BAB	46				
Q15BAB	47				
Q17BAB	47				
Q17BRB	47				
Q19BAB	47				
Q19BGBN	47				
Q19BRB	47				
Q21BAB	47				
Q21BRB	47				
Q23BRB	47				
Q25BAB	47				
Q25BRB	47				
R08BAB	26				
R10BAB	26, 68				
R11BAB	26, 68				
R13BAB	26, 68				
W10BAB	63				

Fasteners: Staples — Specialty

ltem #	Page
X04NRA	29
X06NRA	29
X08NRA	29
Y05BFA	29
Y07BFA	29
Y09BFAN	29

Fasteners: Screws

Item#	Page				
06A125P	8				
06A125PB	8				
06A162P	8				
06A162PB	8				
06A162W	8				
06B125P	8				
06B125PB	8				
06B162P	8				
06B162PB	8				
06B200PB	8				
06C125CB	8				
06C125PB	8				
06C125WK	8				
06C162CB	8				
06C162PB	8				
06C162WK	8				
06C200CB	8				
06C200PB	8				
07A200P	8				
07Q100PB	9				
07Q125PB	9				
07Q125PBQ	9				
08A250PK	8				
08C300WK	8				

Fasteners: Screws (cont.)

Item #	Page				
08D175W	9				
08D200W	9				
08D250S	9				
08D250W	9				
08D250WK	9				
08D300W	9				
08F150Y	8				
08F175Y	8				
08F175YKX	8				
08F200Y	8				
08F200YBTHSS	8				
08F250Y	8				
08F300Y	8				
08G100CBWFDS	9				
08G150CTLDSS	9				
08G162CTWFWS	9				
08G200CKLFPS	9				
08G200WTWFWS	9				
08G250WWK	9				
08L125CBLCTS	8				
08L175YB	8				
08M050CTRFDP	11				
08M050CTRFSP	11				
08M100CBPDSS	11				
08R250W	10				
08R300W	10				
08S250W003	10				
08S250W497	10				
08S250W592	10				
08T125W	9				
08T150WBWFDS	9				
08T200W	9				
08X125CBACTS	11				
08X125CKADDS	11				
08X200CKADDS	11				
09D300S	9				
10G125CBWFDS	9				
10G162CTWFWS	9				
10M075CDK	11				
10M075CTMFDS	10				
10M075YKFT4X	10				
10M075YLFT4X	10				
10M075YTFFDX	10				
10M100CKMFDS	10				
12G175YKLFAX	9				
12G200YKLFCX	9				
12G250YKLFCX	9				
12M087YKFF4X	10				
12M100YKFF3X	10				

Accessories: Screw System

Item #	Page			
6W0003N	6			
9Z0001N	5			
9Z0011N	5			
9Z0012N	5			
9Z0021N	5			
ADP009	12			
ADP019	12			
EA0272	12			
EA0297	12			
EA0297N	12			
EA0298	12			
EA0298N	12			
EA0299	12			
EA0299N	12			
EA0300	12			
EA0301	12			

Accessories: Screw System (cont.)

	_ ` '				
Item #	Page				
EA0301N	12				
EA0302	12				
EA0308	12				
EA0313N	12				
EA0314	12				
EA0315	12				
EA0315N	12				
EA0316	12				
EA0316N	12				
EA0320	12				
EA0321	12				
EA0322	12				
EA0396	12				
EA0397	12				
EA0400	12				
EA0401	12				
EA0402	12				
FA0334	13				
FB0155	13				
FB0157	13				
FB0159	13				
FC0822	13				
FC0878	13				
FC0887	13				
FC0895	13				
FC0983	13				
FC1022	13				
FC1023	13				
MB0173	12				
MB0174	12				

Accessories: Pneumatic

Filedillatic						
Item #	Page					
HA0308	51					
HC0788	38, 62					
MA0013	51					
NPC03	37					
PC0051	75					
PC0057	75					
PC0064	73					
PC0065	73					
PC0101	76					
PC0102	76					
PC0103	76					
PC0344	76					
PC0349	75					
PC0350	76					
PC0351	76					
PC0477	74					
PC0478	74					
PC0479	74					
PC0480	74					
PC0489	75					
PC0501	74					
PC0502	74					
PC0503	74					
PC0504	74					
PC0505	74					
PC0506	74					
PC0576	74					
PC0577	74					
PC0629	76					
PC0630	76					
PC0643	75					
PC0656	75					
PC0657	75					
PC0900	74					

Accessories:

Pneumatic (cont.)

	- /				
Item#	Page				
PC0977	73				
PC0978	73				
PC0979	73				
PC0983	75				
PC0987	75				
PC1138	75				
PC1152	73				
PC1166	76				
PC1295	76				
PC1319	73				
PC1320	73				
PC1321	73				
PC1322	73				
PC1323	74				
PC1325	74				
PC1328	74				
PC1330	74				
PC1337	73				
PC1338	73				
PC1339	73				
PC1340	73				
PC1341	73				
SWM125B	37				
YB0123	76				
YJ0042	33				
YJ0043	33				
YJ0044	37				
YJ0055	33				
· · · · · · · · · · · · · · · · · · ·					

Accessories: Battery & Charger Systems

Item #	Page		
VB0155	13, 77		
VB0156	13, 77		
VB0189	13, 31, 77		
VB0190	13, 31, 77		

Accessories:

No-Mar Pads					
Item #	Page				
HA0170	77				
HA0200	77				
HA0201	77				
HC0253	77				
HC0396	77				
HC0401	77				
HC0463	77				
HC0506	77				
HC0507	77				
HC0536	77				
HC0571	77				
HC0572	77				
HC0625	77				
HC0626	77				
HC0729	77				
HF0028	77				
HF0029	77				
HF0046	77				
HF0064	77				
HF0079	77				
HF0110	77				
HF0113	77				

18 GA 15 GA 16 GA 21 GA Pg. 25 Pg. 24 Pg. 23-24 Pg. 23 SENCLAMP SENCLAMP 23 GA 19 GA 18 GA 16 GA Pg. 23 Pg. 27-28 Pg. 28 Pg. 29 Pg. 29 Pg. 26


FRAMING, SHEATHING & SUBFLOORS

34° Prohead	34°	20°	COIL	METAL	CONCRETE	15 GA	16 GA	17 GA
				MINIMAN TO THE PARTY OF THE PAR	******			
Pg. 39	Pg. 40	Pg. 41-42	Pg. 42-44	Pg. 45	Pg. 45	Pg. 47	Pg. 46-47	Pg. 46

ROOFING, SIDING & FENCING

ROOFING	16 GA WIDE CROWN	FELT CAP & STAPLE	20 GA	WIRE WELD	PLASTIC WOUND
HTTP-PP-19-19-19-19-19-19-19-19-19-19-19-19-19-					
Pg. 51-52	Pg. 53	Pg. 53	Pg. 53	Pg. 51-52	Pg. 51-52

FLOORING



PALLETS & CRATING

15° SMOOTH	15° RING	15° SCREW	20 GA	18 GA
Pg. 57	Pg. 58	Pg. 59	Pg. 59	Pg. 59

UPHOLSTERY & FURNITURE

22 GA	21 GA	20 GA	17 GA	16 GA
Pg. 63	Pg. 63	Pg. 64	Pg. 65	Pg. 65

DURASPIN AUTO-FEED SCREW SYSTEMS

DRYWALL	WOOD/WOOD	WOOD/STEEL	UNDERLAYMENT	DECKS & DOCKS	METAL/METAL	LT. METAL FRAMING	SPECIALTY	#
							No.	FFFBFN
Pg. 8	Pg. 8	Pg. 9	Pg. 9	Pg. 9-10	Pg. 10	Pg. 11	Pg. 10	<u> </u>

HOT DIPPED GALVANIZED

34°	20°	15° COIL		
Pg. 39, 40 & 45	Pg. 41-42	Pg. 43, 51, 52, 57, 58		

304 STAINLESS STEEL

15 GA	34°	20°		15° COIL		15 GA		
Pg. 25	Pg. 40		Pg. 41-42		Pg. 43, 52, 58		Pg. 47	
16 GA	18 GA	20 GA		22 G	A	#2 FLAT HEA	ND CLEAT	
Pg. 46, 47, 53, 65	Pg. 27	F	Pg. 64	Pg. 6	3	Pg. 9	Pg. 68	

DURASPIN AUTO-FEED SCREW SYSTEMS

	3011/101 114 /101	0 1 EED 0011E1	OTOTEMO				
삤	DS225-18V	DS222-18V	DS322-18V	DS245-AC	DS242-AC	DS342-AC	
	10A0001N	10B0001N	10C0001N	10D0001N	10E0001N	10F0001N	
REFERENC							
	Pg. 3 Pg. 3		Pg. 3	Pg. 4	Pg. 4	Pg. 4	
	DS230-S1		DS230-M1	DS230-D1		DS230-D2	
	9Z0001N		9Z0021N	9Z0011N		9Z0012N	
			711 max :			V. (1)	
	Pg. 5		Pg. 5	Pg. 5		Pg. 5	
	DS32	2OAC	DS42	25AC	DS440AC		
	6W00	003N	6W0	012N	6W0011N		
						8	
	Pg.	. 6	Pg	ı. 6	Р	g. 6	
	SG2510		SG4100				
	6X0002N		6X0004N				
3	2000		900				
	Pg. 7		Pg. 7				

Fasteners: see pages 8 - 11

FINISH & WOODWORKING

F-18XP F-16XP F-15 F-LXP FinishPro23LXP FinishPro23LXP FinishPro21LXP LS1XP FinishPro18Mg 10M0001N 10N00001N 10L00001N 10Y00001N 8F0001N 8L0001N 8M0001N 8N0001N 1U0021N Pg. 15 Pg. 15 Pg. 15 Pg. 15 Pg. 16 Pg. 16 Pg. 17 Pg. 17 Pg. 17 FinishPro18BMg SLP20XP FinishPro25XP FinishPro16XP FinishPro30XP FinishPro35Mg FinishPro42XP 980001N 430101N 760102N 9S0001N 9P0002N 6G0001N 4G0001N										
Pg. 15 Pg. 15 Pg. 15 Pg. 15 Pg. 16 Pg. 16 Pg. 17 Pg. 17 Pg. 17 FinishPro18BMg SLP20XP FinishPro25XP FinishPro16XP FinishPro30XP FinishPro35Mg FinishPro42XP 9B0001N 430101N 760102N 9S0001N 9P0002N 6G0001N 4G0001N	F-18XP F-1	6XP F-1	-15 F-LXP	Finish	Pro23SXP	FinishPr	o23LXP	FinishPro21l	LXP LS1XP	FinishPro18Mg
Pg. 15 Pg. 15 Pg. 15 Pg. 15 Pg. 16 Pg. 16 Pg. 17 Pg. 17 Pg. 17 FinishPro18BMg SLP20XP FinishPro25XP FinishPro16XP FinishPro30XP FinishPro35Mg FinishPro42XP 9B0001N 430101N 760102N 9S0001N 9P0002N 6G0001N 4G0001N	10M0001N 10N0	0001N 10L00	0001N 10Y00001	N 8F	0001N	8L00	001N	8M0001N	8N0001N	1U0021N
FinishPro18BMg SLP20XP FinishPro25XP FinishPro16XP FinishPro30XP FinishPro35Mg FinishPro42XP 980001N 430101N 760102N 980001N 9P0002N 6G0001N 4G0001N				SENTO	1	SENCO	and a second	Pankhoy 21L3	SENCO	
9B0001N 430101N 760102N 9S0001N 9P0002N 6G0001N 4G0001N	Pg. 15 Pg	g. 15 Pg.	ı. 15	F	Pg. 16	Pg.	16	Pg. 17	Pg. 17	Pg. 17
7 7		SENCO	ONAS	MA 12 25 12 12 12 12 12 12 12 12 12 12 12 12 12	CONST.		DINES			DISC.
Pg. 17 Pg. 18 Pg. 18 Pg. 18 Pg. 19 Pg. 19 Pg. 19	Pg. 17	Pg. 18	Pg. 1	8	Pg. 18		Pg	g. 19	Pg. 19	Pg. 19
SLS20XP SLS25XP SKSXP SLS150Mg SLS18Mg SC1XP SC2	SLS20XP	SLS25X	KP SKS	XP	SLS15	OMg	SLS	18Mg	SC1XP	SC2
SEE SPECIFICATIONS SEE SPECIFICATIONS SEE SPECIFICATIONS 8C0001N 1W0021N 220101N 470001N	SEE SPECIFICATIONS	SEE SPECIFICA	ATIONS SEE SPECIFIC	ICATIONS	8C000	01N	1W0	0021N	220101N	470001N
	SENCO	SENCO		145	ONE A) Dece		
Pg. 20 Pg. 20 Pg. 21 Pg. 21 Pg. 22 Pg. 22	Pg. 20	Pg. 20	Pg. 2	20	Pg. 2	21	P	g. 21	Pg. 22	Pg. 22

Fasteners: see pages 23-29

FRAMING, SHEATHING & SUBFLOORS

F-35XP	F-35FRHXP	FramePro325XP	FramePro701XP	FramePro751XP	FramePro325FRHXP	FramePro702XP	FramePro752XP
10G0001N	10H0001N	4Z0101N	2H0133N	2J0103N	4H0101N	2K0103N	2F0103N
		CONS	DN35	DNAS	Does .	888	000
Pg. 31	Pg. 31	Pg. 32	Pg. 32	Pg. 32	Pg. 33	Pg. 33	Pg. 33
SCN60XP	SCN65XP	Mini Hand Nailer	A20 Hand Nailer	JN91H1	JN91H2	JN91P1	JN91P2
520101N	540101N/540104N	PC1195	PC0781				
SENCO	SERICO	Man along		DUS	Day		
Pg. 34	Pg. 34	Pg. 35	Pg. 35	Pg. 36	Pg. 36	Pg. 36	Pg. 36

Fasteners: see pages 39-45

SCP40XP	PS15XP	PS20XP	NS20XP	NS20BXP	SNS41	SQS55XP
7J0001N	9T0001N	9W0001N	9X0001N	9Y0001N	3L0003N	660101N
SENCO	ONES THE PROPERTY OF THE PROPE	Days	CHAS	OTAS A	EXC SQUARMAR CONT. MA.41	SENCO
Pg. 37	Pg. 37	Pg. 37	Pg. 38	Pg. 38	Pg. 38	Pg. 38

Fasteners: see pages 45-47

90

ROOFING, SIDING & FENCING

RoofPro445XP	SCN49XP	PS15RXP	BC58 Cap	A11 Hammer Stapler
8V0001N	5J0001N	9U0001N	4A0001N	PC0700
SENEO	ONNE	7738877		
Pg. 49	Pg. 49	Pg. 50	Pg. 50	Pg. 50

Fasteners: see pages 51-53

PALLETS & CRATING

PalletPro57FXP	PalletPro100XP	PalletPro130XP	DFPXP	F75LXP	F75SXP
4L0001N	5L0001N	5M0001N	8H0001N	8J0002N	8J0001N
Sako	100				5
Pg. 55	Pg. 55	Pg. 55	Pg. 56	Pg. 56	Pg. 56

Fasteners: see pages 57-59

UPHOLSTERY & FURNITURE

SFT10XP, SFT10XP Long Nose, SFT10XP Double Length Magazine	SFW09	NS20BXP	
SEE SPECIFICATIONS	4C0001N	9Y0001N	
	57/09	DNAS	
Pg. 61	Pg. 62	Pg. 62	

Fasteners: see pages 63-65

FLOORING

SHF200	SLS20XP-HF
8D0001N	490021N
	SENCO
Pg. 67	Pg. 67

Fasteners: see page 68

SENCO TOOLS AT A GLANCE

AIR COMPRESSORS & KIT

	PC1131	PC0968	PC1280	PC1010	PC1010N	PC0947			
	80		O.C.						
	Pg. 71	Pg. 71							

CORDLESS





FUSION TECHNOLOGY

Feel, speed, and power of a true pneumatic, with no ramp up time between shots



REFILLABLE AIR PORT

Simplifies tool repair and maintenance to reduce downtime



ONBOARD STATUS INDICATOR

Built-in battery power level, battery recharge, and nail-jam notification between shots



SELECTABLE ACTUATION SWITCH

Quickly and safely change from sequential to bump-fire mode between shots



AGGRESSIVE TOENAIL SAFETY

Extra grip for consistent nail placement on toenail applications between shots



RUGGED RAFTERHOOK

Oversized aluminum design rotates into place to secure tool when not in use







KYOCERA SENCO Industrial Tools, Inc.

Looking for more?



Contact Us

4270 Ivy Pointe Blvd. Phone: 800.543.4596 Cincinnati, OH 45245 Fax: 800.543.3299



Visit Us

On the web for more information SENCO.com



Find Us

Search for your closest SENCO dealer SENCO.com/dealer-locator



Join Us

Join our loyalty & rewards program SENCOPROteam.com



Watch Us

Check out all of our latest videos & product launches

► YouTube.com/SencoBrands



Follow Us

On Twitter & Facebook for the latest SENCO news © SENCOBrands



MAKING HARD WORK EASIER