


List 7020

2 Flute, Stub Length

SPEED FEED P1206-1207	CARBIDE	DIA	STUB	30°	SHANK h6
--------------------------	---------	-----	------	-----	-------------

Milling Diameter Tolerance	
1/64 ≤ D ≤ 1/2	+0 / -0.0020"

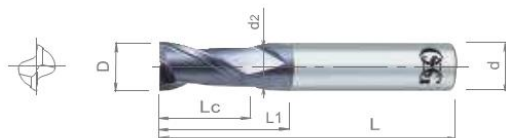

Units: Inch

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter	Coating Thickness	
	D	L	Lc	L1	d2	d	12µm	20µm
70200016	1/64	1-3/4	3/64	3/32	0.015	1/8	◆	
70200116	1/32	1-3/4	3/32	1/4	0.028	1/8	◆	
70200216	3/64	1-3/4	3/16	1/2	0.040	1/8	◆	
70200316	1/16	1-3/4	3/16	1/2	0.056	1/8	◆	
70200416	5/64	1-3/4	1/4	1/2	0.070	1/8	◆	
70200516	3/32	1-3/4	3/8	1/2	0.088	1/8	◆	
70200716	1/8	1-3/4	1/2	-	-	1/8	◆	
70205716	1/8	1 3/4	1/2	-	-	1/8		◆
70200816	5/32	2	9/16	-	-	5/32	◆	
70200916	3/16	2	3/4	-	-	3/16	◆	
70201116	1/4	2-1/2	3/4	-	-	1/4	◆	
70206116	1/4	2-1/2	3/4	-	-	1/4		◆
70201316	5/16	2-1/2	13/16	-	-	5/16	◆	
70201416	3/8	2-1/2	7/8	-	-	3/8	◆	
70206416	3/8	2-1/2	7/8	-	-	3/8		◆
70201616	1/2	3	1	-	-	1/2	◆	
70206616	1/2	3	1	-	-	1/2		◆

Packed: 1 pc.
Available Diamond coating only.



Work Material

List No.	P			Alloy Steels 4140 4340	Die Steels	M			K Cast Iron	N		S		Other				
	Carbon Steels					Stainless Steels				Aluminum		Nickel Alloy	Titanium	Mg	Brass, Bronze	Graphite	Cobalt-Chrome	
	Low 1010 1018	Med. 1035 1045	High 1065			300	400	17-4 PH		6061 7075	Casting	Inconel	6Al4V (30 HRC)					
7020										<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							

good best

