


# Non-Insulated Spade Terminals

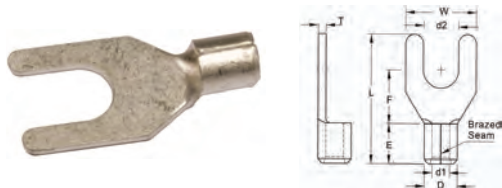

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10	8	6
AMP	9	12	17	18	30	35	50	70	95

MAXIMUM ELECTRIC RATING: 302°F (150°C) 600V

TERMINAL MATERIAL: Electro-Tin Plated Copper - Brazed Seam

FEATURES: Serrated Barrel

DIMENSIONS = INCHES

CAT. NO.	WIRE SIZE AWG	STUD SIZE	D2	W	F	L	E	D	DI	T	BAG QTY	MASTER BAG QTY
11512	22-16	#4	.126	.323	.256	.630	.189	.134	.067	.030	100	1,000
11514	22-16	#6	.146	.252	.256	.630	.189	.134	.067	.030	100	1,000
11516	22-16	#8	.169	.319	.256	.630	.189	.134	.067	.030	100	1,000
11518	22-16	#10	.209	.319	.256	.630	.189	.134	.067	.030	100	1,000
11520	22-16	1/4	.252	.472	.433	.866	.189	.134	.067	.030	100	1,000
11522	16-14	#4	.126	.224	.256	.630	.189	.161	.091	.031	100	1,000
11524	16-14	#6	.146	.283	.256	.630	.189	.161	.091	.031	100	1,000
11526	16-14	#8	.169	.319	.256	.630	.189	.161	.091	.031	100	1,000
11528	16-14	#10	.209	.366	.256	.630	.189	.161	.091	.031	100	1,000
11530	16-14	1/4	.252	.472	.433	.866	.189	.161	.091	.031	100	1,000
11532	12-10	#6	.146	.327	.276	.728	.236	.220	.134	.039	100	1,000
11534	12-10	#8	.169	.354	.276	.728	.236	.220	.134	.039	100	1,000
11536	12-10	#10	.209	.354	.276	.728	.236	.220	.134	.039	100	1,000
11538	12-10	1/4	.252	.472	.472	.965	.236	.220	.134	.039	100	1,000
11540	12-10	5/16	.331	.551	.413	.925	.236	.220	.134	.039	100	1,000
11542	8	#10	.209	.413	.319	.819	.335	.283	.177	.047	100	-
11544	8	1/4	.252	.425	.339	.886	.335	.283	.177	.047	100	-
11546	6	1/4	.252	.433	.421	1.004	.413	.354	.228	.059	100	-
11548	6	5/16	.331	.543	.421	1.122	.413	.354	.228	.059	100	-

# Vinyl Insulated Spade Terminals



MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 167°F (75°C) 600 Volts

INSULATION MATERIAL: Vinyl

TERMINAL MATERIAL: Electro-Tin Plated Copper

FEATURES: Serrated Barrel, Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	STUD SIZE	D2	W	F	L	E	D	DI	T	BAG QTY	MASTER BOX QTY
10110	RED	22-16	#4	.126	.224	.256	.874	.441	.157	.067	.030	100	1,000
10112	RED	22-16	#6	.146	.252	.256	.874	.441	.157	.067	.030	100	1,000
10112B	RED	22-18	#8	.146	.252	.256	.874	.441	.157	.067	.030	1,000	20,000
10114	RED	22-16	#8	.169	.319	.256	.874	.441	.157	.067	.030	100	1,000
10114B	RED	22-16	#8	.169	.319	.256	.874	.441	.157	.067	.030	1,000	20,000
10116	RED	22-16	#10	.209	.319	.256	.874	.441	.157	.067	.030	100	1,000
10116B	RED	22-16	#10	.209	.319	.256	.874	.441	.157	.067	.030	1,000	20,000
10118	RED	22-16	1/4	.252	.472	.433	1.110	.441	.157	.067	.030	100	1,000
10120	BLUE	16-14	#4	.126	.224	.256	.886	.453	.177	.091	.031	100	1,000
10132	BLUE	16-14	#6	.146	.283	.256	.886	.453	.177	.091	.031	100	1,000
10132B	BLUE	16-14	#6	.146	.283	.256	.886	.453	.177	.091	.031	1,000	20,000
10134	BLUE	16-14	#8	.169	.311	.256	.886	.453	.177	.091	.031	100	1,000
10134B	BLUE	16-14	#8	.169	.311	.256	.886	.453	.177	.091	.031	1,000	20,000
10136	BLUE	16-14	#10	.209	.366	.256	.886	.453	.177	.091	.031	100	1,000
10136B	BLUE	16-14	#10	.209	.366	.256	.886	.453	.177	.091	.031	1,000	20,000
10138	BLUE	16-14	1/4	.252	.472	.433	1.122	.453	.177	.091	.031	100	1,000
10140	YELLOW	12-10	#6	.146	.327	.276	1.047	.555	.248	.134	.039	100	1,000
10140B	YELLOW	12-10	#6	.146	.327	.276	1.047	.555	.248	.134	.039	500	10,000
10162	YELLOW	12-10	#8	.169	.354	.276	1.047	.555	.248	.134	.039	100	1,000
10162B	YELLOW	12-10	#8	.169	.354	.276	1.047	.555	.248	.134	.039	500	10,000
10164	YELLOW	12-10	#10	.209	.354	.276	1.047	.555	.248	.134	.039	100	1,000
10164B	YELLOW	12-10	#10	.209	.354	.276	1.047	.555	.248	.134	.039	500	10,000
10166	YELLOW	12-10	1/4	.252	.472	.472	1.283	.555	.248	.134	.039	100	1,000
10166B	YELLOW	12-10	1/4	.252	.472	.472	1.203	.555	.248	.134	.039	500	5,000
10168	YELLOW	12-10	5/16	.331	.551	.413	1.244	.555	.248	.134	.039	100	1,000